

**MOTOROLA SOLUTIONS**

SAMM No.0826



CERTIFICATE 2518.05

DECLARATION OF COMPLIANCE: MPE ASSESSMENT**Motorola Solutions Inc.
EME Test Laboratory**

Motorola Solutions Malaysia Sdn Bhd (Innoplex)
Plot 2A, Medan Bayan Lepas,
Mukim 12 SWD 11900 Bayan Lepas Penang, Malaysia.

Date of Report: 10/15/2019
Report Revision: B

Responsible Engineer: Saw Sun Hock (EME Engineer)
Report author: Saw Sun Hock (EME Engineer)
Date(s) Tested: 7/2/2019 - 7/3/2019
Manufacturer: Motorola Solutions Inc.
Date submitted for test: 04/12/2019
DUT Description: APX6500 7/800MHz - Multiple HW Encryption WiFi Inter-operability Data Modem Tethering via WiFi or Cable
Test TX mode(s): CW
Max. Power output: 18W (762-870 MHz); 11.22 mW (Bluetooth); 6.3 mW (Bluetooth LE); 39.8 mW (WLAN 2.4GHz 802.11b), 15.8 mW (WLAN 2.4GHz 802.11g), 12.6 mW (WLAN 2.4 GHz 802.11n); 15.8mW (WLAN 5 GHz 802.11a/n/ac)
TX Frequency Bands: 762-870 MHz; WLAN 2412-2462 MHz; WLAN 5180-5825 MHz; BT 2402-2480 MHz
Signaling type: FM, TDMA, FHSS (Bluetooth), 802.11b/g/n (WLAN 2.4 GHz), 802.11 a/n/ac (WLAN 5 GHz)
Model(s) Tested: M25URS9PW1BN (PMUF1969A) with G138 option
Model(s) Certified: M25URS9PW1BN (PMUF1969A) with G138 option, M24URS9PW1BN (PMUF1969A) with G138 option
Serial Number(s): 471TVF3344
Classification: Occupational/Controlled Environment
FCC ID: AZ492FT7124
 769-775 MHz, 799-824 MHz, 851-869 MHz, 2402-2480 MHz, 2412-2462 MHz; 5180-5825 MHz
 This report contains results that are immaterial for FCC equipment approval, which are clearly identified.
IC: 109U-92FT7124
 This report contains results that are immaterial for ISED Canada equipment approval, which are clearly identified.

The MPE results clearly demonstrate compliance with FCC Occupational/Controlled RF Exposure limits. FCC rules require compliance for Passengers and Bystanders to the FCC General Population/Uncontrolled limits. The test results clearly demonstrate compliance with ICNIRP Guidelines for limiting exposure in time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz).

Based on the information and the testing results provided herein, the undersigned certifies that when used as stated in the operating instructions supplied, said product complies with the national and international reference standards and guidelines listed in section 4.0 of this report (no deviation from standard methods). This report shall not be reproduced without written approval from an officially designated representative of the Motorola Solutions Inc. EME Laboratory.

I attest to the accuracy of the data and assume full responsibility for the completeness of these measurements.

This reporting format is consistent with the suggested guidelines of the TIA TSB-159 April 2006

The results and statements contained in this report pertain only to the device(s) evaluated herein.

Tiong
Tiong Nguk Ing
 Deputy Technical Manager (Approved Signatory)
 Approval Date: 10/21/2019

Digitally signed
 by Tiong Nguk
 Ing
 Date:
 2019.10.21
 22:56:18 +08'00'

Document Revision History

Date	Revision	Comments
08/13/2019	A	Initial release
10/15/2019	B	Amendment on WiFi Antenna Gain

Table of Contents

1.0	Introduction.....	4
2.0	FCC MPE Summary	4
3.0	Abbreviations / Definitions.....	4
4.0	Referenced Standards and Guidelines	5
5.0	Power Density Limits	5
6.0	N _c Test Channels.....	7
7.0	Measurement Equipment	7
8.0	Measurement System Uncertainty Levels	7
9.0	Product and System Description.....	8
10.0	Additional Options and Accessories.....	9
11.0	Test Set-Up Description.....	9
12.0	Method of Measurement for motorcycle mounted antenna(s).....	9
12.1	Bystander vehicle MPE measurements	9
12.2	Operator vehicle MPE measurements	10
13.0	MPE Calculations	10
14.0	Antenna Summary	11
15.0	Test Results Summary	11
15.1	MPE Test Results Summary for LMR	11
15.2	MPE Test Results for Bluetooth and WLAN.....	13
15.3	Simultaneous Transmission.....	15
16.0	Conclusion.....	16
	Appendix A - Illustration of Antenna Location and Test Distances.....	17
	Appendix B - Probe Calibration Certificates.....	19
	Appendix C - Photos of Assessed Antennas.....	24
	Appendix D - MPE Measurement Results.....	25

1.0 Introduction

This report details the test setup, test equipment and test results of Maximum Permissible Exposure (MPE) performed at Motorola Solutions' outside test site for product model M25URS9PW1BN (PMUF1969A) with G138 option.

2.0 FCC MPE Summary

Table 1

Equipment Class	Frequency band (MHz)	Operator		Bystander	
		Power Density (mW/cm ²)	Percentage of Limit (%)	Power Density (mW/cm ²)	Percentage of Limit (%)
TNB	769-775; 799-824; 851-869	0.192	7.1	0.094	17.4
DTS	2412 – 2462 (WLAN 802.11 b/g/n)	0.025	2.50	0.025	2.50
NII	5180 - 5825 (WLAN 5 GHz)	0.011	1.06	0.011	1.06
DSS	2402-2480 (Bluetooth)	0.007	0.71	0.007	0.71
Simultaneous (Highest Combined Percentage of Limit)			9.60		19.90

3.0 Abbreviations / Definitions

CNR: Calibration Not Required
 CW: Continuous Wave
 DUT: Device Under Test
 EME: Electromagnetic Energy
 FHSS: Frequency Hopping Spread Spectrum
 FM: Frequency Modulation
 MPE: Maximum Permissible Exposure
 GPS: Global Positioning System
 LMR: Land Mobile Radio
 SAR: Specific Absorption Rate
 NA: Not Applicable
 BS: Bystander
 PTT: Push to Talk
 WLAN: Wireless Local Area Network
 TDMA: Time Division Multiple Access

4.0 Referenced Standards and Guidelines

This product is designed to comply with the following applicable national and international standards and guidelines.

- United States Federal Communications Commission, Code of Federal Regulations; Rule Part 47CFR § 1.1310, § 2.1091 (d) and § 2.1093 for RF Exposure, where applicable.
- Federal Communications Commission, “Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields”, OET Bulletin 65 (Edition 97-01), FCC, Washington, D.C.: August 1997.
- American National Standards Institute (ANSI) / Institute of Electrical and Electronics Engineers (IEEE) C95. 1-1999
- American National Standards Institute (ANSI) / Institute of Electrical and Electronics Engineers (IEEE) C95. 1-1992. Specific to FCC rules and regulations.
- Institute of Electrical and Electronics Engineers (IEEE) C95.3-2002
- International Commission on Non-Ionizing Radiation Protection (ICNIRP) 1998
- Ministry of Health (Canada) Safety Code 6 (2015), Limits of Human Exposure to Radio frequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz
- RSS-102 (Issue 5) – Radio Frequency (RF) Exposure Compliance of Radio communication Apparatus (All Frequency Bands)
- FCC KDB – 447498 D01 General RF Exposure Guidance v06
- FCC KDB – 865664 D02 RF Exposure Reporting v01r02

5.0 Power Density Limits

Table 2 – Occupational / Controlled Exposure Limits

Frequency Range (MHz)	FCC OET Bulletin 65 mW/cm ²	ICNIRP W/m ²	IEEE C95.1 1992/1999 mW/cm ²	IEEE C95.1 2005 W/m ²	RSS-102 Issue 5 2015 W/m ²
10 – 20					10.0
20 – 48					$44.72 / f^{0.5}$
30 – 300	1.0				
48 – 100					6.455
10 – 400		10.0			
100 – 300			1.0	10.0	
100 – 6,000					$0.6455 f^{0.5}$
300 – 1,500	$f/300$				

Table 2 – Occupational / Controlled Exposure Limits (Con't.)

Frequency Range (MHz)	FCC OET Bulletin 65	ICNIRP	IEEE C95.1 1992/1999	IEEE C95.1 2005	RSS-102 Issue 5 2015
	mW/cm ²	W/m ²	mW/cm ²	W/m ²	W/m ²
300 – 3,000			f/300	f/30	
400 – 2,000		f/40			
1,500 – 15,000					
1,500 – 100,000	5.0				
2,000 – 300,000		50.0			
3,000 – 300,000			10.0	100.0	
6,000 – 15,000					50.0
15000 – 150,000					50.0
150000 – 300,000					$3.33 \times 10^{-4} f$

Table 3 – General Population / Uncontrolled Exposure Limits

Frequency Range (MHz)	FCC OET Bulletin 65	ICNIRP	IEEE C95.1 1992/1999	IEEE C95.1 2005	RSS-102 Issue 5 2015
	mW/cm ²	W/m ²	mW/cm ²	W/m ²	W/m ²
10 – 20					2.0
20 – 48					$8.944 / f^{0.5}$
30 – 300	0.2				
48 – 300					1.291
10 – 400		2.0			
100 – 300			0.2		
100 – 400				2.0	
300 – 1,500	f/1,500				
300 – 6000					$0.02619 f^{0.6834}$
400 – 2,000		f/200		f/200	
300 – 15,000			f/1,500		
1,500 – 15,000					
1,500 – 100,000	1.0				
2,000 – 100,000				10.0	
2,000 – 300,000		10.0			
6,000 – 15,000					10.0
15,000 – 150,000					10.0
150,000 – 300,000					$6.67 \times 10^{-5} f$

6.0 N_c Test Channels

The number of test channels is determined by using Equation 1 below. This equation is available in FCC's KDB 447498. The test channels are appropriately spaced across the antenna's frequency range.

Equation 1 – Number of test channels

$$N_c = \text{Round} \{ [100(f_{\text{high}} - f_{\text{low}})/f_c]^{0.5} \times (f_c / 100)^{0.2} \}$$

where N_c is the number of test channels, f_{high} and f_{low} are the highest and lowest frequencies within the transmission band, f_c is the mid-band frequency, and frequencies are in MHz.

7.0 Measurement Equipment

Table 4 – Equipment

Equipment Type	Model #	SN	Calibration Date	Calibration Due Date
Motorcycle	Honda CBX750-2003	NA	NA	NA
Survey Meter	ETS Model HI-2200	00206805	4/1/2019	4/1/2020
Probe – E-Field	ETS Model E100	00126277		

E-field measurements are in mW/cm^2 .

8.0 Measurement System Uncertainty Levels

Table 5 – Uncertainty Budget for Near Field Probe Measurements

	Tol. ($\pm$ %)	Prob. Dist.	Divisor	u_i ($\pm$ %)		v_i
Measurement System						
Probe Calibration	7.1	N	1.00	7.1	50.4	∞
Survey Meter Calibration	0.0	N	1.00	0.0	0.0	¥
Hemispherical Isotropy	8.0	R	1.73	4.6	21.33	∞
Linearity	5.0	R	1.73	2.9	8.33	∞
Pulse Response	1.0	R	1.73	0.6	0.33	∞
RF Ambient Noise	3.0	R	1.73	1.7	3.00	∞
RF Reflections	8.0	R	1.73	4.6	21.33	∞
Probe Positioning	10.0	R	1.73	5.8	33.333	∞
Test sample Related					0.00	
Antenna Positioning	3.0	N	1.00	3.0	9.0	∞
Power drift	5.0	R	1.73	2.9	8.33	∞
Bystander measurement uncertainty	4.8	N	1.00	4.8	23.04	∞
Passenger measurement uncertainty	8.1	N	1.00	8.1	65.61	∞
Combined Standard Uncertainty		RSS		15.6	15.6	∞
Expanded Uncertainty (95% CONFIDENCE LEVEL)		$k=2$		31	31	

9.0 Product and System Description

This mobile device operates in the LMR bands using either frequency modulation (FM) with 100% transmit duty cycle or TDMA signals with maximum of 50% transmit duty cycle. For conservative assessment, FM signal was tested. A duty factor of 50% applies for PTT operation mode.

This device also incorporates a Class 1 Bluetooth device which is a Frequency Hopping Spread Spectrum (FHSS) technology. The Bluetooth radio modem is used to wireless link audio accessories. The maximum actual transmission duty cycle is imposed by the Bluetooth standard. The maximum duty cycle for BT is 100%. Bluetooth Low Energy (BT LE) intended to reduce power consumption.

This device also contains WLAN technology for data capabilities over 802.11b/g/n 2.4 GHz and 802.11 a/n/ac 5 GHz wireless networks.

Table 6 below summarizes the technologies, bands, maximum duty cycles and maximum output powers. Maximum output powers are defined as upper limit of the production line final test station.

Table 6

Technologies	Bands (MHz)	Duty Cycle (%)	Max Power (W)
LMR	762-870	50 (PTT)	18
BT	2402-2480	100	0.01122
BT LE	2402-2480	100	0.0063
WLAN	2400 – 2462 (802.11b/g/n)	100	0.0398 (802.11b)
			0.0158 (802.11g)
			0.0126 (802.11n)
	5180-5825 (802.11 a/n/ac)	100	0.0158

This device will be marketed to and used by employees solely for work-related operations, such as public safety agencies, e.g. police, fire and emergency medical. User training is the responsibility of these agencies which can be expected to employ the usage instructions, safety information and operational cautions set forth in the user's manual, instructional sessions or other means.

Accordingly this product is classified as Occupational/Controlled Exposure. However, in accordance with FCC requirements, the bystanders external to the test vehicle are evaluated to the General Population/Uncontrolled Exposure Limits.

(Note that “Bystanders” as used herein are people other than operator)

10.0 Additional Options and Accessories

Not available.

11.0 Test Set-Up Description

Assessments were performed with mobile radio installed on the test vehicle, at the specified distances and test locations indicated in section 11.0, 12.0 and Appendix A.

All antennas described in Table 7 were considered in order to develop the test plan for this product. Antennas were installed and tested per their defined test channels reported in Appendix D.

12.0 Method of Measurement for motorcycle mounted antenna(s)

12.1 Bystander vehicle MPE measurements

Antenna is located at the rear of the test vehicle. Refer to Appendix A for antenna location with respect to the bystander.

MPE measurements for bystander (BS) conditions are determined by taking the average of (10) measurements in a 2m vertical line for the bystander test location indicated in Appendix A with 20 cm height increments, with the distance between the antenna and the geometric center of the probe sensor equal to 60 cm, directly behind the motorcycle. Unlike a car, the motorcycle does not feature a large rectangular trunk and other features (e.g. windows) that may produce significantly distinct exposures depending on the location of a bystander relative to the trunk. For a motorcycle equipped with a wire antenna mounted on a small ground plane, the separation distance between the antenna and bystander is the main factor determining the exposure levels and for this reason the rear test location is employed.

The separation distance used for testing is defined from the antenna where as the RF safety booklet defines the same distance from the vehicle body to ensure that the assessment is applicable to other vehicles. The measurement probe is positioned orthogonal to antenna (typically parallel to ground with a vertically mounted antenna) and aimed directly at the antenna's axis. These measurements are representative of persons other than the operator standing next to the vehicle.

12.2 Operator vehicle MPE measurements

Antenna is located at the rear of the test vehicle. Refer to Appendix A for antenna location with respect to the operator.

MPE measurements for operator (OP) conditions are determined by taking the average of the (3) measurements (Head, Chest) at the test distance of 37.5cm from the operators' seat area to antennas. (Lower Trunk) at test distance of 48.5 cm to maintain 20 cm separation distance between probe sensor and reradiating objects (motorcycle's enclosure).

The measurement probe is oriented parallel (horizontal) to the ground and positioned above the motorcycle operator's seat. The probe head is pointed towards the back of the vehicle and aimed directly at the antenna's axis while maintaining a twenty (20) centimeter separation distance between the probe sensor and reradiating structures. These (3) measurements are representative of the operator.

13.0 MPE Calculations

The final MPE results for this mobile radio are presented in section 15.0. These results are based on 50% duty cycle for PTT for LMR bands.

Below is an explanation of how the MPE results are calculated. Refer to Appendix D for MPE measurement results and calculations for LMR band.

Bystander - 10 measurements are averaged over the body (*Avg_over_body*).

Operator - 3 measurements are averaged over the top portion of body (*Avg_TopPortion_body*).

The Average over Body test methodology is consistent with IEEE/ANSI C95.3-2002 guidelines.

Therefore;

Equation 2 – Power Density Calculation (*Calc._P.D.*)

$$\text{Calc.}_P.D. = (\text{Avg_over_body}) * (\text{probe_frequency_cal_factor}) * (\text{duty_cycle})$$

$$\text{Calc.}_P.D. = (\text{Avg_TopPortion_body}) * \frac{2}{3} * (\text{probe_frequency_cal_factor}) * (\text{duty_cycle})$$

Note 1: The highest "average" cal factors from the calibration certificates were selected for the applicable frequency range. Linear interpretation was used to determine "probe_frequency_cal_factor" for the specific test frequencies.

Note 2: The E-field probe calibration certificate's frequency cal factors were determined by measuring V/m. The survey meter's results were measured in power density (mW/cm²) and therefore the "probe_frequency_cal_factor" was squared in equation 2 to account for these results.

Note 3: The H-field probe calibration certificate's frequency cal factors were determined by measuring A/m. The survey meter's results were measured in A/m and therefore the "Avg_over_body" A/m results were converted to

power density (mW/cm^2) using the equation 3. H-field measurements are only applicable to frequencies below 300MHz.

Equation 3 – Converting A/m to mW/cm^2

$$mW/cm^2 = (A/m)^2 * 37.699$$

Equation 4 – Power Density Maximum Calculation

$$Max_Calc._P.D. = P.D._calc * \frac{\max_output_power}{initial_output_power}$$

Note 4: For initial output power > max_output_power; max_output_power / initial output power = 1

14.0 Antenna Summary

Table 7 below summarizes the tested antennas and their descriptions, overlap of FCC bands, number of test channels per FCC KDB 447498 (FCC N_c) and actual number of tested channels (Actual N_c). This information was used to determine the test configurations presented in this report.

Table 7

Antenna No.	Antenna Model	Frequency Range (MHz)	Physical Length (cm)	Gain (dBi)	Remarks	Overlap FCC Bands (MHz)	FCC N _c	Actual N _c
1	HAF4015A	764-870	39.8	5.15	1/4 wave	769-775; 799-824; 851-869	9	11
2	HAF4018A	764-870	4.5	5.15	1/4 wave	769-775; 799-824; 851-869	9	11
3	AN000197A10	By similarity to HAF4015A, only different with antenna connector.						
4	AN000197A11	By similarity to HAF4018A, only different with antenna connector.						
BT/WLAN								
5	AN000163A02	2400-2500 / 4900-5900	7	5.0 / 5.25	Monopole	2412-2462 ; 5180-5825	3	3

15.0 Test Results Summary

15.1 MPE Test Results Summary for LMR

The following tables below summarize the MPE results for each test configuration: test positions (BS-Bystander, OP-Operator), E/H field measurements, antenna model & freq. range, maximum output power, initial power, TX frequency, max calculated power density results, applicable FCC/ICNIRP/ISED Canada specification limits and % of the applicable specification limits.

Table 8**7/800 Band Bystander MPE assessment to General Population / Uncontrolled Exposure Limits**

Test Pos.	E/H field	Antenna No.	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/cm ²)	FCC Limit	% To FCC Spec Limit	ICNIRP Limit	% To ICNIRP Spec Limit	ISED Limit	% To ISED Spec Limit
BS	E	1	HAF4015A, 1/4 wave, 764-870 MHz	18.0	17.9	762.0125	0.050	0.51	9.8	0.38	13.0	0.24	20.3
				18.0	17.9	769.0125	0.051	0.51	9.9	0.38	13.2	0.25	20.7
				18.0	17.8	772.0000	0.055	0.51	10.6	0.39	14.2	0.25	22.2
				18.0	17.7	774.9875	0.051	0.52	9.9	0.39	13.2	0.25	20.7
				18.0	17.5	794.0125	0.066	0.53	12.5	0.40	16.7	0.25	26.3
				18.0	18.0	799.0125	0.072	0.53	13.5	0.40	18.0	0.25	28.6
				18.0	18.0	811.5000	0.094	0.54	17.4	0.41	23.2	0.25	36.9
				18.0	17.4	823.9875	0.067	0.55	12.3	0.41	16.4	0.26	26.2
				18.0	17.8	851.0125	0.048	0.57	8.5	0.43	11.3	0.26	18.3
				18.0	17.6	860.5000	0.043	0.57	7.4	0.43	9.9	0.27	16.1
				18.0	17.7	868.9875	0.050	0.58	8.6	0.43	11.4	0.27	18.6
BS	E	2	HAF4018A, 1/4 wave, 764-870 MHz	18.0	17.9	762.0125	0.062	0.51	12.3	0.38	16.4	0.24	25.6
				18.0	17.9	769.0125	0.063	0.51	12.3	0.38	16.3	0.25	25.6
				18.0	17.8	772.0000	0.060	0.51	11.8	0.39	15.7	0.25	24.5
				18.0	17.7	774.9875	0.059	0.52	11.4	0.39	15.2	0.25	23.8
				18.0	17.5	794.0125	0.053	0.53	10.0	0.40	13.4	0.25	21.1
				18.0	18.0	799.0125	0.046	0.53	8.7	0.40	11.6	0.25	18.4
				18.0	18.0	811.5000	0.055	0.54	10.2	0.41	13.6	0.25	21.6
				18.0	17.4	823.9875	0.062	0.55	11.3	0.41	15.1	0.26	24.2
				18.0	17.8	851.0125	0.054	0.57	9.6	0.43	12.8	0.26	20.6
				18.0	17.6	860.5000	0.054	0.57	9.5	0.43	12.7	0.27	20.5
				18.0	17.7	868.9875	0.064	0.58	11.0	0.43	14.6	0.27	23.8

Notes:

Results highlight in yellow are configurations with highest percentage of limits for bystander.

Blue fonts: Frequencies not regulated by FCC.

Table 9
7/800 Band Operator MPE assessment to Occupational /Controlled Exposure Limits

Test Pos.	E/H field	Antenna No.	Antenna Model	Max Pwr (W)	Initial Pwr (W)	Tx Freq (MHz)	Max Calc. P.D. (mW/ cm^2)	FCC Limit	% To FCC Spec Limit	ICNIRP Limit	% To ICNIRP Spec Limit	ISED Limit	% To ISED Spec Limit
OP	E	1	HAF4015A, 1/4 wave, 764-870 MHz	18.0	17.9	762.0125	0.136	2.54	5.3	1.91	7.1	1.78	7.6
				18.0	17.9	769.0125	0.150	2.56	5.8	1.92	7.8	1.79	8.4
				18.0	17.8	772.0000	0.153	2.57	5.9	1.93	7.9	1.79	8.5
				18.0	17.7	774.9875	0.142	2.58	5.5	1.94	7.3	1.80	7.9
				18.0	17.5	794.0125	0.150	2.65	5.7	1.99	7.6	1.82	8.2
				18.0	18.0	799.0125	0.170	2.66	6.4	2.00	8.5	1.82	9.3
				18.0	18.0	811.5000	0.192	2.71	7.1	2.03	9.5	1.84	10.4
				18.0	17.4	823.9875	0.176	2.75	6.4	2.06	8.5	1.85	9.5
				18.0	17.8	851.0125	0.188	2.84	6.6	2.13	8.8	1.88	10.0
				18.0	17.6	860.5000	0.165	2.87	5.7	2.15	7.6	1.89	8.7
				18.0	17.7	868.9875	0.142	2.90	4.9	2.17	6.5	1.90	7.4
OP	E	2	HAF4018A, 1/4 wave, 764-870 MHz	18.0	17.9	762.0125	0.098	2.54	3.9	1.91	5.2	1.78	5.5
				18.0	17.9	769.0125	0.099	2.56	3.8	1.92	5.1	1.79	5.5
				18.0	17.8	772.0000	0.089	2.57	3.5	1.93	4.6	1.79	5.0
				18.0	17.7	774.9875	0.091	2.58	3.5	1.94	4.7	1.80	5.0
				18.0	17.5	794.0125	0.141	2.65	5.3	1.99	7.1	1.82	7.7
				18.0	18.0	799.0125	0.131	2.66	4.9	2.00	6.6	1.82	7.2
				18.0	18.0	811.5000	0.173	2.71	6.4	2.03	8.6	1.84	9.4
				18.0	17.4	823.9875	0.136	2.75	4.9	2.06	6.6	1.85	7.3
				18.0	17.8	851.0125	0.131	2.84	4.6	2.13	6.2	1.88	7.0
				18.0	17.6	860.5000	0.139	2.87	4.9	2.15	6.5	1.89	7.4
				18.0	17.7	868.9875	0.118	2.90	4.1	2.17	5.4	1.90	6.2

Notes:

Results highlight in yellow are configurations with highest percentage of limits for operator.

Blue fonts: Frequencies not regulated by FCC.

15.2 MPE Test Results for Bluetooth and WLAN

Antenna AN000163A02 supports BT and WLAN 2.4 GHz / 5 GHz should be installed at motorcycle's enclosure. BT, WLAN 2.4 GHz and 5 GHz will not transmit simultaneously.

MPE calculation was used to determine power density for these transmitters due to lower power. According to FCC's OET Bulletin 65 Edition 97-01 Section 2, calculations can be made to predict RF field strength and power density levels around typical RF sources. Equation (5) is generally accurate in far-field of an antenna.

Equation 5 – Power Density Calculation

$$S = \frac{P_t G}{4\pi d^2 L} F$$

Equation (5) accounts for the maximum duty cycle of the signal, and the factor, F, to provide a worst-case prediction of power density per FCC OET Bulletin 65, Edition 97-01 1997.

Where: S = power density
 P_t = maximum output power scaled by the maximum duty cycle of the signal
 G = power gain of the antenna in the direction of interest relative to an isotropic radiator
 d = distance from antenna
 F = Enhancement factor [1 or 2.56 for predicting ground-level field strength]

Table below summarized the MPE calculation for each standalone transmitter bands, Bluetooth and WLAN.

Table 10
BT/WLAN Bystander MPE assessment to General Population / Uncontrolled Exposure Limits

Antenna #	Max Power (W)	Duty Cycle (%)	Tx Frequency (MHz)	Antenna Gain (dBi)	Cable Loss, L (dB)	Dist., d (cm)	Enhance Factor, F	Max Calc. MPE (mW/cm ²)	MPE Spec Limit (mW/cm ²)					
									FCC	% To FCC Spec Limit	ICNIRP	% To ICNIRP Spec Limit	ISED limit	% To ISED Spec Limit
WLAN 2.4 GHz														
AN000163A02	0.040	100%	2412.0	5.00	0.00	20	1.00	0.025	1.00	2.50	1.00	2.50	0.54	4.67
AN000163A02	0.040	100%	2437.0	5.00	0.00	20	1.00	0.025	1.00	2.50	1.00	2.50	0.54	4.63
AN000163A02	0.040	100%	2462.0	5.00	0.00	20	1.00	0.025	1.00	2.50	1.00	2.50	0.54	4.60
WLAN 5 GHz														
AN000163A02	0.016	100%	5180.0	5.25	0.00	20	1.00	0.011	1.00	1.06	1.00	1.06	0.90	1.17
AN000163A02	0.016	100%	5502.5	5.25	0.00	20	1.00	0.011	1.00	1.06	1.00	1.06	0.94	1.12
AN000163A02	0.016	100%	5825.0	5.25	0.00	20	1.00	0.011	1.00	1.06	1.00	1.06	0.98	1.08
Bluetooth 2.4 GHz														
AN000163A02	0.011	100%	2402.0	5.00	0.00	20	1.00	0.007	1.00	0.71	1.00	0.71	0.54	1.32
AN000163A02	0.011	100%	2441.0	5.00	0.00	20	1.00	0.007	1.00	0.71	1.00	0.71	0.54	1.30
AN000163A02	0.011	100%	2480.0	5.00	0.00	20	1.00	0.007	1.00	0.71	1.00	0.71	0.55	1.29

Notes:

- 1) Distance from antenna (d), 20cm for more conservative estimation.
- 2) Cable loss (L), all cable loss include in antenna gain, 0 dB.
- 3) Enhancement Factor (F), 1 (Ground reflection already factor in during antenna characterization)

15.3 Simultaneous Transmission

LMR bands can transmit simultaneously with Bluetooth or WLAN 2.4 GHz or WLAN 5 GHz. Bluetooth and WLAN 2.4 GHz or WLAN 5 GHz transmitters cannot transmit at the same time.

The highest power density results for each standalone transmitters are indicated in Table 11.

Table 11

Transmitters	Frequency Band (MHz)	Operator (OP)		Bystander (BS)	
		Power Density (mW/cm ²)	Percentage of Limit (%)	Power Density (mW/cm ²)	Percentage of Limit (%)
FCC US					
LMR 7/800	769-775; 799-824; 851-869	0.192	7.1	0.094	17.4
Bluetooth	2402 - 2480	0.007	0.71	0.007	0.71
WLAN 2.4 GHz	2412 - 2462	0.025	2.50	0.025	2.50
WLAN 5 GHz	5180 - 5825	0.011	1.06	0.011	1.06
ISED Canada					
LMR 7/800	769-775; 799-824; 851-869	0.192	10.4	0.094	36.9
Bluetooth	2402 - 2480	0.007	1.32	0.007	1.32
WLAN 2.4 GHz	2412 - 2462	0.025	4.67	0.025	4.67
WLAN 5 GHz	5180 - 5825	0.011	1.17	0.011	1.17
ICNIRP					
LMR 7/800	762 – 805; 806 -870	0.192	9.5	0.094	23.2
Bluetooth	2402 - 2480	0.007	0.71	0.007	0.71
WLAN 2.4 GHz	2412 - 2462	0.025	2.50	0.025	2.50
WLAN 5 GHz	5180 - 5825	0.011	1.06	0.011	1.06

Per KDB 447498 D01, simultaneous transmission MPE test exclusion applies when the sum of MPE ratios for all simultaneous transmitting antennas incorporated in a host device is ≤ 1.0 , according to calculated/estimated, numerically modeled, or measured field strengths or power density.

Calculated Maximum Power density for WLAN 2.4 GHz is greater than WLAN 5 GHz and Bluetooth. WLAN 2.4 GHz, WLAN 5 GHz and Bluetooth transmitters cannot transmit at the same time. Thus, WLAN 2.4 GHz will be used to evaluate simultaneous transmission test exclusion. The highest combined power density percentage for simultaneous transmission indicated in Table 12.

Table 12

Designator	Simultaneous Transmission Scenario	Highest Combined Percentage Of Limit (%)	
		Operator (OP)	Bystander (BS)
FCC	LMR 7/800 and WLAN	9.60 %	19.90 %
ISED Canada	LMR 7/800 and WLAN	15.07 %	41.57 %
ICNIRP	LMR 7/800 and WLAN	12.00 %	25.70 %

16.0 Conclusion

The assessments for this device were performed with an output power range as indicated in section 15.1 (for LMR) and 15.2 (for BT/WLAN). The maximum allowable output power is equal to the upper limit of the final test factory transmit power specification listed in Table 6. The highest power density results for LMR and BT/WLAN transmitters scaled to maximum allowable power output are indicated in Table 13 and 14 for bystander and operator.

Table 13: Maximum MPE RF Exposure Summary (LMR)

Designator	Transmitters	Frequency Band (MHz)	Operator (mW/cm ²)	Bystander (mW/cm ²)
FCC	LMR 7/800	769-775; 799-824; 851-869	0.192	0.094
ISED Canada	LMR 7/800	769-775; 799-824; 851-869	0.192	0.094
ICNIRP	LMR 7/800	762 – 805; 806 -870	0.192	0.094


Table 14: Maximum MPE RF Exposure Summary (BT/WLAN)

Designator	Transmitters	Frequency Band (MHz)	Operator (mW/cm ²)	Bystander (mW/cm ²)
FCC / ISED Canada / ICNIRP	Bluetooth	2402 – 2480	0.007	0.007
	WLAN	2412-2462	0.025	0.025
	WLAN	5180-5825 MHz	0.011	0.011


These MPE results herein demonstrate compliance to the FCC/ICNIRP/ISED Canada Occupational/Controlled Exposure limit. FCC rules require compliance for Bystanders to the FCC General Population/Uncontrolled limits.

Appendix A - Illustration of Antenna Location and Test Distances

Bystander Illustration

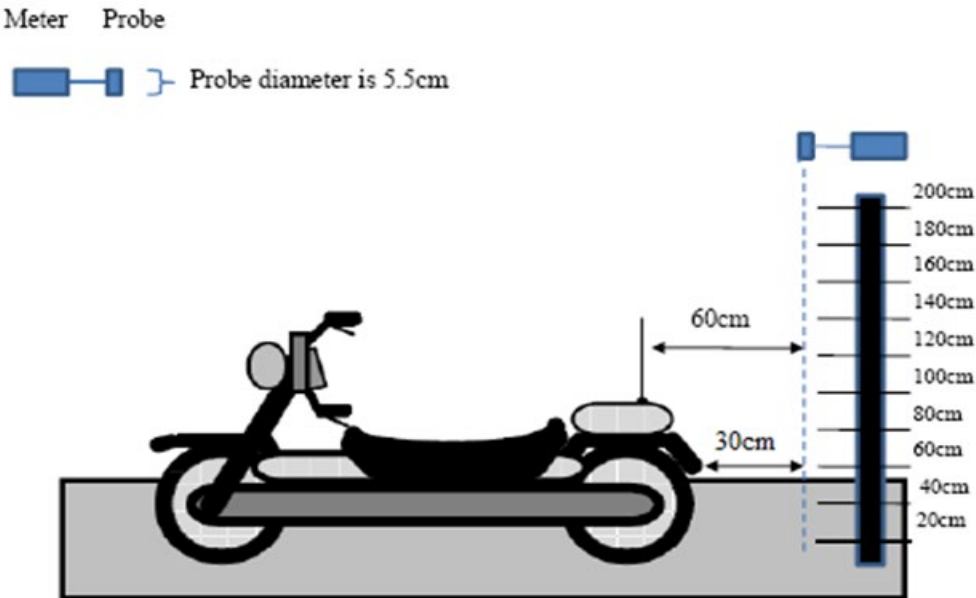

Operator Illustration

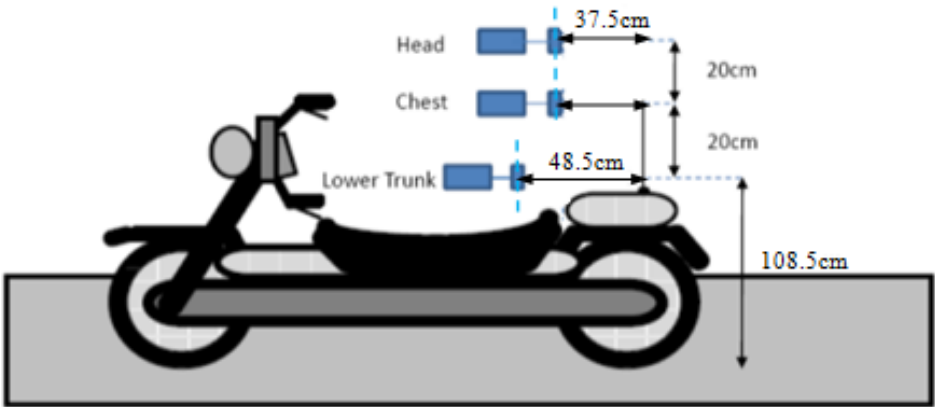

Note: Lower Trunk measurement distance 48.5cm from the antenna is to maintain minimum 20cm separation distance between the probe sensor and reradiating objects (motorcycle’s enclosure)

Appendix B - Probe Calibration Certificates

Service Test Report

QAF 1126, 03/11

Report ID: 129185



An ESCO Technologies Company

1301 Arrow Point Drive
Cedar Park, Texas 78613
(512) 531-6400

An ESCO Technologies Company

Tracking # S000045944

Equipment Check
Attested by GC Date: 01-Apr-19
www.ets-lindgren.com**Certificate of Test Conformance**

Page 1 of 1

Reference: S 000045944**Customer:** Motorola Solutions Malaysia Sdn Bhd (Innoplex) - Plot 2A, Medan Bayan Lepas,
Mukim 12 SWD 11900 Bayan Lepas Penang, Malaysia. Bayan Lepas Penang
11900 Malaysia

The instrument listed below has been tested and verified to Internal Quality Standards. Test data is Attached. Equipment used during instrument testing is controlled by laboratory compliance with ISO/IEC 17025-2005 and ANSI/NCSL Z540-1-1994 using ETS-Lindgren Quality Management System internal procedures.

Manufacturer ETS-Lindgren**Instrument Type** RF Survey Meter**Model** HI-2200**Serial Number/ID** 00206805**Status In**

In Tolerance

Date Completed

01-Apr-19

Status Out

Compliant with Internal Quality Standards

Remarks

Functional test performed with customer's E100 S/N: 00126277 and H200 S/N: 00084225. Firmware Updated.

Sincerely,

A handwritten signature in blue ink, appearing to read "George Cisneros".
George Cisneros

Calibration Supervisor

Date Attested: 01-Apr-19



1301 Arrow Point Drive
Cedar Park, Texas 78613
(512) 531-6400



Track# 8000045944 Ltd Cal ☐

By JAA Date 01-Apr-19

Next Cal Due
www.ets-lindgren.com

Cert I.D.: 129186

Certificate of Calibration Conformance

Page 1 of 3

The instrument identified below has been individually calibrated in compliance with the following standard(s):

IEEE 1309 - 2013, Institute of Electrical and Electronics Engineers, Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas from 9 kHz to 40 GHz

Environment: Laboratory MTE is maintained in a temperature controlled environment with ambient conditions from 18 to 28 C, relative humidity less than 90%. The instrument under test has been calibrated in a suitable environment using an EMCO TEM Cell 5101C, GTEM 5305/5402 and an RF Shielded EMC Chamber which is conducive to maintaining accurate and reliable measurement quality.

Manufacturer:	ETS-Lindgren	Operating Range:	100kHz - 5GHz
Model Number:	E100	Instrument Type:	Isotropic Probe > 1 GHz
Serial Number/ ID:	00126277	Date Code:	
Tracking Number:	S 000045944	Alternate ID:	
Date Completed:	01-Apr-19	Customer:	Motorola Solutions Malaysia Sdn Bhd (Innoplex) - Plot 2A, Medan Bayan Lepas, Mukim 12 SWD 11900 Bayan Lepas Penang, Malaysia, Bayan Lepas Penang 11900 Malaysia
Test Type:	Standard Field, Field Strength		

Calibration Uncertainty: Std Field Method 100kHz - 6 GHz, +/-0.64 dB, Linearity +/- 0.95 dB, Isotropy +/- 0.86
k=2, (95% Confidence Level)

Test Remarks: Probe received in tolerance thus before and after data are the same. Probe calibrated with customer's HI-2200 S/N: 00206805.

Calibration Traceability: All Measuring and Test Equipment (MTE) identified below are traceable to the SI units through the National Institute for Standards and Technology (NIST) or other recognized National Metrology Institute. Calibration Laboratory and Quality System controls are compliant with ISO/IEC 17025-2005 and ANSI/NCCL Z540-1-1994.

Standards and Equipment Used:

Make / Model / Name / S/N / Recall Date

HP	8648C	Signal Generator	3836U02236	18-Apr-19
Keysight	E9304A	Power Sensor	MY56100039	18-Apr-19
Hewlett Packard	E4422B	Signal Generator	US40050591	09-Aug-19
Agilent	E4419B	Power Meter	MY45104171	20-May-19
Rohde & Schwarz	SMB 100A	Signal Generator	101558	17-Sep-19
Agilent	E9304A	Power Sensor	MY41499013	18-Apr-19
Agilent	E9304A	Power Sensor	MY41499012	18-Apr-19
Rohde & Schwarz	NRP-Z91	Power Sensor	100734	18-Apr-19
Rohde & Schwarz	NRP-Z91	Power Sensor	100246	29-Jan-20
Agilent	N1913A	Power Meter	MY50000415	19-Feb-20
Marconi	2024	Signal Generator	112343/043	06-Apr-19
Rohde & Schwarz	NRVD	Power Meter	100451	01-Oct-19
Hewlett Packard	E4419B	Power Meter	US39250717	14-Aug-20
Keysight	E9304A	Power Sensor	MY56100005	18-Apr-19
Rohde & Schwarz	NRV-Z55	Thermal Power Sensor	100362	27-Jul-19
Rohde & Schwarz	NRV-Z55	Thermal Power Sensor	100037	28-Sep-19
Rohde & Schwarz	NRV-Z55	Thermal Power Sensor	100362	13-Dec-19
Rohde & Schwarz	NRP-Z91	Power Sensor	100732	19-Apr-19
Keysight	N5183B	MXG Analog Signal Gener	MY53270789	10-Jan-20

Condition of Instrument

Upon Receipt:

In Tolerance to Internal Quality Standards

On Release:

In Tolerance to Internal Quality Standards

Calibration Completed By
Julio A. Aquino, Calibration Technician

Attested and Issued on 01-Apr-19
George Cisneros, Calibration Supervisor

This document provides traceability of measurements to recognized national standards using controlled processes at the ETS-Lindgren Calibration Laboratory. Uncertainties listed are derived from the methods described by NIST Tech Note 1297. This certificate and report may not be reproduced, except in full, without the written approval of ETS-Lindgren Calibration Laboratory in accordance with ISO/IEC 17025-2005 and ANSI/NCCL Z540-1-1994. The results in this document relate only to the item(s) listed and should not be considered representative of a population unless otherwise noted. QAF 1127 (03/11)

CALIBRATION REPORT

Electric Field Sensor

Model	S/N
E100	00126277
HI-2200	00206805

Date: 01 Apr 2019

☐ New Instrument
☐ Other
☐ Out of Tolerance
☒ Within Tolerance

Frequency Response

Frequency Response	MHz	Nominal Field V/m	Cal Factor* (Applied/Indicated)	Deviation dB
1	1	20	1.05	-0.44
2	15	20	1.01	-0.04
3	30	20	1.01	-0.06
4	75	20	1.01	-0.09
5	100	20	1.02	-0.13
6	150	20	1.01	-0.12
7	200	20	1.01	-0.06
8	250	20	1.01	-0.06
9	300	20	0.99	0.04
10	400	20	1.06	-0.47
11	500	20	0.94	0.54
12	600	20	0.93	0.63
13	700	20	1.00	0.04
14	800	20	1.01	-0.06
15	900	20	1.04	-0.32
16	1000	20	1.06	-0.52
17	2000	20	1.06	-0.48
18	2450	20	1.10	-0.84
19	3000	20	1.07	-0.62
20	3500	20	0.98	0.13
21	4000	20	1.07	-0.60
22	5000	20	1.41	-2.98
23	5500	20	1.40	-2.89
24	6000	20	1.56	-3.84

* Corrected electric field values (V/m) can be obtained by multiplying the Cal Factor with the indicated E field readings.

Linearity

maximum linearity deviation is 0.49 dB

(measurements taken from 0.3 V/m to 800 V/m at 27.12 MHz)

Test Conditions

Calibration performed at ambient room temperature: 23 ±3°C



PROBE ROTATIONAL RESPONSE

Model	E100
S/N	00126277
Report	S000045944
Date	Date of Calibration 01 April 2019
Time	12:14:50 PM
Isotropy *	+ 0.292 dB/ -0.292 dB

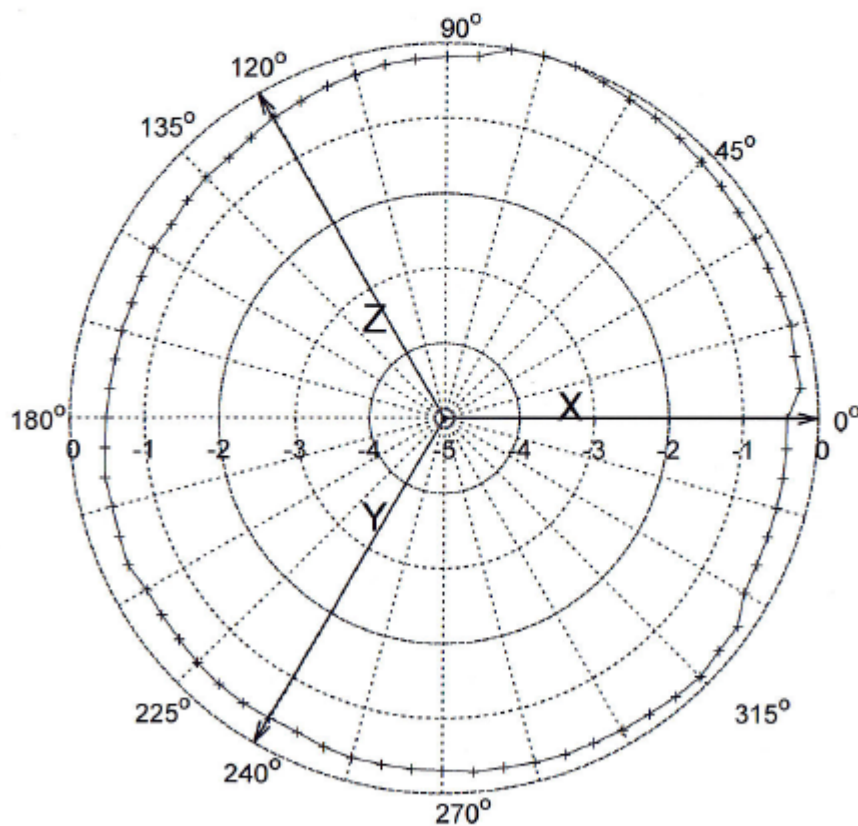


Figure 1: Probe Isotropic Response Chart.

Isotropic response is measured in a 20 V/m field at 400 MHz

*Isotropy is the maximum deviation from the geometric mean as defined by IEEE 1309-2013.

Appendix C - Photos of Assessed Antennas
(Refer to Exhibit 7B)

Appendix D - MPE Measurement Results

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.		Test Pos.	MPE Measurement										DUT Max. TX Factor	Avg. over Body (mW/cm2)	Calc. P.D. (mW/cm2)	Max Calc. P.D. (mW/cm2)
										Bystander (BS) Positions													
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm	200 cm				
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	762.0125	18.0	17.9	CW	E	1.01	BS	0.005	0.012	0.009	0.071	0.249	0.336	0.212	0.057	0.020	0.004	0.5	0.099	0.049	0.050
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	769.0125	18.0	17.9	CW	E	1.01	BS	0.005	0.011	0.010	0.071	0.250	0.343	0.223	0.060	0.020	0.004	0.5	0.101	0.051	0.051
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	772.0000	18.0	17.8	CW	E	1.01	BS	0.005	0.007	0.006	0.086	0.264	0.353	0.227	0.077	0.029	0.011	0.5	0.108	0.054	0.055
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	774.9875	18.0	17.7	CW	E	1.02	BS	0.004	0.005	0.009	0.089	0.233	0.327	0.212	0.067	0.027	0.017	0.5	0.100	0.050	0.051
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	794.0125	18.0	17.5	CW	E	1.02	BS	0.004	0.003	0.019	0.065	0.247	0.461	0.351	0.093	0.011	0.01	0.5	0.129	0.064	0.066
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	799.0125	18.0	18.0	CW	E	1.02	BS	0.003	0.004	0.017	0.064	0.275	0.528	0.408	0.094	0.009	0.011	0.5	0.144	0.072	0.072
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	811.5000	18.0	18.0	CW	E	1.03	BS	0.005	0.003	0.015	0.107	0.357	0.636	0.522	0.156	0.020	0.012	0.5	0.188	0.094	0.094
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	823.9875	18.0	17.4	CW	E	1.03	BS	0.003	0.003	0.013	0.088	0.257	0.447	0.341	0.090	0.015	0.004	0.5	0.130	0.065	0.067
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	851.0125	18.0	17.8	CW	E	1.05	BS	0.002	0.005	0.008	0.041	0.129	0.272	0.300	0.118	0.029	0.002	0.5	0.095	0.048	0.048
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	860.5000	18.0	17.6	CW	E	1.06	BS	0.002	0.008	0.010	0.028	0.078	0.286	0.245	0.100	0.031	0.001	0.5	0.083	0.042	0.043
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	868.9875	18.0	17.7	CW	E	1.06	BS	0.009	0.024	0.027	0.015	0.086	0.315	0.302	0.105	0.024	0.013	0.5	0.098	0.049	0.050

MPE calculations are defined in section 13.0.

MPE measurement data for Bystander

D.U.T. Info.							Probe Info.		Test Pos.	MPE Measurement										DUT Max. TX Factor	Avg. over Body (mW/cm2)	Calc. P.D. (mW/cm2)	Max Calc. P.D. (mW/cm2)
										Bystander (BS) Positions													
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		20 cm	40 cm	60 cm	80 cm	100 cm	120 cm	140 cm	160 cm	180 cm	200 cm				
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	762.0125	18.0	17.9	CW	E	1.01	BS	0.073	0.059	0.155	0.248	0.353	0.182	0.073	0.030	0.040	0.014	0.5	0.124	0.062	0.062
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	769.0125	18.0	17.9	CW	E	1.01	BS	0.076	0.060	0.159	0.242	0.351	0.181	0.076	0.032	0.041	0.015	0.5	0.125	0.063	0.063
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	772.0000	18.0	17.8	CW	E	1.01	BS	0.063	0.047	0.156	0.237	0.339	0.184	0.074	0.033	0.027	0.019	0.5	0.120	0.060	0.060
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	774.9875	18.0	17.7	CW	E	1.02	BS	0.054	0.048	0.160	0.205	0.317	0.195	0.077	0.036	0.027	0.021	0.5	0.116	0.058	0.059
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	794.0125	18.0	17.5	CW	E	1.02	BS	0.041	0.059	0.130	0.238	0.235	0.089	0.059	0.049	0.060	0.054	0.5	0.103	0.052	0.053
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	799.0125	18.0	18.0	CW	E	1.02	BS	0.031	0.047	0.113	0.214	0.198	0.088	0.067	0.052	0.063	0.038	0.5	0.093	0.046	0.046
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	811.5000	18.0	18.0	CW	E	1.03	BS	0.029	0.059	0.122	0.260	0.206	0.141	0.142	0.051	0.030	0.034	0.5	0.110	0.055	0.055
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	823.9875	18.0	17.4	CW	E	1.03	BS	0.045	0.085	0.143	0.307	0.220	0.140	0.091	0.051	0.054	0.027	0.5	0.120	0.060	0.062
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	851.0125	18.0	17.8	CW	E	1.05	BS	0.053	0.109	0.130	0.211	0.150	0.102	0.085	0.078	0.061	0.042	0.5	0.107	0.054	0.054
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	860.5000	18.0	17.6	CW	E	1.06	BS	0.079	0.130	0.136	0.230	0.121	0.080	0.071	0.077	0.057	0.027	0.5	0.107	0.053	0.054
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	868.9875	18.0	17.7	CW	E	1.06	BS	0.083	0.177	0.156	0.228	0.164	0.091	0.088	0.068	0.065	0.057	0.5	0.125	0.063	0.064

MPE calculations are defined in section 13.0.

MPE measurement data for Operator

D.U.T. Info.							Probe Info.		Test Pos.	MPE Measurement			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
							Operator (OP) Positions									
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head/ Top	Chest/ Middle	Lower Trunk/ Bottom				
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	762.0125	18.0	17.9	CW	E	1.01	OP	0.13	0.44	0.63	0.5	0.270	0.135	0.136
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	769.0125	18.0	17.9	CW	E	1.01	OP	0.13	0.61	0.58	0.5	0.297	0.149	0.150
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	772.0000	18.0	17.8	CW	E	1.01	OP	0.14	0.61	0.59	0.5	0.302	0.151	0.153
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	774.9875	18.0	17.7	CW	E	1.02	OP	0.13	0.51	0.60	0.5	0.280	0.140	0.142
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	794.0125	18.0	17.5	CW	E	1.02	OP	0.10	0.48	0.71	0.5	0.292	0.146	0.150
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	799.0125	18.0	18.0	CW	E	1.02	OP	0.10	0.69	0.71	0.5	0.340	0.170	0.170
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	811.5000	18.0	18.0	CW	E	1.03	OP	0.22	0.95	0.51	0.5	0.383	0.192	0.192
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	823.9875	18.0	17.4	CW	E	1.03	OP	0.21	0.86	0.41	0.5	0.340	0.170	0.176
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	851.0125	18.0	17.8	CW	E	1.05	OP	0.32	0.86	0.41	0.5	0.371	0.186	0.188
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	860.5000	18.0	17.6	CW	E	1.06	OP	0.29	0.70	0.38	0.5	0.322	0.161	0.165
MC	HAF4015A, 1/4 Wave, (762-870MHz)	5.15	868.9875	18.0	17.7	CW	E	1.06	OP	0.27	0.66	0.25	0.5	0.279	0.139	0.142

MPE calculations are defined in section 13.0.

MPE measurement data for Operator

D.U.T. Info.							Probe Info.		Test Pos.	MPE Measurement			DUT Max. TX Factor	Avg. over Body (mW/ cm2)	Calc. P.D. (mW/ cm2)	Max Calc. P.D. (mW/ cm2)
										Operator (OP) Positions						
										Head/ Top	Chest/ Middle	Lower Trunk/ Bottom				
Ant Loc.	Ant. Model/ Desc.	Ant. Gain (dBi)	Tx Freq (MHz)	Max Pwr (W)	Initial Pwr (W)	Test Mode	E/H Field	Probe Cal. Factor		Head/ Top	Chest/ Middle	Lower Trunk/ Bottom				
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	762.0125	18.0	17.9	CW	E	1.01	OP	0.22	0.35	0.30	0.5	0.196	0.098	0.098
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	769.0125	18.0	17.9	CW	E	1.01	OP	0.22	0.35	0.30	0.5	0.196	0.098	0.099
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	772.0000	18.0	17.8	CW	E	1.01	OP	0.19	0.33	0.26	0.5	0.176	0.088	0.089
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	774.9875	18.0	17.7	CW	E	1.02	OP	0.20	0.34	0.25	0.5	0.178	0.089	0.091
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	794.0125	18.0	17.5	CW	E	1.02	OP	0.28	0.49	0.44	0.5	0.273	0.137	0.141
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	799.0125	18.0	18.0	CW	E	1.02	OP	0.26	0.49	0.41	0.5	0.263	0.131	0.131
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	811.5000	18.0	18.0	CW	E	1.03	OP	0.38	0.79	0.35	0.5	0.347	0.173	0.173
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	823.9875	18.0	17.4	CW	E	1.03	OP	0.29	0.58	0.27	0.5	0.262	0.131	0.136
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	851.0125	18.0	17.8	CW	E	1.05	OP	0.28	0.58	0.25	0.5	0.259	0.130	0.131
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	860.5000	18.0	17.6	CW	E	1.06	OP	0.30	0.52	0.34	0.5	0.272	0.136	0.139
MC	HAF4018A, 1/4 Wave, (762-870MHz)	5.15	868.9875	18.0	17.7	CW	E	1.06	OP	0.26	0.45	0.27	0.5	0.231	0.116	0.118

MPE calculations are defined in section 13.0.