MOTOROLA SOLUTIONS

CERTIFICATE 2518.08

MS ISO/IEC 17025
TESTING
SAMM NO. 0825

MOTOROLA PENANG ADV. COMM. LABORATORY
Motorola Solutions Malaysia SDN BHD,
Plot 2A, Medan Bayan Lepas,
Mukim 12 S.W.D, 11900 Bayan Lepas,
Penang, Malaysia.

FCC/ISED TEST REPORT
Report Revision : Rev.B

Date/s Tested	:	7-SEP-2020 - 10-SEP-2020
Report Issue Date	:	12-OCT-2020
Manufacturer	:	Motorola Solutions Malaysia SDN BHD
Manufacturer Address	:	Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia
Requestor	:	NUR AYUNI BINTI ALBAKRI
Product Type	:	Mobile
Product Version (PMN)	:	XPR 5550e
Model Number (HVIN)	:	AAM28JNN9RA1AN (PMUD2566C)(IC MODEL: PMUD2566CBMNAA)
Frequency Band	:	136-174MHz
Max RF Output Power	:	30 Watts
Applicant Name	:	Motorola Solutions Inc
Applicant Address	:	8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322
ISED Registrations	:	MY0001
FCC Registrations	:	461337
Firmware Version (FVIN)	:	D02.20.02.0111

The equipment was tested accordance to the requirement listed below:

(LMR)
FCC 47 CFR Part 2/ 22 / 74 / 80 / 90 **PASS**
ISED RSS- Gen Issue 5 / 119 Issue 12 / 182 Issue 5

This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.

Prepared By:

Gan Boon Teong
Test Personnel

Approved Signatory:

Vincent Foong Chuen Kit
Responsible Engineer

Table of Contents

Report Revision History 3
1.0 General Information 4
2.0 Summary of Test Results 5
3.0 Measurement Uncertainty 6
4.0 Equipment List 7
5.0 Test Condition 10
5.1. Transmitter Test Conditions 10
6.0 Transmitter Test Parameters 11
6.1. RF Output Power 11
6.1.1. Test Setup 11
6.1.2. Test Result 11
6.2. Frequency Stability 12
6.2.1. Test Setup 12
6.2.2. Test Result 13
6.2.3. Test Limit 14
6.3. Audio Frequency Response 15
6.3.1. Test Setup 15
6.3.2. Test Result 16
6.3.3. Test Limit 17
6.4. Audio Low Pass Filter Response 18
6.4.1. Test Setup 18
6.4.2. Test Result 19
6.4.3. Test Limit 20
6.5. Modulation Limiting 21
6.5.1. Test Setup 21
6.5.2. Test Result 22
6.5.3. Test Limit 22
6.6. Occupied Bandwidth 23
6.6.1. Test Setup (Analog) 23
6.6.2. Test Result (Analog) 24
6.6.3. Test Setup (Digital) 30
6.6.4. Test Result (Digital) 31
6.6.5. Test Limit 37
6.7. Band Edge Conducted Spurious Emission (Part 22) 38
6.7.1. Test Setup (Analog) 38
6.7.2. Test Result (Analog) 39
6.7.3. Test Setup (Digital) 40
6.7.4. Test Result (Digital) 41
6.7.5. Test Limit 41
6.8. Transient Frequency Behavior 42
6.8.1. Test Setup 42
6.8.2. Test Result 43
6.8.3. Test Limit 45

6.9. Adjacent Channel Power 46
6.9.1. Test Setup (Analog) 46
6.9.2. Test Result 46
6.9.3. Test Setup (Digital) 47
6.9.4. Test Result 47
6.9.5. Test Limit 48
6.10. Conducted Spurious Emission 50
6.10.1. Test Setup 50
6.10.2. Test Result (Analog) 51
6.10.3. Test Result (Digital) 55
6.10.4. Test Limit 67
6.11. Radiated Spurious Emission 68
6.11.1. Test Setup 68
6.11.2. Test Result (Analog) 69
6.11.3. Test Result (Digital) 71
6.11.4. Test Limit 79
6.12. Effective Radiated Power (ERP) 86
6.12.1. Test Setup 86
6.12.2. Test Result 86
6.12.3. Test Limit 86
6.13. GNSS (EIRP for 1559 - 1610MHz) 87
6.13.1. Test Setup 87
6.13.1. Test Result 87
6.13.2. Test Limit 87

Report Revision History

Revision History	Description	Date	Originator
Rev. A	Initial Report	12-SEP-2020	Gan Boon Teong
Rev. B	Added FXE/FXD emission designators	3-DEC-2020	Vincent Foong

1.0 General Information

EUT Description:

Technologies	Land Mobile Radio (LMR)
Modulation Type	Analog, 4FSK

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
IMPRES 4-WAY NAVIGATION KEYPAD MICROPHONE WITH ENHANCED AUDIO	MOTOROLA	RMN5127C
POWER CABLE TO BATTERY, 6M (20 FT.), 20 AMP (1- 45W)	MOTOROLA	HKN4192B

General Description of Applied Standards
The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

ANSI C63.4-2014
ANSI C63.26-2015

Deviation from standard
Not applicable as no deviation from standard test method

Modifications to EUT
No modifications.

2.0 Summary of Test Results

FCC General Rules Part (47CFR)	ISED General Rules Part	Test Item	Result	Remarks	Serial number tested
2.1046, 90.541, 22.565, 74.461, 74.534, 80.215	RSS-119	RF Power Output	Pass		511TWP5900
2.1055, 90.213, 22.355, 74.464, 74.561	RSS-119	Frequency Stability	Pass		511TWP5900
2.1047, 74.463, 80.213	RSS-119	Audio Frequency Response	Pass		511TWP5900
2.1047, 74.463, 80.213	RSS-119	Audio Low Pass Filter Response	Pass		511TWP5900
2.1047, 74.463, 80.213	RSS-119	Modulation limiting	Pass		511TWP5900
2.1049, 90.210, 22.359, 74.462, 74.535, 80.211(c), 80.211(f)	RSS-119	Occupied Bandwidth	Pass	16K0F3E – 15.0410 kHz 11K0F3E – 9.8796 kHz 7K60F1D/FXD – 7.4619 kHz 7K60F1E/FXE – 7.5301 kHz 7K60F1W – 7.3446 kHz	511TWP5900
22.359 (a), (b)	RSS-119	Band Edge Conducted Spurious Emission	Pass		511TWP5900
90.214	RSS-119	Transient Frequency Behavior	Pass		511TWP5900
-	-	Adjacent Channel Power	NA		
Low end of the band, 22, 80, 74D, 74H, 90	RSS-119	Conducted Spurious Emissions	Pass	Highest emission: -45.19dBm	511TWP5900
2.1051, 22.359, 74.462(c), 80.211(c)	RSS-Gen, RSS-182 (7.9)	Radiated Spurious Emission	Pass	Highest emission: No spur detected (noise floor)	511TWP5907
-	-	GNSS (EIRP for 1559 – 1610MHz)	NA		
-	-	Effective Radiated Power (ERP)	NA		

NA → **Not Applicable**

3.0 Measurement Uncertainty

Measurement	Frequency	Expended Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.43 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	4.25 dB
	200MHz ~ 1000MHz	4.25 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	4.94 dB
	18GHz ~ 25GHz	4.94 dB
Conducted Spurious Emissions	9kHz ~ 12.75GHz	2.82 dB
Frequency Stability	9kHz ~ 12.75GHz	0.0085 ppm
Audio Frequency Response / Low Pass Filter Response	300Hz – 20kHz	4.09 %
Modulation Limiting	300Hz – 3kHz	1.15 %
Occupied Bandwidth	9kHz ~ 12.75GHz	2.82 dB
Band Edge Conducted Spurious Emission	9kHz ~ 12.75GHz	2.82 dB
Transient Frequency Behavior	9kHz ~ 12.75GHz	5.4 ms
Adjacent Channel Power	9kHz ~ 12.75GHz	2.82 dB

4.0 Equipment List

FCC Analog ATE#1: (SW version: 2.4.6 & FCC_Frequency Stability 1.0.3 rev.)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
CHAMBER	SH-641	92009188	06-Mar-20	06-Mar-21
DSA Dynamic Signal Analyzer	35670A	MY42507095	19-Jun-20	19-Jun-21
ANALYZER AUDIO	8903B	3729A17612	15-Nov-19	15-Nov-20
POWER METER	E4416A	MY45102699	26-Jun-20	26-Jun-21
POWER SENSOR	E9301B	MY41498918	12-Aug-20	12-Aug-21
POWER SUPPLY	6031A	3325A02771	13-Mar-20	13-Mar-21
SIGNAL GENERATOR	2042	119718/063	24-Jun-20	24-Jun-21
ANALYZER MODULATION	8901B	3122A03662	08-Jul-20	08-Jul-21
N to N RF Cable # 1	M17/128-RG400	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to BNC RF Cable # 7	RG 58	NA	NA	NA
N to SMA RF Cable # 1	RG 58	NA	NA	NA
N to SMA RF Cable # 2	RG 58	NA	NA	NA
N to SMA RF Cable # 3	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-34-LIM	NA	NA	NA

FCC Transient ATE #1: (SW version: FCC Transient ATE_R1.1.3)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A36210	CNR	CNR
ATTENUATOR / SWITCH DRIVER	11713A	2508A10141	CNR	CNR
POWER METER	E4416A	GB41293866	26-Feb-19	26-Feb-21
POWER SUPPLY	6032A	MY41002067	22-Feb-20	22-Feb-21
SIGNAL GENERATOR	8657A	3250A05137	19-Jun-20	19-Jun-21
STEP ATTENUATOR	8494G	MY42143006	12-Jun-20	12-Jun-21
STEP ATTENUATOR	8496G	MY42143012	13-Jun-20	13-Jun-21
OSCILLOSCOPE	MSO8104A	MY45002372	26-Jun-20	26-Jun-21
ANALYZER MODULATION	8901B	3438A05093	23-Jun-20	23-Jun-21
ANALYZER AUDIO	8903B	3011A12671	11-Mar-20	11-Mar-21
ANALYZER AUDIO	8903B	3011A08952	29-Jul-20	29-Jul-21
SPECTRUM ANAYLYZER	E4440A	MY46181974	2-Aug-20	2-Aug-21
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 2	M17/128-RG400	NA	NA	NA
N to N RF Cable # 3	M17/128-RG400	NA	NA	NA
N to N RF Cable # 4	M17/128-RG400	NA	NA	NA
N to N RF Cable # 5	M17/128-RG400	NA	NA	NA
N to N RF Cable # 6	M17/128-RG400	NA	NA	NA
N to N RF Cable # 7	M17/128-RG400	NA	NA	NA
N to N RF Cable # 8	M17/128-RG400	NA	NA	NA
N to N RF Cable # 9	M17/128-RG400	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 10dB	49-10-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA
SWITCH CONTROL UNIT	3488A	2719A36210	CNR	CNR

CONDUCTED SPUR EMISSION ATE # 1 (SW version: Conducted Spur ATE_rev 1.23.03)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A32735	CNR	CNR
ANALYZER SPECTRUM	E4440A	MY46185415	10-Jan-20	10-Jan-22
POWER SUPPLY	6031A	3543A03489	05-Jun-20	05-Jun-21
HIGH PASS FILTER SWITCH BOX	-	CS001	2-Jul-20	2-Jul-21
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 2	SF126/11N/11N	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA

EMC Chamber 1

DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
DRG HORN FREQ.	SAS-571	720	21-Mar-19	21-Mar-21
DRG HORN FREQ.	SAS-571	1143	14-Feb-19	14-Feb-21
POWER SUPPLY (0-60V / 0-50A, 1000W)	6032A	2615A01178	21-May-20	21-May-21
SIGNAL GENERATOR	SMB 100A	181117	8-Nov-18	8-Nov-21
EMI TEST RECEIVER	ESW44	101750	24-Jul-19	24-Nov-20
EMI TEST RECEIVER	ESIB26	100017	19-Jul-19	19-Nov-20
5m SEMI-ANECHOIC CHAMBER	S800-HX	J2308	CNR	CNR
BILOG ANTENNA	CBL6112B	2964	23-Apr-19	23-Apr-21
BILOG ANTENNA	CBL6112B	2950	8-Jul-19	8-Jul-21
DATA LOGGER	SDL500	A.016776	4-Jun-20	4-Jun-21
SYSTEM CONTROLLER	SC104V	050806-1	CNR	CNR
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	CNR	CNR
ANTENNA POSITIONING TOWER	TLT2	NA	CNR	CNR
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170255	27-Jan-20	27-Jan-21
18 - 40GHz PREAMPLIFIER	MITEQ Hi GAIN SUCOFLEX	001	CNR	CNR
PREAMPLIFIER	PAM-0118	269	24-May-19	24-May-22
LOOP ANTENNA	6502	00203479	21-Jan-20	21-Jan-21
TEST SOFTWARE	EMC_FCC_IC_BLUETOOTH_RE_TEST			
VERSION	EMC_FCC_RE_v1.6.2			

5.0 Test Condition

5.1. Transmitter Test Conditions

Test Item, (Channel Spacing)	Power (W)	Modulation	Test Frequency (MHz)	Tested By	Environmental conditions
RF Output Power	Low & Max	Analog	138.0125, 158.55, 161.7, 173.3875	Gan Boon Teong	25.4°C, 42.8%RH
Frequency Stability	Max	Analog	158.550	Gan Boon Teong	25.1°C, 54.3%RH, 60.3°C, 50%RH, -30.1°C, 50%RH
Audio Frequency Response (12.5kHz / 25kHz)	Max	Analog	158.550	Gan Boon Teong	25.4°C, 42.8%RH
Audio Low Pass Filter Response (12.5kHz / 25kHz)	Max	Analog	158.550	Gan Boon Teong	25.4°C, 42.8%RH
Modulation limiting (12.5kHz / 25kHz)	Max	Analog	158.550	Gan Boon Teong	25.4°C, 42.8%RH
Occupied Bandwidth (12.5kHz / 20kHz / 25kHz)	Max	Analog, 4FSK	138.0125, 158.55, 161.7, 173.9875, 173.3875	Gan Boon Teong	25.4°C, 42.8%RH
Band Edge Conducted Spurious Emissions (Part 22) (12.5kHz / 20kHz / 25kHz)	Max	Analog, 4FSK	157.77, 158.67	Gan Boon Teong	25.4°C, 42.8%RH
Transient Frequency Behavior *(UHF & VHF Band)* (12.5kHz / 25kHz)	Max	Analog	158.55	Gan Boon Teong	25.4°C, 42.8%RH
Adjacent Channel Power *(700MHz Band)* (12.5kHz / 25kHz)	Max	NA	NA		
Conducted Spurious Emissions- (12.5kHz / 25kHz)	Low / Max	Analog, 4FSK	138.0125, 158.55, 161.7, 173.9875, 173.3875	Gan Boon Teong	25.4°C, 42.8%RH
Radiated Spurious Emission (12.5kHz / 25kHz)	Low / Max	Analog, C4FM, Phase II	158.550, 161.700	Qawiman&Nazrin	22.5°C, 64%RH
GNSS (EIRP for 1559 - 1610MHz) (12.5kHz / 25kHz)	Max	Analog	NA		
Effective Radiated Power (ERP) (12.5kHz / 25kHz)	Max	Analog	NA		

NA → Not Applicable

6.0 Transmitter Test Parameters

6.1. RF Output Power

6.1.1. Test Setup

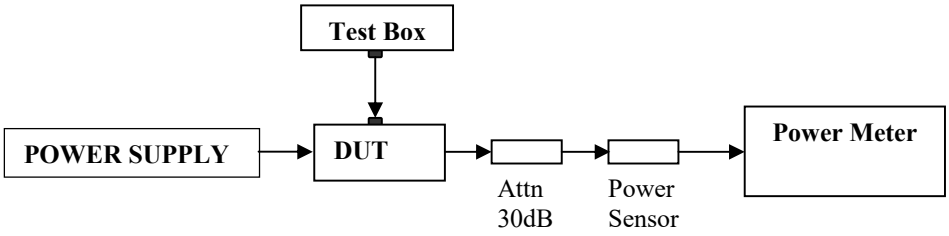

1) The DUT transmitter connected to Power Meter using the 30 dB attenuator and power sensor with above setup.
2) Path loss for the measurement included.
3) All the measurement was done at low, mid, high frequency for each band.
4) Record the power into the test report.

6.1.2. Test Result

Temperature	25˚C				
Voltage (V)	13.6V				
Frequency (MHz)	Low Power (W)	Current (A)	Max Power (W)	Current (A)	Remark
138.01250	1.04	1.32	29.30	4.44	Not for FCC review
158.55000	1.05	1.44	29.20	5.16	
161.70000	1.05	1.47	29.10	5.22	
173.38750	1.03	1.53	29.20	5.67	

6.2. Frequency Stability

6.2.1. Test Setup

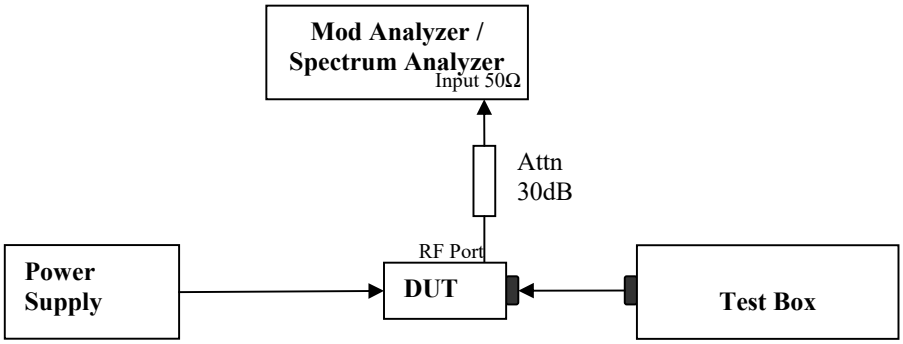

1) The DUT transmitter output port was connected to Modulation / Spectrum Analyzer.
2) Path loss for the measurement included.
3) Transmit the DUT and record the freq in MCF_{MHz}.
4) Test in 2 conditions:
   - Temperature: The frequency of the transmitter was measured from -30°C to 50°C.
   - Supply Voltage:
     -Mobile: The frequency of the transmitter was measured from 85% to 115% of the nominal operating input voltage.
     -Portable: The frequency of the transmitter was measured from nominal ± x % as specified by the manufacturer

5) Calculate the ppm frequency error by the following:

$$ppm\ error = \left(\frac{MCF_{MHz}}{ACF_{MHz}} - 1\right) * 10^6$$

Where: MCF_{MHz} is the Measured Carrier Frequency in MHz
ACF_{MHz} is the Assigned Carrier Frequency in MHz

6.2.2. Test Result

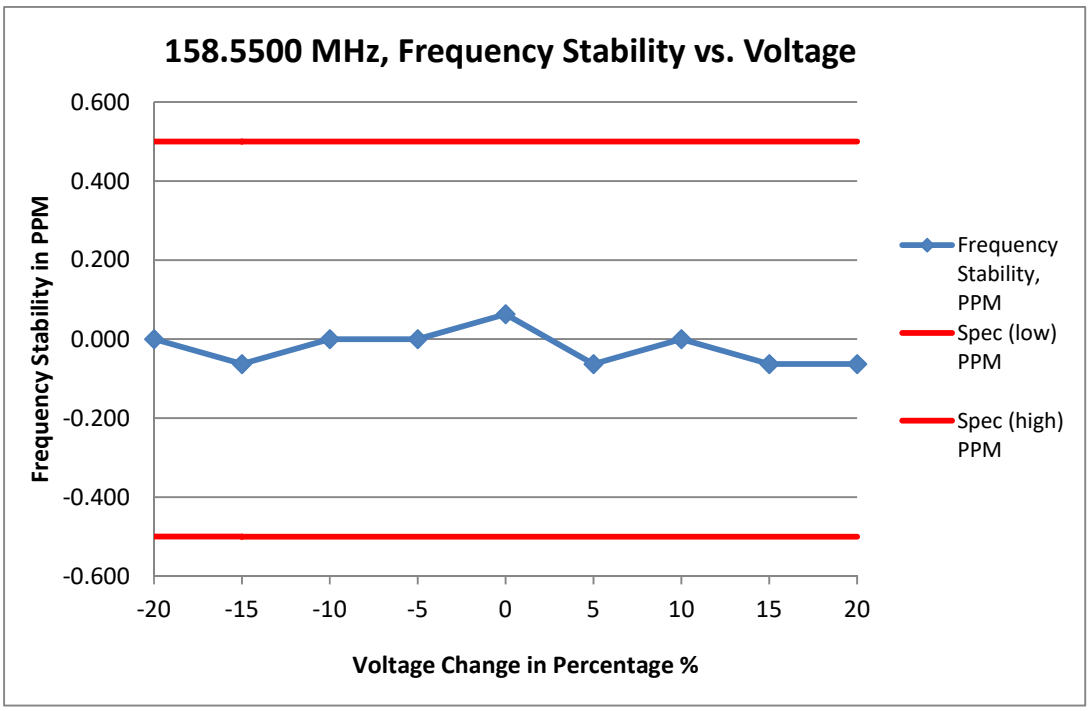

(i) Frequency Stability VS Voltage

Frequency / Channel Spacing	158.5500 MHz / 12.5 kHz				
Temperature, ^{0}C	25				
Voltage %	Voltage, V	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-20	10.88	158.550000	0.000	-0.500	0.500
-15	11.560	158.549990	-0.063	-0.500	0.500
-10	12.240	158.550000	0.000	-0.500	0.500
-5	12.920	158.550000	0.000	-0.500	0.500
0	13.600	158.550010	0.063	-0.500	0.500
5	14.280	158.549990	-0.063	-0.500	0.500
10	14.960	158.550000	0.000	-0.500	0.500
15	15.640	158.549990	-0.063	-0.500	0.500
20	16.320	158.549990	-0.063	-0.500	0.500

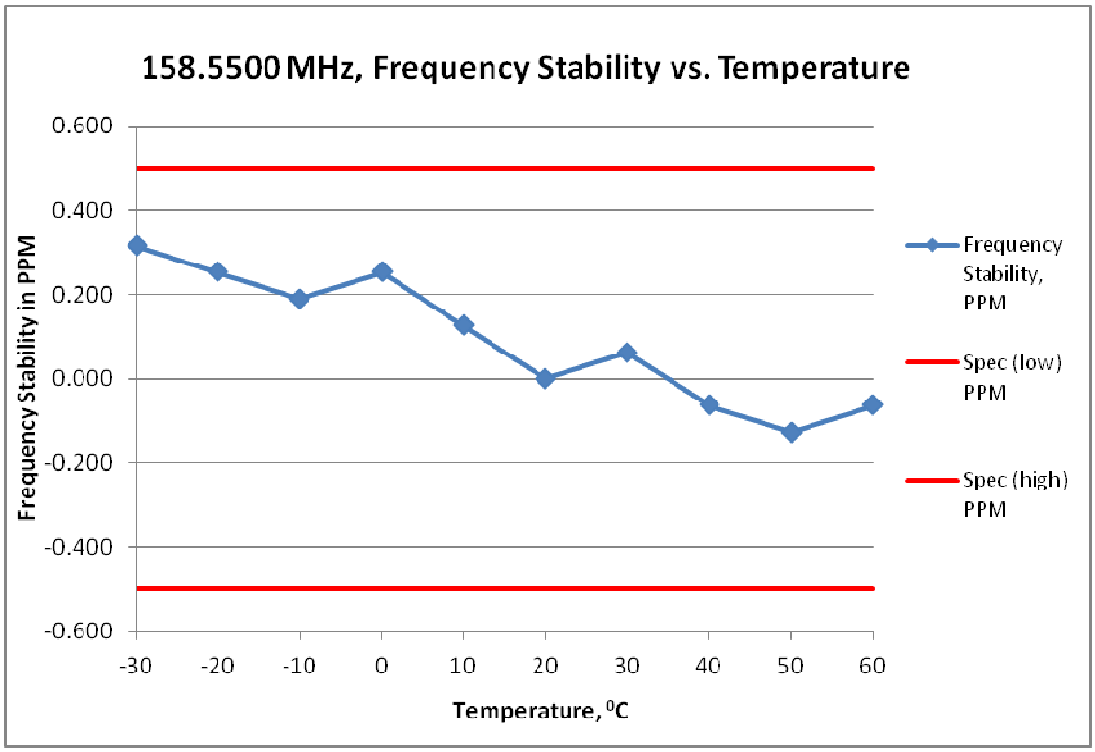

(ii) Frequency Stability VS temperature

Frequency / Channel Spacing	158.5500 MHz / 12.5 kHz			
Voltage, V	7.5			
Temperature, °C	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-30	158.550050	0.315	-0.500	0.500
-20	158.550040	0.252	-0.500	0.500
-10	158.550030	0.189	-0.500	0.500
0	158.550040	0.252	-0.500	0.500
10	158.550020	0.126	-0.500	0.500
20	158.550000	0.000	-0.500	0.500
30	158.550010	0.063	-0.500	0.500
40	158.549990	-0.063	-0.500	0.500
50	158.549980	-0.126	-0.500	0.500
60	158.549990	-0.063	-0.500	0.500

6.2.3. Test Limit

As per manufacturer declared spec +/- #.#ppm

6.3. Audio Frequency Response

6.3.1. Test Setup

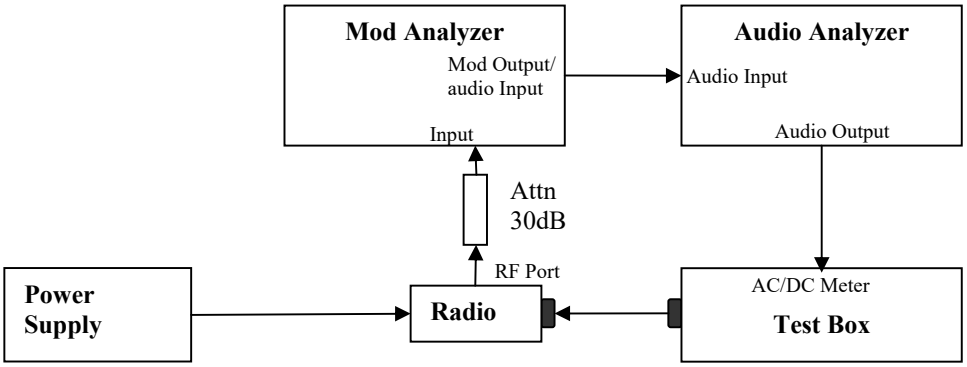

1) The DUT transmitter output port was connected to Modulation Analyzer.
2) Path loss for the measurement included.
3) Set the audio bandwidth filter to 15 kHz and 50 kHz.
4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 20% of the Full rated system deviation.
5) On audio analyzer, set the rated level as reference to zero.
6) Vary the audio frequency from 300 Hz to 3 kHz. Record the change in dB on the audio analyzer.

6.3.2. Test Result

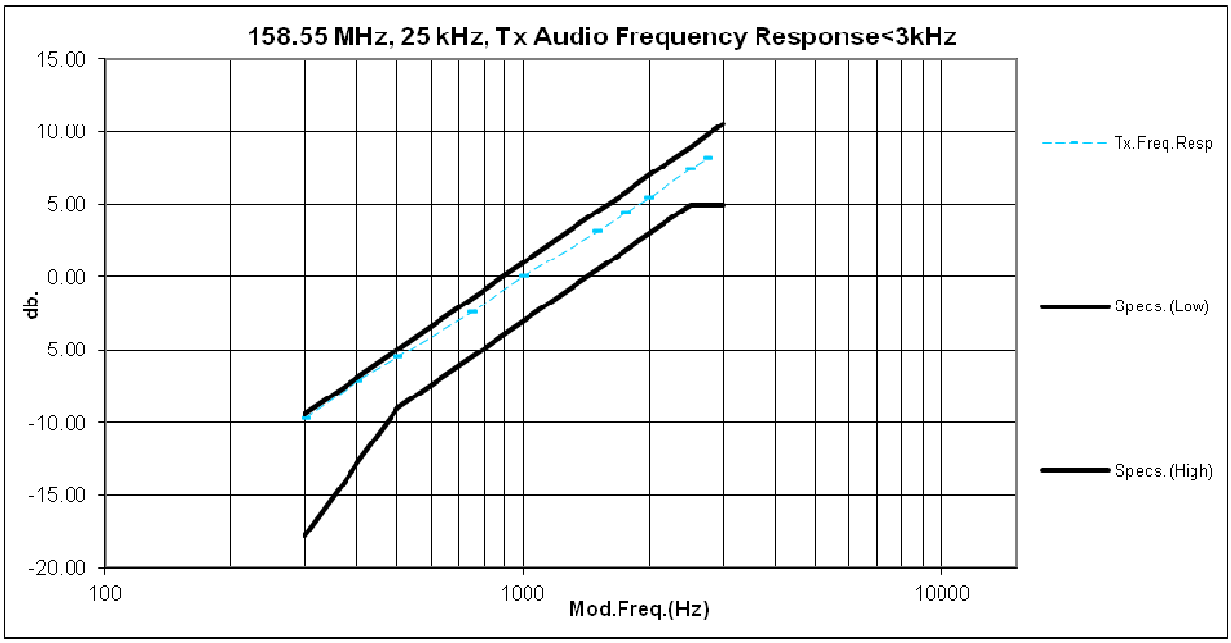

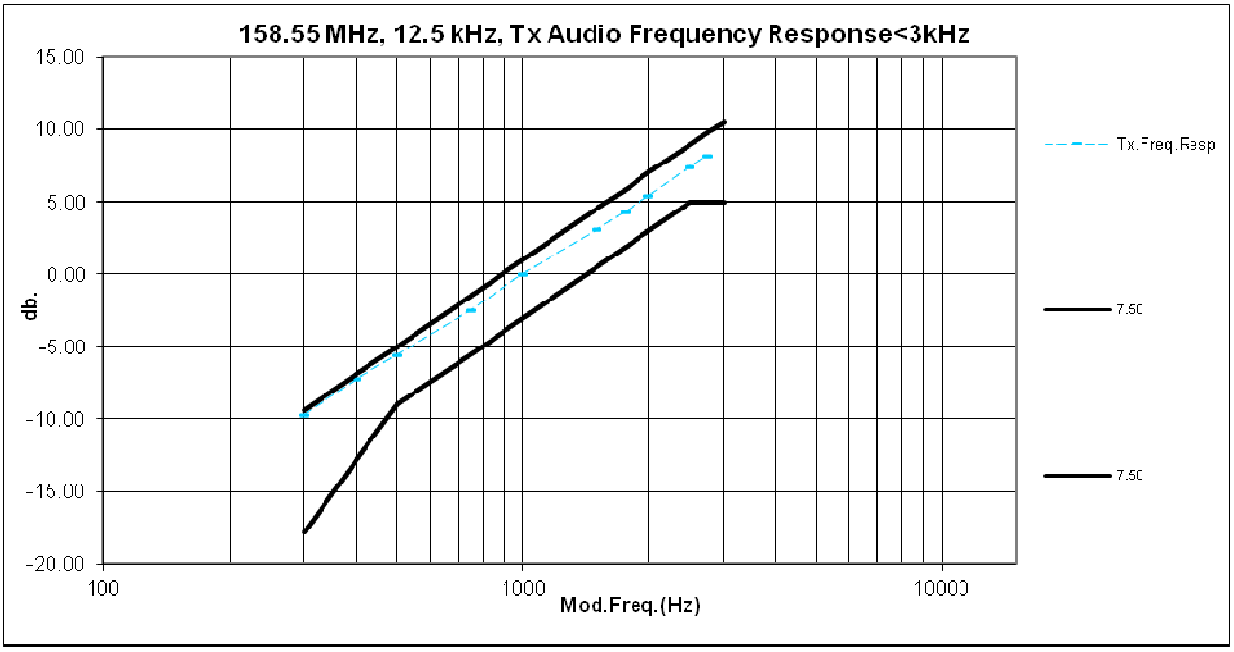

6.3.3. Test Limit

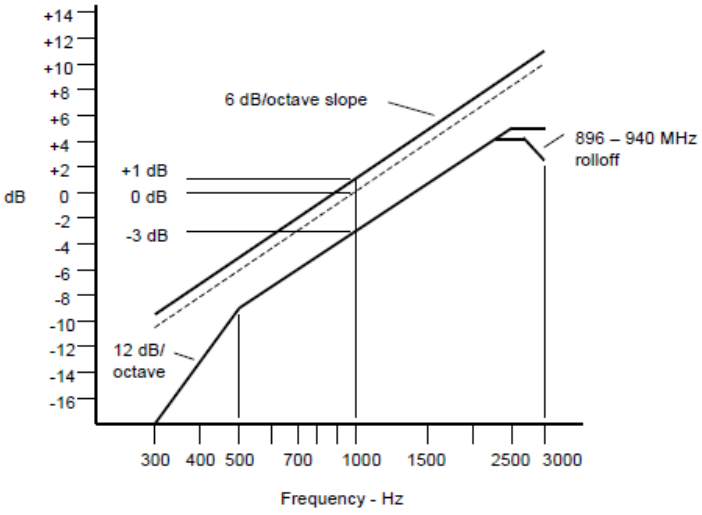

Note:

- *There are additional 6 dB per octave attenuation is allowed from 2.5KHz to 3KHz in equipment 25MHz to 869MHz radio.*
- *Additional 6 dB per octave attenuation is allowed from 2.3KHz to 2.7KHz & additional 12 dB per octave attenuation is allowed from 2.7KHz to 3KHz in equipment 896MHz to 940MHz radio.*

6.4. Audio Low Pass Filter Response

6.4.1. Test Setup

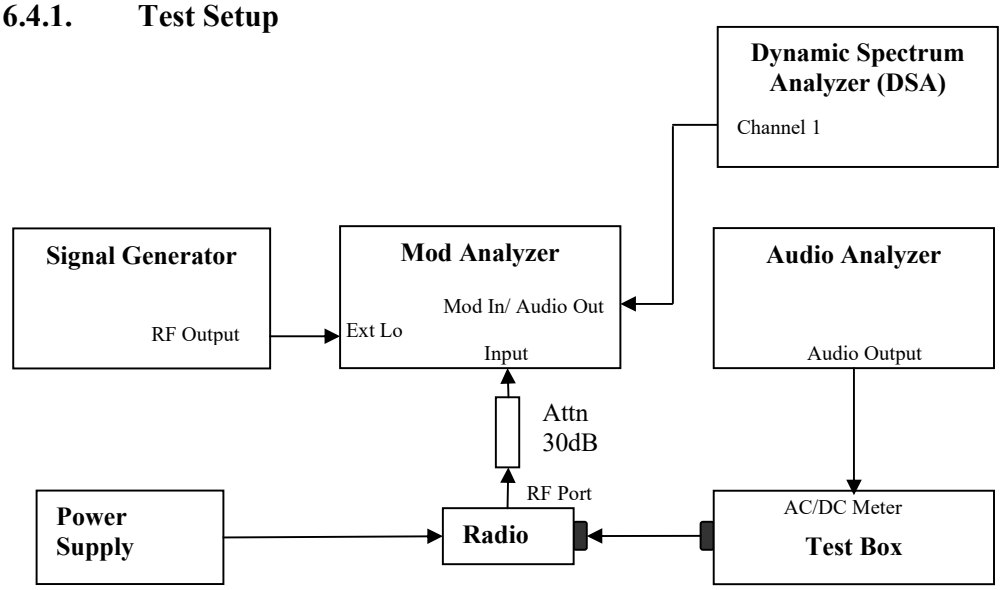

1) The DUT transmitter output port was connected to Modulation Analyzer.
2) Path loss for the measurement included.
3) Press 23.1SPCL on modulation analyzer to enable the external LO from Sigen.
4) Set the Sigen frequency to Fc + 1.5 MHz, RF output level to 0dBm without modulation.
5) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
6) Up the amplitude by 20dB.
7) On DSA, get the reference point to 0dB.
8) Vary the frequency on audio analyzer from 3 kHz to 20 kHz, record the audio tone from DSA.

6.4.2. Test Result

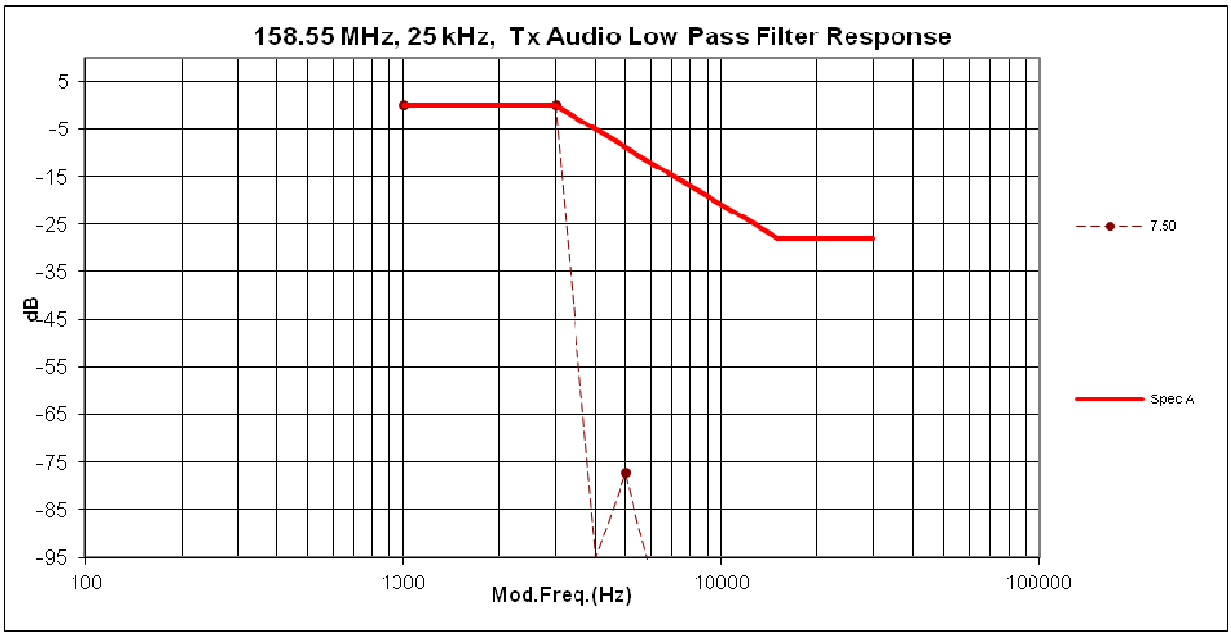

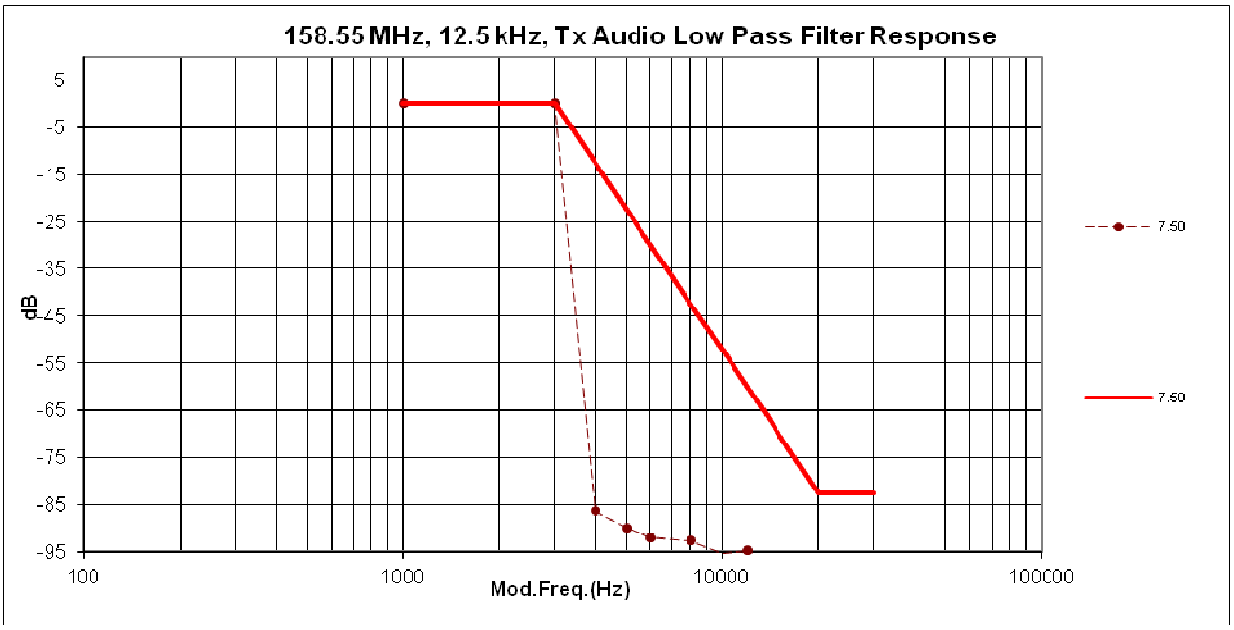

6.4.3. Test Limit

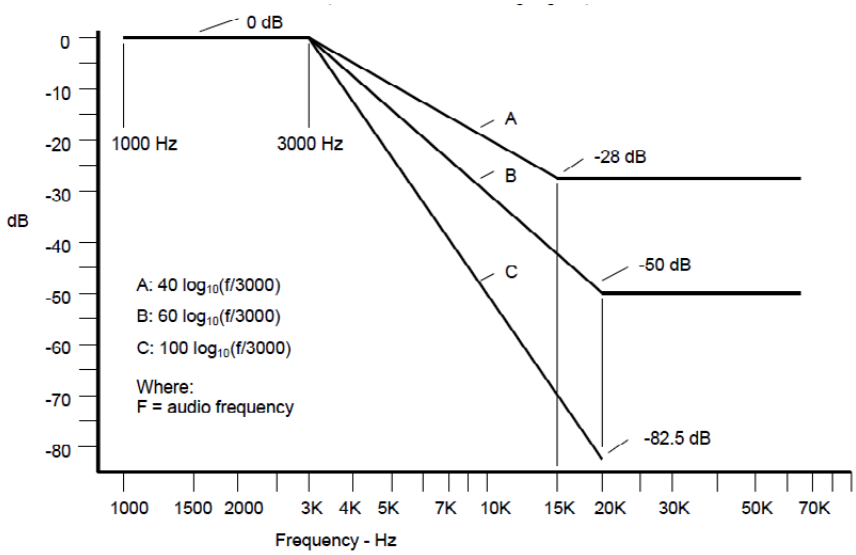

For audio frequencies above 3000 Hz, the audio response of the post limiter low-pass filter shall meet or exceed the following requirements:

a) For equipment operating on 20, 25 or 30 kHz channel bandwidth in the 25 MHz to 174 MHz range:

At frequencies from 3000 Hz through 15,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: 40 $\log_{10}(f / 3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 15,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz, by at least: 28 dB.

b) For equipment operating with 25 kHz bandwidth channels between 406 and 512 MHz through 896 MHz, and between 929 MHz through 930 MHz:

At frequencies from 3000 Hz through 20,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz by at least: 60 $\log_{10}(f / 3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: 50 dB.

c) For equipment operating on channels between 896 MHz through 901 MHz, between 935 MHz through 940 MHz, and 12.5 or 15 kHz spaced channels in the frequency range 138-174 MHz and 406-512 MHz.

At frequencies from 3000 Hz through 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: 100 $\log_{10}(f / 3000)$ dB

where: f is the audio frequency in Hz.

6.5. Modulation Limiting

6.5.1. Test Setup

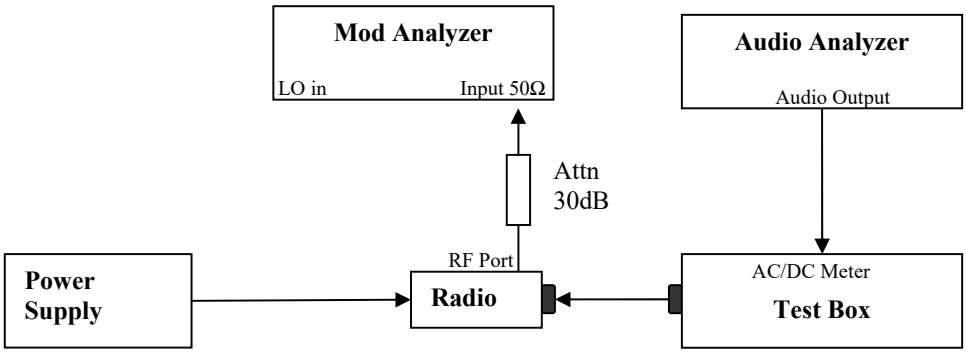

1) The DUT transmitter output port was connected to Modulation Analyzer.
2) Path loss for the measurement included.
3) Set the audio bandwidth filter to 15 kHz.
4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
5) Record the frequency deviation as 0dB input level at 1kHz audio frequency.
6) Repeat the step and record the frequency deviation from -20 dB to 20dB by 5 dB increments and different audio freq 300 Hz, 2.5 kHz and 3 kHz.

6.5.2. Test Result

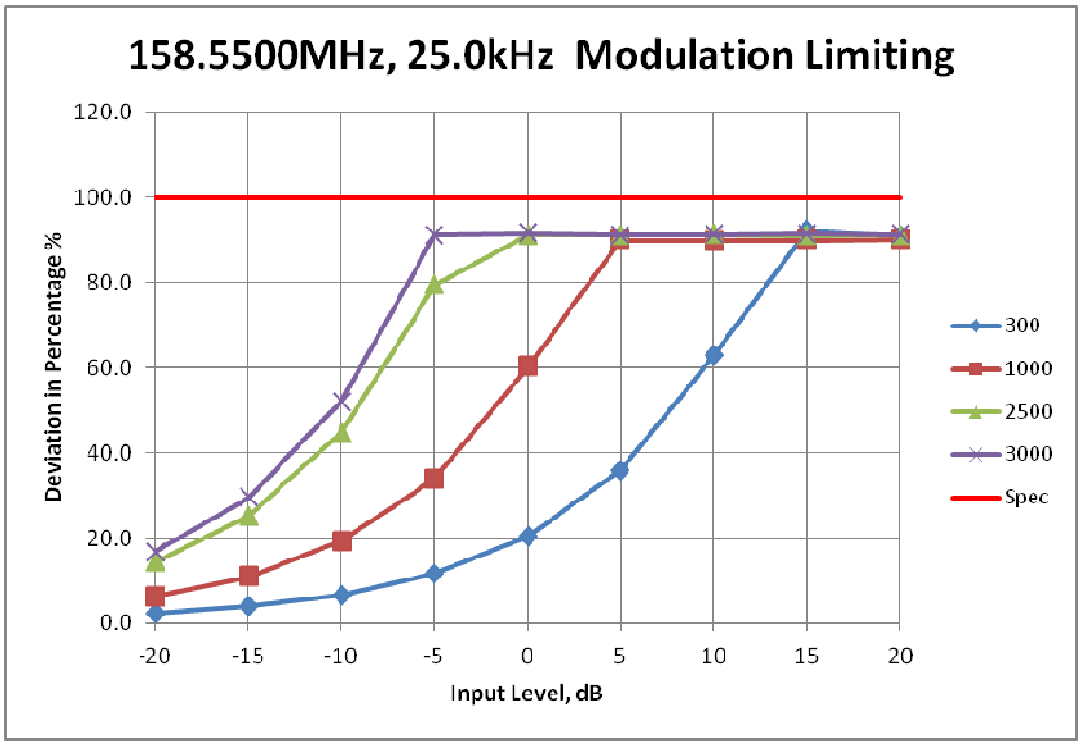

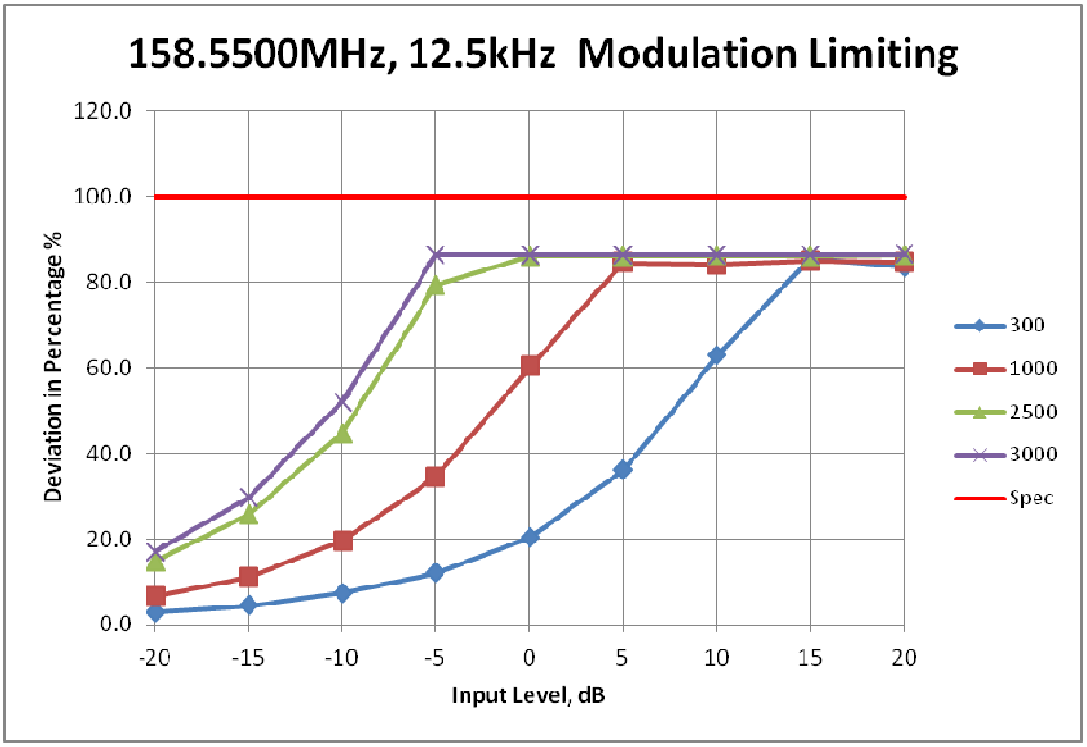

6.5.3. Test Limit

Modulation Limiting shall not exceed 100 percent.

6.6. Occupied Bandwidth

6.6.1. Test Setup (Analog)

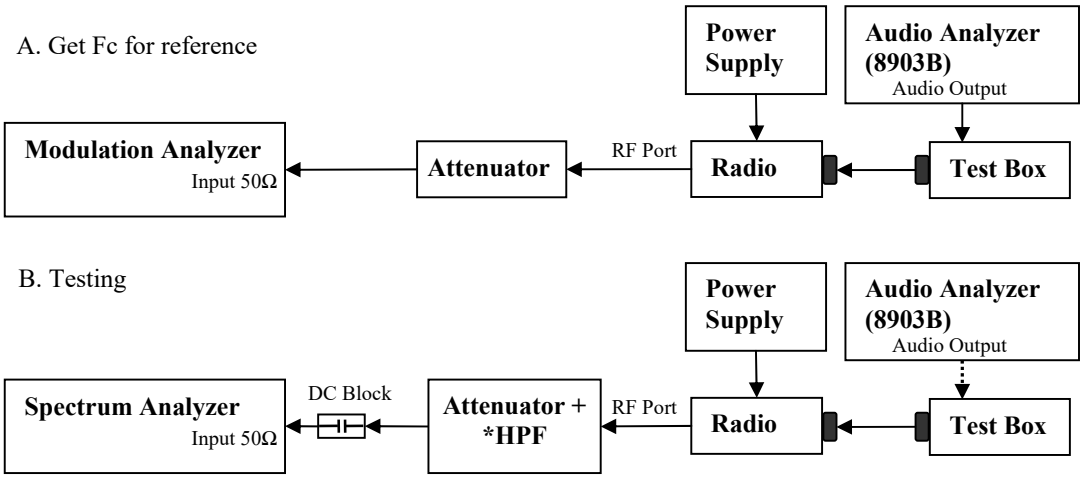

1) The DUT transmitter output port was connected to Modulation Analyzer.
2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
4) Path loss for the measurement included.
5) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
6) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
7) Transmit the DUT and record the occupied Bandwidth frequency.
8) Preset the spectrum analyzer for sideband spectrum measurement.
9) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
10) Save the screen shot as modulated signal
11) Remove the audio tone from audio analyzer to capture unmodulated signal.

* Only HPF added for Mask 80.211 measurement with attenuator.

6.6.2. Test Result (Analog)

Standard Audio Modulation (25 kHz Channelization, Analog Voice):
Emission Designator 16K0F3E

In this case, the maximum modulating frequency is 3 kHz with a 5 kHz deviation.

BW = 2(M+D) = 2*(3 kHz + 5 kHz) = 16 kHz =➔ 16K0
F3E portion of the designator indicates voice.

Therefore, the entire designator for 25 kHz channelization analog voice is 16K0F3E

Standard Audio Modulation (12.5 kHz Channelization, Analog Voice):
Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

BW = 2(M+D) = 2*(3.0 kHz + 2.5 kHz) = 11 kHz =➔ 11K0
F3E portion of the designator indicates voice.

Therefore, the entire designator for 12.5 kHz channelization analog voice is 11K0F3E.

Modulation			Rules Part	
Analog Voice			RSS 119	
Channel Frequency (MHz)	Channel Spacing (kHz)		99% OCB (kHz)	Emission Designator
138.0125	25.0		15.0028	16K0F3E

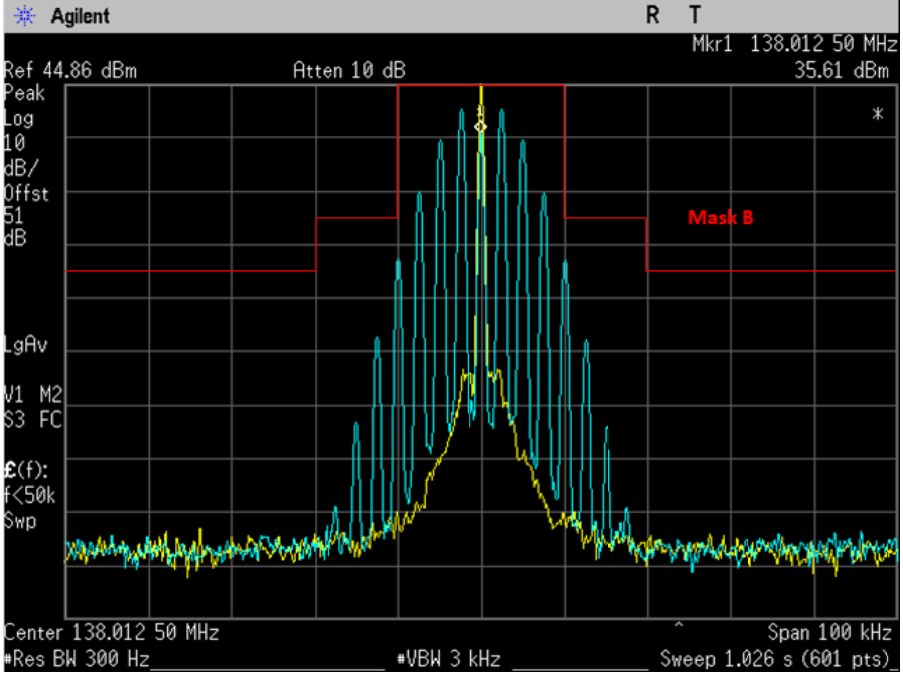

Not for FCC review

Modulation			Rules Part	
Analog Voice			80.211(f) / RSS 119	
Channel Frequency (MHz)	Channel Spacing (kHz)		99% OCB (kHz)	Emission Designator
158.5500	25.0		15.0134	16K0F3E

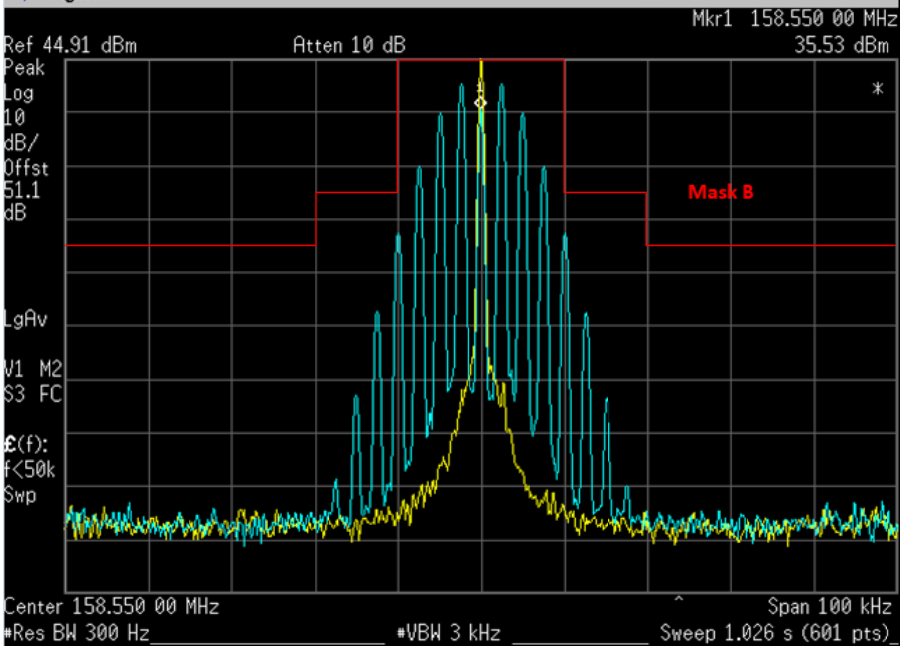

For Part 80

Modulation			Rules Part	
Analog Voice			74.462(c), RSS 119	
Channel Frequency (MHz)	Channel Spacing (kHz)		99% OCB (kHz)	Emission Designator
161.7000	25.0		15.0401	16K0F3E

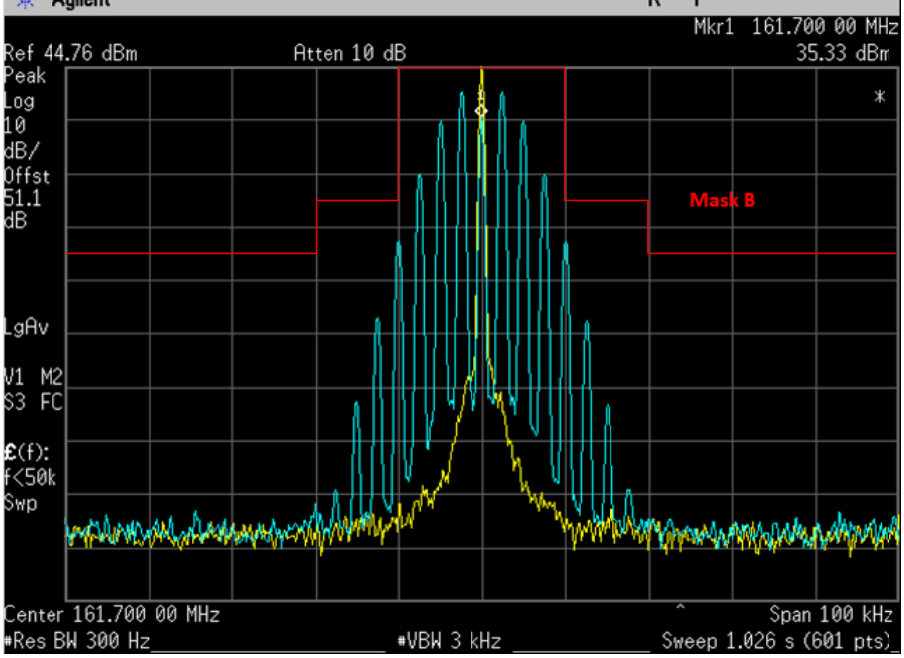

For Part 74

Modulation			Rules Part	
Analog Voice			RSS 119	
Channel Frequency (MHz)	Channel Spacing (kHz)		99% OCB (kHz)	Emission Designator
173.9875	25.0		15.0022	16K0F3E

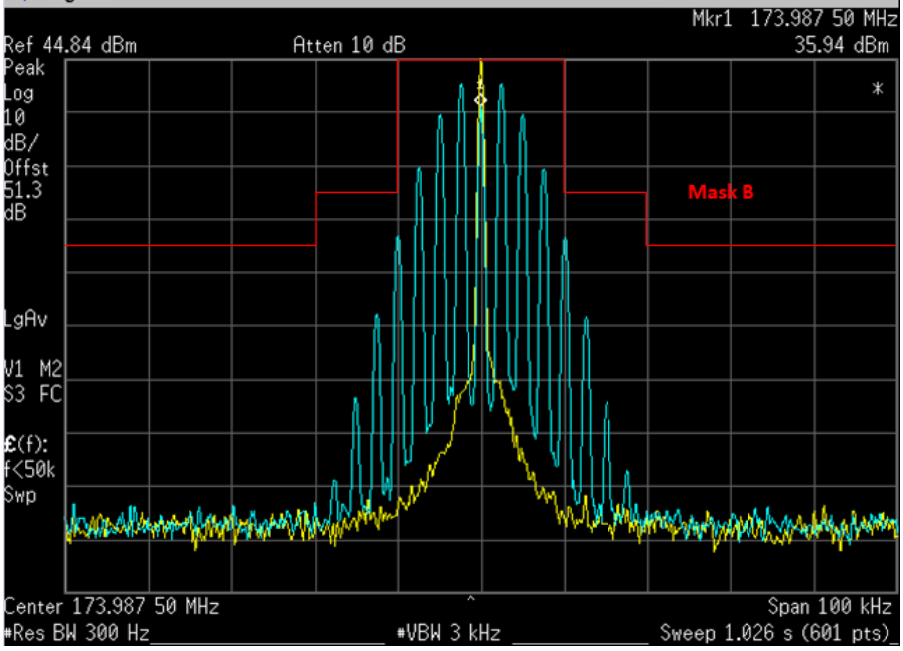

Not for FCC review

Modulation			Rules Part	
Analog Voice			RSS 119	
Channel Frequency (MHz)	Channel Spacing (kHz)		99% OCB (kHz)	Emission Designator
138.0125	12.5		9.8591	11K0F3E

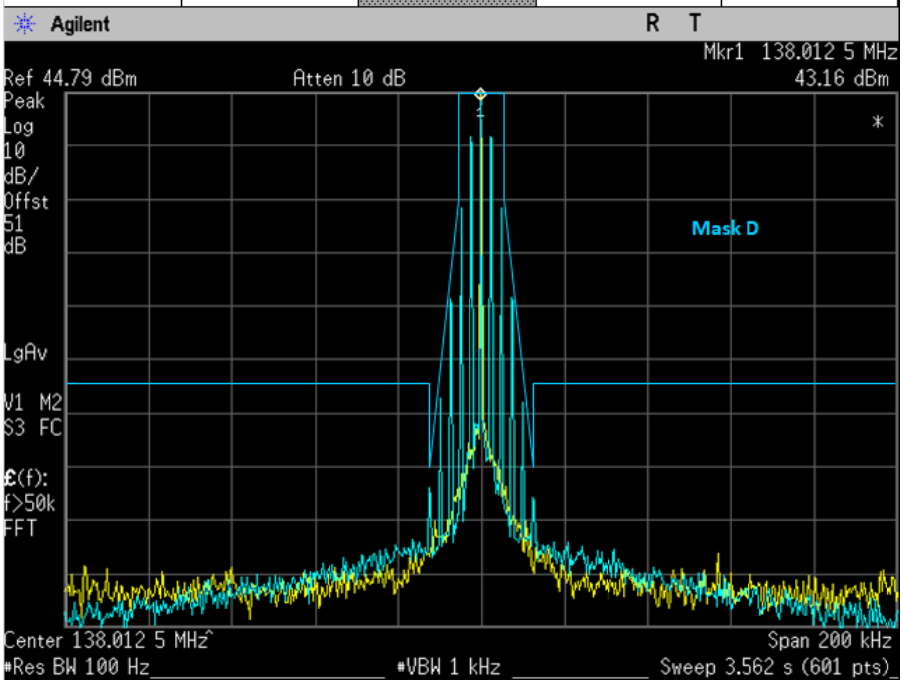

Not for FCC review

Modulation			Rules Part	
Analog Voice			90.210 / 74.462(c)	
Channel Frequency (MHz)	Channel Spacing (kHz)		99% OCB (kHz)	Emission Designator
161.7000	12.5		9.8796	11K0F3E

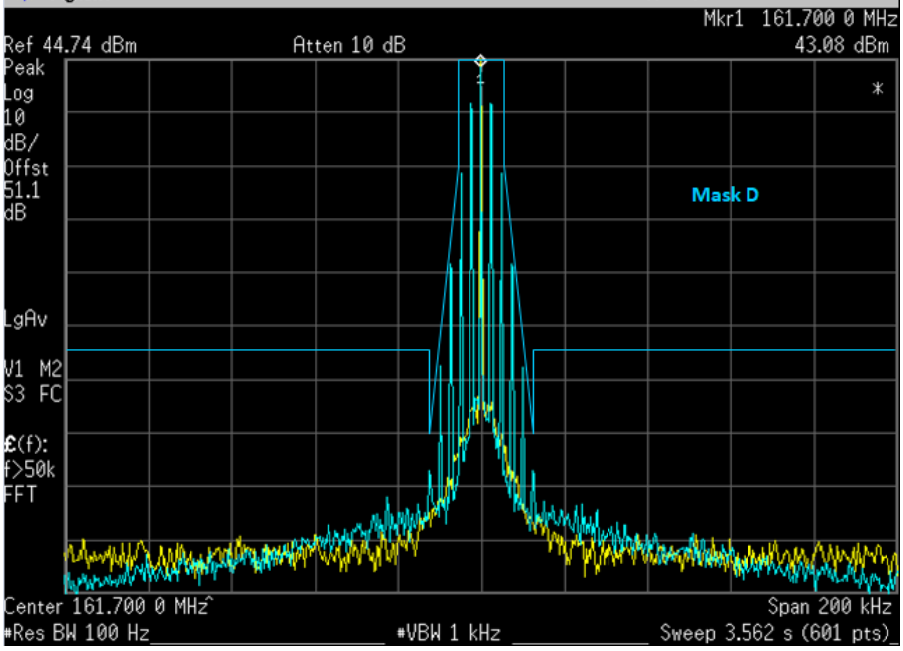

Modulation			Rules Part	
Analog Voice			90.210 / RSS 119	
Channel Frequency (MHz)	Channel Spacing (kHz)		99% OCB (kHz)	Emission Designator
173.3875	12.5		9.8385	11K0F3E

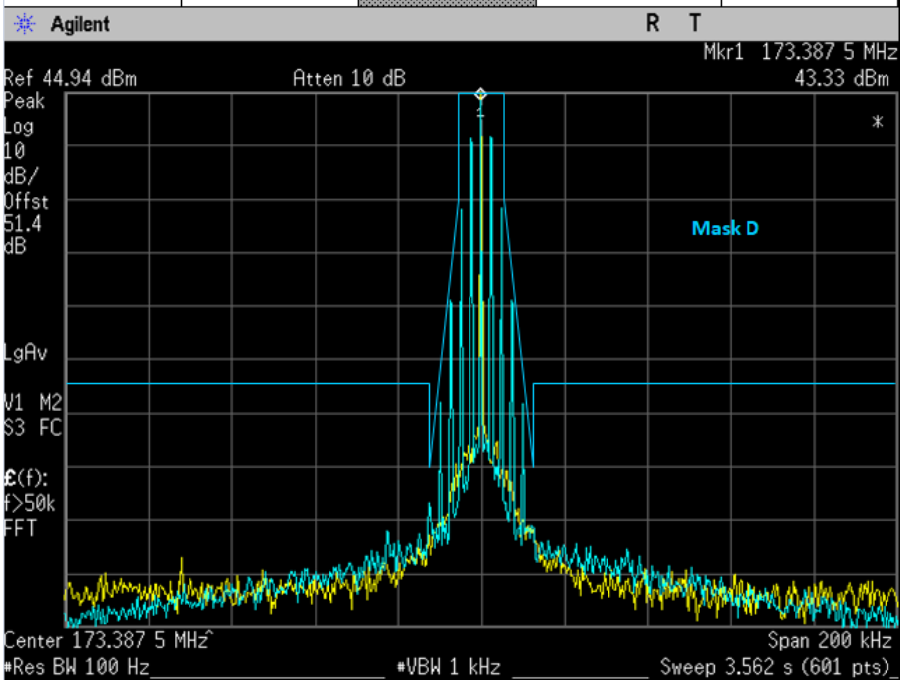

Modulation		Rules Part		
Analog Voice		80.211(c) / RSS 182		
Channel Frequency (MHz)	Channel Spacing (kHz)			Emission Designator
158.5500	25.0			16K0F3E

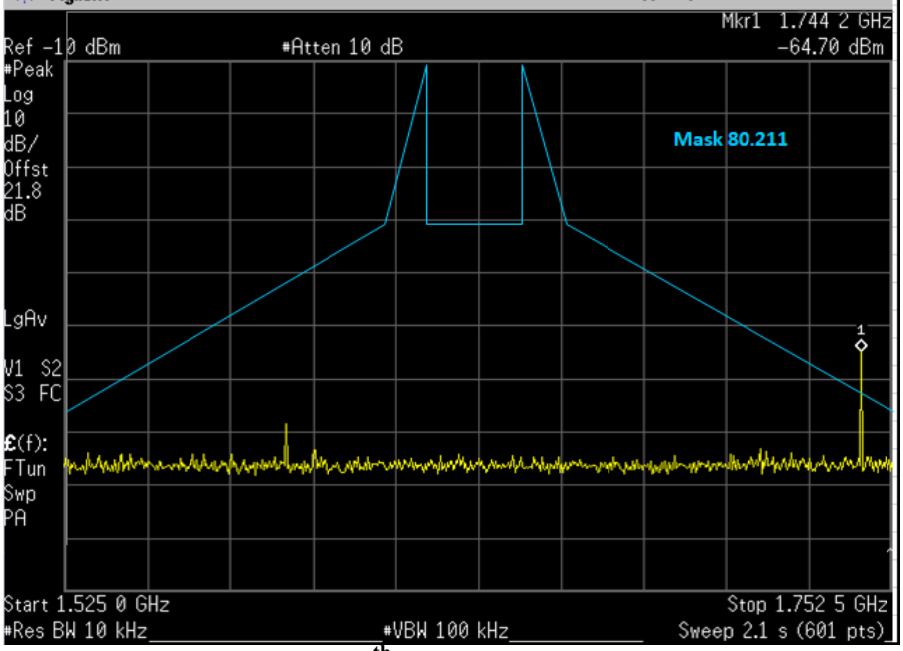

For Part 80 (NOTE: Emission at 1.744GHz is 11th harmonic of fundamental frequency and thus is exempted from the mask as per 80.211(c)(6))

Modulation		Rules Part		
Analog Voice		FCC Part 22.359(b)		
Channel Frequency (MHz)	Channel Spacing (kHz)	-26 dB Point (kHz)	99% OCB (kHz)	Emission Designator
158.5500	25.0	15.5610	15.0171	16K0F3E

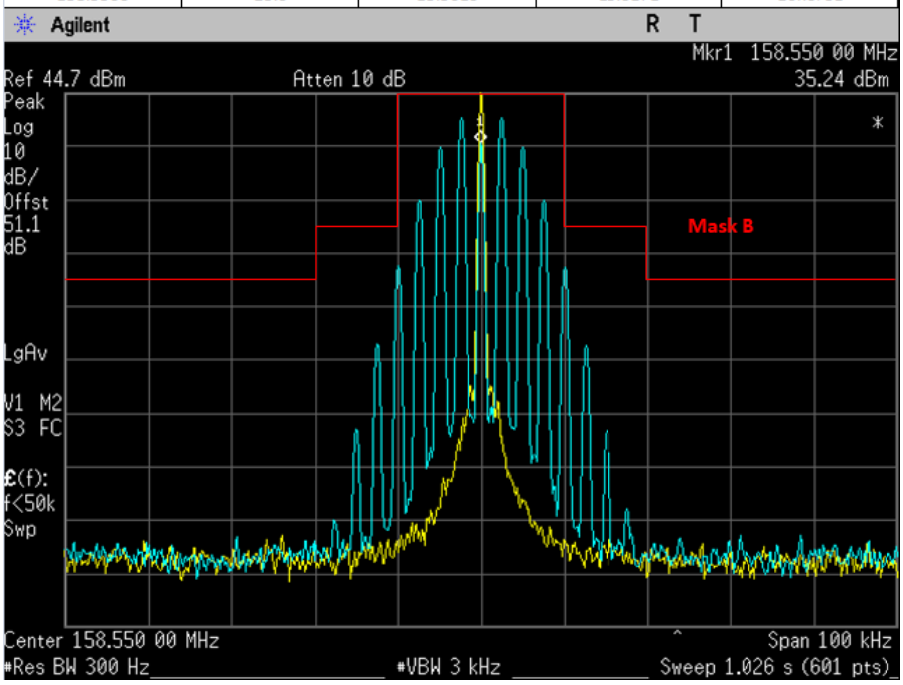

Modulation			Rules Part	
Analog Voice			FCC Part 22.359(b)	
Channel Frequency (MHz)	Channel Spacing (kHz)	-26 dB Point (kHz)	99% OCB (kHz)	Emission Designator
158.5500	20.0	15.4163	10.3968	16K0F3E

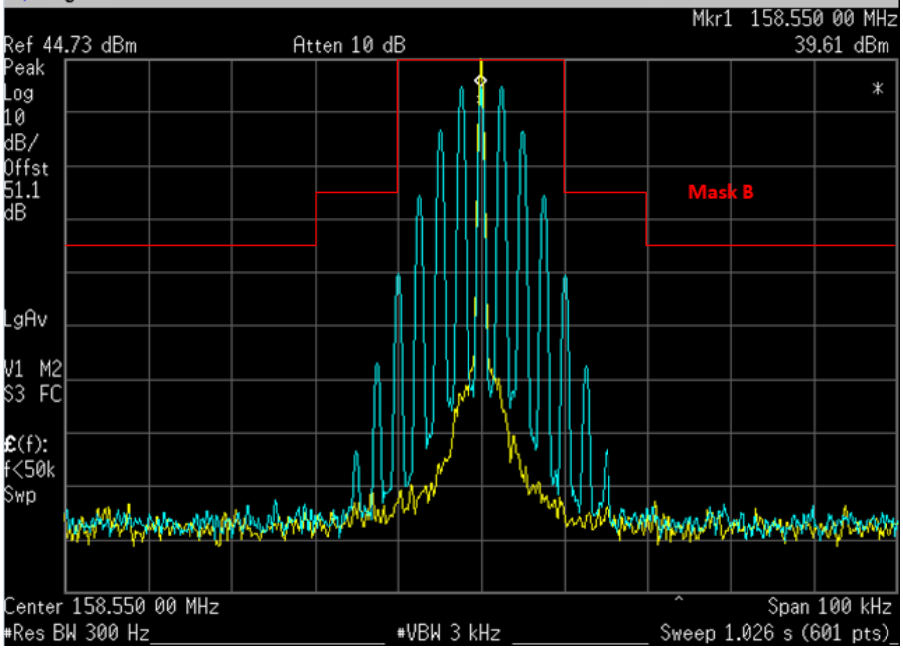

6.6.3. Test Setup (Digital)

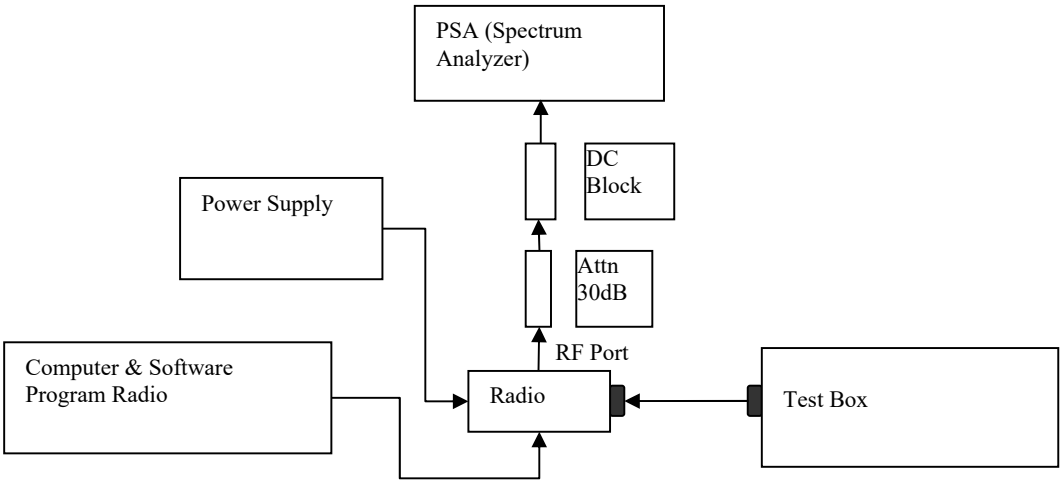

1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
2) Path loss for the measurement included.
3) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
4) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
5) Transmit the DUT and record the occupied Bandwidth frequency.
6) Preset the spectrum analyzer for modulation emission spectrum measurement.
7) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
8) Capture the screen shot as modulated signal.

*Note:

- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.

6.6.4. Test Result (Digital)

Digital (12.5 kHz Channelization, Digital Data/Voice/Voice+Data):
Emission Designator 7K60F1D/7K60F1E/7K60F1W

The 99% energy rule (title 47CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60kHz Measurements were performed in accordance with TIA/EIA TSB102.CAAB Section 2.2.5.2. The emission mask was obtained from 47CFR 90.210(d).

F1D/E/W portion of the designator indicates digital data/voice/voice+data.

Therefore, the entire designator for 12.5 kHz channelization digital data is 7K60F1D / 7K60F1E / 7K60F1W

Modulation			Rules Part	
4FSK Data			RSS 119	
Channel Frequency (MHz)	Channel Spacing (kHz)		99% OCB (kHz)	Emission Designator
138.0125	12.5		7.4185	7K60F1D

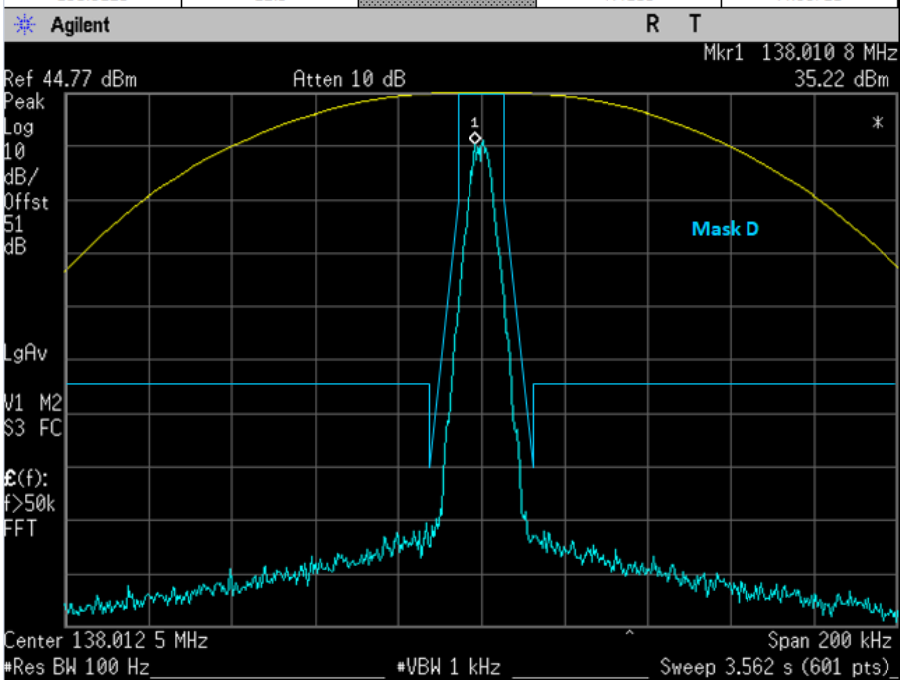

Not for FCC review

Modulation			Rules Part	
4FSK Data			90.210 / 74.462(c)	
Channel Frequency (MHz)	Channel Spacing (kHz)		99% OCB (kHz)	Emission Designator
161.7000	12.5		6.0269	7K60F1D

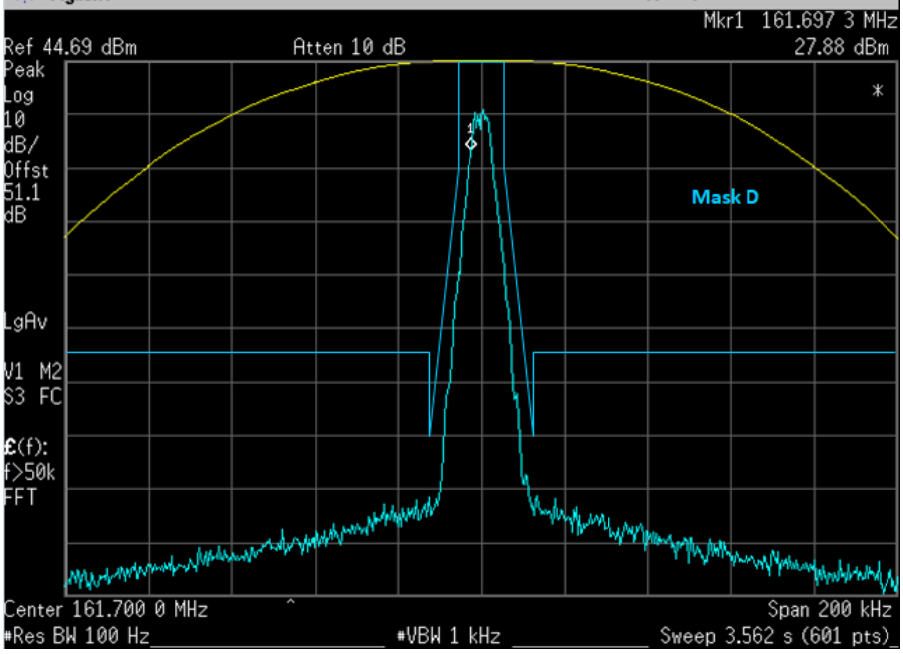

Modulation			Rules Part	
4FSK Data			90.210 / RSS 119	
Channel Frequency (MHz)	Channel Spacing (kHz)		99% OCB (kHz)	Emission Designator
173.9875	12.5		7.4620	7K60F1D

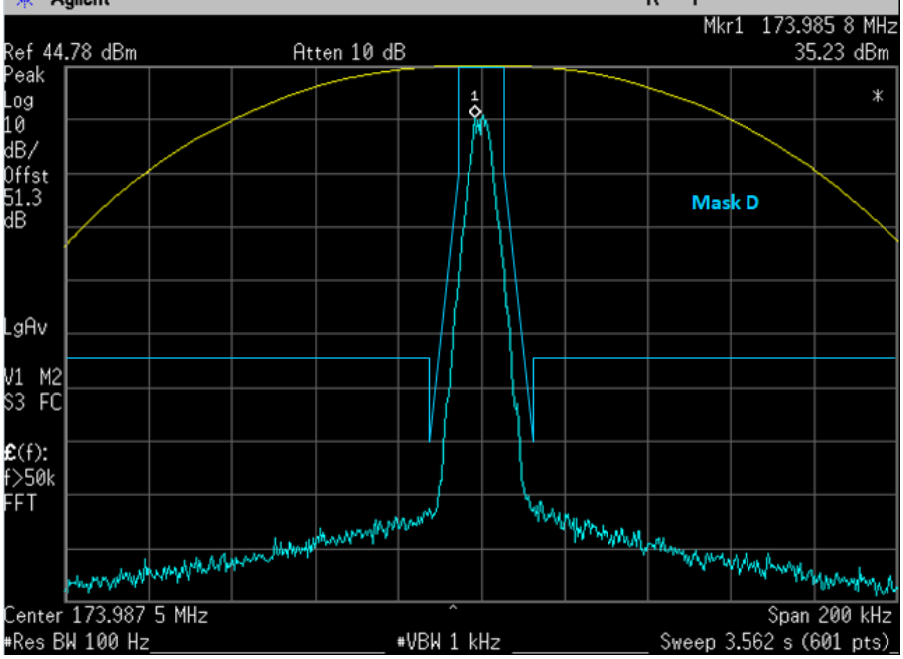

Modulation			Rules Part	
4FSK Voice			RSS 119	
Channel Frequency (MHz)	Channel Spacing (kHz)		99% OCB (kHz)	Emission Designator
138.0125	12.5		6.9397	7K60F1E

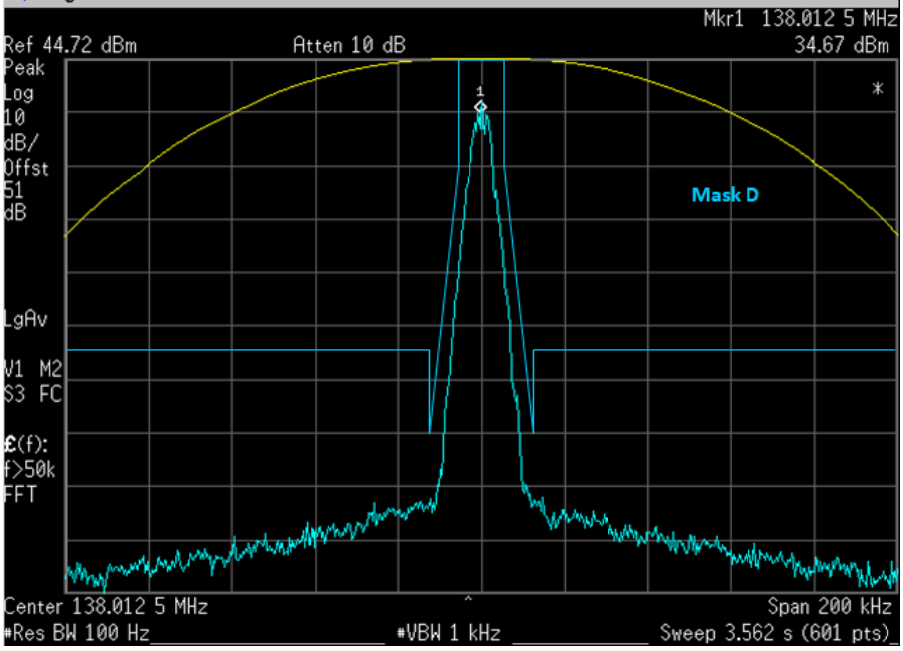

Not for FCC review

Modulation			Rules Part	
4FSK Voice			90.210 / 74.462(c)	
Channel Frequency (MHz)	Channel Spacing (kHz)		99% OCB (kHz)	Emission Designator
161.7000	12.5		7.5156	7K60F1E

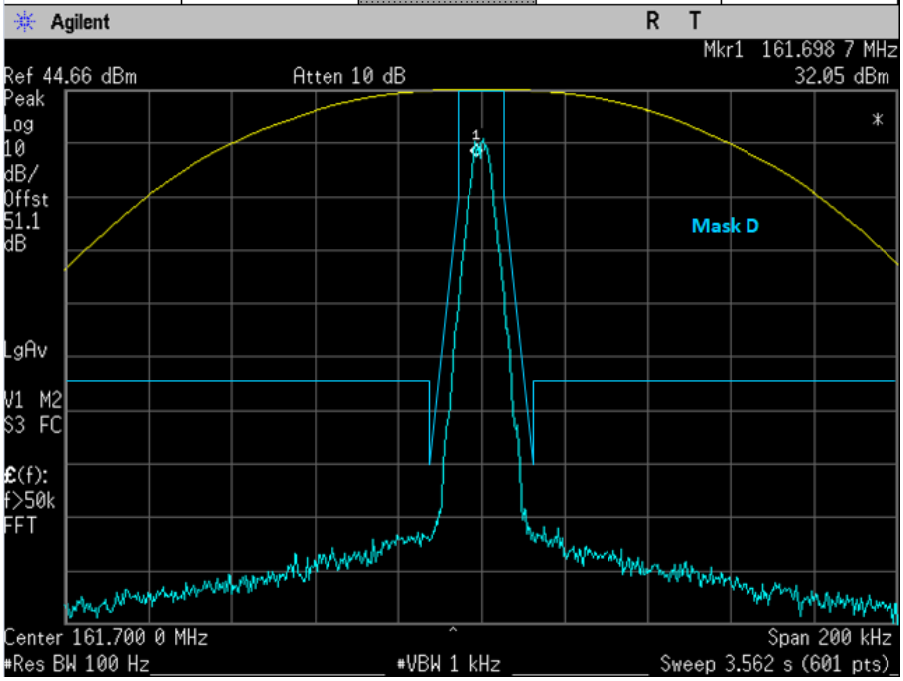

Modulation			Rules Part	
4FSK Voice			90.210 / RSS 119	
Channel Frequency (MHz)	Channel Spacing (kHz)		99% OCB (kHz)	Emission Designator
173.9875	12.5		7.5301	7K60F1E

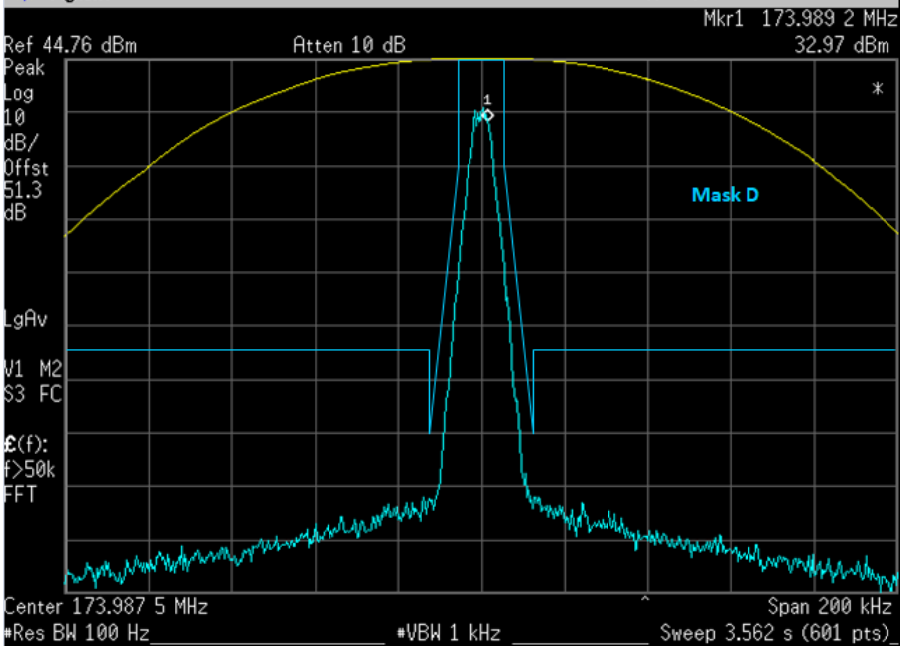

Modulation			Rules Part	
4FSK TDMA			RSS 119	
Channel Frequency (MHz)	Channel Spacing (kHz)		99% OCB (kHz)	Emission Designator
138.0125	12.5		7.1930	7K60F1W

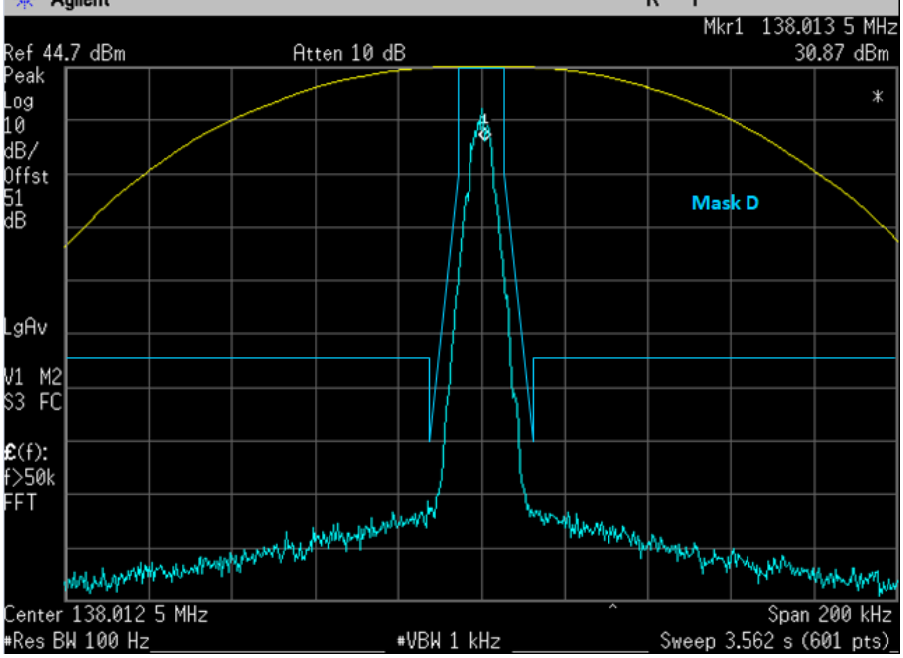

Not for FCC review

Modulation			Rules Part	
4FSK TDMA			90.210 / RSS 119	
Channel Frequency (MHz)	Channel Spacing (kHz)		99% OCB (kHz)	Emission Designator
161.7000	12.5		7.2885	7K60F1W

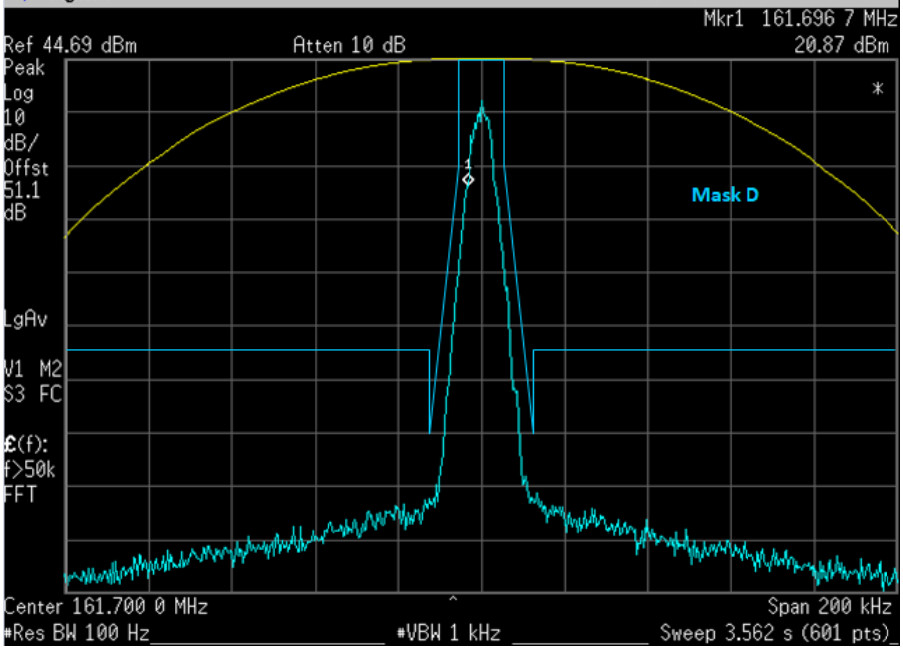

Modulation			Rules Part	
4FSK TDMA			90.210 / RSS 119	
Channel Frequency (MHz)	Channel Spacing (kHz)		99% OCB (kHz)	Emission Designator
173.9875	12.5		7.3446	7K60F1W

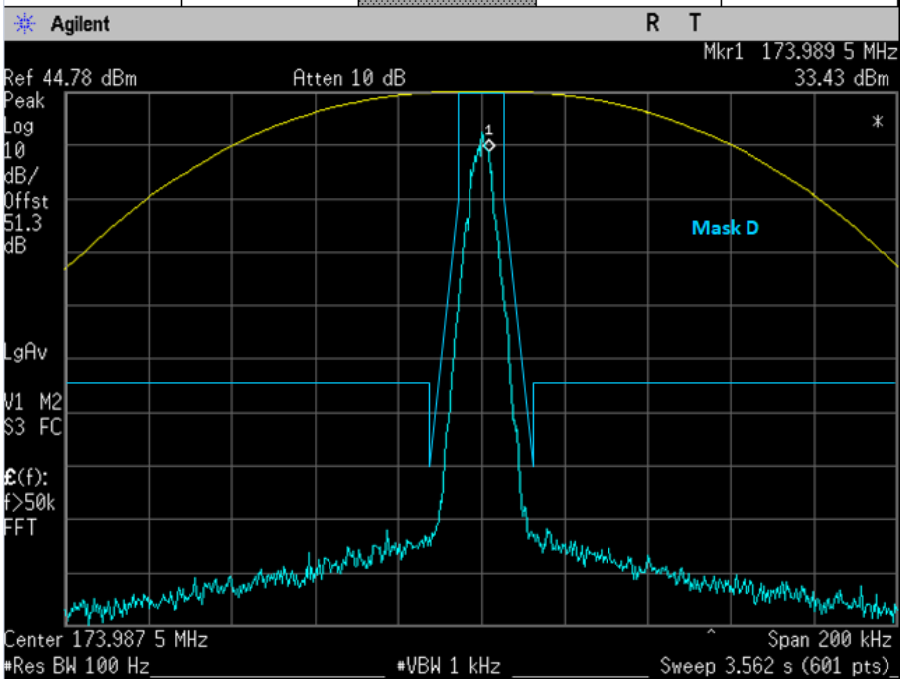

Modulation			Rules Part	
4FSK Data			22.359(b)	
Channel Frequency (MHz)	Channel Spacing (kHz)	-26 dB Point (kHz)	99% OCB (kHz)	Emission Designator
158.5500	12.5	8.3819	6.9298	7K60F1D

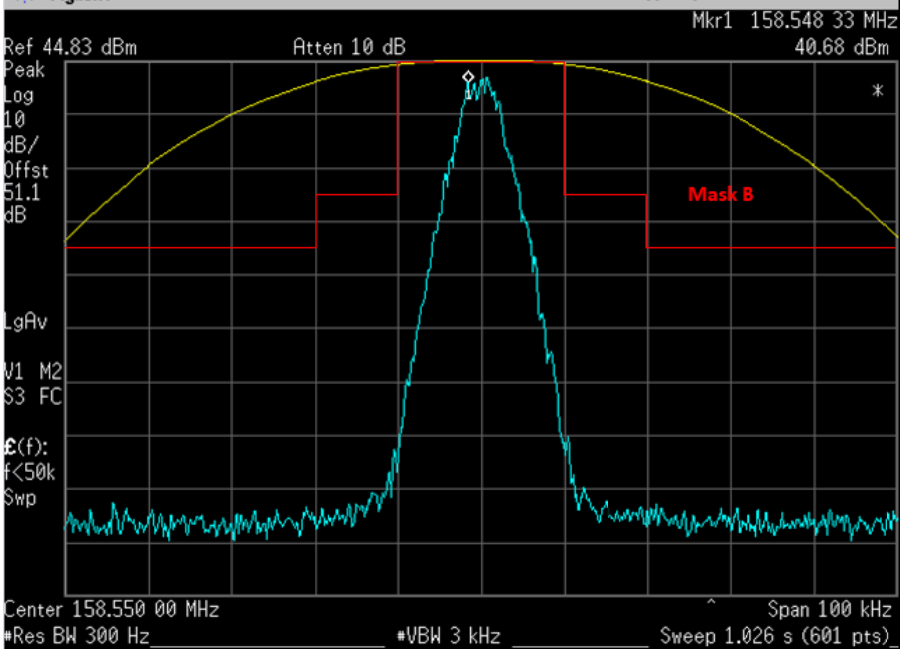

Modulation			Rules Part	
4FSK Voice			22.359(b)	
Channel Frequency (MHz)	Channel Spacing (kHz)	-26 dB Point (kHz)	99% OCB (kHz)	Emission Designator
158.5500	12.5	9.5374	7.4209	7K60F1E

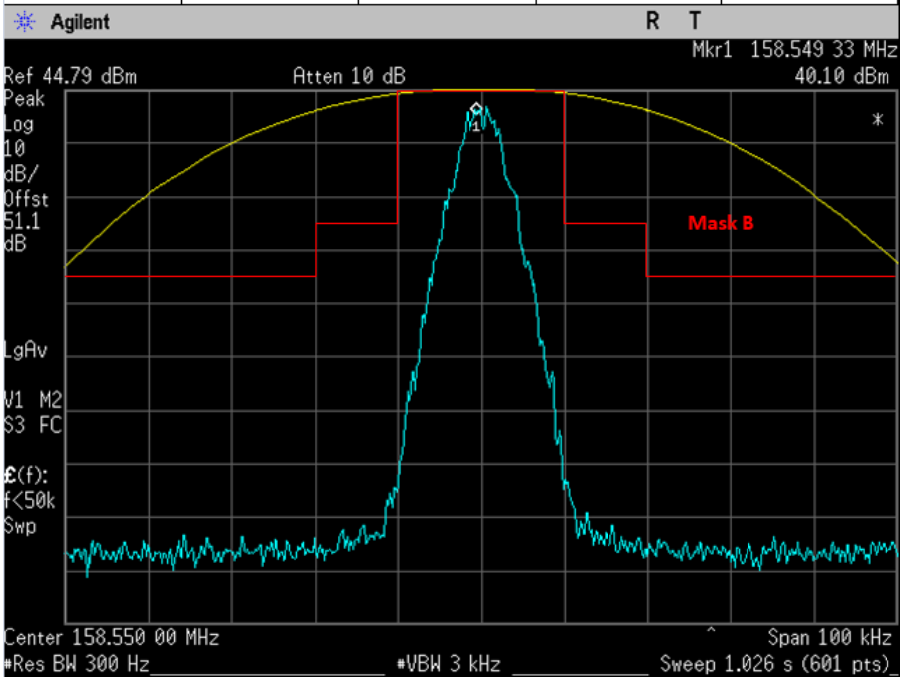

Modulation			Rules Part	
4FSK TDMA			22.359(b)	
Channel Frequency (MHz)	Channel Spacing (kHz)	-26 dB Point (kHz)	99% OCB (kHz)	Emission Designator
158.5500	12.5	9.1873	7.2607	7K60F1W

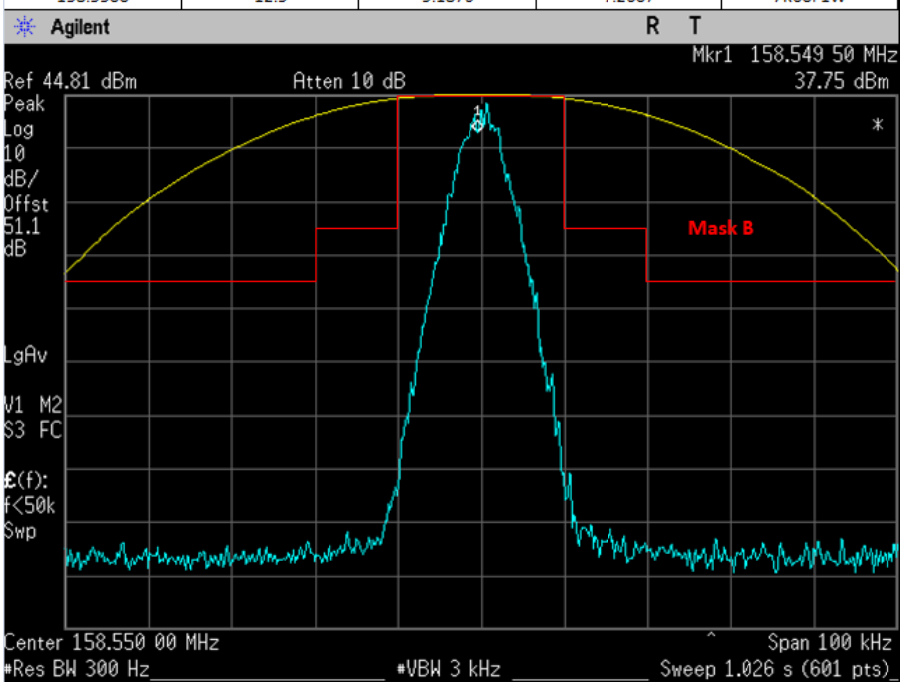

6.6.5. Test Limit

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

6.7. Band Edge Conducted Spurious Emission (Part 22)

6.7.1. Test Setup (Analog)

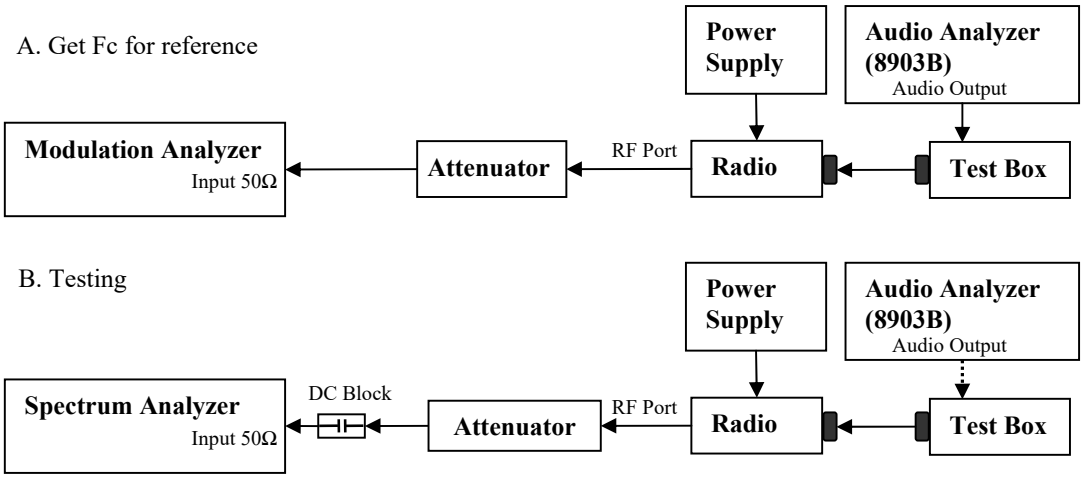

2) The DUT transmitter output port was connected to Modulation Analyzer.
3) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
4) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
5) Path loss for the measurement included.
6) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
7) Key in the Fc and Resolution Bandwidth.
8) Transmit the DUT and record the occupied Bandwidth frequencies.
9) Preset the spectrum analyzer for band edge measurement.
10) The band edges of lowest and highest channels were measured.
11) Key in the Lowest and highest channel frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
12) Save the screen shot as modulated signal.
13) Remove the audio tone from audio analyzer to capture unmodulated signal.

*Note:
- For emission designator ending with F3E, 16K0F3E is the worst case and therefore only 16K0F3E will be shown.

6.7.2. Test Result (Analog)

MAX POWER

Modulation	Rules Part			
Analog Voice	FCC Part 22.359(b)			
Channel Frequency	**Channel Spacing**	**-26 dB Point (kHz)**	**99% OCB**	**Emission Designator**
157.7700	25.0	15.5779	15.0344	16K0F3E

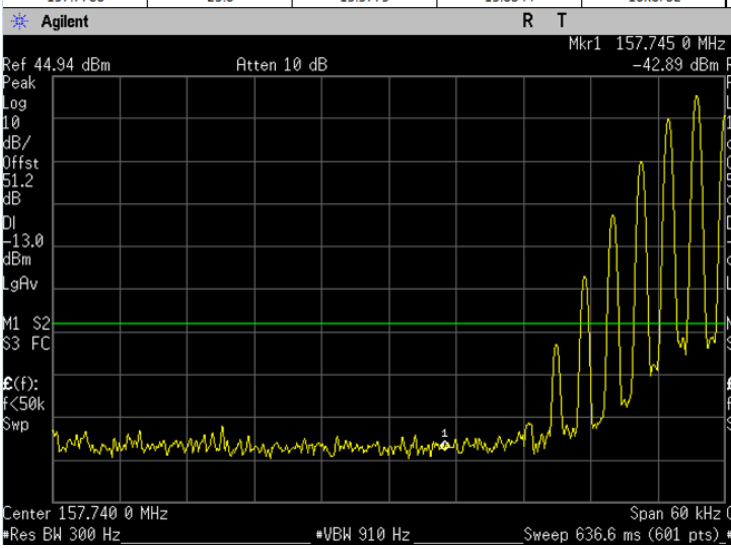

Modulation	Rules Part			
Analog Voice	FCC Part 22.359(b)			
Channel Frequency	**Channel Spacing**	**-26 dB Point (kHz)**	**99% OCB**	**Emission Designator**
158.6700	25.0	15.5792	15.0355	16K0F3E

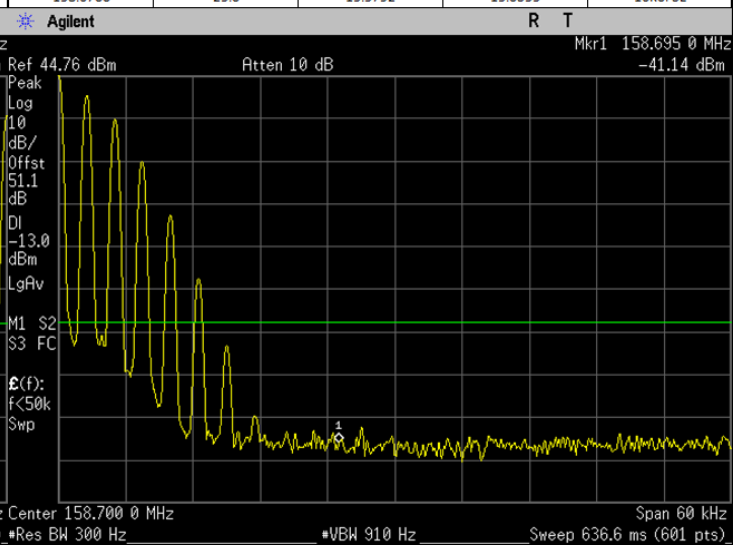

LOW POWER

Modulation	Rules Part			
Analog Voice	FCC Part 22.359(b)			
Channel Frequency	**Channel Spacing**	**-26 dB Point (kHz)**	**99% OCB**	**Emission Designator**
157.7700	25.0	15.5786	15.0351	16K0F3E

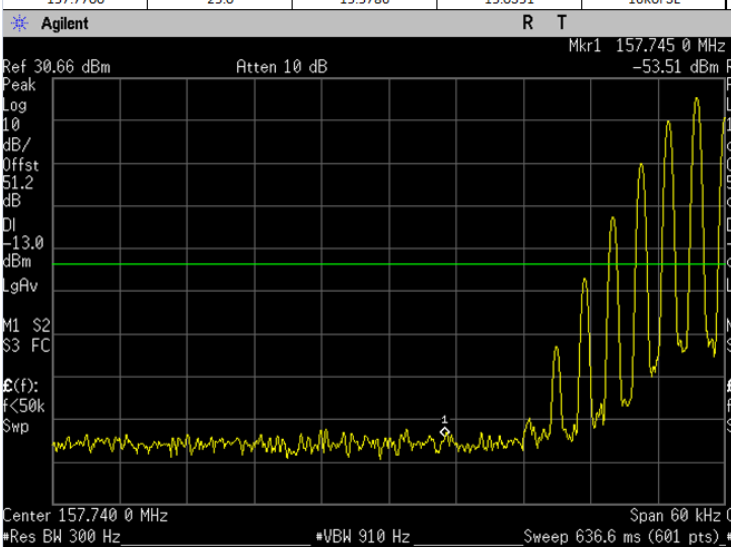

Modulation	Rules Part			
Analog Voice	FCC Part 22.359(b)			
Channel Frequency	**Channel Spacing**	**-26 dB Point (kHz)**	**99% OCB**	**Emission Designator**
158.6700	25.0	15.5798	15.0385	16K0F3E

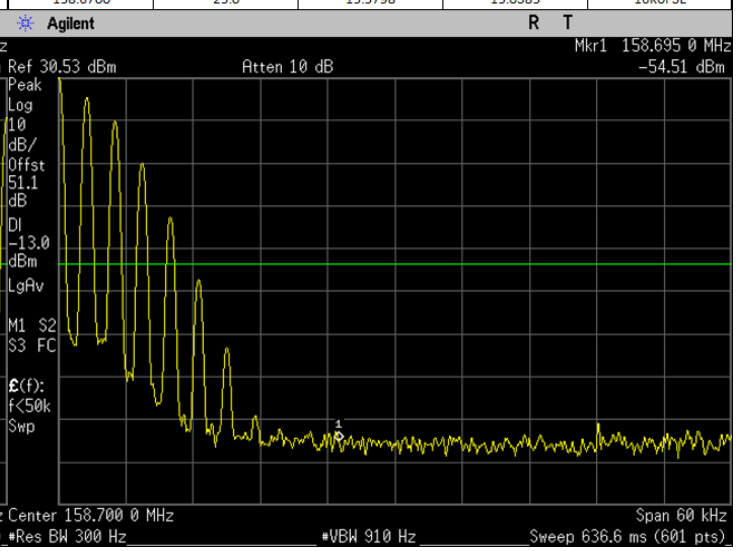

6.7.3. Test Setup (Digital)

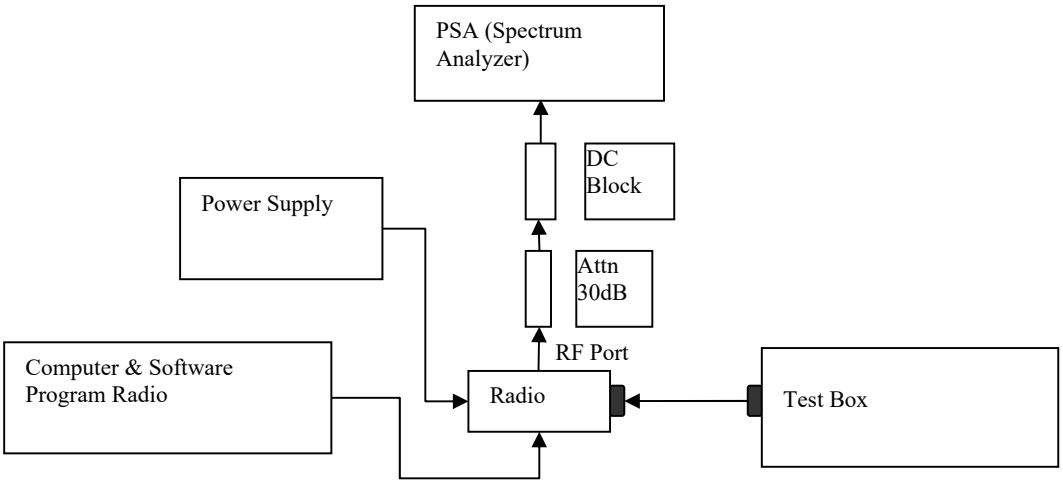

1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
2) Path loss for the measurement included.
3) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
4) Key in the Fc and Resolution Bandwidth.
5) Transmit radio record the occupied Bandwidth frequencies.
6) Preset the spectrum analyzer for band edge measurement.
7) Key in the lowest and highest channels frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
8) Save the screen shot.

*Note:

- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.

6.7.4. Test Result (Digital)

MAX POWER

Modulation	Rules Part			
4FSK Data	FCC Part 22.359(b)			
Channel Frequency	**Channel Spacing**	**-26 dB Point (kHz)**	**99% OCB**	**Emission Designator**
157.7700	12.5	9.3329	7.2780	7K60F1D

Modulation	Rules Part			
4FSK Data	FCC Part 22.359(b)			
Channel Frequency	**Channel Spacing**	**-26 dB Point (kHz)**	**99% OCB**	**Emission Designator**
158.6700	12.5	9.4297	7.5660	7K60F1D

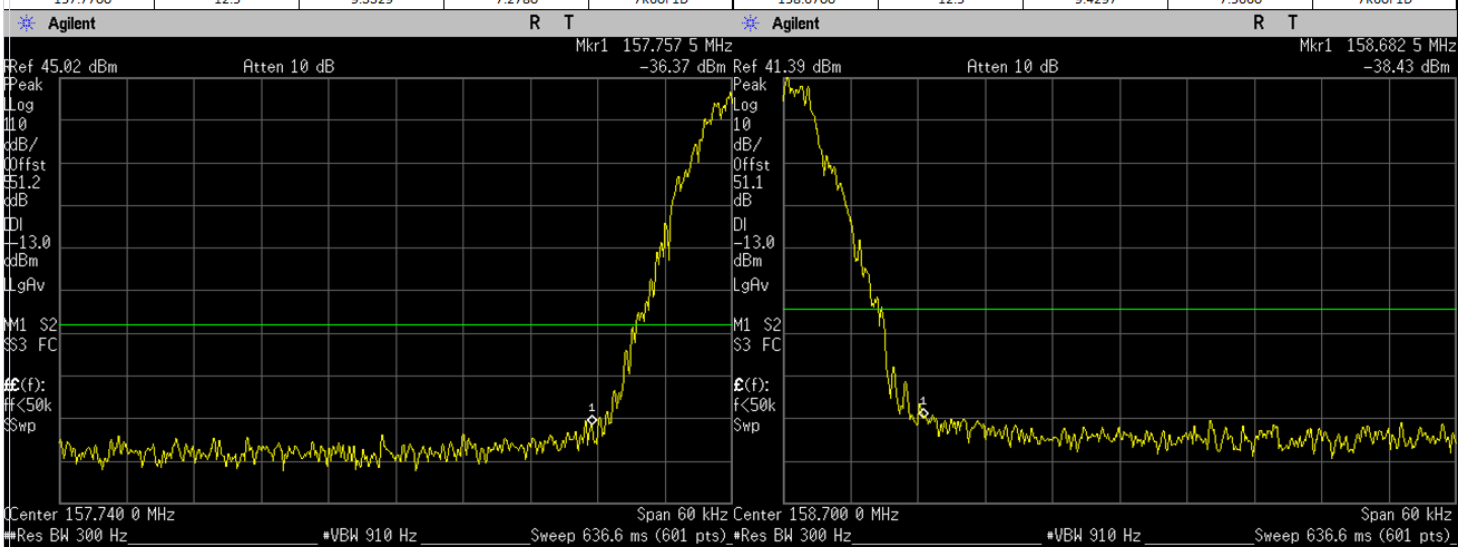

LOW POWER

Modulation	Rules Part			
4FSK Data	FCC Part 22.359(b)			
Channel Frequency	**Channel Spacing**	**-26 dB Point (kHz)**	**99% OCB**	**Emission Designator**
157.7700	12.5	9.7672	7.5913	7K60F1D

Modulation	Rules Part			
4FSK Data	FCC Part 22.359(b)			
Channel Frequency	**Channel Spacing**	**-26 dB Point (kHz)**	**99% OCB**	**Emission Designator**
158.6700	12.5	9.3414	7.4031	7K60F1D

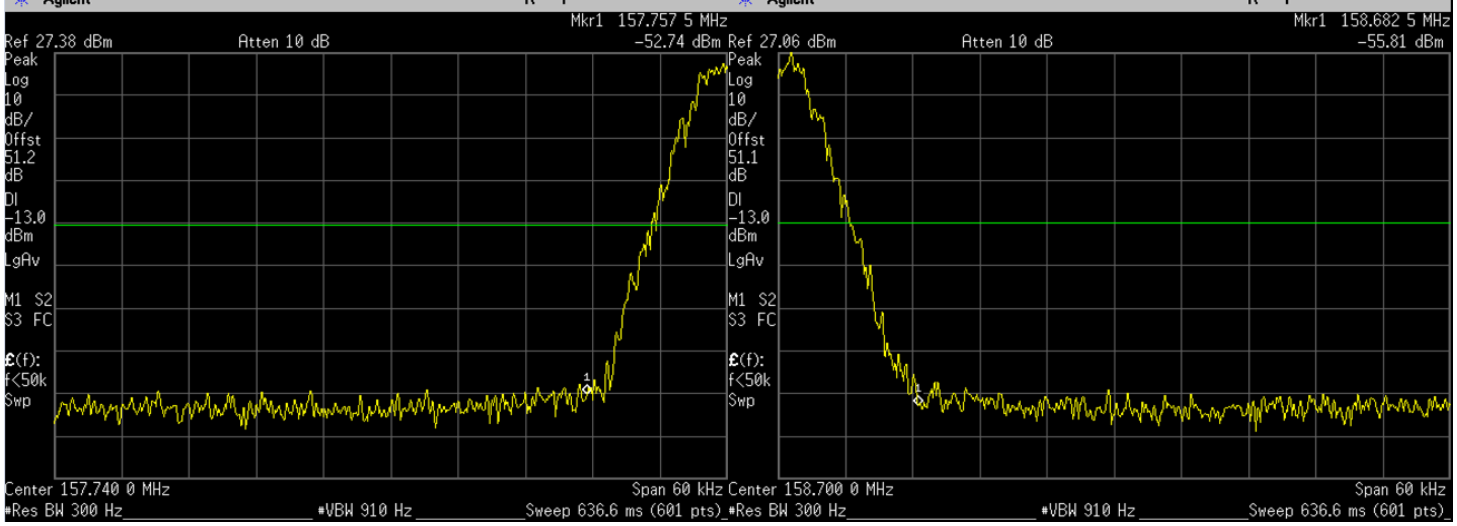

6.7.5. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

6.8. Transient Frequency Behavior

6.8.1. Test Setup

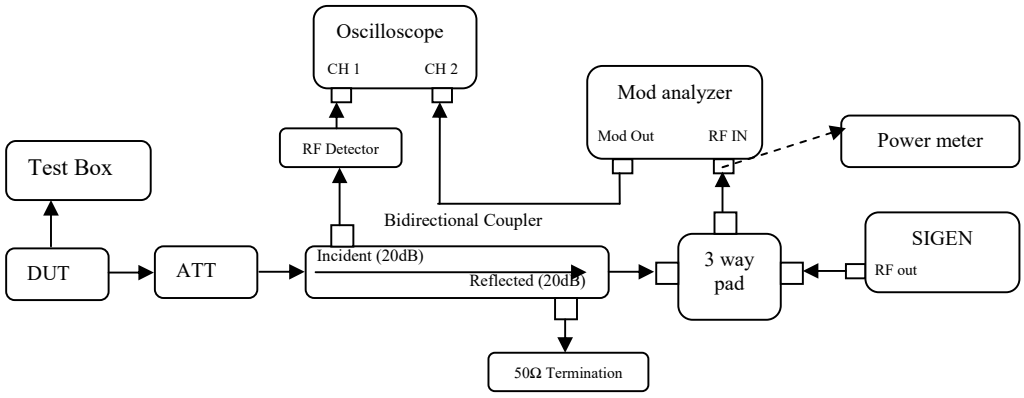

1) Connect the setup as figure above.
2) Path loss for the measurement included.
3) Set on Sigen with the assigned center frequency, internal 1 kHz FM tone.
   FM Deviation: Analog 25kHz Channel Spacing = 25 kHz
   Analog 12.5 kHz Channel Spacing = 12.5 kHz
   C4FM = 12.5 kHz
4) Turn on 50 kHz high pass filter and 15 kHz low pass filter on modulation analyzer.
5) Supply sufficient attenuation ATT to provide the output power of ≤ -11dBm into power meter when DUT is keying up.
6) Note the power level on power meter and dekey the DUT.
7) Adjust the amplitude of the signal generator to the level power meter, maintained the amplitude throughout the rest of the measurement.
8) Connect the output to modulation analyzer.
9) Reduce 30dB attenuation and transmit the radio to get the trigger line.
10) Capture the screen shot for key-up (rising edge) and de-key (falling edge) mode.

6.8.2. Test Result

Switch On Condition t_{on}, t_1 and t_2		
Channel Frequency (MHz)	**Channel Spacing (kHz)**	**Mode**
158.5500	12.5	Analog

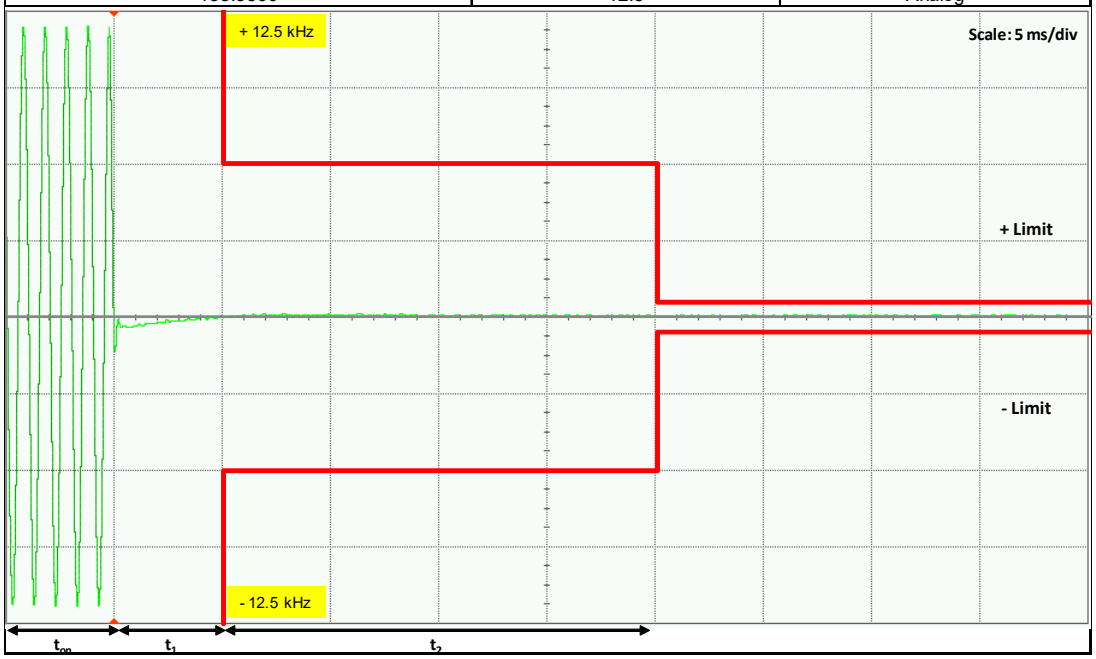

Switch Off Condition t_3 t_{off}		
Channel Frequency (MHz)	**Channel Spacing (kHz)**	**Mode**
158.5500	12.5	Analog

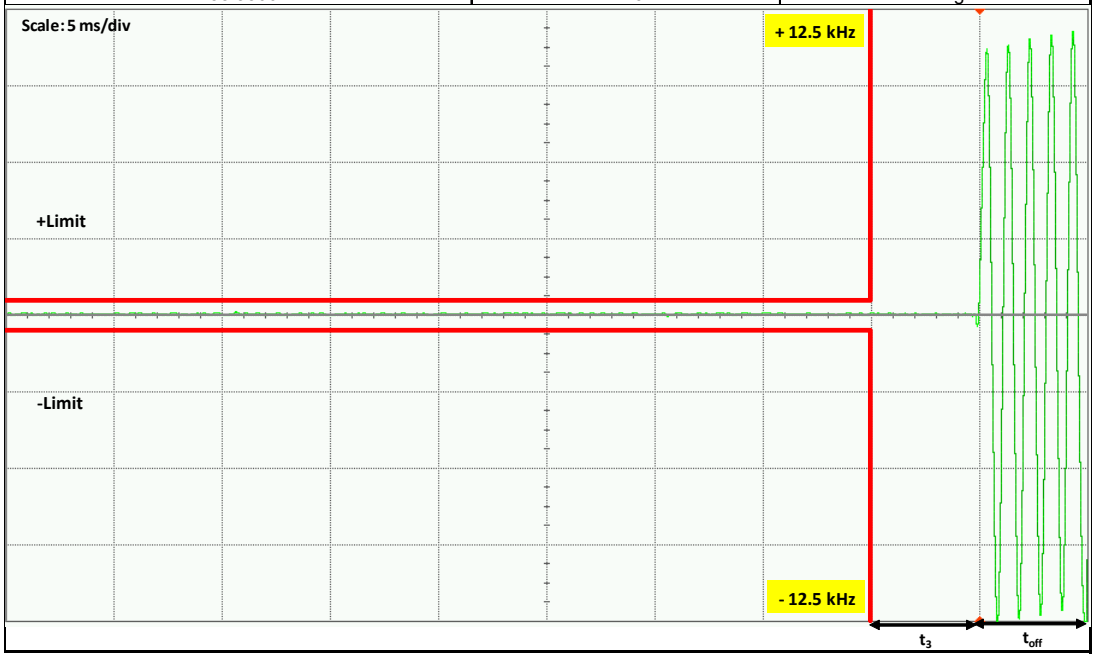

Switch On Condition t_{on}, t_1 and t_2		
Channel Frequency (MHz)	**Channel Spacing (kHz)**	**Mode**
158.5500	25.0	Analog

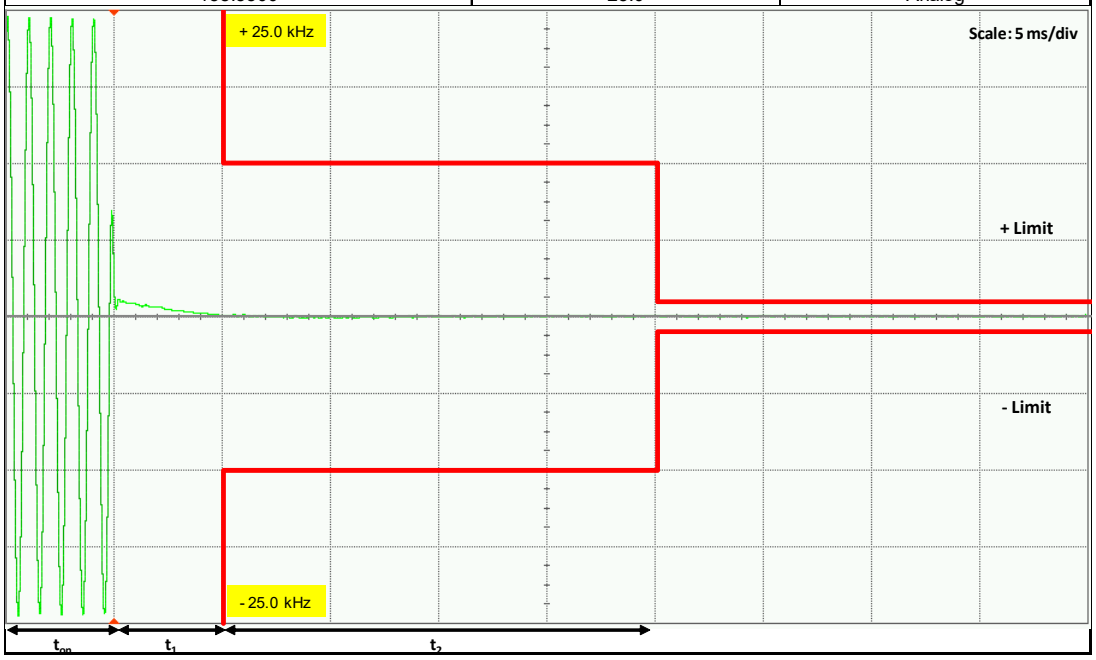

Switch Off Condition t_3 t_{off}		
Channel Frequency (MHz)	**Channel Spacing (kHz)**	**Mode**
158.5500	25.0	Analog

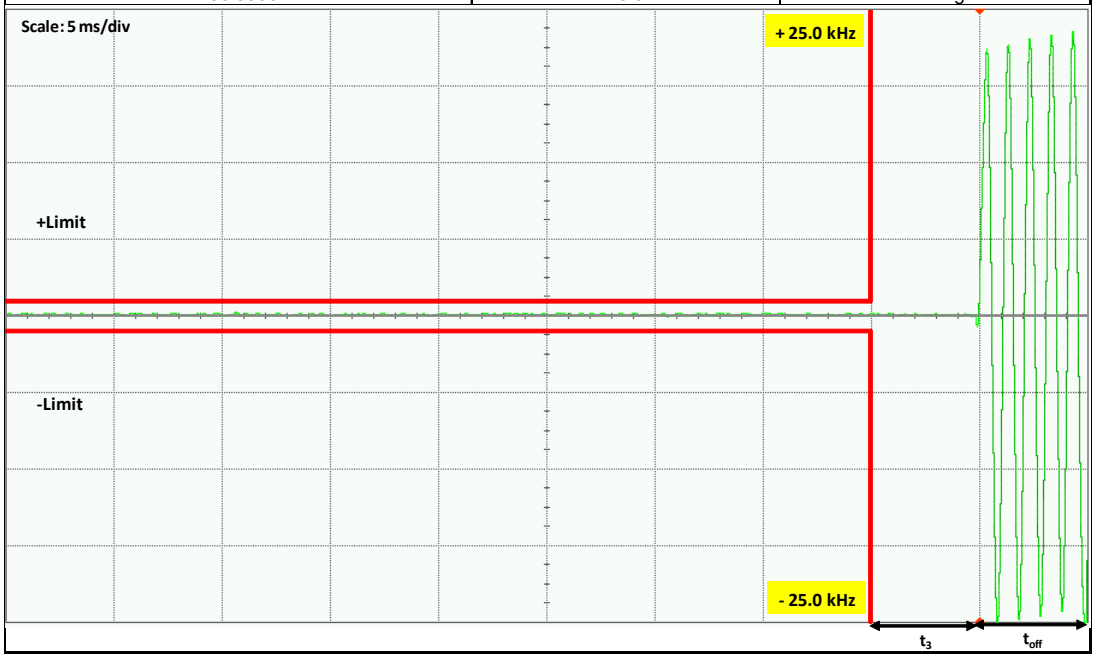

6.8.3. Test Limit

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals[1 2]	**Maximum frequency difference[3]**	**All equipment**	
		150 to 174 MHz	**421 to 512 MHz**
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t_1[4]	±25.0 kHz	5.0 ms	10.0 ms
t_2	±12.5 kHz	20.0 ms	25.0 ms
t_3[4]	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t_1[4]	±12.5 kHz	5.0 ms	10.0 ms
t_2	±6.25 kHz	20.0 ms	25.0 ms
t_3[4]	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t_1[4]	±6.25 kHz	5.0 ms	10.0 ms
t_2	±3.125 kHz	20.0 ms	25.0 ms
t_3[4]	±6.25 kHz	5.0 ms	10.0 ms

[1] $_{on}$ is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.
t_1 is the time period immediately following t_{on}.
t_2 is the time period immediately following t_1.
t_3 is the time period from the instant when the transmitter is turned off until t_{off}.
t_{off} is the instant when the 1 kHz test signal starts to rise.
[2] During the time from the end of t_2 to the beginning of t_3, the frequency difference must not exceed the limits specified in §90.213.
[3] Difference between the actual transmitter frequency and the assigned transmitter frequency.
[4] If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

6.9. Adjacent Channel Power

6.9.1. Test Setup (Analog)

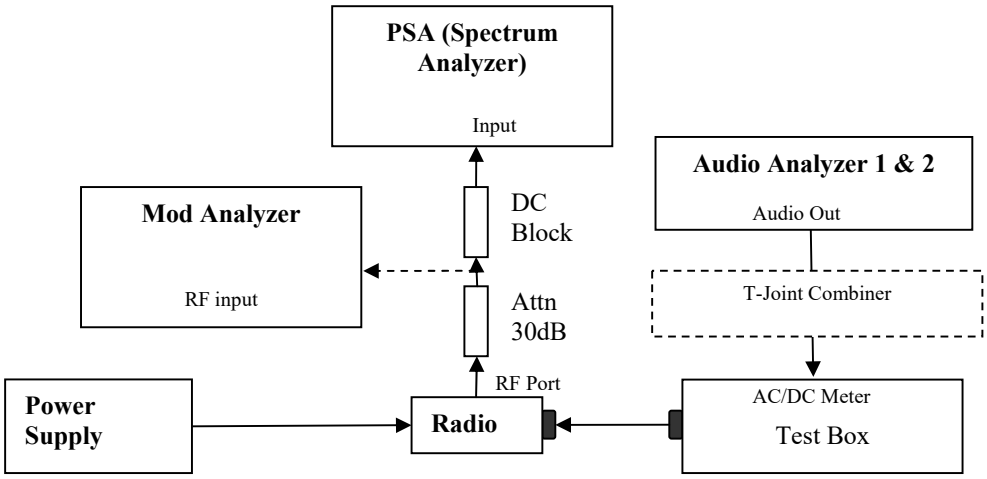

1) The DUT transmitter output port was connected to modulation analyzer.
2) Transmit the radio and turn on 1st audio analyzer with audio frequency 650Hz, 50% rated deviation, and record the amplitude value as AmpT1.
3) Turn off Audio analyzer 1 and turn on audio analyzer 2, set the audio frequency to 2.2 kHz and 50% deviation. Record the amplitude as AmpT2.
4) Turn both audio analyzers ON and up 10dB amplitude level.
5) Connect the output to PSA and set to assigned center frequency.
6) Set Span, Resolution Bandwidth and Video Bandwidth per rules part.
7) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.9.2. Test Result

Not Applicable

6.9.3. Test Setup (Digital)

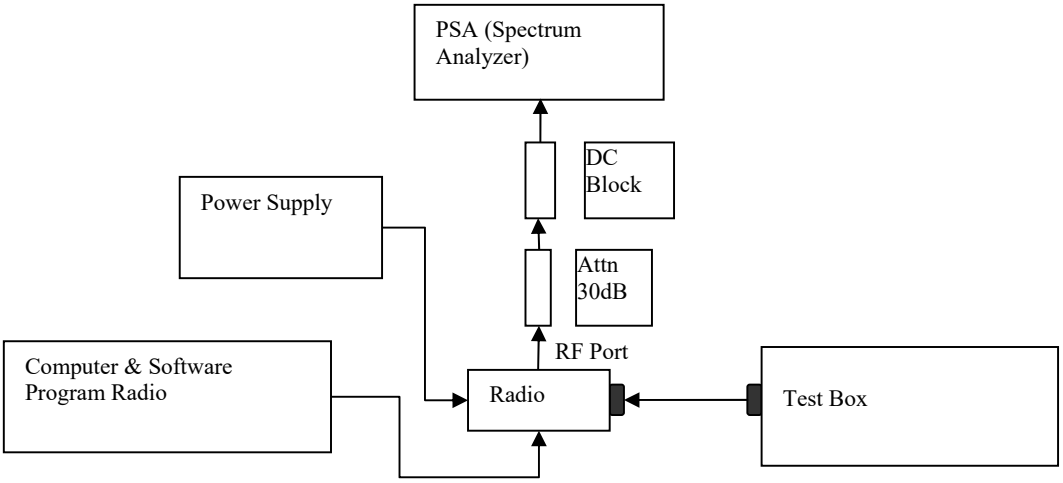

1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM or other digital modulation form).
2) Prepare setup as per picture.
3) Turn on the ACP Measurement – Press Measure, ACP.
4) Set Span, Resolution Bandwidth and Video Bandwidth as per rules part.
5) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.9.4. Test Result

Not Applicable

6.9.5. Test Limit

12.5 kHz Mobile Transmitter ACP Requirements

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
9.375	6.25	−40
15.625	6.25	−60
21.875	6.25	−60
37.50	25.00	−60
62.50	25.00	−65
87.50	25.00	−65
150.00	100	−65
250.00	100	−65
350.00	100	−65
>400 to 12 MHz	30 (s)	−75
12 MHz to paired receive band	30 (s)	−75
In the paired receive band	30 (s)	−100

25 kHz Mobile Transmitter ACP Requirements

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
15.625	6.25	−40
21.875	6.25	−60
37.50	25	−60
62.50	25	−65
87.50	25	−65
150.00	100	−65
250.00	100	−65
350.00	100	−65
>400 kHz to 12 MHz	30 (s)	−75
12 MHz to paired receive band	30 (s)	−75
In the paired receive band	30 (s)	−100

12.5 kHz Base Transmitter ACP Requirements

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
9.375	6.25	−40
15.625	6.25	−60
21.875	6.25	−60
37.5	25	−60
62.5	25	−65
87.5	25	−65
150	100	−65
250	100	−65
350.00	100	−65
>400 kHz to 12 MHz	30 (s)	−80
12 MHz to paired receive band	30 (s)	−80
In the paired receive band	30 (s)	[1]-85

25 kHz Base Transmitter ACP Requirements

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
15.625	6.25	−40
21.875	6.25	−60
37.5	25	−60
62.5	25	−65
87.5	25	−65
150	100	−65
250	100	−65
350	100.00	−65
>400 kHz to 12 MHz	30 (s)	−80
12 MHz to paired receive band	30 (s)	−80
In the paired receive band	30 (s)	[1]-85

6.10. Conducted Spurious Emission

6.10.1. Test Setup

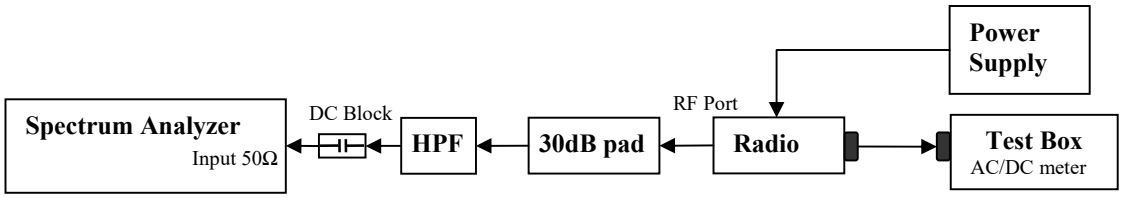

1) The DUT transmitter output port was connected to Spectrum Analyzer with above setup.
2) Program and set radio to operate in desire test frequency and mode. (Analog / digital modulation form).
3) Path loss for the measurement included.
4) Set the PSA Resolution Bandwidth as per rules part.
5) Set the Ref offset from the pathloss offset calibration file.
6) Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:
    a. 9 KHz to Fc – Test Bandwidth
    b. Fc + Test Bandwidth to 2Fc – 5MHz.
7) Key up the DUT, Peak Search the highest Spur and record the levels of spurious emissions
8) Dekey the DUT.
9) Turn On High Pass Filter path and Key up the DUT.
10) Adjust the PSA Freq for incremental coverage of range from 2Fc to 10Fc
11) Key up the DUT and record the highest spur levels of spurious emissions.

6.10.2. Test Result (Analog)

<u>Analog:</u> 138.0125. MHz, 25.0.kHz Channel Spacing, Max. Power
<u>Not for FCC review</u>

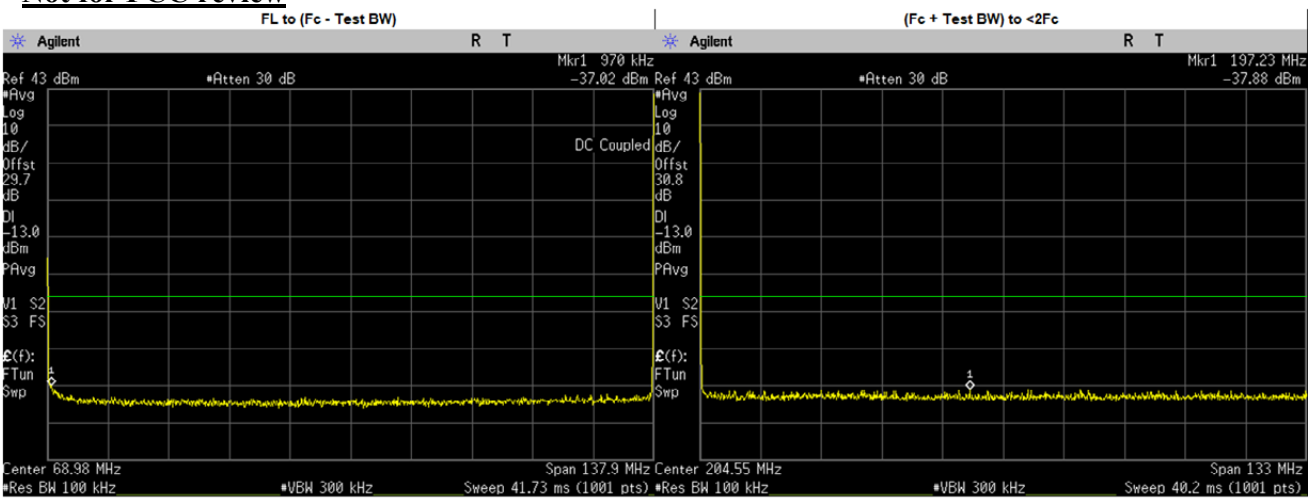

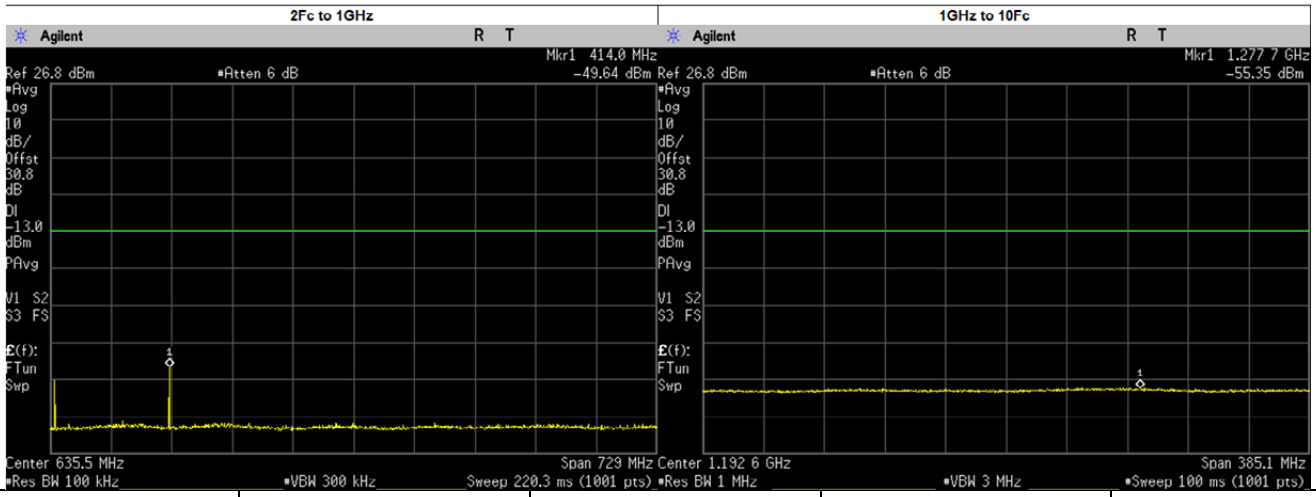

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.9700	-37.0240	-13.00	PASS
(Fc + Test BW) to <2Fc	197.2339	-37.8800	-13.00	PASS
2Fc to 1GHz	414.0000	-49.6400	-13.00	PASS
	276.0250	-55.2998	-13.00	PASS
	414.0375	-52.7610	-13.00	PASS
	552.0500	-66.2433	-13.00	PASS
	690.0625	-65.6572	-13.00	PASS
	828.0750	-65.7763	-13.00	PASS
	966.0875	-66.3329	-13.00	PASS
1GHz to 10Fc	1277.6750	-55.3500	-13.00	PASS
	1104.1000	-56.0527	-13.00	PASS
	1242.1120	-55.9351	-13.00	PASS
	1380.1250	-56.3122	-13.00	PASS

<u>Analog:</u> 138.0125. MHz, 25.0.kHz Channel Spacing, Low. Power
<u>Not for FCC review</u>

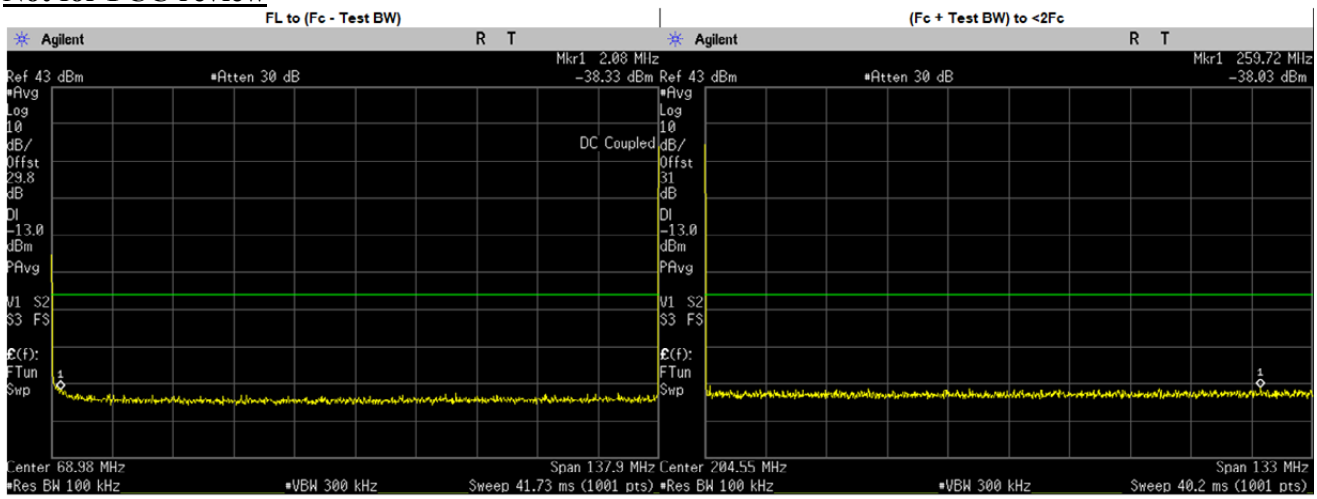

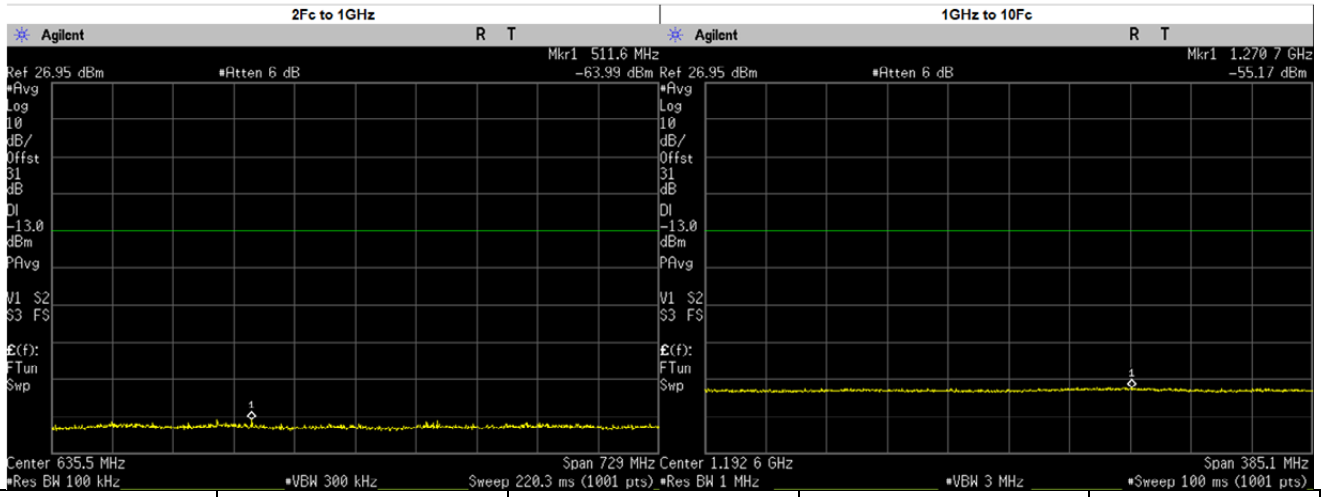

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	2.0800	-38.3340	-13.00	PASS
(Fc + Test BW) to <2Fc	259.7237	-38.0300	-13.00	PASS
2Fc to 1GHz	511.5867	-63.9900	-13.00	PASS
	276.0250	-65.3047	-13.00	PASS
	414.0375	-65.6477	-13.00	PASS
	552.0500	-65.8599	-13.00	PASS
	690.0625	-66.1791	-13.00	PASS
	828.0750	-65.4698	-13.00	PASS
	966.0875	-65.8473	-13.00	PASS
1GHz to 10Fc	1270.7430	-55.1700	-13.00	PASS
	1104.1000	-55.9011	-13.00	PASS
	1242.1120	-55.5776	-13.00	PASS
	1380.1250	-55.7419	-13.00	PASS

<u>Analog:</u> 158.55. MHz, 25.0.kHz Channel Spacing, Max. Power
<u>For Part 22, 80</u>

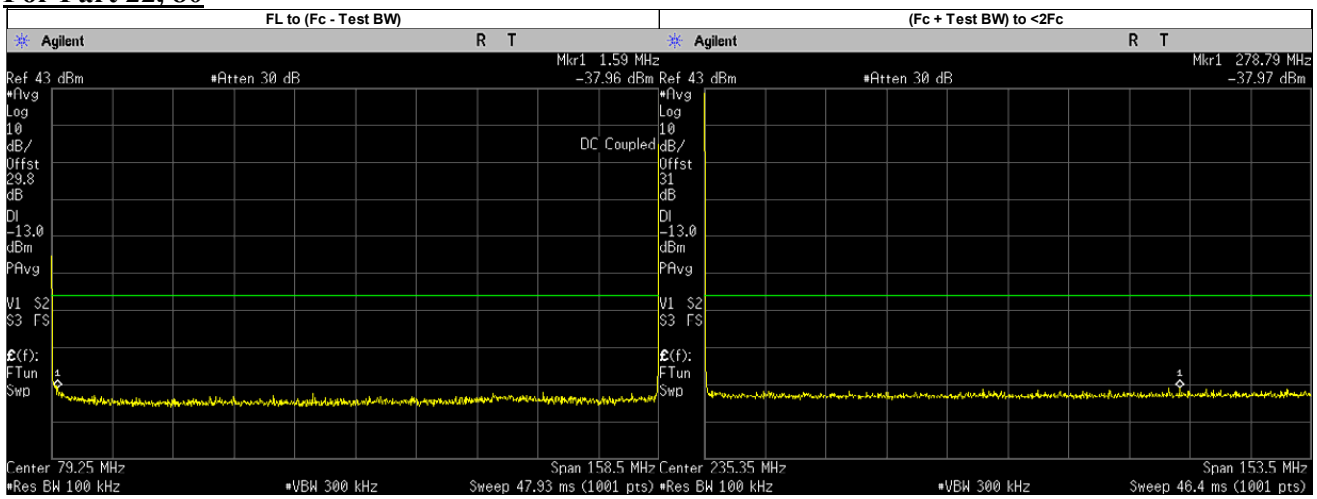

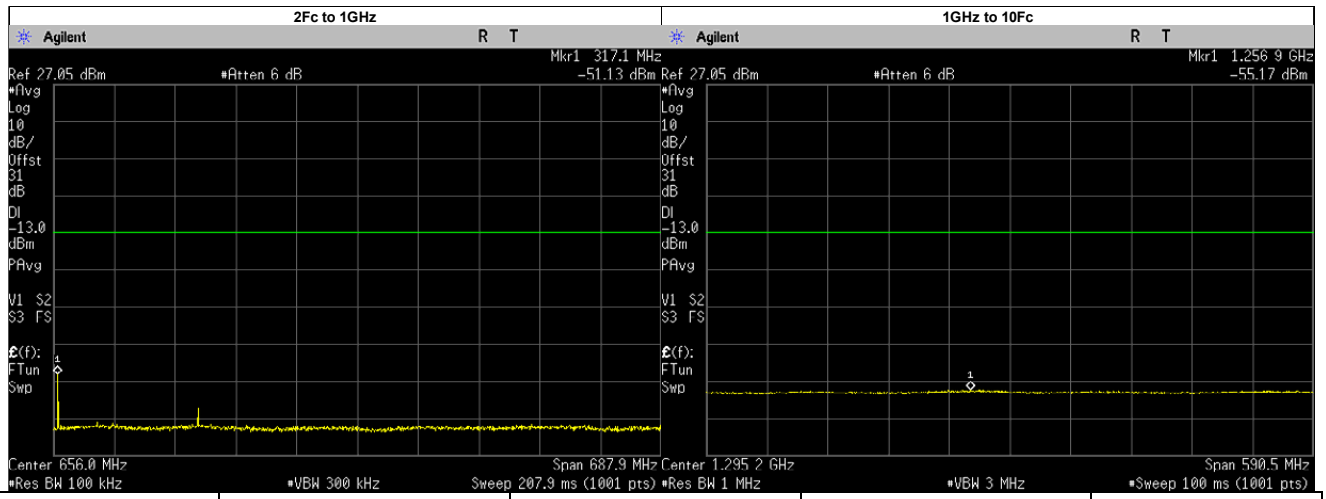

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.5900	-37.9620	-13.00	PASS
(Fc + Test BW) to <2Fc	278.7917	-37.9700	-13.00	PASS
2Fc to 1GHz	317.1000	-51.1300	-13.00	PASS
	317.1000	-54.9551	-13.00	PASS
	475.6500	-61.2514	-13.00	PASS
	634.2000	-65.9529	-13.00	PASS
	792.7500	-65.4317	-13.00	PASS
	951.3000	-65.8429	-13.00	PASS
1GHz to 10Fc	1256.8680	-55.1700	-13.00	PASS
	1109.8500	-55.8152	-13.00	PASS
	1268.4000	-55.5547	-13.00	PASS
	1426.9500	-56.0268	-13.00	PASS
	1585.5000	-55.8583	-13.00	PASS

<u>Analog:</u> 158.55. MHz, 25.0.kHz Channel Spacing, Low. Power
<u>For Part 22, 80</u>

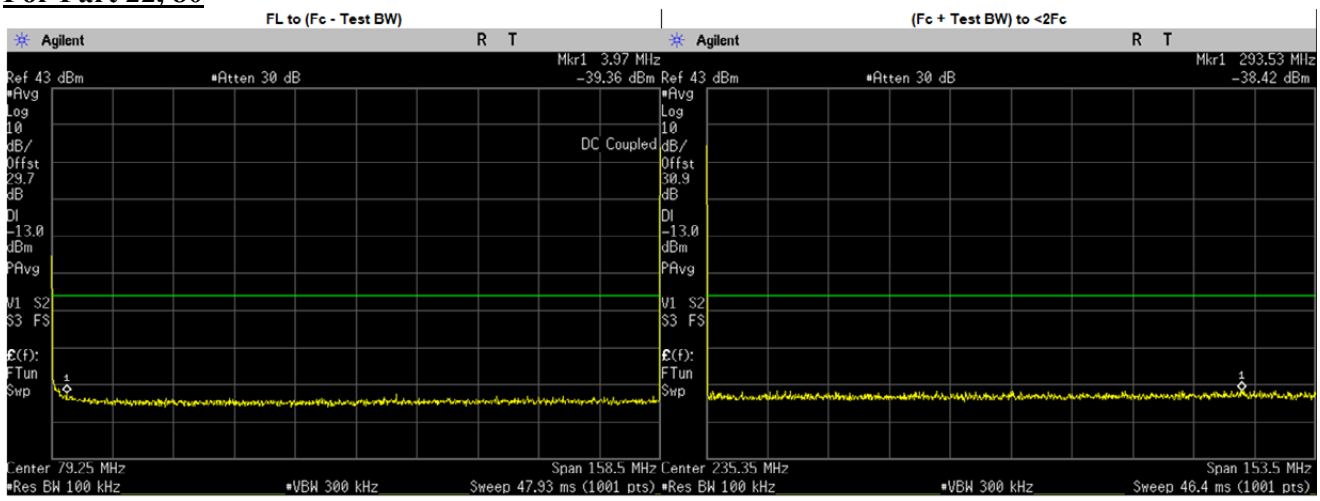

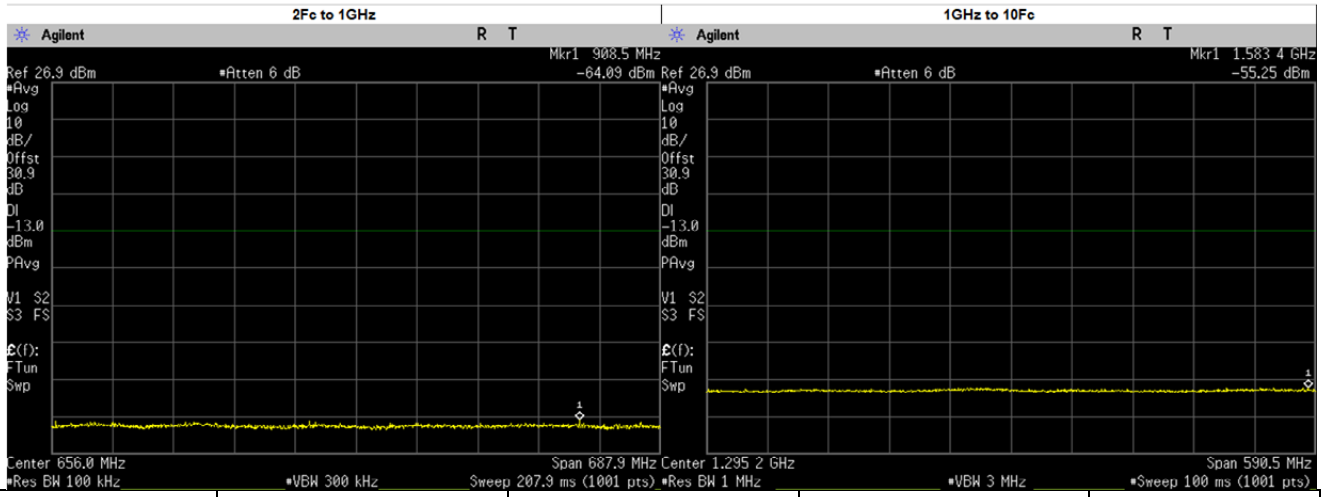

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	3.9700	-39.3590	-13.00	PASS
(Fc + Test BW) to <2Fc	293.5272	-38.4200	-13.00	PASS
2Fc to 1GHz	908.5093	-64.0900	-13.00	PASS
	317.1000	-64.6464	-13.00	PASS
	475.6500	-64.7099	-13.00	PASS
	634.2000	-65.6522	-13.00	PASS
	792.7500	-65.5112	-13.00	PASS
	951.3000	-65.9229	-13.00	PASS
1GHz to 10Fc	1583.4140	-55.2500	-13.00	PASS
	1109.8500	-56.0556	-13.00	PASS
	1268.4000	-55.6596	-13.00	PASS
	1426.9500	-56.1272	-13.00	PASS
	1585.5000	-55.8818	-13.00	PASS

<u>Analog:</u> 161.7. MHz, 25.0.kHz Channel Spacing, Max. Power
<u>For Part 74</u>

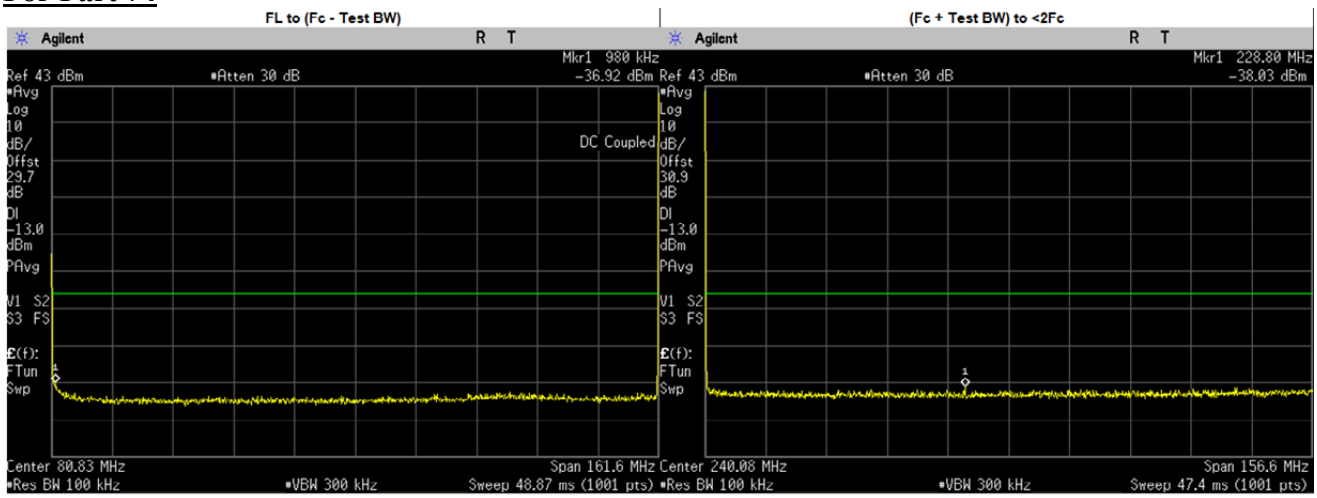

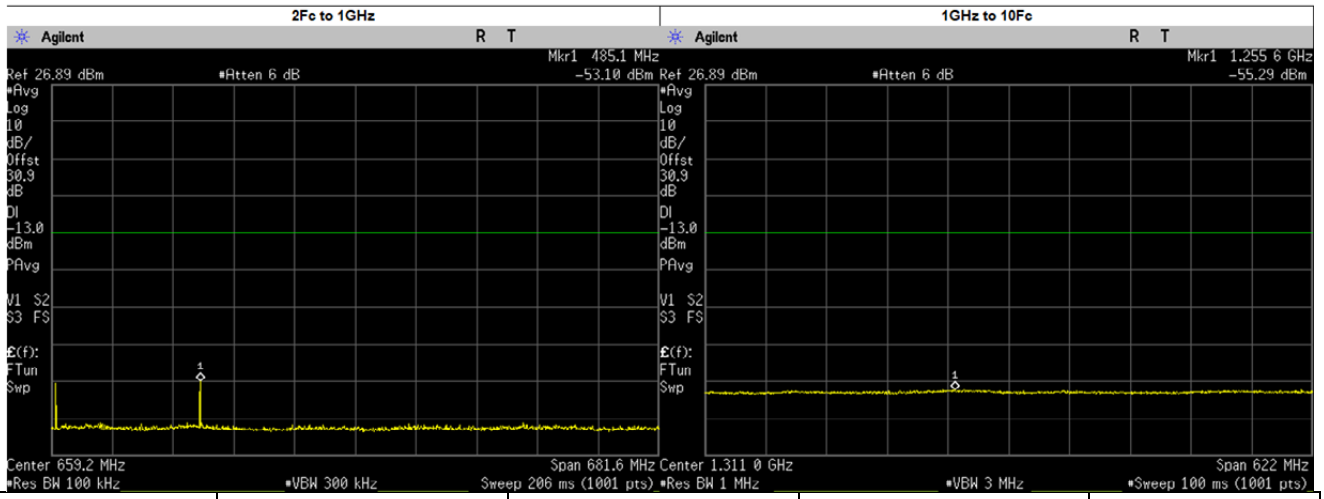

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.9800	-36.9240	-13.00	PASS
(Fc + Test BW) to <2Fc	228.7994	-38.0300	-13.00	PASS
2Fc to 1GHz	485.1000	-53.1000	-13.00	PASS
	323.4000	-57.5505	-13.00	PASS
	485.1000	-55.3310	-13.00	PASS
	646.8000	-65.1278	-13.00	PASS
	808.5000	-65.5767	-13.00	PASS
	970.2000	-65.7884	-13.00	PASS
1GHz to 10Fc	1255.6420	-55.2900	-13.00	PASS
	1131.9000	-56.1031	-13.00	PASS
	1293.6000	-55.7829	-13.00	PASS
	1455.3000	-56.0622	-13.00	PASS
	1617.0000	-55.8896	-13.00	PASS

<u>Analog:</u> 161.7. MHz, 25.0.kHz Channel Spacing, Low. Power
<u>For Part 74</u>

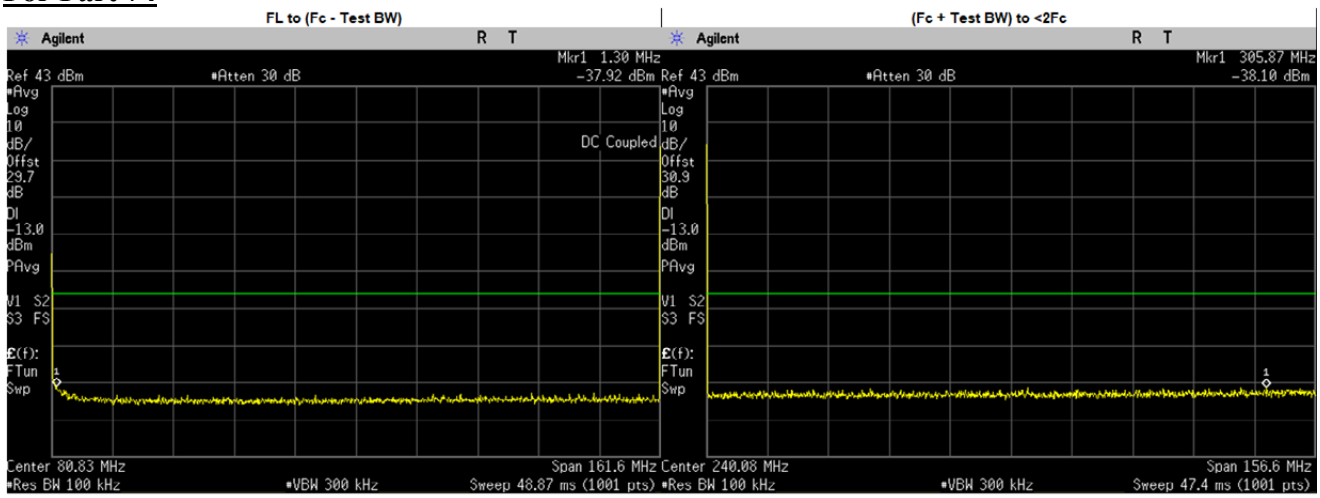

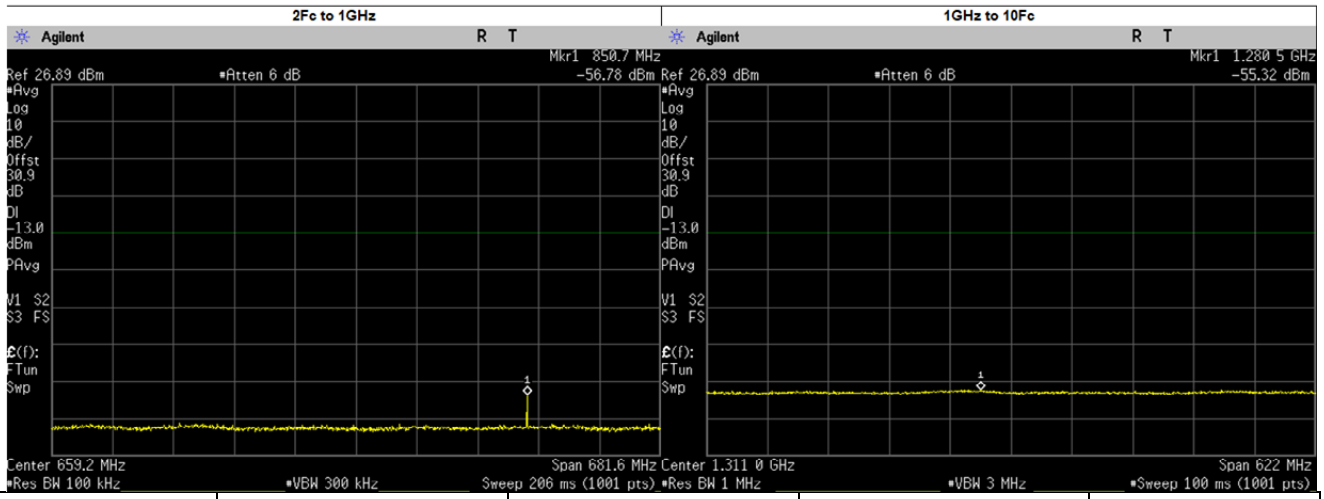

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.3000	-37.9220	-13.00	PASS
(Fc + Test BW) to <2Fc	305.8685	-38.1000	-13.00	PASS
2Fc to 1GHz	850.7296	-56.7800	-13.00	PASS
	323.4000	-65.1710	-13.00	PASS
	485.1000	-64.9813	-13.00	PASS
	646.8000	-65.8262	-13.00	PASS
	808.5000	-65.8927	-13.00	PASS
	970.2000	-65.5157	-13.00	PASS
1GHz to 10Fc	1280.5220	-55.3200	-13.00	PASS
	1131.9000	-56.1682	-13.00	PASS
	1293.6000	-55.8896	-13.00	PASS
	1455.3000	-56.3016	-13.00	PASS
	1617.0000	-55.9560	-13.00	PASS