

FCC 15.247 & RSS-247 2.4GHz Test Report

for

FUTABA Corporation

**1080 Yabutsuka Chosei-son Chosei-gun,
Chiba-ken, 299-4395 Japan.**

Product Name : RECEIVER
Model Name : (1)R7201SB (2)R7301SB
Brand Futaba
FCC ID : AZPR7201SB-24G
IC : 2914D-R7201SB

**Prepared by: : AUDIX Technology Corporation,
EMC Department**



The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.

TABLE OF CONTENTS

Description	Page
TEST REPORT	4
1. REVISION RECORD OF TEST REPORT	5
2. SUMMARY OF TEST RESULTS	6
3. GENERAL INFORMATION	7
3.1. Description of Application	7
3.2. Description of EUT	8
3.3. Reference Test Guidance	9
3.4. Antenna Information	9
3.5. EUT Specifications Assessed in Current Report	9
3.6. Descriptions of Key Components	10
3.7. Test Configuration	10
3.8. Output Power Setting	12
3.9. Tested Supporting System List	12
3.10. Setup Configuration	13
3.11. Operating Condition of EUT	13
3.12. Description of Test Facility	14
3.13. Measurement Uncertainty	15
4. MEASUREMENT EQUIPMENT LIST	17
4.1. Radiated Emission Measurement	17
4.2. RF Conducted Measurement	17
5. CONDUCTED EMISSION	18
6. RADIATED EMISSION	19
6.1. Block Diagram of Test Setup	19
6.2. Radiated Emission Limits	20
6.3. Test Procedure	21
6.4. Measurement Result Explanation	22
6.5. Test Results	22
7. DTS/OCCUPIED BANDWIDTH	23
7.1. Block Diagram of Test Setup	23
7.2. Specification Limits	23
7.3. Test Procedure	23
7.4. Test Results	23
8. MAXIMUM PEAK OUTPUT POWER	24
8.1. Block Diagram of Test Setup	24
8.2. Specification Limits	24
8.3. Test Procedure	25
8.4. Test Results	25
9. EMISSION LIMITATIONS	26
9.1. Block Diagram of Test Setup	26
9.2. Specification Limits	26
9.3. Test Procedure	26
9.4. Test Results	27
10. POWER SPECTRAL DENSITY	28



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

10.1. Block Diagram of Test Setup	28
10.2. Specification Limits.....	28
10.3. Test Procedure	28
10.4. Test Results	28
11. DEVIATION TO TEST SPECIFICATIONS	29

APPENDIX A TEST DATA AND PLOTS

APPENDIX B TEST PHOTOGRAPHS

TEST REPORT

Applicant : FUTABA Corporation
Manufacturer : FUTABA Corporation
EUT Description
(1) Product : RECEIVER
(2) Model : (1)R7201SB (2)R7301SB
(3) Brand : Futaba
(4) Power Supply: DC 3.5 ~ DC 8.4V

Applicable Standards:

Title 47 CFR FCC Part 15 Subpart C
RSS-Gen (Issue 5), Amendment 2, February 2021
RSS-247 (Issue 2), February 2017

Audix Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Audix Technology Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.


Date of Report: 2023. 12. 06

Reviewed by:



(Tina Huang/Section Manager)

Approved by:

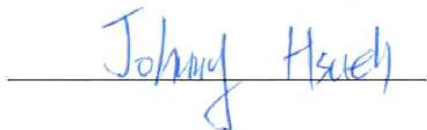

(Johnny Hsueh/Section Manager)



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

1. REVISION RECORD OF TEST REPORT

Edition No	Issued Date	Revision Summary	Report Number
0	2023. 12. 06	Original Report	EM-F230624

2. SUMMARY OF TEST RESULTS

Rule		Description	Results
FCC	IC		
15.207	RSS-Gen §8.8	Conducted Emission	N/A, NOTE 3
15.247(d)/ 15.205	RSS-Gen §8.9 RSS-247 §5.5	Radiated Band Edge and Radiated Spurious Emission	PASS
15.247(a)(2)	RSS-247 §5.2(1)	DTS/Occupied Bandwidth	PASS
15.247(b)(3)	RSS-247 §5.4(4)	Maximum Peak Output Power	PASS
15.247(d)	RSS-247 §5.5	Conducted Band Edges and Conducted Spurious Emission	PASS
15.247 (e)	RSS-247 §5.2(2)	Peak Power Spectral Density	PASS
15.203	---	Antenna Requirement	Compliance
Note: 1. Decision rule according to the limit of the test standard chapter, the test value is lower than the limit specified in the test chapter, and it is judged as Pass. 2. The uncertainties value is not used in determining the result. 3. The EUT only employs battery power for operation, so it is unnecessary to test.			

3. GENERAL INFORMATION

3.1. Description of Application

Applicant	FUTABA Corporation 1080 Yabutsuka Chosei-mura Chosei-gun Chiba-ken, 299-4395 Japan.													
Manufacturer	FUTABA Corporation 1080 Yabutsuka Chosei-mura Chosei-gun Chiba-ken, 299-4395 Japan.													
Product	RECEIVER													
Model	(1)R7201SB (2)R7301SB The difference between models is as following. The models R7201SB and R7301SB were tested in this report. <table><tr><th colspan="2">Difference</th><th>Antenna</th></tr><tr><th>Model</th><th></th><th></th></tr><tr><td>R7201SB</td><td></td><td>SANSEI ELECTRIC CO., LTD, ANTC32-072A0, Type: 1/4λ mono pole antenna, Antenna Gain: -5.16dBi</td></tr><tr><td>R7301SB</td><td></td><td>SANSEI ELECTRIC CO., LTD, ANTB24-104A0, Type: 1/2λ sleeve antenna, Antenna Gain: 2.10dBi</td></tr></table>		Difference		Antenna	Model			R7201SB		SANSEI ELECTRIC CO., LTD, ANTC32-072A0, Type: 1/4λ mono pole antenna, Antenna Gain: -5.16dBi	R7301SB		SANSEI ELECTRIC CO., LTD, ANTB24-104A0, Type: 1/2λ sleeve antenna, Antenna Gain: 2.10dBi
Difference		Antenna												
Model														
R7201SB		SANSEI ELECTRIC CO., LTD, ANTC32-072A0, Type: 1/4λ mono pole antenna, Antenna Gain: -5.16dBi												
R7301SB		SANSEI ELECTRIC CO., LTD, ANTB24-104A0, Type: 1/2λ sleeve antenna, Antenna Gain: 2.10dBi												
Brand	Futaba													

3.2. Description of EUT

Test Model	(1)R7201SB (2)R7301SB			
Serial Number	N/A			
Power Rating	DC 3.5 ~ DC 8.4V			
Software Version	N/A			
RF Features	FASSTest			
Transmit Type	1T1R			
Test Sample	Sample No.	Model	Test Item	Firmware
	01	R7201SB	RSE	N/A
	02	R7301SB	RSE	N/A
	03	R7201SB	RF Conducted	N/A
Sample Status	Trial sample			
Date of Receipt	2023. 10. 04			
Date of Test	2023. 10. 20 ~ 27			
Interface Ports of EUT	None			
Accessories Supplied	None			

Pursuant ISO 17025:2017 section 7.8.2, **Audix Technology Corp.** does not assume responsibility for all EUT's information including RF features, transmit type, antenna information...etc are provided by customer.

3.3. Reference Test Guidance

ANSI C63.10:2013

3.4. Antenna Information

For Mode R7201SB						
No.	Antenna Type		Manufacture	Antenna Part Number	Frequency (MHz)	Max Gain (dBi)
1.	ANT A	1/4λ mono pole antenna	SANSEI ELECTRIC CO., LTD	ANTC32-072A0	2400 - 2500	-5.16
	ANT B	1/4λ mono pole antenna	SANSEI ELECTRIC CO., LTD	ANTC32-072A0	2400 - 2500	-5.16

For Mode R7301SB						
No.	Antenna Type		Manufacture	Antenna Part Number	Frequency (MHz)	Max Gain (dBi)
1.	ANT A	1/2λ sleeve antenna	SANSEI ELECTRIC CO., LTD	ANTB24-104A0	2400 - 2500	2.10
	ANT B	1/2λ sleeve antenna	SANSEI ELECTRIC CO., LTD	ANTB24-104A0	2400 - 2500	2.10

3.5. EUT Specifications Assessed in Current Report

Mode	Fundamental Range (MHz)	Channel Number	Modulation	Data Rate (kbps)
FASSTest	2405.376 - 2472.960	23	DSSS	136

FASSTest							
Channel List							
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
00	2405.376	06	2423.808	12	2442.240	18	2460.672
01	2408.448	07	2426.880	13	2445.312	19	2463.744
02	2411.520	08	2429.952	14	2448.384	20	2466.816
03	2414.592	09	2433.024	15	2451.456	21	2469.888
04	2417.664	10	2436.096	16	2454.528	22	2472.960
05	2420.736	11	2439.168	17	2457.600		


3.6. Descriptions of Key Components

None

3.7. Test Configuration

Mode	TX _{on} (ms)	TX _{on+off} (ms)	Duty Cycle (x)	Duty Cycle Factor [10log(1/x)] (dB)
FASSTest	1.000	1.000	1.000	N/A

Note: When duty cycle is less than 98% (0.98) that duty cycle factor 10log(1/x) is needed to add in conducted test items measured in average detector.

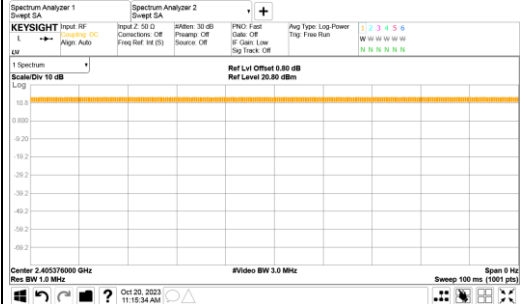Mode	TX _{on} (ms)	T _{on} +T _{off} (ms)
FASSTest		---

Item		Mode	Test Model	ANT Port	Test Channel
Radiated Test Case	Radiated Spurious Emission (30MHz~1GHz)	FASSTest	R7201SB	ANT A	22
				ANT B	22
		FASSTest	R7301SB	ANT A	22
				ANT B	22

Item		Mode	Test Model	ANT Port	Test Channel
Radiated Test Case	Radiated Band Edge ^{Note}	FASSTest	R7201SB	ANT A	0/22
				ANT B	0/22
			R7301SB	ANT A	0/22
				ANT B	0/22
	Radiated Spurious Emission ^{Note}	FASSTest	R7201SB	ANT A	0/11/22
				ANT B	0/11/22
			R7301SB	ANT A	0/11/22
				ANT B	0/11/22

Item		Mode	Test Model	ANT Port	Test Channel
Conducted Test Case Note 3	DTS/Occupied Bandwidth	FASSTest	R7201SB	ANT A	00/11/22
				ANT B	00/11/22
	Peak Output Power	FASSTest		ANT A	00/11/22
				ANT B	00/11/22
	Band Edge	FASSTest		ANT A	00/22
				ANT B	00/22
	Spurious Emission	FASSTest		ANT A	00/11/22
				ANT B	00/11/22
	Peak Power Spectral Density	FASSTest		ANT A	00/11/22
				ANT B	00/11/22

Note 1: ☒ Mobile Device ☐ Portable Device

and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow:

☒ Lie ☐ Side ☐ Stand

Note 2: Low, mid, and high channels were measured, only the worst channel of each modulation was presented in this report.

Note 3: Both of models have identical RF mechanism. The difference is used antenna, so we presented conducted test case with model R7201SB.

3.8. Output Power Setting

Mode	Centre Frequency (MHz)	Power Setting
FASSTest	2405.376	Default
	2439.168	Default
	2472.960	Default

3.9. Tested Supporting System List

3.9.1. Support Peripheral Unit


No.	Product	Brand	Model No.	Serial No.	Approval
1.	Notebook PC	hp	TPN-Q189	5CD8175992	Contains FCC ID: PD93168NG Contains IC: 1000M-3168NG
2.	Test Jig	Futaba	CIU-3	N/A	N/A
3.	DC Power Supply (For Radiated Test Case)	TOP WARD	3303A	721773	N/A
4.	Battery (DC 6.6V) (For Conducted Test Case)	Futaba	FT2F2100BV2	N/A	N/A

3.9.2. Cable Lists

No.	Cable Description Of The Above Support Units
1.	Adapter: hp, M/N PPP-012C-S DC Cord : Shielded, Undetachable, 1.8m, Bonded a ferrite core AC Power Cord : Unshielded, Detachable, 1.0m USB Cable: Detachable, 1.8m (For Conducted Test Case only)
2.	Signal Cable: Unshielded, Undetachable, 0.5m
3.	DC Power Cord*2: Unshielded, Detachable, 0.7m AC Power Cord: Unshielded, Undetachable, 1.8m

3.10. Setup Configuration

3.10.1. EUT Configuration for Power Line & Radiated Emission

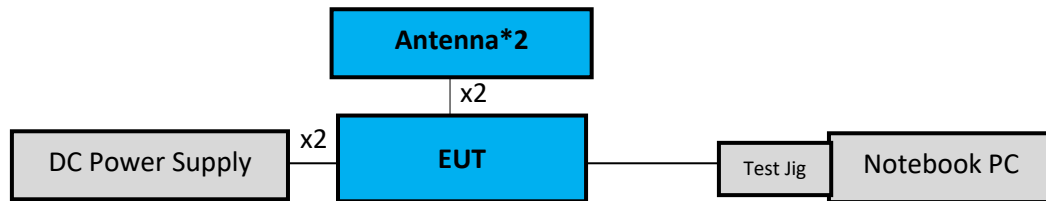

3.10.2. EUT Configuration for RF Conducted Test Items



3.11. Operating Condition of EUT

Test program “Futaba Term” is used for enabling EUT RF function under continue transmitting and choosing channel.

3.12. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 491, Zhongfu Rd., Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2017 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is : TW1724 ISED CAB Identifier Number under APEC TEL MRA by NCC is TW1724 (1) No.1 3m Semi Anechoic Chamber

3.13.Measurement Uncertainty

The measurement uncertainty levels have been estimated as specified in ETSI TR 100 028-2001

Test Items/Facilities			Frequency Range	Uncertainty
Conduction Test	☐	No. 7 Shielded Room	9kHz-150kHz	±3.7dB
			150kHz-30MHz	±3.4dB
	☐	No. 8 Shielded Room	9kHz-150kHz	±3.7dB
			150kHz-30MHz	±3.5dB
Radiation Test	☒	No.1 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.6dB
			200MHz-1000MHz, 3m, Horizontal	±4.3dB
			30MHz-200MHz, 3m, Vertical	±4.4dB
			200MHz-1000MHz, 3m, Vertical	±4.8dB
			1GHz-6GHz, 3m	±4.8dB
			6GHz-18GHz, 3m	±4.5dB
	☐	No.3 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.0dB
			200MHz-1000MHz, 3m, Horizontal	±4.4dB
			30MHz-200MHz, 3m, Vertical	±4.7dB
			200MHz-1000MHz, 3m, Vertical	±4.5dB
			1GHz-6GHz, 3m	±4.8dB
			6GHz-18GHz, 3m	±4.5dB
	☐	No.4 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.3dB
			200MHz-1000MHz, 3m, Horizontal	±4.2dB
			30MHz-200MHz, 3m, Vertical	±4.8dB
			200MHz-1000MHz, 3m, Vertical	±4.7dB
			1GHz-6GHz, 3m	±4.6dB
			6GHz-18GHz, 3m	±4.4dB
	☐	No.5 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.6dB
			200MHz-1000MHz, 3m, Horizontal	±4.4dB
			30MHz-200MHz, 3m, Vertical	±4.5dB
			200MHz-1000MHz, 3m, Vertical	±4.9dB
			1GHz-6GHz, 3m	±4.9dB
			6GHz-18GHz, 3m	±4.6dB
	Radiated emissions (18GHz-40GHz)		18GHz-40GHz, 3m	±3.4dB

Remark : Uncertainty = $ku_c(y)$

**Audix Technology Corp.**

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Test Item	Uncertainty
Bandwidth	$\pm 0.05\text{kHz}$
Maximum peak output power	$\pm 0.33\text{dB}$
Power spectral density	$\pm 0.13\text{dB}$
Conducted Emission Limitations	$\pm 0.13\text{dB}$

4. MEASUREMENT EQUIPMENT LIST

4.1. Radiated Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9010B-526	MY57410128	2022.12.21	1 Year
2.	Test Receiver	R&S	ESCS30	100338	2023.06.20	1 Year
3.	Amplifier	HP	8447D	2944A06305	2022.12.29	1 Year
4.	Microwave Preamplifier	Agilent	8449B	3008A01284	2023.06.06	1 Year
5.	Microwave Amplifier	Keysight	83051A	MY56480113	2023.09.11	1 Year
6.	Loop Antenna	TESEQ	HLA 6121	60478	2023.02.21	1 Year
7.	Bilog Antenna	TESEQ	CBL6112D	33821	2023.06.30	1 Year
8.	Double-Ridged Waveguide Horn	EMCO	3115	9609-4927	2023.07.21	1 Year
9.	Horn Antenna	COM-POWER	AH-840	101092	2022.12.30	1 Year
10.	2.4GHz Notch Filter	K&L Microwave	7NSL10-2441.5/E130.5-O/O	2	2023.07.22	1 Year
11.	High-Pass Filter	Microwave	H3G018G1	484796	2023.07.22	1 Year
12.	Coaxial Cable	MIYAZAKI	5D2W	RE-11	2023.01.07	1 Year
13.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 106	RE-14	2023.01.07	1 Year
14.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 102	RE-30	2023.08.21	1 Year
15.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.1 3m A/C	2023.04.13	1 Year
16.	Test Software	Audix	e3	V9 18621a	N.C.R.	N.C.R.

4.2. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9030B	MY61330403	2022.12.16	1 Year
2.	Digital Thermo-Hygro Meter	iMax	HTC-1	RF-03	2023.04.13	1 Year



5. CONDUCTED EMISSION

【The EUT only employs uses DC power for operation, no conductive emission limits are required according to FCC Part 15 Section §15.207 and RSS-Gen §8.8】


6. RADIATED EMISSION

6.1. Block Diagram of Test Setup


6.1.1. Block Diagram of EUT

Indicated as section 3.10


6.1.2. Setup Diagram for 9kHz-30MHz

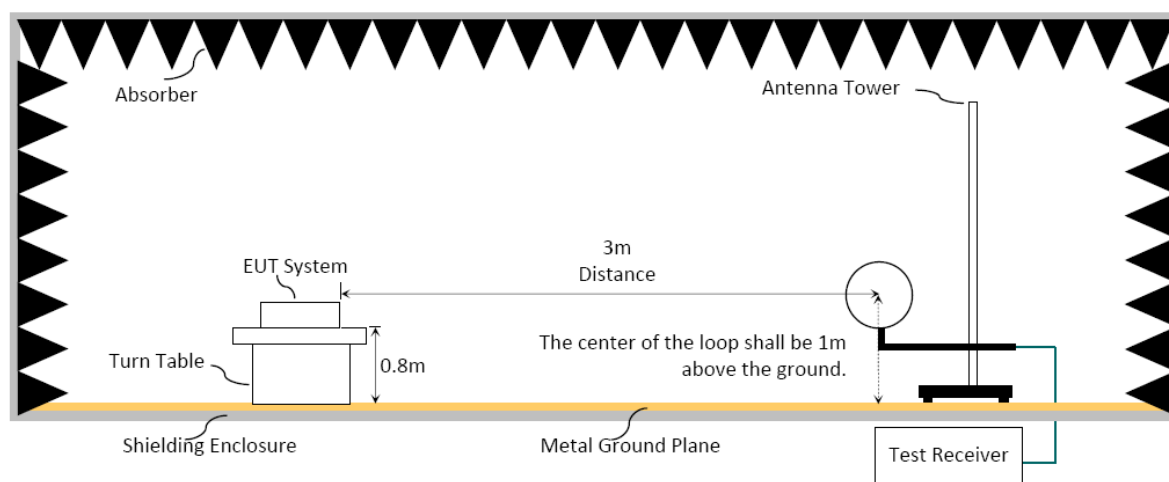

6.1.3. Setup Diagram for 30-1000MHz

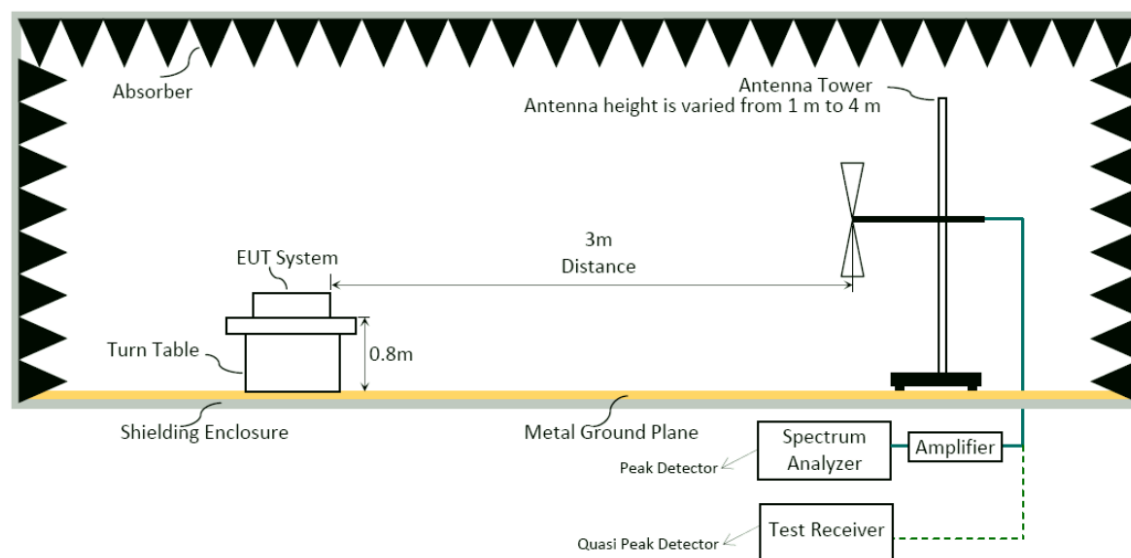

6.1.4. Setup Diagram for above 1GHz

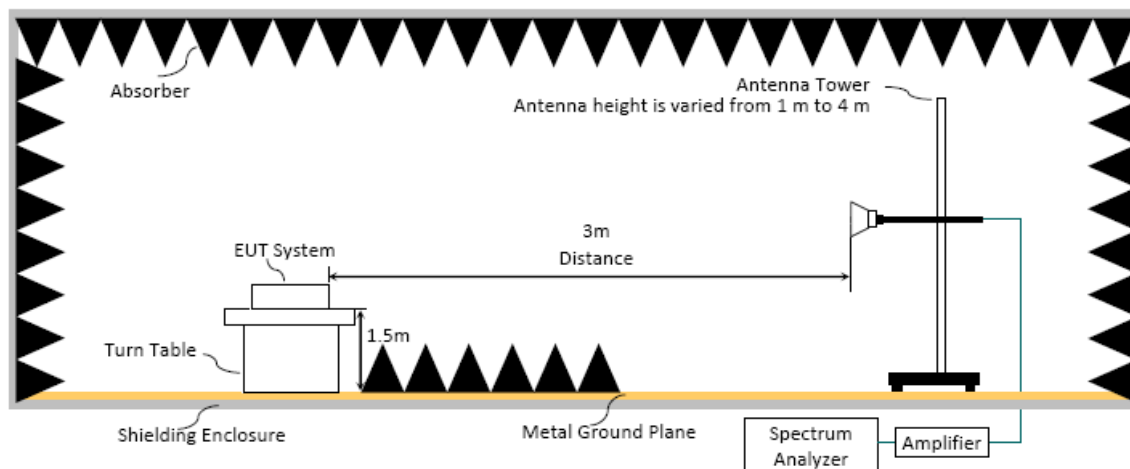

6.2. Radiated Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205/RSS-Gen Section 8.10 table 6, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance(m)	Limits	
		dBμV/m	μV/m
0.009 - 0.490	300	67.6-20 log f(kHz)	2400/f kHz
0.490 - 1.705	30	87.6-20 log f(kHz)	24000/f kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dBμV/m (Peak) 54.0 dBμV/m (Average)	

Remark : (1) $\text{dB}\mu\text{V/m} = 20 \log (\mu\text{V/m})$

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.3. Test Procedure

Frequency Range 9kHz~30MHz:

The EUT setup on the turntable which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)
Q.P. (490kHz-30MHz)

Frequency Range 30MHz ~ 25GHz:

The EUT setup on the turn table which has 80cm (for 30-1000MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

Frequency below 1GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note 1: When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required, otherwise using Q.P. for final measurement.

Note 2: When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

Frequency above 1GHz to 10th harmonic (up to 25 GHz):

Peak Detector:

- (1) RBW = 1MHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Average Detector:**■ Option 1:**

(1) RBW = 1MHz

(2) VBW $\geq 1/T$. (Duty Cycle < 98%)

(3) VBW = 10Hz (Duty Cycle $\geq 98\%$, when duty cycle presented in section 3.7)

Modulation Type	VBW Setting
FASSTest	10Hz

(4) Detector = Peak.

(5) Sweep time = auto.

(6) Trace mode = max hold.

(7) Allow sweeps to continue until the trace stabilizes.

□ Option 2:

Average Emission Level = Peak Emission Level + D.C.C.F.

6.4. Measurement Result Explanation

■ Peak Emission Level (dB μ V/m) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB) + Reading (dB μ V).

■ Average Emission Level (dB μ V/m) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB) + Reading (dB μ V).

□ Average Emission Level (dB μ V/m) = Peak Emission Level (dB μ V/m) + DCCF (dB)
Duty Cycle Correction Factor (DCCF) (dB) = $20\log(TX_{on}/TX_{on+off})$ presented in section 3.7.


□ ERP (dBm) = Peak Emission Level (dB μ V/m) - 95.2dB - 2.14dB

6.5. Test Results

Please refer to Appendix A.

7. DTS/OCCUPIED BANDWIDTH

7.1. Block Diagram of Test Setup

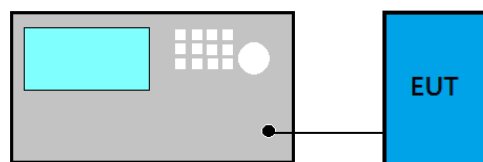

7.2. Specification Limits

The minimum bandwidth shall be at least 500kHz.

7.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

For DTS Bandwidth

- (1) Set RBW = 100 kHz.
- (2) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x to -6dB power to record the final bandwidth..

For 99% Occupied Bandwidth


- (1) Set Span range 1.5~5 times the OBW
- (2) Set RBW close to 1% to 5% of OBW.
- (3) Set $\text{VBW} \geq 3 \times \text{RBW}$.
- (4) Detector = Peak.
- (5) Trace mode = Max hold
- (6) Sweep = Auto couple.
- (7) Allow the trace to stabilize.

7.4. Test Results

Please refer to Appendix A

8. MAXIMUM PEAK OUTPUT POWER

8.1. Block Diagram of Test Setup

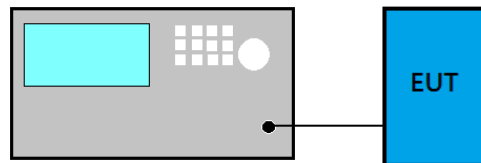

8.2. Specification Limits

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5MHz is : 1Watt. (30dBm), and E.I.R.P.: 4Watt (36dBm)

8.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

☐ **PKPM1 Peak power meter method:**

EUT is connected to power sensor and record the maximum output power.

☒ **Maximum peak conducted output power method:**

- (1) Set the RBW $\geq$ DTS bandwidth
- (2) Set VBW $\geq 3 \times$ RBW
- (3) Set span $\geq 3 \times$ RBW.
- (4) Sweep time = auto couple
- (5) Detector = peak.
- (6) Trace mode = max hold.
- (7) Allow trace to fully stabilize.
- (8) Use peak marker function to determine the peak amplitude level.

☐ **Method AVGPM (Measurement using an RF average power meter):**

EUT is connected to power sensor and record the maximum average output power and duty cycle factor is added when duty cycle presented in section 3.7 is $< 98\%$.

☐ **Method AVGSA-2 (Spectrum channel power)**


- (1) Set span to at least 1.5 times the OBW
- (2) Set RBW = 1 -5% of OBW
- (3) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- (4) Detector = RMS.
- (5) Trace mode = trace average at least 100 traces
- (6) Sweep = auto couple.
- (7) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
- (8) Duty cycle factor is added when duty cycle presented in section 3.7 is $< 98\%$.

8.4. Test Results

Please refer to Appendix A

9. EMISSION LIMITATIONS

9.1. Block Diagram of Test Setup

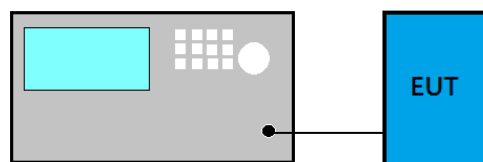

9.2. Specification Limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, that the required attenuation shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in Section 15.209(a)/RSS-Gen Section 8.9 table 4 is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a)/RSS-Gen Section 8.10 table 6, must also comply with the radiated emission limits specified in Section 15.209(a)/RSS-Gen Section 8.9 table 4 (See Section 15.205(c)).

9.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

■ Reference Level

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW $\geq 3 \times$ RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max PSD as reference level.

■ Emission Level Measurement


- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW $\geq 3 \times$ RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max level.

9.4. Test Results

Please refer to Appendix A

10. POWER SPECTRAL DENSITY

10.1. Block Diagram of Test Setup

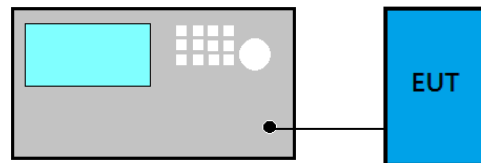

10.2. Specification Limits

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band.

10.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

■ Method PKPSD (peak PSD)

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- (4) Set the VBW $\geq 3 \times \text{RBW}$.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize.
- (9) Use the peak marker function to determine the maximum amplitude level.
- (10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

□ Method AVGPSD-2

- (1) Using peak PSD procedure step 1 to step 4.
- (2) Detector = RMS detector
- (3) Sweep time = auto couple
- (4) Trace mode = trace averaging over a minimum of 100 traces
- (5) Use the peak marker function to determine the maximum amplitude level.
- (6) Duty cycle factor is added when duty cycle presented in section 3.7 < 98%.
- (7) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

10.4. Test Results

Please refer to Appendix A



11.DEVIATION TO TEST SPECIFICATIONS

【NONE】



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

APPENDIX A

Tel: +886 2 26099301
Fax: +886 2 26099303

APPDNDIX A

TEST DATA AND PLOTS

(Model: (1)R7201SB (2)R7301SB)

TABLE OF CONTENTS

A.1 RADIATED EMISSION	2
A.1.1 Emissions within Restricted Frequency Bands.....	2
A.1.2 Emissions outside the frequency band:.....	21
A.1.3 Emissions in Non-restricted Frequency Bands:.....	28
A.2 DTS/OCCUPIED BANDWIDTH.....	29
A.2.1 DTS/Occupied Bandwidth Result.....	29
A.2.2 Measurement Plots	30
A.3 MAXIMUM PEAK OUTPUT POWER	32
A.3.1 Peak Output Power	32
A.3.2 Measurement Plots	33
A.4 EMISSION LIMITATIONS	34
A.5 POWER SPECTRAL DENSITY	37
A.5.1 Power Spectral Density Result	37
A.5.2 Measurement Plots	38

A.1 RADIATED EMISSION

Test Date	2023/10/27	Temp./Hum.	25°C /64%
Test Voltage	DC 6.6V (Via DC Power Supply)	Tested By	Ryan Chiang

A.1.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

A.2.1.2 Frequency Below 1GHz

Test Model: R7201SB, ANT A

Mode	FASSTest	Frequency	TX 2472.960MHz
------	----------	-----------	----------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.95	1.20	26.52	31.97	30.60	40.00	9.40	Peak
46.975	15.75	1.51	26.49	39.16	29.93	40.00	10.07	Peak
324.233	19.61	4.67	25.89	33.75	32.14	46.00	13.86	Peak
378.392	21.05	5.29	26.35	34.86	34.85	46.00	11.15	Peak
567.542	23.97	6.65	27.33	32.85	36.14	46.00	9.86	Peak
713.850	24.74	7.40	27.38	32.65	37.40	46.00	8.60	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	26.51	30.62	27.62	40.00	12.38	Peak
184.392	15.33	3.22	25.87	38.92	31.60	43.50	11.90	Peak
199.750	15.29	3.40	25.81	42.60	35.48	43.50	8.02	Peak
377.583	21.03	5.28	26.34	35.51	35.47	46.00	10.53	Peak
480.242	22.85	6.24	27.04	33.47	35.52	46.00	10.48	Peak
793.067	24.98	7.91	27.29	33.04	38.64	46.00	7.36	Peak

Test Model: R7201SB, ANT B

Mode	FASSTest	Frequency	TX 2472.960MHz
------	----------	-----------	----------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.95	1.20	26.52	32.81	31.44	40.00	8.56	Peak
46.167	16.14	1.50	26.49	40.37	31.52	40.00	8.48	Peak
128.617	17.56	2.63	26.13	32.97	27.04	43.50	16.46	Peak
198.942	15.29	3.39	25.81	34.40	27.26	43.50	16.24	Peak
324.233	19.61	4.67	25.89	33.43	31.82	46.00	14.18	Peak
395.367	21.45	5.46	26.48	33.01	33.44	46.00	12.56	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.95	1.20	26.52	33.12	31.75	40.00	8.25	Peak
168.225	15.72	3.06	25.93	43.23	36.08	43.50	7.42	Peak
199.750	15.29	3.40	25.81	40.07	32.94	43.50	10.56	Peak
263.608	18.33	4.01	25.71	36.41	33.04	46.00	12.96	Peak
324.233	19.61	4.67	25.89	35.04	33.43	46.00	12.57	Peak
377.583	21.03	5.28	26.34	34.37	34.34	46.00	11.66	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303****Test Model: R7301SB, ANT A**

Mode	FASSTest	Frequency	TX 2472.960MHz
------	----------	-----------	----------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.000	23.95	1.20	26.52	34.16	32.79	40.00	7.21	Peak
46.975	15.75	1.51	26.49	40.17	30.94	40.00	9.06	Peak
324.233	19.61	4.67	25.89	33.01	31.40	46.00	14.60	Peak
378.392	21.05	5.29	26.35	35.08	35.07	46.00	10.93	Peak
629.783	24.44	6.93	27.41	33.64	37.61	46.00	8.39	Peak
774.475	24.92	7.79	27.31	33.42	38.83	46.00	7.17	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.425	23.06	1.25	26.52	32.27	30.07	40.00	9.93	Peak
199.750	15.29	3.40	25.81	40.89	33.77	43.50	9.73	Peak
215.917	16.26	3.56	25.78	40.90	34.93	43.50	8.57	Peak
377.583	21.03	5.28	26.34	35.28	35.25	46.00	10.75	Peak
540.058	23.63	6.55	27.27	33.57	36.49	46.00	9.51	Peak
663.733	24.57	7.11	27.40	32.59	36.87	46.00	9.13	Peak

Test Model: R7301SB, ANT B

Mode	FASSTest	Frequency	TX 2472.960MHz
------	----------	-----------	----------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.808	23.65	1.22	26.52	32.40	30.75	40.00	9.25	Peak
46.167	16.14	1.50	26.49	38.95	30.09	40.00	9.91	Peak
199.750	15.29	3.40	25.81	34.48	27.36	43.50	16.14	Peak
324.233	19.61	4.67	25.89	33.67	32.06	46.00	13.94	Peak
540.058	23.63	6.55	27.27	32.90	35.82	46.00	10.18	Peak
784.983	24.95	7.86	27.30	32.82	38.33	46.00	7.67	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.233	22.77	1.27	26.52	31.15	28.67	40.00	11.33	Peak
199.750	15.29	3.40	25.81	41.40	34.28	43.50	9.22	Peak
540.058	23.63	6.55	27.27	32.89	35.81	46.00	10.19	Peak
567.542	23.97	6.65	27.33	32.42	35.71	46.00	10.29	Peak
665.350	24.58	7.12	27.40	33.08	37.38	46.00	8.62	Peak
864.200	25.82	8.45	27.12	33.81	40.96	46.00	5.04	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics

Band Edge:


Test Model: R7201SB, ANT A

Mode	FASSTest	Frequency	TX 2405.376MHz
------	----------	-----------	----------------

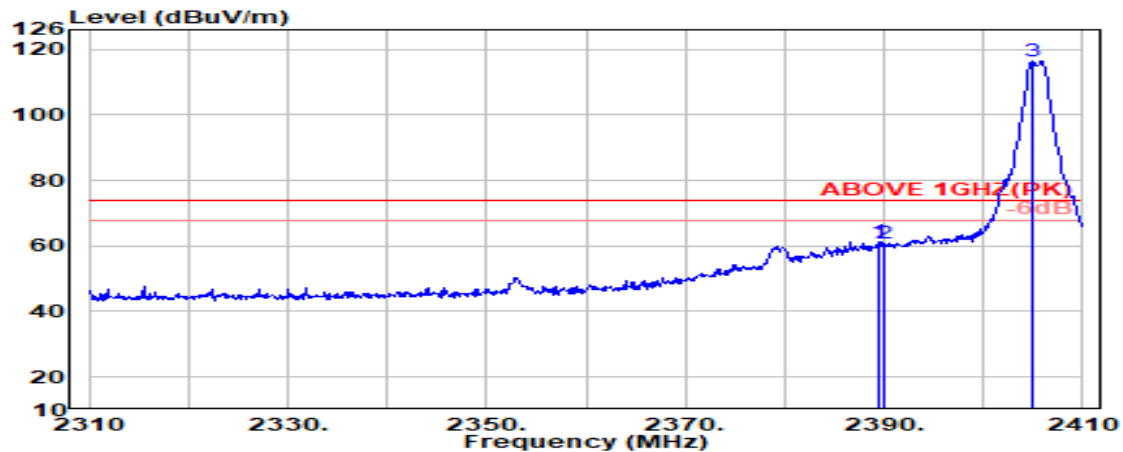

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	6.03	39.93	66.89	61.20	74.00	12.80	Peak
2390.000	28.20	6.03	39.93	66.66	60.96	74.00	13.04	Peak
@ 2404.900	28.22	6.06	39.93	121.92	116.27	---	---	Peak

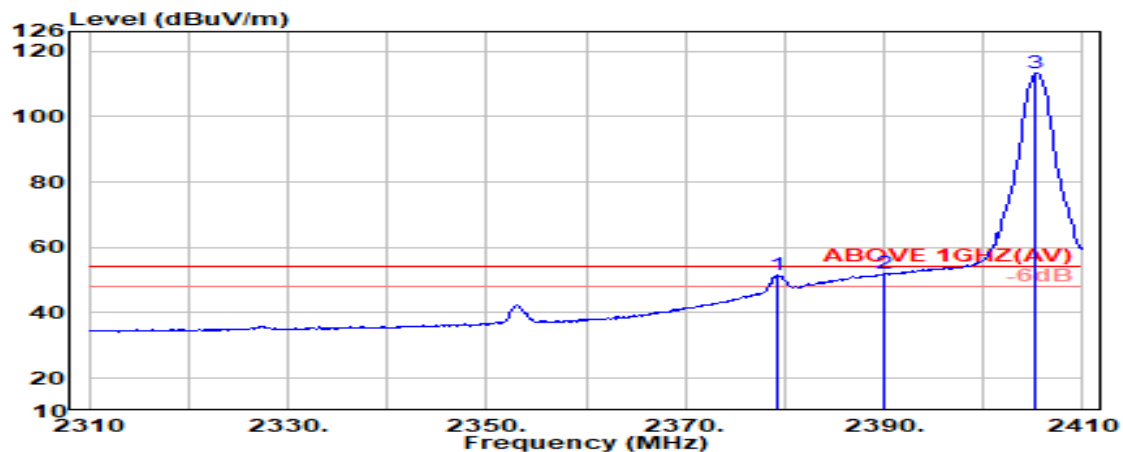

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.300	28.20	6.02	39.93	57.22	51.51	54.00	2.49	Average
2390.000	28.20	6.03	39.93	57.64	51.94	54.00	2.06	Average
@ 2405.300	28.22	6.06	39.93	119.00	113.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	FASSTest	Frequency	TX 2405.376MHz
------	----------	-----------	----------------

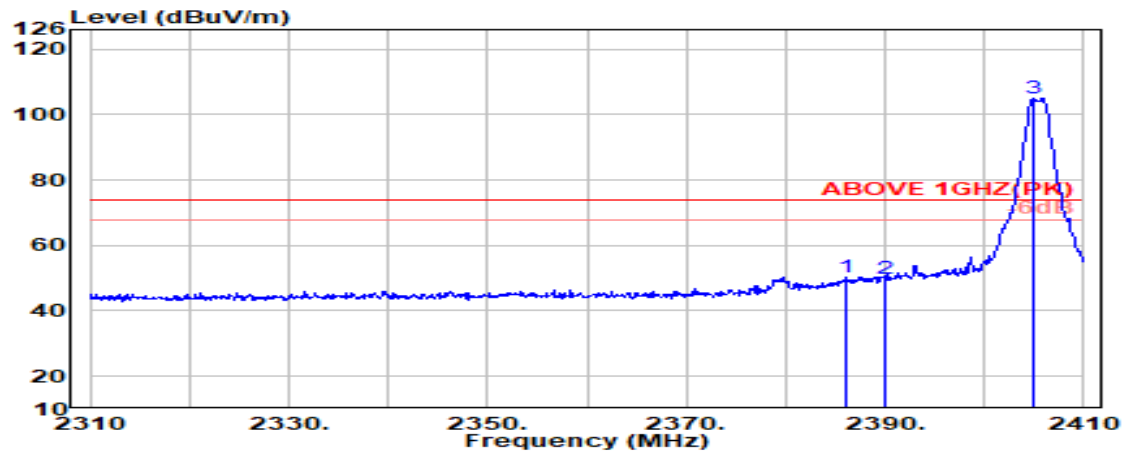

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.000	28.20	6.03	39.93	55.98	50.28	74.00	23.72	Peak
2390.000	28.20	6.03	39.93	55.72	50.02	74.00	23.98	Peak
@ 2404.900	28.22	6.06	39.93	110.63	104.98	---	---	Peak

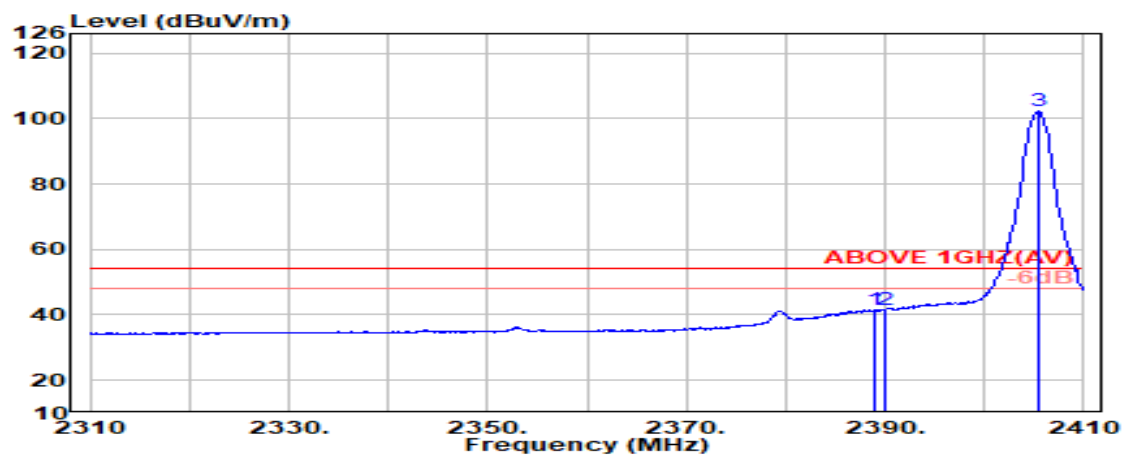

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.900	28.20	6.03	39.93	47.16	41.46	54.00	12.54	Average
2390.000	28.20	6.03	39.93	47.43	41.73	54.00	12.27	Average
@ 2405.400	28.22	6.06	39.93	107.80	102.15	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	FASSTest	Frequency	TX 2472.960MHz
------	----------	-----------	----------------

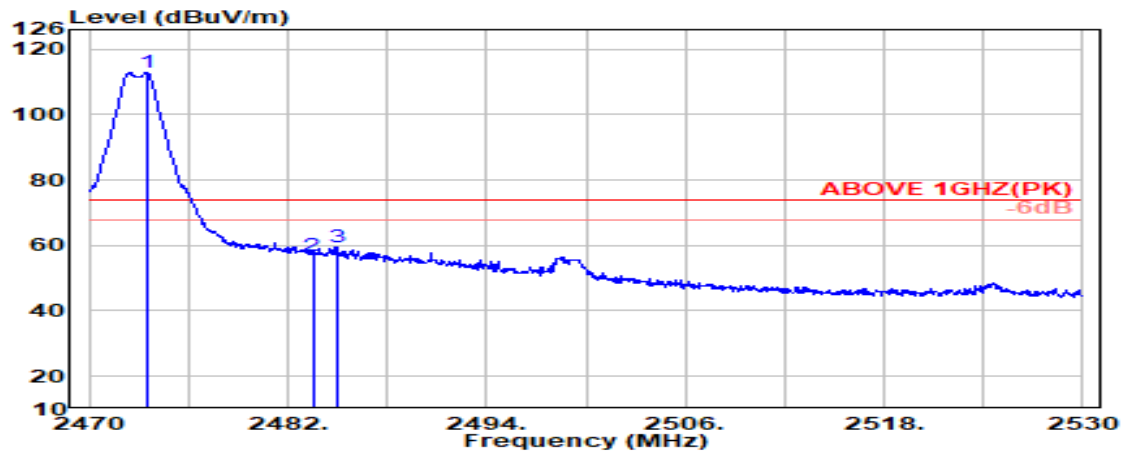

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2473.450	28.45	6.15	39.92	118.06	112.74	---	---	Peak
	2483.500	28.47	6.17	39.92	62.08	56.79	74.00	17.21	Peak
	2484.950	28.47	6.17	39.92	64.76	59.47	74.00	14.53	Peak

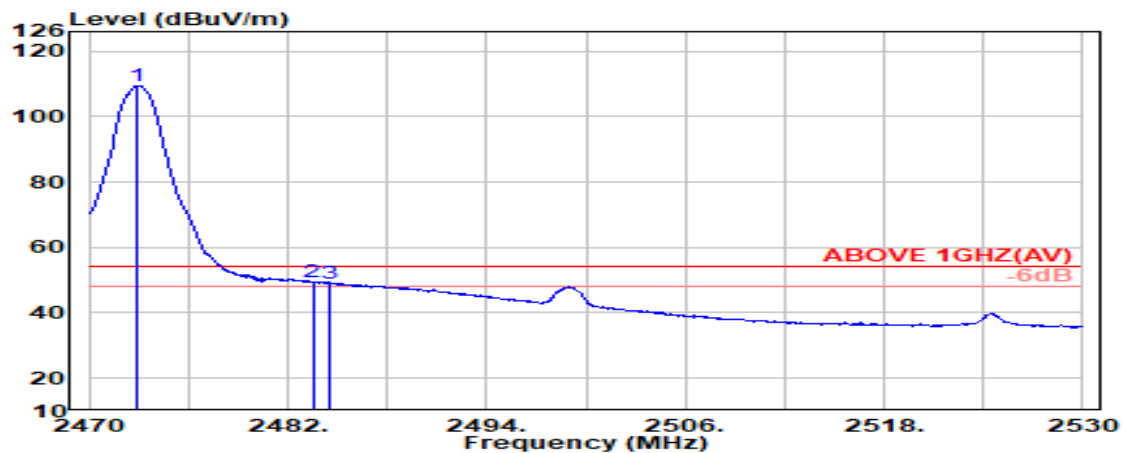

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2472.950	28.45	6.15	39.92	114.78	109.45	---	---	Average
	2483.500	28.47	6.17	39.92	54.84	49.55	54.00	4.45	Average
	2484.500	28.47	6.17	39.92	54.32	49.04	54.00	4.96	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	FASSTest	Frequency	TX 2472.960MHz
------	----------	-----------	----------------

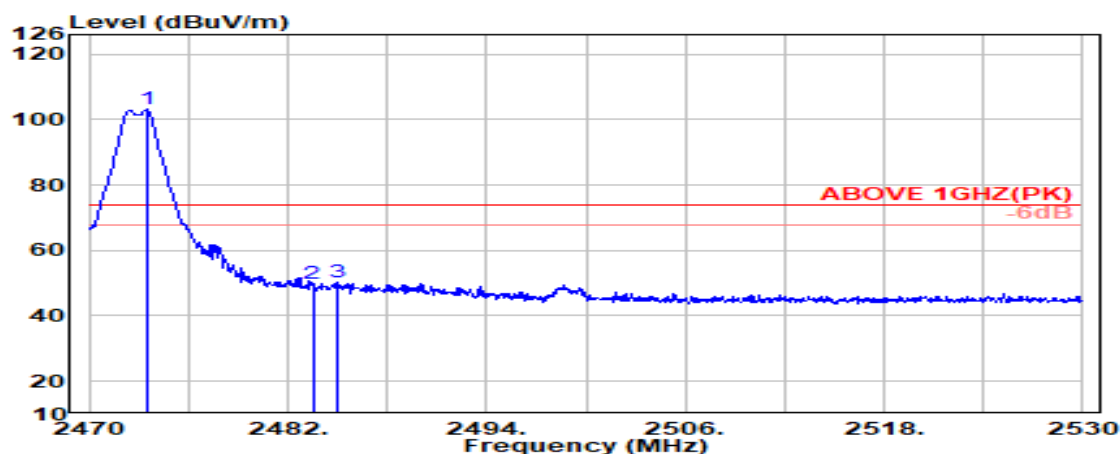

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2473.450	28.45	6.15	39.92	108.42	103.10	---	---	Peak
	2483.500	28.47	6.17	39.92	55.07	49.78	74.00	24.22	Peak
	2485.050	28.47	6.17	39.92	55.36	50.08	74.00	23.92	Peak

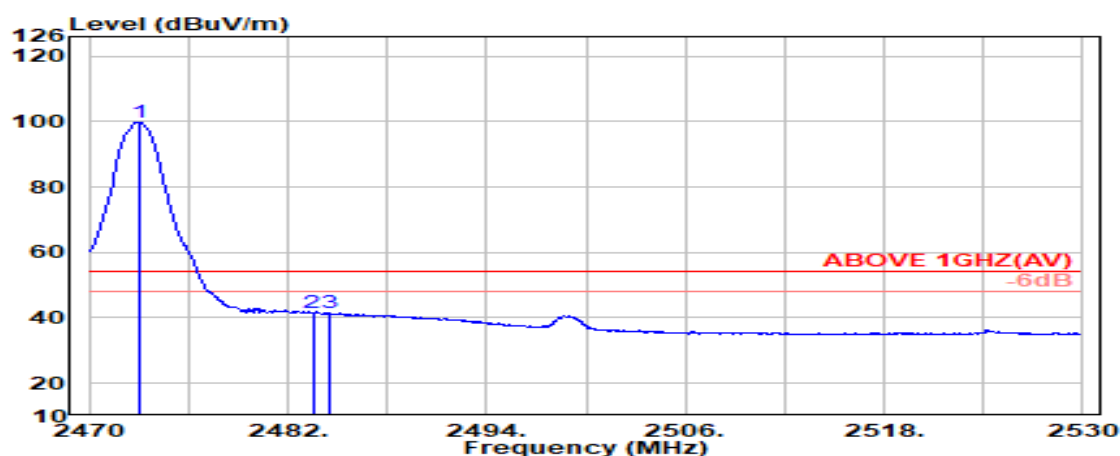

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2473.000	28.45	6.15	39.92	105.18	99.85	---	---	Average
	2483.500	28.47	6.17	39.92	46.83	41.54	54.00	12.46	Average
	2484.500	28.47	6.17	39.92	46.79	41.50	54.00	12.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


Test Model: R7201SB, ANT B

Mode	FASSTest	Frequency	TX 2405.376MHz
------	----------	-----------	----------------

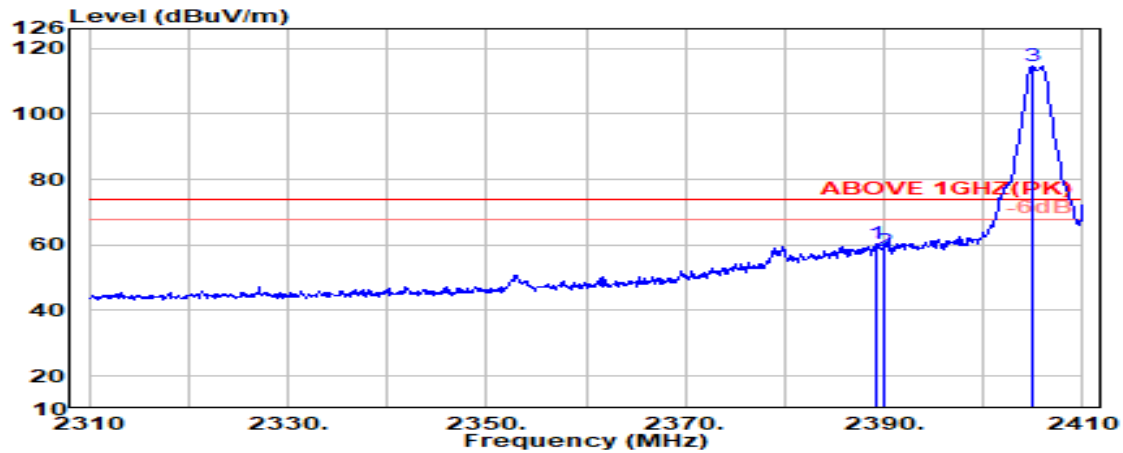

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.20	6.03	39.93	66.00	60.30	74.00	13.70	Peak
2390.000	28.20	6.03	39.93	63.87	58.17	74.00	15.83	Peak
@ 2404.900	28.22	6.06	39.93	120.18	114.53	---	---	Peak

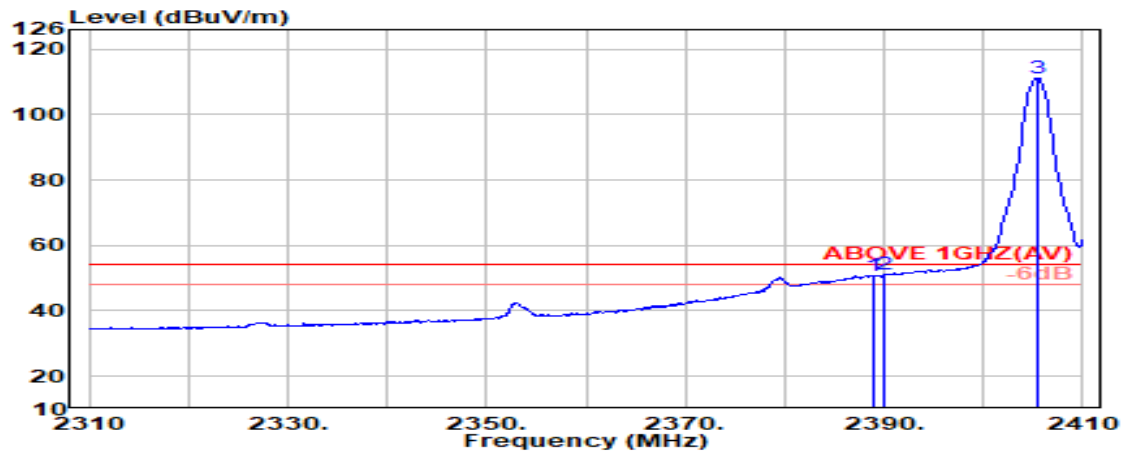

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.20	6.03	39.93	56.56	50.87	54.00	3.13	Average
2390.000	28.20	6.03	39.93	56.67	50.97	54.00	3.03	Average
@ 2405.400	28.22	6.06	39.93	116.93	111.28	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	FASSTest	Frequency	TX 2405.376MHz
------	----------	-----------	----------------

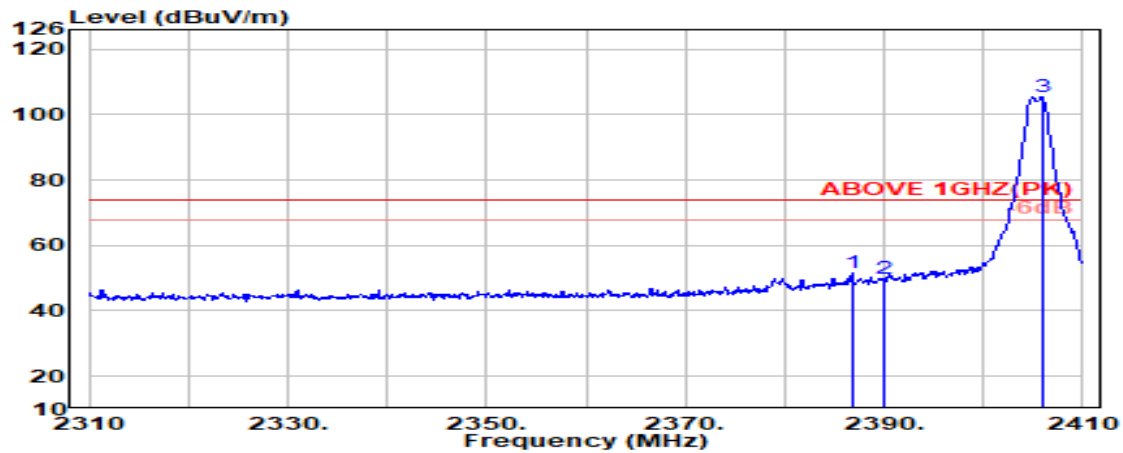

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.800	28.20	6.03	39.93	57.16	51.46	74.00	22.54	Peak
2390.000	28.20	6.03	39.93	55.31	49.62	74.00	24.38	Peak
@ 2405.900	28.22	6.06	39.93	110.91	105.27	---	---	Peak

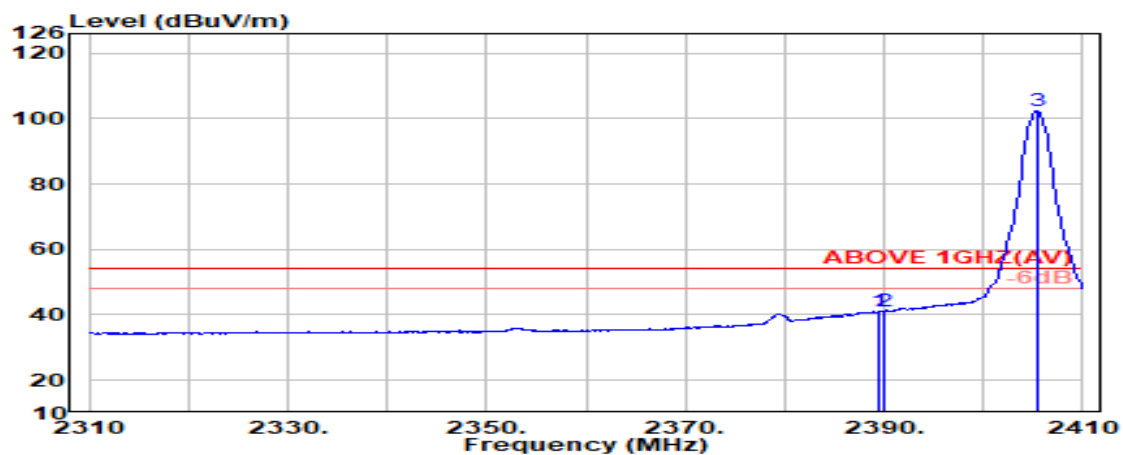

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.20	6.03	39.93	46.56	40.87	54.00	13.13	Average
2390.000	28.20	6.03	39.93	46.57	40.88	54.00	13.12	Average
@ 2405.400	28.22	6.06	39.93	107.85	102.20	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	FASSTest	Frequency	TX 2472.960MHz
------	----------	-----------	----------------

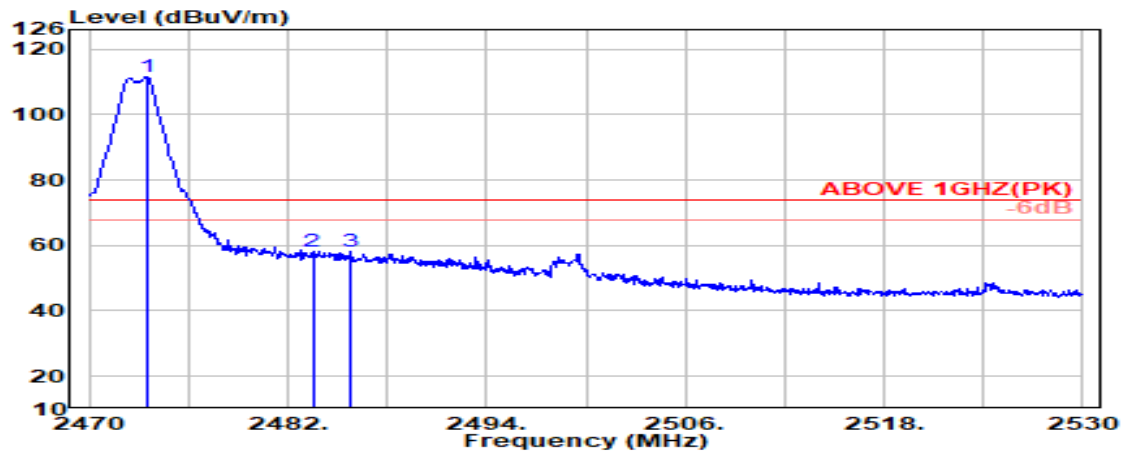

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2473.450	28.45	6.15	39.92	116.70	111.38	---	---	Peak
	2483.500	28.47	6.17	39.92	63.27	57.98	74.00	16.02	Peak
	2485.800	28.47	6.17	39.92	63.32	58.04	74.00	15.96	Peak

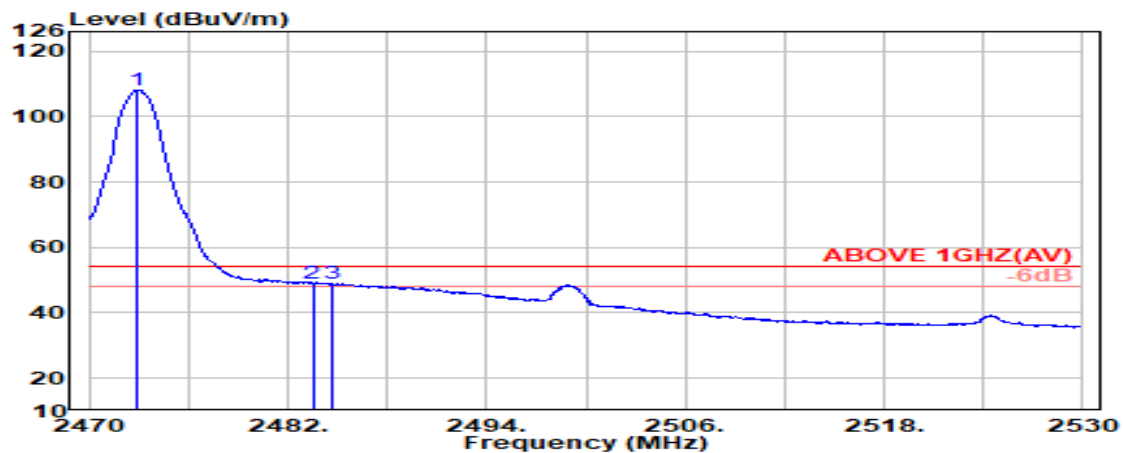

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2472.900	28.45	6.15	39.92	113.38	108.06	---	---	Average
	2483.500	28.47	6.17	39.92	54.40	49.12	54.00	4.88	Average
	2484.650	28.47	6.17	39.92	54.10	48.82	54.00	5.18	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	FASSTest	Frequency	TX 2472.960MHz
------	----------	-----------	----------------

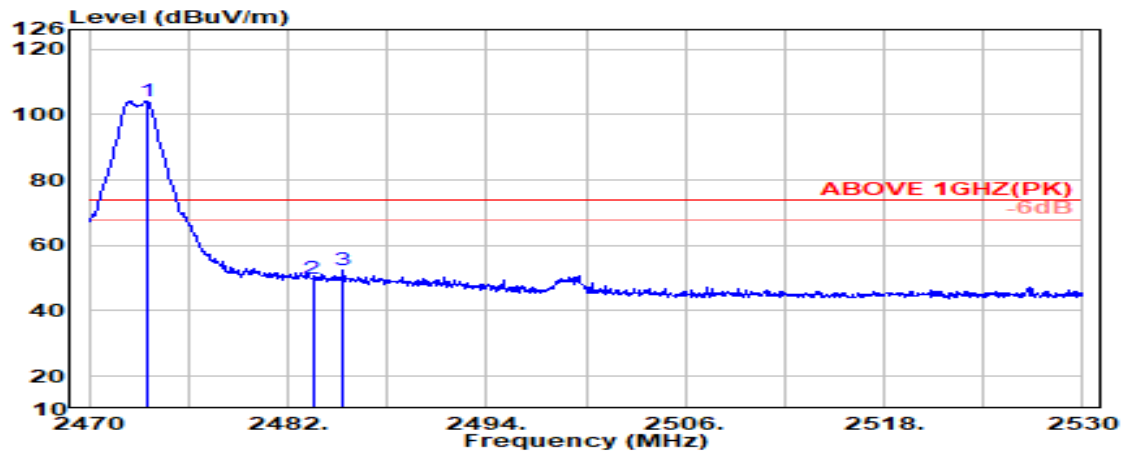

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2473.450	28.45	6.15	39.92	109.39	104.06	---	---	Peak
	2483.500	28.47	6.17	39.92	55.22	49.93	74.00	24.07	Peak
	2485.300	28.47	6.17	39.92	57.55	52.27	74.00	21.73	Peak

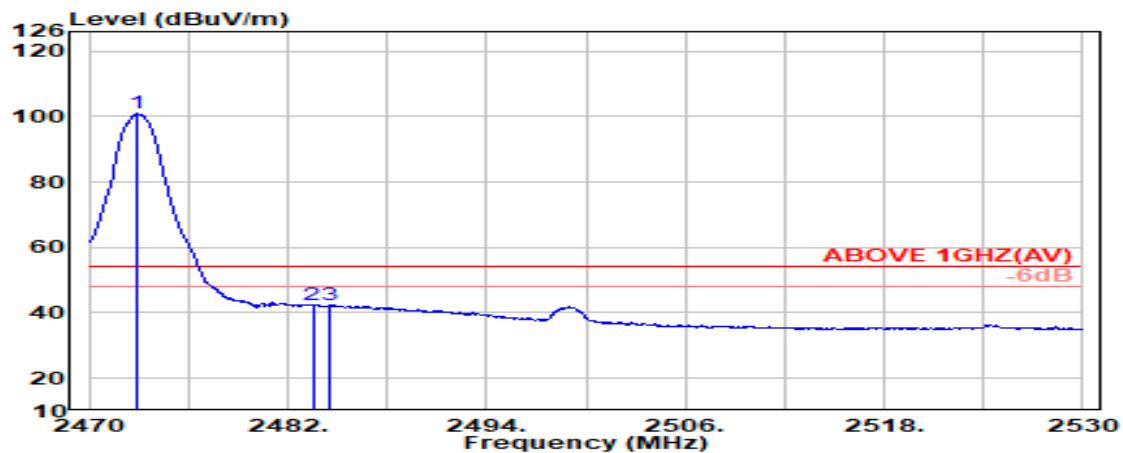

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2472.950	28.45	6.15	39.92	106.22	100.90	---	---	Average
	2483.500	28.47	6.17	39.92	47.61	42.33	54.00	11.67	Average
	2484.550	28.47	6.17	39.92	47.57	42.29	54.00	11.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


Test Model: R7301SB, ANT A

Mode	FASSTest	Frequency	TX 2405.376MHz
------	----------	-----------	----------------

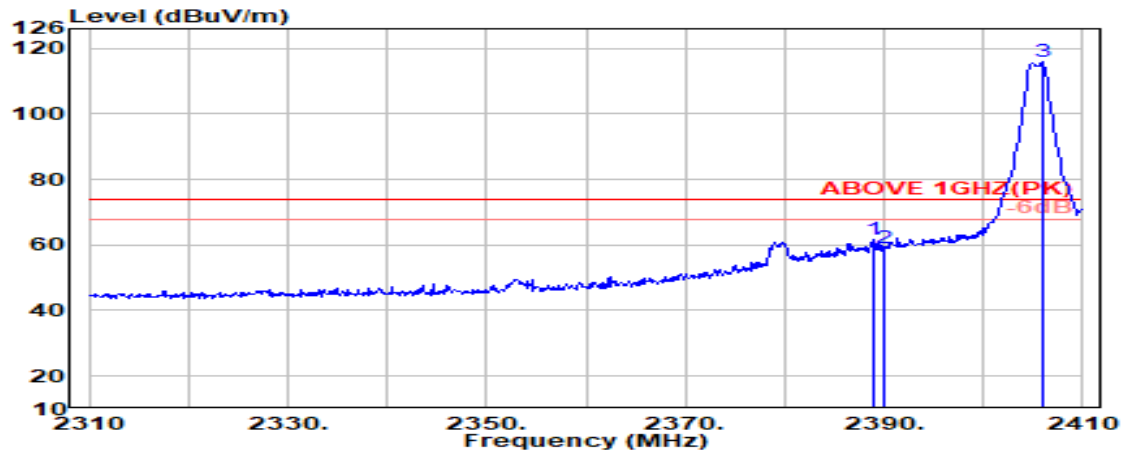

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.20	6.03	39.93	67.48	61.78	74.00	12.22	Peak
2390.000	28.20	6.03	39.93	64.60	58.90	74.00	15.10	Peak
@ 2405.900	28.22	6.06	39.93	121.37	115.72	---	---	Peak

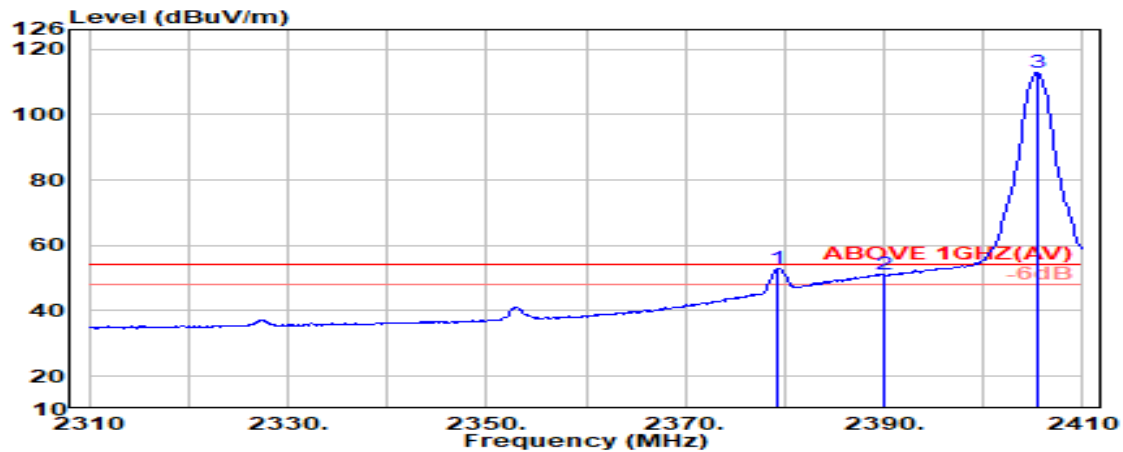

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.300	28.20	6.02	39.93	58.51	52.79	54.00	1.21	Average
2390.000	28.20	6.03	39.93	56.68	50.99	54.00	3.01	Average
@ 2405.400	28.22	6.06	39.93	118.41	112.76	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	FASSTest	Frequency	TX 2405.376MHz
------	----------	-----------	----------------

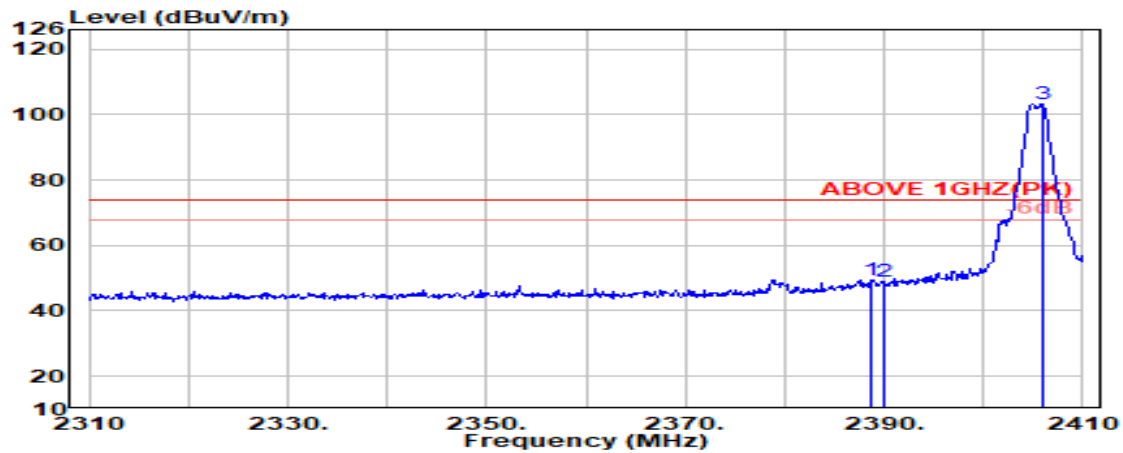

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.700	28.20	6.03	39.93	55.24	49.55	74.00	24.45	Peak
2390.000	28.20	6.03	39.93	54.73	49.03	74.00	24.97	Peak
@ 2405.900	28.22	6.06	39.93	108.89	103.24	---	---	Peak

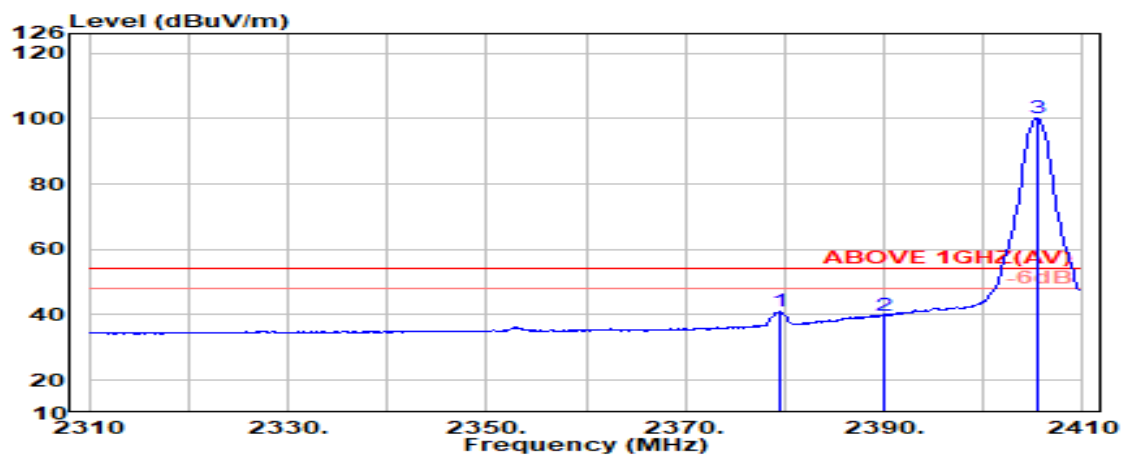

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.400	28.20	6.02	39.93	46.63	40.92	54.00	13.08	Average
2390.000	28.20	6.03	39.93	45.43	39.73	54.00	14.27	Average
@ 2405.400	28.22	6.06	39.93	105.81	100.16	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	FASSTest	Frequency	TX 2472.960MHz
------	----------	-----------	----------------

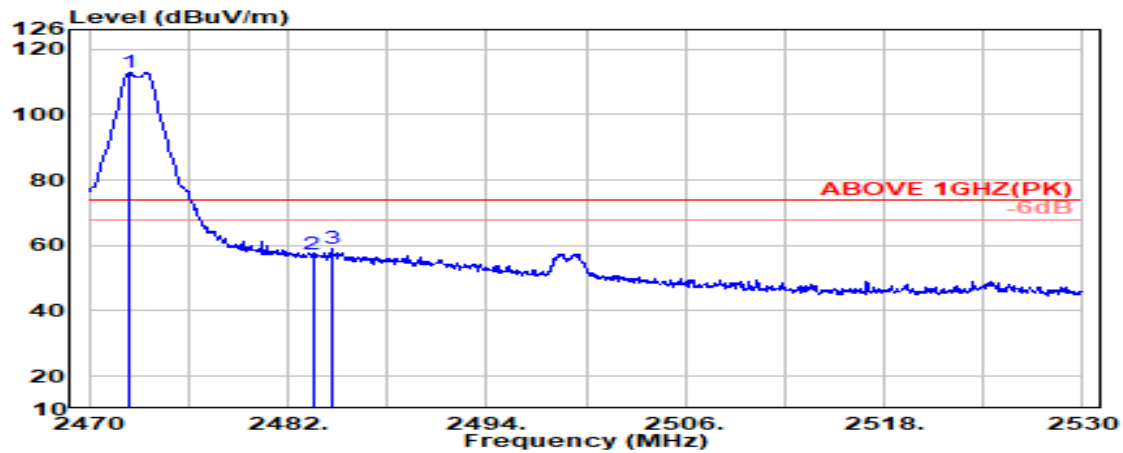

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2472.450	28.45	6.15	39.92	118.09	112.76	---	---	Peak
	2483.500	28.47	6.17	39.92	62.40	57.11	74.00	16.89	Peak
	2484.700	28.47	6.17	39.92	64.12	58.84	74.00	15.16	Peak

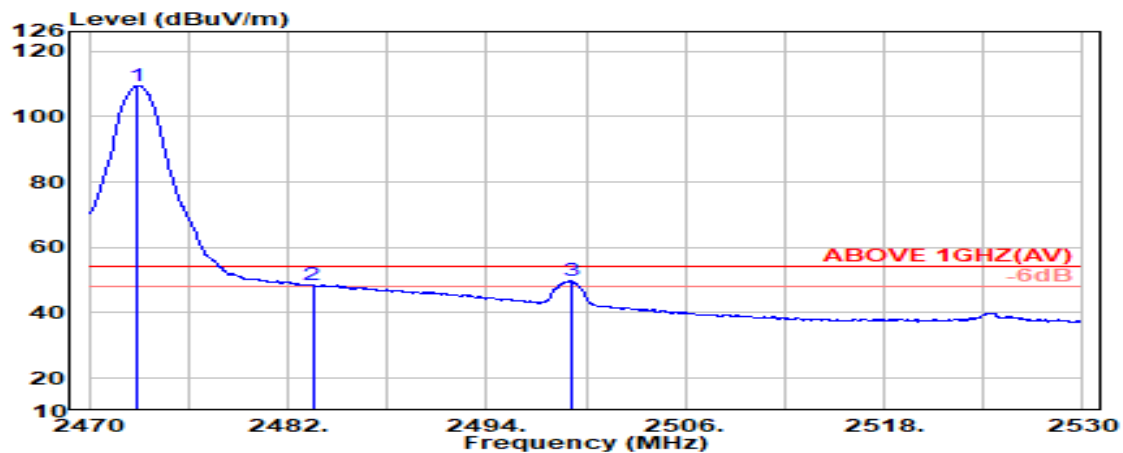

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2472.900	28.45	6.15	39.92	114.80	109.47	---	---	Average
	2483.500	28.47	6.17	39.92	53.72	48.43	54.00	5.57	Average
	2499.100	28.50	6.19	39.92	54.92	49.68	54.00	4.32	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	FASSTest	Frequency	TX 2472.960MHz
------	----------	-----------	----------------

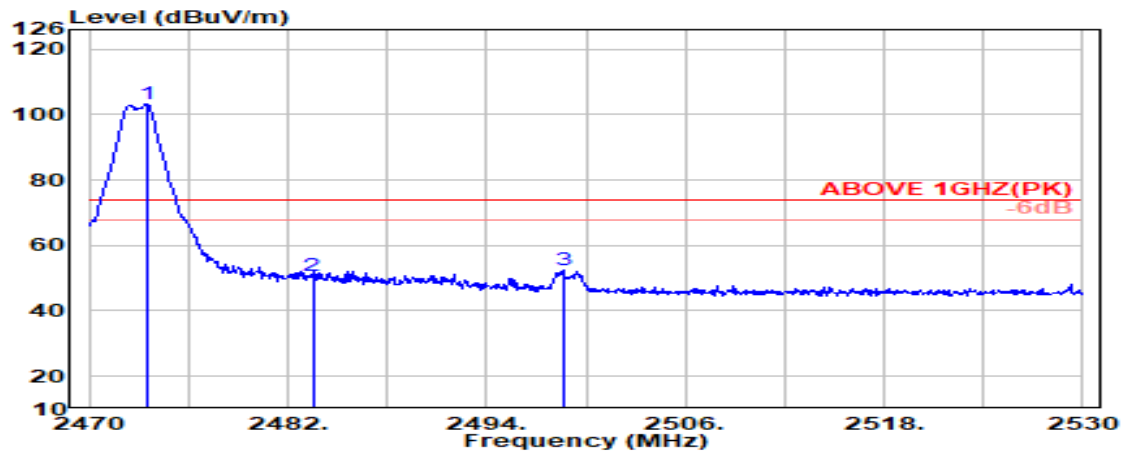

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2473.450	28.45	6.15	39.92	108.47	103.15	---	---	Peak
	2483.500	28.47	6.17	39.92	55.94	50.65	74.00	23.35	Peak
	2498.650	28.50	6.19	39.92	57.58	52.35	74.00	21.65	Peak

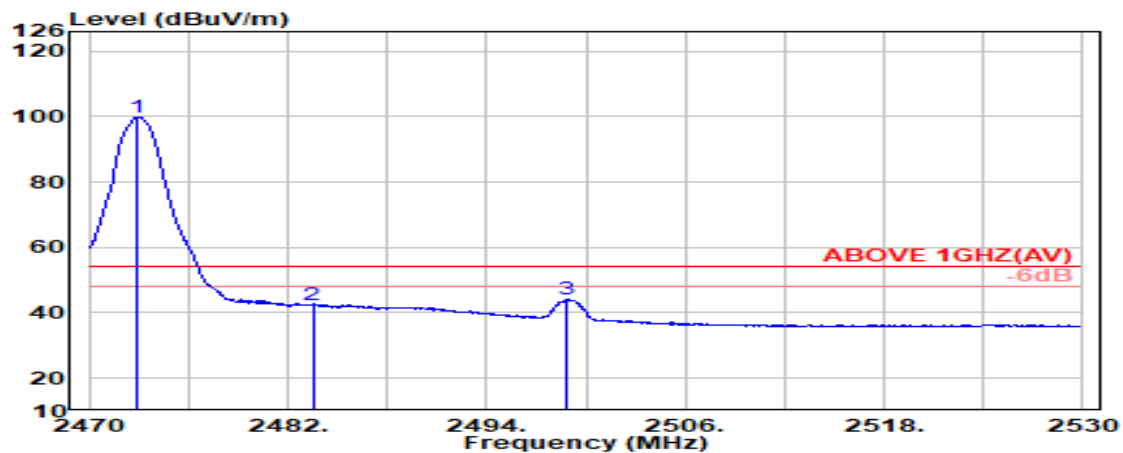

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2472.950	28.45	6.15	39.92	105.06	99.73	---	---	Average
	2483.500	28.47	6.17	39.92	47.68	42.39	54.00	11.61	Average
	2498.850	28.50	6.19	39.92	49.23	43.99	54.00	10.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


Test Model: R7301SB, ANT B

Mode	FASSTest	Frequency	TX 2405.376MHz
------	----------	-----------	----------------

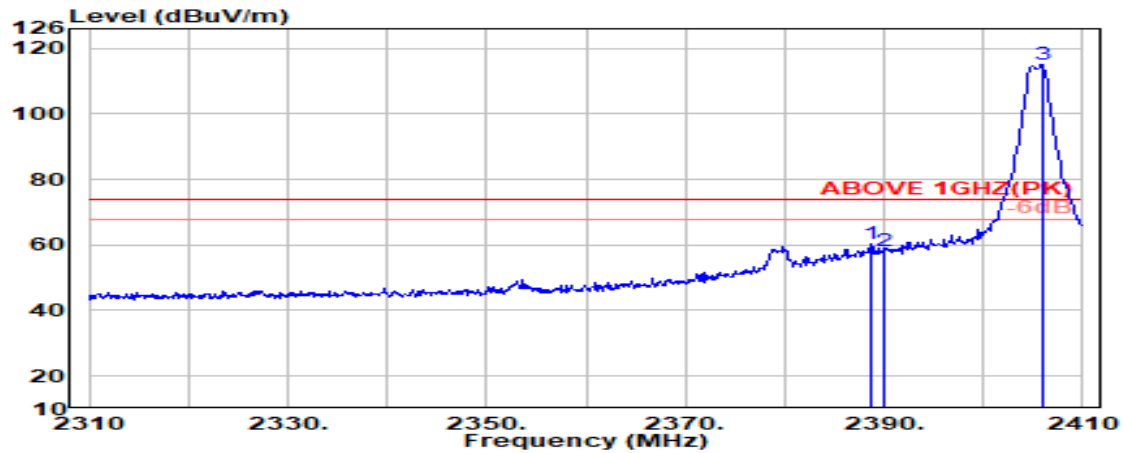

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.800	28.20	6.03	39.93	65.90	60.20	74.00	13.80	Peak
2390.000	28.20	6.03	39.93	63.76	58.07	74.00	15.93	Peak
@ 2405.900	28.22	6.06	39.93	120.52	114.87	---	---	Peak

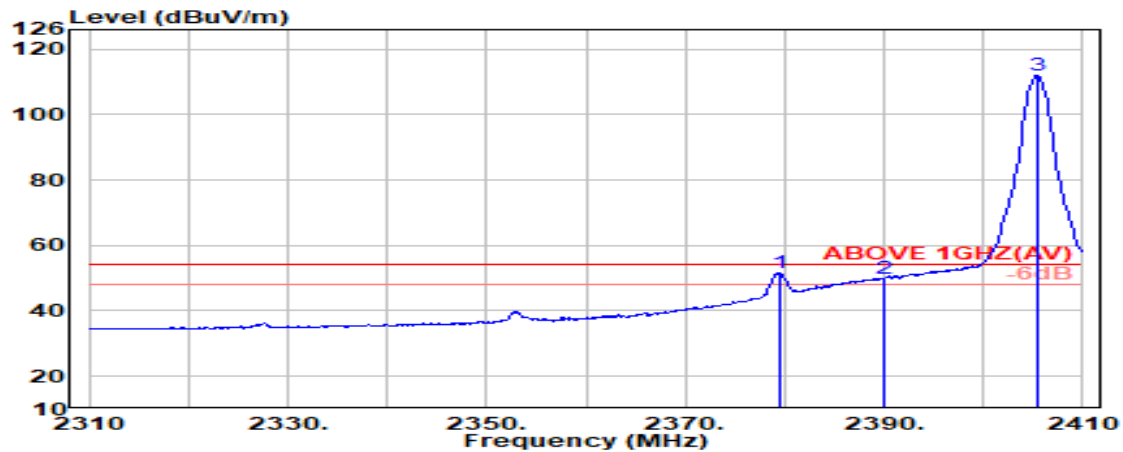

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.400	28.20	6.02	39.93	57.25	51.54	54.00	2.46	Average
2390.000	28.20	6.03	39.93	55.59	49.89	54.00	4.11	Average
@ 2405.500	28.22	6.06	39.93	117.60	111.95	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	FASSTest	Frequency	TX 2405.376MHz
------	----------	-----------	----------------

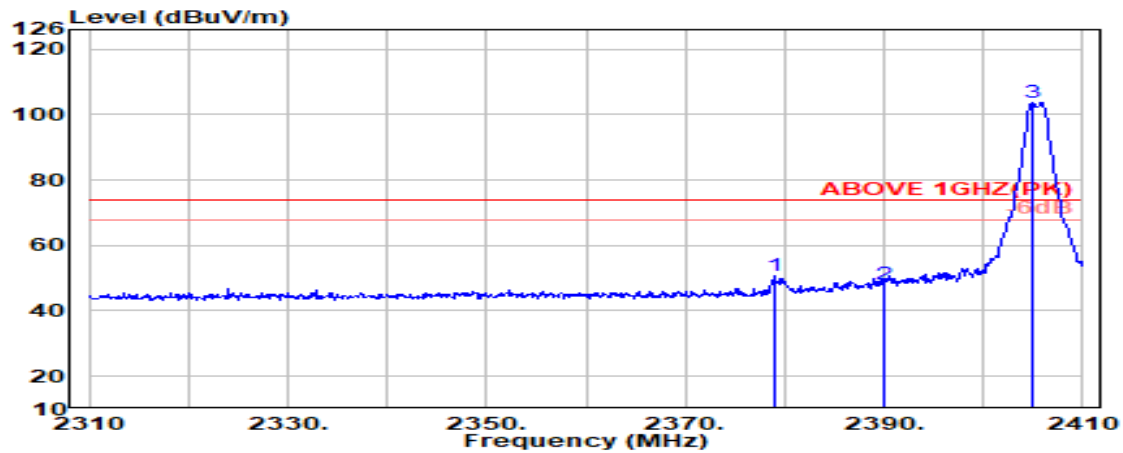

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.000	28.20	6.02	39.93	56.28	50.56	74.00	23.44	Peak
2390.000	28.20	6.03	39.93	53.57	47.87	74.00	26.13	Peak
@ 2404.900	28.22	6.06	39.93	109.20	103.55	---	---	Peak

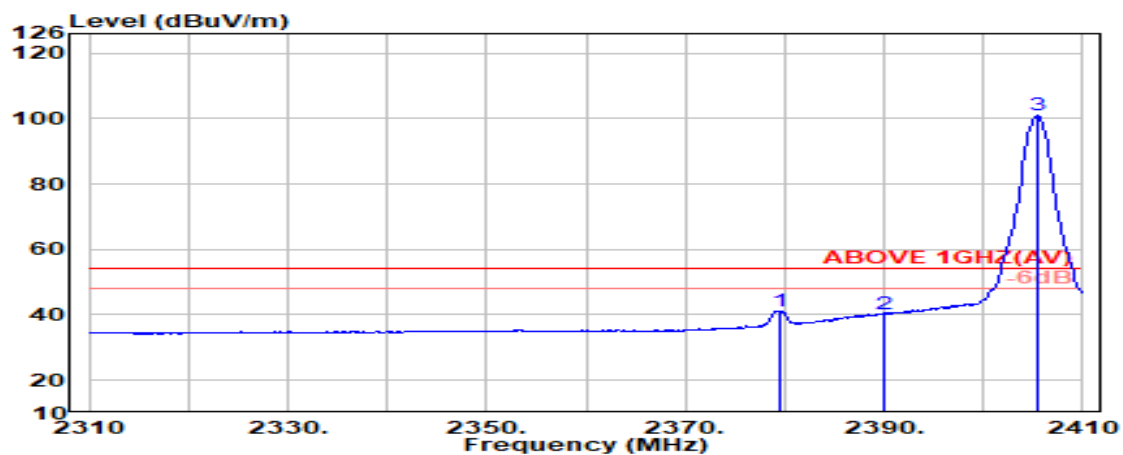

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.500	28.20	6.02	39.93	46.95	41.24	54.00	12.76	Average
2390.000	28.20	6.03	39.93	46.02	40.32	54.00	13.68	Average
@ 2405.400	28.22	6.06	39.93	106.49	100.84	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	FASSTest	Frequency	TX 2472.960MHz
------	----------	-----------	----------------

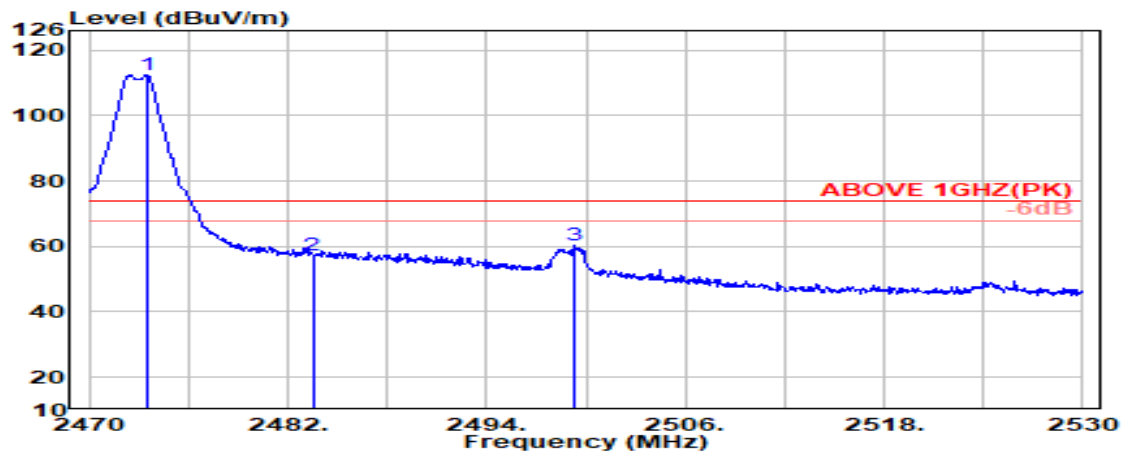

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2473.450	28.45	6.15	39.92	117.73	112.41	---	---	Peak
	2483.500	28.47	6.17	39.92	62.63	57.35	74.00	16.65	Peak
	2499.250	28.50	6.19	39.92	65.50	60.27	74.00	13.73	Peak

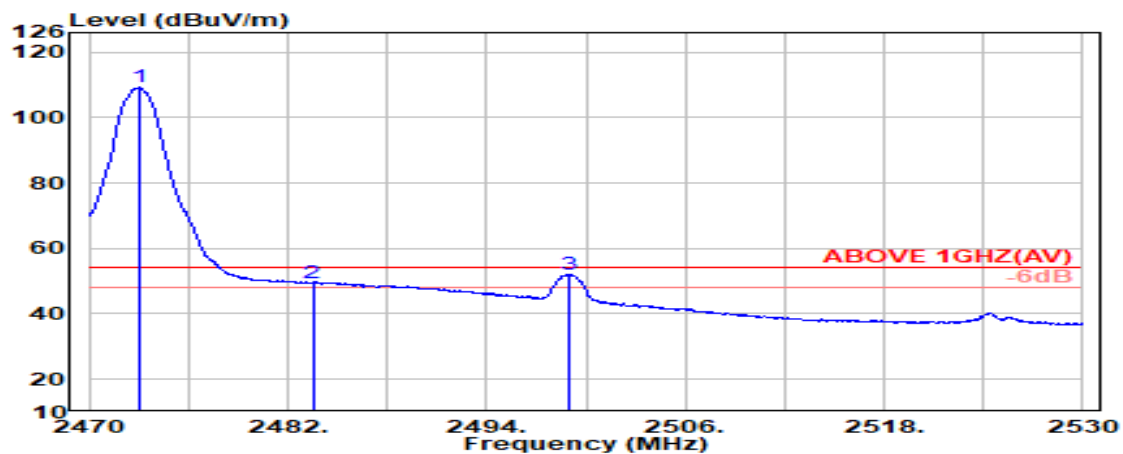

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2473.000	28.45	6.15	39.92	114.48	109.15	---	---	Average
	2483.500	28.47	6.17	39.92	54.75	49.46	54.00	4.54	Average
	2499.050	28.50	6.19	39.92	57.30	52.07	54.00	1.93	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	FASSTest	Frequency	TX 2472.960MHz
------	----------	-----------	----------------

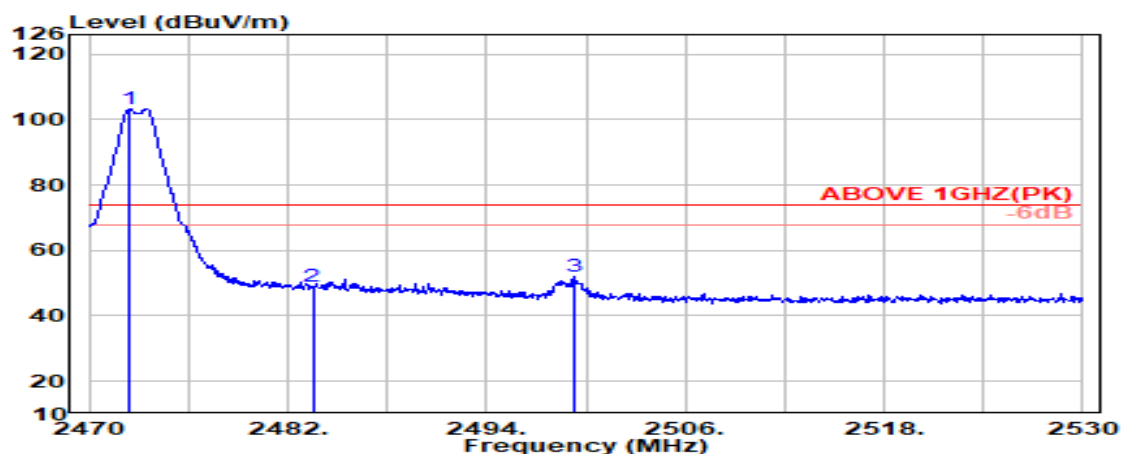

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2472.450	28.45	6.15	39.92	108.76	103.43	---	---	Peak
	2483.500	28.47	6.17	39.92	54.40	49.11	74.00	24.89	Peak
	2499.250	28.50	6.19	39.92	57.18	51.95	74.00	22.05	Peak

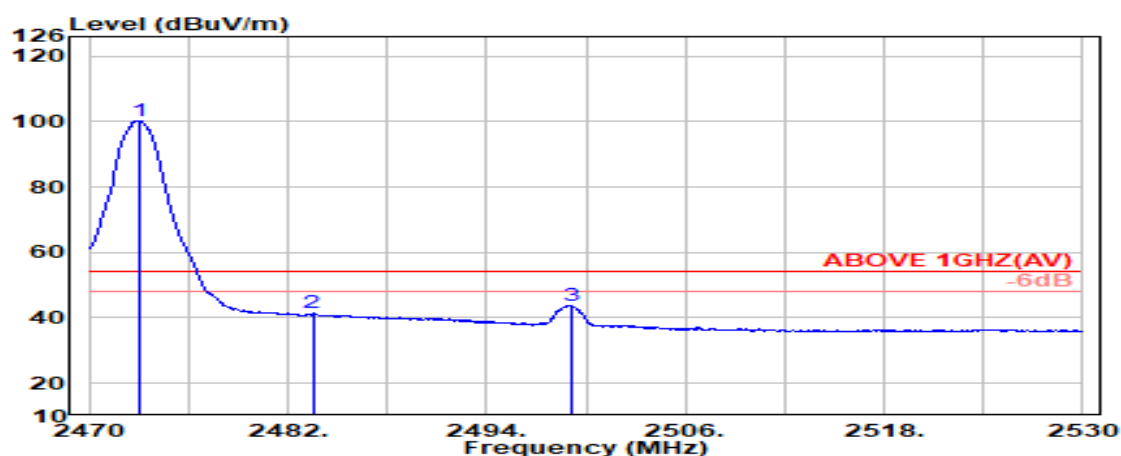

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2473.050	28.45	6.15	39.92	105.66	100.33	---	---	Average
	2483.500	28.47	6.17	39.92	46.59	41.30	54.00	12.70	Average
	2499.100	28.50	6.19	39.92	49.01	43.78	54.00	10.22	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Test Model: R7201SB, ANT A

Mode	FASSTest	Frequency	TX 2405.376MHz
------	----------	-----------	----------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4810.000	33.22	8.33	39.37	50.11	52.29	54.00	1.71	Average
4810.000	33.22	8.33	39.37	54.05	56.23	74.00	17.77	Peak
7215.000	36.42	9.86	39.52	44.68	51.43	54.00	2.57	Average
7215.000	36.42	9.86	39.52	48.51	55.27	74.00	18.73	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4810.000	33.22	8.33	39.37	48.65	50.82	54.00	3.18	Average
4810.000	33.22	8.33	39.37	53.33	55.51	74.00	18.49	Peak
7215.000	36.42	9.86	39.52	42.75	49.51	54.00	4.49	Average
7215.000	36.42	9.86	39.52	44.53	51.28	74.00	22.72	Peak

Mode	FASSTest	Frequency	TX 2439.168MHz
------	----------	-----------	----------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4877.500	33.41	8.37	39.34	50.11	52.55	54.00	1.45	Average
4877.500	33.41	8.37	39.34	54.05	56.49	74.00	17.51	Peak
7316.563	36.73	9.92	39.55	46.32	53.43	54.00	0.57	Average
7316.563	36.73	9.92	39.55	42.37	49.48	74.00	24.52	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4878.125	33.41	8.37	39.34	49.98	52.43	54.00	1.57	Average
4878.125	33.41	8.37	39.34	53.70	56.14	74.00	17.86	Peak
7318.438	36.73	9.92	39.55	41.68	48.79	54.00	5.21	Average
7318.438	36.73	9.92	39.55	45.48	52.59	74.00	21.41	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	FASSTest	Frequency	TX 2472.960MHz
------	----------	-----------	----------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4945.000	33.68	8.42	39.31	47.98	50.77	54.00	3.23	Average
4945.000	33.68	8.42	39.31	52.03	54.82	74.00	19.18	Peak
7420.625	36.70	9.99	39.57	42.93	50.04	54.00	3.96	Average
7420.625	36.70	9.99	39.57	45.98	53.10	74.00	20.90	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4945.625	33.68	8.42	39.31	49.88	52.67	54.00	1.33	Average
4945.625	33.68	8.42	39.31	55.03	57.82	74.00	16.18	Peak
7417.813	36.70	9.98	39.57	45.86	52.98	54.00	1.02	Average
7417.813	36.70	9.98	39.57	42.68	49.79	74.00	24.21	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303****Test Model: R7201SB, ANT B**

Mode	FASSTest	Frequency	TX 2405.376MHz
------	----------	-----------	----------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4810.000	33.22	8.33	39.37	47.53	49.71	54.00	4.29	Average
4810.000	33.22	8.33	39.37	51.31	53.49	74.00	20.51	Peak
7218.125	36.45	9.86	39.52	43.67	50.45	54.00	3.55	Average
7218.125	36.45	9.86	39.52	45.57	52.35	74.00	21.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4810.000	33.22	8.33	39.37	48.35	50.53	54.00	3.47	Average
4810.000	33.22	8.33	39.37	52.69	54.86	74.00	19.14	Peak
7214.375	36.42	9.86	39.52	42.33	49.08	54.00	4.92	Average
7214.375	36.42	9.86	39.52	44.28	51.04	74.00	22.96	Peak

Mode	FASSTest	Frequency	TX 2439.168MHz
------	----------	-----------	----------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4877.500	33.41	8.37	39.34	50.06	52.51	54.00	1.49	Average
4877.500	33.41	8.37	39.34	56.28	58.72	74.00	15.28	Peak
7315.625	36.74	9.92	39.55	44.10	51.21	54.00	2.79	Average
7315.625	36.74	9.92	39.55	46.18	53.29	74.00	20.71	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4879.375	33.42	8.37	39.34	50.05	52.51	54.00	1.49	Average
4879.375	33.42	8.37	39.34	56.95	59.41	74.00	14.59	Peak
7319.375	36.72	9.92	39.55	44.02	51.12	54.00	2.88	Average
7319.375	36.72	9.92	39.55	45.76	52.86	74.00	21.14	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	FASSTest	Frequency	TX 2472.960MHz
------	----------	-----------	----------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4945.625	33.68	8.42	39.31	49.73	52.52	54.00	1.48	Average
4945.625	33.68	8.42	39.31	55.31	58.10	74.00	15.90	Peak
7417.813	36.70	9.98	39.57	45.49	52.60	54.00	1.40	Average
7417.813	36.70	9.98	39.57	43.68	50.79	74.00	23.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4946.875	33.69	8.42	39.31	49.85	52.65	54.00	1.35	Average
4946.875	33.69	8.42	39.31	57.04	59.84	74.00	14.16	Peak
7417.813	36.70	9.98	39.57	45.45	52.56	54.00	1.44	Average
7417.813	36.70	9.98	39.57	43.83	50.94	74.00	23.06	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303****Test Model: R7301SB, ANT A**

Mode	FASSTest	Frequency	TX 2405.376MHz
------	----------	-----------	----------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4810.000	33.22	8.33	39.37	50.89	53.06	54.00	0.94	Average
4810.000	33.22	8.33	39.37	54.93	57.11	74.00	16.89	Peak
7215.000	36.42	9.86	39.52	45.99	52.74	54.00	1.26	Average
7215.000	36.42	9.86	39.52	49.66	56.42	74.00	17.58	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4810.000	33.22	8.33	39.37	49.72	51.90	54.00	2.10	Average
4810.000	33.22	8.33	39.37	54.65	56.83	74.00	17.17	Peak
7215.000	36.42	9.86	39.52	43.54	50.29	54.00	3.71	Average
7215.000	36.42	9.86	39.52	45.29	52.04	74.00	21.96	Peak

Mode	FASSTest	Frequency	TX 2439.168MHz
------	----------	-----------	----------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4877.500	33.41	8.37	39.34	50.13	52.57	54.00	1.43	Average
4877.500	33.41	8.37	39.34	53.12	55.56	74.00	18.44	Peak
7316.563	36.73	9.92	39.55	43.33	50.44	54.00	3.56	Average
7316.563	36.73	9.92	39.55	47.61	54.71	74.00	19.29	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4878.125	33.41	8.37	39.34	50.28	52.73	54.00	1.27	Average
4878.125	33.41	8.37	39.34	54.03	56.48	74.00	17.52	Peak
7318.438	36.73	9.92	39.55	42.53	49.63	54.00	4.37	Average
7318.438	36.73	9.92	39.55	46.53	53.64	74.00	20.36	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	FASSTest	Frequency	TX 2472.960MHz
------	----------	-----------	----------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4945.000	33.68	8.42	39.31	48.89	51.68	54.00	2.32	Average
4945.000	33.68	8.42	39.31	53.02	55.81	74.00	18.19	Peak
7420.625	36.70	9.99	39.57	44.03	51.15	54.00	2.85	Average
7420.625	36.70	9.99	39.57	46.76	53.87	74.00	20.13	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4945.625	33.68	8.42	39.31	50.11	52.90	54.00	1.10	Average
4945.625	33.68	8.42	39.31	56.34	59.13	74.00	14.87	Peak
7417.813	36.70	9.98	39.57	43.58	50.69	54.00	3.31	Average
7417.813	36.70	9.98	39.57	46.97	54.08	74.00	19.92	Peak

Audix Technology Corp.
 No. 491, Zhongfu Rd., Linkou Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Model: R7301SB, ANT B

Mode	FASSTest	Frequency	TX 2405.376MHz
------	----------	-----------	----------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4810.000	33.22	8.33	39.37	48.69	50.86	54.00	3.14	Average
4810.000	33.22	8.33	39.37	52.62	54.80	74.00	19.20	Peak
7218.125	36.45	9.86	39.52	44.96	51.74	54.00	2.26	Average
7218.125	36.45	9.86	39.52	46.71	53.50	74.00	20.50	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4810.000	33.22	8.33	39.37	49.63	51.81	54.00	2.19	Average
4810.000	33.22	8.33	39.37	53.92	56.09	74.00	17.91	Peak
7214.375	36.42	9.86	39.52	43.87	50.62	54.00	3.38	Average
7214.375	36.42	9.86	39.52	45.55	52.30	74.00	21.70	Peak

Mode	FASSTest	Frequency	TX 2439.168MHz
------	----------	-----------	----------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4877.500	33.41	8.37	39.34	50.69	53.13	54.00	0.87	Average
4877.500	33.41	8.37	39.34	57.52	59.97	74.00	14.03	Peak
7315.625	36.74	9.92	39.55	45.40	52.51	54.00	1.49	Average
7315.625	36.74	9.92	39.55	47.68	54.80	74.00	19.20	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4879.375	33.42	8.37	39.34	50.36	52.81	54.00	1.19	Average
4879.375	33.42	8.37	39.34	57.14	59.59	74.00	14.41	Peak
7319.375	36.72	9.92	39.55	45.15	52.25	54.00	1.75	Average
7319.375	36.72	9.92	39.55	46.70	53.80	74.00	20.20	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	FASSTest	Frequency	TX 2472.960MHz
------	----------	-----------	----------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4945.625	33.68	8.42	39.31	50.24	53.03	54.00	0.97	Average
4945.625	33.68	8.42	39.31	55.21	58.00	74.00	16.00	Peak
7417.813	36.70	9.98	39.57	44.47	51.58	54.00	2.42	Average
7417.813	36.70	9.98	39.57	46.89	54.00	74.00	20.00	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4946.875	33.69	8.42	39.31	49.89	52.69	54.00	1.31	Average
4946.875	33.69	8.42	39.31	58.16	60.96	74.00	13.04	Peak
7417.813	36.70	9.98	39.57	44.95	52.06	54.00	1.94	Average
7417.813	36.70	9.98	39.57	46.57	53.68	74.00	20.32	Peak

A.1.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

A.2 DTS/OCCUPIED BANDWIDTH

Test Date	2023/10/20	Temp./Hum.	25°C /57%
Cable Loss	0.8dB	Tested By	Ryan Chiang
Test Voltage	DC 6.6V (Via Battery)		

A.2.1 DTS/Occupied Bandwidth Result


Mode	ANT	Centre Frequency (MHz)	DTS (6dB) Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz)	Limit
FASSTest	ANT A	2405.376	1.524	2.5150	>500kHz
		2439.168	1.538	2.5506	
		2472.960	1.537	2.5894	
FASSTest	ANT B	2405.376	1.524	2.5110	>500kHz
		2439.168	1.535	2.5491	
		2472.960	1.541	2.5908	

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.2 Measurement Plots


● DTS (6dB) Bandwidth

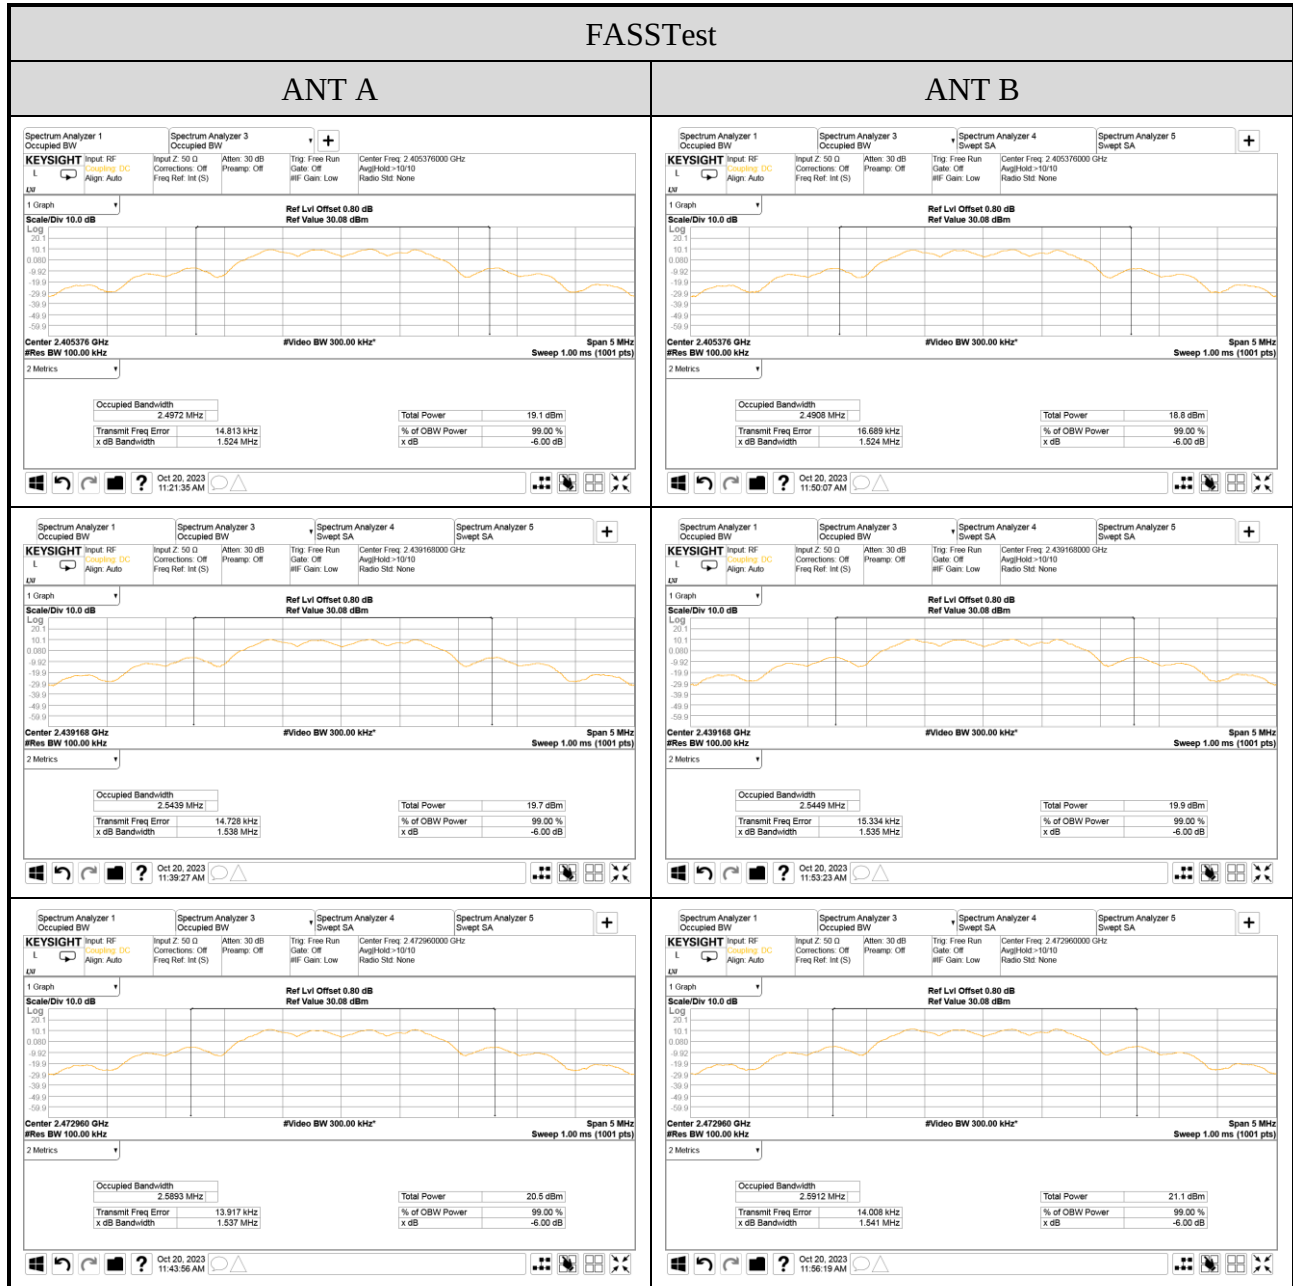

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● Occupied (99%) Bandwidth

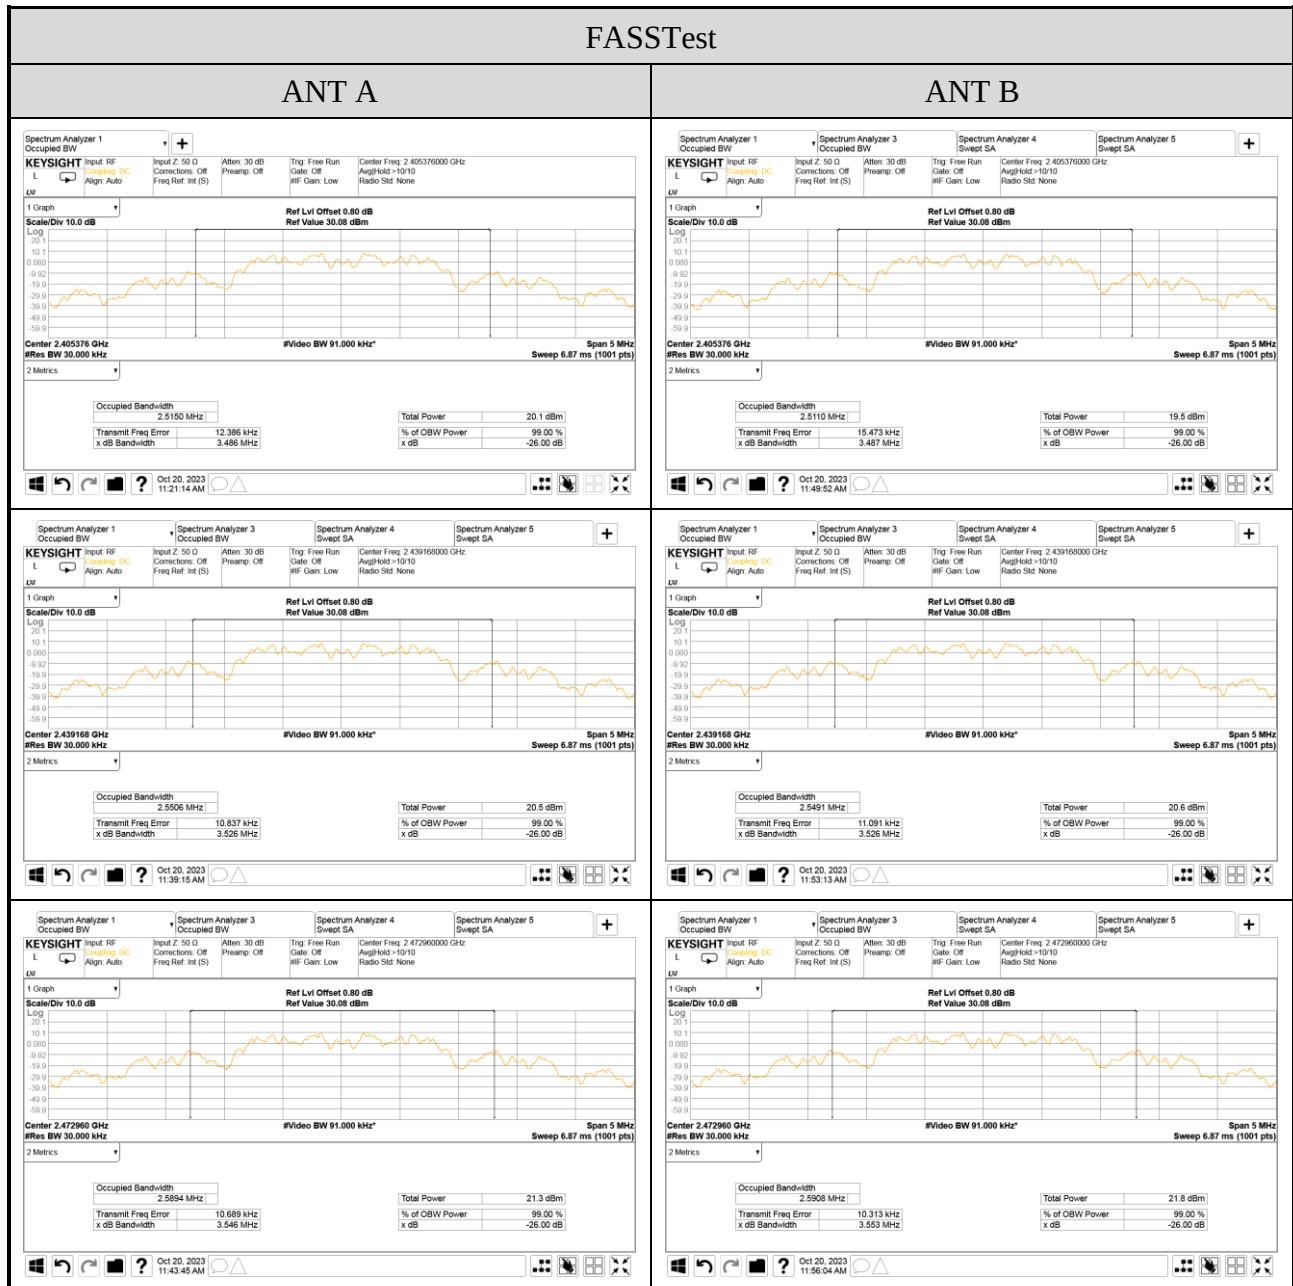

A.3 MAXIMUM PEAK OUTPUT POWER

Test Date	2023/10/20	Temp./Hum.	25°C /57%
Cable Loss	0.8dB	Tested By	Ryan Chiang
Test Voltage	DC 6.6V (Via Battery)		

A.3.1 Peak Output Power

Mode	ANT	Centre Frequency (MHz)	Peak Output Power (dBm)	Antenna Gain (dBi)	E.I.R.P (dBm) ^{Note 2}	Limit
FASSTest	ANT A	2405.376	15.34	2.10	17.44	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
		2439.168	15.86	2.10	17.96	
		2472.960	16.67	2.10	18.77	
FASSTest	ANT B	2405.376	14.84	2.10	16.94	
		2439.168	15.91	2.10	18.01	
		2472.960	17.16	2.10	19.26	


Note: 1. The results have been included cable loss.

2. E.I.R.P.= The Peak Output Power (dBm)+ Antenna Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.3.2 Measurement Plots

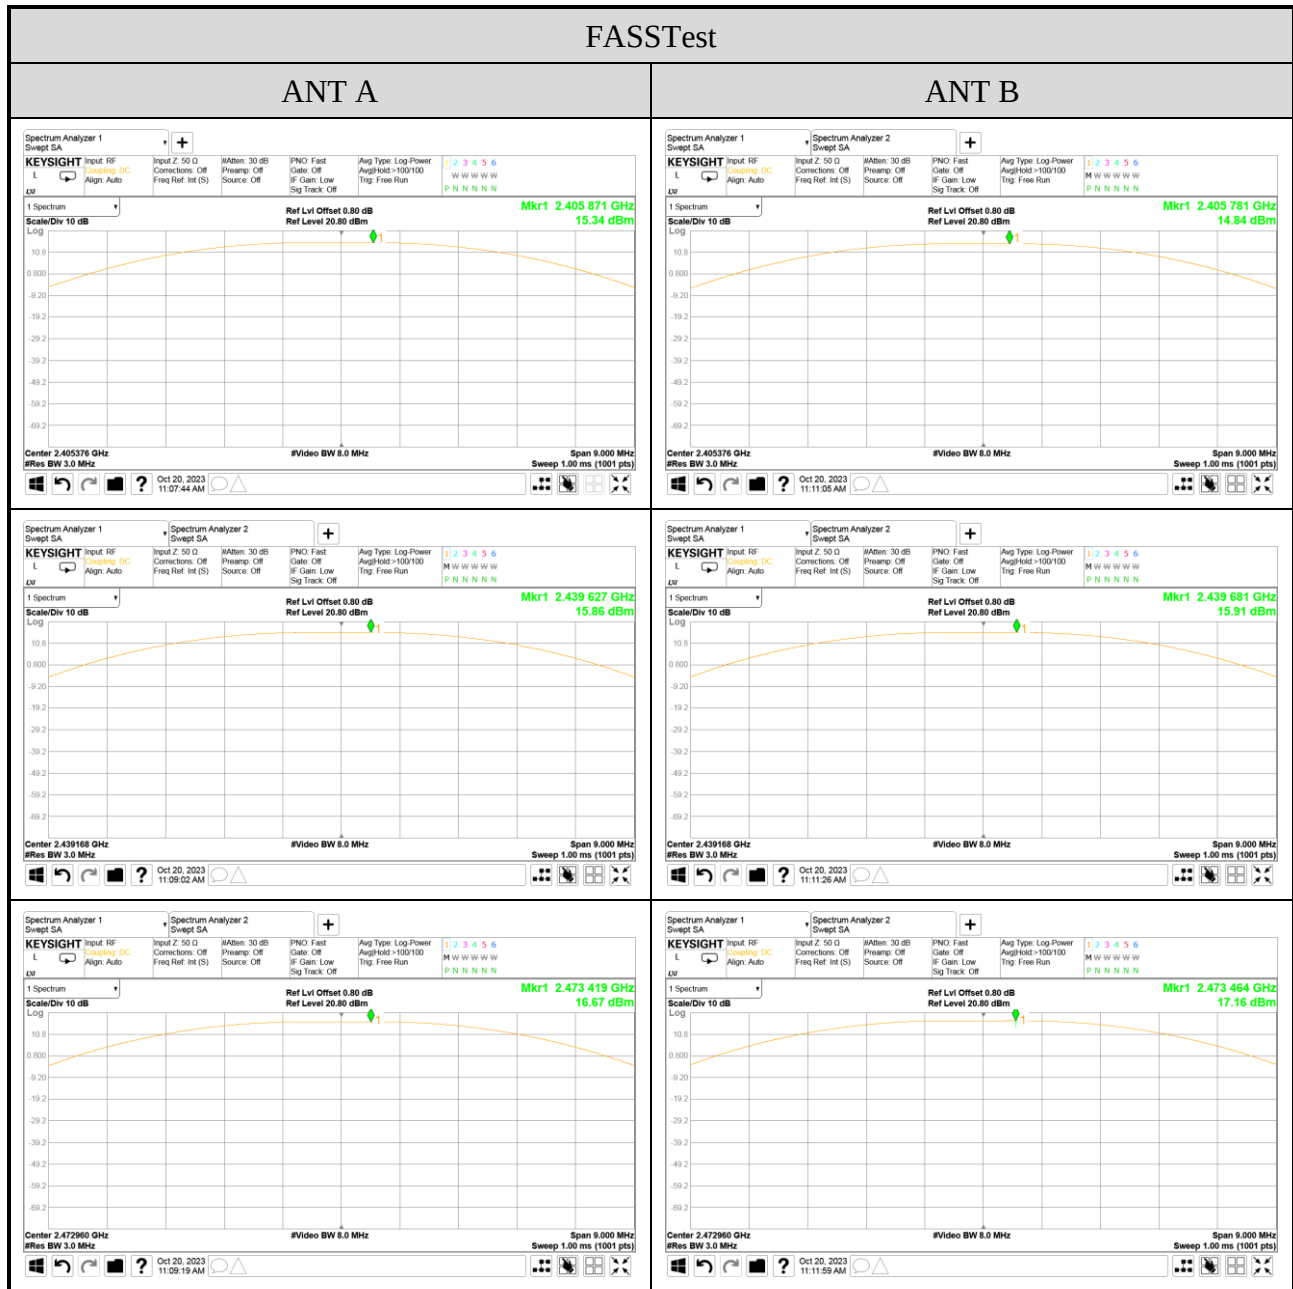


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


A.4 EMISSION LIMITATIONS

Test Date	2023/10/20	Temp./Hum.	25°C /57%
Cable Loss	0.8dB	Tested By	Ryan Chiang
Test Voltage	DC 6.6V (Via Battery)		

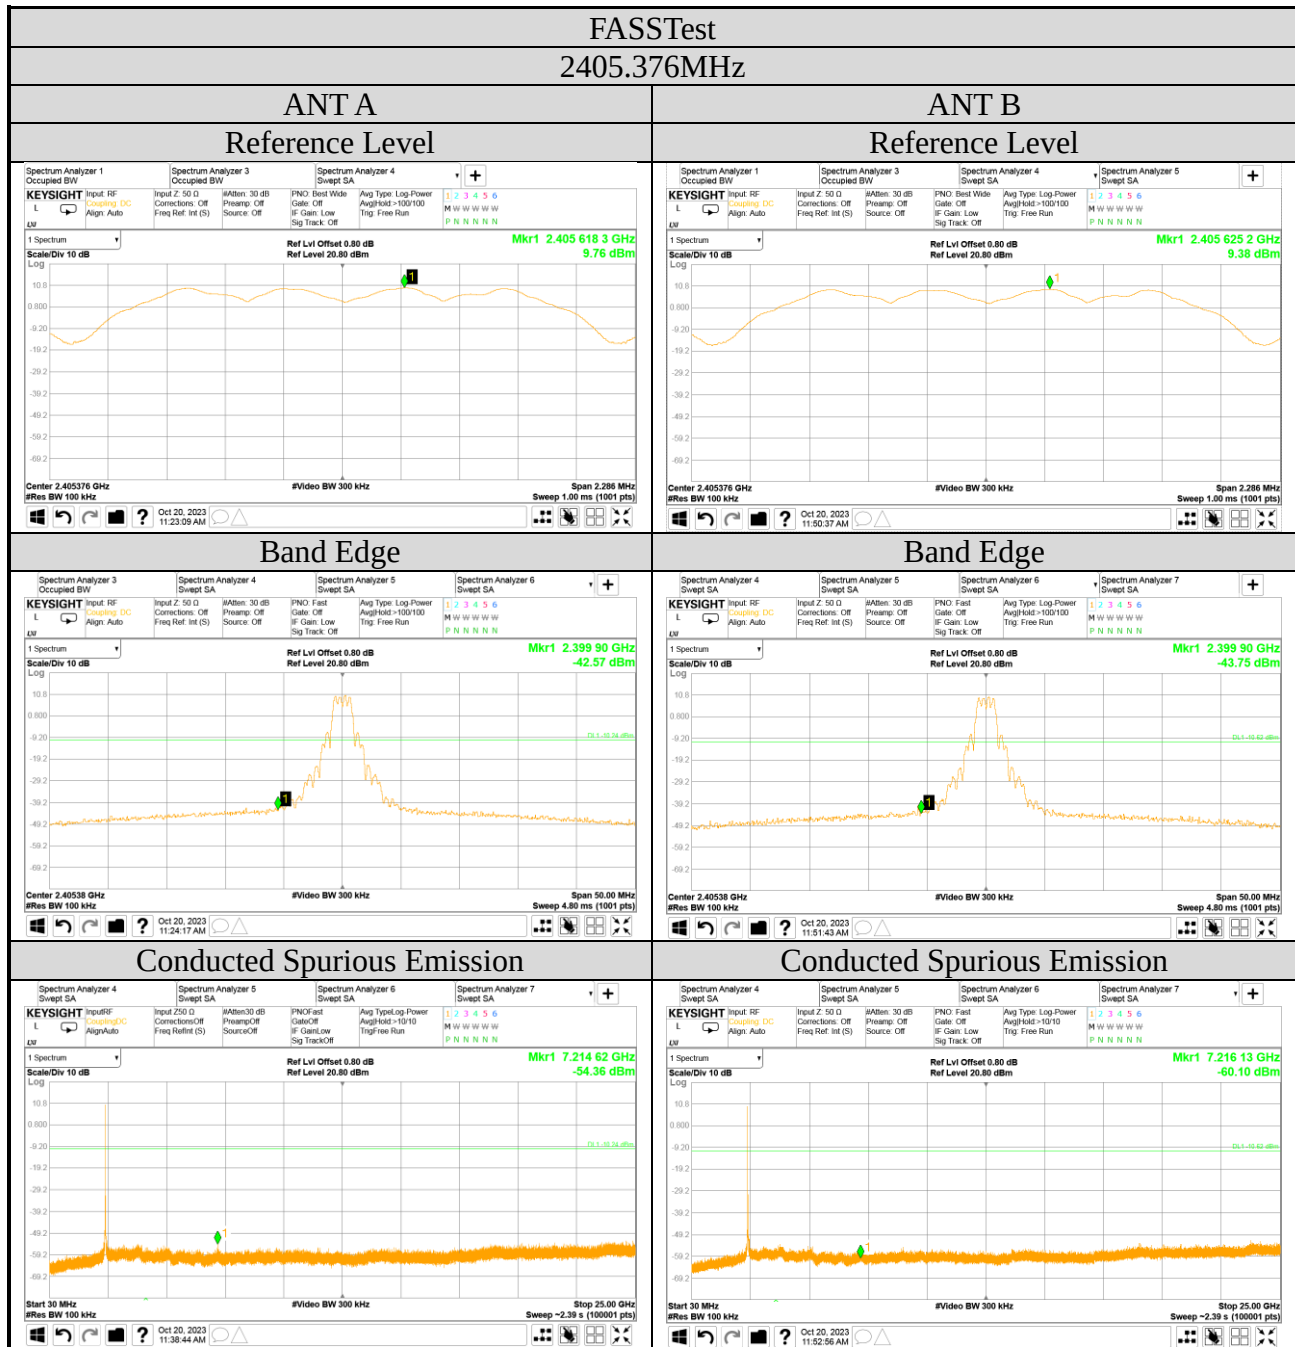


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

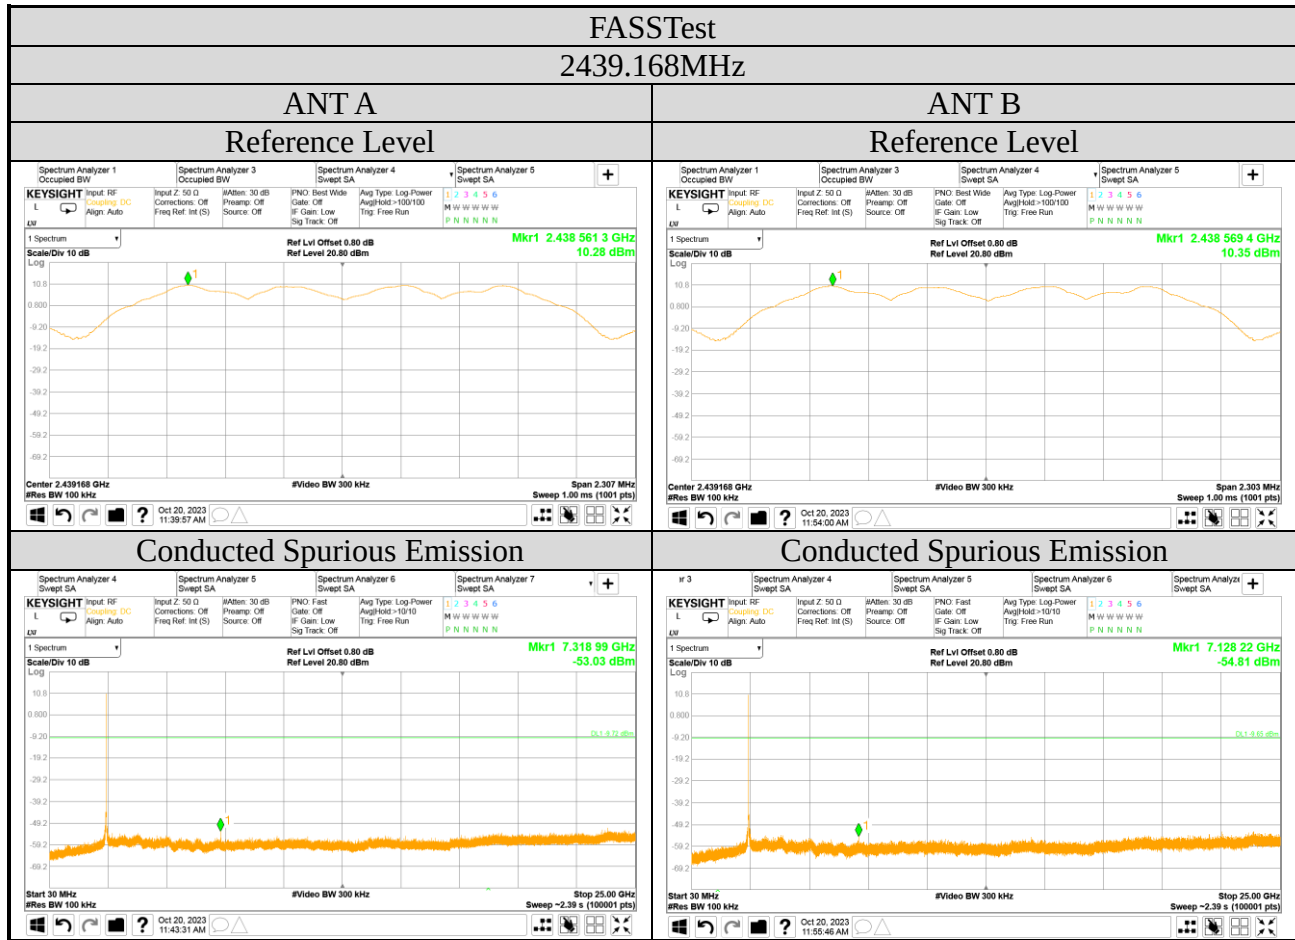

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

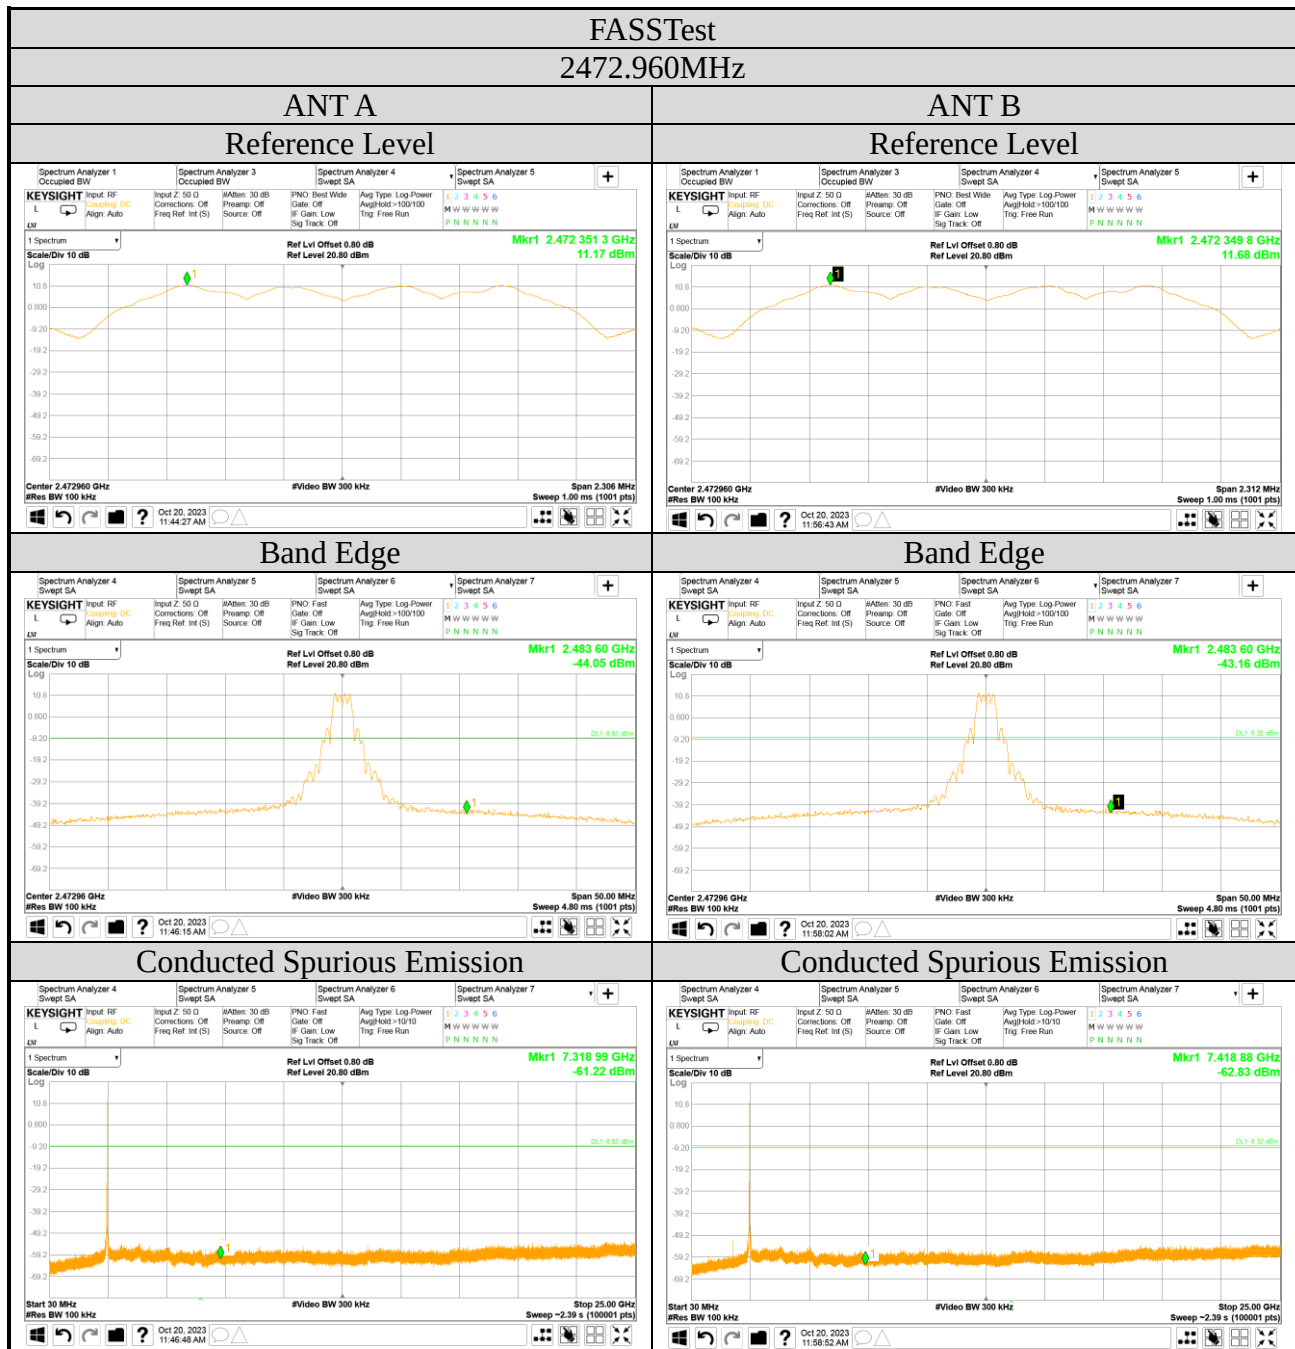

A.5 POWER SPECTRAL DENSITY

Test Date	2023/10/20	Temp./Hum.	25°C /57%
Cable Loss	0.8dB	Tested By	Ryan Chiang
Test Voltage	DC 6.6V (Via Battery)		

A.5.1 Power Spectral Density Result


Mode	ANT	Centre Frequency (MHz)	Power Spectral Density (dBm)	Limit
FASSTest	ANT A	2405.376	3.86	<8 dBm/3kHz
		2439.168	4.59	
		2472.960	5.46	
FASSTest	ANT B	2405.376	3.46	
		2439.168	3.98	
		2472.960	5.84	

Note: All results have been included cable loss.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.5.2 Measurement Plots

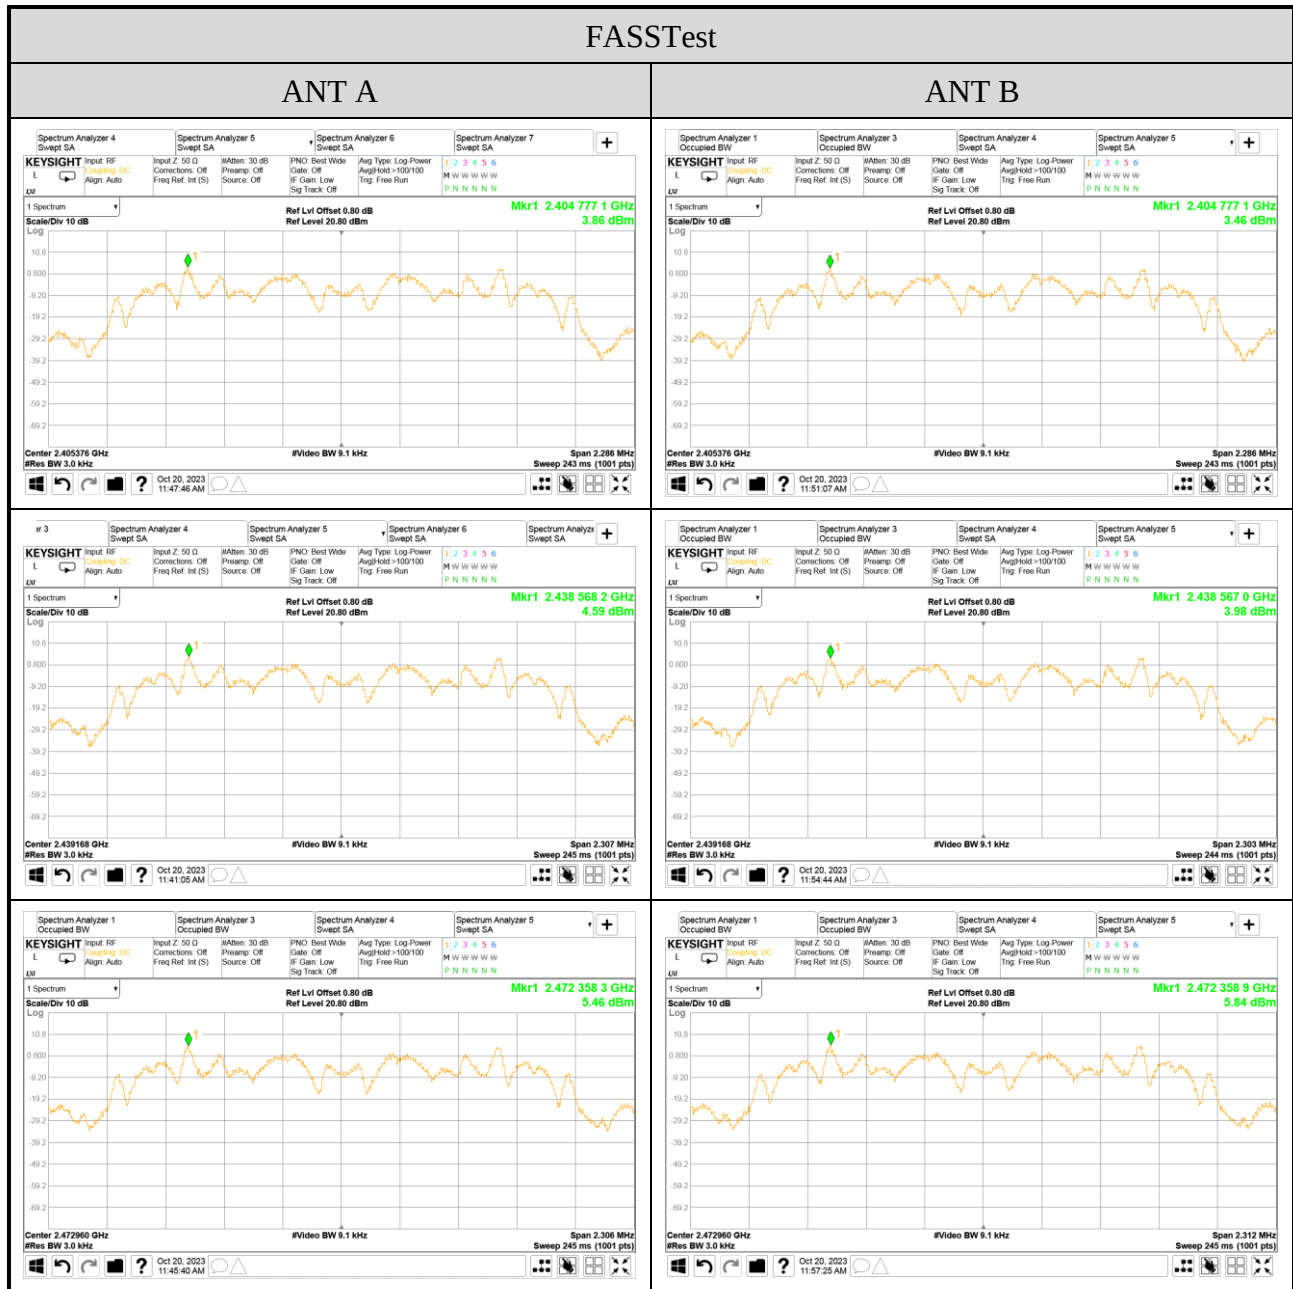

Note: All results have been included cable loss.



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

APPENDIX B

Tel: +886 2 26099301
Fax: +886 2 26099303

APPDNDIX B

TEST PHOTOGRAPHS

(Model: (1)R7201SB (2)R7301SB)