

APPROVAL SHEET

Customer Name: VeriFone

Date: December.26.2025

Verifone P/N	
DCT P/N	F001N6301K11000
Description	ANTENNA, Rugged Mobile （SP7865A）WCN
Version	DVT1

Prepared by	Signed by	Approved by Customer
RF Engineer	Youqiang Dong	Jackie Xiong
ME Engineer	Zijun Chen	
Reviewed by	Signed by	
RF Manager	Jiapeng Yan	
ME Manager	Yuqing Xie	
Project Manager	Min Cai	

Project: Rugged Mobile (SP7865A)	Author:Youqiang Dong	File Name: Rugged Mobile （SP7865A）DIV Antenna Approval sheet
Date: December 12.2025		
Language: English	Check: Xudong Zhang	
Document No.:		
Kunshan Ruixiang Xun Tong Communication Technology Co., Ltd.		

1. Antenna Description

WCN Antenna Structure
1. FPC with SPRING ; Fixed Internal Antenna （PIFA antenna）

1.2 Matching Circuit

WCN 天線 匹配	DVT 匹配	SAR SENSOR	DVT 匹配	WCN 天線匹配	DVT 匹配	SAR SENSOR	DVT 匹配
L3504	10nH	L3503	22NH（可更改）	C3553	NA	R3506	18pF 勿动
R3505	0 0hm	L3513	100nH（可更改）	R3511	33pF 勿动		
C3528	NA	R3504	33PF 勿动	C3524	33PF 勿动		
R3510	2pF	L3502	100nH 勿动				

1.3 Calibration certificate and darkroom

Instrument model: GTS1800
Calibration organization: Kunshan Ruixiang Xun Tong Communication Technology Co., Ltd.
Calibration Date: September 8, 2025
Next calibration date: September 8, 2026.
Calibration Specialist:Dongyouqiang

2 Product Specification

2.1 S11 (Return Loss)

The S11 over the frequencies stated in Table 1 below shall be measured at the connector end of the cable for each antenna assembly. The S11 are measured with the antennas installed on platform. The S11 shall be 100% tested in production.

Test Parameter	698 MHz to 960 MHz	1710 MHz to 2690 MHz
S11:	-5dB Max	-5dB Max

2.2 Test environment

The radiation pattern and antenna gain shall be tested either with a conventional far field anechoic chamber or a near field anechoic chamber such as a Satimo SG24-L.

For a far field anechoic chamber, the gain measurements shall be made within an RF anechoic chamber with at least 3-meter separation from the receive antenna to the antenna under test (AUT). The RF anechoic chamber must be lined with absorptive material rated as a minimum frequency range from 400MHz to 10GHz. The notebook with the antenna assemblies installed shall be placed on a non-conductive structure at a sufficient height to be in the ‘quiet zone’ of the chamber. All test equipment including horn antennas, adapters, cables, network analyzers, and receivers shall be calibrated per manufacturer’s minimum calibration requirements.

For a near field anechoic chamber, the AUT test must be place in the center (and within the admissible offset) of the probe array elements. The RF anechoic chamber must be lined with absorptive material rated as a minimum frequency range from 400MHz to 10GHz. The notebook with the antenna assemblies installed shall be placed on a non-conductive structure.

2.3 Antenna radiation measurement


In order to ensure compliance with network carrier specifications, it is required to measure a 3-D gain measurement for WCN Antenna.

Table below specifies the details of the 3-D gain measurement points

Theta Start: 0°	Phi Start: 0°
Theta Stop: 150°	Phi Stop: 330°
Theta increment: 30°	Phi Increment: 30°

The table above specifies the minimum 23 measurement points (x2 polarizations) for each measurement frequency.


The axis and AUT orientation for gain measurements are outlined in below Figures.

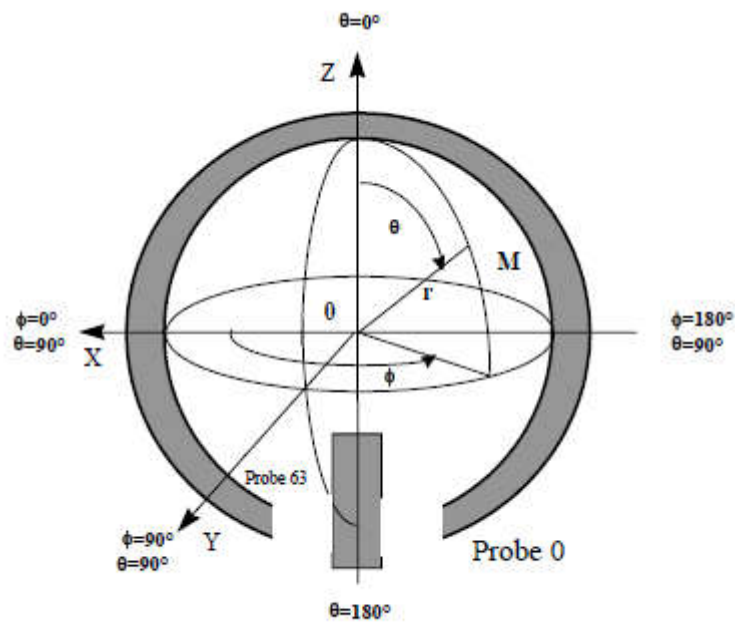

The probe 0 is near the door of the chamber.

3 Antenna Performance Test

3.1 S11 of WCN Antenna



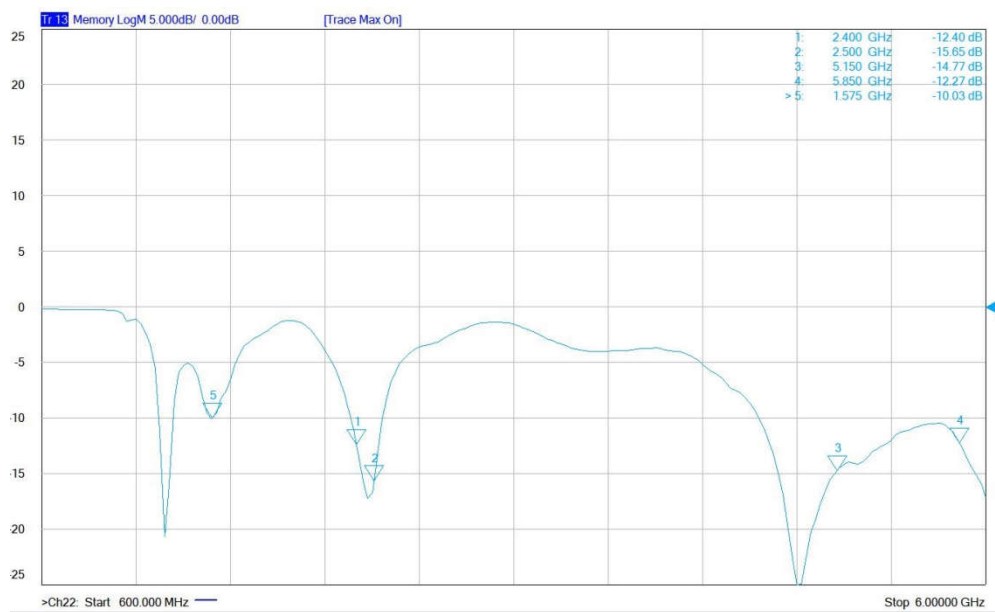


3.2 Antenna Radiated Efficiency

Frequency (MHz)	Peak Gain	Frequency (MHz)	Peak Gain	Frequency (MHz)	Peak Gain
1550	0.9	2400	1.1	5150	-0.9
1555	0.7	2410	1.2	5200	-1
1560	0.5	2420	1.3	5250	-1.2
1565	0.4	2430	1.3	5300	-1.1
1570	0.4	2440	1.2	5350	-1.1
1575	0.3	2450	0.8	5400	-1.0
1580	0.3	2460	0.8	5450	-1.1
1585	0.2	2470	0.9	5500	-1.1
1590	0.3	2480	0.8	5550	-1.2
1595	0.0	2490	0.8	5600	-1.3
1600	-0.1	2500	0.9	5650	-1.1
平均值	0.4	平均值	1	5700	-1.4
				5750	-1.3
				5800	-1.2
				5850	-1.0
				平均值	-1.1




3. 3Radiation Pattern

WCN antenna: 2400MHz

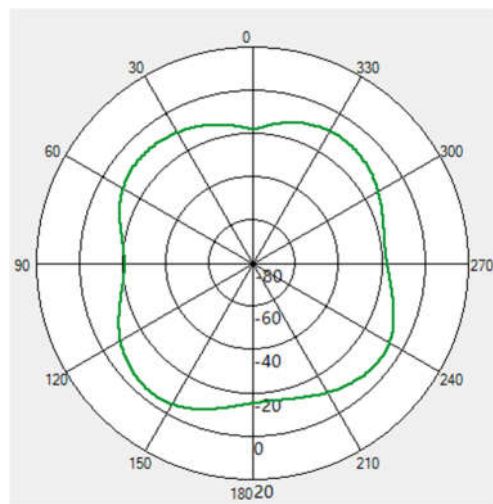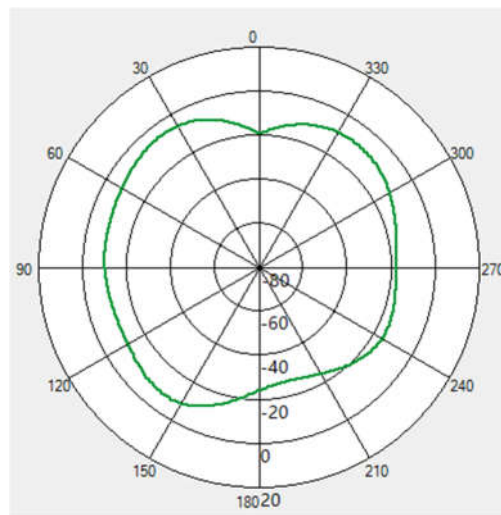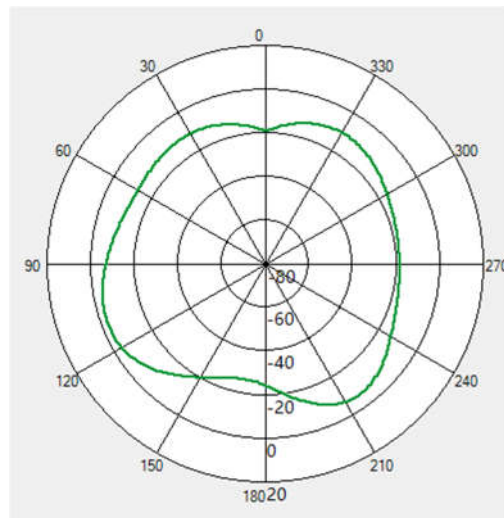




2400MHz		
Phi=0deg Peak (dBi)	1.1	210 deg
Phi=90deg Peak (dBi)	0.23	150 deg
Theta=90deg Peak(dBi)	0.74	240 deg

WCN antenna: 2480MHz

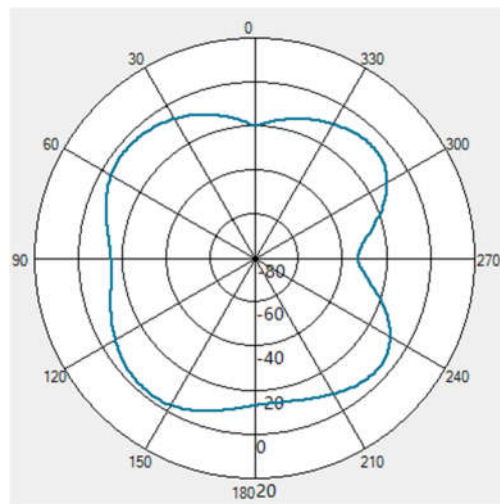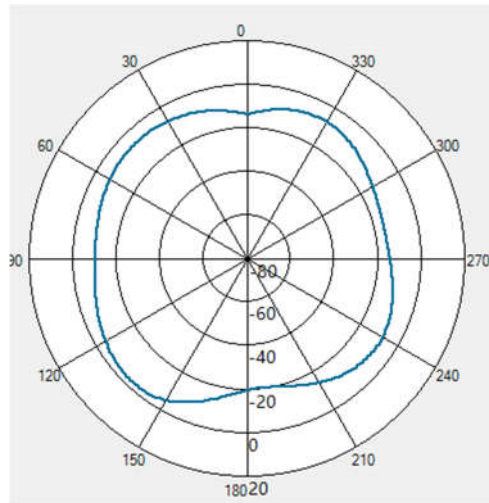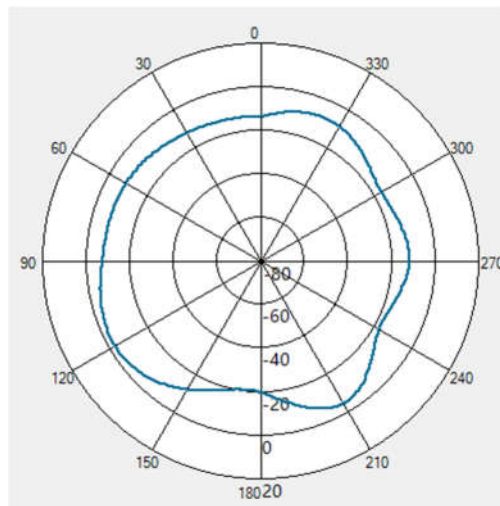




2480MHz		
Phi=0deg Peak (dBi)	0.8	210 deg
Phi=90deg Peak (dBi)	0.53	150 deg
Theta=90deg Peak(dBi)	-0.53	240 deg

WCN antenna: 2500MHz

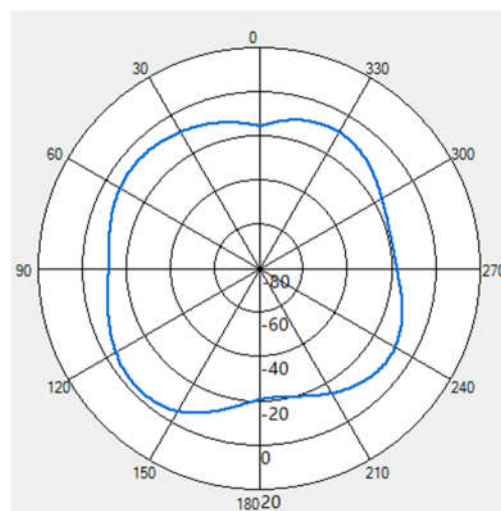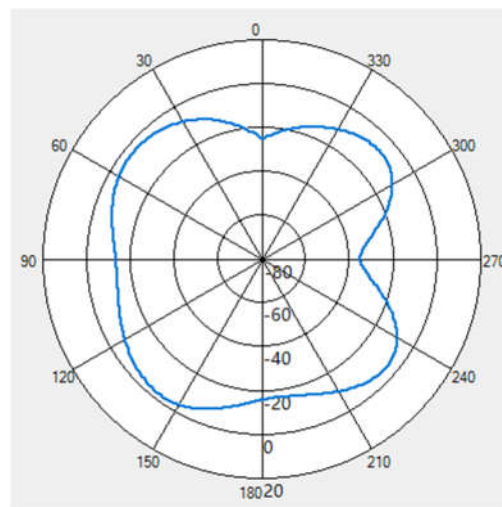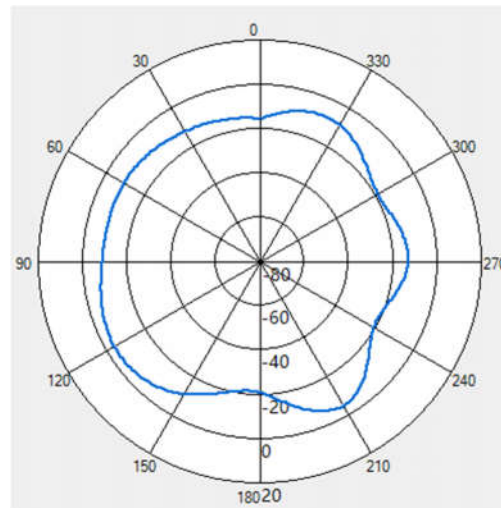




2500MHz		
Phi=0deg Peak (dBi)	0.9	210 deg
Phi=90deg Peak (dBi)	0.73	150 deg
Theta=90deg Peak(dBi)	0.66	240 deg

WCN antenna: 5150MHz

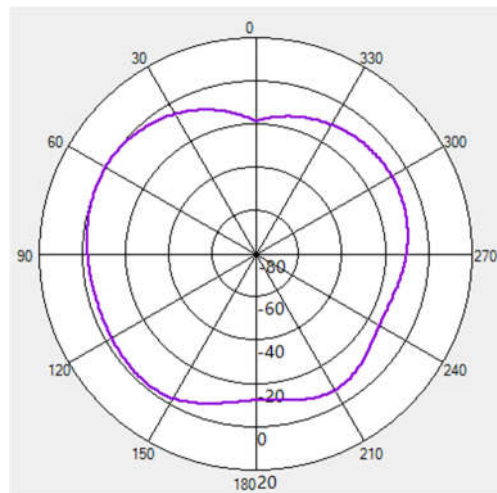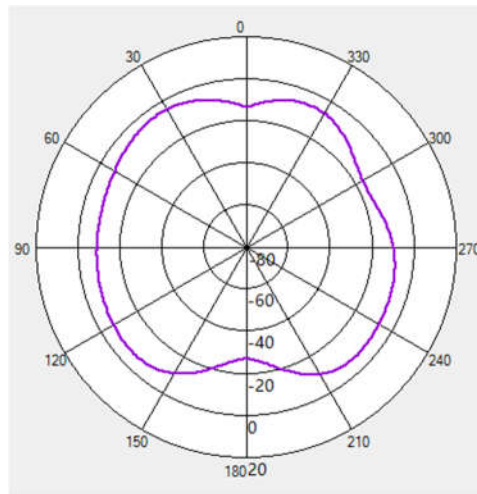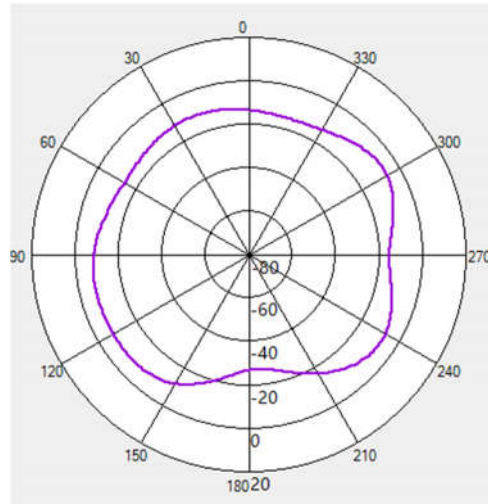




5150MHz		
Phi=0deg Peak (dBi)	-1.8	210 deg
Phi=90deg Peak (dBi)	-0.9	120 deg
Theta=90deg Peak(dBi)	-1	90 deg

WCN antenna: 5350MHz

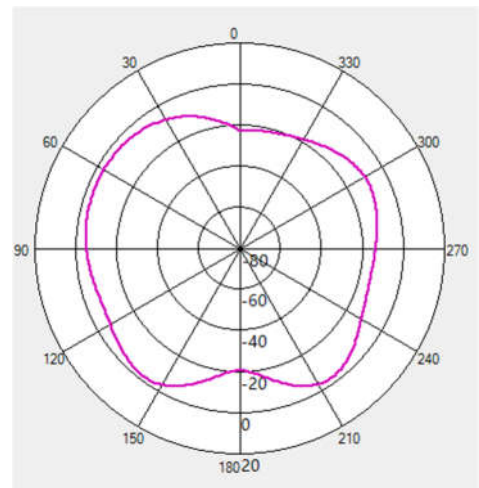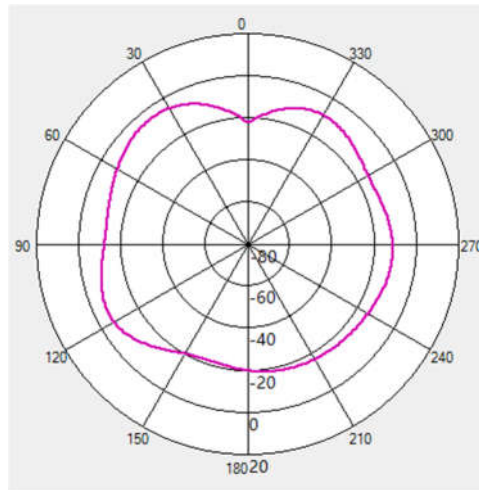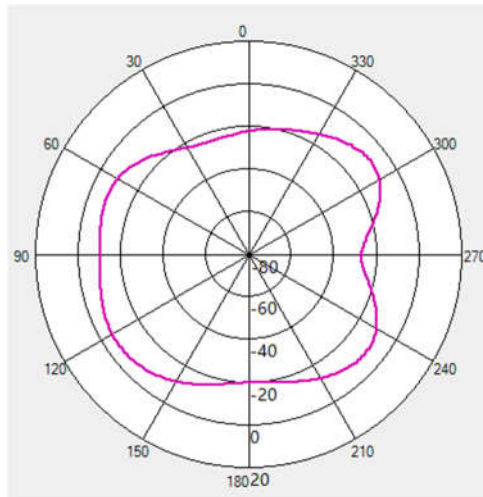




5350MHz		
Phi=0deg Peak (dBi)	-1.25	120 deg
Phi=90deg Peak (dBi)	-1.43	330 deg
Theta=90deg Peak(dBi)	-1.1	0 deg

WCN antenna: 5600MHz

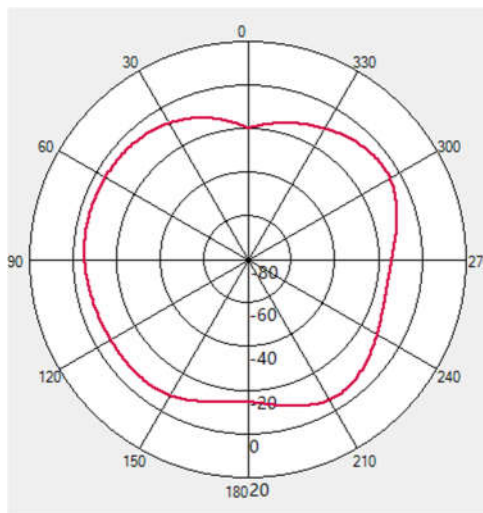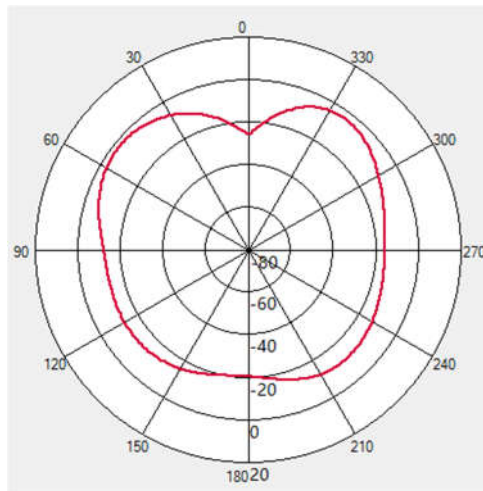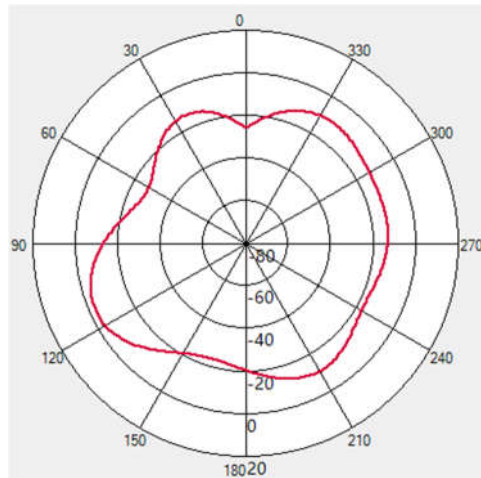




5600MHz		
Phi=0deg Peak (dBi)	-1.3	120 deg
Phi=90deg Peak (dBi)	-1.49	60 deg
Theta=90deg Peak(dBi)	-1.47	60 deg

WCN antenna: 5850MHz

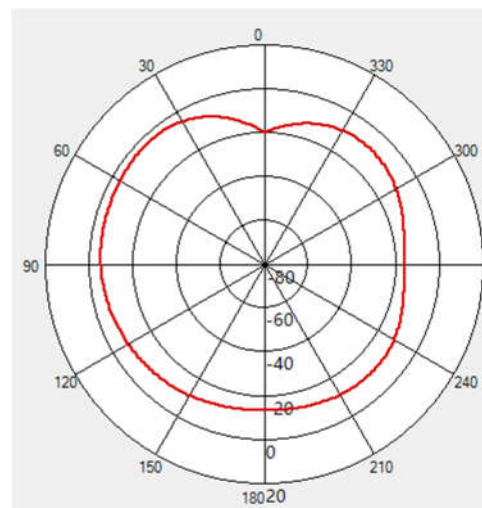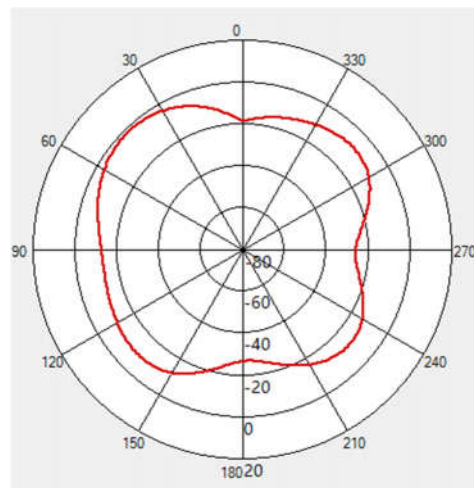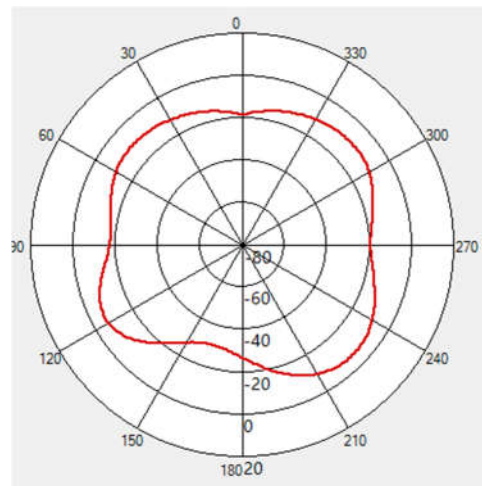

5850MHz		
Phi=0deg Peak (dBi)	-1.1	90 deg
Phi=90deg Peak (dBi)	-1.63	90 deg
Theta=90deg Peak(dBi)	-1.14	90 deg

WCN antenna: 1575MHz

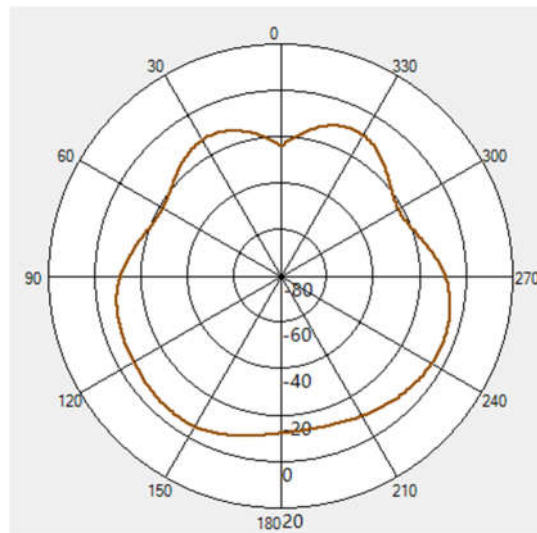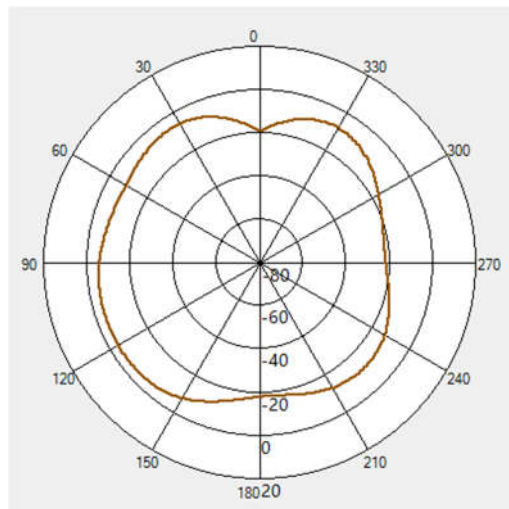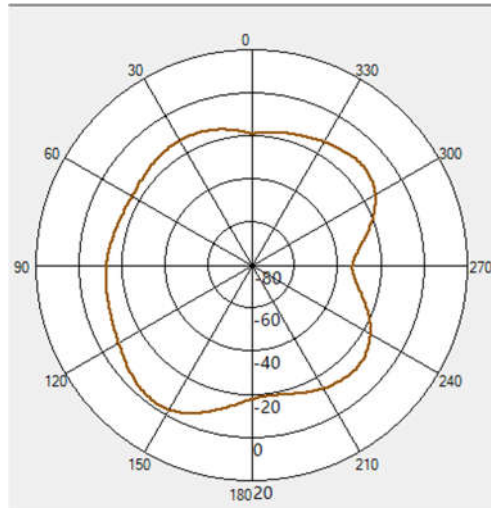

1575MHz		
Phi=0deg Peak (dBi)	-0.65	0 deg
Phi=90deg Peak (dBi)	0.3	90 deg
Theta=90deg Peak(dBi)	0.23	60 deg

3.3 NFC Antenna

NFC Frequency Band : 13.553 - 13.567 MHz

Modulation Type : ASK

Supported Card Type : A / B

NFC Antenna Type : Loop Antenna

NFC Antenna size : 75.40*66.35*1.5mm

NFC Antenna location : at the back of device screen