

FCC SAR Test Report

APPLICANT : VeriFone, Inc.
EQUIPMENT : Point of Sale Terminal
BRAND NAME : Verifone or VERIFONE or verifone
MODEL NAME : VS100-M
FCC ID : B32VS100M
STANDARD : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Approved by: Si Zhang

Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied	5
4. Equipment Under Test (EUT) Information	6
4.1 General Information	6
4.2 General LTE SAR Test and Reporting Considerations	7
5. RF Exposure Limits	10
5.1 Uncontrolled Environment	10
5.2 Controlled Environment	10
6. Specific Absorption Rate (SAR)	11
6.1 Introduction	11
6.2 SAR Definition	11
7. System Description and Setup	12
7.1 E-Field Probe	13
7.2 Data Acquisition Electronics (DAE)	13
7.3 Phantom	14
7.4 Device Holder	15
8. Measurement Procedures	16
8.1 Spatial Peak SAR Evaluation	16
8.2 Power Reference Measurement	17
8.3 Area Scan	17
8.4 Zoom Scan	18
8.5 Volume Scan Procedures	18
8.6 Power Drift Monitoring	18
9. Test Equipment List	19
10. System Verification	20
10.1 Tissue Simulating Liquids	20
10.2 Tissue Verification	20
10.3 System Performance Check Results	21
11. RF Exposure Positions	22
11.1 Ear and handset reference point	22
11.2 Definition of the cheek position	23
11.3 Definition of the tilt position	24
11.4 Body Worn Accessory	25
11.5 Extremity SAR Testing for Device	25
12. Conducted RF Output Power (Unit: dBm)	26
13. Antenna Location	34
14. SAR Test Results	35
14.1 Head SAR	37
14.2 Body Worn Accessory SAR	39
14.3 Extremity SAR	41
14.4 Repeated SAR Measurement	44
15. Simultaneous Transmission Analysis	45
15.1 Head Exposure Conditions	46
15.2 Body-Worn Exposure Conditions	46
15.3 Extremity Exposure Conditions	46
15.4 SPLSR Evaluation and Analysis	47
16. Uncertainty Assessment	49
17. References	50
Appendixes	51
Appendix A. Plots of System Performance Check	51
Appendix B. Plots of High SAR Measurement	51
Appendix C. DASY Calibration Certificate	51
Appendix D. Test Setup Photos	51
Appendix E. Conducted RF Output Power Table	51



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA572113	Rev. 01	Initial issue of report	Nov. 19, 2025

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **VeriFone, Inc., Point of Sale Terminal, VS100-M**, are as follows.

Frequency Band		Highest SAR Summary			Highest Simultaneous Transmission 1g SAR (W/kg)	Highest Simultaneous Transmission 10g SAR (W/kg)
		Head (Separation 0mm)	Body-worn (Separation 5mm)	Extremity (Separation 0mm)		
		1g SAR (W/kg)	1g SAR (W/kg)	10g SAR (W/kg)		
WCDMA	WCDMA II	0.35	1.09	1.38	1.59	2.14
	WCDMA IV	0.31	1.08	1.15		
	WCDMA V	0.49	0.97	0.80		
LTE	LTE Band 7	0.59	1.01	1.27		
	LTE Band 12/17	0.21	0.65	1.09		
	LTE Band 13	0.35	1.02	0.90		
	LTE Band 14	0.36	1.06	0.85		
	LTE Band 25/2	0.28	1.09	1.33		
	LTE Band 26/5	0.37	0.99	0.82		
	LTE Band 41	0.20	1.14	1.15		
	LTE Band 66/4	0.29	0.98	1.12		
	LTE Band 71	0.29	0.68	0.75		
WLAN	2.4GHz WLAN	0.17	0.57	0.75	1.59	2.14
	5GHz WLAN	0.19	1.09	0.71	1.37	2.10
Bluetooth	Bluetooth	<0.10	0.21	0.24	1.34	1.63
Date of Testing:		2025/08/28 ~ 2025/11/03				

Remark: This device supports LTE B2 / B4 / B5 / B17 and B25 / B66 / B26 / B12. Since the supported frequency span for LTE B2 / B4 / B5 / B17 falls completely within the supports frequency span for LTE B25 / B66 / B26 / B12, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B25 / B66 / B26 / B12.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2. Administration Data

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory			
Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR01-KS	CN1257	314309

Applicant	
Company Name	VeriFone, Inc.
Address	1400 West Stanford Ranch Road Suite 150 Rocklin CA 95765 USA

Manufacturer	
Company Name	VeriFone, Inc.
Address	1400 West Stanford Ranch Road Suite 150 Rocklin CA 95765 USA

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Point of Sale Terminal
Brand Name	Verifone or VERIFONE or verifone
Model Name	VS100-M
FCC ID	B32VS100M
S/N	713-015-922
Wireless Technology and Frequency Range	WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz WLAN 2.4 GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2 GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3 GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5 GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8 GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480MHz NFC : 13.56 MHz
Mode	RMC 12.2Kbps HSDPA HSUPA HSPA+ (16QAM uplink is supported) LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC: ASK
EUT Stage	Identical Prototype
Remark: 1. This device does support Vo-WiFi function and supports VoIP in WCDMA, LTE and WIFI (e.g. for 3rd-party VoIP). 2. This device has no hotspot function. 3. NFC SAR will be submitted separately.	

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																													
FCC ID	B32VS100M																																																																												
Equipment Name	Point of Sale Terminal																																																																												
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz																																																																												
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz																																																																												
Uplink Modulations used	QPSK / 16QAM / 64QAM																																																																												
LTE Voice / Data requirements	Data only																																																																												
LTE Release Version	R8																																																																												
CA Support	Not Supported																																																																												
LTE MPR permanently built-in by design	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table>							Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3								Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																													
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																						
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																							
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																						
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																						
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																						
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																						
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																						
256 QAM	≥ 1						≤ 5																																																																						
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																												
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																												



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)					
L	23205		779.5		23230		782					
M	23230		782									
H	23255		784.5									
LTE Band 14												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Channel #		Channel #		Freq.(MHz)					
L	23305		790.5		23330		793					
M	23330		793									
H	23355		795.5									
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)					
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					
LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905

LTE Band 26										
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5

LTE Band 41								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5
M	40620	2593	40620	2593	40620	2593	40620	2593
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680

LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

LTE Band 71								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	133147	665.5	133172	668	133197	670.5	133222	673
M	133247	675.5	133272	678	133297	680.5	133322	683
H	133447	695.5	133422	693	133397	690.5	133372	688

<For LTE Overlap Bands Description>

1) LTE Bands BW

Band	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
LTE Band 2	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 25	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 4	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 66	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 5	Yes	Yes	Yes	Yes		
LTE Band 26	Yes	Yes	Yes	Yes	Yes	
LTE Band 12	Yes	Yes	Yes	Yes		
LTE Band 17			Yes	Yes		

2) LTE Bands tune up:

Band	Antenna	Full Power
		Tune-up Limit
LTE Band 2	Ant 0	21
LTE Band 25	Ant 0	21
LTE Band 4	Ant 0	21
LTE Band 66	Ant 0	21
LTE Band 5	Ant 0	22
LTE Band 26	Ant 0	22
LTE Band 12	Ant 0	24
LTE Band 17	Ant 0	24

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

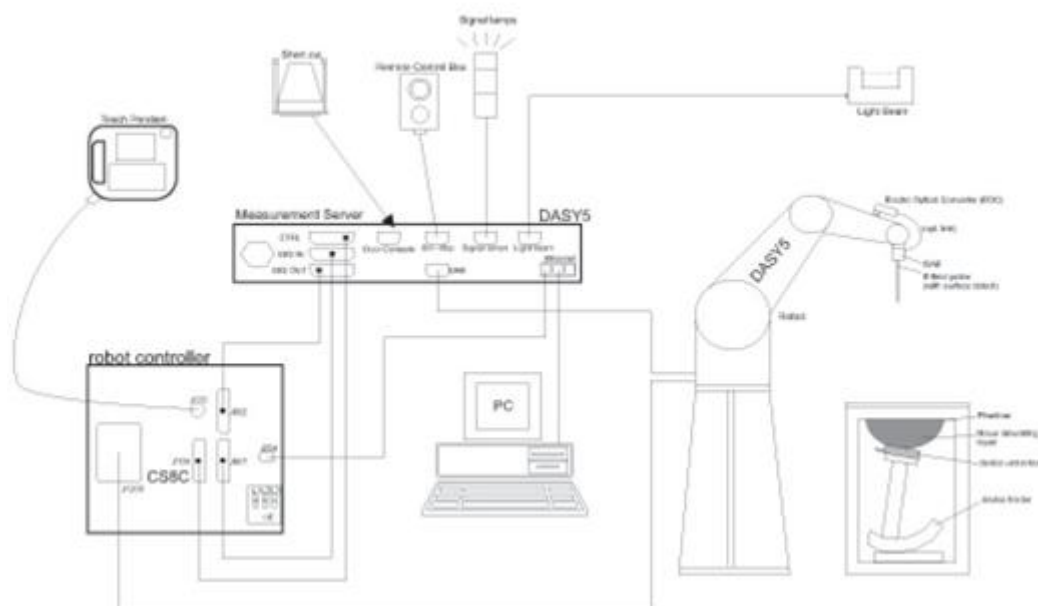

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 10 GHz Linearity: ± 0.2 dB (30 MHz – 10 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE


7.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

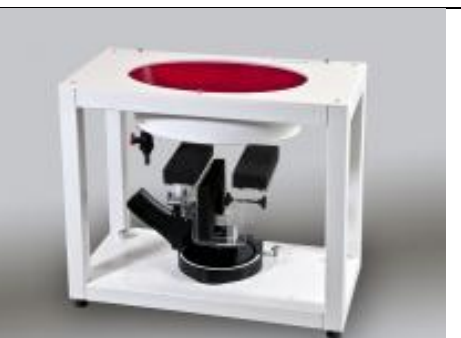Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices or for evaluating transmitters operating at low frequencies. ELI is fully compatible with standard and all known tissue simulating liquids.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1087	Mar. 12, 2025	Mar. 11, 2026
SPEAG	835MHz System Validation Kit	D835V2	4d298	Jan. 26, 2024	Jan. 24, 2026
SPEAG	1750MHz System Validation Kit	D1750V2	1137	Oct. 15, 2024	Oct. 14, 2025
SPEAG	1900MHz System Validation Kit	D1900V2	5d182	Dec. 16, 2024	Dec. 15, 2025
SPEAG	2450MHz System Validation Kit	D2450V2	1095	Feb. 08, 2024	Feb. 06, 2026
SPEAG	2600MHz System Validation Kit	D2600V2	1112	Dec. 18, 2023	Dec. 16, 2025
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	Sep. 23, 2022	Sep. 21, 2025
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	Sep. 17, 2025	Sep. 16, 2026
SPEAG	Data Acquisition Electronics	DAE4	1303	Dec. 06, 2024	Dec. 05, 2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	Feb. 19, 2025	Feb. 18, 2026
SPEAG	SAM Twin Phantom	SAM Twin	TP-1754	NCR	NCR
Beichuang	Thermo-Hygrometer	HTC-1	1959633	May 27, 2025	May 26, 2026
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8820C	6201563900	Jul. 02, 2025	Jul. 01, 2026
Agilent	ENA Series Network Analyzer	E5071C	MY46112129	Jul. 02, 2025	Jul. 01, 2026
SPEAG	Dielectric Probe Kit	DAK-3.5	1071	Feb. 24, 2025	Feb. 23, 2026
Anritsu	Vector Signal Generator	MG3710A	6201682672	Jan. 03, 2025	Jan. 02, 2026
Rohde & Schwarz	Power Meter	NRVD	102081	Jul. 02, 2025	Jul. 01, 2026
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	Jul. 02, 2025	Jul. 01, 2026
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	Jul. 02, 2025	Jul. 01, 2026
R&S	BLUETOOTH TESTER	CBT	101246	Jul. 03, 2025	Jul. 02, 2026
Rohde & Schwarz	Spectrum Analyzer	FSV7	101631	Oct. 11, 2024	Oct. 10, 2025
Rohde & Schwarz	Spectrum Analyzer	FSV7	101631	Oct. 11, 2025	Oct. 10, 2026
TES	DIGITAC THERMOMETER	TYPE-K	220305411	Jan. 02, 2025	Jan. 01, 2026
ARRA	Power Divider	A3200-2	N/A	Note 1	
MCL	Attenuation1	BW-S10W5+	N/A	Note 1	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note 1	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note 1	
Agilent	Dual Directional Coupler	778D	20500	Note 1	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note 1	

Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

10. System Verification

10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

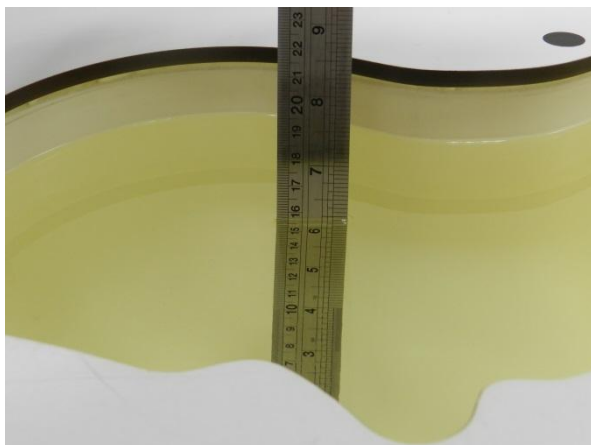


Fig 10.1 Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR

10.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp (°C)	Conductivity (σ)	Permittivity (εr)	Conductivity Target (σ)	Permittivity Target (εr)	Delta (σ) (%)	Delta (εr) (%)	Limit (%)	Date
750	22.7	0.892	42.818	0.89	41.9	0.22	2.19	±5.0	2025-08-28
750	22.9	0.885	42.848	0.89	41.9	-0.56	2.26	±5.0	2025-09-01
835	22.8	0.919	42.426	0.9	41.5	2.11	2.23	±5.0	2025-08-29
835	22.7	0.913	42.435	0.9	41.5	1.44	2.25	±5.0	2025-09-02
1750	22.8	1.378	40.63	1.37	40.1	0.58	1.32	±5.0	2025-08-30
1750	22.6	1.369	40.722	1.37	40.1	-0.07	1.55	±5.0	2025-09-03
1900	22.8	1.439	39.08	1.4	40.0	2.79	-2.30	±5.0	2025-08-31
1900	22.5	1.44	39.094	1.4	40.0	2.86	-2.26	±5.0	2025-09-05
2450	22.6	1.773	39.234	1.8	39.2	-1.50	0.09	±5.0	2025-09-03
2600	22.7	1.911	38.867	1.96	39.0	-2.50	-0.34	±5.0	2025-09-04
2600	22.6	1.919	38.843	1.96	39.0	-2.09	-0.40	±5.0	2025-09-06
5250	22.6	4.65	36.376	4.71	35.95	-1.27	1.18	±5.0	2025-09-05
5600	22.7	5.082	35.711	5.07	35.5	0.24	0.59	±5.0	2025-09-06
5750	22.7	5.141	35.457	5.22	35.35	-1.51	0.30	±5.0	2025-09-07
750	22.8	0.891	42.950	0.89	41.9	0.11	2.51	±5.0	2025-10-20
5250	22.7	4.696	36.152	4.71	35.95	-0.30	0.56	±5.0	2025-11-03

10.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2025-08-28	750	50.00	D750V3 - 1087	EX3DV4 - SN3857	DAE4 Sn1303	0.425	8.680	8.500	-2.07	0.282	5.610	5.640	0.53
2025-09-01	750	50.00	D750V3 - 1087	EX3DV4 - SN3857	DAE4 Sn1303	0.431	8.680	8.620	-0.69	0.288	5.610	5.760	2.67
2025-08-29	835	50.00	D835V2 - 4d298	EX3DV4 - SN3857	DAE4 Sn1303	0.451	9.890	9.020	-8.80	0.301	6.450	6.020	-6.67
2025-09-02	835	50.00	D835V2 - 4d298	EX3DV4 - SN3857	DAE4 Sn1303	0.451	9.890	9.020	-8.80	0.303	6.450	6.060	-6.05
2025-08-30	1750	50.00	D1750V2 - 1137	EX3DV4 - SN3857	DAE4 Sn1303	1.940	36.800	38.800	5.43	1.050	19.600	21.000	7.14
2025-09-03	1750	50.00	D1750V2 - 1137	EX3DV4 - SN3857	DAE4 Sn1303	1.860	36.800	37.200	1.09	0.986	19.600	19.720	0.61
2025-08-31	1900	50.00	D1900V2 - 5d182	EX3DV4 - SN3857	DAE4 Sn1303	2.130	39.800	42.600	7.04	1.110	21.000	22.200	5.71
2025-09-05	1900	50.00	D1900V2 - 5d182	EX3DV4 - SN3857	DAE4 Sn1303	1.940	39.800	38.800	-2.51	1.050	21.000	21.000	0.00
2025-09-03	2450	50.00	D2450V2 - 1095	EX3DV4 - SN3857	DAE4 Sn1303	2.540	52.600	50.800	-3.42	1.190	24.700	23.800	-3.64
2025-09-04	2600	50.00	D2600V2 - 1112	EX3DV4 - SN3857	DAE4 Sn1303	2.920	55.100	58.400	5.99	1.340	24.800	26.800	8.06
2025-09-06	2600	50.00	D2600V2 - 1112	EX3DV4 - SN3857	DAE4 Sn1303	2.750	55.100	55.000	-0.18	1.270	24.800	25.400	2.42
2025-09-05	5250	50.00	D5GHZV2 - 1113	EX3DV4 - SN3857	DAE4 Sn1303	4.110	81.500	82.200	0.86	1.170	23.300	23.400	0.43
2025-09-06	5600	50.00	D5GHZV2 - 1113	EX3DV4 - SN3857	DAE4 Sn1303	4.280	82.600	85.600	3.63	1.290	23.700	25.800	8.86
2025-09-07	5750	50.00	D5GHZV2 - 1113	EX3DV4 - SN3857	DAE4 Sn1303	4.090	80.800	81.800	1.24	1.180	23.000	23.600	2.61
2025-10-20	750	50	D750V3 - 1087	EX3DV4 - SN3857	DAE4 Sn1303	0.443	8.68	8.86	2.07	0.292	5.61	5.84	4.1
2025-11-03	5250	50	D5GHZV2 - 1113	EX3DV4 - SN3857	DAE4 Sn1303	4.08	78.1	81.6	4.48	1.18	22.4	23.6	5.36

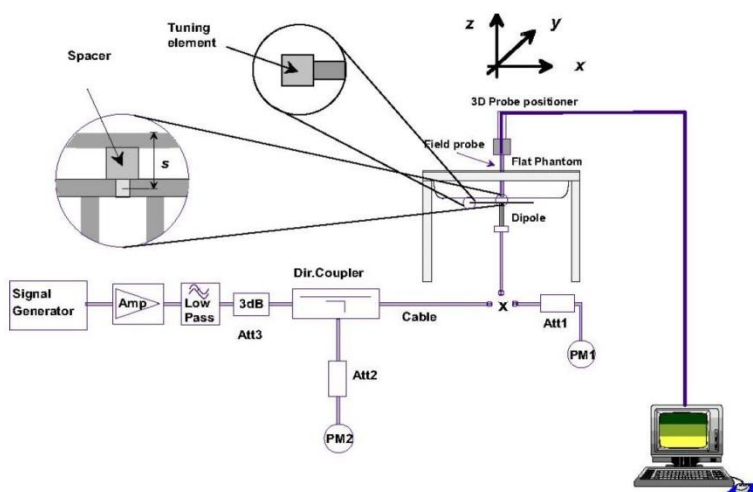


Fig 10.3.1 System Performance Check Setup



Fig 10.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 11.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 11.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 11.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 11.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

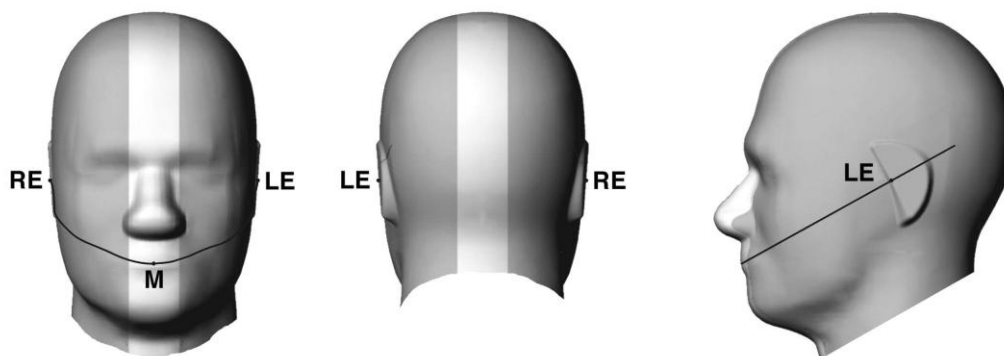


Fig 11.1.1 Front, back, and side views of SAM twin phantom

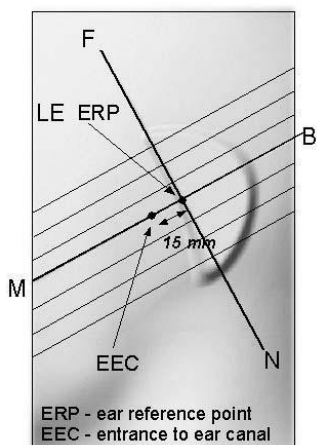


Fig 11.1.2 Close-up side view of phantom showing the ear region.

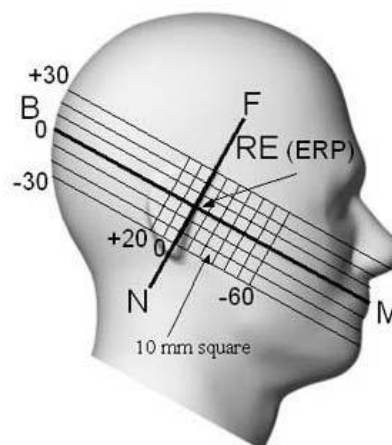


Fig 11.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 11.2.1 and Figure 11.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 11.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 11.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 11.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 11.2.3. The actual rotation angles should be documented in the test report.

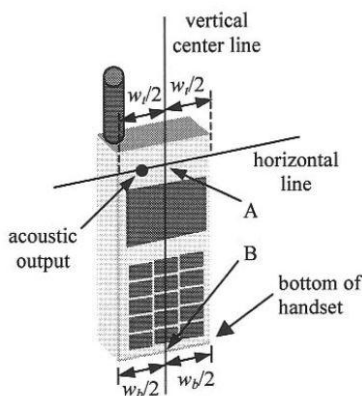


Fig 11.2.1 Handset vertical and horizontal reference lines—"fixed case"

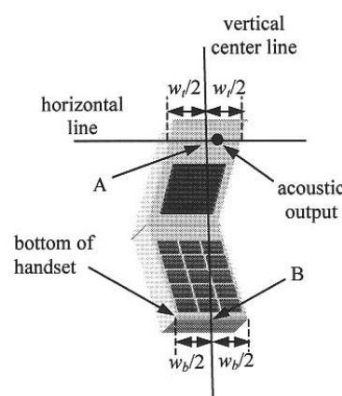


Fig 11.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

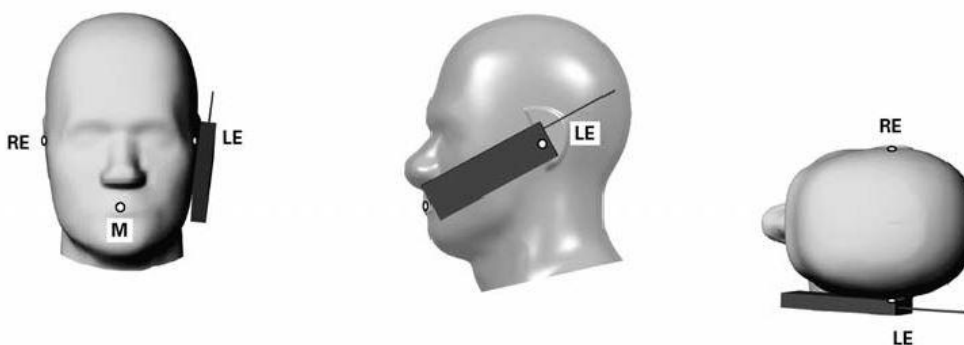


Fig 11.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15° .
3. Rotate the handset around the horizontal line by 15° .
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 11.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

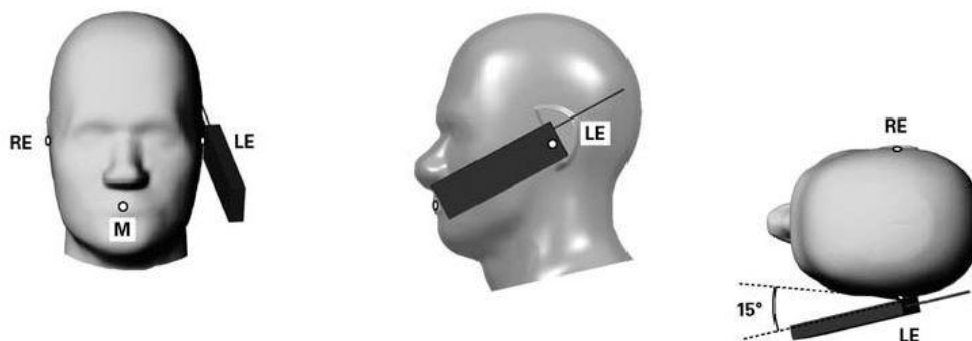


Fig 11.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 11.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

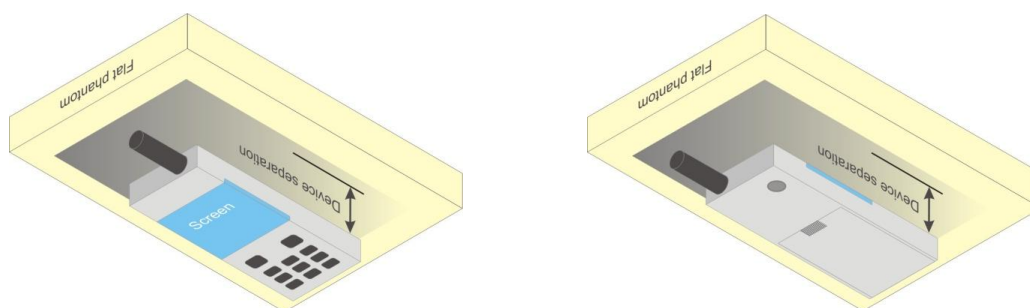


Fig 12.4 Body Worn Position

11.5 Extremity SAR Testing for Device

- To position the device parallel to the phantom surface with all surfaces of the device.
- To adjust the device parallel to the flat phantom.
- To adjust the distance between the device surface and the flat phantom to 0 mm.

Please refer to Appendix D for the test setup photos.

12. Conducted RF Output Power (Unit: dBm)

The detailed conducted power table can refer to Appendix E.

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - Set Cell Power = -86 dBm
 - Set Channel Type = 12.2k + HSPA
 - Set UE Target Power
 - Power Ctrl Mode= Alternating bits
 - Set and observe the E-TFCI
 - Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_d/\beta_c = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
 - iii. Set Channel Params
 - iv. Set Cell Power = -86 dBm
 - v. Set Channel Type = HSPA
 - vi. Set UE Target Power =21 dBm
 - vii. Power Ctrl Mode= All Up Bits
 - viii. Set Manual Uplink DPCH Bc/Bd = Manual
 - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
 - x. Set HSPA Conn DL Channel Levels
 - xi. Set HS-SCCH Configs
 - xii. Set RB Test Mode Setup
 - xiii. Set Common HSUPA Parameters
 - xiv. Set Serving Grant
 - xv. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.
 Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).
 Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.
 Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.
 Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.


Setup Configuration
<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / HSPA+.

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B17 / B26/ B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B2 /B4 /B5 / B17 SAR test was covered by B25 / B66 / B26 / B12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to May 2017 TCB workshop, for 16QAM and 64QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

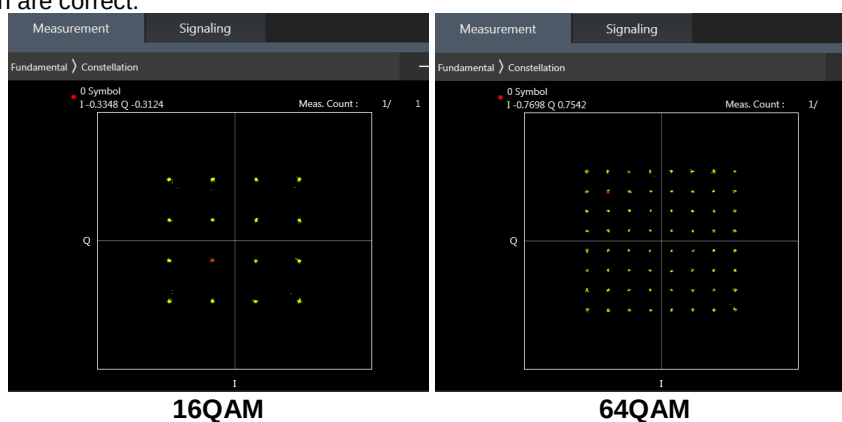

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

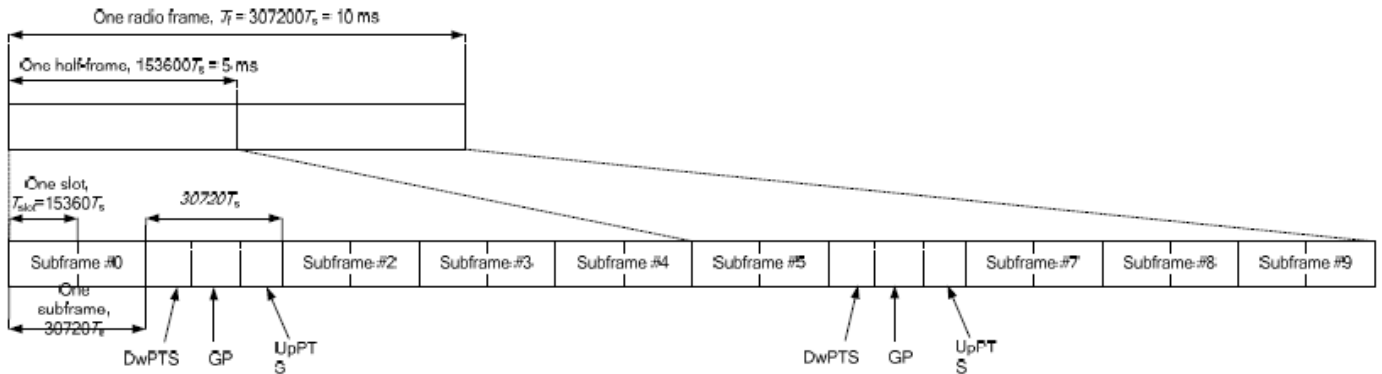


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

For LTE TDD Power class 3

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.


<WLAN Conducted Power>**General Note:**

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For “Not required”, SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration. Additional output power measurements were not necessary.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle are 76.83% as following figure, Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation.

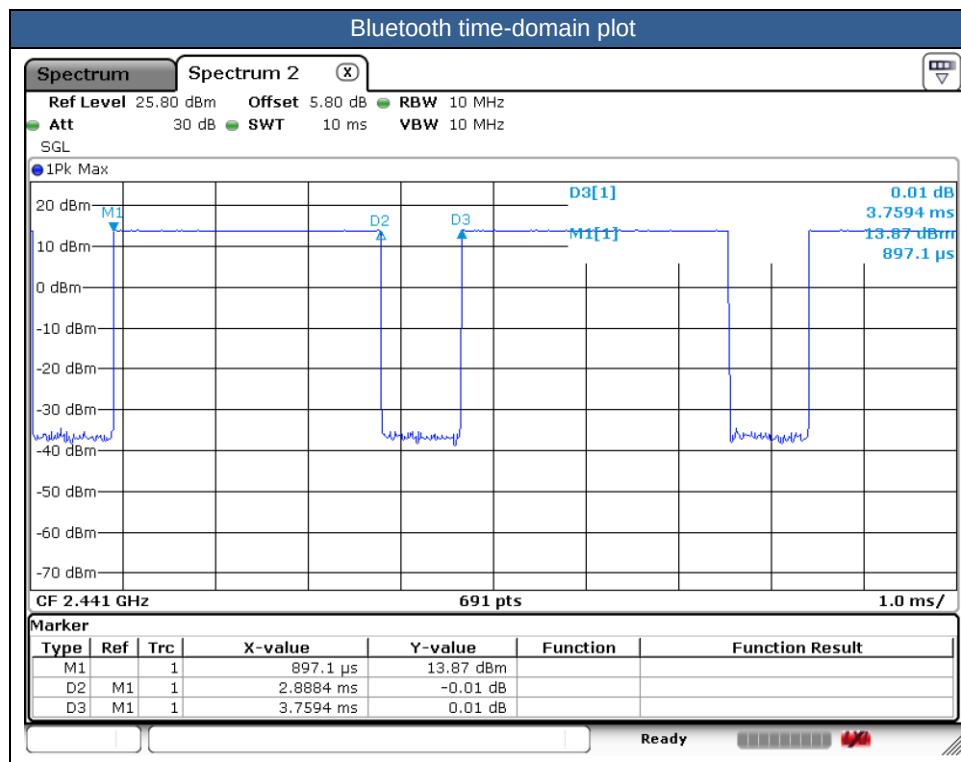



13. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

14. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For SAR testing of Bluetooth signal with 83.3% theoretical duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle) *83.3%".
 - d. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - e. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - f. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The Reported TDD LTE SAR (W/kg) = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. For 10-g extremity SAR testing, only performed within a transmitting antenna located within 25mm from that surface or edge.
6. While 1-g SAR thresholds are specified in the procedures for SAR test reduction and exclusion, these thresholds should be multiplied by 2.5 when 10-g extremity SAR is considered.
7. This device has no hotspot function.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / HSPA+.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B12 / B17 / B26 / B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B2 / B4 / B5 / B17 SAR test was covered by B25 / B66 / B26 / B12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

WLAN/Bluetooth Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

14.1 Head SAR

【WCDMA SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	Full Power	9400	1880	20.04	21.00	1.247	0.09	0.138	0.172
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	Full Power	9400	1880	20.04	21.00	1.247	0.14	0.170	0.212
01	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	Full Power	9400	1880	20.04	21.00	1.247	0.17	0.281	0.350
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	Full Power	9400	1880	20.04	21.00	1.247	0.07	0.132	0.165
	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	Full Power	1413	1732.6	19.75	20.50	1.189	-0.03	0.191	0.227
	WCDMA IV	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	Full Power	1413	1732.6	19.75	20.50	1.189	0.11	0.187	0.222
02	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	Full Power	1413	1732.6	19.75	20.50	1.189	0.10	0.258	0.307
	WCDMA IV	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	Full Power	1413	1732.6	19.75	20.50	1.189	0.01	0.237	0.282
03	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	Full Power	4182	836.4	20.98	21.50	1.127	-0.05	0.437	0.492
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	Full Power	4182	836.4	20.98	21.50	1.127	-0.07	0.255	0.287
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	Full Power	4182	836.4	20.98	21.50	1.127	-0.06	0.331	0.373
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	Full Power	4182	836.4	20.98	21.50	1.127	0.02	0.247	0.278

【LTE SAR】

Plot No	Band	BW	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	Ant 0	Full Power	21100	2535	21.95	23.00	1.274			0.11	0.241	0.307
	LTE Band 7	20M	QPSK	50	0	Right Cheek	0mm	Ant 0	Full Power	21100	2535	21.94	23.00	1.276			-0.07	0.200	0.255
	LTE Band 7	20M	QPSK	1	0	Right Tilted	0mm	Ant 0	Full Power	21100	2535	21.95	23.00	1.274			-0.14	0.148	0.189
	LTE Band 7	20M	QPSK	50	0	Right Tilted	0mm	Ant 0	Full Power	21100	2535	21.94	23.00	1.276			-0.17	0.126	0.161
04	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	Ant 0	Full Power	21100	2535	21.95	23.00	1.274			0.01	0.464	0.591
	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	Ant 0	Full Power	20850	2510	21.91	23.00	1.285			0.02	0.401	0.515
	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	Ant 0	Full Power	21350	2560	21.85	23.00	1.303			0.03	0.423	0.551
	LTE Band 7	20M	QPSK	50	0	Left Cheek	0mm	Ant 0	Full Power	21100	2535	21.94	23.00	1.276			0.16	0.382	0.487
	LTE Band 7	20M	QPSK	1	0	Left Tilted	0mm	Ant 0	Full Power	21100	2535	21.95	23.00	1.274			-0.09	0.256	0.326
	LTE Band 7	20M	QPSK	50	0	Left Tilted	0mm	Ant 0	Full Power	21100	2535	21.94	23.00	1.276			-0.13	0.220	0.281
05	LTE Band 12	10M	QPSK	1	0	Right Cheek	0mm	Ant 0	Full Power	23095	707.5	23.15	24.00	1.216			0.17	0.173	0.210
	LTE Band 12	10M	QPSK	25	0	Right Cheek	0mm	Ant 0	Full Power	23095	707.5	21.99	23.00	1.262			0.04	0.152	0.192
	LTE Band 12	10M	QPSK	1	0	Right Tilted	0mm	Ant 0	Full Power	23095	707.5	23.15	24.00	1.216			0.14	0.098	0.119
	LTE Band 12	10M	QPSK	25	0	Right Tilted	0mm	Ant 0	Full Power	23095	707.5	21.99	23.00	1.262			-0.14	0.085	0.107
	LTE Band 12	10M	QPSK	1	0	Left Cheek	0mm	Ant 0	Full Power	23095	707.5	23.15	24.00	1.216			0.04	0.120	0.146
	LTE Band 12	10M	QPSK	25	0	Left Cheek	0mm	Ant 0	Full Power	23095	707.5	21.99	23.00	1.262			-0.00	0.110	0.139
	LTE Band 12	10M	QPSK	1	0	Left Tilted	0mm	Ant 0	Full Power	23095	707.5	23.15	24.00	1.216			0.16	0.083	0.101
	LTE Band 12	10M	QPSK	25	0	Left Tilted	0mm	Ant 0	Full Power	23095	707.5	21.99	23.00	1.262			0.18	0.073	0.092
06	LTE Band 13	10M	QPSK	1	0	Right Cheek	0mm	Ant 0	Full Power	23230	782	22.11	23.00	1.227			0.05	0.282	0.346
	LTE Band 13	10M	QPSK	25	0	Right Cheek	0mm	Ant 0	Full Power	23230	782	22.08	23.00	1.236			-0.17	0.219	0.271
	LTE Band 13	10M	QPSK	1	0	Right Tilted	0mm	Ant 0	Full Power	23230	782	22.11	23.00	1.227			0.06	0.157	0.193
	LTE Band 13	10M	QPSK	25	0	Right Tilted	0mm	Ant 0	Full Power	23230	782	22.08	23.00	1.236			0.14	0.130	0.161
	LTE Band 13	10M	QPSK	1	0	Left Cheek	0mm	Ant 0	Full Power	23230	782	22.11	23.00	1.227			-0.10	0.191	0.234
	LTE Band 13	10M	QPSK	25	0	Left Cheek	0mm	Ant 0	Full Power	23230	782	22.08	23.00	1.236			-0.19	0.155	0.192
	LTE Band 13	10M	QPSK	1	0	Left Tilted	0mm	Ant 0	Full Power	23230	782	22.11	23.00	1.227			-0.07	0.139	0.171
	LTE Band 13	10M	QPSK	25	0	Left Tilted	0mm	Ant 0	Full Power	23230	782	22.08	23.00	1.236			-0.05	0.113	0.140
50	LTE Band 14	10M	QPSK	1	0	Right Cheek	0mm	Ant 0	Full Power	23330	793	22.05	23	1.245			0.160	0.287	0.357
	LTE Band 14	10M	QPSK	25	0	Right Cheek	0mm	Ant 0	Full Power	23330	793	22.04	23	1.247			0.030	0.228	0.284
	LTE Band 14	10M	QPSK	1	0	Right Tilted	0mm	Ant 0	Full Power	23330	793	22.05	23	1.245			-0.040	0.161	0.2
	LTE Band 14	10M	QPSK	25	0	Right Tilted	0mm	Ant 0	Full Power	23330	793	22.04	23	1.247			0.140	0.136	0.17
	LTE Band 14	10M	QPSK	1	0	Left Cheek	0mm	Ant 0	Full Power	23330	793	22.05	23	1.245			-0.050	0.205	0.255
	LTE Band 14	10M	QPSK	25	0	Left Cheek	0mm	Ant 0	Full Power	23330	793	22.04	23	1.247			-0.150	0.159	0.198
	LTE Band 14	10M	QPSK	1	0	Left Tilted	0mm	Ant 0	Full Power	23330	793	22.05	23	1.245			0.070	0.148	0.184
	LTE Band 14	10M	QPSK	25	0	Left Tilted	0mm	Ant 0	Full Power	23330	793	22.04	23	1.247			0.110	0.12	0.150
	LTE Band 25	20M	QPSK	1	0	Right Cheek	0mm	Ant 0	Full Power	26340	1880	19.68	21.00	1.355			0.07	0.096	0.130
	LTE Band 25	20M	QPSK	50	0	Right Cheek	0mm	Ant 0	Full Power	26340	1880	19.66	21.00	1.361			0.14	0.083	0.113
	LTE Band 25	20M	QPSK	1	0	Right Tilted	0mm	Ant 0	Full Power	26340	1880	19.68	21.00	1.355			0.04	0.118	0.160
	LTE Band 25	20M	QPSK	50	0	Right Tilted	0mm	Ant 0	Full Power	26340	1880	19.66	21.00	1.361			-0.11	0.099	0.135
07	LTE Band 25	20M	QPSK	1	0	Left Cheek	0mm	Ant 0	Full Power	26340	1880	19.68	21.00	1.355			-0.03	0.208	0.282
	LTE Band 25	20M	QPSK	50	0	Left Cheek	0mm	Ant 0	Full Power	26340	1880	19.66	21.00	1.361			-0.13	0.169	0.230
	LTE Band 25	20M	QPSK	1	0	Left Tilted	0mm	Ant 0	Full Power	26340	1880	19.68	21.00	1.355			0.17	0.086	0.117
	LTE Band 25	20M	QPSK	50	0	Left Tilted	0mm	Ant 0	Full Power	26340	1880	19.66	21.00	1.361			-0.09	0.074	0.101
08	LTE Band 26	15M	QPSK	1	0	Right Cheek	0mm	Ant 0	Full Power	26865	831.5	21.13	22.00	1.222			0.09	0.301	0.368
	LTE Band 26	15M	QPSK	36	0	Right Cheek	0mm	Ant 0	Full Power	26865	831.5	21.07	22.00	1.239			-0.13	0.262	0.325
	LTE Band 26	15M	QPSK	1	0	Right Tilted	0mm	Ant 0	Full Power	26865	831.5	21.13	22.00	1.222			-0.15	0.185	0.226
	LTE Band 26	15M	QPSK	36	0	Right Tilted	0mm	Ant 0	Full Power	26865	831.5	21.07	22.00	1.239			0.05	0.157	0.195
	LTE Band 26	15M	QPSK	1	0	Left Cheek	0mm	Ant 0	Full Power	26865	831.5	21.13	22.00	1.222			0.08	0.251	0.307
	LTE Band 26	15M	QPSK	36	0	Left Cheek	0mm	Ant 0	Full Power	26865	831.5	21.07	22.00	1.239			-0.06	0.201	0.249
	LTE Band 26	15M	QPSK	1	0	Left Tilted	0mm	Ant 0	Full Power	26865	831.5	21.13	22.00	1.222			0.09	0.185	0.226
	LTE Band 26	15M	QPSK	36	0	Left Tilted	0mm	Ant 0	Full Power	26865	831.5	21.07	22.00	1.239			-0.10	0.150	0.186



FCC SAR Test Report

Report No. : FA572113

	LTE Band 66	20M	QPSK	1	0	Right Cheek	0mm	Ant 0	Full Power	132322	1745	19.71	21.00	1.346			0.16	0.132	0.178
	LTE Band 66	20M	QPSK	50	0	Right Cheek	0mm	Ant 0	Full Power	132322	1745	19.69	21.00	1.352			-0.05	0.102	0.138
	LTE Band 66	20M	QPSK	1	0	Right Tilted	0mm	Ant 0	Full Power	132322	1745	19.71	21.00	1.346			0.06	0.147	0.198
	LTE Band 66	20M	QPSK	50	0	Right Tilted	0mm	Ant 0	Full Power	132322	1745	19.69	21.00	1.352			-0.07	0.114	0.154
09	LTE Band 66	20M	QPSK	1	0	Left Cheek	0mm	Ant 0	Full Power	132322	1745	19.71	21.00	1.346			0.04	0.217	0.292
	LTE Band 66	20M	QPSK	50	0	Left Cheek	0mm	Ant 0	Full Power	132322	1745	19.69	21.00	1.352			0.19	0.174	0.235
	LTE Band 66	20M	QPSK	1	0	Left Tilted	0mm	Ant 0	Full Power	132322	1745	19.71	21.00	1.346			0.09	0.169	0.227
	LTE Band 66	20M	QPSK	50	0	Left Tilted	0mm	Ant 0	Full Power	132322	1745	19.69	21.00	1.352			-0.12	0.128	0.173
10	LTE Band 71	20M	QPSK	1	0	Right Cheek	0mm	Ant 0	Full Power	133297	680.5	22.83	24.00	1.309			0.03	0.220	0.288
	LTE Band 71	20M	QPSK	50	0	Right Cheek	0mm	Ant 0	Full Power	133297	680.5	22.19	23.00	1.205			0.13	0.181	0.218
	LTE Band 71	20M	QPSK	1	0	Right Tilted	0mm	Ant 0	Full Power	133297	680.5	22.83	24.00	1.309			-0.09	0.117	0.153
	LTE Band 71	20M	QPSK	50	0	Right Tilted	0mm	Ant 0	Full Power	133297	680.5	22.19	23.00	1.205			0.13	0.093	0.112
	LTE Band 71	20M	QPSK	1	0	Left Cheek	0mm	Ant 0	Full Power	133297	680.5	22.83	24.00	1.309			0.11	0.177	0.232
	LTE Band 71	20M	QPSK	50	0	Left Cheek	0mm	Ant 0	Full Power	133297	680.5	22.19	23.00	1.205			0.11	0.140	0.169
	LTE Band 71	20M	QPSK	1	0	Left Tilted	0mm	Ant 0	Full Power	133297	680.5	22.83	24.00	1.309			-0.17	0.092	0.120
	LTE Band 71	20M	QPSK	50	0	Left Tilted	0mm	Ant 0	Full Power	133297	680.5	22.19	23.00	1.205			-0.15	0.072	0.087
	LTE Band 41	20M	QPSK	1	49	Right Cheek	0mm	Ant 0	Full Power	41490	2680	23.47	24.00	1.113	62.9	1.006	-0.09	0.155	0.176
	LTE Band 41	20M	QPSK	50	24	Right Cheek	0mm	Ant 0	Full Power	41490	2680	22.03	23.00	1.25	62.9	1.006	-0.19	0.116	0.146
	LTE Band 41	20M	QPSK	1	49	Right Tilted	0mm	Ant 0	Full Power	41490	2680	23.47	24.00	1.113	62.9	1.006	-0.14	0.134	0.152
	LTE Band 41	20M	QPSK	50	24	Right Tilted	0mm	Ant 0	Full Power	41490	2680	22.03	23.00	1.25	62.9	1.006	-0.11	0.095	0.119
11	LTE Band 41	20M	QPSK	1	49	Left Cheek	0mm	Ant 0	Full Power	41490	2680	23.47	24.00	1.113	62.9	1.006	0.05	0.179	0.203
	LTE Band 41	20M	QPSK	50	24	Left Cheek	0mm	Ant 0	Full Power	41490	2680	22.03	23.00	1.25	62.9	1.006	0.13	0.129	0.162
	LTE Band 41	20M	QPSK	1	49	Left Tilted	0mm	Ant 0	Full Power	41490	2680	23.47	24.00	1.113	62.9	1.006	-0.09	0.088	0.100
	LTE Band 41	20M	QPSK	50	24	Left Tilted	0mm	Ant 0	Full Power	41490	2680	22.03	23.00	1.25	62.9	1.006	-0.10	0.060	0.075

【WLAN 2.4GHz_5GHz SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 1	Full Power	6	2437	16.92	18.00	1.282	100.0	1.0	-0.04	0.108	0.138
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 1	Full Power	6	2437	16.92	18.00	1.282	100.0	1.0	0.19	0.112	0.144
12	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 1	Full Power	6	2437	16.92	18.00	1.282	100.0	1.0	0.05	0.133	0.171
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 1	Full Power	6	2437	16.92	18.00	1.282	100.0	1.0	-0.10	0.105	0.135
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 1	Full Power	60	5300	16.84	18.00	1.306	98.26	1.018	-0.080	0.101	0.134
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 1	Full Power	60	5300	16.84	18.00	1.306	98.26	1.018	-0.080	0.051	0.068
13	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 1	Full Power	60	5300	16.84	18.00	1.306	98.26	1.018	-0.090	0.138	0.183
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 1	Full Power	60	5300	16.84	18.00	1.306	98.26	1.018	-0.180	0.001	0.001
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 1	Full Power	144	5720	16.48	17.50	1.265	98.26	1.018	-0.17	0.090	0.116
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 1	Full Power	144	5720	16.48	17.50	1.265	98.26	1.018	0.07	0.111	0.143
14	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 1	Full Power	144	5720	16.48	17.50	1.265	98.26	1.018	-0.05	0.122	0.157
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 1	Full Power	144	5720	16.48	17.50	1.265	98.26	1.018	0.10	0.077	0.099
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 1	Full Power	149	5745	16.09	17.00	1.233	98.26	1.018	0.18	0.113	0.142
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 1	Full Power	149	5745	16.09	17.00	1.233	98.26	1.018	0.19	0.130	0.163
15	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 1	Full Power	149	5745	16.09	17.00	1.233	98.26	1.018	0.04	0.149	0.187
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 1	Full Power	149	5745	16.09	17.00	1.233	98.26	1.018	-0.01	0.100	0.126

【Bluetooth SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	0mm	Ant 1	Full Power	39	2441	13.36	14.50	1.3	76.83	1.084	0.07	0.001	0.001
	Bluetooth	1Mbps	Right Tilted	0mm	Ant 1	Full Power	39	2441	13.36	14.50	1.3	76.83	1.084	-0.13	0.001	0.001
16	Bluetooth	1Mbps	Left Cheek	0mm	Ant 1	Full Power	39	2441	13.36	14.50	1.3	76.83	1.084	-0.12	0.044	0.062
	Bluetooth	1Mbps	Left Tilted	0mm	Ant 1	Full Power	39	2441	13.36	14.50	1.3	76.83	1.084	-0.15	0.001	0.001



14.2 Body Worn Accessory SAR

【WCDMA SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
17	WCDMA II	RMC 12.2Kbps	Front	5mm	Ant 0	Full Power	9400	1880	20.04	21.00	1.247	0.12	0.459	0.572
	WCDMA II	RMC 12.2Kbps	Back	5mm	Ant 0	Full Power	9400	1880	20.04	21.00	1.247	-0.11	0.872	1.087
	WCDMA II	RMC 12.2Kbps	Back	5mm	Ant 0	Full Power	9262	1852.4	20.02	21.00	1.253	0.03	0.849	1.064
	WCDMA II	RMC 12.2Kbps	Back	5mm	Ant 0	Full Power	9538	1907.6	20.01	21.00	1.256	-0.02	0.799	1.004
	WCDMA IV	RMC 12.2Kbps	Front	5mm	Ant 0	Full Power	1413	1732.6	19.75	20.50	1.189	0.03	0.567	0.674
	WCDMA IV	RMC 12.2Kbps	Back	5mm	Ant 0	Full Power	1413	1732.6	19.75	20.50	1.189	0.03	0.887	1.055
	WCDMA IV	RMC 12.2Kbps	Back	5mm	Ant 0	Full Power	1312	1712.4	19.71	20.50	1.199	0.00	0.791	0.948
	WCDMA IV	RMC 12.2Kbps	Back	5mm	Ant 0	Full Power	1513	1752.6	19.65	20.50	1.216	0.10	0.887	1.079
	WCDMA V	RMC 12.2Kbps	Front	5mm	Ant 0	Full Power	4182	836.4	20.98	21.50	1.127	-0.05	0.562	0.633
	WCDMA V	RMC 12.2Kbps	Back	5mm	Ant 0	Full Power	4182	836.4	20.98	21.50	1.127	0.02	0.846	0.953
	WCDMA V	RMC 12.2Kbps	Back	5mm	Ant 0	Full Power	4132	826.4	20.96	21.50	1.132	-0.00	0.858	0.971
	WCDMA V	RMC 12.2Kbps	Back	5mm	Ant 0	Full Power	4233	846.6	20.93	21.50	1.14	0.19	0.810	0.923

【LTE SAR】

Plot No	Band	BW	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Front	5mm	Ant 0	Full Power	21100	2535	21.95	23.00	1.274			0.00	0.767	0.977
	LTE Band 7	20M	QPSK	1	0	Front	5mm	Ant 0	Full Power	20850	2510	21.91	23.00	1.285			0.15	0.692	0.889
	LTE Band 7	20M	QPSK	1	0	Front	5mm	Ant 0	Full Power	21350	2560	21.85	23.00	1.303			0.19	0.776	1.011
	LTE Band 7	20M	QPSK	50	0	Front	5mm	Ant 0	Full Power	21100	2535	21.94	23.00	1.276			-0.13	0.598	0.763
	LTE Band 7	20M	QPSK	100	0	Front	5mm	Ant 0	Full Power	21100	2535	21.89	23.00	1.291			0.02	0.582	0.751
	LTE Band 7	20M	QPSK	1	0	Back	5mm	Ant 0	Full Power	21100	2535	21.95	23.00	1.274			-0.06	0.583	0.743
	LTE Band 7	20M	QPSK	50	0	Back	5mm	Ant 0	Full Power	21100	2535	21.94	23.00	1.276			-0.06	0.459	0.586
	LTE Band 7	20M	QPSK	100	0	Back	5mm	Ant 0	Full Power	21100	2535	21.94	23.00	1.276			-0.06	0.459	0.586
	LTE Band 12	10M	QPSK	1	0	Front	5mm	Ant 0	Full Power	23095	707.5	23.15	24.00	1.216			0.16	0.306	0.372
	LTE Band 12	10M	QPSK	25	0	Front	5mm	Ant 0	Full Power	23095	707.5	21.99	23.00	1.262			-0.01	0.239	0.302
	LTE Band 12	10M	QPSK	1	0	Back	5mm	Ant 0	Full Power	23095	707.5	23.15	24.00	1.216			-0.15	0.532	0.647
	LTE Band 12	10M	QPSK	25	0	Back	5mm	Ant 0	Full Power	23095	707.5	21.99	23.00	1.262			0.06	0.388	0.490
	LTE Band 13	10M	QPSK	1	0	Front	5mm	Ant 0	Full Power	23230	782	22.11	23.00	1.227			-0.08	0.587	0.720
	LTE Band 13	10M	QPSK	25	0	Front	5mm	Ant 0	Full Power	23230	782	22.08	23.00	1.236			0.07	0.421	0.520
	LTE Band 13	10M	QPSK	1	0	Back	5mm	Ant 0	Full Power	23230	782	22.11	23.00	1.227			0.19	0.832	1.021
	LTE Band 13	10M	QPSK	25	0	Back	5mm	Ant 0	Full Power	23230	782	22.08	23.00	1.236			-0.03	0.596	0.737
	LTE Band 13	10M	QPSK	50	0	Back	5mm	Ant 0	Full Power	23230	782	22.01	23.00	1.256			-0.12	0.593	0.745
	LTE Band 14	10M	QPSK	1	0	Front	5mm	Ant 0	Full Power	23330	793	22.05	23	1.245			0.140	0.569	0.708
	LTE Band 14	10M	QPSK	25	0	Front	5mm	Ant 0	Full Power	23330	793	22.04	23	1.247			-0.080	0.437	0.545
	LTE Band 14	10M	QPSK	1	0	Back	5mm	Ant 0	Full Power	23330	793	22.05	23	1.245			0.110	0.853	1.062
	LTE Band 14	10M	QPSK	25	0	Back	5mm	Ant 0	Full Power	23330	793	22.04	23	1.247			-0.180	0.629	0.784
	LTE Band 14	10M	QPSK	50	0	Back	5mm	Ant 0	Full Power	23330	793	22.03	23	1.25			-0.180	0.62	0.775
	LTE Band 25	20M	QPSK	1	0	Front	5mm	Ant 0	Full Power	26340	1880	19.68	21.00	1.355			-0.13	0.409	0.554
	LTE Band 25	20M	QPSK	50	0	Front	5mm	Ant 0	Full Power	26340	1880	19.66	21.00	1.361			-0.12	0.326	0.444
	LTE Band 25	20M	QPSK	1	0	Back	5mm	Ant 0	Full Power	26340	1880	19.68	21.00	1.355			0.14	0.732	0.992
	LTE Band 25	20M	QPSK	1	0	Back	5mm	Ant 0	Full Power	26140	1860	19.59	21.00	1.384			-0.10	0.788	1.091
	LTE Band 25	20M	QPSK	1	0	Back	5mm	Ant 0	Full Power	26590	1905	19.62	21.00	1.374			0.02	0.693	0.952
	LTE Band 25	20M	QPSK	50	0	Back	5mm	Ant 0	Full Power	26340	1880	19.66	21.00	1.361			0.14	0.572	0.778
	LTE Band 25	20M	QPSK	100	0	Back	5mm	Ant 0	Full Power	26340	1880	19.62	21.00	1.374			-0.09	0.563	0.774
	LTE Band 25	20M	QPSK	100	0	Back	5mm	Ant 0	Full Power	26340	1880	19.62	21.00	1.374			-0.09	0.563	0.774
	LTE Band 26	15M	QPSK	1	0	Front	5mm	Ant 0	Full Power	26865	831.5	21.13	22.00	1.222			0.10	0.567	0.693
	LTE Band 26	15M	QPSK	36	0	Front	5mm	Ant 0	Full Power	26865	831.5	21.07	22.00	1.239			-0.02	0.447	0.554
	LTE Band 26	15M	QPSK	1	0	Back	5mm	Ant 0	Full Power	26865	831.5	21.13	22.00	1.222			-0.02	0.809	0.989
	LTE Band 26	15M	QPSK	36	0	Back	5mm	Ant 0	Full Power	26865	831.5	21.07	22.00	1.239			-0.10	0.622	0.771
	LTE Band 26	15M	QPSK	75	0	Back	5mm	Ant 0	Full Power	26865	831.5	21.03	22.00	1.25			0.00	0.627	0.784
	LTE Band 66	20M	QPSK	1	0	Front	5mm	Ant 0	Full Power	132322	1745	19.71	21.00	1.346			0.05	0.430	0.579
	LTE Band 66	20M	QPSK	50	0	Front	5mm	Ant 0	Full Power	132322	1745	19.69	21.00	1.352			0.01	0.354	0.479
	LTE Band 66	20M	QPSK	1	0	Back	5mm	Ant 0	Full Power	132322	1745	19.71	21.00	1.346			0.18	0.696	0.937
	LTE Band 66	20M	QPSK	1	0	Back	5mm	Ant 0	Full Power	132072	1720	19.65	21.00	1.365			0.11	0.721	0.984
	LTE Band 66	20M	QPSK	1	0	Back	5mm	Ant 0	Full Power	132572	1770	19.66	21.00	1.361			-0.15	0.696	0.947
	LTE Band 66	20M	QPSK	50	0	Back	5mm	Ant 0	Full Power	132322	1745	19.69	21.00	1.352			-0.12	0.553	0.748
	LTE Band 66	20M	QPSK	100	0	Back	5mm	Ant 0	Full Power	132572	1770	19.63	21.00	1.371			0.03	0.651	0.893
	LTE Band 71	20M	QPSK	1	0	Front	5mm	Ant 0	Full Power	133297	680.5	22.83	24.00	1.309			0.16	0.351	0.459
	LTE Band 71	20M	QPSK	50	0	Front	5mm	Ant 0	Full Power	133297	680.5	22.19	23.00	1.205			-0.10	0.266	0.321
	LTE Band 71	20M	QPSK	1	0	Back	5mm	Ant 0	Full Power	133297	680.5	22.83	24.00	1.309			-0.01	0.520	0.681
	LTE Band 71	20M	QPSK	50	0	Back	5mm	Ant 0	Full Power	133297	680.5	22.19	23.00	1.205			0.10	0.375	0.452
	LTE Band 41	20M	QPSK	1	49	Front	5mm	Ant 0	Full Power	41490	2680	23.47	24.00	1.13	62.9	1.006	-0.03	0.873	0.992
	LTE Band 41	20M	QPSK	1	49	Front	5mm	Ant 0	Full Power	39750	2506	22.74	24.00	1.337	62.9	1.006	0.06	0.438	0.589
	LTE Band 41	20M	QPSK	1	49	Front	5mm	Ant 0	Full Power	40185	2549.5	22.77	24.00	1.327	62.9	1.006	0.13	0.535	0.714
	LTE Band 41	20M	QPSK	1	49	Front	5mm	Ant 0	Full Power	40185	2549.5	22.77	24.00	1.327	62.9	1.006	0.13	0.535	0.714



FCC SAR Test Report

Report No. : FA572113

	LTE Band 41	20M	QPSK	1	49	Front	5mm	Ant 0	Full Power	40620	2593	22.89	24.00	1.291	62.9	1.006	0.13	0.574	0.745
27	LTE Band 41	20M	QPSK	1	49	Front	5mm	Ant 0	Full Power	41055	2636.5	23.01	24.00	1.256	62.9	1.006	0.07	0.902	1.140
	LTE Band 41	20M	QPSK	50	24	Front	5mm	Ant 0	Full Power	41490	2680	22.03	23.00	1.25	62.9	1.006	0.09	0.709	0.892
	LTE Band 41	20M	QPSK	50	24	Front	5mm	Ant 0	Full Power	39750	2506	21.37	23.00	1.455	62.9	1.006	0.19	0.337	0.493
	LTE Band 41	20M	QPSK	50	24	Front	5mm	Ant 0	Full Power	40185	2549.5	21.44	23.00	1.432	62.9	1.006	0.05	0.408	0.588
	LTE Band 41	20M	QPSK	50	24	Front	5mm	Ant 0	Full Power	40620	2593	21.51	23.00	1.409	62.9	1.006	-0.10	0.434	0.615
	LTE Band 41	20M	QPSK	50	24	Front	5mm	Ant 0	Full Power	41055	2636.5	21.63	23.00	1.371	62.9	1.006	0.01	0.720	0.993
	LTE Band 41	20M	QPSK	100	0	Front	5mm	Ant 0	Full Power	41490	2680	21.92	23.00	1.282	62.9	1.006	0.11	0.603	0.778
	LTE Band 41	20M	QPSK	1	49	Back	5mm	Ant 0	Full Power	41490	2680	23.47	24.00	1.13	62.9	1.006	-0.14	0.846	0.962
	LTE Band 41	20M	QPSK	1	49	Back	5mm	Ant 0	Full Power	39750	2506	22.74	24.00	1.337	62.9	1.006	-0.17	0.322	0.433
	LTE Band 41	20M	QPSK	1	49	Back	5mm	Ant 0	Full Power	40185	2549.5	22.77	24.00	1.327	62.9	1.006	0.09	0.398	0.531
	LTE Band 41	20M	QPSK	1	49	Back	5mm	Ant 0	Full Power	40620	2593	22.89	24.00	1.291	62.9	1.006	0.04	0.482	0.626
	LTE Band 41	20M	QPSK	1	49	Back	5mm	Ant 0	Full Power	41055	2636.5	23.01	24.00	1.256	62.9	1.006	-0.16	0.897	1.133
	LTE Band 41	20M	QPSK	50	24	Back	5mm	Ant 0	Full Power	41490	2680	22.03	23.00	1.25	62.9	1.006	-0.04	0.656	0.825
	LTE Band 41	20M	QPSK	50	24	Back	5mm	Ant 0	Full Power	39750	2506	21.37	23.00	1.455	62.9	1.006	-0.15	0.260	0.381
	LTE Band 41	20M	QPSK	50	24	Back	5mm	Ant 0	Full Power	40185	2549.5	21.44	23.00	1.432	62.9	1.006	0.01	0.321	0.462
	LTE Band 41	20M	QPSK	50	24	Back	5mm	Ant 0	Full Power	40620	2593	21.51	23.00	1.409	62.9	1.006	-0.08	0.369	0.523
	LTE Band 41	20M	QPSK	50	24	Back	5mm	Ant 0	Full Power	41055	2636.5	21.63	23.00	1.371	62.9	1.006	0.01	0.725	1.000
	LTE Band 41	20M	QPSK	100	0	Back	5mm	Ant 0	Full Power	41490	2680	21.92	23.00	1.282	62.9	1.006	-0.08	0.660	0.851

【WLAN 2.4GHz_5GHz SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	Ant 1	Full Power	6	2437	16.92	18.00	1.282	100.0	1.0	-0.12	0.092	0.118
28	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 1	Full Power	6	2437	16.92	18.00	1.282	100.0	1.0	0.01	0.445	0.570
	WLAN5GHz	802.11a 6Mbps	Front	5mm	Ant 1	Full Power	60	5300	16.84	18	1.306	98.26	1.018	0.100	0.17	0.226
29	WLAN5GHz	802.11a 6Mbps	Back	5mm	Ant 1	Full Power	60	5300	16.84	18	1.306	98.26	1.018	0.080	0.8	1.064
	WLAN5GHz	802.11a 6Mbps	Back	5mm	Ant 1	Full Power	52	5260	16.77	18	1.327	98.26	1.018	-0.180	0.756	1.021
	WLAN5GHz	802.11a 6Mbps	Back	5mm	Ant 1	Full Power	56	5280	16.8	18	1.318	98.26	1.018	0.100	0.766	1.028
	WLAN5GHz	802.11a 6Mbps	Back	5mm	Ant 1	Full Power	64	5320	16.6	18	1.38	98.26	1.018	0.120	0.731	1.027
	WLAN5GHz	802.11a 6Mbps	Front	5mm	Ant 1	Full Power	144	5720	16.48	17.50	1.265	98.26	1.018	-0.04	0.113	0.146
30	WLAN5GHz	802.11a 6Mbps	Back	5mm	Ant 1	Full Power	144	5720	16.48	17.50	1.265	98.26	1.018	-0.02	0.777	1.001
	WLAN5GHz	802.11a 6Mbps	Back	5mm	Ant 1	Full Power	100	5500	16.10	17.00	1.23	98.26	1.018	-0.06	0.515	0.645
	WLAN5GHz	802.11a 6Mbps	Back	5mm	Ant 1	Full Power	132	5660	16.29	17.50	1.321	98.26	1.018	-0.03	0.738	0.992
	WLAN5GHz	802.11a 6Mbps	Front	5mm	Ant 1	Full Power	149	5745	16.09	17.00	1.233	98.26	1.018	-0.05	0.108	0.136
31	WLAN5GHz	802.11a 6Mbps	Back	5mm	Ant 1	Full Power	149	5745	16.09	17.00	1.233	98.26	1.018	-0.09	0.868	1.090
	WLAN5GHz	802.11a 6Mbps	Back	5mm	Ant 1	Full Power	157	5785	15.76	17.00	1.33	98.26	1.018	-0.16	0.710	0.961
	WLAN5GHz	802.11a 6Mbps	Back	5mm	Ant 1	Full Power	165	5825	15.63	17.00	1.371	98.26	1.018	-0.10	0.637	0.889

【Bluetooth SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	5mm	Ant 1	Full Power	39	2441	13.36	14.50	1.3	76.83	1.084	-0.02	0.001	0.001
32	Bluetooth	1Mbps	Back	5mm	Ant 1	Full Power	39	2441	13.36	14.50	1.3	76.83	1.084	-0.07	0.148	0.209

14.3 Extremity SAR

【WCDMA SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	0mm	Ant 0	Full Power	9400	1880	20.04	21.00	1.247	-0.09	0.769	0.959
	WCDMA II	RMC 12.2Kbps	Back	0mm	Ant 0	Full Power	9400	1880	20.04	21.00	1.247	-0.17	1.050	1.309
	WCDMA II	RMC 12.2Kbps	Left Side	0mm	Ant 0	Full Power	9400	1880	20.04	21.00	1.247	0.03	0.187	0.233
	WCDMA II	RMC 12.2Kbps	Right Side	0mm	Ant 0	Full Power	9400	1880	20.04	21.00	1.247	-0.01	0.053	0.066
33	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	Full Power	9400	1880	20.04	21.00	1.247	0.09	1.110	1.384
	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	Full Power	9262	1852.4	20.02	21.00	1.253	0.01	1.010	1.266
	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	Full Power	9538	1907.6	20.01	21.00	1.256	0.02	1.050	1.319
	WCDMA IV	RMC 12.2Kbps	Front	0mm	Ant 0	Full Power	1413	1732.6	19.75	20.50	1.189	-0.04	0.655	0.779
34	WCDMA IV	RMC 12.2Kbps	Back	0mm	Ant 0	Full Power	1413	1732.6	19.75	20.50	1.189	0.14	0.964	1.146
	WCDMA IV	RMC 12.2Kbps	Left Side	0mm	Ant 0	Full Power	1413	1732.6	19.75	20.50	1.189	-0.17	0.210	0.250
	WCDMA IV	RMC 12.2Kbps	Right Side	0mm	Ant 0	Full Power	1413	1732.6	19.75	20.50	1.189	0.15	0.067	0.080
	WCDMA IV	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	Full Power	1413	1732.6	19.75	20.50	1.189	0.11	0.429	0.510
35	WCDMA V	RMC 12.2Kbps	Front	0mm	Ant 0	Full Power	4182	836.4	20.98	21.50	1.127	0.07	0.706	0.796
	WCDMA V	RMC 12.2Kbps	Back	0mm	Ant 0	Full Power	4182	836.4	20.98	21.50	1.127	-0.12	0.688	0.775
	WCDMA V	RMC 12.2Kbps	Left Side	0mm	Ant 0	Full Power	4182	836.4	20.98	21.50	1.127	0.14	0.145	0.163
	WCDMA V	RMC 12.2Kbps	Right Side	0mm	Ant 0	Full Power	4182	836.4	20.98	21.50	1.127	-0.15	0.133	0.150
	WCDMA V	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	Full Power	4182	836.4	20.98	21.50	1.127	-0.18	0.281	0.317

【LTE SAR】

Plot No	Band	BW	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
36	LTE Band 7	20M	QPSK	1	0	Front	0mm	Ant 0	Full Power	21100	2535	21.95	23.00	1.274			0.00	0.993	1.265
	LTE Band 7	20M	QPSK	50	0	Front	0mm	Ant 0	Full Power	21100	2535	21.94	23.00	1.276			-0.13	0.830	1.059
	LTE Band 7	20M	QPSK	1	0	Back	0mm	Ant 0	Full Power	21100	2535	21.95	23.00	1.274			-0.09	0.543	0.692
	LTE Band 7	20M	QPSK	50	0	Back	0mm	Ant 0	Full Power	21100	2535	21.94	23.00	1.276			0.14	0.448	0.572
	LTE Band 7	20M	QPSK	1	0	Left Side	0mm	Ant 0	Full Power	21100	2535	21.95	23.00	1.274			0.17	0.373	0.475
	LTE Band 7	20M	QPSK	50	0	Left Side	0mm	Ant 0	Full Power	21100	2535	21.94	23.00	1.276			0.11	0.302	0.385
	LTE Band 7	20M	QPSK	1	0	Right Side	0mm	Ant 0	Full Power	21100	2535	21.95	23.00	1.274			0.06	0.166	0.211
	LTE Band 7	20M	QPSK	50	0	Right Side	0mm	Ant 0	Full Power	21100	2535	21.94	23.00	1.276			0.09	0.129	0.165
	LTE Band 7	20M	QPSK	1	0	Bottom Side	0mm	Ant 0	Full Power	21100	2535	21.95	23.00	1.274			0.04	0.865	1.102
	LTE Band 7	20M	QPSK	50	0	Bottom Side	0mm	Ant 0	Full Power	21100	2535	21.94	23.00	1.276			-0.09	0.689	0.879
	LTE Band 12	10M	QPSK	1	0	Front	0mm	Ant 0	Full Power	23095	707.5	23.15	24.00	1.216			0.00	0.608	0.739
	LTE Band 12	10M	QPSK	25	0	Front	0mm	Ant 0	Full Power	23095	707.5	21.99	23.00	1.262			-0.17	0.461	0.582
37	LTE Band 12	10M	QPSK	1	0	Back	0mm	Ant 0	Full Power	23095	707.5	23.15	24.00	1.216			0.17	0.897	1.091
	LTE Band 12	10M	QPSK	25	0	Back	0mm	Ant 0	Full Power	23095	707.5	21.99	23.00	1.262			0.13	0.688	0.868
	LTE Band 12	10M	QPSK	1	0	Left Side	0mm	Ant 0	Full Power	23095	707.5	23.15	24.00	1.216			-0.15	0.092	0.112
	LTE Band 12	10M	QPSK	25	0	Left Side	0mm	Ant 0	Full Power	23095	707.5	21.99	23.00	1.262			0.11	0.069	0.087
	LTE Band 12	10M	QPSK	1	0	Right Side	0mm	Ant 0	Full Power	23095	707.5	23.15	24.00	1.216			0.13	0.157	0.191
	LTE Band 12	10M	QPSK	25	0	Right Side	0mm	Ant 0	Full Power	23095	707.5	21.99	23.00	1.262			-0.12	0.114	0.144
	LTE Band 12	10M	QPSK	1	0	Bottom Side	0mm	Ant 0	Full Power	23095	707.5	23.15	24.00	1.216			-0.05	0.350	0.426
	LTE Band 12	10M	QPSK	25	0	Bottom Side	0mm	Ant 0	Full Power	23095	707.5	21.99	23.00	1.262			0.04	0.254	0.321
	LTE Band 13	10M	QPSK	1	0	Front	0mm	Ant 0	Full Power	23230	782	22.11	23.00	1.227			0.06	0.697	0.855
	LTE Band 13	10M	QPSK	25	0	Front	0mm	Ant 0	Full Power	23230	782	22.08	23.00	1.236			-0.01	0.529	0.654
38	LTE Band 13	10M	QPSK	1	0	Back	0mm	Ant 0	Full Power	23230	782	22.11	23.00	1.227			0.13	0.730	0.896
	LTE Band 13	10M	QPSK	25	0	Back	0mm	Ant 0	Full Power	23230	782	22.08	23.00	1.236			-0.08	0.548	0.677
	LTE Band 13	10M	QPSK	1	0	Left Side	0mm	Ant 0	Full Power	23230	782	22.11	23.00	1.227			-0.05	0.150	0.184
	LTE Band 13	10M	QPSK	25	0	Left Side	0mm	Ant 0	Full Power	23230	782	22.08	23.00	1.236			-0.05	0.114	0.141
	LTE Band 13	10M	QPSK	1	0	Right Side	0mm	Ant 0	Full Power	23230	782	22.11	23.00	1.227			0.05	0.169	0.207
	LTE Band 13	10M	QPSK	25	0	Right Side	0mm	Ant 0	Full Power	23230	782	22.08	23.00	1.236			-0.10	0.126	0.156
	LTE Band 13	10M	QPSK	1	0	Bottom Side	0mm	Ant 0	Full Power	23230	782	22.11	23.00	1.227			0.04	0.277	0.340
	LTE Band 13	10M	QPSK	25	0	Bottom Side	0mm	Ant 0	Full Power	23230	782	22.08	23.00	1.236			0.00	0.216	0.267
	LTE Band 14	10M	QPSK	1	0	Front	0mm	Ant 0	Full Power	23330	793	22.05	23	1.245			-0.160	0.604	0.752
	LTE Band 14	10M	QPSK	25	0	Front	0mm	Ant 0	Full Power	23330	793	22.04	23	1.247			0.040	0.449	0.56
52	LTE Band 14	10M	QPSK	1	0	Back	0mm	Ant 0	Full Power	23330	793	22.05	23	1.245			0.040	0.680	0.847
	LTE Band 14	10M	QPSK	25	0	Back	0mm	Ant 0	Full Power	23330	793	22.04	23	1.247			-0.170	0.468	0.584
	LTE Band 14	10M	QPSK	1	0	Left Side	0mm	Ant 0	Full Power	23330	793	22.05	23	1.245			-0.150	0.139	0.173
	LTE Band 14	10M	QPSK	25	0	Left Side	0mm	Ant 0	Full Power	23330	793	22.04	23	1.247			-0.030	0.103	0.128
	LTE Band 14	10M	QPSK	1	0	Right Side	0mm	Ant 0	Full Power	23330	793	22.05	23	1.245			0.080	0.143	0.178
	LTE Band 14	10M	QPSK	25	0	Right Side	0mm	Ant 0	Full Power	23330	793	22.04	23	1.247			-0.030	0.106	0.132
	LTE Band 14	10M	QPSK	1	0	Bottom Side	0mm	Ant 0	Full Power	23330	793	22.05	23	1.245			-0.070	0.239	0.298
	LTE Band 14	10M	QPSK	25	0	Bottom Side	0mm	Ant 0	Full Power	23330	793	22.04	23	1.247			-0.190	0.188	0.234
	LTE Band 25	20M	QPSK	1	0	Front	0mm	Ant 0	Full Power	26340	1880	19.68	21.00	1.355			0.02	0.663	0.898
	LTE Band 25	20M	QPSK	50	0	Front	0mm	Ant 0	Full Power	26340	1880	19.66	21.00	1.361			0.14	0.542	0.738
	LTE Band 25	20M	QPSK	1	0	Back	0mm	Ant 0	Full Power	26340	1880	19.68	21.00	1.355			-0.13	0.958	1.298
	LTE Band 25	20M	QPSK	50	0	Back	0mm	Ant 0	Full Power	26340	1880	19.66	21.00	1.361			-0.16	0.752	1.023
	LTE Band 25	20M	QPSK	1	0	Left Side	0mm	Ant 0	Full Power	26340	1880	19.68	21.00	1.355			-0.03	0.158	0.214



FCC SAR Test Report

Report No. : FA572113

	LTE Band 25	20M	QPSK	50	0	Left Side	0mm	Ant 0	Full Power	26340	1880	19.66	21.00	1.361			-0.00	0.134	0.182
	LTE Band 25	20M	QPSK	1	0	Right Side	0mm	Ant 0	Full Power	26340	1880	19.68	21.00	1.355			0.11	0.052	0.070
	LTE Band 25	20M	QPSK	50	0	Right Side	0mm	Ant 0	Full Power	26340	1880	19.66	21.00	1.361			-0.16	0.039	0.053
39	LTE Band 25	20M	QPSK	1	0	Bottom Side	0mm	Ant 0	Full Power	26340	1880	19.68	21.00	1.355			0.07	0.980	1.328
	LTE Band 25	20M	QPSK	50	0	Bottom Side	0mm	Ant 0	Full Power	26340	1880	19.66	21.00	1.361			-0.12	0.785	1.068
	LTE Band 26	15M	QPSK	1	0	Front	0mm	Ant 0	Full Power	26865	831.5	21.13	22.00	1.222			0.03	0.668	0.816
	LTE Band 26	15M	QPSK	36	0	Front	0mm	Ant 0	Full Power	26865	831.5	21.07	22.00	1.239			-0.04	0.561	0.695
40	LTE Band 26	15M	QPSK	1	0	Back	0mm	Ant 0	Full Power	26865	831.5	21.13	22.00	1.222			0.08	0.669	0.818
	LTE Band 26	15M	QPSK	36	0	Back	0mm	Ant 0	Full Power	26865	831.5	21.07	22.00	1.239			-0.06	0.566	0.701
	LTE Band 26	15M	QPSK	1	0	Left Side	0mm	Ant 0	Full Power	26865	831.5	21.13	22.00	1.222			-0.15	0.165	0.202
	LTE Band 26	15M	QPSK	36	0	Left Side	0mm	Ant 0	Full Power	26865	831.5	21.07	22.00	1.239			-0.07	0.132	0.164
	LTE Band 26	15M	QPSK	1	0	Right Side	0mm	Ant 0	Full Power	26865	831.5	21.13	22.00	1.222			-0.14	0.152	0.186
	LTE Band 26	15M	QPSK	36	0	Right Side	0mm	Ant 0	Full Power	26865	831.5	21.07	22.00	1.239			0.17	0.114	0.141
	LTE Band 26	15M	QPSK	1	0	Bottom Side	0mm	Ant 0	Full Power	26865	831.5	21.13	22.00	1.222			0.14	0.271	0.331
	LTE Band 26	15M	QPSK	36	0	Bottom Side	0mm	Ant 0	Full Power	26865	831.5	21.07	22.00	1.239			-0.03	0.219	0.271
	LTE Band 66	20M	QPSK	1	0	Front	0mm	Ant 0	Full Power	132322	1745	19.71	21.00	1.346			0.16	0.535	0.720
	LTE Band 66	20M	QPSK	50	0	Front	0mm	Ant 0	Full Power	132322	1745	19.69	21.00	1.352			-0.17	0.448	0.606
41	LTE Band 66	20M	QPSK	1	0	Back	0mm	Ant 0	Full Power	132322	1745	19.71	21.00	1.346			0.08	0.832	1.120
	LTE Band 66	20M	QPSK	50	0	Back	0mm	Ant 0	Full Power	132322	1745	19.69	21.00	1.352			0.14	0.649	0.877
	LTE Band 66	20M	QPSK	1	0	Left Side	0mm	Ant 0	Full Power	132322	1745	19.71	21.00	1.346			0.17	0.153	0.206
	LTE Band 66	20M	QPSK	50	0	Left Side	0mm	Ant 0	Full Power	132322	1745	19.69	21.00	1.352			-0.03	0.123	0.166
	LTE Band 66	20M	QPSK	1	0	Right Side	0mm	Ant 0	Full Power	132322	1745	19.71	21.00	1.346			0.03	0.065	0.087
	LTE Band 66	20M	QPSK	50	0	Right Side	0mm	Ant 0	Full Power	132322	1745	19.69	21.00	1.352			-0.14	0.049	0.066
	LTE Band 66	20M	QPSK	1	0	Bottom Side	0mm	Ant 0	Full Power	132322	1745	19.71	21.00	1.346			0.19	0.395	0.532
	LTE Band 66	20M	QPSK	50	0	Bottom Side	0mm	Ant 0	Full Power	132322	1745	19.69	21.00	1.352			0.15	0.324	0.438
	LTE Band 71	20M	QPSK	1	0	Front	0mm	Ant 0	Full Power	133297	680.5	22.83	24.00	1.309			0.17	0.465	0.609
	LTE Band 71	20M	QPSK	50	0	Front	0mm	Ant 0	Full Power	133297	680.5	22.19	23.00	1.205			0.17	0.371	0.447
42	LTE Band 71	20M	QPSK	1	0	Back	0mm	Ant 0	Full Power	133297	680.5	22.83	24.00	1.309			0.03	0.570	0.746
	LTE Band 71	20M	QPSK	50	0	Back	0mm	Ant 0	Full Power	133297	680.5	22.19	23.00	1.205			0.16	0.436	0.525
	LTE Band 71	20M	QPSK	1	0	Left Side	0mm	Ant 0	Full Power	133297	680.5	22.83	24.00	1.309			0.17	0.085	0.111
	LTE Band 71	20M	QPSK	50	0	Left Side	0mm	Ant 0	Full Power	133297	680.5	22.19	23.00	1.205			-0.01	0.063	0.076
	LTE Band 71	20M	QPSK	1	0	Right Side	0mm	Ant 0	Full Power	133297	680.5	22.83	24.00	1.309			0.10	0.145	0.190
	LTE Band 71	20M	QPSK	50	0	Right Side	0mm	Ant 0	Full Power	133297	680.5	22.19	23.00	1.205			0.03	0.103	0.124
	LTE Band 71	20M	QPSK	1	0	Bottom Side	0mm	Ant 0	Full Power	133297	680.5	22.83	24.00	1.309			-0.08	0.222	0.291
	LTE Band 71	20M	QPSK	50	0	Bottom Side	0mm	Ant 0	Full Power	133297	680.5	22.19	23.00	1.205			-0.15	0.177	0.213
43	LTE Band 41	20M	QPSK	1	49	Front	0mm	Ant 0	Full Power	41490	2680	23.47	24.00	1.113	62.9	1.006	0.04	1.010	1.148
	LTE Band 41	20M	QPSK	50	24	Front	0mm	Ant 0	Full Power	41490	2680	22.03	23.00	1.25	62.9	1.006	0.18	0.746	0.938
	LTE Band 41	20M	QPSK	1	49	Back	0mm	Ant 0	Full Power	41490	2680	23.47	24.00	1.113	62.9	1.006	0.13	0.762	0.866
	LTE Band 41	20M	QPSK	50	24	Back	0mm	Ant 0	Full Power	41490	2680	22.03	23.00	1.25	62.9	1.006	0.08	0.622	0.782
	LTE Band 41	20M	QPSK	1	49	Left Side	0mm	Ant 0	Full Power	41490	2680	23.47	24.00	1.113	62.9	1.006	-0.01	0.600	0.682
	LTE Band 41	20M	QPSK	50	24	Left Side	0mm	Ant 0	Full Power	41490	2680	22.03	23.00	1.25	62.9	1.006	0.05	0.455	0.572
	LTE Band 41	20M	QPSK	1	49	Right Side	0mm	Ant 0	Full Power	41490	2680	23.47	24.00	1.113	62.9	1.006	0.03	0.060	0.068
	LTE Band 41	20M	QPSK	50	24	Right Side	0mm	Ant 0	Full Power	41490	2680	22.03	23.00	1.25	62.9	1.006	-0.12	0.046	0.058
	LTE Band 41	20M	QPSK	1	49	Bottom Side	0mm	Ant 0	Full Power	41490	2680	23.47	24.00	1.113	62.9	1.006	-0.13	0.554	0.630
	LTE Band 41	20M	QPSK	50	24	Bottom Side	0mm	Ant 0	Full Power	41490	2680	22.03	23.00	1.25	62.9	1.006	0.09	0.427	0.537



【WLAN 2.4GHz_5GHz SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
44	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 1	Full Power	6	2437	16.92	18.00	1.282	100.0	1.0	0.05	0.130	0.167
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 1	Full Power	6	2437	16.92	18.00	1.282	100.0	1.0	0.09	0.581	0.745
	WLAN2.4GHz	802.11b 1Mbps	Right Side	0mm	Ant 1	Full Power	6	2437	16.92	18.00	1.282	100.0	1.0	0.09	0.533	0.683
	WLAN2.4GHz	802.11b 1Mbps	Top Side	0mm	Ant 1	Full Power	6	2437	16.92	18.00	1.282	100.0	1.0	0.14	0.062	0.079
46	WLAN5GHz	802.11a 6Mbps	Front	0mm	Ant 1	Full Power	60	5300	16.84	18.00	1.306	98.26	1.018	0.080	0.100	0.133
	WLAN5GHz	802.11a 6Mbps	Back	0mm	Ant 1	Full Power	60	5300	16.84	18.00	1.306	98.26	1.018	0.010	0.460	0.612
	WLAN5GHz	802.11a 6Mbps	Right Side	0mm	Ant 1	Full Power	60	5300	16.84	18.00	1.306	98.26	1.018	0.030	0.377	0.501
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	Ant 1	Full Power	60	5300	16.84	18.00	1.306	98.26	1.018	-0.080	0.033	0.044
47	WLAN5GHz	802.11a 6Mbps	Front	0mm	Ant 1	Full Power	144	5720	16.48	17.50	1.265	98.26	1.018	0.05	0.081	0.104
	WLAN5GHz	802.11a 6Mbps	Back	0mm	Ant 1	Full Power	144	5720	16.48	17.50	1.265	98.26	1.018	0.18	0.547	0.704
	WLAN5GHz	802.11a 6Mbps	Right Side	0mm	Ant 1	Full Power	144	5720	16.48	17.50	1.265	98.26	1.018	-0.13	0.434	0.559
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	Ant 1	Full Power	144	5720	16.48	17.50	1.265	98.26	1.018	0.16	0.040	0.052
48	WLAN5GHz	802.11a 6Mbps	Front	0mm	Ant 1	Full Power	149	5745	16.09	17.00	1.233	98.26	1.018	0.02	0.120	0.151
	WLAN5GHz	802.11a 6Mbps	Back	0mm	Ant 1	Full Power	149	5745	16.09	17.00	1.233	98.26	1.018	0.01	0.565	0.709
	WLAN5GHz	802.11a 6Mbps	Right Side	0mm	Ant 1	Full Power	149	5745	16.09	17.00	1.233	98.26	1.018	0.15	0.541	0.679
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	Ant 1	Full Power	149	5745	16.09	17.00	1.233	98.26	1.018	-0.14	0.052	0.065

【Bluetooth SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
49	Bluetooth	1Mbps	Front	0mm	Ant 1	Full Power	39	2441	13.36	14.50	1.3	76.83	1.084	0.16	0.040	0.056
	Bluetooth	1Mbps	Back	0mm	Ant 1	Full Power	39	2441	13.36	14.50	1.3	76.83	1.084	0.02	0.168	0.237
	Bluetooth	1Mbps	Right Side	0mm	Ant 1	Full Power	39	2441	13.36	14.50	1.3	76.83	1.084	0.16	0.159	0.224
	Bluetooth	1Mbps	Top Side	0mm	Ant 1	Full Power	39	2441	13.36	14.50	1.3	76.83	1.084	0.15	0.001	0.001



14.4 Repeated SAR Measurement

【Repeat SAR 1g - FCC】

No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Ratio
1st	LTE Band 14	10M_QPSK_1_0	Back	5.0	Ant 0	Full Power	23330	793	22.05	23.00	1.245			0.11	0.853	1.062	-
2nd	LTE Band 14	10M_QPSK_1_0	Back	5.0	Ant 0	Full Power	23330	793	22.05	23.00	1.245			0.02	0.811	1.01	1.05
1st	WCDMA V	RMC 12.2Kbps	Back	5.0	Ant 0	Full Power	4132	826.4	20.96	21.50	1.132			-0.00	0.858	0.971	-
2nd	WCDMA V	RMC 12.2Kbps	Back	5.0	Ant 0	Full Power	4132	826.4	20.96	21.50	1.132			0.01	0.803	0.909	1.07
1st	WCDMA IV	RMC 12.2Kbps	Back	5.0	Ant 0	Full Power	1413	1732.6	19.75	20.50	1.189			0.03	0.887	1.055	-
2nd	WCDMA IV	RMC 12.2Kbps	Back	5.0	Ant 0	Full Power	1413	1732.6	19.75	20.50	1.189			0.01	0.821	0.976	1.08
1st	WCDMA II	RMC 12.2Kbps	Back	5.0	Ant 0	Full Power	9400	1880	20.04	21.00	1.247			-0.11	0.872	1.087	-
2nd	WCDMA II	RMC 12.2Kbps	Back	5.0	Ant 0	Full Power	9400	1880	20.04	21.00	1.247			0.02	0.813	1.014	1.07
1st	LTE Band 41	20M_QPSK_1_49	Front	5.0	Ant 0	Full Power	41055	2636.5	23.01	24.00	1.256	62.9	1.006	0.07	0.902	1.140	-
2nd	LTE Band 41	20M_QPSK_1_49	Front	5.0	Ant 0	Full Power	41055	2636.5	23.01	24.00	1.256	62.9	1.006	0.03	0.876	1.107	1.03
1st	WLAN5GHz	802.11a 6Mbps	Back	5.0	Ant 1	Full Power	149	5745	16.09	17.00	1.233	98.26	1.018	-0.09	0.868	1.090	-
2nd	WLAN5GHz	802.11a 6Mbps	Back	5.0	Ant 1	Full Power	149	5745	16.09	17.00	1.233	98.26	1.018	0.02	0.835	1.048	1.04

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Point of Sale Terminal		
		Head	Body-worn	Extremity
1.	WWAN + WLAN 2.4GHz	Yes	Yes	Yes
2.	WWAN + WLAN 5GHz	Yes	Yes	Yes
3.	WWAN + Bluetooth	Yes	Yes	Yes
4.	WWAN + WLAN 2.4GHz + NFC			Yes
5.	WWAN + WLAN 5GHz+ NFC			Yes
6.	WWAN + Bluetooth + NFC			Yes

General Note:

- EUT will choose each WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment though they have independent antenna.
- WLAN 2.4GHz and Bluetooth share the same antenna and they can't transmit simultaneously.
- NFC can transmit simultaneously with other Radios in extremity exposure condition.
- For standalone WWAN, always choose the highest SAR among the selected WWAN bands within the selected antenna for each exposure position to perform simultaneous transmission analysis with WLAN/BT. This is the worst co-located analysis and can represent each band.
- All licensed modes share the same antenna part and cannot transmit simultaneously.
- The reported SAR summation is calculated based on the same configuration and test position
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.
 - The SPLSR calculated results please refer to section 15.4.

15.1 Head Exposure Conditions

WWAN	Exposure Position	1	3	4	5	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)
		WWAN1 1g SAR (W/kg)	2.4GHz WLAN Ant 1 1g SAR (W/kg)	5GHz WLAN Ant 1 1g SAR (W/kg)	Bluetooth Ant 1 1g SAR (W/kg)			
WWAN All Bands	Right Cheek	0.492	0.138	0.142	0.001	0.63	0.63	0.49
	Right Tilted	0.287	0.144	0.163	0.001	0.43	0.45	0.29
	Left Cheek	0.591	0.171	0.187	0.062	0.76	0.78	0.65
	Left Tilted	0.326	0.135	0.126	0.001	0.46	0.45	0.33

15.2 Body-Worn Exposure Conditions

WWAN1	Exposure Position	1	3	4	5	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	Case No
		WWAN1 1g SAR (W/kg)	2.4GHz WLAN Ant 1 1g SAR (W/kg)	5GHz WLAN Ant 1 1g SAR (W/kg)	Bluetooth Ant 1 1g SAR (W/kg)				
WCDMA II Ant 0	Front at 5mm	0.572	0.118	0.226	0.001	0.69	0.80	0.57	
	Back at 5mm	1.087	0.570	1.090	0.209	1.66	2.18	1.30	1/2
WCDMA IV Ant 0	Front at 5mm	0.674	0.118	0.226	0.001	0.79	0.90	0.68	
	Back at 5mm	1.079	0.570	1.090	0.209	1.65	2.17	1.29	3/4
WCDMA V Ant 0	Front at 5mm	0.633	0.118	0.226	0.001	0.75	0.86	0.63	
	Back at 5mm	0.971	0.570	1.090	0.209	1.54	2.06	1.18	5
LTE Band 7 Ant 0	Front at 5mm	1.011	0.118	0.226	0.001	1.13	1.24	1.01	
	Back at 5mm	0.743	0.570	1.090	0.209	1.31	1.83	0.95	6
LTE Band 12 Ant 0	Front at 5mm	0.372	0.118	0.226	0.001	0.49	0.60	0.37	
	Back at 5mm	0.647	0.570	1.090	0.209	1.22	1.74	0.86	7
LTE Band 13 Ant 0	Front at 5mm	0.72	0.118	0.226	0.001	0.84	0.95	0.72	
	Back at 5mm	1.021	0.570	1.090	0.209	1.59	2.11	1.23	8
LTE Band 14 Ant 0	Front at 5mm	0.708	0.118	0.226	0.001	0.83	0.93	0.71	
	Back at 5mm	1.062	0.570	1.090	0.209	1.63	2.15	1.27	9/10
LTE Band 25 Ant 0	Front at 5mm	0.554	0.118	0.226	0.001	0.67	0.78	0.56	
	Back at 5mm	1.091	0.570	1.090	0.209	1.66	2.18	1.30	11/12
LTE Band 26 Ant 0	Front at 5mm	0.693	0.118	0.226	0.001	0.81	0.92	0.69	
	Back at 5mm	0.989	0.570	1.090	0.209	1.56	2.08	1.20	13
LTE Band 66 Ant 0	Front at 5mm	0.579	0.118	0.226	0.001	0.70	0.81	0.58	
	Back at 5mm	0.984	0.570	1.090	0.209	1.55	2.07	1.19	14
LTE Band 71 Ant 0	Front at 5mm	0.459	0.118	0.226	0.001	0.58	0.69	0.46	
	Back at 5mm	0.681	0.570	1.090	0.209	1.25	1.77	0.89	15
LTE Band 41 Ant 0	Front at 5mm	1.14	0.118	0.226	0.001	1.26	1.37	1.14	
	Back at 5mm	1.133	0.570	1.090	0.209	1.70	2.22	1.34	16/17

15.3 Extremity Exposure Conditions


WWAN	Exposure Position	1	3	4	5	6	1+3+6 Summed 10g SAR (W/kg)	1+4+6 Summed 10g SAR (W/kg)	1+5+6 Summed 10g SAR (W/kg)
		WWAN1 10g SAR (W/kg)	2.4GHz WLAN Ant 1 10g SAR (W/kg)	5GHz WLAN Ant 1 10g SAR (W/kg)	Bluetooth Ant 1 10g SAR (W/kg)	NFC 10g SAR (W/kg)			
WWAN All Bands	Front	1.265	0.167	0.151	0.056	0.143	1.58	1.56	1.46
	Back	1.309	0.745	0.709	0.237	0.086	2.14	2.10	1.63
	Left Side	0.682				0.079	0.76	0.76	0.76
	Right Side	0.211	0.683	0.679	0.224	0.060	0.95	0.95	0.5
	Top Side		0.079	0.065	0.001	0.078	0.16	0.14	0.08
	Bottom Side	1.384				0.001	1.39	1.39	1.39

Note: NFC SAR value is from another NFC SAR report which is submitted separately.

15.4 SPLSR Evaluation and Analysis

General Note:

1. When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
2. $SPLSR = (SAR_1 + SAR_2)1.5 / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$ for 1g SAR, simultaneously transmission SAR measurement is not necessary.
3. The detail hotspot point for each transmitter in each exposure condition are showing as below figure and the minimum 3D distance for each sum combination is used for SPLSR analysis.

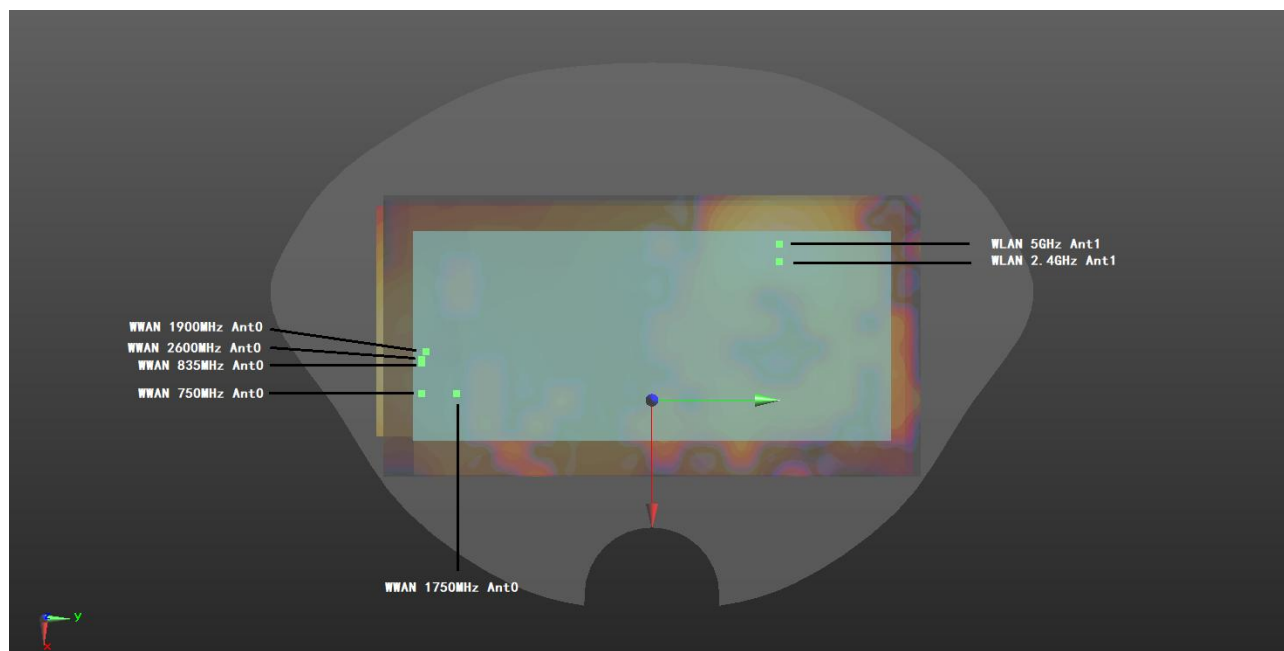

WWAN + WLAN (Back 5mm)_Body-worn

<Body-worn>

Case No	Band	Position	SAR 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 1	WCDMA II Ant 0	Back	1.087	5mm	6	-88.5	-1.1	141.8	1.66	0.02	Not required
	WLAN2.4GHz Ant 1		0.570	5mm	-33	47.8	-1.94				
Case 2	WCDMA II Ant 0	Back	1.087	5mm	6	-88.5	-1.1	142.6	2.18	0.02	Not required
	WLAN5GHz Ant 1		1.090	5mm	-37.8	47.2	-1.76				
Case 3	WCDMA IV Ant 0	Back	1.079	5mm	16.3	-81.3	-1.08	138.2	1.65	0.02	Not required
	WLAN2.4GHz Ant 1		0.570	5mm	-33	47.8	-1.94				
Case 4	WCDMA IV Ant 0	Back	1.079	5mm	16.3	-81.3	-1.08	139.4	2.17	0.02	Not required
	WLAN5GHz Ant 1		1.090	5mm	-37.8	47.2	-1.76				
Case 5	WCDMA V Ant 0	Back	0.971	5mm	15.3	-85.2	-1.05	142.7	2.06	0.02	Not required
	WLAN5GHz Ant 1		1.090	5mm	-37.8	47.2	-1.76				
Case 6	LTE Band 7 Ant 0	Back	0.743	5mm	-29.8	-85.6	-1.3	133.0	1.83	0.02	Not required
	WLAN5GHz Ant 1		1.090	5mm	-37.8	47.2	-1.76				
Case 7	LTE Band 12 Ant 0	Back	0.647	5mm	20.9	-91.6	-0.99	150.7	1.74	0.02	Not required
	WLAN5GHz Ant 1		1.090	5mm	-37.8	47.2	-1.76				
Case 8	LTE Band 13 Ant 0	Back	1.021	5mm	20.9	-90	-0.99	149.2	2.11	0.02	Not required
	WLAN5GHz Ant 1		1.090	5mm	-37.8	47.2	-1.76				
Case 9	LTE Band 14 Ant 0	Back	1.062	5mm	20.9	-90	-0.96	148.0	1.63	0.01	Not required
	WLAN2.4GHz Ant 1		0.570	5mm	-33	47.8	-1.94				
Case 10	LTE Band 14 Ant 0	Back	1.062	5mm	20.9	-90	-0.96	149.2	2.15	0.02	Not required
	WLAN5GHz Ant 1		1.090	5mm	-37.8	47.2	-1.76				
Case 11	LTE Band 25 Ant 0	Back	1.091	5mm	9	-90	-1.09	144.1	1.66	0.01	Not required
	WLAN2.4GHz Ant 1		0.570	5mm	-33	47.8	-1.94				
Case 12	LTE Band 25 Ant 0	Back	1.091	5mm	9	-90	-1.09	145.0	2.18	0.02	Not required
	WLAN5GHz Ant 1		1.090	5mm	-37.8	47.2	-1.76				
Case 13	LTE Band 26 Ant 0	Back	0.989	5mm	17.9	-87	-1.03	145.3	2.08	0.02	Not required
	WLAN5GHz Ant 1		1.090	5mm	-37.8	47.2	-1.76				
Case 14	LTE Band 66 Ant 0	Back	0.984	5mm	19.3	-81.3	-1.04	140.6	2.07	0.02	Not required
	WLAN5GHz Ant 1		1.090	5mm	-37.8	47.2	-1.76				
Case 15	LTE Band 71 Ant 0	Back	0.681	5mm	14.7	-91.8	-0.96	148.6	1.77	0.02	Not required
	WLAN5GHz Ant 1		1.090	5mm	-37.8	47.2	-1.76				
Case 16	LTE Band 41 Ant 0	Back	1.133	5mm	-29.7	-85.1	-1.2	132.9	1.70	0.02	Not required
	WLAN2.4GHz Ant 1		0.570	5mm	-33	47.8	-1.94				
Case 17	LTE Band 41 Ant 0	Back	1.133	5mm	-29.7	-85.1	-1.2	132.5	2.22	0.03	Not required
	WLAN5GHz Ant 1		1.090	5mm	-37.8	47.2	-1.76				

Test Engineer : Martin Li, Varus Wang, Light Wang, Ricky Gu

16. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [11] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.



Appendixes

Please refer to separated files for the following appendixes

Appendix A. Plots of System Performance Check

Appendix B. Plots of High SAR Measurement

Appendix C. DASY Calibration Certificate

Appendix D. Test Setup Photos

Appendix E. Conducted RF Output Power Table

-----THE END-----