


Appendix A. Test Result of AC Power Line Conducted Emission

TX_BLE2M_2440MHz_Line

Site :HY-SR01
Condition :Line
Mode :TX_BLE2M_2440MHz
test by :Kevin

Level (dBuV)

Date: 2025-06-12

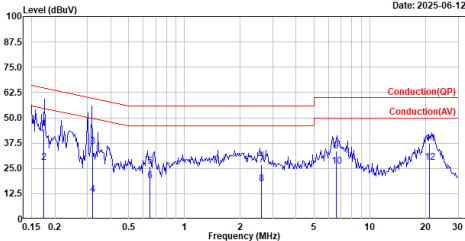

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.175	44.65	64.73	-20.08	35.01	9.64	QP
2	0.175	27.88	54.73	-26.85	18.24	9.64	Average
3	0.320	35.89	59.70	-23.81	26.25	9.64	QP
4	0.320	12.18	49.70	-37.52	2.54	9.64	Average
5	0.651	26.18	56.00	-29.82	16.51	9.67	QP
6	0.651	18.81	46.00	-27.19	9.14	9.67	Average
7	2.594	26.94	56.00	-29.06	17.09	9.85	QP
8	2.594	17.43	46.00	-28.57	7.58	9.85	Average
9	6.589	33.56	60.00	-26.44	23.41	10.15	QP
10	6.589	26.04	50.00	-23.96	15.89	10.15	Average
11	20.987	37.28	60.00	-22.72	27.41	9.87	QP
12	20.987	27.89	50.00	-22.11	18.02	9.87	Average


Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

TX_BLE2M_2440MHz_Neutral

Site :HY-SR01
Condition :Neutral
Mode :TX_BLE2M_2440MHz
test by :Kevin

Level (dBuV)

Date: 2025-06-12

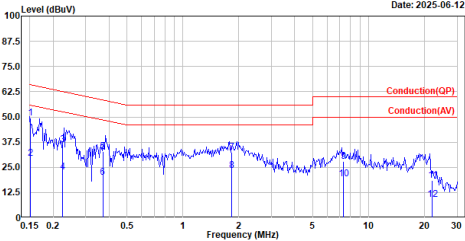


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.151	49.52	65.94	-16.42	39.90	9.62	QP
2	0.151	29.53	55.94	-26.41	19.91	9.62	Average
3	0.225	36.16	62.65	-26.49	26.54	9.62	QP
4	0.225	22.70	52.65	-29.95	13.08	9.62	Average
5	0.371	32.88	58.49	-25.61	23.26	9.62	QP
6	0.371	19.83	48.49	-28.66	10.21	9.62	Average
7	1.832	32.31	56.00	-23.69	22.57	9.74	QP
8	1.832	23.28	46.00	-22.72	13.54	9.74	Average
9	7.294	27.81	60.00	-32.19	17.65	10.16	QP
10	7.294	19.38	50.00	-30.62	9.22	10.16	Average
11	22.026	18.57	60.00	-41.43	8.59	9.98	QP
12	22.026	9.16	50.00	-40.84	-0.82	9.98	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Appendix B. Test Result of 6dB Bandwidth

Modulation	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
		Ant. 1		
GFSK (1Mbps)	2402	0.70	0.50	Pass
	2440	0.70	0.50	Pass
	2480	0.70	0.50	Pass
GFSK (2Mbps)	2404	1.20	0.50	Pass
	2440	1.20	0.50	Pass
	2478	1.20	0.50	Pass

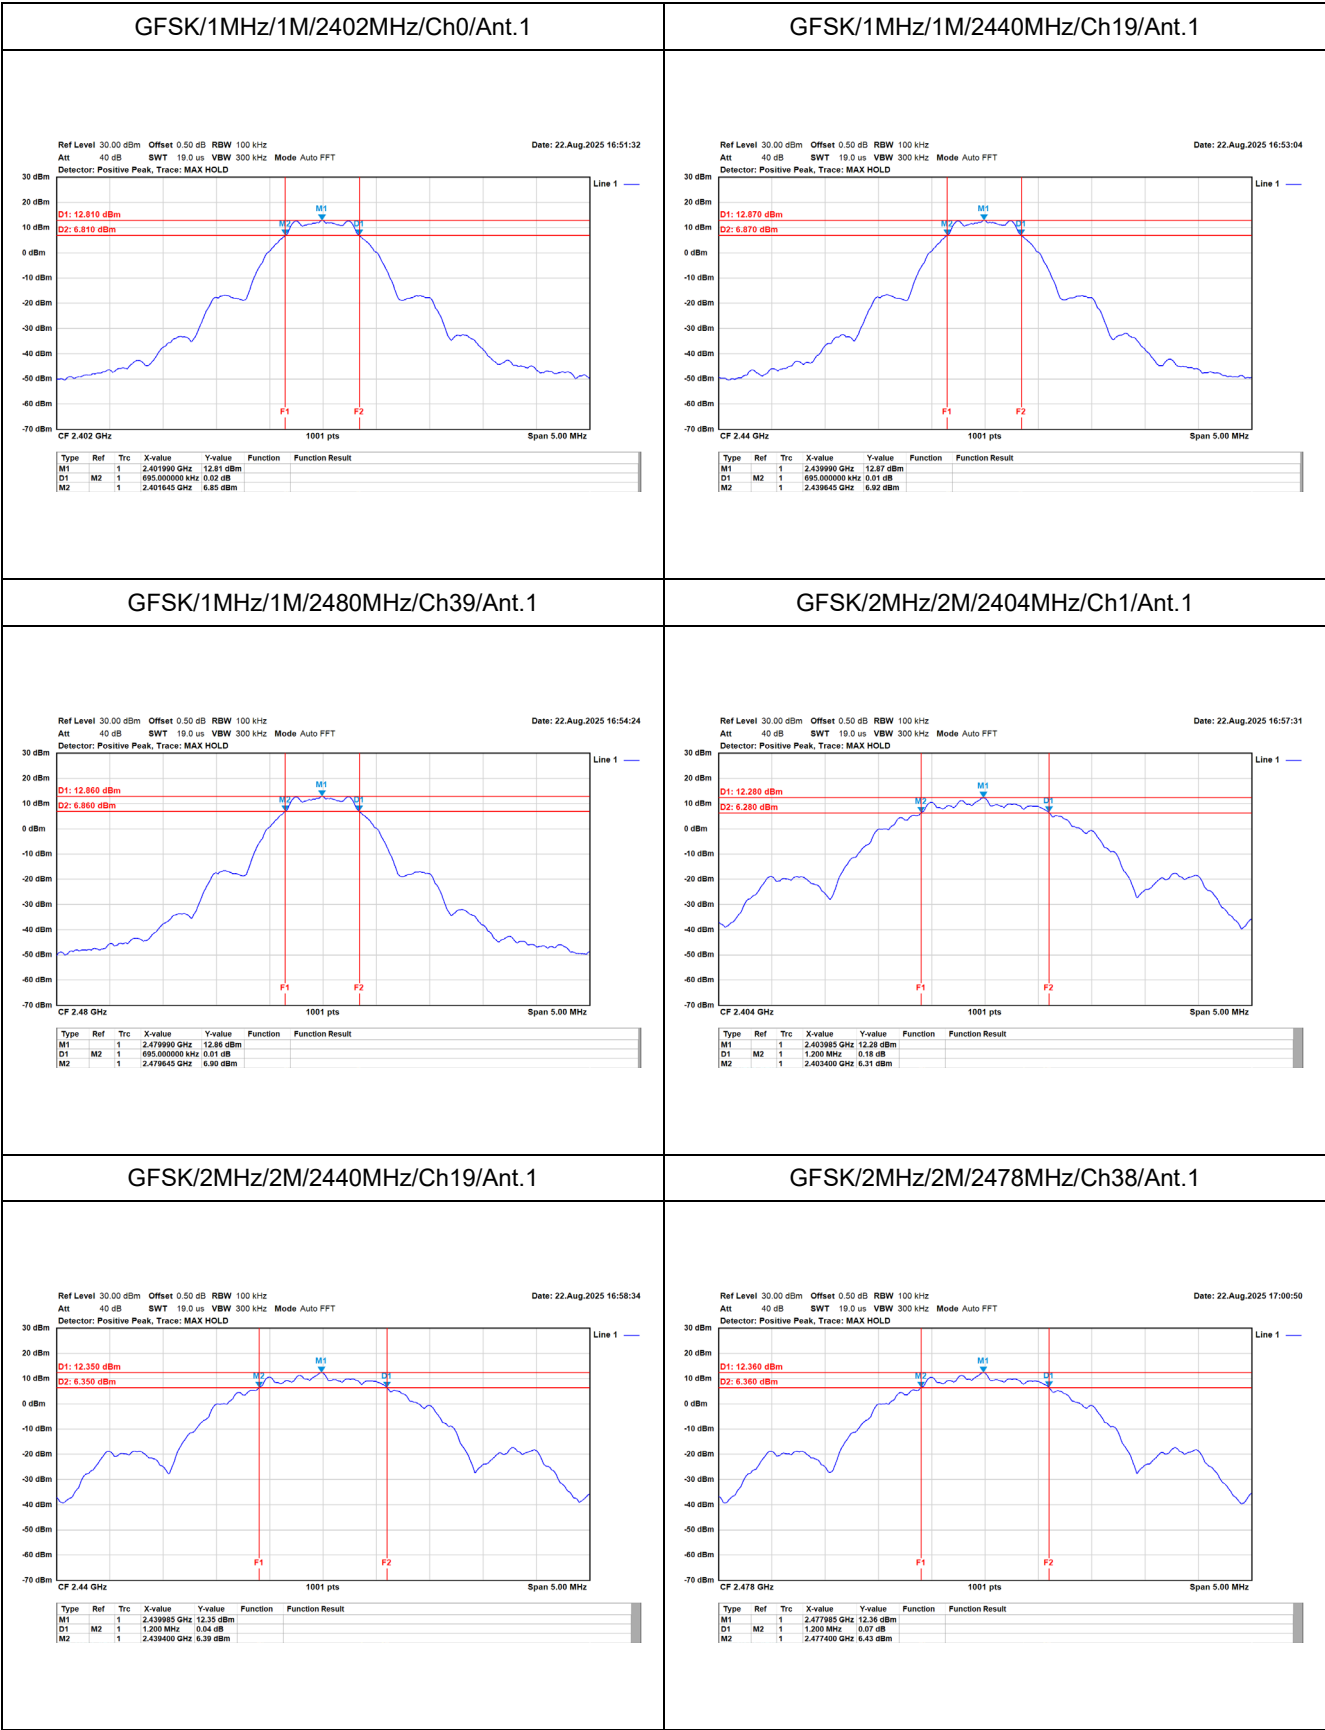

Appendix C. Test Result of Maximum Peak Conducted Output Power

Low Power


Modulation	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)	Result
GFSK (1Mbps)	2402	5.21	30.00	Pass
	2440	4.94	30.00	Pass
	2480	4.74	30.00	Pass
GFSK (2Mbps)	2404	5.23	30.00	Pass
	2440	4.94	30.00	Pass
	2478	4.88	30.00	Pass

High Power

Modulation	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)	Result
GFSK (1Mbps)	2402	14.56	30.00	Pass
	2440	14.49	30.00	Pass
	2480	14.28	30.00	Pass
GFSK (2Mbps)	2404	14.60	30.00	Pass
	2440	14.50	30.00	Pass
	2478	14.37	30.00	Pass


Appendix D. Test Result of Power Spectral Density


Modulation	Frequency (MHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
		Ant. 1		
GFSK (1Mbps)	2402	0.45	8.00	Pass
	2440	0.50	8.00	Pass
	2480	0.48	8.00	Pass
GFSK (2Mbps)	2404	-2.12	8.00	Pass
	2440	-2.05	8.00	Pass
	2478	-2.06	8.00	Pass

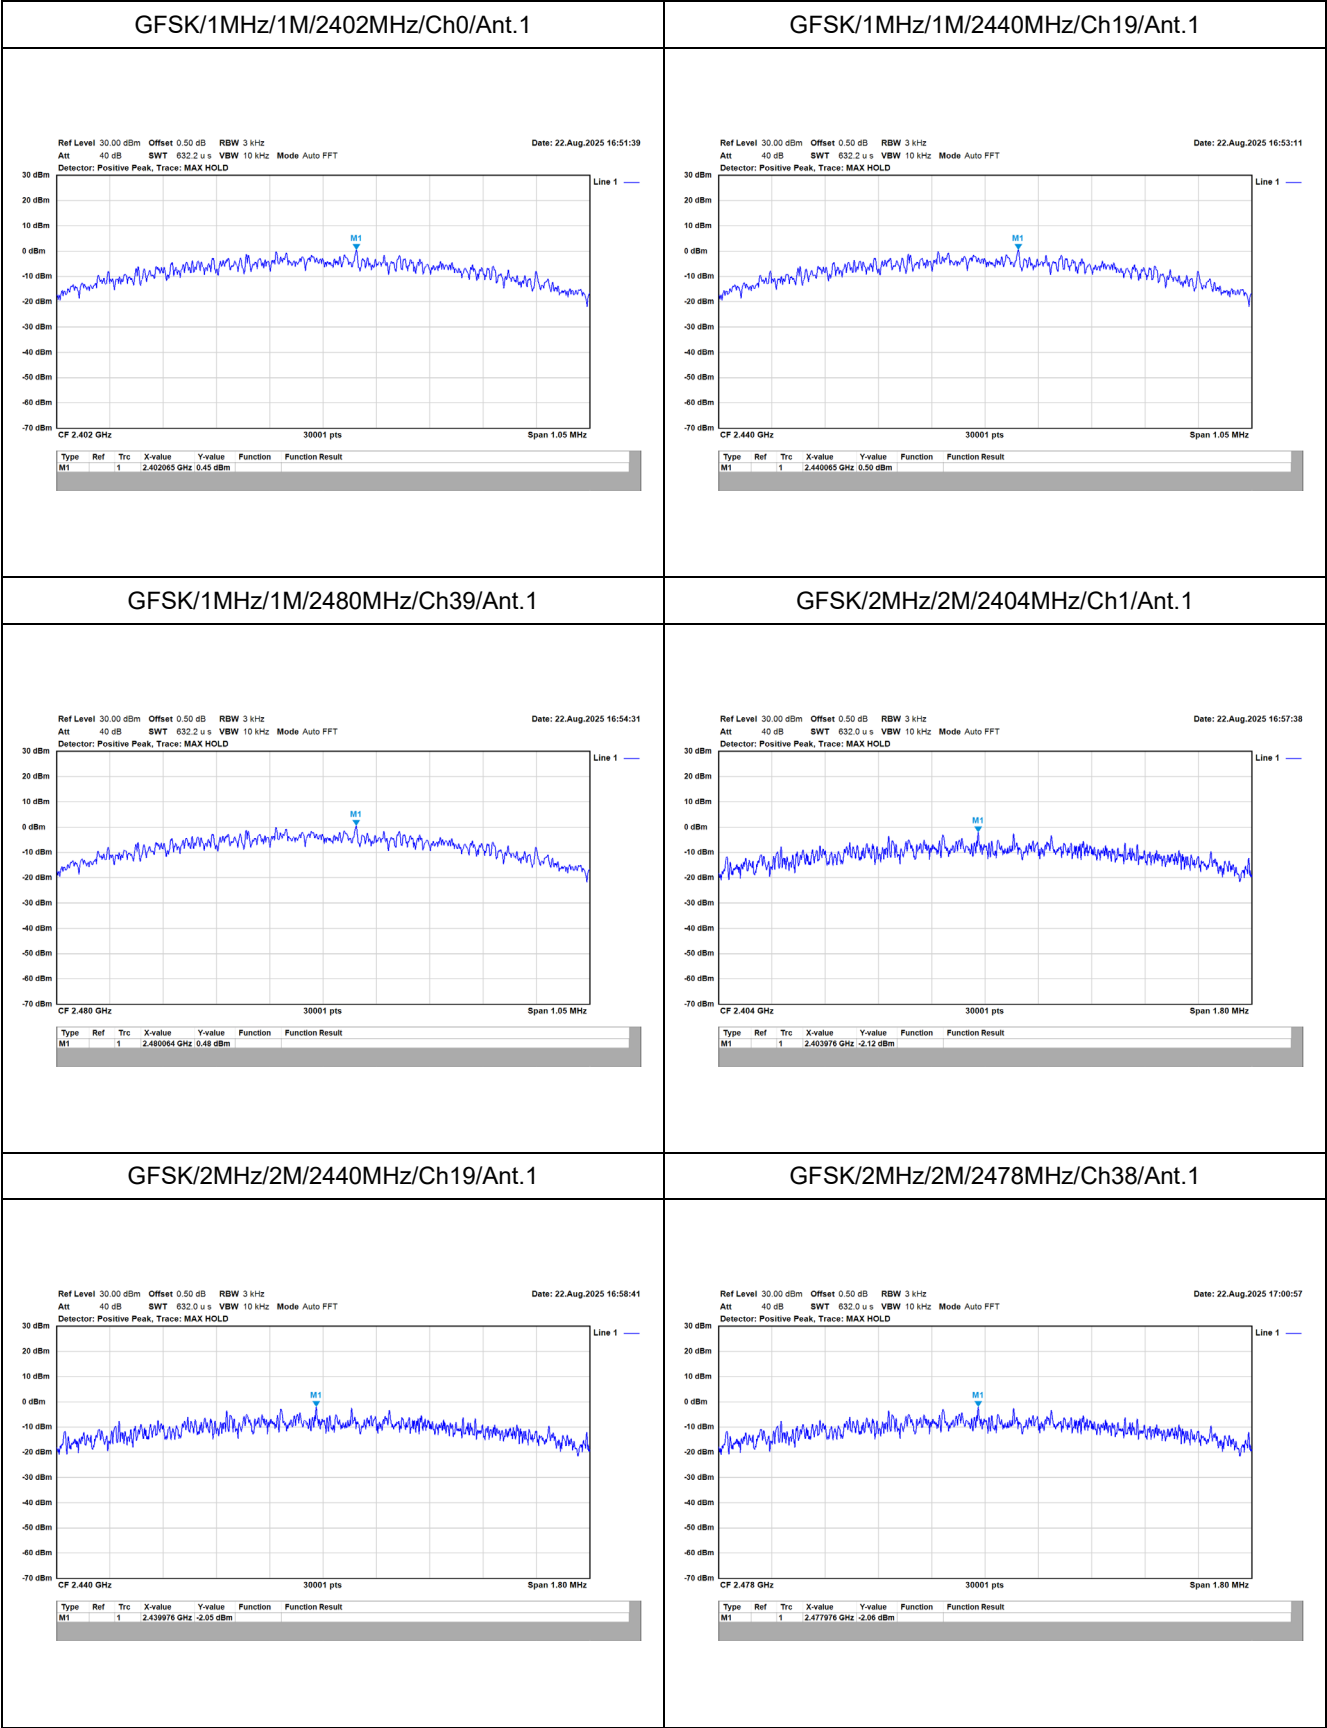


Appendix E. Test Result of Antenna Port Conducted Emission

Modulation	Measurement Level Δ (dB)	Result
GFSK (1 Mbps)	> 20	PASS
GFSK (2 Mbps)	> 20	PASS

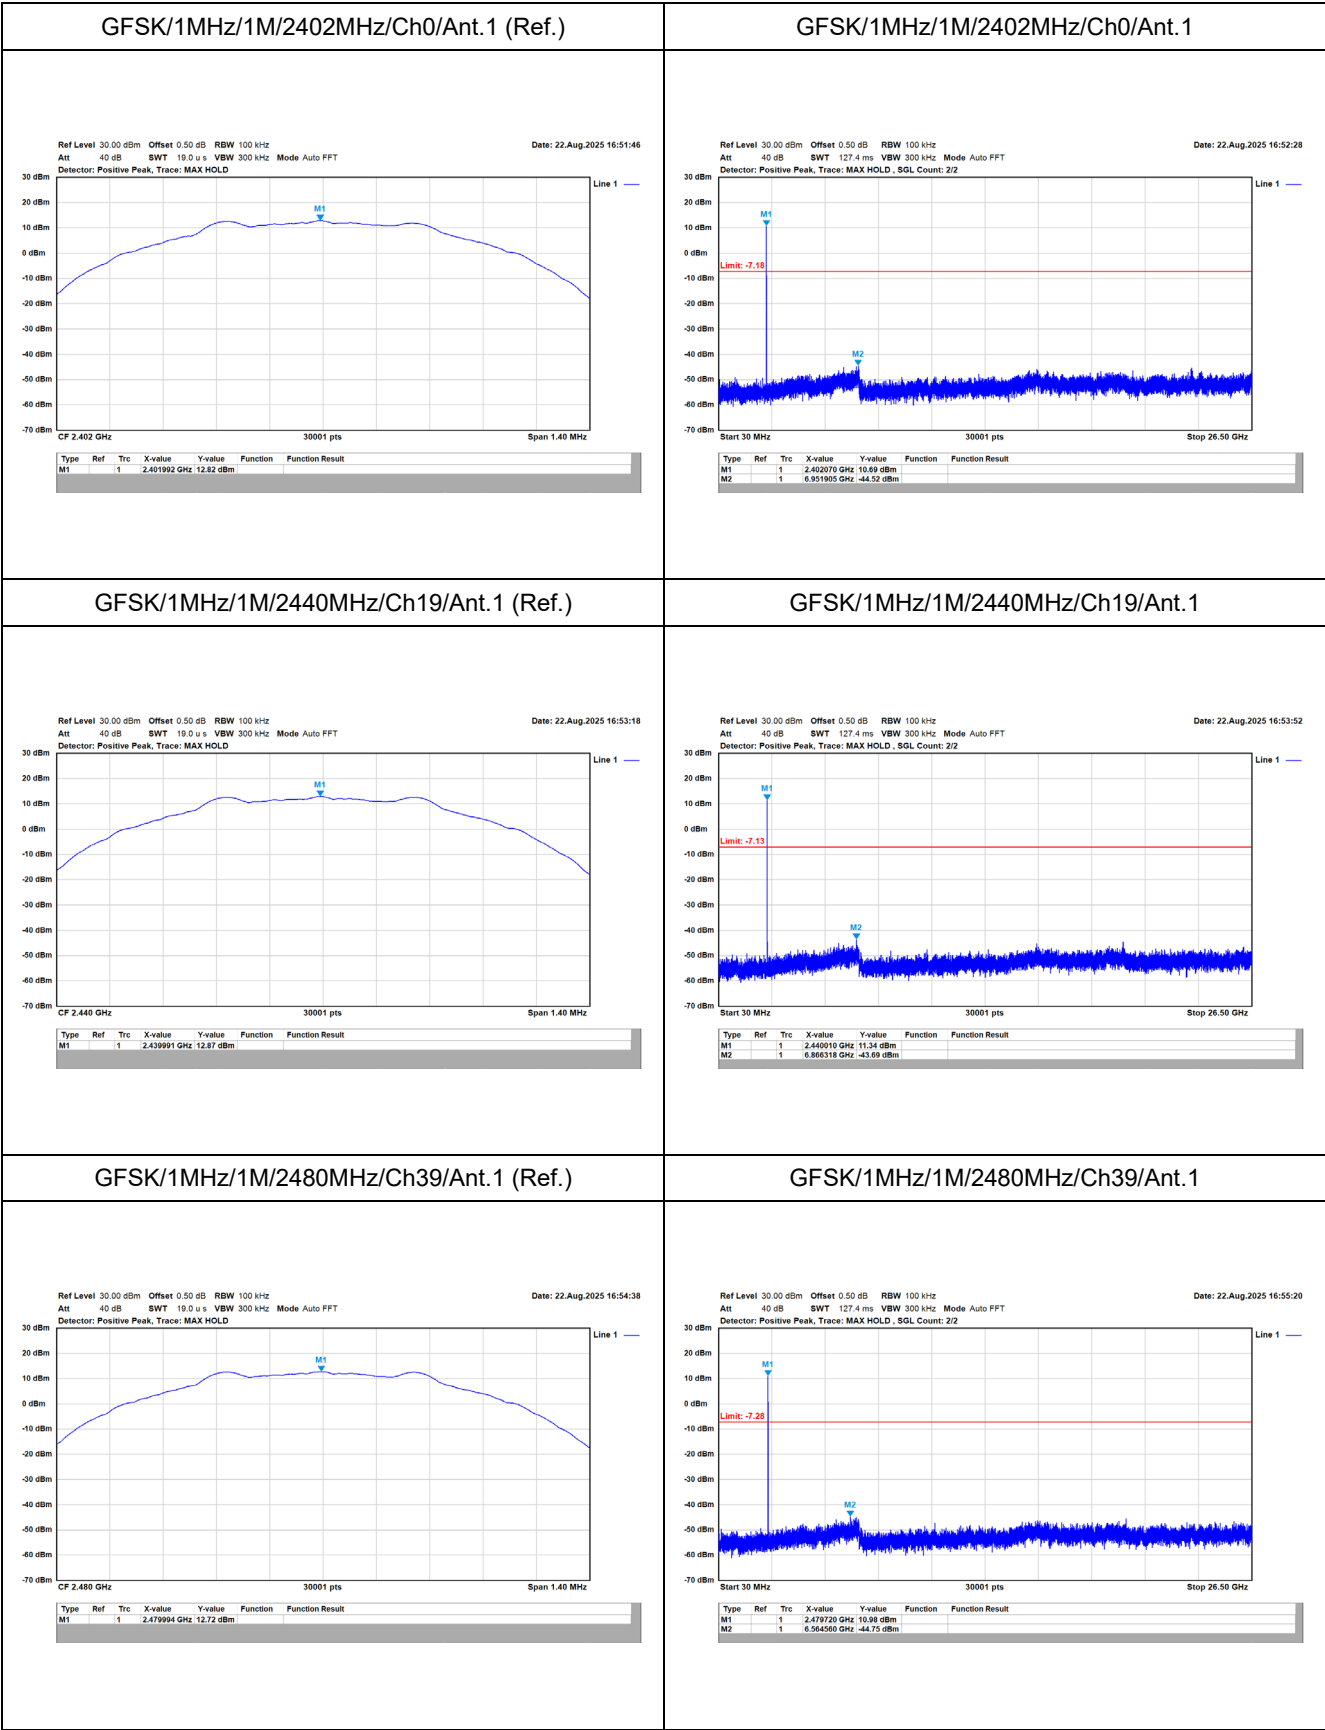

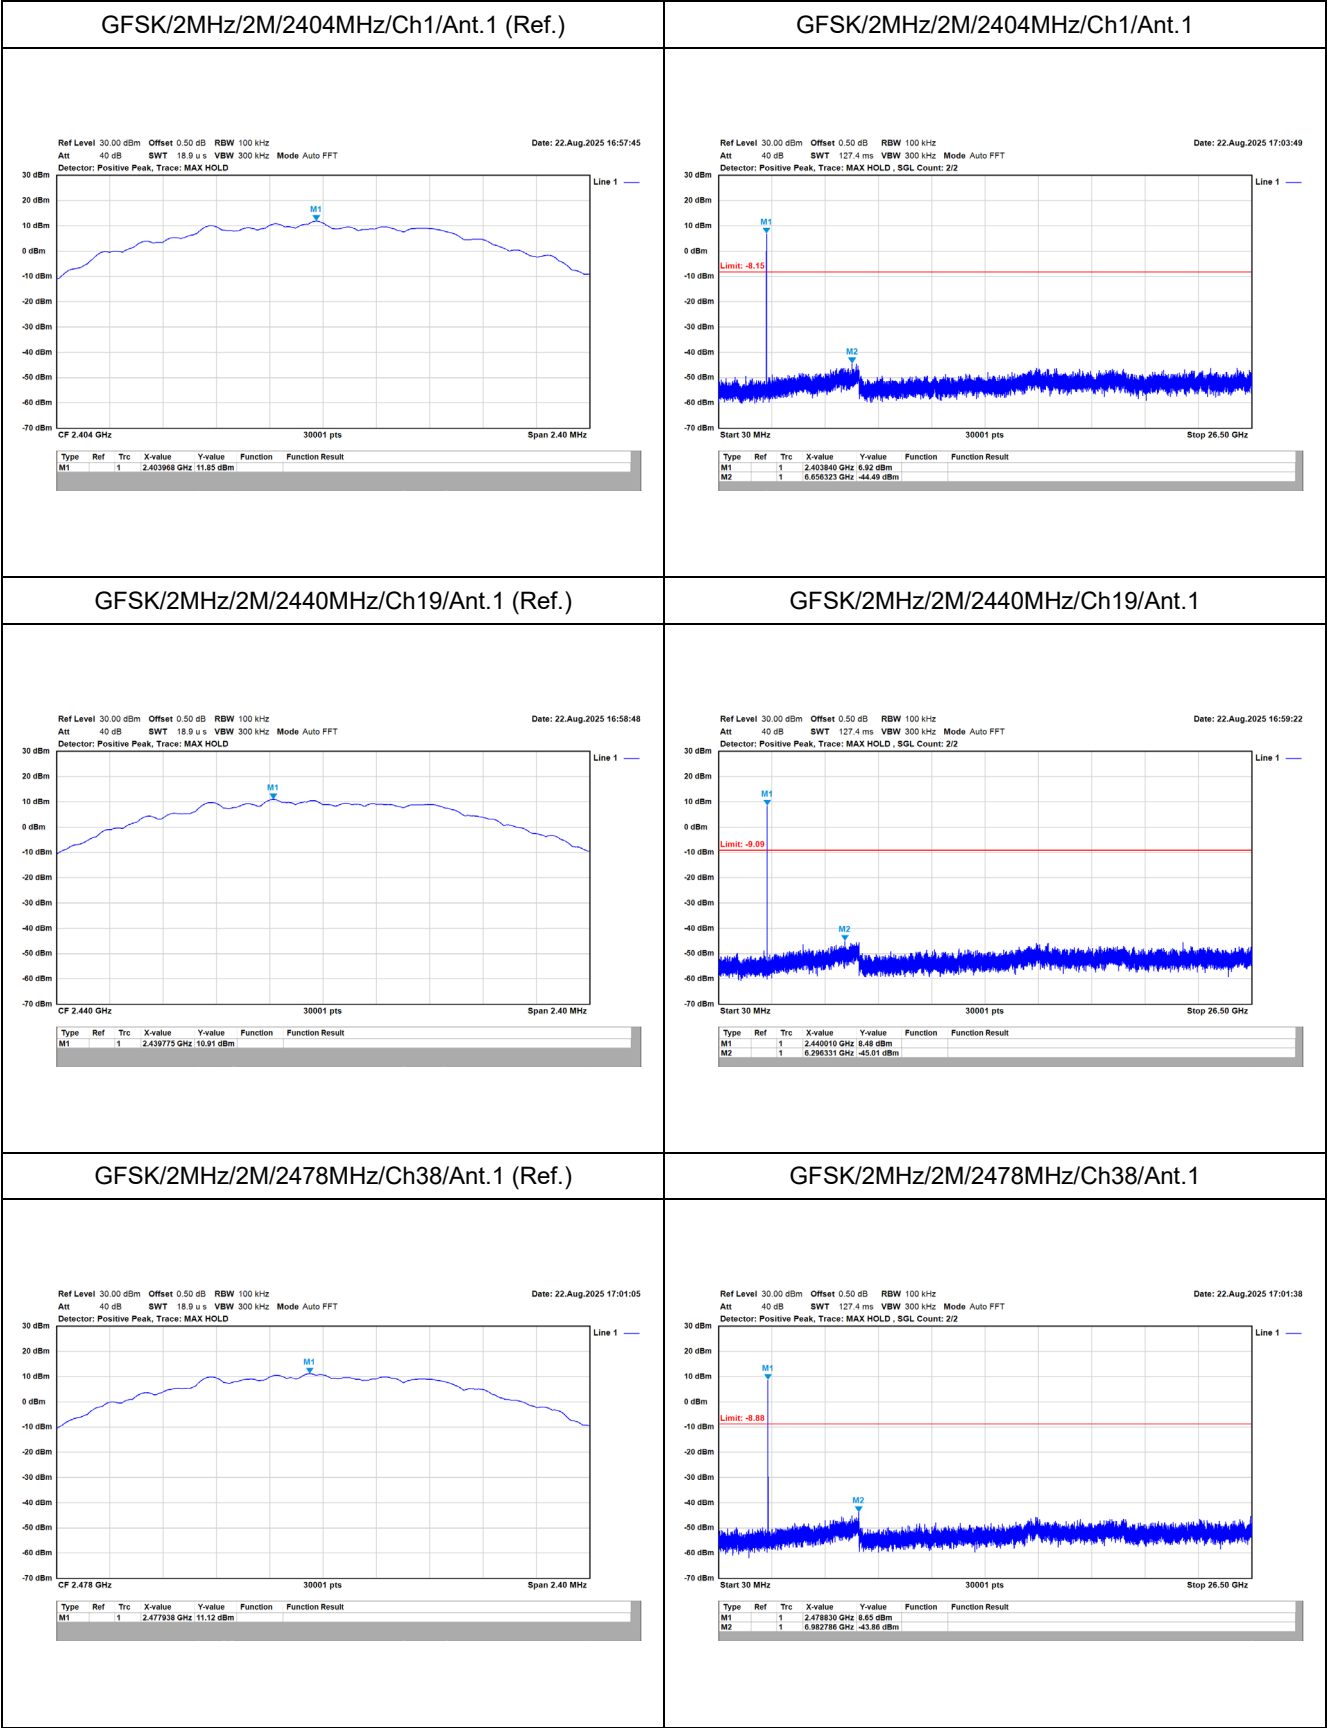


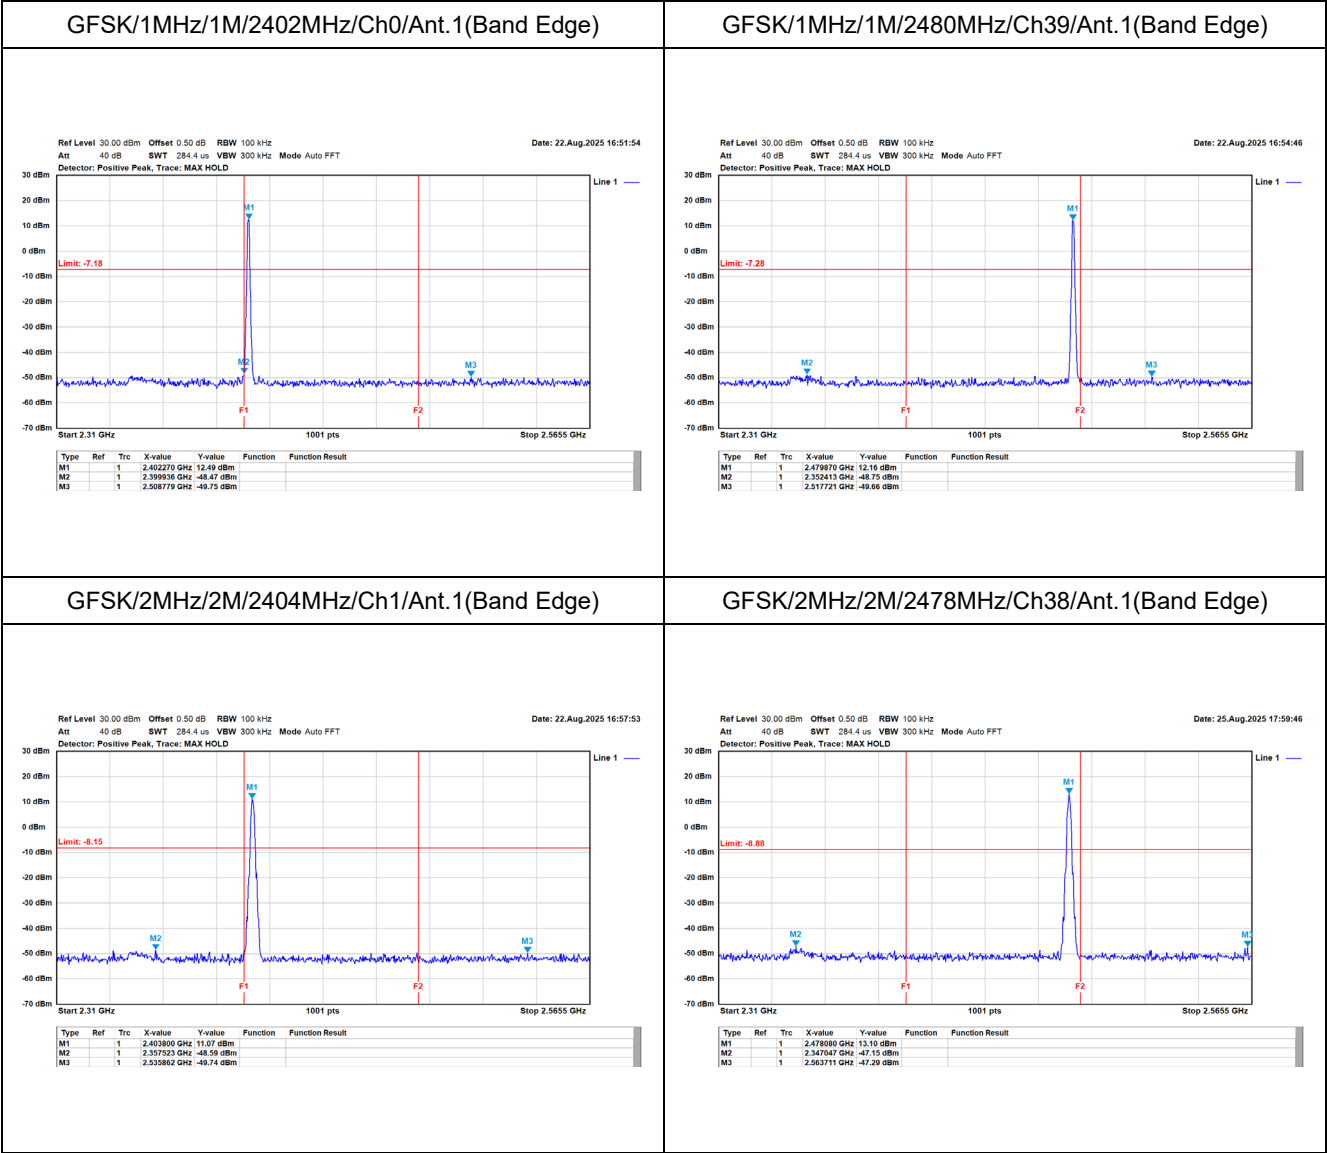

Appendix F. Test Result of Radiated Emission

TX_BLE1M_2402MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Bob

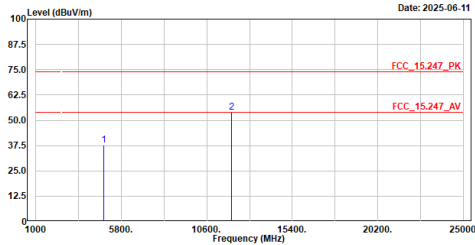


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	37.57	74.00	-36.43	52.52	-14.95	Peak
2	12010.000	53.86	74.00	-20.14	55.13	-1.27	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Bob

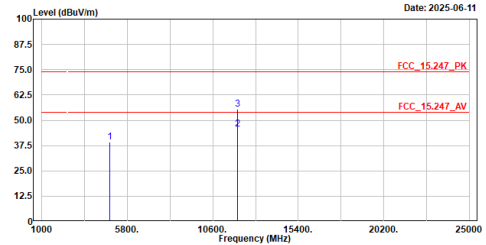


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	39.08	74.00	-34.92	54.03	-14.95	Peak
2	12010.000	45.56	54.00	-8.44	46.83	-1.27	Average
3	12010.000	55.35	74.00	-18.65	56.62	-1.27	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2440MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2440MHz
Test BY :Bob

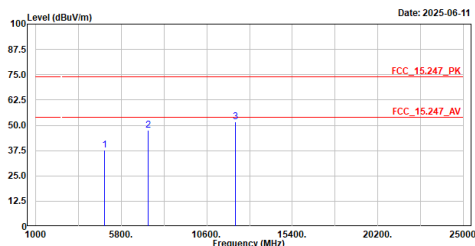


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4880.000	37.76	74.00	-36.24	52.35	-14.59	Peak
2	7320.000	47.41	74.00	-26.59	54.33	-6.92	Peak
3	12200.000	51.71	74.00	-22.29	52.93	-1.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2440MHz
Test BY :Bob

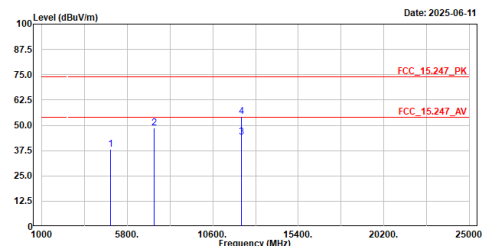


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4880.000	38.21	74.00	-35.79	52.80	-14.59	Peak
2	7320.000	48.70	74.00	-25.30	55.62	-6.92	Peak
3	12200.000	44.16	54.00	-9.84	45.38	-1.22	Average
4	12200.000	54.24	74.00	-19.76	55.46	-1.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Bob

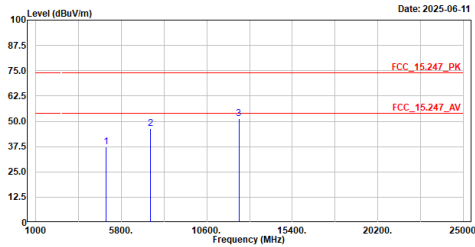


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	37.46	74.00	-36.54	51.68	-14.22	Peak
2	7440.000	46.42	74.00	-27.58	53.43	-7.01	Peak
3	12400.000	51.22	74.00	-22.78	52.02	-0.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Bob

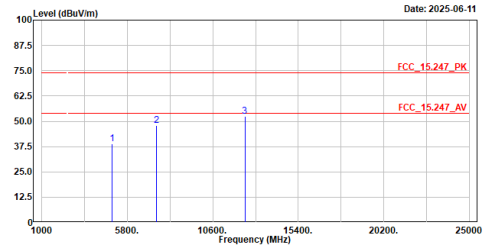


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	38.71	74.00	-35.29	52.93	-14.22	Peak
2	7440.000	47.96	74.00	-26.04	54.97	-7.01	Peak
3	12400.000	52.58	74.00	-21.42	53.38	-0.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2404MHz
Test BY :Ashton

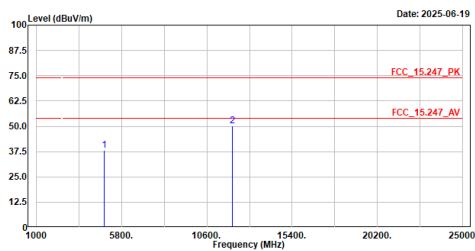


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4800.000	38.18	74.00	-35.82	53.12	-14.94	Peak
2	12020.000	50.10	74.00	-23.90	51.36	-1.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2404MHz
Test BY :Ashton

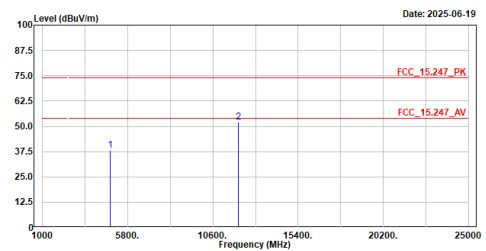


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4800.000	38.23	74.00	-35.77	53.17	-14.94	Peak
2	12020.000	51.90	74.00	-22.10	53.16	-1.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2440MHz
Test BY :Bob

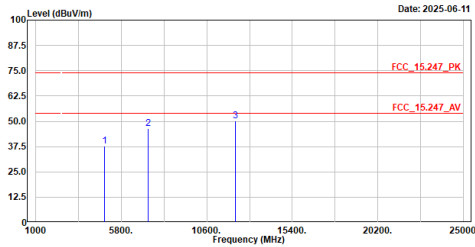


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4880.000	37.78	74.00	-36.22	52.37	-14.59	Peak
2	7320.000	46.30	74.00	-27.70	53.22	-6.92	Peak
3	12200.000	50.36	74.00	-23.64	51.58	-1.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2440MHz
Test BY :Bob

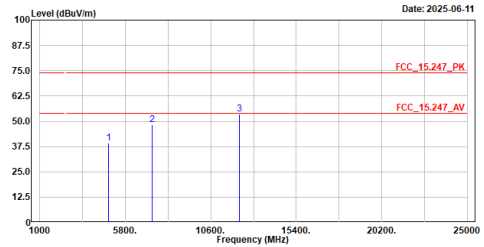


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4880.000	39.12	74.00	-34.88	53.71	-14.59	Peak
2	7320.000	48.33	74.00	-25.67	55.25	-6.92	Peak
3	12200.000	53.45	74.00	-20.55	54.67	-1.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2478MHz
Test BY :Ashton

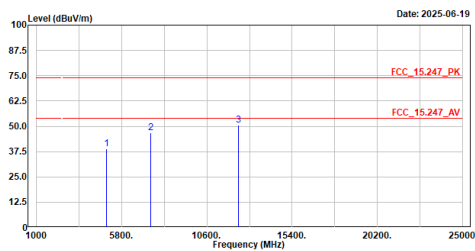


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4956.000	38.90	74.00	-35.10	53.13	-14.23	Peak
2	7434.000	46.67	74.00	-27.33	53.67	-7.00	Peak
3	12390.000	50.55	74.00	-23.45	51.37	-0.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2478MHz
Test BY :Ashton

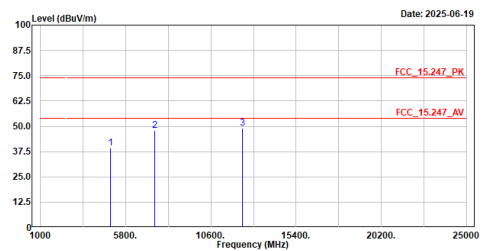


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4956.000	39.26	74.00	-34.74	53.49	-14.23	Peak
2	7434.000	48.10	74.00	-25.90	55.10	-7.00	Peak
3	12390.000	48.88	74.00	-25.12	49.70	-0.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H_QP

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2440MHz
Test BY :Ashton

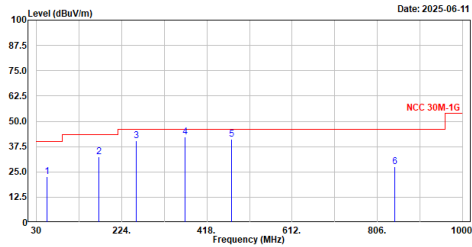


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	53.280	22.59	40.00	-17.41	46.12	-23.53	QP
2	171.620	32.31	43.50	-11.19	56.87	-24.56	QP
3	256.980	40.52	46.00	-5.48	65.26	-24.74	QP
4	367.560	42.40	46.00	-3.60	63.81	-21.41	QP
5	474.260	41.12	46.00	-4.88	59.59	-18.47	QP
6	845.770	27.53	46.00	-18.47	39.53	-12.00	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE2M_2440MHz_V_QP

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2440MHz
Test BY :Ashton

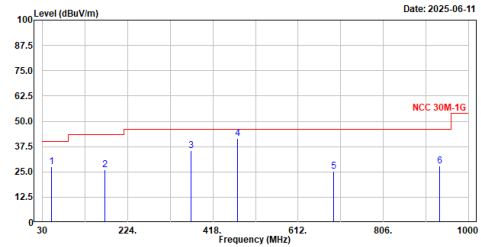


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	50.370	27.40	40.00	-12.60	50.88	-23.48	QP
2	171.620	25.93	43.50	-17.57	50.49	-24.56	QP
3	367.560	35.30	46.00	-10.70	56.71	-21.41	QP
4	474.260	41.53	46.00	-4.47	60.00	-18.47	QP
5	692.510	25.45	46.00	-20.55	39.58	-14.13	QP
6	935.010	27.87	46.00	-18.13	38.76	-10.89	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE1M_2402MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Bob

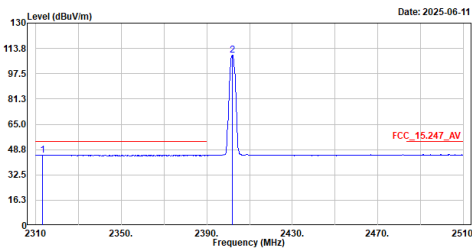


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2313.000	45.32	54.00	-8.68	14.71	30.61	Average
2	2402.000	109.54	-----	-----	79.08	30.46	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Bob

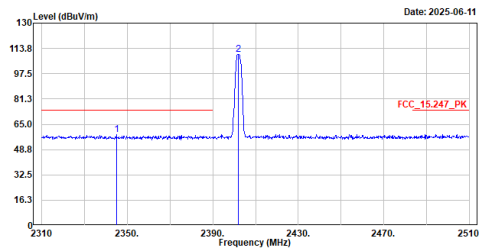


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2345.000	58.14	74.00	-15.86	27.72	30.42	Peak
2	2401.800	110.10	-----	-----	79.64	30.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Bob

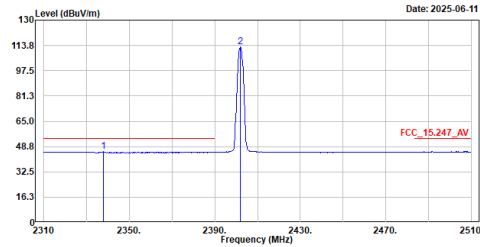


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2338.000	45.42	54.00	-8.58	14.99	30.43	Average
2	2402.000	112.62	-----	-----	82.16	30.46	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Bob

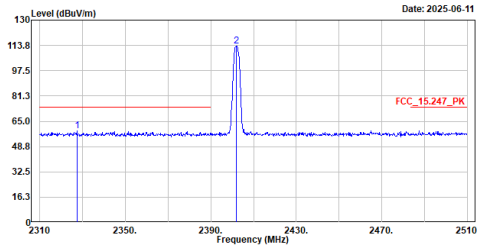


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2327.400	58.64	74.00	-15.36	28.18	30.54	Peak
2	2402.000	113.13	-----	-----	82.67	30.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Bob

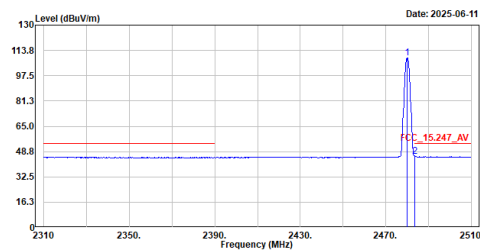


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.000	108.85	-----	-----	78.46	30.39	Average
2	2483.600	45.78	54.00	-8.22	15.34	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Bob

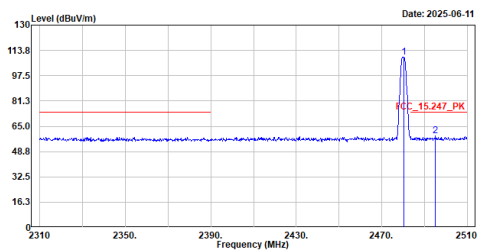


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.200	109.38	-----	-----	78.99	30.39	Peak
2	2495.200	58.80	74.00	-15.20	28.29	30.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Bob

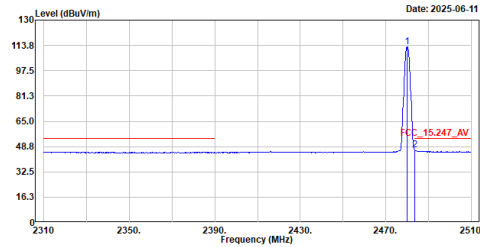


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	112.62	-----	-----	82.23	30.39	Average
2	2483.600	46.46	54.00	-7.54	16.02	30.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Bob

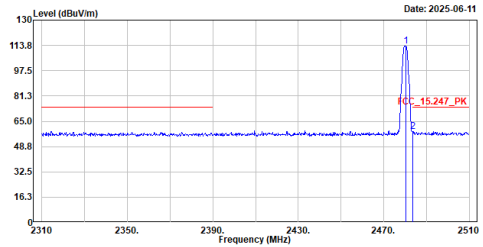


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.200	113.19	-----	-----	82.80	30.39	Peak
2	2483.600	58.40	74.00	-15.60	27.96	30.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2404MHz
Test BY :Ashton

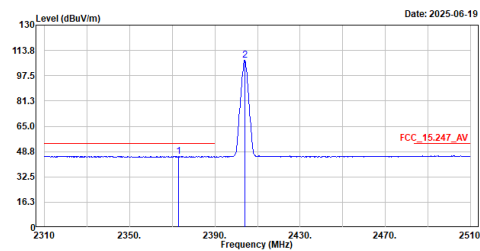


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2372.800	45.80	54.00	-8.20	15.37	30.43	Average
2	2404.000	107.61	-----	-----	77.12	30.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2404MHz
Test BY :Ashton

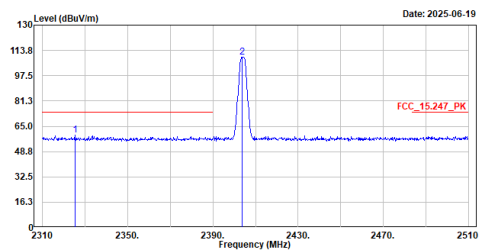


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2325.200	59.14	74.00	-14.86	28.58	30.56	Peak
2	2403.600	109.47	-----	-----	78.98	30.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2404MHz
Test BY :Ashton

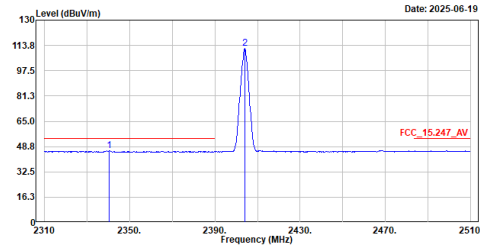


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2340.400	46.24	54.00	-7.76	15.82	30.42	Average
2	2404.000	111.73	-----	-----	81.24	30.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2404MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2404MHz
Test BY :Ashton

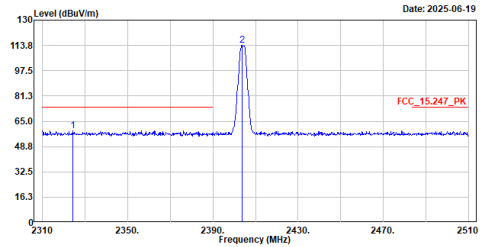


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2324.200	59.09	74.00	-14.91	28.52	30.57	Peak
2	2403.600	113.62	-----	-----	83.13	30.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2478MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2478MHz
Test BY :Ashton

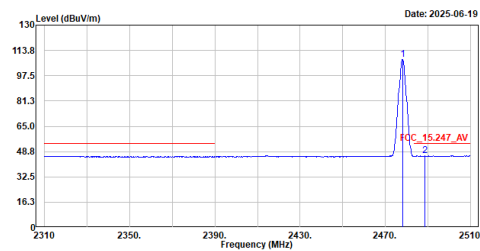


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2478.200	107.74	-----	-----	77.35	30.39	Average
2	2488.600	46.02	54.00	-7.98	15.53	30.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



TX_BLE2M_2478MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2478MHz
Test BY :Ashton

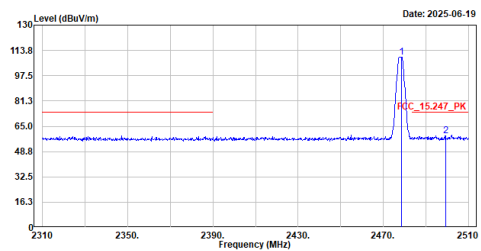

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2478.600	109.52	-----	-----	79.13	30.39	Peak
2	2499.200	58.90	74.00	-15.10	28.39	30.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

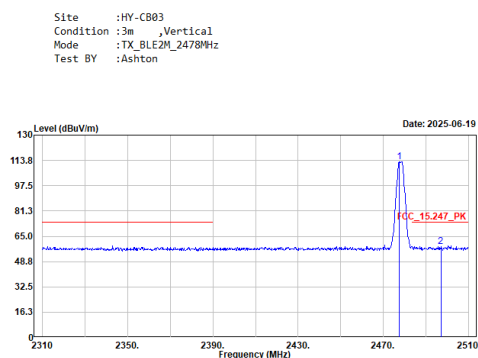

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2477.600	112.73	-----		82.34	30.39	Peak
2	2497.000	58.42	-74.00	-15.58	27.91	30.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.