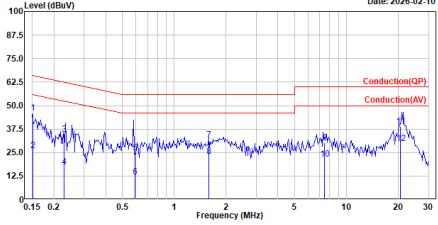
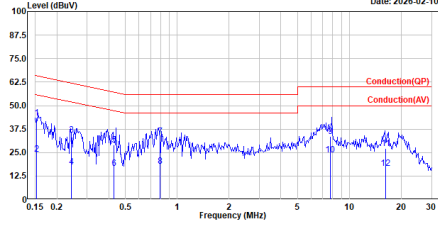
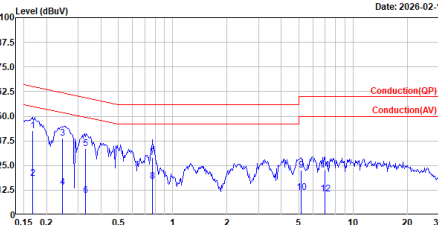
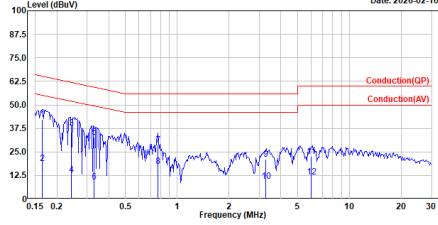


Appendix A. Test Result of AC Power Line Conducted Emission

TX_BT3M_2441MHz_Line								TX_BT3M_2441MHz_Neutral							
Site :HY-SR01 Condition :Line Mode :TX_BT3M_2441MHz test by :Kevin Date: 2026-02-10 								Site :HY-SR01 Condition :Neutral Mode :TX_BT3M_2441MHz test by :Kevin Date: 2026-02-10 							
No.	Frequency	Level	Limit	Over	Read	Factor	Remark	No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB			MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.152	46.19	65.92	-19.73	36.62	9.57	QP	1	0.153	43.34	65.82	-22.48	33.78	9.56	QP
2	0.152	25.97	55.92	-29.95	16.40	9.57	Average	2	0.153	24.25	55.82	-31.57	14.69	9.56	Average
3	0.230	34.67	62.44	-27.77	25.11	9.56	QP	3	0.244	34.15	61.97	-27.82	24.56	9.59	QP
4	0.230	17.52	52.44	-34.92	7.96	9.56	Average	4	0.244	17.36	51.97	-34.61	7.77	9.59	Average
5	0.592	24.94	56.00	-31.06	15.34	9.60	QP	5	0.431	28.91	57.24	-28.33	19.32	9.59	QP
6	0.592	12.02	46.00	-33.98	2.42	9.60	Average	6	0.431	16.45	47.24	-30.79	6.86	9.59	Average
7	1.585	31.59	56.00	-24.41	21.91	9.68	QP	7	0.794	33.47	56.00	-22.53	23.85	9.62	QP
8	1.585	23.20	46.00	-22.80	13.52	9.68	Average	8	0.794	17.78	46.00	-28.22	8.16	9.62	Average
9	7.450	30.08	60.00	-29.92	19.96	10.12	QP	9	7.710	33.74	60.00	-26.26	23.58	10.16	QP
10	7.450	21.59	50.00	-28.41	11.47	10.12	Average	10	7.710	23.77	50.00	-26.23	13.61	10.16	Average
11	20.585	39.00	60.00	-21.00	29.14	9.86	QP	11	16.145	27.05	60.00	-32.95	17.16	9.89	QP
12	20.585	29.79	50.00	-20.21	19.93	9.86	Average	12	16.145	16.48	50.00	-33.52	6.59	9.89	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

For Charge Mode


charge mode_Line								charge mode_Neutral							
Site :HY-SR01 Condition :Line Mode :charge mode test by :Kevin Date: 2026-02-10 								Site :HY-SR01 Condition :Neutral Mode :charge mode test by :Kevin Date: 2026-02-10 							
No.	Frequency	Level	Limit	Over	Read	Factor	Remark	No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB			MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.167	42.74	65.10	-22.36	33.17	9.57	QP	1	0.165	42.27	65.20	-22.93	32.70	9.57	QP
2	0.167	18.47	55.10	-36.63	8.90	9.57	Average	2	0.165	18.68	55.20	-36.52	9.11	9.57	Average
3	0.245	38.69	61.93	-23.24	29.12	9.57	QP	3	0.242	37.81	62.03	-24.22	28.22	9.59	QP
4	0.245	13.81	51.93	-38.12	4.24	9.57	Average	4	0.242	12.98	52.03	-39.05	3.39	9.59	Average
5	0.329	33.59	59.47	-25.88	24.01	9.58	QP	5	0.328	32.95	59.50	-26.55	23.37	9.58	QP
6	0.329	9.98	49.47	-39.49	0.40	9.58	Average	6	0.328	9.12	49.50	-40.38	-0.46	9.58	Average
7	0.773	29.05	56.00	-26.95	19.43	9.62	QP	7	0.775	28.77	56.00	-27.23	19.15	9.62	QP
8	0.773	16.97	46.00	-29.03	7.35	9.62	Average	8	0.775	17.42	46.00	-28.58	7.80	9.62	Average
9	5.142	22.69	60.00	-37.31	12.64	10.05	QP	9	3.255	20.99	56.00	-35.01	11.11	9.88	QP
10	5.142	11.39	50.00	-38.61	1.34	10.05	Average	10	3.255	9.57	46.00	-36.43	-0.31	9.88	Average
11	6.950	22.46	60.00	-37.54	12.35	10.11	QP	11	5.990	22.60	60.00	-37.40	12.49	10.11	QP
12	6.950	10.68	50.00	-39.32	0.57	10.11	Average	12	5.990	11.71	50.00	-38.29	1.60	10.11	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line


Appendix B. Test Result of 20dB Bandwidth

Modulation	Frequency (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
GFSK	2402	0.96	-
	2441	0.96	-
	2480	0.96	-
8DPSK	2402	1.27	-
	2441	1.27	-
	2480	1.27	-


GFSK(DH5) / 2402 MHz

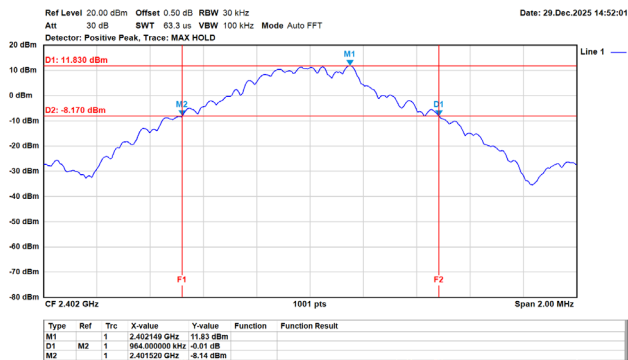


GFSK(DH5) / 2441 MHz

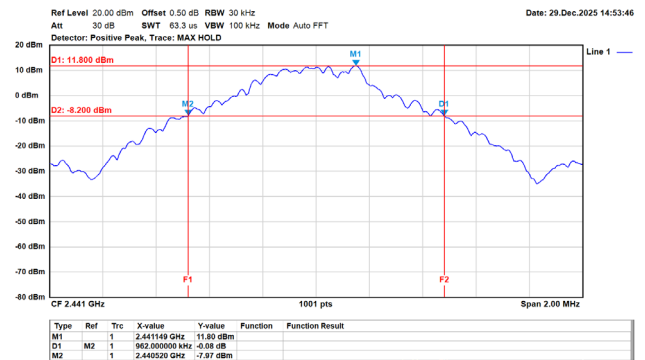


GFSK(DH5) / 2480 MHz

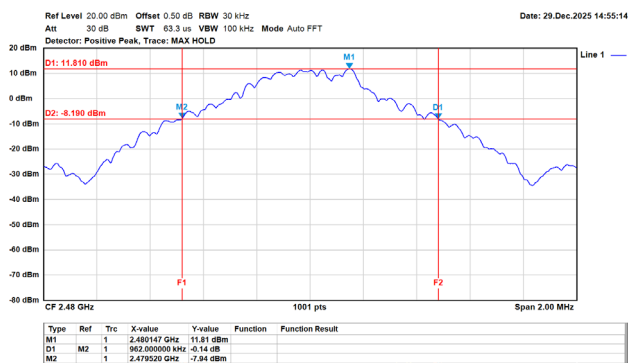


8DPSK(3DH5) / 2402 MHz

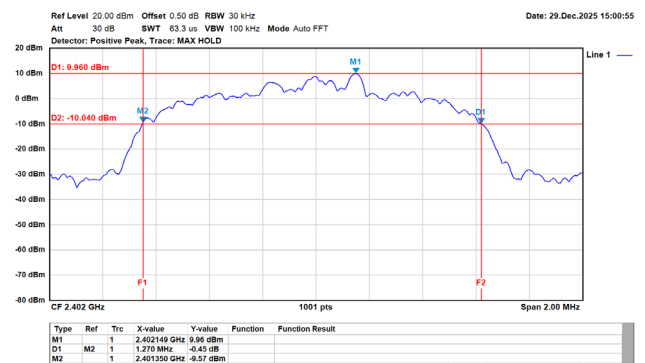

8DPSK(3DH5) / 2441 MHz

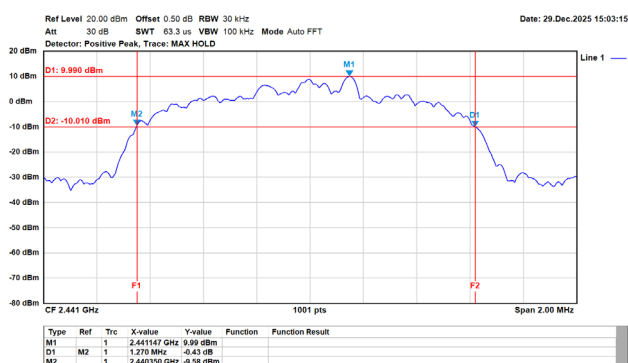


8DPSK(3DH5) / 2480 MHz

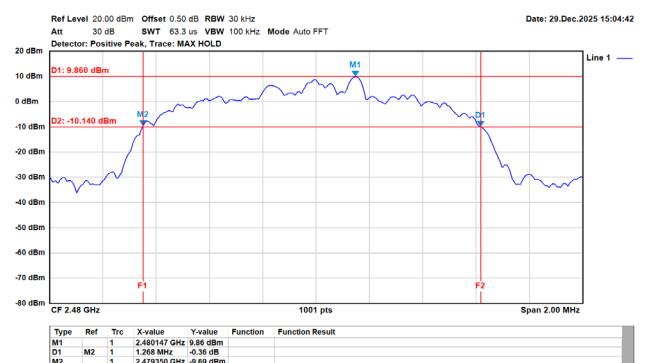


Appendix C. Test Result of Carrier Frequency Separation

Modulation	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
GFSK	2402	1.00	0.643	Pass
	2441	1.00	0.641	Pass
	2480	1.00	0.641	Pass
8DPSK	2402	1.00	0.847	Pass
	2441	1.00	0.847	Pass
	2480	0.99	0.845	Pass


GFSK(DH5) / 2402 MHz

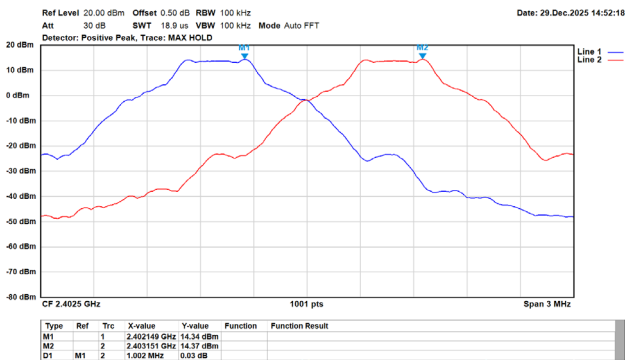


GFSK(DH5) / 2441 MHz

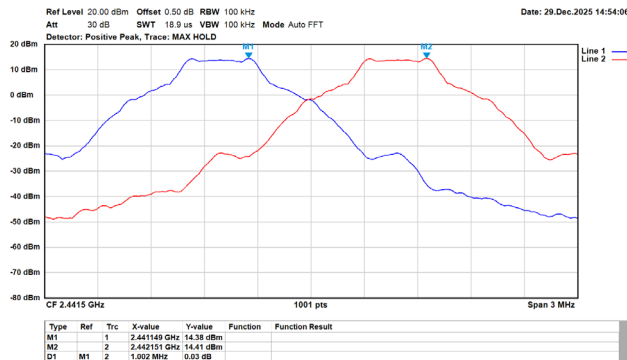


GFSK(DH5) / 2480 MHz

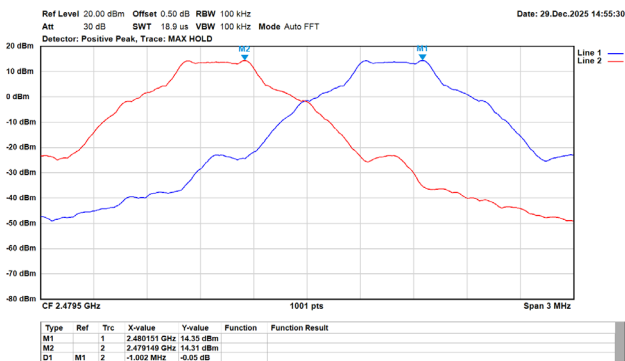


8DPSK(3DH5) / 2402 MHz

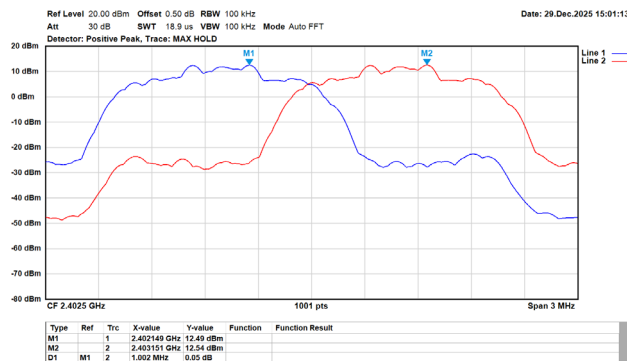

8DPSK(3DH5) / 2441 MHz

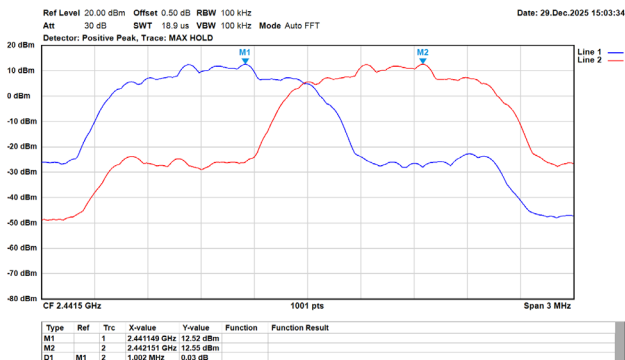

8DPSK(3DH5) / 2480 MHz

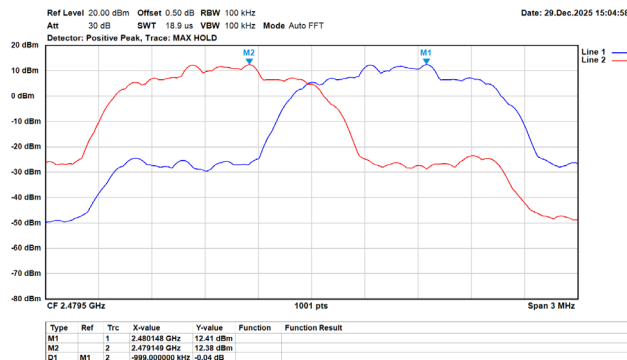


Appendix D. Test Result of Maximum Peak Conducted Output Power

Modulation	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)	Result
GFSK	2402	15.04	21.00	Pass
	2441	14.96	21.00	Pass
	2480	14.87	21.00	Pass
8DPSK	2402	13.77	21.00	Pass
	2441	13.66	21.00	Pass
	2480	13.42	21.00	Pass

Appendix E. Test Result of Number of Hopping Frequency


Frequency (MHz)	Measure Level (Channels)	Limit (Channels)
2402.0 ~ 2480.0	79	≥ 15

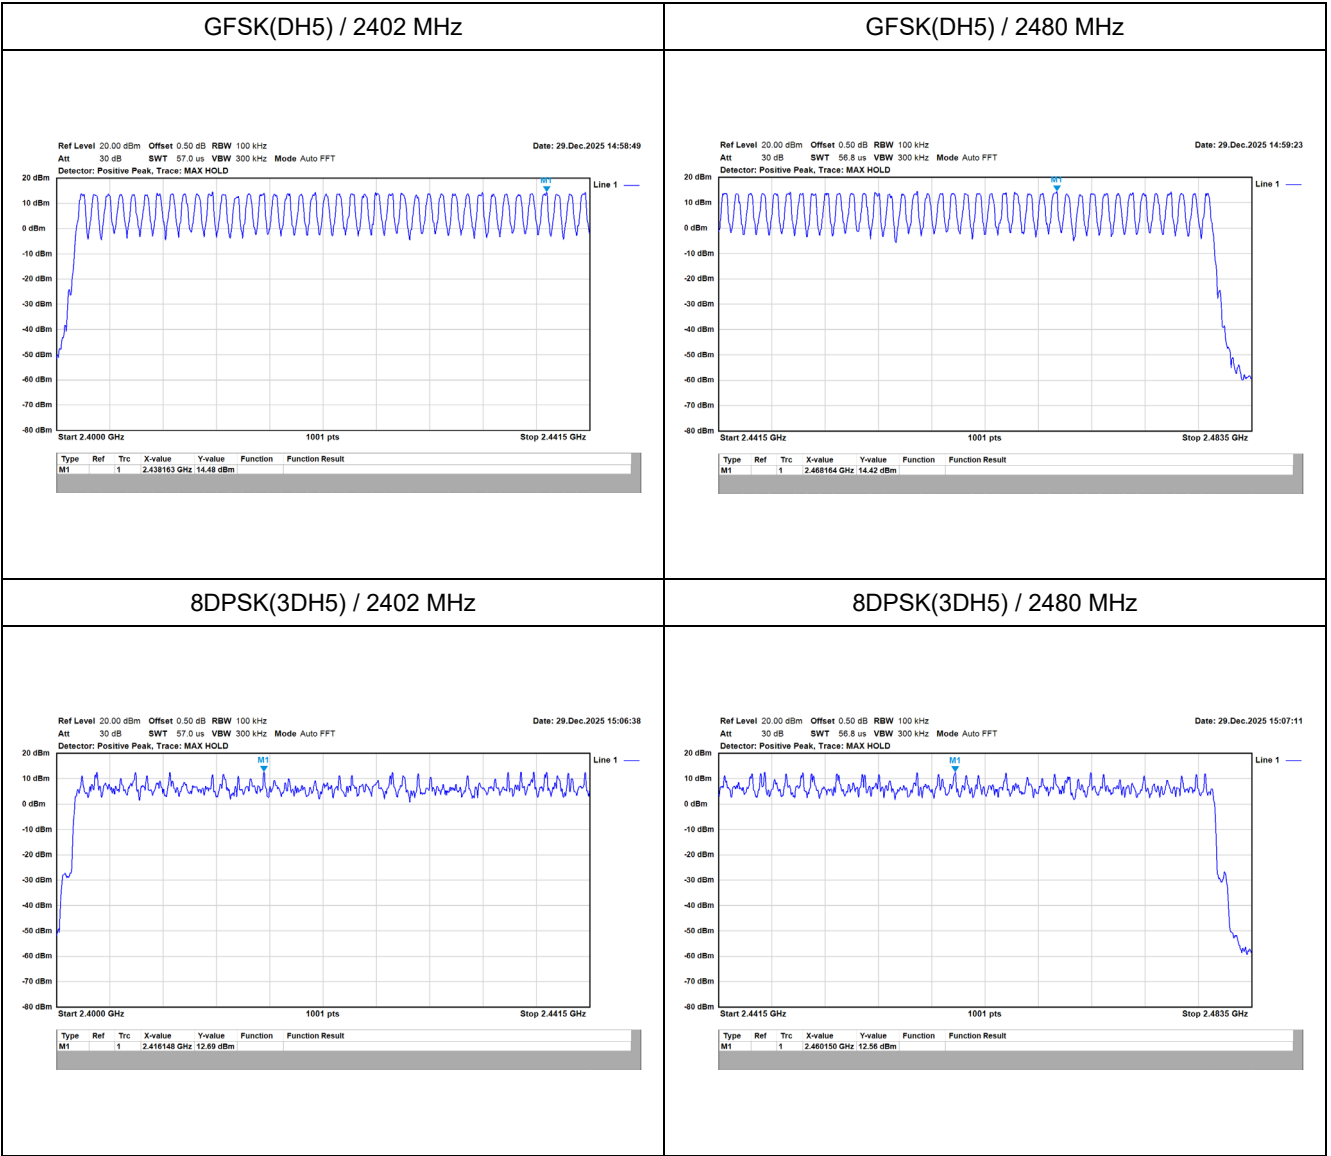


Appendix F. Test Result of Dwell Time

Modulation	Occupancy Time of Frequency Hopping System
GFSK	A) 2402 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec °
	B) 2441 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.86 = 0.002860 sec
	Dwell Time : $0.002860 \times (266.67/79) \times 31.60 = 0.305$ sec °
	C) 2480 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec °
8DPSK	A) 2402 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec °
	B) 2441 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.87 = 0.002870 sec
	Dwell Time : $0.002870 \times (266.67/79) \times 31.60 = 0.306$ sec °
	C) 2480 MHz Test Time Period: $0.4 \times 79 = 31.60$ sec, Time slot length :2.86 = 0.002860 sec
	Dwell Time : $0.002860 \times (266.67/79) \times 31.60 = 0.305$ sec °
Test Result: The occupancy time of each highest, middle and lowest channel is less than 0.4 sec, and corresponds to the standard.	


GFSK(DH5) / 2402 MHz

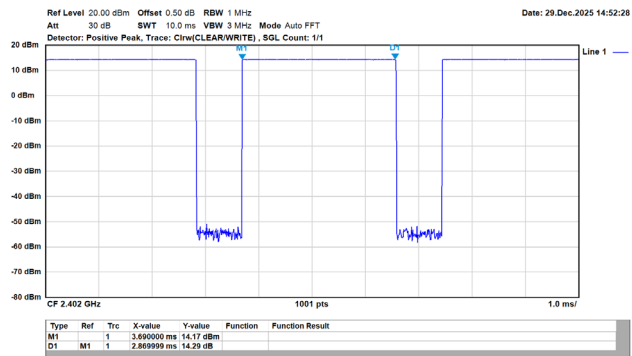


GFSK(DH5) / 2441 MHz

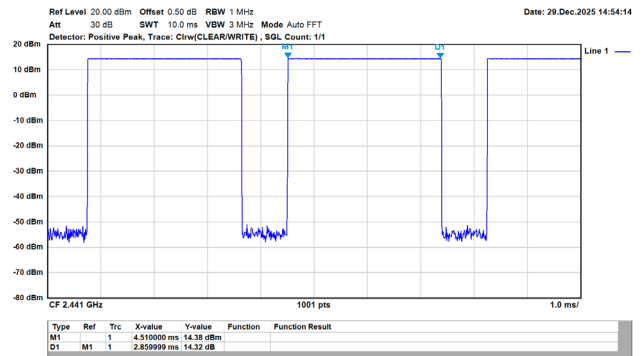


GFSK(DH5) / 2480 MHz

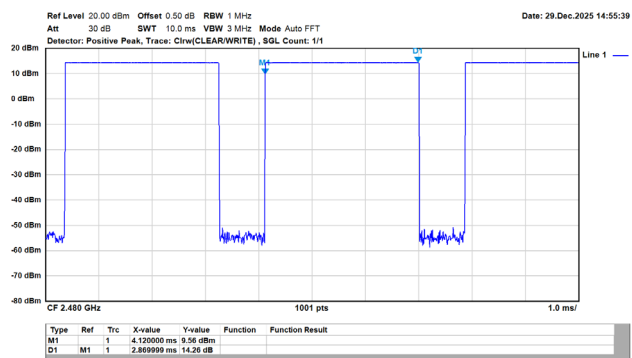


8DPSK(3DH5) / 2402 MHz

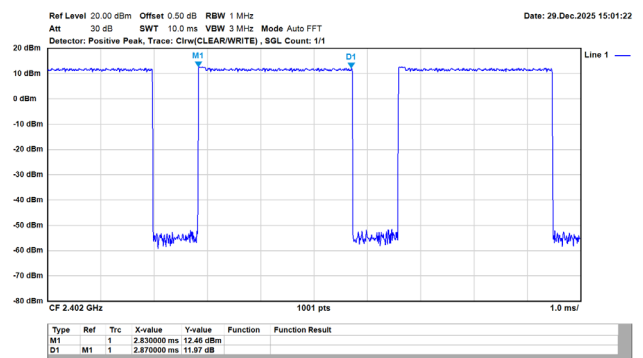

8DPSK(3DH5) / 2441 MHz

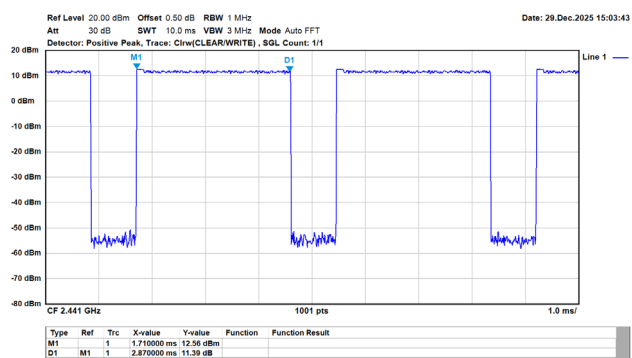


8DPSK(3DH5) / 2480 MHz

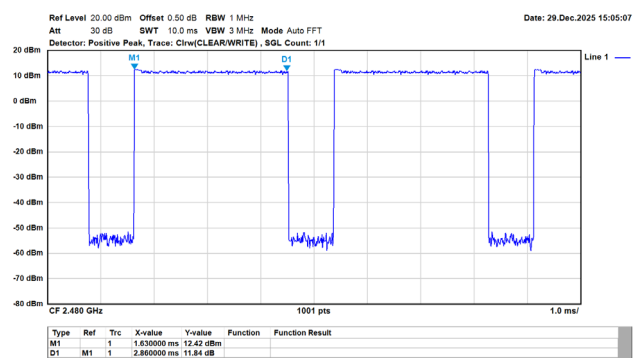


Appendix G. Test Result of Antenna Port Conducted Emission

Modulation	Measurement Level Δ (dB)	Result
GFSK	> 20	Pass
8DPSK	> 20	Pass


GFSK(DH5) / 2402 MHz

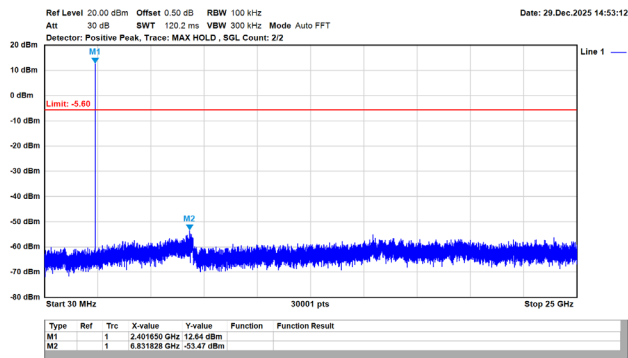


GFSK(DH5) / 2441 MHz

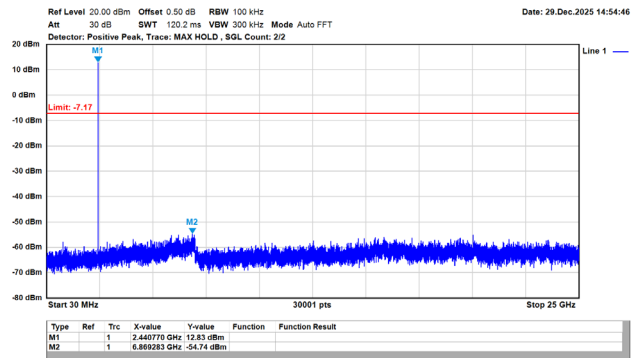


GFSK(DH5) / 2480 MHz

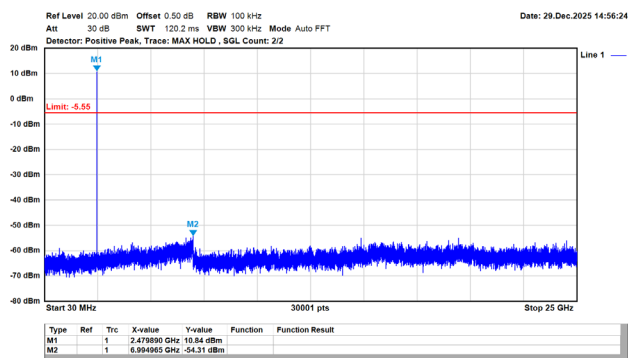


8DPSK(3DH5) / 2402 MHz

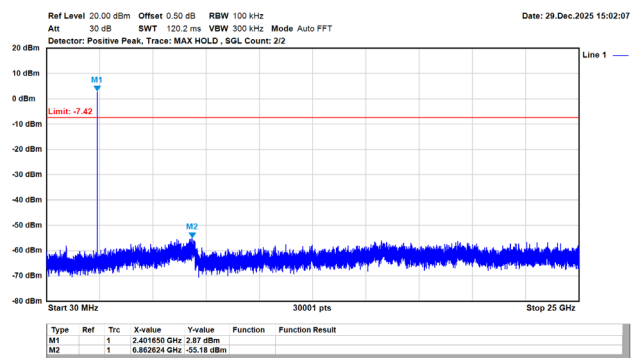



8DPSK(3DH5) / 2441 MHz

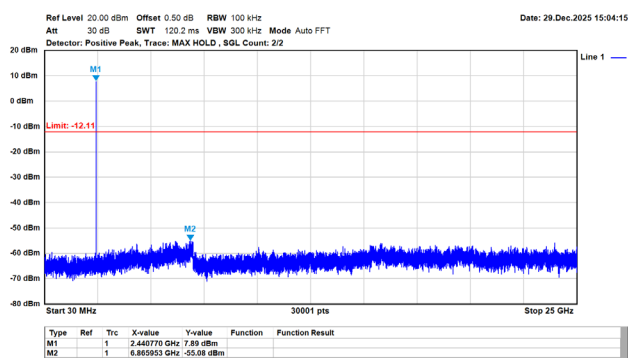

8DPSK(3DH5) / 2480 MHz

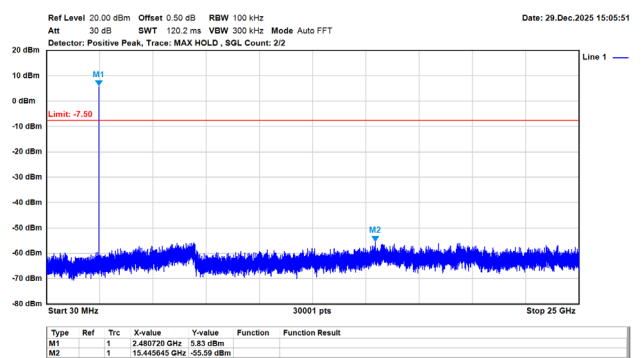

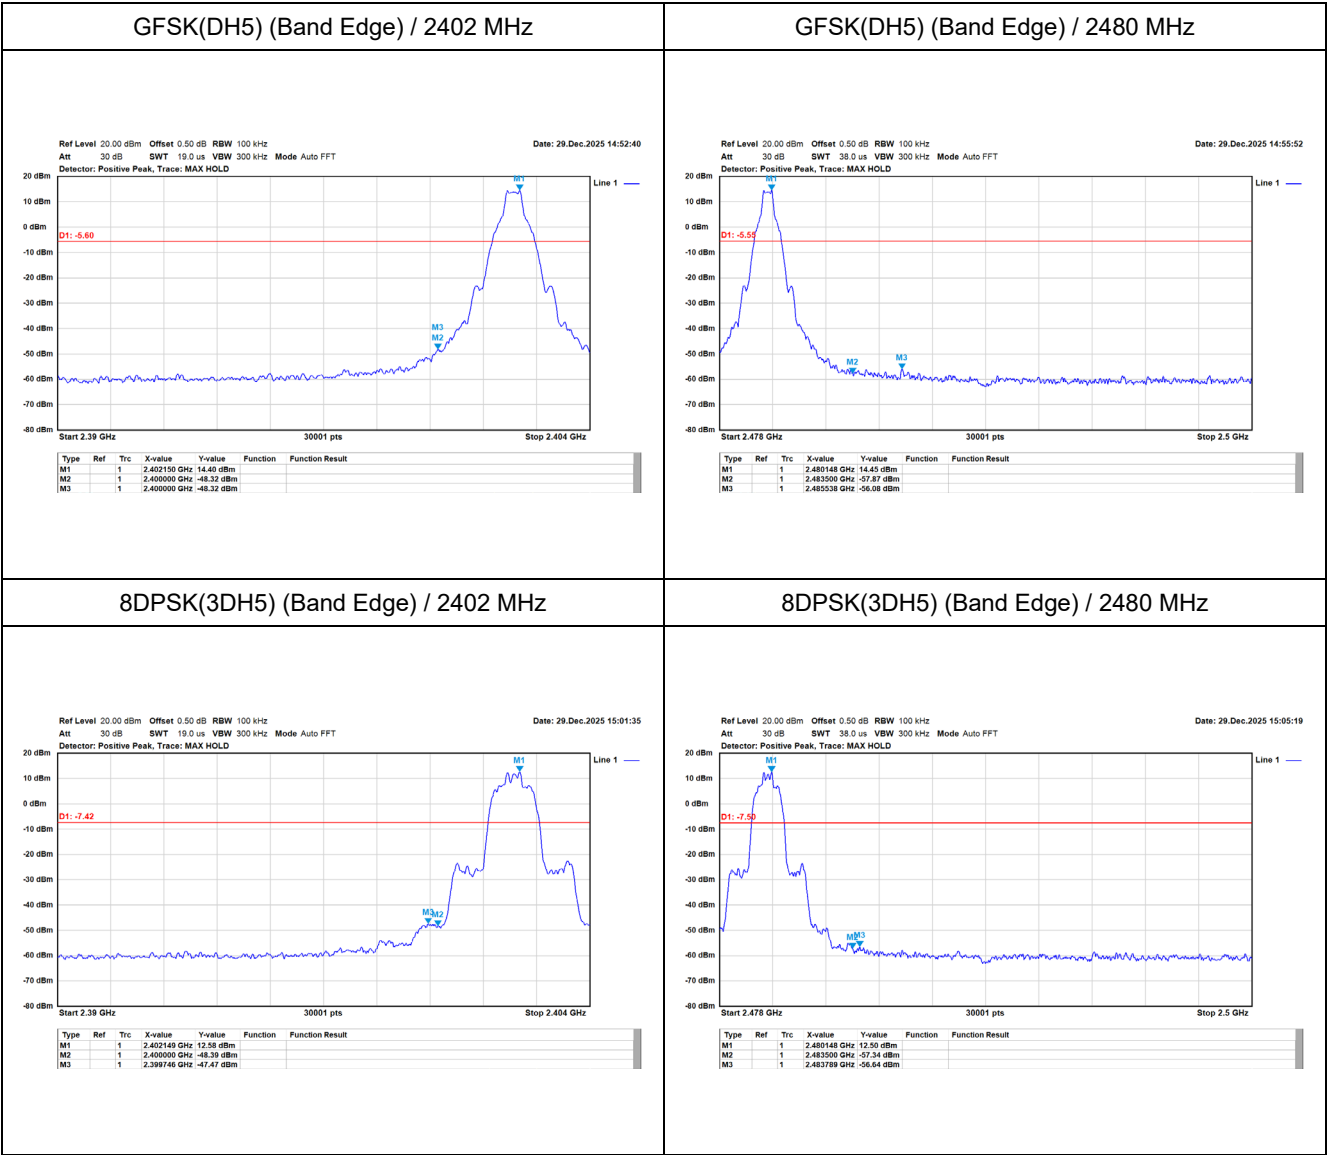

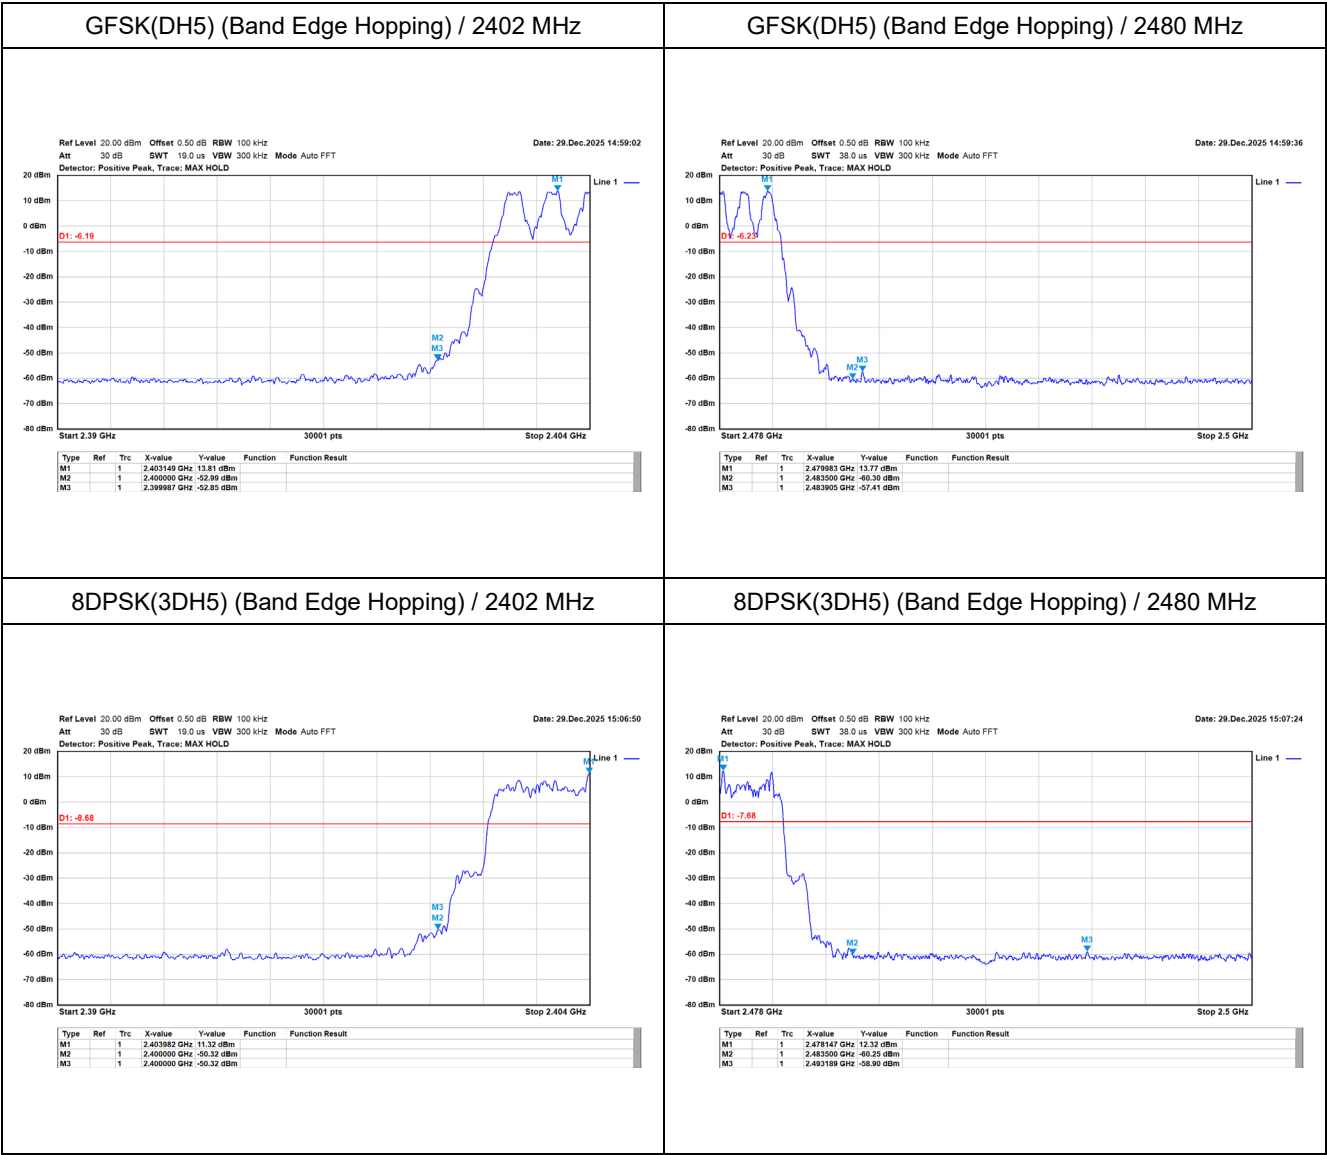


Appendix H. Test Result of Radiated Emission

TX_BT1M_2402MHz_H	TX_BT1M_2402MHz_V																																																																																
Site :HY-CB02 Condition :3m ,HORIZONTAL mode :TX_BT1M_2402MHz Test by :Nova Level (dBuV/m) Date: 2026-02-06 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4884.000</td><td>40.25</td><td>74.00</td><td>-33.75</td><td>52.38</td><td>-12.13</td><td>Peak</td></tr><tr><td>2</td><td>7993.906</td><td>47.16</td><td>74.00</td><td>-26.84</td><td>53.12</td><td>-5.96</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4884.000	40.25	74.00	-33.75	52.38	-12.13	Peak	2	7993.906	47.16	74.00	-26.84	53.12	-5.96	Peak	Site :HY-CB02 Condition :3m ,VERTICAL mode :TX_BT1M_2402MHz Test by :Nova Level (dBuV/m) Date: 2026-02-06 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4884.000</td><td>38.70</td><td>74.00</td><td>-35.30</td><td>50.83</td><td>-12.13</td><td>Peak</td></tr><tr><td>2</td><td>5981.000</td><td>44.52</td><td>74.00</td><td>-29.48</td><td>52.56</td><td>-8.04</td><td>Peak</td></tr><tr><td>3</td><td>7974.250</td><td>47.65</td><td>74.00</td><td>-26.35</td><td>53.51</td><td>-5.86</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4884.000	38.70	74.00	-35.30	50.83	-12.13	Peak	2	5981.000	44.52	74.00	-29.48	52.56	-8.04	Peak	3	7974.250	47.65	74.00	-26.35	53.51	-5.86	Peak								
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																											
1	4884.000	40.25	74.00	-33.75	52.38	-12.13	Peak																																																																										
2	7993.906	47.16	74.00	-26.84	53.12	-5.96	Peak																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																											
1	4884.000	38.70	74.00	-35.30	50.83	-12.13	Peak																																																																										
2	5981.000	44.52	74.00	-29.48	52.56	-8.04	Peak																																																																										
3	7974.250	47.65	74.00	-26.35	53.51	-5.86	Peak																																																																										
TX_BT1M_2441MHz_H	TX_BT1M_2441MHz_V																																																																																
Site :HY-CB02 Condition :3m ,HORIZONTAL mode :TX_BT1M_2441MHz Test by :Nova Level (dBuV/m) Date: 2026-02-06 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4882.000</td><td>39.64</td><td>74.00</td><td>-34.36</td><td>51.33</td><td>-11.69</td><td>Peak</td></tr><tr><td>2</td><td>7971.594</td><td>47.65</td><td>74.00</td><td>-26.35</td><td>53.50</td><td>-5.85</td><td>Peak</td></tr><tr><td>3</td><td>12205.000</td><td>48.15</td><td>74.00</td><td>-25.85</td><td>49.95</td><td>-1.80</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4882.000	39.64	74.00	-34.36	51.33	-11.69	Peak	2	7971.594	47.65	74.00	-26.35	53.50	-5.85	Peak	3	12205.000	48.15	74.00	-25.85	49.95	-1.80	Peak	Site :HY-CB02 Condition :3m ,VERTICAL mode :TX_BT1M_2441MHz Test by :Nova Level (dBuV/m) Date: 2026-02-06 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4882.000</td><td>38.80</td><td>74.00</td><td>-35.20</td><td>50.49</td><td>-11.69</td><td>Peak</td></tr><tr><td>2</td><td>7962.563</td><td>47.16</td><td>74.00</td><td>-26.84</td><td>53.02</td><td>-5.86</td><td>Peak</td></tr><tr><td>3</td><td>12205.000</td><td>48.18</td><td>74.00</td><td>-25.82</td><td>49.98</td><td>-1.80</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4882.000	38.80	74.00	-35.20	50.49	-11.69	Peak	2	7962.563	47.16	74.00	-26.84	53.02	-5.86	Peak	3	12205.000	48.18	74.00	-25.82	49.98	-1.80	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																											
1	4882.000	39.64	74.00	-34.36	51.33	-11.69	Peak																																																																										
2	7971.594	47.65	74.00	-26.35	53.50	-5.85	Peak																																																																										
3	12205.000	48.15	74.00	-25.85	49.95	-1.80	Peak																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																											
1	4882.000	38.80	74.00	-35.20	50.49	-11.69	Peak																																																																										
2	7962.563	47.16	74.00	-26.84	53.02	-5.86	Peak																																																																										
3	12205.000	48.18	74.00	-25.82	49.98	-1.80	Peak																																																																										

TX BT1M 2480MHz H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT1M_2480MHz
Test by :Nova

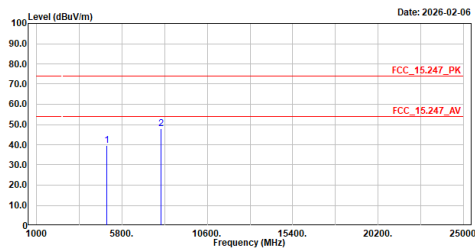


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	39.67	74.00	-34.33	50.96	-11.29	Peak
2	7988.063	47.80	74.00	-26.20	53.74	-5.94	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX BT1M 2480MHz V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT1M_2480MHz
Test by :Nova

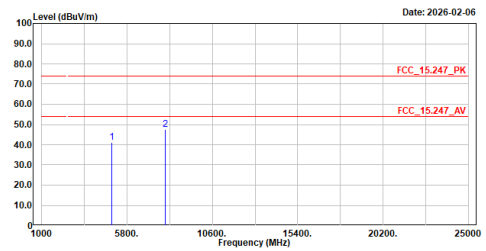


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	40.99	74.00	-33.01	52.28	-11.29	Peak
2	7966.281	47.66	74.00	-26.34	53.51	-5.85	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX BT3M 2402MHz H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT3M_2402MHz
Test by :Nova

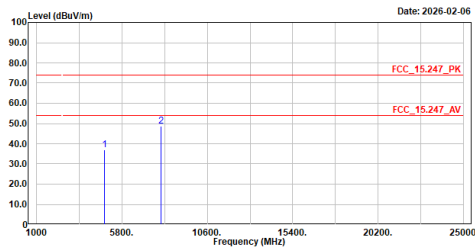


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	37.08	74.00	-36.92	49.21	-12.13	Peak
2	7980.625	48.72	74.00	-25.28	54.61	-5.89	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX BT3M 2402MHz V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT3M_2402MHz
Test by :Nova

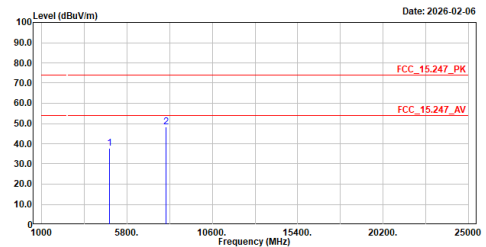


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	37.58	74.00	-36.42	49.71	-12.13	Peak
2	7980.094	48.44	74.00	-25.56	54.33	-5.89	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX BT3M 2441MHz H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT3M_2441MHz
Test by :Nova

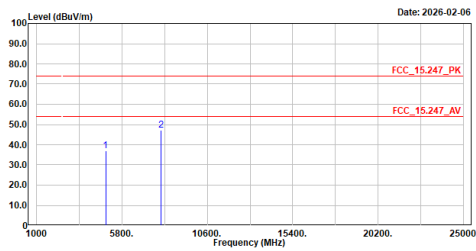


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4882.000	36.96	74.00	-37.04	48.65	-11.69	Peak
2	7998.688	47.26	74.00	-26.74	53.25	-5.99	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX BT3M 2441MHz V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT3M_2441MHz
Test by :Nova

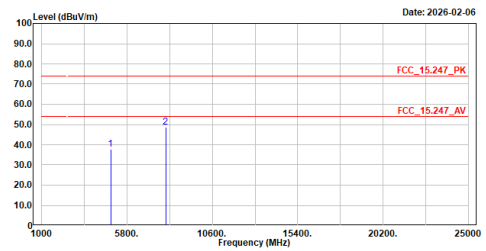


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4882.000	37.64	74.00	-36.36	49.33	-11.69	Peak
2	7974.250	48.52	74.00	-25.48	54.38	-5.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX BT3M 2480MHz H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT3M_2480MHz
Test by :Nova

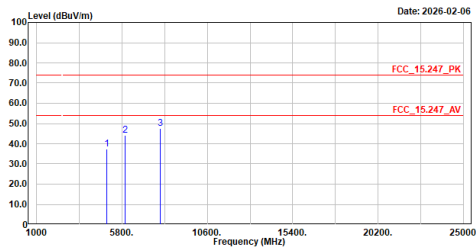


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	37.27	74.00	-36.73	48.56	-11.29	Peak
2	5994.813	44.30	74.00	-29.70	52.34	-8.04	Peak
3	7968.406	47.43	74.00	-26.57	53.28	-5.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX BT3M 2480MHz V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT3M_2480MHz
Test by :Nova

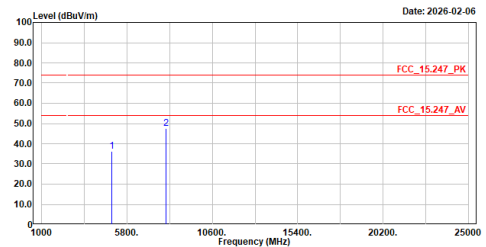


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	36.36	74.00	-37.64	47.65	-11.29	Peak
2	8000.281	47.46	74.00	-26.54	53.45	-5.99	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BT3M_2441MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BT3M_2441MHz
Test by :Caster

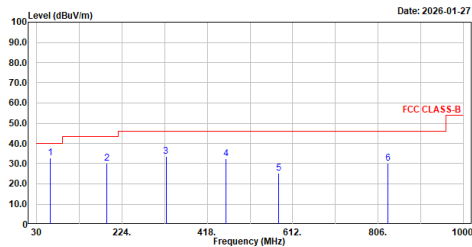


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	60.702	32.90	40.00	-7.10	43.91	-11.01	QP
2	189.508	30.29	43.50	-13.21	43.88	-13.59	QP
3	324.015	33.63	46.00	-12.37	43.23	-9.60	QP
4	459.572	32.45	46.00	-13.55	38.72	-6.27	QP
5	580.878	25.36	46.00	-20.64	29.35	-3.99	QP
6	828.491	30.11	46.00	-15.89	30.79	-0.68	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BT3M_2441MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BT3M_2441MHz
Test by :Caster

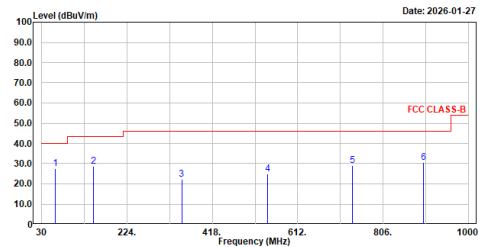


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	61.002	27.46	40.00	-12.54	38.60	-11.14	QP
2	148.506	28.71	43.50	-14.79	39.58	-10.87	QP
3	348.366	22.24	46.00	-23.76	31.55	-9.31	QP
4	543.627	25.05	46.00	-20.95	30.85	-5.00	QP
5	735.786	29.00	46.00	-17.00	30.39	-1.39	QP
6	898.395	30.69	46.00	-15.31	30.59	0.10	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

charge mode_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :charge mode
Test by :Nova

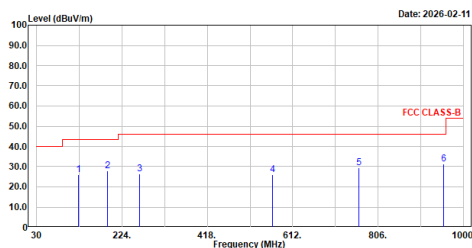


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	125.055	25.91	43.50	-17.59	38.73	-12.82	QP
2	191.108	28.10	43.50	-15.40	41.68	-13.58	QP
3	264.062	26.27	46.00	-19.73	37.92	-11.65	QP
4	566.278	26.02	46.00	-19.98	30.51	-4.49	QP
5	762.138	29.53	46.00	-16.47	30.62	-1.09	QP
6	954.848	31.28	46.00	-14.72	30.19	1.09	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

charge mode_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :charge mode
Test by :Nova

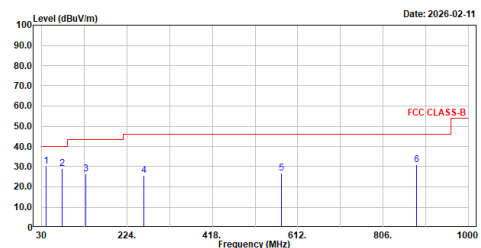


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	40.701	30.37	40.00	-9.63	40.81	-10.44	QP
2	75.802	28.88	40.00	-11.12	43.38	-14.50	QP
3	129.905	26.51	43.50	-16.99	38.64	-12.13	QP
4	261.912	25.52	46.00	-20.48	37.25	-11.73	QP
5	574.878	26.72	46.00	-19.28	30.85	-4.13	QP
6	882.744	31.03	46.00	-14.97	31.10	-0.07	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX BT1M 2402MHz H Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BT1M_2402MHz
Test by :Nova

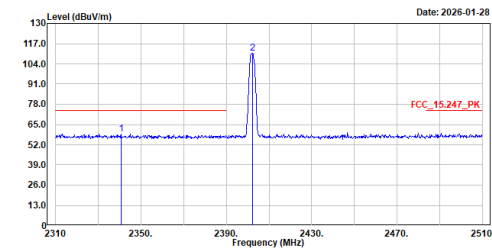


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2340.600	58.73	74.00	-15.27	28.55	30.18	Peak
2	2402.200	110.92	74.00	36.92	80.80	30.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX BT1M 2402MHz V Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BT1M_2402MHz
Test by :Nova

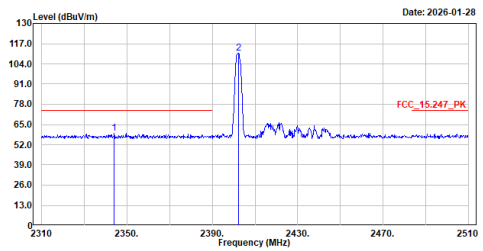


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2344.000	59.25	74.00	-14.75	29.07	30.18	Peak
2	2402.200	111.07	74.00	37.07	80.95	30.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX BT1M 2480MHz H Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BT1M_2480MHz
Test by :Nova

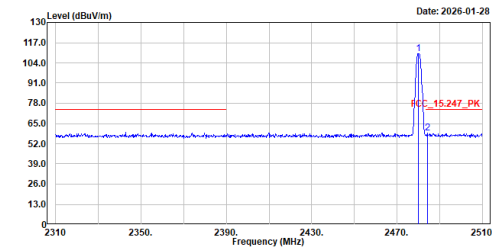


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	109.88	74.00	35.88	79.80	30.08	Peak
2	2484.200	58.69	74.00	-15.31	28.57	30.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX BT1M 2480MHz V Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BT1M_2480MHz
Test by :Nova

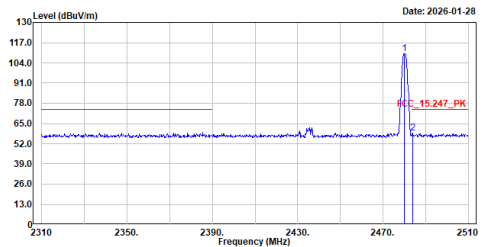


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	109.85	74.00	35.85	79.77	30.08	Peak
2	2484.000	58.65	74.00	-15.35	28.53	30.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX BT3M 2402MHz H Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BT3M_2402MHz
Test by :Nova

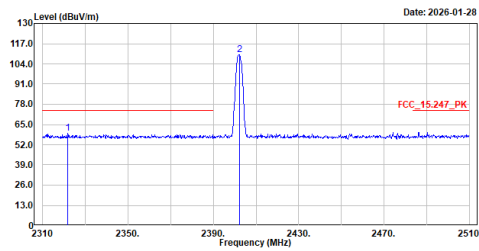


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2321.800	59.56	74.00	-14.44	29.36	30.20	Peak
2	2402.200	109.83	74.00	35.83	79.71	30.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX BT3M 2402MHz V Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BT3M_2402MHz
Test by :Nova

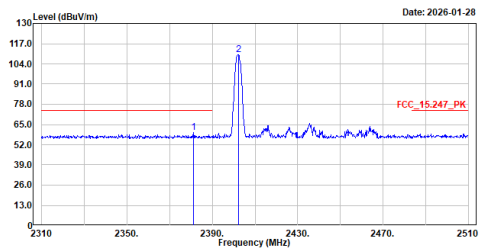


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2381.200	59.64	74.00	-14.36	29.43	30.21	Peak
2	2402.200	109.96	74.00	35.96	79.84	30.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX BT3M 2480MHz H Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BT3M_2480MHz
Test by :Nova

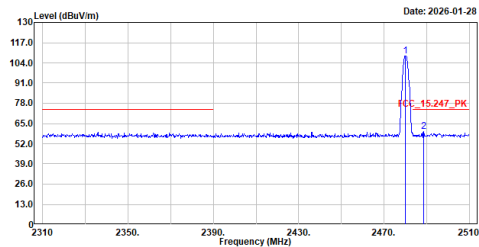


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	108.49	74.00	34.49	78.41	30.08	Peak
2	2488.600	59.88	74.00	-14.12	29.70	30.18	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX BT3M 2480MHz V Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BT3M_2480MHz
Test by :Nova

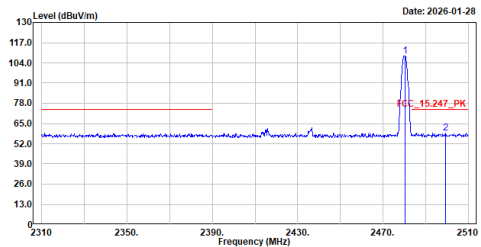

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	108.49	74.00	34.49	78.41	30.08	Peak
2	2499.400	58.92	74.00	-15.08	28.73	30.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Calculating Average Emission

Horizontal Polarization for Average Detector:

Modulation	Channel No.	Frequency (MHz)	Peak Measurement (dB μ V/m)	Duty Cycle Factor (dB)	Measurement Level (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)
GFSK	0	2340.6	58.73	-30.755	27.975	-26.025	54
		2402.2	110.92	-30.755	80.165	--	--
	78	2480.0	109.88	-30.755	79.125	--	--
		2484.2	58.69	-30.755	27.935	-26.065	54
8DPSK	0	2321.8	59.06	-31.201	27.859	-26.141	54
		2402.2	109.83	-31.201	78.629	--	--
	78	2480.0	108.49	-31.201	77.289	--	--
		2488.6	59.88	-31.201	28.679	-25.321	54

Vertical Polarization for Average Detector:

Modulation	Channel No.	Frequency (MHz)	Peak Measurement (dB μ V/m)	Duty Cycle Factor (dB)	Measurement Level (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)
GFSK	0	2344.0	59.25	-30.755	28.495	-25.505	54
		2402.2	111.07	-30.755	80.315	--	--
	78	2480.0	109.85	-30.755	79.095	--	--
		2484.0	58.65	-30.755	27.895	-26.105	54
8DPSK	0	2381.2	59.64	-31.201	28.439	-25.561	54
		2402.2	109.96	-31.201	78.759	--	--
	78	2480.2	108.49	-31.201	77.289	--	--
		2499.4	58.92	-31.201	27.719	-26.281	54