


Appendix A. Test Result of AC Power Line Conducted Emission

TX_BLE2M_2440MHz_Line

Site :HY-SR01
Condition :Line
Mode :TX_BLE2M_2440MHz
Test by :Kevin

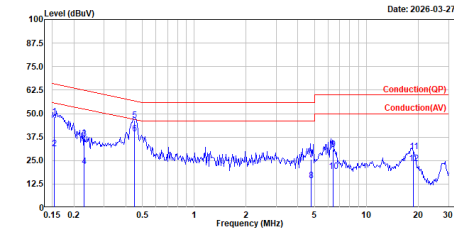


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	Limit	Level	dB	
1	0.155	48.15	65.75	-17.60	38.58	9.57	QP
2	0.155	31.18	55.75	-24.57	21.61	9.57	Average
3	0.229	36.52	62.50	-25.98	26.96	9.56	QP
4	0.229	21.92	52.50	-30.58	12.36	9.56	Average
5	0.451	46.23	56.85	-10.36	36.78	9.59	QP
6	0.451	39.16	46.85	-7.69	29.57	9.59	Average
7	4.784	25.57	56.00	-30.43	15.54	10.03	QP
8	4.784	14.51	46.00	-31.49	4.48	10.03	Average
9	6.397	30.88	60.00	-29.12	20.78	10.10	QP
10	6.397	19.07	50.00	-30.93	8.97	10.10	Average
11	18.764	29.81	60.00	-30.19	19.99	9.82	QP
12	18.764	23.25	50.00	-26.75	13.43	9.82	Average

Note:

1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

TX_BLE2M_2440MHz_Neutral

Site :HY-SR01
Condition :Neutral
Mode :TX_BLE2M_2440MHz
Test by :Kevin

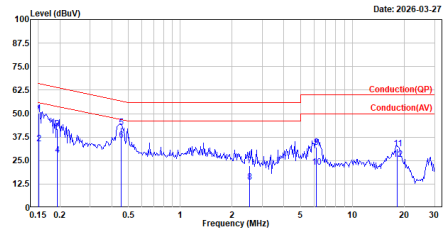


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	Limit	Level	dB	
1	0.151	50.23	65.94	-15.71	40.67	9.56	QP
2	0.151	33.81	55.94	-22.13	24.25	9.56	Average
3	0.193	41.99	63.92	-21.93	32.41	9.58	QP
4	0.193	27.86	53.92	-26.06	18.28	9.58	Average
5	0.455	42.69	56.79	-14.10	33.10	9.59	QP
6	0.455	35.74	46.79	-11.05	26.15	9.59	Average
7	2.533	22.34	56.00	-33.66	12.55	9.79	QP
8	2.533	13.55	46.00	-32.45	3.76	9.79	Average
9	6.190	32.19	60.00	-27.81	22.08	10.11	QP
10	6.190	21.54	50.00	-28.46	11.43	10.11	Average
11	18.223	31.40	60.00	-28.60	21.42	9.98	QP
12	18.223	25.53	50.00	-24.47	15.55	9.98	Average

Note:

1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Appendix B. Test Result of 6dB Bandwidth

Modulation	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK (1Mbps)	2402	0.66	≥ 0.50	Pass
	2440	0.66	≥ 0.50	Pass
	2480	0.66	≥ 0.50	Pass
GFSK (2Mbps)	2402	1.13	≥ 0.50	Pass
	2440	1.13	≥ 0.50	Pass
	2480	1.13	≥ 0.50	Pass

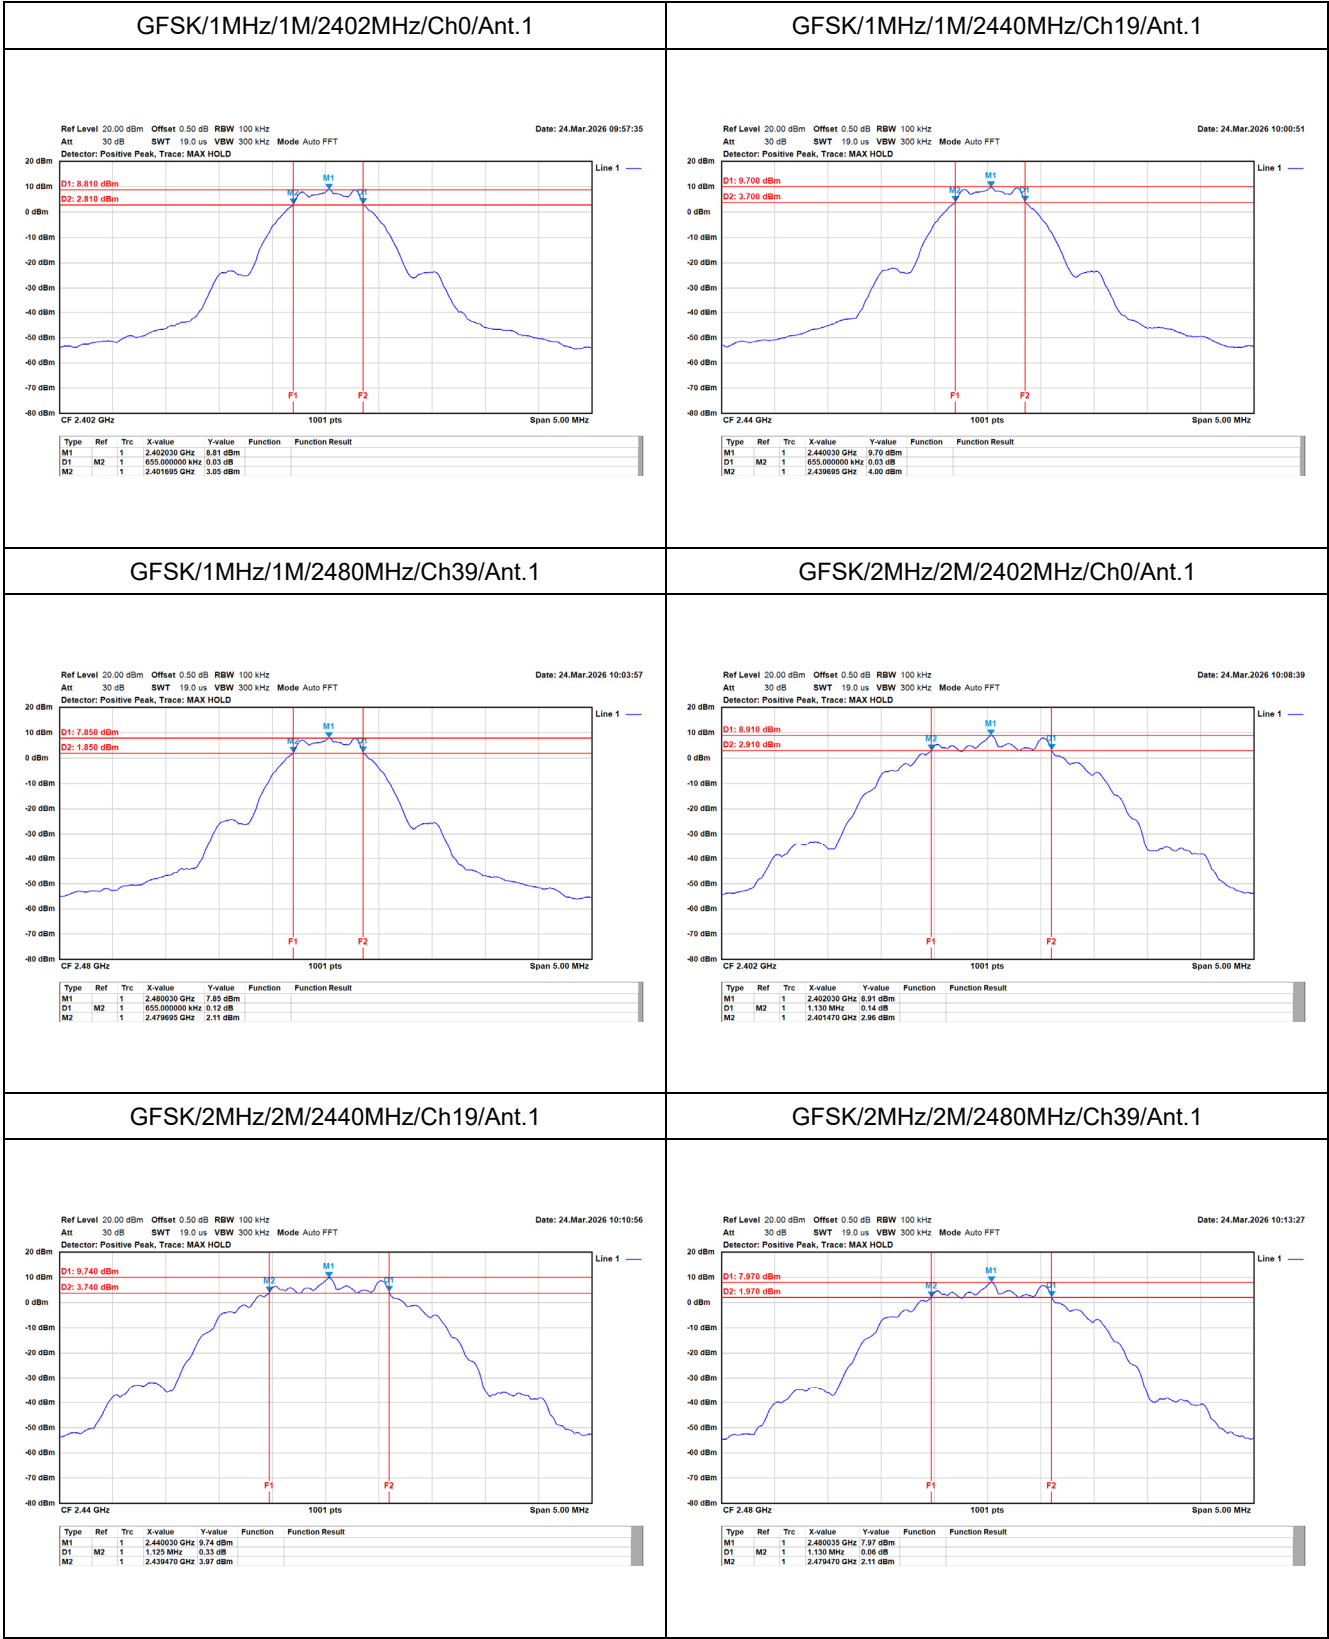


Appendix C. Test Result of Maximum Peak Conducted Output Power

Modulation	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)	Result
GFSK (1Mbps)	2402	3.03	30.00	Pass
	2440	4.17	30.00	Pass
	2480	2.16	30.00	Pass
GFSK (2Mbps)	2402	3.22	30.00	Pass
	2440	4.37	30.00	Pass
	2480	2.33	30.00	Pass


Appendix D. Test Result of Power Spectral Density

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK (1Mbps)	2402	-7.82	8.00	Pass
	2440	-6.83	8.00	Pass
	2480	-8.71	8.00	Pass
GFSK (2Mbps)	2402	-10.33	8.00	Pass
	2440	-9.45	8.00	Pass
	2480	-11.21	8.00	Pass

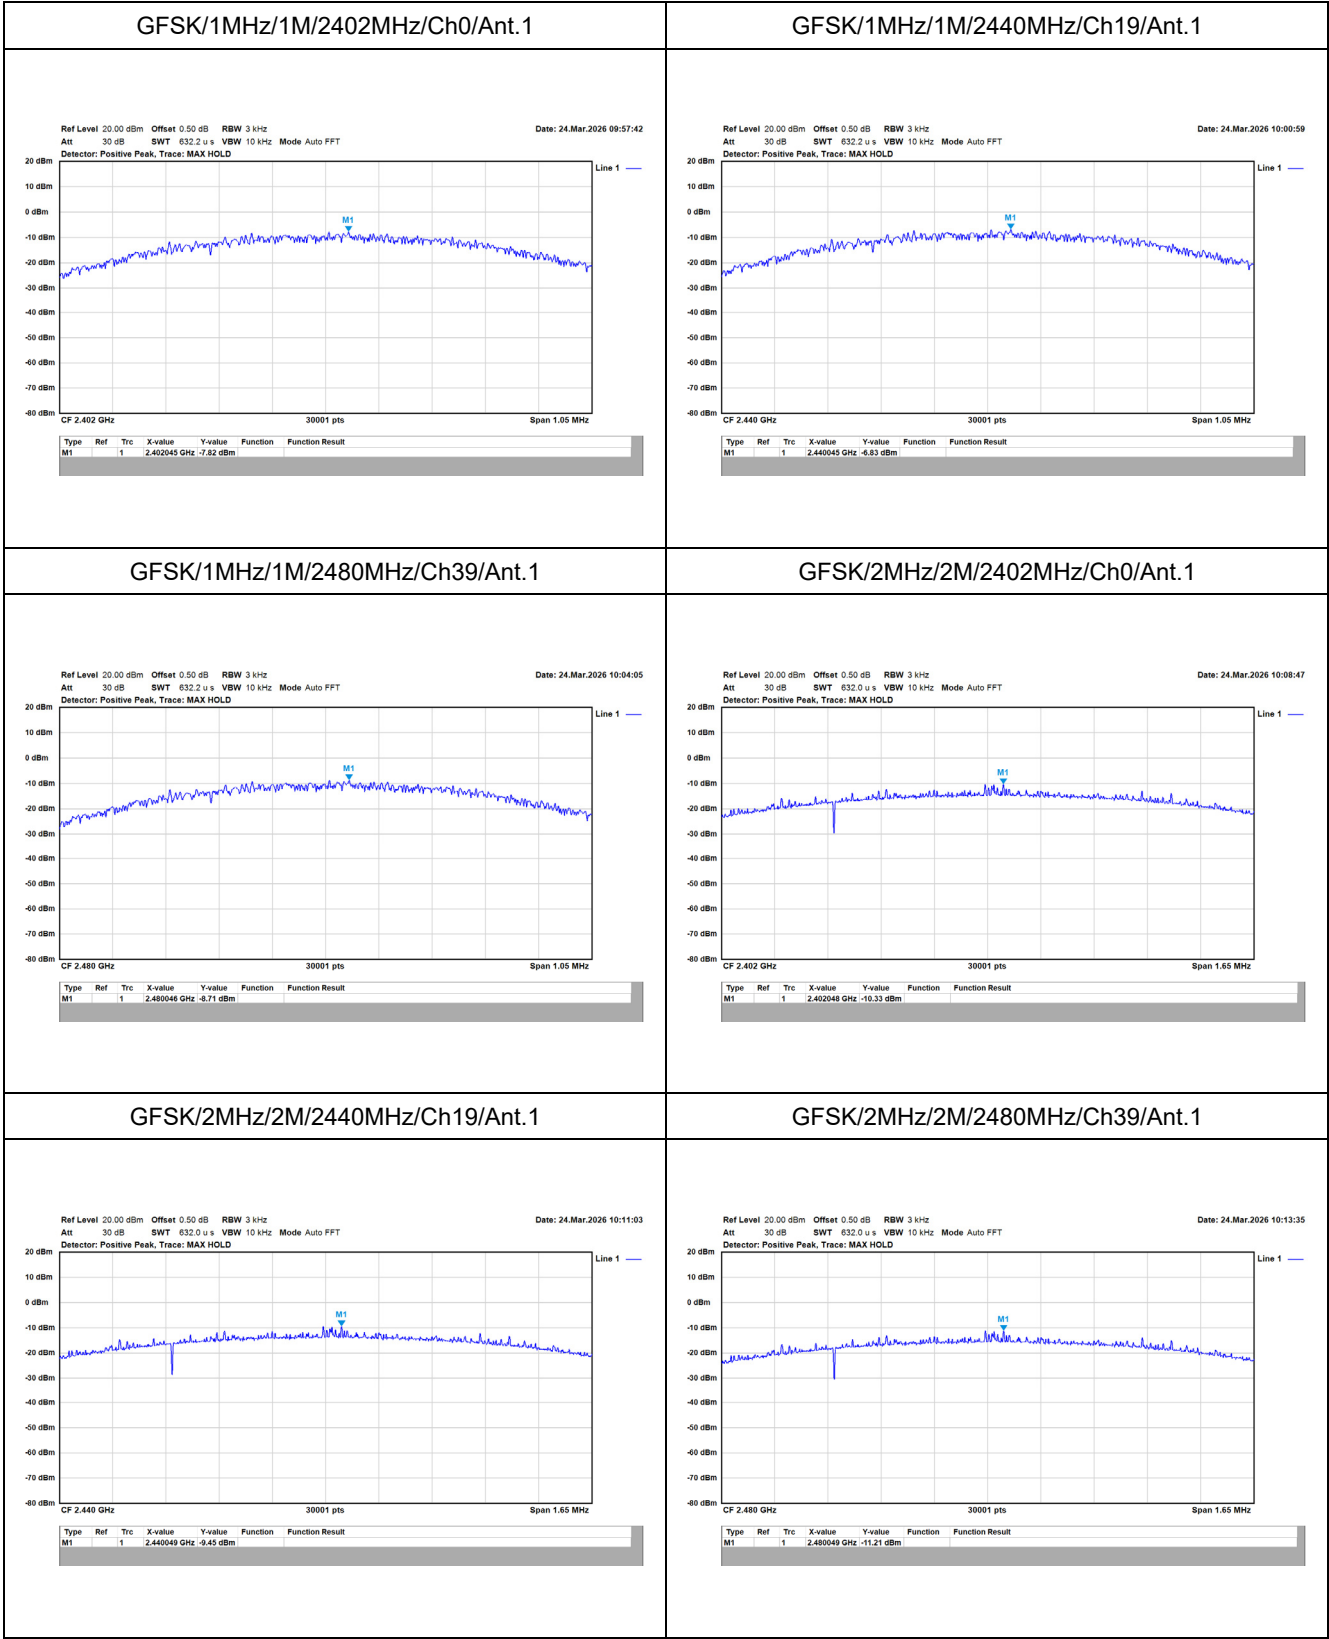


Appendix E. Test Result of Antenna Port Conducted Emission


Modulation	Measurement Level Δ (dB)	Result
GFSK (1 Mbps)	> 20	PASS
GFSK (2 Mbps)	> 20	PASS

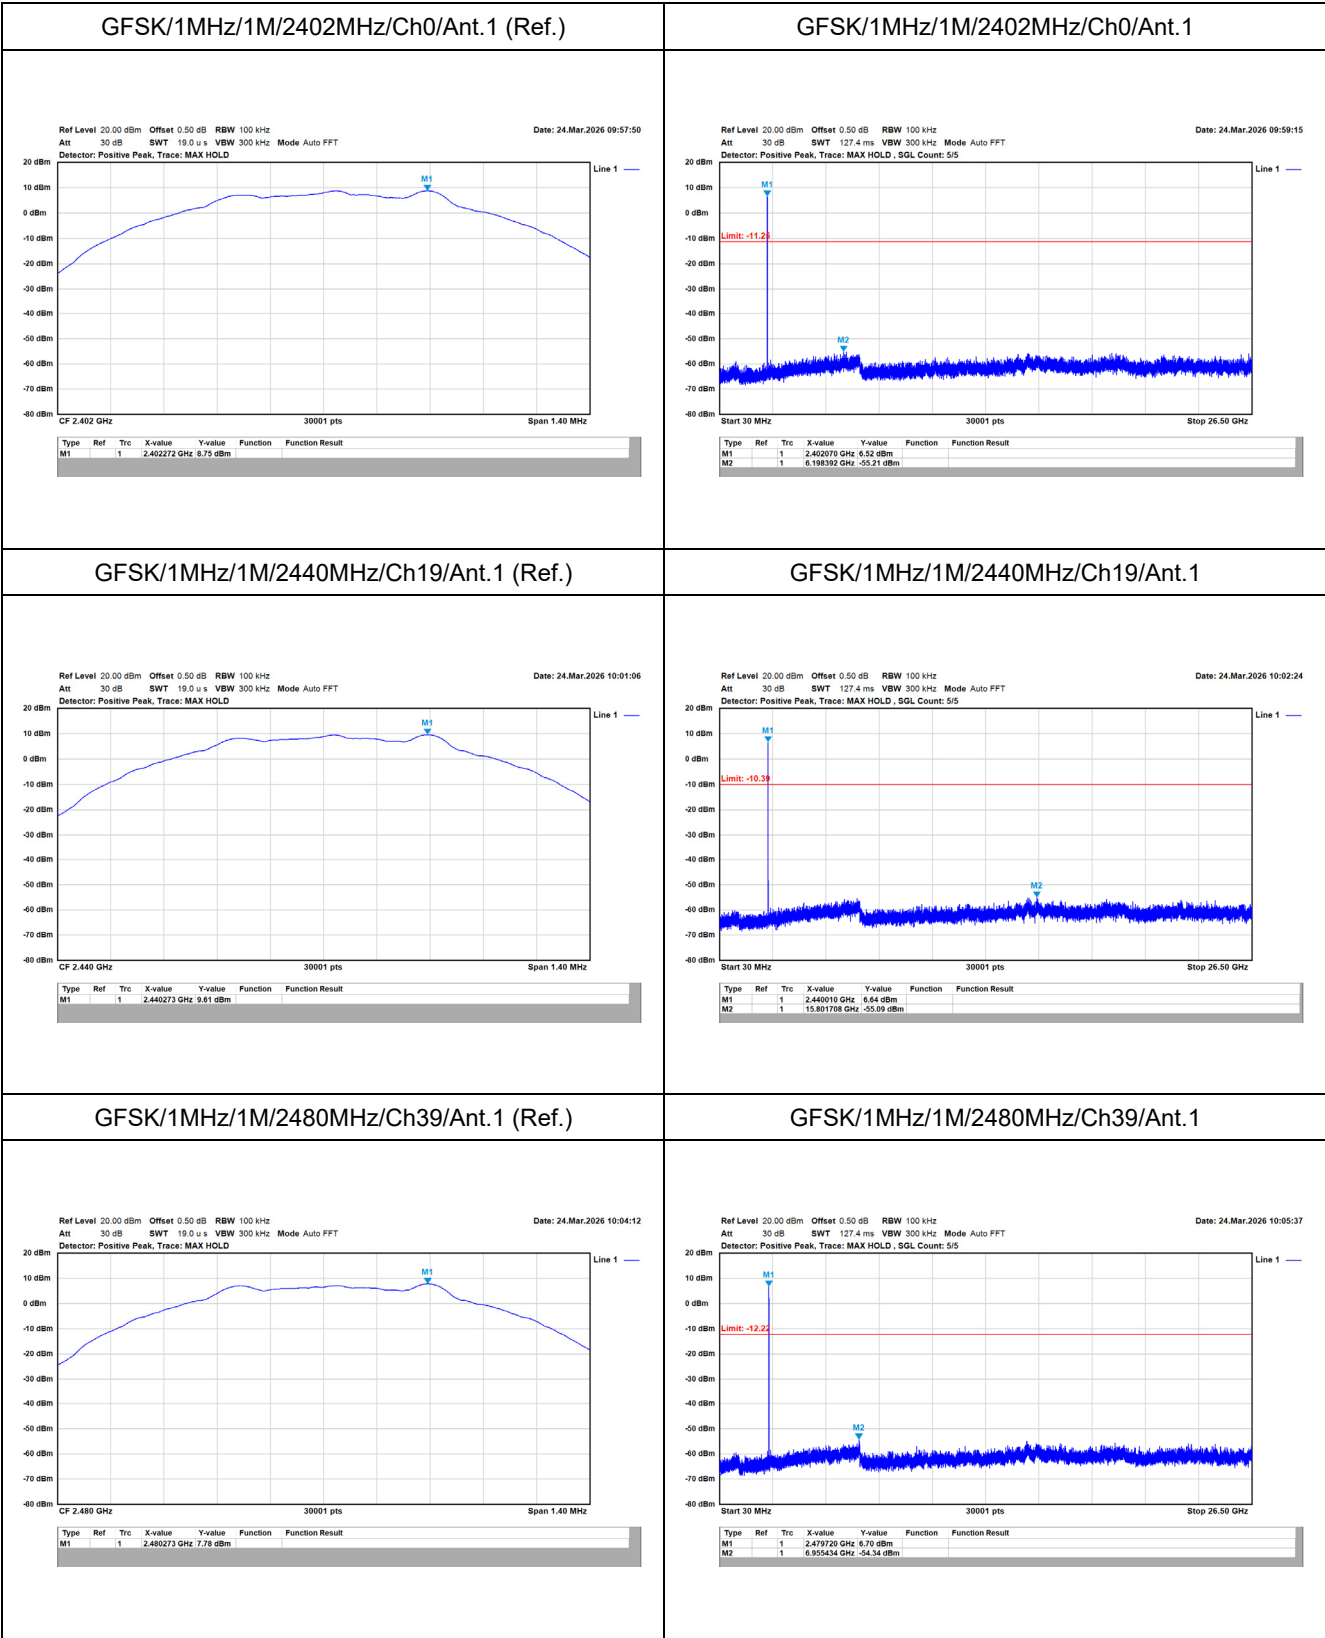


GFSK/2MHz/2M/2402MHz/Ch0/Ant.1 (Ref.)

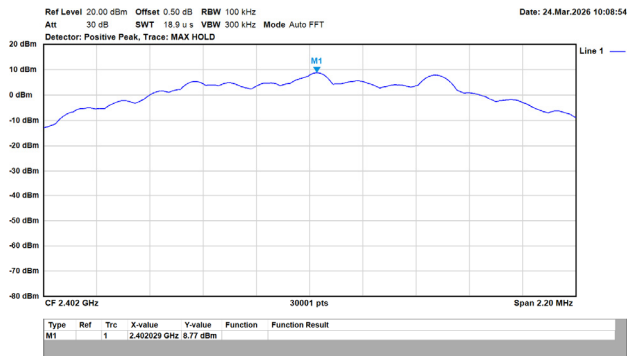


GFSK/2MHz/2M/2402MHz/Ch0/Ant.1

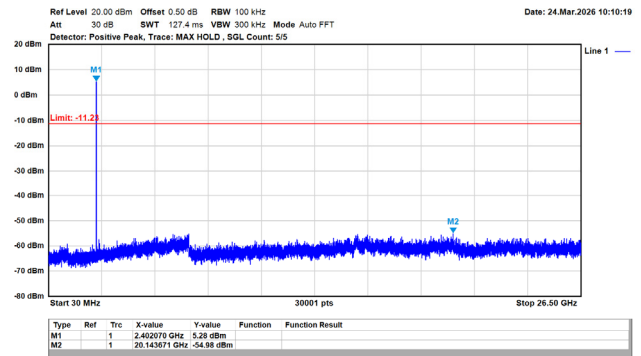


GFSK/2MHz/2M/2440MHz/Ch19/Ant.1 (Ref.)

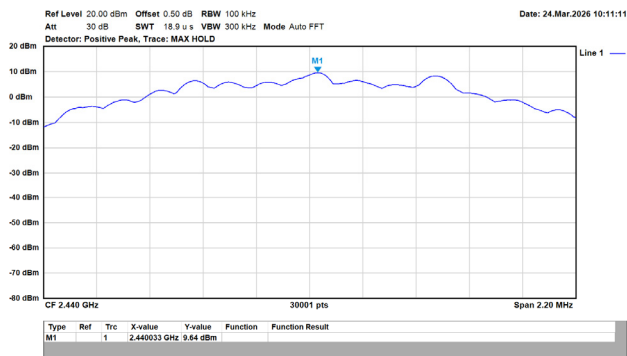


GFSK/2MHz/2M/2440MHz/Ch19/Ant.1

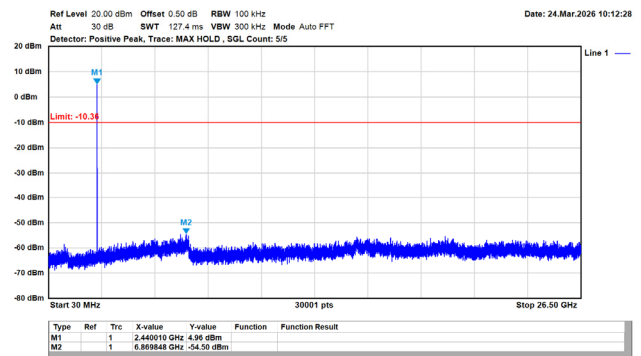

GFSK/2MHz/2M/2480MHz/Ch39/Ant.1 (Ref.)

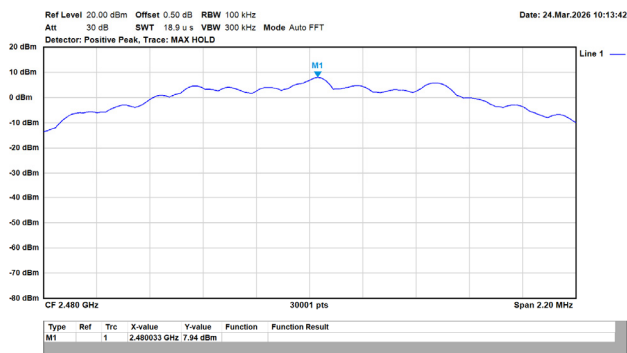

GFSK/2MHz/2M/2480MHz/Ch39/Ant.1

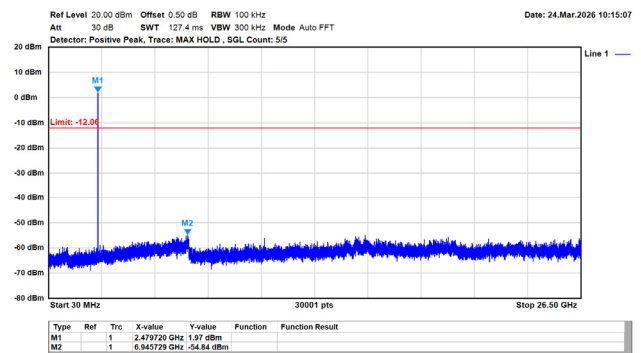




Appendix F. Test Result of Radiated Emission

TX_BLE1M_2402MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE1M_2402MHz
Test by :Bob Chiu

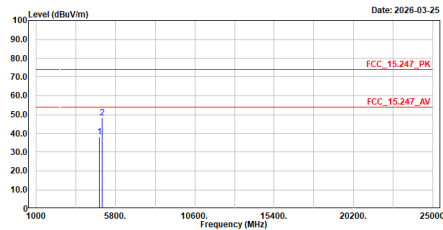


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4884.000	38.21	74.00	-35.79	50.34	-12.13	Peak
2	4991.813	48.47	74.00	-25.53	59.63	-11.16	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE1M_2402MHz
Test by :Bob Chiu

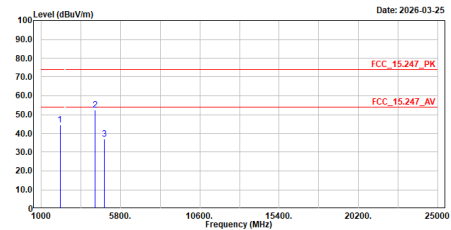


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2132.625	44.51	74.00	-29.49	65.83	-21.32	Peak
2	4266.656	52.30	74.00	-21.70	67.42	-15.12	Peak
3	4884.000	37.01	74.00	-36.99	49.14	-12.13	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2440MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE1M_2440MHz
Test by :Bob Chiu

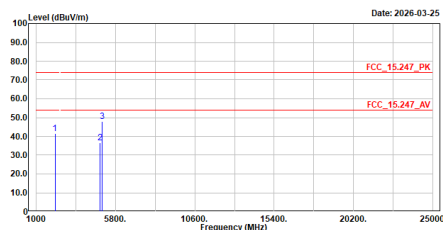


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2132.625	41.42	74.00	-32.58	62.74	-21.32	Peak
2	4888.000	36.75	74.00	-37.25	48.45	-11.70	Peak
3	4996.594	48.10	74.00	-25.90	59.25	-11.15	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2440MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE1M_2440MHz
Test by :Bob Chiu

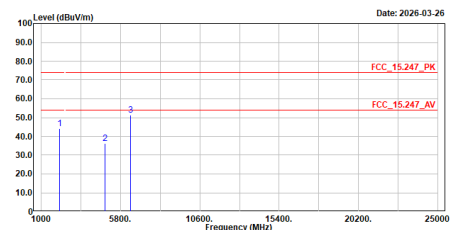


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2130.500	44.16	74.00	-29.84	65.48	-21.32	Peak
2	4888.000	36.33	74.00	-37.67	48.93	-11.70	Peak
3	6393.781	51.49	74.00	-22.51	57.33	-5.84	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE1M_2480MHz
Test by :Bob Chiu

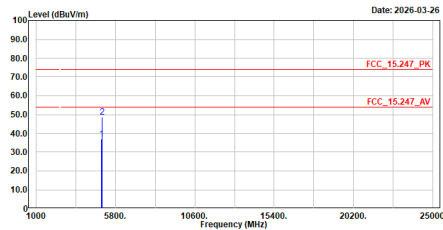


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	37.07	74.00	-36.93	48.36	-11.29	Peak
2	4997.125	48.68	74.00	-25.32	59.82	-11.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE1M_2480MHz
Test by :Bob Chiu

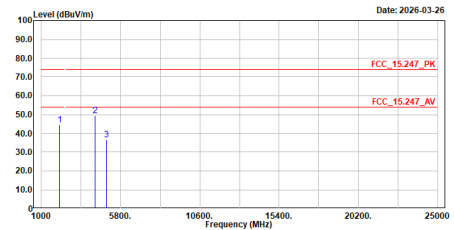


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2129.969	44.35	74.00	-29.65	65.67	-21.32	Peak
2	4253.375	49.44	74.00	-24.56	64.61	-15.17	Peak
3	4960.000	36.47	74.00	-37.53	47.76	-11.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE2M_2402MHz
Test by :Bob Chiu

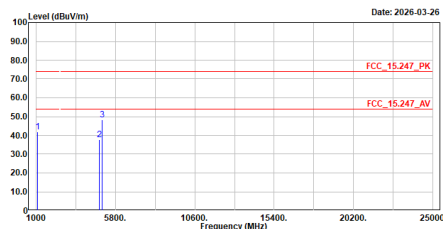


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1865.344	41.99	74.00	-32.01	66.30	-24.31	Peak
2	4884.000	37.80	74.00	-36.20	49.93	-12.13	Peak
3	4986.500	48.42	74.00	-25.58	59.60	-11.18	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE2M_2402MHz
Test by :Bob Chiu

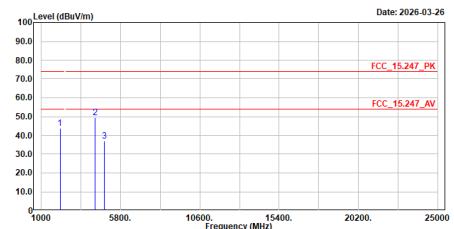


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2132.625	43.71	74.00	-30.29	65.03	-21.32	Peak
2	4249.656	49.51	74.00	-24.49	64.70	-15.19	Peak
3	4884.000	36.94	74.00	-37.06	49.07	-12.13	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE2M_2440MHz
Test by :Bob Chiu

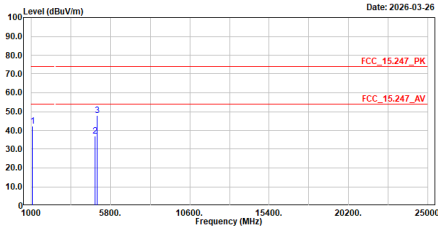


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	1862.688	42.35	74.00	-31.65	66.68	-24.33	Peak
2	4880.000	36.80	74.00	-37.20	48.50	-11.70	Peak
3	4983.844	48.02	74.00	-25.98	59.22	-11.20	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE2M_2440MHz
Test by :Bob Chiu

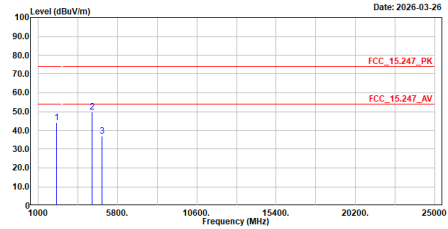


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2122.531	44.10	74.00	-29.90	65.49	-21.39	Peak
2	4252.313	49.92	74.00	-24.08	65.10	-15.18	Peak
3	4880.000	37.08	74.00	-36.92	48.78	-11.70	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE2M_2480MHz
Test by :Bob Chiu

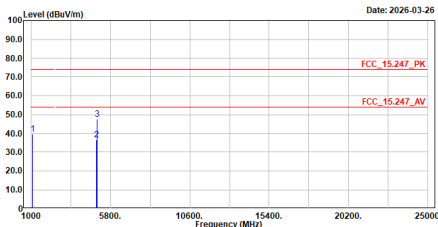


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	1863.219	39.77	74.00	-34.23	64.10	-24.33	Peak
2	4960.000	36.70	74.00	-37.30	47.99	-11.29	Peak
3	4988.094	47.68	74.00	-26.32	58.85	-11.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE2M_2480MHz
Test by :Bob Chiu

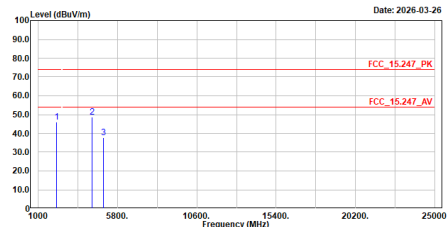


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2124.656	46.05	74.00	-27.95	67.42	-21.37	Peak
2	4249.656	48.55	74.00	-25.45	63.74	-15.19	Peak
3	4960.000	37.91	74.00	-36.09	49.20	-11.29	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE2M_2440MHz
Test by :Nova

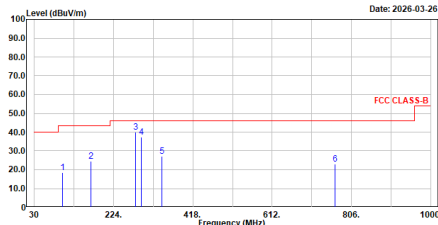


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	98.954	18.50	43.50	-25.00	33.97	-15.47	QP
2	168.757	24.59	43.50	-18.91	35.83	-11.24	QP
3	277.413	40.12	46.00	-5.88	51.09	-10.97	QP
4	291.964	37.25	46.00	-8.75	47.79	-10.54	QP
5	342.666	27.35	46.00	-18.65	36.66	-9.31	QP
6	766.538	22.85	46.00	-23.15	23.95	-1.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE2M_2440MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE2M_2440MHz
Test by :Nova

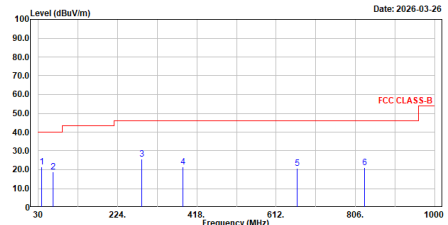


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	37.950	21.68	40.00	-18.32	32.23	-10.55	QP
2	66.652	19.05	40.00	-20.95	31.47	-12.42	QP
3	283.563	25.67	46.00	-20.33	36.38	-10.71	QP
4	383.818	21.70	46.00	-24.30	29.84	-8.14	QP
5	662.783	20.92	46.00	-25.08	23.59	-2.67	QP
6	829.041	20.99	46.00	-25.01	21.68	-0.69	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE1M_2402MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BLE1M_2402MHz
Test by :Bob Chiu

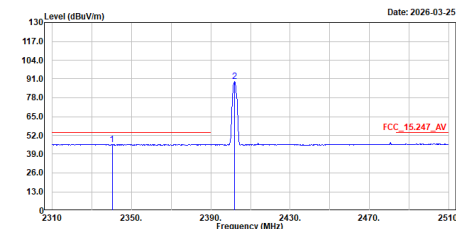


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2340.200	45.73	54.00	-8.27	15.40	30.33	Average
2	2402.000	89.19	-----	-----	58.91	30.28	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BLE1M_2402MHz
Test by :Bob Chiu

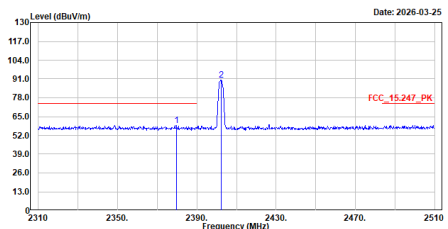


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2379.800	59.07	74.00	-14.93	28.71	30.36	Peak
2	2402.200	90.11	-----	-----	59.83	30.28	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BLE1M_2402MHz
Test by :Bob Chiu

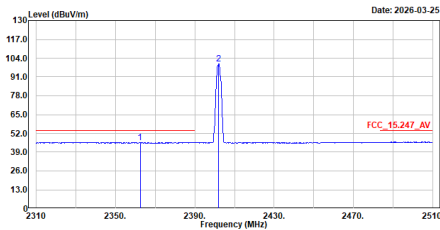


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2362.400	45.74	54.00	-8.26	15.42	30.32	Average
2	2402.000	100.17	-----	-----	69.89	30.28	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BLE1M_2402MHz
Test by :Bob Chiu

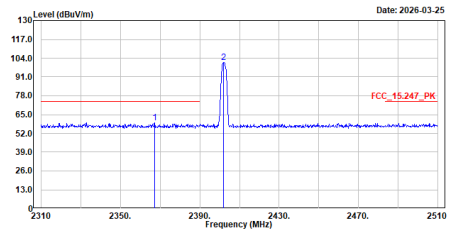


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2367.200	59.31	74.00	-14.69	29.03	30.28	Peak
2	2402.000	101.03	-----	-----	70.75	30.28	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BLE1M_2480MHz
Test by :Bob Chiu

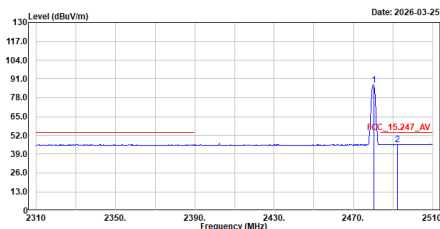


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	86.82	-----	-----	56.74	30.08	Average
2	2492.000	45.76	54.00	-8.24	15.57	30.19	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BLE1M_2480MHz
Test by :Bob Chiu

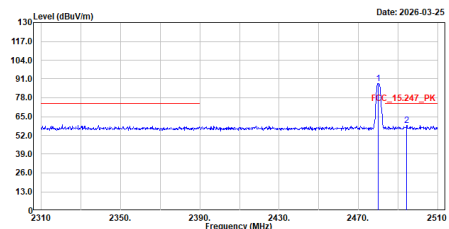


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	87.77	-----	-----	57.69	30.08	Peak
2	2494.400	59.04	74.00	-14.96	28.85	30.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BLE1M_2480MHz
Test by :Bob Chiu

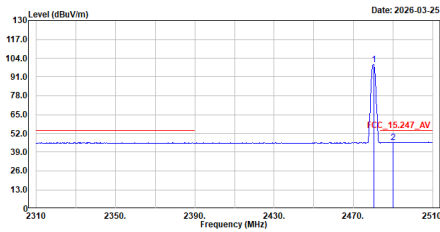


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	99.52	-----	-----	69.44	30.08	Average
2	2490.000	45.73	54.00	-8.27	15.54	30.19	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BLE1M_2480MHz
Test by :Bob Chiu

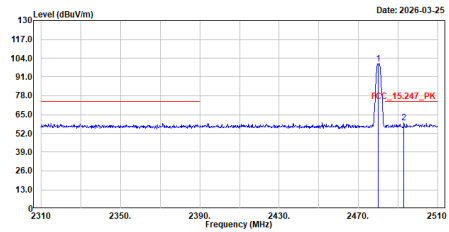


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	100.31	-----	-----	70.23	30.08	Peak
2	2493.000	59.17	74.00	-14.83	28.98	30.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BLE2M_2402MHz
Test by :Bob Chiu

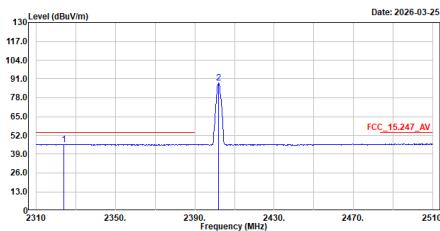


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2324.000	45.83	54.00	-8.17	15.61	30.22	Average
2	2402.000	88.09	-----	-----	57.97	30.12	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BLE2M_2402MHz
Test by :Bob Chiu

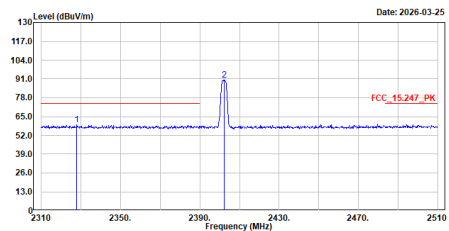


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2328.000	59.23	74.00	-14.77	28.97	30.26	Peak
2	2402.200	90.25	-----	-----	60.13	30.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BLE2M_2402MHz
Test by :Bob Chiu

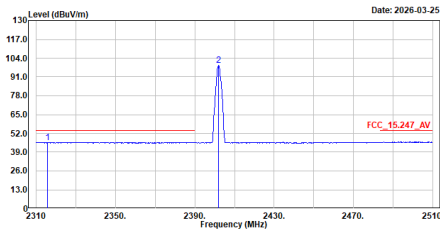


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2315.800	45.78	54.00	-8.22	15.61	38.17	Average
2	2402.000	98.88	-----	-----	68.76	30.12	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BLE2M_2402MHz
Test by :Bob Chiu

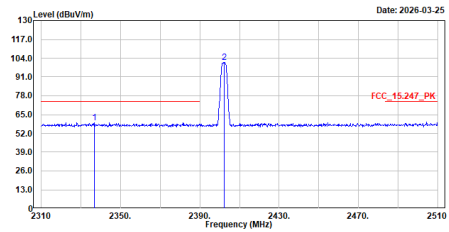


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2336.800	59.29	74.00	-14.71	29.08	30.21	Peak
2	2402.200	101.03	-----	-----	70.91	30.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BLE2M_2480MHz
Test by :Bob Chiu

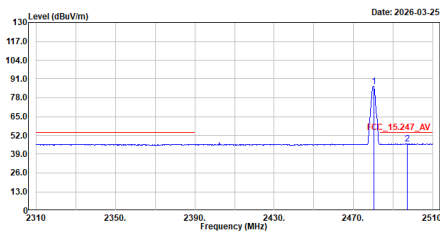


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.200	85.69	-----	-----	55.61	30.08	Average
2	2497.200	46.17	54.00	-7.83	15.98	30.19	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BLE2M_2480MHz
Test by :Bob Chiu

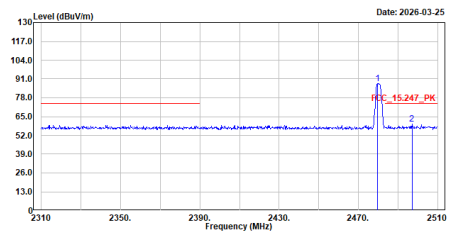

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2479.800	87.93	-----	-----	57.85	30.08	Peak
2	2497.000	59.68	74.00	-14.32	29.49	30.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_V_Average	TX_BLE2M_2480MHz_V_Peak
Site :HY-CB02 Condition :3m ,Vertical mode :TX_BLE2M_2480MHz Test by :Bob Chiu Level (dBuV/m) 130 117.0 104.0 91.0 78.0 65.0 52.0 39.0 26.0 13.0 0 231023502390243024702510 Frequency (MHz) Date: 2026-03-25 1 2480.200 98.36 ----- ----- 68.28 30.08 Average 2 2491.600 45.96 54.00 -8.04 15.77 30.19 Average Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	Site :HY-CB02 Condition :3m ,Vertical mode :TX_BLE2M_2480MHz Test by :Bob Chiu Level (dBuV/m) 130 117.0 104.0 91.0 78.0 65.0 52.0 39.0 26.0 13.0 0 231023502390243024702510 Frequency (MHz) Date: 2026-03-25 1 2480.000 100.39 ----- ----- 70.31 30.08 Peak 2 2496.600 59.50 74.00 -14.50 29.31 30.19 Peak Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.