



**FCC 47 CFR PART 15 SUBPART E
CERTIFICATION TEST REPORT**

FOR

CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

MODEL NUMBERS: A1633, A1688, A1691 AND A1700

FCC ID: BCG-E2946A

REPORT NUMBER: 15U20164-E5, REVISION B

ISSUE DATE: JULY 24, 2015

Prepared for
APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	07/15/2015	Initial Issue	M. Mekuria
A	07/22/2015	Addressed TCB questions	M. Mekuria
B	07/24/2015	Addressed TCB questions	E.YU

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	11
2. TEST METHODOLOGY	12
3. FACILITIES AND ACCREDITATION	12
4. CALIBRATION AND UNCERTAINTY	13
4.1. MEASURING INSTRUMENT CALIBRATION	13
4.2. SAMPLE CALCULATION	13
4.3. MEASUREMENT UNCERTAINTY	13
5. EQUIPMENT UNDER TEST	14
5.1. DESCRIPTION OF EUT	14
5.2. MAXIMUM OUTPUT POWER	14
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	16
5.4. SOFTWARE AND FIRMWARE	16
5.5. WORST-CASE CONFIGURATION AND MODE	17
5.6. DESCRIPTION OF TEST SETUP	18
6. TEST AND MEASUREMENT EQUIPMENT	22
7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	23
7.1. ON TIME AND DUTY CYCLE	23
7.2. MEASUREMENT METHODS	27
8. ANTENNA PORT TEST RESULTS (MODEL: A1633)	28
8.1. 802.11n HT20 CHAIN 0 MODE IN THE 5.2 GHz BAND	28
8.1.1. 26 dB BANDWIDTH	28
8.1.2. 99% BANDWIDTH	31
8.1.3. AVERAGE POWER (FCC)	34
8.1.4. OUTPUT POWER AND PSD (FCC)	35
8.2. 802.11n HT20 CHAIN 1 MODE IN THE 5.2 GHz BAND	39
8.2.1. 26 dB BANDWIDTH	39
8.2.2. 99% BANDWIDTH	42
8.2.3. AVERAGE POWER	45
8.2.4. OUTPUT POWER AND PSD	46
8.3. 802.11n HT20 2Tx CDD MODE IN THE 5.2 GHz BAND	50
8.3.1. 26 dB BANDWIDTH	50
8.3.2. 99% BANDWIDTH	54
8.3.3. AVERAGE POWER	58
8.3.4. OUTPUT POWER AND PSD	59
8.4. 802.11n HT20 2Tx STBC MODE IN THE 5.2 GHz BAND	65
8.5. 802.11n HT40 CHAIN 0 MODE IN THE 5.2 GHz BAND	66

8.5.1.	26 dB BANDWIDTH.....	66
8.5.2.	99% BANDWIDTH.....	68
8.5.3.	AVERAGE POWER.....	70
8.5.4.	OUTPUT POWER AND PSD.....	71
8.6.	<i>802.11n HT40 CHAIN 1 MODE IN THE 5.2 GHz BAND</i>	<i>74</i>
8.6.1.	26 dB BANDWIDTH.....	74
8.6.2.	99% BANDWIDTH.....	76
8.6.3.	AVERAGE POWER.....	78
8.6.4.	OUTPUT POWER AND PSD.....	79
8.7.	<i>802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND.....</i>	<i>82</i>
8.7.1.	26 dB BANDWIDTH.....	82
8.7.2.	99% BANDWIDTH.....	85
8.7.3.	AVERAGE POWER.....	88
8.7.4.	OUTPUT POWER AND PSD.....	89
8.8.	<i>802.11n HT40 2Tx STBC MODE IN THE 5.2 GHz BAND.....</i>	<i>94</i>
8.9.	<i>802.11ac HT80 CHAIN 0 MODE IN THE 5.2 GHz BAND</i>	<i>95</i>
8.9.1.	26 dB BANDWIDTH.....	95
8.9.2.	99% BANDWIDTH.....	96
8.9.3.	AVERAGE POWER.....	97
8.9.4.	OUTPUT POWER AND PSD.....	98
8.10.	<i>802.11ac HT80 CHAIN 1 MODE IN THE 5.2 GHz BAND</i>	<i>101</i>
8.10.1.	26 dB BANDWIDTH	101
8.10.2.	99% BANDWIDTH	102
8.10.3.	AVERAGE POWER	103
8.10.4.	OUTPUT POWER AND PSD	104
8.11.	<i>802.11ac HT80 2Tx CDD MODE IN THE 5.2 GHz BAND</i>	<i>107</i>
8.11.1.	26 dB BANDWIDTH	107
8.11.2.	99% BANDWIDTH	109
8.11.3.	AVERAGE POWER	111
8.11.4.	OUTPUT POWER AND PSD	112
8.12.	<i>802.11ac HT80 2Tx STBC MODE IN THE 5.2 GHz BAND.....</i>	<i>116</i>
8.13.	<i>802.11n HT20 CHAIN 0 MODE IN THE 5.3 GHz BAND.....</i>	<i>117</i>
8.13.1.	26 dB BANDWIDTH	117
8.13.2.	99% BANDWIDTH	120
8.13.3.	AVERAGE POWER	123
8.13.4.	OUTPUT POWER AND PSD	124
8.14.	<i>802.11n HT20 CHAIN 1 MODE IN THE 5.3 GHz BAND.....</i>	<i>128</i>
8.14.1.	26 dB BANDWIDTH	128
8.14.2.	99% BANDWIDTH	131
8.14.3.	AVERAGE POWER	134
8.14.4.	OUTPUT POWER AND PSD	135
8.15.	<i>802.11n HT20 2Tx CDD MODE IN THE 5.3 GHz BAND</i>	<i>139</i>
8.15.1.	26 dB BANDWIDTH	139
8.15.2.	99% BANDWIDTH	143
8.15.3.	AVERAGE POWER	147
8.15.4.	OUTPUT POWER AND PSD	148
8.16.	<i>802.11n HT20 2Tx STBC MODE IN THE 5.3 GHz BAND</i>	<i>153</i>

8.17.	802.11n HT40 CHAIN 0 MODE IN THE 5.3 GHz BAND	154
8.17.1.	26 dB BANDWIDTH	154
8.17.2.	99% BANDWIDTH	156
8.17.3.	AVERAGE POWER	158
8.17.4.	OUTPUT POWER AND PSD	159
8.18.	802.11n HT40 CHAIN 1 MODE IN THE 5.3 GHz BAND	162
8.18.1.	26 dB BANDWIDTH	162
8.18.2.	99% BANDWIDTH	164
8.18.3.	AVERAGE POWER	166
8.18.4.	OUTPUT POWER AND PSD	167
8.19.	802.11n HT40 2Tx CDD MODE IN THE 5.3 GHz BAND	170
8.19.1.	26 dB BANDWIDTH	170
8.19.2.	99% BANDWIDTH	173
8.19.3.	AVERAGE POWER	176
8.19.4.	OUTPUT POWER AND PSD	177
8.20.	802.11n HT40 2Tx STBC MODE IN THE 5.3 GHz BAND	181
8.21.	802.11ac HT80 CHAIN 0 MODE IN THE 5.3 GHz BAND	182
8.21.1.	26 dB BANDWIDTH	182
8.21.2.	99% BANDWIDTH	183
8.21.3.	AVERAGE POWER	184
8.21.4.	OUTPUT POWER AND PSD	185
8.22.	802.11ac HT80 CHAIN 1 MODE IN THE 5.3 GHz BAND	188
8.22.1.	26 dB BANDWIDTH	188
8.22.2.	99% BANDWIDTH	189
8.22.3.	AVERAGE POWER	190
8.22.4.	OUTPUT POWER AND PSD	191
8.23.	802.11ac HT80 2Tx CDD MODE IN THE 5.3 GHz BAND	194
8.23.1.	26 dB BANDWIDTH	194
8.23.2.	99% BANDWIDTH	196
8.23.3.	AVERAGE POWER	198
8.23.4.	OUTPUT POWER AND PSD	199
8.24.	802.11ac HT80 2Tx STBC MODE IN THE 5.3 GHz BAND	202
8.25.	802.11n HT20 CHAIN 0 MODE IN THE 5.6 GHz BAND	203
8.25.1.	26 dB BANDWIDTH	203
8.25.2.	99% BANDWIDTH	206
8.25.3.	AVERAGE POWER	209
8.25.4.	OUTPUT POWER AND PSD	210
8.25.5.	STRADDLE CHANNEL 144 RESULTS	214
8.25.6.	6 dB BANDWIDTH	218
8.26.	802.11n HT20 CHAIN 1 MODE IN THE 5.6 GHz BAND	219
8.26.1.	26 dB BANDWIDTH	219
8.26.2.	99% BANDWIDTH	222
8.26.3.	AVERAGE POWER	225
8.26.4.	OUTPUT POWER AND PSD	226
8.26.5.	STRADDLE CHANNEL 144 RESULTS	230
8.26.6.	6 dB BANDWIDTH	234
8.27.	802.11n HT20 2Tx CDD MODE IN THE 5.6 GHz BAND	235
8.27.1.	26 dB BANDWIDTH	235

8.27.2.	99% BANDWIDTH	240
8.27.3.	AVERAGE POWER	245
8.27.4.	OUTPUT POWER AND PSD	246
8.27.5.	STRADDLE CHANNEL 144 RESULTS	251
8.27.6.	6 dB BANDWIDTH	256
8.28.	<i>802.11n HT20 2Tx STBC MODE IN THE 5.6 GHz BAND</i>	<i>258</i>
8.29.	<i>802.11n HT40 CHAIN 0 MODE IN THE 5.6 GHz BAND</i>	<i>259</i>
8.29.1.	26 dB BANDWIDTH	259
8.29.2.	99% BANDWIDTH	262
8.29.3.	AVERAGE POWER	265
8.29.4.	OUTPUT POWER AND PSD	266
8.29.5.	STRADDLE CH 142 RESULTS	270
8.29.6.	6 dB BANDWIDTH	274
8.30.	<i>802.11n HT40 CHAIN 1 MODE IN THE 5.6 GHz BAND</i>	<i>275</i>
8.30.1.	26 dB BANDWIDTH	275
8.30.2.	99% BANDWIDTH	278
8.30.3.	AVERAGE POWER	281
8.30.4.	OUTPUT POWER AND PSD	282
8.30.5.	STRADDLE CH 142 RESULTS	286
8.30.6.	6 dB BANDWIDTH	290
8.31.	<i>802.11n HT40 2Tx CDD MODE IN THE 5.6 GHz BAND</i>	<i>291</i>
8.31.1.	26 dB BANDWIDTH	291
8.31.2.	99% BANDWIDTH	296
8.31.3.	AVERAGE POWER	301
8.31.4.	OUTPUT POWER AND PSD	302
8.31.5.	STRADDLE CHANNEL 142 RESULTS	307
8.31.6.	6 dB BBANDWIDTH	312
8.32.	<i>802.11n HT40 2Tx STBC MODE IN THE 5.6 GHz BAND</i>	<i>314</i>
8.33.	<i>802.11ac HT80 CHAIN 0 MODE IN THE 5.6 GHz BAND</i>	<i>315</i>
8.33.1.	26 dB BANDWIDTH	315
8.33.2.	99% BANDWIDTH	318
8.33.3.	AVERAGE POWER	321
8.33.4.	OUTPUT POWER AND PSD	322
8.33.5.	STRADDLE CHANNEL 138 RESULTS	325
8.33.6.	6 dB BANDWIDTH	329
8.34.	<i>802.11ac HT80 CHAIN 1 MODE IN THE 5.6 GHz BAND</i>	<i>330</i>
8.34.1.	26 dB BANDWIDTH	330
8.34.2.	99% BANDWIDTH	333
8.34.3.	AVERAGE POWER	336
8.34.4.	OUTPUT POWER AND PSD	337
8.34.5.	STRADDLE CHANNEL 138 RESULTS	340
8.34.6.	6 dB BANDWIDTH	344
8.35.	<i>802.11ac HT80 2Tx CDD MODE IN THE 5.6 GHz BAND (5610MHz for FCC only)</i>	<i>345</i>
8.35.1.	26 dB BANDWIDTH	345
8.35.2.	99% BANDWIDTH	349
8.35.3.	AVERAGE POWER	353
8.35.4.	OUTPUT POWER AND PSD	354
8.35.5.	STRADDLE CHANNEL 138 RESULTS	358
8.35.6.	6 dB BANDWIDTH	363

8.36.	802.11ac HT80 2Tx STBC MODE IN THE 5.6 GHz BAND (5610MHz for FCC only) ...	365
8.37.	802.11n HT20 CHAIN 0 MODE IN THE 5.8 GHz BAND	366
8.37.1.	6 dB BANDWIDTH	366
8.37.2.	26 dB BANDWIDTH	369
8.37.3.	99% BANDWIDTH	372
8.37.4.	AVERAGE POWER	375
8.37.5.	OUTPUT POWER.....	376
8.37.6.	PSD	378
8.38.	802.11n HT20 CHAIN 1 MODE IN THE 5.8 GHz BAND	381
8.38.1.	6 dB BANDWIDTH	381
8.38.2.	26 dB BANDWIDTH	384
8.38.3.	99% BANDWIDTH	387
8.38.4.	AVERAGE POWER	390
8.38.5.	OUTPUT POWER.....	391
8.38.6.	PSD	393
8.39.	802.11n HT20 2Tx CDD MODE IN THE 5.8 GHz BAND	396
8.39.1.	6 dB BANDWIDTH	396
8.39.2.	26 dB BANDWIDTH	400
8.39.3.	99% BANDWIDTH	404
8.39.4.	AVERAGE POWER	408
8.39.5.	OUTPUT POWER.....	409
8.39.6.	PSD	411
8.40.	802.11n HT20 2Tx STBC MODE IN THE 5.8 GHz BAND	416
8.41.	802.11n HT40 CHAIN 0 MODE IN THE 5.8 GHz BAND.....	417
8.41.1.	6 dB BANDWIDTH	417
8.41.2.	26 dB BANDWIDTH	419
8.41.3.	99% BANDWIDTH	421
8.41.4.	AVERAGE POWER	423
8.41.5.	OUTPUT POWER.....	424
8.41.6.	PSD	426
8.42.	802.11n HT40 CHAIN 1 MODE IN THE 5.8 GHz BAND.....	429
8.42.1.	6 dB BANDWIDTH	429
8.42.2.	26 dB BANDWIDTH	431
8.42.3.	99% BANDWIDTH	433
8.42.4.	AVERAGE POWER	435
8.42.5.	OUTPUT POWER.....	436
8.42.6.	PSD	438
8.43.	802.11n HT40 2Tx CDD MODE IN THE 5.8 GHz BAND	441
8.43.1.	6 dB BANDWIDTH	441
8.43.2.	26 dB BANDWIDTH	444
8.43.3.	99% BANDWIDTH	447
8.43.4.	AVERAGE POWER	450
8.43.5.	OUTPUT POWER.....	451
8.43.6.	PSD	453
8.44.	802.11n HT40 2Tx STBC MODE IN THE 5.8 GHz BAND	457
8.45.	802.11ac VHT80 CHAIN 0 MODE IN THE 5.8 GHz BAND.....	458
8.45.1.	6 dB BANDWIDTH	458
8.45.2.	26 dB BANDWIDTH	459
8.45.3.	99% BANDWIDTH	460

8.45.4.	AVERAGE POWER	461
8.45.5.	OUTPUT POWER.....	462
8.45.6.	PSD	464
8.46.	802.11ac VHT80 CHAIN 1 MODE IN THE 5.8 GHz BAND.....	466
8.46.1.	6 dB BANDWIDTH	466
8.46.2.	26 dB BANDWIDTH	467
8.46.3.	99% BANDWIDTH	468
8.46.4.	AVERAGE POWER	469
8.46.5.	OUTPUT POWER.....	470
8.46.6.	PSD	472
8.47.	802.11ac VHT80 2Tx CDD MODE IN THE 5.8 GHz BAND	474
8.47.1.	6 dB BANDWIDTH	474
8.47.2.	26 dB BANDWIDTH	476
8.47.3.	99% BANDWIDTH	478
8.47.4.	AVERAGE POWER	480
8.47.5.	OUTPUT POWER.....	481
8.47.6.	PSD	483
8.48.	802.11ac VHT80 2Tx STBC MODE IN THE 5.8 GHz BAND	486
9.	ANTENNA PORT TEST RESULTS (MODEL: A1688)	487
10.	RADIATED TEST RESULTS (MODEL: A1633).....	488
10.1.	LIMITS AND PROCEDURE	488
10.1.	802.11n HT20 1Tx MODE IN THE 5.2 GHz BAND.....	489
10.2.	802.11n HT20 2Tx CDD MODE IN THE 5.2 GHz BAND	505
10.3.	802.11n HT40 1Tx MODE IN THE 5.2 GHz BAND.....	513
10.4.	802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND	525
10.5.	802.11ac VHT80 1Tx MODE IN THE 5.2 GHz BAND.....	531
10.6.	802.11ac VHT80 2Tx CDD MODE IN THE 5.2 GHz BAND	539
10.7.	802.11n HT20 1Tx MODE IN THE 5.3 GHz BAND.....	543
10.8.	802.11n HT20 2Tx CDD MODE IN THE 5.3 GHz BAND	559
10.9.	802.11n HT40 1Tx MODE IN THE 5.3 GHz BAND.....	567
10.10.	802.11n HT40 2Tx CDD MODE IN THE 5.3 GHz BAND	579
10.11.	802.11ac VHT80 1Tx MODE IN THE 5.3 GHz BAND.....	585
10.12.	802.11ac VHT80 2Tx CDD MODE IN THE 5.3 GHz BAND	593
10.13.	802.11n HT20 1Tx MODE IN THE 5.6 GHz BAND.....	597
10.14.	802.11n HT20 2Tx CDD MODE IN THE 5.6 GHz BAND	621
10.15.	802.11n HT40 1Tx MODE IN THE 5.6 GHz BAND.....	633
10.16.	802.11n HT40 2Tx CDD MODE IN THE 5.6 GHz BAND	657
10.17.	802.11ac VHT80 1Tx MODE IN THE 5.6 GHz BAND.....	669
10.18.	802.11ac VHT80 2Tx CDD MODE IN THE 5.6 GHz BAND	685
10.19.	802.11n HT20 1Tx MODE IN THE 5.8 GHz BAND.....	693

10.20.	802.11n HT20 2Tx CDD MODE IN THE 5.8 GHz BAND	713
10.21.	802.11n HT40 1Tx MODE IN THE 5.8 GHz BAND.....	723
10.22.	802.11n HT40 2Tx CDD MODE IN THE 5.8 GHz BAND	739
10.23.	802.11ac 80Mhz 1Tx MODE IN THE 5.8 GHz BAND	747
10.24.	802.11ac 80Mhz 2Tx CDD MODE IN THE 5.8 GHz BAND	759
10.25.	WORST-CASE BELOW 1 GHz	765
10.26.	WORST-CASE ABOVE 18 GHz.....	767
11.	RADIATED TEST RESULTS (MODEL: A1688).....	769
11.1.	LIMITS AND PROCEDURE	769
11.2.	802.11n HT20 1Tx MODE IN THE 5.2 GHz BAND.....	770
11.3.	802.11n HT20 2Tx CDD MODE IN THE 5.2 GHz BAND	786
11.4.	802.11n HT40 1Tx MODE IN THE 5.2 GHz BAND.....	794
11.5.	802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND	806
11.6.	802.11ac VHT80 1Tx MODE IN THE 5.2 GHz BAND.....	812
11.7.	802.11ac VHT80 2Tx CDD MODE IN THE 5.2 GHz BAND	820
11.8.	802.11n HT20 1Tx MODE IN THE 5.3 GHz BAND.....	824
11.9.	802.11n HT20 2Tx CDD MODE IN THE 5.3 GHz BAND	840
11.10.	802.11n HT40 1Tx MODE IN THE 5.3 GHz BAND.....	848
11.11.	802.11n HT40 2Tx CDD MODE IN THE 5.3 GHz BAND	860
11.12.	802.11ac VHT80 1Tx MODE IN THE 5.3 GHz BAND.....	866
11.13.	802.11ac VHT80 2Tx CDD MODE IN THE 5.3 GHz BAND	874
11.14.	802.11n HT20 1Tx MODE IN THE 5.6 GHz BAND.....	878
11.15.	802.11n HT20 2Tx CDD MODE IN THE 5.6 GHz BAND	902
11.16.	802.11n HT40 1Tx MODE IN THE 5.6 GHz BAND.....	914
11.17.	802.11n HT40 2Tx CDD MODE IN THE 5.6 GHz BAND	938
11.18.	802.11ac VHT80 1Tx MODE IN THE 5.6 GHz BAND.....	950
11.19.	802.11ac VHT80 2Tx CDD MODE IN THE 5.6 GHz BAND	966
11.20.	802.11n HT20 1Tx MODE IN THE 5.8 GHz BAND.....	974
11.21.	802.11n HT20 2Tx CDD MODE IN THE 5.8 GHz BAND	994
11.22.	802.11n HT40 1Tx MODE IN THE 5.8 GHz BAND.....	1004
11.23.	802.11n HT40 2Tx CDD MODE IN THE 5.8 GHz BAND	1020
11.24.	802.11ac 80Mhz 1Tx MODE IN THE 5.8 GHz BAND	1028
11.25.	802.11ac 80Mhz 2Tx CDD MODE IN THE 5.8 GHz BAND	1040
11.26.	WORST-CASE BELOW 1 GHz	1046
11.27.	WORST-CASE ABOVE 18 GHz.....	1048

12.	AC POWER LINE CONDUCTED EMISSIONS	1050
12.1.	EUT POWERED BY AC ADAPTER	1051
12.2.	EUT POWERED BY HOST PC VIA USB CABLE.....	1053
13.	DYNAMIC FREQUENCY SELECTION	1057
13.1.	OVERVIEW.....	1057
13.1.1.	LIMITS	1057
13.1.2.	TEST AND MEASUREMENT SYSTEM	1061
13.1.3.	SETUP OF EUT (CLIENT MODE).....	1064
13.1.4.	SETUP OF EUT (CLIENT-TO-CLIENT COMMUNICATIONS MODE)	1066
13.1.5.	DESCRIPTION OF EUT.....	1068
13.2.	CLIENT MODE RESULTS FOR 20 MHz BANDWIDTH.....	1070
13.2.1.	TEST CHANNEL.....	1070
13.2.2.	RADAR WAVEFORM AND TRAFFIC	1070
13.2.3.	OVERLAPPING CHANNEL TESTS	1073
13.2.4.	MOVE AND CLOSING TIME.....	1073
13.3.	CLIENT MODE RESULTS FOR 40 MHz BANDWIDTH.....	1077
13.3.1.	TEST CHANNEL.....	1077
13.3.2.	RADAR WAVEFORM AND TRAFFIC	1077
13.3.3.	OVERLAPPING CHANNEL TESTS	1080
13.3.4.	MOVE AND CLOSING TIME.....	1080
13.4.	CLIENT MODE RESULTS FOR 80 MHz BANDWIDTH.....	1084
13.4.1.	TEST CHANNEL.....	1084
13.4.2.	RADAR WAVEFORM AND TRAFFIC	1084
13.4.3.	OVERLAPPING CHANNEL TESTS	1087
13.4.4.	MOVE AND CLOSING TIME.....	1087
13.4.5.	10-MINUTE CLIENT TX MONITORING PERIOD.....	1091
13.5.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 20 MHz BANDWIDTH 1092	
13.5.1.	TEST CHANNEL.....	1092
13.5.2.	RADAR WAVEFORM AND TRAFFIC	1092
13.5.3.	OVERLAPPING CHANNEL TESTS	1095
13.5.4.	MOVE AND CLOSING TIME.....	1095
13.6.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 40 MHz BANDWIDTH 1099	
13.6.1.	TEST CHANNEL.....	1099
13.6.2.	RADAR WAVEFORM AND TRAFFIC	1099
13.6.3.	OVERLAPPING CHANNEL TESTS	1102
13.6.4.	MOVE AND CLOSING TIME.....	1102
13.7.	CLIENT-TO-CLIENT COMMUNICATIONS MODE RESULTS FOR 80 MHz BANDWIDTH 1106	
13.7.1.	TEST CHANNEL.....	1106
13.7.2.	RADAR WAVEFORM AND TRAFFIC	1106
13.7.3.	OVERLAPPING CHANNEL TESTS	1109
13.7.4.	MOVE AND CLOSING TIME.....	1109
13.7.5.	10-MINUTE CLIENT TX MONITORING PERIOD.....	1113
14.	SETUP PHOTOS	1114

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: APPLE, INC.
1 INFINITE LOOP
CUPERTINO, CA 95014, U.S.A.

EUT DESCRIPTION: CELLULAR PHONE WITH BLUETOOTH AND WLAN RADIOS

MODELS: A1633, A1688, A1691 AND A1700

SERIAL NUMBER: A1633:
C7JPQ2Q1GNP9 (RADIATED); C7JPQ2PRGNP9 (CONDUCTED)
A1688:
C7JPR061GNPN (RADIATED); C7PG030GKWD (CONDUCTED)

DATE TESTED: APRIL 24– JULY 10, 2015


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



MENGISTU MEKURIA
SENIOR ENGINEER
UL VERIFICATION SERVICES INC.



J. VANG
EMC LAB ENGINEER
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 14-30, FCC KDB 662911 D01 v02r01, FCC KDB 905462 D02 v01r01/D03 v01r01/D06 v01, FCC KDB 789033 D02, FCC KDB 644545 D03 v01 and ANSI C63.10- 2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A	☒ Chamber D
☐ Chamber B	☒ Chamber E
☐ Chamber C	☒ Chamber F
	☒ Chamber G
	☒ Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned}\text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m}\end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	± 3.52 dB
Radiated Disturbance, 30 to 1000 MHz	± 4.94 dB
Radiated Disturbance, 1 to 6 GHz	± 3.86 dB
Radiated Disturbance, 6 to 18 GHz	± 4.23 dB
Radiated Disturbance, 18 to 26 GHz	± 5.30 dB
Radiated Disturbance, 26 to 40 GHz	± 5.23 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a mobile phone with multimedia functions (music, application support, and video), cellular GSM/GPRS/EGPRS/WCDMA/HSPA+/DC-HSDPA/CDMA/EVDO/LTE radio, IEEE 802.11a/b/g/n/ac, NFC, Bluetooth and GPS radio. The rechargeable battery is not user accessible.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

5.2GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	19.50	89.13
	802.11n HT20 CDD 2TX	19.95	98.86
	802.11n HT20 2TX STBC	Covered by 802.11n HT20 CDD 2TX	
5190 - 5230	802.11n HT40 SISO	16.92	49.20
	802.11n HT40 CDD 2TX	19.92	98.17
	802.11n HT40 2TX STBC	Covered by 802.11n HT40 CDD 2TX	
5210	802.11ac VHT80 SISO	12.97	19.82
	802.11ac VHT80 2TX CDD	14.95	31.26
	802.11ac VHT80 2TX STBC/SDM	Covered by 802.11n HT80 CDD 2TX	

5.3GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5260 - 5320	802.11a	Covered by 802.11n HT20 SISO	
	802.11n HT20 SISO	19.45	88.10
	802.11n HT20 2TX CDD	19.95	98.86
	802.11n HT20 2TX STBC	Covered by 802.11n HT20 CDD 2TX	
5270 - 5310	802.11n HT40 SISO	17.94	62.23
	802.11n HT40 2TX CDD	20.90	123.03
	802.11n HT40 2TX STBC	Covered by 802.11n HT40 CDD 2TX	
5290	802.11ac VHT80 SISO	15.00	31.62
	802.11ac VHT80 2TX CDD	16.96	49.66
	802.11ac VHT80 2TX STBC/SDM	Covered by 802.11n HT80 CDD 2TX	

5.6GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5500 - 5700	802.11a	Covered by 802.11n HT20 SISO	
5720	802.11a	Covered by 802.11n HT20 SISO	
5500 - 5700	802.11n HT20 SISO	19.50	89.13
5720	802.11n HT20 SISO	19.48	88.72
5500 - 5700	802.11n HT20 2TX CDD	19.93	98.40
5720	802.11n HT20 2TX CDD	19.96	99.08
5500 - 5700	802.11n HT20 2TX STBC	Covered by 802.11n HT20 CDD 2TX	
5720	802.11n HT20 2TX STBC	Covered by 802.11n HT20 CDD 2TX	
5510 - 5670	802.11n HT40 SISO	18.93	78.16
5710	802.11n HT40 SISO	18.84	76.56
5510 - 5670	802.11n HT40 2TX CDD	21.70	147.91
5710	802.11n HT40 2TX CDD	21.48	140.60
5510 - 5670	802.11n HT40 2TX STBC	Covered by 802.11n HT40 CDD 2TX	
5710	802.11n HT40 STBC/SDM 2TX	Covered by 802.11n HT40 CDD 2TX	
5530-5610	802.11ac VHT80 SISO	16.94	49.43
5690	802.11ac VHT80 SISO	18.43	69.66
5530-5610	802.11ac VHT80 CDD 2TX	18.92	77.98
5690	802.11ac VHT80 CDD 2TX	21.28	134.28
5530-5610	802.11ac VHT80 2TX STBC	Covered by 802.11n VHT80 CDD 2TX	
5690	802.11ac VHT80 2TX STBC	Covered by 802.11n VHT80 CDD 2TX	

5.8GHz Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5745 - 5825	802.11a	Covered by 802.11n HT20 SISO	
5745 - 5825	802.11n HT20 SISO	19.46	88.31
5745 - 5825	802.11a 2TX CDD	Covered by 802.11n HT20 CDD 2TX	
5745 - 5825	802.11n HT20 CDD 2TX	22.18	165.20
5745 - 5825	802.11n HT20 STBC/SDM 2TX	Covered by 802.11n HT20 CDD 2TX	
5755 - 5795	802.11n HT40 SISO	17.97	62.66
5755 - 5795	802.11n HT40 CDD 2TX	19.96	99.08
5755 - 5795	802.11n HT40 STBC/SDM 2TX	Covered by 802.11n HT40 CDD 2TX	
5775	802.11ac VHT80 SISO	14.89	30.83
5775	802.11ac VHT80 CDD 2TX	17.94	62.23
5775	802.11ac VHT80 STBC/SDM 2TX	Covered by 802.11n VHT80 CDD 2TX	

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band (GHz)	Antenna Gain	
	Chain 0	Chain 1
5.2	-4.18	-1.54
5.3	-2.96	-1.54
5.5	-3.40	-0.44
5.8	-4.33	-1.00

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 7.15.213.1.

5.6. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

For SISO modes, there are two transmission antennas. The antenna used in any given time can be either Chain 0 or Chain 1. Both antenna ports have different output powers. Therefore, output power and PSD measurement for SISO modes on both antenna ports are reported.

For MIMO modes, both Chain 0 and Chain 1 used at the same time.

The fundamental of the EUT was investigated in three orthogonal orientations X (Flatbed), Y (Landscape), Z (Portrait), it was determined that (see table below) was worst-case orientations. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Frequency Band (GHz)	Mode	Antenna Port	Worst-case Orientation
5.2-5.8	1TX SISO	Chain 0	Z-Portrait
		Chain 1	Z-Portrait
	2TX MIMO	Chain 0 + Chain 1	X-Flatbed

Worst-case data rates as provided by the client were:

802.11a mode: 6 Mbps

802.11n HT20 mode: MCS0

802.11n HT40 mode: MCS0

802.11ac VHT20 mode: MCS0

802.11ac VHT40 mode: MCS0

802.11ac VHT80 mode: MCS0

802.11ac VHT20 and VHT40 mode are different from 802.11nHT20 and HT40 only in control messages and have the same power settings.

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

Baseline testing was performed on the two variants to determine the worst case on all conducted power and radiated emissions

Based on the manufacturer's statement Model A1688, A1700 and A1691 are exactly same, except for marketing reasons.

For WLAN/BT mode, all four models use the same WLAN/BT chipset. Therefore, conducted tests on Model A1633 was considered representative of Model A1688. Radiated testing was performed on both models A1633 and A1688.

Delta Items	A1633	A1688	A1691	A1700
Band 30	Yes	No	No	No

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Dell	Latitude 3540	6LNG802	N/A
Laptop AC/DC adapter	Dell	FA90PE1-00	CN-OCM889-73245-95L-4954-A00	N/A
Earphone	Apple	NA	NA	N/A
EUT AC/DC adapter	Apple	A1385	D293062F3WVDHLHCF	N/A

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	2	SMA	Un-Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1	N/A
3	AC	1	AC	Un-shielded	3	N/A

I/O CABLES (RADIATED ABOVE 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
None used						


I/O CABLES (AC POWER CONDUCTED TEST AND BELOW 1 GHZ)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	3	N/A
2	Audio	1	Jack	Un-shielded	0.5	NA

TEST SETUP

The EUT was tested connected to a host Laptop via USB cable and to spectrum analyzer via antenna port. Test software exercised the EUT.


SETUP DIAGRAM

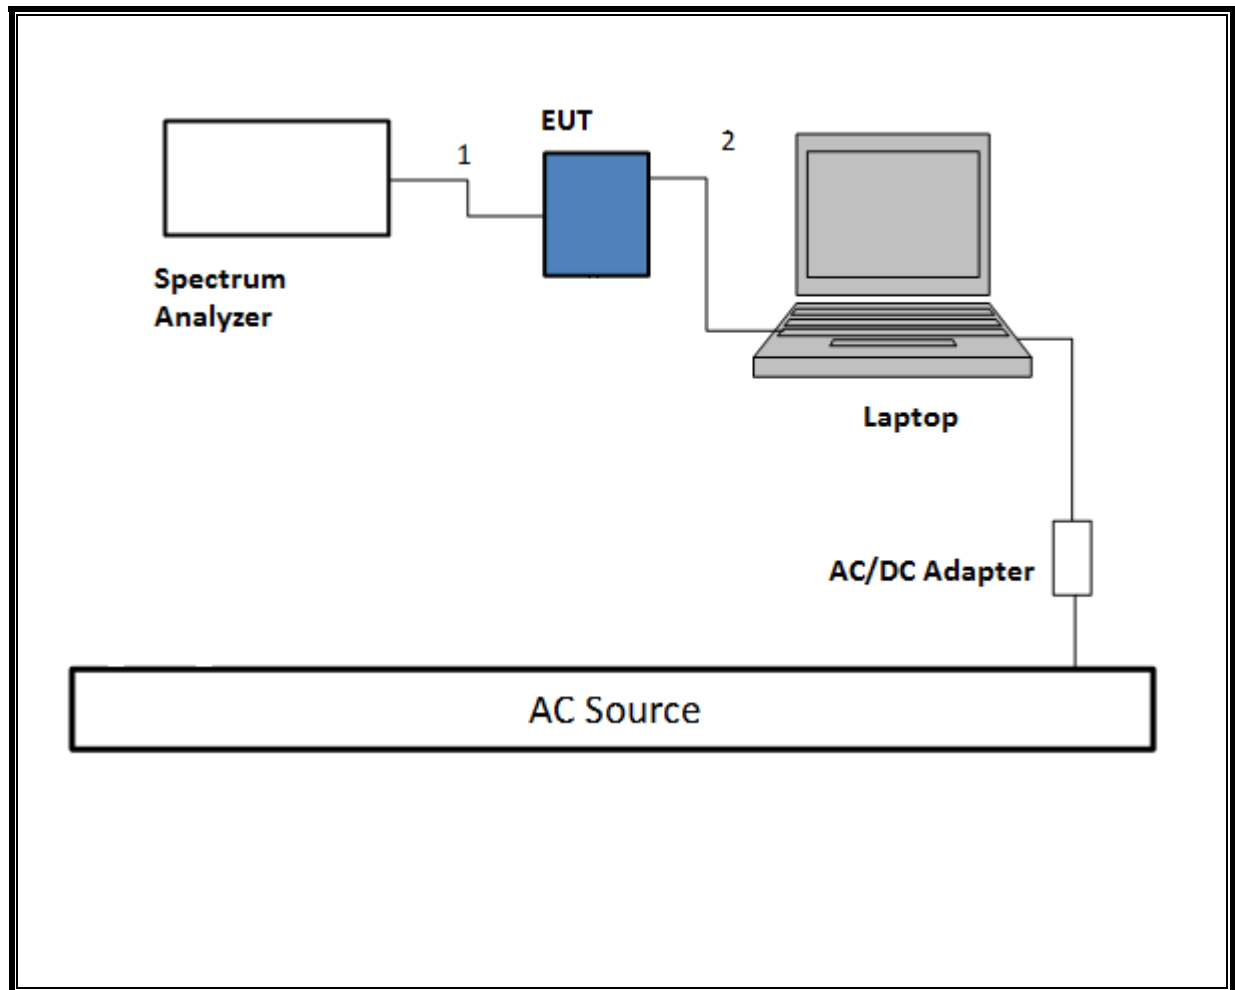

TEST SETUP- RADIATED-ABOVE 1 GHZ

The EUT was tested battery powered. Test software exercised the EUT.


SETUP DIAGRAM

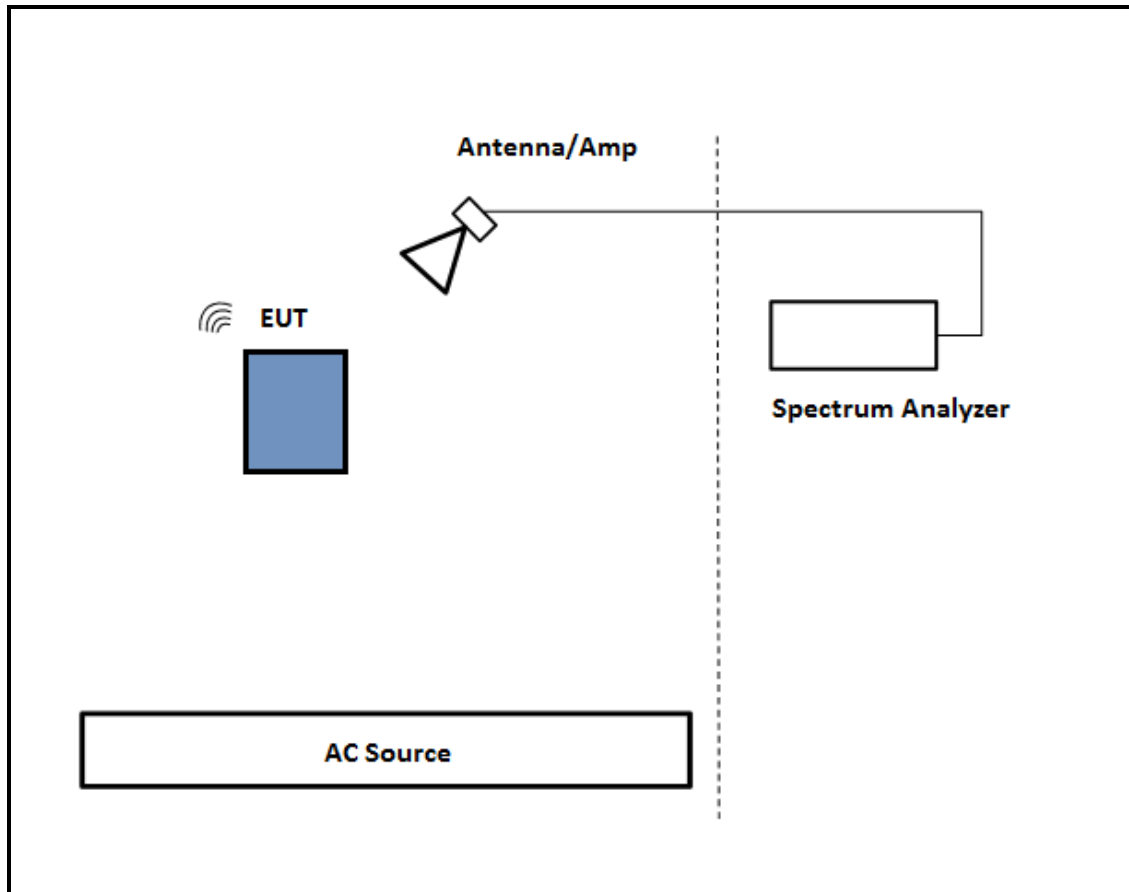

TEST SETUP- BELOW 1GHZ & AC LINE CONDUCTED TESTS

The EUT was tested with earphone connected and powered by AC adapter. Test software exercised the EUT.

SETUP DIAGRAM

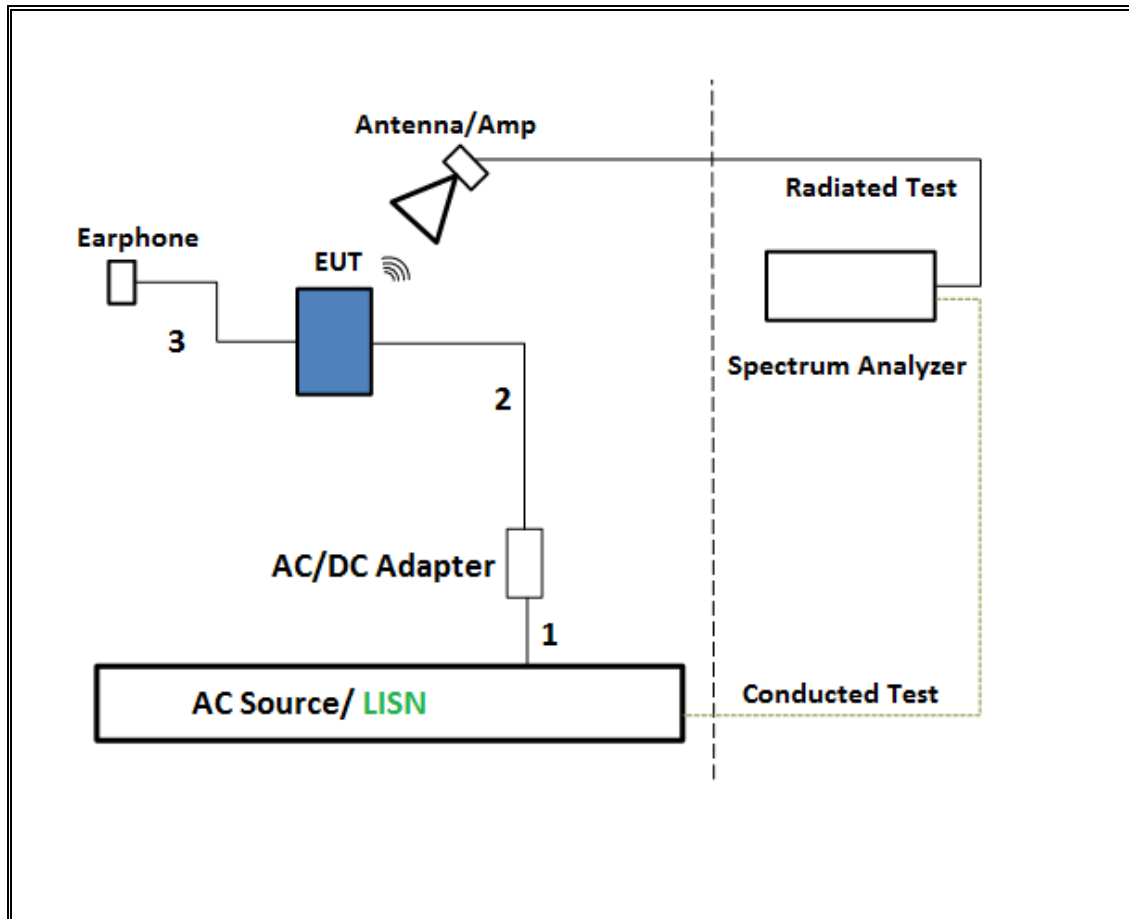

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	00143448	2/10/2016
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	A022813-1	1/14/2016
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	1782158	1/26/2016
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	323561	6/8/2016
Spectrum Analyzer, PXA, 3Hz to 50GHz	Agilent	N9030A	MY52350427	9/13/2015
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	325117	6/9/2016
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A-544	US51160264	12/23/2015
Power Meter, P-series single channel	Agilent	N1911A	GB45100212	10/9/2015
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Agilent	N1921A	MY53260010	7/12/2015
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826	1049	12/17/2015
Horn Antenna, 40GHz	ARA	MWH-2640/B	1029	7/15/2015
Spectrum Analyzer, 40 GHz	Agilent	8564E	3943A01643	8/6/2015
Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Agilent	8449B	3008A01114	10/4/2015
Amplifier, 26 to 40GHz	Miteq	NSP4000-SP2	1029	9/3/2015
AC Line Conducted				
EMI Test Receiver 9KHz-7GHz	Rohde & Schwarz	ESCI7	100935	9/16/2015
LISN for Conducted Emissions CISPR-16	FCC	50/250-25-2	114	1/16/2016
Power Cable, Line Conducted Emissions ANSI 63.4	UL	PG1	N/A	7/28/2015
UL SOFTWARE				
*Radiated Software	UL	UL EMC	Ver 9.5, July 22, 2014	
*Conducted Software	UL	UL EMC	Ver 2.2, March 31, 2015	
*AC Line Conducted Software	UL	UL EMC	Ver 9.5, April 3, 2015	

Note: * indicates automation software version used in the compliance certification testing

7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

7.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.



PROCEDURE



KDB 789033 Zero-Span Spectrum Analyzer Method.



RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11n HT20 1TX	1.920	1.938	0.991	99.07%	0.00	0.010
802.11n HT20 CDD	1.920	1.940	0.990	98.97%	0.00	0.010
802.11n HT40 1TX	1.122	1.140	0.984	98.42%	0.00	0.010
802.11n HT40 CDD	1.124	1.142	0.984	98.42%	0.00	0.010
802.11ac VHT80 1TX	0.544	0.572	0.952	95.17%	0.21	1.837
802.11ac VHT80 CDD	0.459	0.483	0.950	95.03%	0.22	2.179

DUTY CYCLE PLOTS

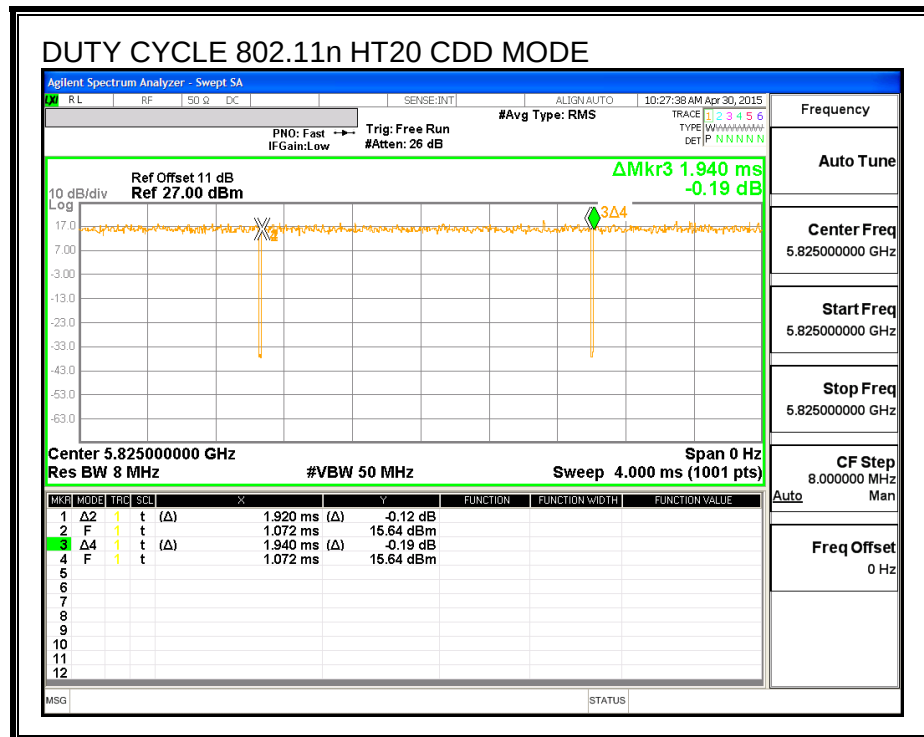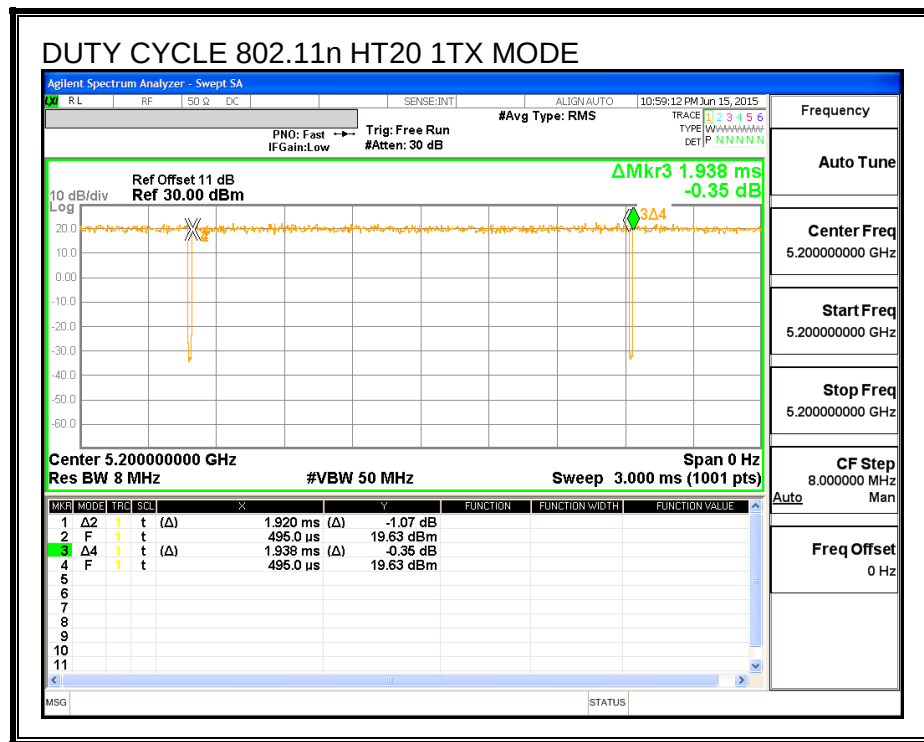

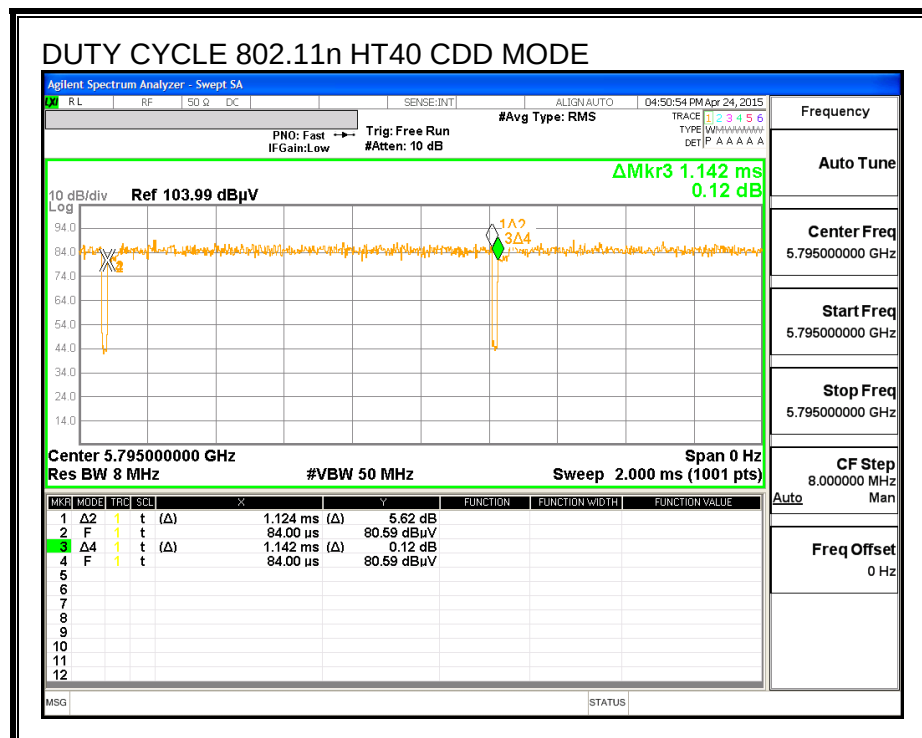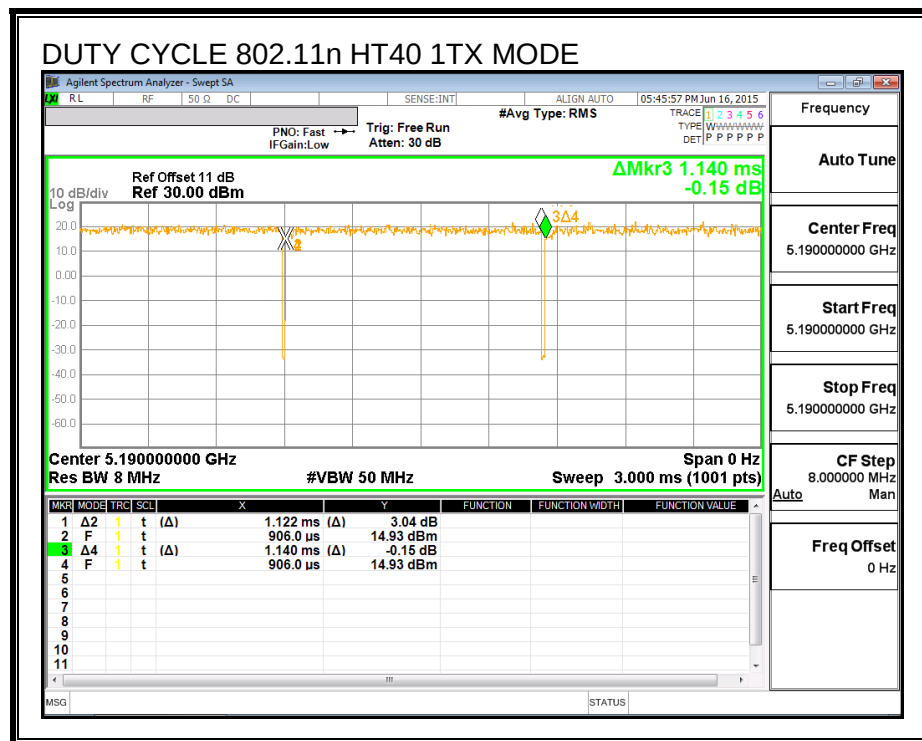

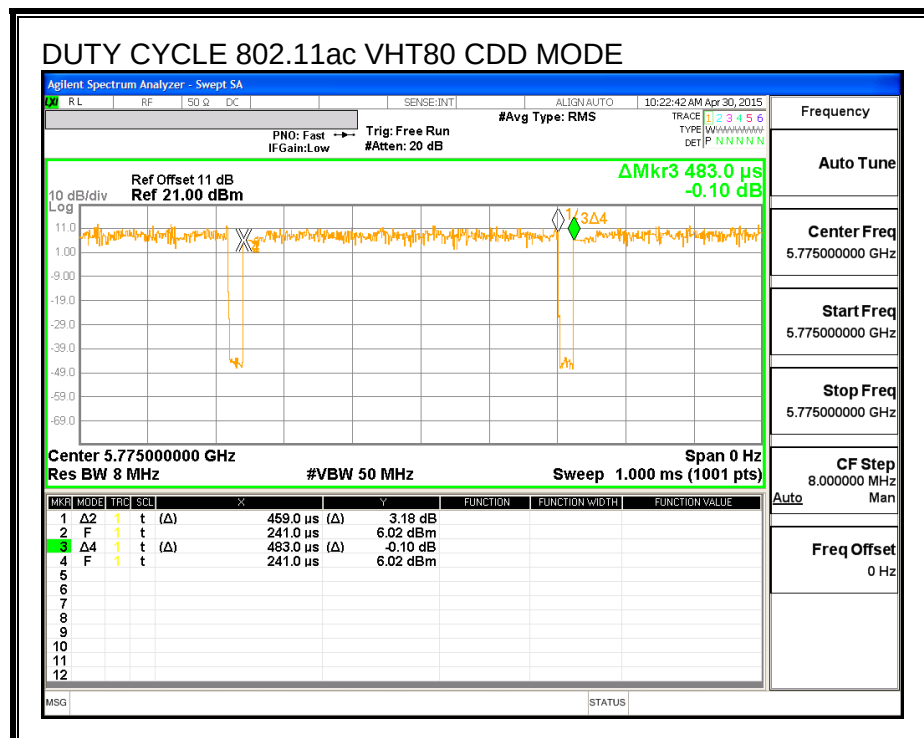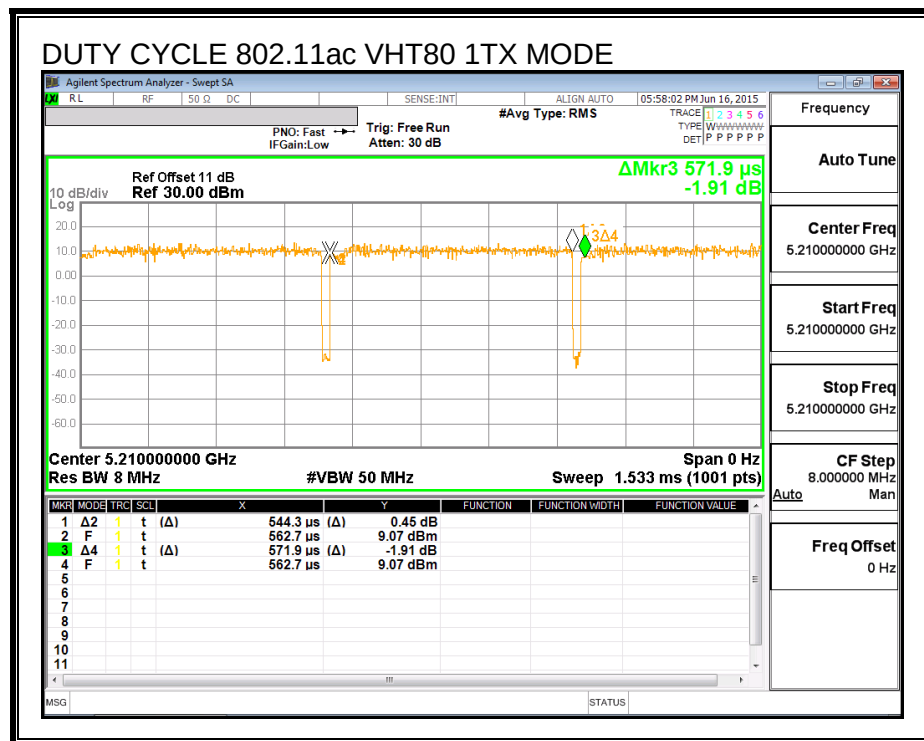

7.2. MEASUREMENT METHODS

26 dB Emission BW: KDB 789033 D02 v01, Section C.

99% Occupied BW: KDB 789033 D02 v01, Section D.

Conducted Output Power: KDB 789033 D02 v01, Section E.3.a (Method PM).

Power Spectral Density: KDB 789033 D02 v01, Section F.

Unwanted emissions in restricted bands: KDB 789033 D02 v01, Sections G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v01, Sections G.3, G.4, and G.5.

8. ANTENNA PORT TEST RESULTS (MODEL: A1633)

8.1. 802.11n HT20 CHAIN 0 MODE IN THE 5.2 GHz BAND

8.1.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	21.74
Mid	5200	21.66
High	5240	21.61

26 dB BANDWIDTH

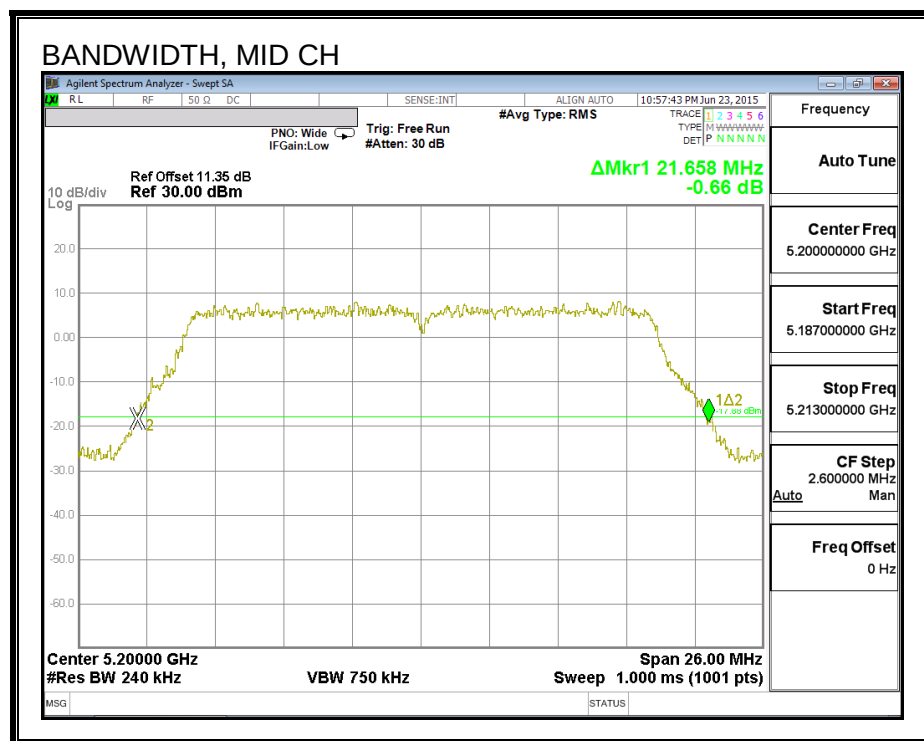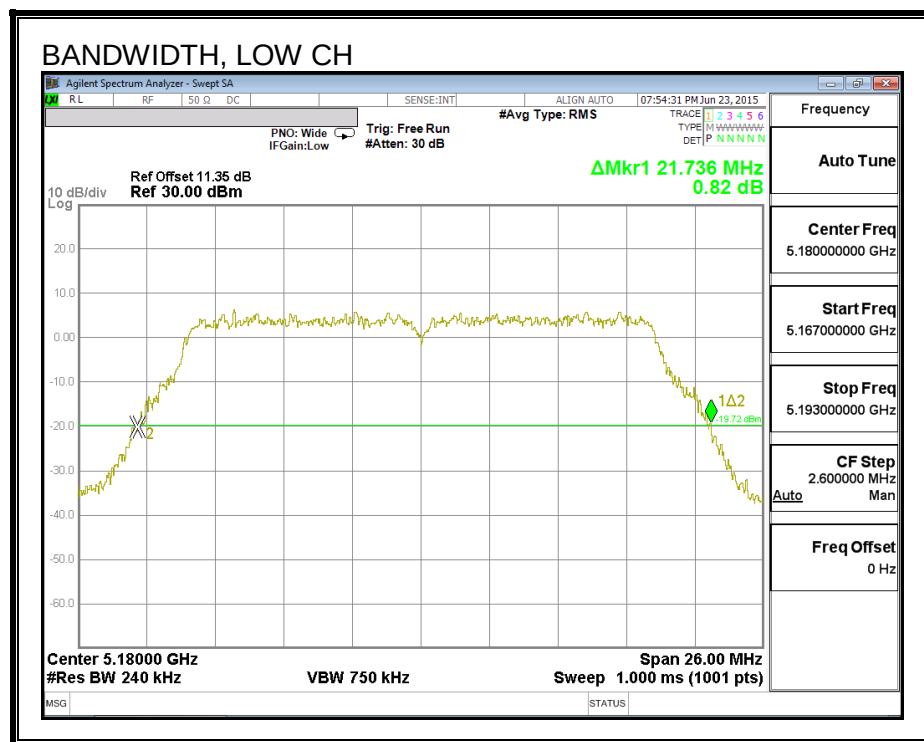

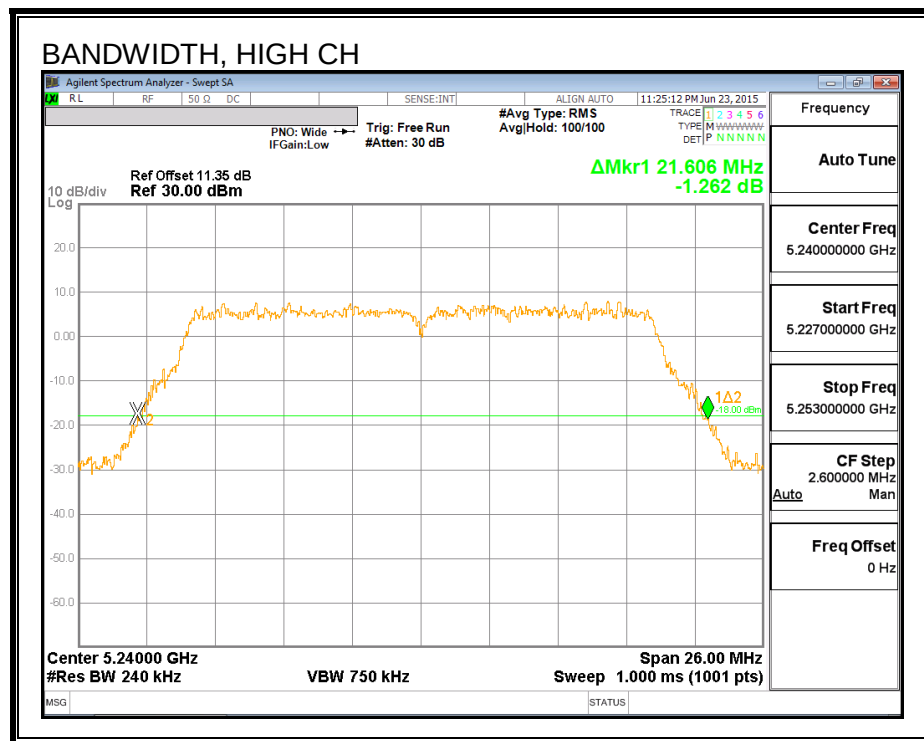

8.1.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW (MHz)
Low	5180	17.895
Mid	5200	17.998
High	5240	17.813

99% BANDWIDTH

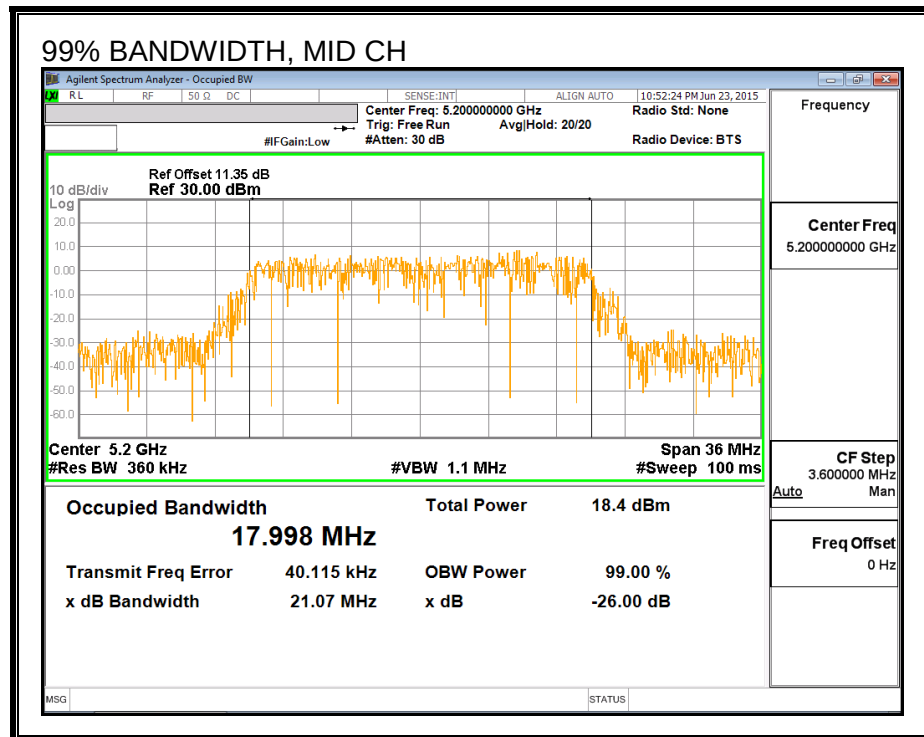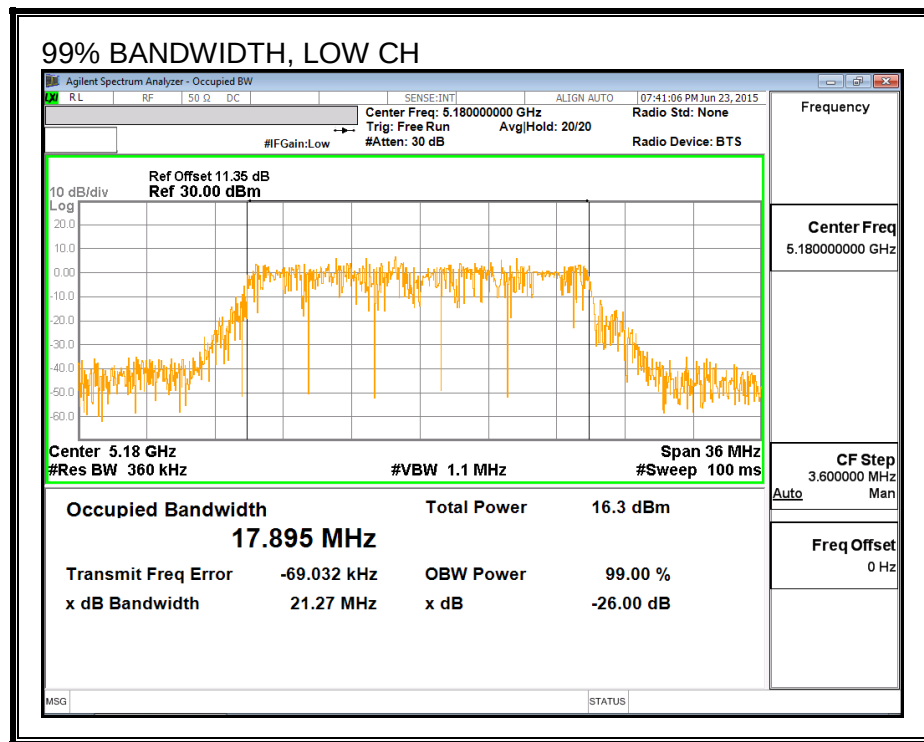

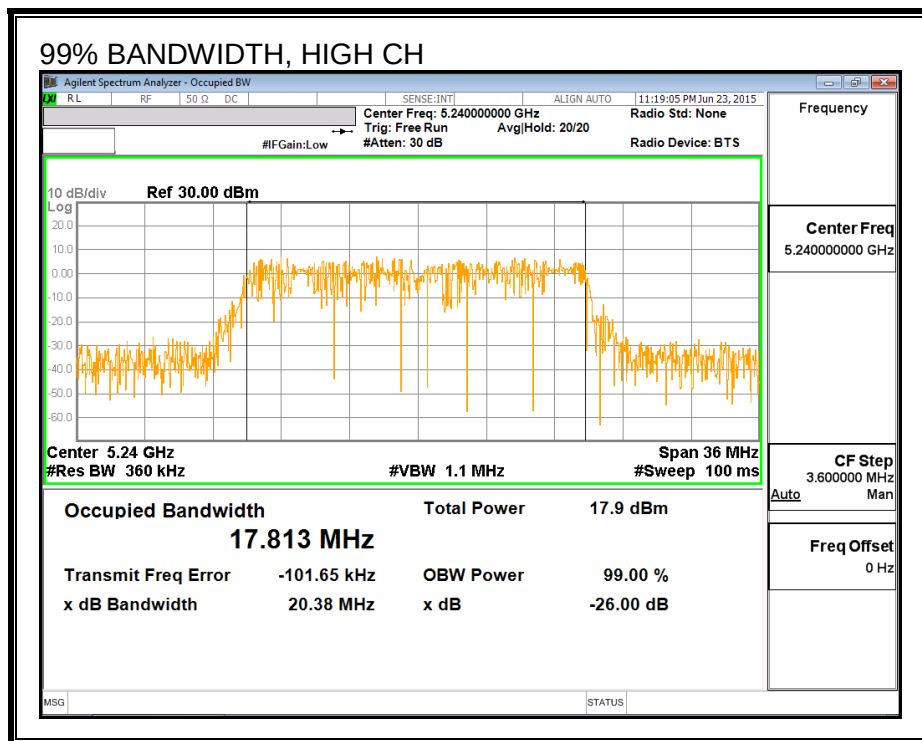

8.1.3. AVERAGE POWER (FCC)

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5180	15.99
Mid	5200	17.94
High	5240	17.80

8.1.4. OUTPUT POWER AND PSD (FCC)

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	-4.18	-4.18	24.00	11.00
Mid	5200	-4.18	-4.18	24.00	11.00
High	5240	-4.18	-4.18	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.99	15.99	24.00	-8.01
Mid	5200	17.94	17.94	24.00	-6.06
High	5240	17.80	17.80	24.00	-6.20

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	4.58	4.58	11.00	-6.42
Mid	5200	6.77	6.77	11.00	-4.24
High	5240	6.49	6.49	11.00	-4.51

PSD

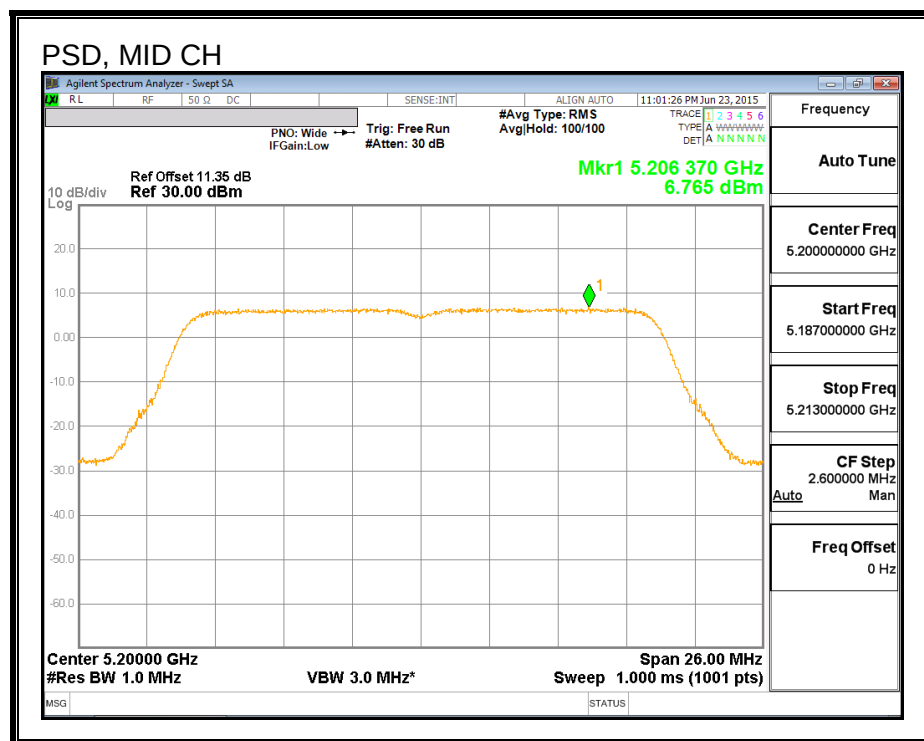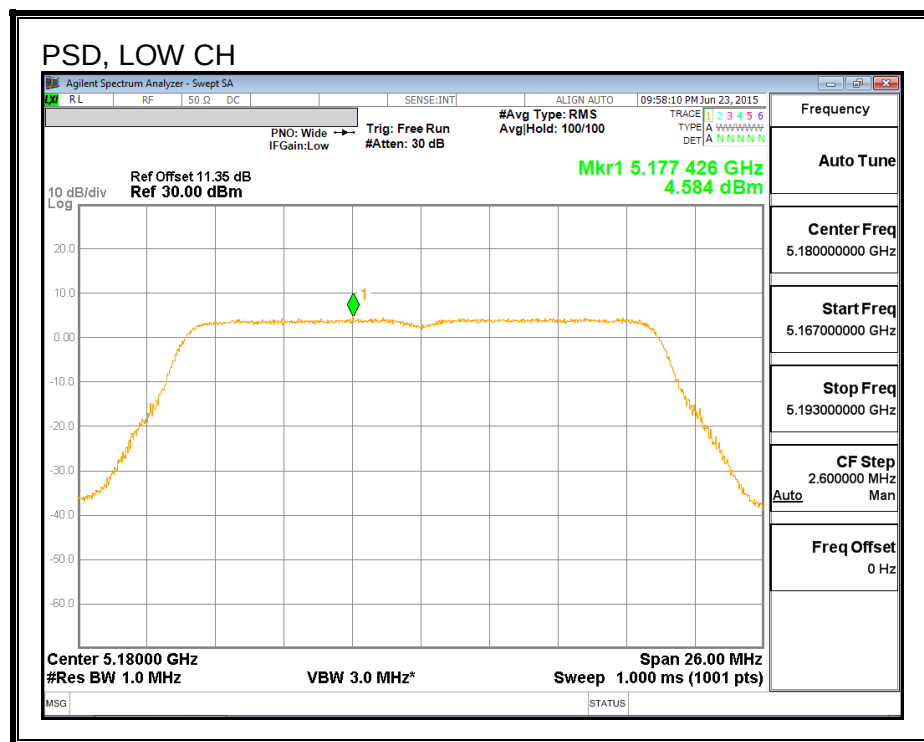

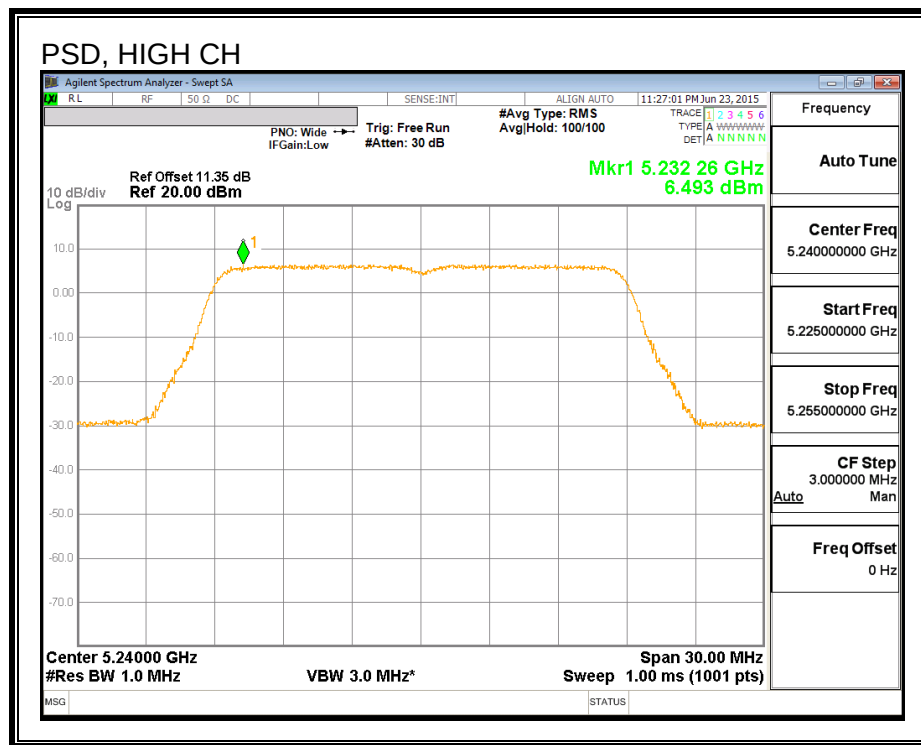

8.2. 802.11n HT20 CHAIN 1 MODE IN THE 5.2 GHz BAND

8.2.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	21.89
Mid	5200	22.02
High	5240	21.92

26 dB BANDWIDTH

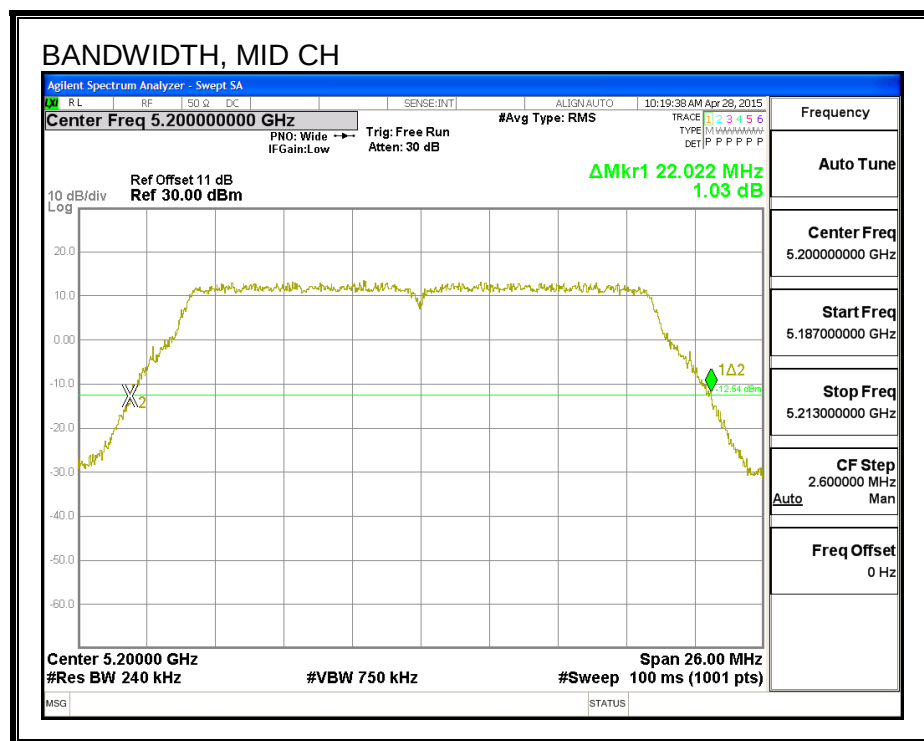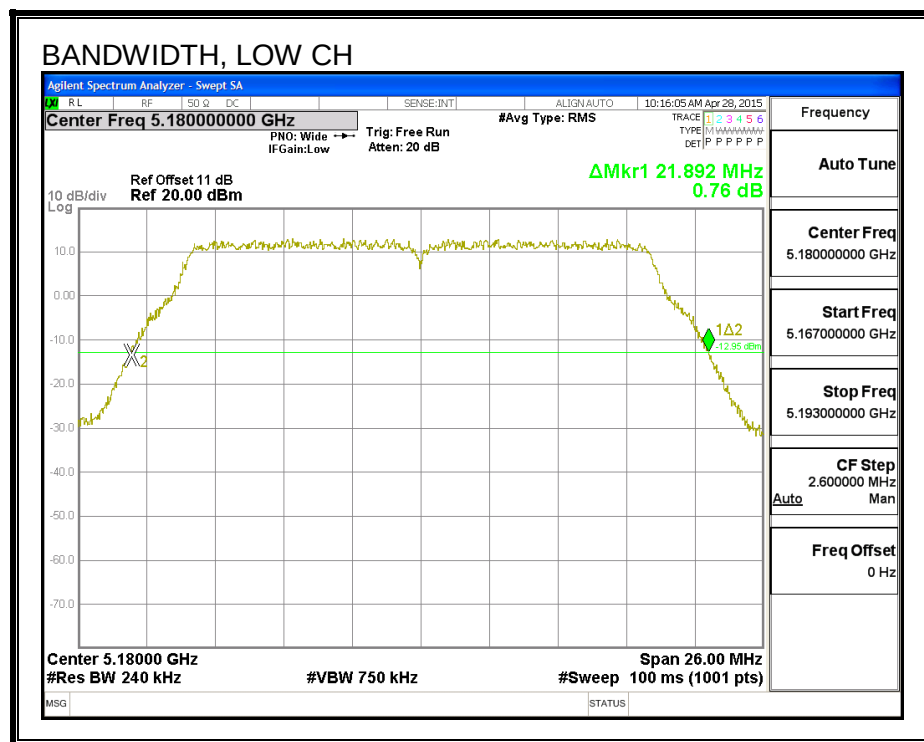

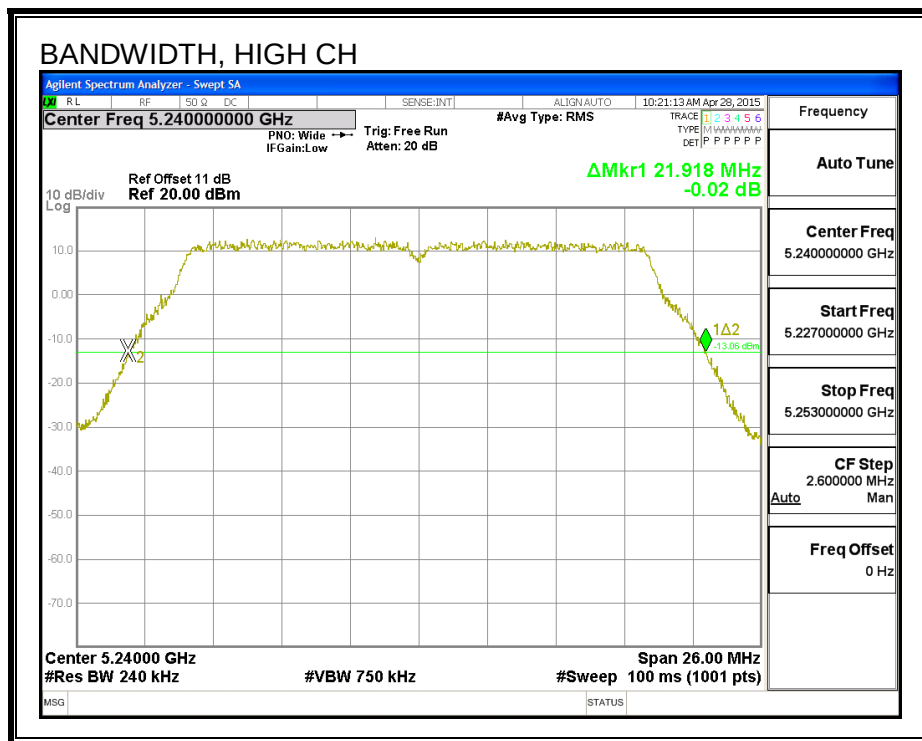

8.2.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW (MHz)
Low	5180	17.818
Mid	5200	17.824
High	5240	17.990

99% BANDWIDTH

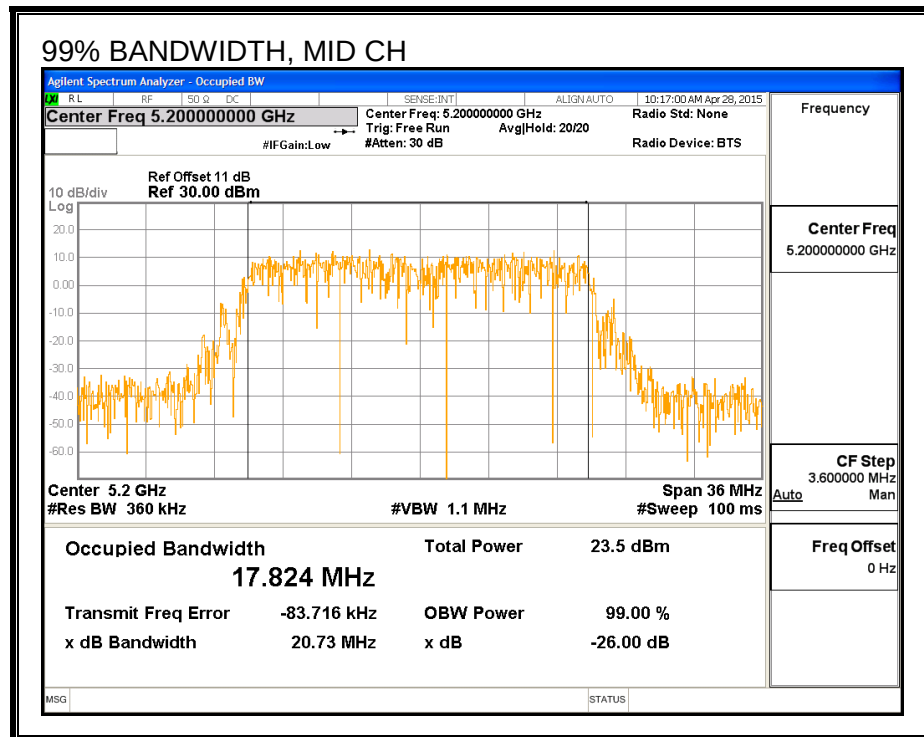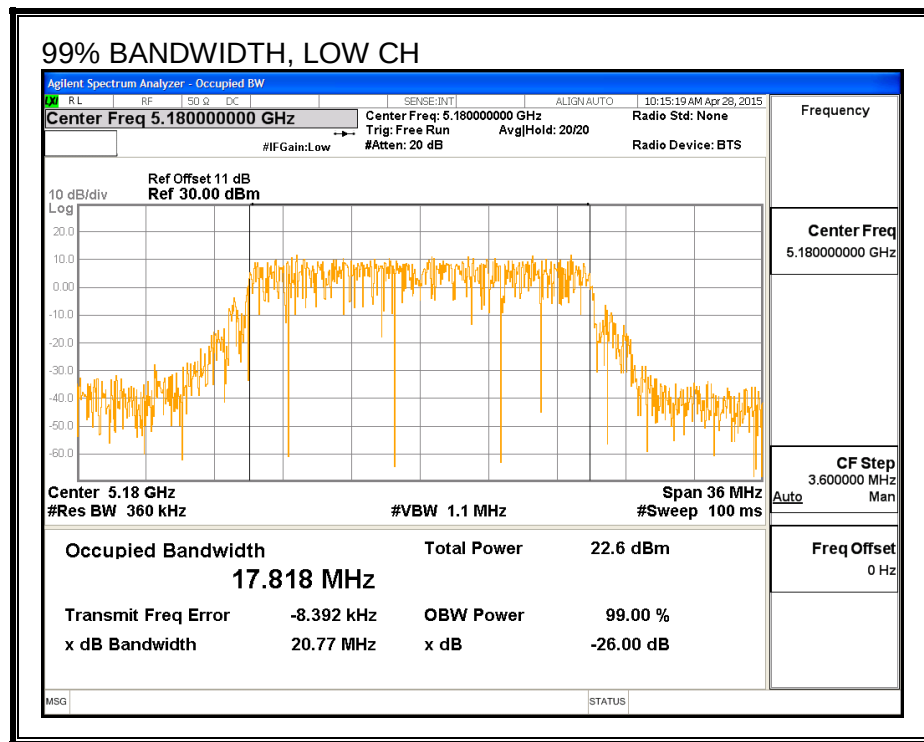

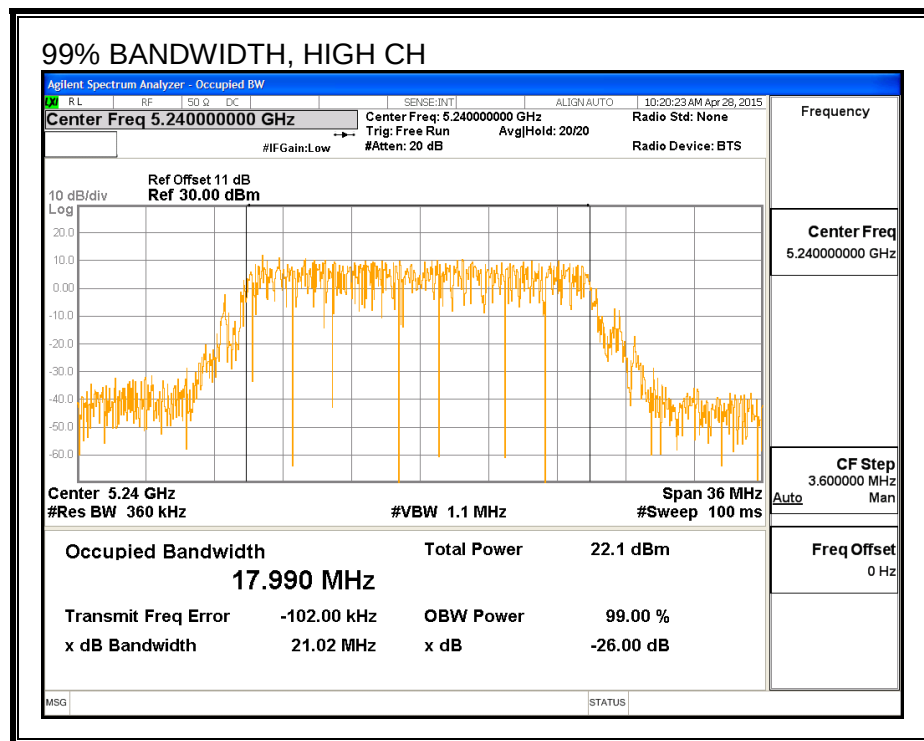

8.2.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5180	15.99
Mid	5200	19.50
High	5240	19.48

8.2.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	-1.54	-1.54	24.00	11.00
Mid	5200	-1.54	-1.54	24.00	11.00
High	5240	-1.54	-1.54	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.99	15.99	24.00	-8.01
Mid	5200	19.50	19.50	24.00	-4.50
High	5240	19.48	19.48	24.00	-4.52

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	4.44	4.44	11.00	-6.56
Mid	5200	7.93	7.93	11.00	-3.07
High	5240	8.06	8.06	11.00	-2.94

PSD

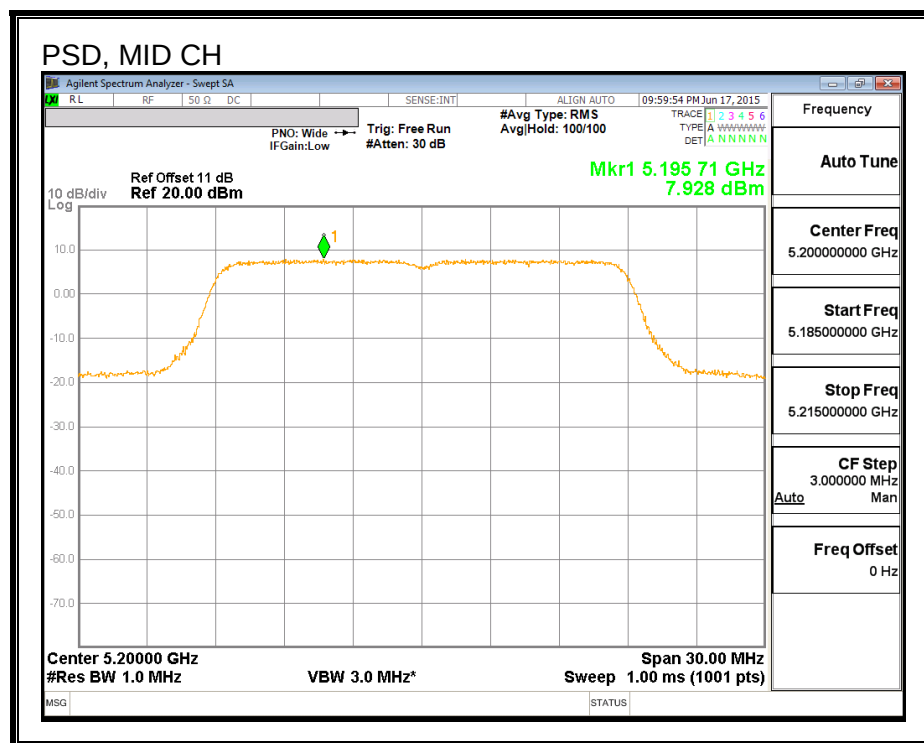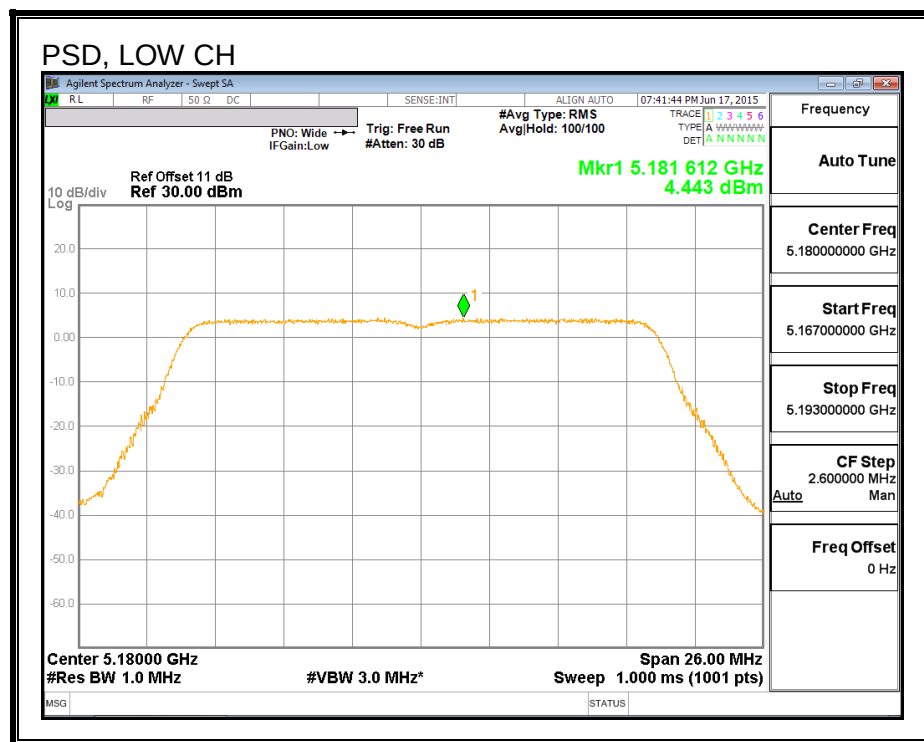

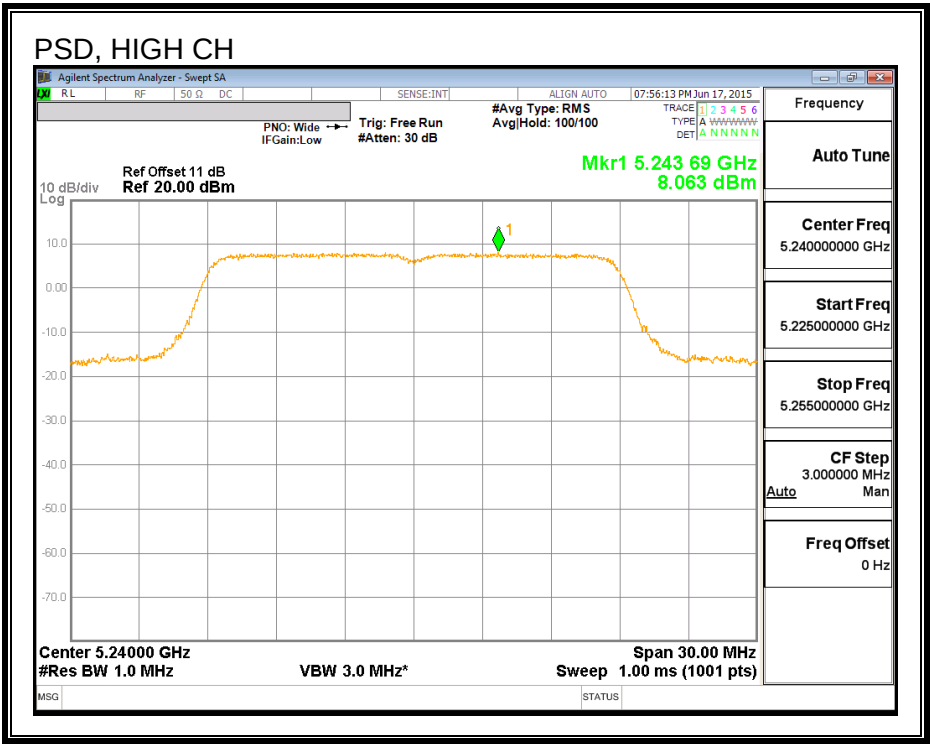

8.3. 802.11n HT20 2Tx CDD MODE IN THE 5.2 GHz BAND

8.3.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5180	21.89	21.84
Mid	5200	22.00	21.92
High	5240	22.00	21.84



26 DB BANDWIDTH, CHAIN 0

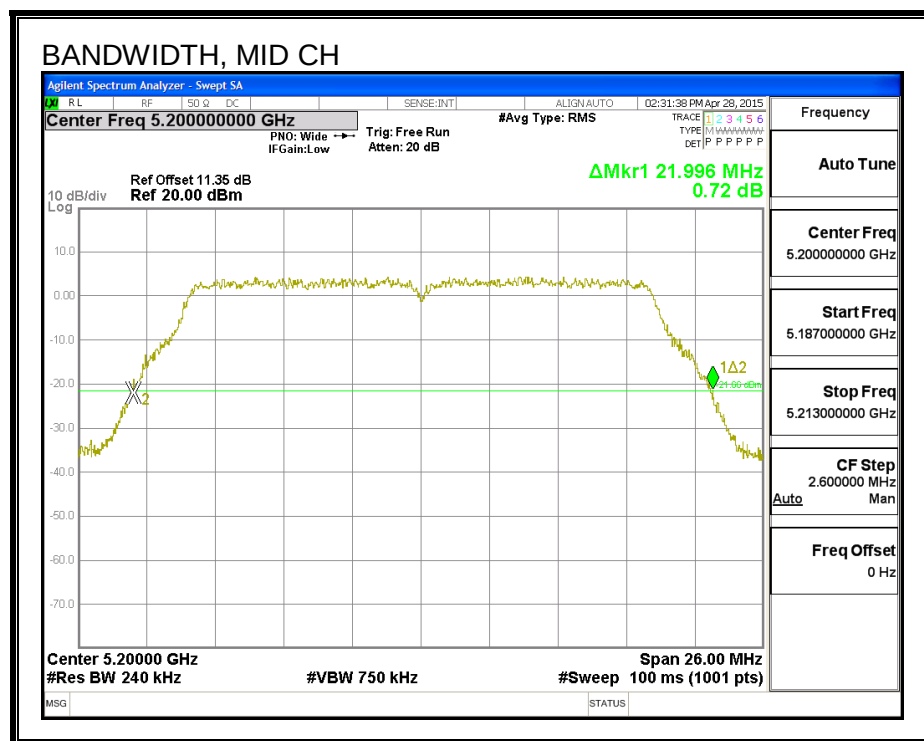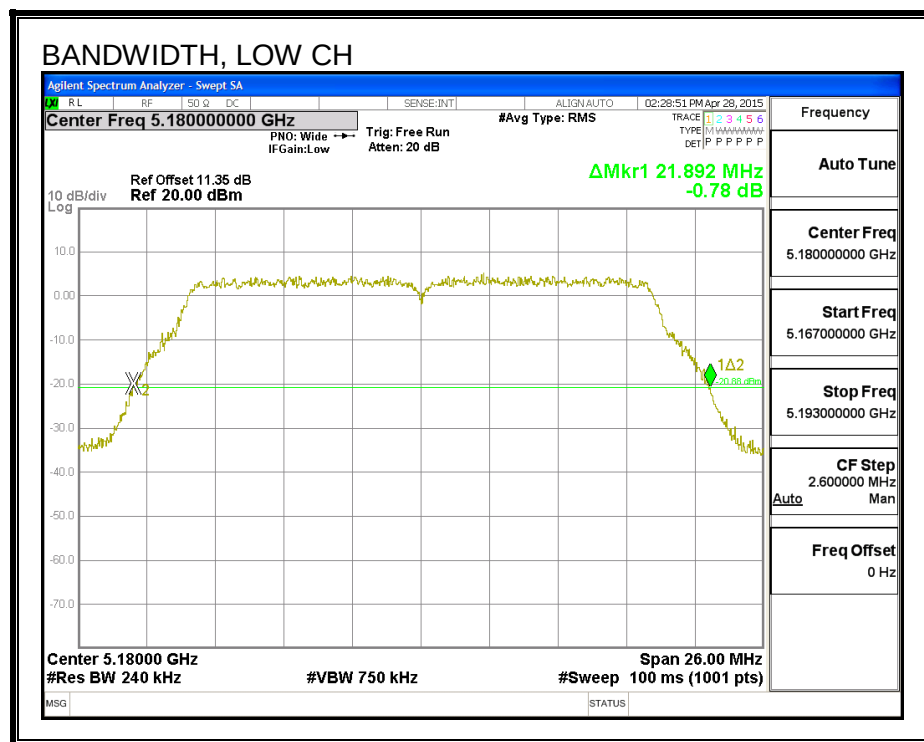

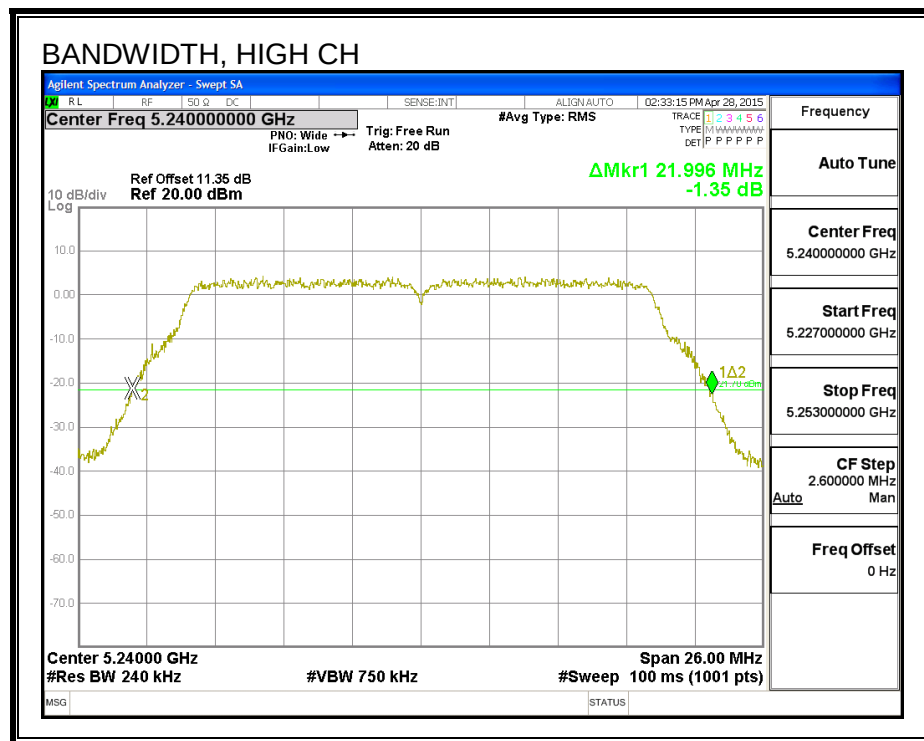

26 DB BANDWIDTH, CHAIN 1

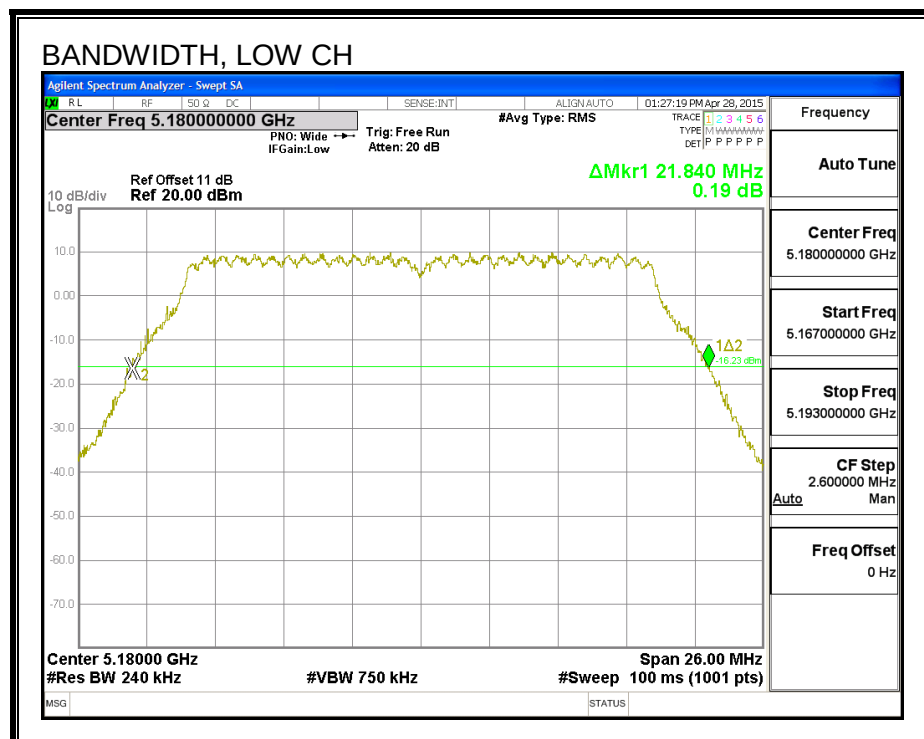

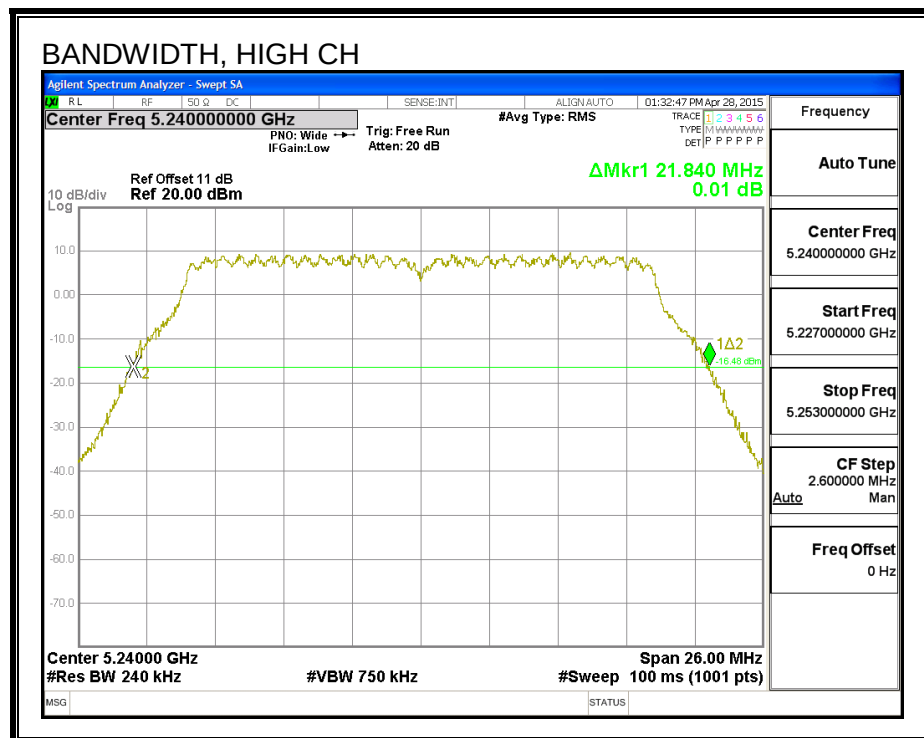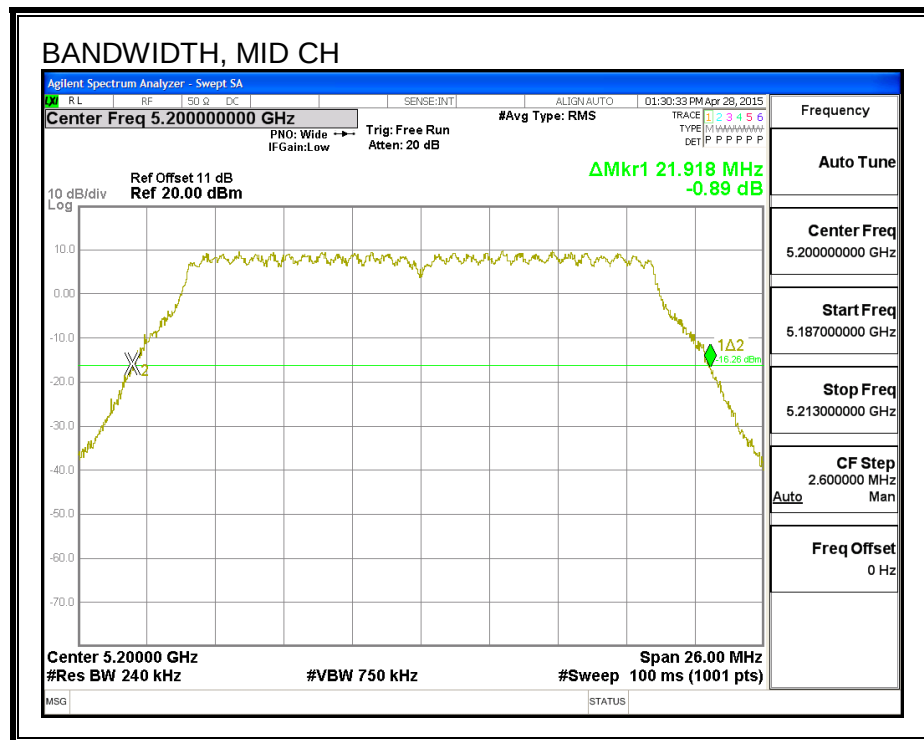

8.3.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5180	17.809	17.719
Mid	5200	17.795	17.830
High	5240	17.687	17.963



99% BANDWIDTH, CHAIN 0

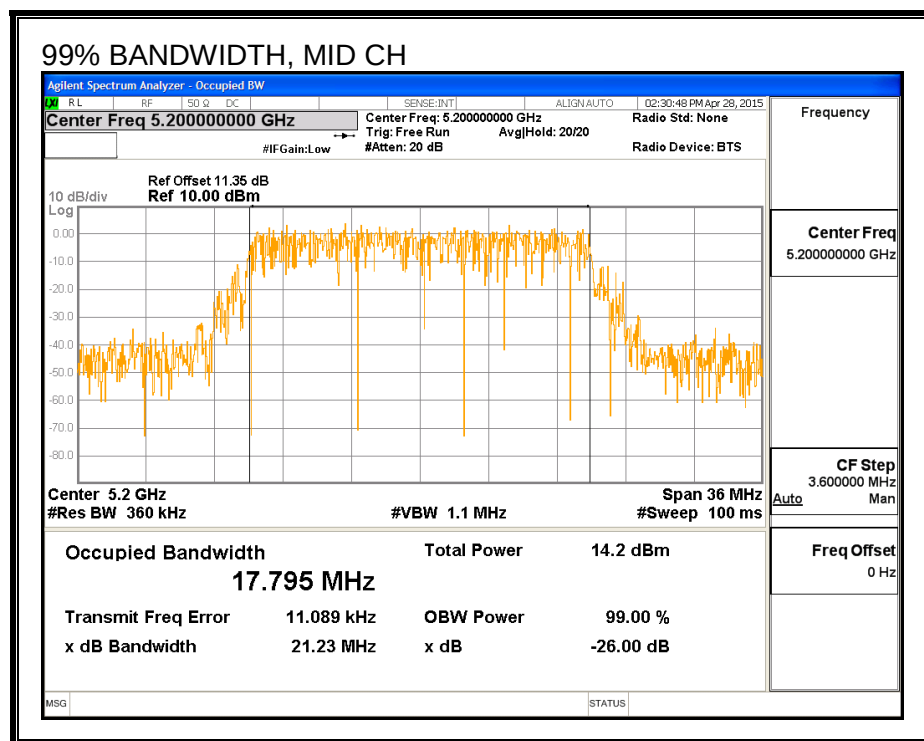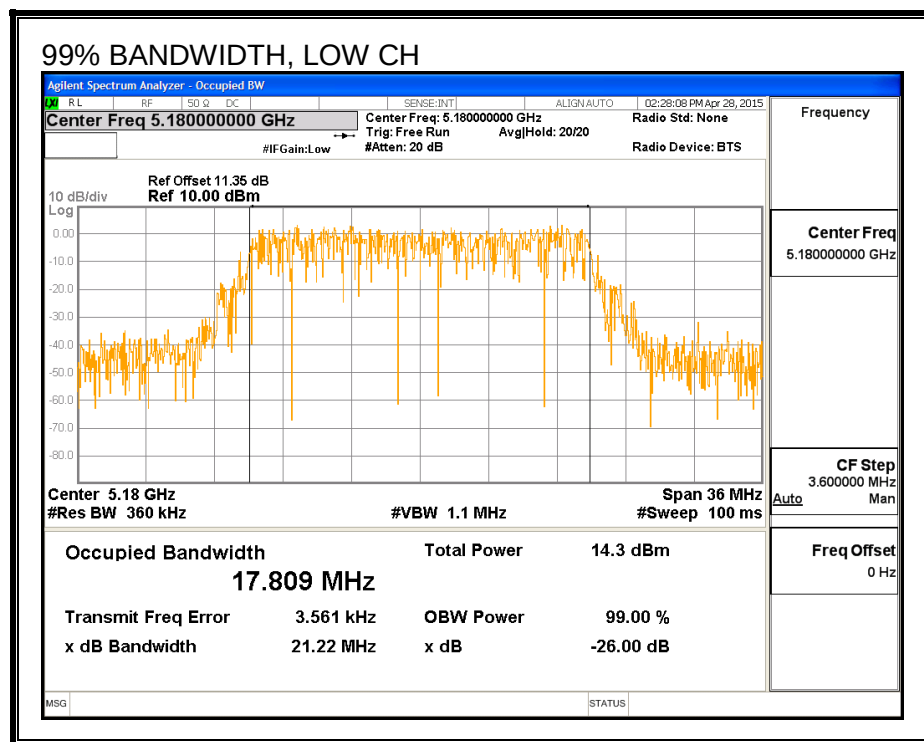

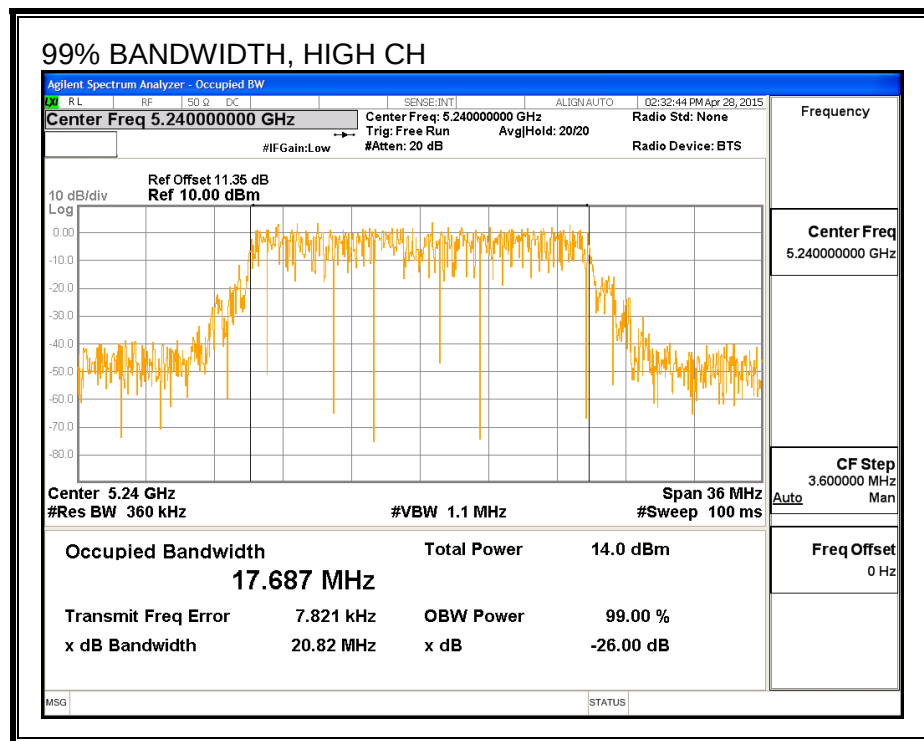

99% BANDWIDTH, CHAIN 1

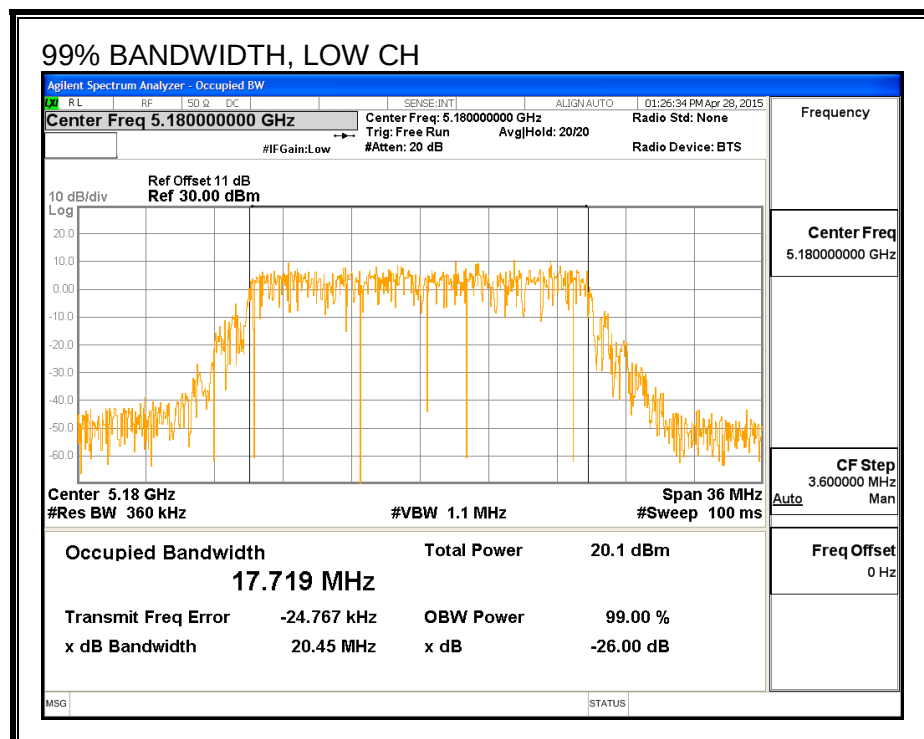

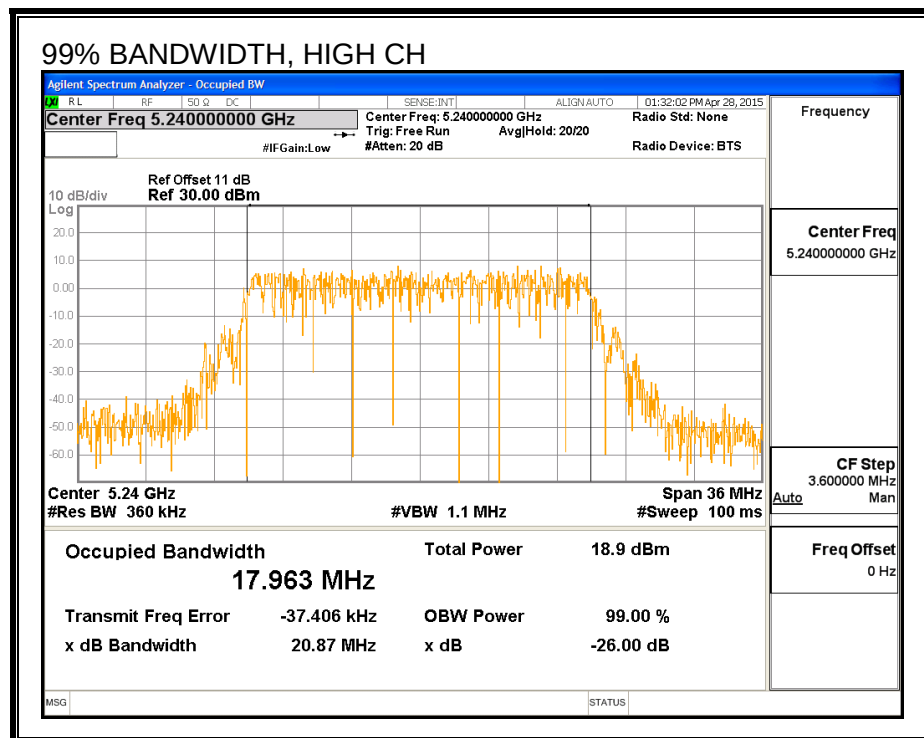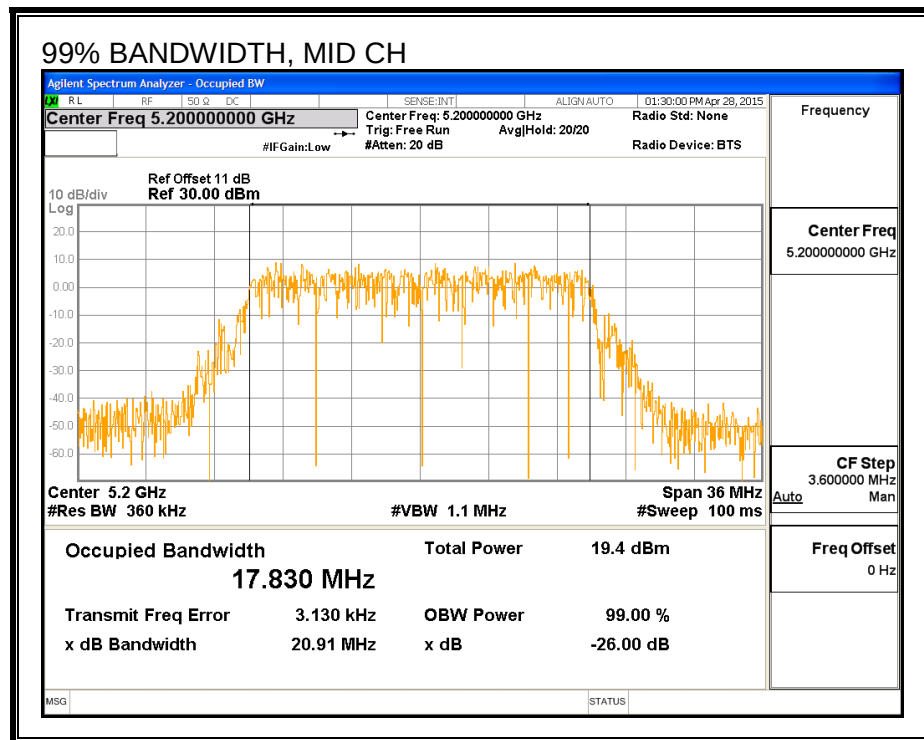

8.3.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5180	16.00	15.98	19.00
Mid	5200	16.96	16.91	19.95
High	5240	16.95	16.90	19.94

8.3.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-4.18	-1.54	-2.66

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-4.18	-1.54	0.25

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	-2.66	0.25	24.00	11.00
Mid	5200	-2.66	0.25	24.00	11.00
High	5240	-2.66	0.25	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	16.00	15.98	19.00	24.00	-5.00
Mid	5200	16.96	16.91	19.95	24.00	-4.05
High	5240	16.95	16.90	19.94	24.00	-4.06



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	4.56	4.50	7.54	11.00	-3.46
Mid	5200	5.50	5.49	8.51	11.00	-2.49
High	5240	5.46	5.36	8.42	11.00	-2.58

PSD, CHAIN 0

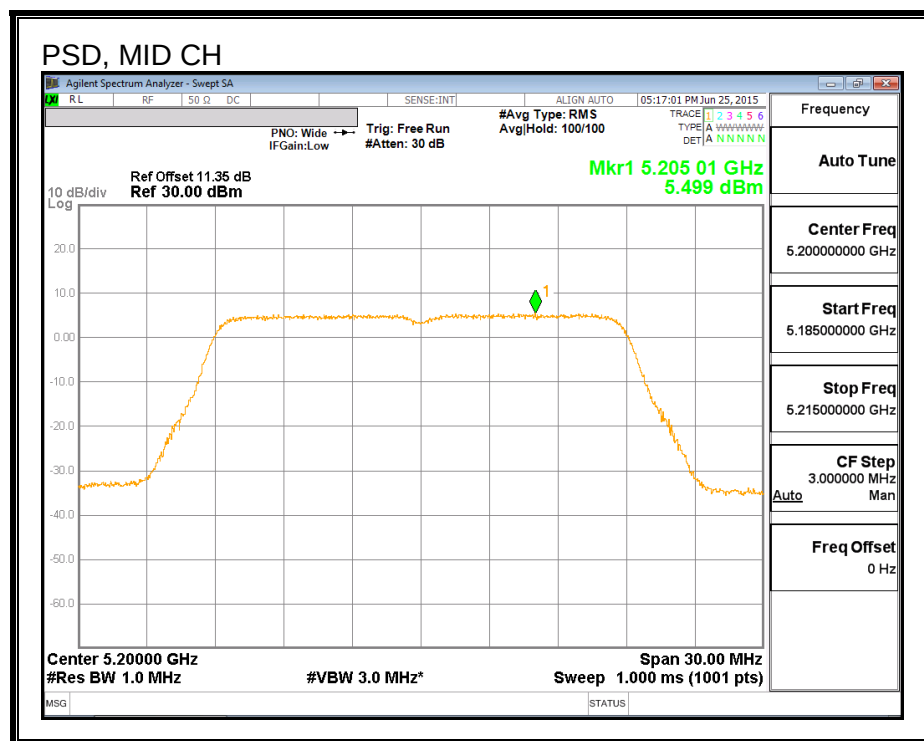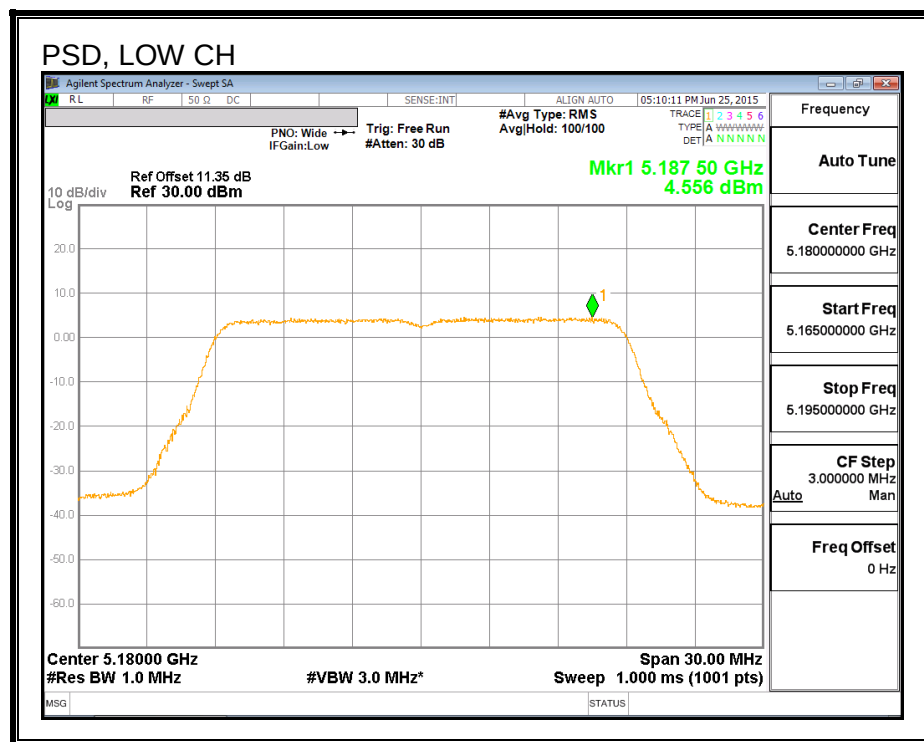



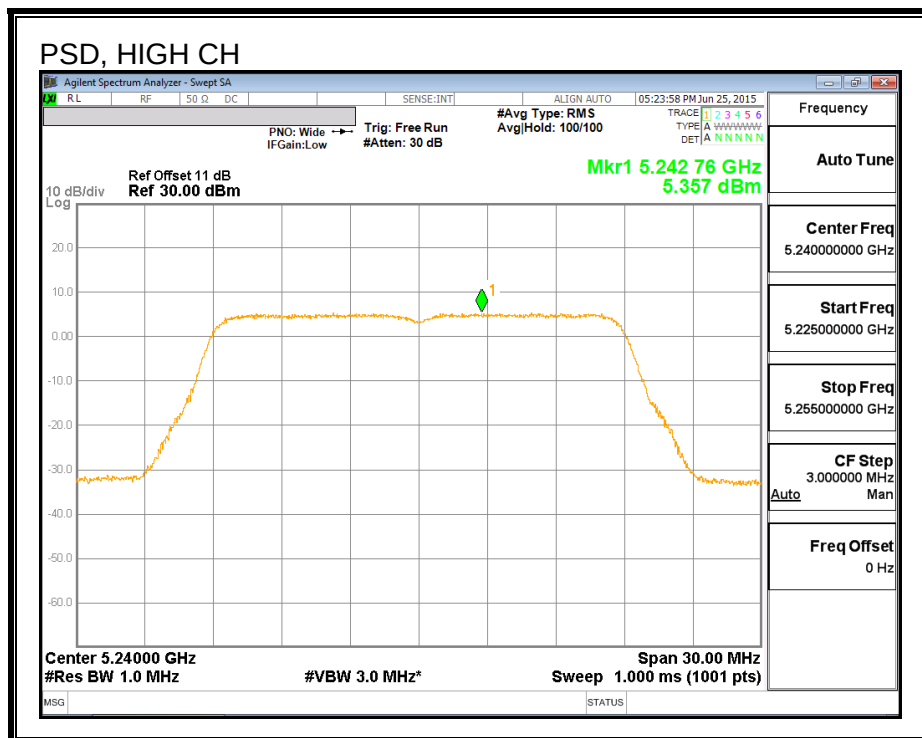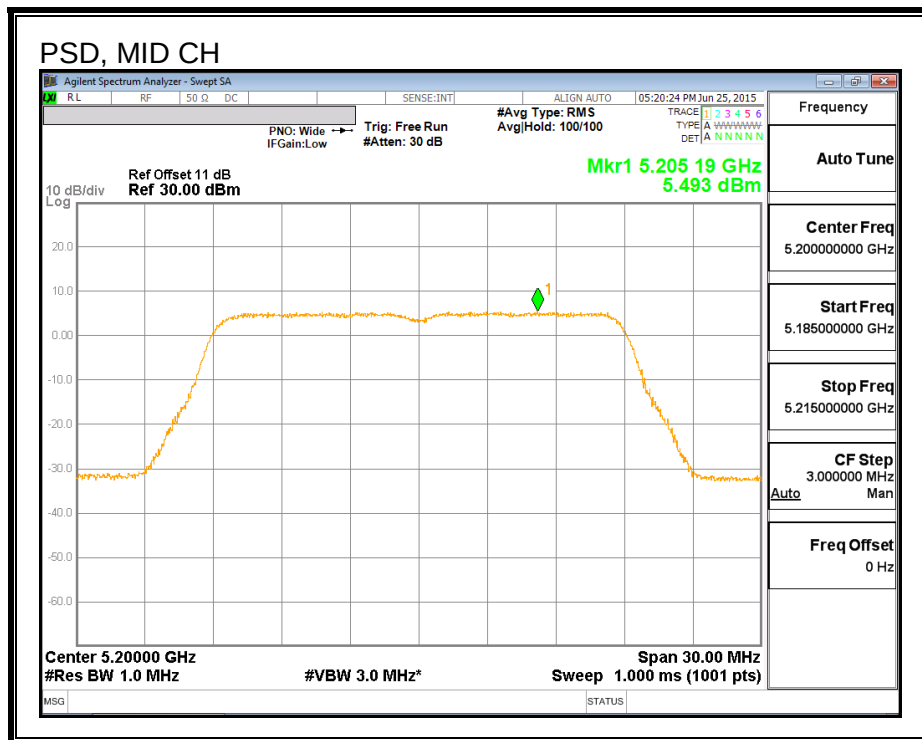

8.4. 802.11n HT20 2Tx STBC MODE IN THE 5.2 GHz BAND

Note: Covered by 802.11n HT20 2Tx CDD MODE

8.5. 802.11n HT40 CHAIN 0 MODE IN THE 5.2 GHz BAND

8.5.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.47
High	5230	40.12

26 dB BANDWIDTH

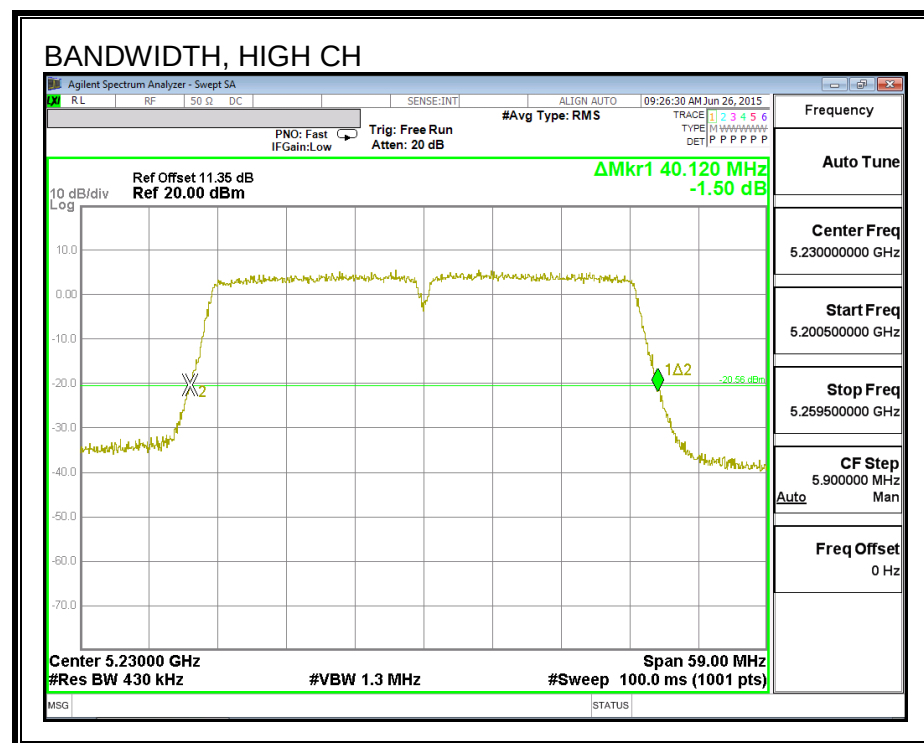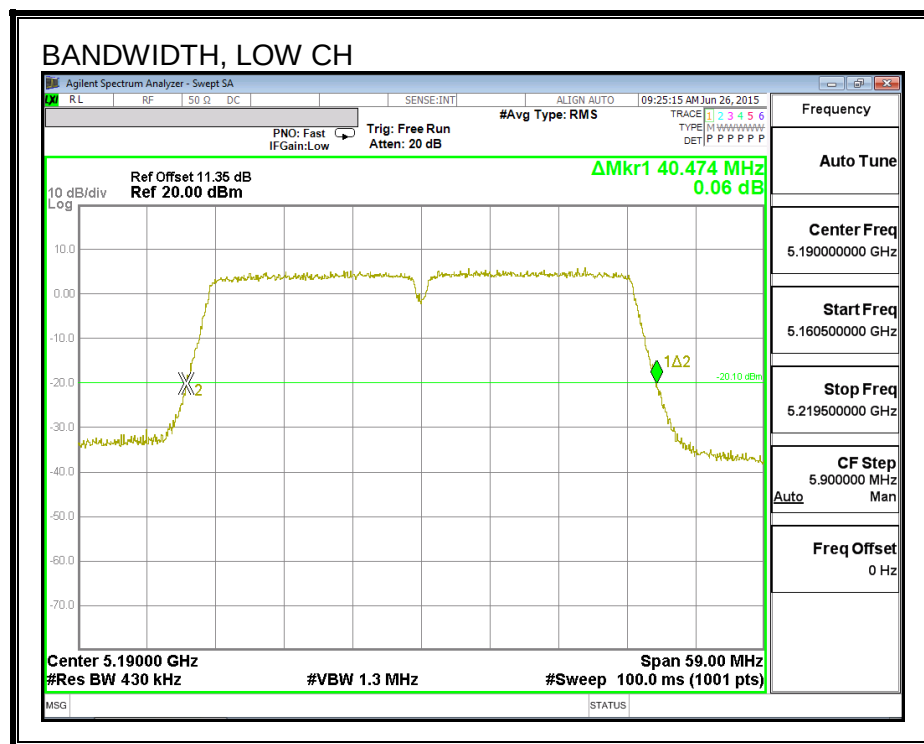

8.5.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.401
High	5230	36.065

99% BANDWIDTH

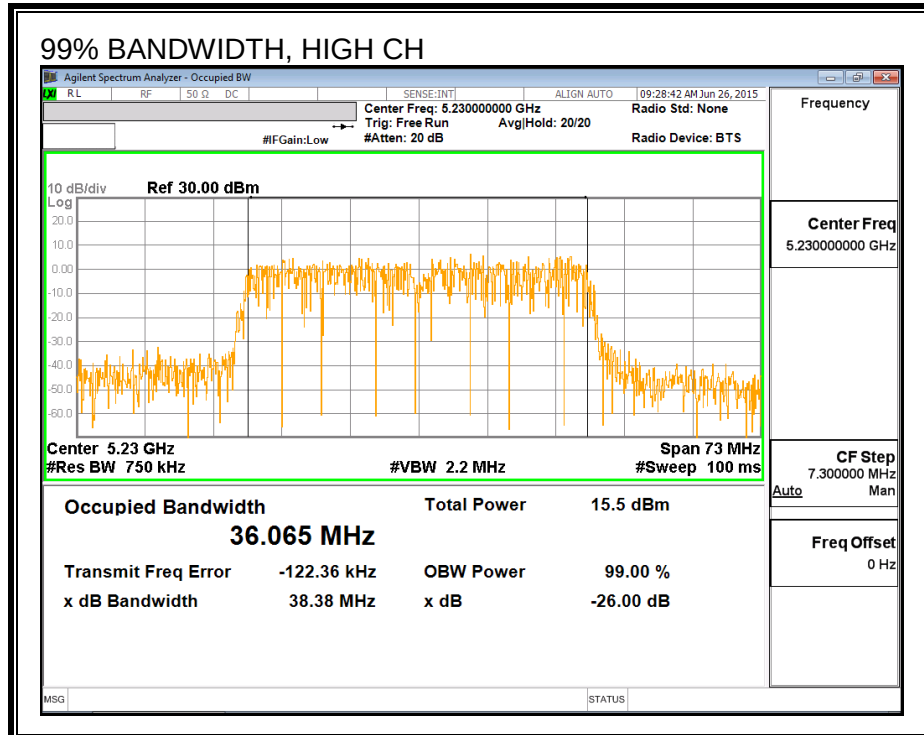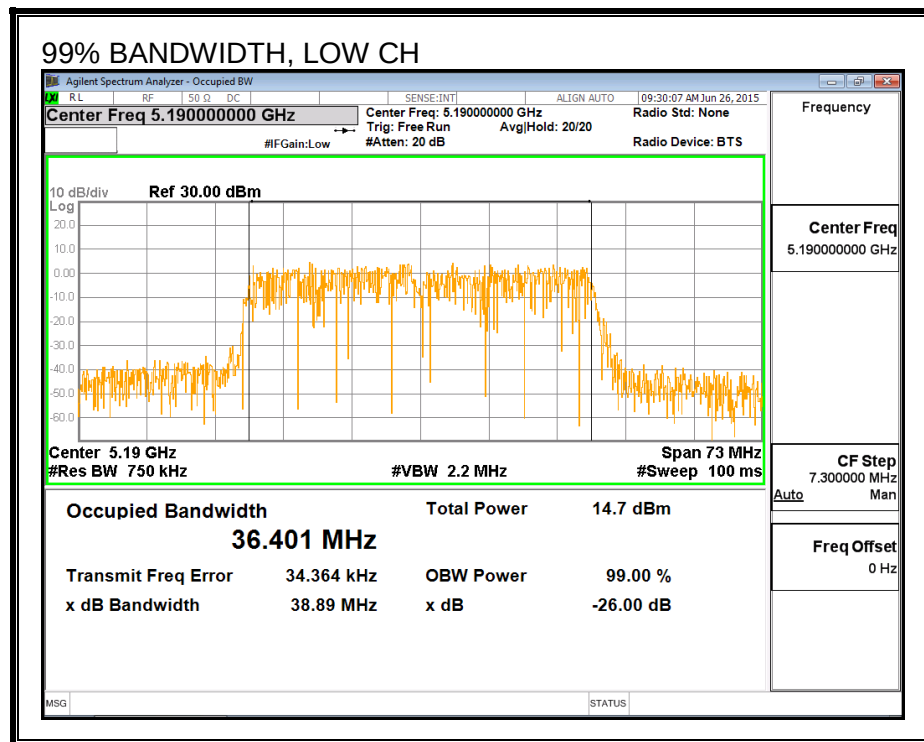

8.5.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5190	14.37
High	5230	16.92

8.5.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	-4.18	-4.18	24.00	11.00
High	5230	-4.18	-4.18	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	14.37	14.37	24.00	-9.63
High	5230	16.92	16.92	24.00	-7.08

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	-0.16	-0.16	11.00	-11.16
High	5230	2.40	2.40	11.00	-8.60

PSD

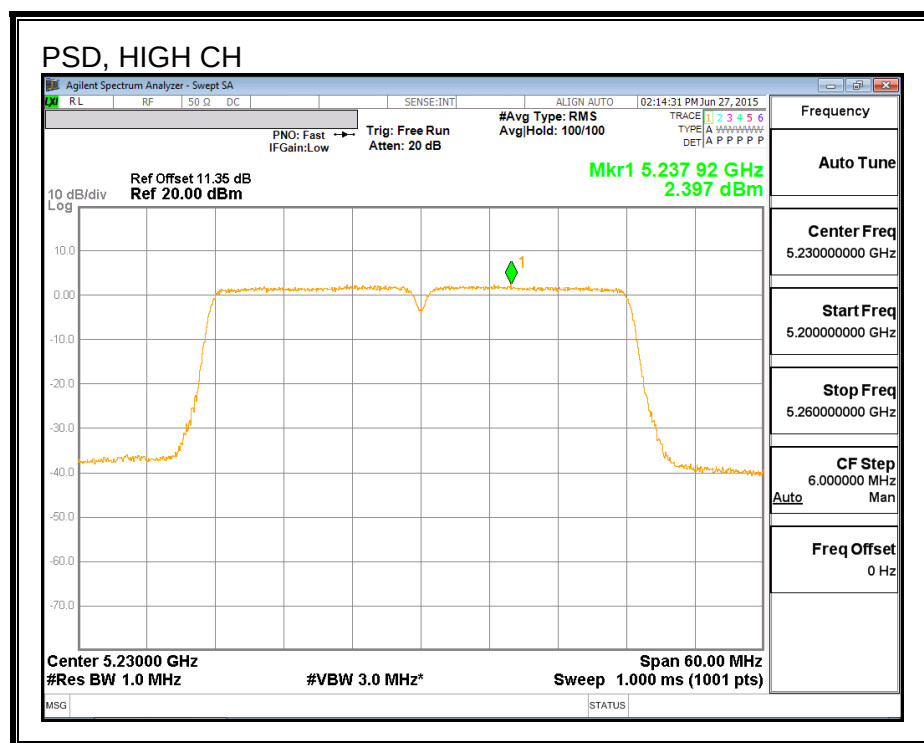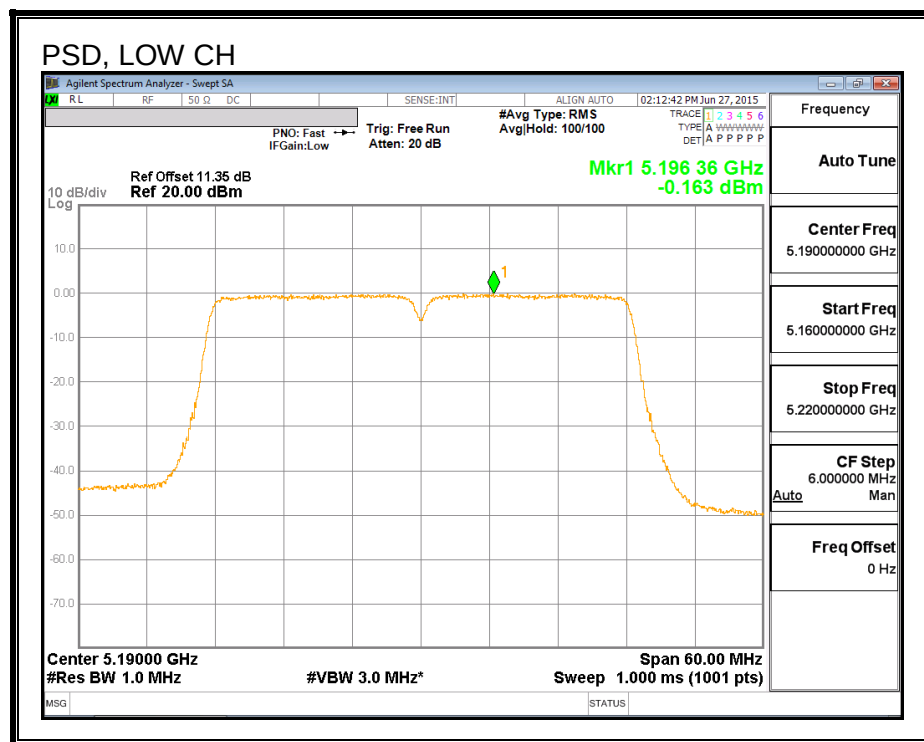

8.6. 802.11n HT40 CHAIN 1 MODE IN THE 5.2 GHz BAND

8.6.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.30
High	5230	40.12

26 dB BANDWIDTH

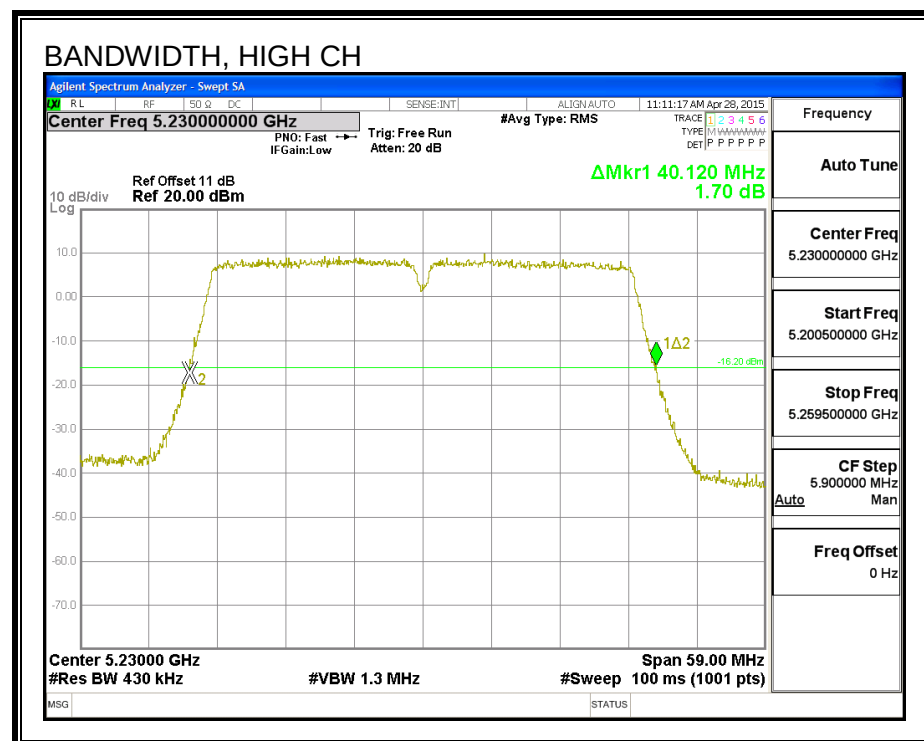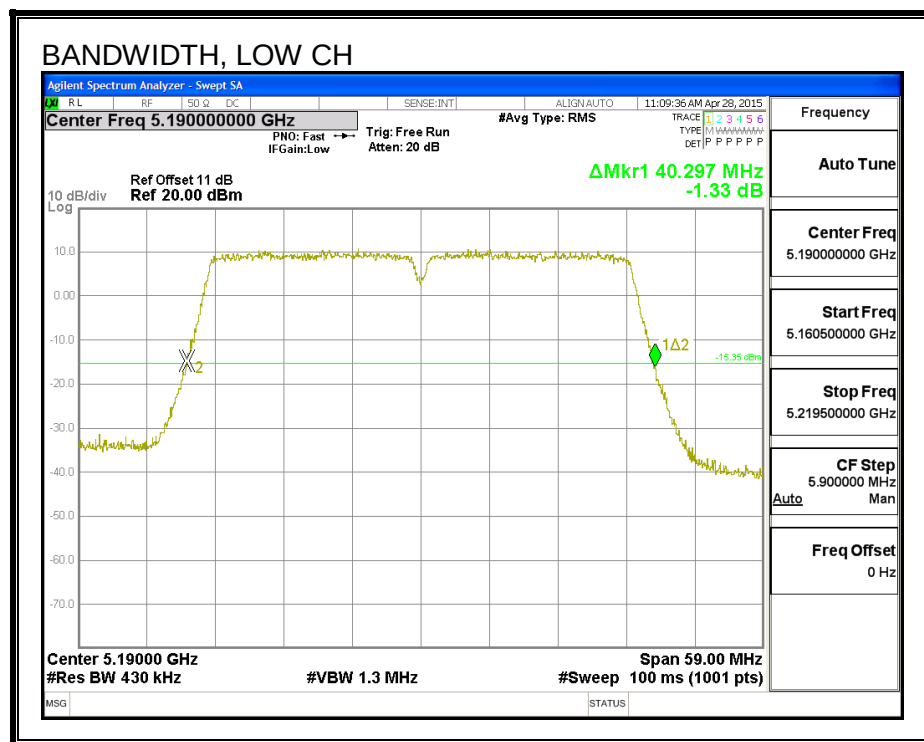

8.6.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.539
High	5230	36.346

99% BANDWIDTH

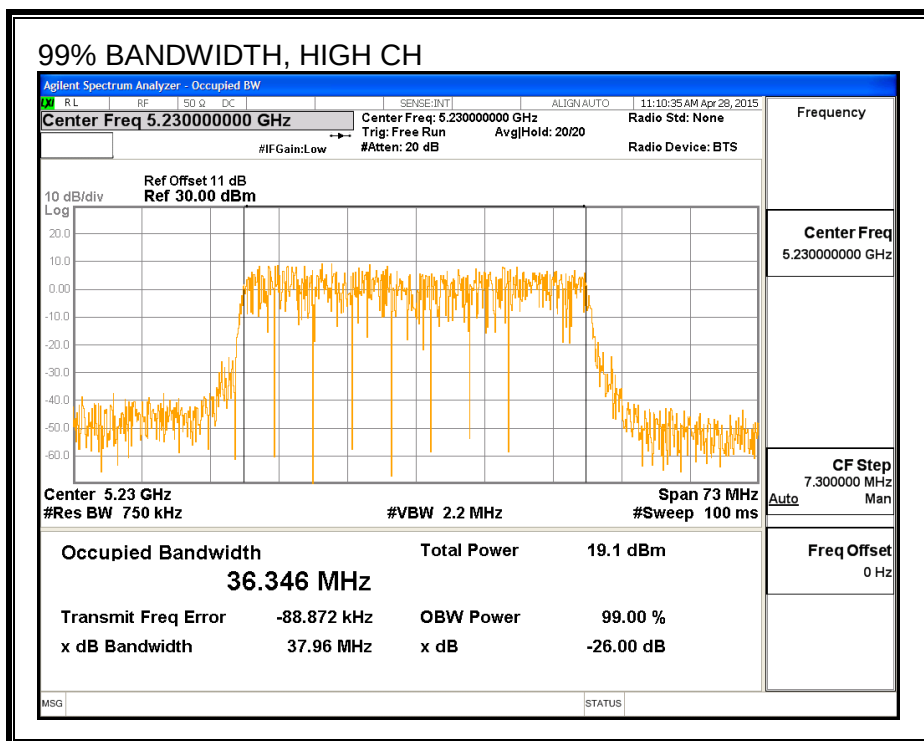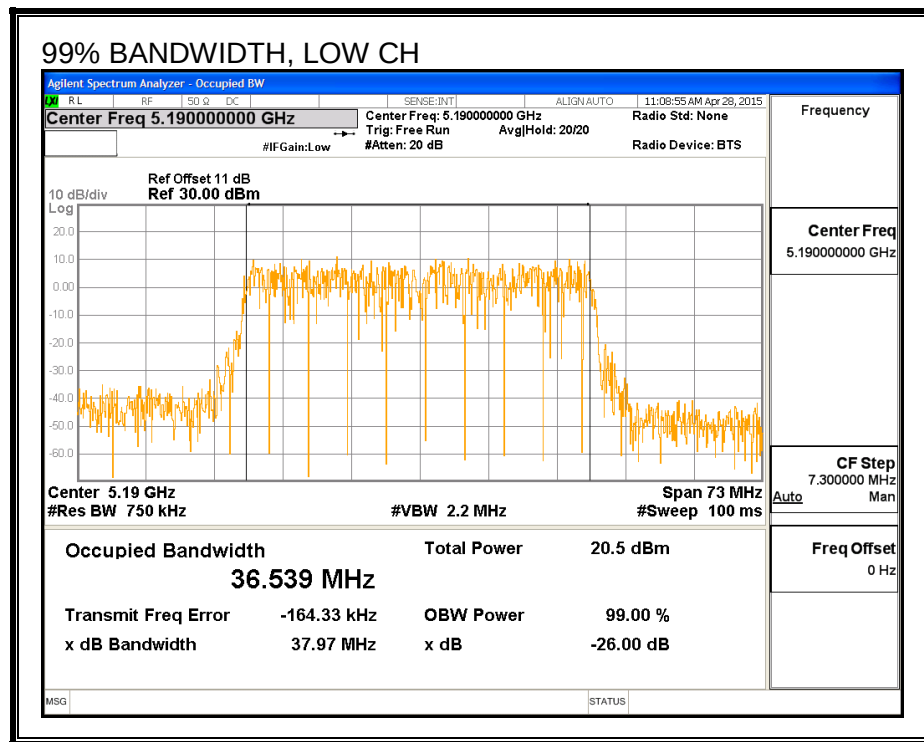

8.6.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5190	14.45
High	5230	16.75

8.6.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	-1.54	-1.54	24.00	11.00
High	5230	-1.54	-1.54	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	14.45	14.45	24.00	-9.55
High	5230	16.75	16.75	24.00	-7.25

PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	0.01	0.01	11.00	-10.99
High	5230	2.57	2.57	11.00	-8.43

PSD

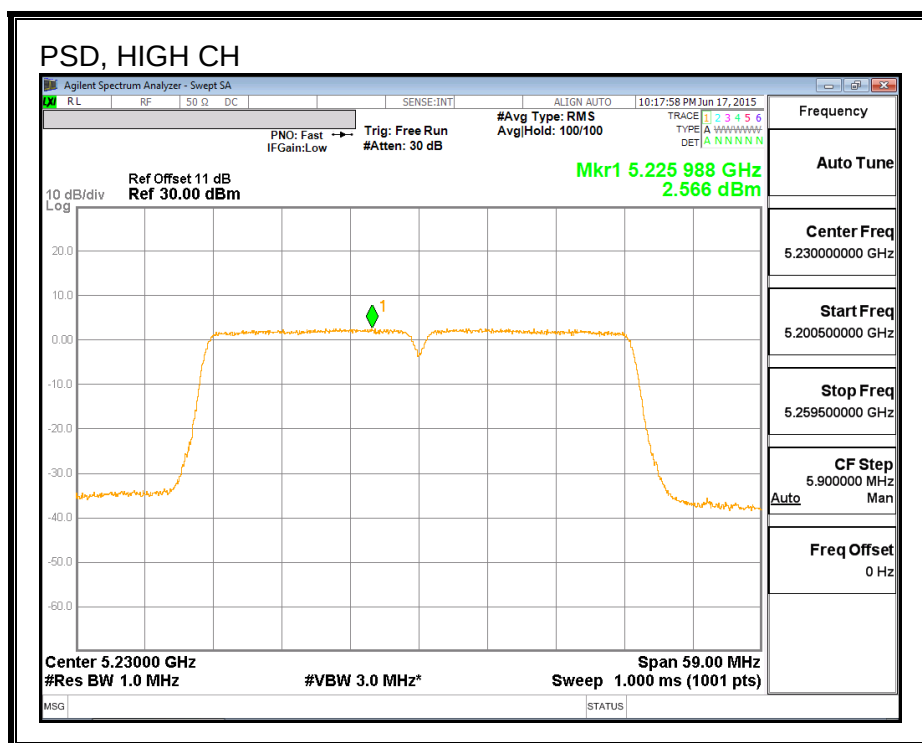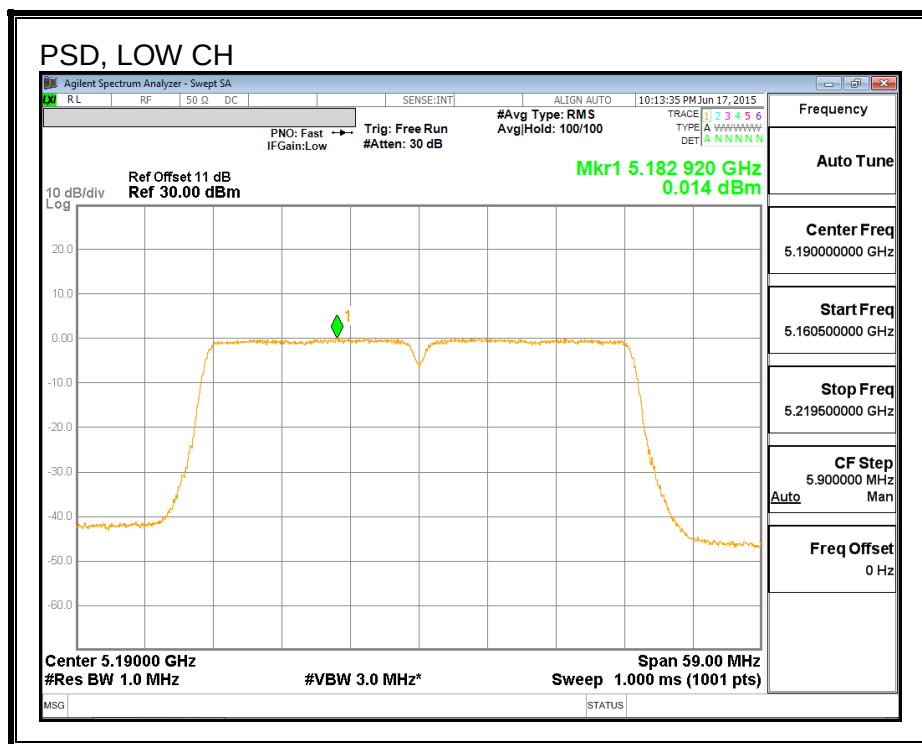

8.7. 802.11n HT40 2Tx CDD MODE IN THE 5.2 GHz BAND

8.7.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5190	40.18	39.88
High	5230	40.12	39.71

26 DB BANDWIDTH, CHAIN 1

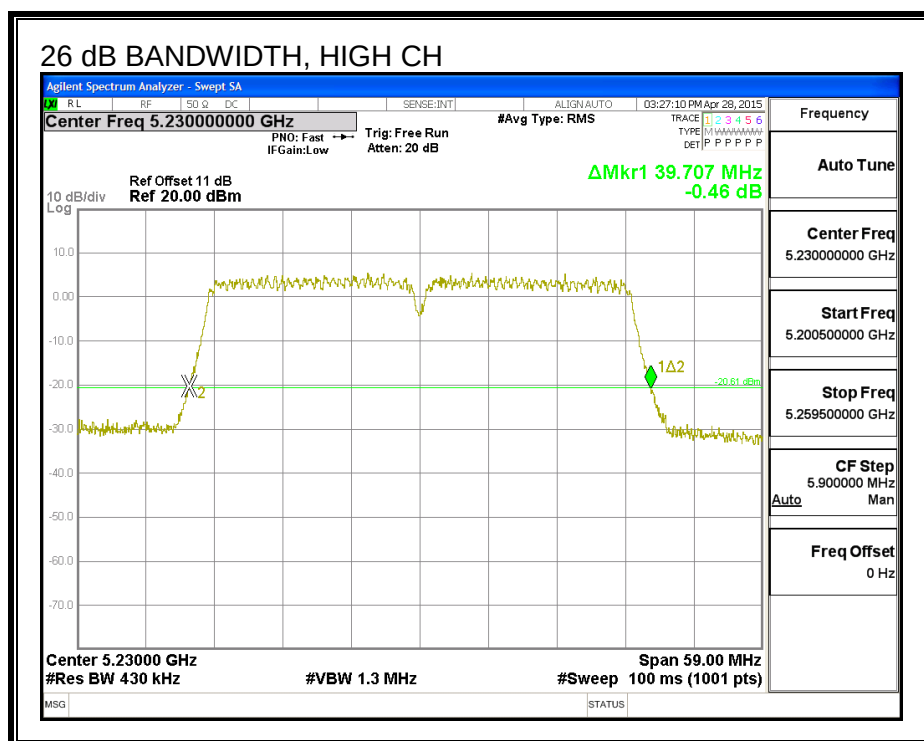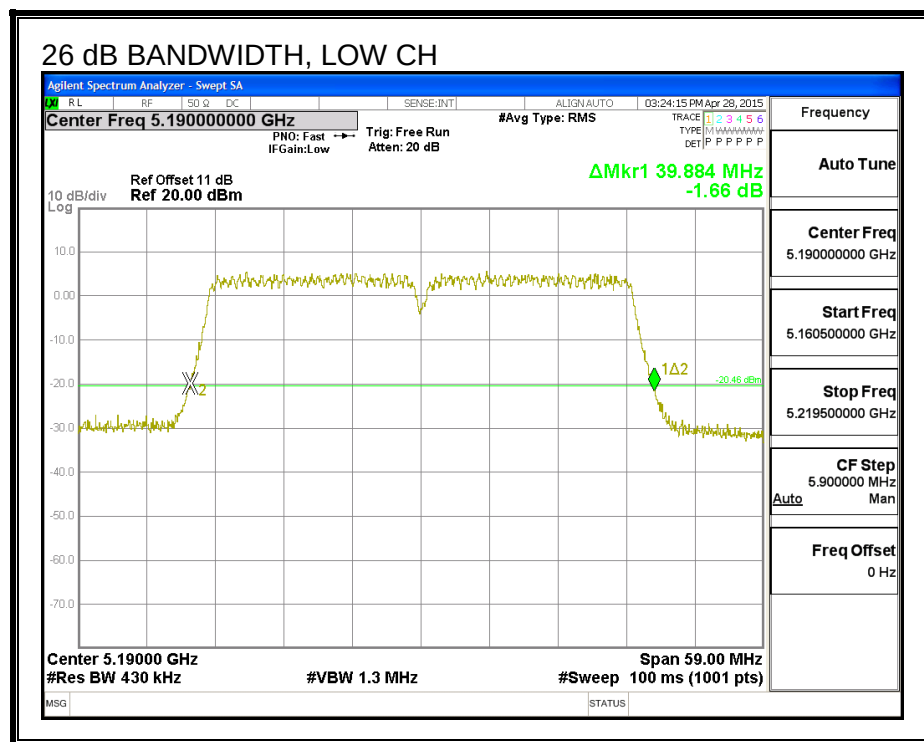

8.7.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5190	36.377	36.212
High	5230	36.262	36.373

99% BANDWIDTH, CHAIN 0

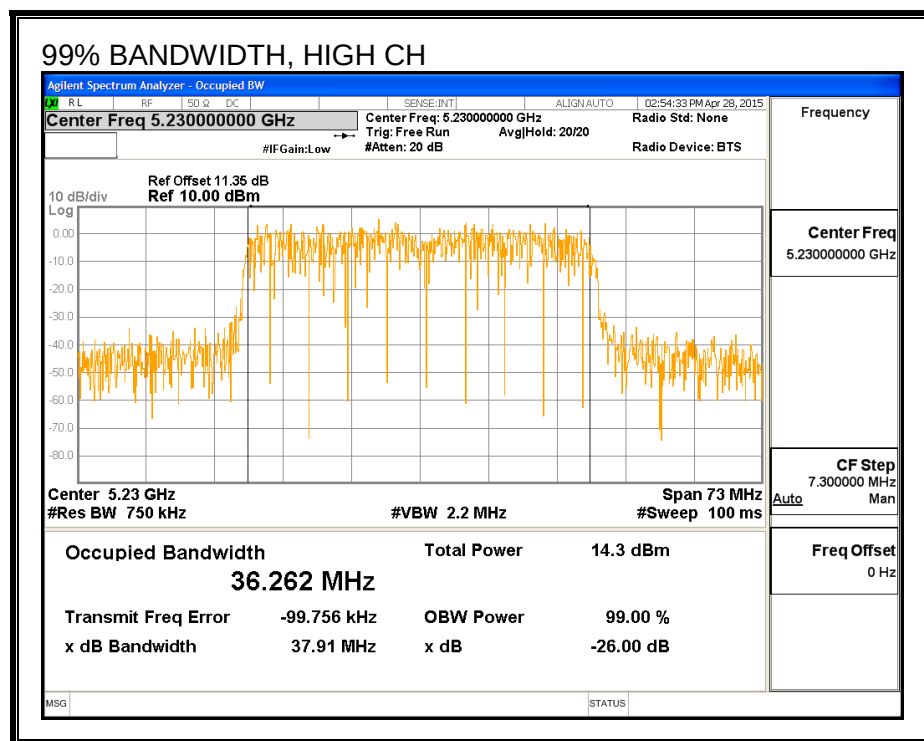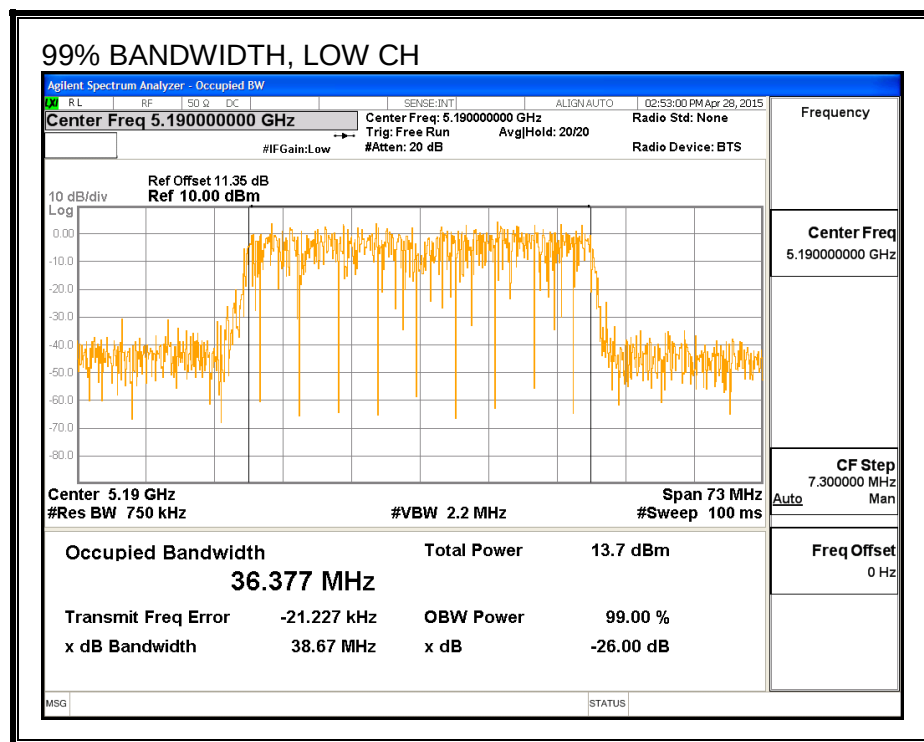

99% BANDWIDTH, CHAIN 1

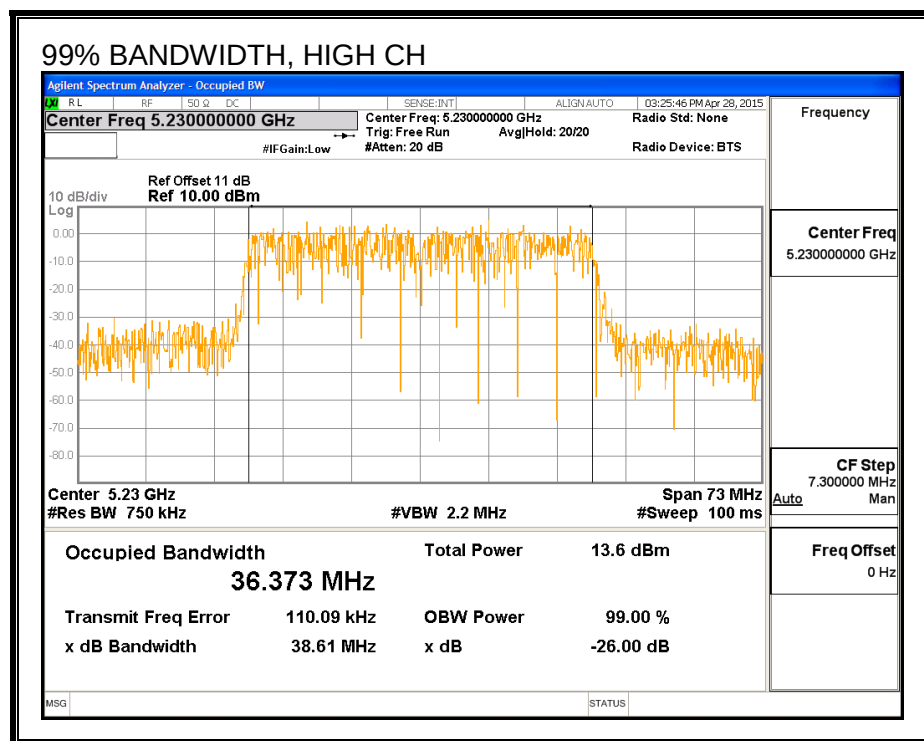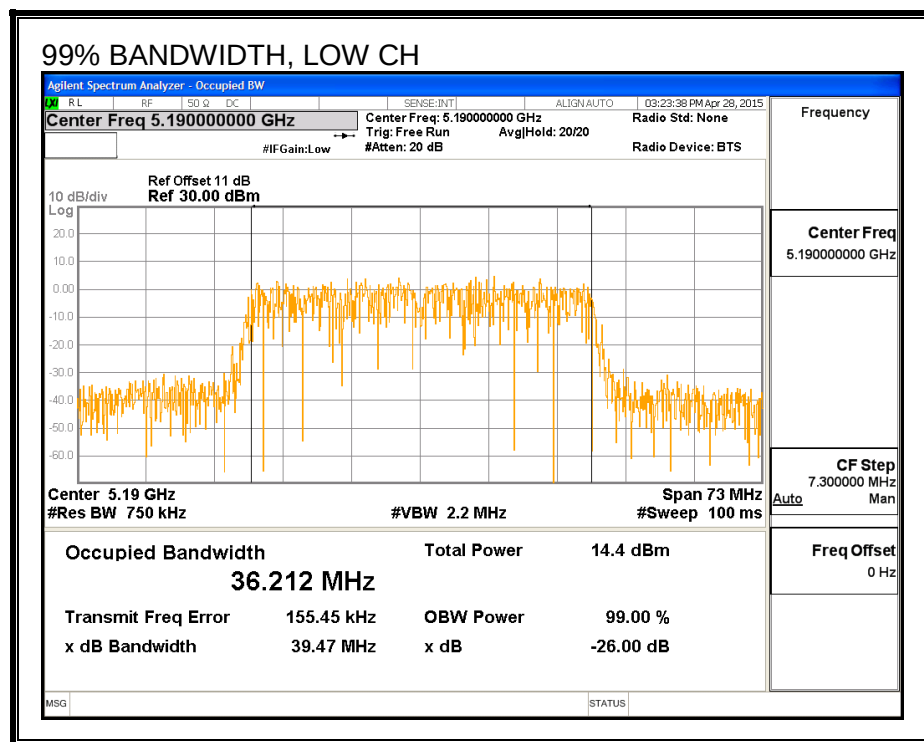

8.7.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

RESULTS

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5190	13.75	13.89	16.83
High	5230	16.86	16.96	19.92

8.7.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-4.18	-1.54	-2.66

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
-4.18	-1.54	0.25

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	-2.66	0.25	24.00	11.00
High	5230	-2.66	0.25	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	13.75	13.89	16.83	24.00	-7.17
High	5230	16.86	16.96	19.92	24.00	-4.08



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	-0.60	-0.78	2.32	11.00	-8.68
High	5230	2.43	2.70	5.57	11.00	-5.43

PSD, CHAIN 0

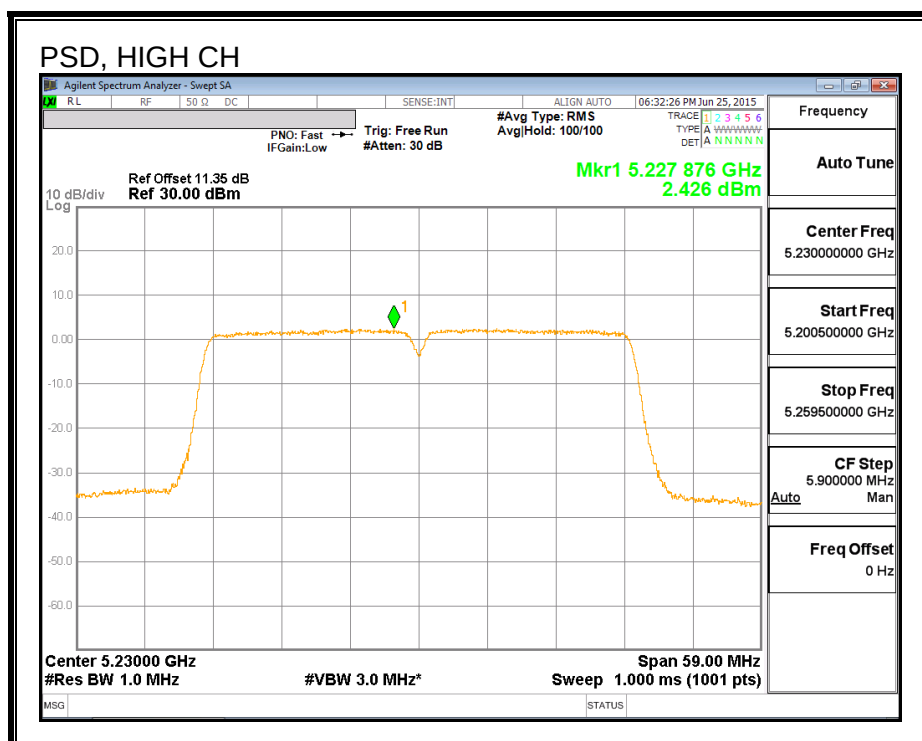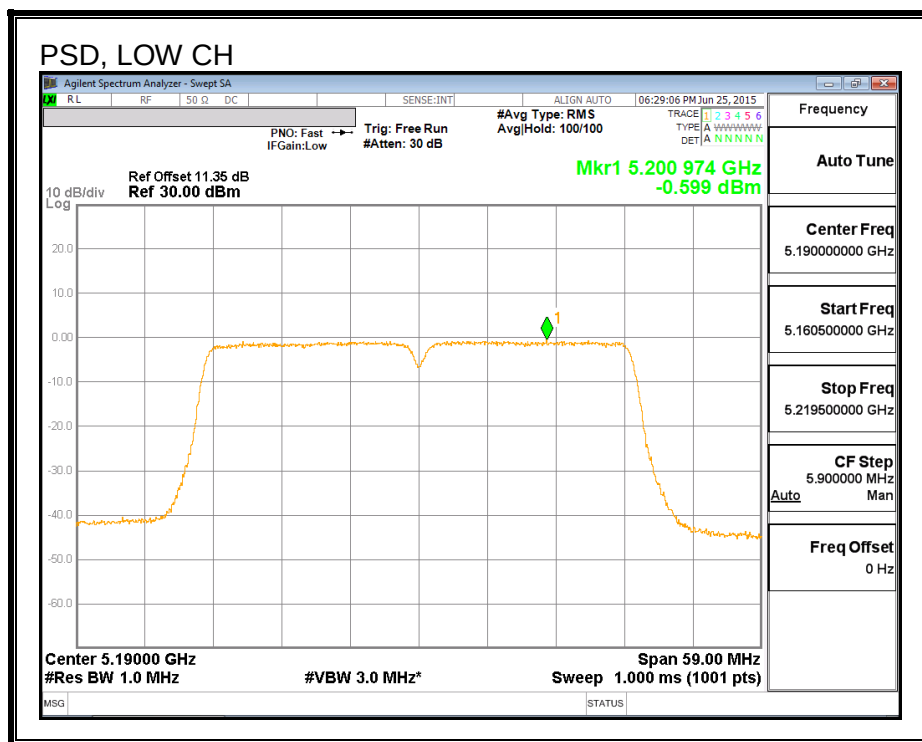

PSD, CHAIN 1

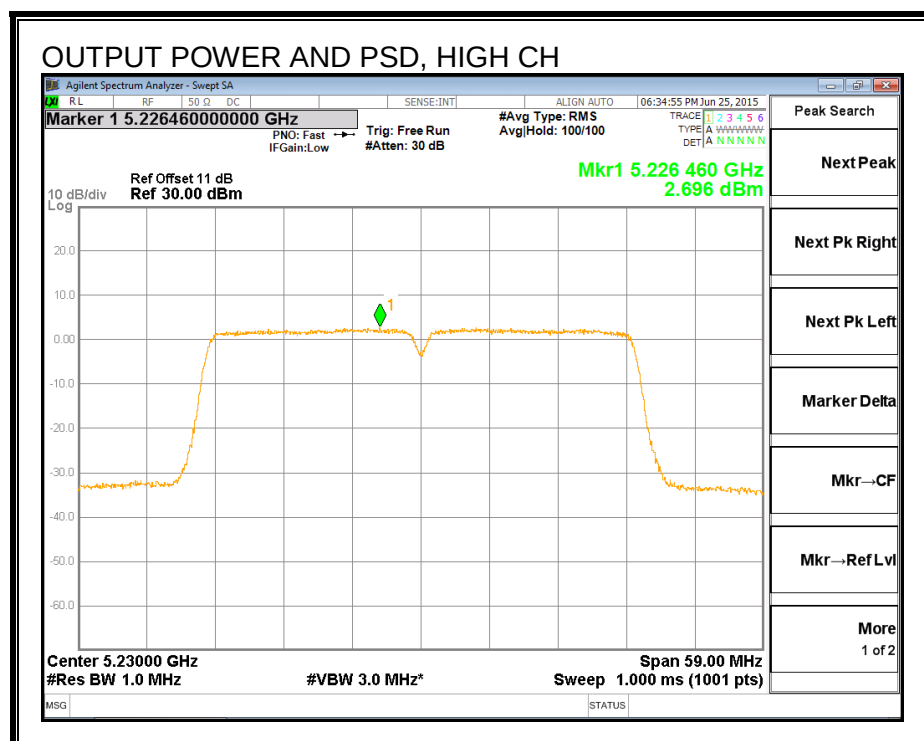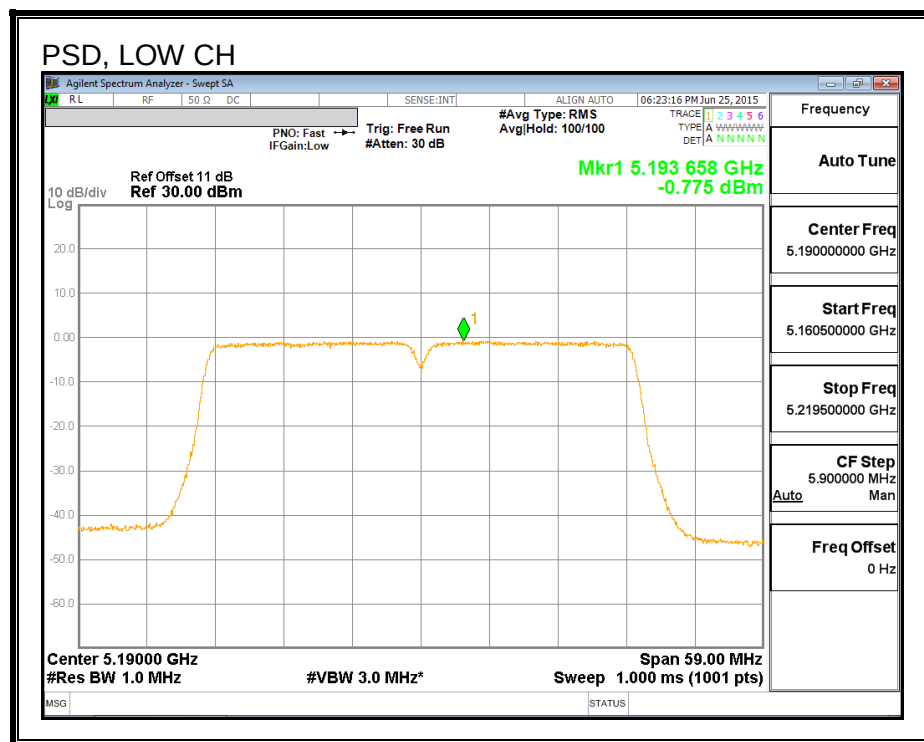

8.8. 802.11n HT40 2Tx STBC MODE IN THE 5.2 GHz BAND

Note: Covered by 802.11n HT40 2Tx CDD MODE

8.9. 802.11ac HT80 CHAIN 0 MODE IN THE 5.2 GHz BAND

8.9.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5210	82.28

26 dB BANDWIDTH

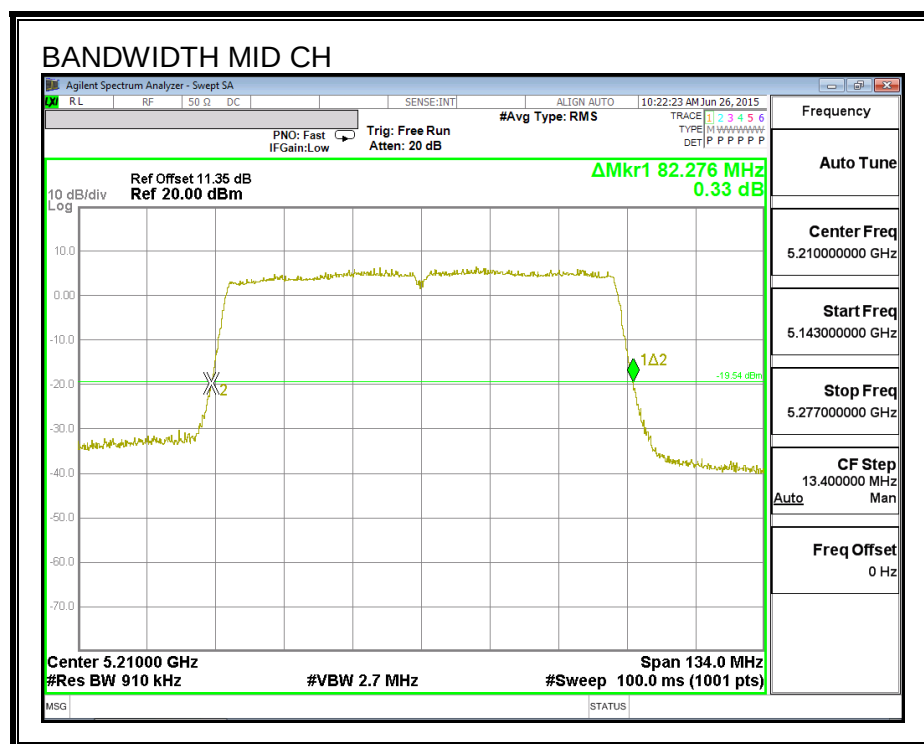

8.9.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5210	75.476

99% BANDWIDTH

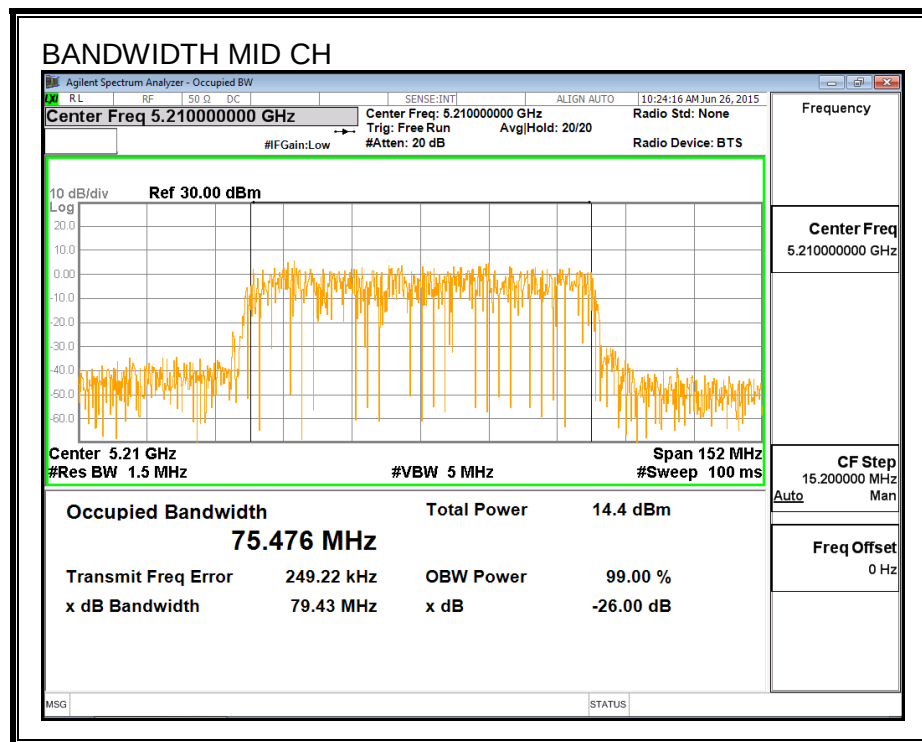

8.9.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Mid	5210	12.92

8.9.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	-4.18	-4.18	24.00	11.00

Duty Cycle CF (dB)	0.21	Included in Calculations of Corr'd Power & PSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	12.92	13.13	24.00	-10.87

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	-4.98	-4.77	11.00	-15.77

PSD

