



## **HAC T-COIL SIGNAL TEST REPORT**

**FCC 47 CFR § 20.19  
ANSI C63.19-2011**

*For*  
**SMARTPHONE**

**FCC ID: BCG-E3545A  
Model Name: A2341**

**Report Number: 13259315-S2V4  
Issue Date: 9/21/2020**

*Prepared for*  
**APPLE INC.  
1 APPLE PARK WAY  
CUPERTINO, CA 95014-2084**

*Prepared by*  
**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 319-4000  
FAX: (510) 661-0888**

**Revision History**

| Rev. | Date      | Revisions                                          | Revised By      |
|------|-----------|----------------------------------------------------|-----------------|
| V1   | 9/11/2020 | Initial Issue                                      | --              |
| V2   | 9/16/2020 | Section 8.1: Updated table                         | Coltyce Sanders |
| V3   | 9/16/2020 | Sections 9 & 10: Added note regarding LTE B26      | Coltyce Sanders |
| V4   | 9/21/2020 | Section 8.1: Separated 5G NR into FDD and TDD rows | Dave Weaver     |

## Table of Contents

|                                                                      |           |
|----------------------------------------------------------------------|-----------|
| <b>1. Attestation of Test Results.....</b>                           | <b>5</b>  |
| <b>2. Test Methodology .....</b>                                     | <b>6</b>  |
| <b>3. Facilities and Accreditation .....</b>                         | <b>6</b>  |
| <b>4. Calibration and Uncertainty .....</b>                          | <b>6</b>  |
| 4.1. <i>Measuring Instrument Calibration .....</i>                   | <i>6</i>  |
| 4.2. <i>Measurement Uncertainty.....</i>                             | <i>7</i>  |
| <b>5. Test Procedures for all Technologies .....</b>                 | <b>8</b>  |
| 5.1. <i>General Procedures C63.19-2011, §7 .....</i>                 | <i>8</i>  |
| 5.2. <i>VoWiFi – For PAG REUSE .....</i>                             | <i>9</i>  |
| 5.3. <i>Over the Top (OTT) – For PAG REUSE.....</i>                  | <i>10</i> |
| <b>6. Audio Level and Gain Measurements.....</b>                     | <b>12</b> |
| 6.1. <i>GSM/W-CDMA and VoLTE.....</i>                                | <i>12</i> |
| 6.2. <i>CDMA (1xRTT).....</i>                                        | <i>12</i> |
| 6.3. <i>VoWi-Fi – For PAG REUSE.....</i>                             | <i>13</i> |
| 6.4. <i>Over the Top (OTT) – For PAG REUSE.....</i>                  | <i>14</i> |
| <b>7. T-coil Measurement Criteria.....</b>                           | <b>15</b> |
| 7.1. <i>Frequency Response.....</i>                                  | <i>15</i> |
| 7.2. <i>Signal to Noise.....</i>                                     | <i>16</i> |
| <b>8. Device Under Test.....</b>                                     | <b>17</b> |
| 8.1. <i>Air Interfaces and Operating Mode .....</i>                  | <i>17</i> |
| <b>9. Investigations (Antenna, Codec, &amp; Air Interface) .....</b> | <b>19</b> |
| 9.1. <i>CMRS.....</i>                                                | <i>19</i> |
| 9.1.1. <i>Antenna Investigation .....</i>                            | <i>19</i> |
| 9.1.2. <i>Codec Investigation .....</i>                              | <i>21</i> |
| 9.1.3. <i>Air Interface Investigation .....</i>                      | <i>22</i> |
| 9.1.4. <i>VoWi-Fi Codec Investigation.....</i>                       | <i>25</i> |
| 9.1.5. <i>VoWi-Fi Air Interface Investigation .....</i>              | <i>26</i> |
| 9.2. <i>OTT Application .....</i>                                    | <i>28</i> |
| 9.2.1. <i>Antenna Investigation .....</i>                            | <i>28</i> |
| 9.2.2. <i>Codec Investigation .....</i>                              | <i>30</i> |
| 9.2.3. <i>Air Interface Investigation .....</i>                      | <i>31</i> |
| <b>10. HAC (T-coil) Test Results .....</b>                           | <b>36</b> |
| 10.1. <i>CMRS .....</i>                                              | <i>36</i> |

|                 |                                   |           |
|-----------------|-----------------------------------|-----------|
| 10.2.           | OTT Application .....             | 38        |
| 10.3.           | Worst Case T-Coil Test Plot ..... | 41        |
| <b>Appendix</b> | <b>.....</b>                      | <b>42</b> |
| Appendix A:     | T-Coil Setup Photo .....          | 42        |
| Appendix B:     | T-Coil Test Plots (CMRS) .....    | 42        |
| Appendix C:     | T-Coil Test Plots (OTT) .....     | 42        |
| Appendix D:     | T-Coil Probe Certificates .....   | 42        |
| Appendix E:     | Adjusted Gain Procedure .....     | 42        |

## 1. Attestation of Test Results

|                      |                                        |
|----------------------|----------------------------------------|
| Applicant Name       | APPLE, INC.                            |
| FCC ID               | BCG-E3545A                             |
| Model Name           | A2341                                  |
| Applicable Standards | FCC 47 CFR § 20.19<br>ANSI C63.19-2011 |
| HAC Rating           | T4                                     |
| Date Tested          | 7/8/2020 to 8/26/2020                  |
| Test Results         | Pass                                   |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

|                                                                                                                |                                                                                                      |
|----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| Approved & Released By:<br> | Prepared By:<br> |
| Dave Weaver<br>Operations Leader<br>UL Verification Services Inc.                                              | Nathan Sousa<br>Senior Test Engineer<br>UL Verification Services Inc.                                |

## 2. Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.19-2011 Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids and FCC published procedure

KDB 285076 D01 HAC Guidance v05r01

KDB 285076 D02 T-Coil testing for CMRS IP v03

KDB 285076 D03 HAC FAQ v01r02

TCB workshop updates

## 3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

|                      |
|----------------------|
| 47266 Benicia Street |
| SAR Lab 5            |
| SAR Lab 7            |

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

## 4. Calibration and Uncertainty

### 4.1. Measuring Instrument Calibration

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations and is traceable to recognized national standards.

| Name of Equipment            | Manufacturer  | Type/Model | Serial No.    | Cal. Due Date |
|------------------------------|---------------|------------|---------------|---------------|
| ABM Probe                    | SPEAG         | AM1DV3     | 3083          | 01/20/2021    |
| Data Acquisition Electronics | SPEAG         | DAE4       | 1357          | 2/20/2021     |
| Radio Communication Tester   | R & S         | CMW 500    | 125236        | 2/22/2021     |
| DAC                          | Sound Devices | USBPre 2   | HB1117341003  | N/A           |
| Switch                       | TP-Link       | TL-SG1016D | 2165473001109 | N/A           |
| Support Device               | Apple         | iMac 14,4  | C02NP00JGD92  | N/A           |

## 4.2. Measurement Uncertainty

### Measurement Uncertainty for Audio Band Magnetic Measurement

| Error Description                                     | Uncertainty values (±%) | Probe Dist. | Div. | c <sub>i</sub> | c <sub>i</sub> | Std. Unc. |           |
|-------------------------------------------------------|-------------------------|-------------|------|----------------|----------------|-----------|-----------|
|                                                       |                         |             |      | ABM1           | ABM2           | ABM1 (±%) | ABM2 (±%) |
| Probe Sensitivity                                     |                         |             |      |                |                |           |           |
| Reference level                                       | 3.0                     | N           | 1    | 1              | 1              | 3.0       | 3.0       |
| AMCC geometry                                         | 0.4                     | R           | √3   | 1              | 1              | 0.2       | 0.2       |
| AMCC current                                          | 1.0                     | R           | √3   | 1              | 1              | 0.6       | 0.6       |
| Probe positioning during calibration                  | 0.1                     | R           | √3   | 1              | 1              | 0.1       | 0.1       |
| Noise contribution                                    | 0.7                     | R           | √3   | 0.0143         | 1              | 0.0       | 0.4       |
| Frequency slope                                       | 5.9                     | R           | √3   | 0.1            | 1.00           | 0.3       | 3.5       |
| Probe System                                          |                         |             |      |                |                |           |           |
| Repeatability / drift                                 | 1.0                     | R           | √3   | 1              | 1              | 0.6       | 0.6       |
| Linearity / Dynamic range                             | 0.6                     | R           | √3   | 1              | 1              | 0.4       | 0.4       |
| Acoustic noise                                        | 1.0                     | R           | √3   | 0.1            | 1              | 0.1       | 0.6       |
| Probe angle                                           | 2.3                     | R           | √3   | 1              | 1              | 1.4       | 1.4       |
| Spectral processing                                   | 0.9                     | R           | √3   | 1              | 1              | 0.5       | 0.5       |
| Integration time                                      | 0.6                     | N           | 1    | 1              | 5              | 0.6       | 3.0       |
| Field disturbance                                     | 0.2                     | R           | √3   | 1              | 1              | 0.1       | 0.1       |
| Test Signal                                           |                         |             |      |                |                |           |           |
| Reference signal spectral response                    | 0.6                     | R           | √3   | 0              | 1              | 0.0       | 0.4       |
| Positioning                                           |                         |             |      |                |                |           |           |
| Probe positioning                                     | 1.9                     | R           | √3   | 1              | 1              | 1.1       | 1.1       |
| Phantom positioning                                   | 0.9                     | R           | √3   | 1              | 1              | 0.5       | 0.5       |
| EUT positioning                                       | 1.9                     | R           | √3   | 1              | 1              | 1.1       | 1.1       |
| External Contributions                                |                         |             |      |                |                |           |           |
| RF interference                                       | 0.0                     | R           | √3   | 1              | 0.3            | 0.0       | 0.0       |
| Test signal variation                                 | 2.0                     | R           | √3   | 1              | 1              | 1.2       | 1.2       |
| Combined Std. Uncertainty (ABM field)                 |                         |             |      |                |                | 4.1       | 6.1       |
| Expanded Std. Uncertainty (%)                         |                         |             |      |                |                | 8.1       | 12.3      |
| Notes for table                                       |                         |             |      |                |                |           |           |
| 1. N - Nomal                                          |                         |             |      |                |                |           |           |
| 2. R - Rectangular                                    |                         |             |      |                |                |           |           |
| 3. Div. - Divisor used to obtain standard uncertainty |                         |             |      |                |                |           |           |

## 5. Test Procedures for all Technologies

### 5.1. General Procedures C63.19-2011, §7

ANSI C63.19-2011, §7

This document describes the procedures used to measure the ABM (T-Coil) performance of the WD. In addition to measuring the absolute signal levels, the A-weighted magnitude of the unintended signal shall also be determined. In order to assure that the required signal quality is measured, the measurement of the intended signal and the measurement of the unintended signal must be made at the same location for all measurement positions. In addition, the RF field strength at each measurement location must be at or below that required for the assigned category.

Measurements shall not include undesired properties from the WD's RF field; therefore, use of a coaxial connection to a base station simulator or non-radiating load may be necessary. However, even then with a coaxial connection to a base station simulator or non-radiating load there may still be RF leakage from the WD, which may interfere with the desired measurement. Pre-measurement checks should be made to avoid this possibility. All measurements shall be done with the WD operating on battery power with an appropriate normal speech audio signal input level given in Table 7.1. If the device display can be turned off during a phone call then that may be done during the measurement as well.

Measurements shall be performed at two locations specified in A.3, with the correct probe orientation for a particular location, in a multistage sequence by first measuring the field intensity of the desired T-Coil signal (ABM1) that is useful to a hearing aid T-Coil. The undesired magnetic components (ABM2) must be measured at the same location as the desired ABM or T-Coil signal (ABM1), and the ratio of desired to undesired ABM signals must be calculated. For the perpendicular field location, only the ABM1 frequency response shall be determined in a third measurement stage. The flow chart in Figure 7.3 illustrates this three-stage, two orientation process.

The following steps summarize the basic test flow for determining ABM1<sup>1</sup> and ABM2<sup>2</sup>. These steps assume that a sine wave or narrowband 1/3 octave signal can be used for the measurement of ABM1.

- a. A validation of the test setup and instrumentation may be performed using a TMFS or Helmholtz coil. Measure the emissions and confirm that they are within the specified tolerance.
- b. Position the WD in the test setup and connect the WD RF connector to a base station simulator or a non-radiating load as shown in Figure 7.1 or Figure 7.2. Confirm that equipment that requires calibration has been calibrated, and that the noise level meets the requirements given in 7.3.1.
- c. The drive level to the WD is set such that the reference input level specified in Table 7.1 is input to the base station simulator (or manufacturer's test mode equivalent) in the 1 kHz, 1/3 octave band. This drive level shall be used for the T-Coil signal test (ABM1) at  $f = 1$  kHz. Either a sine wave at 1025 Hz or a voice-like signal, band-limited to the 1 kHz 1/3 octave, as defined in 7.4.2, shall be used for the reference audio signal. If interference is found at 1025 Hz an alternative nearby reference audio signal frequency may be used.<sup>46</sup> The same drive level will be used for the ABM1 frequency response measurements at each 1/3 octave band center frequency. The WD volume control may be set at any level up to maximum, provided that a signal at any frequency at maximum modulation would not result in clipping or signal overload.
- d. Determine the magnetic measurement locations for the WD device (A.3), if not already specified by the manufacturer, as described in 7.4.4.1.1 and 7.4.4.2.

---

<sup>1</sup> **Audio Band Magnetic signal - desired (ABM1):** Measured quantity of the desired magnetic signal

<sup>2</sup> **Audio Band Magnetic signal - undesired (ABM2):** Measured quantity of the undesired magnetic signal, such as interference from battery current and similar non-signal elements.


- e. At each measurement location, measure and record the desired T-Coil magnetic signals (ABM1 at  $f_i$ ) as described in 7.4.4.2 in each individual ISO 266-1975 R10 standard 1/3 octave band. The desired audio band input frequency ( $f_i$ ) shall be centered in each 1/3 octave band maintaining the same drive level as determined in item c) and the reading taken for that band.

Equivalent methods of determining the frequency response may also be employed, such as fast Fourier transform (FFT) analysis using noise excitation or input-output comparison using simulated speech. The full-band integrated or half-band integrated probe output, as specified in D.9, may be used, as long as the appropriate calibration curve is applied to the measured result, so as to yield an accurate measurement of the field magnitude. (The resulting measurement shall be an accurate measurement in dB A/m.)

All measurements of the desired signal shall be shown to be of the desired signal and not of an undesired signal. This may be shown by turning the desired signal ON and OFF with the probe measuring the same location. If the scanning method is used the scans shall show that all measurement points selected for the ABM1 measurement meet the ambient and test system noise criteria in 7.3.1.

- f. At the measurement location for each orientation, measure and record the undesired broadband audio magnetic signal (ABM2) as specified in 7.4.4.4 with no audio signal applied (or digital zero applied, if appropriate) using A-weighting and the half-band integrator. Calculate the ratio of the desired to undesired signal strength (i.e., signal quality).
- g. Obtain the data from the postprocessor, SEMCAD, and determine the category that properly classifies the signal quality based on Table 8.5.

Test Setup Diagram

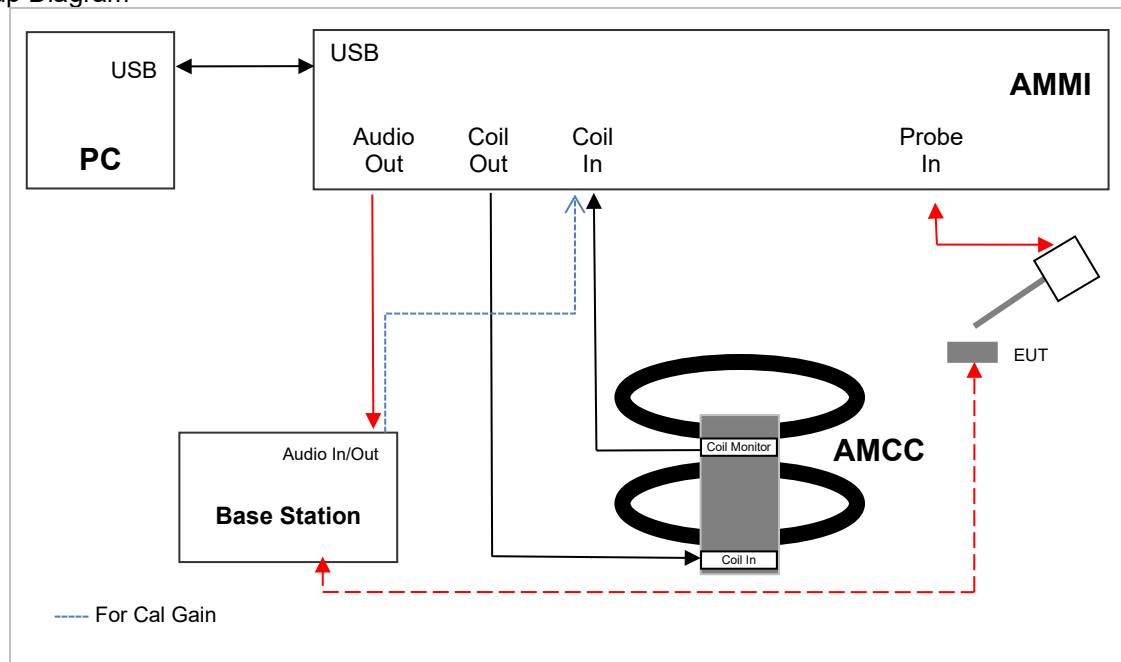

## 5.2. VoWiFi – For PAG REUSE

This device supports Wi-Fi calling (aka Voice over Wi-Fi or VoWi-Fi) which is an extended feature of the carriers CMRS service to offload VoLTE calls onto local area networks over Wi-Fi via the Internet and subject to HAC assessment for phones with a HAC rating. HAC assessment for this feature is subject to Pre Approval Guidance.

The set up for VoWi-Fi uses the base station as described in §5.1 with the exception that the reference audio level is set to -20dBm0. The reference level is calibrated using the standard call box calibration procedures with the exception of the -20dBm0 reference level being used (refer to §6).


An investigation was performed to determine worst case codec, bit rate, and air interface configuration (refer to §9).

### 5.3. Over the Top (OTT) – For PAG REUSE

This device supports VoIP via a preinstalled application that uses the FaceTime service, using ACC-ELD as its only codec (refer to §8.1 for air interface details and §9.2.2 for codec bit rates). VoIP capabilities require HAC assessment when voice calls are supported over the cellular data connection via pre-installed VoIP applications and the assessment is subject to Pre-Approval Guidance procedures.

The equipment is set up as shown below with a support device used to originate the call using the IP transport. The support device<sup>3</sup> connects to the cloud-based FaceTime service via a Wi-Fi access point and router, or a RJ45 Ethernet connection. The DUT connects to the VoIP service via a cellular/unlicensed air interface to the call box and an Ethernet connection from call box to Internet. The various codec bit rate and air interface configurations are evaluated to determine the worst-case configuration (refer to §9.2).


Test Setup configuration for OTT calls

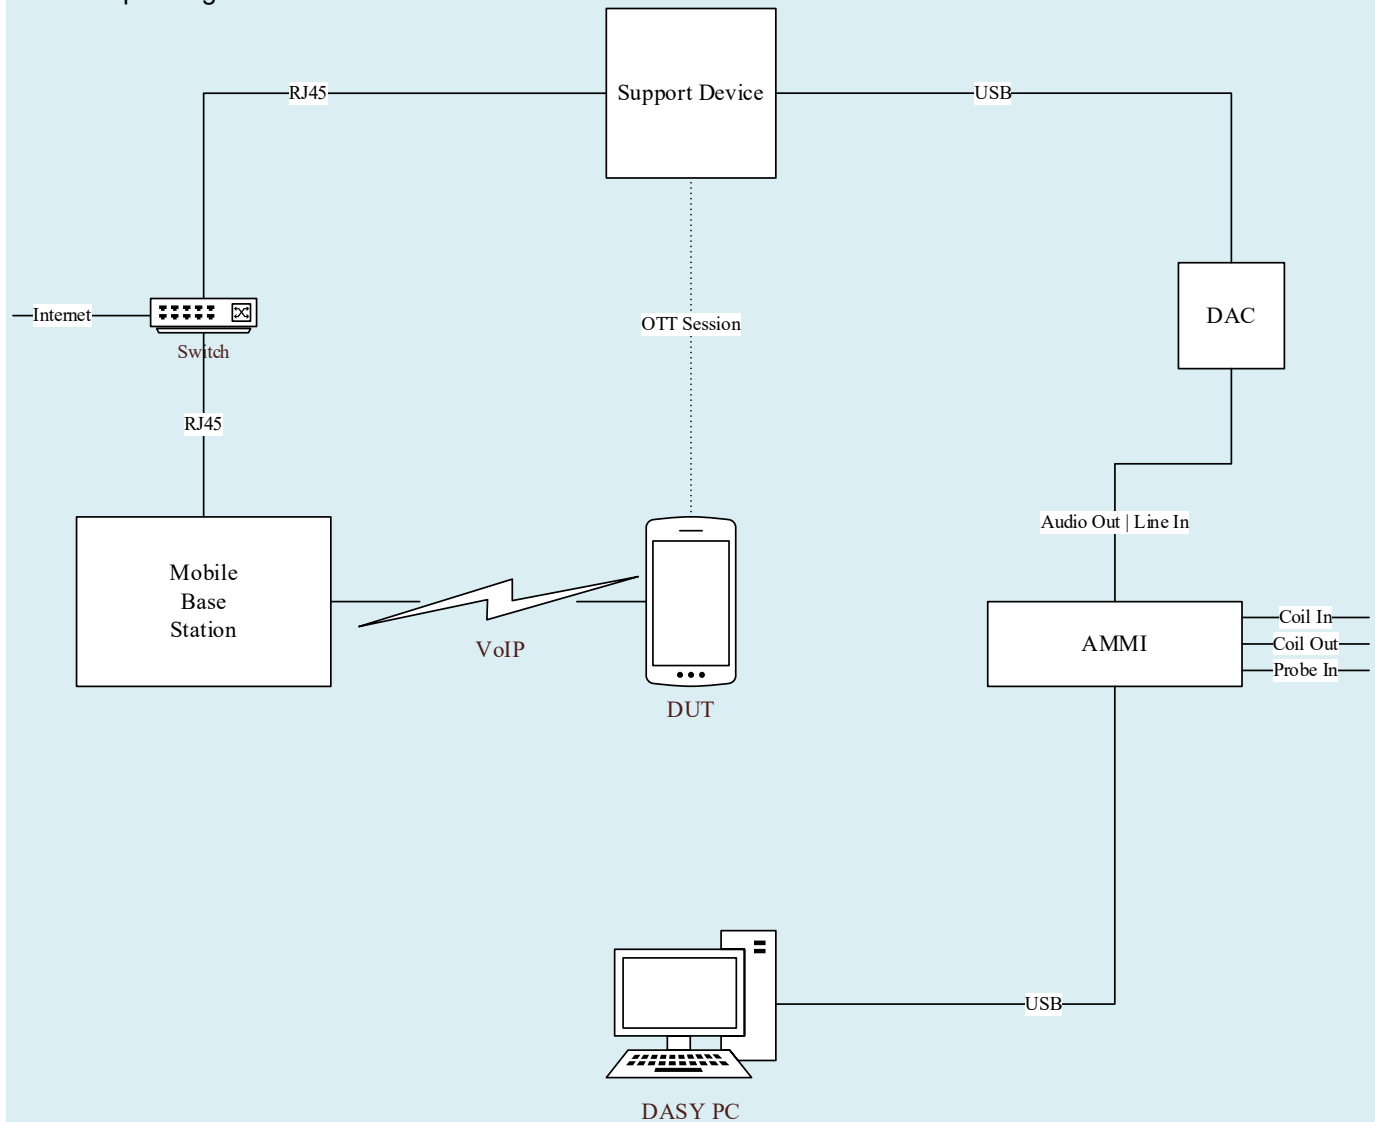

For the OTT call, the calibrated audio card within the CMW500 cannot be used so the AMMI is connected to an external Digital-Analog Converter (DAC) and the DAC is connected to the Support Device via USB. The test signal is sent from the DASY PC to the AMMI, from the AMMI to the DAC, from the DAC to the Support Device, and, via the VoIP call, to the DUT.

<sup>3</sup> The support device is an Apple iMac and MacBook Pro

As this test set up uses an external DAC between the AMMI's audio output and support device, the appropriate gain factor for the OTT call needs to be determined. This is done by connecting the DAC between the AMMI Audio output and Coil input as shown below.

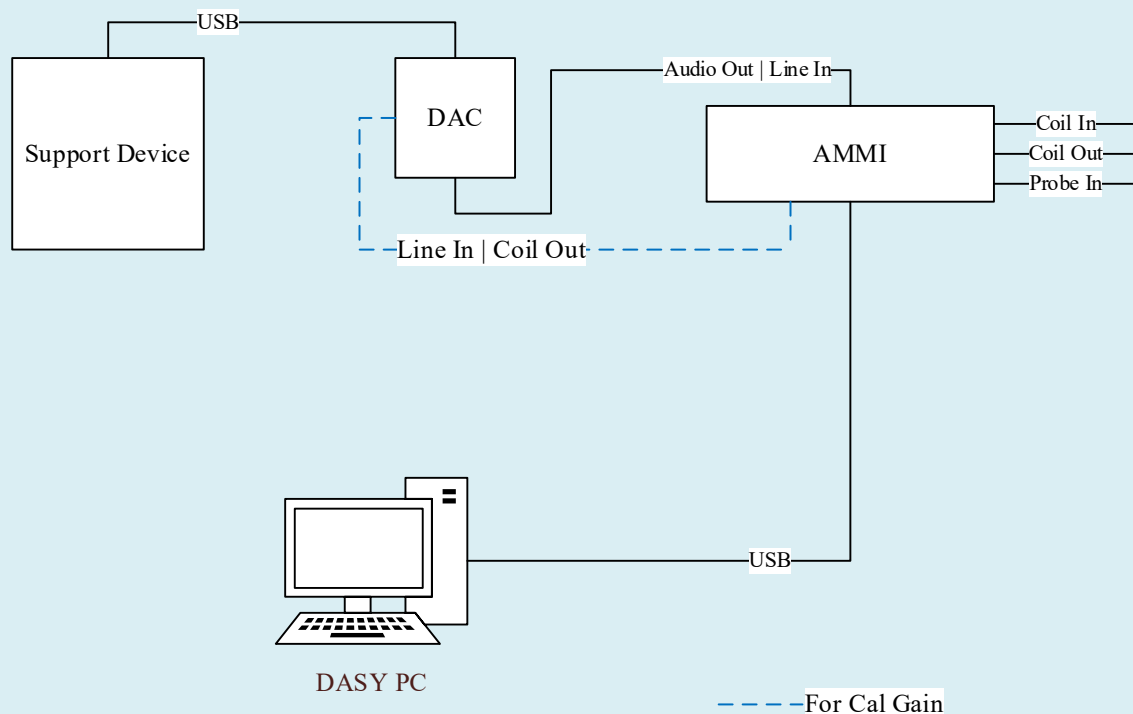

The DAC's gain is adjusted until the volume reaches 0 dBFS (3.14 dBm0 based on TIA/EIA 810-A) at the output. SPEAG's "TN-LK-05042018-C-T-Coil\_Levels" document (Appendix E) steps E through H are then followed to determine the adjusted gain values as detailed in §6 so that the reference level is set to 23.14dB below full scale, i.e. at -20dBm0. A verification of the DAC's output is performed prior to testing.

## 6. Audio Level and Gain Measurements

The adjusted gain was calculated using Speag's *TN-LK-05042018-D-T-Coil\_Levels* document (please refer to Appendix E). First, the output of AMMI is determined in a closed loop, then, using the CMW500's input sensitivity, the adjusted gain required for testing can then be calculated. The adjusted linear gain used within this report is as follows:

### 6.1. GSM/W-CDMA and VoLTE

Probe 3083 (SAR 7):

| Signal type    | Audio level<br>[dBm0] | Gain<br>[dB] | Gain<br>(linear) |
|----------------|-----------------------|--------------|------------------|
| 1 kHz sine     | -16.00                | 14.90        | 5.56             |
| Voice 1 kHz    | -16.00                | 27.63        | 24.07            |
| Voice 300-3kHz | -16.00                | 33.48        | 47.21            |

The following software/firmware was used to simulate the VoLTE server for testing:

| Firmware          | License Keys | Software Name         |
|-------------------|--------------|-----------------------|
| V3.7.60 for LTE   | KS500        | LTE FDD R8 SIG BASIC  |
|                   | KS550        | LTE TDD R8 SIG BASIC  |
| V3.7.20 for Audio | KA100        | IP APPL ENABLING IPv4 |
|                   | KA150        | IP APPL ENABLING IPv6 |
|                   | KAA20        | IP APPL IMS BASIC     |
|                   | KM050        | DATA APPL MEAS        |
|                   | KS104        | EVS SPEECH CODEC      |

### 6.2. CDMA (1xRTT)

Probe 3083 (SAR 7):

| Signal type    | Audio level<br>[dBm0] | Gain<br>[dB] | Gain<br>(linear) |
|----------------|-----------------------|--------------|------------------|
| 1 kHz sine     | -18.00                | 12.90        | 4.42             |
| Voice 1 kHz    | -18.00                | 25.63        | 19.12            |
| Voice 300-3kHz | -18.00                | 31.48        | 37.50            |

### 6.3. VoWi-Fi – For PAG REUSE

#### Probe 3083 (SAR 7):

| Signal type    | Audio level<br>[dBm0] | Gain<br>[dB] | Gain<br>(linear) |
|----------------|-----------------------|--------------|------------------|
| 1 kHz sine     | -20.00                | 10.90        | 3.51             |
| Voice 1 kHz    | -20.00                | 23.63        | 15.19            |
| Voice 300-3kHz | -20.00                | 29.48        | 29.79            |

| Firmware          | License Keys | Software Name         |
|-------------------|--------------|-----------------------|
| V3.7.40 for WLAN  | KS650        | WLAN A/B/G SIG BASIC  |
|                   | KS651        | WLAN N SIG BASIC      |
|                   | KS656        | WLAN IEEE 802.11ac    |
|                   | KS657        | WLAN IEEE 802.11ax    |
| V3.7.20 for Audio | KA100        | IP APPL ENABLING IPv4 |
|                   | KA150        | IP APPL ENABLING IPv6 |
|                   | KAA20        | IP APPL IMS BASIC     |
|                   | KM050        | DATA APPL MEAS        |
|                   | KS104        | EVS SPEECH CODEC      |

#### 6.4. Over the Top (OTT) – For PAG REUSE

For EDGE, HSPA, Ev-Do, LTE, 5G, and Wi-Fi, the linear gain levels are listed below were used. The results below are based on a reference input level of -20 dBm0. Granted, the C63.19-2011 interpretation for T-coil audio levels for LTE states that an input reference level of -16 dBm0 should be used, we, the test lab, opted for -20 dBm0 for LTE due to it being a more conservative input reference level.

To calibrate the DAC (refer §5.3), three .wav audio files (sine wave, 1 kHz voice, and 300 to 3 kHz voice) are sent from the DASY5 PC to the AMMI, then to the DAC. The Helmholtz resonator measures the field strength, which represents the AMMI to DAC input sensitivity. After determining the input sensitivity, the adjusted linear gain values can then be calculated.

##### Probe 3083 (SAR 7):


| Signal type    | Audio level<br>[dBm0] | Gain<br>[dB] | Gain<br>(linear) |
|----------------|-----------------------|--------------|------------------|
| 1 kHz sine     | -20.00                | 18.69        | 8.60             |
| Voice 1 kHz    | -20.00                | 31.42        | 37.24            |
| Voice 300-3kHz | -20.00                | 37.27        | 73.03            |

## 7. T-coil Measurement Criteria

### 7.1. Frequency Response


The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve, over the frequency range 300 Hz to 3000 Hz.

Figure 8.1 and Figure 8.2 provide the boundaries for the specified frequency. These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

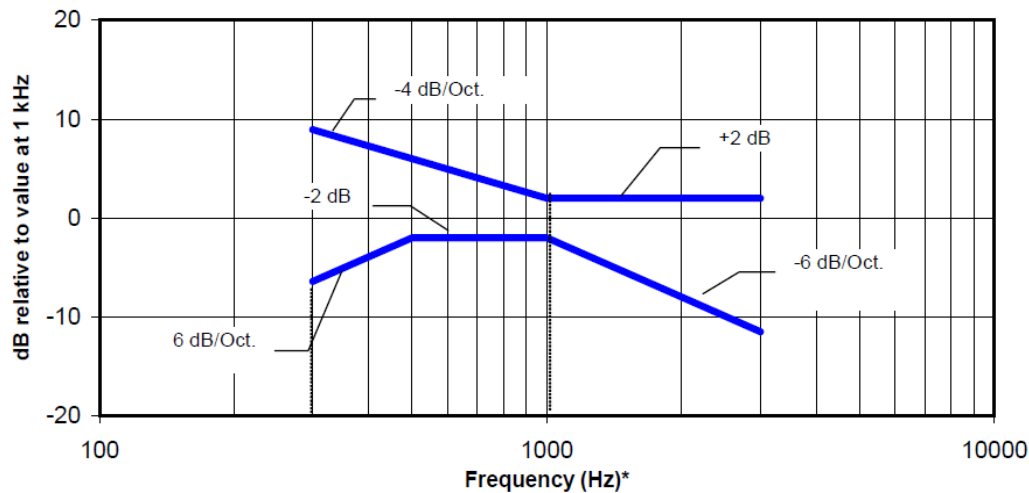

NOTE—The frequency response is between 300 Hz and 3000 Hz.

**Figure 8.1—Magnetic field frequency response for WDs with field strength  $\leq -15$  dB (A/m) at 1 kHz**

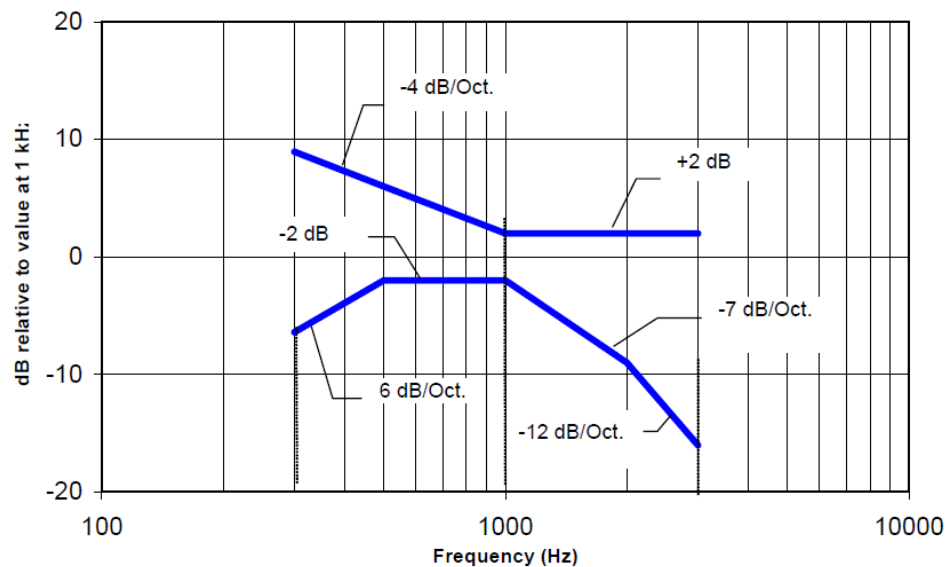

NOTE—The frequency response is between 300 Hz and 3000 Hz.

**Figure 8.2—Magnetic field frequency response for WDs with a field that exceeds  $-15$  dB(A/m) at 1 kHz**

## 7.2. Signal to Noise


This specifies the signal-to-noise quality requirement for the intended T-Coil signal from a WD. The worst signal to noise of the two T-Coil signal measurements, as determined in Clause 7, shall be used to determine the T-Coil mode category per Table 8.5.

Only the RF immunity of the hearing aid is measured in T-Coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. So, the only criterion that can be measured is the RF immunity in T-Coil Mode. This is measured using the same procedure as for the audio coupling mode and at the same levels as specified in 6.4.

**Table 8.5—T-Coil signal-to-noise categories**

| Category    | Telephone parameters<br>WD signal quality<br>[(signal + noise)-to-noise ratio in decibels] |
|-------------|--------------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                              |
| Category T2 | 10 dB to 20 dB                                                                             |
| Category T3 | 20 dB to 30 dB                                                                             |
| Category T4 | >30 dB                                                                                     |

Measurement locations and reference plane to be used for the T-coil measurements

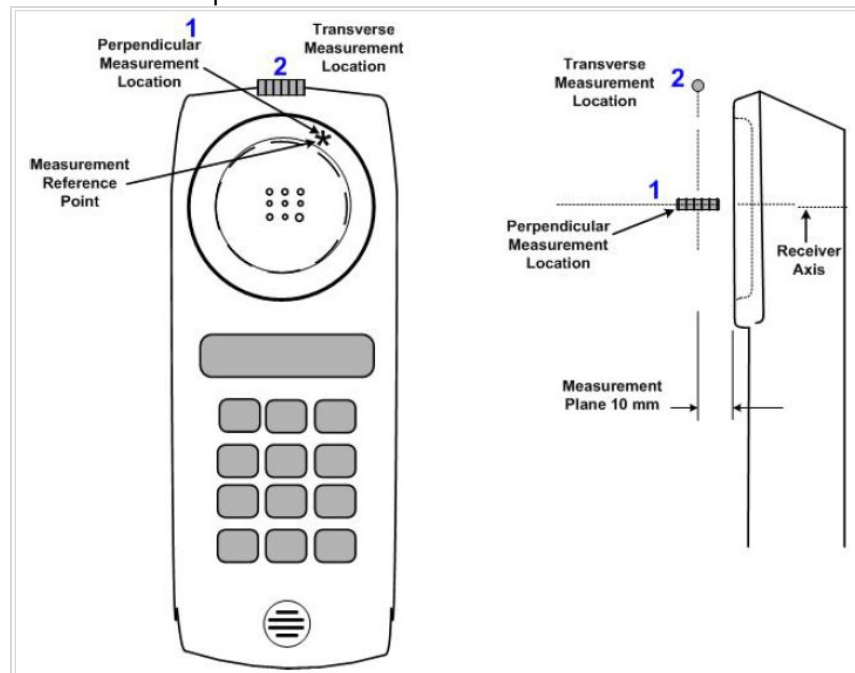

## 8. Device Under Test

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, CDMA, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC and WPT. All models support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible.

The device utilizes two power modes: Mode A(DSI=0) and Mode B(DSI=1). Power selection is determined by the device's positioning and use case as described in §10 of the SAR Report (13259315-S1). Mode A power is used when the device is used against the user's head, or away from the body. Mode B is used when the device is used in a body-worn configuration by the user.

The WWAN transmit antenna switching mechanism between WWAN antennas is implemented with a physical "break-before-make" switch so that only one antenna can be used for WWAN transmission at one time.

In Airplay mode, the device uses same power and power control mechanism as Wi-Fi. Airplay is not supported in hotspot mode. Airplay utilize the same 802.11 modes, modulation, MIMO, Channel Bandwidth, etc. as Wi-Fi does. Therefore, Airplay usage is categorized by the Wi-Fi SAR testing contained in §10 of the SAR Report (13259315-S1).

There are two vendors of the Wi-Fi/Bluetooth radio modules: variant 1 and variant 2. The Wi-Fi/BT radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. It is confirmed that Variant 1 represents the worst case.

This product utilizes a time-averaged power control mechanism – Wi-Fi Time-Averaging SAR within the Wi-Fi chipset – that ensures total power across all Wi-Fi transmitters does not exceed applicable regulatory limits. For further details, refer to the technical description document and Appendix I of the SAR Report (13259315-S1).

|                         |                                 |      |              |
|-------------------------|---------------------------------|------|--------------|
| Normal operation        | Held to head                    |      |              |
| Back Cover              | The Back Cover is not removable |      |              |
| Test sample information | S/N                             | IMEI | Notes        |
|                         | G6TCP02GQ5RR                    | N/A  | HAC Radiated |

### 8.1. Air Interfaces and Operating Mode

| Air Interface | Bands (MHz) | Type | C63.19 Tested | Simultaneous Transmitter | OTT Testing Required?<br>Name of Voice Service <sup>1,2</sup> | Power Reduction | Audio Codecs Evaluated |
|---------------|-------------|------|---------------|--------------------------|---------------------------------------------------------------|-----------------|------------------------|
| GSM           | 850         | VO   | Yes           | Wi-Fi & BT               | CMRS                                                          | N/A             | EFR                    |
|               | 1900        |      |               |                          |                                                               | No              |                        |
|               | GPRS/EDGE   | VD   | Yes           | Wi-Fi & BT               | Yes<br>FaceTime                                               | N/A             | ACC-ELD                |
| W-CDMA (UMTS) | 850         | VO   | Yes           | Wi-Fi & BT               | CMRS                                                          | N/A             | AMR-NB & AMR-WB        |
|               | 1700        |      |               |                          |                                                               |                 |                        |
|               | 1900        | VD   | Yes           | Wi-Fi & BT               | Yes<br>FaceTime                                               | N/A             | ACC-ELD                |
| CDMA          | HSPA        |      |               |                          |                                                               |                 |                        |
|               | 800         | VO   | Yes           | Wi-Fi & BT               | CMRS                                                          | N/A             | EVRC                   |
|               | 1900        |      |               |                          |                                                               |                 |                        |
|               | EVDO        | VD   | Yes           | Wi-Fi & BT               | Yes<br>FaceTime                                               | N/A             | ACC-ELD                |

**Air Interfaces and Operating Mode (continued)**

| Air Interface                                                                                                                                                              | Bands (MHz)        | Type | C63.19 Tested                                                                                                                                                                                                            | Simultaneous Transmitter     | OTT Testing Required? Name of Voice Service <sup>1,2</sup> | Power Reduction | Audio Codecs Evaluated                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|------------------------------------------------------------|-----------------|----------------------------------------------|
| LTE - FDD                                                                                                                                                                  | 600 (B71)          | VD   | Yes                                                                                                                                                                                                                      | Wi-Fi & BT                   | Yes<br>FaceTime & VoLTE                                    | N/A             | VoLTE: AMR-NB, AMR-WB, EVS<br>OTT: ACC-ELD   |
|                                                                                                                                                                            | 700 (B12/13/14/17) |      |                                                                                                                                                                                                                          |                              |                                                            |                 |                                              |
|                                                                                                                                                                            | 850 (B5/26)        |      |                                                                                                                                                                                                                          |                              |                                                            |                 |                                              |
|                                                                                                                                                                            | 1700 (B4/66)       |      |                                                                                                                                                                                                                          |                              |                                                            |                 |                                              |
|                                                                                                                                                                            | 1900 (B2/25)       |      |                                                                                                                                                                                                                          |                              |                                                            |                 |                                              |
|                                                                                                                                                                            | 2300 (B30)         |      |                                                                                                                                                                                                                          |                              |                                                            |                 |                                              |
|                                                                                                                                                                            | 2600 (B7)          |      |                                                                                                                                                                                                                          |                              |                                                            |                 |                                              |
| LTE - TDD                                                                                                                                                                  | 2500 (B41)         | VD   | Yes                                                                                                                                                                                                                      | Wi-Fi & BT                   | Yes<br>FaceTime & VoLTE                                    | N/A             | VoLTE: AMR-NB, AMR-WB, EVS<br>OTT: ACC-ELD   |
|                                                                                                                                                                            | 3600 (B48)         |      |                                                                                                                                                                                                                          |                              |                                                            |                 |                                              |
| 5G NR - FDD <sup>3</sup>                                                                                                                                                   | 600 (n71)          | VD   | Yes                                                                                                                                                                                                                      | LTE, Wi-Fi, & BT             | Yes<br>FaceTime                                            | N/A             | OTT: ACC-ELD                                 |
|                                                                                                                                                                            | 700 (n12)          |      |                                                                                                                                                                                                                          |                              |                                                            |                 |                                              |
|                                                                                                                                                                            | 850 (n5)           |      |                                                                                                                                                                                                                          |                              |                                                            |                 |                                              |
|                                                                                                                                                                            | 1700 (n66)         |      |                                                                                                                                                                                                                          |                              |                                                            |                 |                                              |
|                                                                                                                                                                            | 1900 (n2/25)       |      |                                                                                                                                                                                                                          |                              |                                                            |                 |                                              |
| 5G NR - TDD <sup>3</sup>                                                                                                                                                   | 2500 (n41)         | VD   | Yes                                                                                                                                                                                                                      | LTE, Wi-Fi, & BT             | Yes<br>FaceTime                                            | N/A             | OTT: ACC-ELD                                 |
|                                                                                                                                                                            | 3800 (n77)         |      |                                                                                                                                                                                                                          |                              |                                                            |                 |                                              |
| Wi-Fi                                                                                                                                                                      | 2450               | VD   | Yes                                                                                                                                                                                                                      | WWAN                         | Yes<br>FaceTime & Wi-Fi Calling                            | N/A             | VoWi-Fi: AMR-NB, AMR-WB, EVS<br>OTT: ACC-ELD |
|                                                                                                                                                                            | 5200 (U-NII-1)     |      |                                                                                                                                                                                                                          | WWAN, BT, & Wi-Fi<br>2.4 GHz |                                                            |                 |                                              |
|                                                                                                                                                                            | 5300 (U-NII-2A)    |      |                                                                                                                                                                                                                          |                              |                                                            |                 |                                              |
|                                                                                                                                                                            | 5500 (U-NII-2C)    |      |                                                                                                                                                                                                                          |                              |                                                            |                 |                                              |
|                                                                                                                                                                            | 5800 (U-NII-3)     |      |                                                                                                                                                                                                                          |                              |                                                            |                 |                                              |
| BT                                                                                                                                                                         | 2450               | DT   | NA                                                                                                                                                                                                                       | WWAN, Wi-Fi<br>(5 GHz bands) | NA                                                         | N/A             | N/A                                          |
| Type<br>VO: Legacy Cellular Voice Service<br>DT: Digital Transport only (no voice)<br>VD: IP Voice Service over Digital Transport<br>CMRS: Commercial Mobile Radio Service |                    |      | Note:<br>1. For protocols not listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation, the average speech level of -20 dBm0 was used<br>2. <b>For PAG REUSE</b><br>3. VoNR is not supported |                              |                                                            |                 |                                              |

## 9. Investigations (Antenna, Codec, & Air Interface)

### 9.1. CMRS

An investigation was performed to determine the worst-case antenna per technology. All subsequent measurements were determined by this investigation.

#### 9.1.1. Antenna Investigation

| Note(s) | Mode:                                                   | Channel and Frequency | Bandwidth (Data Rate) | Port | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location        |
|---------|---------------------------------------------------------|-----------------------|-----------------------|------|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|
| 1       | GSM 1900 Voice Codec Speechcodec Low                    | 661 1880 MHz          | N/A                   | A    | ANT1    | z (Axial)       | 14.39        | -11.67       | -51.36                | 1.40                | 47.42        | T4       | 9.2, -9.6, 3.7  |
|         |                                                         |                       |                       |      |         | y (Transversal) | 4.47         | -10.54       | -51.16                |                     | 43.35        | T4       | 8.3, -3.8, 3.7  |
|         |                                                         |                       |                       | B    | ANT2    | z (Axial)       | 14.42        | -33.76       | -51.36                | 1.72                | 48.18        | T4       | 9, -9.5, 3.7    |
|         |                                                         |                       |                       |      |         | y (Transversal) | 4.80         | -39.04       | -51.16                |                     | 43.84        | T4       | 8.1, -3.6, 3.7  |
|         |                                                         |                       |                       | C    | ANT3    | z (Axial)       | 14.38        | -33.75       | -51.36                | 1.48                | 48.14        | T4       | 9, -9.5, 3.7    |
|         |                                                         |                       |                       |      |         | y (Transversal) | 4.71         | -38.04       | -51.16                |                     | 42.76        | T4       | 8.1, -3.6, 3.7  |
|         |                                                         |                       |                       | D    | ANT4    | z (Axial)       | 14.34        | -34.67       | -51.36                | 1.72                | 49.01        | T4       | 9, -9.5, 3.7    |
|         |                                                         |                       |                       |      |         | y (Transversal) | 4.69         | -40.33       | -51.16                |                     | 45.03        | T4       | 8.1, -3.6, 3.7  |
| 2       | W-CDMA B1 Rel. 99 AMR-NB 4.75 kbps                      | 9400 1880 MHz         | N/A                   | A    | ANT1    | z (Axial)       | 11.40        | -24.54       | -51.36                | 1.31                | 50.75        | T4       | 5.8, -10.8, 3.7 |
|         |                                                         |                       |                       |      |         | y (Transversal) | 4.74         | -23.03       | -51.16                |                     | 50.17        | T4       | 8.3, -2.9, 3.7  |
|         |                                                         |                       |                       | B    | ANT2    | z (Axial)       | 11.14        | -24.42       | -51.36                | 1.64                | 50.75        | T4       | 5.8, -11.3, 3.7 |
|         |                                                         |                       |                       |      |         | y (Transversal) | 4.76         | -21.73       | -51.16                |                     | 50.54        | T4       | 8.3, -2.9, 3.7  |
|         |                                                         |                       |                       | C    | ANT3    | z (Axial)       | 8.98         | -33.95       | -51.51                | 0.67                | 52.01        | T4       | 4.6, -12.1, 3.7 |
|         |                                                         |                       |                       |      |         | y (Transversal) | 5.05         | -35.13       | -51.33                |                     | 51.84        | T4       | 8.3, -2.5, 3.7  |
|         |                                                         |                       |                       | D    | ANT4    | z (Axial)       | 9.30         | -33.95       | -51.51                | 2.00                | 52.05        | T4       | 4.6, -11.7, 3.7 |
|         |                                                         |                       |                       |      |         | y (Transversal) | 5.15         | -35.62       | -51.33                |                     | 51.91        | T4       | 8.3, -2.5, 3.7  |
| 3       | CDMA2000 BC1 RC1 / SO3 Full Fr Voice Codec: 8K EVRC Low | 600 1880.0 MHz        | N/A                   | A    | ANT1    | z (Axial)       | 4.05         | -33.49       | -51.51                | 1.14                | 48.00        | T4       | 4.6, -12.1, 3.7 |
|         |                                                         |                       |                       |      |         | y (Transversal) | 0.89         | -35.66       | -51.33                |                     | 49.52        | T4       | 8.3, -2.9, 3.7  |
|         |                                                         |                       |                       | B    | ANT2    | z (Axial)       | 4.33         | -33.60       | -51.51                | 1.26                | 48.02        | T4       | 4.6, -12.1, 3.7 |
|         |                                                         |                       |                       |      |         | y (Transversal) | 0.00         | -35.72       | -51.33                |                     | 48.59        | T4       | 8.3, -2.9, 3.7  |
|         |                                                         |                       |                       | C    | ANT3    | z (Axial)       | 4.02         | -33.59       | -51.51                | 1.31                | 47.83        | T4       | 4.6, -12.1, 3.7 |
|         |                                                         |                       |                       |      |         | y (Transversal) | -0.04        | -35.69       | -51.33                |                     | 48.58        | T4       | 8.3, -2.9, 3.7  |
|         |                                                         |                       |                       | D    | ANT4    | z (Axial)       | 4.62         | -33.51       | -51.51                | 1.22                | 47.89        | T4       | 4.6, -11.3, 3.7 |
|         |                                                         |                       |                       |      |         | y (Transversal) | 0.18         | -35.53       | -51.33                |                     | 48.47        | T4       | 8.3, -2.5, 3.7  |
| 4       | LTE Band 25 QPSK 1/49 RB AMR-NB 4.75 kbps               | 26365 1882.5 MHz      | 20 MHz                | A    | ANT1    | z (Axial)       | 7.95         | -33.23       | -51.51                | 1.32                | 49.22        | T4       | 5, -11.3, 3.7   |
|         |                                                         |                       |                       |      |         | y (Transversal) | 2.78         | -34.04       | -51.33                |                     | 49.83        | T4       | 8.3, -2.5, 3.7  |
|         |                                                         |                       |                       | B    | ANT2    | z (Axial)       | 6.67         | -33.19       | -51.51                | 0.80                | 48.90        | T4       | 4.6, -12.1, 3.7 |
|         |                                                         |                       |                       |      |         | y (Transversal) | 2.60         | -11.63       | -51.33                |                     | 53.49        | T4       | 7.9, 0.8, 3.7   |
|         |                                                         |                       |                       | C    | ANT3    | z (Axial)       | 6.35         | -33.70       | -51.51                | 0.56                | 51.04        | T4       | 4.6, -12.1, 3.7 |
|         |                                                         |                       |                       |      |         | y (Transversal) | 2.34         | -33.59       | -51.33                |                     | 50.56        | T4       | 8.3, -2.9, 3.7  |
|         |                                                         |                       |                       | D    | ANT4    | z (Axial)       | 8.25         | -27.72       | -51.51                | 1.21                | 48.20        | T4       | 5.4, -11.3, 3.7 |
|         |                                                         |                       |                       |      |         | y (Transversal) | 2.39         | -22.23       | -51.33                |                     | 48.28        | T4       | 8.3, -2.9, 3.7  |
| 5       | LTE Band 41 QPSK 1/49 RB AMR-NB 4.75 kbps               | 40620 2593 MHz        | 20 MHz                | A    | ANT1    | z (Axial)       | 12.37        | -20.05       | -51.51                | 1.36                | 48.01        | T4       | 8.3, -8.3, 3.7  |
|         |                                                         |                       |                       |      |         | y (Transversal) | 2.21         | -18.64       | -51.33                |                     | 46.77        | T4       | 8.3, -3.3, 3.7  |
|         |                                                         |                       |                       | B    | ANT2    | z (Axial)       | 12.45        | -19.44       | -51.51                | 1.04                | 47.62        | T4       | 8.3, -9.6, 3.7  |
|         |                                                         |                       |                       |      |         | y (Transversal) | 1.09         | -17.95       | -51.33                |                     | 46.17        | T4       | 4.6, 0, 3.7     |
|         |                                                         |                       |                       | C    | ANT3    | z (Axial)       | 12.22        | -19.35       | -51.51                | 1.55                | 47.46        | T4       | 8.3, -9.6, 3.7  |
|         |                                                         |                       |                       |      |         | y (Transversal) | 2.79         | -17.85       | -51.33                |                     | 46.44        | T4       | 8.3, -2.9, 3.7  |
|         |                                                         |                       |                       | D    | ANT4    | z (Axial)       | 12.09        | -19.41       | -51.51                | 0.85                | 47.41        | T4       | 8.3, -10, 3.7   |
|         |                                                         |                       |                       |      |         | y (Transversal) | 2.55         | -16.37       | -51.33                |                     | 46.56        | T4       | 8.3, -3.3, 3.7  |

| Note(s) | Mode:                                     | Channel and Frequency | Bandwidth (Data Rate) | Port   | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location        |
|---------|-------------------------------------------|-----------------------|-----------------------|--------|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|
| 5a      | LTE Band 48 QPSK 1/49 RB AMR-NB 4.75 kbps | 55990 3625 MHz        | 20 MHz                | A      | ANT7    | z (Axial)       | 12.20        | -11.52       | -51.51                | 0.89                | 47.64        | T4       | 8.3, -10.4, 3.7 |
|         |                                           |                       |                       |        |         | y (Transversal) | 0.31         | -11.27       | -51.33                |                     | 44.84        | T4       | 4.2, 0, 3.7     |
|         |                                           |                       |                       | B      | ANT4    | z (Axial)       | 11.73        | -11.85       | -51.51                | 0.90                | 47.05        | T4       | 8.3, -10.4, 3.7 |
|         |                                           |                       |                       |        |         | y (Transversal) | 0.66         | -11.26       | -51.33                |                     | 45.19        | T4       | 4.2, 0, 3.7     |
|         |                                           |                       |                       | C      | ANT9    | z (Axial)       | 11.91        | -11.83       | -51.51                | 1.78                | 47.33        | T4       | 8.3, -10.4, 3.7 |
|         |                                           |                       |                       |        |         | y (Transversal) | 0.54         | -11.31       | -51.33                |                     | 45.18        | T4       | 4.2, 0, 3.7     |
|         |                                           |                       |                       | D      | ANT8    | z (Axial)       | 12.12        | -11.81       | -51.51                | 0.74                | 47.24        | T4       | 8.3, -9.6, 3.7  |
|         |                                           |                       |                       |        |         | y (Transversal) | 0.28         | -11.30       | -51.33                |                     | 44.96        | T4       | 4.2, 0, 3.7     |
| 6       | 802.11b AMR-NB 4.75 kbps                  | 6 2437 MHz            | 20 MHz DSSS 1 Mbps    | Core 0 | ANT4    | z (Axial)       | 4.72         | -14.39       | -51.49                | 0.57                | 47.48        | T4       | 4.6, -11.7, 3.7 |
|         |                                           |                       |                       |        |         | y (Transversal) | -1.38        | -20.61       | -51.28                |                     | 44.92        | T4       | 4.2, 0, 3.7     |
|         |                                           |                       |                       | Core 1 | ANT3    | z (Axial)       | 4.39         | -35.03       | -51.49                | 0.98                | 48.65        | T4       | 4.6, -12.5, 3.7 |
|         |                                           |                       |                       |        |         | y (Transversal) | 1.09         | -37.65       | -51.28                |                     | 48.69        | T4       | 8.8, -2.9, 3.7  |
| 7       | 802.11a AMR-NB 4.75 kbps                  | 36 5180 MHz           | 20 MHz BPSK 6 Mbps    | Core 0 | ANT6    | z (Axial)       | 4.54         | -30.45       | -51.49                | 0.62                | 48.43        | T4       | 4.6, -12.1, 3.7 |
|         |                                           |                       |                       |        |         | y (Transversal) | 0.65         | -30.05       | -51.28                |                     | 47.87        | T4       | 8.8, -3.3, 3.7  |
|         |                                           |                       |                       | Core 1 | ANT5    | z (Axial)       | 4.67         | -34.07       | -51.49                | 0.73                | 49.06        | T4       | 4.6, -12.1, 3.7 |
|         |                                           |                       |                       |        |         | y (Transversal) | 0.66         | -36.73       | -51.28                |                     | 48.47        | T4       | 8.3, -2.9, 3.7  |

**Note(s):**

- Port C/ANT 3 has been determined to be the worst-case antenna for GSM; for sub-1 GHz frequency bands, Port A/ANT1 was determined to be the worst-case antenna.
- Port A/ANT 1 has been determined to be the worst-case antenna for W-CDMA.
- Port C/ANT 3 has been determined to be the worst-case antenna for CDMA; for sub-1 GHz frequency bands, Port A/ANT1 was determined to be the worst-case antenna.
- Port D/ANT 4 has been determined to be the worst-case antenna for LTE-FDD; for sub-1 GHz frequency bands, Port A/ANT1 was determined to be the worst-case antenna.
- Port B/ANT 2 has been determined to be the worst-case antenna for LTE-TDD.
  - Port A/ANT 7 has been determined to be the worst-case antenna for LTE-TDD (applicable to LTE Band 48 only).
- Core 0/ANT 4 has been determined to be the worst-case antenna for Wi-Fi 2.4 GHz.
- Core 0/ANT 6 has been determined to be the worst-case antenna for Wi-Fi 5 GHz.

### 9.1.2. Codec Investigation

An investigation between the various codec configurations (Low/Mid/High bit rates for Narrowband, Wideband and EVS) and specific parameters are documented (ABM1, ABM2, S+N/N, frequency response) to determine the worst-case bit rates for each voice service type. The table below compares the varying codec configurations. A codec investigation was performed on one band of each W-CDMA, LTE FDD and LTE TDD.

The highlighted results below were determined to be the worst-case codec configuration(s) for LTE and W-CDMA.

#### W-CDMA Codec Investigation:

| W-CDMA Codec Investigation |               |        |        |               |        |        |                 |      |         |                                   |
|----------------------------|---------------|--------|--------|---------------|--------|--------|-----------------|------|---------|-----------------------------------|
| Codec State                | AMR-NB (kbps) |        |        | AMR-WB (kbps) |        |        | Orientation     | Port | Antenna | Band/Channel/<br>Bandwidth        |
|                            | 4.75          | 7.4    | 12.2   | 6.6           | 15.85  | 23.85  |                 |      |         |                                   |
| ABM1 (dB/m)                | 11.40         | 12.62  | 12.70  | 1.98          | 4.25   | 4.26   | z (Axial)       | A    | ANT1    | W-CDMA BII<br>Rel. 99<br>Ch. 9400 |
| ABM2 (dBA/m)               | -24.54        | -38.26 | -37.90 | -33.79        | -42.63 | -42.48 |                 |      |         |                                   |
| SNR (dB)                   | 50.75         | 50.88  | 50.60  | 46.08         | 46.87  | 46.74  |                 |      |         |                                   |
| Freq. Resposne (dB)        | 1.31          | 1.03   | 1.41   | 0.91          | 1.73   | 1.39   |                 |      |         |                                   |
| ABM1 (dB/m)                | 4.74          | 5.20   | 5.38   | -1.92         | -0.75  | -0.79  | y (Transversal) | A    | ANT1    | W-CDMA BII<br>Rel. 99<br>Ch. 9400 |
| ABM2 (dBA/m)               | -23.03        | -46.62 | -45.97 | -35.19        | -47.90 | -47.69 |                 |      |         |                                   |
| SNR (dB)                   | 50.17         | 51.82  | 51.34  | 45.65         | 47.16  | 46.91  |                 |      |         |                                   |

#### VoLTE Codec Investigation:

| VoLTE Codec Investigation |               |        |        |               |        |        |            |        |        |                 |      |         |                                                          |
|---------------------------|---------------|--------|--------|---------------|--------|--------|------------|--------|--------|-----------------|------|---------|----------------------------------------------------------|
| Codec State               | AMR-NB (kbps) |        |        | AMR-WB (kbps) |        |        | EVS (kbps) |        |        | Orientation     | Port | Antenna | Band/Channel/<br>Bandwidth                               |
|                           | 4.75          | 7.4    | 12.2   | 6.6           | 15.85  | 23.85  | 5.9        | 9.6    | 24.4   |                 |      |         |                                                          |
| ABM1 (dB/m)               | 8.25          | 9.65   | 9.84   | 4.04          | 5.43   | 5.47   | 7.82       | 9.27   | 9.34   | z (Axial)       | D    | ANT4    | LTE Band 25<br>CH. 26365<br>1/49 RB<br>QPSK<br>20 MHz BW |
| ABM2 (dBA/m)              | -27.72        | -40.47 | -40.17 | -23.24        | -38.49 | -38.64 | -27.44     | -40.76 | -40.39 |                 |      |         |                                                          |
| SNR (dB)                  | 48.20         | 50.12  | 50.01  | 42.40         | 43.92  | 44.11  | 47.48      | 50.03  | 49.73  |                 |      |         |                                                          |
| Freq. Resposne (dB)       | 1.21          | 1.29   | 1.15   | 1.69          | 1.24   | 1.39   | 1.03       | 1.46   | 1.05   |                 |      |         |                                                          |
| ABM1 (dB/m)               | 2.39          | 2.62   | 2.77   | -4.69         | -3.51  | -3.65  | 1.54       | 1.67   | 1.60   | y (Transversal) |      |         |                                                          |
| ABM2 (dBA/m)              | -22.23        | -47.16 | -47.22 | -25.97        | -48.19 | -48.21 | -22.00     | -47.20 | -47.46 |                 |      |         |                                                          |
| SNR (dB)                  | 48.28         | 49.78  | 49.99  | 43.43         | 44.68  | 44.56  | 47.23      | 48.87  | 49.06  |                 |      |         |                                                          |
| ABM1 (dB/m)               | 12.45         | 12.50  | 12.71  | 4.56          | 1.98   | 3.17   | 12.25      | 12.78  | 12.63  | z (Axial)       | B    | ANT2    | LTE Band 41<br>CH. 40620<br>1/49 RB<br>QPSK<br>20 MHz BW |
| ABM2 (dBA/m)              | -19.44        | -35.82 | -35.57 | -19.39        | -32.54 | -40.08 | -32.33     | -34.71 | -34.52 |                 |      |         |                                                          |
| SNR (dB)                  | 47.62         | 48.32  | 48.28  | 40.32         | 42.81  | 43.25  | 46.72      | 47.50  | 47.15  |                 |      |         |                                                          |
| Freq. Resposne (dB)       | 1.04          | 1.07   | 1.00   | 0.86          | 1.30   | 1.28   | 1.18       | 0.79   | 1.10   |                 |      |         |                                                          |
| ABM1 (dB/m)               | 1.09          | 1.42   | 1.74   | -4.31         | -2.93  | -3.05  | 2.96       | 2.98   | 3.06   | y (Transversal) |      |         |                                                          |
| ABM2 (dBA/m)              | -17.95        | -44.53 | -44.59 | -17.97        | -34.11 | -47.88 | -34.19     | -45.42 | -45.95 |                 |      |         |                                                          |
| SNR (dB)                  | 46.17         | 45.95  | 46.33  | 39.58         | 44.43  | 44.82  | 47.85      | 48.40  | 49.01  |                 |      |         |                                                          |

#### Note(s):

1. For W-CDMA, it is observed that 6.60 kbps is the worst-case.
2. For LTE-FDD, it is observed that 6.60 kbps is the worst-case.
3. For LTE-TDD, it is observed that 6.60 kbps is the worst-case.

### 9.1.3. Air Interface Investigation

A limited set of bands/channels/bandwidths were tested to confirm that there is no effect to the T-rating when changing the band/channel/bandwidth.

#### W-CDMA Air Interface Investigation:

| W-CDMA Air Interface Investigation            |                       |                           |      |         |                 |              |              |                       |                     |              |          |                 |
|-----------------------------------------------|-----------------------|---------------------------|------|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|
| Mode:                                         | Channel and Frequency | Bandwidth (if applicable) | Port | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location        |
| W-CDMA Band II<br>Rel. 99<br>AMR-WB: 6.6 kbps | 9262<br>1852.4 MHz    | N/A                       | A    | ANT1    | z (Axial)       | 2.94         | -42.63       | -51.51                | 0.93                | 45.57        | T4       | 4.6, -12, 3.7   |
|                                               |                       |                           |      |         | y (Transversal) | -1.97        | -47.86       | -51.33                |                     | 45.89        | T4       | 8.3, -2.3, 3.7  |
|                                               | 9400<br>1880.0 MHz    | N/A                       | A    | ANT1    | z (Axial)       | 1.98         | -33.79       | -51.51                | 0.91                | 46.08        | T4       | 4.6, -12.1, 3.7 |
|                                               |                       |                           |      |         | y (Transversal) | -1.92        | -35.19       | -51.33                |                     | 45.65        | T4       | 8.3, -2.1, 3.7  |
|                                               | 9538<br>1907.6 MHz    | N/A                       | A    | ANT1    | z (Axial)       | 2.82         | -42.48       | -51.51                | 0.90                | 45.30        | T4       | 4.6, -12, 3.7   |
|                                               |                       |                           |      |         | y (Transversal) | -1.69        | -47.72       | -51.33                |                     | 46.02        | T4       | 8.3, -2.3, 3.7  |
| W-CDMA Band IV<br>Rel. 99<br>AMR-WB: 6.6 kbps | 1312<br>1712.4 MHz    | N/A                       | A    | ANT1    | z (Axial)       | 3.02         | -43.73       | -51.51                | 1.03                | 46.75        | T4       | 4.5, -12, 3.7   |
|                                               |                       |                           |      |         | y (Transversal) | -2.34        | -49.00       | -51.33                |                     | 46.66        | T4       | 8.6, -3.1, 3.7  |
|                                               | 1413<br>1732.6 MHz    | N/A                       | A    | ANT1    | z (Axial)       | 1.92         | -33.73       | -51.51                | 0.94                | 46.06        | T4       | 4.6, -12.1, 3.7 |
|                                               |                       |                           |      |         | y (Transversal) | -2.40        | -36.11       | -51.33                |                     | 46.52        | T4       | 8.8, -2.9, 3.7  |
|                                               | 1513<br>1752.6 MHz    | N/A                       | A    | ANT1    | z (Axial)       | 2.95         | -43.76       | -51.51                | 0.80                | 46.71        | T4       | 4.5, -12, 3.7   |
|                                               |                       |                           |      |         | y (Transversal) | -2.40        | -49.01       | -51.33                |                     | 46.61        | T4       | 8.6, -3.1, 3.7  |
| W-CDMA Band V<br>Rel. 99<br>AMR-WB: 6.6 kbps  | 4132<br>826.4 MHz     | N/A                       | A    | ANT1    | z (Axial)       | 4.07         | -40.97       | -51.51                | 1.05                | 45.04        | T4       | 5.1, -11.7, 3.7 |
|                                               |                       |                           |      |         | y (Transversal) | -2.08        | -47.12       | -51.33                |                     | 45.04        | T4       | 8.3, -2.6, 3.7  |
|                                               | 4183<br>836.6 MHz     | N/A                       | A    | ANT1    | z (Axial)       | 2.67         | -23.26       | -51.51                | 1.30                | 44.45        | T4       | 5, -11.7, 3.7   |
|                                               |                       |                           |      |         | y (Transversal) | -2.19        | -25.56       | -51.33                |                     | 44.39        | T4       | 8.3, -2.5, 3.7  |
|                                               | 4233<br>846.6 MHz     | N/A                       | A    | ANT1    | z (Axial)       | 4.11         | -41.11       | -51.51                | 1.51                | 45.22        | T4       | 5.1, -11.7, 3.7 |
|                                               |                       |                           |      |         | y (Transversal) | -2.17        | -47.32       | -51.33                |                     | 45.15        | T4       | 8.3, -2.6, 3.7  |

**VoLTE Air Interface Investigation:**

| VoLTE Air Interface Investigation     |                           |      |         |                       |               |    |                 |              |              |                       |                     |              |          |                  |
|---------------------------------------|---------------------------|------|---------|-----------------------|---------------|----|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|------------------|
| Mode:                                 | Bandwidth (if applicable) | Port | Antenna | Channel and Frequency | RB Allocation |    | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location         |
| LTE Band 25 QPSK<br>AMR-WB 6.6 kbps   | 20 MHz                    | D    | ANT4    | 26140<br>1860 MHz     | 50            | 24 | z (Axial)       | 4.85         | -37.91       | -51.50                | 1.55                | 42.76        | T4       | 7, -11, 3, 7     |
|                                       |                           |      |         |                       |               |    | y (Transversal) | -5.19        | -47.40       | -51.26                |                     | 42.21        | T4       | 4.8, 0.1, 3, 7   |
|                                       |                           |      |         | 26365<br>1882.5 MHz   | 1             | 0  | z (Axial)       | 3.80         | -23.16       | -51.50                | 0.66                | 41.75        | T4       | 6.3, -10.8, 3, 7 |
|                                       |                           |      |         |                       |               |    | y (Transversal) | -5.53        | -22.09       | -51.26                |                     | 41.90        | T4       | 5, 0, 3, 7       |
|                                       |                           |      |         |                       | 1             | 49 | z (Axial)       | 4.04         | -23.24       | -51.51                | 1.69                | 42.40        | T4       | 6.7, -10.4, 3, 7 |
|                                       |                           |      |         |                       |               |    | y (Transversal) | -4.69        | -25.97       | -51.33                |                     | 43.43        | T4       | 8.3, -3.3, 3, 7  |
|                                       |                           |      |         |                       | 1             | 99 | z (Axial)       | 4.79         | -38.38       | -51.50                | 1.51                | 43.17        | T4       | 6.4, -10.7, 3, 7 |
|                                       |                           |      |         |                       |               |    | y (Transversal) | -5.34        | -47.14       | -51.26                |                     | 41.79        | T4       | 4.9, 0.1, 3, 7   |
|                                       |                           |      |         |                       | 50            | 0  | z (Axial)       | 4.67         | -23.38       | -51.50                | 1.10                | 42.16        | T4       | 7.1, -10.8, 3, 7 |
|                                       |                           |      |         |                       |               |    | y (Transversal) | -5.60        | -22.23       | -51.26                |                     | 42.15        | T4       | 5, 0, 3, 7       |
|                                       |                           |      |         |                       | 50            | 24 | z (Axial)       | 4.35         | -37.92       | -51.50                | 0.49                | 42.27        | T4       | 7, -11, 3, 7     |
|                                       |                           |      |         |                       |               |    | y (Transversal) | -5.84        | -47.28       | -51.26                |                     | 41.44        | T4       | 4.8, 0.1, 3, 7   |
|                                       |                           |      |         |                       | 50            | 49 | z (Axial)       | 5.06         | -37.84       | -51.50                | 0.88                | 42.90        | T4       | 7, -11, 3, 7     |
|                                       |                           |      |         |                       |               |    | y (Transversal) | -5.39        | -47.65       | -51.26                |                     | 42.26        | T4       | 4.8, 0.1, 3, 7   |
|                                       |                           |      |         |                       | 100           | 0  | z (Axial)       | 3.20         | -23.81       | -51.50                | 1.64                | 42.22        | T4       | 5.8, -11.3, 3, 7 |
|                                       |                           |      |         |                       |               |    | y (Transversal) | -3.98        | -21.94       | -51.26                |                     | 41.74        | T4       | 7.9, -1.3, 3, 7  |
|                                       |                           |      |         | 26590<br>1905 MHz     | 50            | 24 | z (Axial)       | 5.25         | -37.80       | -51.50                | 1.21                | 43.05        | T4       | 7, -11, 3, 7     |
|                                       |                           |      |         |                       |               |    | y (Transversal) | -5.43        | -47.49       | -51.26                |                     | 42.06        | T4       | 4.8, 0.1, 3, 7   |
| LTE Band 25 16QAM<br>AMR-WB 6.6 kbps  | 20 MHz                    | D    | ANT4    | 26365<br>1882.5 MHz   | 50            | 24 | z (Axial)       | 5.01         | -22.88       | -51.50                | 1.13                | 42.33        | T4       | 7.1, -10, 3, 7   |
|                                       |                           |      |         |                       |               |    | y (Transversal) | -5.67        | -22.04       | -51.26                |                     | 42.00        | T4       | 5, 0, 3, 7       |
| LTE Band 25 64QAM<br>AMR-WB 6.6 kbps  | 20 MHz                    | D    | ANT4    | 26365<br>1882.5 MHz   | 50            | 24 | z (Axial)       | 2.97         | -23.58       | -51.50                | 1.43                | 42.11        | T4       | 5.8, -11.3, 3, 7 |
|                                       |                           |      |         |                       |               |    | y (Transversal) | -5.27        | -22.04       | -51.26                |                     | 41.71        | T4       | 5.8, 0, 3, 7     |
| LTE Band 25 256QAM<br>AMR-WB 6.6 kbps | 20 MHz                    | D    | ANT4    | 26365<br>1882.5 MHz   | 50            | 24 | z (Axial)       | 3.02         | -23.48       | -51.50                | 0.94                | 42.09        | T4       | 5.8, -11.3, 3, 7 |
|                                       |                           |      |         |                       |               |    | y (Transversal) | -5.92        | -22.34       | -51.26                |                     | 42.21        | T4       | 4.6, 0, 3, 7     |
| LTE Band 25 QPSK<br>AMR-WB 6.6 kbps   | 15 MHz                    | D    | ANT4    | 26365<br>1882.5 MHz   | 36            | 20 | z (Axial)       | -0.35        | -33.65       | -51.49                | 1.05                | 43.18        | T4       | 4.6, -11.7, 3, 7 |
|                                       |                           |      |         |                       |               |    | y (Transversal) | -4.07        | -34.45       | -51.28                |                     | 43.52        | T4       | 8.3, -2.9, 3, 7  |
| LTE Band 25 QPSK<br>AMR-WB 6.6 kbps   | 10 MHz                    | D    | ANT4    | 26365<br>1882.5 MHz   | 25            | 12 | z (Axial)       | 0.35         | -33.59       | -51.49                | 1.24                | 43.41        | T4       | 4.6, -11.7, 3, 7 |
|                                       |                           |      |         |                       |               |    | y (Transversal) | -4.11        | -34.05       | -51.28                |                     | 43.40        | T4       | 8.3, -2.9, 3, 7  |

**Note(s):**

For all subsequent tests for LTE-FDD, middle channel, QPSK modulation, and 50% RB size and middle RB allocation was used in conjunction with the worst-case bit rate found in §9.1.2.

**VoLTE Air Interface Investigation (continued):**

| VoLTE Air Interface Investigation        |                              |      |                   |                          |               |                 |                 |                 |                 |                             |                           |                 |                 |                 |
|------------------------------------------|------------------------------|------|-------------------|--------------------------|---------------|-----------------|-----------------|-----------------|-----------------|-----------------------------|---------------------------|-----------------|-----------------|-----------------|
| Mode:                                    | Bandwidth<br>(if applicable) | Port | Antenna           | Channel and<br>Frequency | RB Allocation |                 | Orientation     | ABM1<br>dB(A/m) | ABM2<br>dB(A/m) | Ambient<br>Noise<br>dB(A/m) | Freq.<br>Response<br>(dB) | ABM SNR<br>(dB) | T-Rating        | Location        |
| LTE Band 41<br>QPSK<br>AMR-WB 6.6 kbps   | 20 MHz                       | B    | ANT2              | 39750<br>2506 MHz        | 50            | 49              | z (Axial)       | 1.57            | -32.43          | -51.50                      | 1.58                      | 42.80           | T4              | 5, -11.7, 3.7   |
|                                          |                              |      |                   |                          |               |                 | y (Transversal) | -4.96           | -34.29          | -51.26                      |                           | 43.09           | T4              | 5.8, 0, 3.7     |
|                                          |                              |      |                   | 40185<br>2549.5 MHz      | 50            | 49              | z (Axial)       | 1.52            | -40.92          | -51.50                      | 1.66                      | 42.44           | T4              | 4.8, -11.7, 3.7 |
|                                          |                              |      |                   |                          |               |                 | y (Transversal) | -4.72           | -48.07          | -51.26                      |                           | 43.35           | T4              | 5.9, 0, 3.7     |
|                                          |                              |      |                   | 40620<br>2593 MHz        | 1             | 0               | z (Axial)       | 1.40            | -32.26          | -51.50                      | 1.18                      | 42.13           | T4              | 5, -11.7, 3.7   |
|                                          |                              |      |                   |                          |               |                 | y (Transversal) | -4.07           | -34.04          | -51.26                      |                           | 42.91           | T4              | 8.3, -1.7, 3.7  |
|                                          |                              |      |                   |                          | 1             | 49              | z (Axial)       | 4.56            | -19.39          | -51.51                      | 0.86                      | 40.32           | T4              | 7.9, -10.4, 3.7 |
|                                          |                              |      |                   |                          |               |                 | y (Transversal) | -4.31           | -17.97          | -51.33                      |                           | 39.58           | T4              | 8.3, -2.9, 3.7  |
|                                          |                              |      |                   |                          | 1             | 99              | z (Axial)       | 2.46            | -39.69          | -51.50                      | 1.30                      | 42.15           | T4              | 5.1, -11.7, 3.7 |
|                                          |                              |      |                   |                          |               |                 | y (Transversal) | -4.35           | -47.82          | -51.26                      |                           | 43.46           | T4              | 8.3, -1.9, 3.7  |
|                                          |                              |      |                   | 50                       | 0             | z (Axial)       | 5.69            | -20.11          | -51.50          | 1.31                        | 41.18                     | T4              | 8.3, -11.3, 3.7 |                 |
|                                          |                              |      |                   |                          |               | y (Transversal) | -5.79           | -19.27          | -51.26          |                             | 39.94                     | T4              | 4.6, 0, 3.7     |                 |
|                                          |                              |      |                   | 50                       | 24            | z (Axial)       | 5.93            | -35.95          | -51.50          | 1.15                        | 41.88                     | T4              | 8.2, -11.2, 3.7 |                 |
|                                          |                              |      |                   |                          |               | y (Transversal) | -5.31           | -45.12          | -51.26          |                             | 39.80                     | T4              | 4.6, -0.1, 3.7  |                 |
|                                          |                              |      |                   | 50                       | 49            | z (Axial)       | 5.53            | -35.84          | -51.50          | 1.38                        | 41.37                     | T4              | 8.2, -11.2, 3.7 |                 |
|                                          |                              |      |                   |                          |               | y (Transversal) | -5.65           | -44.83          | -51.26          |                             | 39.17                     | T4              | 4.6, -0.1, 3.7  |                 |
|                                          |                              |      |                   | 100                      | 0             | z (Axial)       | 5.89            | -19.37          | -51.50          | 1.35                        | 41.23                     | T4              | 8.3, -11.3, 3.7 |                 |
|                                          |                              |      |                   |                          |               | y (Transversal) | -5.87           | -18.14          | -51.26          |                             | 39.73                     | T4              | 4.6, 0, 3.7     |                 |
|                                          | 41055<br>2636.5 MHz          | 50   | 49                | z (Axial)                | 1.89          | -40.93          | -51.50          | 1.44            | 42.82           | T4                          | 4.8, -11.7, 3.7           |                 |                 |                 |
|                                          |                              |      |                   | y (Transversal)          | -4.60         | -47.77          | -51.26          |                 | 43.17           | T4                          | 5.9, 0, 3.7               |                 |                 |                 |
|                                          | 41490<br>2680 MHz            | 50   | 49                | z (Axial)                | 1.87          | -40.57          | -51.50          | 0.82            | 42.44           | T4                          | 4.8, -11.7, 3.7           |                 |                 |                 |
|                                          |                              |      |                   | y (Transversal)          | -4.76         | -47.73          | -51.26          |                 | 42.97           | T4                          | 5.9, 0, 3.7               |                 |                 |                 |
| 15 MHz                                   | B                            | ANT2 | 40620<br>2593 MHz | 36                       | 39            | z (Axial)       | 1.22            | -32.71          | -51.50          | 0.70                        | 42.14                     | T4              | 5, -11.3, 3.7   |                 |
|                                          |                              |      |                   |                          |               | y (Transversal) | -4.04           | -34.35          | -51.26          |                             | 43.22                     | T4              | 8.3, -2.5, 3.7  |                 |
| 10 MHz                                   | B                            | ANT2 | 40620<br>2593 MHz | 25                       | 25            | z (Axial)       | 1.47            | -32.53          | -51.50          | 0.97                        | 42.45                     | T4              | 5, -11.3, 3.7   |                 |
|                                          |                              |      |                   |                          |               | y (Transversal) | -3.74           | -34.30          | -51.26          |                             | 43.18                     | T4              | 7.9, -1.7, 3.7  |                 |
| LTE Band 41<br>16QAM<br>AMR-WB 6.6 kbps  | 20 MHz                       | B    | ANT2              | 40620<br>2593 MHz        | 50            | 49              | z (Axial)       | 1.05            | -32.80          | -51.50                      | 1.27                      | 42.75           | T4              | 5, -12.1, 3.7   |
|                                          |                              |      |                   |                          |               |                 | y (Transversal) | -4.18           | -28.11          | -51.26                      |                           | 42.76           | T4              | 8.3, -2.1, 3.7  |
| LTE Band 41<br>64QAM<br>AMR-WB 6.6 kbps  | 20 MHz                       | B    | ANT2              | 40620<br>2593 MHz        | 50            | 49              | z (Axial)       | 5.05            | -20.22          | -51.50                      | 1.24                      | 41.06           | T4              | 7.5, -11.3, 3.7 |
|                                          |                              |      |                   |                          |               |                 | y (Transversal) | -5.99           | -19.66          | -51.26                      |                           | 40.66           | T4              | 4.6, 0, 3.7     |
| LTE Band 41<br>256QAM<br>AMR-WB 6.6 kbps | 20 MHz                       | B    | ANT2              | 40620<br>2593 MHz        | 50            | 49              | z (Axial)       | 5.84            | -22.52          | -51.50                      | 1.46                      | 41.50           | T4              | 7.9, -10, 3.7   |
|                                          |                              |      |                   |                          |               |                 | y (Transversal) | -4.08           | -20.29          | -51.26                      |                           | 40.83           | T4              | 8.3, -2.5, 3.7  |

**Note(s):**

For all subsequent tests for LTE-TDD, middle channel, QPSK modulation, and 50% RB size and high RB allocation was used in conjunction with the worst-case bit rate found in §9.1.2.

### 9.1.4. VoWi-Fi Codec Investigation

An investigation between the various codec configurations (Low/Mid/High bit rates for Narrowband, Wideband and EVS) and specific parameters are documented (ABM1, ABM2, S+N/N, frequency response) to determine the worst-case bit rates for each voice service type. The table below compares the varying codec configurations. A codec investigation was performed for each Wi-Fi 2.4GHz and 5GHz.

The highlighted results below were determined to be the worst-case codec configuration(s) for Wi-Fi 2.4GHz and 5GHz

| VoWi-Fi Codec Investigation |                 |        |        |                 |        |        |              |        |        |                 |        |         |                                  |
|-----------------------------|-----------------|--------|--------|-----------------|--------|--------|--------------|--------|--------|-----------------|--------|---------|----------------------------------|
| Codec State                 | AMR-NB (kbit/s) |        |        | AMR-WB (kbit/s) |        |        | EVS (kbit/s) |        |        | Orientation     | Port   | Antenna | Band/Channel/<br>Bandwidth       |
|                             | 4.75            | 7.4    | 12.2   | 6.6             | 15.85  | 23.85  | 5.9          | 9.6    | 24.4   |                 |        |         |                                  |
| ABM1 (dB/m)                 | 4.72            | 5.50   | 7.15   | -2.03           | 0.03   | 0.01   | -1.52        | -1.05  | -0.06  | z (Axial)       | Core 0 | ANT4    | 802.11b<br>Ch. 6<br>DSSS 1 Mbps  |
| ABM2 (dBA/m)                | -14.39          | -26.48 | -41.00 | -22.40          | -43.20 | -43.14 | -31.71       | 43.51  | -43.62 |                 |        |         |                                  |
| SNR (dB)                    | 47.48           | 48.02  | 48.15  | 41.91           | 43.23  | 43.15  | 43.26        | 42.46  | 43.56  |                 |        |         |                                  |
| Freq. Resposne (dB)         | 0.57            | 1.16   | 0.93   | 1.01            | 1.12   | 1.09   | 0.66         | 1.09   | 1.13   |                 |        |         |                                  |
| ABM1 (dB/m)                 | -1.38           | 0.96   | 1.35   | -6.17           | -5.14  | -5.24  | -5.08        | -6.12  | -5.81  | y (Transversal) |        |         |                                  |
| ABM2 (dBA/m)                | -20.61          | -25.46 | -46.43 | -26.00          | -48.32 | -48.29 | -30.91       | -48.20 | -48.59 |                 |        |         |                                  |
| SNR (dB)                    | 44.92           | 47.90  | 47.77  | 41.74           | 43.19  | 43.05  | 42.77        | 42.08  | 42.77  |                 |        |         |                                  |
| ABM1 (dB/m)                 | 4.54            | 5.17   | 6.61   | -2.35           | -0.41  | 0.01   | -1.39        | -1.48  | -1.34  | z (Axial)       | Core 0 | ANT6    | 802.11a<br>Ch. 36<br>BPSK 6 Mbps |
| ABM2 (dBA/m)                | -30.45          | -28.21 | -41.85 | -28.06          | -43.07 | -43.31 | -32.40       | -44.87 | -44.92 |                 |        |         |                                  |
| SNR (dB)                    | 48.43           | 48.69  | 48.46  | 43.15           | 42.66  | 43.32  | 43.76        | 43.40  | 43.58  |                 |        |         |                                  |
| Freq. Resposne (dB)         | 0.62            | 1.12   | 0.72   | 0.88            | 0.98   | 0.96   | 1.55         | 1.10   | 1.03   |                 |        |         |                                  |
| ABM1 (dB/m)                 | 0.65            | 1.06   | 1.34   | -7.82           | -6.32  | -6.08  | -6.49        | -6.79  | -6.03  | y (Transversal) |        |         |                                  |
| ABM2 (dBA/m)                | -30.05          | -19.40 | -46.63 | -26.37          | -48.33 | -48.43 | -31.58       | -48.31 | -48.43 |                 |        |         |                                  |
| SNR (dB)                    | 47.87           | 48.20  | 47.97  | 41.40           | 42.01  | 42.35  | 42.05        | 41.52  | 42.40  |                 |        |         |                                  |

#### Note(s):

A bit rate investigation was performed on the pre-installed phone application to determine the worst-case bit rate:

1. For Wi-Fi 2.4 GHz, it is observed that 6.60 kbps is the worst-case.
2. For Wi-Fi 5 GHz, it is observed that 6.60 kbps is the worst-case.

### 9.1.5. VoWi-Fi Air Interface Investigation

| VoWi-Fi Air Interface Investigation  |                       |        |         |                  |           |                 |              |              |                       |                     |              |          |                 |
|--------------------------------------|-----------------------|--------|---------|------------------|-----------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|
| Mode:                                | Channel and Frequency | Port   | Antenna | Modulation/Index | Data Rate | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location        |
| 802.11b<br>AMR-WB 6.6 kbps           | 6<br>2437 MHz         | Core 0 | ANT4    | CCK              | 5.5 Mbps  | z (Axial)       | -1.95        | -21.17       | -51.53                | 0.59                | 41.79        | T4       | 4.6, -11.7, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -8.19        | -27.23       | -51.37                |                     | 38.55        | T4       | 4.6, 0, 3.7     |
|                                      |                       |        |         |                  | 11 Mbps   | z (Axial)       | -1.05        | -43.07       | -51.53                | 1.47                | 42.02        | T4       | 4.6, -11.9, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -8.17        | -45.94       | -51.37                |                     | 37.77        | T4       | 4.6, 0, 3.7     |
| 802.11g<br>AMR-WB 6.6 kbps           | 6<br>2437 MHz         | Core 0 | ANT4    | DSSS             | 1 Mbps    | z (Axial)       | -1.89        | -21.15       | -51.53                | 1.30                | 42.28        | T4       | 4.6, -12.1, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -8.14        | -27.71       | -51.37                |                     | 38.65        | T4       | 4.2, 0.4, 3.7   |
|                                      |                       |        |         | QPSK             | 12 Mbps   | z (Axial)       | -1.13        | -43.02       | -51.53                | 1.48                | 41.89        | T4       | 4.5, -12.2, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -8.16        | -49.10       | -51.37                |                     | 40.94        | T4       | 4.2, 0.2, 3.7   |
|                                      |                       |        |         | 64QAM            | 54 Mbps   | z (Axial)       | -0.93        | -42.61       | -51.53                | 1.79                | 41.67        | T4       | 4.5, -12.2, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -8.01        | -49.10       | -51.37                |                     | 41.09        | T4       | 4.2, 0.2, 3.7   |
| 802.11n<br>AMR-WB 6.6 kbps           | 6<br>2437 MHz         | Core 0 | ANT4    | MCS0             | 6.5 Mbps  | z (Axial)       | -2.28        | -25.55       | -51.53                | 0.69                | 43.62        | T4       | 4.2, -12.5, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -8.73        | -31.78       | -51.37                |                     | 40.23        | T4       | 4.2, 0.4, 3.7   |
|                                      |                       |        |         | MCS3             | 26 Mbps   | z (Axial)       | -1.75        | -44.13       | -51.53                | 0.87                | 42.37        | T4       | 4.3, -12.3, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -7.92        | -48.99       | -51.37                |                     | 41.07        | T4       | 4.3, 0.2, 3.7   |
|                                      |                       |        |         | MCS7             | 65 Mbps   | z (Axial)       | -2.39        | -43.68       | -51.53                | 1.04                | 41.29        | T4       | 4.3, -12.3, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -7.72        | -48.95       | -51.37                |                     | 41.24        | T4       | 4.3, 0.2, 3.7   |
| 802.11ac<br>AMR-WB 6.6 kbps          | 6<br>2437 MHz         | Core 0 | ANT4    | MCS0             | 6.5 Mbps  | z (Axial)       | -2.74        | -27.74       | -51.53                | 0.79                | 42.90        | T4       | 4.2, -12.5, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -5.72        | -33.48       | -51.37                |                     | 41.34        | T4       | 8.3, -2.5, 3.7  |
|                                      |                       |        |         | MCS3             | 26 Mbps   | z (Axial)       | -1.85        | -44.08       | -51.53                | 1.20                | 42.23        | T4       | 4.3, -12.4, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -6.58        | -48.18       | -51.37                |                     | 41.59        | T4       | 8.1, -2.4, 3.7  |
|                                      |                       |        |         | MCS7             | 65 Mbps   | z (Axial)       | -0.30        | -44.20       | -51.53                | 1.18                | 43.89        | T4       | 4.3, -12.4, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -6.66        | -48.02       | -51.37                |                     | 41.36        | T4       | 8.1, -2.4, 3.7  |
| 802.11ax<br>AMR-WB 6.6 kbps          | 6<br>2437 MHz         | Core 0 | ANT4    | MCS0             | 7.3 Mbps  | z (Axial)       | 0.10         | -25.42       | -51.54                | 0.97                | 44.78        | T4       | 4.2, -12.1, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -5.15        | -31.81       | -51.30                |                     | 43.04        | T4       | 4.6, 0, 3.7     |
|                                      |                       |        |         | MCS5             | 58.5 Mbps | z (Axial)       | 1.64         | -43.75       | -51.54                | 0.74                | 45.39        | T4       | 4.3, -12.1, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -4.94        | -47.88       | -51.30                |                     | 42.93        | T4       | 4.4, 0.1, 3.7   |
|                                      |                       |        |         | MCS9             | 97.5 Mbps | z (Axial)       | 1.83         | -43.80       | -51.54                | 0.69                | 45.63        | T4       | 4.3, -12.1, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -4.91        | -48.49       | -51.30                |                     | 43.58        | T4       | 4.4, 0.1, 3.7   |
| 802.11a<br>AMR-WB 6.6 kbps           | 36<br>5180 MHz        | Core 0 | ANT6    | QPSK             | 18 Mbps   | z (Axial)       | -2.53        | -32.15       | -51.53                | 0.93                | 43.57        | T4       | 4.2, -12.5, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -7.37        | -32.24       | -51.37                |                     | 42.47        | T4       | 4.6, 0, 3.7     |
|                                      |                       |        |         | 64QAM            | 54 Mbps   | z (Axial)       | -1.78        | -44.04       | -51.53                | 1.14                | 42.27        | T4       | 4.3, -12.4, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -7.50        | -49.20       | -51.37                |                     | 41.69        | T4       | 4.4, 0.1, 3.7   |
| 802.11n<br>20 MHz<br>AMR-WB 6.6 kbps | 36<br>5180 MHz        | Core 0 | ANT6    | MCS0             | 6.5 Mbps  | z (Axial)       | -2.18        | -29.28       | -51.53                | 1.73                | 43.21        | T4       | 4.6, -12.1, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -7.28        | -29.44       | -51.37                |                     | 42.58        | T4       | 4.6, 0, 3.7     |
|                                      |                       |        |         | MCS3             | 26 Mbps   | z (Axial)       | -1.09        | -43.79       | -51.53                | 1.48                | 42.70        | T4       | 4.4, -12.1, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -7.74        | -49.30       | -51.37                |                     | 41.56        | T4       | 4.5, 0.1, 3.7   |
|                                      |                       |        |         | MCS7             | 65 Mbps   | z (Axial)       | -1.47        | -43.92       | -51.53                | 1.14                | 42.46        | T4       | 4.4, -12.1, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -7.09        | -49.27       | -51.37                |                     | 42.18        | T4       | 4.5, 0.1, 3.7   |
| 802.11n<br>40 MHz<br>AMR-WB 6.6 kbps | 38<br>5190 MHz        | Core 0 | ANT6    | MCS0             | 13.5 Mbps | z (Axial)       | -2.20        | -25.54       | -51.53                | 1.20                | 43.74        | T4       | 4.2, -12.1, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -6.53        | -30.66       | -51.37                |                     | 42.34        | T4       | 8.3, -3.3, 3.7  |
|                                      |                       |        |         | MCS3             | 54 Mbps   | z (Axial)       | -1.46        | -44.33       | -51.53                | 0.84                | 42.87        | T4       | 4.3, -12.2, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -6.13        | -49.50       | -51.37                |                     | 43.37        | T4       | 8.3, -3.2, 3.7  |
|                                      |                       |        |         | MCS7             | 135 Mbps  | z (Axial)       | -1.02        | -44.49       | -51.53                | 0.76                | 43.46        | T4       | 4.3, -12.2, 3.7 |
|                                      |                       |        |         |                  |           | y (Transversal) | -6.22        | -49.14       | -51.37                |                     | 42.92        | T4       | 8.3, -3.2, 3.7  |

**VoWi-Fi Air Interface Investigation (continued):**

| VoWi-Fi Air Interface Investigation   |                       |        |         |                  |           |                 |                 |                 |                             |                           |                 |          |                 |
|---------------------------------------|-----------------------|--------|---------|------------------|-----------|-----------------|-----------------|-----------------|-----------------------------|---------------------------|-----------------|----------|-----------------|
| Mode:                                 | Channel and Frequency | Port   | Antenna | Modulation/Index | Data Rate | Orientation     | ABM1<br>dB(A/m) | ABM2<br>dB(A/m) | Ambient<br>Noise<br>dB(A/m) | Freq.<br>Response<br>(dB) | ABM SNR<br>(dB) | T-Rating | Location        |
| 802.11ac<br>20 MHz<br>AMR-WB 6.6 kbps | 36<br>5180 MHz        | Core 0 | ANT6    | MCS0             | 6.5 Mbps  | z (Axial)       | -2.08           | -28.86          | -51.53                      | 1.03                      | 42.72           | T4       | 4.6, -12.1, 3.7 |
|                                       |                       |        |         |                  |           | y (Transversal) | -6.40           | -29.93          | -51.37                      |                           | 42.00           | T4       | 8.3, -2.9, 3.7  |
|                                       |                       |        |         | MCS4             | 39 Mbps   | z (Axial)       | -1.12           | -43.45          | -51.53                      | 1.27                      | 42.33           | T4       | 4.7, -12, 3.7   |
|                                       |                       |        |         |                  |           | y (Transversal) | -5.76           | -49.14          | -51.37                      |                           | 43.38           | T4       | 8.3, -2.9, 3.7  |
|                                       |                       |        |         | MCS8             | 78 Mbps   | z (Axial)       | -0.32           | -43.50          | -51.53                      | 1.03                      | 43.18           | T4       | 4.7, -12, 3.7   |
|                                       |                       |        |         |                  |           | y (Transversal) | -6.09           | -49.00          | -51.37                      |                           | 42.91           | T4       | 8.3, -2.9, 3.7  |
| 802.11ac<br>40 MHz<br>AMR-WB 6.6 kbps | 38<br>5190 MHz        | Core 0 | ANT6    | MCS0             | 13.5 Mbps | z (Axial)       | -3.51           | -30.33          | -51.53                      | 0.89                      | 42.15           | T4       | 4.2, -12.5, 3.7 |
|                                       |                       |        |         |                  |           | y (Transversal) | -6.39           | -26.17          | -51.37                      |                           | 41.54           | T4       | 8.3, -3.3, 3.7  |
|                                       |                       |        |         | MCS5             | 108 Mbps  | z (Axial)       | -1.41           | -43.90          | -51.53                      | 1.23                      | 42.49           | T4       | 4.3, -12.3, 3.7 |
|                                       |                       |        |         |                  |           | y (Transversal) | -5.59           | -48.49          | -51.37                      |                           | 42.90           | T4       | 8.5, -3.5, 3.7  |
|                                       |                       |        |         | MCS9             | 180 Mbps  | z (Axial)       | -2.91           | -43.99          | -51.53                      | 0.90                      | 41.07           | T4       | 4.3, -12.3, 3.7 |
|                                       |                       |        |         |                  |           | y (Transversal) | -7.02           | -48.08          | -51.37                      |                           | 41.06           | T4       | 8.5, -3.5, 3.7  |
| 802.11ac<br>80 MHz<br>AMR-WB 6.6 kbps | 42<br>5210 MHz        | Core 0 | ANT6    | MCS0             | 13.5 Mbps | z (Axial)       | -2.58           | -30.81          | -51.53                      | 0.99                      | 43.31           | T4       | 4.2, -12.5, 3.7 |
|                                       |                       |        |         |                  |           | y (Transversal) | -7.61           | -31.35          | -51.37                      |                           | 42.00           | T4       | 4.6, 0, 3.7     |
|                                       |                       |        |         | MCS5             | 108 Mbps  | z (Axial)       | -2.08           | -44.72          | -51.53                      | 0.68                      | 42.64           | T4       | 4.3, -12.4, 3.7 |
|                                       |                       |        |         |                  |           | y (Transversal) | -7.81           | -49.44          | -51.37                      |                           | 41.63           | T4       | 4.6, -0.1, 3.7  |
|                                       |                       |        |         | MCS9             | 180 Mbps  | z (Axial)       | -1.26           | -44.77          | -51.53                      | 1.17                      | 43.51           | T4       | 4.3, -12.4, 3.7 |
|                                       |                       |        |         |                  |           | y (Transversal) | -7.62           | -49.46          | -51.37                      |                           | 41.83           | T4       | 4.6, -0.1, 3.7  |
| 802.11ax<br>20 MHz<br>AMR-WB 6.6 kbps | 36<br>5180 MHz        | Core 0 | ANT6    | MCS0             | 8.6 Mbps  | z (Axial)       | -2.35           | -27.02          | -51.53                      | 1.11                      | 42.56           | T4       | 4.6, -12.1, 3.7 |
|                                       |                       |        |         |                  |           | y (Transversal) | -6.60           | -26.70          | -51.37                      |                           | 41.57           | T4       | 8.3, -3.8, 3.7  |
|                                       |                       |        |         | MCS6             | 77 Mbps   | z (Axial)       | -1.25           | -43.98          | -51.53                      | 1.00                      | 42.73           | T4       | 4.4, -12.2, 3.7 |
|                                       |                       |        |         |                  |           | y (Transversal) | -6.41           | -48.77          | -51.37                      |                           | 42.36           | T4       | 8.3, -3.6, 3.7  |
|                                       |                       |        |         | MCS11            | 143 Mbps  | z (Axial)       | -1.38           | -43.62          | -51.53                      | 1.25                      | 42.24           | T4       | 4.4, -12.2, 3.7 |
|                                       |                       |        |         |                  |           | y (Transversal) | -6.58           | -48.52          | -51.37                      |                           | 41.94           | T4       | 8.3, -3.6, 3.7  |
| 802.11ax<br>40 MHz<br>AMR-WB 6.6 kbps | 38<br>5190 MHz        | Core 0 | ANT6    | MCS0             | 17.2 Mbps | z (Axial)       | -1.83           | -26.13          | -51.53                      | 1.45                      | 43.29           | T4       | 4.6, -12.1, 3.7 |
|                                       |                       |        |         |                  |           | y (Transversal) | -6.87           | -25.70          | -51.37                      |                           | 41.30           | T4       | 8.3, -3.3, 3.7  |
|                                       |                       |        |         | MCS6             | 155 Mbps  | z (Axial)       | -0.97           | -44.09          | -51.53                      | 1.04                      | 43.12           | T4       | 4.4, -12.2, 3.7 |
|                                       |                       |        |         |                  |           | y (Transversal) | -6.36           | -48.35          | -51.37                      |                           | 41.99           | T4       | 8.3, -3.4, 3.7  |
|                                       |                       |        |         | MCS11            | 287 Mbps  | z (Axial)       | -1.32           | -44.13          | -51.53                      | 1.16                      | 42.82           | T4       | 4.4, -12.2, 3.7 |
|                                       |                       |        |         |                  |           | y (Transversal) | -7.20           | -47.88          | -51.37                      |                           | 40.68           | T4       | 8.3, -3.4, 3.7  |
| 802.11ax<br>80 MHz<br>AMR-WB 6.6 kbps | 42<br>5210 MHz        | Core 0 | ANT6    | MCS0             | 36 Mbps   | z (Axial)       | -2.29           | -26.50          | -51.53                      | 1.25                      | 42.22           | T4       | 4.6, -12.1, 3.7 |
|                                       |                       |        |         |                  |           | y (Transversal) | -8.00           | -26.60          | -51.37                      |                           | 41.33           | T4       | 4.2, 0, 3.7     |
|                                       |                       |        |         | MCS6             | 324 Mbps  | z (Axial)       | -1.54           | -42.44          | -51.53                      | 1.09                      | 40.90           | T4       | 4.5, -12.2, 3.7 |
|                                       |                       |        |         |                  |           | y (Transversal) | -7.95           | -48.58          | -51.37                      |                           | 40.64           | T4       | 4.4, -0.1, 3.7  |
|                                       |                       |        |         | MCS11            | 600 Mbps  | z (Axial)       | -1.02           | -44.03          | -51.53                      | 1.08                      | 43.00           | T4       | 4.5, -12.2, 3.7 |
|                                       |                       |        |         |                  |           | y (Transversal) | -8.12           | -48.77          | -51.37                      |                           | 40.64           | T4       | 4.4, -0.1, 3.7  |

**Note(s):**

- For all subsequent tests for 2.4 GHz, 802.11b CCK 11 Mbps was used in conjunction with the worst-case bit rate found in §9.1.4.
- For all subsequent tests for 5 GHz, 802.11ax HE80 MHz MCS6 324 Mbps was used in conjunction with the worst-case bit rate found in §9.1.4.

## 9.2. OTT Application

### 9.2.1. Antenna Investigation

| Note(s) | Mode:                                            | Channel and Frequency | Bandwidth (Data Rate) | Port | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location        |
|---------|--------------------------------------------------|-----------------------|-----------------------|------|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|
| 1       | GSM1900<br>EGPRS 2 Slots<br>ACC-ELD: 28 kbps     | 661<br>1880 MHz       | N/A                   | A    | ANT1    | z (Axial)       | 2.49         | -30.51       | -51.54                | 0.83                | 42.08        | T4       | 5, -10.8, 3.7   |
|         |                                                  |                       |                       |      |         | y (Transversal) | -3.29        | -34.77       | -51.30                |                     | 44.82        | T4       | 8.3, -3.3, 3.7  |
|         |                                                  |                       |                       | B    | ANT2    | z (Axial)       | 3.04         | -30.57       | -51.54                | 0.62                | 41.60        | T4       | 5.4, -10.8, 3.7 |
|         |                                                  |                       |                       |      |         | y (Transversal) | -3.13        | -31.58       | -51.30                |                     | 44.33        | T4       | 8.3, -2.9, 3.7  |
|         |                                                  |                       |                       | C    | ANT3    | z (Axial)       | 5.25         | -28.42       | -51.54                | 0.83                | 40.35        | T4       | 7.1, -10.4, 3.7 |
|         |                                                  |                       |                       |      |         | y (Transversal) | -3.40        | -33.38       | -51.30                |                     | 43.74        | T4       | 8.3, -2.9, 3.7  |
|         |                                                  |                       |                       | D    | ANT4    | z (Axial)       | 6.30         | -15.21       | -51.54                | 0.96                | 42.21        | T4       | 8.8, -9.6, 3.7  |
|         |                                                  |                       |                       |      |         | y (Transversal) | -3.29        | -12.74       | -51.30                |                     | 38.20        | T4       | 8.3, -3.8, 3.7  |
| 2       | W-CDMA BII<br>HSPA<br>ACC-ELD: 28 kbps           | 9400<br>1880 MHz      | N/A                   | A    | ANT1    | z (Axial)       | 0.38         | -34.14       | -51.54                | 0.70                | 46.24        | T4       | 4.2, -12.1, 3.7 |
|         |                                                  |                       |                       |      |         | y (Transversal) | -3.17        | -36.57       | -51.30                |                     | 45.31        | T4       | 8.3, -2.9, 3.7  |
|         |                                                  |                       |                       | B    | ANT2    | z (Axial)       | 0.44         | -34.09       | -51.54                | 0.57                | 46.65        | T4       | 4.2, -12.1, 3.7 |
|         |                                                  |                       |                       |      |         | y (Transversal) | -3.15        | -36.64       | -51.30                |                     | 45.05        | T4       | 8.3, -2.5, 3.7  |
|         |                                                  |                       |                       | C    | ANT3    | z (Axial)       | 0.37         | -42.47       | -51.54                | 0.66                | 46.45        | T4       | 4.2, -12.1, 3.7 |
|         |                                                  |                       |                       |      |         | y (Transversal) | -3.09        | -36.54       | -51.30                |                     | 45.35        | T4       | 8.3, -2.9, 3.7  |
|         |                                                  |                       |                       | D    | ANT4    | z (Axial)       | 1.03         | -34.52       | -51.54                | 0.75                | 46.41        | T4       | 4.6, -12.1, 3.7 |
|         |                                                  |                       |                       |      |         | y (Transversal) | -3.21        | -34.12       | -51.30                |                     | 44.70        | T4       | 8.3, -2.9, 3.7  |
| 3       | CDMA2000 BC0<br>Ev-Do Rel. 0<br>ACC-ELD: 28 kbps | 384<br>836.52 MHz     | N/A                   | A    | ANT1    | z (Axial)       | 1.94         | -44.26       | -51.49                | 0.83                | 46.20        | T4       | 4.5, -10.5, 3.7 |
|         |                                                  |                       |                       |      |         | y (Transversal) | -4.32        | -49.19       | -51.27                |                     | 44.87        | T4       | 8.5, -3.2, 3.7  |
|         |                                                  |                       |                       | B    | ANT2    | z (Axial)       | 1.89         | -44.17       | -51.49                | 0.64                | 46.06        | T4       | 4.5, -10.5, 3.7 |
|         |                                                  |                       |                       |      |         | y (Transversal) | -4.34        | -49.16       | -51.27                |                     | 44.82        | T4       | 8.5, -3.2, 3.7  |
| 3a      | CDMA2000 BC0<br>Ev-Do Rev. A<br>ACC-ELD: 28 kbps | 384<br>836.52 MHz     | N/A                   | A    | ANT1    | z (Axial)       | -0.19        | -34.19       | -51.49                | 0.72                | 44.93        | T4       | 4.2, -12.1, 3.7 |
|         |                                                  |                       |                       |      |         | y (Transversal) | -5.76        | -49.62       | -51.27                |                     | 43.85        | T4       | 8.5, -3.3, 4.4  |
|         |                                                  |                       |                       | B    | ANT2    | z (Axial)       | 0.58         | -34.19       | -51.49                | 0.69                | 45.38        | T4       | 4.6, -10.4, 3.7 |
|         |                                                  |                       |                       |      |         | y (Transversal) | -3.16        | -36.88       | -51.27                |                     | 45.94        | T4       | 8.3, -3.3, 3.7  |
| 4       | LTE Band 25 QPSK<br>1/49 RB<br>ACC-ELD: 28 kbps  | 26365<br>1882.5 MHz   | 20 MHz                | A    | ANT1    | z (Axial)       | 1.36         | -26.74       | -51.54                | 0.65                | 45.18        | T4       | 4.6, -12.1, 3.7 |
|         |                                                  |                       |                       |      |         | y (Transversal) | -3.09        | -25.95       | -51.30                |                     | 43.91        | T4       | 8.3, -2.9, 3.7  |
|         |                                                  |                       |                       | B    | ANT2    | z (Axial)       | 1.17         | -27.44       | -51.54                | 0.52                | 45.52        | T4       | 4.6, -12.1, 3.7 |
|         |                                                  |                       |                       |      |         | y (Transversal) | -3.11        | -17.09       | -51.30                |                     | 44.31        | T4       | 8.3, -2.9, 3.7  |
|         |                                                  |                       |                       | C    | ANT3    | z (Axial)       | 1.46         | -26.20       | -51.54                | 0.60                | 45.12        | T4       | 4.6, -11.7, 3.7 |
|         |                                                  |                       |                       |      |         | y (Transversal) | -3.21        | -26.05       | -51.30                |                     | 43.76        | T4       | 8.3, -2.9, 3.7  |
|         |                                                  |                       |                       | D    | ANT4    | z (Axial)       | 0.66         | -27.45       | -51.54                | 0.57                | 45.51        | T4       | 4.2, -12.1, 3.7 |
|         |                                                  |                       |                       |      |         | y (Transversal) | -3.36        | -26.99       | -51.30                |                     | 44.19        | T4       | 8.3, -3.3, 3.7  |
| 5       | LTE Band 41 QPSK<br>1/49 RB<br>ACC-ELD: 28 kbps  | 40620<br>2593 MHz     | 20 MHz                | A    | ANT1    | z (Axial)       | 1.83         | -32.83       | -51.57                | 0.55                | 43.67        | T4       | 4.6, -11.3, 3.7 |
|         |                                                  |                       |                       |      |         | y (Transversal) | -2.90        | -35.22       | -51.35                |                     | 45.06        | T4       | 8.3, -3.3, 3.7  |
|         |                                                  |                       |                       | B    | ANT2    | z (Axial)       | 1.60         | -32.78       | -51.57                | 0.75                | 43.94        | T4       | 4.6, -11.7, 3.7 |
|         |                                                  |                       |                       |      |         | y (Transversal) | -2.97        | -35.28       | -51.35                |                     | 45.08        | T4       | 8.3, -3.3, 3.7  |
|         |                                                  |                       |                       | C    | ANT3    | z (Axial)       | 1.21         | -32.77       | -51.57                | 0.71                | 43.76        | T4       | 4.2, -11.3, 3.7 |
|         |                                                  |                       |                       |      |         | y (Transversal) | -3.07        | -34.95       | -51.35                |                     | 45.02        | T4       | 8.3, -3.3, 3.7  |
|         |                                                  |                       |                       | D    | ANT4    | z (Axial)       | 1.63         | -32.51       | -51.57                | 0.57                | 43.75        | T4       | 4.6, -11.7, 3.7 |
|         |                                                  |                       |                       |      |         | y (Transversal) | -3.06        | -35.10       | -51.35                |                     | 44.98        | T4       | 8.3, -3.3, 3.7  |

| Note(s) | Mode:                                           | Channel and Frequency | Bandwidth (Data Rate) | Port   | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location        |
|---------|-------------------------------------------------|-----------------------|-----------------------|--------|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|
| 5a      | LTE Band 48 QPSK<br>1/49 RB<br>ACC-ELD: 28 kbps | 55990<br>3625 MHz     | 20 MHz                | A      | ANT7    | z (Axial)       | 5.69         | -28.16       | -51.57                | 0.70                | 40.47        | T4       | 7.1, -10, 3.7   |
|         |                                                 |                       |                       |        |         | y (Transversal) | -3.58        | -28.89       | -51.35                |                     | 35.34        | T4       | 6.7, 0, 3.7     |
|         |                                                 |                       |                       | B      | ANT4    | z (Axial)       | 5.59         | -27.87       | -51.57                | 1.42                | 40.25        | T4       | 7.1, -10, 3.7   |
|         |                                                 |                       |                       |        |         | y (Transversal) | -3.86        | -28.67       | -51.35                |                     | 35.17        | T4       | 6.3, 0.4, 3.7   |
|         |                                                 |                       |                       | C      | ANT9    | z (Axial)       | 4.89         | -29.37       | -51.57                | 0.65                | 40.48        | T4       | 7.1, -8.8, 3.7  |
|         |                                                 |                       |                       |        |         | y (Transversal) | -3.89        | -29.32       | -51.35                |                     | 35.46        | T4       | 5.8, -0.4, 3.7  |
|         |                                                 |                       |                       | D      | ANT8    | z (Axial)       | 5.37         | -28.53       | -51.57                | 0.74                | 39.88        | T4       | 7.9, -8.8, 3.7  |
|         |                                                 |                       |                       |        |         | y (Transversal) | -4.08        | -28.72       | -51.35                |                     | 35.26        | T4       | 5.4, 0, 3.7     |
| 6       | 802.11b<br>ACC-ELD: 32 kbps                     | 6<br>2437 MHz         | 20 MHz<br>(1 Mbps)    | Core 0 | ANT4    | z (Axial)       | 1.17         | -15.72       | -51.52                | 0.73                | 44.18        | T4       | 4.6, -11.7, 3.7 |
|         |                                                 |                       |                       |        |         | y (Transversal) | -5.36        | -25.23       | -51.33                |                     | 40.90        | T4       | 3.8, 0.4, 3.7   |
|         |                                                 |                       |                       | Core 1 | ANT3    | z (Axial)       | 0.50         | -33.89       | -51.52                | 0.79                | 45.88        | T4       | 4.2, -12.1, 3.7 |
|         |                                                 |                       |                       |        |         | y (Transversal) | -3.44        | -36.89       | -51.33                |                     | 45.89        | T4       | 8.8, -3.3, 3.7  |
| 7       | 802.11a<br>ACC-ELD: 32 kbps                     | 36<br>5180 MHz        | 20 MHz<br>(6 Mbps)    | Core 0 | ANT6    | z (Axial)       | 0.54         | -27.43       | -51.52                | 0.89                | 45.26        | T4       | 4.6, -12.1, 3.7 |
|         |                                                 |                       |                       |        |         | y (Transversal) | -5.43        | -18.77       | -51.33                |                     | 44.26        | T4       | 3.8, 0, 3.7     |
|         |                                                 |                       |                       | Core 1 | ANT5    | z (Axial)       | 1.09         | -29.64       | -51.52                | 0.90                | 46.24        | T4       | 4.6, -12.1, 3.7 |
|         |                                                 |                       |                       |        |         | y (Transversal) | -3.34        | -28.77       | -51.33                |                     | 45.28        | T4       | 8.3, -2.9, 3.7  |

**Note(s):**

- Port D/ANT 4 has been determined to be the worst-case antenna for GSM Edge; for sub-1 GHz frequency bands, Port B/ANT 2 was determined to be the worst-case antenna.
- Port D/ANT 4 has been determined to be the worst-case antenna for W-CDMA HSPA; for sub-1 GHz frequency bands, Port B/ANT 2 was determined to be the worst-case antenna.
- Port B/ANT 2 has been determined to be the worst-case antenna for CDMA Ev-Do Rel. 0.
  - Port A/ANT 1 has been determined to be the worst-case antenna for CDMA Ev-Do Rev. A.
- Port A/ANT 1 has been determined to be the worst-case antenna for LTE-FDD; for sub-1 GHz frequency bands, Port A/ANT 1 was determined to be the worst-case antenna.
- Port A/ANT 1 has been determined to be the worst-case antenna for LTE-TDD.
  - Port B/ANT 4 has been determined to be the worst-case antenna for LTE-TDD (applicable to LTE Band 48 only).
- Core 0/ANT 4 has been determined to be the worst-case antenna for Wi-Fi 2.4 GHz.
- Core 0/ANT 6 has been determined to be the worst-case antenna for Wi-Fi 5 GHz.

### 9.2.2. Codec Investigation

The OTT Application did not support a means for the test lab to change the codec's bit rates. When a VoIP call was established, the test lab recorded the bit rate used during that session, listed below, for the supported technologies: EDGE, HSPA, Ev-Do Rel. 0 and Rev. A, LTE and 5G, LTE and 5G, Wi-Fi 2.4 GHz, and Wi-Fi 5 GHz

| Codec Bit Rate<br>(kbps) |                       |    |
|--------------------------|-----------------------|----|
| <b>GSM</b>               | <b>EDGE</b>           | 28 |
| <b>W-CDMA</b>            | <b>HSPA</b>           | 28 |
| <b>CDMA</b>              | <b>Rel. 0</b>         | 28 |
|                          | <b>Rev. A</b>         | 28 |
| <b>LTE</b>               | <b>FDD</b>            | 28 |
|                          | <b>TDD</b>            | 28 |
| <b>5G</b>                | <b>FDD</b>            | 28 |
|                          | <b>TDD</b>            | 28 |
| <b>Wi-Fi<br/>2.4 GHz</b> | <b>802.11b</b>        | 32 |
|                          | <b>802.11g</b>        | 32 |
|                          | <b>802.11n</b>        | 32 |
|                          | <b>802.11ax</b>       | 32 |
| <b>Wi-Fi<br/>5 GHz</b>   | <b>802.11a</b>        | 32 |
|                          | <b>802.11n HT20</b>   | 32 |
|                          | <b>802.11n HT40</b>   | 32 |
|                          | <b>802.11ac VHT20</b> | 32 |
|                          | <b>802.11ac VHT40</b> | 32 |
|                          | <b>802.11ac VHT80</b> | 32 |
|                          | <b>802.11ax HE20</b>  | 32 |
|                          | <b>802.11ax HE40</b>  | 32 |
|                          | <b>802.11ax HE80</b>  | 32 |

### 9.2.3. Air Interface Investigation

A limited set of bands/channels/bandwidths were then tested to confirm that there is no effect to the T-rating when changing the band/channel/bandwidth.

#### GSM Air Interface Investigation:

| GSM Air Interface Investigation             |                       |                           |      |         |                 |              |              |                       |                     |              |          |                |
|---------------------------------------------|-----------------------|---------------------------|------|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|----------------|
| Mode:                                       | Channel and Frequency | Bandwidth (if applicable) | Port | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location       |
| GSM1900<br>EDGE/EGPRS 2<br>ACC-ELD: 28 kbps | 512<br>1850.2 MHz     | N/A                       | D    | ANT4    | z (Axial)       | 5.35         | -15.05       | -51.54                | 0.05                | 41.33        | T4       | 8.8, -10, 3.7  |
|                                             |                       |                           |      |         | y (Transversal) | -6.39        | -13.88       | -51.30                |                     | 36.27        | T4       | 4.2, -0.4, 3.7 |
|                                             | 661<br>1880.0 MHz     | N/A                       | D    | ANT4    | z (Axial)       | 6.30         | -15.21       | -51.54                | 0.96                | 42.21        | T4       | 8.8, -9.6, 3.7 |
|                                             |                       |                           |      |         | y (Transversal) | -3.29        | -12.74       | -51.30                |                     | 38.20        | T4       | 8.3, -3.8, 3.7 |
|                                             | 810<br>1909.8 MHz     | N/A                       | D    | ANT4    | z (Axial)       | 6.20         | -20.12       | -51.54                | 0.82                | 41.82        | T4       | 8.8, -9.6, 3.7 |
|                                             |                       |                           |      |         | y (Transversal) | -3.10        | -12.58       | -51.30                |                     | 38.45        | T4       | 8.3, -3.3, 3.7 |

#### W-CDMA Air Interface Investigation:

| W-CDMA Air Interface Investigation     |                       |                           |      |         |                 |              |              |                       |                     |              |          |                 |
|----------------------------------------|-----------------------|---------------------------|------|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|
| Mode:                                  | Channel and Frequency | Bandwidth (if applicable) | Port | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location        |
| W-CDMA BII<br>HSPA<br>ACC-ELD: 28 kbps | 9262<br>1852.4 MHz    | N/A                       | D    | ANT4    | z (Axial)       | 1.91         | -43.87       | -51.54                | 0.69                | 45.78        | T4       | 4.4, -12, 3.7   |
|                                        |                       |                           |      |         | y (Transversal) | -3.47        | -49.16       | -51.30                |                     | 45.69        | T4       | 8.4, -3.1, 3.7  |
|                                        | 9400<br>1880.0 MHz    | N/A                       | D    | ANT4    | z (Axial)       | 1.03         | -34.52       | -51.54                | 0.75                | 46.41        | T4       | 4.6, -12.1, 3.7 |
|                                        |                       |                           |      |         | y (Transversal) | -3.21        | -34.12       | -51.30                |                     | 44.70        | T4       | 8.3, -2.9, 3.7  |
|                                        | 9538<br>1907.6 MHz    | N/A                       | D    | ANT4    | z (Axial)       | 1.89         | -43.14       | -51.54                | 0.62                | 45.03        | T4       | 4.4, -12, 3.7   |
|                                        |                       |                           |      |         | y (Transversal) | -3.75        | -49.07       | -51.30                |                     | 45.32        | T4       | 8.4, -3.1, 3.7  |
| W-CDMA BIV<br>HSPA<br>ACC-ELD: 28 kbps | 1312<br>1712.4 MHz    | N/A                       | D    | ANT4    | z (Axial)       | 1.83         | -43.87       | -51.54                | 0.72                | 45.70        | T4       | 4.3, -12.2, 3.7 |
|                                        |                       |                           |      |         | y (Transversal) | -3.32        | -48.97       | -51.30                |                     | 45.66        | T4       | 8.4, -2.8, 3.7  |
|                                        | 1413<br>1732.6 MHz    | N/A                       | D    | ANT4    | z (Axial)       | 0.57         | -33.92       | -51.54                | 0.69                | 46.40        | T4       | 4.2, -12.1, 3.7 |
|                                        |                       |                           |      |         | y (Transversal) | -3.16        | -36.43       | -51.30                |                     | 45.07        | T4       | 8.3, -2.9, 3.7  |
|                                        | 1513<br>1752.6 MHz    | N/A                       | D    | ANT4    | z (Axial)       | 1.79         | -43.87       | -51.54                | 0.70                | 45.66        | T4       | 4.3, -12.2, 3.7 |
|                                        |                       |                           |      |         | y (Transversal) | -3.28        | -48.83       | -51.30                |                     | 45.55        | T4       | 8.4, -2.8, 3.7  |

#### CDMA Air Interface Investigation:

| CDMA Air Interface Investigation                 |                       |                           |      |         |                 |              |              |                       |                     |              |          |                 |
|--------------------------------------------------|-----------------------|---------------------------|------|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|
| Mode:                                            | Channel and Frequency | Bandwidth (if applicable) | Port | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location        |
| CDMA2000 BC0<br>Ev-Do Rel. 0<br>ACC-ELD: 28 kbps | 1013<br>824.7 MHz     | N/A                       | B    | ANT2    | z (Axial)       | 2.07         | -44.29       | -51.49                | 0.77                | 46.36        | T4       | 4.5, -10.5, 3.7 |
|                                                  |                       |                           |      |         | y (Transversal) | -4.32        | -49.26       | -51.27                |                     | 44.94        | T4       | 8.5, -3.2, 3.7  |
|                                                  | 384<br>836.52 MHz     | N/A                       | B    | ANT2    | z (Axial)       | 1.89         | -44.17       | -51.49                | 0.64                | 46.06        | T4       | 4.5, -10.5, 3.7 |
|                                                  |                       |                           |      |         | y (Transversal) | -4.34        | -49.16       | -51.27                |                     | 44.82        | T4       | 8.5, -3.2, 3.7  |
|                                                  | 777<br>848.31 MHz     | N/A                       | B    | ANT2    | z (Axial)       | 1.95         | -44.47       | -51.49                | 0.69                | 46.42        | T4       | 4.5, -10.5, 3.7 |
|                                                  |                       |                           |      |         | y (Transversal) | -4.36        | -49.03       | -51.27                |                     | 44.67        | T4       | 8.5, -3.2, 3.7  |
| CDMA2000 BC0<br>Ev-Do Rev. A<br>ACC-ELD: 28 kbps | 777<br>848.31 MHz     | N/A                       | A    | ANT1    | z (Axial)       | 1.94         | -44.38       | -51.49                | 0.68                | 46.31        | T4       | 4.5, -10.5, 3.7 |
|                                                  |                       |                           |      |         | y (Transversal) | -4.43        | -49.13       | -51.27                |                     | 44.69        | T4       | 8.5, -3.2, 3.7  |
|                                                  | 384<br>836.52 MHz     | N/A                       | A    | ANT1    | z (Axial)       | -0.19        | -34.19       | -51.49                | 0.72                | 44.93        | T4       | 4.2, -12.1, 3.7 |
|                                                  |                       |                           |      |         | y (Transversal) | -5.76        | -49.62       | -51.27                |                     | 43.85        | T4       | 8.5, -3.3, 4.4  |

**LTE Air Interface Investigation:**

| LTE Air Interface Investigation        |                           |      |         |                       |               |    |                 |              |              |                       |                     |              |          |                 |
|----------------------------------------|---------------------------|------|---------|-----------------------|---------------|----|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|
| Mode:                                  | Bandwidth (if applicable) | Port | Antenna | Channel and Frequency | RB Allocation |    | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location        |
| LTE Band 25 QPSK<br>ACC-ELD: 28 kbps   | 20 MHz                    | C    | ANT3    | 26140<br>1860 MHz     | 1             | 49 | z (Axial)       | 2.70         | -42.46       | -51.50                | 0.50                | 45.16        | T4       | 4.5, -11.9, 3.7 |
|                                        |                           |      |         |                       |               |    | y (Transversal) | -3.45        | -47.75       | -51.29                |                     | 44.30        | T4       | 8.5, -3.5, 3.7  |
|                                        |                           |      |         | 26365<br>1882.5 MHz   | 1             | 0  | z (Axial)       | 1.84         | -27.13       | -51.50                | 0.71                | 44.37        | T4       | 4.6, -11.7, 3.7 |
|                                        |                           |      |         |                       |               |    | y (Transversal) | -3.10        | -24.49       | -51.29                |                     | 44.29        | T4       | 8.3, -3.3, 3.7  |
|                                        |                           |      |         |                       | 1             | 49 | z (Axial)       | 1.46         | -26.20       | -51.54                | 0.60                | 45.12        | T4       | 4.6, -11.7, 3.7 |
|                                        |                           |      |         |                       |               |    | y (Transversal) | -3.21        | -26.05       | -51.30                |                     | 43.76        | T4       | 8.3, -2.9, 3.7  |
|                                        |                           |      |         |                       | 1             | 99 | z (Axial)       | 2.67         | -41.98       | -51.50                | 0.60                | 44.65        | T4       | 4.5, -11.9, 3.7 |
|                                        |                           |      |         |                       |               |    | y (Transversal) | -3.46        | -47.70       | -51.29                |                     | 44.24        | T4       | 8.5, -3.5, 3.7  |
|                                        |                           |      |         |                       | 50            | 0  | z (Axial)       | 1.58         | -28.27       | -51.50                | 0.70                | 44.83        | T4       | 4.6, -12.1, 3.7 |
|                                        |                           |      |         |                       |               |    | y (Transversal) | -3.19        | -27.66       | -51.29                |                     | 44.73        | T4       | 8.3, -3.3, 3.7  |
|                                        |                           |      |         |                       | 50            | 24 | z (Axial)       | 2.40         | -42.45       | -51.50                | 0.56                | 44.85        | T4       | 4.4, -12.2, 3.7 |
|                                        |                           |      |         |                       |               |    | y (Transversal) | -3.44        | -48.64       | -51.29                |                     | 45.19        | T4       | 8.5, -3.4, 3.7  |
|                                        |                           |      |         |                       | 50            | 49 | z (Axial)       | 2.40         | -42.59       | -51.50                | 0.73                | 44.99        | T4       | 4.4, -12.2, 3.7 |
|                                        |                           |      |         |                       |               |    | y (Transversal) | -3.46        | -48.39       | -51.29                |                     | 44.93        | T4       | 8.5, -3.4, 3.7  |
|                                        |                           |      |         |                       | 100           | 0  | z (Axial)       | 1.66         | -22.77       | -51.50                | 0.71                | 45.21        | T4       | 4.6, -12.1, 3.7 |
|                                        |                           |      |         |                       |               |    | y (Transversal) | -3.11        | -27.53       | -51.29                |                     | 44.83        | T4       | 8.3, -3.3, 3.7  |
|                                        |                           |      |         | 26590<br>1905 MHz     | 1             | 49 | z (Axial)       | 2.72         | -42.17       | -51.50                | 0.65                | 44.90        | T4       | 4.5, -11.9, 3.7 |
|                                        |                           |      |         |                       |               |    | y (Transversal) | -3.46        | -47.88       | -51.29                |                     | 44.41        | T4       | 8.5, -3.5, 3.7  |
| LTE Band 25 16QAM<br>ACC-ELD: 28 kbps  | 20 MHz                    | C    | ANT3    | 26365<br>1882.5 MHz   | 1             | 49 | z (Axial)       | 2.84         | -23.63       | -51.50                | 0.72                | 43.65        | T4       | 5, -10.4, 3.7   |
|                                        |                           |      |         |                       |               |    | y (Transversal) | -3.01        | -23.09       | -51.29                |                     | 42.46        | T4       | 8.3, -2.9, 3.7  |
| LTE Band 25 64QAM<br>ACC-ELD: 28 kbps  | 20 MHz                    | C    | ANT3    | 26365<br>1882.5 MHz   | 1             | 49 | z (Axial)       | 2.46         | -24.51       | -51.50                | 0.62                | 44.50        | T4       | 5, -11.7, 3.7   |
|                                        |                           |      |         |                       |               |    | y (Transversal) | -3.09        | -23.71       | -51.29                |                     | 43.06        | T4       | 8.3, -3.3, 3.7  |
| LTE Band 25 256QAM<br>ACC-ELD: 28 kbps | 20 MHz                    | C    | ANT3    | 26365<br>1882.5 MHz   | 1             | 49 | z (Axial)       | 1.71         | -27.76       | -51.50                | 0.70                | 45.14        | T4       | 4.6, -12.1, 3.7 |
|                                        |                           |      |         |                       |               |    | y (Transversal) | -3.10        | -26.44       | -51.29                |                     | 44.43        | T4       | 8.3, -3.3, 3.7  |
| LTE Band 25 16QAM<br>ACC-ELD: 28 kbps  | 15 MHz                    | C    | ANT3    | 26365<br>1882.5 MHz   | 1             | 37 | z (Axial)       | 2.49         | -23.00       | -51.50                | 0.79                | 44.14        | T4       | 5, -11.7, 3.7   |
|                                        |                           |      |         |                       |               |    | y (Transversal) | -2.92        | -22.59       | -51.29                |                     | 42.16        | T4       | 8.3, -2.9, 3.7  |
| LTE Band 25 16QAM<br>ACC-ELD: 28 kbps  | 10 MHz                    | C    | ANT3    | 26365<br>1882.5 MHz   | 1             | 25 | z (Axial)       | 2.55         | -23.28       | -51.50                | 0.62                | 44.01        | T4       | 5, -11.3, 3.7   |
|                                        |                           |      |         |                       |               |    | y (Transversal) | -2.97        | -17.69       | -51.29                |                     | 42.18        | T4       | 8.3, -2.9, 3.7  |

**Note(s):**

For all subsequent tests for LTE-FDD, middle channel, 16QAM modulation, 15 MHz bandwidth, and 1% RB size and middle RB allocation was used in conjunction with the worst-case bit rate found in §9.2.2.

**LTE Air Interface Investigation (continued):**

| LTE Air Interface Investigation           |                              |      |         |                          |               |    |                 |                 |                 |                             |                           |                 |          |                 |
|-------------------------------------------|------------------------------|------|---------|--------------------------|---------------|----|-----------------|-----------------|-----------------|-----------------------------|---------------------------|-----------------|----------|-----------------|
| Mode:                                     | Bandwidth<br>(if applicable) | Port | Antenna | Channel and<br>Frequency | RB Allocation |    | Orientation     | ABM1<br>dB(A/m) | ABM2<br>dB(A/m) | Ambient<br>Noise<br>dB(A/m) | Freq.<br>Response<br>(dB) | ABM SNR<br>(dB) | T-Rating | Location        |
| LTE Band 41<br>QPSK<br>ACC-ELD: 28 kbps   | 20 MHz                       | A    | ANT1    | 39750<br>2506 MHz        | 1             | 0  | z (Axial)       | 1.44            | -32.80          | -51.50                      | 0.84                      | 43.48           | T4       | 4.6, -11.7, 3.7 |
|                                           |                              |      |         |                          |               |    | y (Transversal) | -3.08           | -35.44          | -51.29                      |                           | 44.89           | T4       | 8.3, -2.9, 3.7  |
|                                           |                              |      |         | 40185<br>2549.5 MHz      | 1             | 0  | z (Axial)       | 2.60            | -41.04          | -51.50                      | 0.72                      | 43.64           | T4       | 4.7, -11.8, 3.7 |
|                                           |                              |      |         |                          |               |    | y (Transversal) | -3.33           | -48.61          | -51.29                      |                           | 45.28           | T4       | 8.5, -3.2, 3.7  |
|                                           |                              |      |         | 40620<br>2593 MHz        | 1             | 0  | z (Axial)       | 4.97            | -33.71          | -51.57                      | 0.76                      | 41.90           | T4       | 7.5, -9.6, 3.7  |
|                                           |                              |      |         |                          |               |    | y (Transversal) | -3.81           | -19.19          | -51.35                      |                           | 41.55           | T4       | 7.9, -3.8, 3.7  |
|                                           |                              |      |         |                          | 1             | 49 | z (Axial)       | 1.83            | -32.83          | -51.57                      | 0.55                      | 43.67           | T4       | 4.6, -11.3, 3.7 |
|                                           |                              |      |         |                          |               |    | y (Transversal) | -2.90           | -35.22          | -51.35                      |                           | 45.06           | T4       | 8.3, -3.3, 3.7  |
|                                           |                              |      |         |                          | 1             | 99 | z (Axial)       | 5.25            | -37.41          | -51.57                      | 0.64                      | 42.66           | T4       | 7.5, -9.5, 3.7  |
|                                           |                              |      |         |                          |               |    | y (Transversal) | -3.65           | -45.63          | -51.35                      |                           | 41.98           | T4       | 7.7, -3.9, 3.7  |
|                                           |                              |      |         |                          | 50            | 0  | z (Axial)       | 4.17            | -21.64          | -51.57                      | 0.70                      | 42.59           | T4       | 6.7, -9.6, 3.7  |
|                                           |                              |      |         |                          |               |    | y (Transversal) | -3.68           | -20.40          | -51.35                      |                           | 42.12           | T4       | 7.9, -3.8, 3.7  |
|                                           |                              |      |         |                          | 50            | 24 | z (Axial)       | 4.65            | -38.46          | -51.57                      | 0.78                      | 43.12           | T4       | 6.7, -9.6, 3.7  |
|                                           |                              |      |         |                          |               |    | y (Transversal) | -3.41           | -45.68          | -51.35                      |                           | 42.27           | T4       | 7.8, -3.7, 3.7  |
|                                           |                              |      |         |                          | 50            | 49 | z (Axial)       | 4.58            | -38.43          | -51.57                      | 0.75                      | 43.01           | T4       | 6.7, -9.6, 3.7  |
|                                           |                              |      |         |                          |               |    | y (Transversal) | -3.33           | -45.78          | -51.35                      |                           | 42.45           | T4       | 7.8, -3.7, 3.7  |
|                                           |                              |      |         |                          | 100           | 0  | z (Axial)       | 0.44            | -33.17          | -51.57                      | 0.61                      | 44.02           | T4       | 4.6, -10.8, 3.7 |
|                                           |                              |      |         |                          |               |    | y (Transversal) | -3.31           | -35.43          | -51.35                      |                           | 44.53           | T4       | 7.9, -3.3, 3.7  |
|                                           |                              |      |         | 41055<br>2636.5 MHz      | 1             | 0  | z (Axial)       | 2.56            | -40.88          | -51.50                      | 0.70                      | 43.44           | T4       | 4.7, -11.8, 3.7 |
|                                           |                              |      |         |                          |               |    | y (Transversal) | -3.35           | -48.48          | -51.29                      |                           | 45.14           | T4       | 8.5, -3.2, 3.7  |
|                                           |                              |      |         | 41490<br>2680 MHz        | 1             | 0  | z (Axial)       | 2.63            | -40.53          | -51.50                      | 0.75                      | 43.16           | T4       | 4.7, -11.8, 3.7 |
|                                           |                              |      |         |                          |               |    | y (Transversal) | -3.35           | -48.33          | -51.29                      |                           | 44.98           | T4       | 8.5, -3.2, 3.7  |
| LTE Band 41<br>QPSK<br>ACC-ELD: 28 kbps   | 15 MHz                       | A    | ANT1    | 40620<br>2593 MHz        | 1             | 0  | z (Axial)       | 1.24            | -32.96          | -51.50                      | 0.66                      | 43.65           | T4       | 4.6, -12.1, 3.7 |
|                                           |                              |      |         |                          |               |    | y (Transversal) | -3.41           | -35.40          | -51.29                      |                           | 44.79           | T4       | 8.3, -3.3, 3.7  |
|                                           | 10 MHz                       | A    | ANT1    | 40620<br>2593 MHz        | 1             | 0  | z (Axial)       | 2.50            | -41.39          | -51.50                      | 0.68                      | 43.89           | T4       | 4.6, -12, 3.7   |
|                                           |                              |      |         |                          |               |    | y (Transversal) | -3.31           | -48.58          | -51.29                      |                           | 45.27           | T4       | 8.4, -3.2, 3.7  |
| LTE Band 41<br>16QAM<br>ACC-ELD: 28 kbps  | 20 MHz                       | A    | ANT1    | 40620<br>2593 MHz        | 1             | 0  | z (Axial)       | 1.40            | -33.03          | -51.50                      | 0.76                      | 43.82           | T4       | 4.6, -12.1, 3.7 |
|                                           |                              |      |         |                          |               |    | y (Transversal) | -3.36           | -35.53          | -51.29                      |                           | 44.79           | T4       | 8.3, -3.3, 3.7  |
| LTE Band 41<br>64QAM<br>ACC-ELD: 28 kbps  | 20 MHz                       | A    | ANT1    | 40620<br>2593 MHz        | 1             | 0  | z (Axial)       | 2.15            | -34.08          | -51.50                      | 0.67                      | 44.62           | T4       | 4.6, -11.7, 3.7 |
|                                           |                              |      |         |                          |               |    | y (Transversal) | -3.03           | -35.67          | -51.29                      |                           | 45.15           | T4       | 8.3, -2.9, 3.7  |
| LTE Band 41<br>256QAM<br>ACC-ELD: 28 kbps | 20 MHz                       | A    | ANT1    | 40620<br>2593 MHz        | 1             | 0  | z (Axial)       | 1.32            | -33.58          | -51.50                      | 0.70                      | 45.12           | T4       | 4.2, -12.1, 3.7 |
|                                           |                              |      |         |                          |               |    | y (Transversal) | -3.00           | -35.80          | -51.29                      |                           | 45.36           | T4       | 8.3, -2.9, 3.7  |

**Note(s):**

For all subsequent tests for LTE-TDD, middle channel, QPSK modulation, and 1% RB size and low RB allocation was used in conjunction with the worst-case bit rate found in §9.2.2.

**Wi-Fi Air Interface Investigation:**

| Wi-Fi Air Interface Investigation        |                       |        |         |                  |           |                 |              |              |                       |                     |              |          |                 |
|------------------------------------------|-----------------------|--------|---------|------------------|-----------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|
| Mode:                                    | Channel and Frequency | Core   | Antenna | Modulation/Index | Data Rate | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location        |
| 802.11b<br>ACC-ELD: 32 kbps              | 6<br>2437 MHz         | Core 0 | ANT4    | CCK              | 5.5 Mbps  | z (Axial)       | 2.55         | -42.13       | -51.52                | 0.71                | 44.68        | T4       | 4.7, -11.8, 3.7 |
|                                          |                       |        |         |                  |           | y (Transversal) | -5.13        | -48.05       | -51.33                |                     | 42.92        | T4       | 4, 0.3, 3.7     |
|                                          |                       |        |         |                  | 11 Mbps   | z (Axial)       | 2.54         | -42.58       | -51.52                | 0.62                | 45.12        | T4       | 4.7, -11.8, 3.7 |
|                                          |                       |        |         |                  |           | y (Transversal) | -5.10        | -48.15       | -51.33                |                     | 43.05        | T4       | 4, 0.3, 3.7     |
| 802.11g<br>ACC-ELD: 32 kbps              | 6<br>2437 MHz         | Core 0 | ANT4    | DSSS             | 1 Mbps    | z (Axial)       | 1.50         | -26.87       | -51.52                | 0.71                | 44.72        | T4       | 5, -12.5, 3.7   |
|                                          |                       |        |         |                  |           | y (Transversal) | -3.30        | -26.10       | -51.33                |                     | 44.55        | T4       | 8.3, -3.3, 3.7  |
|                                          |                       |        |         | QPSK             | 12 Mbps   | z (Axial)       | 2.56         | -43.25       | -51.52                | 0.72                | 45.81        | T4       | 4.9, -12.3, 3.7 |
|                                          |                       |        |         |                  |           | y (Transversal) | -3.41        | -48.92       | -51.33                |                     | 45.51        | T4       | 8.5, -3.2, 3.7  |
|                                          |                       |        |         | 64QAM            | 54 Mbps   | z (Axial)       | 2.68         | -43.26       | -51.52                | 0.68                | 45.94        | T4       | 4.9, -12.3, 3.7 |
|                                          |                       |        |         |                  |           | y (Transversal) | -3.40        | -49.11       | -51.33                |                     | 45.71        | T4       | 8.5, -3.2, 3.7  |
| 802.11n<br>ACC-ELD: 32 kbps              | 6<br>2437 MHz         | Core 0 | ANT4    | MCS0             | 6.5 Mbps  | z (Axial)       | 1.29         | -29.48       | -51.52                | 0.77                | 44.93        | T4       | 4.6, -11.7, 3.7 |
|                                          |                       |        |         |                  |           | y (Transversal) | -3.10        | -27.89       | -51.33                |                     | 44.83        | T4       | 8.3, -2.9, 3.7  |
|                                          |                       |        |         | MCS3             | 26 Mbps   | z (Axial)       | 2.46         | -43.44       | -51.52                | 0.68                | 45.91        | T4       | 4.5, -11.6, 3.7 |
|                                          |                       |        |         |                  |           | y (Transversal) | -3.42        | -48.80       | -51.33                |                     | 45.39        | T4       | 8.5, -3.1, 3.7  |
|                                          |                       |        |         | MCS7             | 65 Mbps   | z (Axial)       | 2.47         | -43.00       | -51.52                | 0.70                | 45.47        | T4       | 4.5, -11.6, 3.7 |
|                                          |                       |        |         |                  |           | y (Transversal) | -3.38        | -49.01       | -51.33                |                     | 45.63        | T4       | 8.5, -3.1, 3.7  |
| 802.11ac<br>ACC-ELD: 32 kbps             | 6<br>2437 MHz         | Core 0 | ANT4    | MCS0             | 6.5 Mbps  | z (Axial)       | 1.10         | -29.64       | -51.52                | 0.72                | 46.07        | T4       | 4.6, -12.1, 3.7 |
|                                          |                       |        |         |                  |           | y (Transversal) | -3.36        | -29.69       | -51.33                |                     | 45.05        | T4       | 8.8, -3.3, 3.7  |
|                                          |                       |        |         | MCS3             | 26 Mbps   | z (Axial)       | 2.04         | -43.49       | -51.52                | 0.72                | 45.54        | T4       | 4.4, -12.1, 3.7 |
|                                          |                       |        |         |                  |           | y (Transversal) | -3.32        | -48.83       | -51.33                |                     | 45.51        | T4       | 8.5, -3.2, 3.7  |
|                                          |                       |        |         | MCS7             | 65 Mbps   | z (Axial)       | 2.14         | -43.40       | -51.52                | 0.79                | 45.54        | T4       | 4.4, -12.1, 3.7 |
|                                          |                       |        |         |                  |           | y (Transversal) | -3.28        | -48.78       | -51.33                |                     | 45.50        | T4       | 8.5, -3.2, 3.7  |
| 802.11ax<br>ACC-ELD: 32 kbps             | 6<br>2437 MHz         | Core 0 | ANT4    | MCS0             | 7.3 Mbps  | z (Axial)       | 0.87         | -28.61       | -51.52                | 0.74                | 45.22        | T4       | 4.6, -12.5, 3.7 |
|                                          |                       |        |         |                  |           | y (Transversal) | -3.07        | -28.52       | -51.33                |                     | 44.95        | T4       | 8.3, -2.9, 3.7  |
|                                          |                       |        |         | MCS5             | 58.5 Mbps | z (Axial)       | 2.21         | -43.83       | -51.52                | 0.59                | 46.04        | T4       | 4.7, -12.5, 3.7 |
|                                          |                       |        |         |                  |           | y (Transversal) | -3.31        | -48.80       | -51.33                |                     | 45.49        | T4       | 8.5, -3.1, 3.7  |
|                                          |                       |        |         | MCS9             | 97.5 Mbps | z (Axial)       | 2.24         | -43.26       | -51.52                | 0.76                | 45.51        | T4       | 4.7, -12.5, 3.7 |
|                                          |                       |        |         |                  |           | y (Transversal) | -3.34        | -48.90       | -51.33                |                     | 45.56        | T4       | 8.5, -3.1, 3.7  |
| 802.11a<br>ACC-ELD: 32 kbps              | 36<br>5180 MHz        | Core 0 | ANT6    | QPSK             | 18 Mbps   | z (Axial)       | 2.41         | -42.31       | -51.52                | 0.82                | 44.72        | T4       | 4.5, -11.9, 3.7 |
|                                          |                       |        |         |                  |           | y (Transversal) | -5.27        | -48.91       | -51.33                |                     | 43.64        | T4       | 3.7, 0.1, 3.7   |
|                                          |                       |        |         | 64QAM            | 54 Mbps   | z (Axial)       | 2.34         | -42.06       | -51.52                | 0.78                | 44.40        | T4       | 4.5, -11.9, 3.7 |
|                                          |                       |        |         |                  |           | y (Transversal) | -5.29        | -49.17       | -51.33                |                     | 43.88        | T4       | 3.7, 0.1, 3.7   |
| 802.11n<br>20 MHz BW<br>ACC-ELD: 32 kbps | 36<br>5180 MHz        | Core 0 | ANT6    | MCS0             | 6.5 Mbps  | z (Axial)       | 0.53         | -29.07       | -51.50                | 0.93                | 45.71        | T4       | 4.6, -12.1, 3.7 |
|                                          |                       |        |         |                  |           | y (Transversal) | -3.47        | -29.85       | -51.29                |                     | 45.39        | T4       | 8.3, -3.3, 3.7  |
|                                          |                       |        |         | MCS3             | 26 Mbps   | z (Axial)       | 1.56         | -44.59       | -51.50                | 0.79                | 46.15        | T4       | 4.4, -12, 3.7   |
|                                          |                       |        |         |                  |           | y (Transversal) | -3.71        | -49.32       | -51.29                |                     | 45.61        | T4       | 8.3, -3.2, 3.7  |
|                                          |                       |        |         | MCS7             | 65 Mbps   | z (Axial)       | 1.55         | -44.74       | -51.50                | 0.74                | 46.29        | T4       | 4.4, -12, 3.7   |
|                                          |                       |        |         |                  |           | y (Transversal) | -3.76        | -49.24       | -51.29                |                     | 45.48        | T4       | 8.3, -3.2, 3.7  |
| 802.11n<br>40 MHz BW<br>ACC-ELD: 32 kbps | 38<br>5190 MHz        | Core 0 | ANT6    | MCS0             | 13.5 Mbps | z (Axial)       | 0.22         | -29.48       | -51.50                | 0.68                | 46.62        | T4       | 4.2, -12.1, 3.7 |
|                                          |                       |        |         |                  |           | y (Transversal) | -3.30        | -30.16       | -51.29                |                     | 45.43        | T4       | 8.3, -3.3, 3.7  |
|                                          |                       |        |         | MCS3             | 54 Mbps   | z (Axial)       | 1.73         | -43.68       | -51.50                | 0.74                | 45.42        | T4       | 4.4, -12.1, 3.7 |
|                                          |                       |        |         |                  |           | y (Transversal) | -3.41        | -49.15       | -51.29                |                     | 45.74        | T4       | 8.3, -3.2, 3.7  |
|                                          |                       |        |         | MCS7             | 135 Mbps  | z (Axial)       | 1.75         | -44.17       | -51.50                | 0.66                | 45.92        | T4       | 4.4, -12.1, 3.7 |
|                                          |                       |        |         |                  |           | y (Transversal) | -3.43        | -49.04       | -51.29                |                     | 45.61        | T4       | 8.3, -3.2, 3.7  |

**Wi-Fi Air Interface Investigation (continued):**

| Wi-Fi Air Interface Investigation         |                       |        |         |                  |           |                 |              |              |                       |                     |              |          |                 |
|-------------------------------------------|-----------------------|--------|---------|------------------|-----------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|
| Mode:                                     | Channel and Frequency | Core   | Antenna | Modulation/Index | Data Rate | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location        |
| 802.11ac<br>20 MHz BW<br>ACC-ELD: 32 kbps | 36<br>5180 MHz        | Core 0 | ANT6    | MCS0             | 6.5 Mbps  | z (Axial)       | 1.01         | -25.34       | -51.50                | 0.72                | 45.69        | T4       | 4.6, -12.1, 3.7 |
|                                           |                       |        |         |                  |           | y (Transversal) | -3.33        | -24.53       | -51.29                |                     | 44.18        | T4       | 8.3, -3.3, 3.7  |
|                                           |                       |        |         | MCS4             | 39 Mbps   | z (Axial)       | 2.13         | -43.30       | -51.50                | 0.73                | 45.44        | T4       | 4.5, -12, 3.7   |
|                                           |                       |        |         |                  |           | y (Transversal) | -3.40        | -48.29       | -51.29                |                     | 44.88        | T4       | 8.4, -3.3, 3.7  |
|                                           |                       |        |         | MCS8             | 78 Mbps   | z (Axial)       | 2.17         | -42.79       | -51.50                | 0.63                | 44.96        | T4       | 4.5, -12, 3.7   |
|                                           |                       |        |         |                  |           | y (Transversal) | -3.45        | -48.40       | -51.29                |                     | 44.95        | T4       | 8.4, -3.3, 3.7  |
| 802.11ac<br>40 MHz BW<br>ACC-ELD: 32 kbps | 38<br>5190 MHz        | Core 0 | ANT6    | MCS0             | 13.5 Mbps | z (Axial)       | 1.71         | -25.32       | -51.50                | 0.65                | 44.93        | T4       | 5, -12.1, 3.7   |
|                                           |                       |        |         |                  |           | y (Transversal) | -3.41        | -23.89       | -51.29                |                     | 44.10        | T4       | 8.3, -3.3, 3.7  |
|                                           |                       |        |         | MCS5             | 108 Mbps  | z (Axial)       | 2.35         | -43.49       | -51.50                | 0.65                | 45.84        | T4       | 4.8, -12.3, 3.7 |
|                                           |                       |        |         |                  |           | y (Transversal) | -3.45        | -48.64       | -51.29                |                     | 45.19        | T4       | 8.4, -3.3, 3.7  |
|                                           |                       |        |         | MCS9             | 180 Mbps  | z (Axial)       | 2.40         | -43.11       | -51.50                | 0.60                | 45.51        | T4       | 4.8, -12.3, 3.7 |
|                                           |                       |        |         |                  |           | y (Transversal) | -3.45        | -48.22       | -51.29                |                     | 44.77        | T4       | 8.4, -3.2, 3.7  |
| 802.11ac<br>80 MHz BW<br>ACC-ELD: 32 kbps | 42<br>5210 MHz        | Core 0 | ANT6    | MCS0             | 13.5 Mbps | z (Axial)       | 1.23         | -25.50       | -51.50                | 0.74                | 45.53        | T4       | 4.6, -11.7, 3.7 |
|                                           |                       |        |         |                  |           | y (Transversal) | -3.33        | -24.66       | -51.29                |                     | 44.29        | T4       | 8.3, -3.3, 3.7  |
|                                           |                       |        |         | MCS5             | 108 Mbps  | z (Axial)       | 2.58         | -42.98       | -51.50                | 0.65                | 45.57        | T4       | 4.6, -11.5, 3.7 |
|                                           |                       |        |         |                  |           | y (Transversal) | -3.47        | -48.49       | -51.29                |                     | 45.02        | T4       | 8.4, -3.4, 3.7  |
|                                           |                       |        |         | MCS9             | 180 Mbps  | z (Axial)       | 2.58         | -42.80       | -51.50                | 0.77                | 45.37        | T4       | 4.6, -11.5, 3.7 |
|                                           |                       |        |         |                  |           | y (Transversal) | -3.39        | -48.44       | -51.29                |                     | 45.05        | T4       | 8.4, -3.4, 3.7  |
| 802.11ax<br>20 MHz BW<br>ACC-ELD: 32 kbps | 36<br>5180 MHz        | Core 0 | ANT6    | MCS0             | 8.6 Mbps  | z (Axial)       | 1.06         | -24.81       | -51.50                | 0.73                | 45.62        | T4       | 4.6, -12.1, 3.7 |
|                                           |                       |        |         |                  |           | y (Transversal) | -3.29        | -24.07       | -51.29                |                     | 44.07        | T4       | 8.3, -3.3, 3.7  |
|                                           |                       |        |         | MCS6             | 77 Mbps   | z (Axial)       | 2.48         | -43.12       | -51.50                | 0.70                | 45.60        | T4       | 4.6, -11.9, 3.7 |
|                                           |                       |        |         |                  |           | y (Transversal) | -3.45        | -47.96       | -51.29                |                     | 44.51        | T4       | 8.4, -3.3, 3.7  |
|                                           |                       |        |         | MCS11            | 143 Mbps  | z (Axial)       | 2.43         | -43.19       | -51.50                | 0.62                | 45.62        | T4       | 4.6, -11.9, 3.7 |
|                                           |                       |        |         |                  |           | y (Transversal) | -3.36        | -48.12       | -51.29                |                     | 44.76        | T4       | 8.4, -3.3, 3.7  |
| 802.11ax<br>40 MHz BW<br>ACC-ELD: 32 kbps | 38<br>5190 MHz        | Core 0 | ANT6    | MCS0             | 17.2 Mbps | z (Axial)       | 1.29         | -25.00       | -51.50                | 0.68                | 45.11        | T4       | 4.6, -11.7, 3.7 |
|                                           |                       |        |         |                  |           | y (Transversal) | -3.34        | -23.51       | -51.29                |                     | 44.28        | T4       | 8.3, -3.3, 3.7  |
|                                           |                       |        |         | MCS6             | 155 Mbps  | z (Axial)       | 2.34         | -42.71       | -51.50                | 0.63                | 45.06        | T4       | 4.5, -11.8, 3.7 |
|                                           |                       |        |         |                  |           | y (Transversal) | -3.48        | -48.09       | -51.29                |                     | 44.62        | T4       | 8.4, -3.4, 3.7  |
|                                           |                       |        |         | MCS11            | 287 Mbps  | z (Axial)       | 2.38         | -42.04       | -51.50                | 0.61                | 44.42        | T4       | 4.5, -11.8, 3.7 |
|                                           |                       |        |         |                  |           | y (Transversal) | -3.40        | -48.30       | -51.29                |                     | 44.90        | T4       | 8.4, -3.4, 3.7  |
| 802.11ax<br>80 MHz BW<br>ACC-ELD: 32 kbps | 42<br>5210 MHz        | Core 0 | ANT6    | MCS0             | 36 Mbps   | z (Axial)       | 0.88         | -24.31       | -51.50                | 0.62                | 45.24        | T4       | 4.6, -12.5, 3.7 |
|                                           |                       |        |         |                  |           | y (Transversal) | -3.34        | -23.49       | -51.29                |                     | 43.71        | T4       | 8.3, -3.3, 3.7  |
|                                           |                       |        |         | MCS6             | 324 Mbps  | z (Axial)       | 2.16         | -43.44       | -51.50                | 0.74                | 45.60        | T4       | 4.7, -12.4, 3.7 |
|                                           |                       |        |         |                  |           | y (Transversal) | -3.44        | -47.92       | -51.29                |                     | 44.48        | T4       | 8.3, -3.2, 3.7  |
|                                           |                       |        |         | MCS11            | 600 Mbps  | z (Axial)       | 2.26         | -43.00       | -51.50                | 0.79                | 45.26        | T4       | 4.7, -12.4, 3.7 |
|                                           |                       |        |         |                  |           | y (Transversal) | -3.45        | -48.11       | -51.29                |                     | 44.66        | T4       | 8.3, -3.2, 3.7  |

**Note(s):**

- For all subsequent tests for 2.4 GHz, 802.11b DSSS 1 Mbps was used in conjunction with the worst-case bit rate found in §9.2.2.
- For all subsequent tests for 5 GHz, 802.11a QPSK 18 Mbps was used in conjunction with the worst-case bit rate found in §9.2.2.

## 10. HAC (T-coil) Test Results

As the margin for the worst-case T-rating is greater than T3/T4, no further investigation is required into the technology's supported channels to affirm the T-rating.

### 10.1. CMRS

#### GSM/W-CDMA/CDMA:

| Mode:                                                             | Channel and Frequency | Bandwidth (Data Rate) | Port | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location        | Plot Page # |
|-------------------------------------------------------------------|-----------------------|-----------------------|------|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|-------------|
| GSM 850<br>Voice Coder<br>Speechcodec Low                         | 190<br>836.6 MHz      | N/A                   | A    | ANT1    | z (Axial)       | 13.20        | -9.17        | -51.36                | 1.77                | 46.71        | T4       | 11.7, -9.6, 3.7 | 1 - 3       |
|                                                                   |                       |                       |      |         | y (Transversal) | 4.53         | -7.61        | -51.16                |                     | 42.03        | T4       | 8.3, -3.8, 3.7  |             |
| GSM 1900<br>Voice Coder<br>Speechcodec Low                        | 661<br>1880 MHz       | N/A                   | C    | ANT3    | z (Axial)       | 14.38        | -33.75       | -51.36                | 1.48                | 48.14        | T4       | 9, -9.5, 3.7    | 4 - 6       |
|                                                                   |                       |                       |      |         | y (Transversal) | 4.71         | -38.04       | -51.16                |                     | 42.76        | T4       | 8.1, -3.6, 3.7  |             |
| W-CDMA Band II<br>Rel. 99<br>AMR-WB: 6.6 kbps                     | 9538<br>1907.6 MHz    | N/A                   | A    | ANT1    | z (Axial)       | 2.82         | -42.48       | -51.51                | 0.90                | 45.30        | T4       | 4.6, -12, 3.7   | 7 - 9       |
|                                                                   |                       |                       |      |         | y (Transversal) | -1.69        | -47.72       | -51.33                |                     | 46.02        | T4       | 8.3, -2.3, 3.7  |             |
| W-CDMA Band IV<br>Rel. 99<br>AMR-WB: 6.6 kbps                     | 1413<br>1732.6 MHz    | N/A                   | A    | ANT1    | z (Axial)       | 1.92         | -33.73       | -51.51                | 0.94                | 46.06        | T4       | 4.6, -12.1, 3.7 | 10 - 12     |
|                                                                   |                       |                       |      |         | y (Transversal) | -2.40        | -36.11       | -51.33                |                     | 46.52        | T4       | 8.8, -2.9, 3.7  |             |
| W-CDMA Band V<br>Rel. 99<br>AMR-WB: 6.6 kbps                      | 4183<br>836.6 MHz     | N/A                   | A    | ANT1    | z (Axial)       | 2.67         | -23.26       | -51.51                | 1.30                | 44.45        | T4       | 5, -11.7, 3.7   | 13 - 15     |
|                                                                   |                       |                       |      |         | y (Transversal) | -2.19        | -25.56       | -51.33                |                     | 44.39        | T4       | 8.3, -2.5, 3.7  |             |
| CDMA2000 BC0<br>RC1 / SO3 Full Fr<br>Voice Coder: 8K EVRC<br>Low  | 384<br>836.52 MHz     | N/A                   | A    | ANT1    | z (Axial)       | 3.75         | -33.72       | -51.51                | 1.07                | 48.41        | T4       | 4.6, -12.1, 3.7 | 16 - 18     |
|                                                                   |                       |                       |      |         | y (Transversal) | -1.56        | -35.53       | -51.33                |                     | 47.88        | T4       | 5, 0, 3.7       |             |
| CDMA2000 BC1<br>RC1 / SO3 Full Fr<br>Voice Coder: 8K EVRC<br>Low  | 600<br>1880 MHz       | N/A                   | C    | ANT3    | z (Axial)       | 4.02         | -33.59       | -51.51                | 1.31                | 47.83        | T4       | 4.6, -12.1, 3.7 | 19 - 21     |
|                                                                   |                       |                       |      |         | y (Transversal) | -0.04        | -35.69       | -51.33                |                     | 48.58        | T4       | 8.3, -2.9, 3.7  |             |
| CDMA2000 BC10<br>RC1 / SO3 Full Fr<br>Voice Coder: 8K EVRC<br>Low | 580<br>820.5 MHz      | N/A                   | A    | ANT1    | z (Axial)       | 4.41         | -32.82       | -51.51                | 0.93                | 48.22        | T4       | 4.6, -11.7, 3.7 | 22 - 24     |
|                                                                   |                       |                       |      |         | y (Transversal) | 0.30         | -32.92       | -51.33                |                     | 48.45        | T4       | 8.3, -2.1, 3.7  |             |

**VoLTE:**

| Mode:                                                | Bandwidth<br>(Data Rate) | Channel and<br>Frequency | RB<br>Allocation |    | Port | Antenna | Orientation     | ABM1<br>dB(A/m) | ABM2<br>dB(A/m) | Ambient<br>Noise<br>dB(A/m) | Freq.<br>Response<br>(dB) | ABM SNR<br>(dB) | T-Rating | Location        | Plot<br>Page # |
|------------------------------------------------------|--------------------------|--------------------------|------------------|----|------|---------|-----------------|-----------------|-----------------|-----------------------------|---------------------------|-----------------|----------|-----------------|----------------|
| LTE Band 2<br>QPSK<br>AMR-WB 6.6 kbps                | 20 MHz                   | 18900<br>1880 MHz        | 50               | 24 | D    | ANT4    | z (Axial)       | -0.13           | -33.65          | -51.49                      | 1.40                      | 43.49           | T4       | 4.6, -11.7, 3.7 | 25 - 27        |
|                                                      |                          |                          |                  |    |      |         | y (Transversal) | -4.38           | -33.94          | -51.28                      |                           | 43.28           | T4       | 8.3, -2.9, 3.7  |                |
| LTE Band 4 <sup>2</sup><br>QPSK<br>AMR-WB: 6.6 kbps  | 20 MHz                   | 20175<br>1732.5 MHz      | 50               | 24 | D    | ANT4    | z (Axial)       | 0.98            | -42.62          | -51.49                      | 0.92                      | 43.59           | T4       | 4.5, -11.5, 3.7 | 28 - 30        |
|                                                      |                          |                          |                  |    |      |         | y (Transversal) | -4.13           | -48.09          | -51.28                      |                           | 43.96           | T4       | 8.4, -2.8, 3.7  |                |
| LTE Band 5<br>QPSK<br>AMR-WB 6.6 kbps                | 10 MHz                   | 20525<br>836.5 MHz       | 25               | 12 | B    | ANT2    | z (Axial)       | 3.29            | -33.27          | -51.49                      | 1.62                      | 42.08           | T4       | 6.7, -11.7, 3.7 | 31 - 33        |
|                                                      |                          |                          |                  |    |      |         | y (Transversal) | -5.93           | -23.83          | -51.28                      |                           | 42.67           | T4       | 4.6, 0, 3.7     |                |
| LTE Band 7<br>QPSK<br>AMR-WB 6.6 kbps                | 20 MHz                   | 21100<br>2535 MHz        | 50               | 24 | D    | ANT4    | z (Axial)       | -0.26           | -27.12          | -51.49                      | 0.71                      | 44.70           | T4       | 4.6, -12.1, 3.7 | 34 - 36        |
|                                                      |                          |                          |                  |    |      |         | y (Transversal) | -4.36           | -27.55          | -51.28                      |                           | 43.80           | T4       | 8.3, -3.3, 3.7  |                |
| LTE Band 12 <sup>2</sup><br>QPSK<br>AMR-WB: 6.6 kbps | 10 MHz                   | 23095<br>707.5 MHz       | 25               | 12 | B    | ANT2    | z (Axial)       | 3.46            | -39.22          | -51.49                      | 0.54                      | 42.68           | T4       | 6.7, -11.9, 3.7 | 37 - 39        |
|                                                      |                          |                          |                  |    |      |         | y (Transversal) | -5.19           | -48.74          | -51.28                      |                           | 43.55           | T4       | 4.7, 0, 3.7     |                |
| LTE Band 13<br>QPSK<br>AMR-WB 6.6 kbps               | 10 MHz                   | 23230<br>782 MHz         | 25               | 12 | B    | ANT2    | z (Axial)       | 0.15            | -33.44          | -51.49                      | 1.22                      | 44.30           | T4       | 4.6, -12.1, 3.7 | 40 - 42        |
|                                                      |                          |                          |                  |    |      |         | y (Transversal) | -3.91           | -34.64          | -51.28                      |                           | 43.76           | T4       | 8.3, -2.9, 3.7  |                |
| LTE Band 14<br>QPSK<br>AMR-WB 6.6 kbps               | 10 MHz                   | 23330<br>793 MHz         | 25               | 12 | B    | ANT2    | z (Axial)       | 0.32            | -33.40          | -51.49                      | 0.96                      | 43.87           | T4       | 4.6, -11.7, 3.7 | 43 - 45        |
|                                                      |                          |                          |                  |    |      |         | y (Transversal) | -3.91           | -34.44          | -51.28                      |                           | 43.55           | T4       | 8.3, -2.5, 3.7  |                |
| LTE Band 17 <sup>2</sup><br>QPSK<br>AMR-WB: 6.6 kbps | 10 MHz                   | 23790<br>710 MHz         | 25               | 12 | B    | ANT2    | z (Axial)       | 3.33            | -38.75          | -51.49                      | 0.97                      | 42.08           | T4       | 6.7, -11.9, 3.7 | 46 - 48        |
|                                                      |                          |                          |                  |    |      |         | y (Transversal) | -5.32           | -48.69          | -51.28                      |                           | 43.37           | T4       | 4.7, 0, 3.7     |                |
| LTE Band 25 <sup>2</sup><br>QPSK<br>AMR-WB: 6.6 kbps | 20 MHz                   | 26365<br>1882.5 MHz      | 50               | 24 | D    | ANT4    | z (Axial)       | 4.35            | -37.92          | -51.50                      | 0.49                      | 42.27           | T4       | 7, -11, 3.7     | 49 - 51        |
|                                                      |                          |                          |                  |    |      |         | y (Transversal) | -5.84           | -47.28          | -51.26                      |                           | 41.44           | T4       | 4.8, 0.1, 3.7   |                |
| LTE Band 26<br>QPSK<br>AMR-WB 6.6 kbps               | 15 MHz                   | 26865<br>831.5 MHz       | 36               | 20 | B    | ANT2    | z (Axial)       | 1.50            | -34.13          | -51.49                      | 1.05                      | 43.44           | T4       | 5, -10.8, 3.7   | 52 - 54        |
|                                                      |                          |                          |                  |    |      |         | y (Transversal) | -3.96           | -34.48          | -51.28                      |                           | 43.53           | T4       | 8.3, -2.5, 3.7  |                |
| LTE Band 30 <sup>2</sup><br>QPSK<br>AMR-WB: 6.6 kbps | 10 MHz                   | 27710<br>2310 MHz        | 25               | 12 | D    | ANT4    | z (Axial)       | 0.78            | -43.45          | -51.49                      | 1.51                      | 44.24           | T4       | 4.5, -11.9, 3.7 | 55 - 57        |
|                                                      |                          |                          |                  |    |      |         | y (Transversal) | -4.17           | -48.79          | -51.28                      |                           | 44.61           | T4       | 8.5, -3.2, 3.7  |                |
| LTE Band 41 <sup>2</sup><br>QPSK<br>AMR-WB: 6.6 kbps | 20 MHz                   | 40620<br>2593 MHz        | 50               | 49 | B    | ANT2    | z (Axial)       | 5.53            | -35.84          | -51.50                      | 1.38                      | 41.37           | T4       | 8.2, -11.2, 3.7 | 58 - 60        |
|                                                      |                          |                          |                  |    |      |         | y (Transversal) | -5.65           | -44.83          | -51.26                      |                           | 39.17           | T4       | 4.6, -0.1, 3.7  |                |
| LTE Band 48<br>QPSK<br>AMR-WB 6.6 kbps               | 20 MHz                   | 55990<br>3625 MHz        | 50               | 49 | A    | ANT7    | z (Axial)       | 5.93            | -11.99          | -51.50                      | 1.53                      | 41.09           | T4       | 8.3, -9.6, 3.7  | 61 - 63        |
|                                                      |                          |                          |                  |    |      |         | y (Transversal) | -6.64           | -11.58          | -51.26                      |                           | 38.21           | T4       | 4.2, 0, 3.7     |                |
| LTE Band 66<br>QPSK<br>AMR-WB 6.6 kbps               | 20 MHz                   | 132322<br>1745 MHz       | 50               | 24 | D    | ANT4    | z (Axial)       | -0.24           | -28.34          | -51.49                      | 0.72                      | 44.42           | T4       | 4.6, -11.7, 3.7 | 64 - 66        |
|                                                      |                          |                          |                  |    |      |         | y (Transversal) | -4.13           | -25.18          | -51.28                      |                           | 43.75           | T4       | 8.3, -2.9, 3.7  |                |
| LTE Band 71<br>QPSK<br>AMR-WB 6.6 kbps               | 20 MHz                   | 133297<br>680.5 MHz      | 50               | 24 | B    | ANT2    | z (Axial)       | -0.03           | -33.44          | -51.49                      | 1.07                      | 43.26           | T4       | 4.6, -11.7, 3.7 | 67 - 69        |
|                                                      |                          |                          |                  |    |      |         | y (Transversal) | -3.91           | -34.26          | -51.28                      |                           | 43.69           | T4       | 8.3, -2.9, 3.7  |                |

**Note(s):**

1. The radial longitudinal (x axis) measurements are no longer required per ANSI C63.19
2. Denotes single point measurements, as per §7.4.4.2 of ANSI C63.19-2011.
3. LTE-FDD Band 26 was tested using 15 MHz BW. Final product will only support up to 10 MHz BW

**VoWi-Fi:**

| Mode:                                 | Channel and Frequency       | Bandwidth (Data Rate) | Port   | Antenna | Orientation     | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location        | Plot Page # |
|---------------------------------------|-----------------------------|-----------------------|--------|---------|-----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|-------------|
| 802.11b<br>AMR-WB 6.6 kbps            | 6 <sup>2</sup><br>2437 MHz  | CCK<br>11 Mbps        | Core 0 | ANT4    | z (Axial)       | -1.05        | -43.07       | -51.53                | 1.47                | 42.02        | T4       | 4.6, -11.9, 3.7 | 70 - 72     |
|                                       |                             |                       |        |         | y (Transversal) | -8.17        | -45.94       | -51.37                |                     | 37.77        | T4       | 4.6, 0, 3.7     |             |
| 802.11ax<br>80 MHz<br>AMR-WB 6.6 kbps | 42 <sup>2</sup><br>5210 MHz | MCS6<br>324 Mbps      | Core 0 | ANT6    | z (Axial)       | -1.54        | -42.44       | -51.53                | 1.09                | 40.90        | T4       | 4.5, -12.2, 3.7 | 73 - 75     |
|                                       |                             |                       |        |         | y (Transversal) | -7.95        | -48.58       | -51.37                |                     | 40.64        | T4       | 4.4, -0.1, 3.7  |             |
|                                       | 58<br>5290 MHz              | MCS6<br>324 Mbps      | Core 0 | ANT6    | z (Axial)       | -2.52        | -28.41       | -51.53                | 1.86                | 42.33        | T4       | 4.6, -12.1, 3.7 | 76 - 78     |
|                                       |                             |                       |        |         | y (Transversal) | -7.13        | -27.87       | -51.37                |                     | 41.44        | T4       | 8.8, -3.3, 3.7  |             |
|                                       | 106<br>5530 MHz             | MCS6<br>324 Mbps      | Core 0 | ANT6    | z (Axial)       | -2.23        | -29.03       | -51.53                | 1.53                | 43.28        | T4       | 4.6, -12.1, 3.7 | 79 - 81     |
|                                       |                             |                       |        |         | y (Transversal) | -6.91        | -26.69       | -51.37                |                     | 41.71        | T4       | 8.8, -3.8, 3.7  |             |
|                                       | 155<br>5775 MHz             | MCS6<br>324 Mbps      | Core 0 | ANT6    | z (Axial)       | -2.88        | -28.05       | -51.53                | 1.02                | 43.08        | T4       | 4.2, -12.1, 3.7 | 82 - 84     |
|                                       |                             |                       |        |         | y (Transversal) | -7.65        | -26.83       | -51.37                |                     | 40.74        | T4       | 8.8, -3.3, 3.7  |             |

**Note(s):**

1. The radial longitudinal (x axis) measurements are no longer required per ANSI C63.19
2. Denotes single point measurements, as per §7.4.4.2 of ANSI C63.19-2011.

## 10.2. OTT Application

### GSM/W-CDMA/CDMA:

| Mode:                                                      | Channel and Frequency | Bandwidth (Data Rate) | Port | Antenna | Orientation                  | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Location        | Plot Page # |
|------------------------------------------------------------|-----------------------|-----------------------|------|---------|------------------------------|--------------|--------------|-----------------------|---------------------|--------------|----------|-----------------|-------------|
| GSM850<br>EDGE/EGPRS 2 Slots<br>ACC-ELD: 28 kbps           | 128<br>824.2 MHz      | N/A                   | B    | ANT2    | z (Axial)                    | 6.25         | -13.31       | -51.54                | 0.87                | 40.20        | T4       | 8.8, -9.6, 3.7  | 1 - 3       |
|                                                            |                       |                       |      |         | y (Transversal)              | -3.36        | -11.40       | -51.30                |                     | 37.51        | T4       | 8.3, -3.8, 3.7  |             |
| GSM1900<br>EDGE/EGPRS 2 Slots<br>ACC-ELD: 28 kbps          | 512<br>1850.2 MHz     | N/A                   | D    | ANT4    | z (Axial)                    | 5.35         | -15.05       | -51.54                | 0.05                | 41.33        | T4       | 8.8, -10, 3.7   | 4 - 6       |
|                                                            |                       |                       |      |         | y (Transversal)              | -6.39        | -13.88       | -51.30                |                     | 36.27        | T4       | 4.2, -0.4, 3.7  |             |
| W-CDMA BII<br>HSPA<br>ACC-ELD: 28 kbps                     | 9400<br>1880 MHz      | N/A                   | D    | ANT4    | z (Axial)                    | 1.03         | -34.52       | -51.54                | 0.75                | 46.41        | T4       | 4.6, -12.1, 3.7 | 7 - 9       |
|                                                            |                       |                       |      |         | y (Transversal)              | -3.21        | -34.12       | -51.30                |                     | 44.70        | T4       | 8.3, -2.9, 3.7  |             |
| W-CDMA BIV<br>HSPA<br>ACC-ELD: 28 kbps                     | 1413<br>1732.6 MHz    | N/A                   | D    | ANT4    | z (Axial)                    | 0.57         | -33.92       | -51.54                | 0.69                | 46.40        | T4       | 4.2, -12.1, 3.7 | 10 - 12     |
|                                                            |                       |                       |      |         | y (Transversal)              | -3.16        | -36.43       | -51.30                |                     | 45.07        | T4       | 8.3, -2.9, 3.7  |             |
| W-CDMA BV<br>HSPA<br>ACC-ELD: 28 kbps                      | 4183<br>836.6 MHz     | N/A                   | B    | ANT2    | z (Axial)                    | 0.55         | -34.01       | -51.54                | 0.76                | 46.12        | T4       | 4.2, -12.1, 3.7 | 13 - 15     |
|                                                            |                       |                       |      |         | y (Transversal)              | -3.18        | -36.08       | -51.30                |                     | 45.09        | T4       | 8.3, -2.9, 3.7  |             |
| CDMA BC0<br>Ev-Do Rev. A<br>ACC-ELD: 28 kbps               | 384<br>836.52 MHz     | N/A                   | A    | ANT1    | z (Axial)                    | -0.19        | -34.19       | -51.49                | 0.72                | 44.93        | T4       | 4.2, -12.1, 3.7 | 16 - 18     |
|                                                            |                       |                       |      |         | y (Transversal) <sup>2</sup> | -5.76        | -49.62       | -51.27                |                     | 43.85        | T4       | 8.5, -3.3, 4.4  |             |
| CDMA BC1 <sup>2</sup><br>Ev-Do Rev. A<br>ACC-ELD: 28 kbps  | 600<br>1880.00 MHz    | N/A                   | A    | ANT1    | z (Axial)                    | 1.88         | -39.30       | -51.49                | 0.75                | 41.18        | T4       | 4.5, -10.5, 3.7 | 19 - 21     |
|                                                            |                       |                       |      |         | y (Transversal)              | -4.46        | -49.14       | -51.27                |                     | 44.68        | T4       | 8.5, -3.2, 3.7  |             |
| CDMA BC10 <sup>2</sup><br>Ev-Do Rev. A<br>ACC-ELD: 28 kbps | 560<br>820.00 MHz     | N/A                   | A    | ANT1    | z (Axial)                    | 1.77         | -43.94       | -51.49                | 0.69                | 45.71        | T4       | 4.5, -10.5, 3.7 | 22 - 24     |
|                                                            |                       |                       |      |         | y (Transversal)              | -4.49        | -49.30       | -51.27                |                     | 44.81        | T4       | 8.5, -3.2, 3.7  |             |

**LTE:**

| Mode:                                    | Bandwidth<br>(Data Rate) | Channel and<br>Frequency | RB<br>Allocation |    | Port | Antenna | Orientation     | ABM1<br>dB(A/m) | ABM2<br>dB(A/m) | Ambient<br>Noise<br>dB(A/m) | Freq.<br>Response<br>(dB) | ABM SNR<br>(dB) | T-Rating | Location        | Plot<br>Page # |
|------------------------------------------|--------------------------|--------------------------|------------------|----|------|---------|-----------------|-----------------|-----------------|-----------------------------|---------------------------|-----------------|----------|-----------------|----------------|
| LTE Band 2<br>16QAM<br>ACC-ELD: 28 kbps  | 15 MHz                   | 18900<br>1880 MHz        | 1                | 37 | C    | ANT3    | z (Axial)       | 1.61            | -23.22          | -51.50                      | 0.63                      | 43.98           | T4       | 4.6, -12.1, 3.7 | 25 - 27        |
|                                          |                          |                          |                  |    |      |         | y (Transversal) | -2.92           | -22.26          | -51.29                      |                           | 42.22           | T4       | 8.3, -2.9, 3.7  |                |
| LTE Band 4<br>16QAM<br>ACC-ELD: 28 kbps  | 15 MHz                   | 20175<br>1732.5 MHz      | 1                | 37 | C    | ANT3    | z (Axial)       | 2.51            | -22.26          | -51.50                      | 0.49                      | 43.25           | T4       | 5, -11.7, 3.7   | 28 - 30        |
|                                          |                          |                          |                  |    |      |         | y (Transversal) | -2.94           | -21.65          | -51.29                      |                           | 41.33           | T4       | 8.3, -2.9, 3.7  |                |
| LTE Band 5<br>16QAM<br>ACC-ELD: 28 kbps  | 5 MHz                    | 20525<br>836.5 MHz       | 1                | 12 | A    | ANT1    | z (Axial)       | 0.51            | -33.70          | -51.52                      | 0.74                      | 44.77           | T4       | 4.2, -12.5, 3.7 | 31 - 33        |
|                                          |                          |                          |                  |    |      |         | y (Transversal) | -3.15           | -35.26          | -51.33                      |                           | 45.02           | T4       | 8.3, -3.3, 3.7  |                |
| LTE Band 7<br>16QAM<br>ACC-ELD: 28 kbps  | 15 MHz                   | 21100<br>2535 MHz        | 1                | 37 | C    | ANT3    | z (Axial)       | 1.53            | -33.88          | -51.52                      | 0.68                      | 44.14           | T4       | 4.6, -11.7, 3.7 | 34 - 36        |
|                                          |                          |                          |                  |    |      |         | y (Transversal) | -3.32           | -34.53          | -51.33                      |                           | 44.06           | T4       | 8.3, -2.9, 3.7  |                |
| LTE Band 12<br>16QAM<br>ACC-ELD: 28 kbps | 5 MHz                    | 23095<br>707.5 MHz       | 1                | 12 | A    | ANT1    | z (Axial)       | 0.85            | -33.67          | -51.52                      | 0.64                      | 44.83           | T4       | 4.2, -12.1, 3.7 | 37 - 39        |
|                                          |                          |                          |                  |    |      |         | y (Transversal) | -3.12           | -35.75          | -51.33                      |                           | 44.79           | T4       | 8.3, -2.9, 3.7  |                |
| LTE Band 13<br>16QAM<br>ACC-ELD: 28 kbps | 5 MHz                    | 23230<br>782 MHz         | 1                | 12 | A    | ANT1    | z (Axial)       | 0.85            | -33.87          | -51.52                      | 0.83                      | 45.00           | T4       | 4.2, -12.1, 3.7 | 40 - 42        |
|                                          |                          |                          |                  |    |      |         | y (Transversal) | -3.32           | -35.41          | -51.33                      |                           | 44.94           | T4       | 8.3, -3.3, 3.7  |                |
| LTE Band 14<br>16QAM<br>ACC-ELD: 28 kbps | 5 MHz                    | 23330<br>793 MHz         | 1                | 12 | A    | ANT1    | z (Axial)       | 0.69            | -33.64          | -51.52                      | 0.57                      | 44.88           | T4       | 4.2, -12.5, 3.7 | 43 - 45        |
|                                          |                          |                          |                  |    |      |         | y (Transversal) | -3.37           | -35.42          | -51.33                      |                           | 44.54           | T4       | 8.3, -3.3, 3.7  |                |
| LTE Band 17<br>16QAM<br>ACC-ELD: 28 kbps | 5 MHz                    | 23790<br>710 MHz         | 1                | 12 | A    | ANT1    | z (Axial)       | 0.81            | -33.53          | -51.52                      | 0.77                      | 45.02           | T4       | 4.2, -12.1, 3.7 | 46 - 48        |
|                                          |                          |                          |                  |    |      |         | y (Transversal) | -3.26           | -35.52          | -51.33                      |                           | 44.63           | T4       | 8.3, -3.3, 3.7  |                |
| LTE Band 25<br>16QAM<br>ACC-ELD: 28 kbps | 15 MHz                   | 26365<br>1882.5 MHz      | 1                | 37 | C    | ANT3    | z (Axial)       | 2.49            | -23.00          | -51.50                      | 0.79                      | 44.14           | T4       | 5, -11.7, 3.7   | 49 - 51        |
|                                          |                          |                          |                  |    |      |         | y (Transversal) | -2.92           | -22.59          | -51.29                      |                           | 42.16           | T4       | 8.3, -2.9, 3.7  |                |
| LTE Band 26<br>16QAM<br>ACC-ELD: 28 kbps | 10 MHz                   | 26865<br>831.5 MHz       | 1                | 25 | A    | ANT1    | z (Axial)       | 0.48            | -33.74          | -51.52                      | 0.60                      | 45.63           | T4       | 4.2, -12.5, 3.7 | 52 - 54        |
|                                          |                          |                          |                  |    |      |         | y (Transversal) | -3.47           | -26.53          | -51.33                      |                           | 44.35           | T4       | 8.8, -3.3, 3.7  |                |
| LTE Band 30<br>16QAM<br>ACC-ELD: 28 kbps | 5 MHz                    | 27710<br>2310 MHz        | 1                | 12 | C    | ANT3    | z (Axial)       | 2.15            | -21.51          | -51.52                      | 0.85                      | 42.41           | T4       | 5, -11.3, 3.7   | 55 - 57        |
|                                          |                          |                          |                  |    |      |         | y (Transversal) | -5.02           | -21.62          | -51.33                      |                           | 41.80           | T4       | 4.6, 0, 3.7     |                |
| LTE Band 41<br>QPSK<br>ACC-ELD: 28 kbps  | 20 MHz                   | 40620<br>2593 MHz        | 1                | 0  | A    | ANT1    | z (Axial)       | 4.97            | -33.71          | -51.57                      | 0.76                      | 41.90           | T4       | 7.5, -9.6, 3.7  | 58 - 60        |
|                                          |                          |                          |                  |    |      |         | y (Transversal) | -3.81           | -19.19          | -51.35                      |                           | 41.55           | T4       | 7.9, -3.8, 3.7  |                |
| LTE Band 48<br>QPSK<br>ACC-ELD: 28 kbps  | 20 MHz                   | 55990<br>3625 MHz        | 1                | 0  | B    | ANT4    | z (Axial)       | 3.73            | -28.60          | -51.50                      | 0.63                      | 40.35           | T4       | 5.4, -10.4, 3.7 | 61 - 63        |
|                                          |                          |                          |                  |    |      |         | y (Transversal) | -3.69           | -29.54          | -51.29                      |                           | 35.66           | T4       | 6.7, 0.4, 3.7   |                |
| LTE Band 66<br>16QAM<br>ACC-ELD: 28 kbps | 15 MHz                   | 132322<br>1745 MHz       | 1                | 37 | C    | ANT3    | z (Axial)       | 1.37            | -33.38          | -51.52                      | 0.72                      | 44.43           | T4       | 4.6, -12.1, 3.7 | 64 - 66        |
|                                          |                          |                          |                  |    |      |         | y (Transversal) | -3.33           | -35.00          | -51.33                      |                           | 44.62           | T4       | 8.3, -3.3, 3.7  |                |
| LTE Band 71<br>16QAM<br>ACC-ELD: 28 kbps | 15 MHz                   | 133297<br>680.5 MHz      | 1                | 37 | A    | ANT1    | z (Axial)       | 0.80            | -33.61          | -51.52                      | 0.67                      | 45.45           | T4       | 4.2, -12.1, 3.7 | 67 - 69        |
|                                          |                          |                          |                  |    |      |         | y (Transversal) | -3.36           | -35.53          | -51.33                      |                           | 44.88           | T4       | 8.3, -3.3, 3.7  |                |

**Note(s):**

- The radial longitudinal (x axis) measurements are no longer required per ANSI C63.19
- Denotes single point measurements, as per §7.4.4.2 of ANSI C63.19-2011.

**Wi-Fi:**

| Mode:                       | Channel and<br>Frequency    | Data Rate       | Port   | Antenna | Orientation     | ABM1<br>dB(A/m) | ABM2<br>dB(A/m) | Ambient<br>Noise<br>dB(A/m) | Freq.<br>Response<br>(dB) | ABM SNR<br>(dB) | T-Rating | Location        | Plot<br>Page # |
|-----------------------------|-----------------------------|-----------------|--------|---------|-----------------|-----------------|-----------------|-----------------------------|---------------------------|-----------------|----------|-----------------|----------------|
| 802.11b<br>ACC-ELD: 32 kbps | 6<br>2437 MHz               | DSSS<br>1 Mbps  | Core 0 | ANT4    | z (Axial)       | 1.17            | -15.72          | -51.52                      | 0.73                      | 44.18           | T4       | 4.6, -11.7, 3.7 | 70 - 72        |
|                             |                             |                 |        |         | y (Transversal) | -5.36           | -25.23          | -51.33                      |                           | 40.90           | T4       | 3.8, 0.4, 3.7   |                |
| 802.11a<br>ACC-ELD: 32 kbps | 36 <sup>2</sup><br>5180 MHz | QPSK<br>18 Mbps | Core 0 | ANT6    | z (Axial)       | 2.41            | -42.31          | -51.52                      | 0.82                      | 44.72           | T4       | 4.5, -11.9, 3.7 | 73 - 75        |
|                             |                             |                 |        |         | y (Transversal) | -5.27           | -48.91          | -51.33                      |                           | 43.64           | T4       | 3.7, 0.1, 3.7   |                |
|                             | 52<br>5260 MHz              | QPSK<br>18 Mbps | Core 0 | ANT6    | z (Axial)       | 0.61            | -32.83          | -51.54                      | 0.84                      | 46.64           | T4       | 4.2, -12.1, 3.7 | 76 - 78        |
|                             |                             |                 |        |         | y (Transversal) | -2.86           | -32.45          | -51.31                      |                           | 45.98           | T4       | 8.3, -3.3, 3.7  |                |
|                             | 100<br>5500 MHz             | QPSK<br>18 Mbps | Core 0 | ANT6    | z (Axial)       | 1.31            | -33.01          | -51.54                      | 0.60                      | 46.37           | T4       | 4.6, -12.1, 3.7 | 79 - 81        |
|                             |                             |                 |        |         | y (Transversal) | -2.92           | -33.19          | -51.31                      |                           | 45.79           | T4       | 8.3, -3.3, 3.7  |                |
|                             | 149<br>5745 MHz             | QPSK<br>18 Mbps | Core 0 | ANT6    | z (Axial)       | 0.66            | -32.43          | -51.54                      | 0.67                      | 46.11           | T4       | 4.2, -12.1, 3.7 | 82 - 84        |
|                             |                             |                 |        |         | y (Transversal) | -3.03           | -17.68          | -51.31                      |                           | 46.27           | T4       | 7.9, -3.3, 3.7  |                |

**Note(s):**

- The radial longitudinal (x axis) measurements are no longer required per ANSI C63.19
- Denotes single point measurements, as per §7.4.4.2 of ANSI C63.19-2011.

**5G NR:**

The testing, herein, was performed following the procedure listed in *KDB 285076 D03 HAC FAQ v01r02*, A9, where: [When] 5G Sub 6 OTT call uses the same protocol, codec, and reference level as OTT LTE (i.e. -20 dBm0).

To determine which LTE-FDD and LTE-TDD band will be tested, all supported LTE bands were tested for OTT and the worst performing FDD and TDD band was selected for 5G NR. To determine the 5G NR SNR rating, the following was performed:

1. Determine the ABM1 for the worst-case OTT LTE band, labeled  $ABM1_{LTE}$ .
2. Measure the ABM2 for the equivalent 5G Sub 6 band, labeled  $ABM2_{S65G}$ .
3. Calculate the SNR for 5G Sub 6:  $(ABM1_{LTE}/ABM2_{S65G}) - 3dB$

An initial EN-DC connection is needed for the module to transmit, then modified for a completely Stand-Alone transmission scenario. The mode(s) listed below show EN-DC combinations; however, power was dropped to 0% transmission power for LTE OTT, establishing a 100% Stand-Alone 5G Sub 6 transmission.

All data recorded within this test report for 5G NR was done with a simulated connection, i.e., a forced transmission using the manufacture's test tool. The signal was taken from the worst performing LTE-FDD and LTE-TDD OTT bands, the noise was measured with a simulated Stand-Alone 5G connection (due to equipment limitations), and the 5G Sub 6 OTT SNR was calculated using those two instances. If the calculated 5G Sub 6 OTT SNR is greater than, or within 3 dB, of LTE OTT SNR, no further testing is deemed necessary; when 5G Sub 6 OTT is 6 dB below LTE OTT, further testing will be performed. Testing for Stand-Alone n77 and n78 will only be performed when OTT LTE-TDD Band 48 is determined to be the worst-case for OTT, as there are no equivalent LTE bands for n77 and n78.

| Mode:                                                    | Bandwidth<br>(Data Rate) | Channel and<br>Frequency | RB<br>Allocation |    | S65G<br>SCS<br>(kHz) | S65G<br>Bandwidth | S65G<br>Channel and<br>Frequency | S65G<br>PRB<br>Allocation |    | Port | Antenna | Orientation     | ABM1 <sub>LTE</sub><br>dB(A/m) | ABM2 <sub>LTE</sub><br>dB(A/m) | ABM2 <sub>S65G</sub><br>dB(A/m) | Ambient<br>Noise <sub>LTE</sub><br>dB(A/m) | Ambient<br>Noise <sub>S65G</sub><br>dB(A/m) | Freq.<br>Response<br>(dB) | LTE             |          |                 | S65G            |          |                 |
|----------------------------------------------------------|--------------------------|--------------------------|------------------|----|----------------------|-------------------|----------------------------------|---------------------------|----|------|---------|-----------------|--------------------------------|--------------------------------|---------------------------------|--------------------------------------------|---------------------------------------------|---------------------------|-----------------|----------|-----------------|-----------------|----------|-----------------|
|                                                          |                          |                          |                  |    |                      |                   |                                  |                           |    |      |         |                 |                                |                                |                                 |                                            |                                             |                           | ABM SNR<br>(dB) | T-Rating | Location        | ABM SNR<br>(dB) | T-Rating | Location        |
| LTE Band 5 Anchor<br>5G n25<br>16QAM<br>ACC-ELD: 28 kbps | 15 MHz                   | 26365<br>1882.5 MHz      | 1                | 37 | 15                   | 15 MHz            | 376500<br>1882.5 MHz             | 1                         | 37 | C    | ANT3    | z (Axial)       | 2.49                           | -41.65                         | -47.01                          | -51.50                                     | -51.48                                      | 0.79                      | 44.14           | T4       | 5, -11.7, 3.7   | 46.50           | T4       | 5, -11.7, 3.7   |
|                                                          |                          |                          |                  |    |                      |                   |                                  |                           |    |      |         | y (Transversal) | -2.92                          | -45.08                         | -50.28                          | -51.29                                     | -51.29                                      |                           | 42.16           | T4       | 8.3, -2.9, 3.7  | 44.36           | T4       | 8.3, -2.9, 3.7  |
| LTE Band 48 (Ref.)<br>5G n77<br>QPSK<br>ACC-ELD: 28 kbps | 20 MHz                   | 55990<br>3625 MHz        | 1                | 0  | 30                   | 100 MHz           | 650000<br>3750 MHz               | 1                         | 0  | B    | ANT4    | z (Axial)       | 3.73                           | -36.62                         | -47.45                          | -51.50                                     | -51.48                                      | 0.63                      | 40.35           | T4       | 5.4, -10.4, 3.7 | 48.18           | T4       | 5.4, -10.4, 3.7 |
|                                                          |                          |                          |                  |    |                      |                   |                                  |                           |    |      |         | y (Transversal) | -3.69                          | -39.35                         | -50.72                          | -51.29                                     | -51.29                                      |                           | 35.66           | T4       | 6.7, 0.4, 3.7   | 44.03           | T4       | 6.7, 0.4, 3.7   |

### 10.3. Worst Case T-Coil Test Plot

Test Laboratory: UL Verification Services Inc. SAR Lab 7

Date/Time: 7/16/2020 5:11:19 PM

#### LTE Band 48

Communication System: UID 0, 1@LTE (TDD) (0); Frequency: 3625 MHz; Duty Cycle: 1:1.59956

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3083; ; Calibrated: 1/20/2020
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1357; Calibrated: 2/20/2020
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

#### T-Coil scan (scan for ANSI C63.19 2011 compliance)/LTE Band 48\_QPSK\_RB 1/0\_20 MHz\_Ch 55990\_Port B\_ANT4/y (transversal) 4.2mm 50 x 50/ABM Interpolated

SNR(x,y,z) (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 37.24

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

#### Cursor:

ABM1/ABM2 = 35.66 dB


ABM1 comp = -3.69 dBA/m

BWC Factor = 0.16 dB

Location: 6.7, 0.4, 3.7 mm

ABM2 = -29.54 dBA/m

Location: 25, -16.7, 3.7 mm

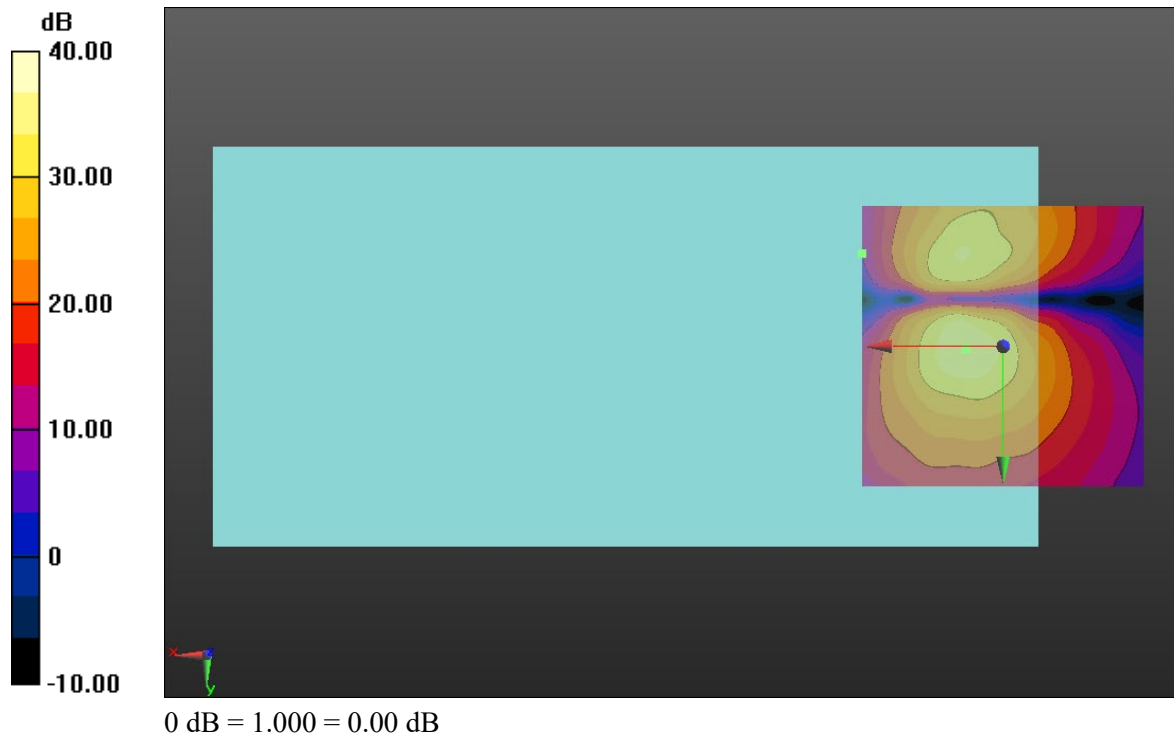

## **Appendix**

**Refer to separated files for the following appendixes**

**Appendix A: T-Coil Setup Photo**

**Appendix B: T-Coil Test Plots (CMRS)**

**Appendix C: T-Coil Test Plots (OTT)**

**Appendix D: T-Coil Probe Certificates**

**Appendix E: Adjusted Gain Procedure**

**END OF REPORT**