



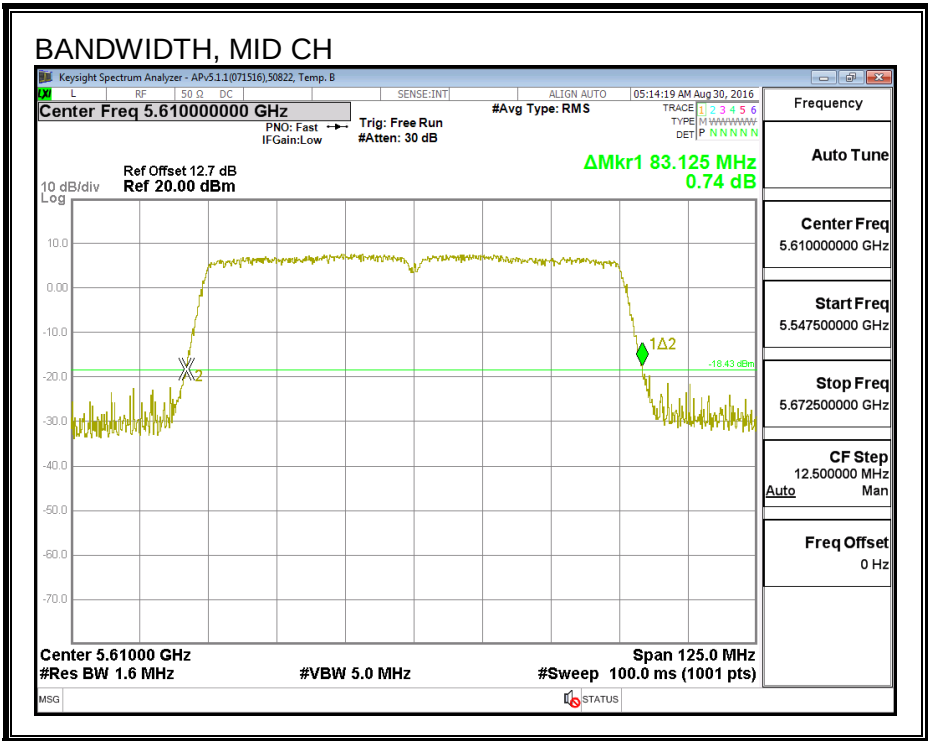
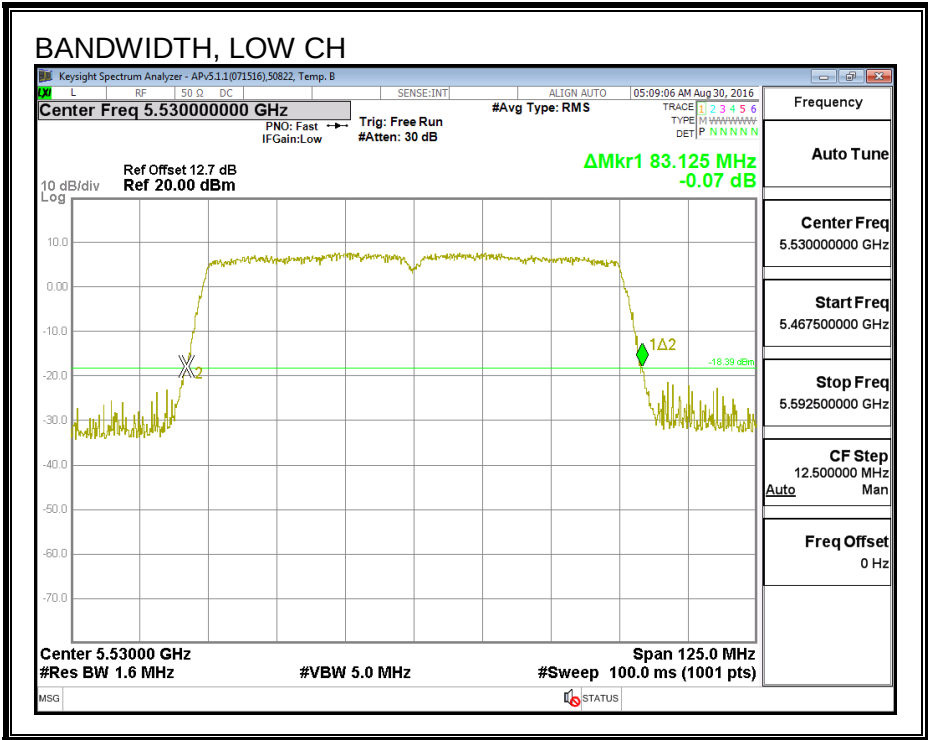


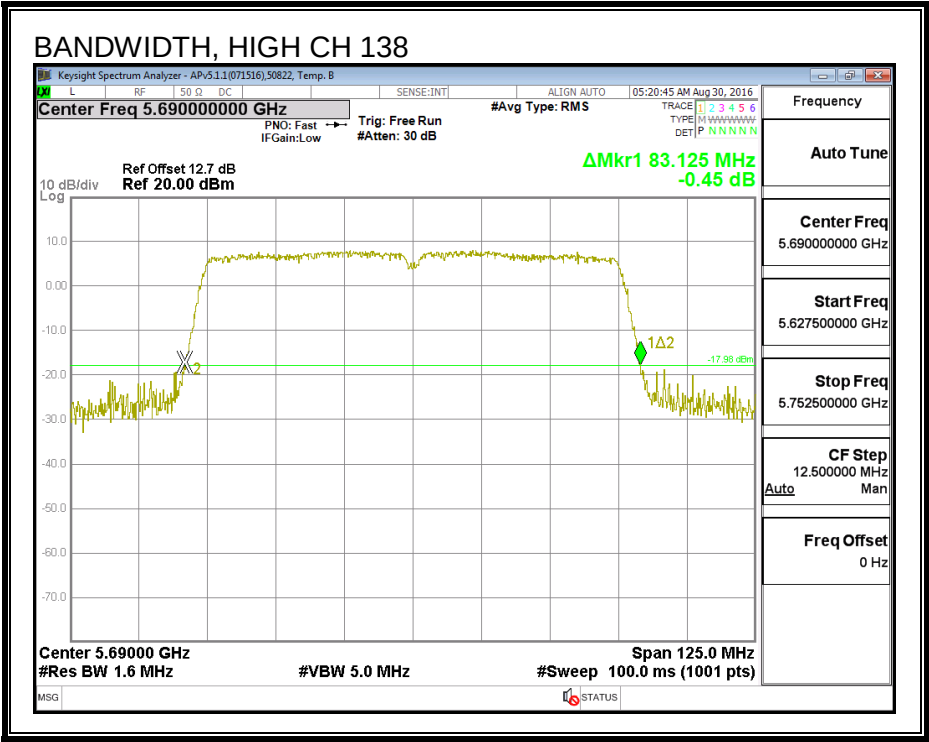


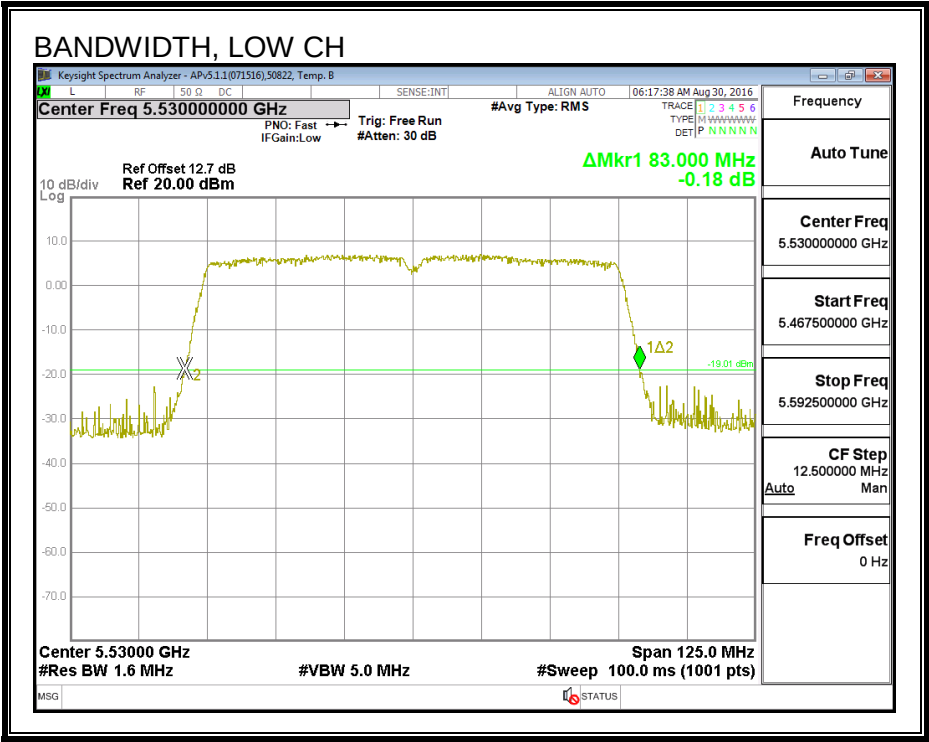



26 dB BANDWIDTH, CHAIN 1

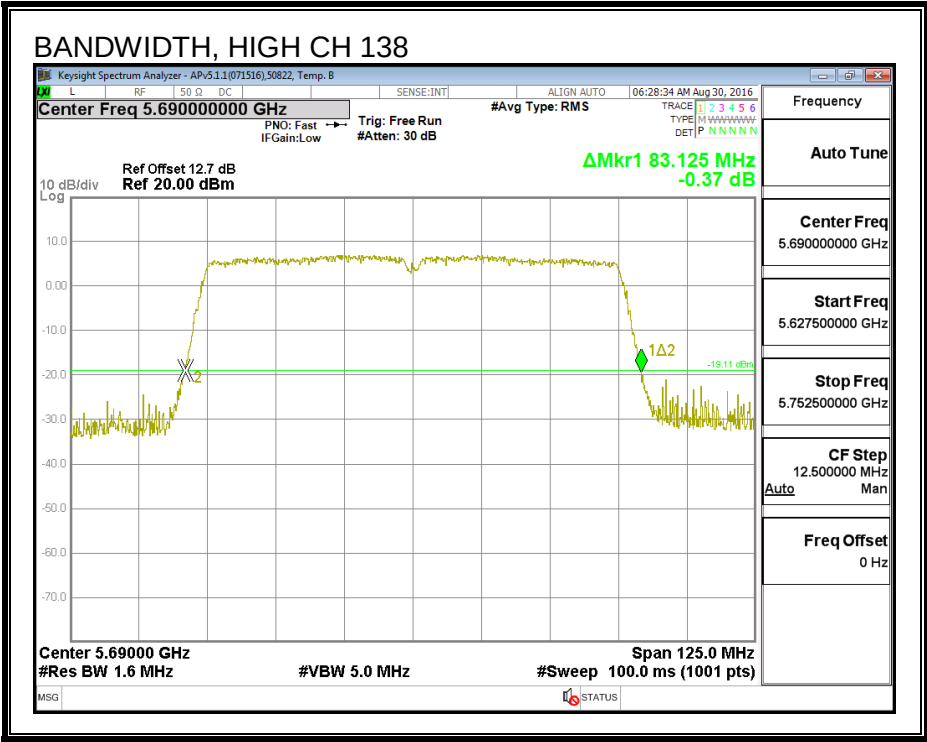

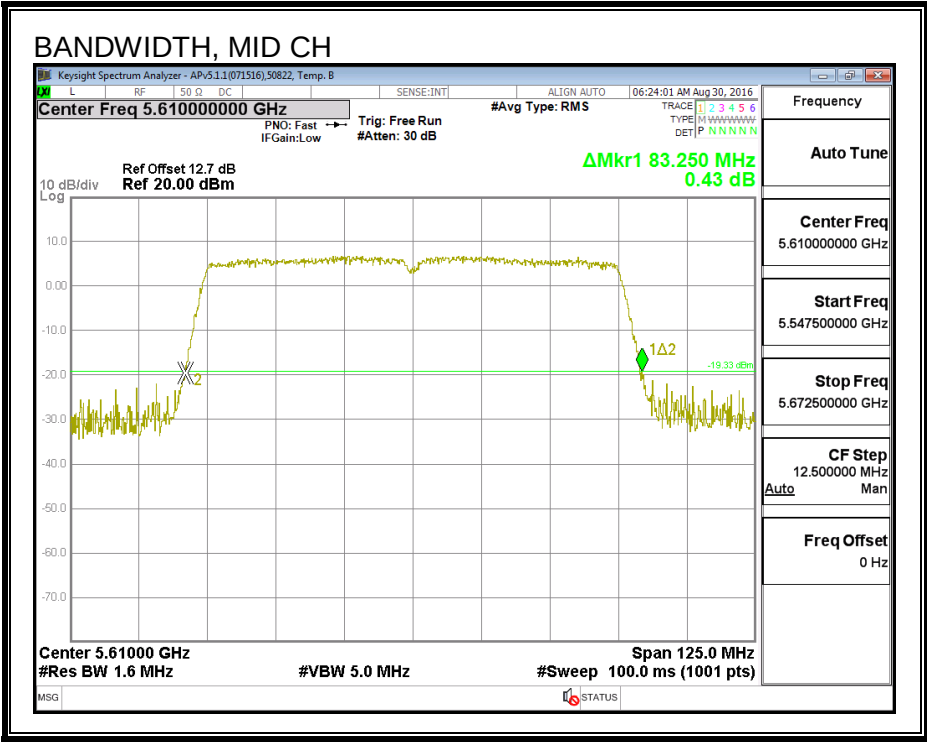

26 dB BANDWIDTH, CHAIN 2

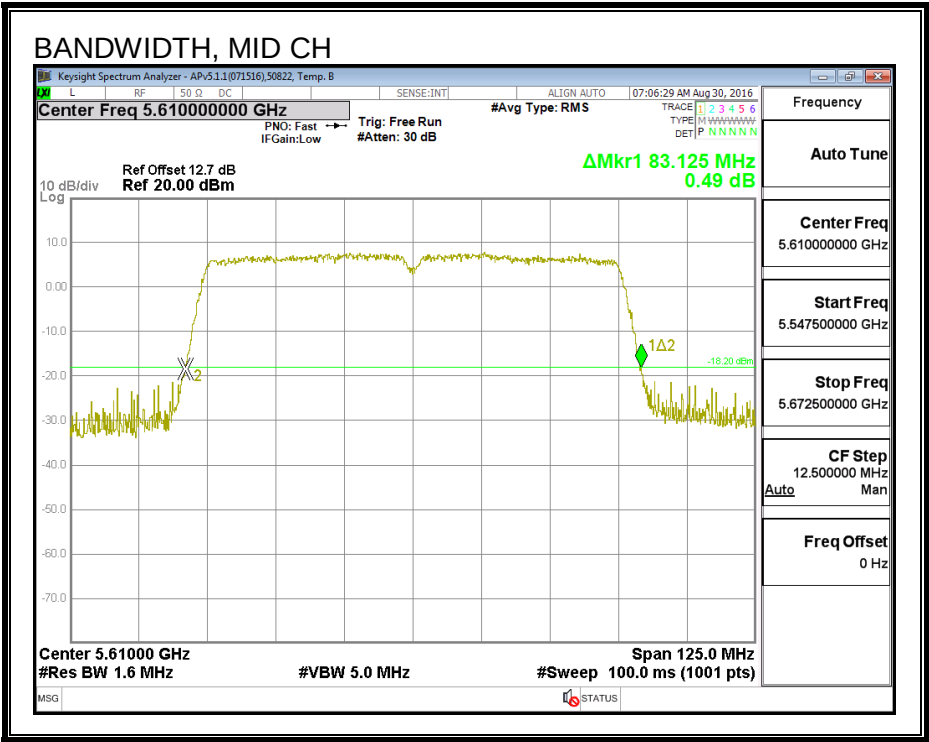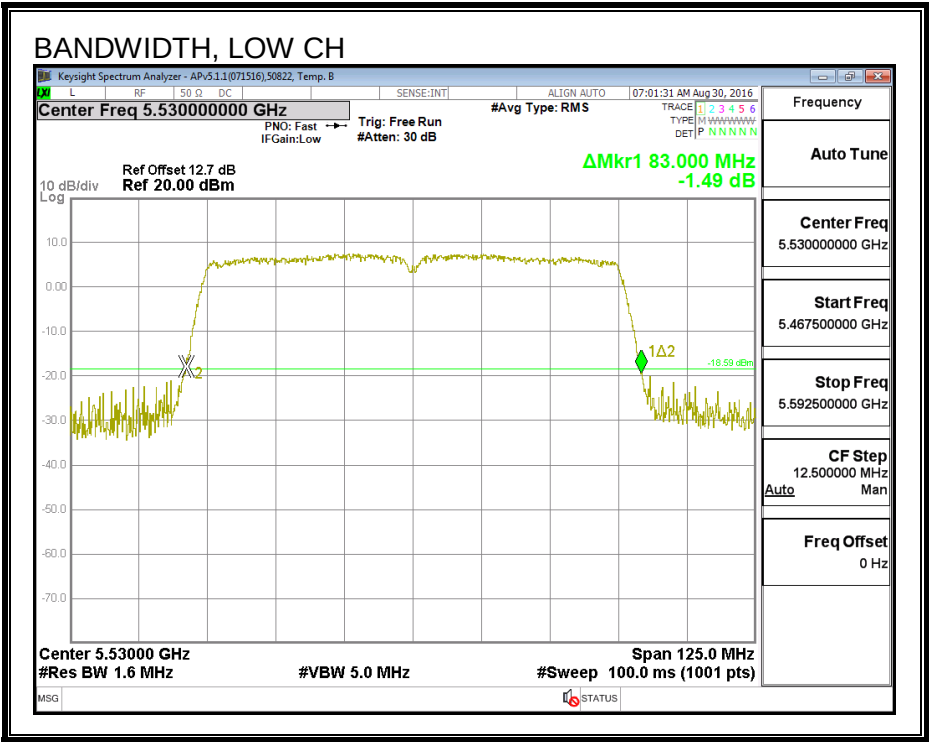

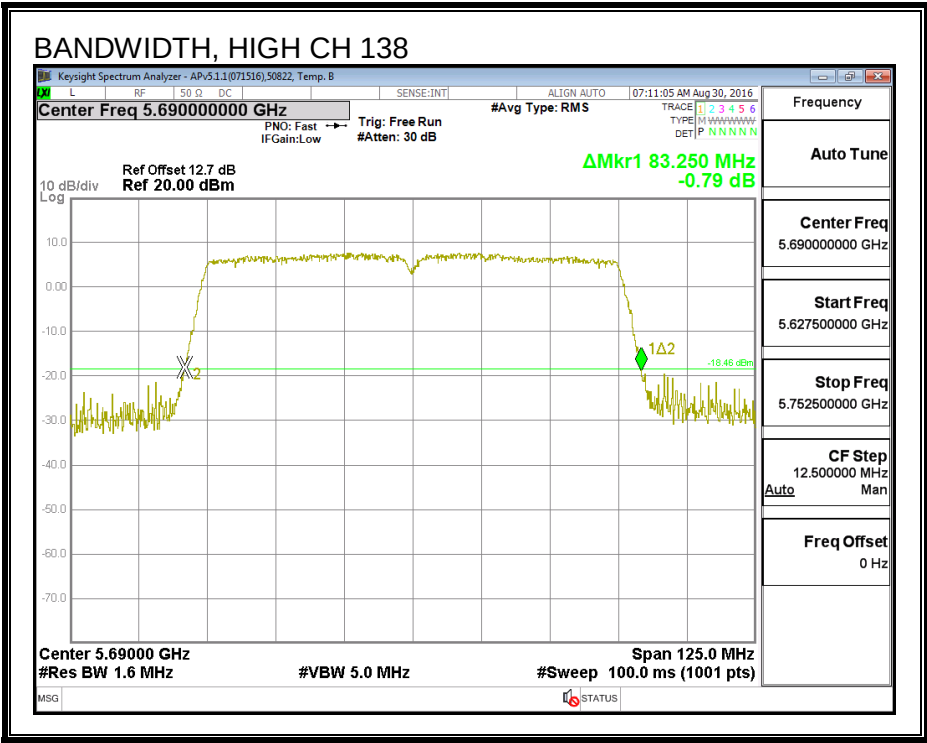

8.103.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
Low	5530	75.798	75.858	76.103
Mid	5610	76.099	76.048	76.147
High	5690	76.089	75.982	75.674



99% BANDWIDTH, CHAIN 0

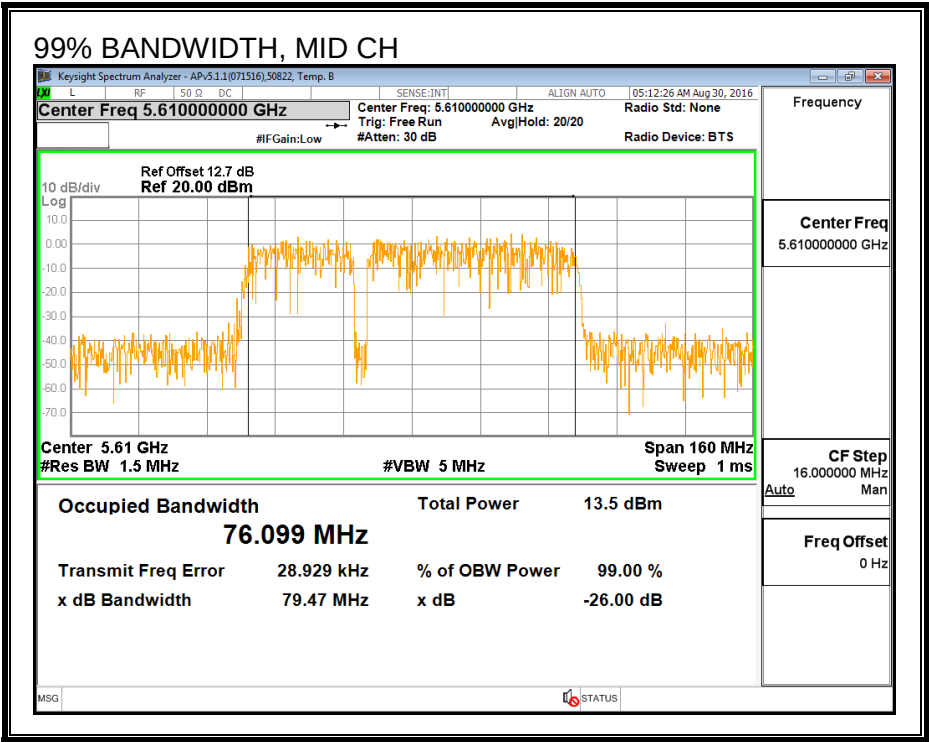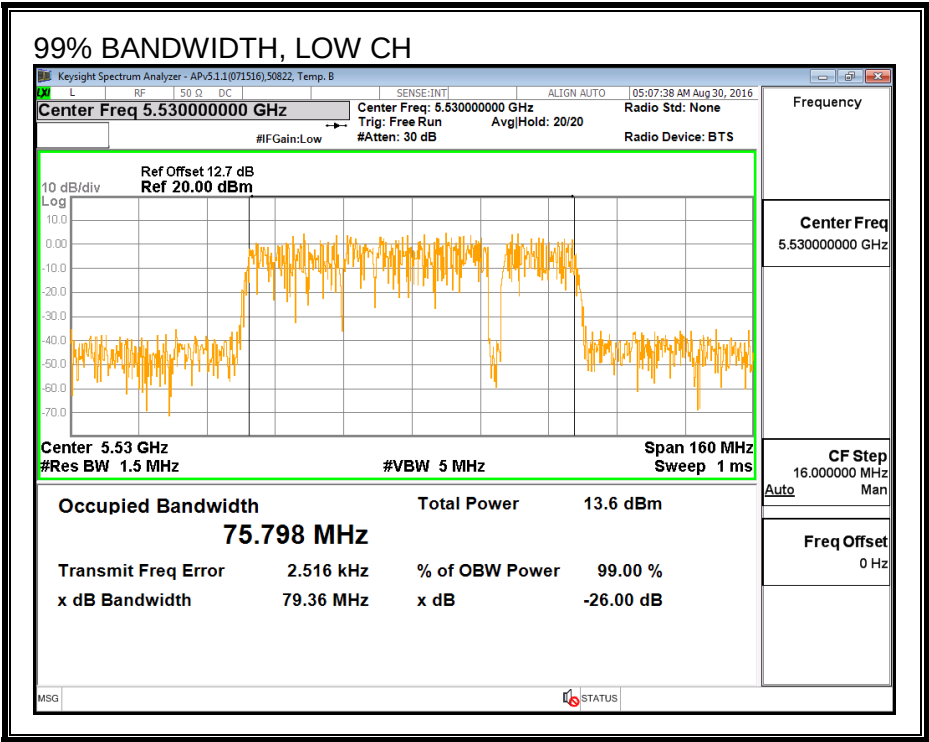


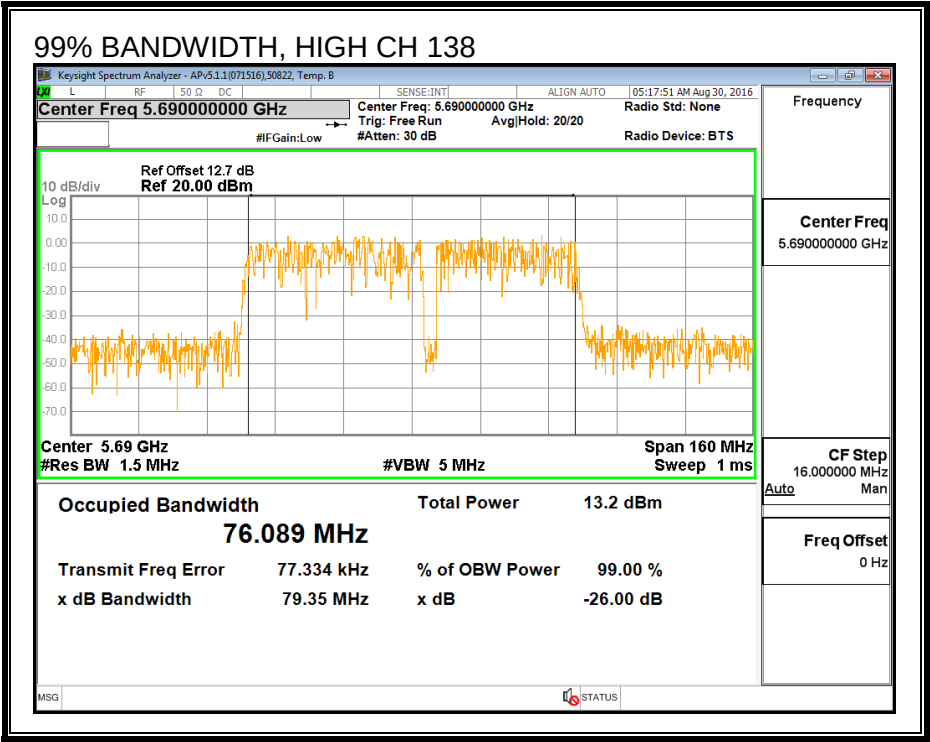



99% BANDWIDTH, CHAIN 1

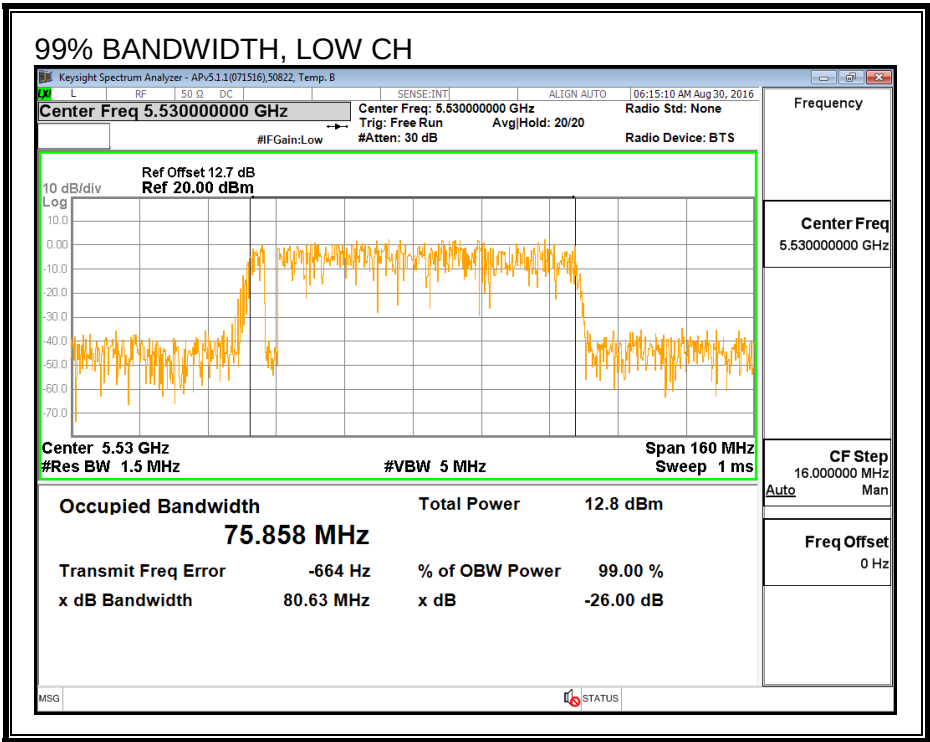

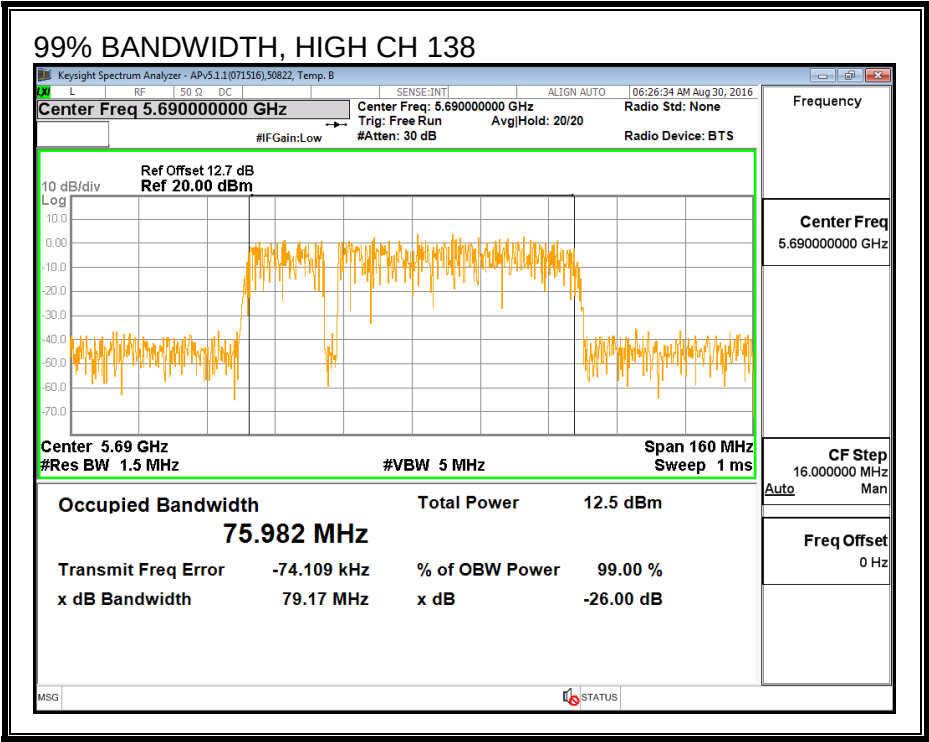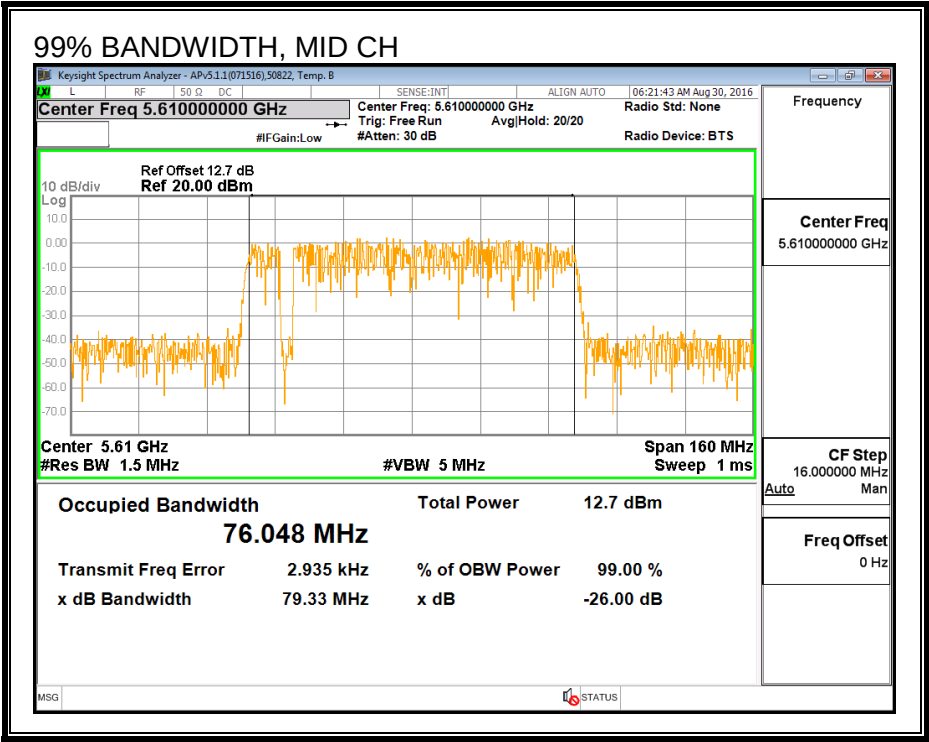

99% BANDWIDTH, CHAIN 2

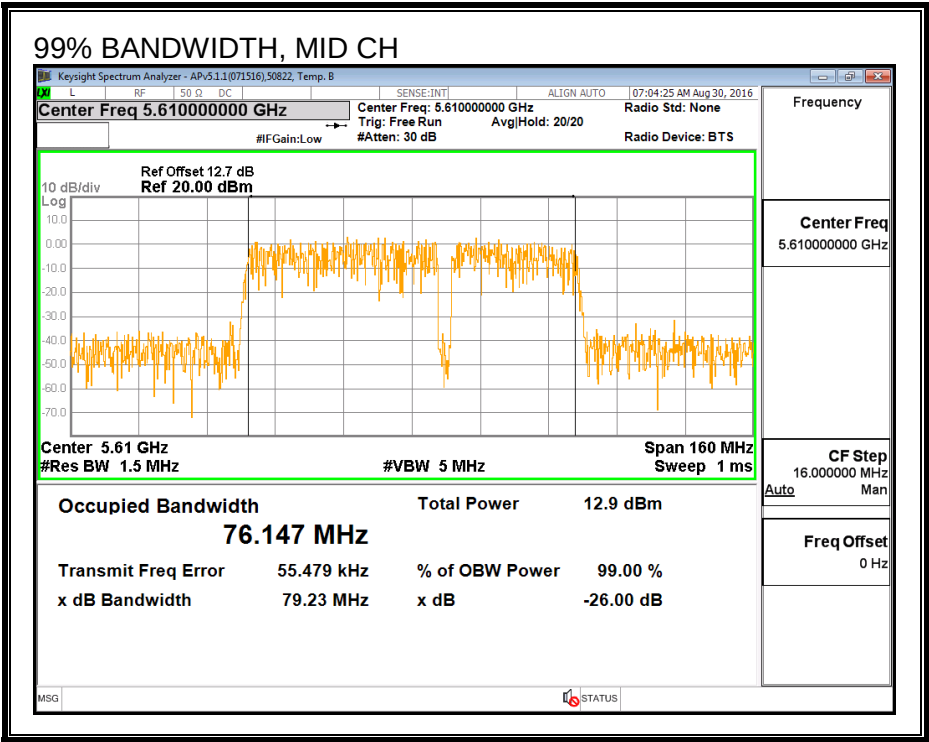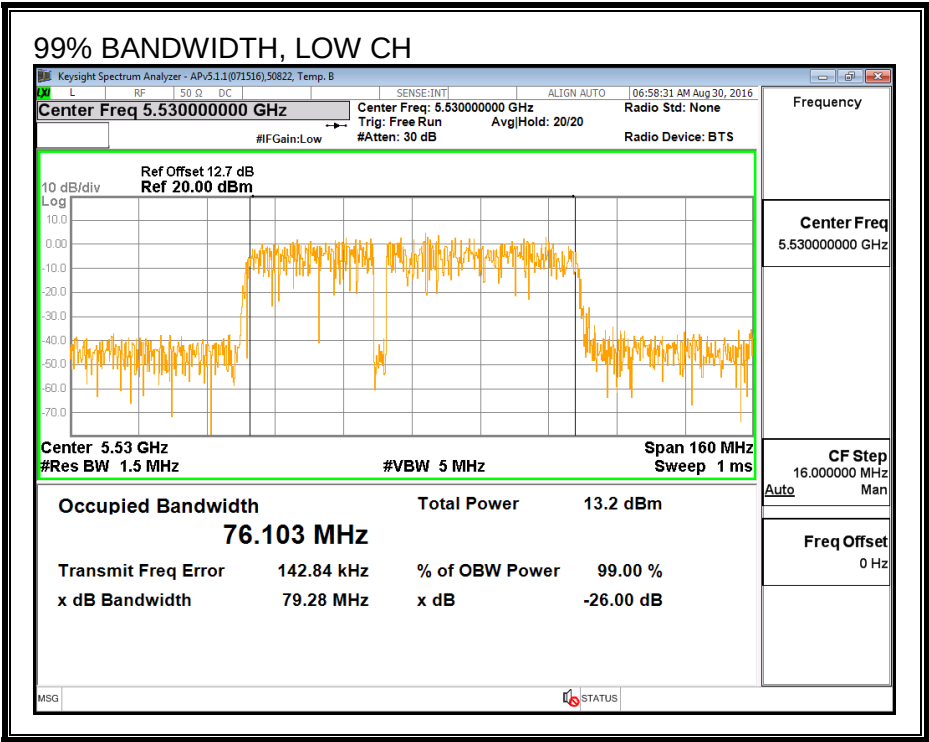

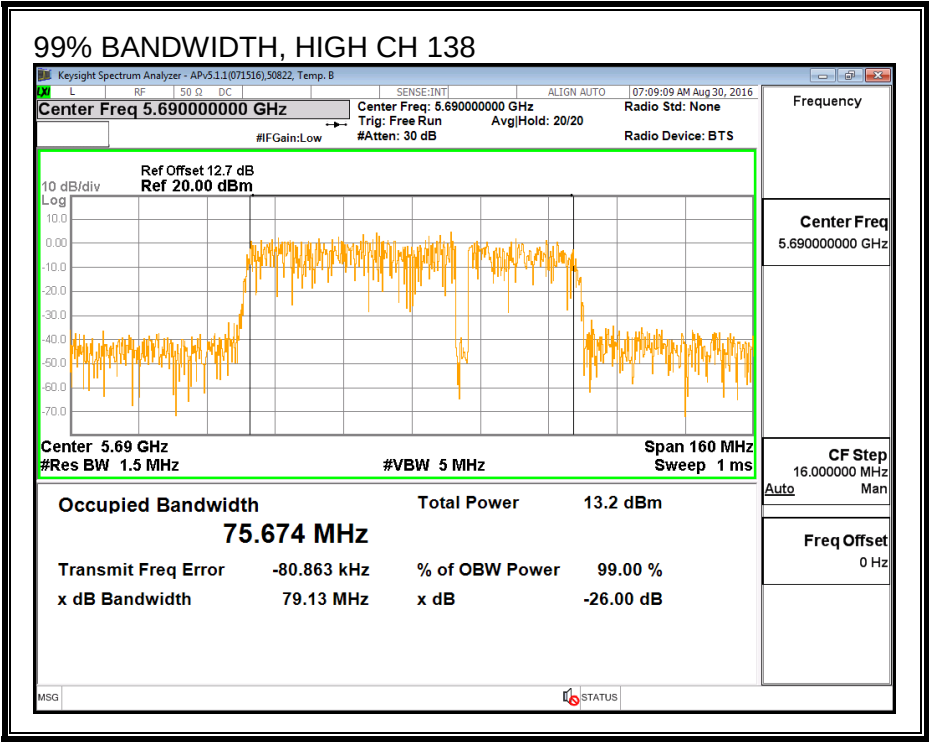

8.103.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
Low	5530	8.89	8.86	8.91	13.66
Mid	5610	12.24	12.21	12.18	16.98
High	5690	12.21	11.98	12.25	16.92

8.103.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 (6.2.3) (1)

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Straddle channel power is measured using PXA spectrum analyzer, duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
4.90	7.40	5.20	5.98

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
4.90	7.40	5.20	10.68

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5530	83.00	75.798	5.98	10.68	24.00	6.32
High	5610	83.13	76.048	5.98	10.68	24.00	6.32

Duty Cycle CF (dB)	0.18	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	8.89	8.86	8.91	13.66	24.00	-10.34
High	5610	12.24	12.21	12.18	16.98	24.00	-7.02



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5530	-8.11	-8.17	-8.28	-3.24	6.32	-9.56
High	5610	-5.12	-5.09	-5.18	-0.18	6.32	-6.50



PSD, CHAIN 0

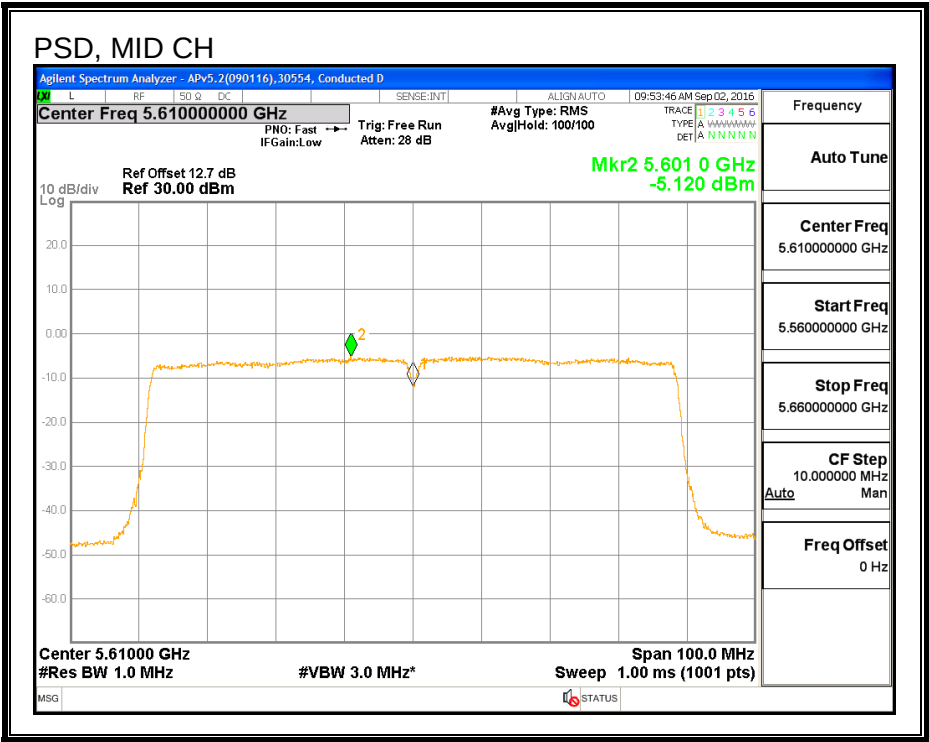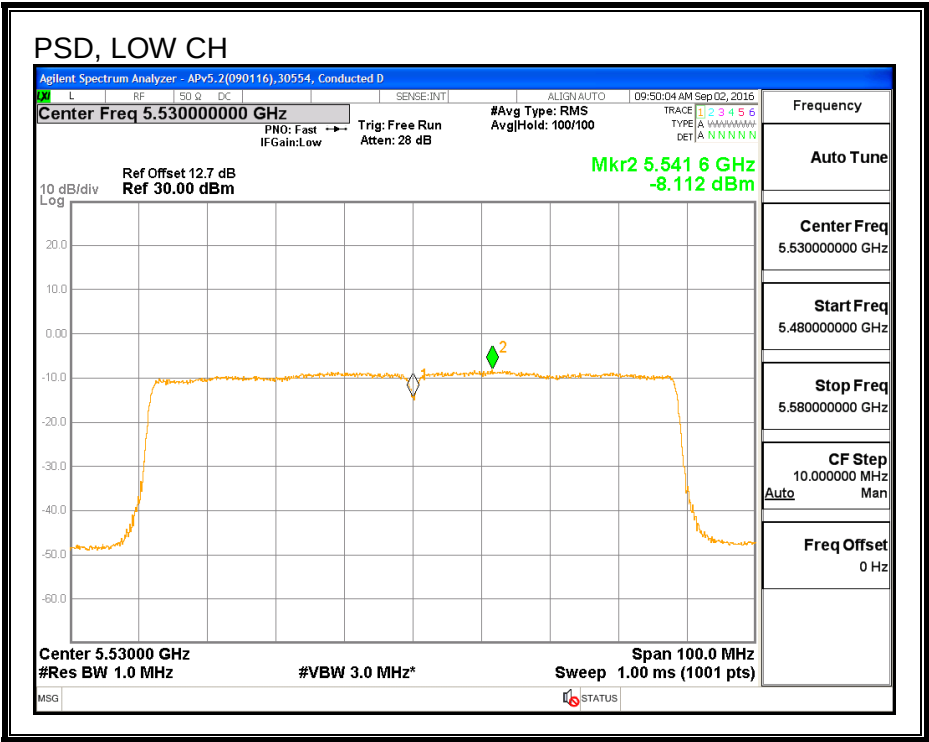

PSD, CHAIN 1

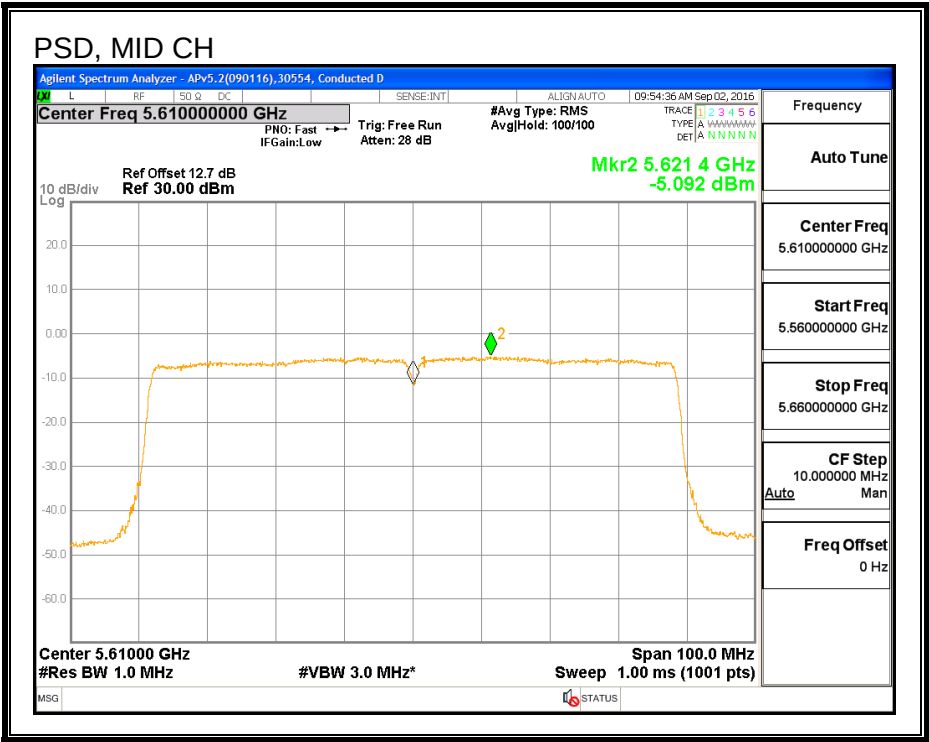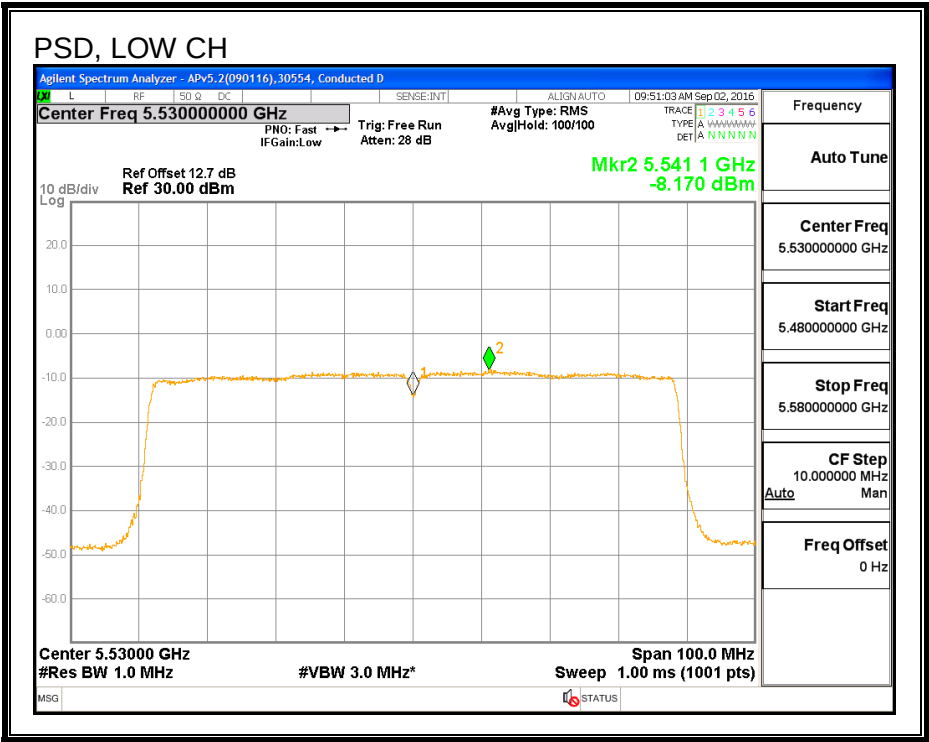

PSD, CHAIN 2

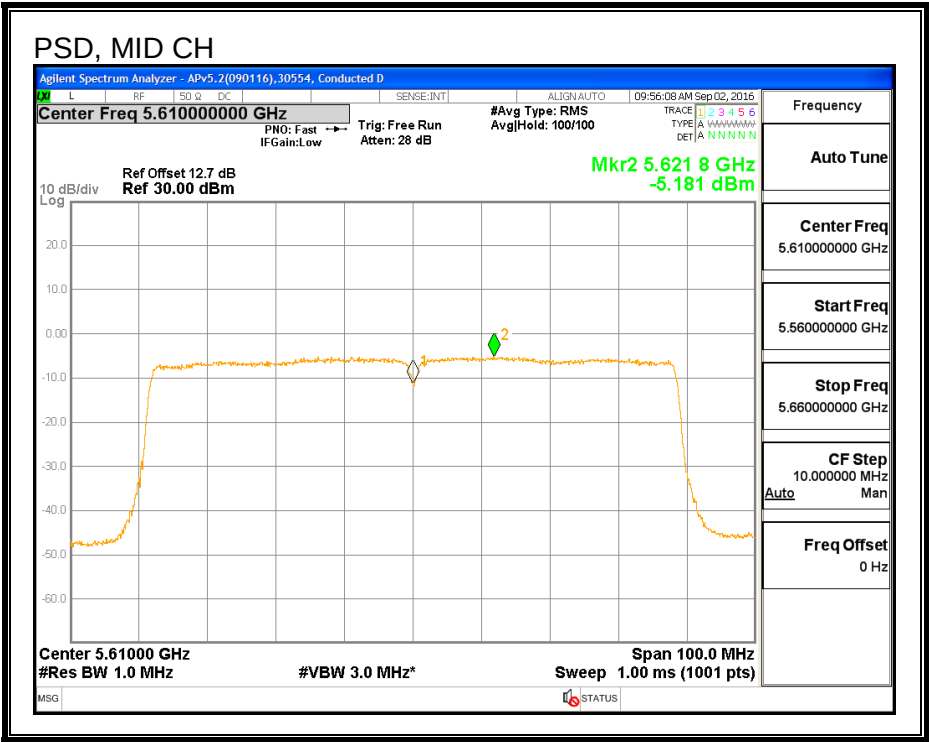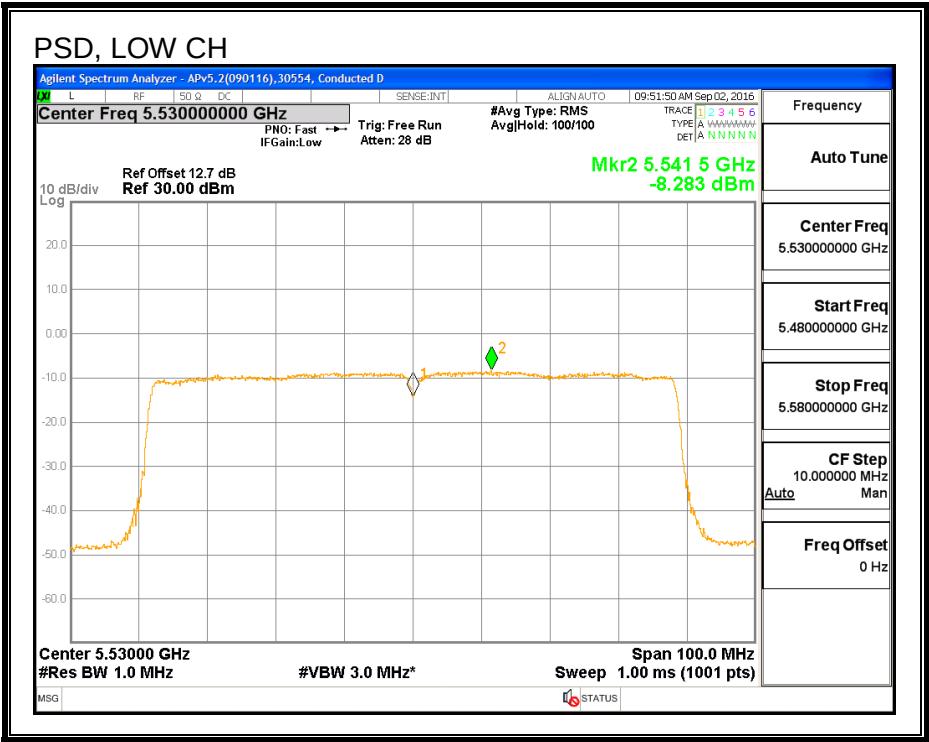

8.103.5. STRADDLE CHANNEL 138 RESULTS (FCC)

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	76.56	5.98	10.68	24.00	6.32

Duty Cycle CF (dB)	0.18	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	12.01	11.75	12.08	16.90	24.00	-7.10


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-5.54	-5.85	-5.45	-0.66	6.32	-6.98


OUTPUT POWER, CHAIN 0

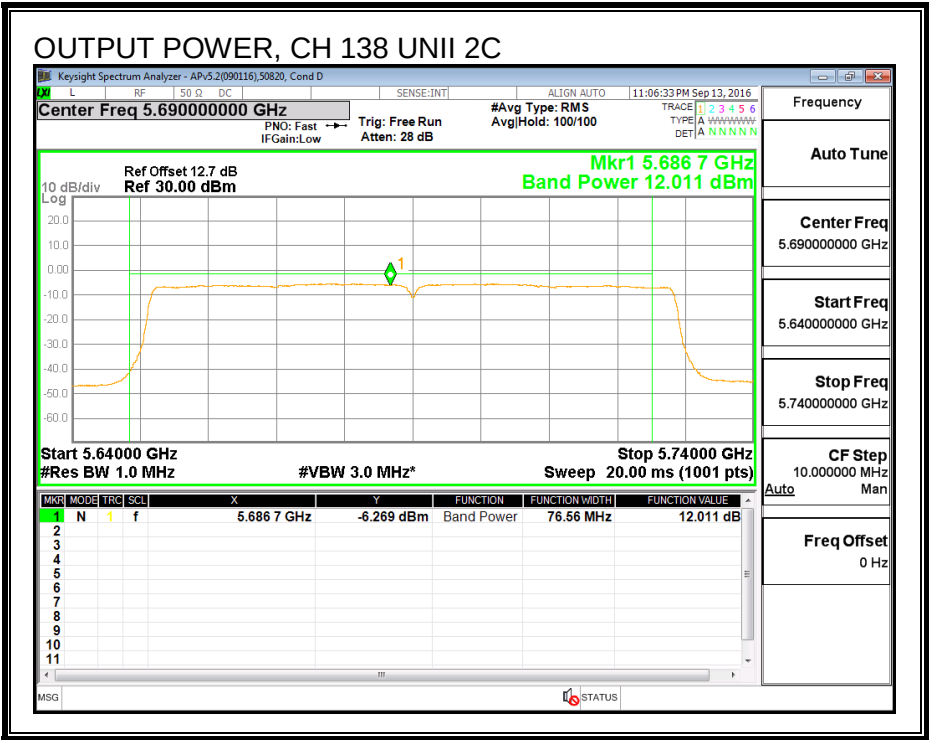


OUTPUT POWER, CHAIN 1

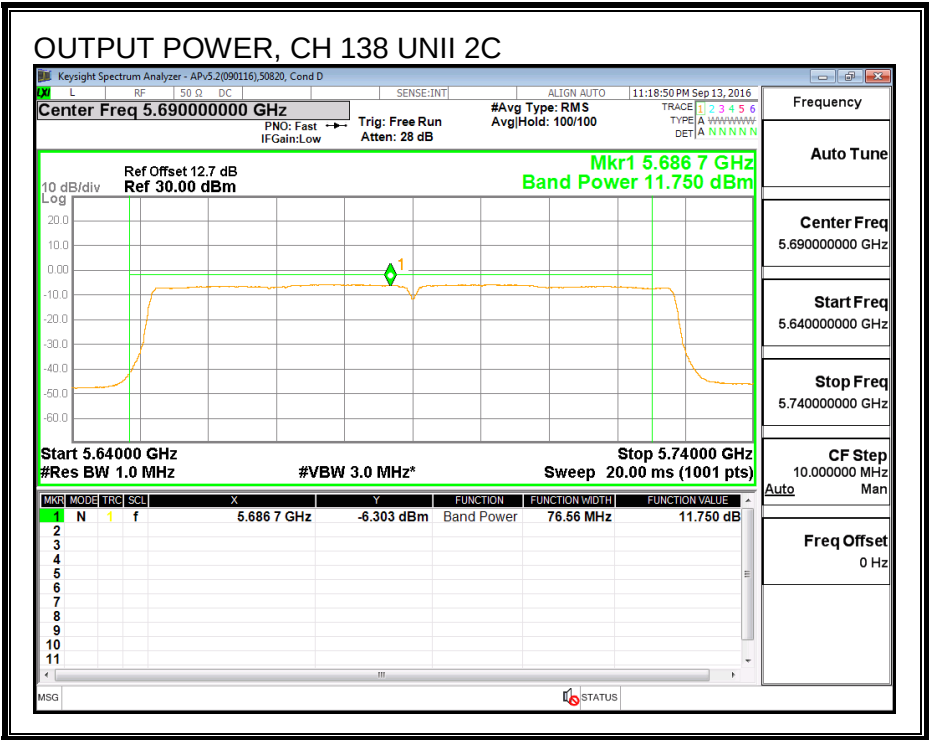


OUTPUT POWER, CHAIN 2

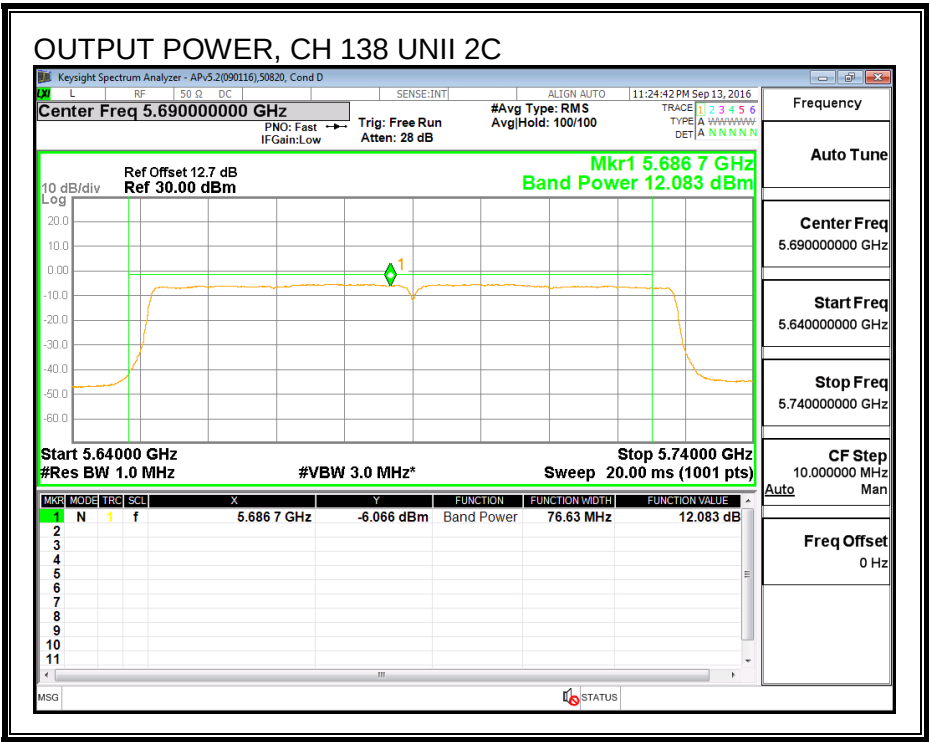


PSD, CHAIN 0

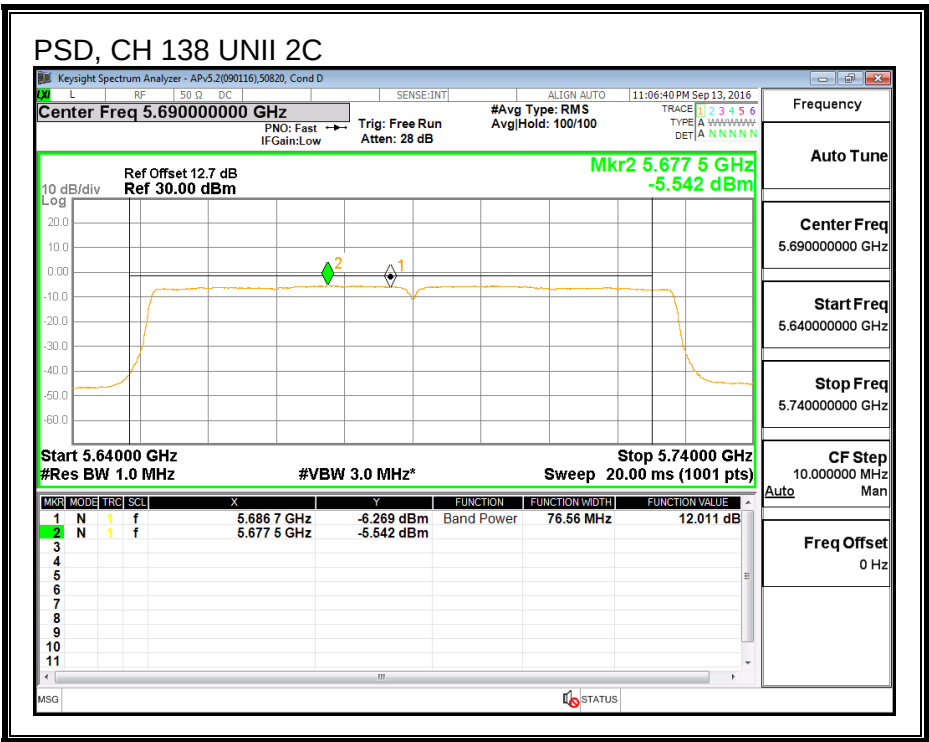

PSD, CHAIN 1

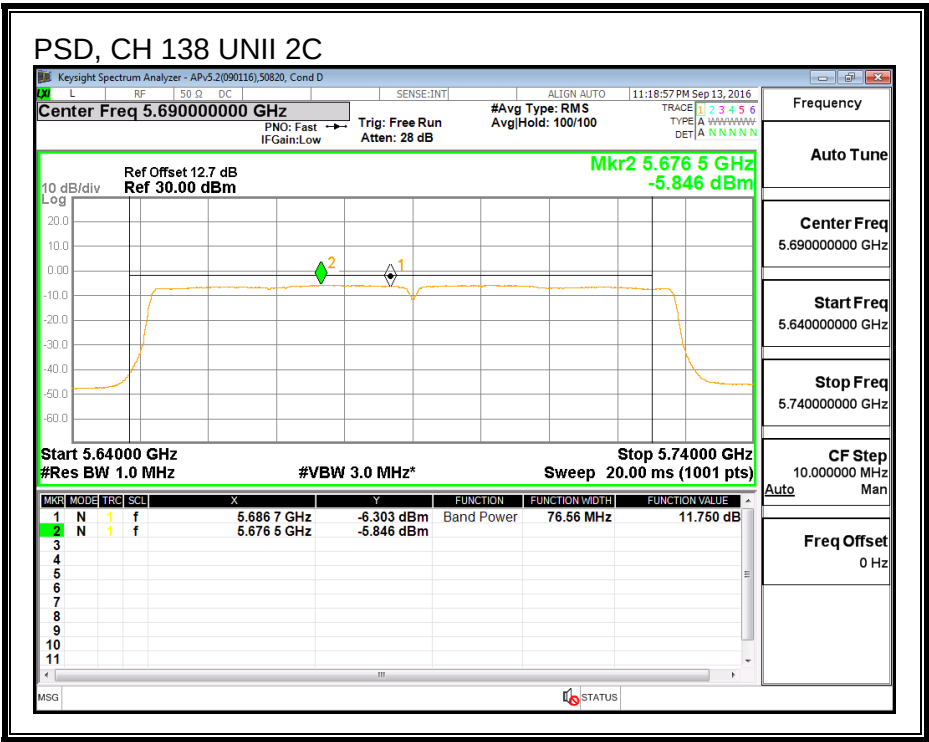

PSD, CHAIN 2

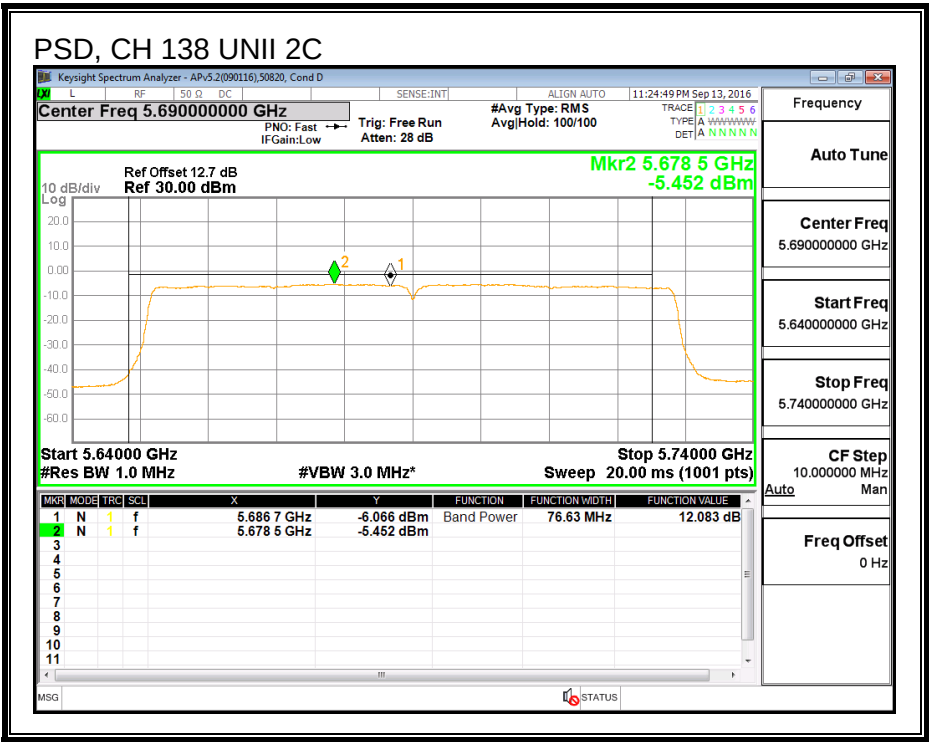

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	6.56	5.98	10.68	30.00	25.32

Duty Cycle CF (dB)	0.18	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	-2.22	-2.44	-2.17	2.68	30.00	-27.32


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-9.74	-9.95	-9.75	-4.86	25.32	-30.18


OUTPUT POWER, CHAIN 0

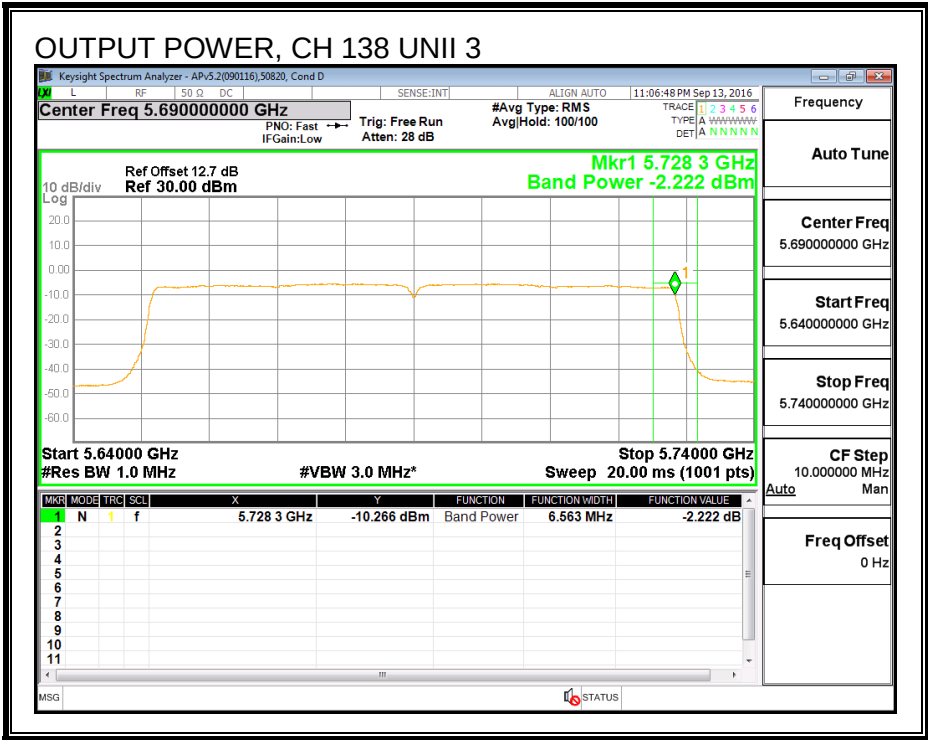


OUTPUT POWER, CHAIN 1

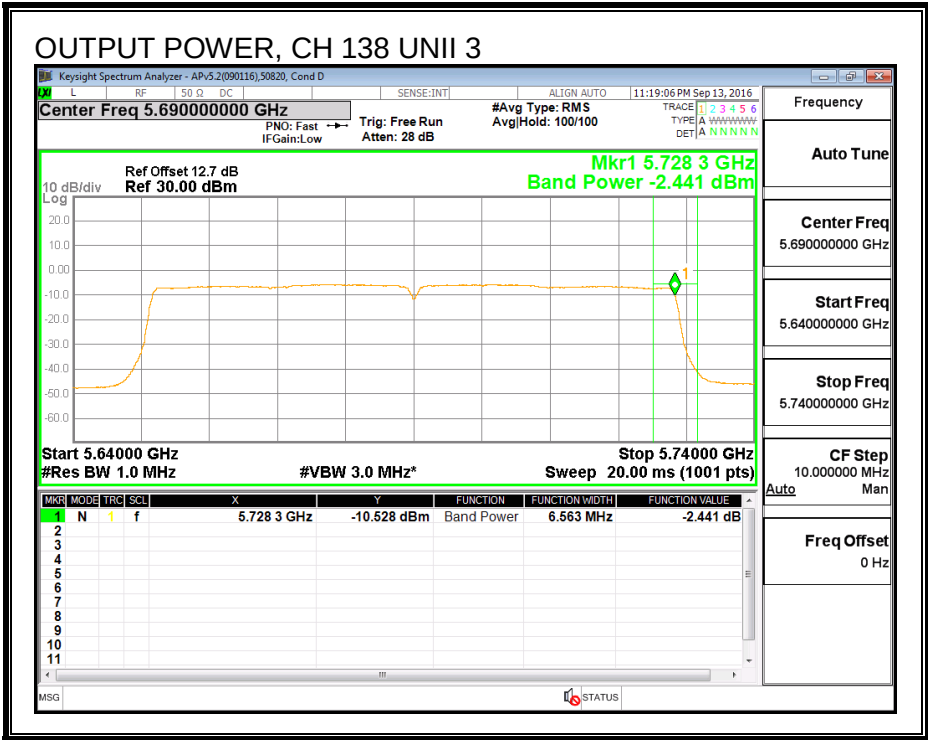


OUTPUT POWER, CHAIN 2

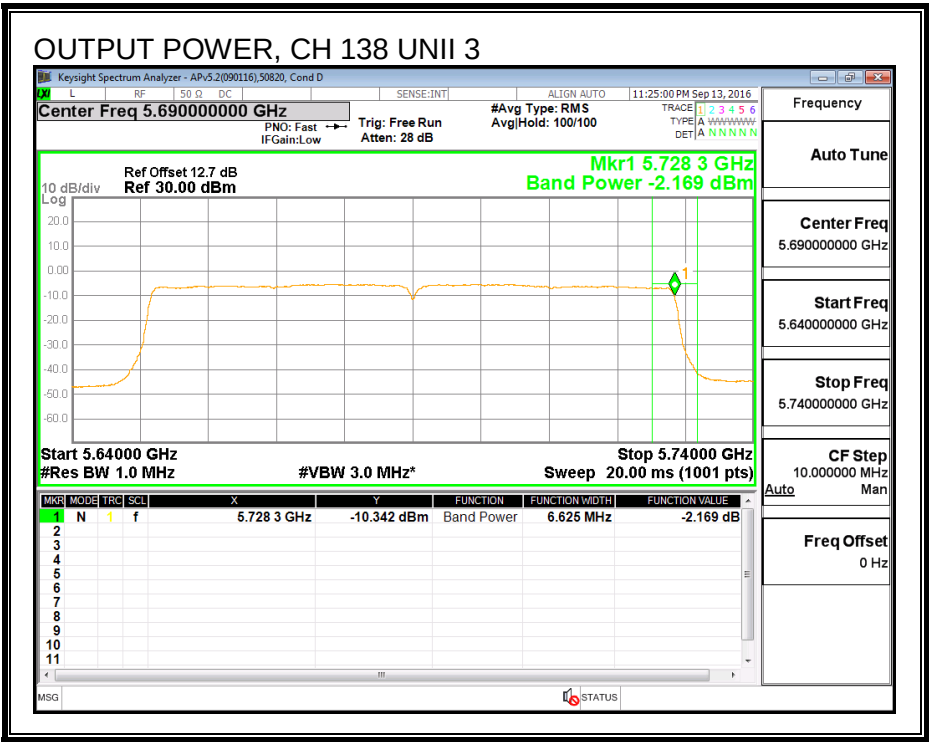


PSD, CHAIN 0

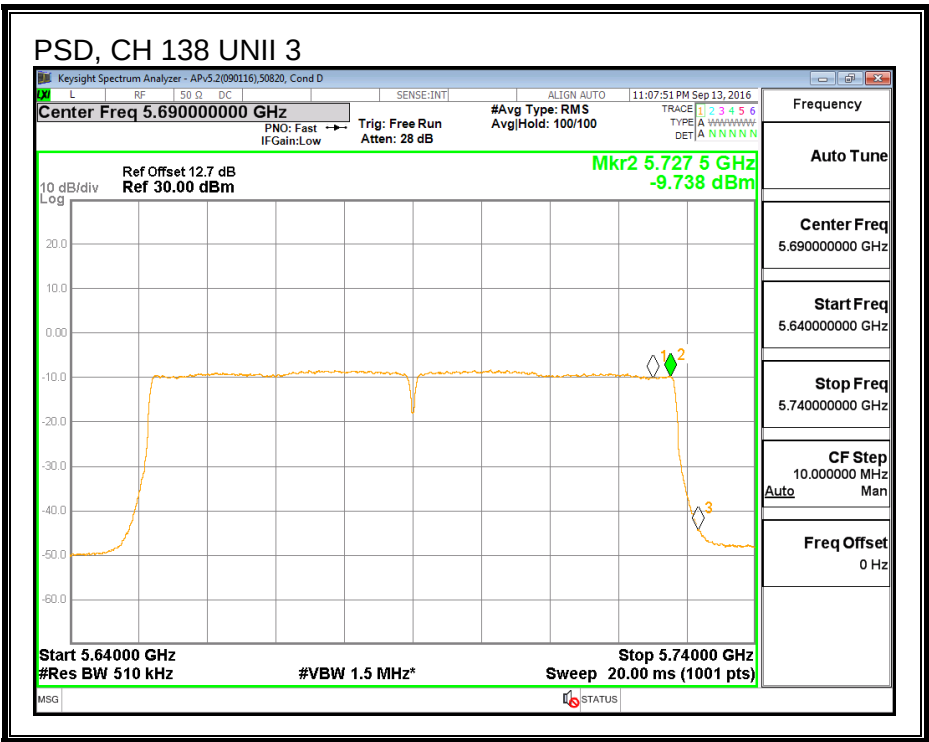

PSD, CHAIN 1

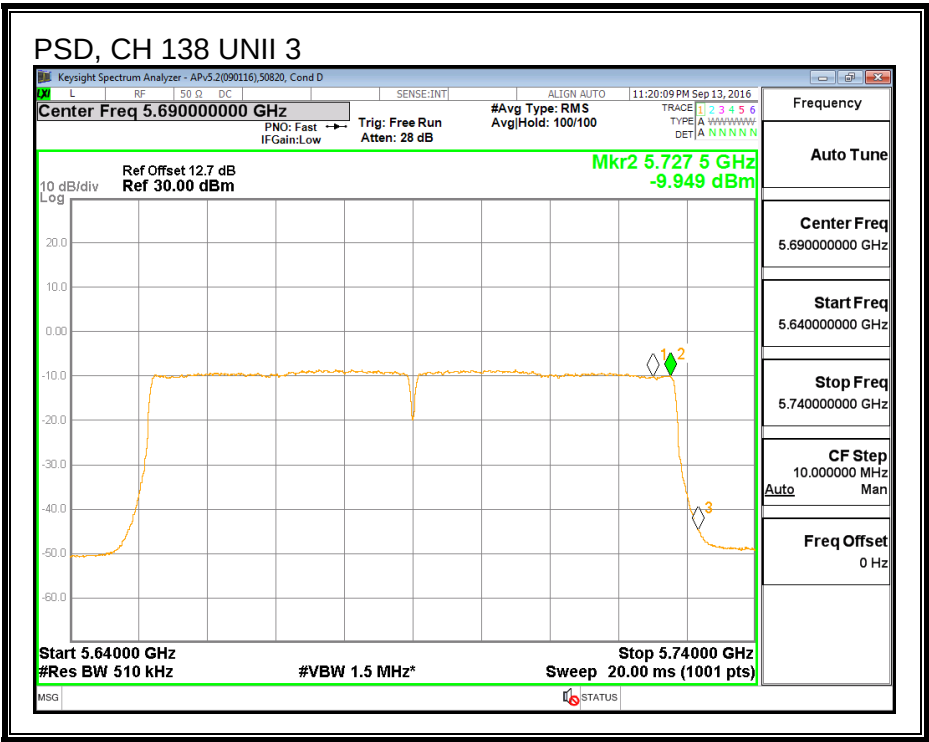

PSD, CHAIN 2

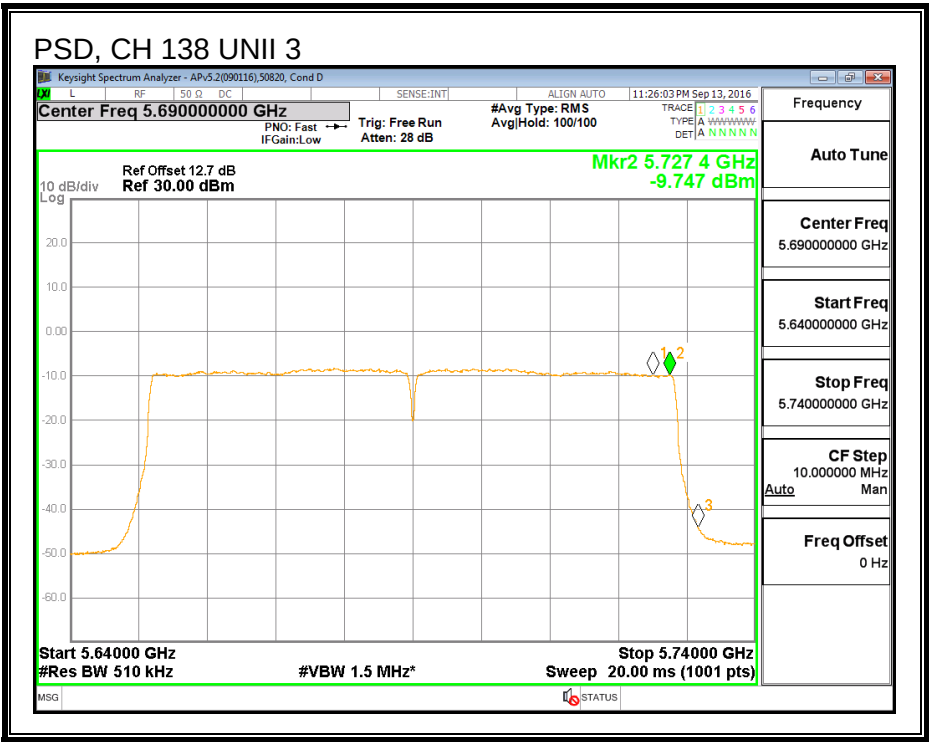

8.103.6. STRADDLE CHANNEL 138 RESULTS (IC)

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	72.840	5.98	10.68	24.00	6.32

Duty Cycle CF (dB)	0.18	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	12.00	11.73	12.06	16.88	24.00	-7.12


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-5.54	-5.85	-5.45	-0.66	6.32	-6.98


OUTPUT POWER, CHAIN 0

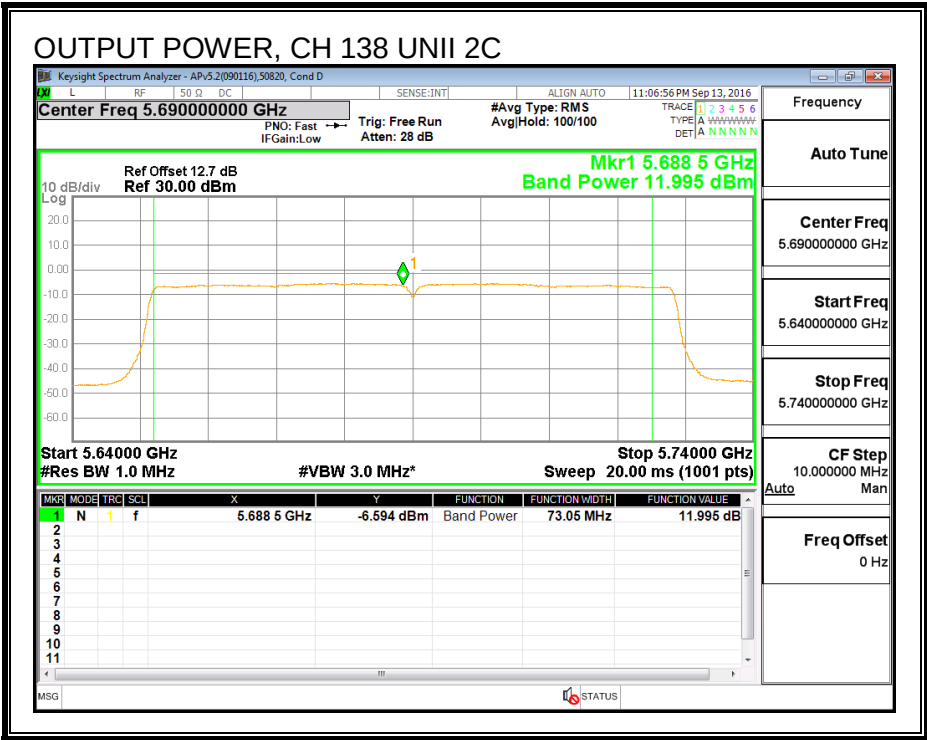


OUTPUT POWER, CHAIN 1

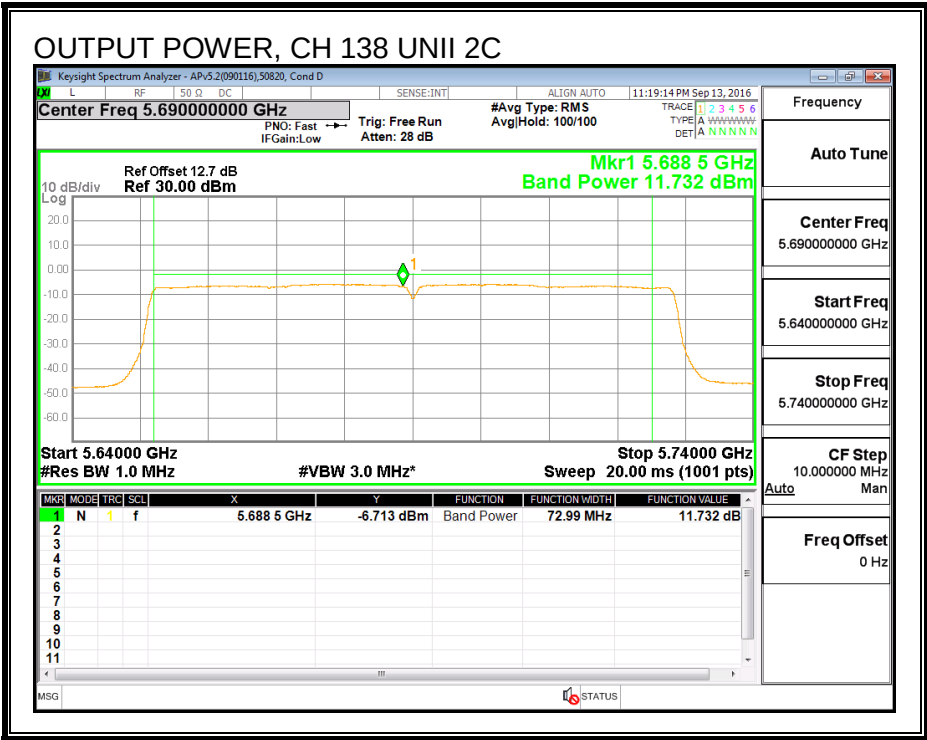


OUTPUT POWER, CHAIN 2

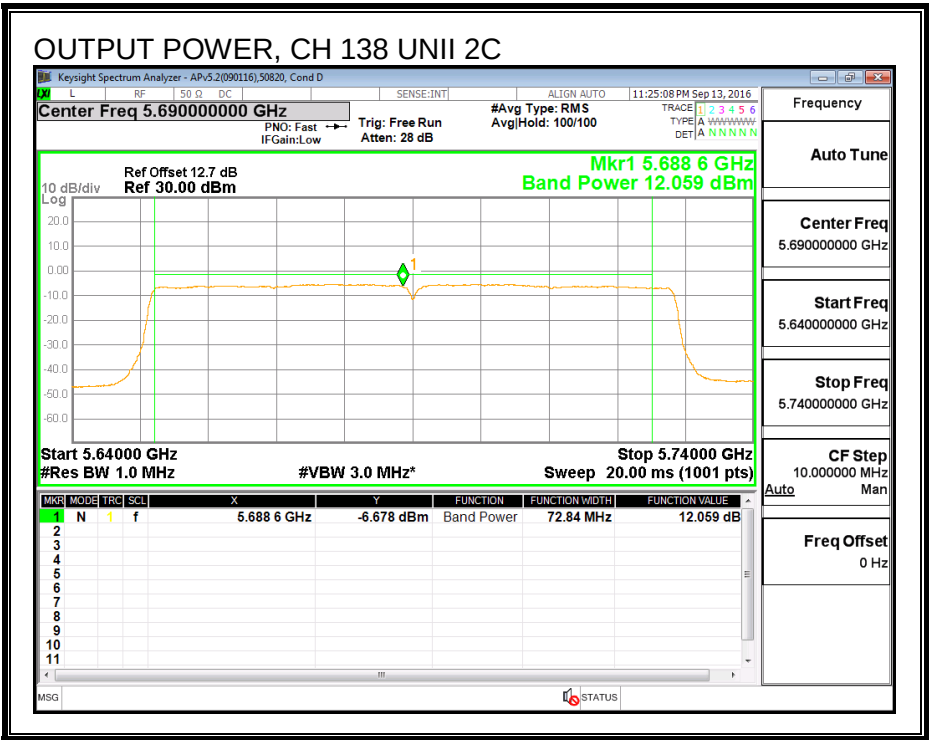


PSD, CHAIN 0

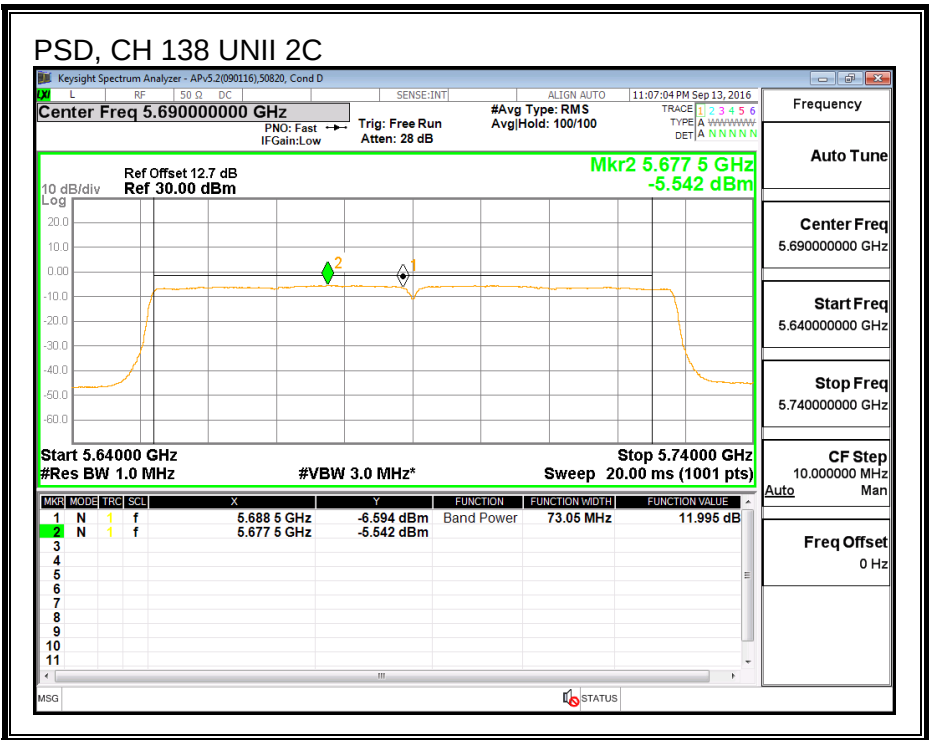

PSD, CHAIN 1

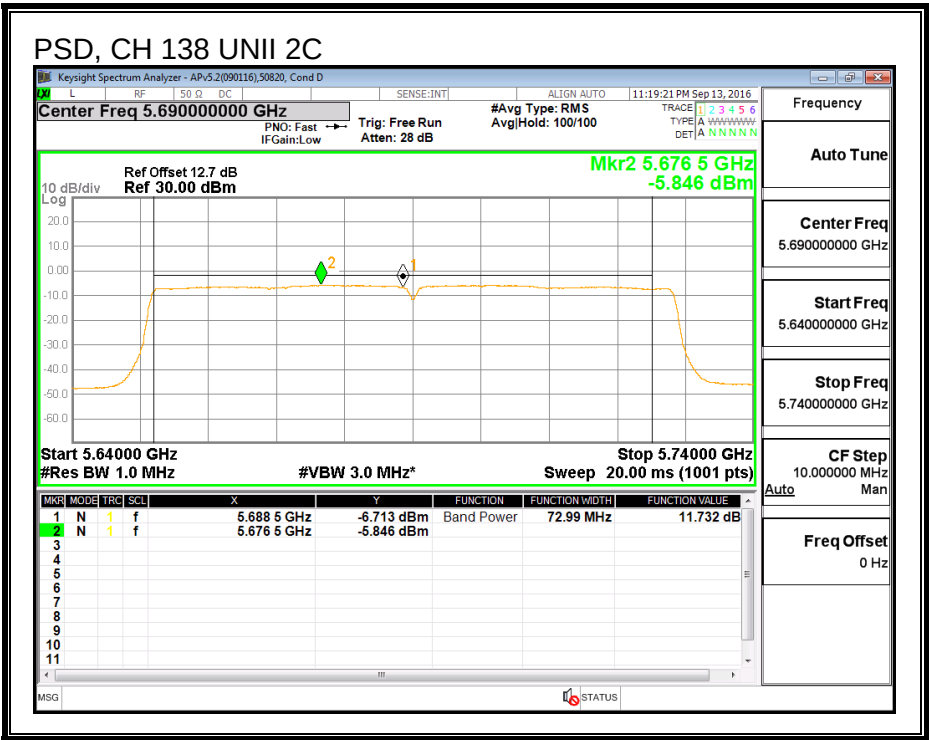

PSD, CHAIN 2

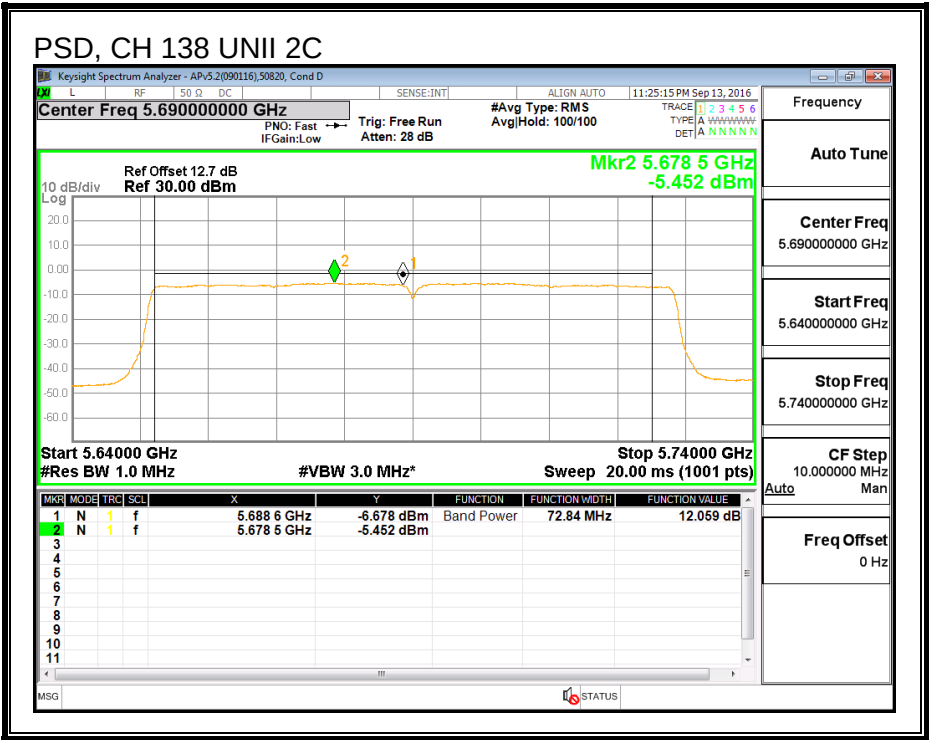

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	2.837	5.98	10.68	30.00	25.32

Duty Cycle CF (dB)	0.18	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	-2.68	-2.95	-2.87	2.12	30.00	-27.88


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-9.74	-9.95	-9.75	-4.86	25.32	-30.18


OUTPUT POWER, CHAIN 0

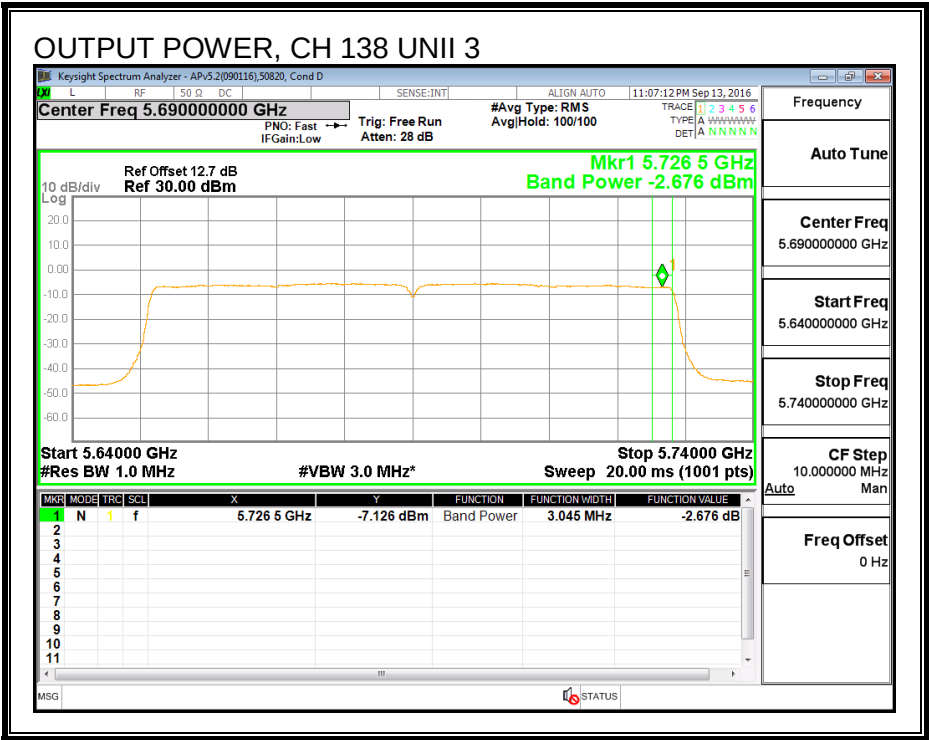


OUTPUT POWER, CHAIN 1

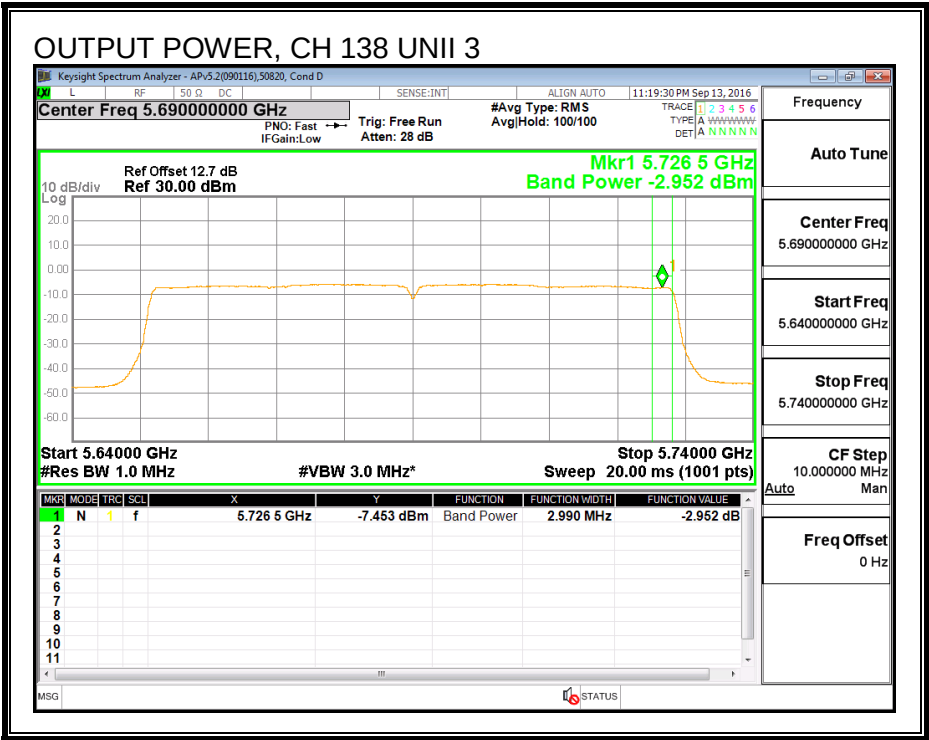


OUTPUT POWER, CHAIN 2

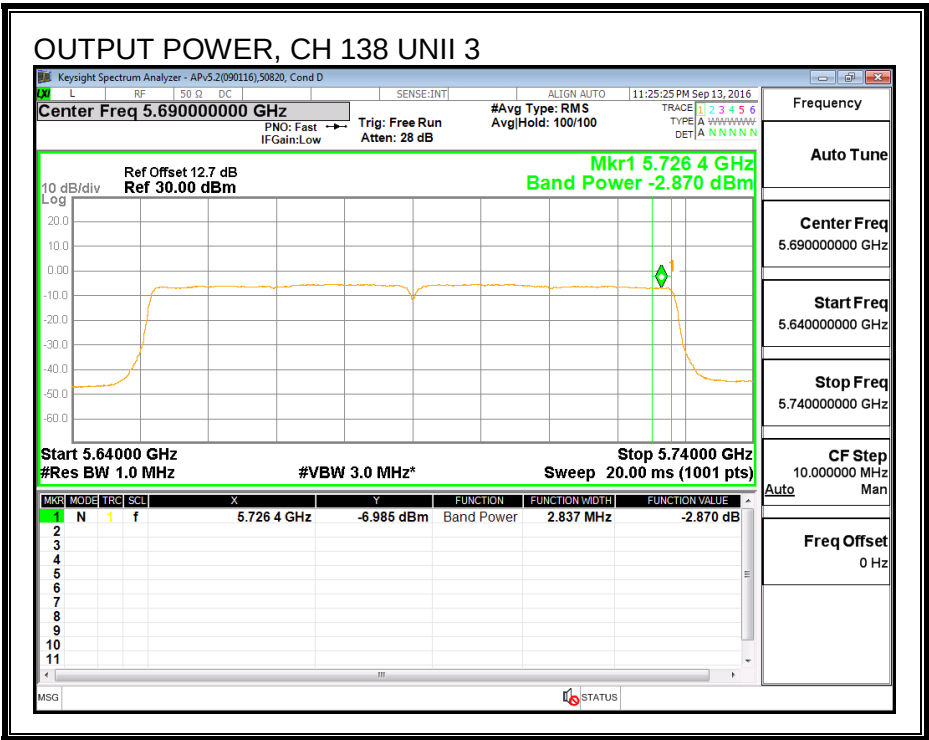


PSD, CHAIN 0

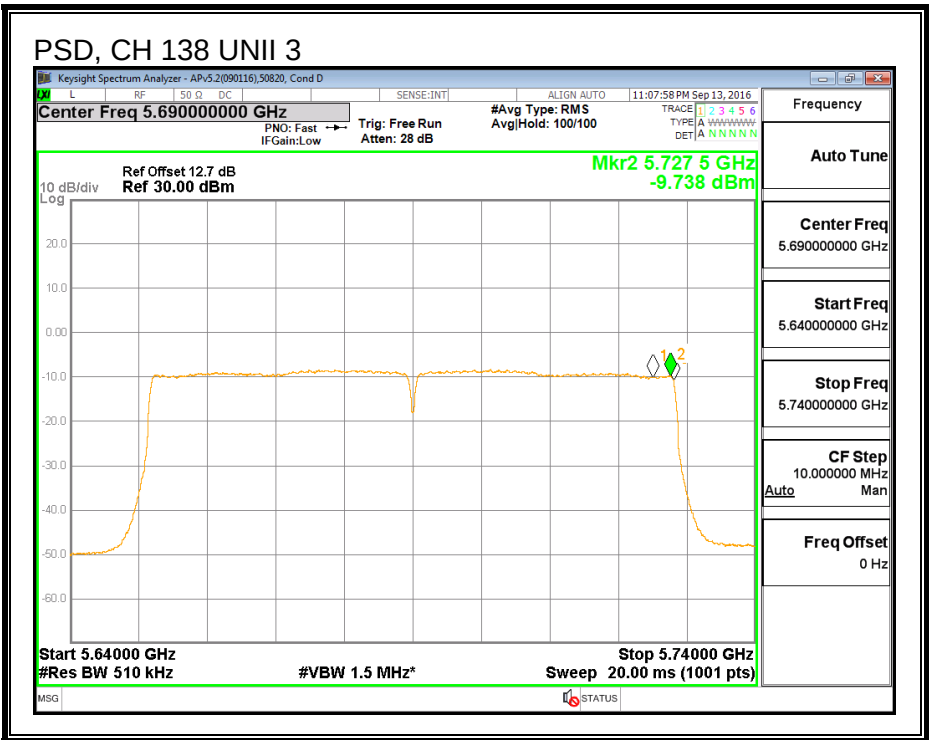

PSD, CHAIN 1

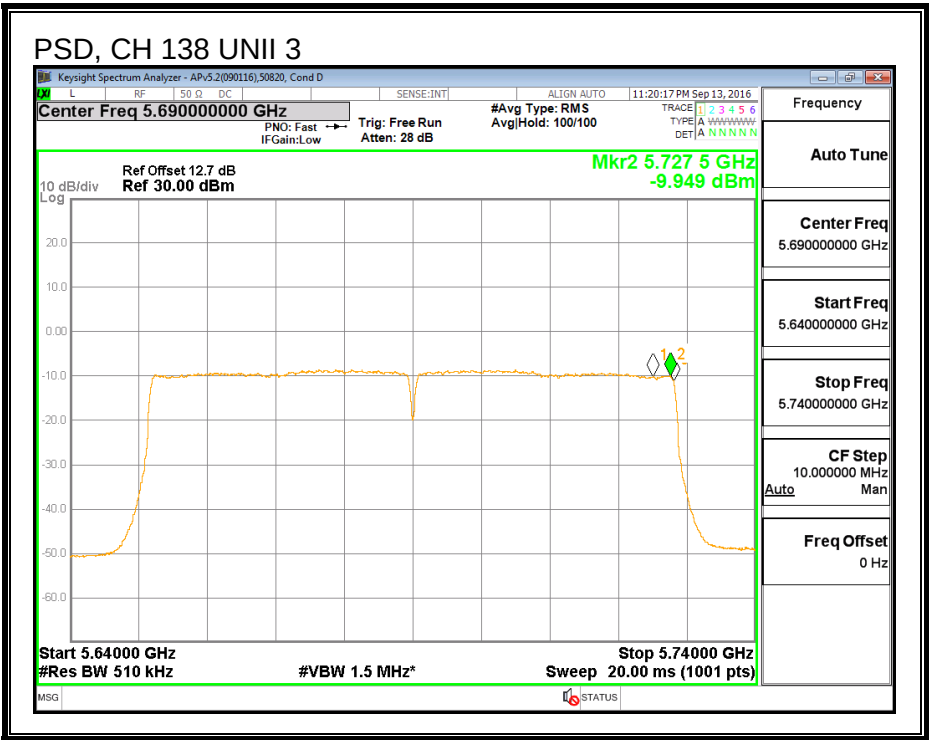

PSD, CHAIN 2

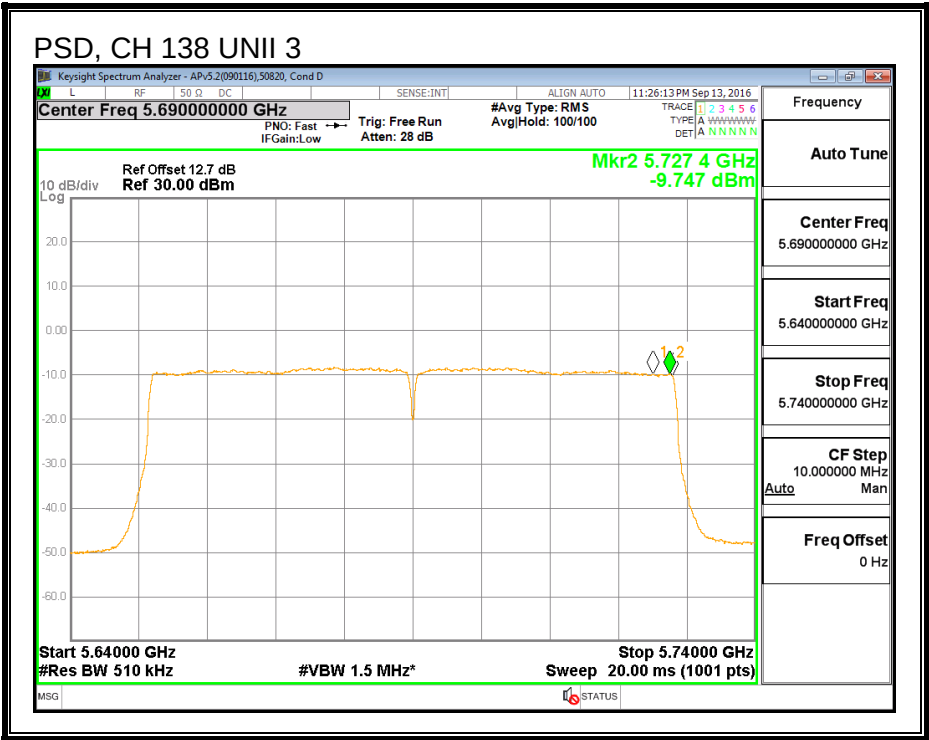

8.103.7. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)


IC RSS-247 (6.2.4) (1)

The minimum 6 dB bandwidth shall be at least 500 kHz.


RESULTS

Channel	Frequency (MHz)	6 dB BW Chain 0 (MHz)	6 dB BW Chain 1 (MHz)	6 dB BW Chain 2 (MHz)
High	5690	3.19	3.22	3.31


CHAIN 0

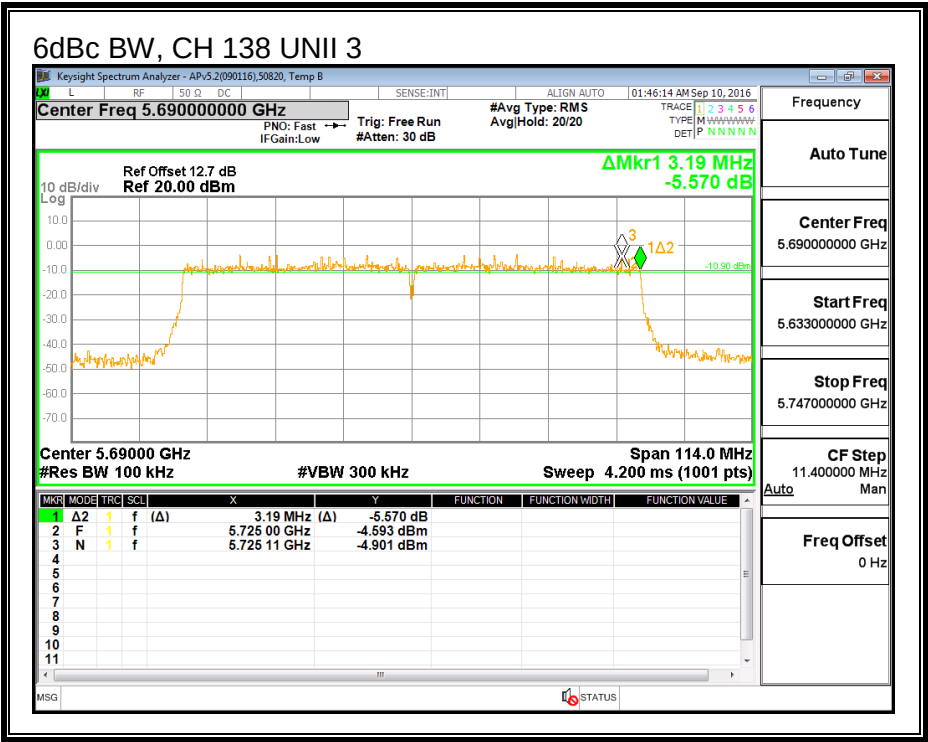

CHAIN 1

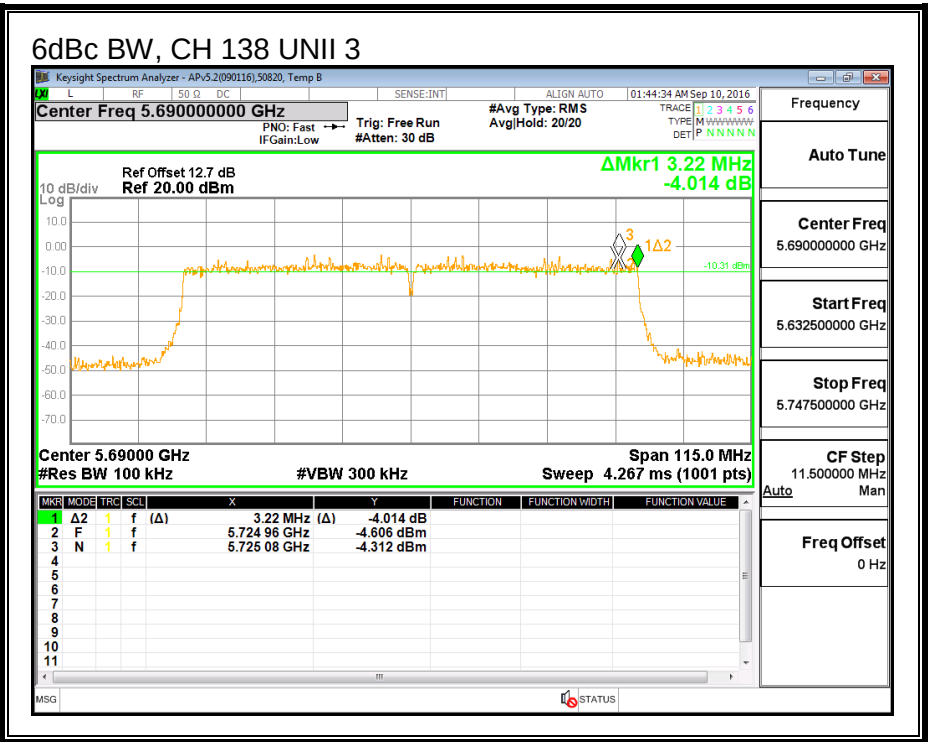

CHAIN 2

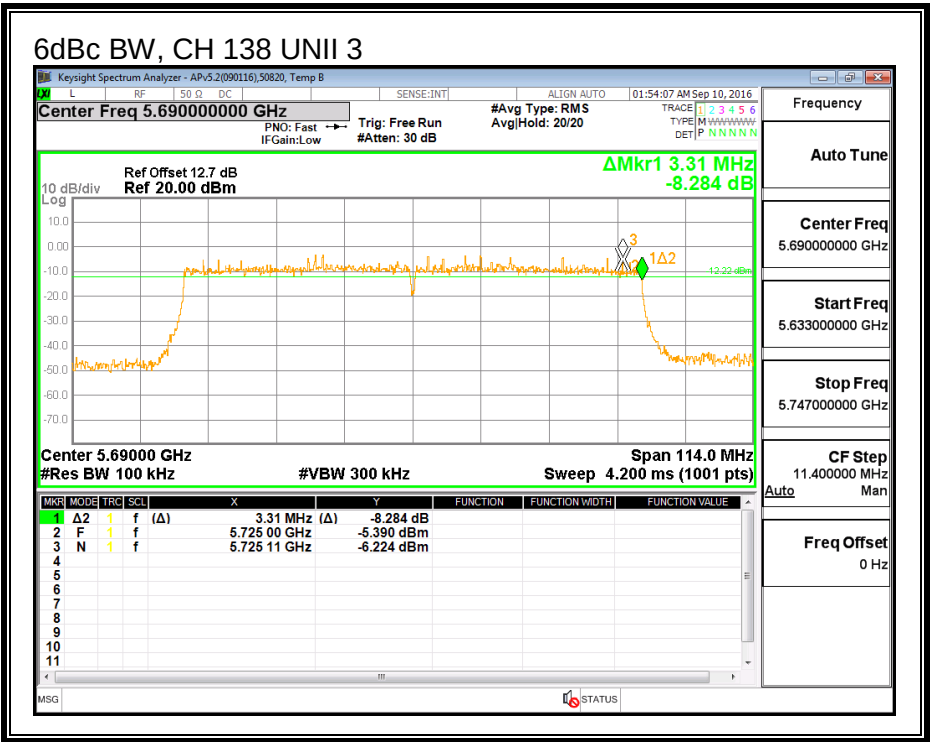

8.104. 802.11ac VHT80 3Tx STBC MODE IN THE 5.6 GHz BAND (5610MHz for FCC only)

8.104.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Low	5530	83.125	82.875	82.584
Mid	5610	82.750	82.875	82.584
High	5690	82.875	82.750	83.125



26 dB BANDWIDTH, CHAIN 0

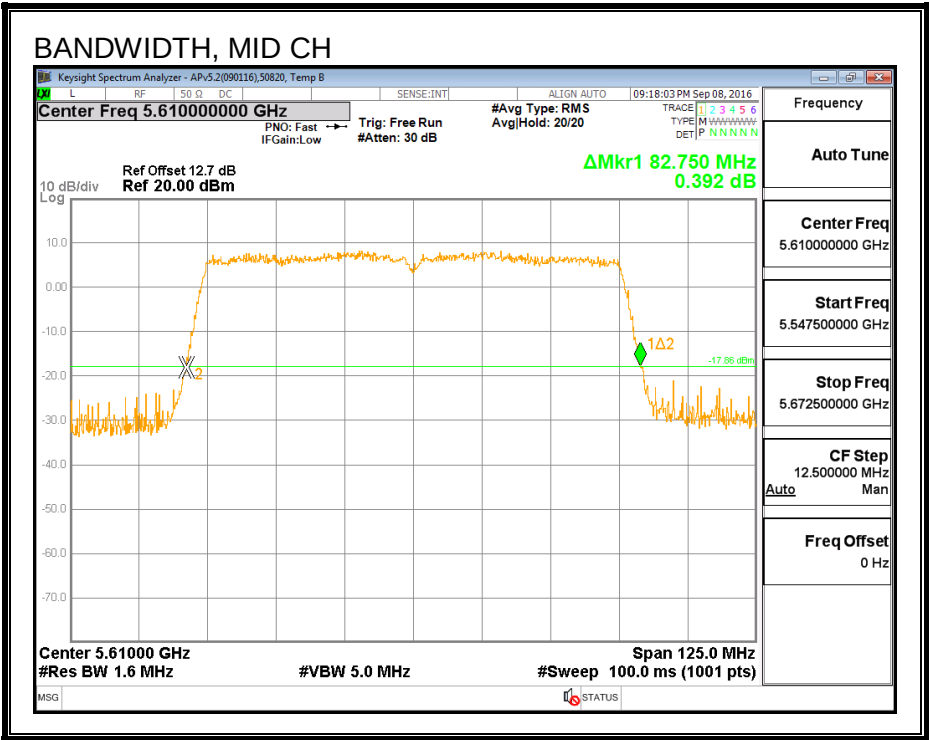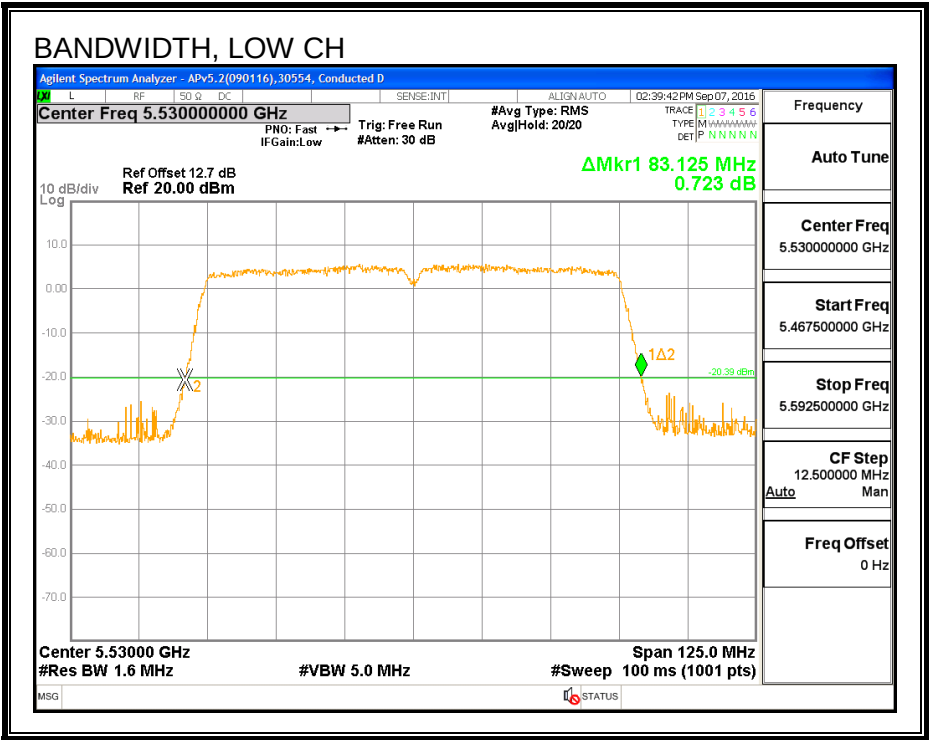


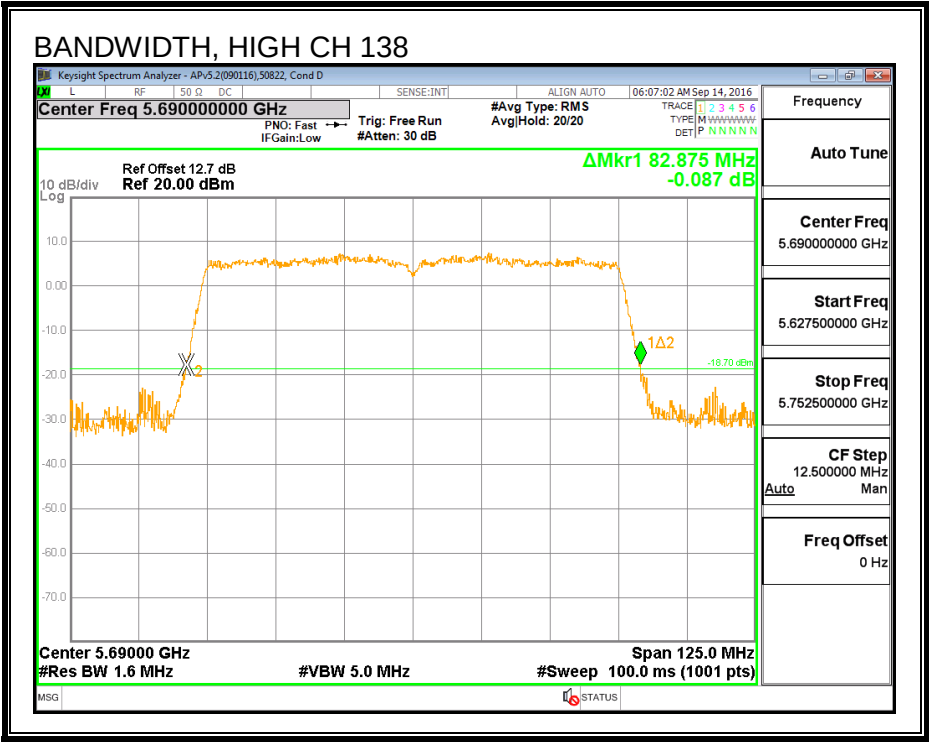



26 dB BANDWIDTH, CHAIN 1

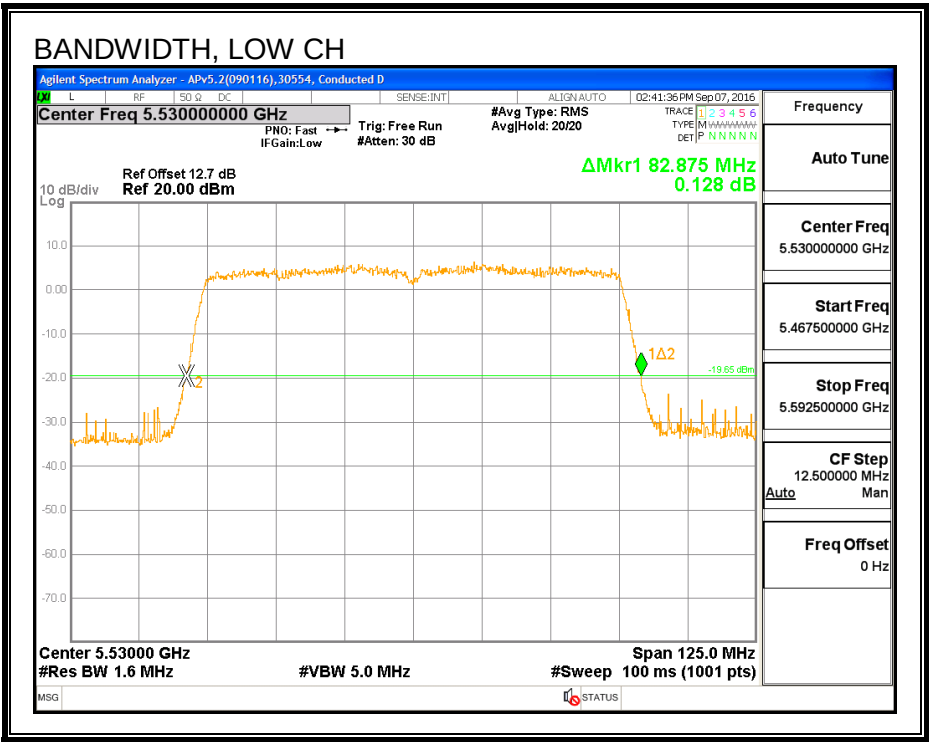

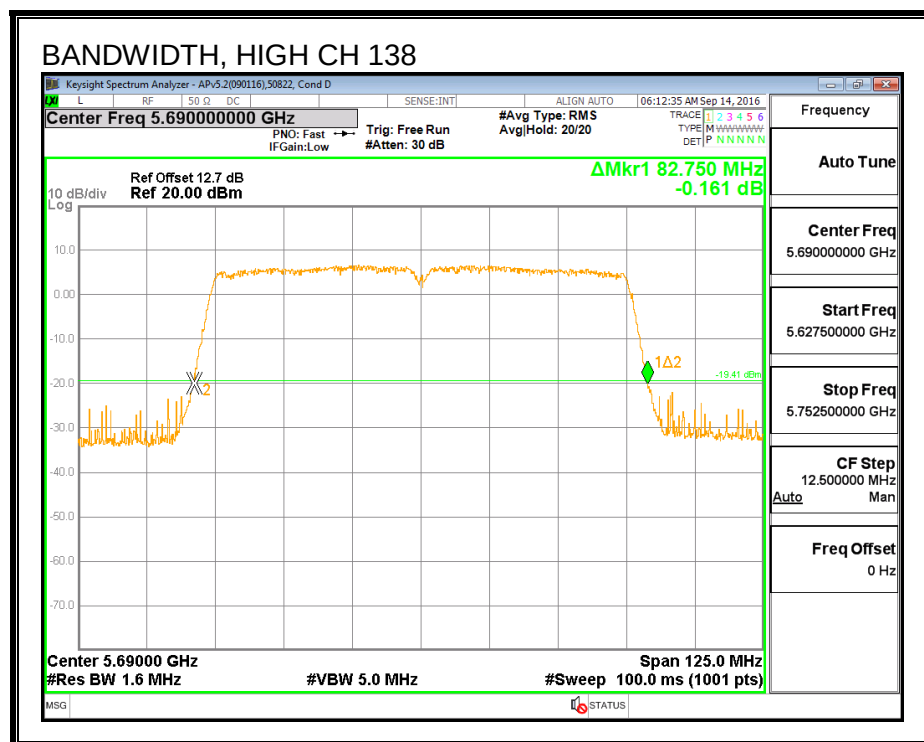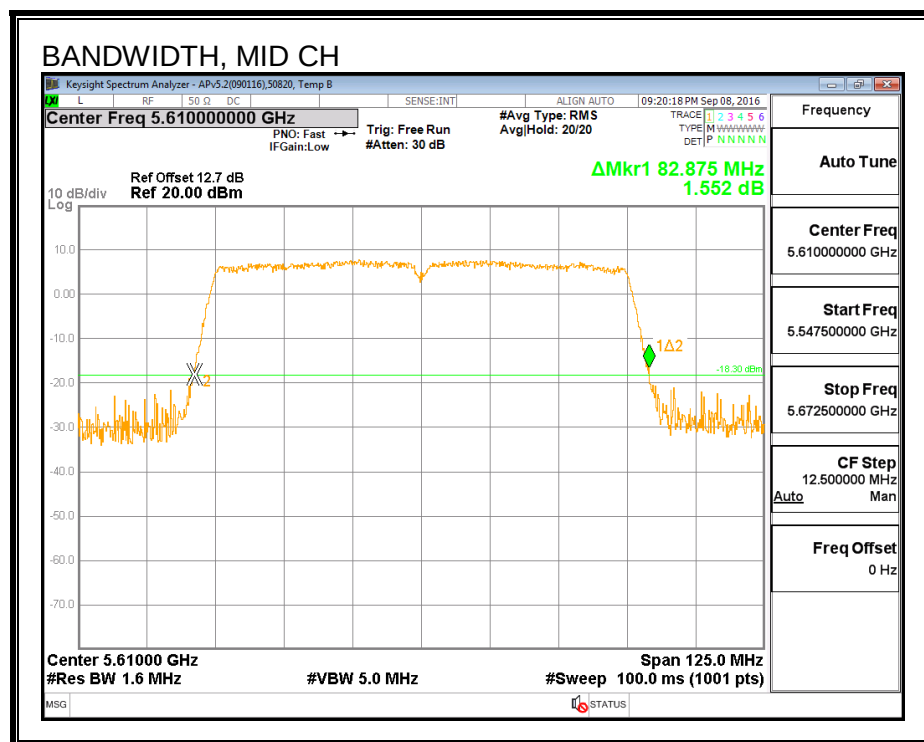

26 dB BANDWIDTH, CHAIN 2

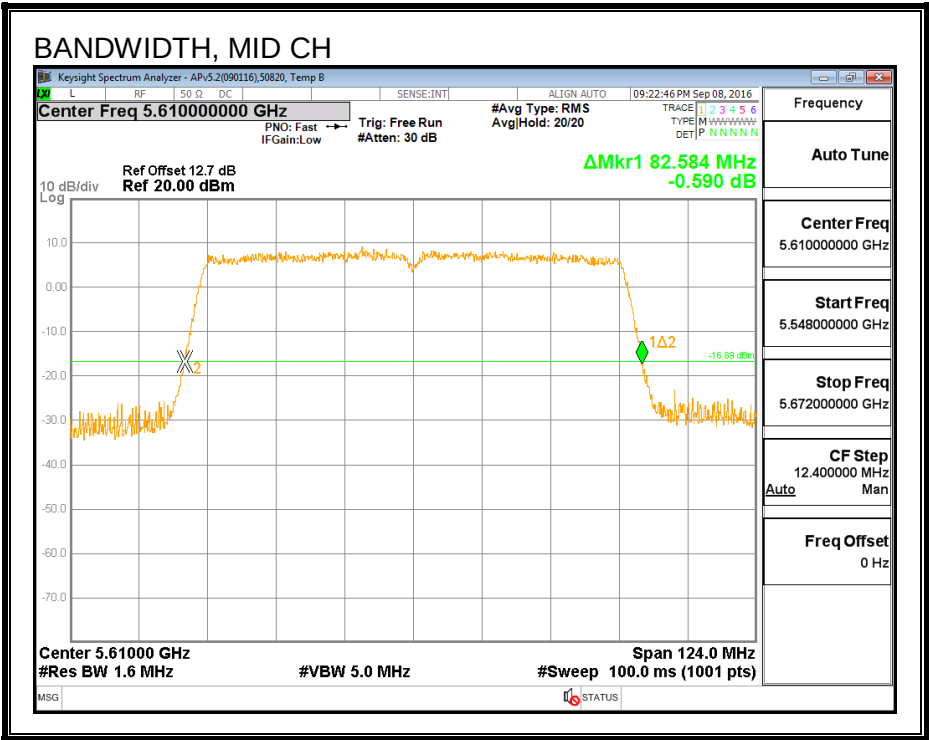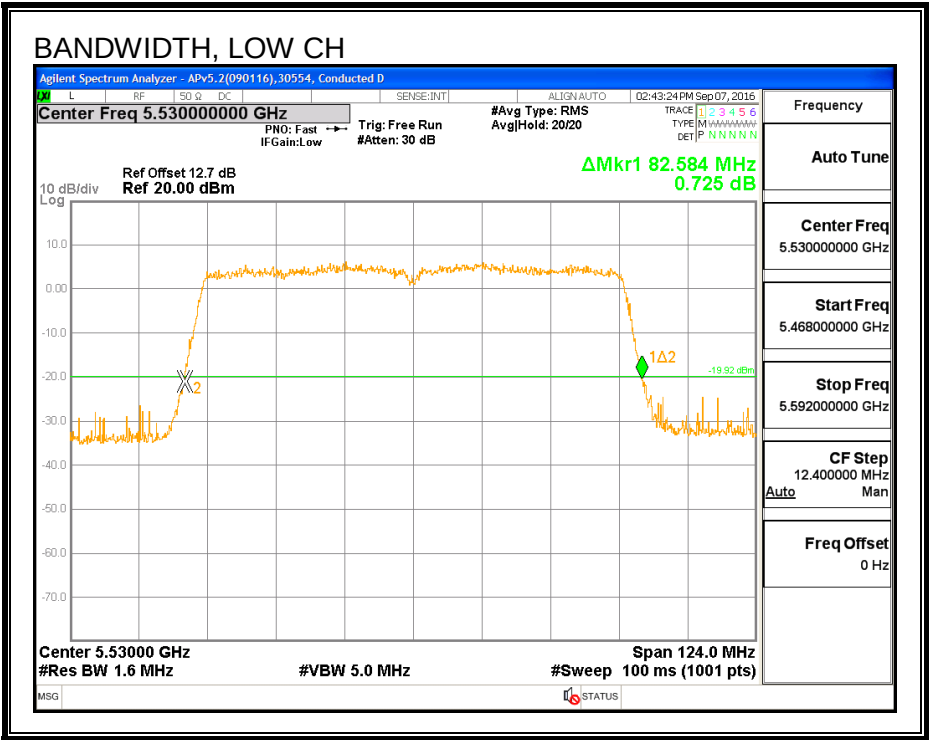

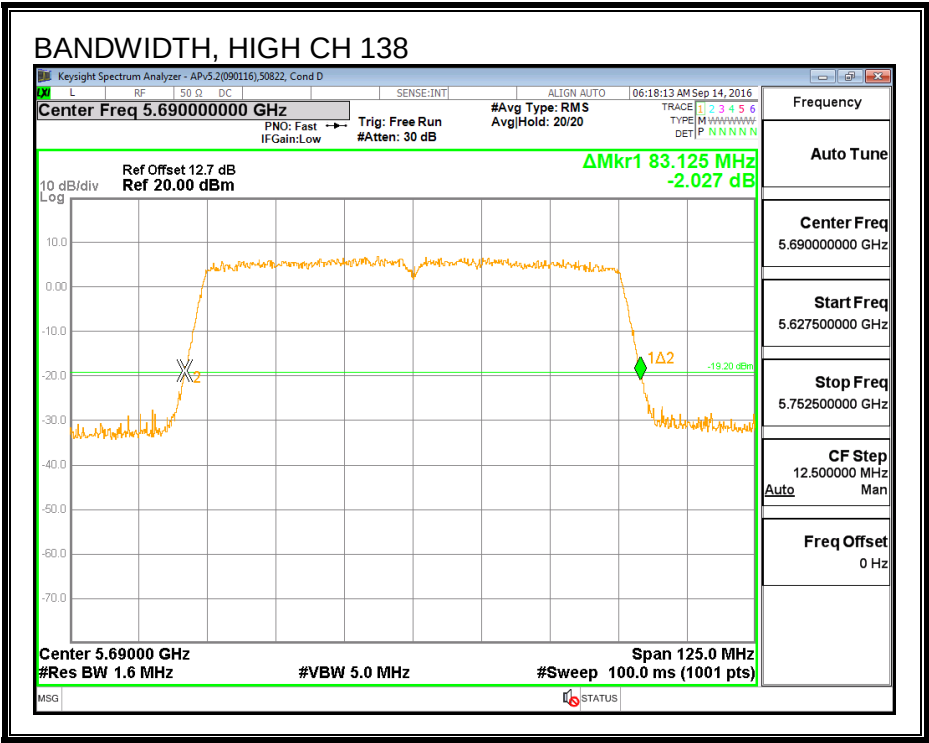

8.104.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
Low	5530	75.693	76.525	75.998
Mid	5610	76.076	76.374	76.061
High	5690	75.964	76.280	75.942



99% BANDWIDTH, CHAIN 0

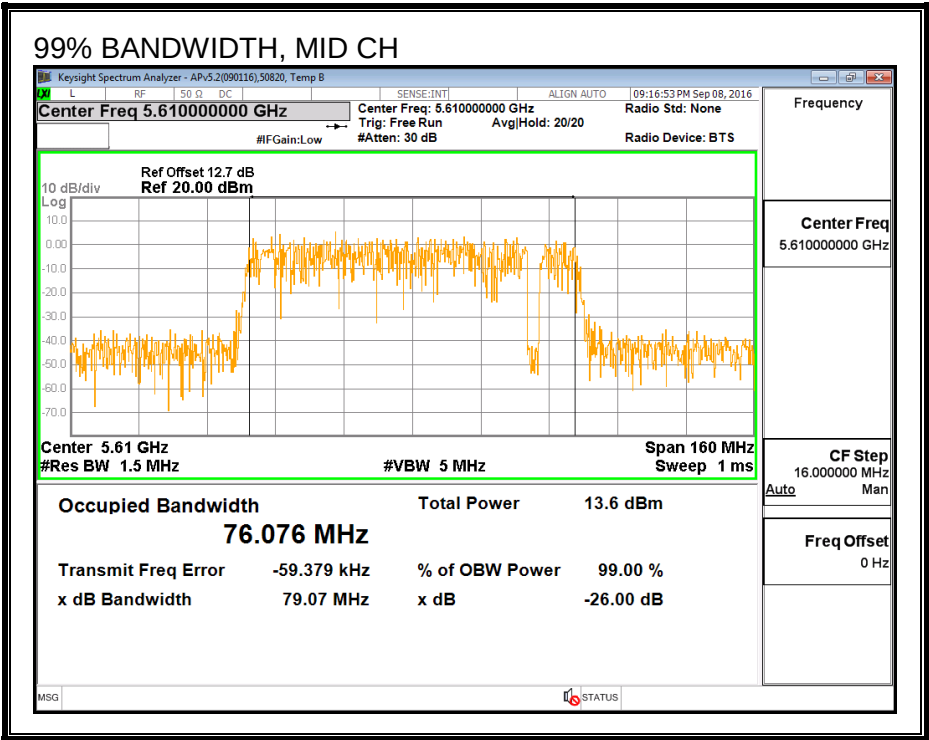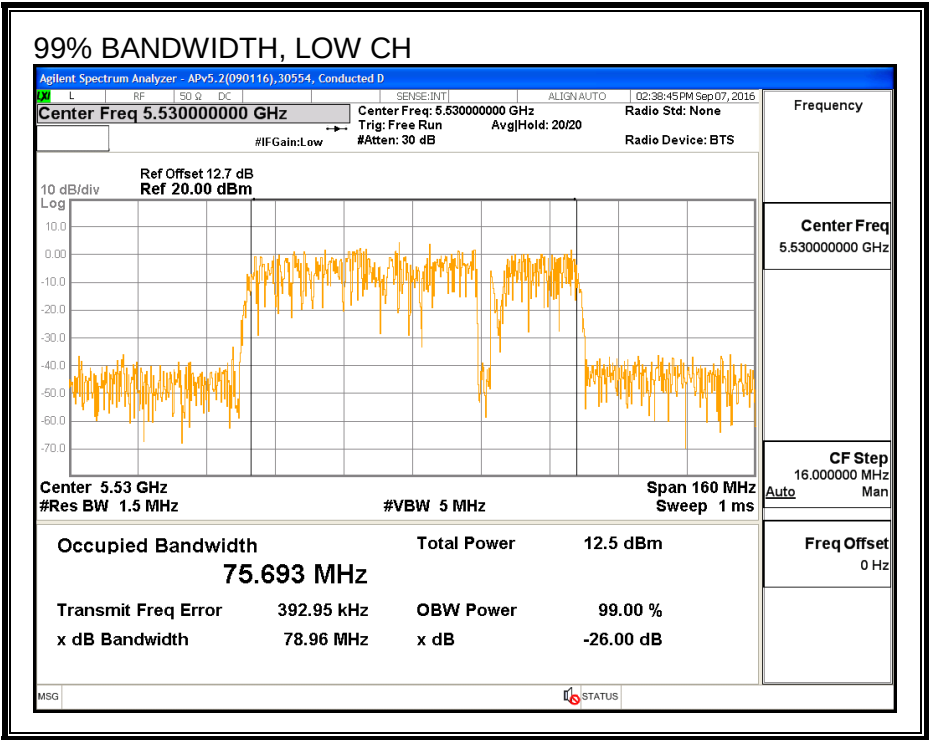


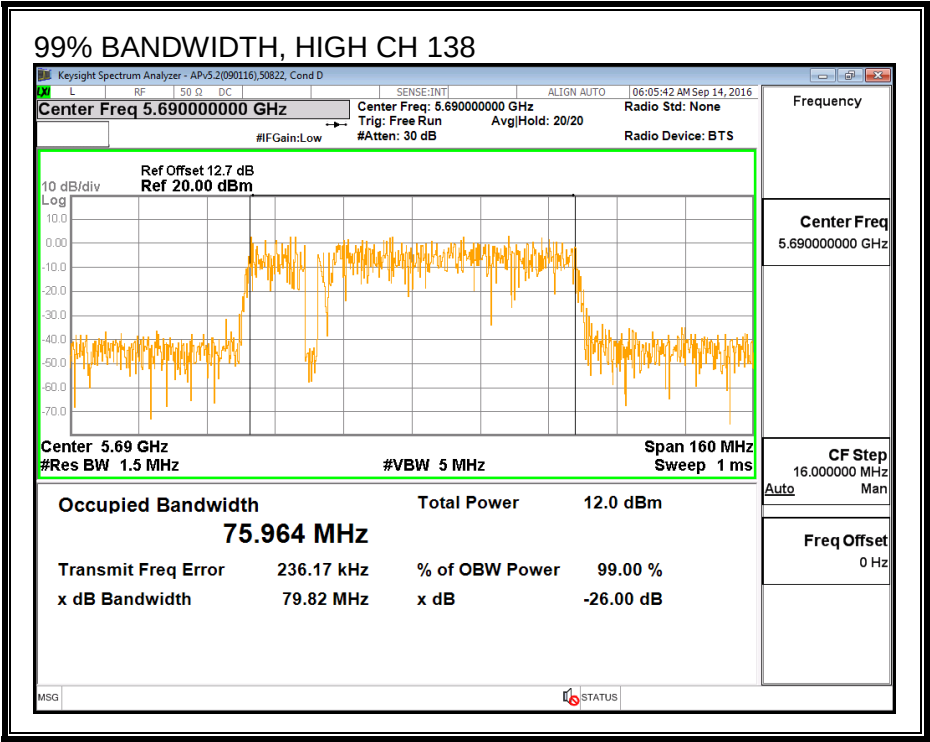



99% BANDWIDTH, CHAIN 1

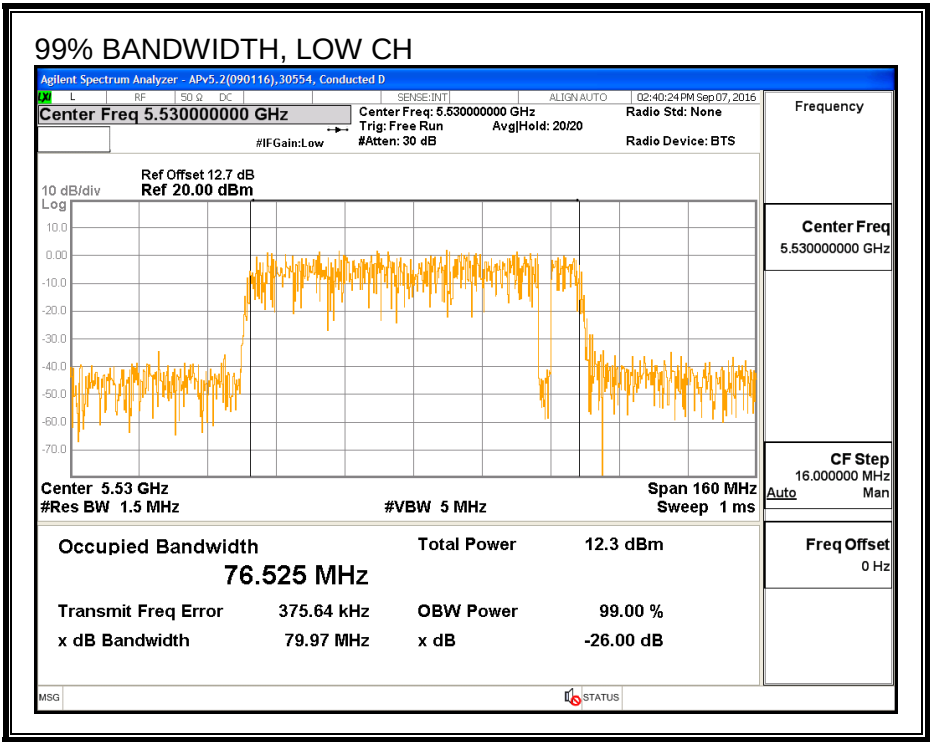

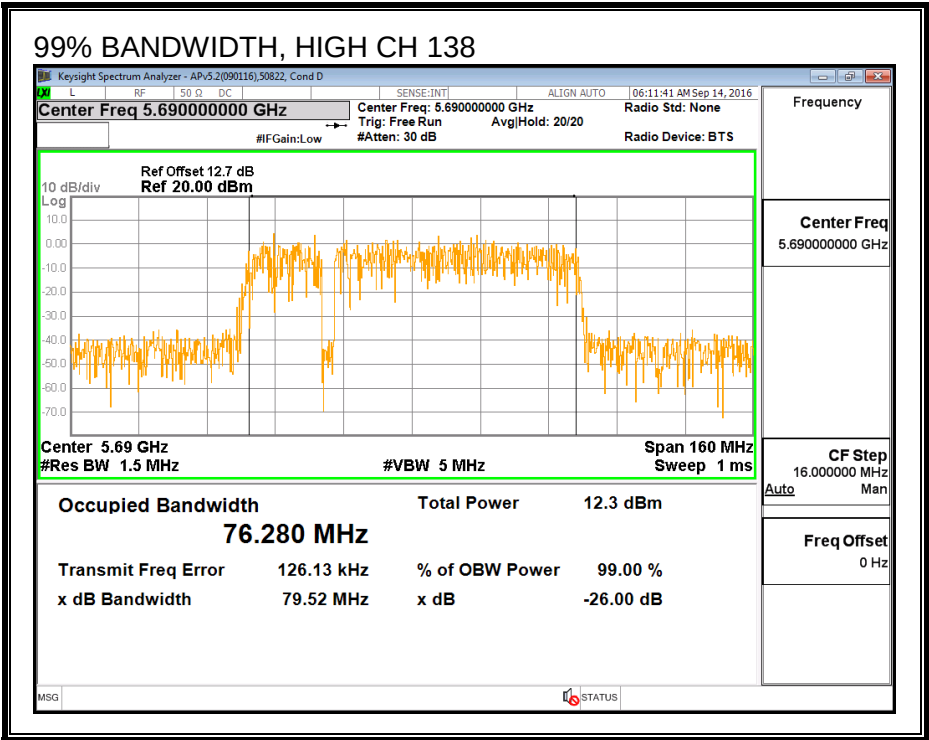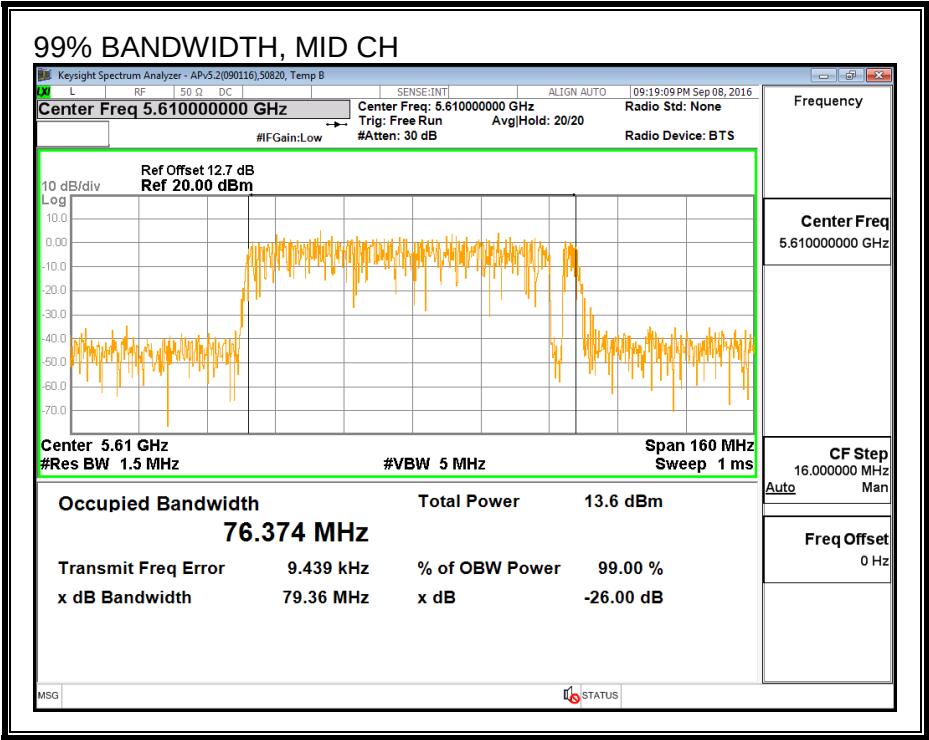

99% BANDWIDTH, CHAIN 2

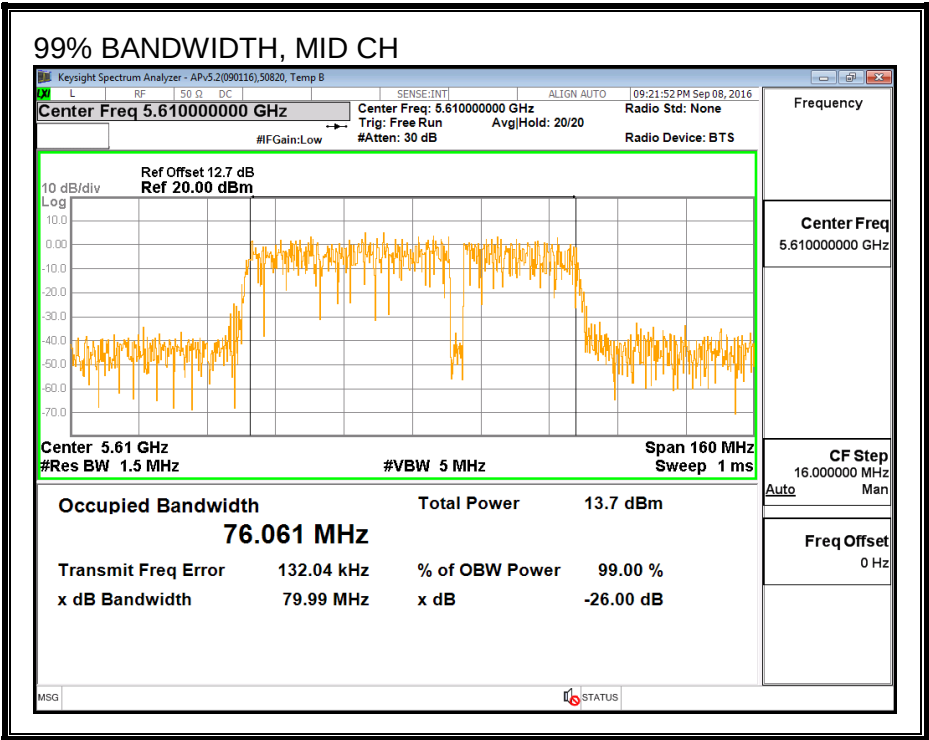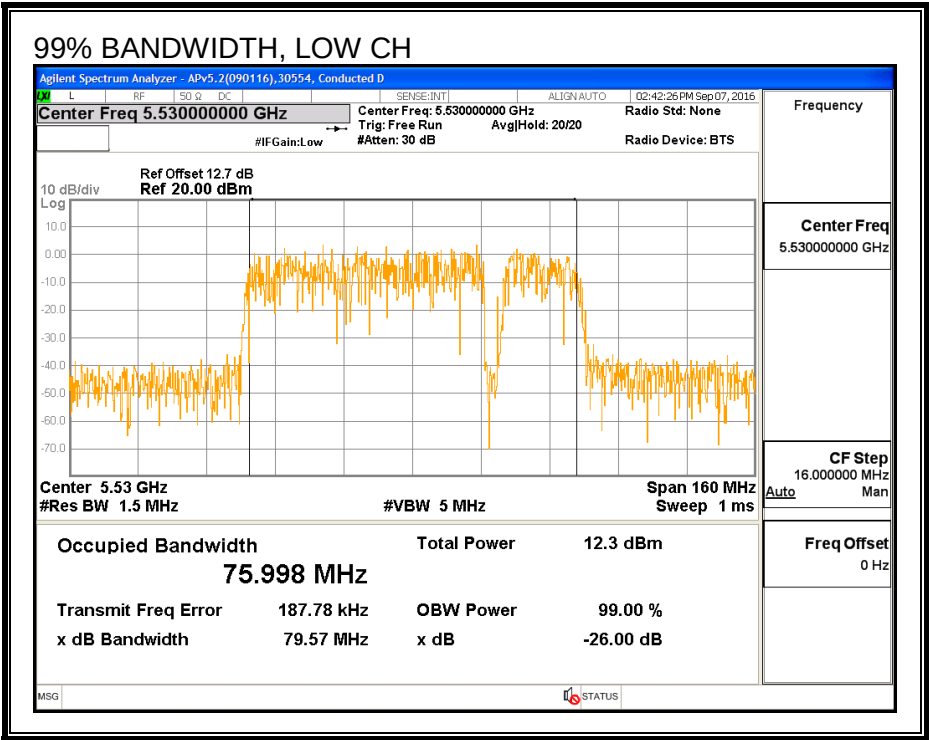

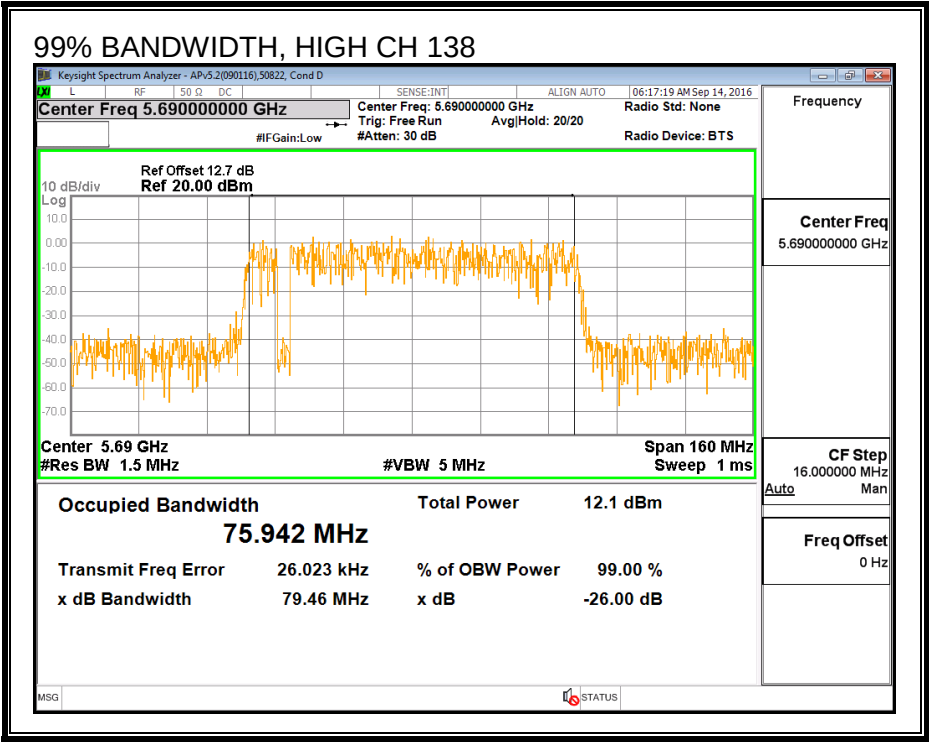

8.104.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
Low	5530	12.24	12.23	12.24	17.01
Mid	5610	11.97	12.04	12.23	16.85
High	5690	12.23	12.14	12.22	16.97

8.104.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 (6.2.3) (1)

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Straddle channel power is measured using PXA spectrum analyzer, duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
4.90	7.40	5.20	5.98

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5530	82.58	75.693	5.98	5.98	24.00	11.00
High	5610	82.58	76.061	5.98	5.98	24.00	11.00

Duty Cycle CF (dB)	0.18	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	12.24	12.23	12.24	17.01	24.00	-6.99
High	5610	11.97	12.04	12.23	16.85	24.00	-7.15



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5530	-4.59	-4.93	-4.65	0.23	11.00	-10.77
High	5610	-5.04	-5.27	-4.75	-0.06	11.00	-11.06



PSD, CHAIN 0

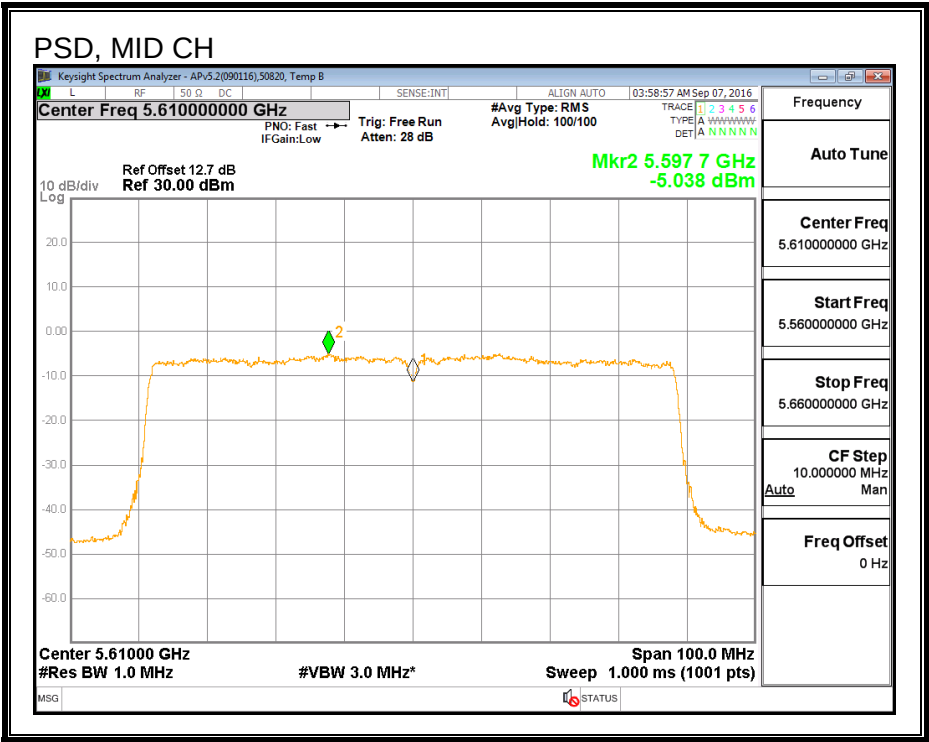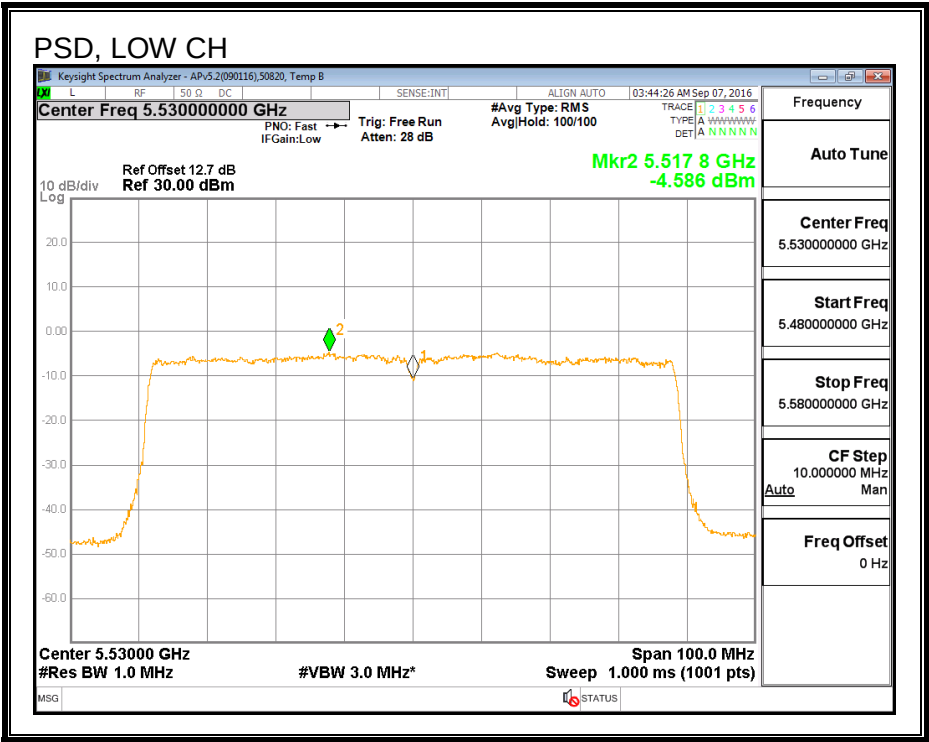

PSD, CHAIN 1

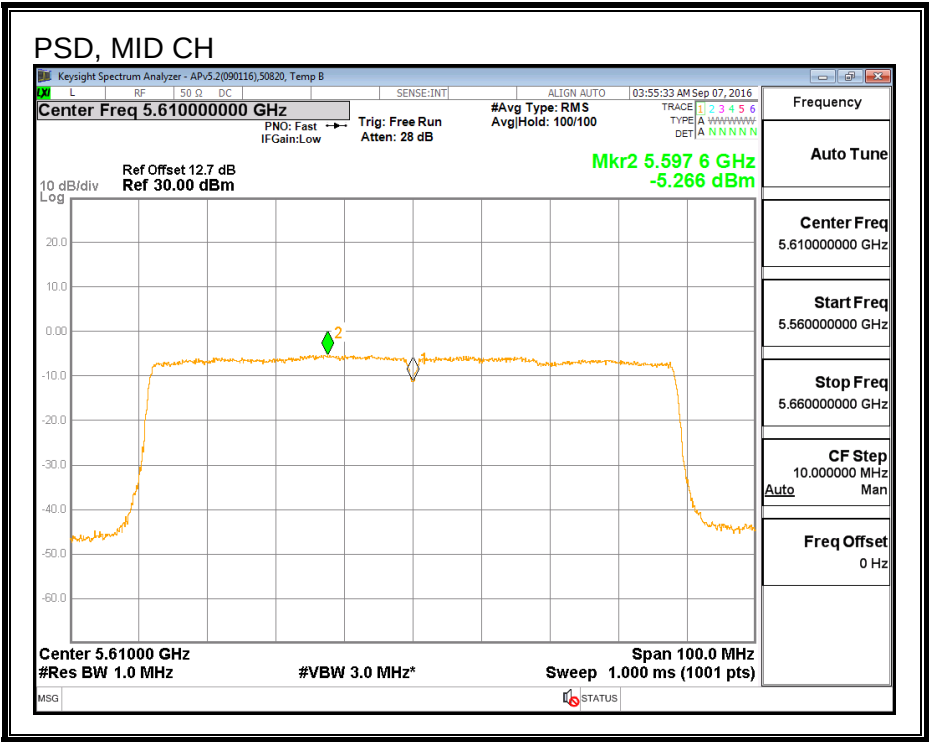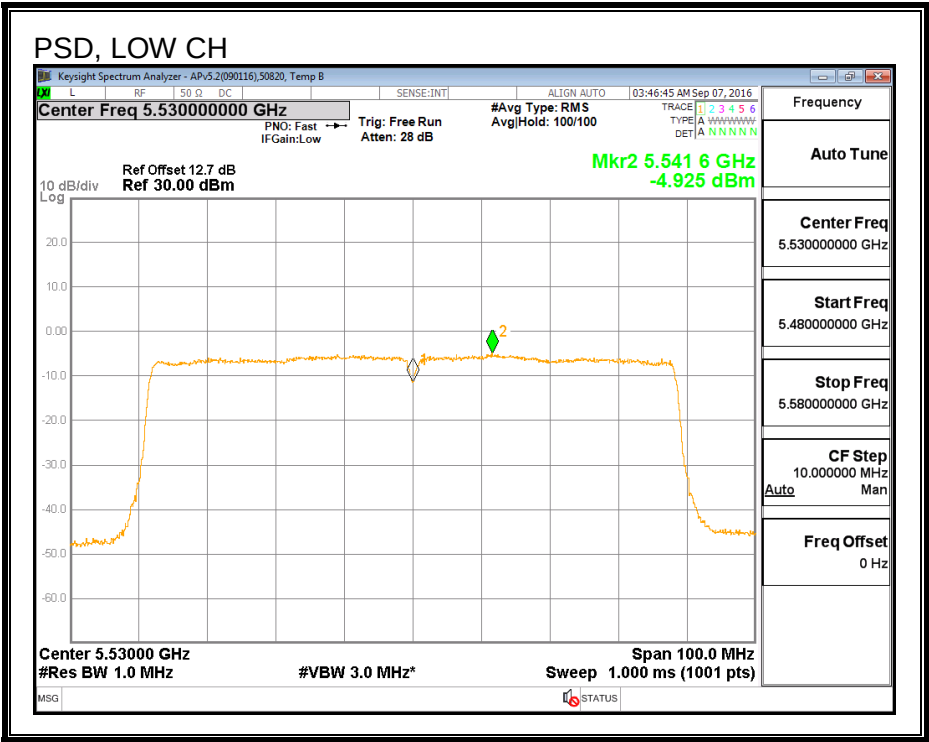

PSD, CHAIN 2

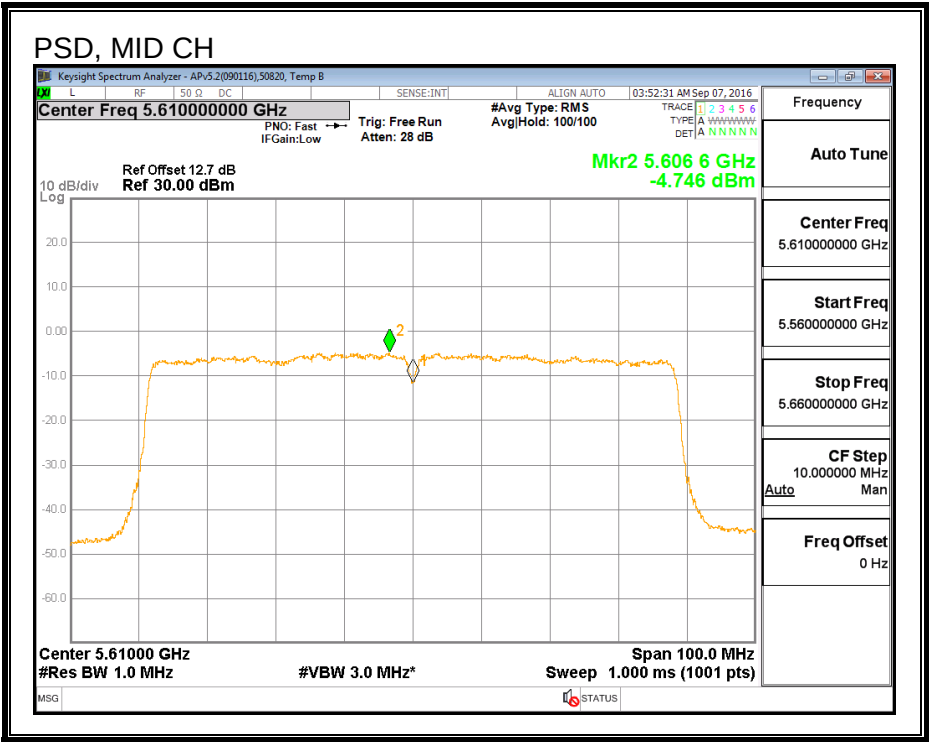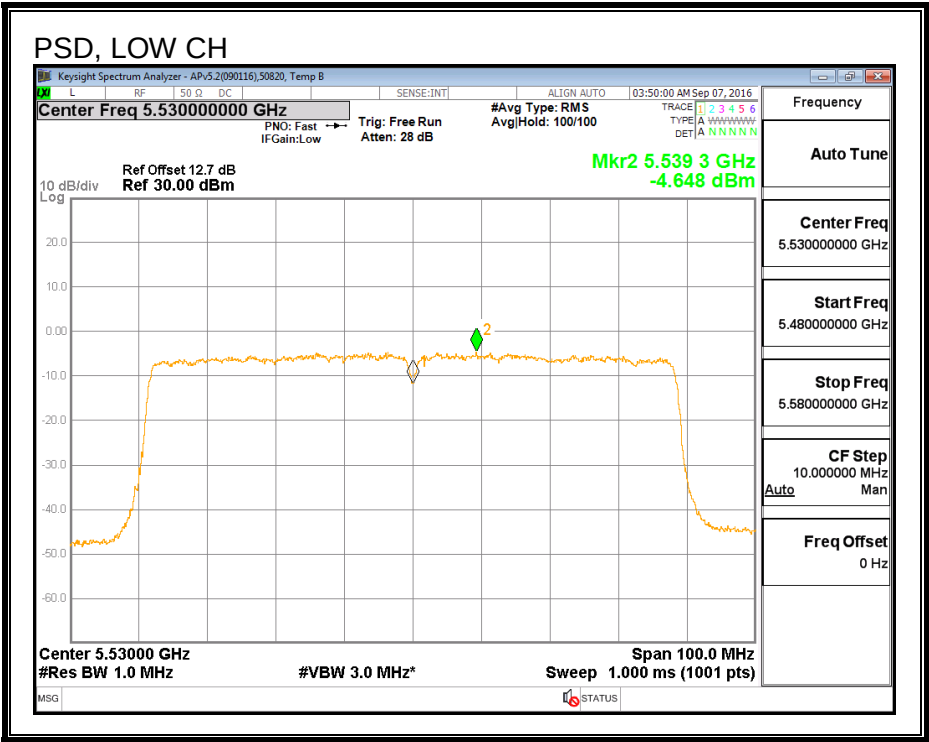

8.104.5. STRADDLE CHANNEL 138 RESULTS (FCC)

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	76.38	5.98	5.98	24.00	11.00

Duty Cycle CF (dB)	0.18	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	12.01	11.92	12.04	16.94	24.00	-7.06


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-4.58	-5.28	-4.96	0.02	11.00	-10.98


OUTPUT POWER, CHAIN 0

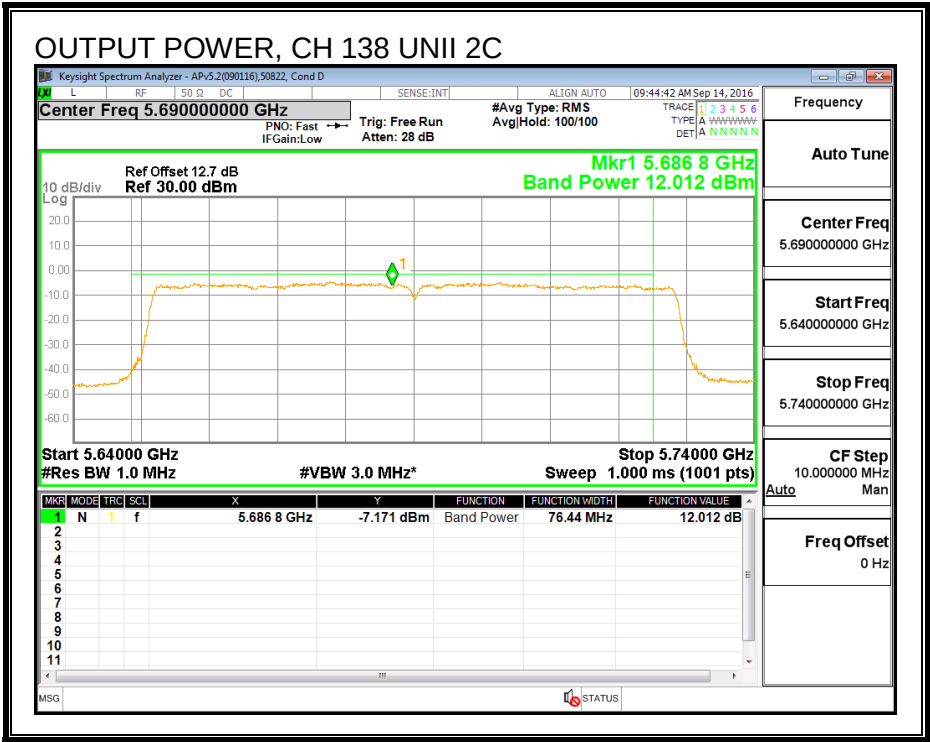


OUTPUT POWER, CHAIN 1

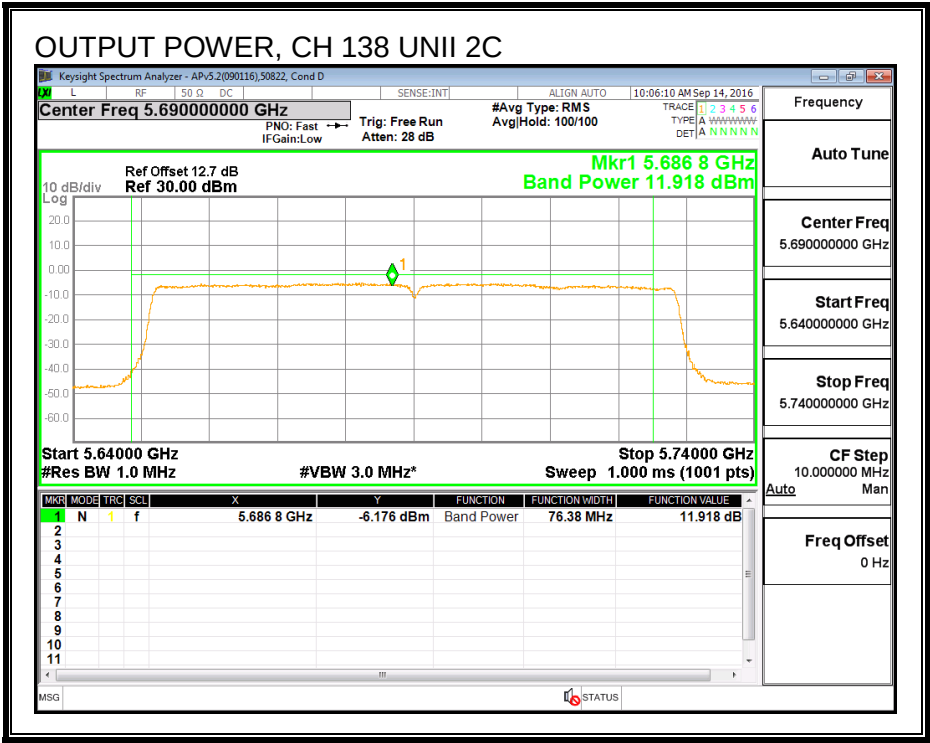


OUTPUT POWER, CHAIN 2

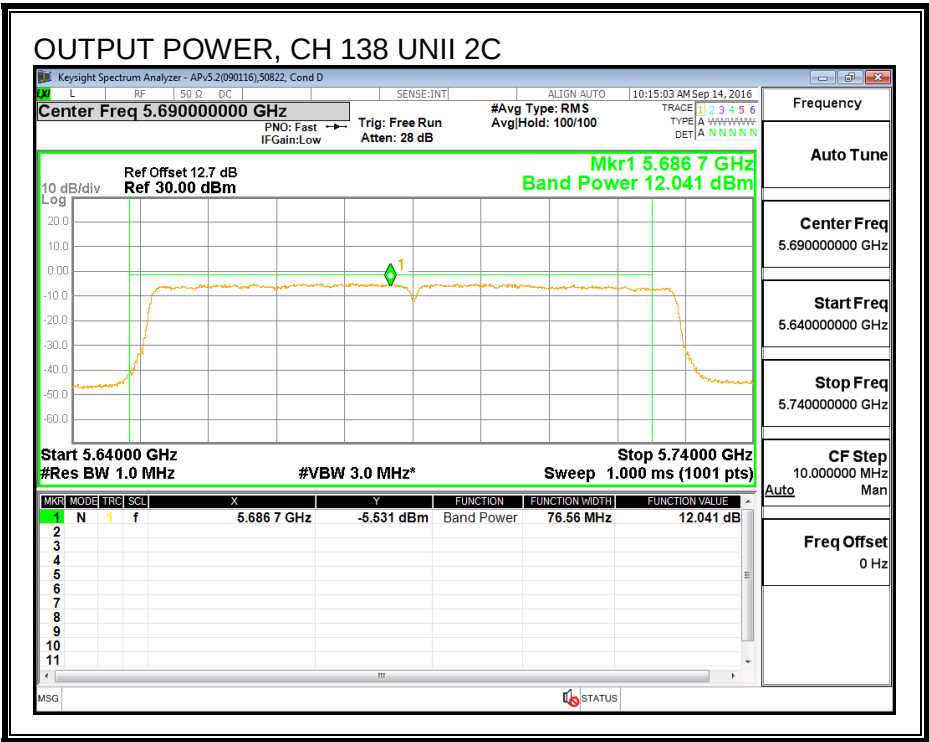


PSD, CHAIN 0

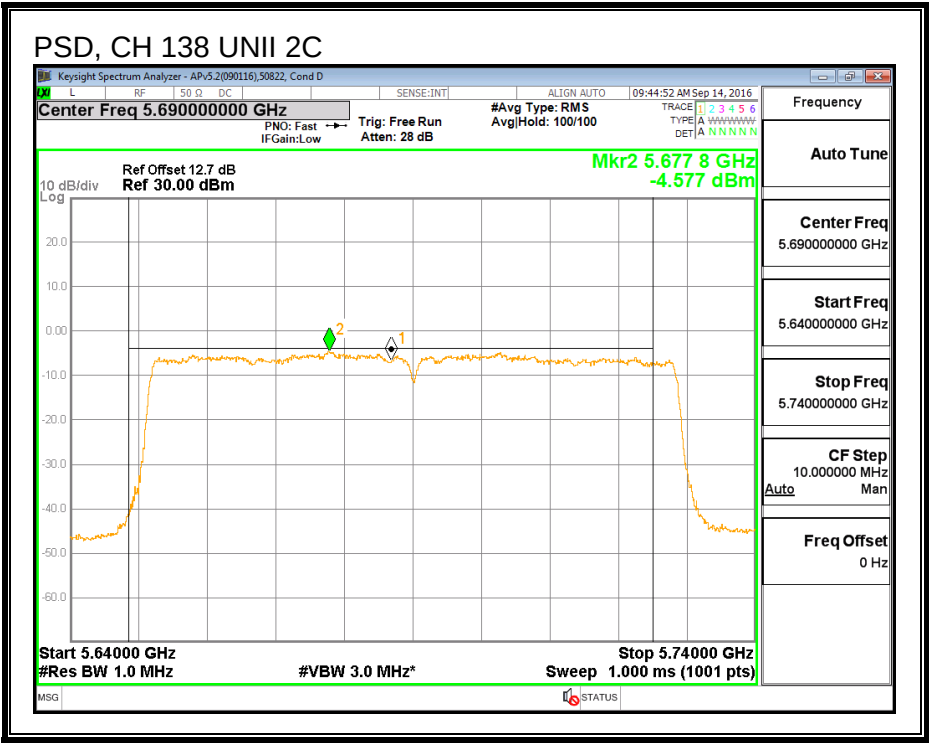

PSD, CHAIN 1

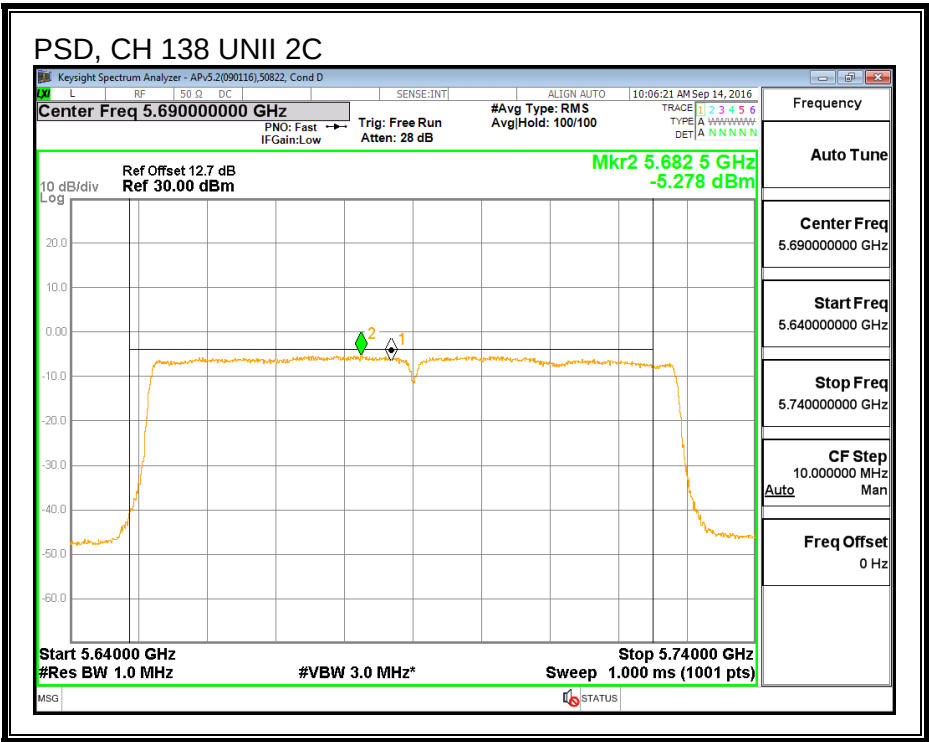

PSD, CHAIN 2

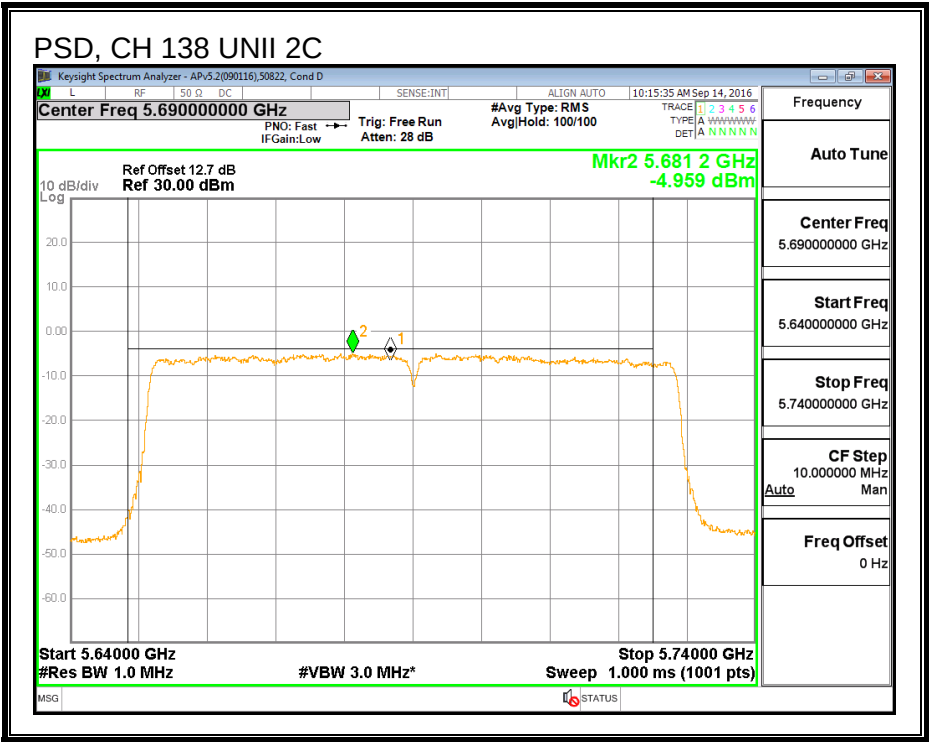

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	6.38	5.98	5.98	30.00	30.00

Duty Cycle CF (dB)	0.18	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	-2.22	-2.51	-2.32	2.60	30.00	-27.40


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-9.14	-9.82	-9.39	-4.49	30.00	-34.49


OUTPUT POWER, CHAIN 0

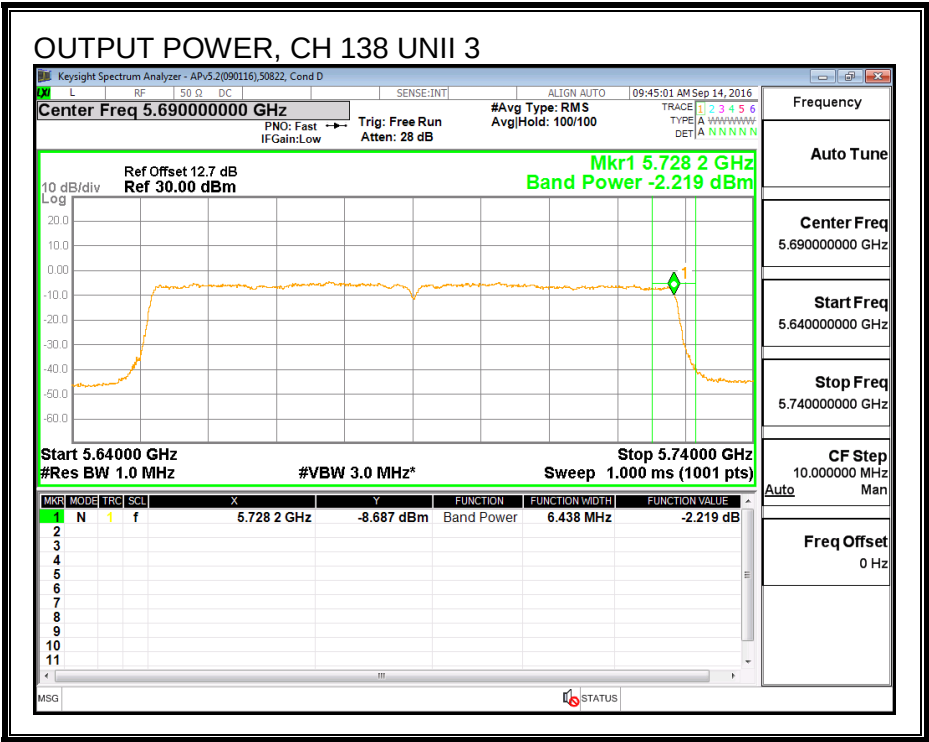


OUTPUT POWER, CHAIN 1

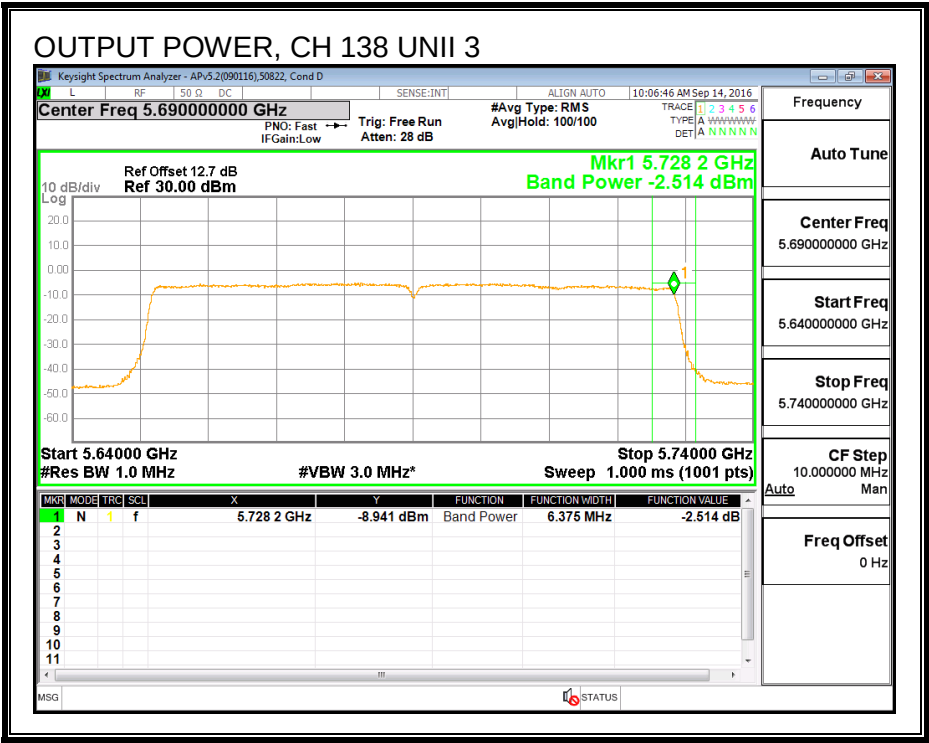


OUTPUT POWER, CHAIN 2

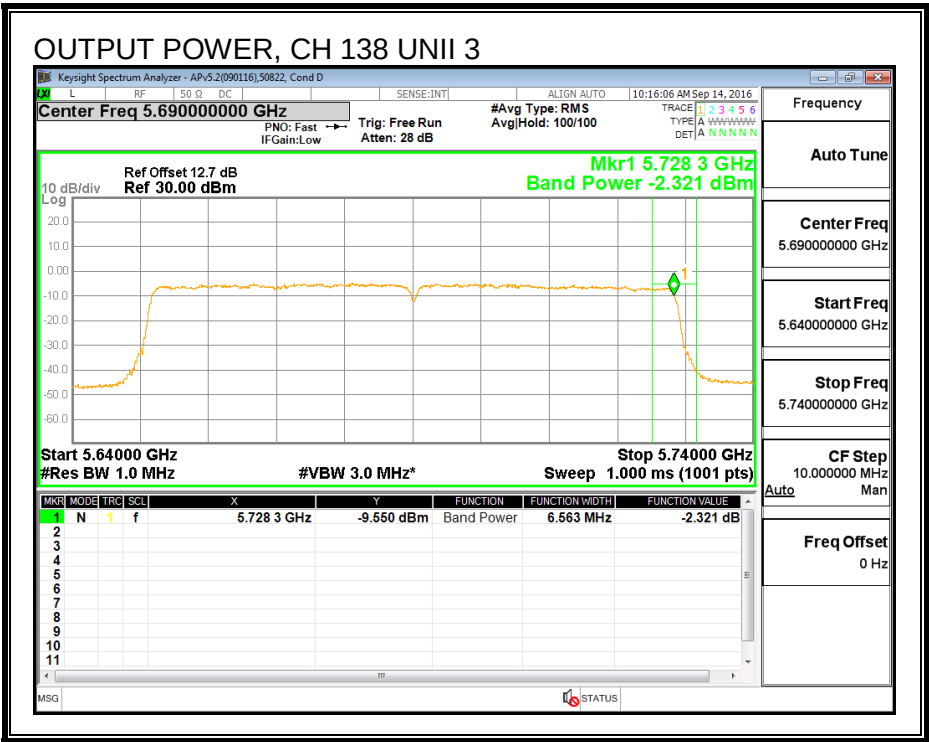


PSD, CHAIN 0

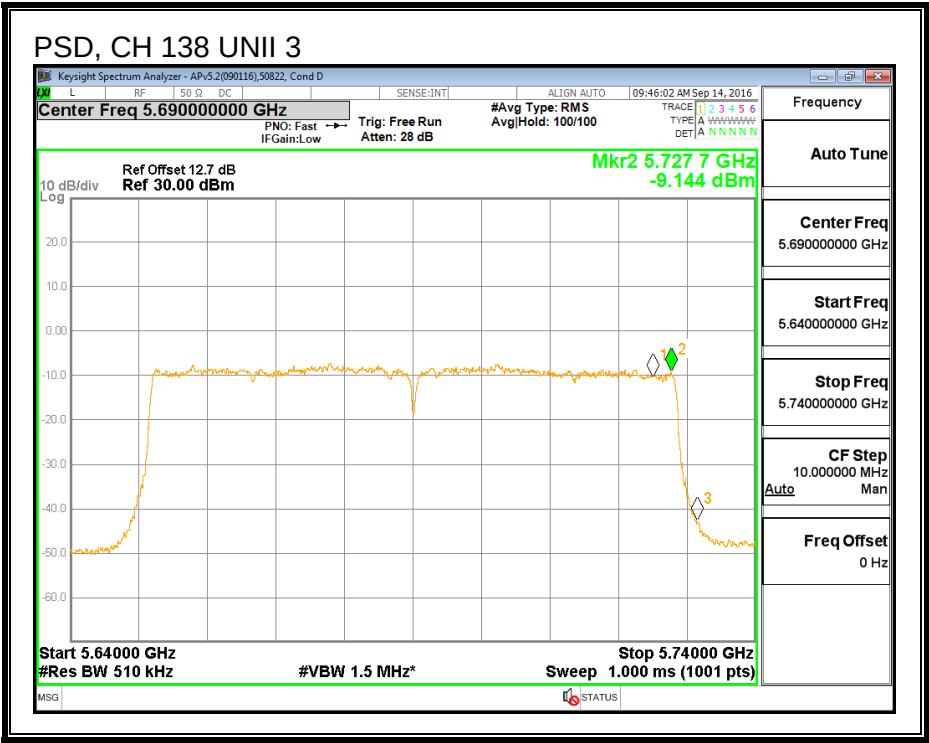

PSD, CHAIN 1

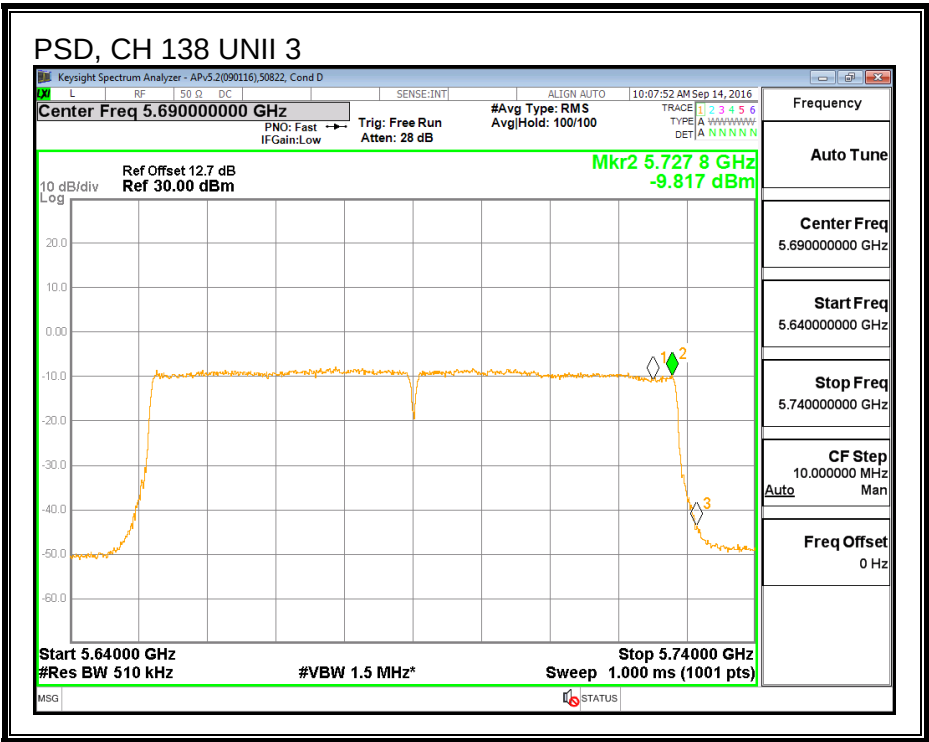

PSD, CHAIN 2

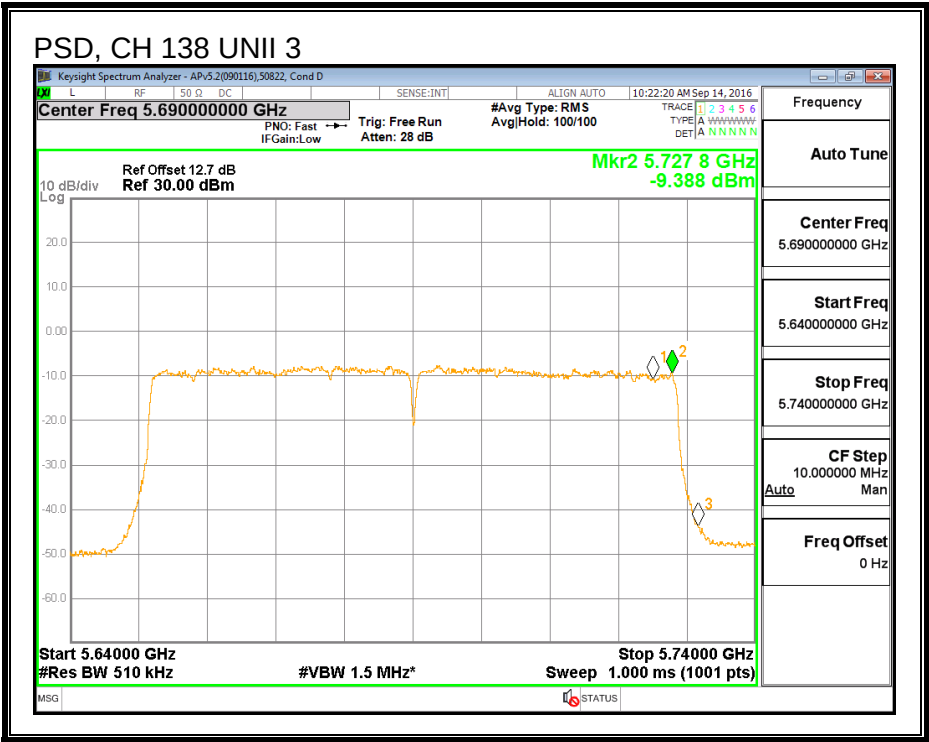

8.104.6. STRADDLE CHANNEL 138 RESULTS (IC)

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	72.970	5.98	5.98	24.00	11.00

Duty Cycle CF (dB)	0.18	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	12.00	11.91	12.03	16.93	24.00	-7.07


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-4.58	-5.28	-4.96	0.02	11.00	-10.98


OUTPUT POWER, CHAIN 0

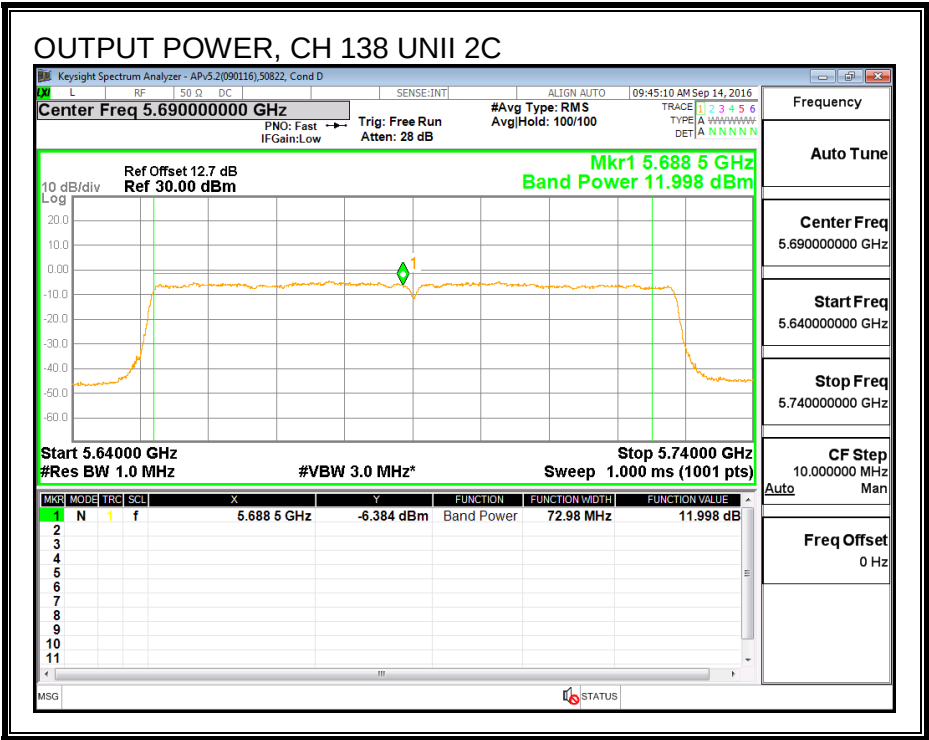


OUTPUT POWER, CHAIN 1

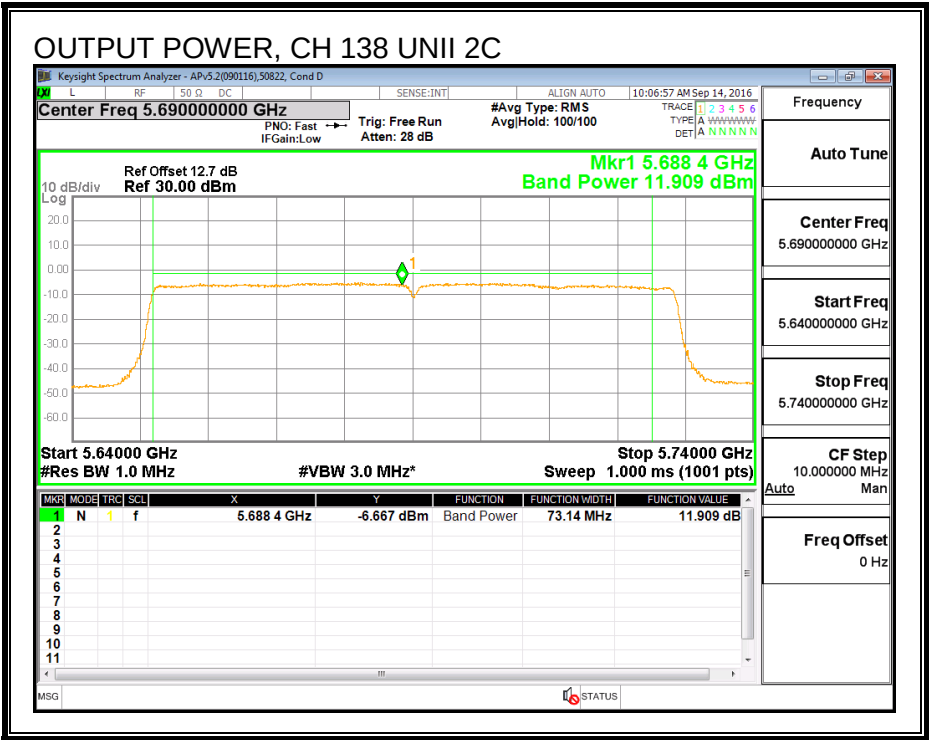


OUTPUT POWER, CHAIN 2

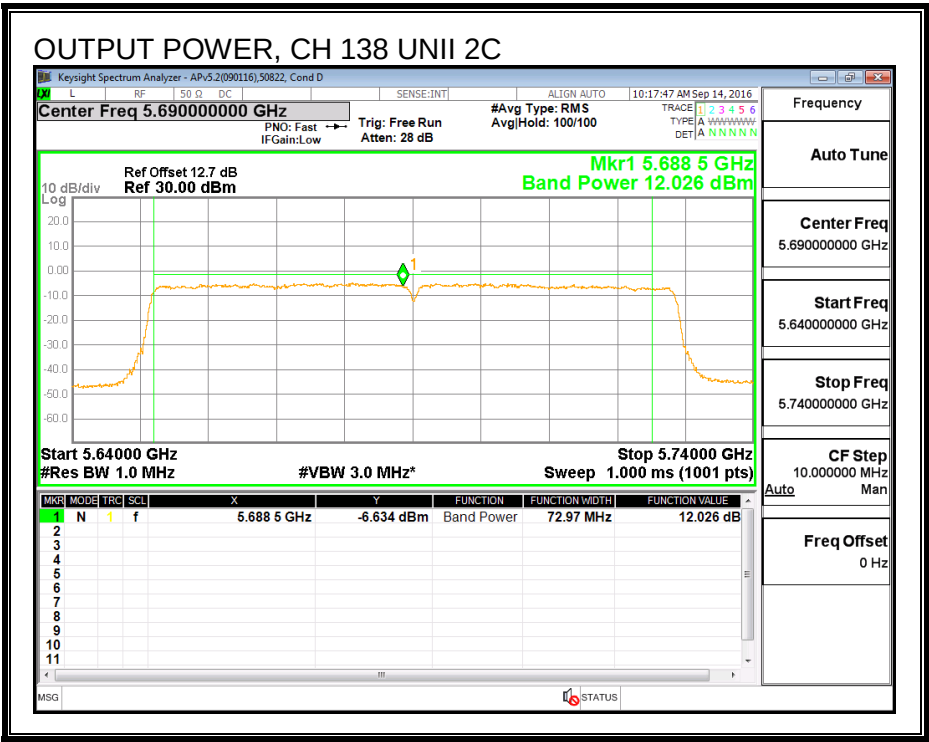


PSD, CHAIN 0

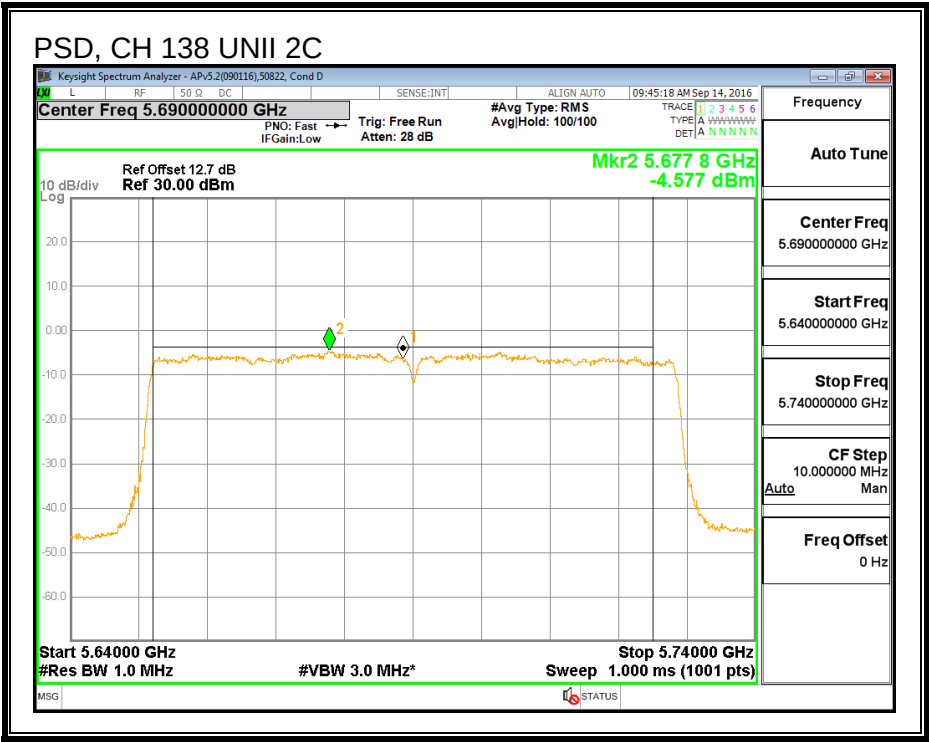

PSD, CHAIN 1

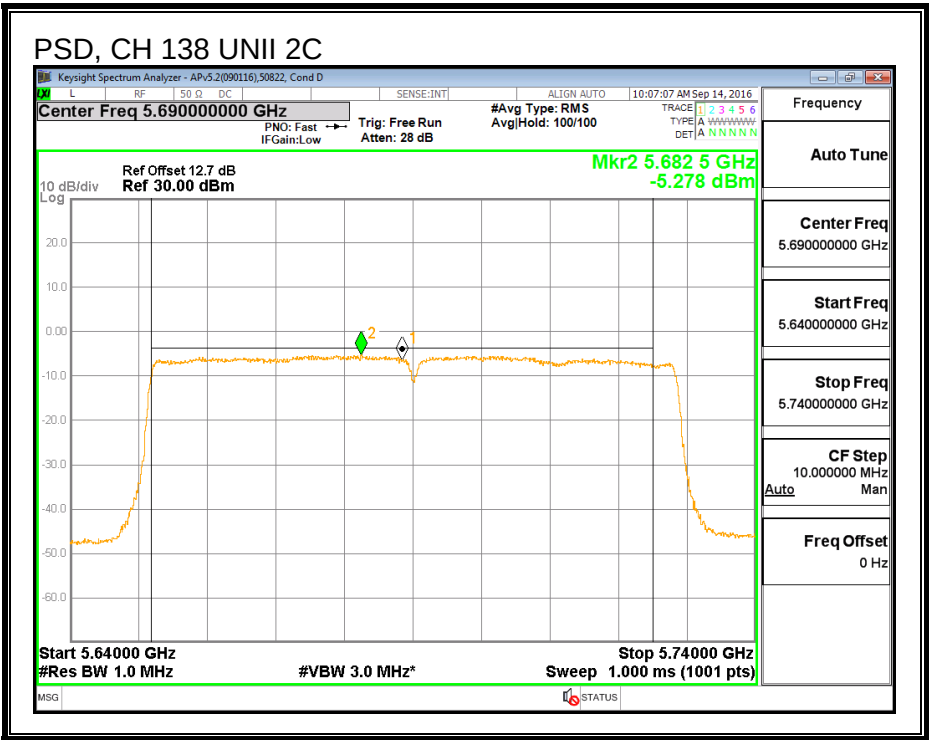

PSD, CHAIN 2

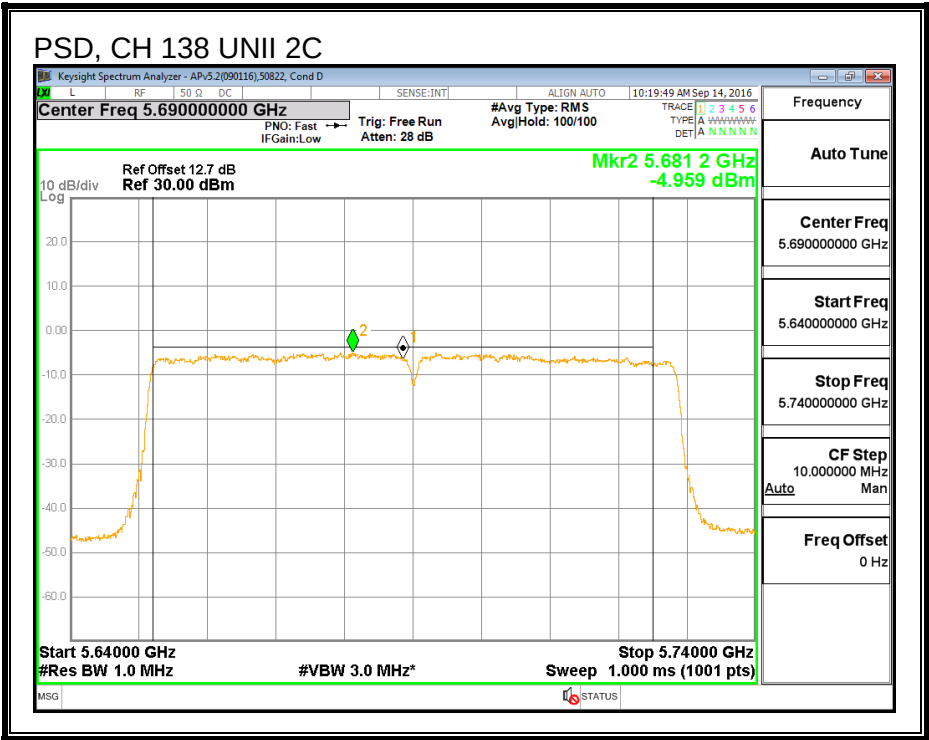

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	2.971	5.98	5.98	30.00	30.00

Duty Cycle CF (dB)	0.18	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	-2.88	-3.00	-3.00	1.99	30.00	-28.01


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-9.14	-9.82	-9.39	-4.49	30.00	-34.49


OUTPUT POWER, CHAIN 0

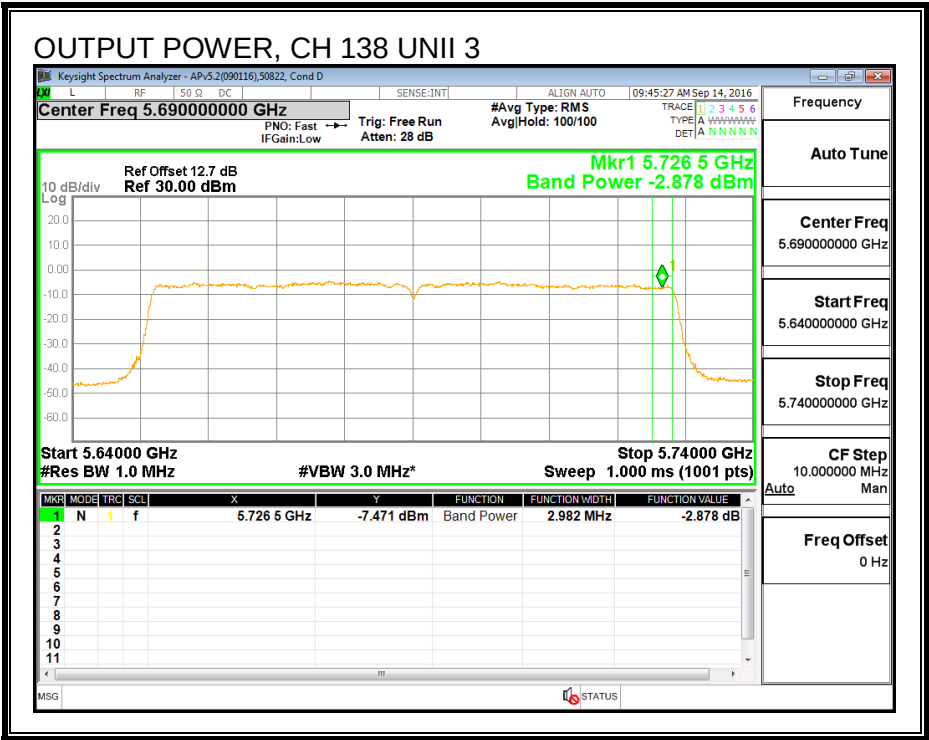


OUTPUT POWER, CHAIN 1

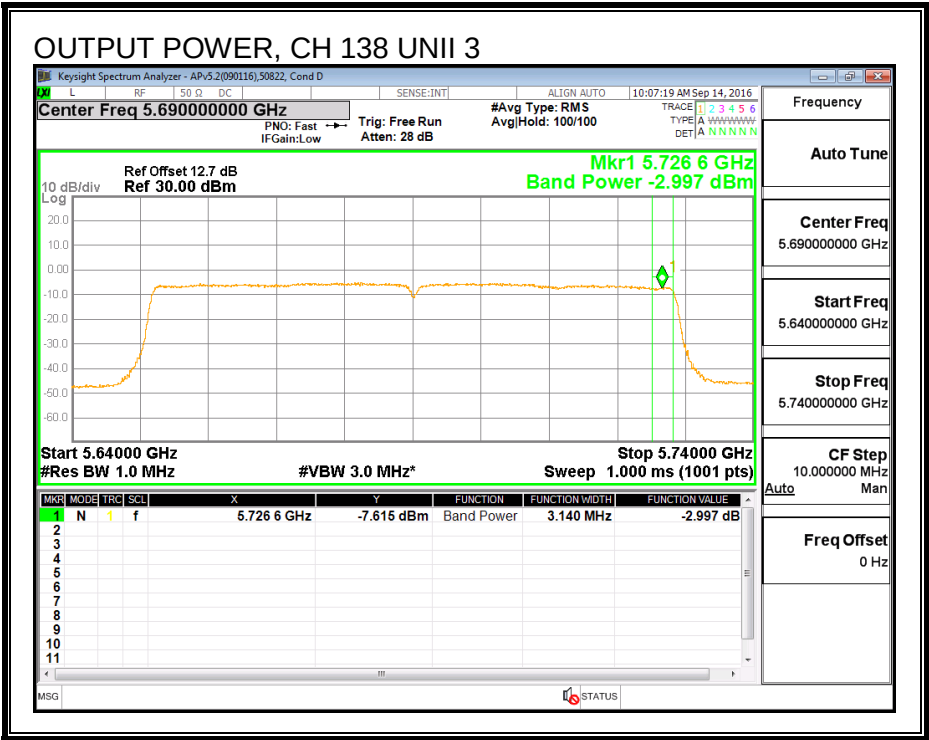


OUTPUT POWER, CHAIN 2

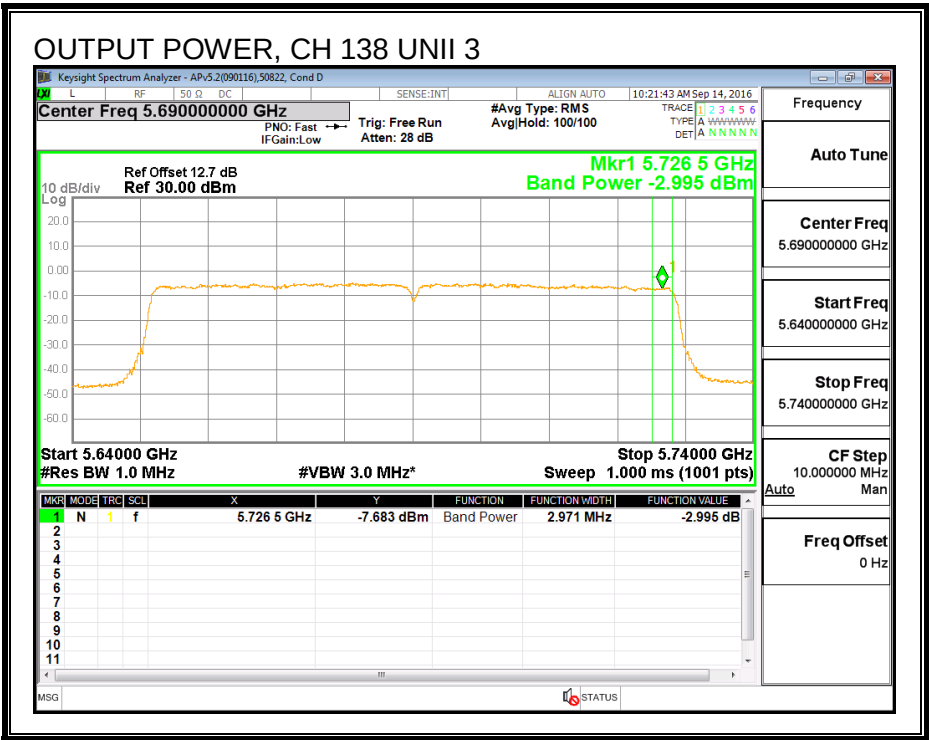


PSD, CHAIN 0

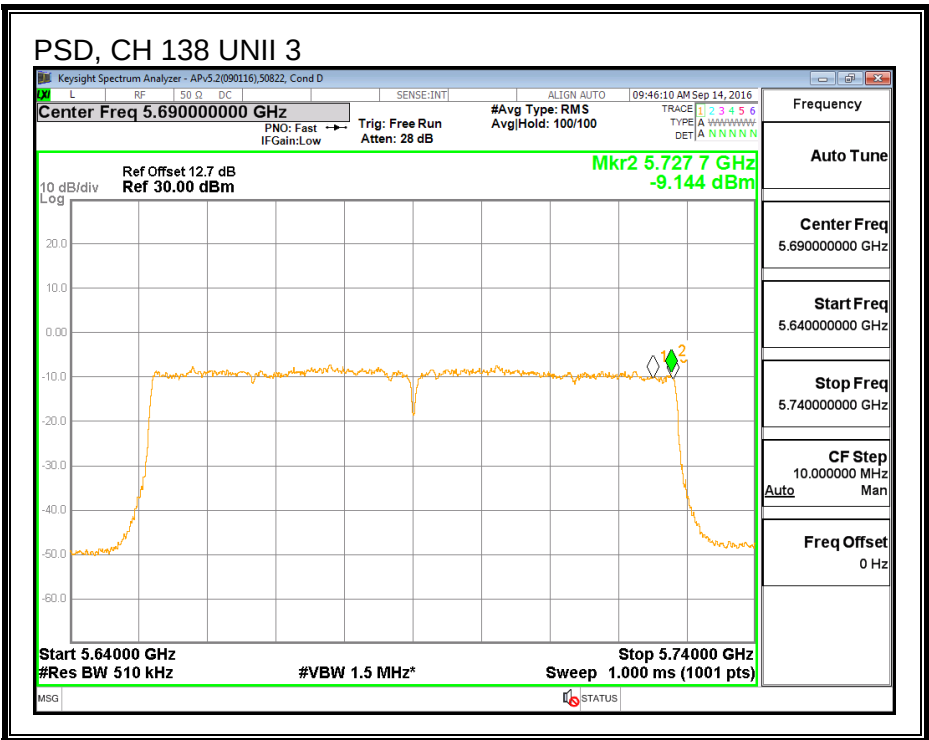

PSD, CHAIN 1

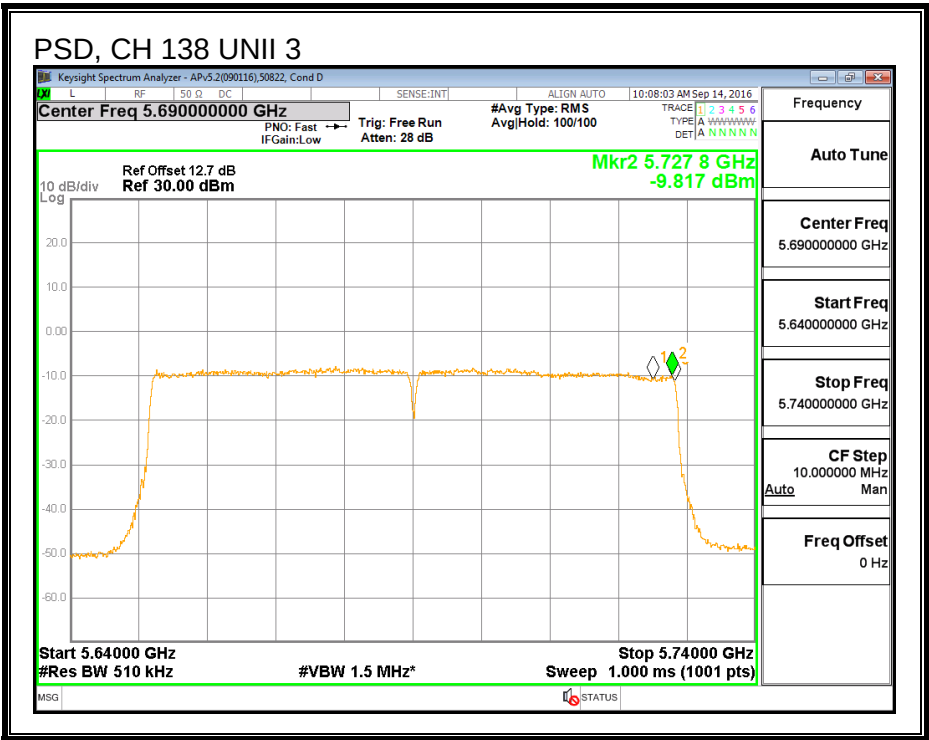

PSD, CHAIN 2

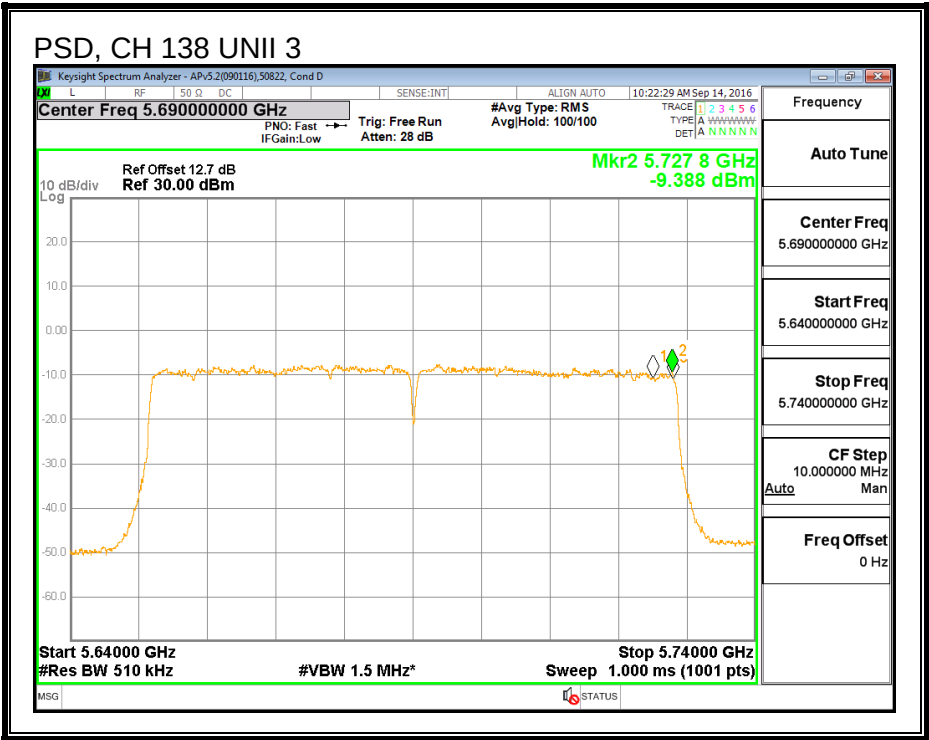

8.104.7. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)


IC RSS-247 (6.2.4) (1)

The minimum 6 dB bandwidth shall be at least 500 kHz.


RESULTS

Channel	Frequency (MHz)	6 dB BW Chain 0 (MHz)	6 dB BW Chain 1 (MHz)	6 dB BW Chain 2 (MHz)
High	5690	3.16	3.19	3.08


CHAIN 0

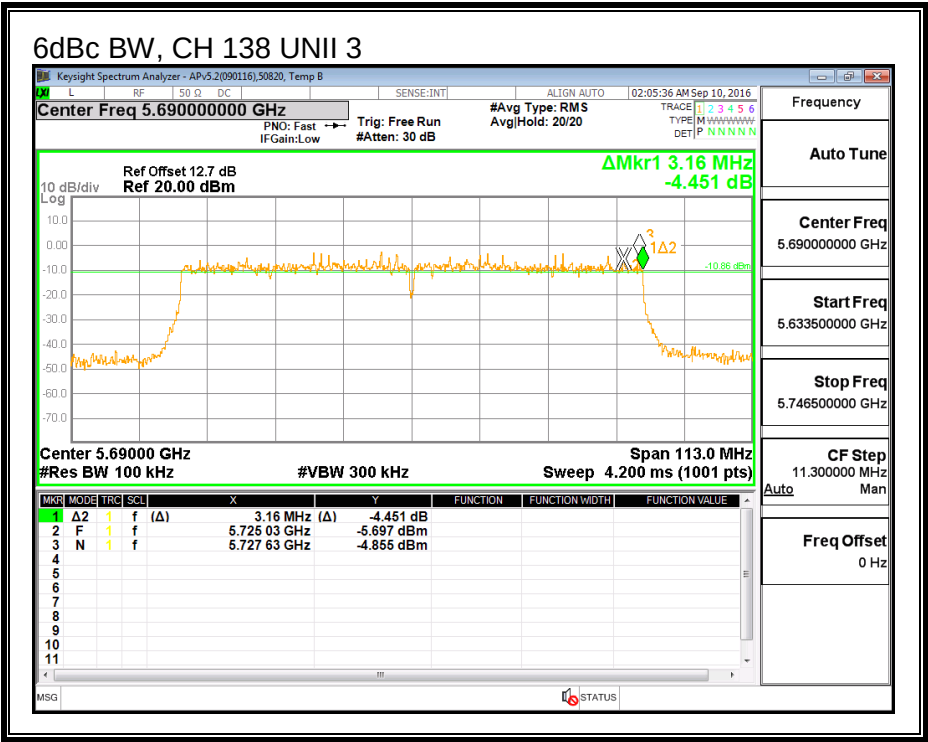

CHAIN 1

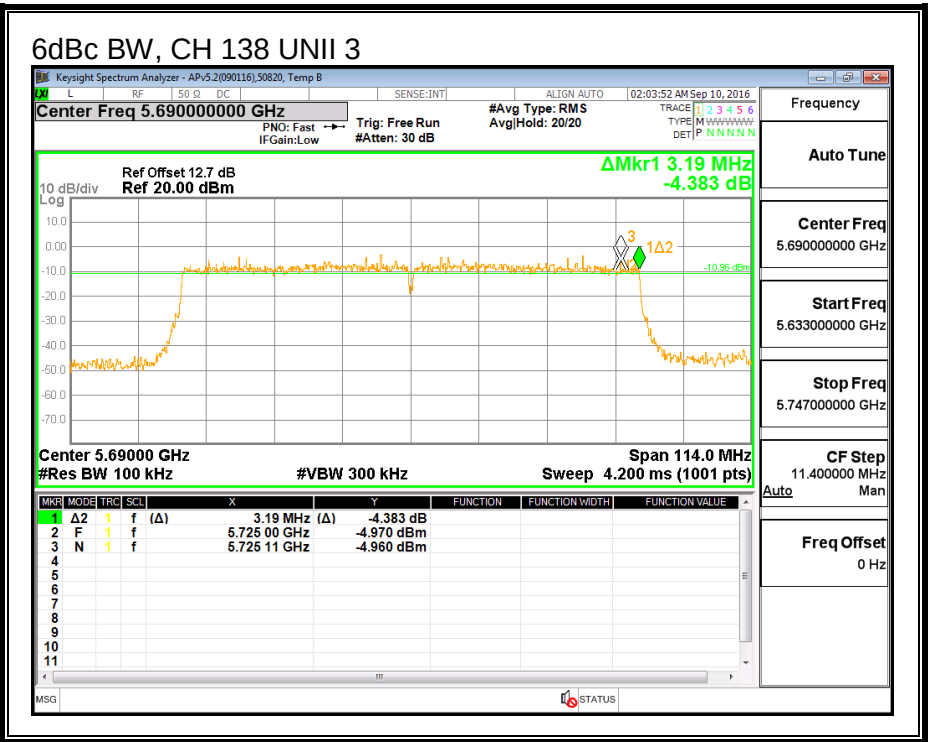

CHAIN 2

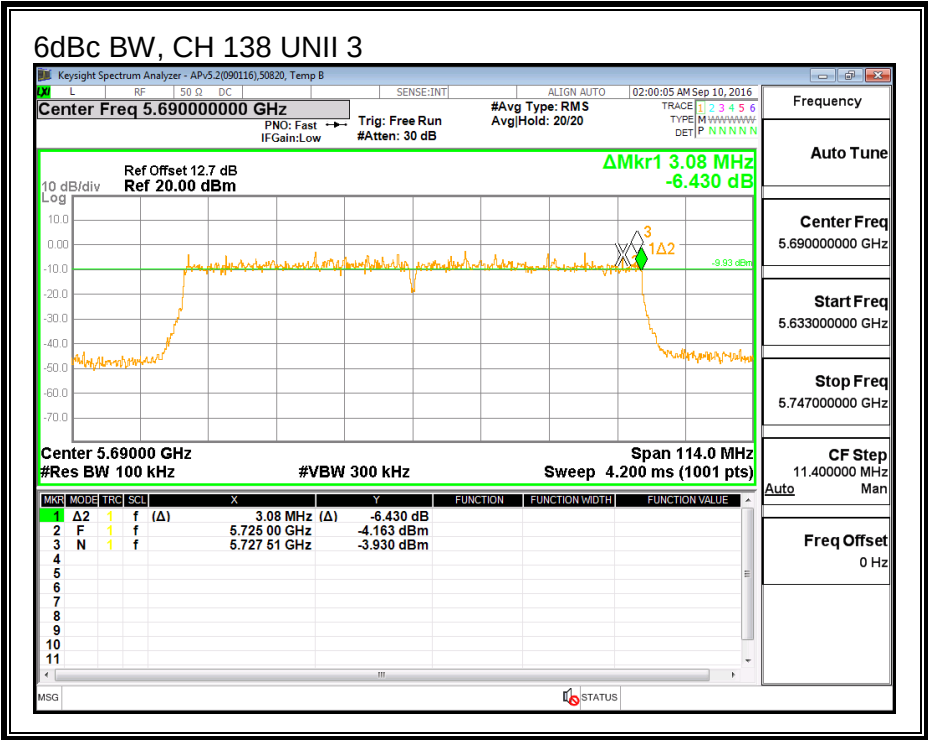

8.105. 802.11ac VHT80 3Tx BEAM FORMING MODE IN THE 5.6 GHz BAND (5610MHz for FCC only)

8.105.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Low	5530	83.250	83.250	82.750
Mid	5610	83.125	83.000	82.460
High	5690	83.250	82.875	82.212



26 dB BANDWIDTH, CHAIN 0

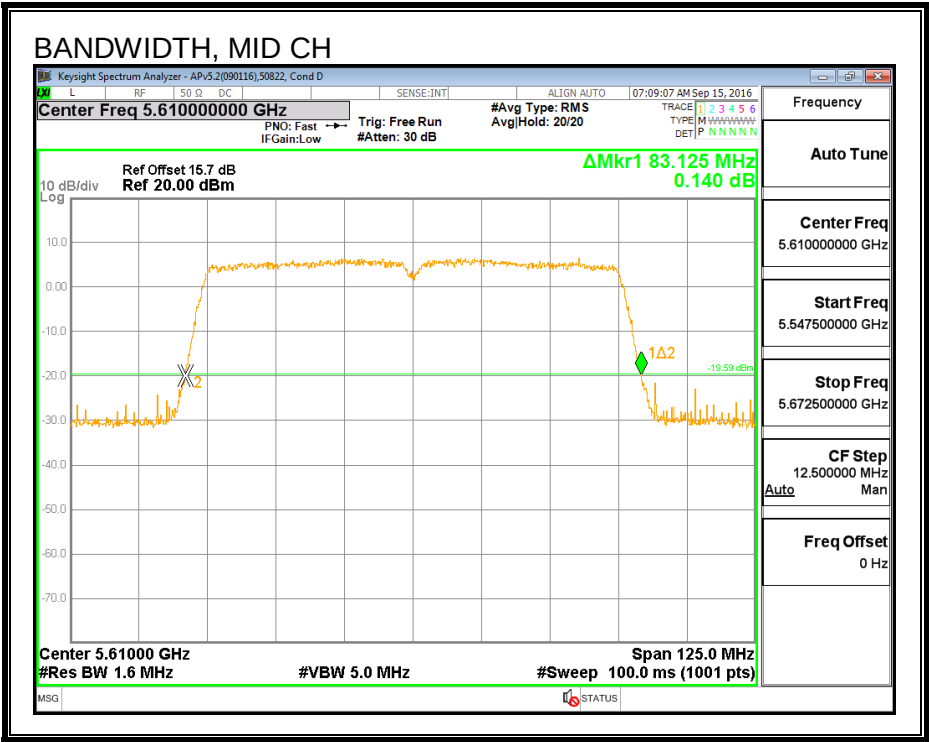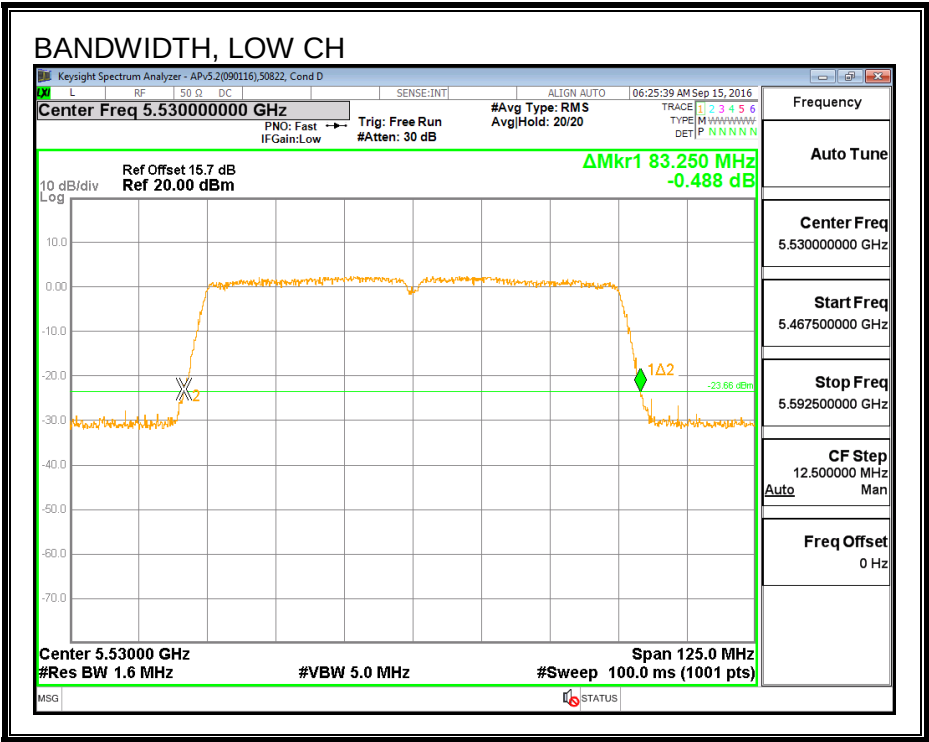

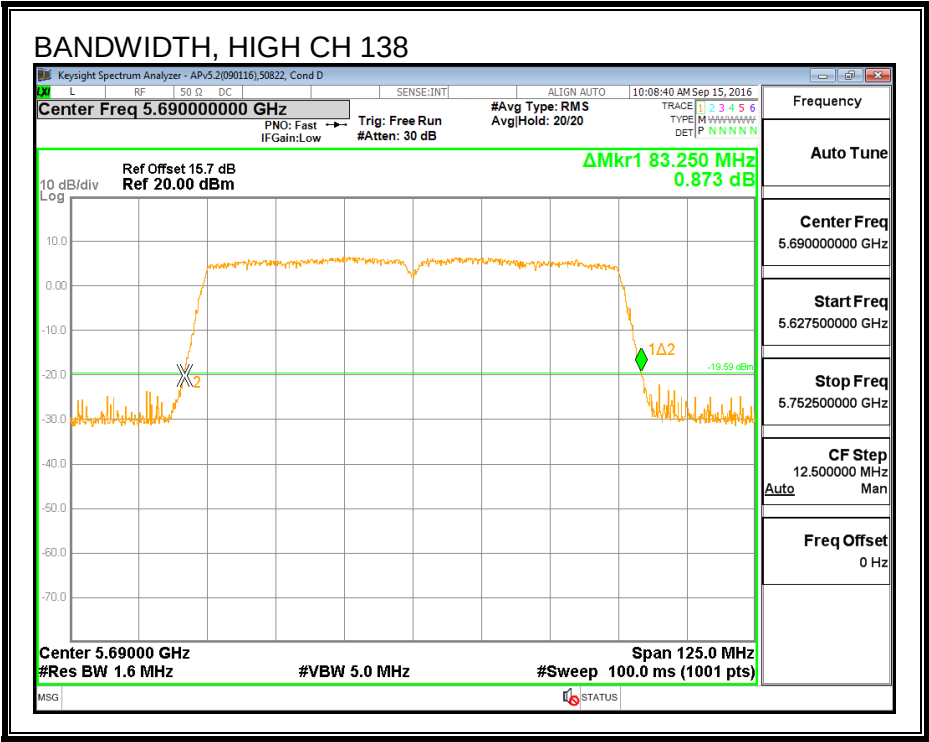

26 dB BANDWIDTH, CHAIN 1

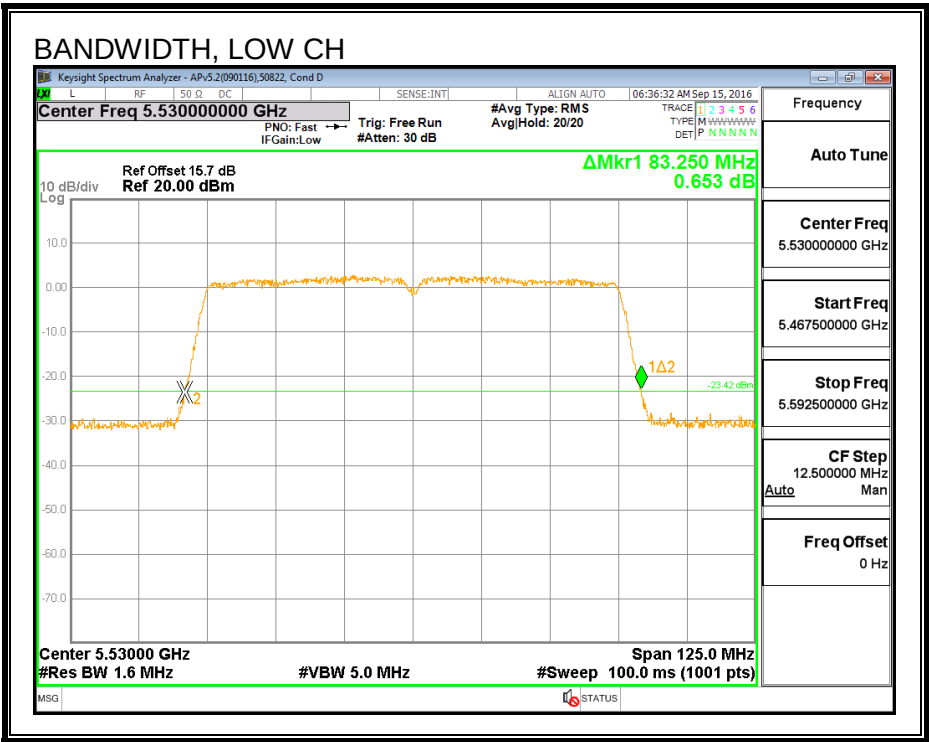

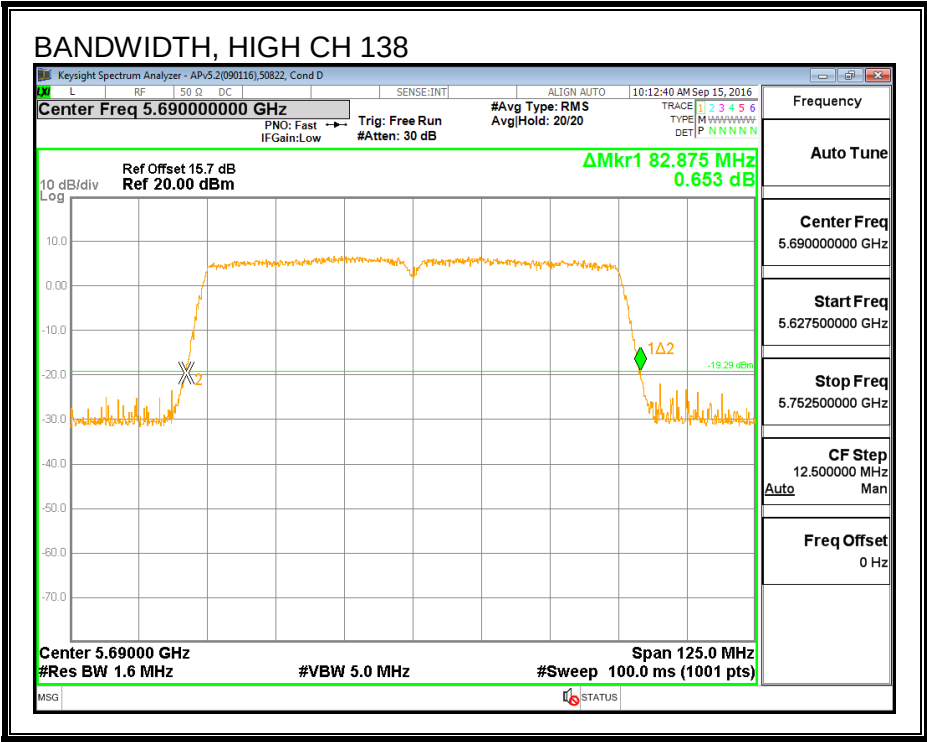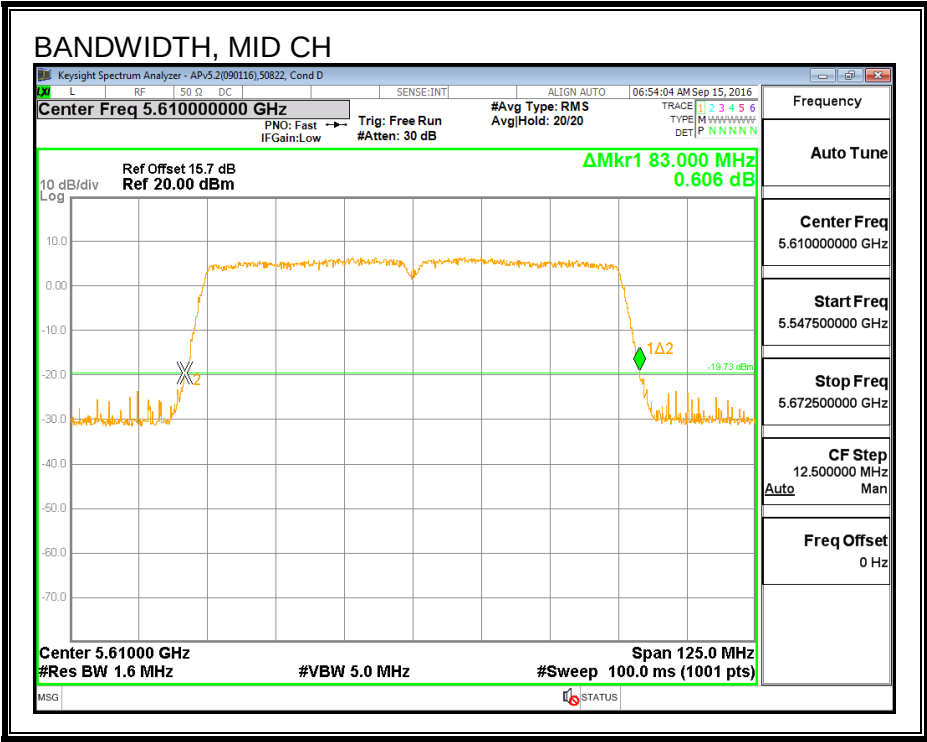

26 dB BANDWIDTH, CHAIN 2

