

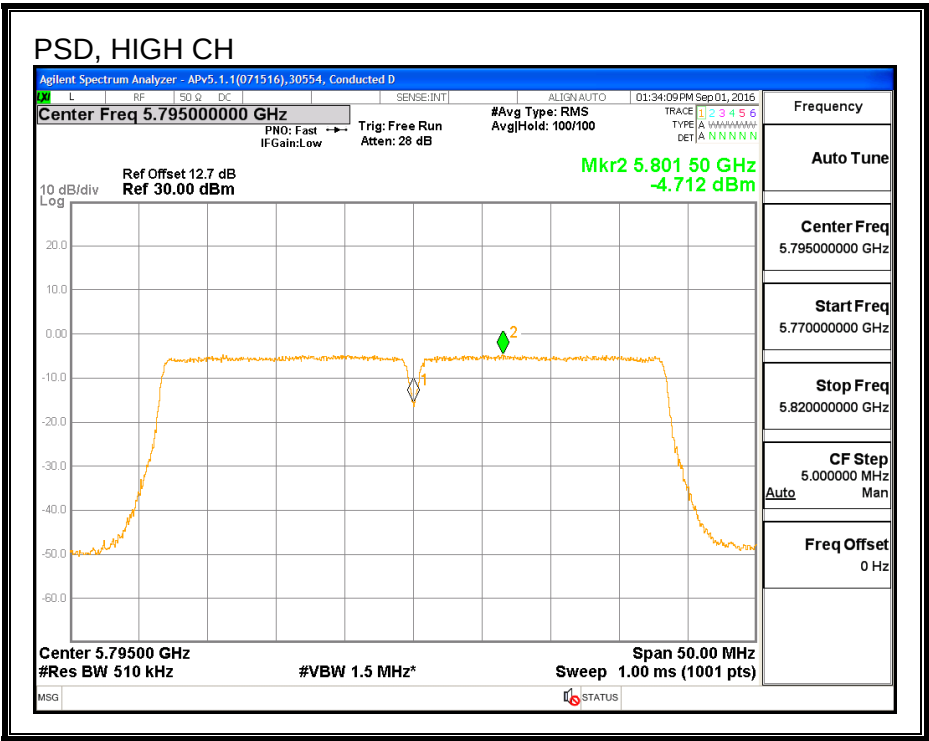
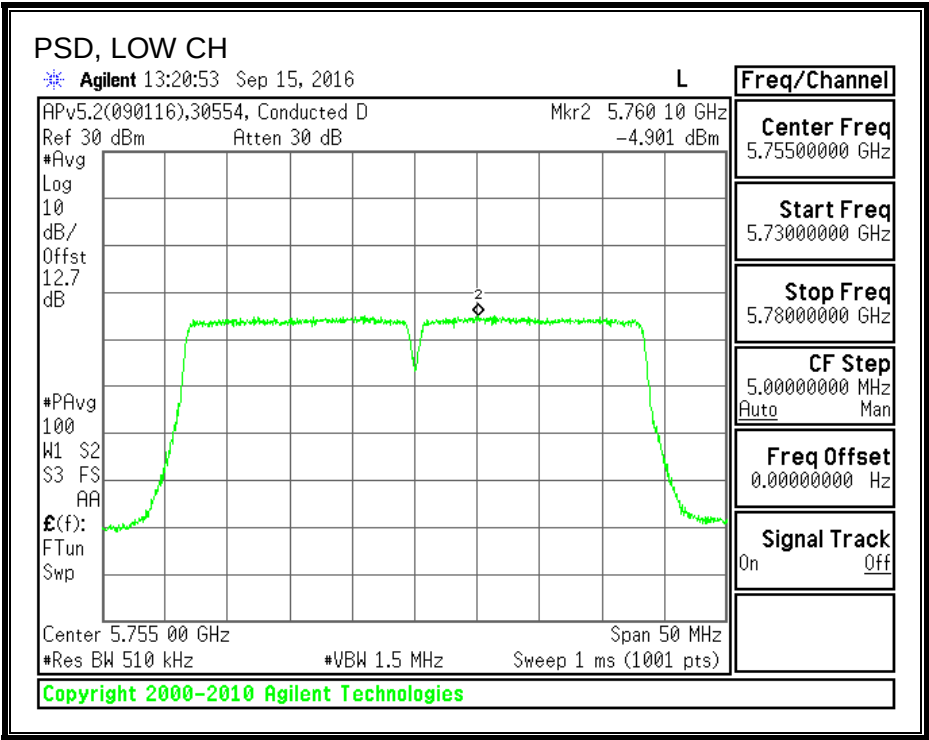


PSD, CHAIN 0

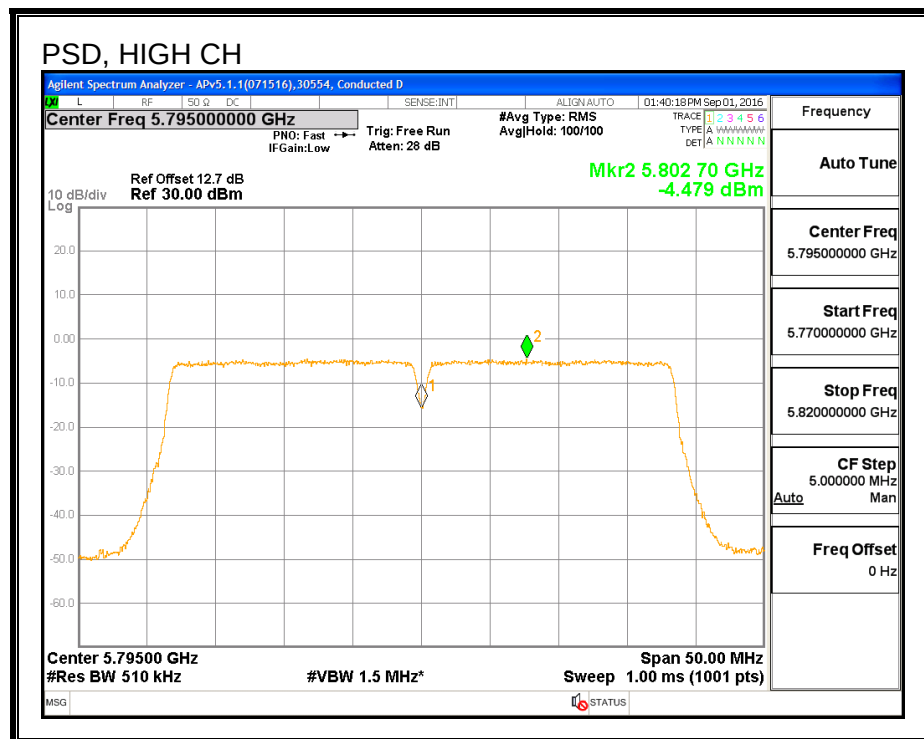

PSD, CHAIN 2

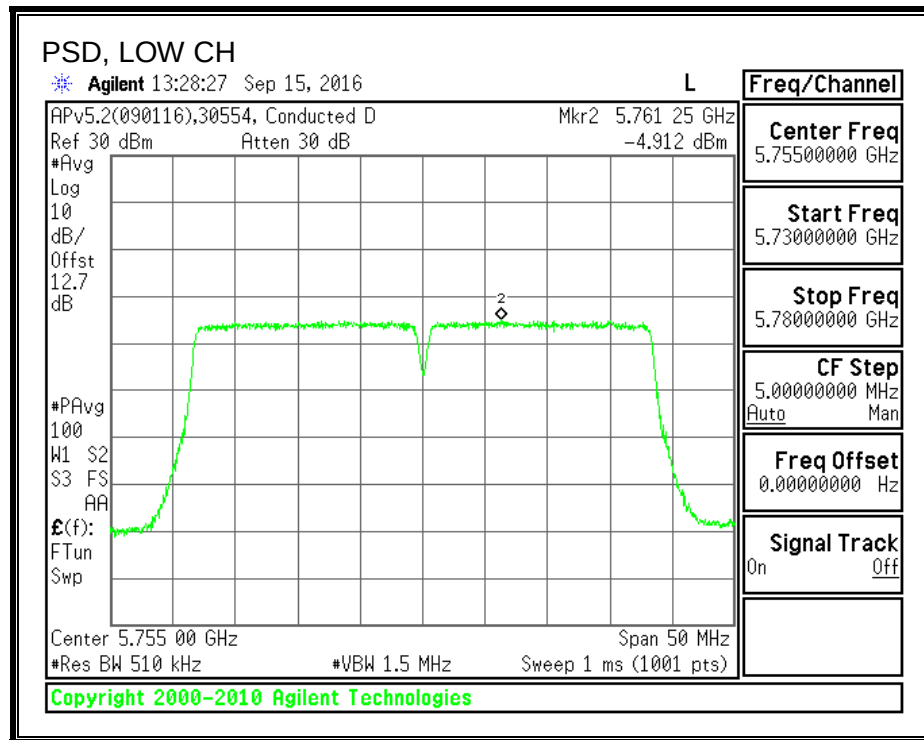

8.21. 802.11n HT40 2Tx (CHAIN 1 + CHAIN 2) CDD MODE IN THE 5.8 GHz BAND

8.21.1. 6 dB BANDWIDTH

LIMITS



FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.



RESULTS

Channel	Frequency (MHz)	6 dB BW Chain 1 (MHz)	6 dB BW Chain 2 (MHz)	Minimum Limit (MHz)
Low	5755	36.300	36.355	0.5
High	5795	36.355	36.300	0.5

6 dB BANDWIDTH, CHAIN 1

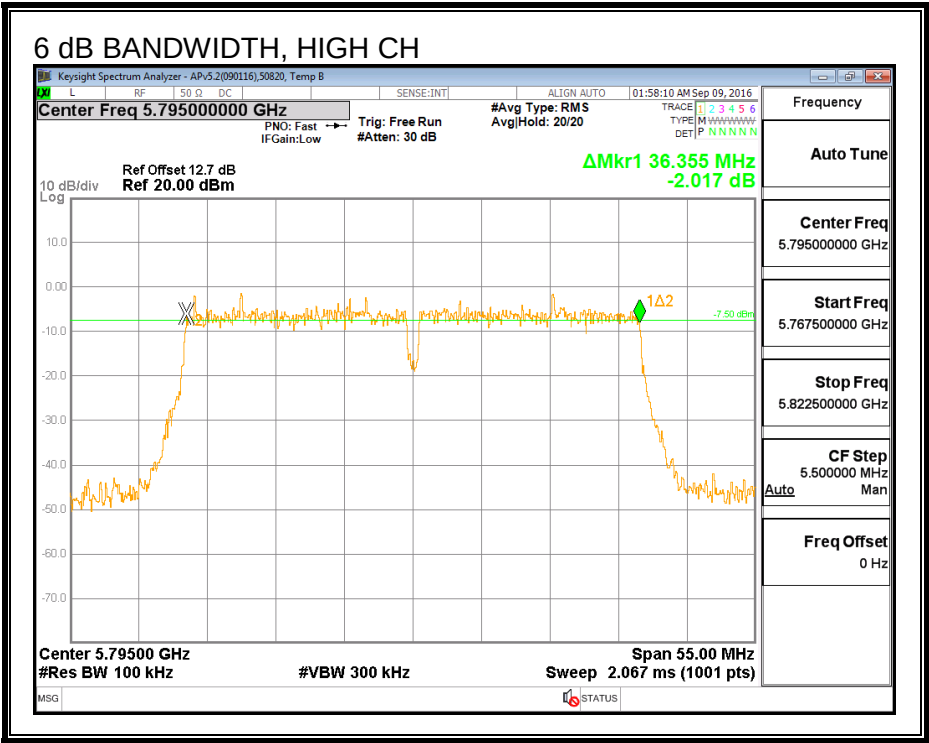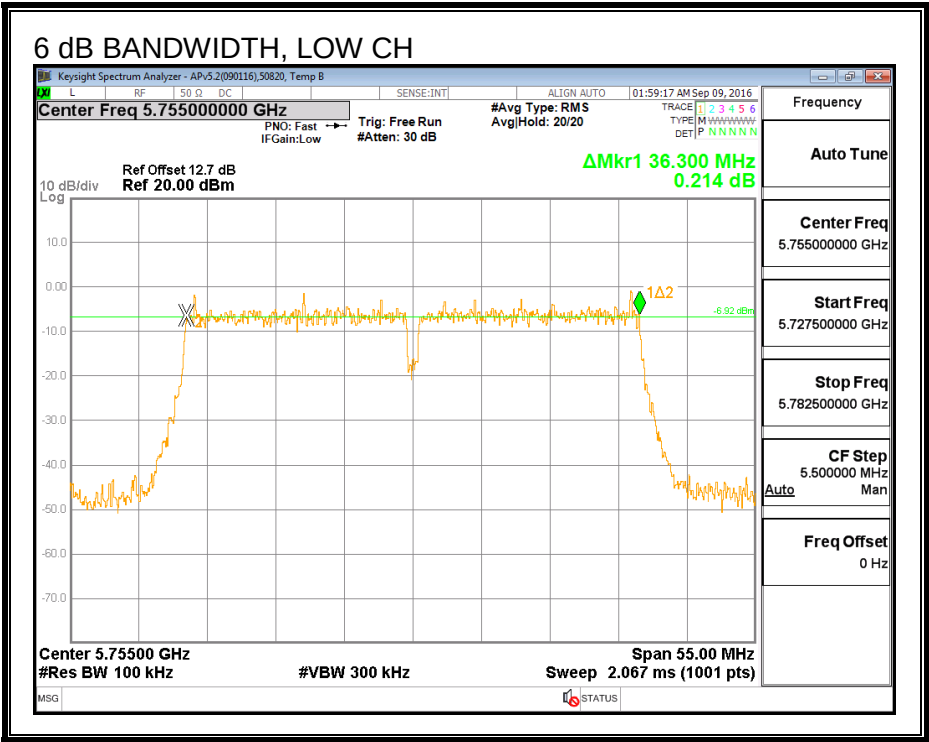

6 dB BANDWIDTH, CHAIN 2

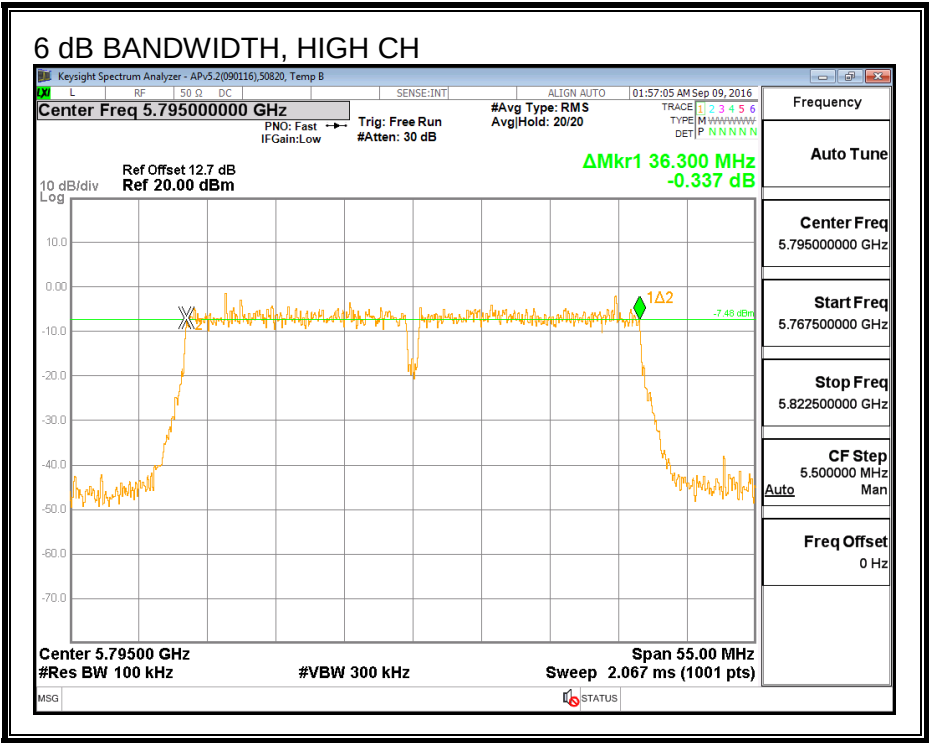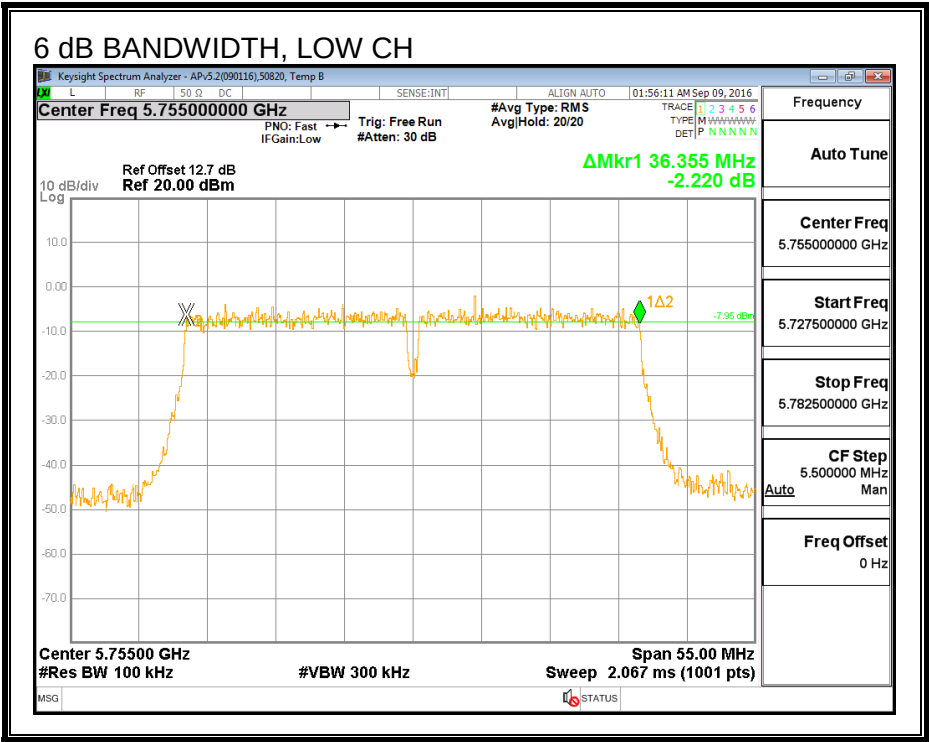

8.21.2. 26 dB BANDWIDTH



LIMITS

None, for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Low	5755	40.982	40.626
High	5795	40.858	40.626

26 dB BANDWIDTH, CHAIN 1

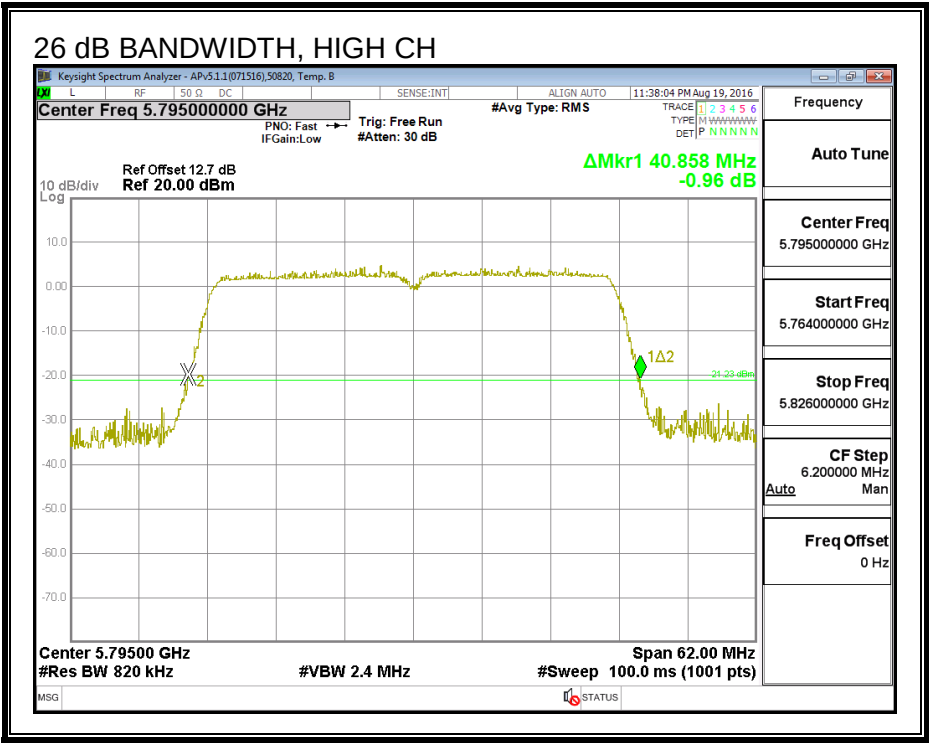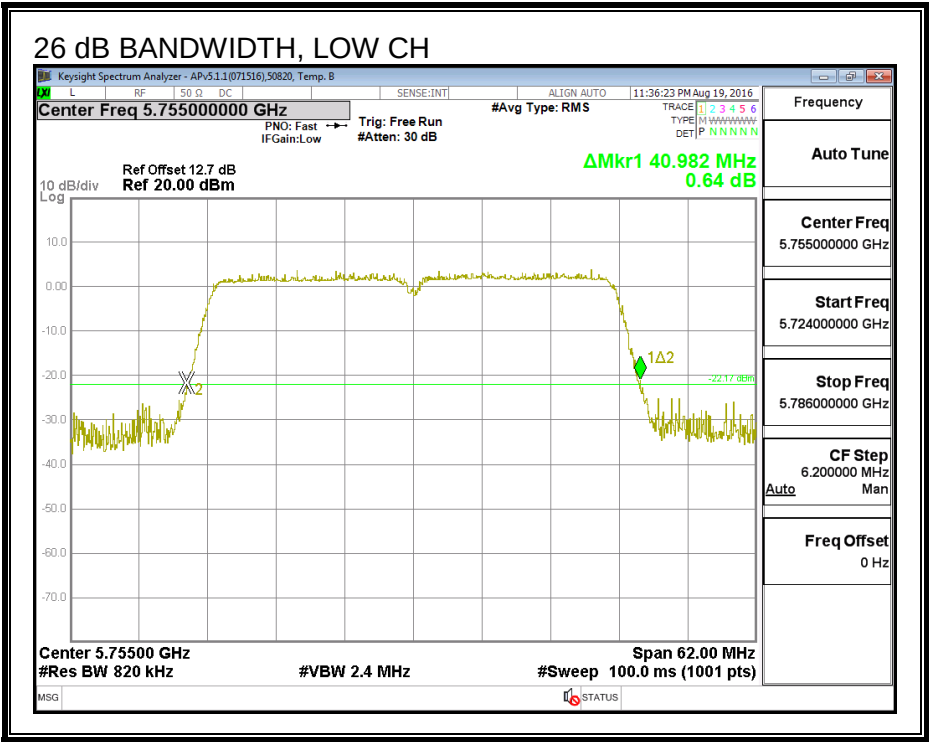

26 dB BANDWIDTH, CHAIN 2

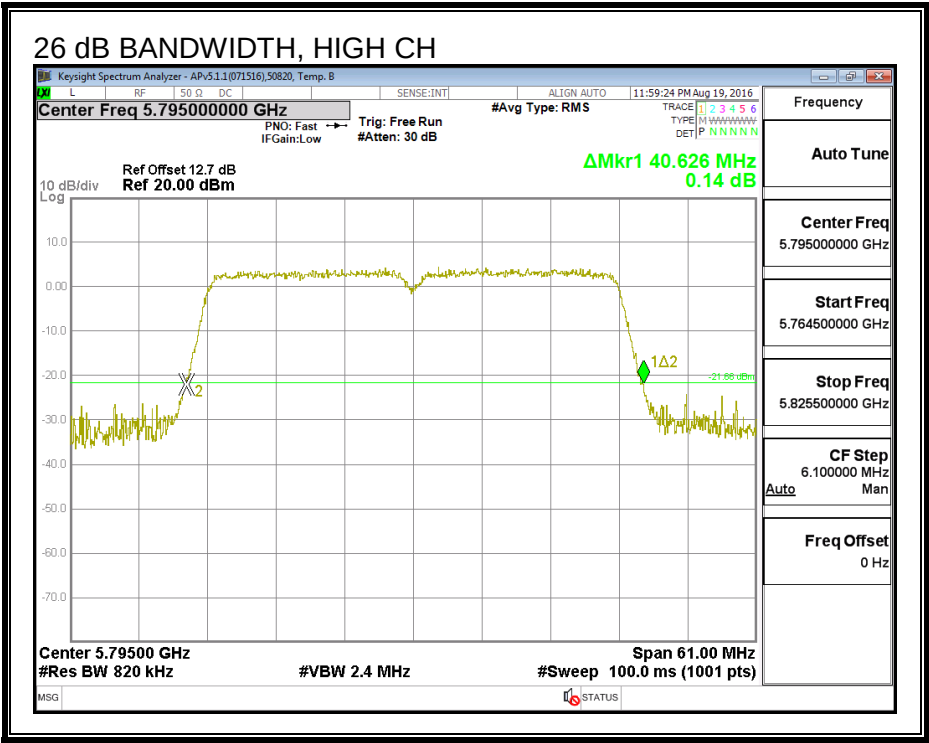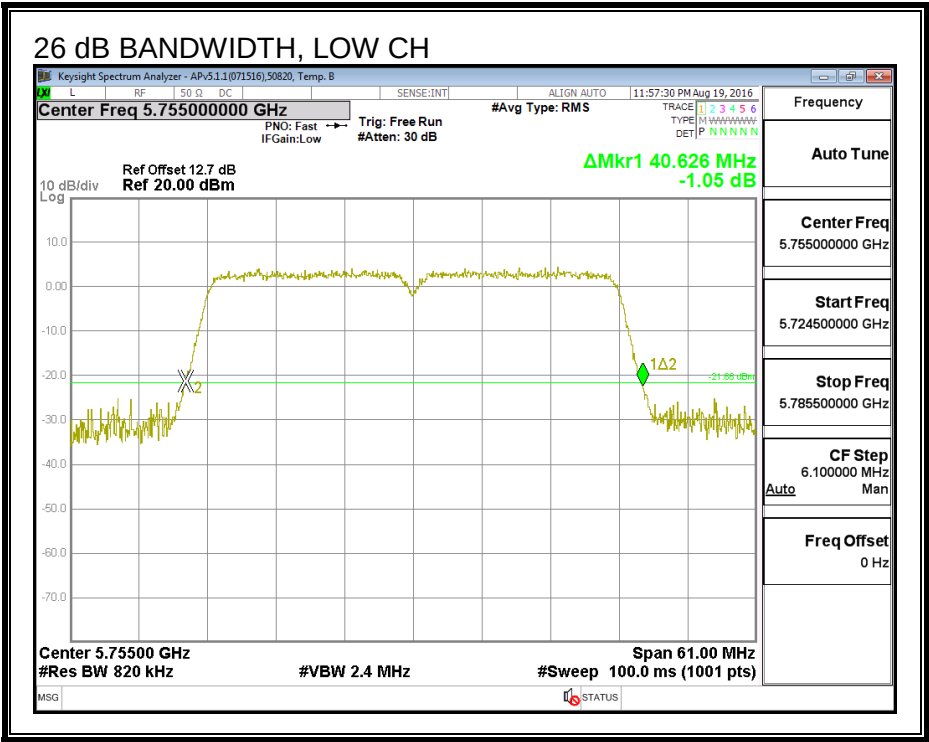

8.21.3. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
Low	5755	36.562	36.446
High	5795	36.374	36.269

99% BANDWIDTH, CHAIN 1

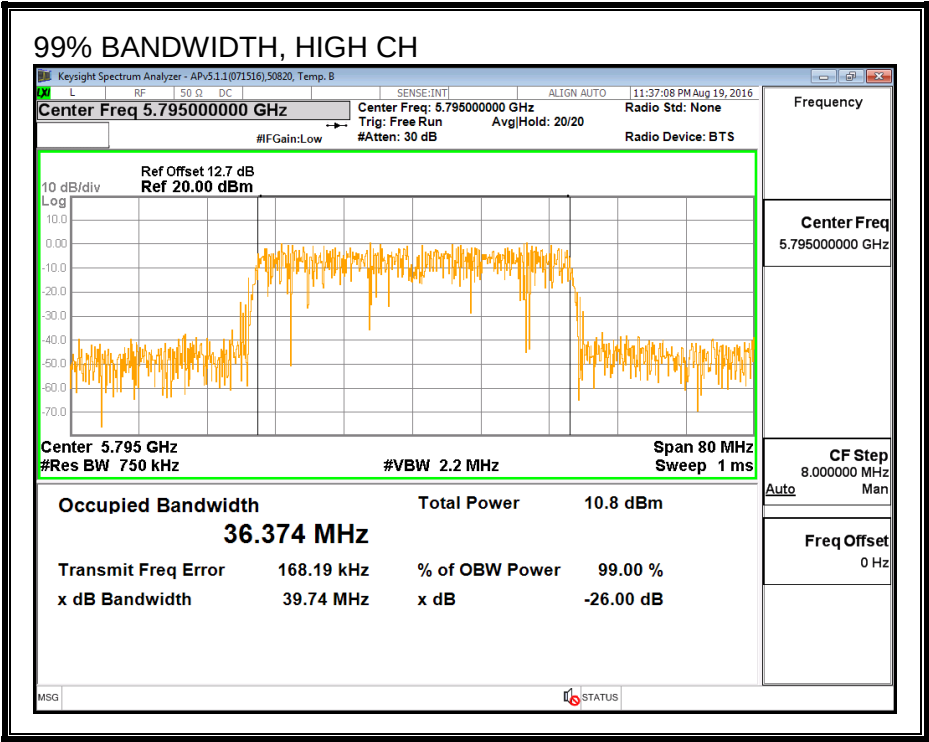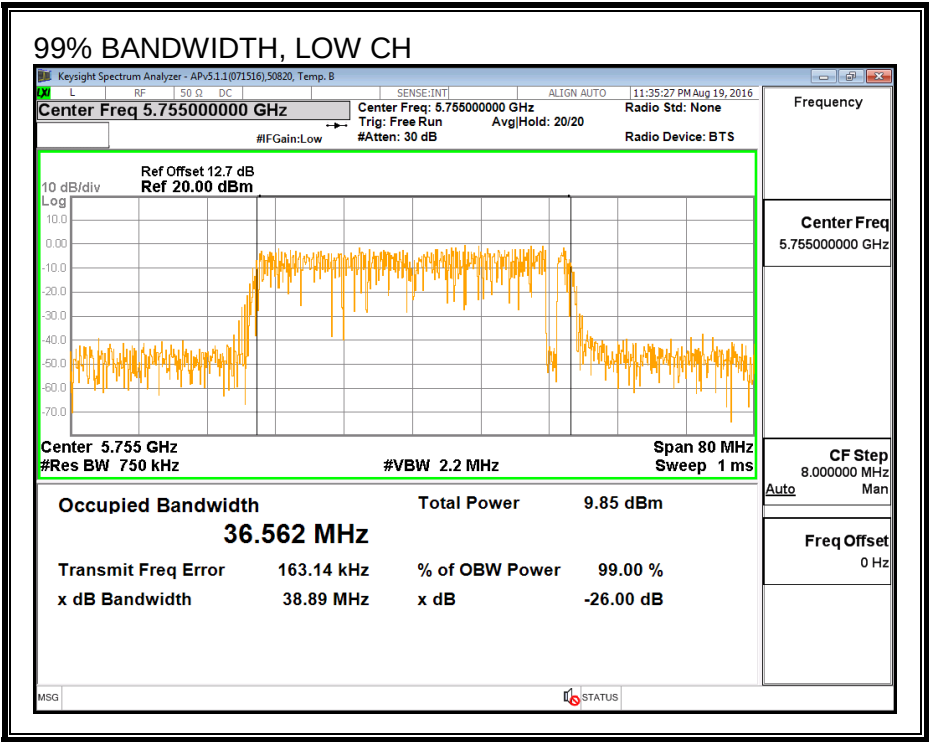

99% BANDWIDTH, CHAIN 2

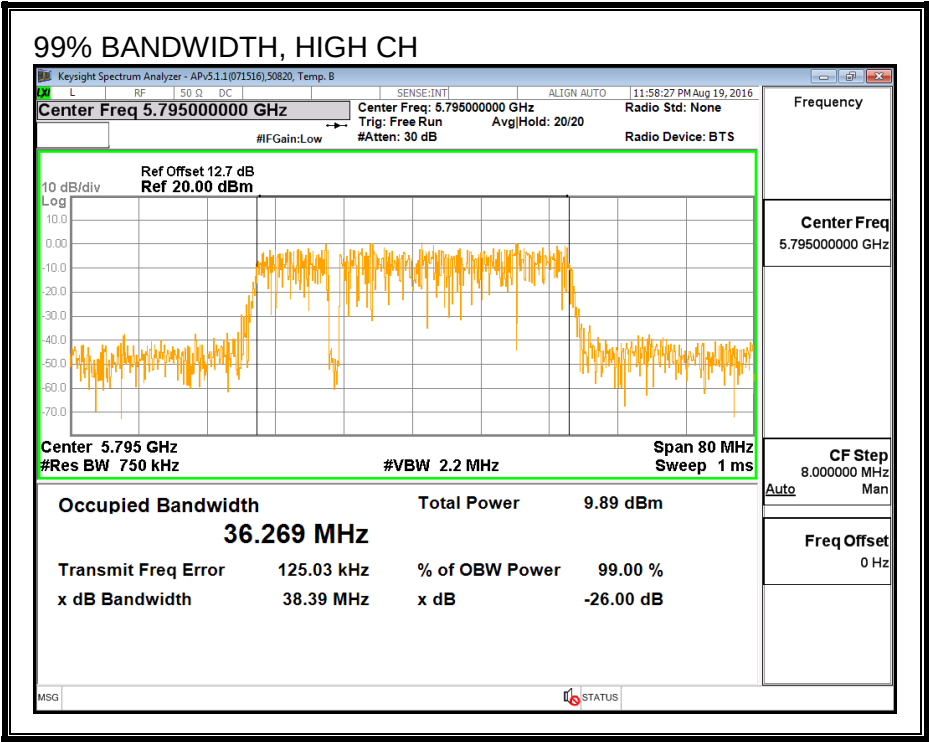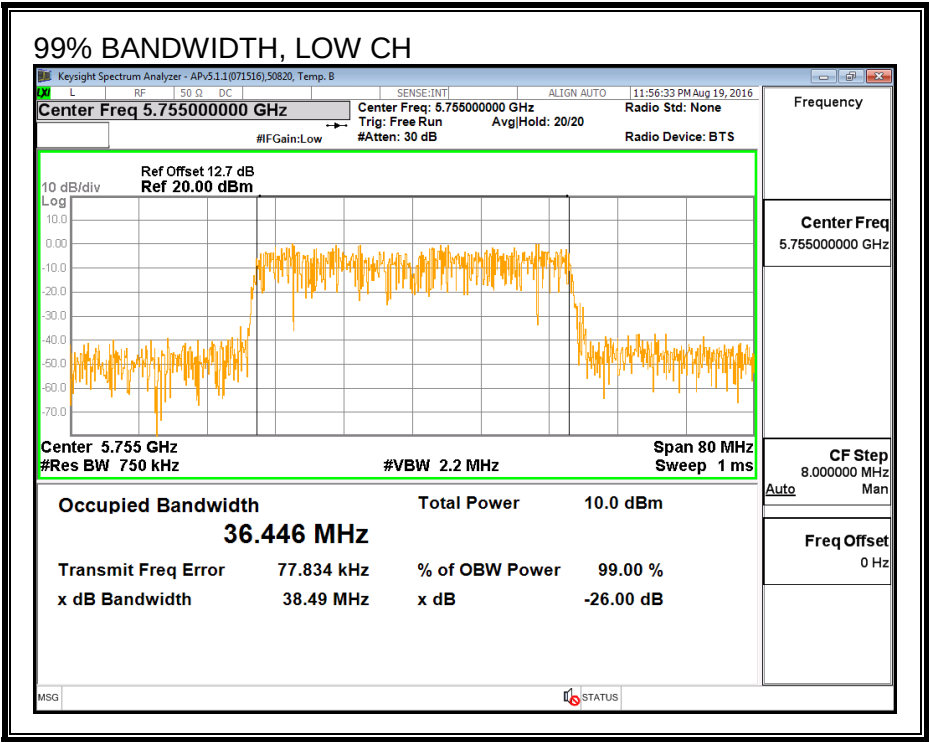

8.21.4. AVERAGE POWER (FCC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
Low	5755	12.67	12.73	15.71
High	5795	12.74	12.71	15.74

8.21.5. OUTPUT POWER (FCC)

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
6.30	4.70	5.57

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)
Low	5755	5.57	30.00
High	5795	5.57	30.00

Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	12.67	12.73	15.71	30.00	-14.29
High	5795	12.74	12.71	15.74	30.00	-14.26

8.21.6. PSD (FCC)

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
6.30	4.70	8.55

RESULTS

Antenna Gain and Limit



Channel	Frequency (MHz)	Directional Gain (dBi)	PSD Limit (dBm)
Low	5755	8.55	27.45
High	5795	8.55	27.45

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5755	-4.474	-4.689	-1.57	27.45	-29.02
High	5795	-4.563	-4.523	-1.53	27.45	-28.98

PSD, CHAIN 1

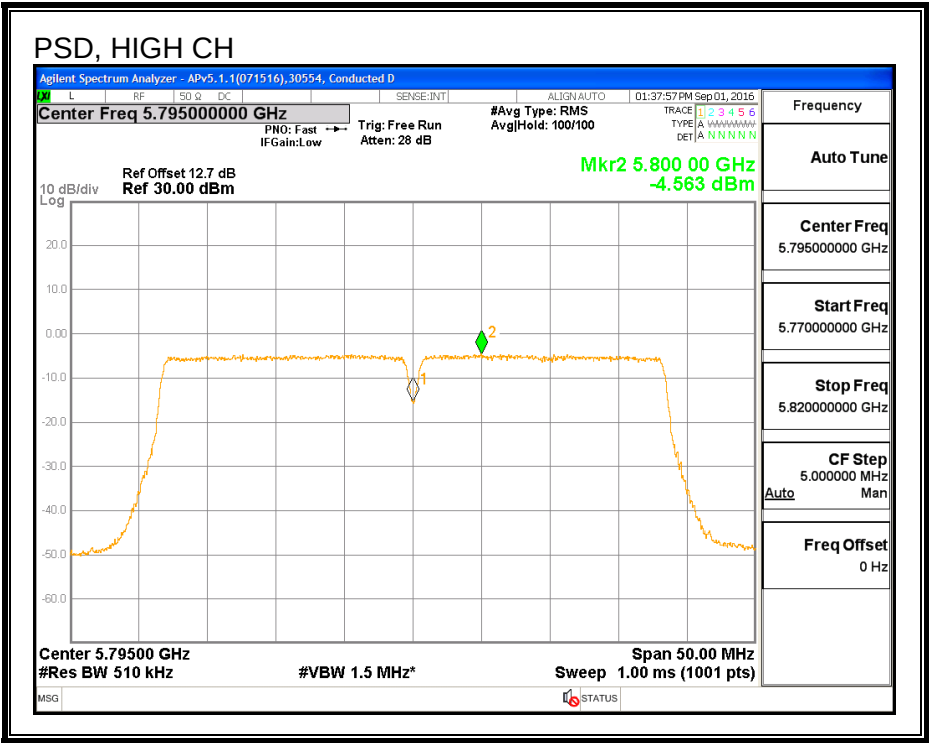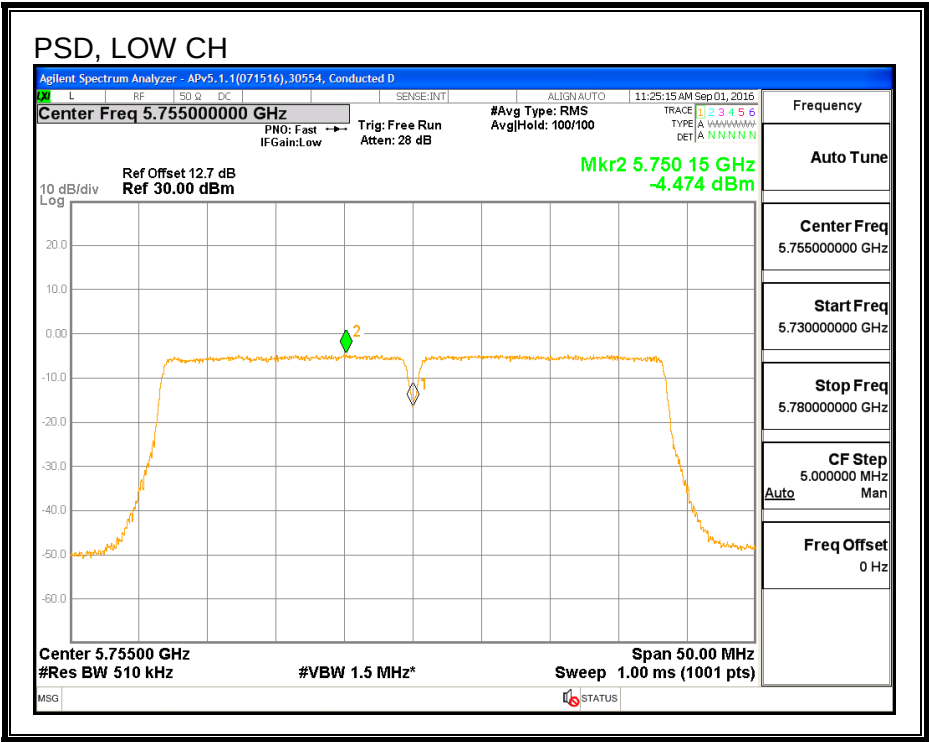

PSD, CHAIN 2

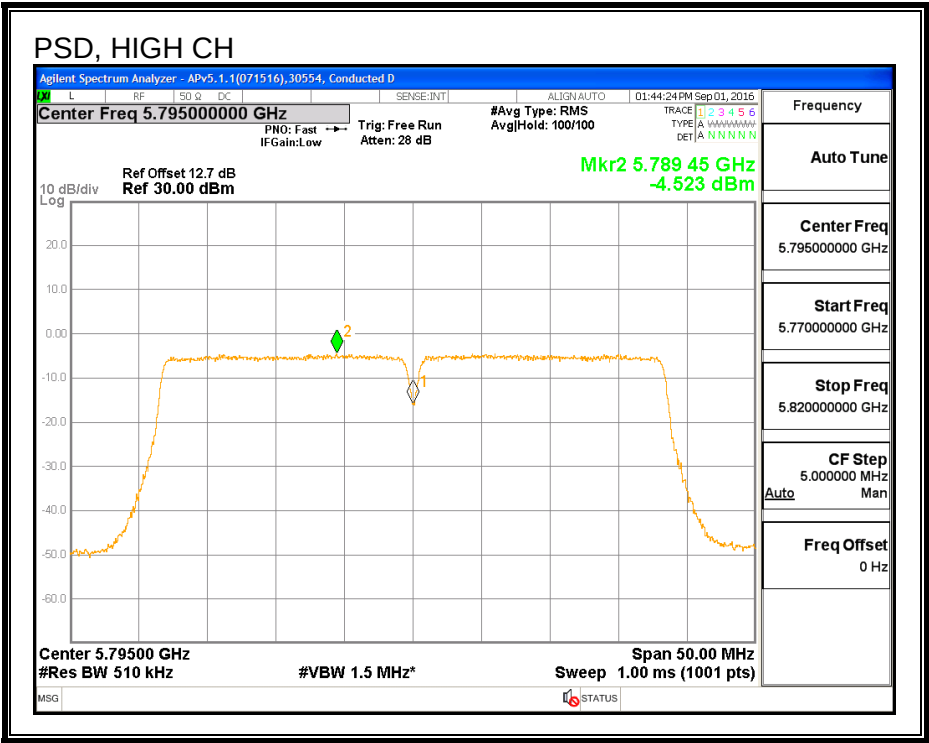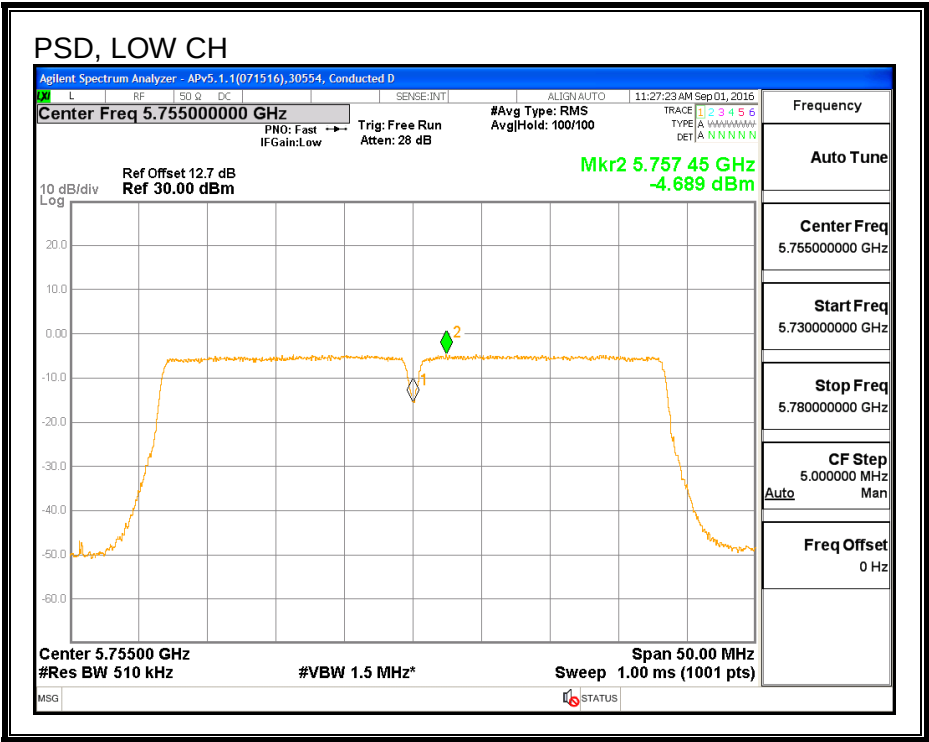

8.21.7. AVERAGE POWER (IC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
Low	5755	11.89	11.87	14.89
High	5795	12.74	12.71	15.74

8.21.8. OUTPUT POWER (IC)

LIMITS

IC RSS-247 (6.2.4) (1)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
6.30	4.70	5.57

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)
Low	5755	5.57	30.00
High	5795	5.57	30.00

Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	11.89	11.87	14.89	30.00	-15.11
High	5795	12.74	12.71	15.74	30.00	-14.26

8.21.9. PSD (IC)

LIMITS

IC RSS-247 (6.2.4) (1)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
6.30	4.70	8.55

RESULTS

Antenna Gain and Limit



Channel	Frequency (MHz)	Directional Gain (dBi)	PSD Limit (dBm)
Low	5755	8.55	27.45
High	5795	8.55	27.45

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5755	-4.839	-4.984	-1.90	27.45	-29.35
High	5795	-4.563	-4.523	-1.53	27.45	-28.98

PSD, CHAIN 1

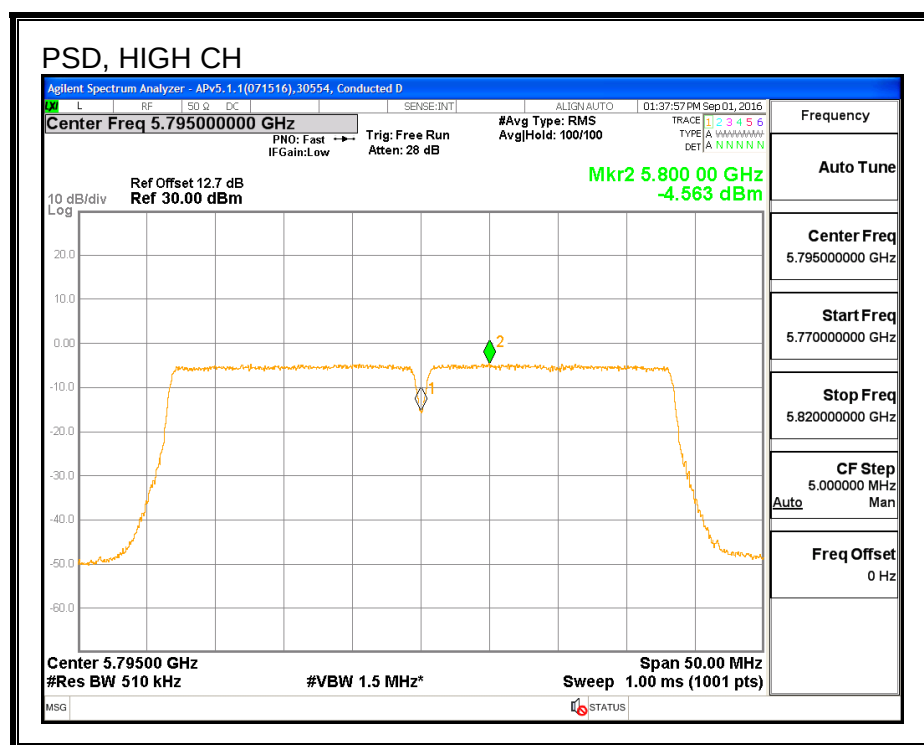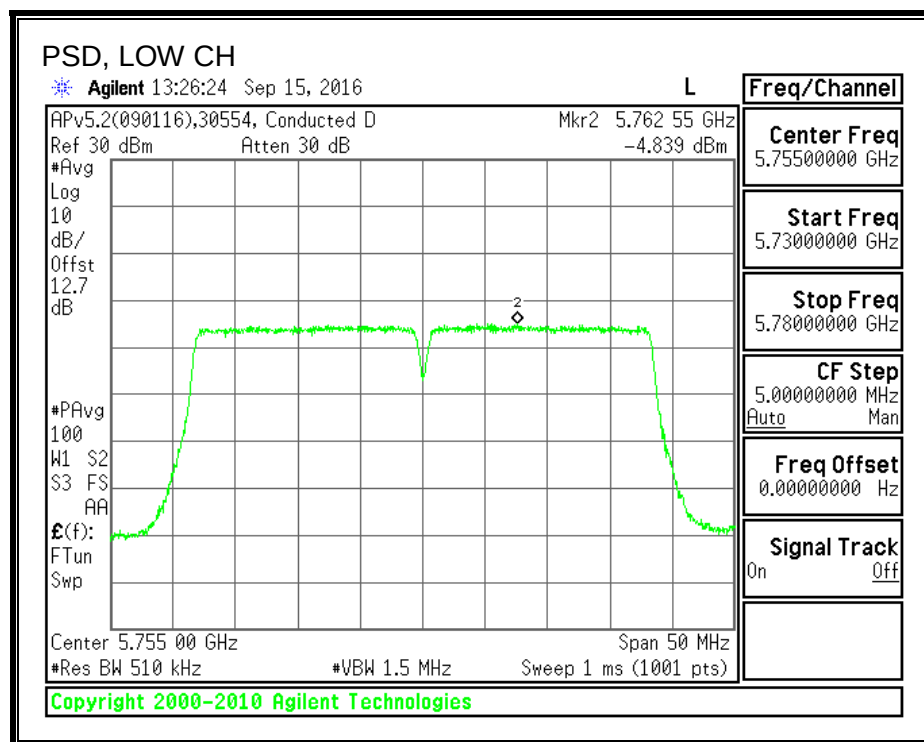

PSD, CHAIN 2

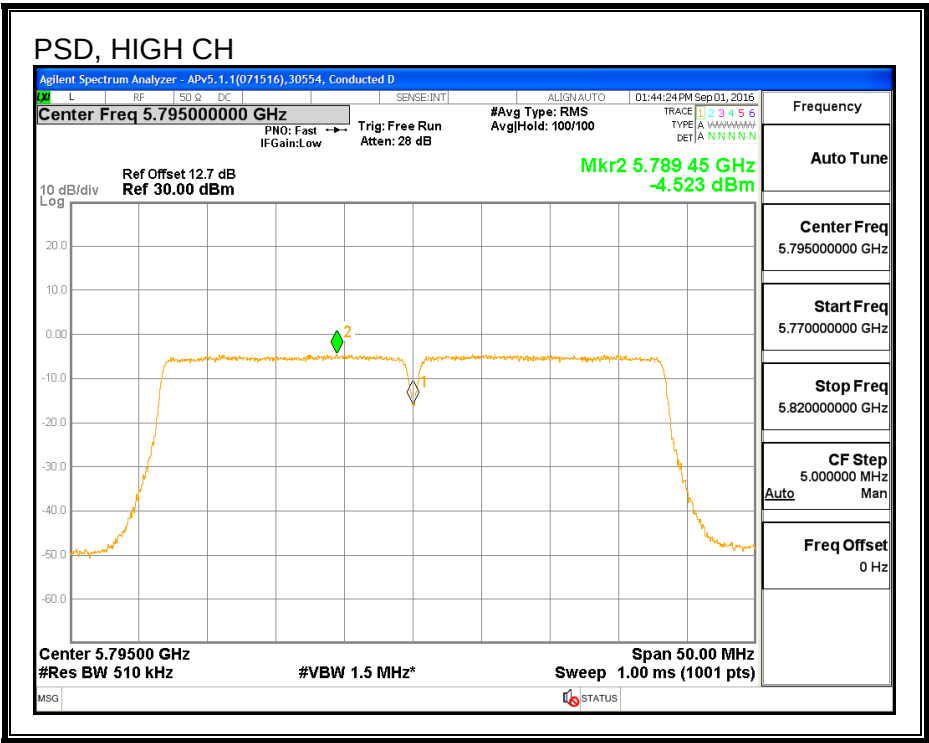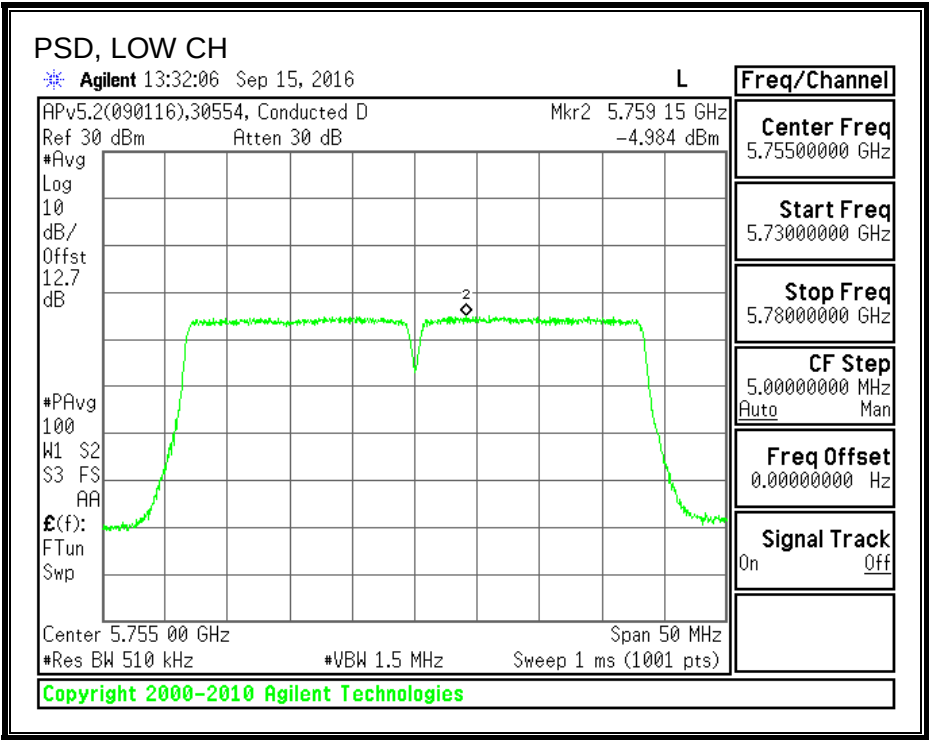

8.22. 802.11n HT40 2Tx (CHAIN 0 + CHAIN 1) STBC MODE IN THE 5.8 GHz BAND

8.22.1. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)



IC RSS-247 (6.2.4) (1)

The minimum 6 dB bandwidth shall be at least 500 kHz.



RESULTS

Channel	Frequency (MHz)	6 dB BW Chain 0 (MHz)	6 dB BW Chain 1 (MHz)	Minimum Limit (MHz)
Low	5755	36.03	36.36	0.5
High	5795	36.36	36.30	0.5

6 dB BANDWIDTH, CHAIN 0

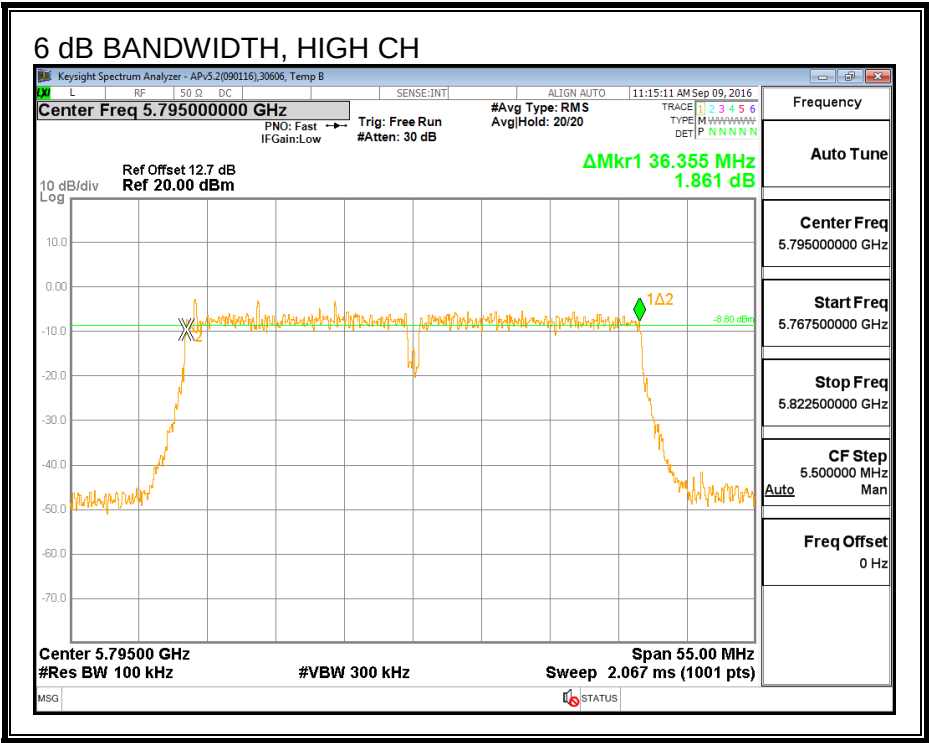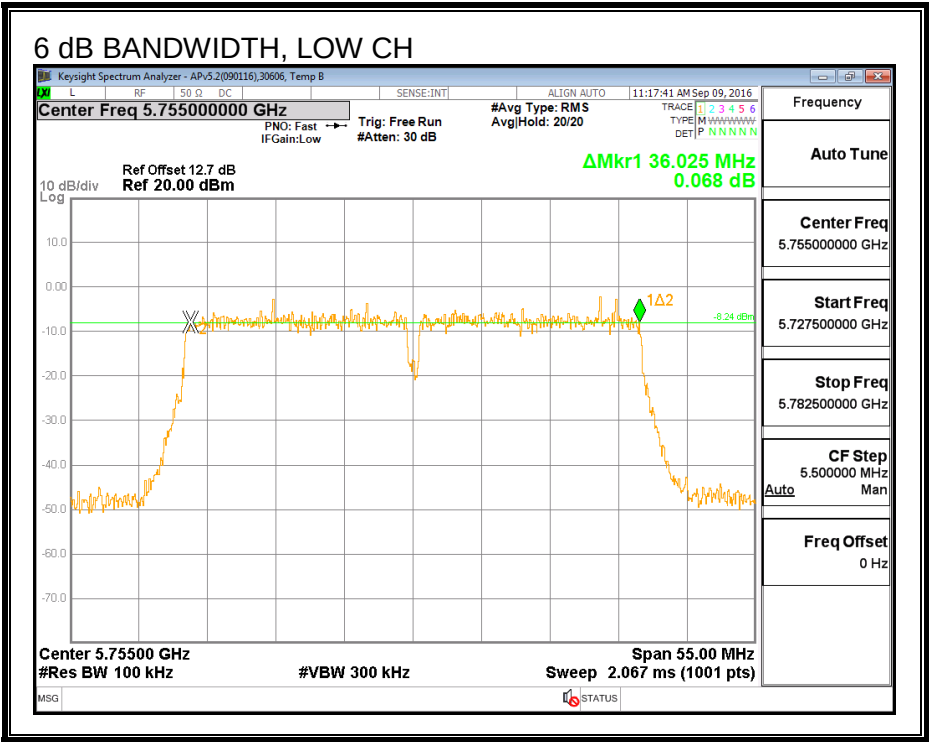

6 dB BANDWIDTH, CHAIN 1

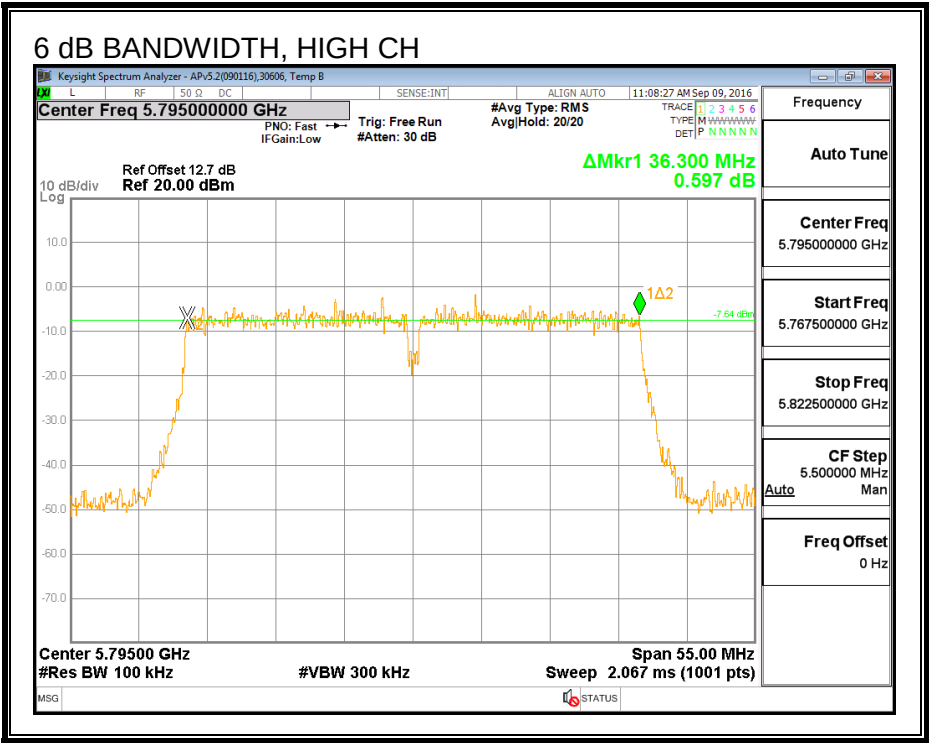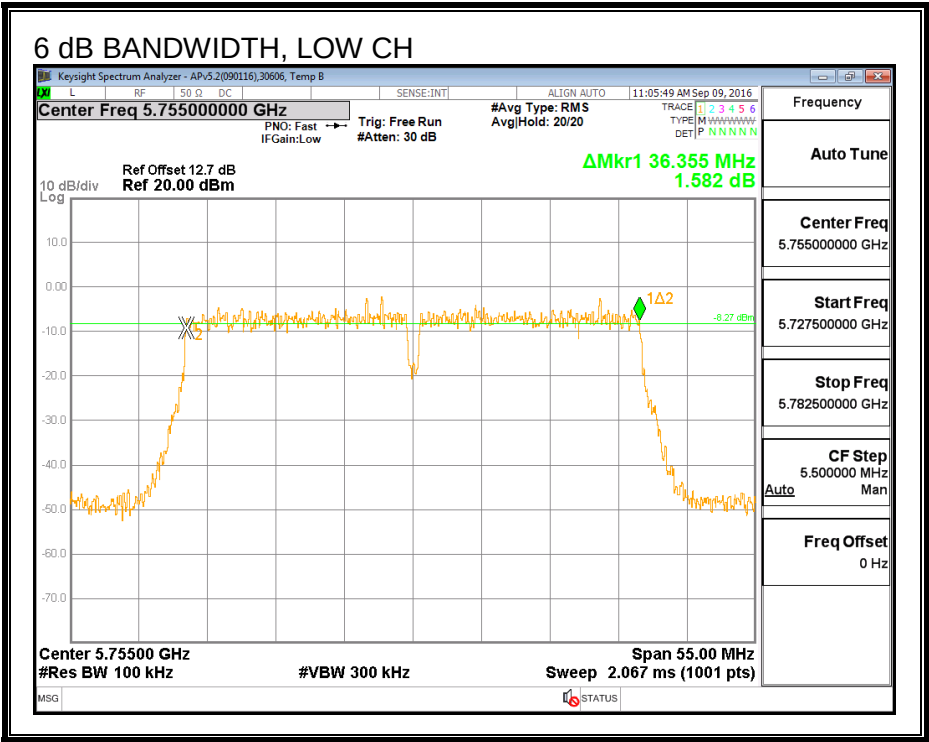

8.22.2. 26 dB BANDWIDTH



LIMITS

None, for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5755	40.626	40.504
High	5795	40.504	40.626

26 dB BANDWIDTH, CHAIN 0

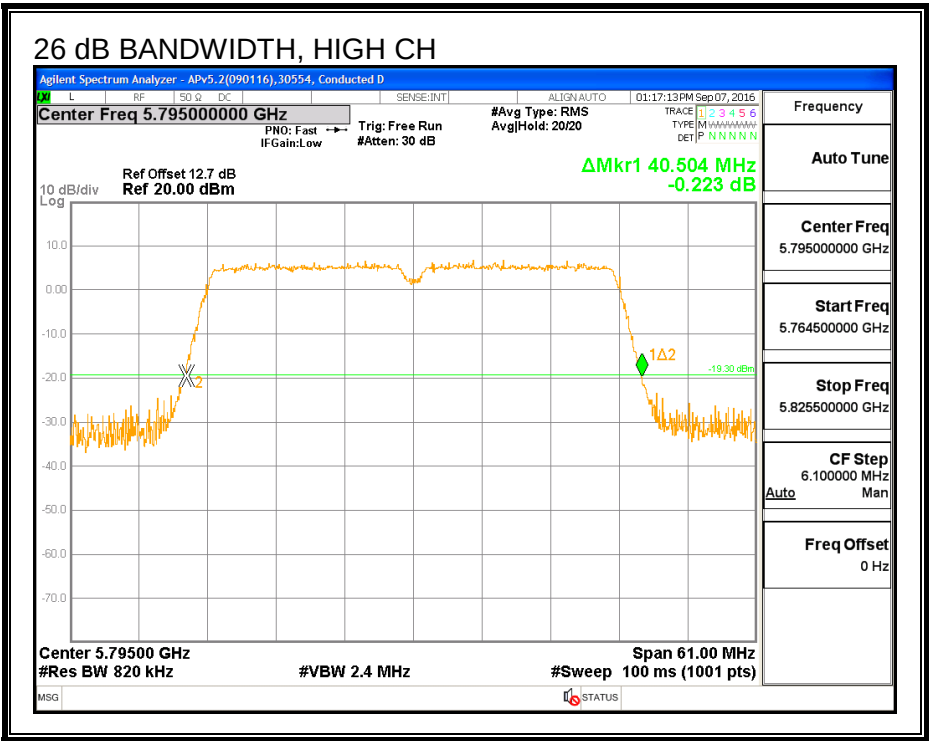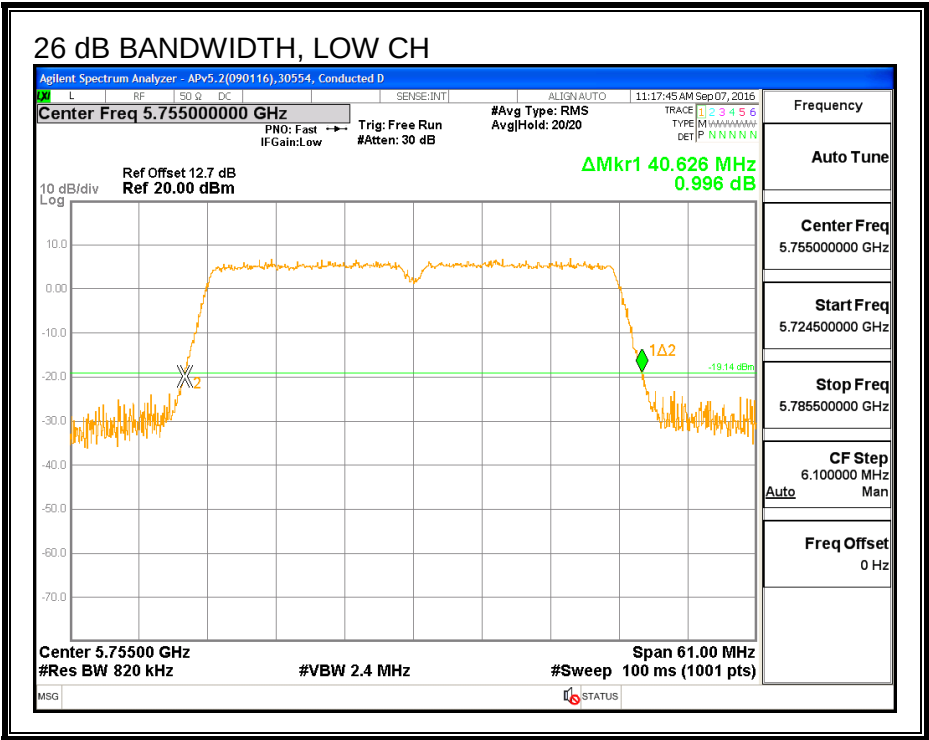

26 dB BANDWIDTH, CHAIN 1

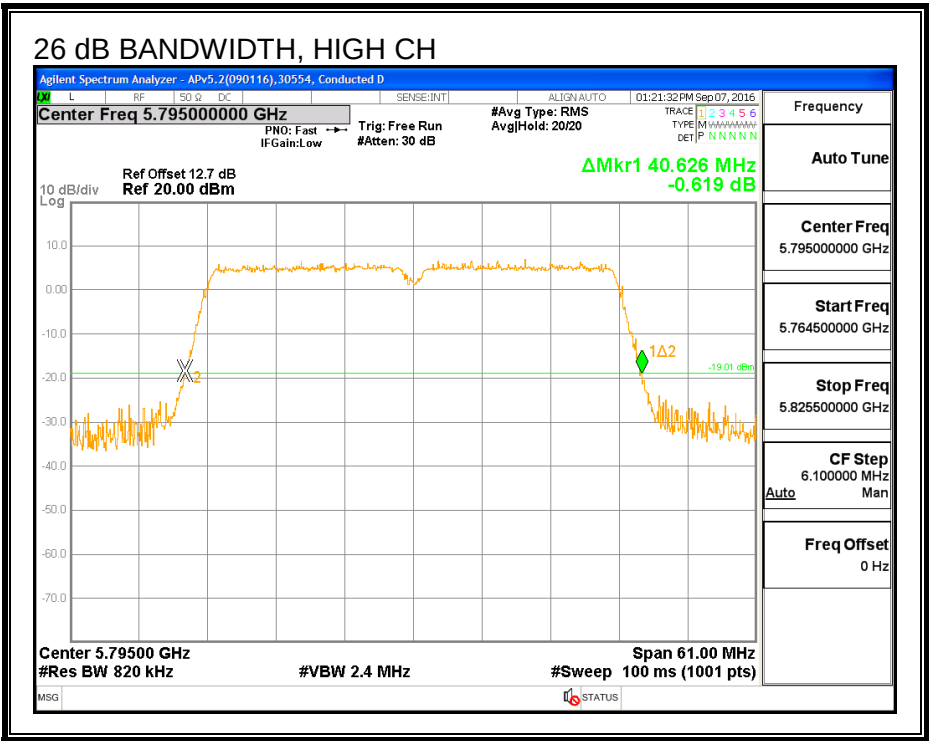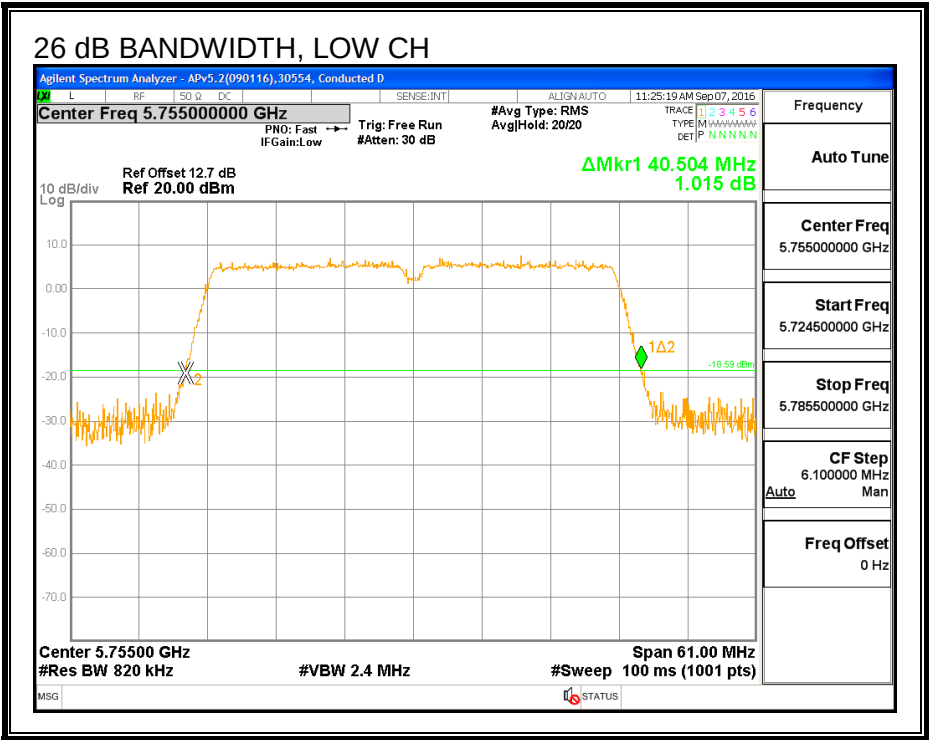

8.22.3. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5755	36.436	36.334
High	5795	36.353	36.320

99% BANDWIDTH, CHAIN 0

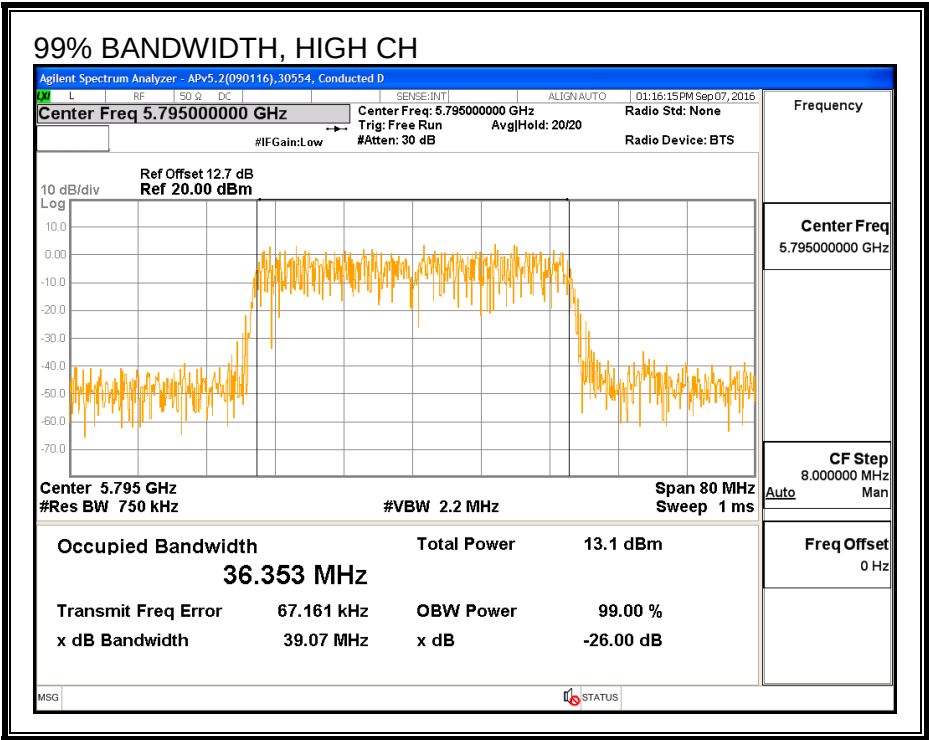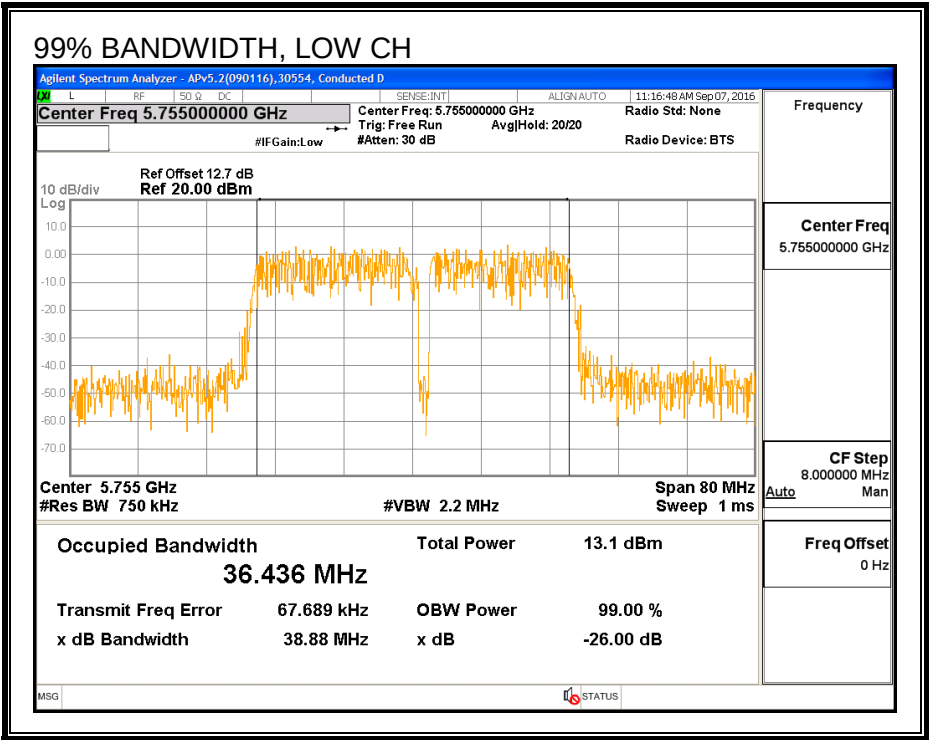

99% BANDWIDTH, CHAIN 1

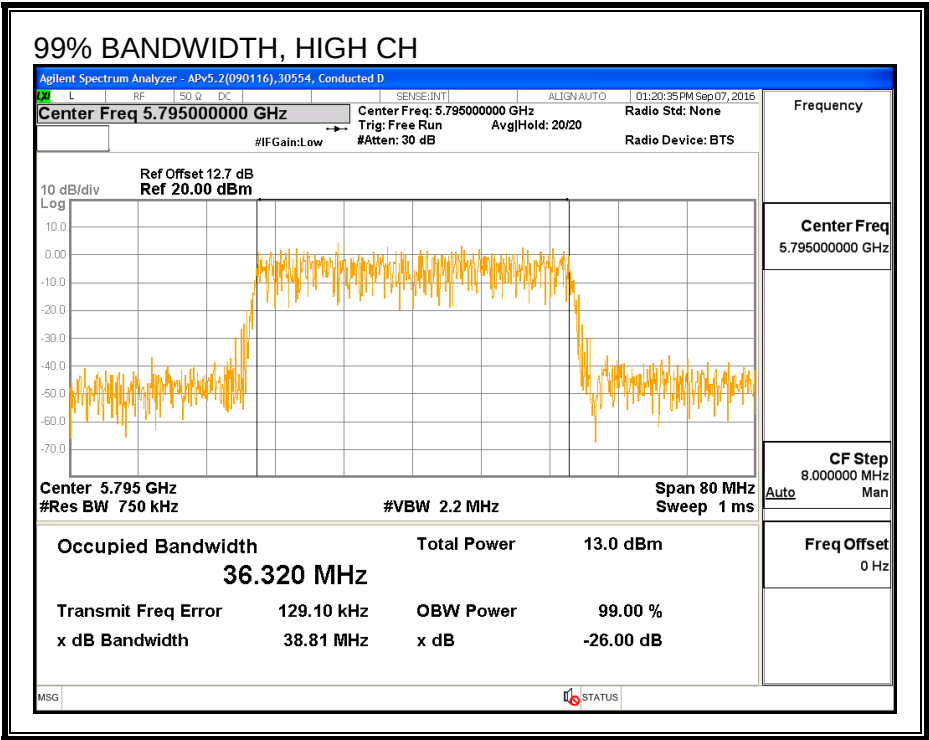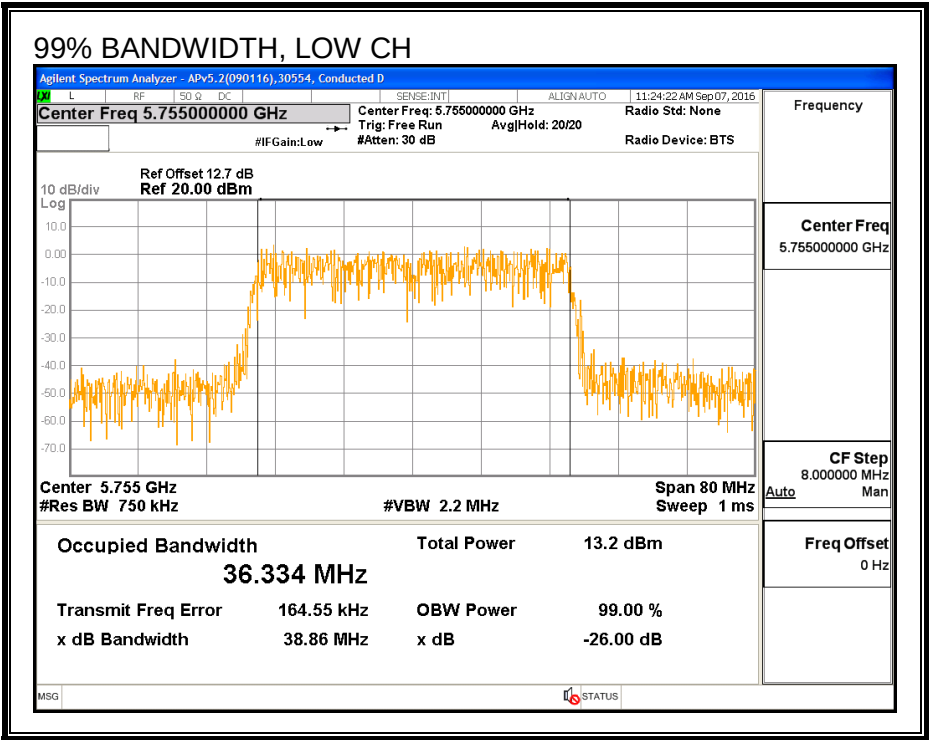

8.22.4. AVERAGE POWER (FCC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5755	12.68	12.69	15.70
High	5795	12.73	12.71	15.73

8.22.5. OUTPUT POWER (FCC)

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
4.00	6.30	5.30

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)
Low	5755	5.30	30.00
High	5795	5.30	30.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	12.68	12.69	15.70	30.00	-14.30
High	5795	12.73	12.71	15.73	30.00	-14.27

8.22.6. PSD (FCC)

LIMITS

FCC §15.407 (a) (3)

IC RSS-247 (6.2.4) (1)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
4.00	6.30	5.30

RESULTS

Antenna Gain and Limit



Channel	Frequency (MHz)	Directional Gain (dBi)	PSD Limit (dBm)
Low	5755	5.30	30.00
High	5795	5.30	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5755	-4.67	-4.80	-1.72	30.00	-31.72
High	5795	-4.27	-4.48	-1.36	30.00	-31.36

PSD, CHAIN 0

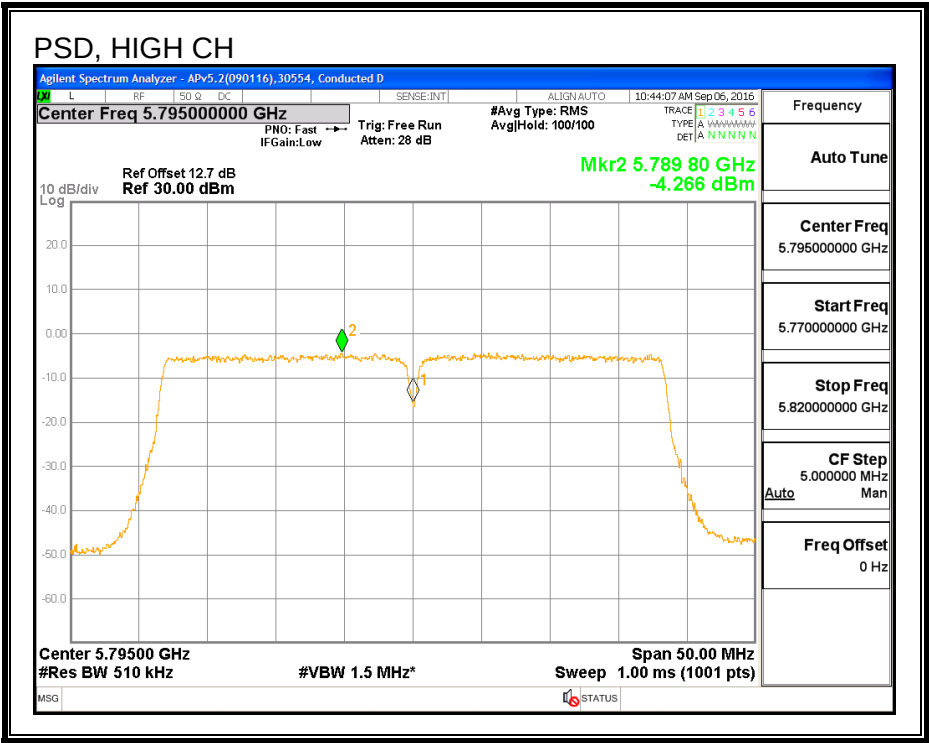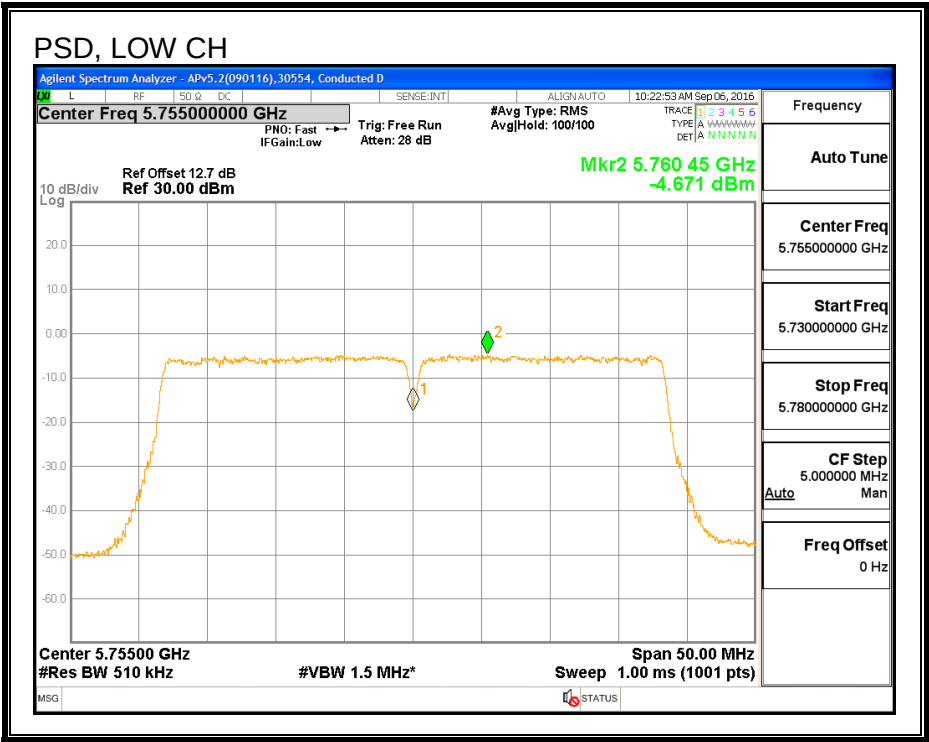

PSD, CHAIN 1

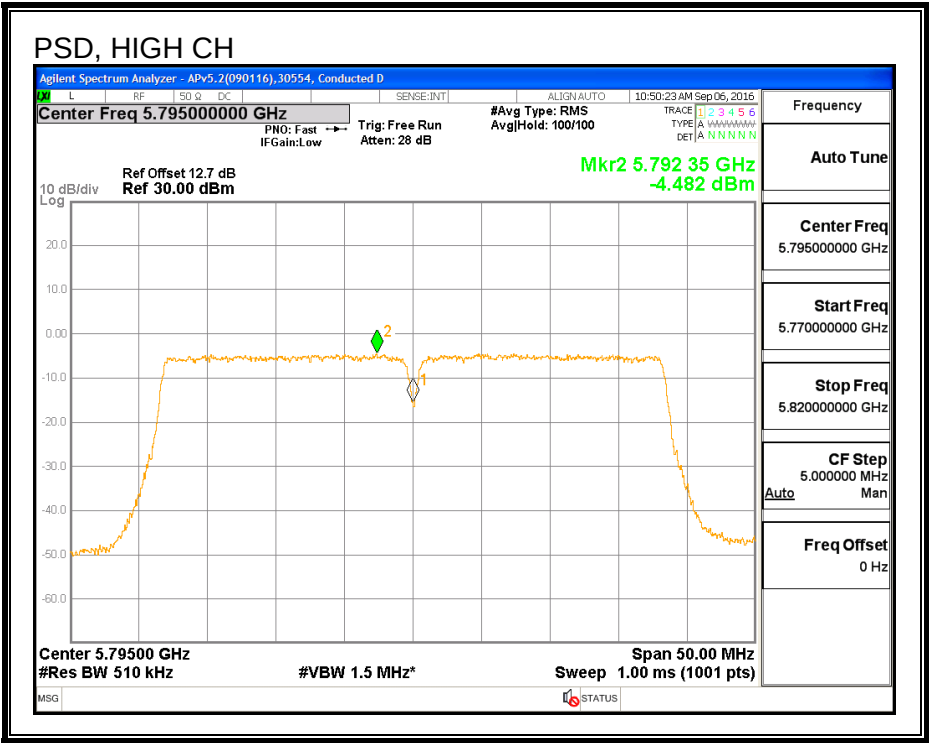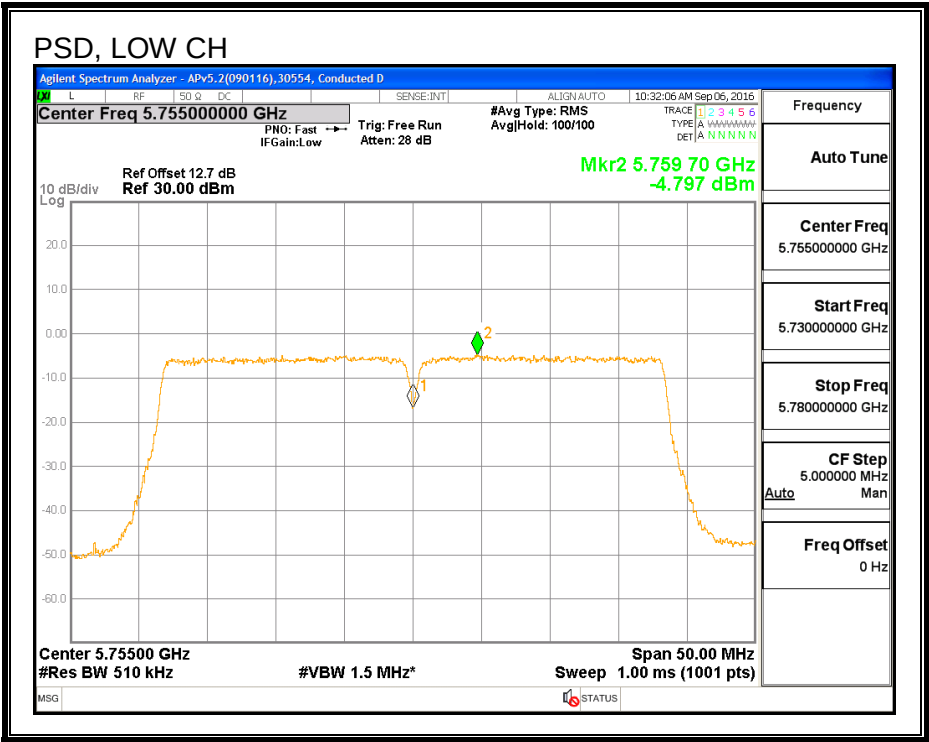

8.22.7. AVERAGE POWER (IC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5755	11.41	11.45	14.44
High	5795	12.73	12.71	15.73

8.22.8. OUTPUT POWER (IC)

LIMITS

IC RSS-247 (6.2.4) (1)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
4.00	6.30	5.30

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)
Low	5755	5.30	30.00
High	5795	5.30	30.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	11.41	11.45	14.44	30.00	-15.56
High	5795	12.73	12.71	15.73	30.00	-14.27

8.22.9. PSD (IC)

LIMITS

IC RSS-247 (6.2.4) (1)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
4.00	6.30	5.30

RESULTS

Antenna Gain and Limit



Channel	Frequency (MHz)	Directional Gain (dBi)	PSD Limit (dBm)
Low	5755	5.30	30.00
High	5795	5.30	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5755	-4.88	-5.11	-1.98	30.00	-31.98
High	5795	-4.27	-4.48	-1.36	30.00	-31.36

PSD, CHAIN 0

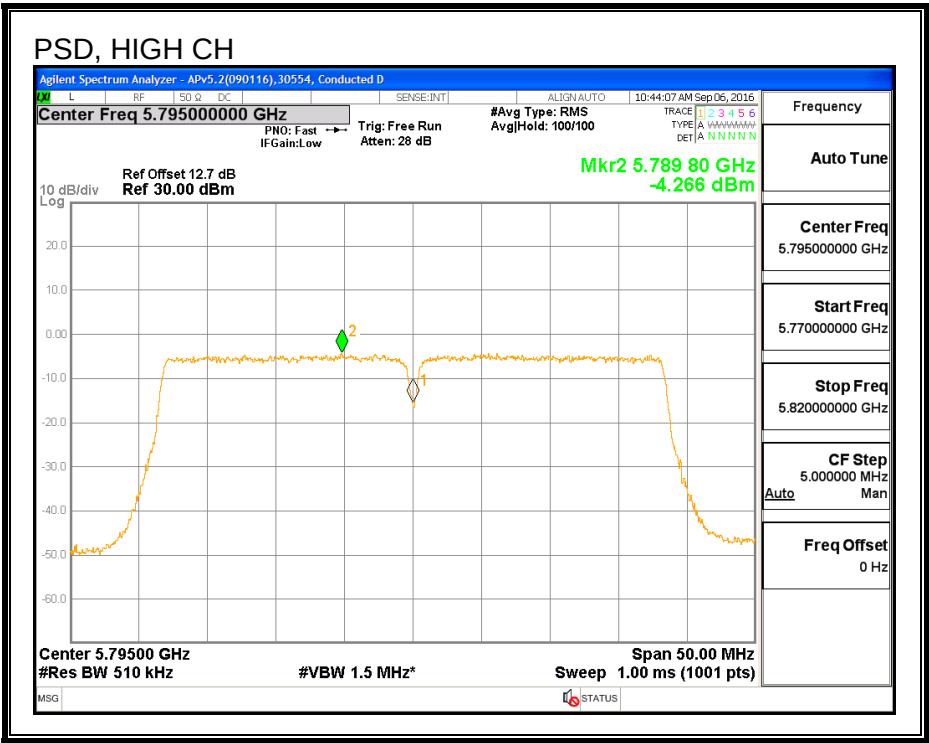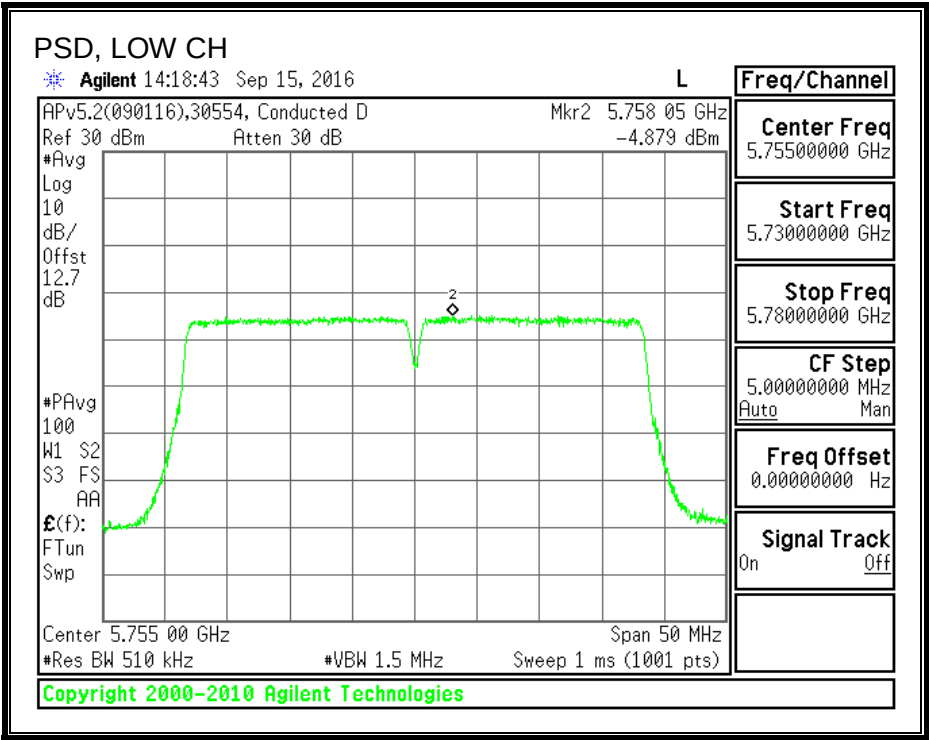

PSD, CHAIN 1

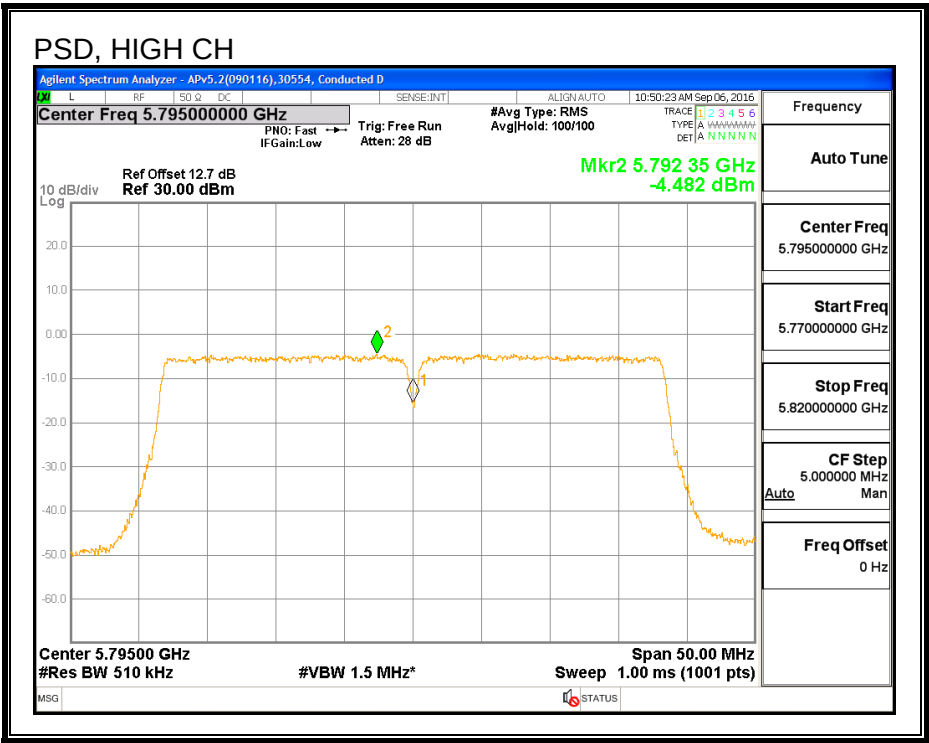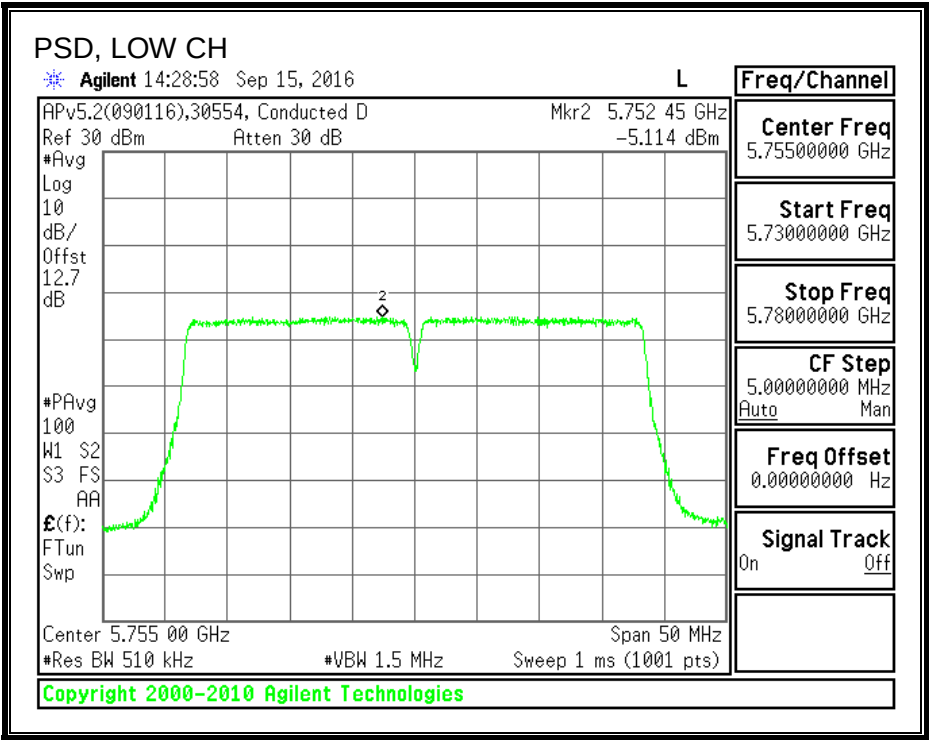

8.23. 802.11n HT40 2Tx (CHAIN 0 + CHAIN 2) STBC MODE IN THE 5.8 GHz BAND

8.23.1. 6 dB BANDWIDTH

LIMITS



FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.



RESULTS

Channel	Frequency (MHz)	6 dB BW Chain 0 (MHz)	6 dB BW Chain 2 (MHz)	Minimum Limit (MHz)
Low	5755	35.856	34.465	0.5
High	5795	36.025	36.520	0.5

6 dB BANDWIDTH, CHAIN 0

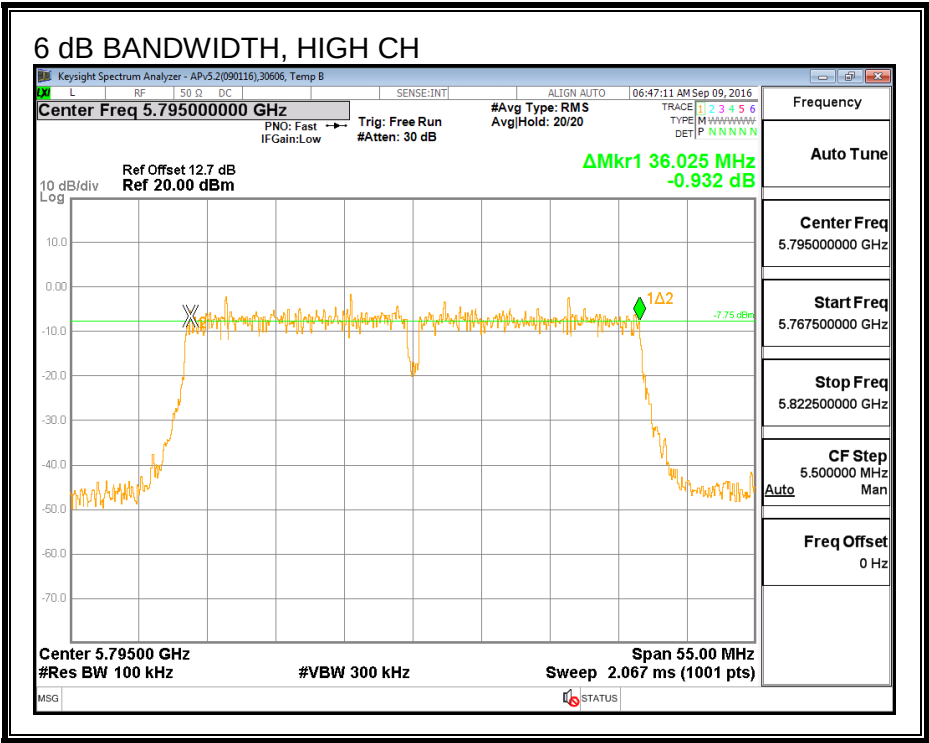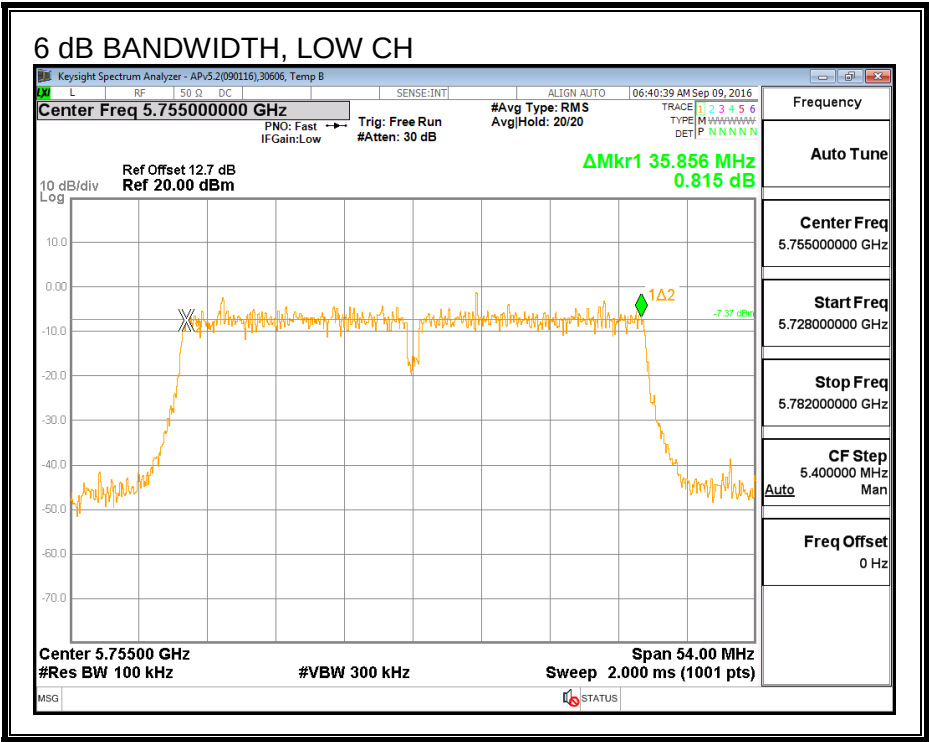

6 dB BANDWIDTH, CHAIN 2

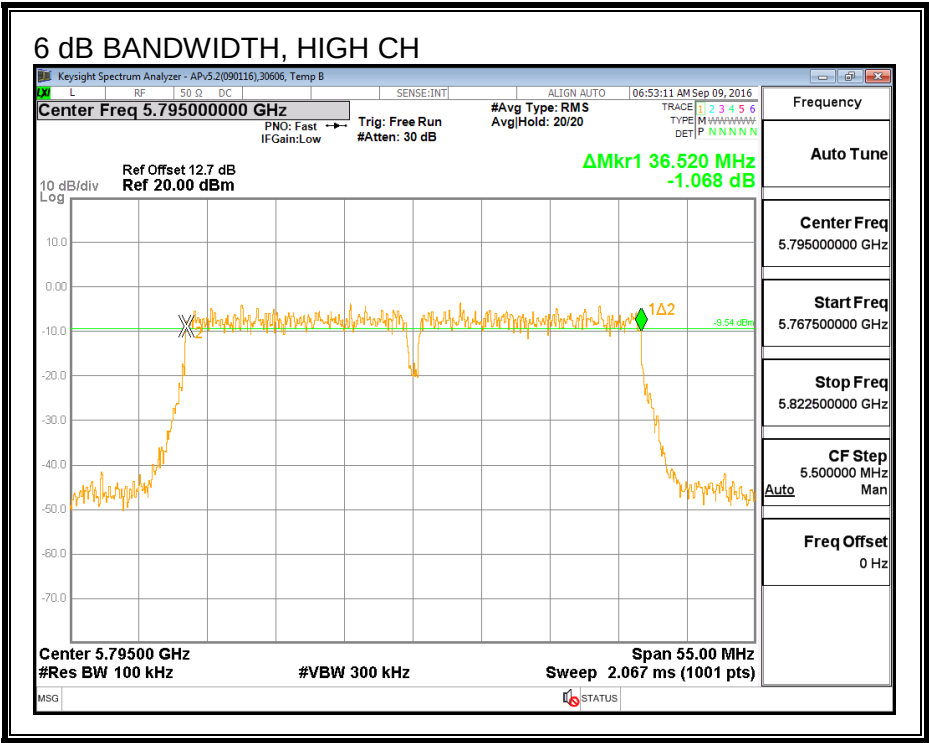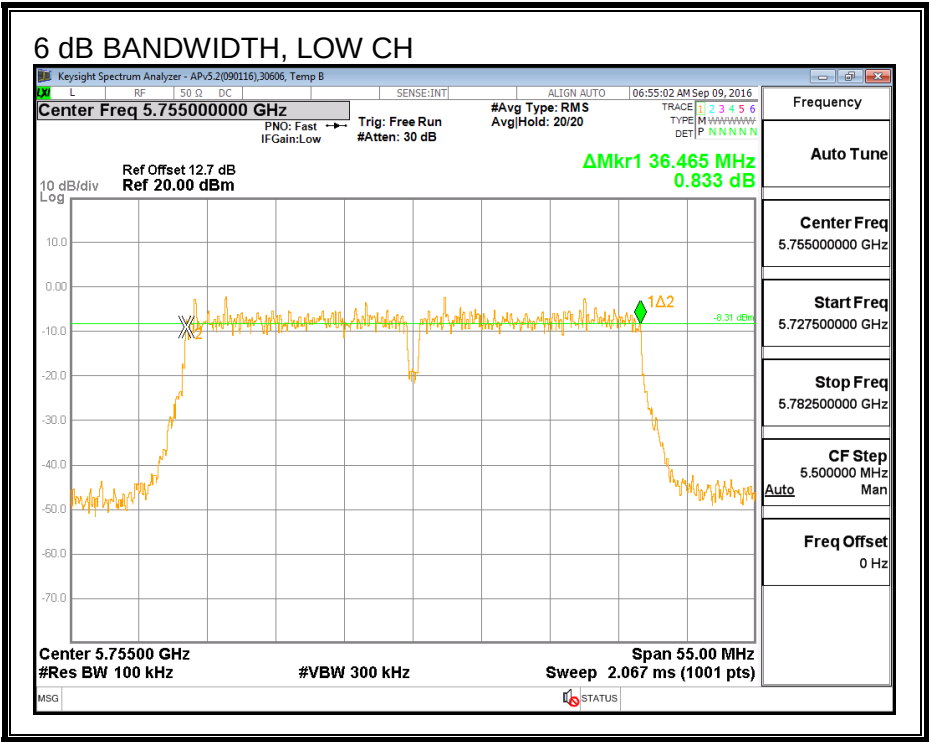

8.23.2. 26 dB BANDWIDTH



LIMITS

None, for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 2 (MHz)
Low	5755	40.610	40.565
High	5795	40.504	40.626

26 dB BANDWIDTH, CHAIN 0

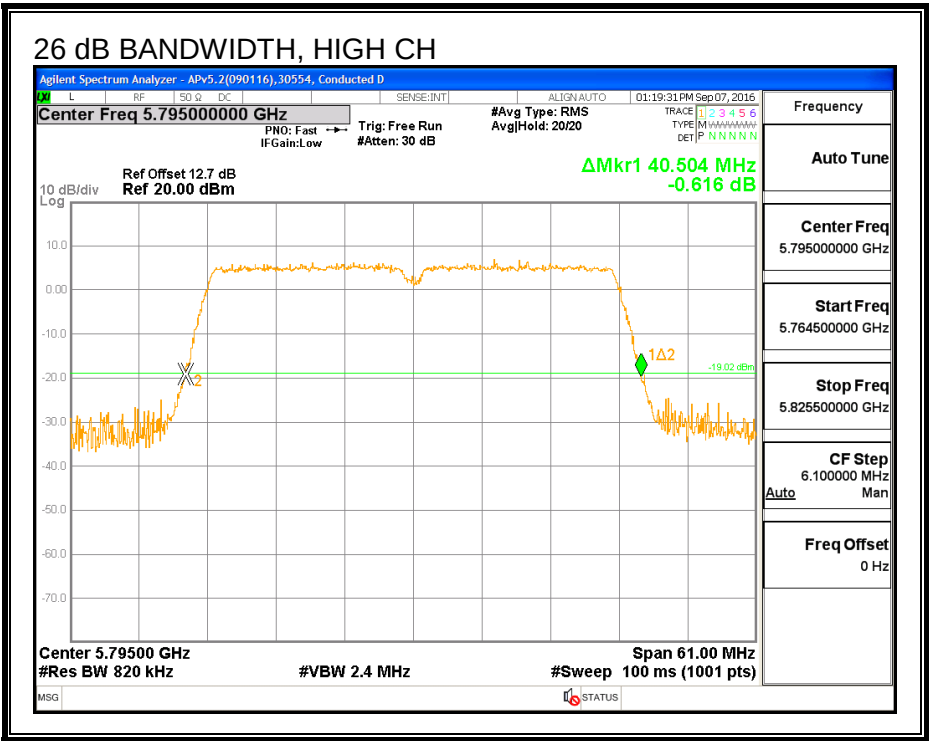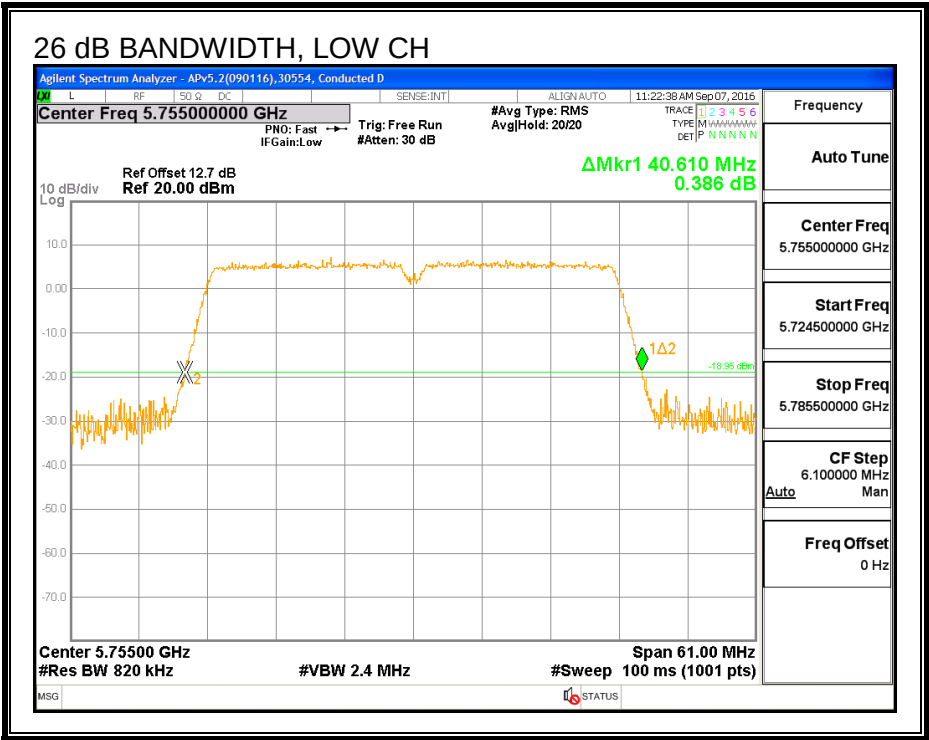

26 dB BANDWIDTH, CHAIN 2

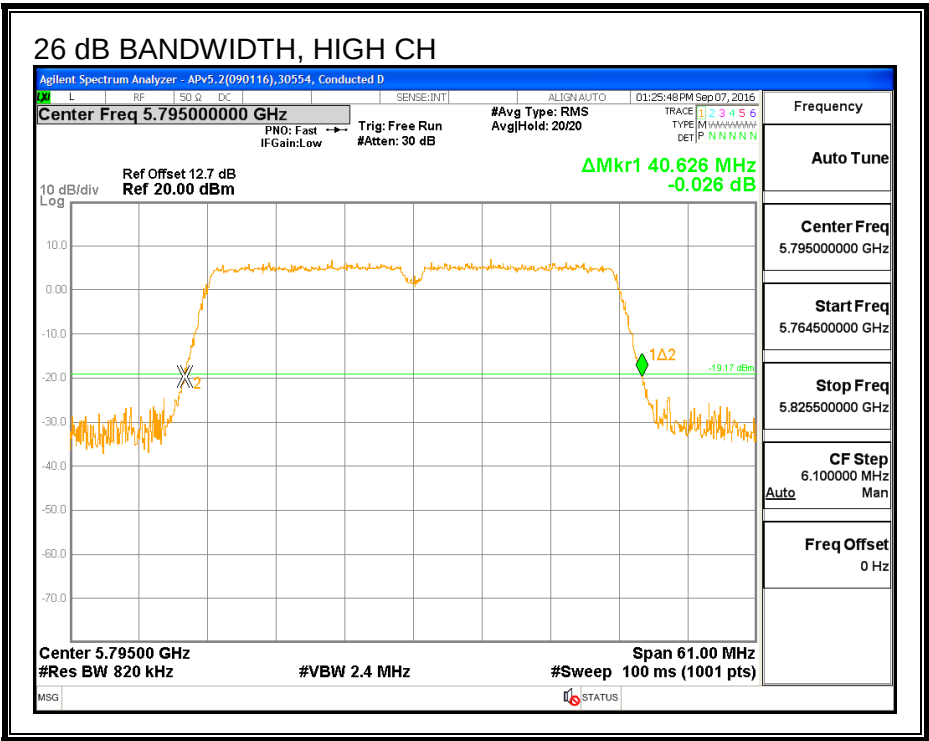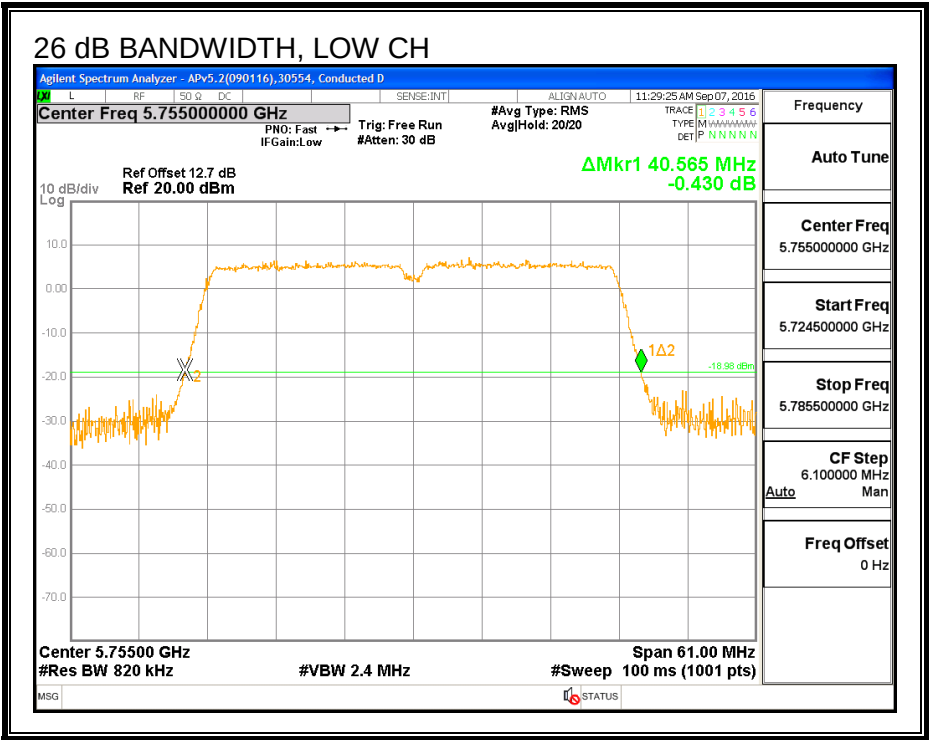

8.23.3. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 2 (MHz)
Low	5755	36.266	36.249
High	5795	36.346	36.313

99% BANDWIDTH, CHAIN 0

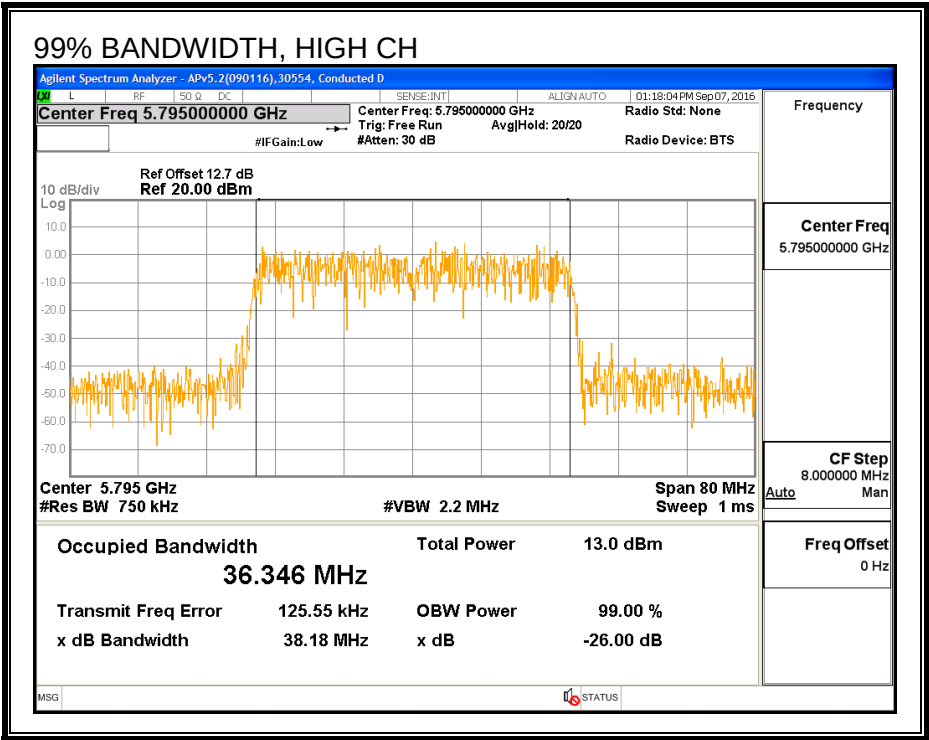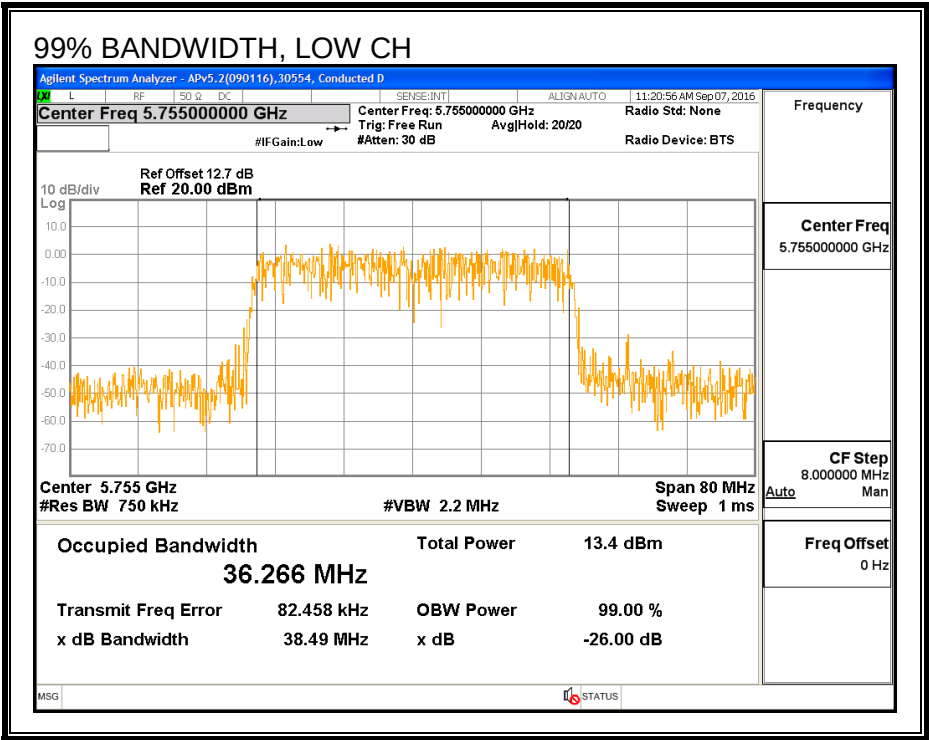

99% BANDWIDTH, CHAIN 2

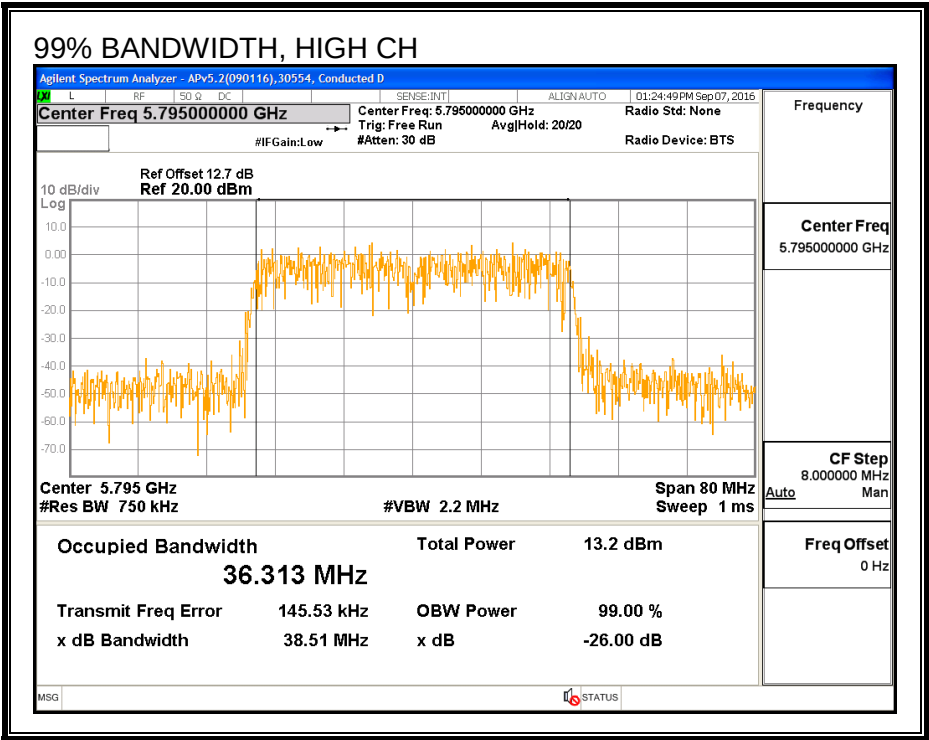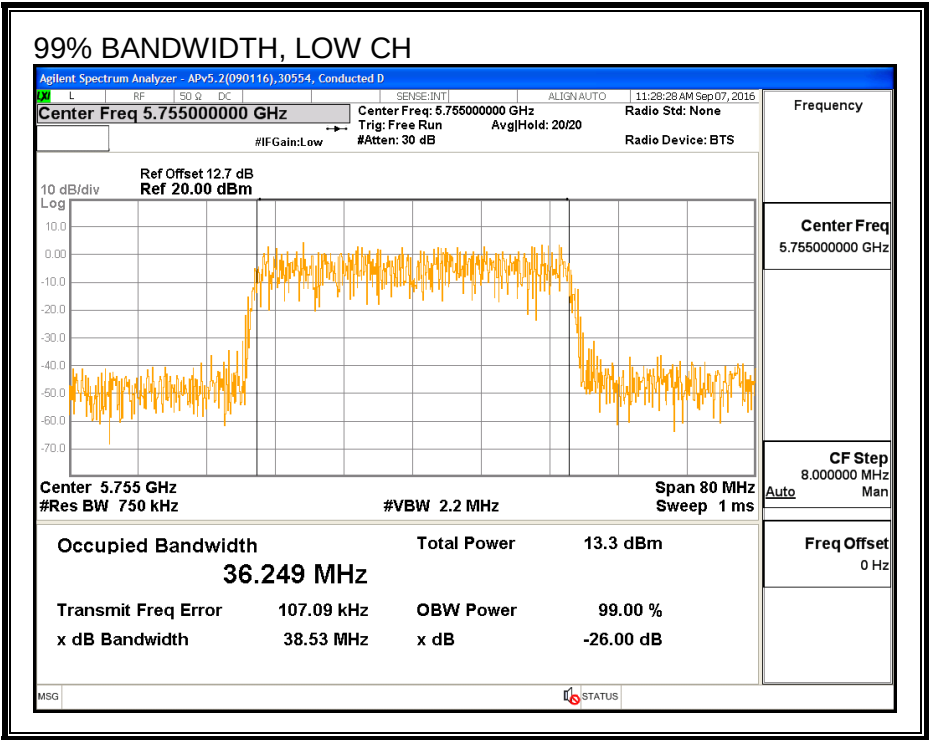

8.23.4. AVERAGE POWER (FCC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
Low	5755	12.70	12.73	15.73
High	5795	12.72	12.70	15.72

8.23.5. OUTPUT POWER (FCC)

LIMITS

IC RSS-247 (6.2.4) (1)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
4.00	4.70	4.36

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)
Low	5755	4.36	30.00
High	5795	4.36	30.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	12.70	12.73	15.73	30.00	-14.27
High	5795	12.72	12.70	15.72	30.00	-14.28

8.23.6. PSD (FCC)

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
4.00	4.70	4.36

RESULTS

Antenna Gain and Limit



Channel	Frequency (MHz)	Directional Gain (dBi)	PSD Limit (dBm)
Low	5755	4.36	30.00
High	5795	4.36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5755	-4.825	-4.653	-1.73	30.00	-31.73
High	5795	-4.544	-4.355	-1.44	30.00	-31.44

PSD, CHAIN 0

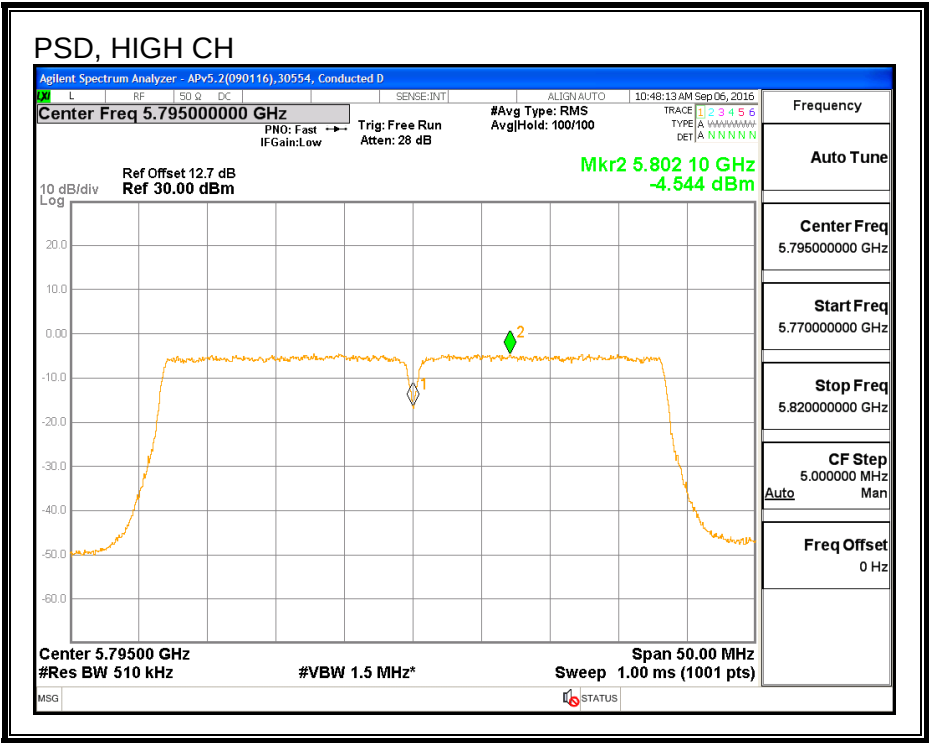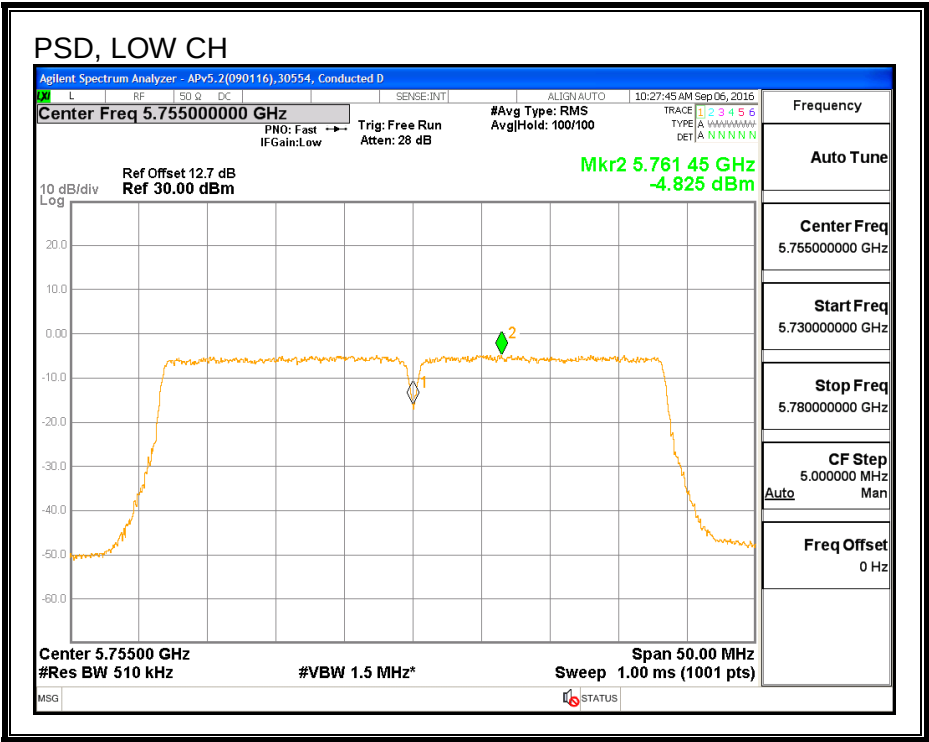

PSD, CHAIN 2

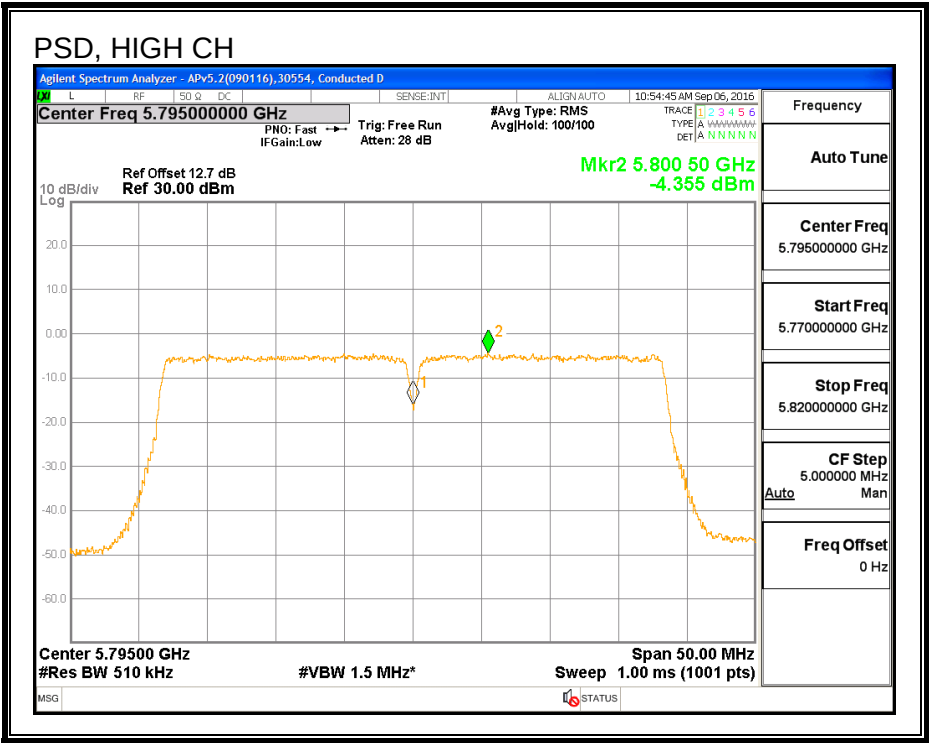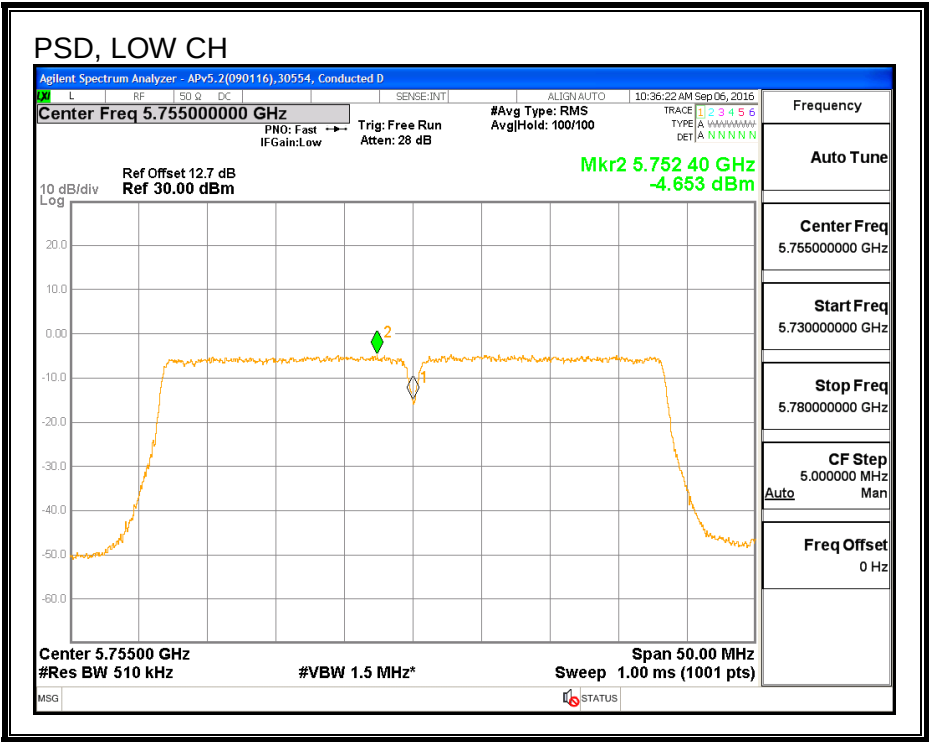

8.23.7. AVERAGE POWER (IC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
Low	5755	11.44	11.48	14.47
High	5795	12.72	12.70	15.72

8.23.8. OUTPUT POWER (IC)

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
4.00	4.70	4.36

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)
Low	5755	4.36	30.00
High	5795	4.36	30.00

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	11.44	11.48	14.47	30.00	-15.53
High	5795	12.72	12.70	15.72	30.00	-14.28

8.23.9. PSD (IC)

LIMITS

IC RSS-247 (6.2.4) (1)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
4.00	4.70	4.36

RESULTS

Antenna Gain and Limit



Channel	Frequency (MHz)	Directional Gain (dBi)	PSD Limit (dBm)
Low	5755	4.36	30.00
High	5795	4.36	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5755	-4.723	-4.776	-1.74	30.00	-31.74
High	5795	-4.544	-4.355	-1.44	30.00	-31.44

PSD, CHAIN 0

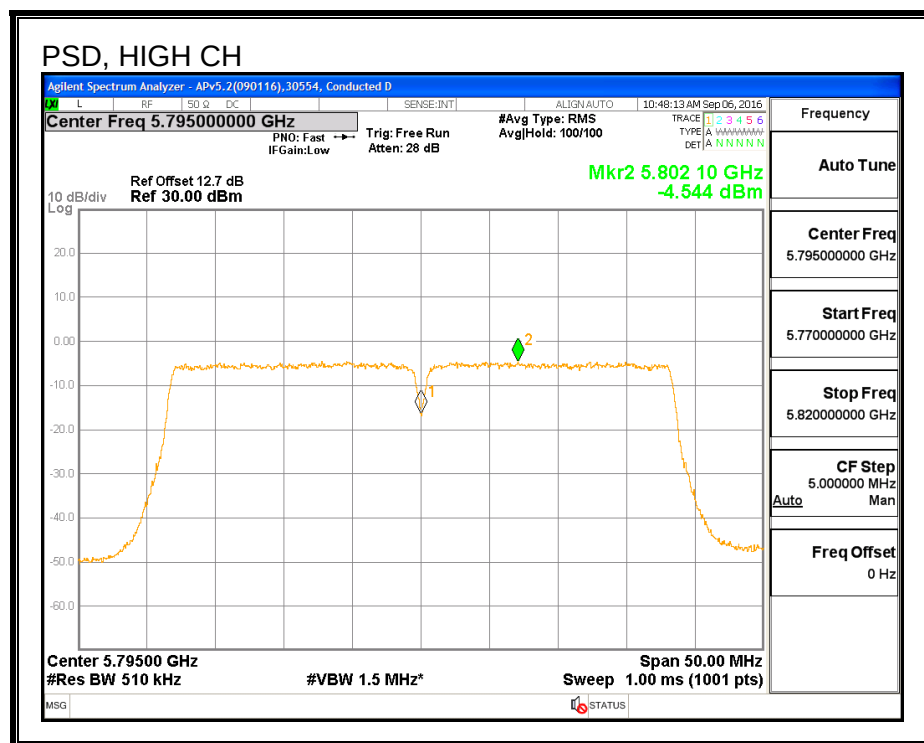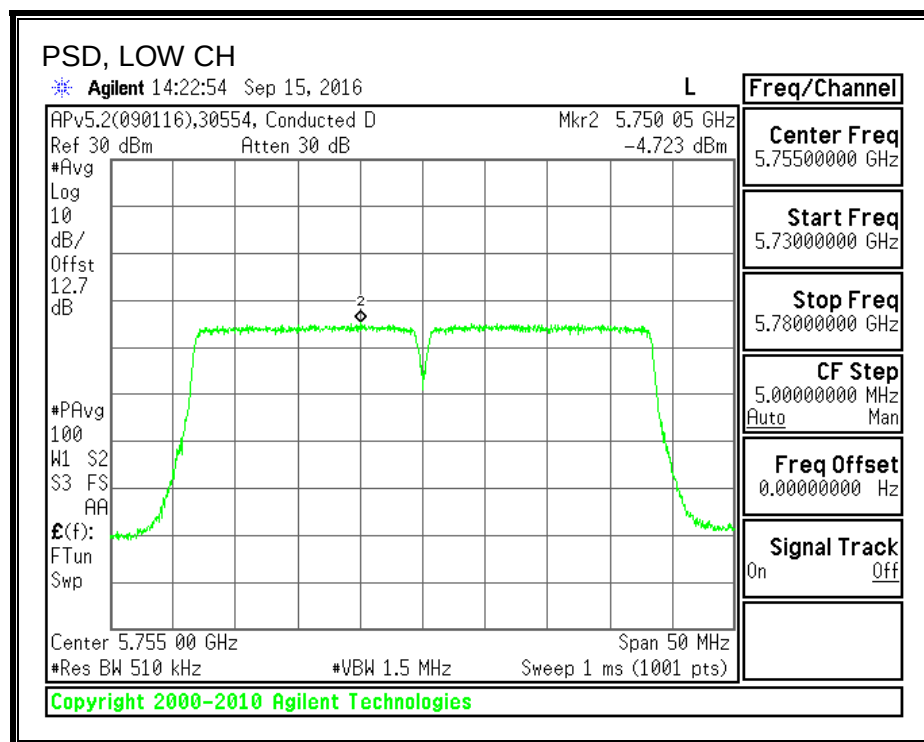

PSD, CHAIN 2

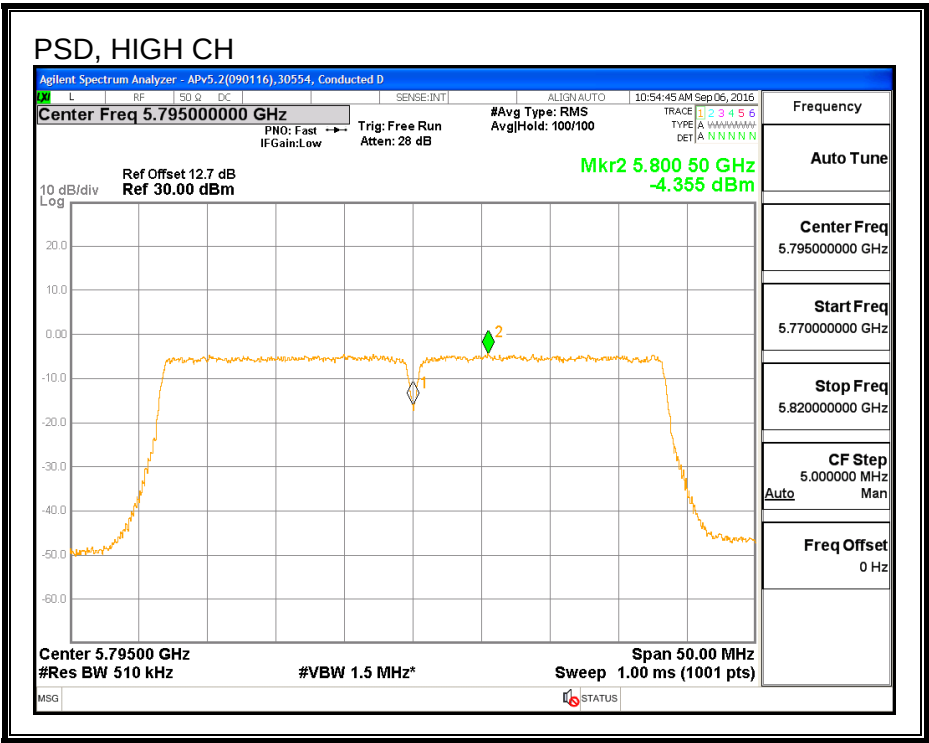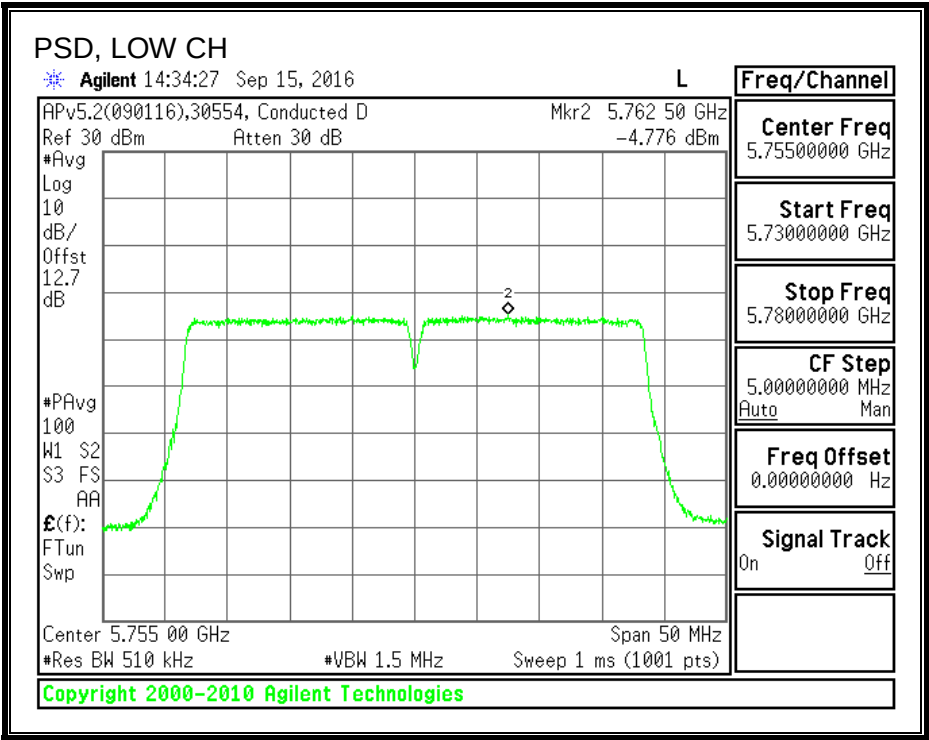

8.24. 802.11n HT40 2Tx (CHAIN 1 + CHAIN 2) STBC MODE IN THE 5.8 GHz BAND

8.24.1. 6 dB BANDWIDTH

LIMITS



FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.



RESULTS

Channel	Frequency (MHz)	6 dB BW Chain 1 (MHz)	6 dB BW Chain 2 (MHz)	Minimum Limit (MHz)
Low	5755	36.410	36.520	0.5
High	5795	36.300	36.410	0.5

6 dB BANDWIDTH, CHAIN 1

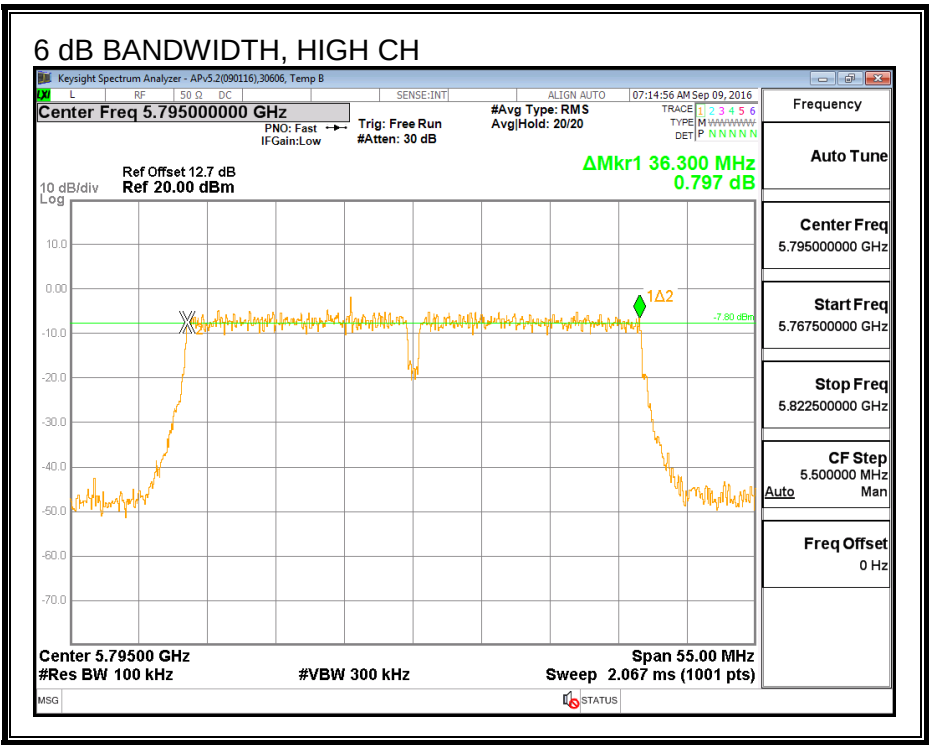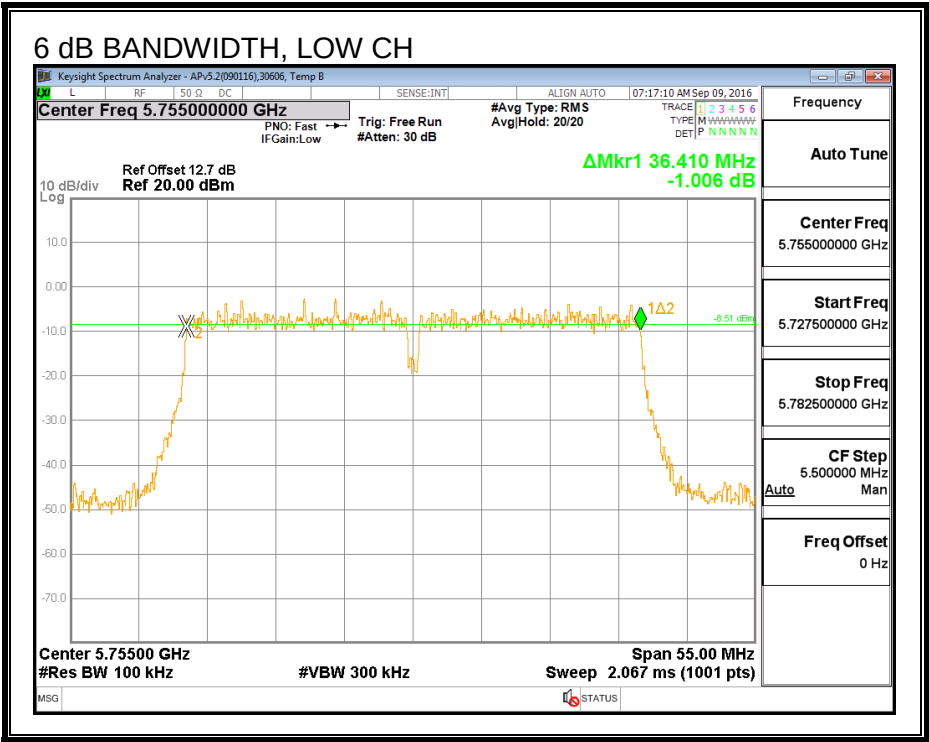

6 dB BANDWIDTH, CHAIN 2

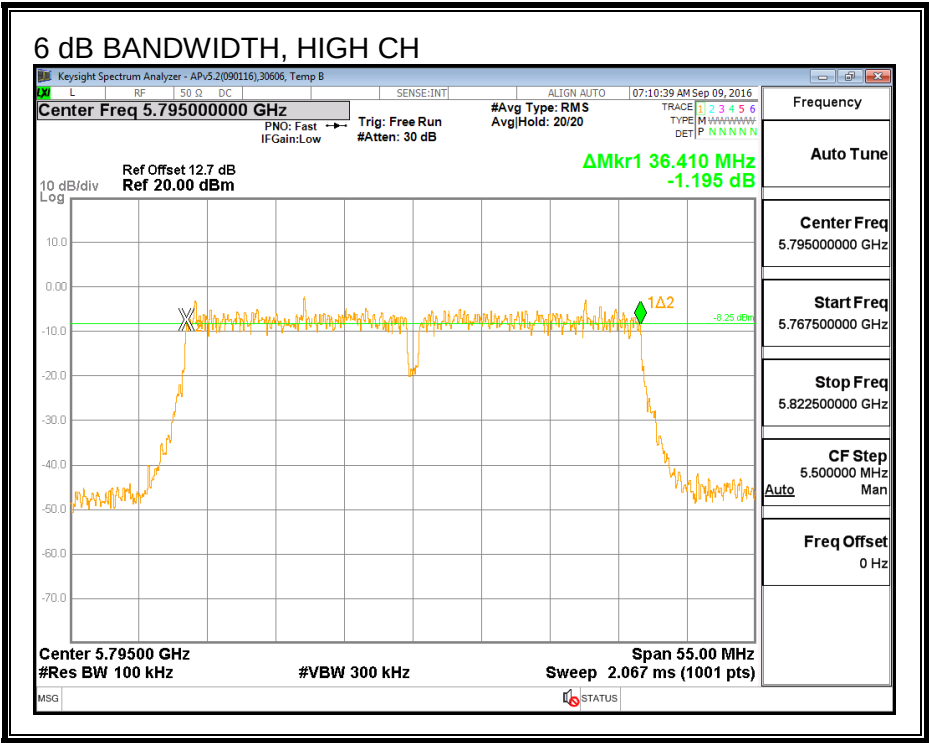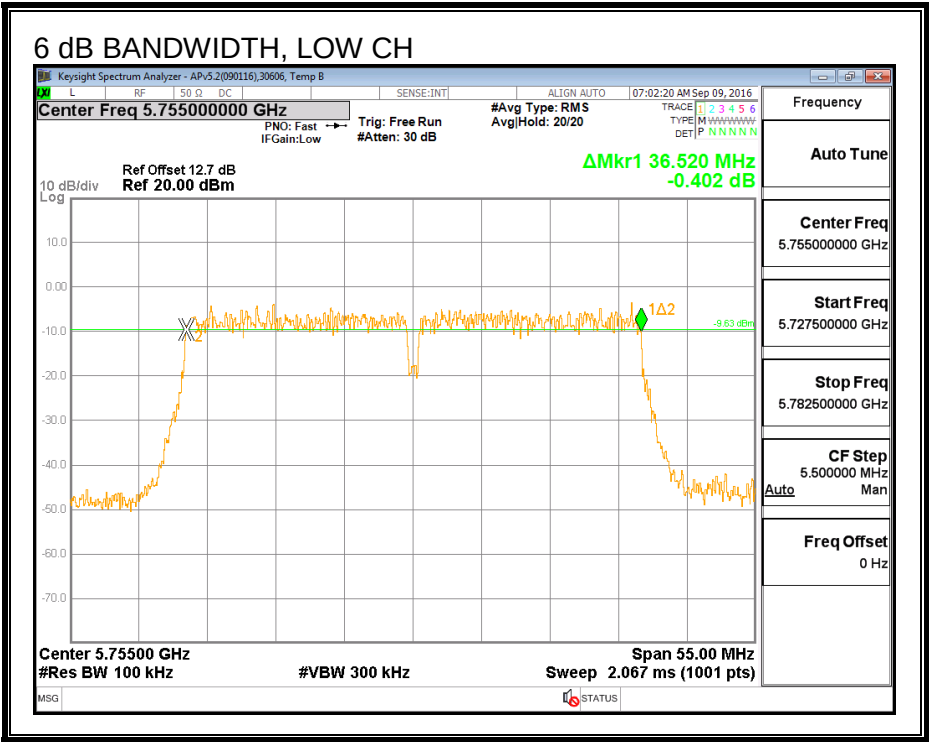

8.24.2. 26 dB BANDWIDTH



LIMITS

None, for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Low	5755	40.548	40.504
High	5795	40.672	40.565

26 dB BANDWIDTH, CHAIN 1

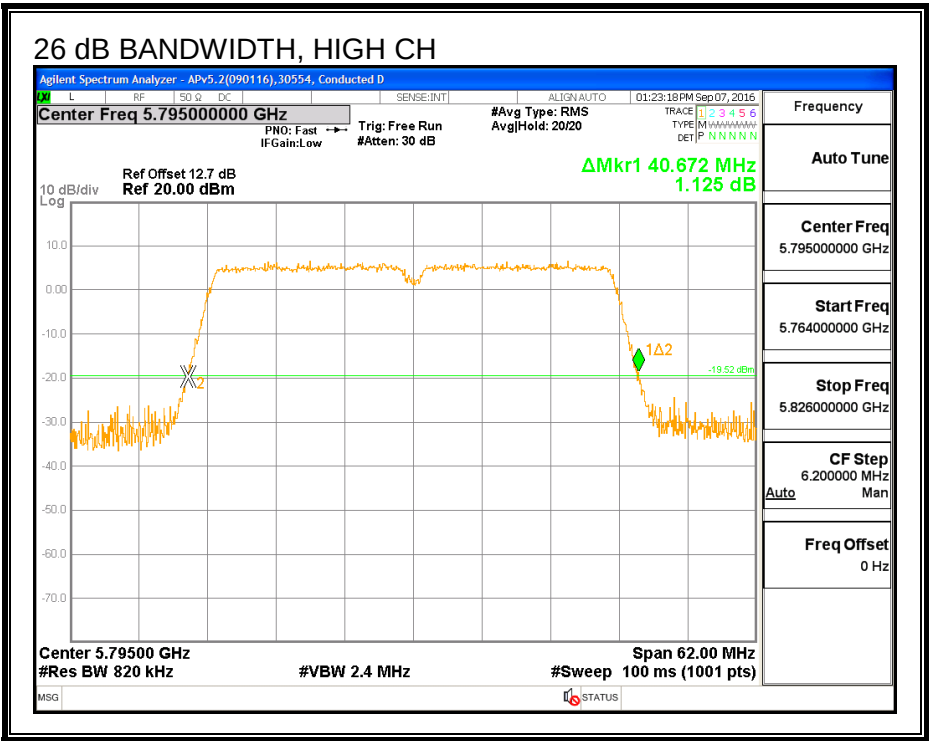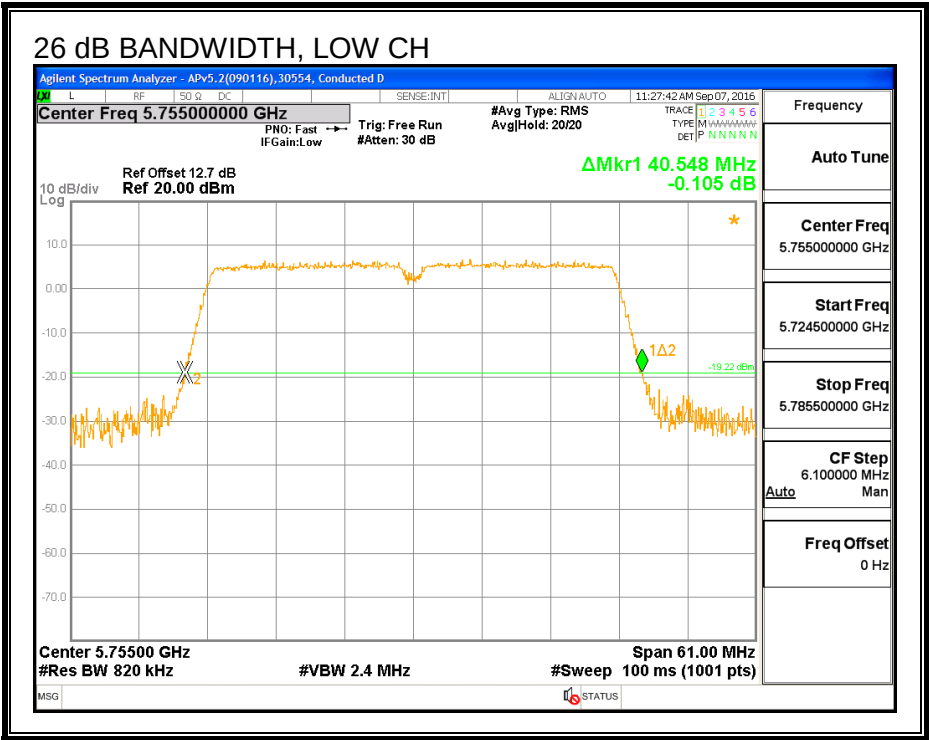

26 dB BANDWIDTH, CHAIN 2

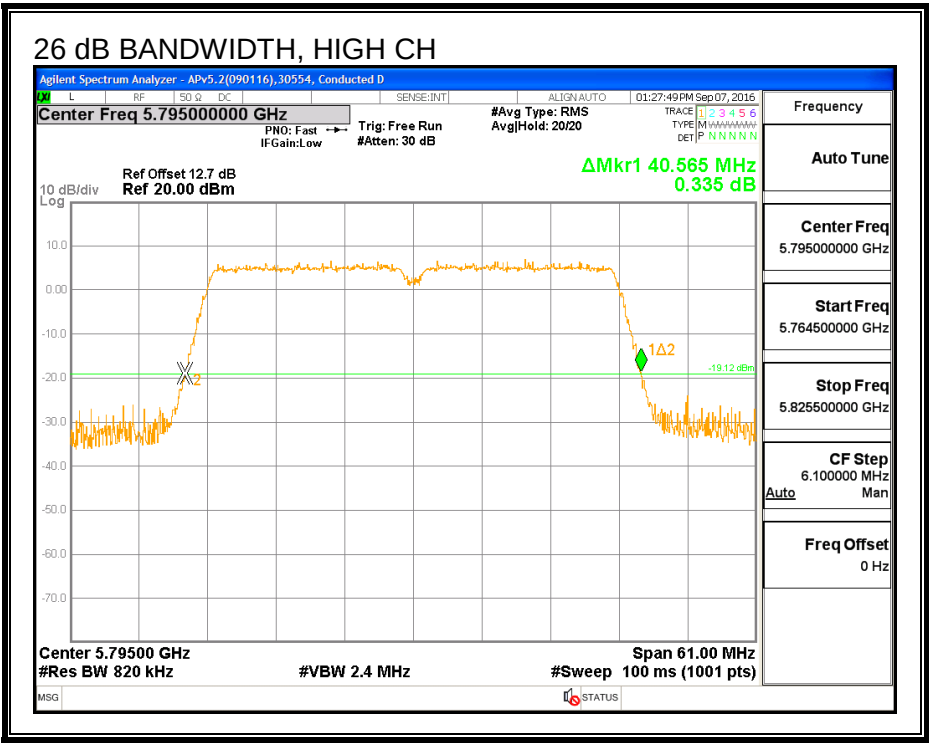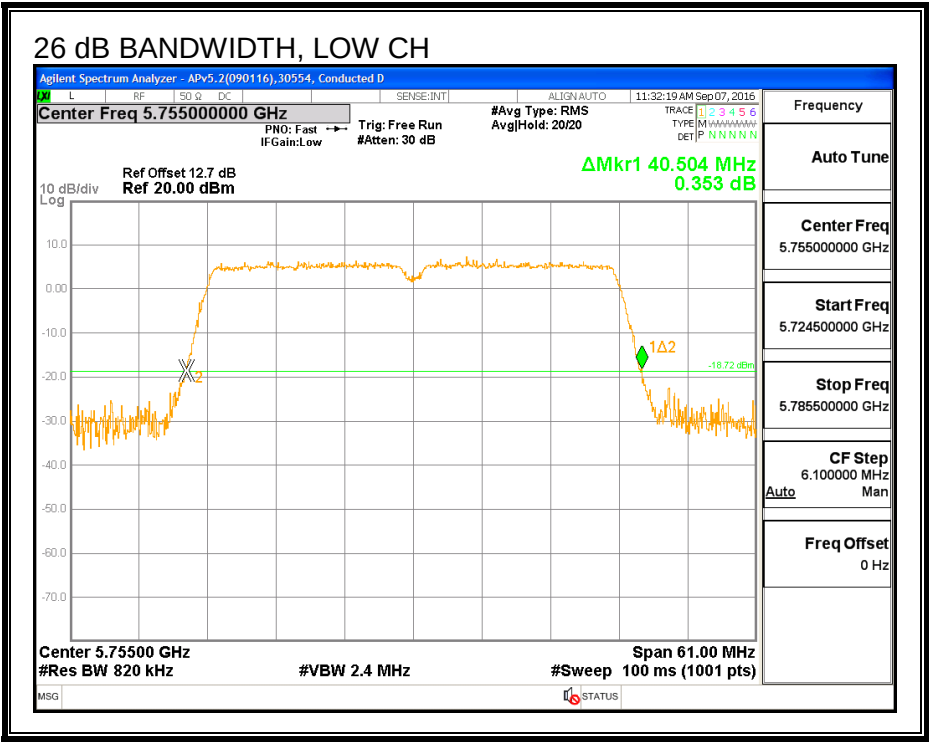

8.24.3. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
Low	5755	36.347	36.401
High	5795	36.275	36.369

99% BANDWIDTH, CHAIN 1

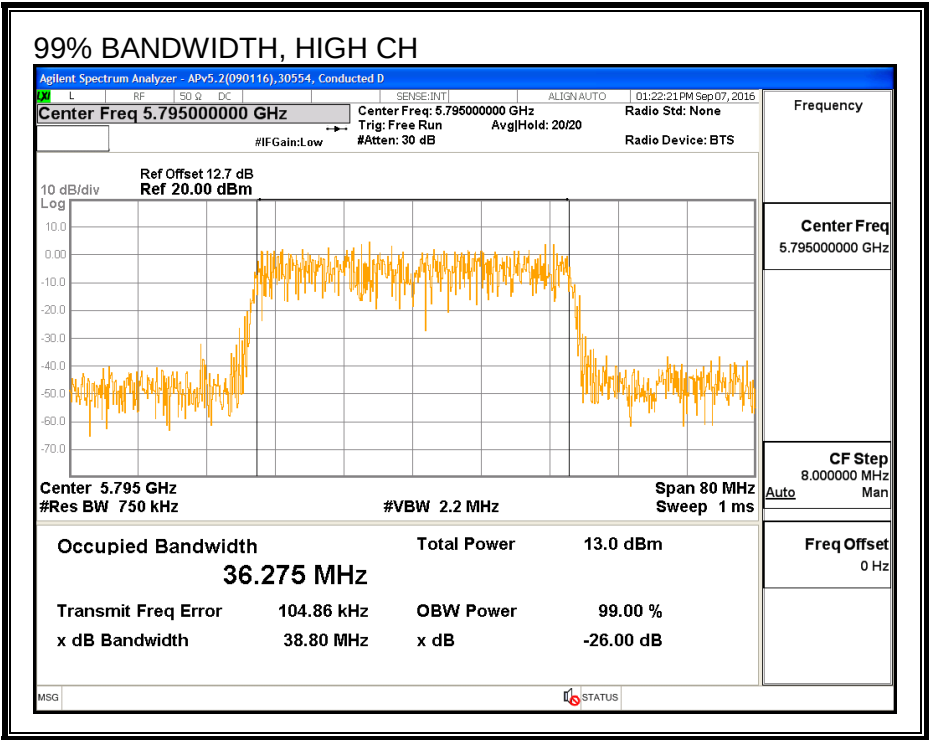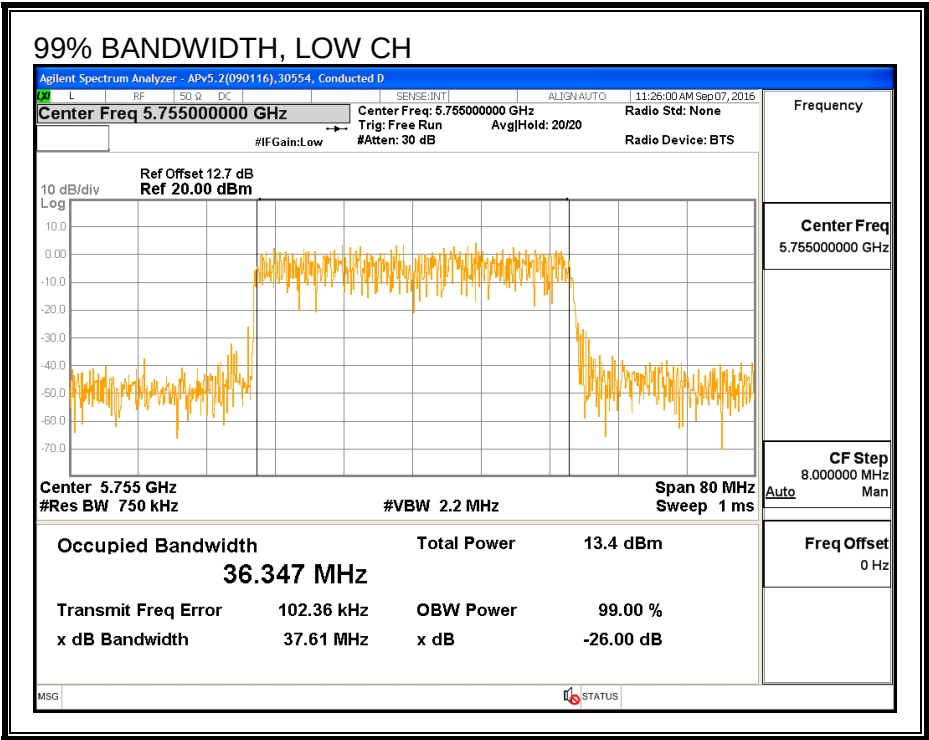

99% BANDWIDTH, CHAIN 2

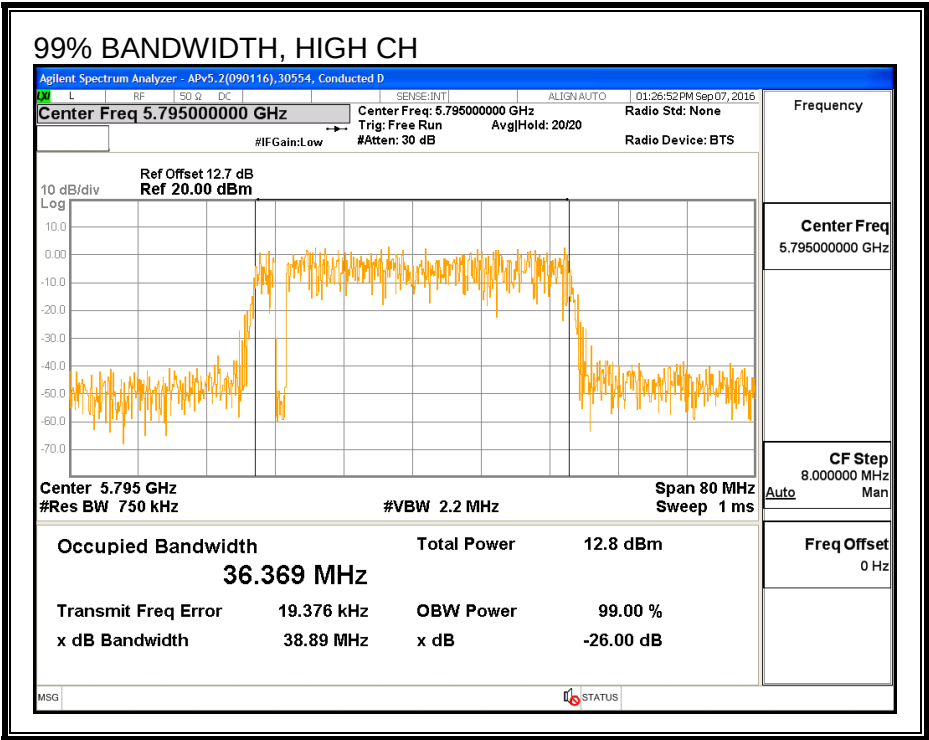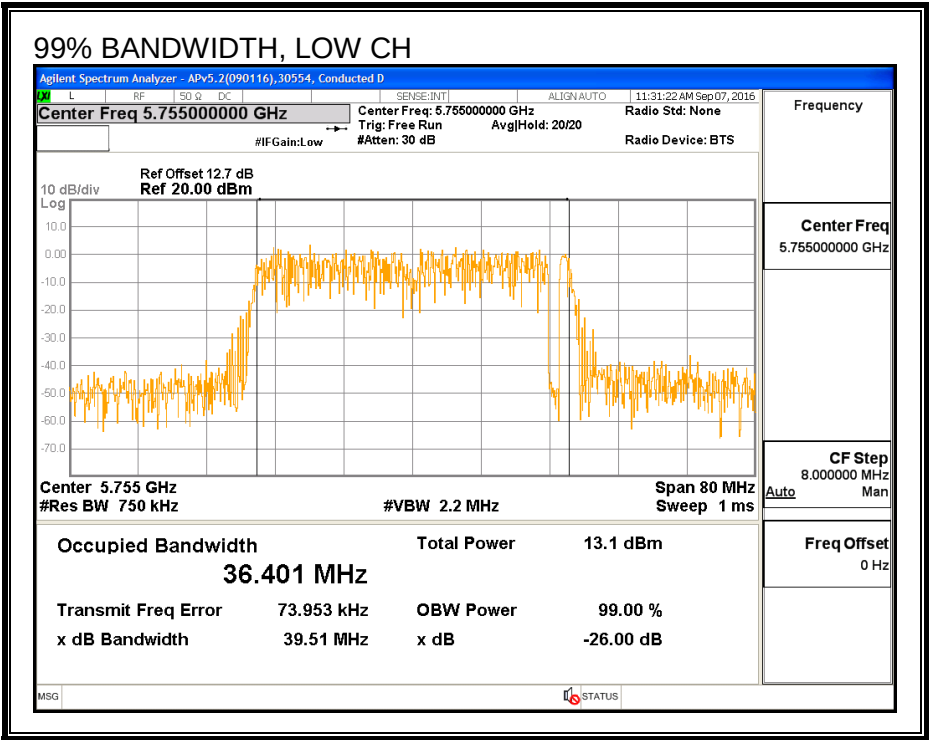

8.24.4. AVERAGE POWER (FCC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
Low	5755	12.68	12.69	15.70
High	5795	12.72	12.69	15.72

8.24.5. OUTPUT POWER (FCC)

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
6.30	4.70	5.57

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)
Low	5755	5.57	30.00
High	5795	5.57	30.00

Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	12.68	12.69	15.70	30.00	-14.30
High	5795	12.72	12.69	15.72	30.00	-14.28

8.24.6. PSD (FCC)

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
6.30	4.70	5.57

RESULTS

Antenna Gain and Limit



Channel	Frequency (MHz)	Directional Gain (dBi)	PSD Limit (dBm)
Low	5755	5.57	30.00
High	5795	5.57	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5755	-4.61	-4.621	-1.61	30.00	-31.61
High	5795	-4.408	-4.4	-1.39	30.00	-31.39

PSD, CHAIN 1

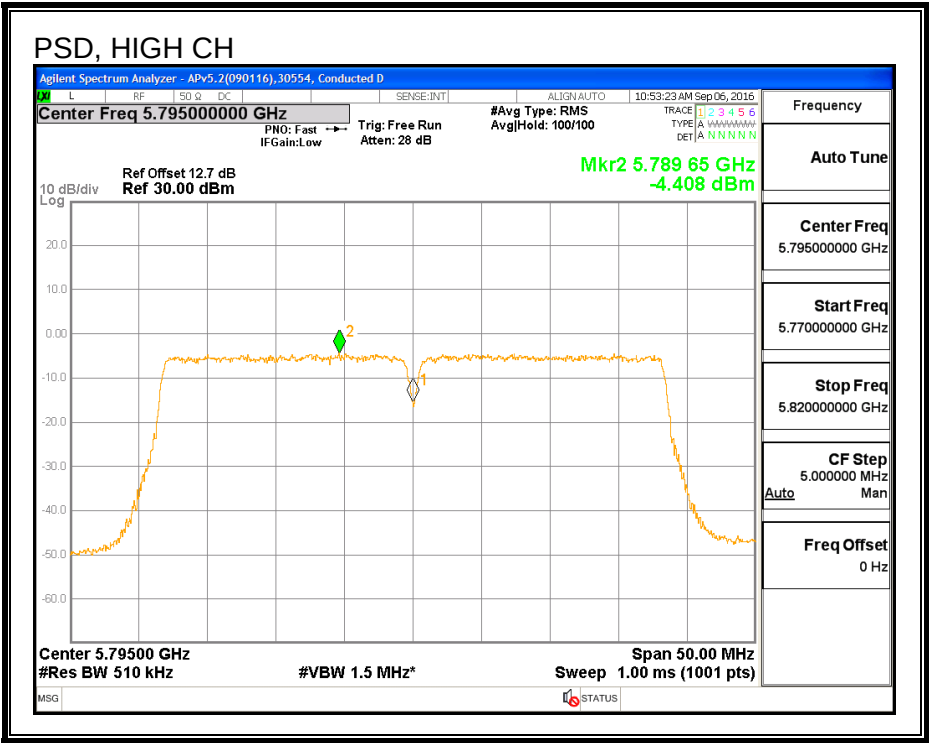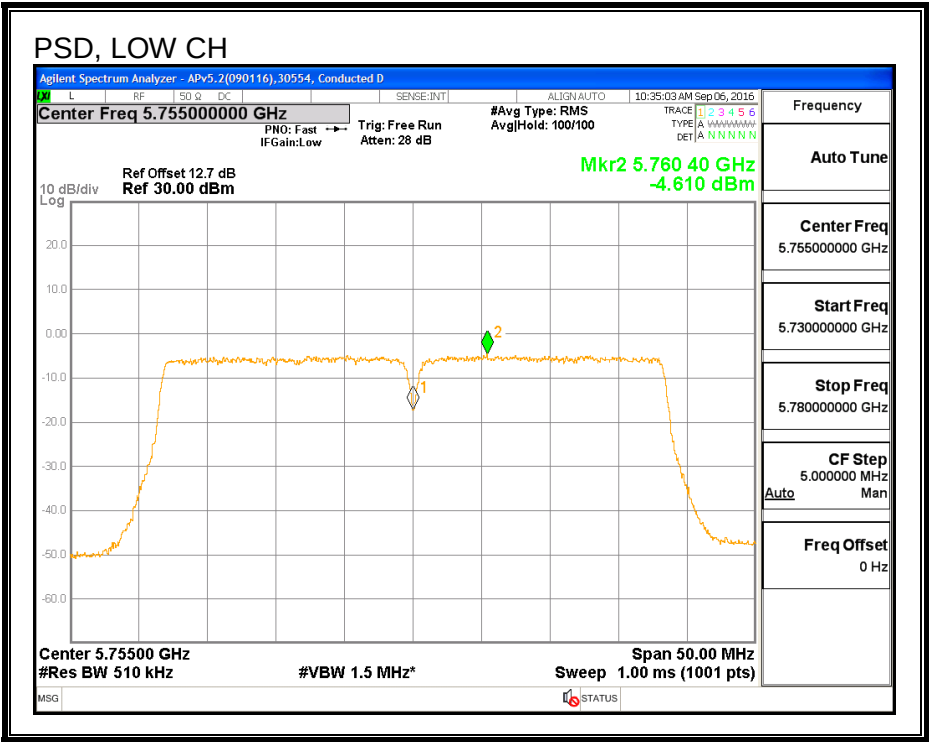

PSD, CHAIN 2

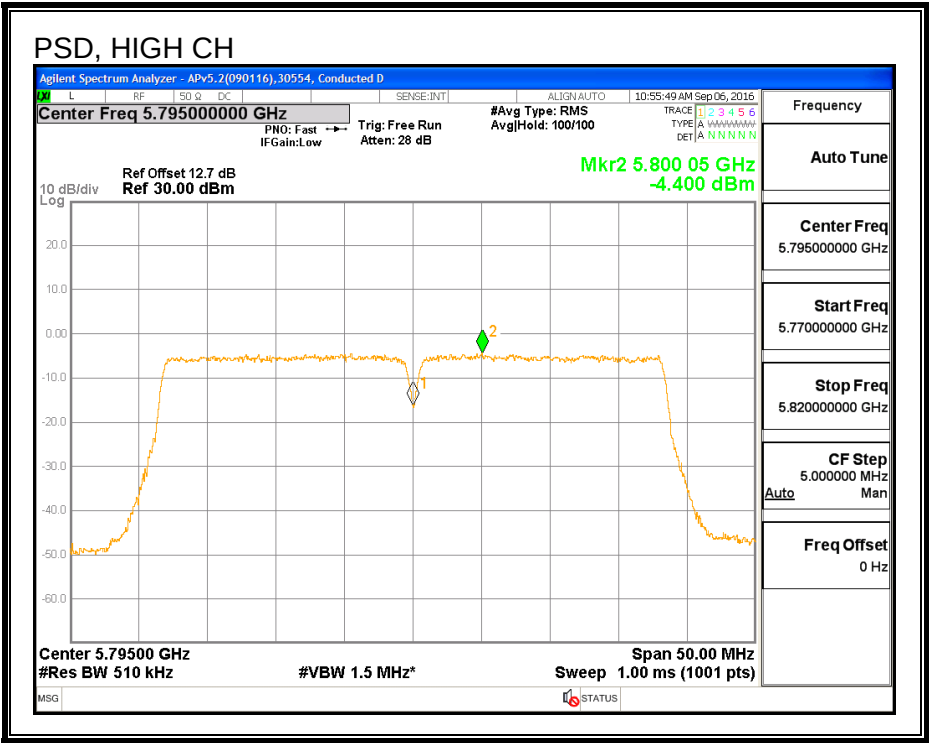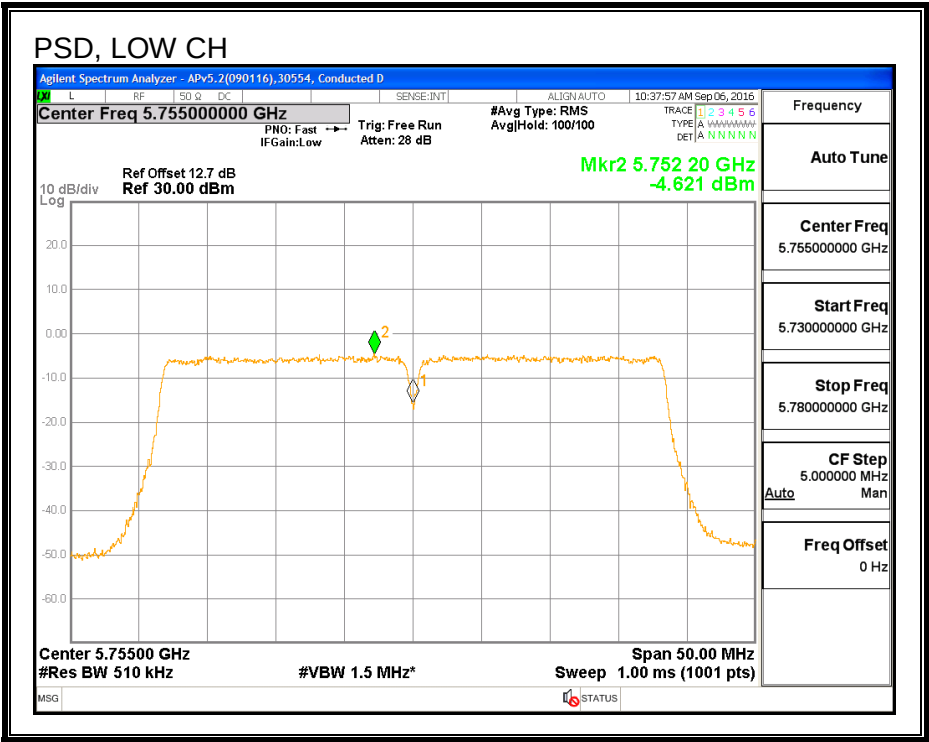

8.24.1. AVERAGE POWER (IC)

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
Low	5755	11.41	11.43	14.43
High	5795	12.72	12.69	15.72

8.24.2. OUTPUT POWER (IC)

LIMITS

IC RSS-247 (6.2.4) (1)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
6.30	4.70	5.57

RESULTS

ID:	43573	Date:	9/7/16
------------	-------	--------------	--------

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)
Low	5755	5.57	30.00
High	5795	5.57	30.00

Output Power Results

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	11.41	11.43	14.43	30.00	-15.57
High	5795	12.72	12.69	15.72	30.00	-14.28

8.24.3. PSD (IC)

LIMITS

IC RSS-247 (6.2.4) (1)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
6.30	4.70	5.57

RESULTS

Antenna Gain and Limit



Channel	Frequency (MHz)	Directional Gain (dBi)	PSD Limit (dBm)
Low	5755	5.57	30.00
High	5795	5.57	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



PSD Results

Channel	Frequency (MHz)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5755	-4.951	-4.904	-1.92	30.00	-31.92
High	5795	-4.408	-4.4	-1.39	30.00	-31.39

PSD, CHAIN 1

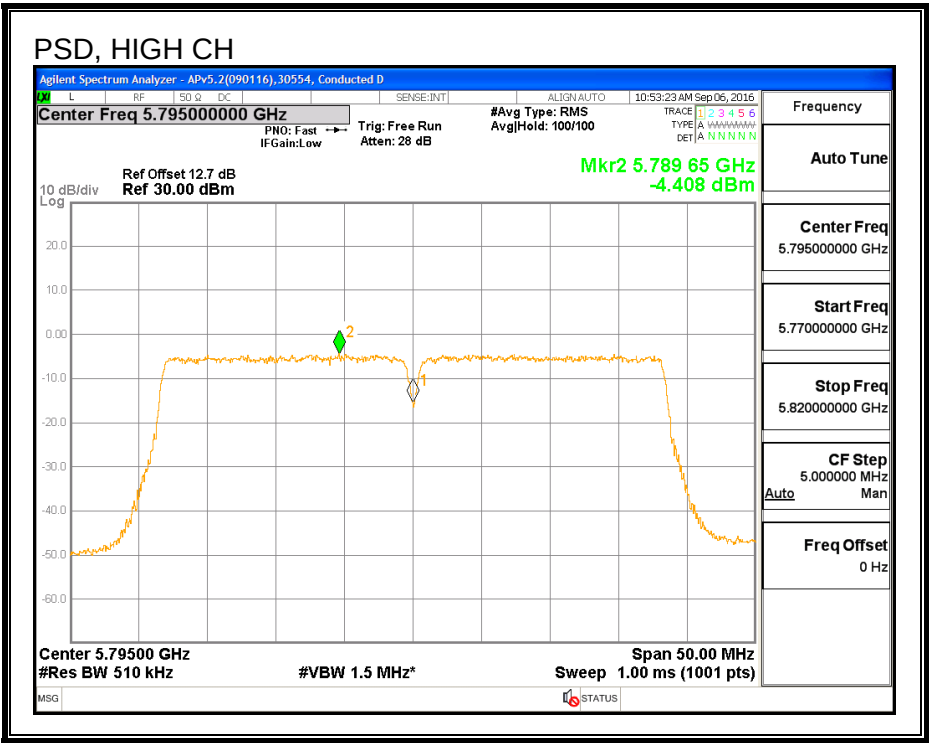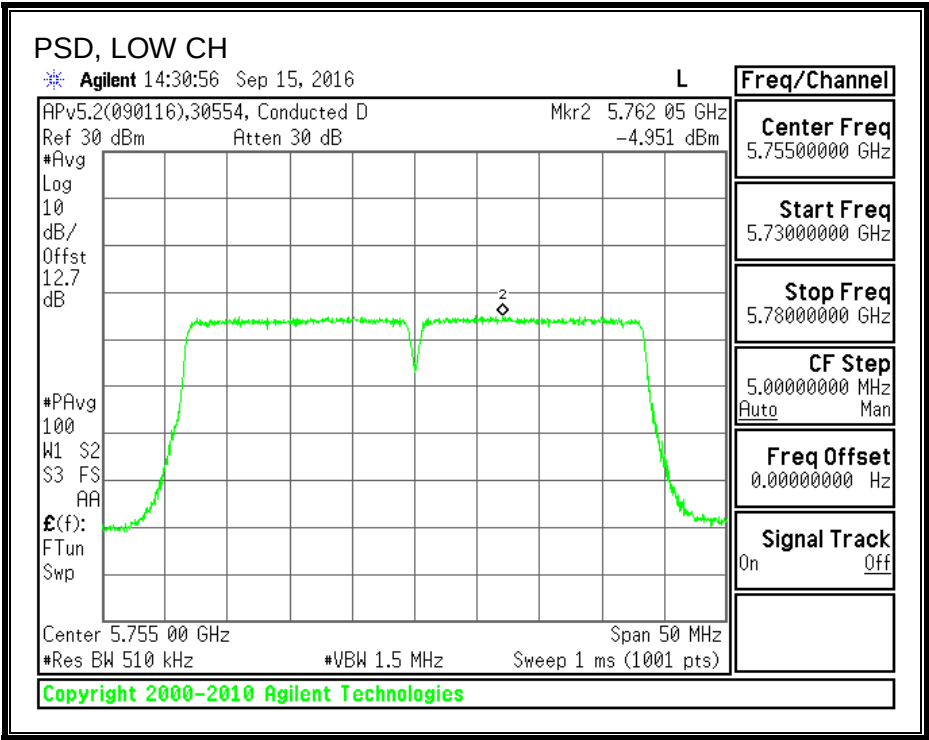

PSD, CHAIN 2

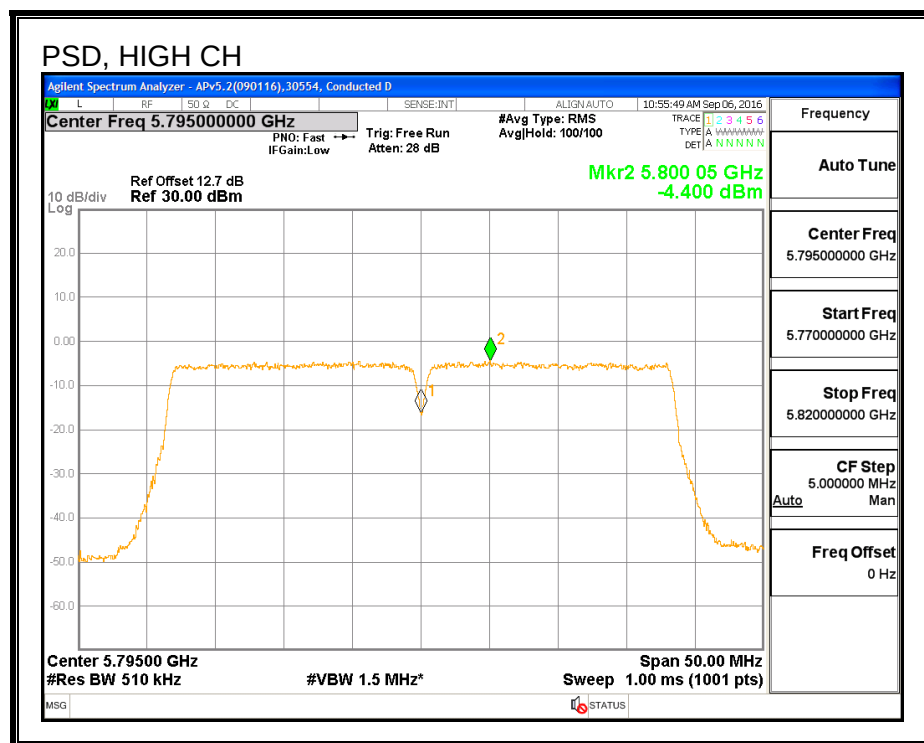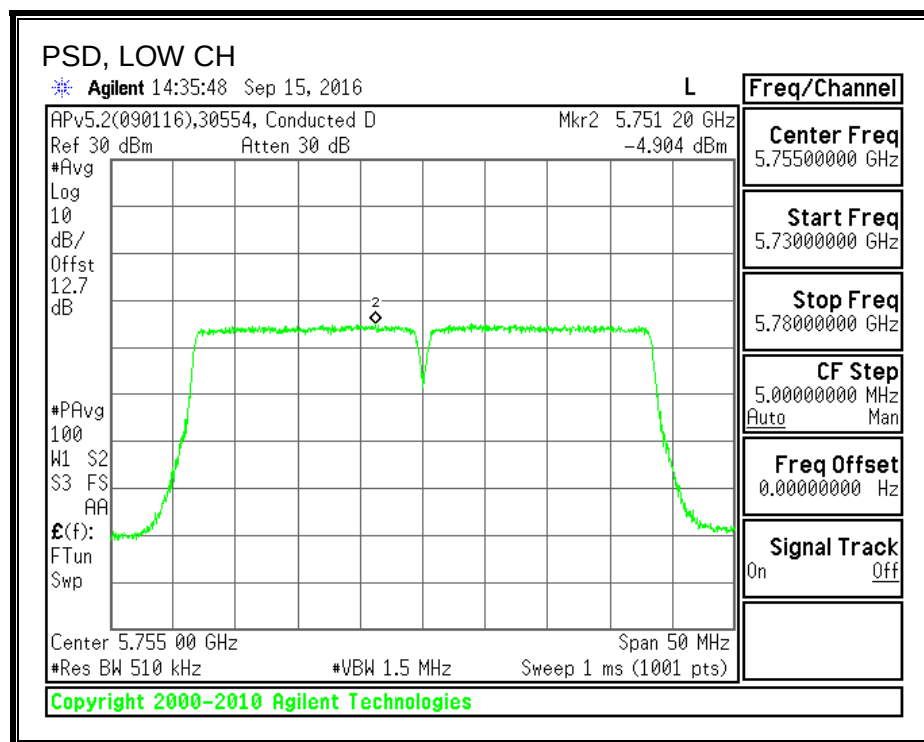

8.25. 802.11ac VHT40 2Tx (CHAIN 0 + CHAIN 1) BEAM FORMING MODE IN THE 5.8 GHz BAND

8.25.1. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)



IC RSS-247 (6.2.4) (1)

The minimum 6 dB bandwidth shall be at least 500 kHz.



RESULTS

Channel	Frequency (MHz)	6 dB BW Chain 0 (MHz)	6 dB BW Chain 1 (MHz)	Minimum Limit (MHz)
Low	5755	36.36	36.41	0.5
High	5795	36.41	36.41	0.5

6 dB BANDWIDTH, CHAIN 0

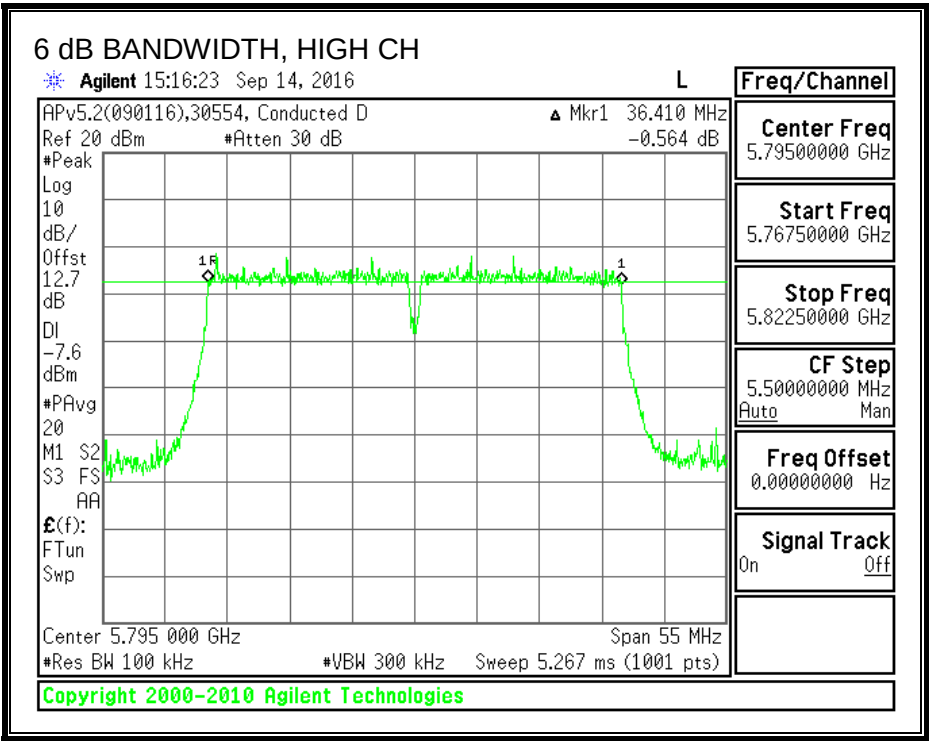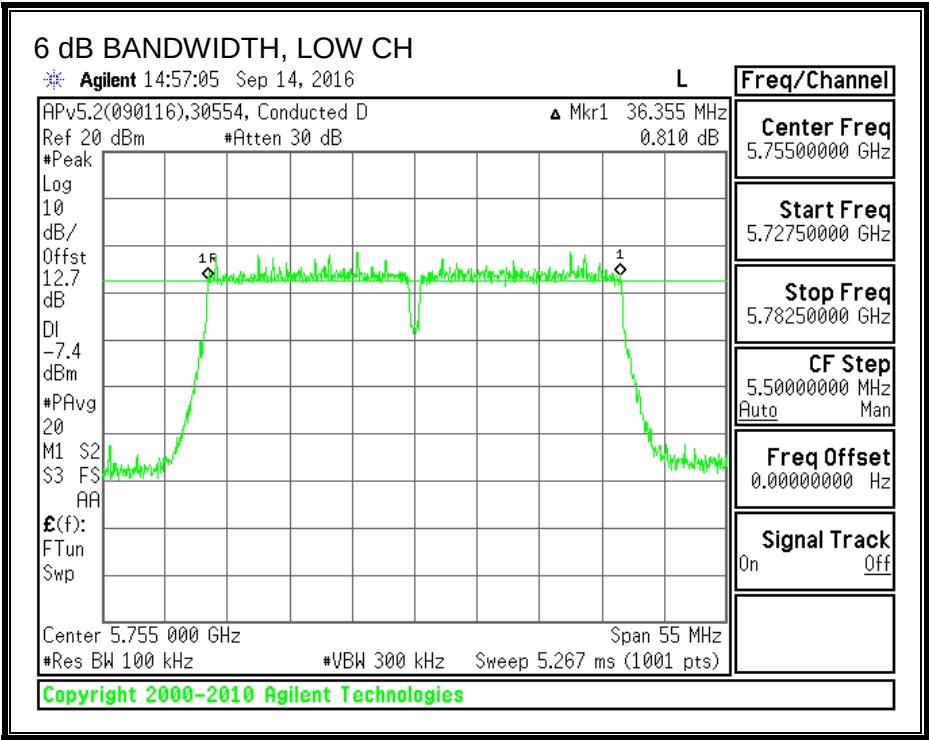

6 dB BANDWIDTH, CHAIN 1

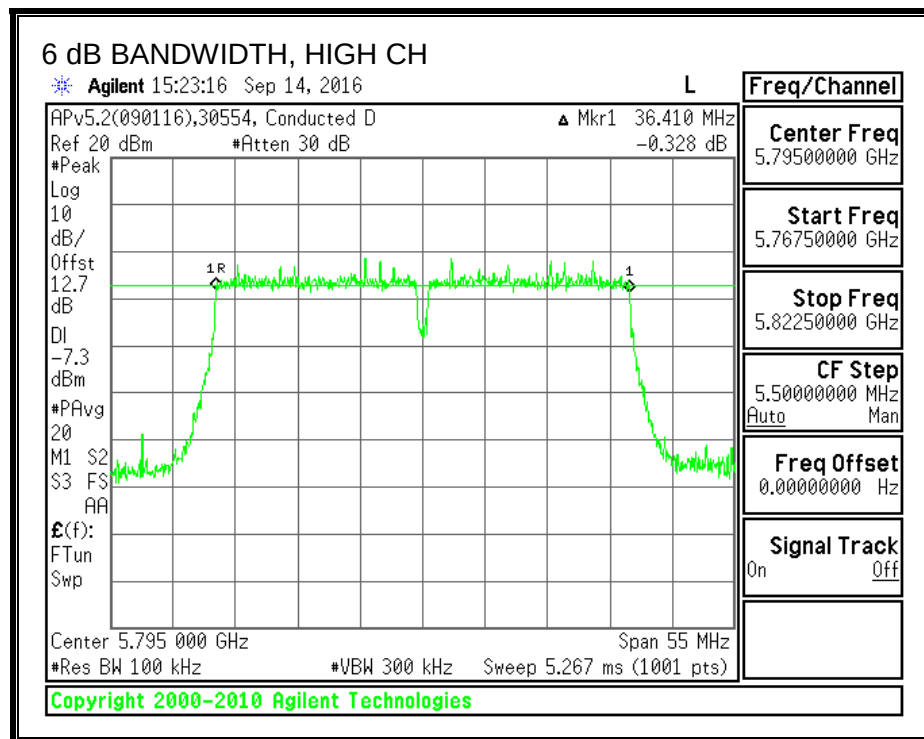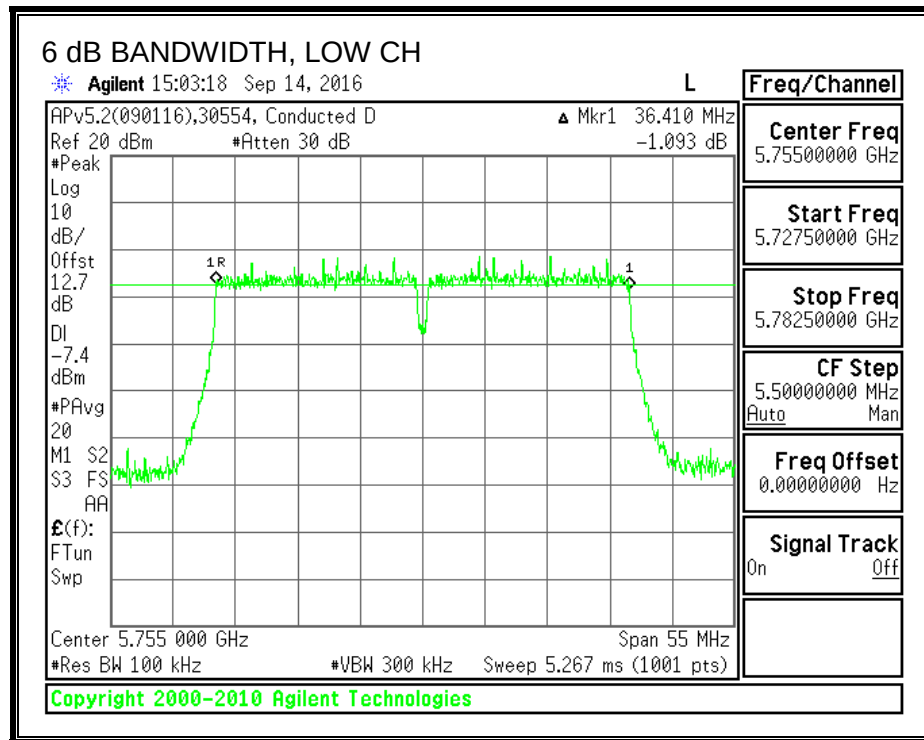

8.25.2. 26 dB BANDWIDTH



LIMITS

None, for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5755	40.382	40.260
High	5795	40.260	40.443

26 dB BANDWIDTH, CHAIN 0

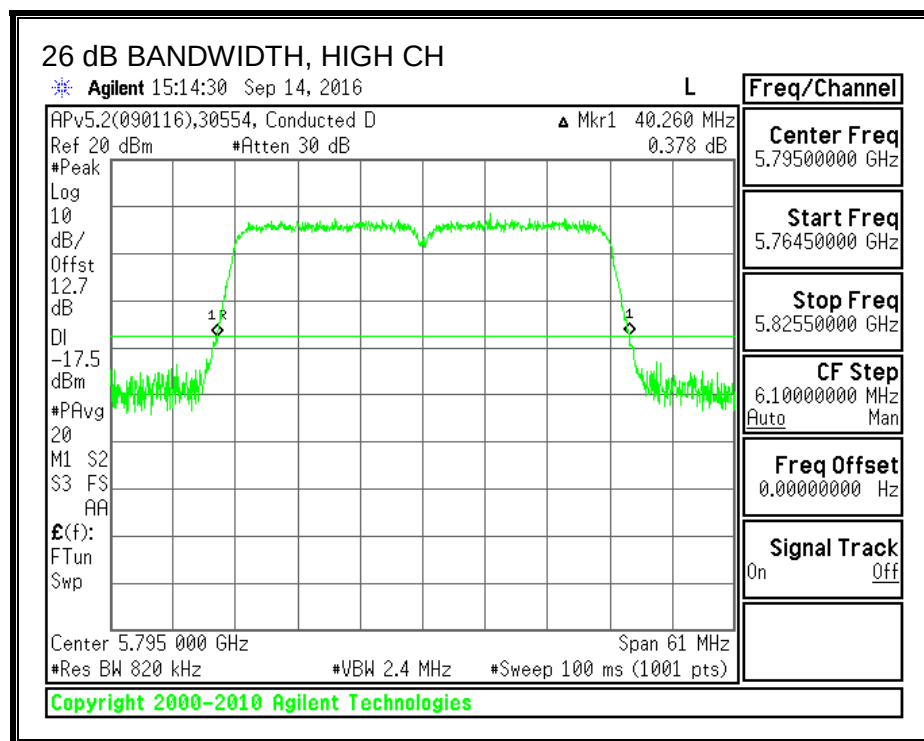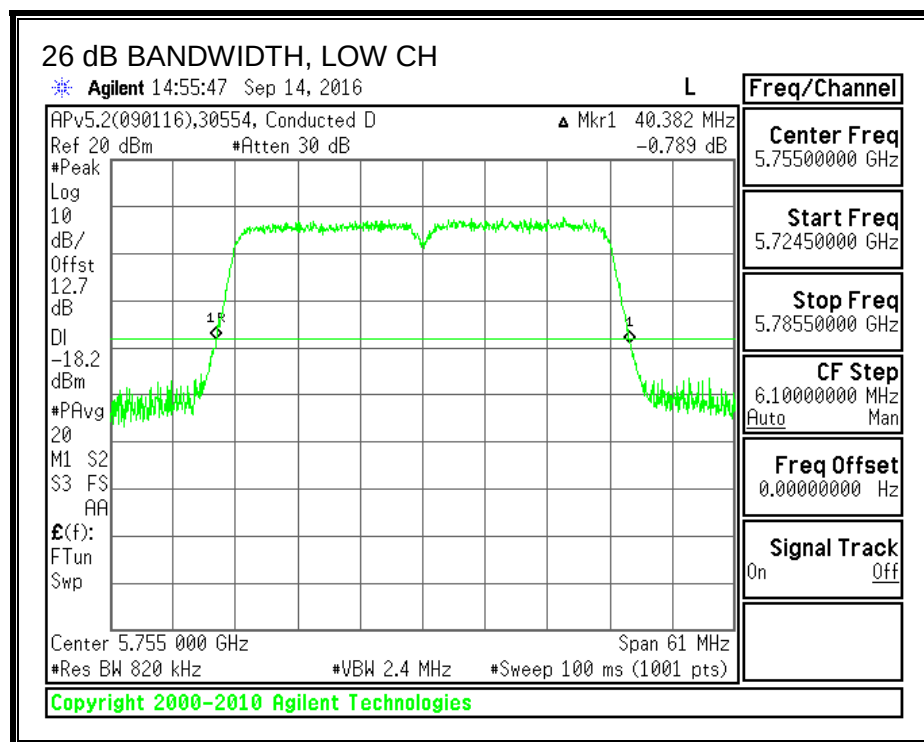

26 dB BANDWIDTH, CHAIN 1

