
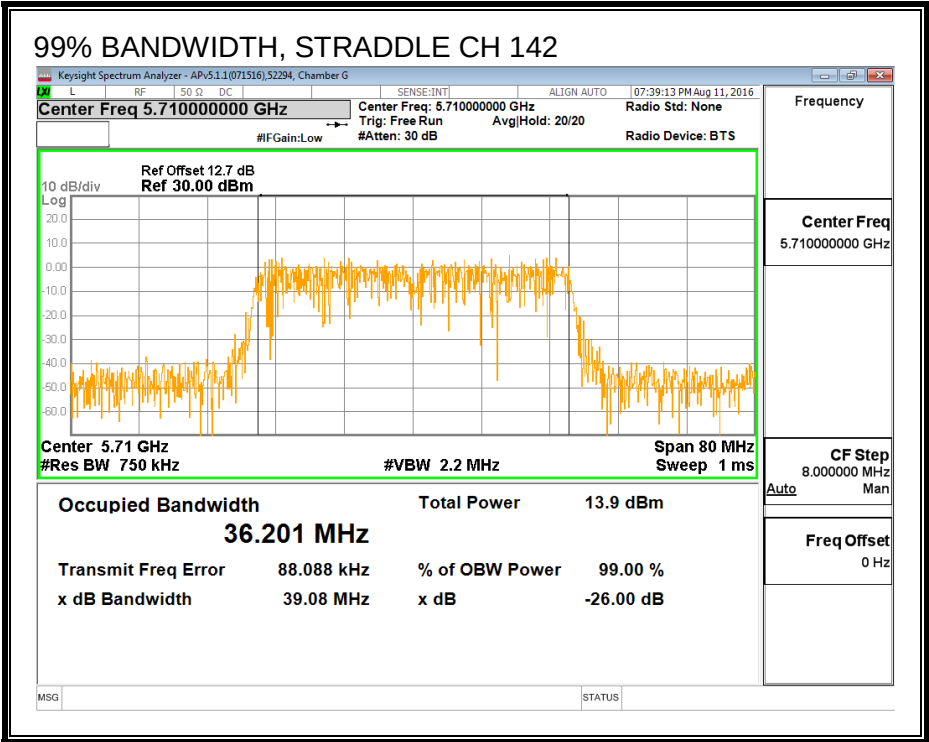


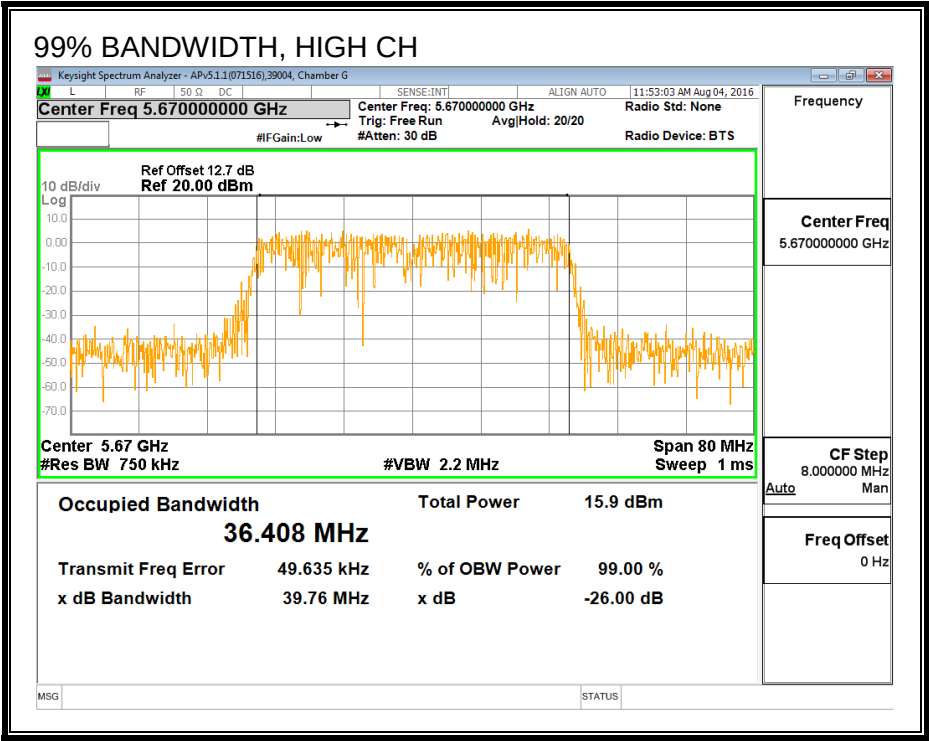

8.53.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5510	12.41	12.37	15.40
Mid	5550	12.39	12.36	15.39
High	5670	12.38	12.35	15.38
142	5710	12.40	12.34	15.38

8.53.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 (6.2.3) (1)

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Straddle channel power is measured using PXA spectrum analyzer, duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
6.40	7.90	7.21

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
6.40	7.90	10.19

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5510	40.73	36.41	7.21	10.19	24.00	6.81
Mid	5550	40.67	36.28	7.21	10.19	24.00	6.81
High	5670	40.86	36.40	7.21	10.19	24.00	6.81

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	12.41	12.37	15.40	24.00	-8.60
Mid	5550	12.39	12.36	15.39	24.00	-8.61
High	5670	12.38	12.35	15.38	24.00	-8.62

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5510	0.50	0.41	3.47	6.81	-3.34
Mid	5550	-0.81	-1.06	2.08	6.81	-4.73
High	5670	1.27	0.98	4.14	6.81	-2.67



PSD, CHAIN 0

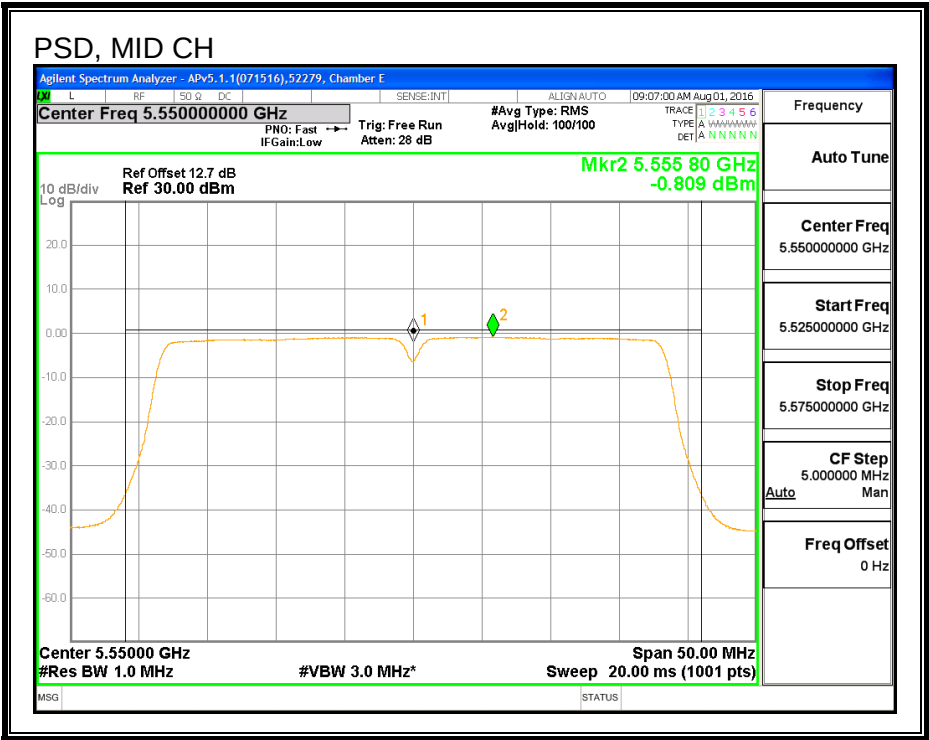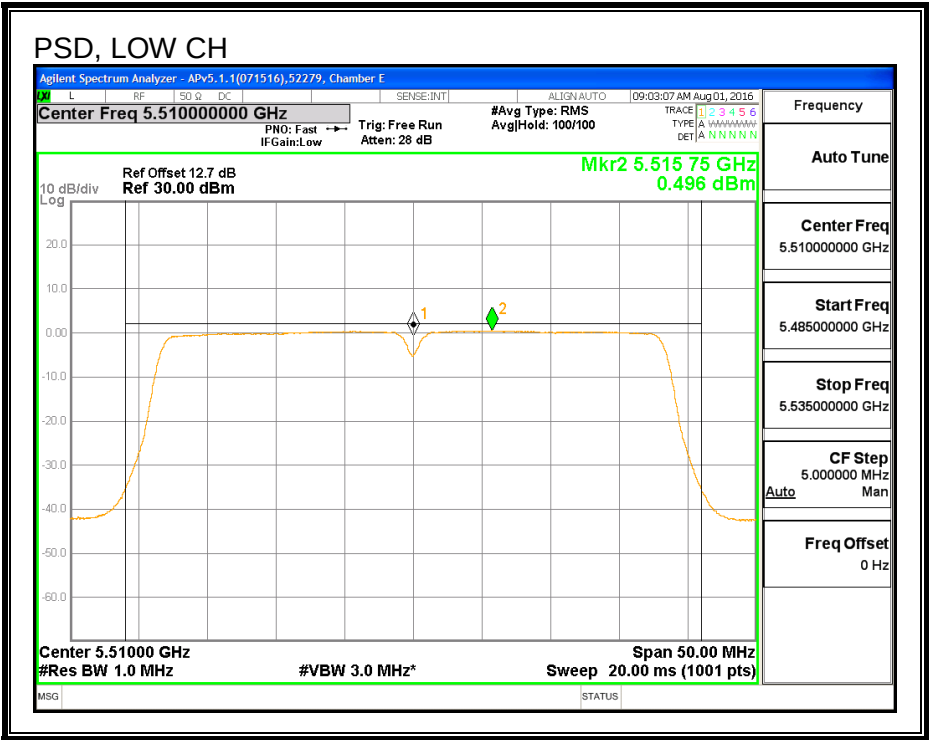

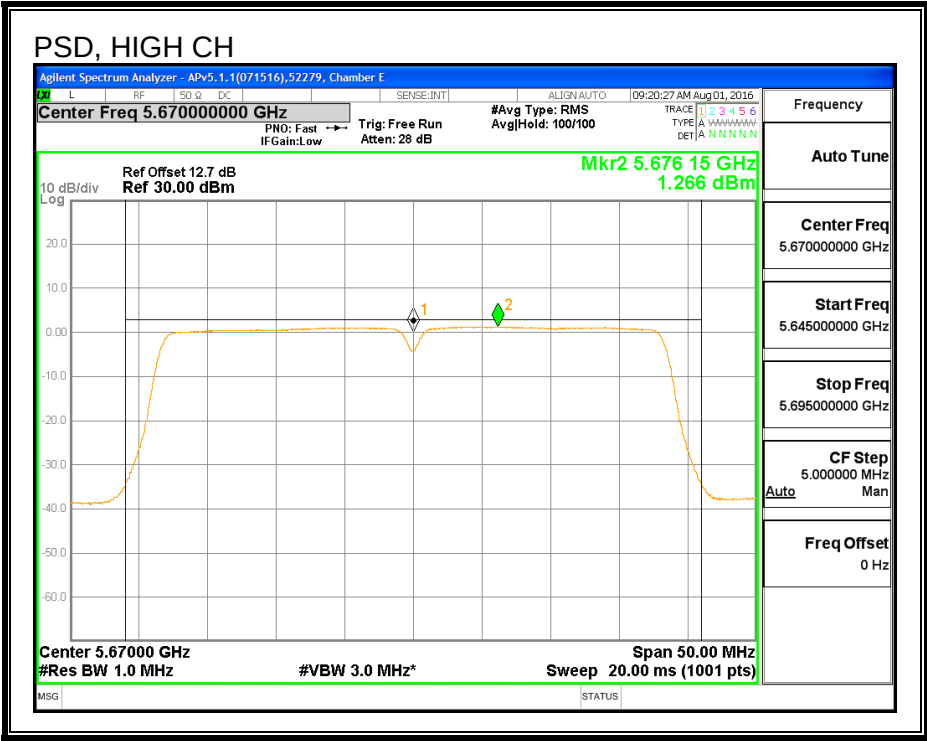

PSD, CHAIN 1

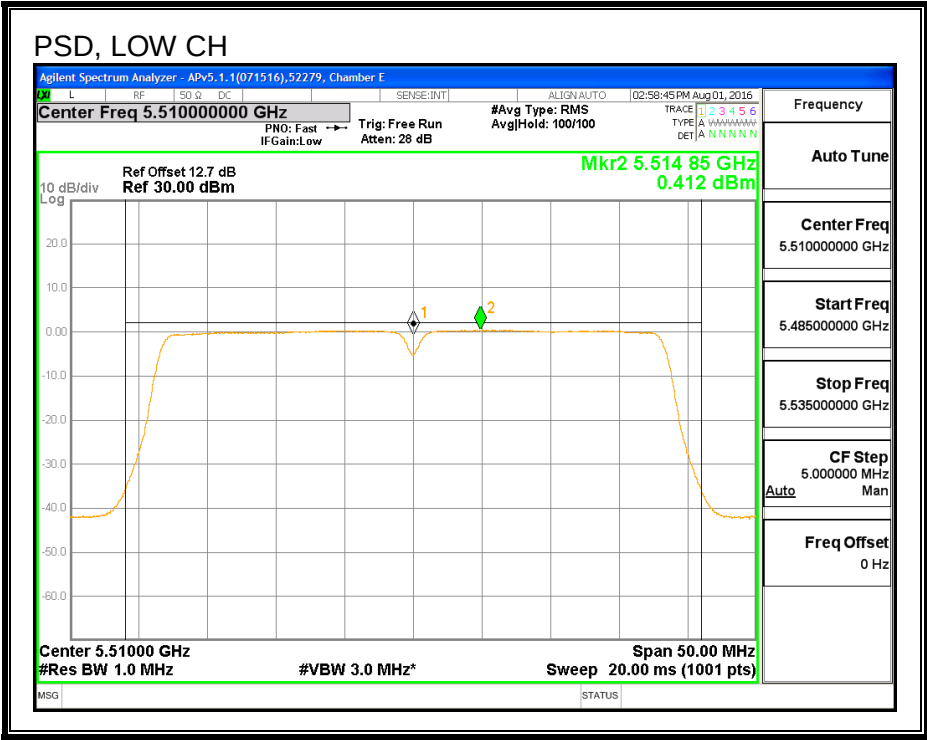

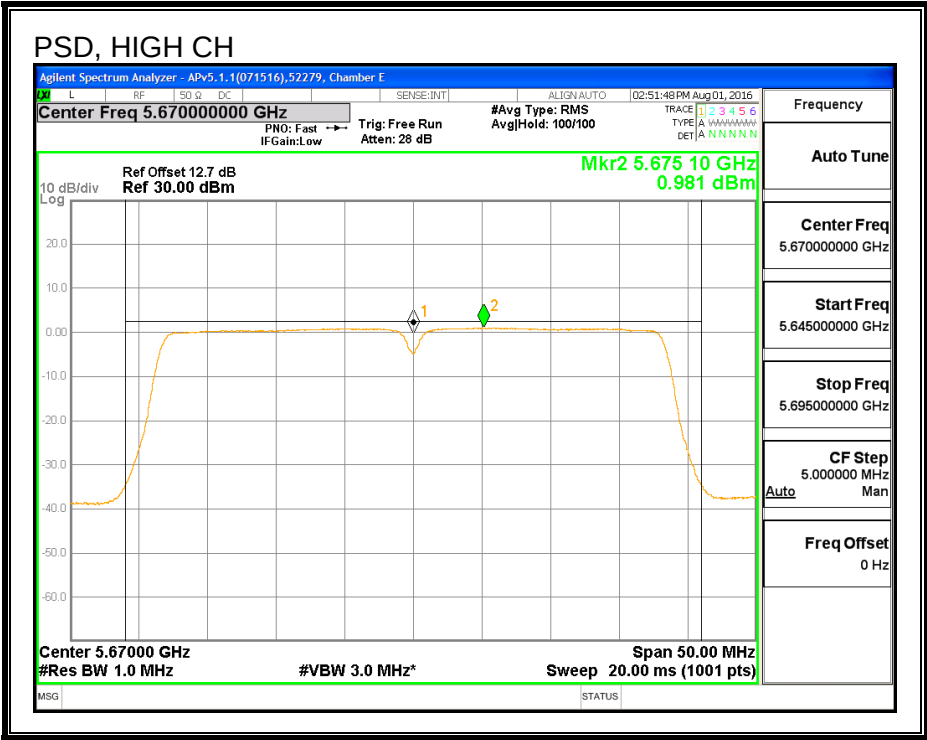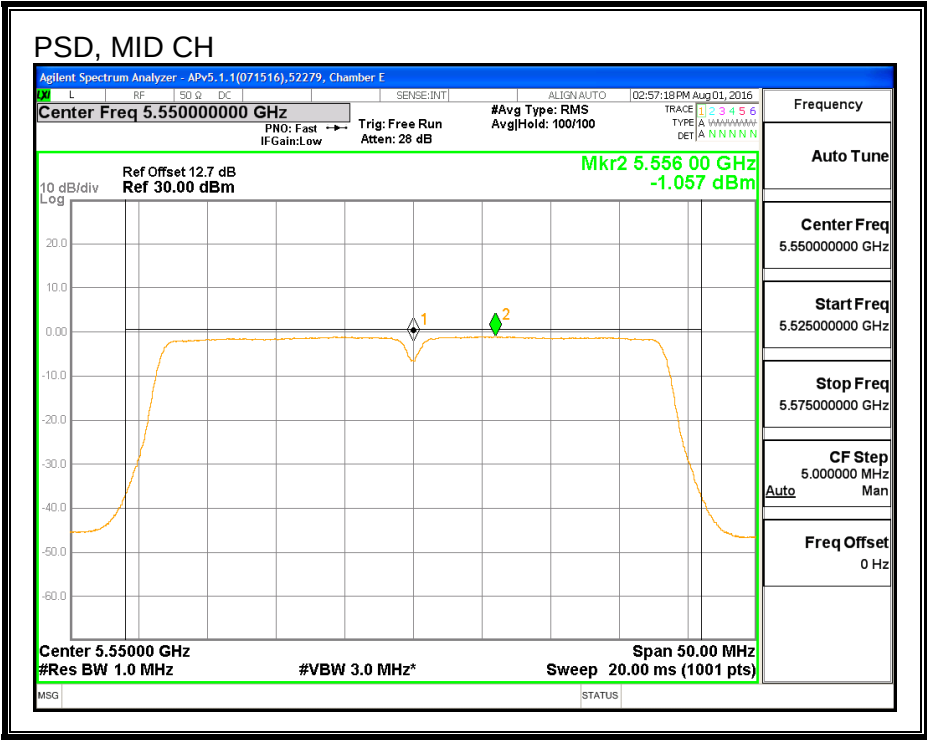

8.54. 802.11ac VHT40 2Tx CDD STRADDLE CHANNEL 142 RESULTS (FCC)

8.54.1. OUTPUT POWER AND PSD

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	35.22	7.21	10.19	22.79	6.81

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	12.10	12.10	15.11	22.79	-7.68


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-2.28	-2.27	0.73	6.81	-6.08


OUTPUT POWER, CHAIN 0

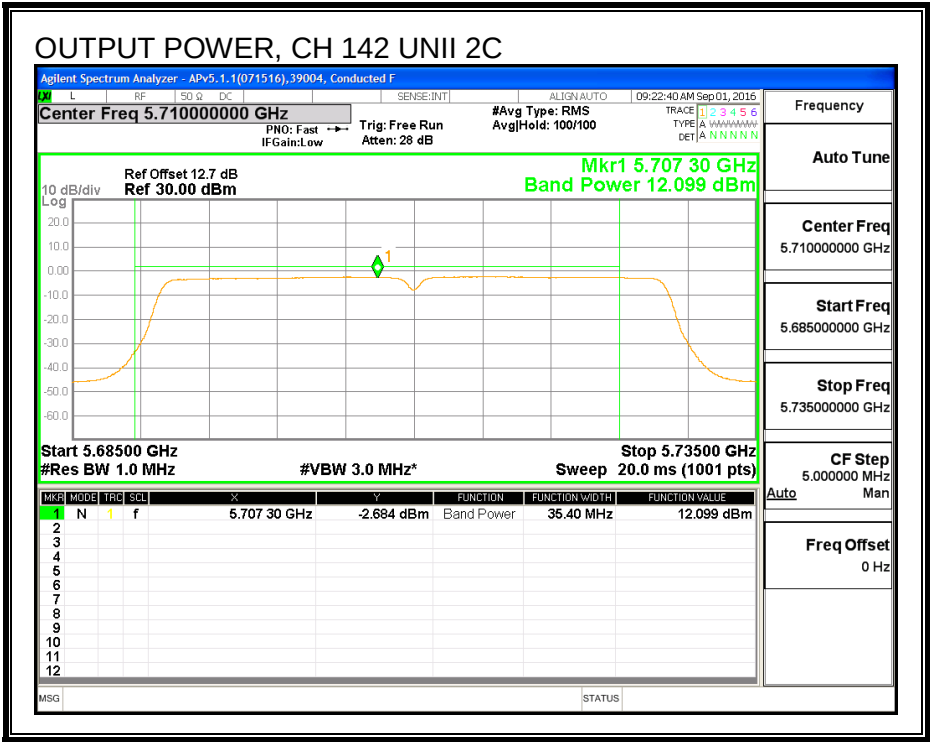


OUTPUT POWER, CHAIN 1

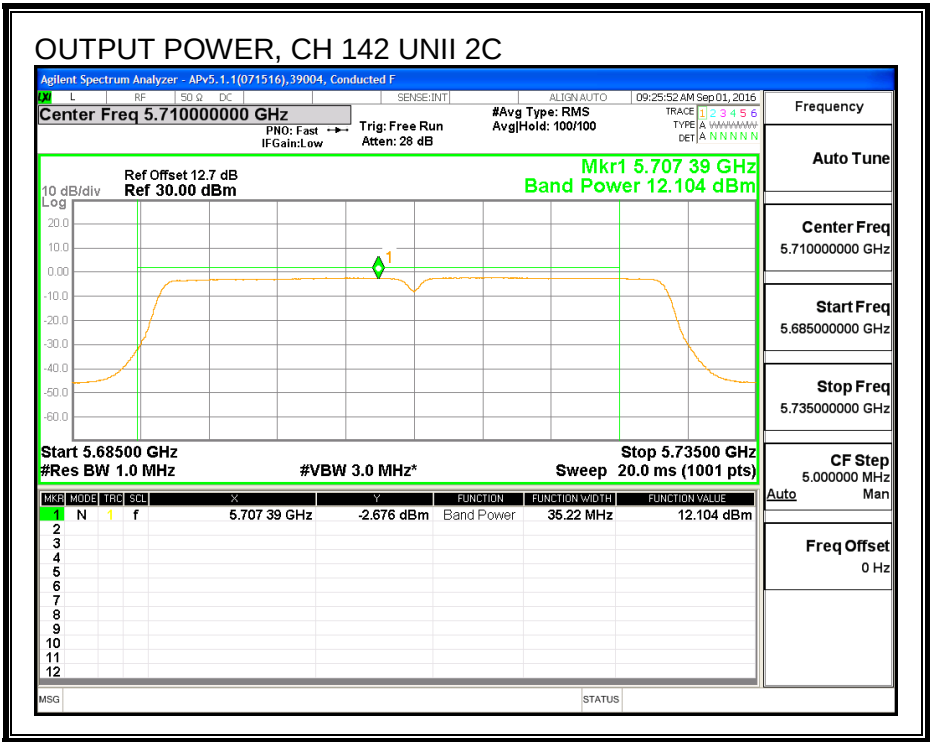

PSD, CHAIN 0

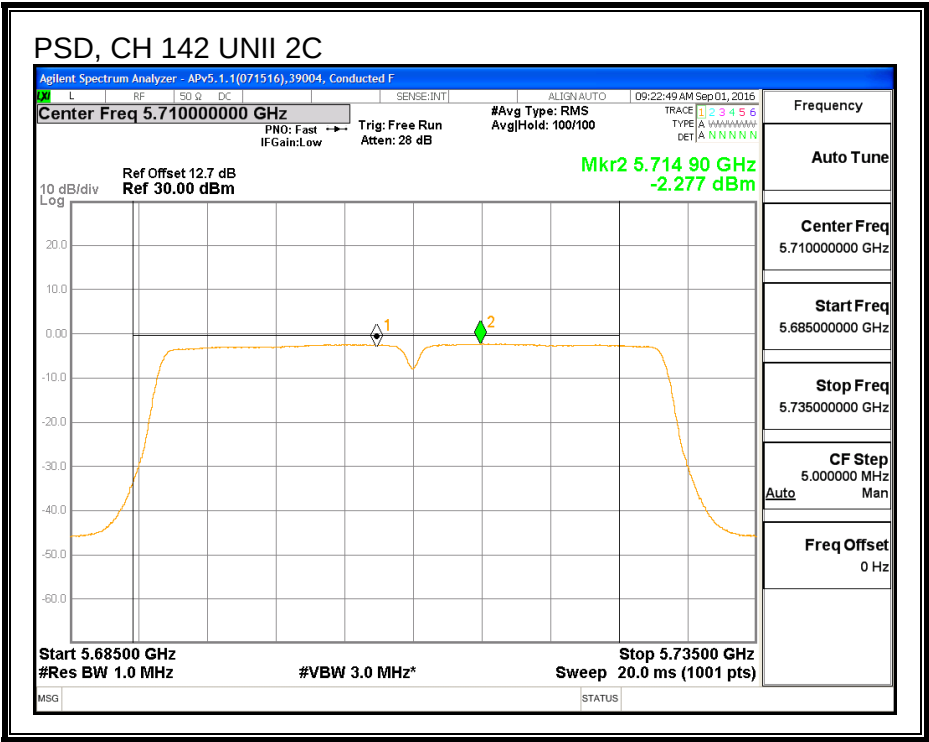

PSD, CHAIN 1

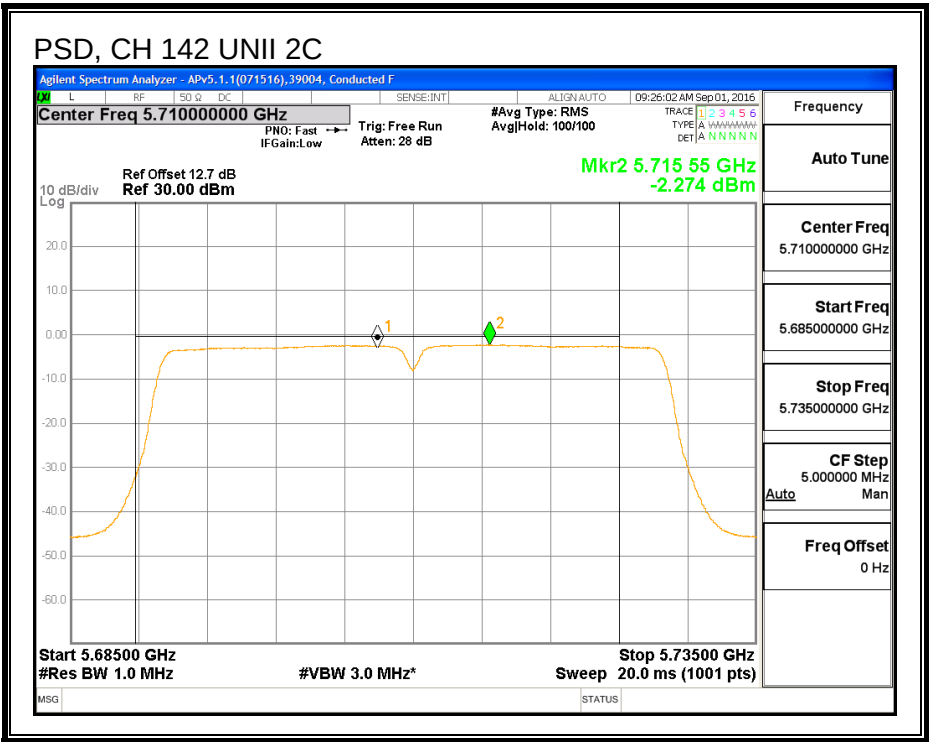

UNII-3 BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	5.22	7.21	10.19	16.97	6.81

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	1.98	1.98	4.99	16.97	-11.98


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-5.64	-5.17	-2.39	6.81	-9.20


OUTPUT POWER, CHAIN 0

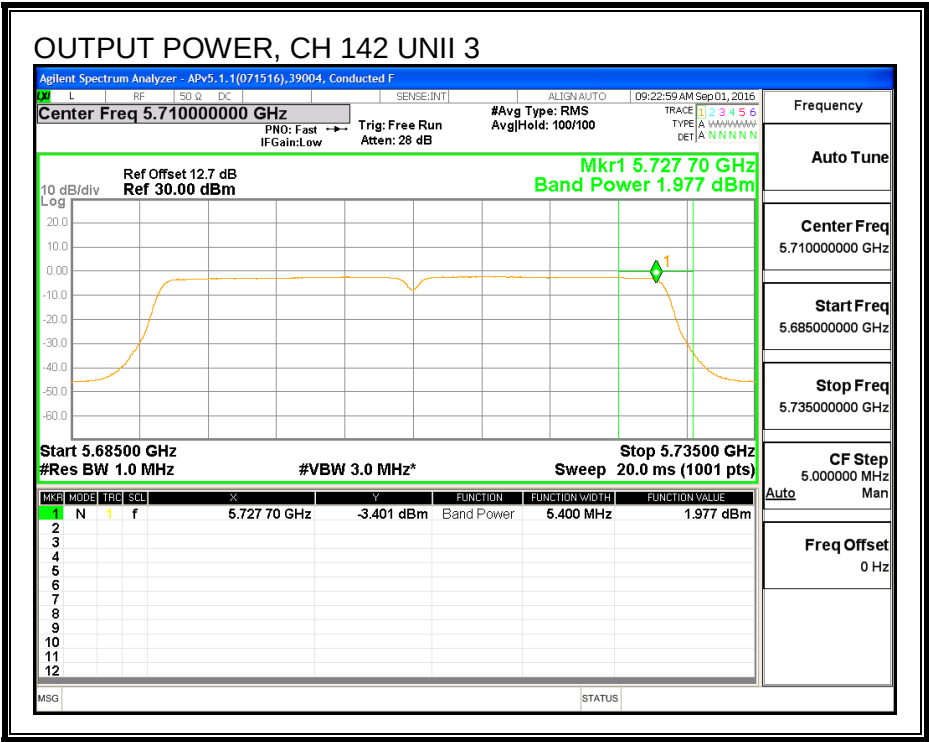


OUTPUT POWER, CHAIN 1

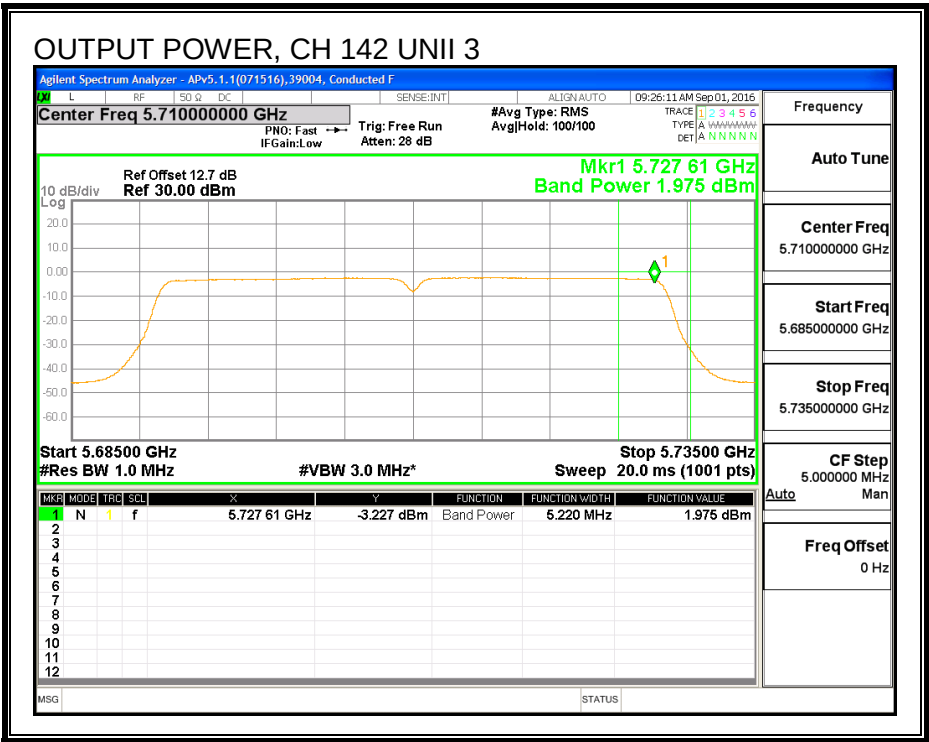

PSD, CHAIN 0

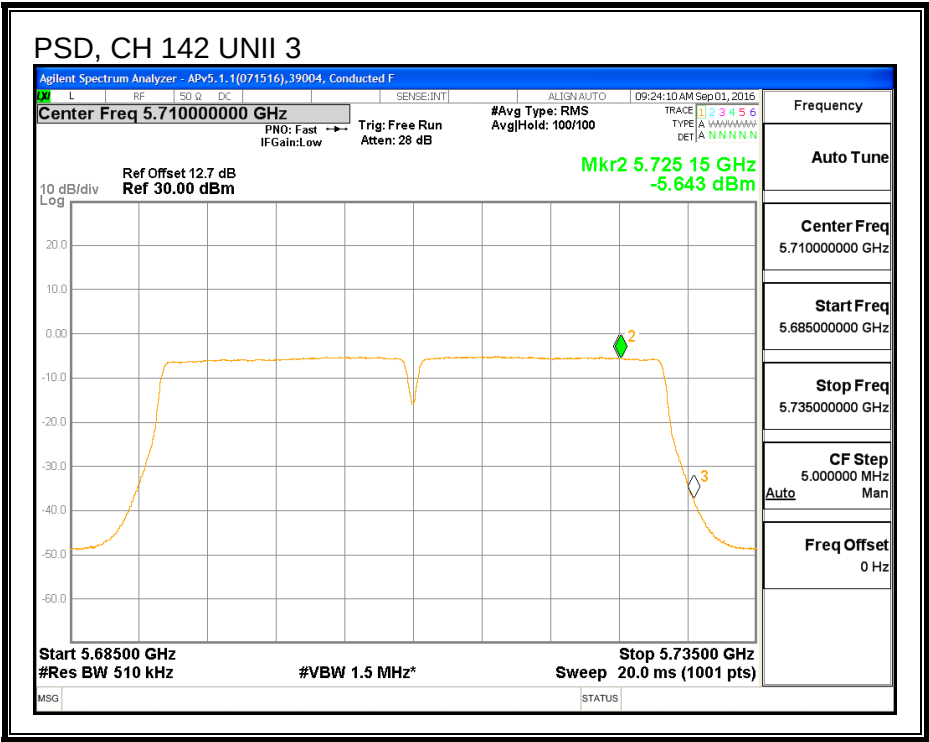

PSD, CHAIN 1

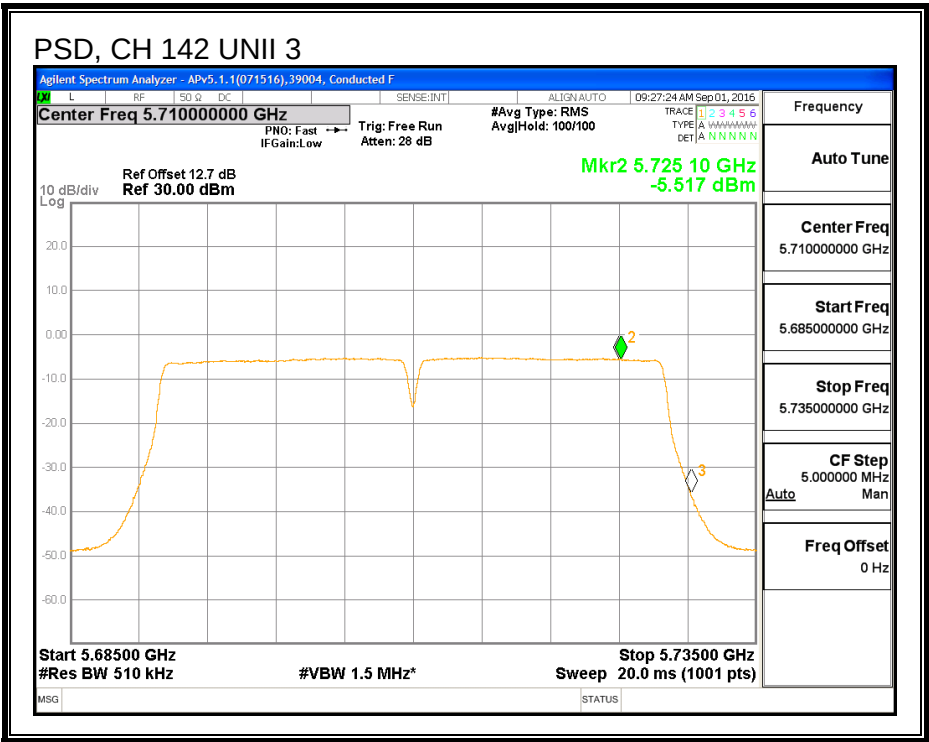

8.55. 802.11ac VHT40 2Tx CDD STRADDLE CHANNEL 142 RESULTS (IC)

8.55.1. OUTPUT POWER AND PSD

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	33.10	7.21	10.19	22.79	6.81

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	12.07	12.07	15.08	22.79	-7.71


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-2.28	-2.27	0.73	6.81	-6.08


OUTPUT POWER, CHAIN 0

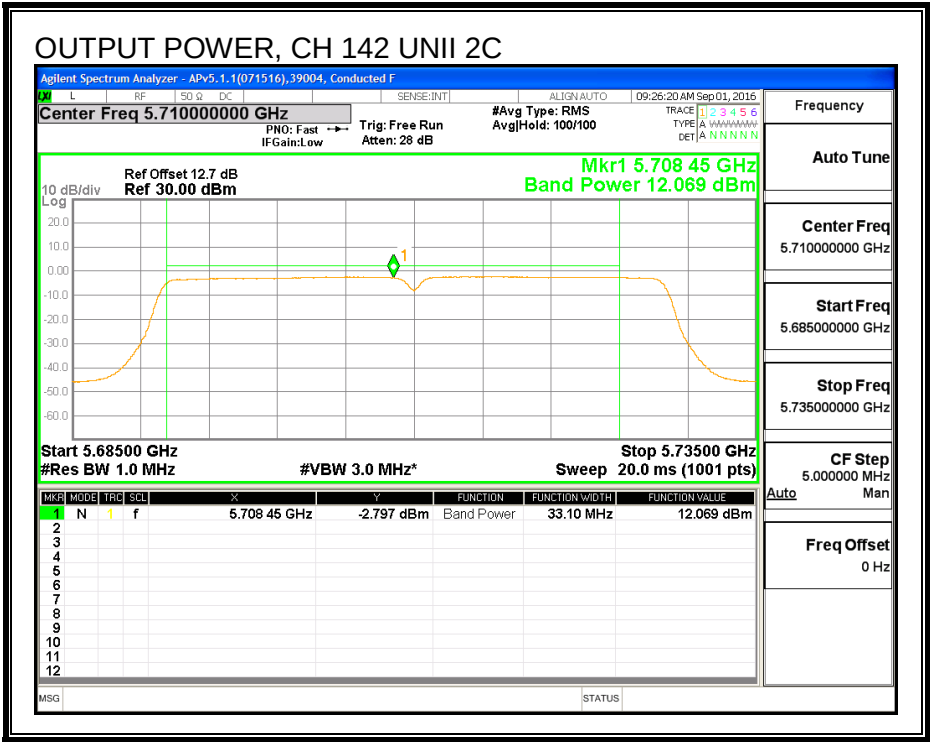


OUTPUT POWER, CHAIN 1

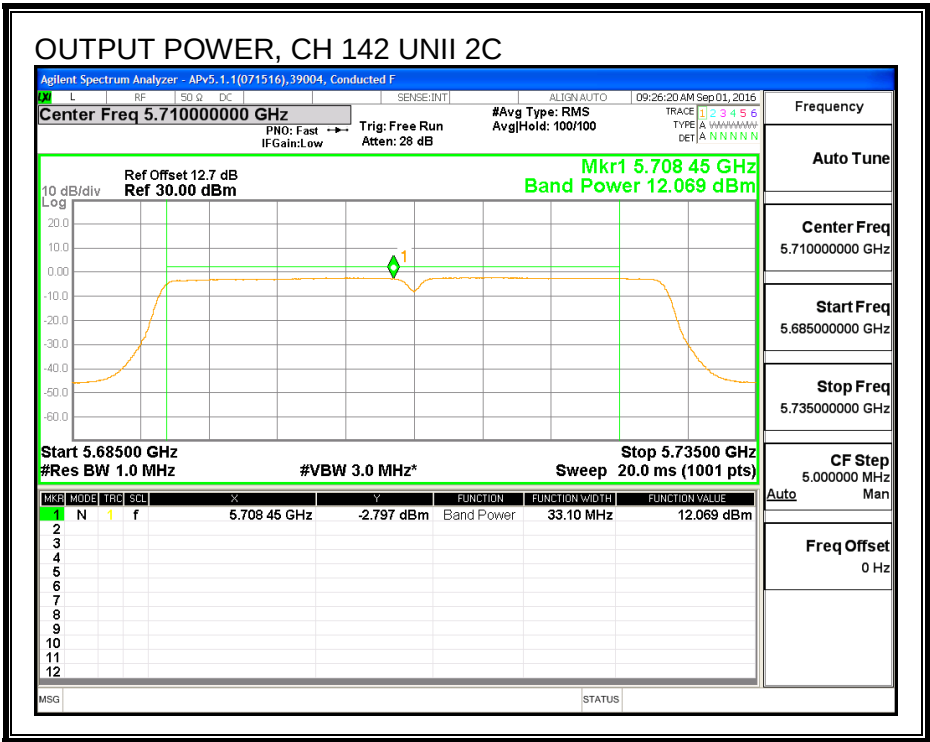

PSD, CHAIN 0

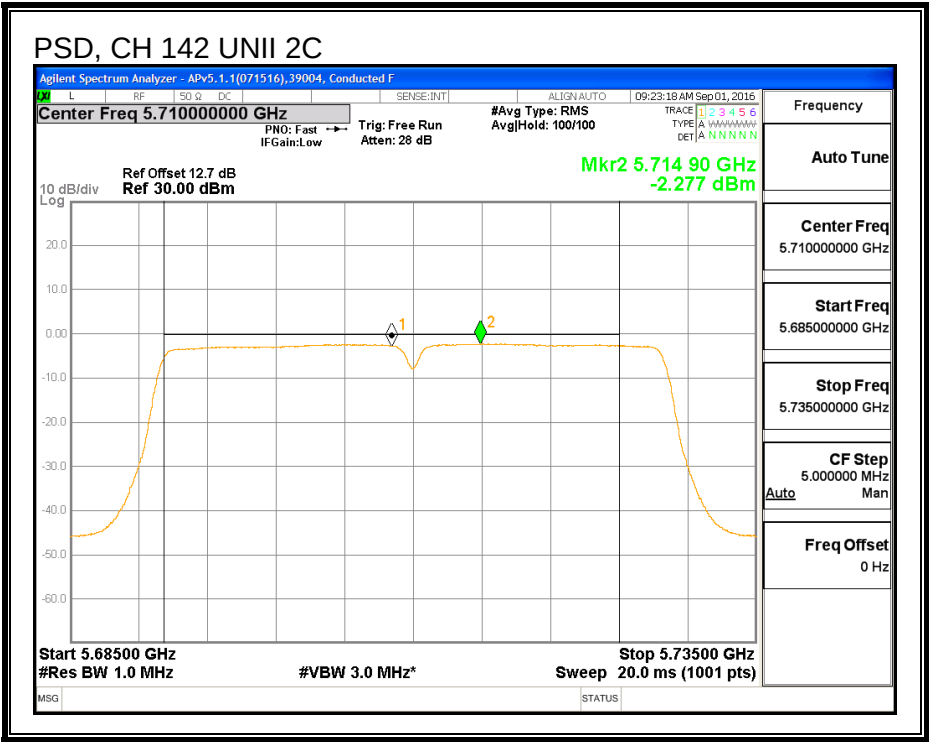

PSD, CHAIN 1

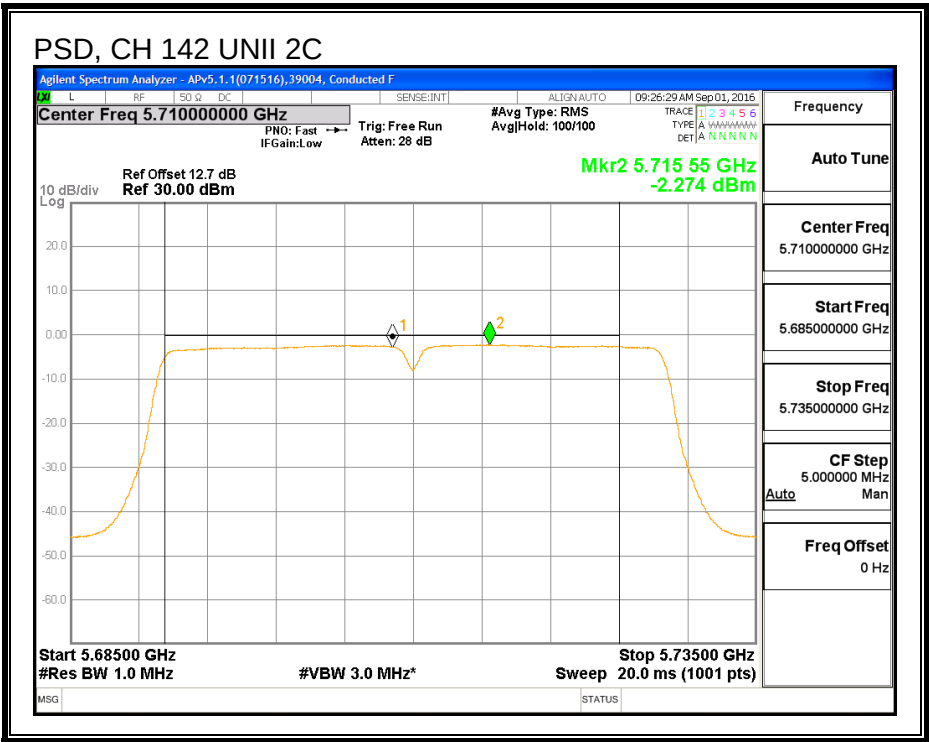

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	3.10	7.21	10.19	28.79	25.81

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	1.68	1.61	4.65	28.79	-24.14


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-5.64	-5.52	-2.57	25.81	-28.38


OUTPUT POWER, CHAIN 0

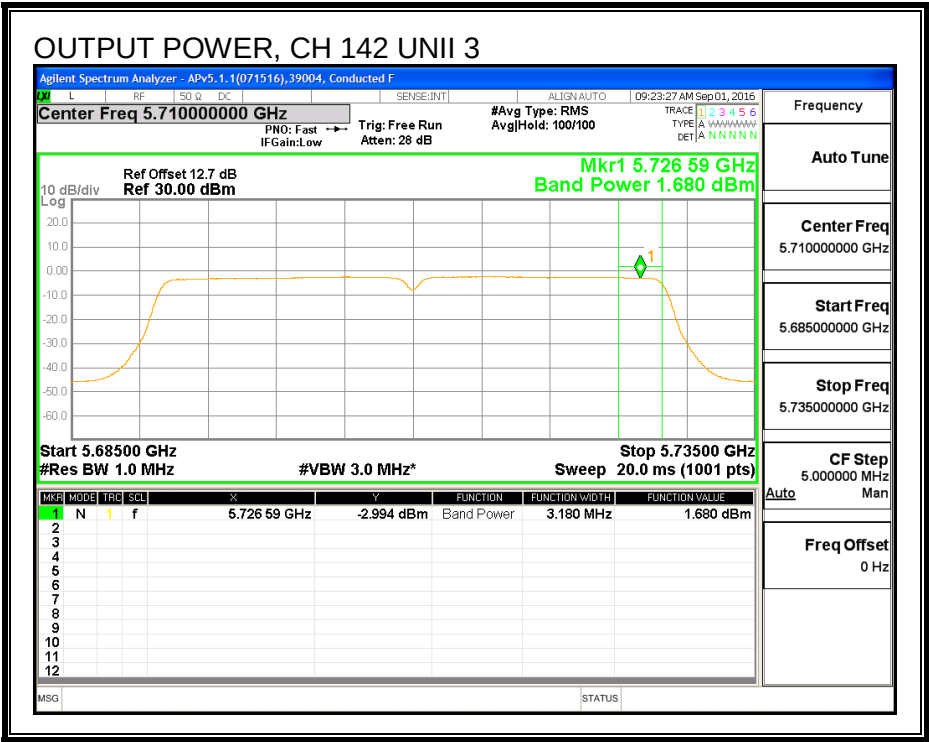


OUTPUT POWER, CHAIN 1

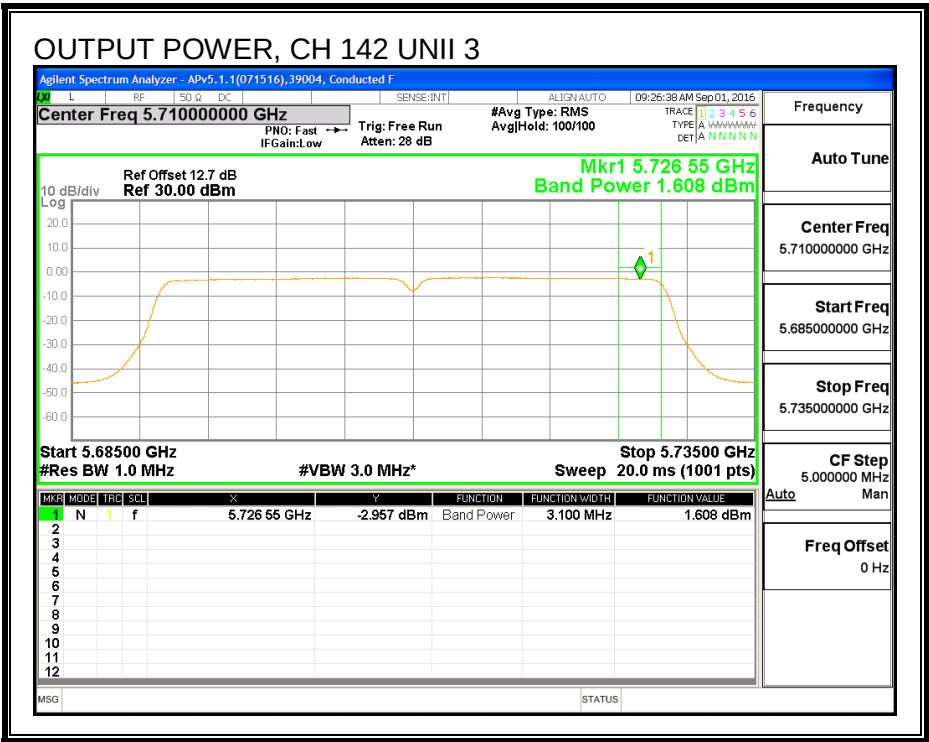

PSD, CHAIN 0

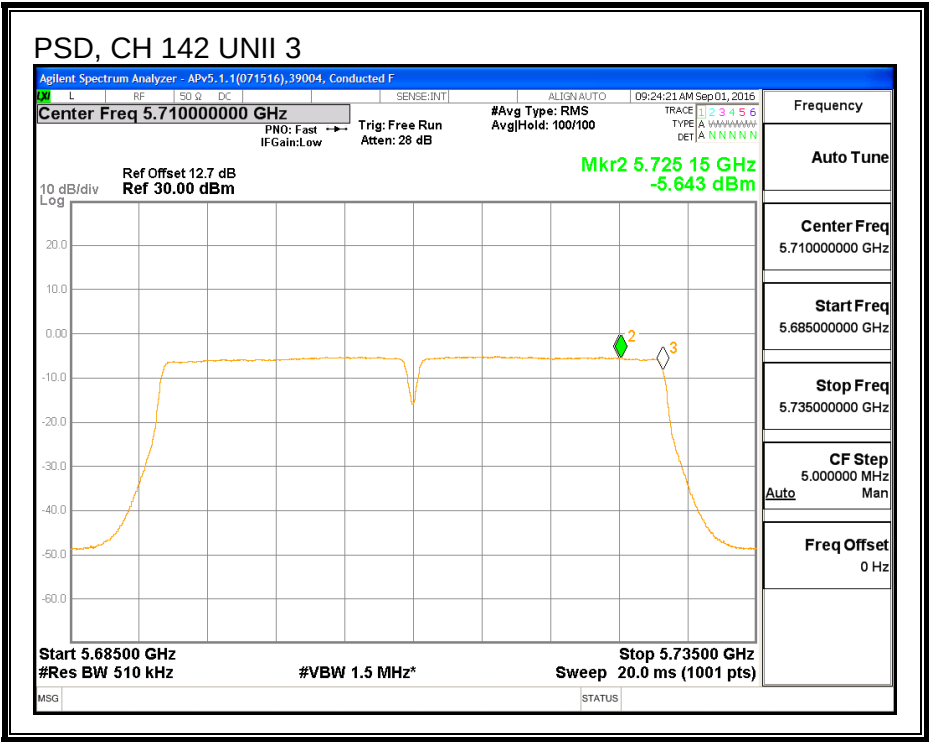

PSD, CHAIN 1

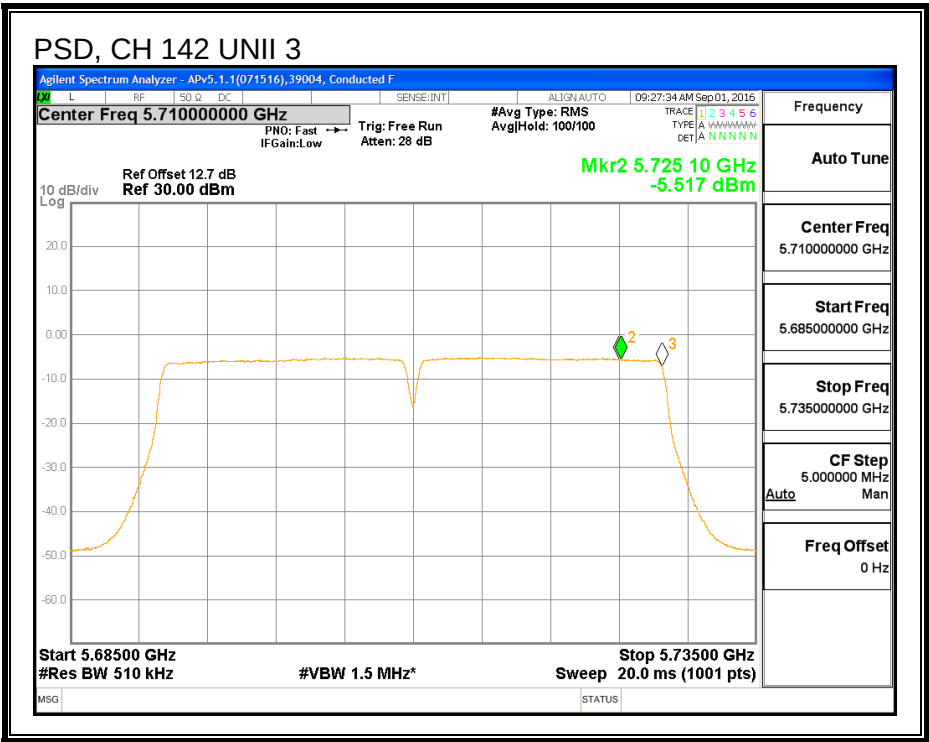

8.55.2. 6 dB BBANDWIDTH

LIMITS

FCC §15.407 (e)


IC RSS-247 (6.2.4) (1)

The minimum 6 dB bandwidth shall be at least 500 kHz.


RESULTS

Channel	Frequency (MHz)	6 dB BW Chain 0 (MHz)	6 dB BW Chain 1 (MHz)
142	5710	36.52	36.47

CHAIN 0

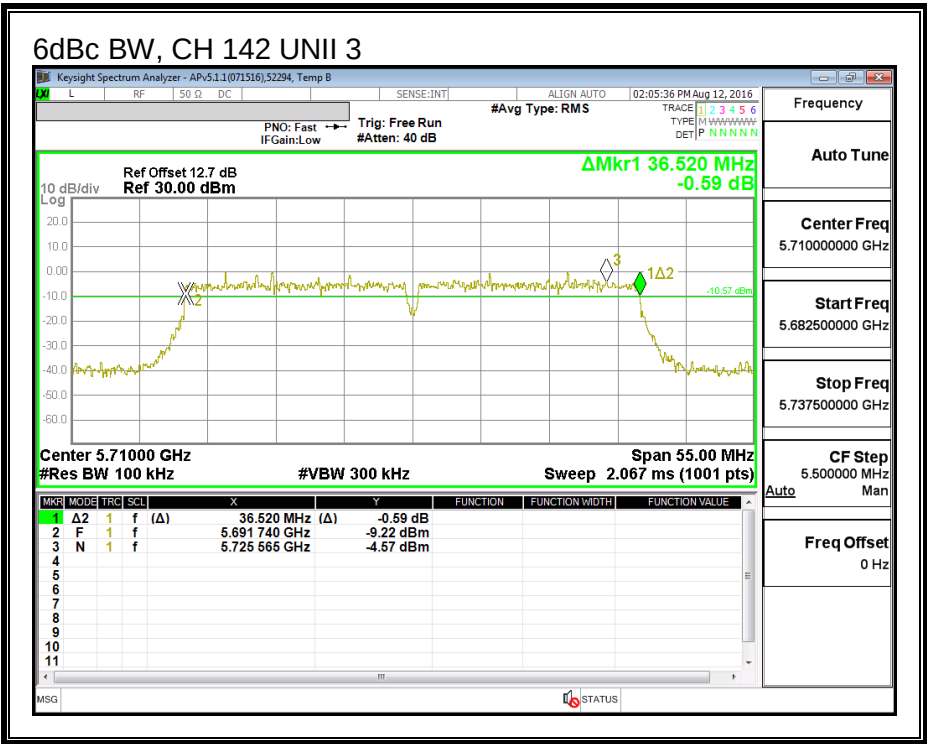

CHAIN 1

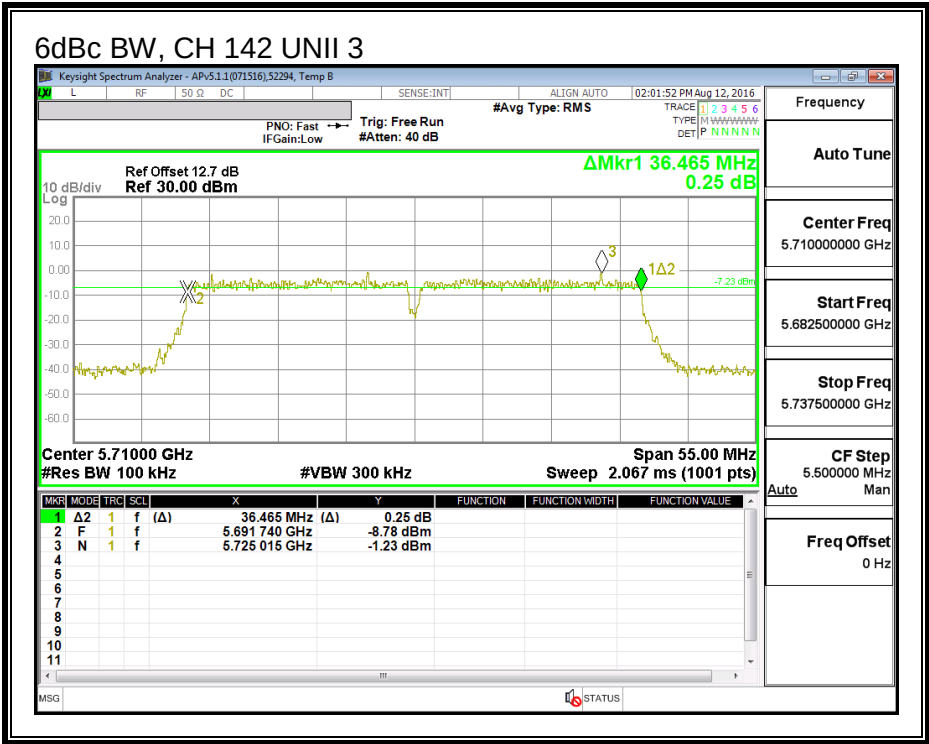

8.56. 802.11n HT40 2Tx STBC MODE IN THE 5.6 GHz BAND

8.56.1. 26 dB BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS



Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5510	40.92	40.26
Mid	5550	40.86	40.32
High	5670	40.63	40.44
142	5710	40.73	40.50



26 dB BANDWIDTH, CHAIN 0

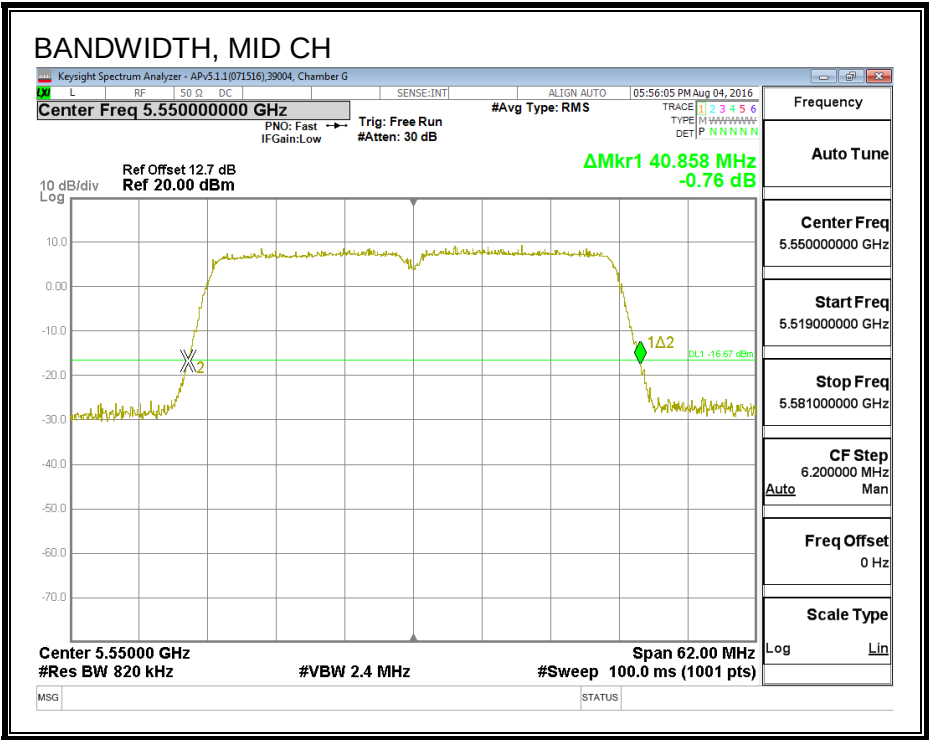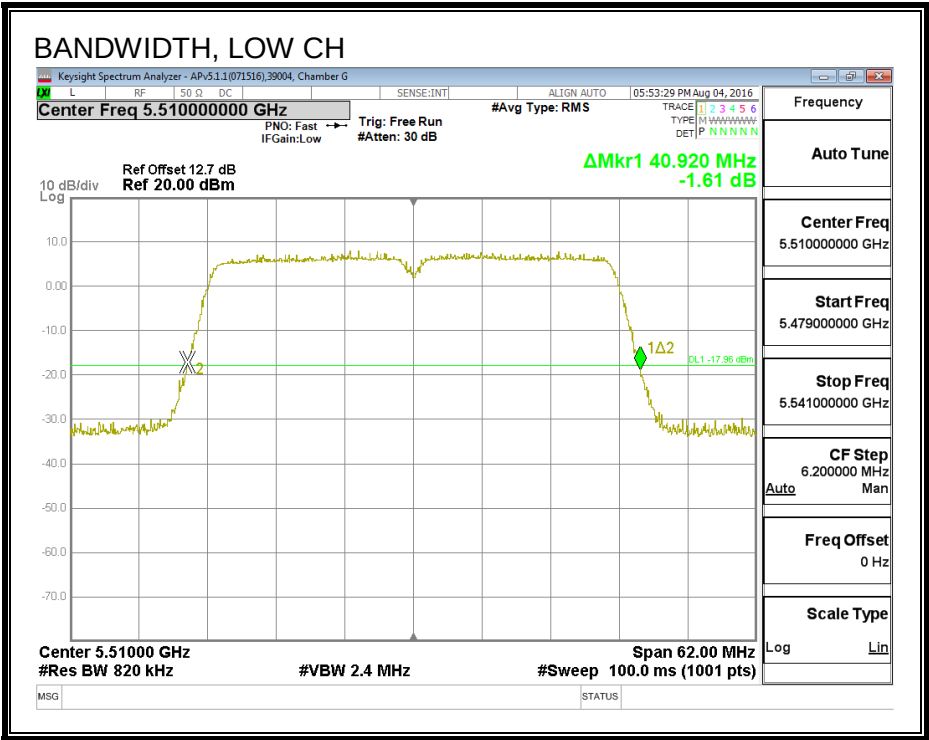

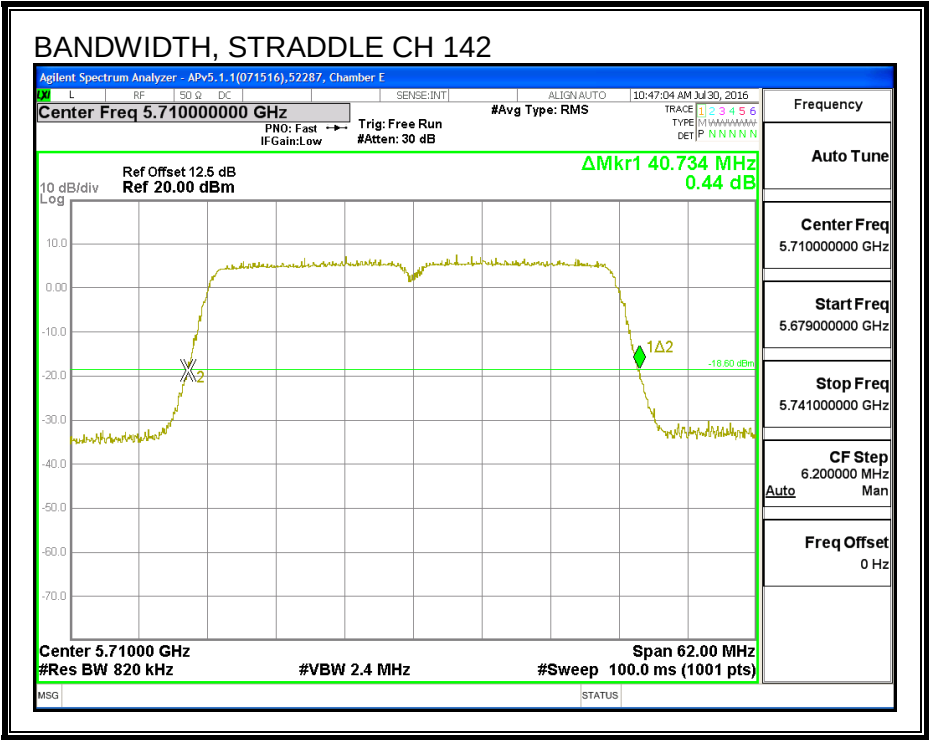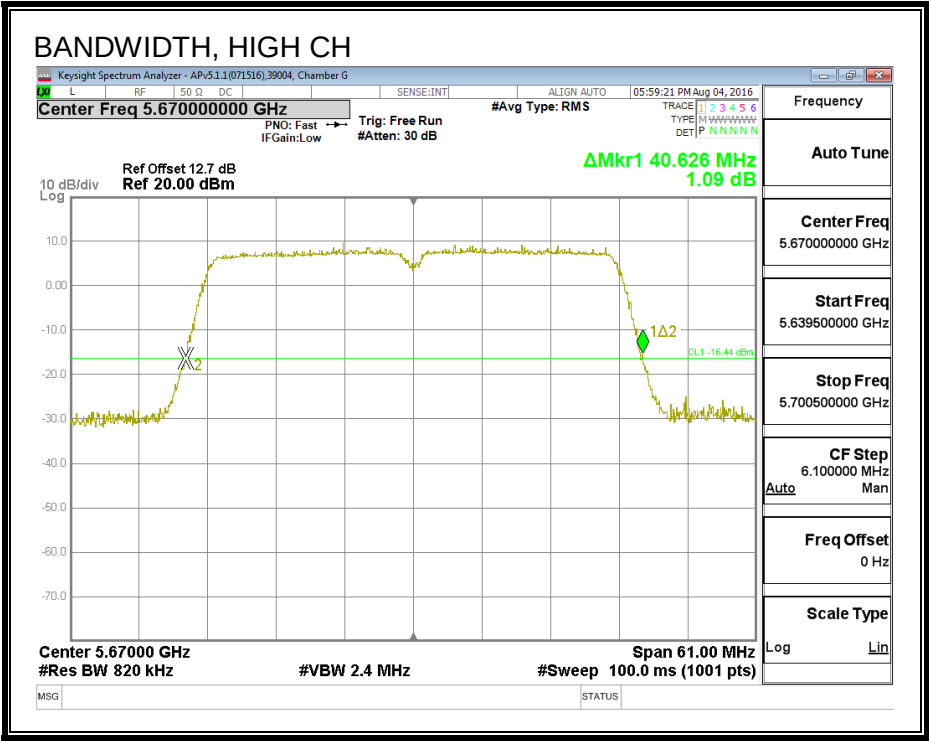

26 dB BANDWIDTH, CHAIN 1

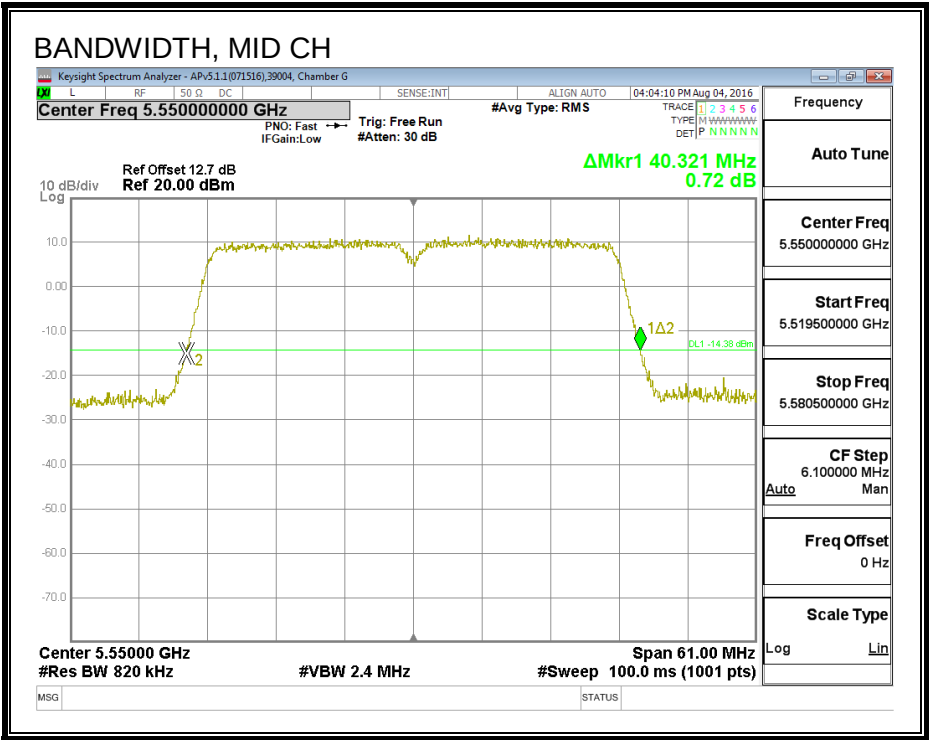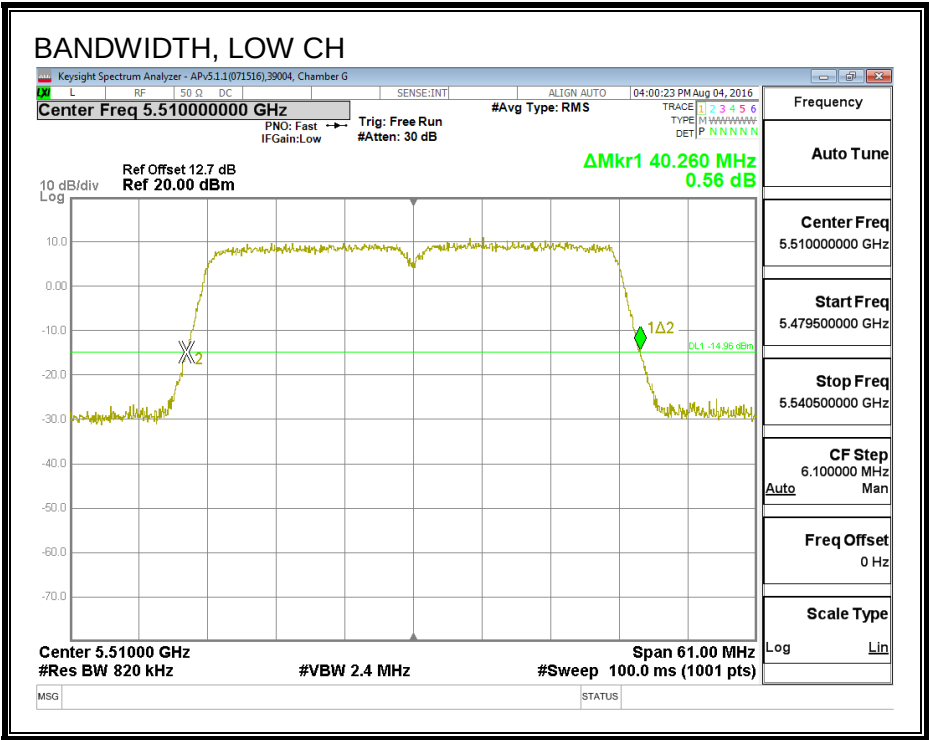

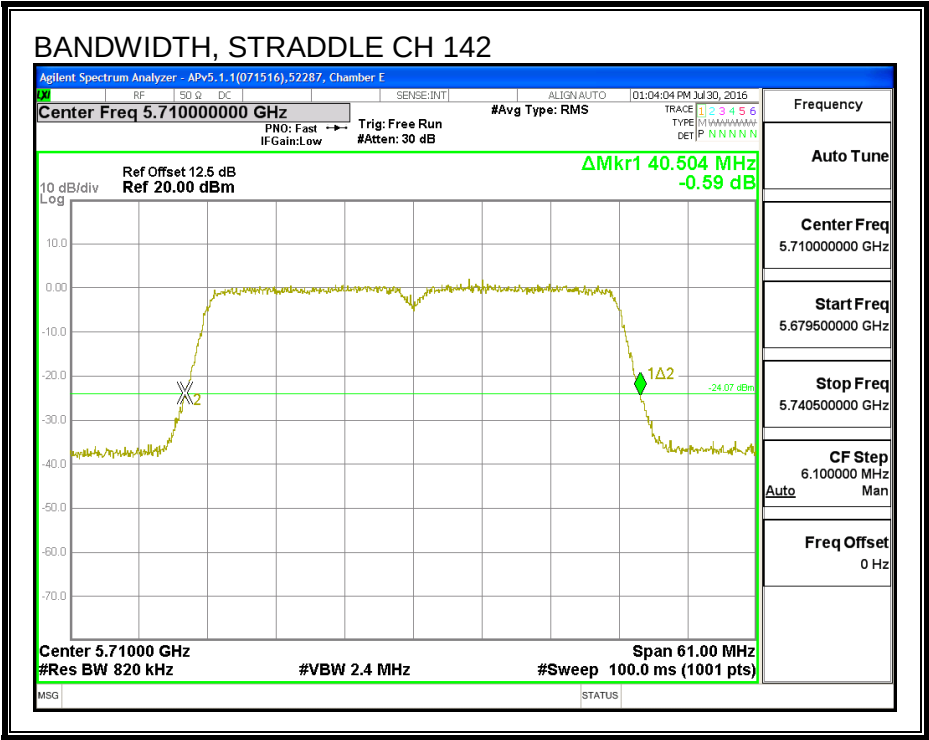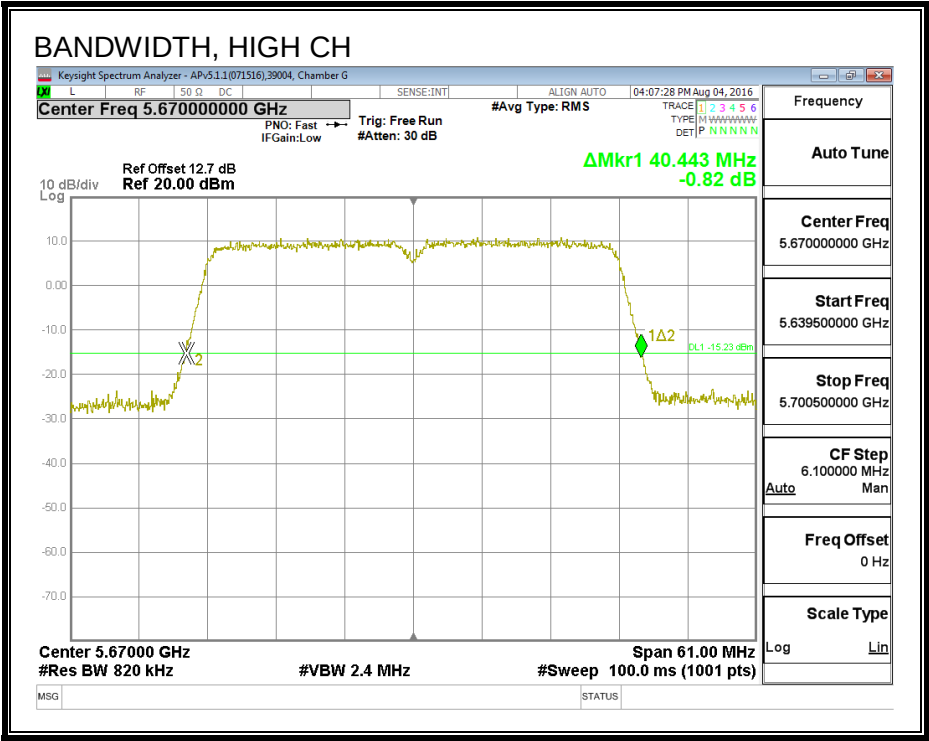

8.56.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS



Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5510	36.437	36.402
Mid	5550	36.256	36.583
High	5670	36.323	36.244
142	5710	36.121	36.228



99% BANDWIDTH, CHAIN 0

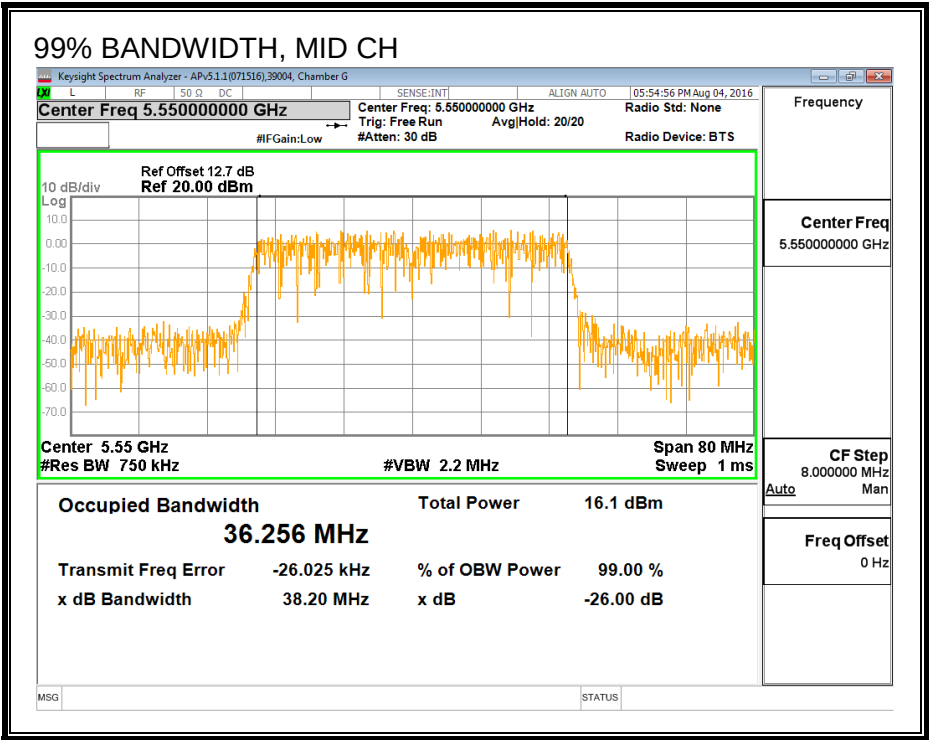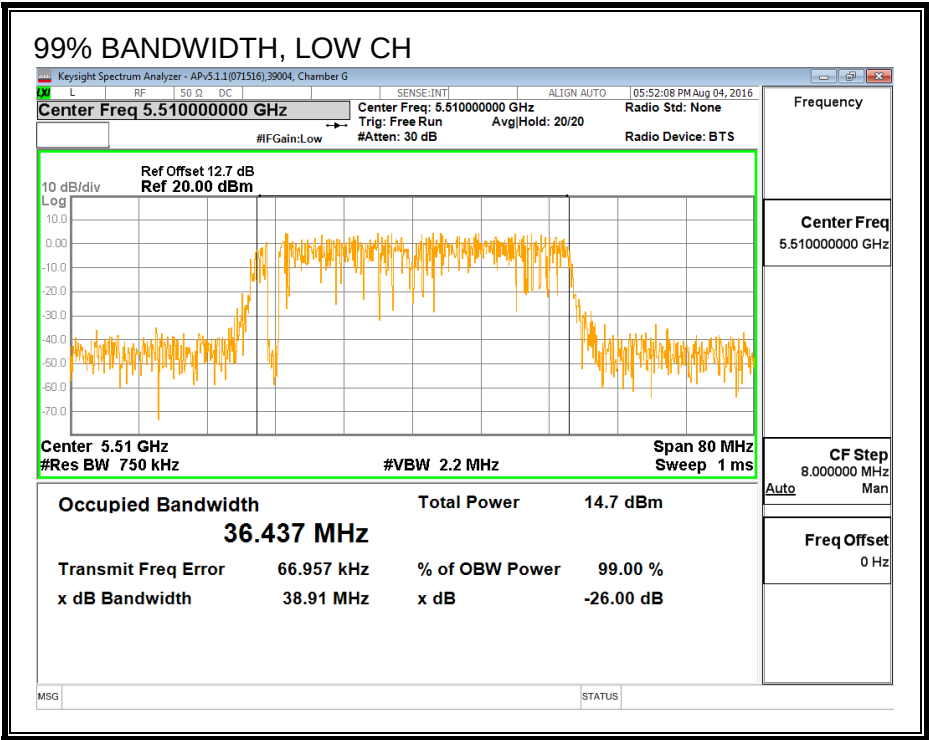

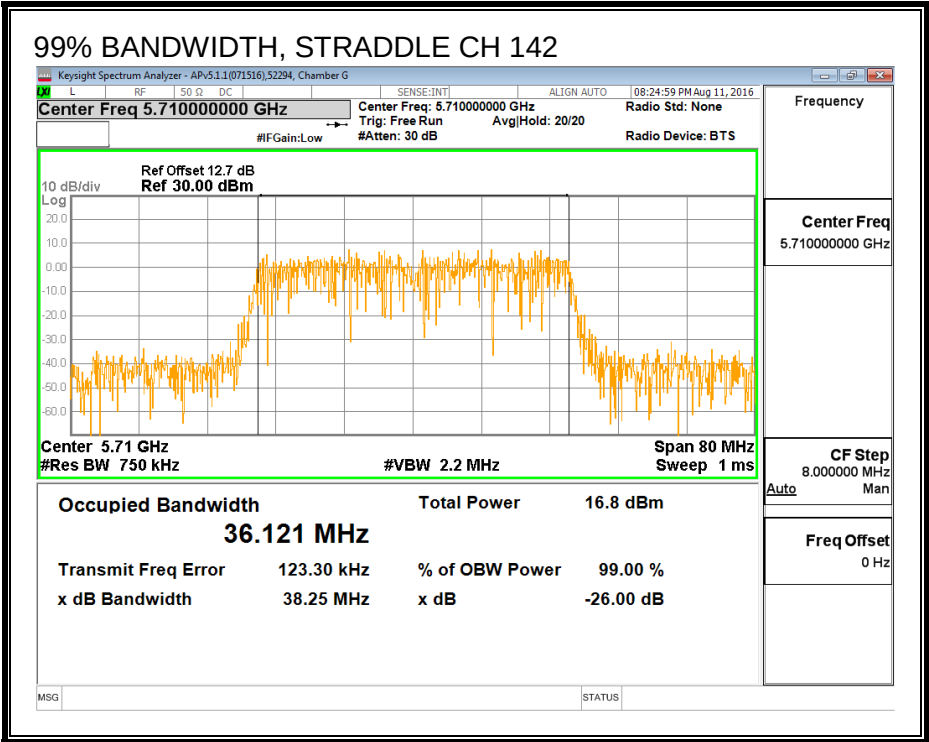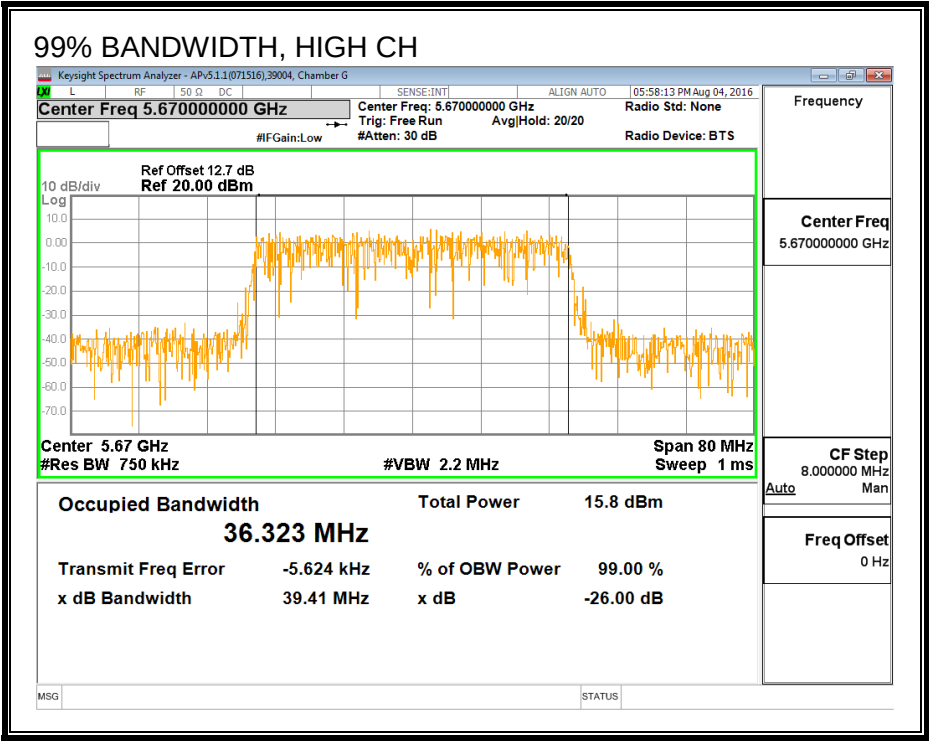

99% BANDWIDTH, CHAIN 1

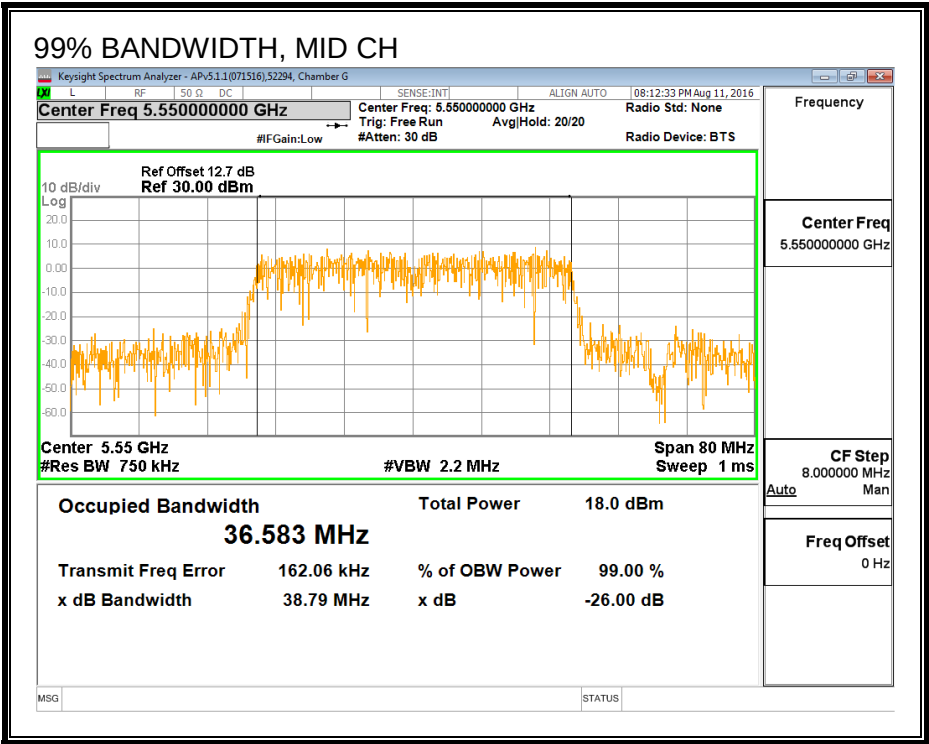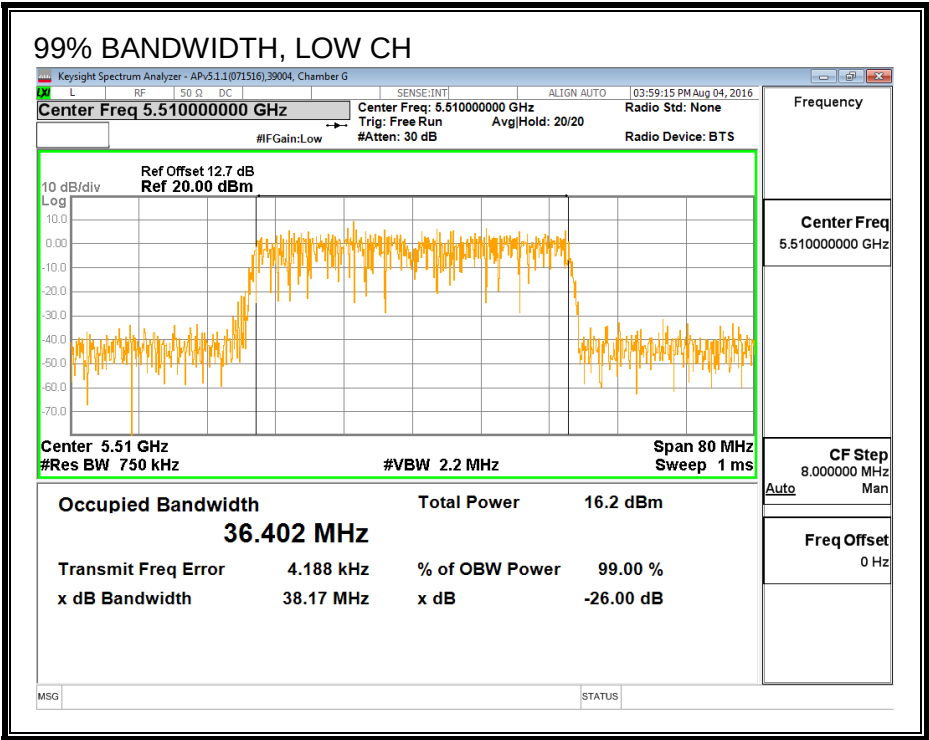

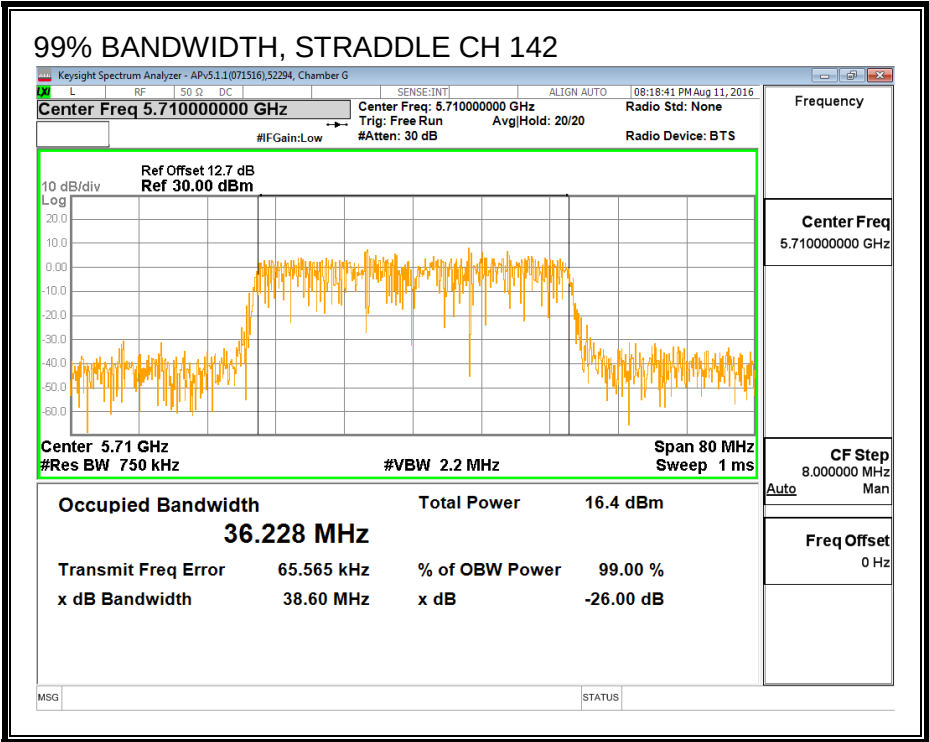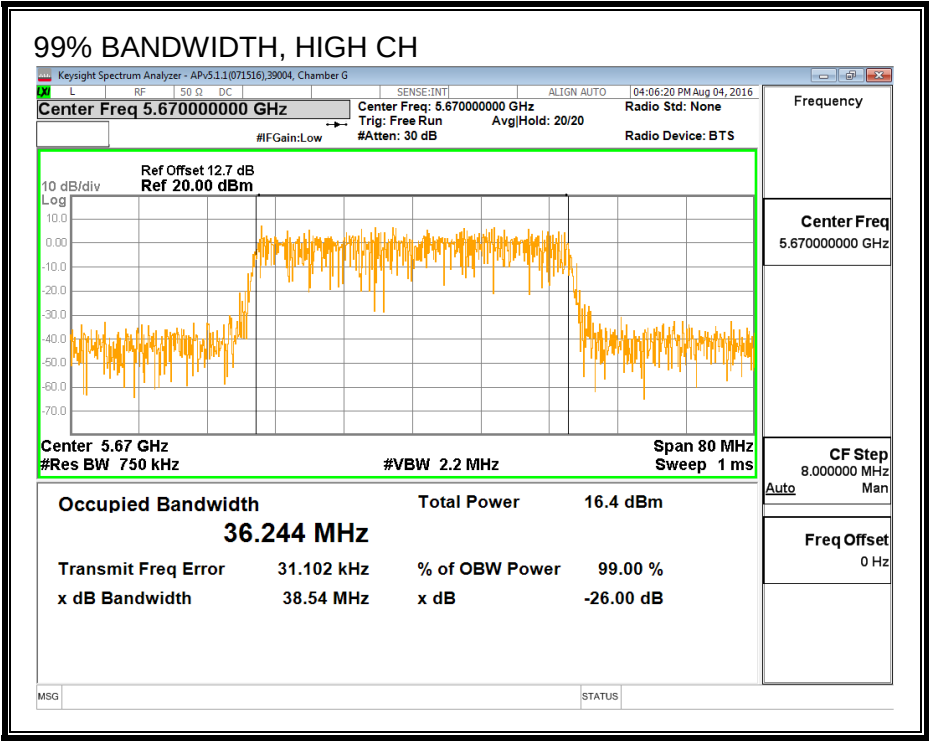

8.56.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5510	12.36	12.37	15.38
Mid	5590	12.41	12.38	15.41
High	5670	12.39	12.35	15.38
142	5710	12.44	12.40	15.43

8.56.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 (6.2.3) (1)

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Straddle channel power is measured using PXA spectrum analyzer, duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
6.40	7.90	7.21

RESULTS

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5510	40.26	36.40	7.21	7.21	24.00	9.79
Mid	5550	40.32	36.58	7.21	7.21	24.00	9.79
High	5670	40.44	36.24	7.21	7.21	24.00	9.79

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	12.36	12.37	15.38	24.00	-8.62
Mid	5550	12.41	12.38	15.41	24.00	-8.59
High	5670	12.39	12.35	15.38	24.00	-8.62

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5510	0.70	0.40	3.56	9.79	-6.23
Mid	5550	1.61	1.55	4.59	9.79	-5.20
High	5670	1.59	1.44	4.53	9.79	-5.26



PSD, CHAIN 0

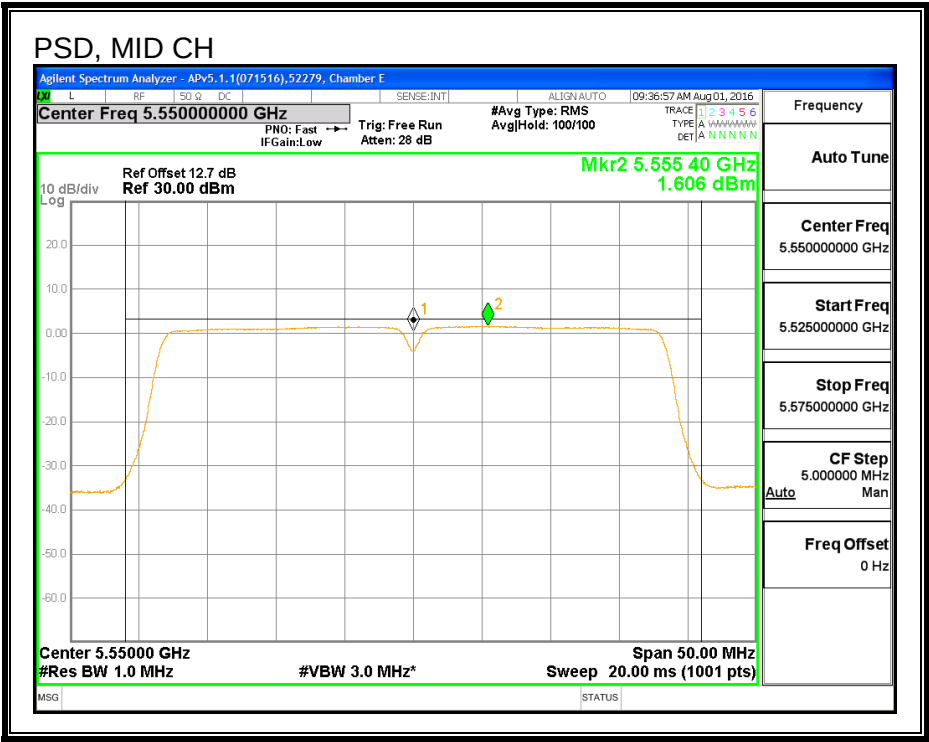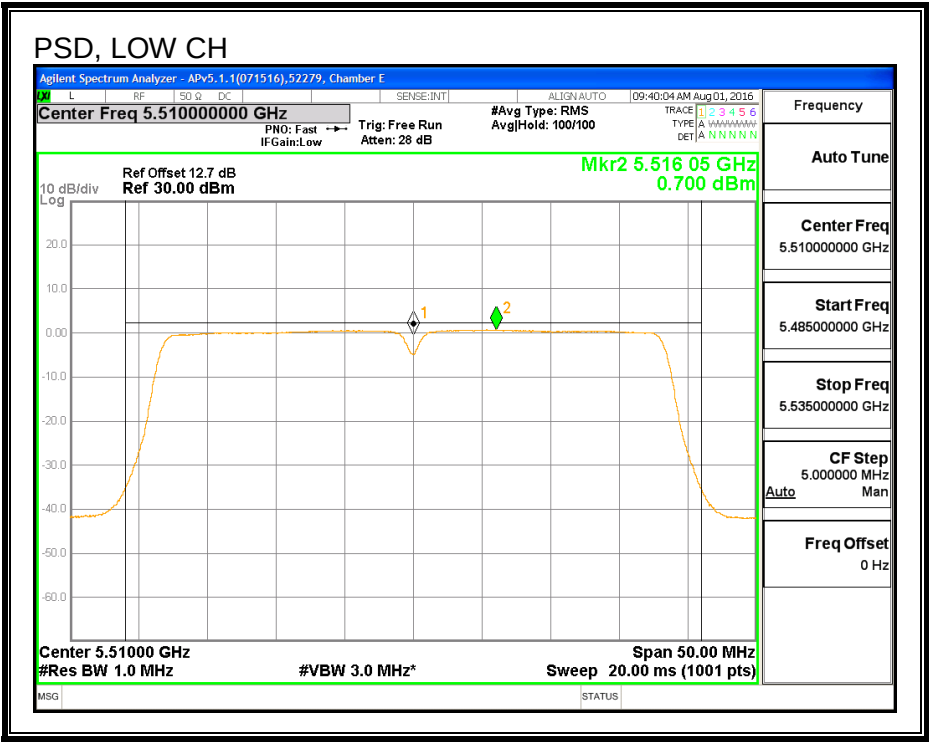

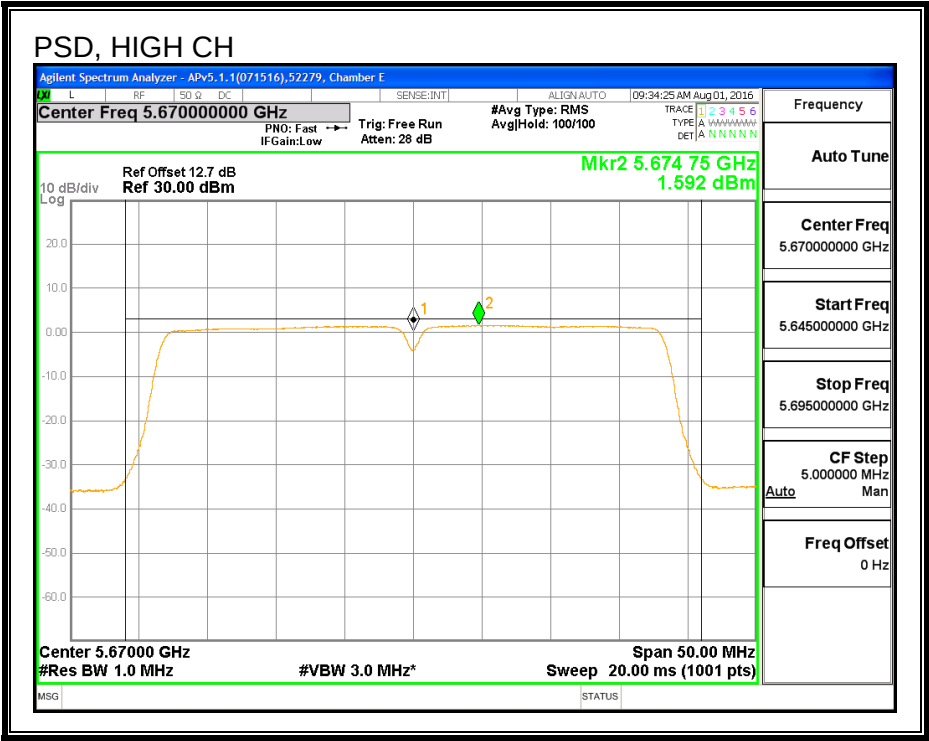

PSD, CHAIN 1

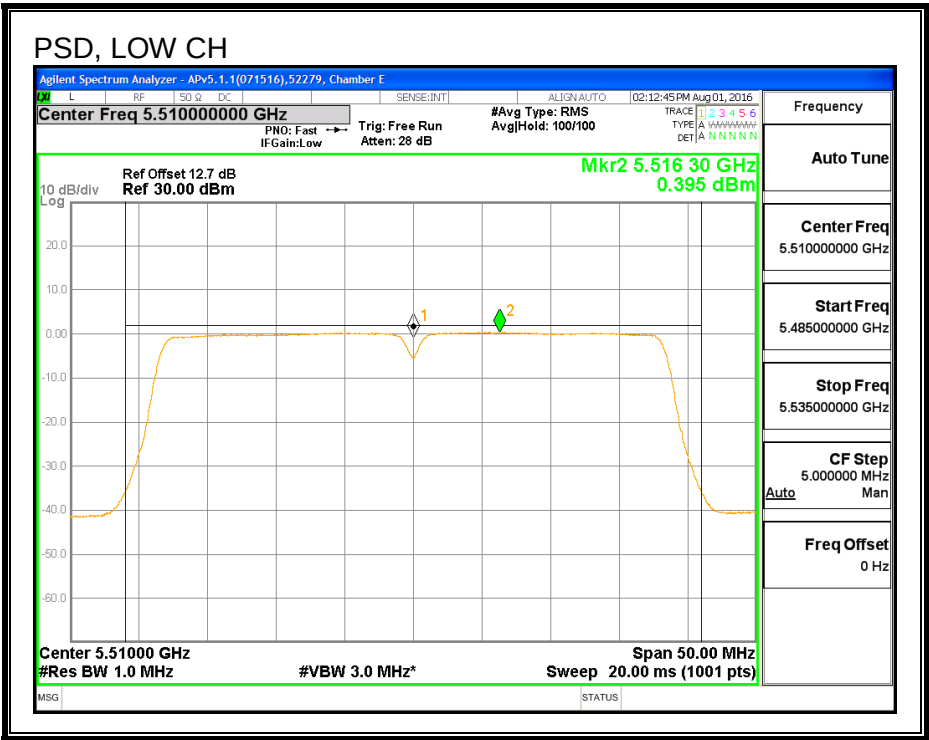

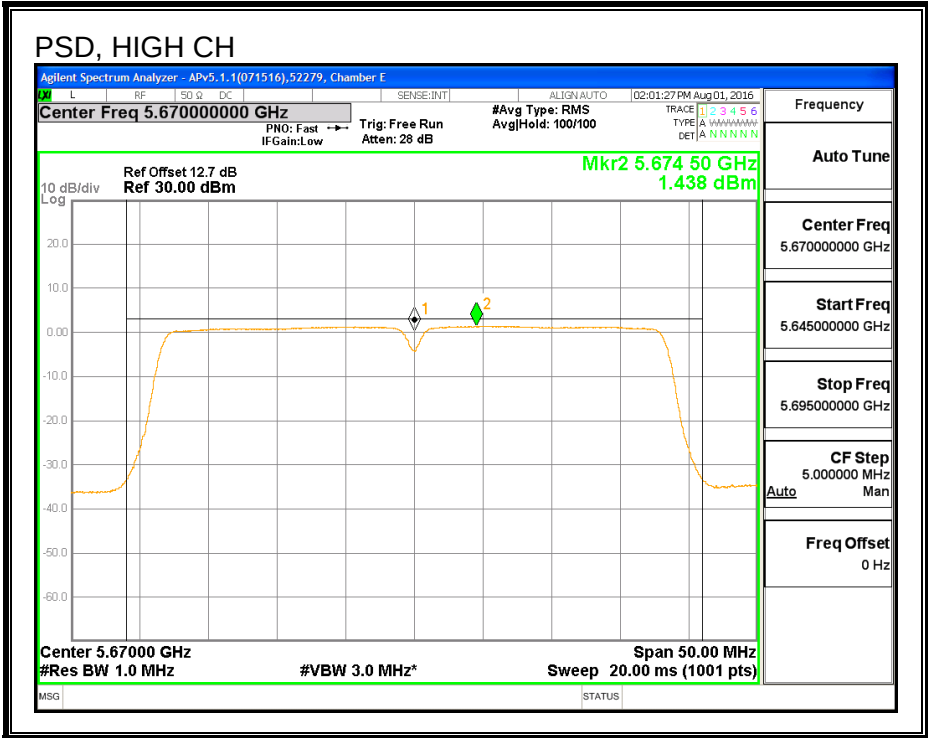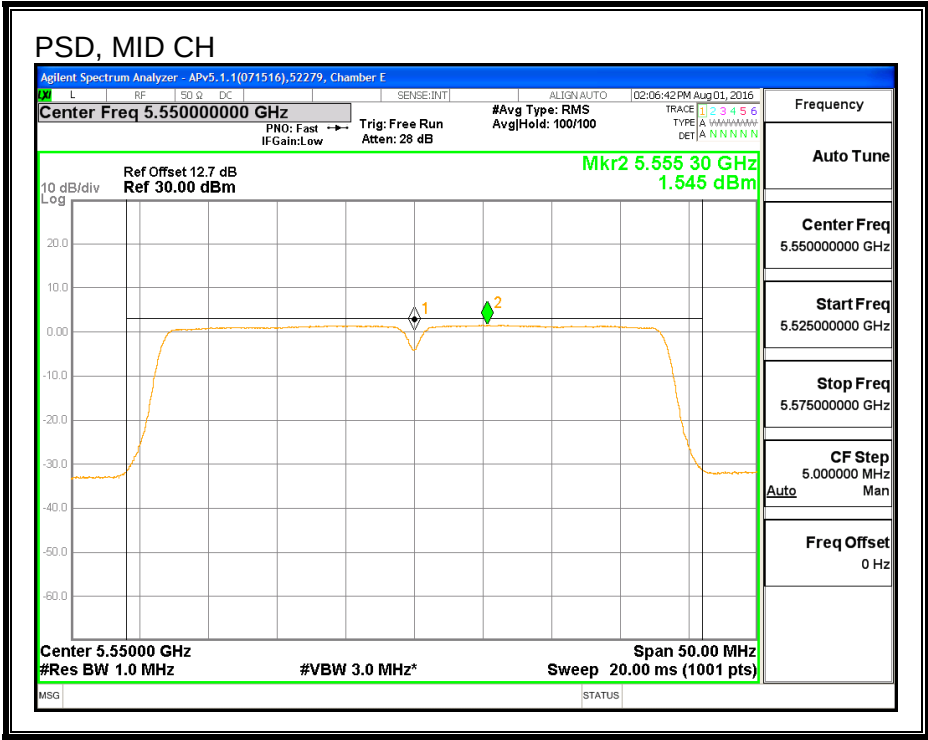

8.57. 802.11ac VHT40 2Tx STBC STRADDLE CHANNEL 142 RESULTS (FCC)

8.57.1. OUTPUT POWER AND PSD

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	35.25	7.21	7.21	22.79	9.79

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	12.11	12.13	15.13	22.79	-7.66


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-2.30	-2.25	0.73	9.79	-9.06


OUTPUT POWER, CHAIN 0

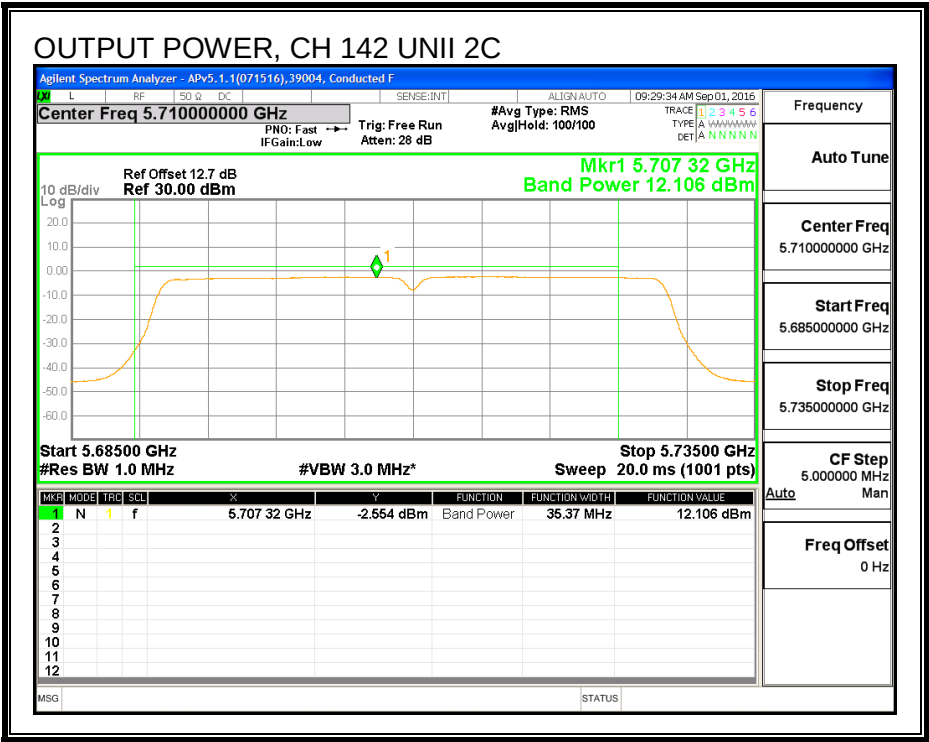


OUTPUT POWER, CHAIN 1

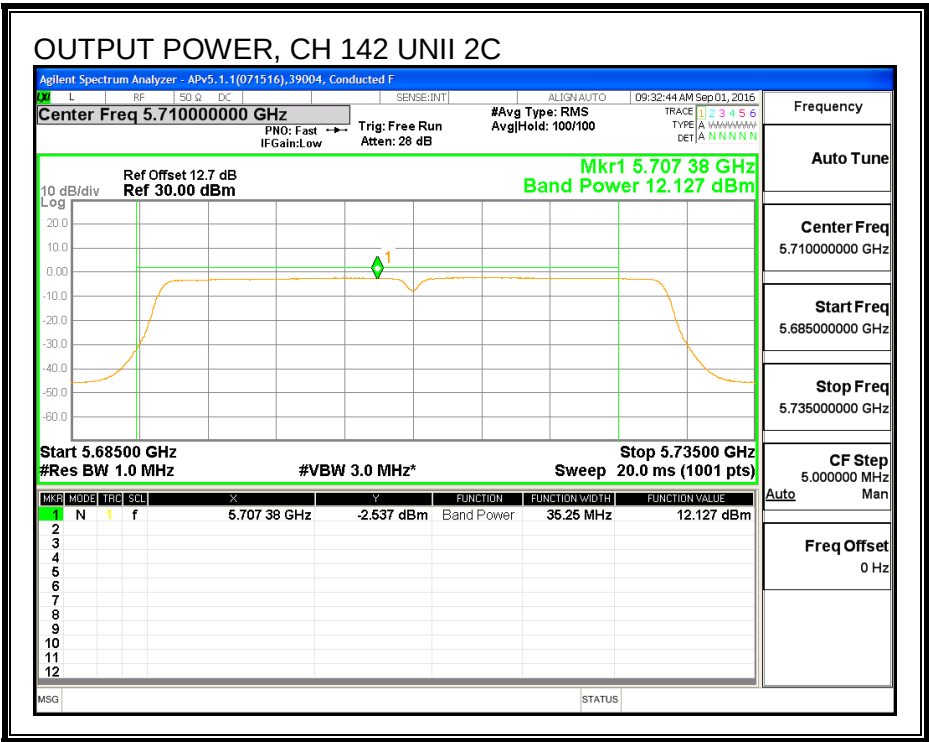

PSD, CHAIN 0

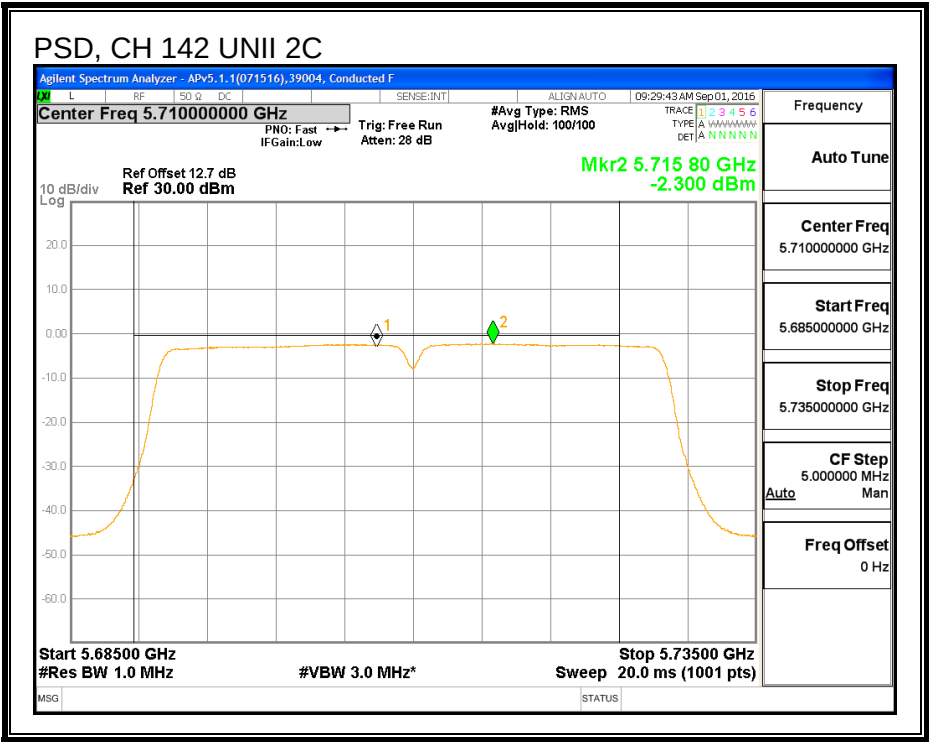

PSD, CHAIN 1

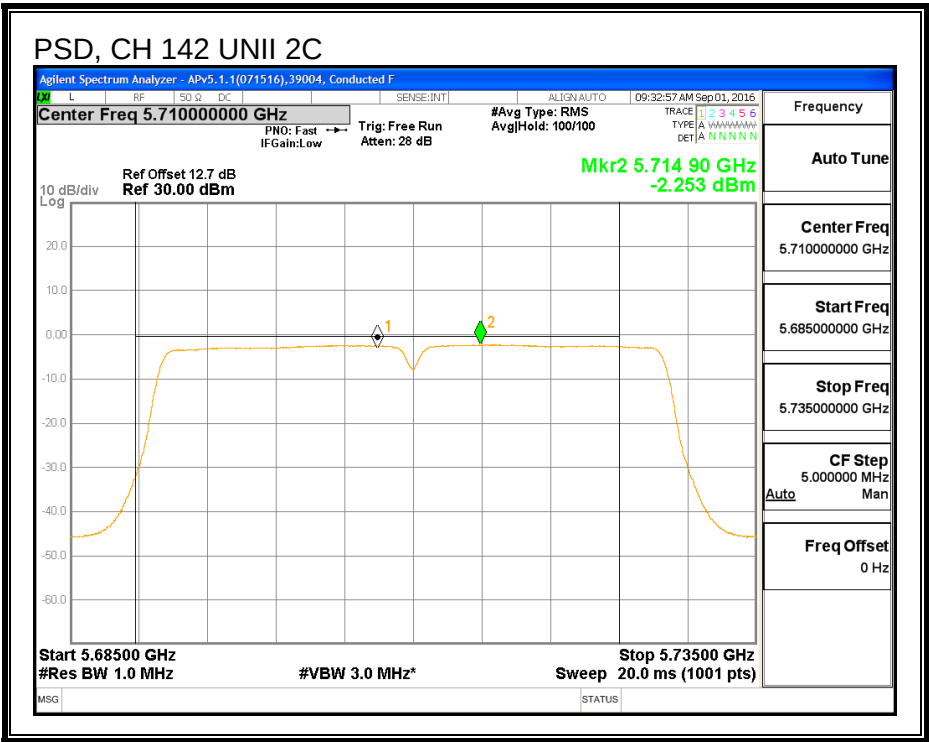

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	5.25	7.21	7.21	28.79	28.79

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	1.98	2.00	5.00	28.79	-23.79


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-5.49	-5.48	-2.48	28.79	-31.27


OUTPUT POWER, CHAIN 0

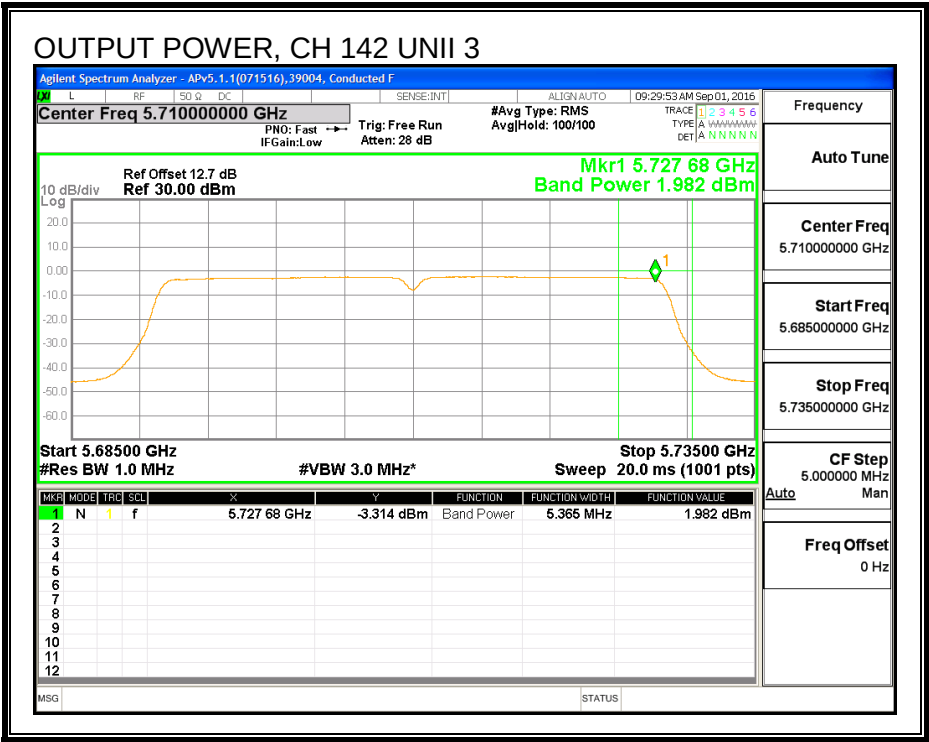


OUTPUT POWER, CHAIN 1

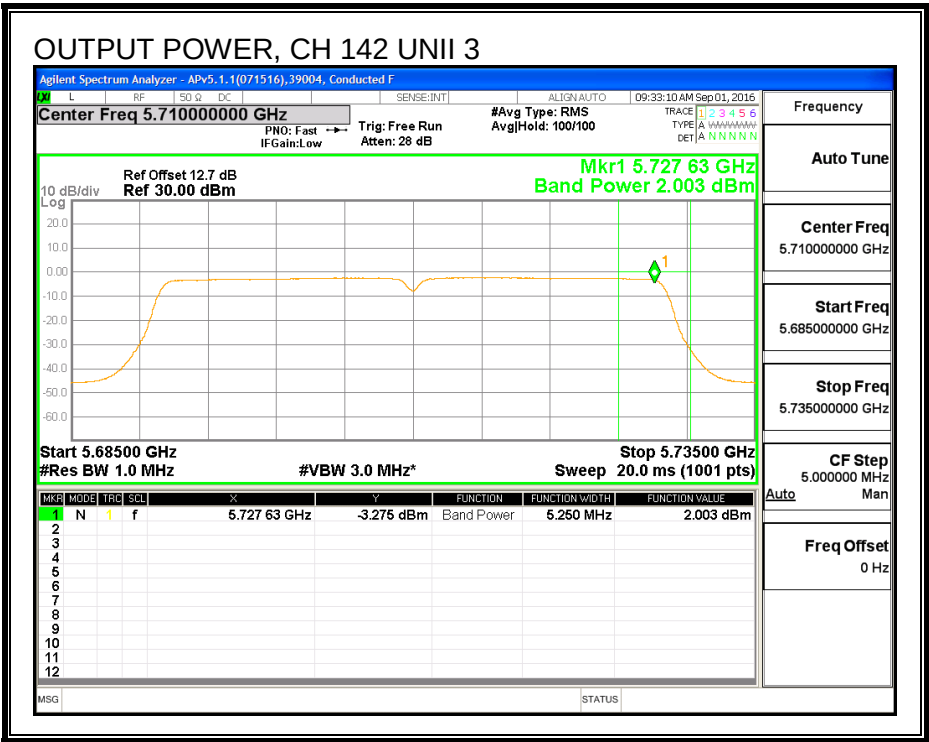

PSD, CHAIN 0

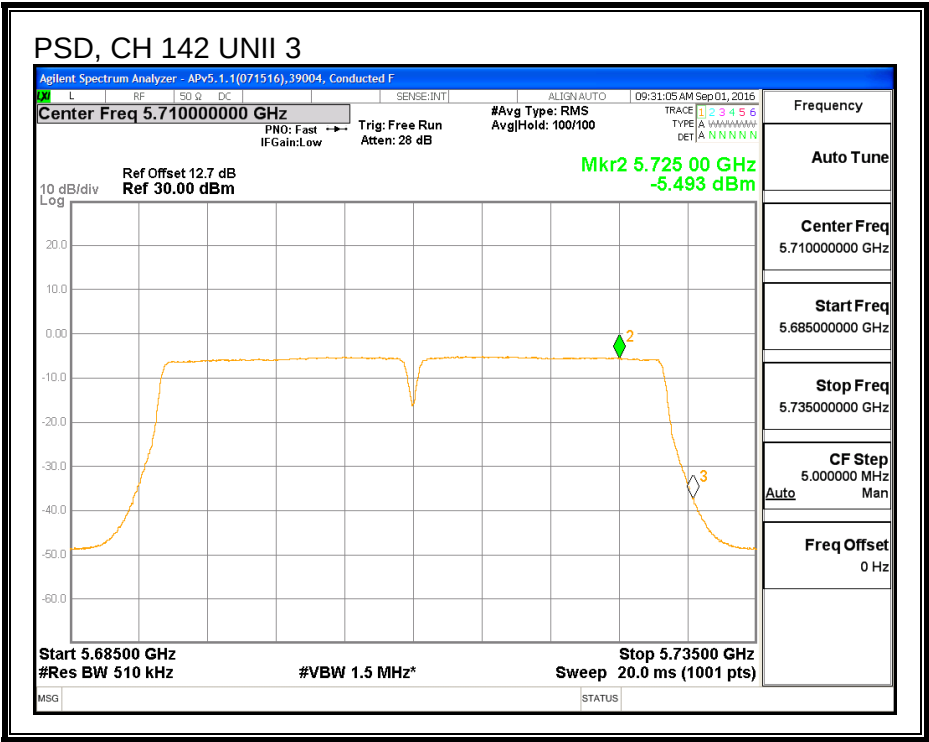

PSD, CHAIN 1

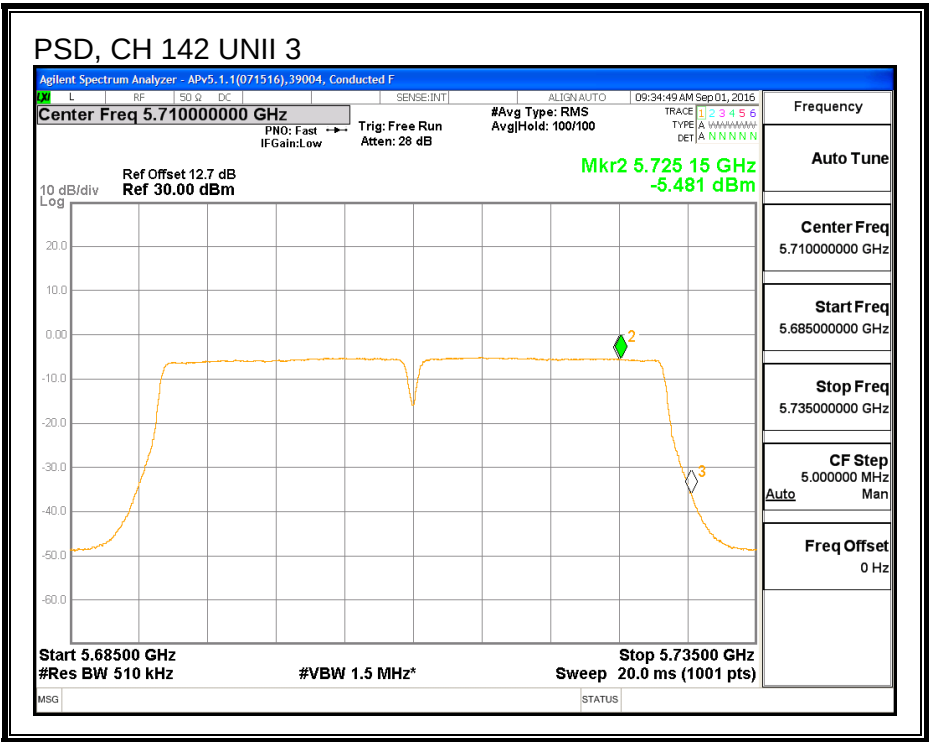

8.58. 802.11ac VHT40 2Tx STBC STRADDLE CHANNEL 142 RESULTS (IC)

8.58.1. OUTPUT POWER AND PSD

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	33.06	7.21	7.21	22.79	9.79

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	12.07	12.09	15.09	22.79	-7.70


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-2.30	-2.25	0.73	9.79	-9.06


OUTPUT POWER, CHAIN 0

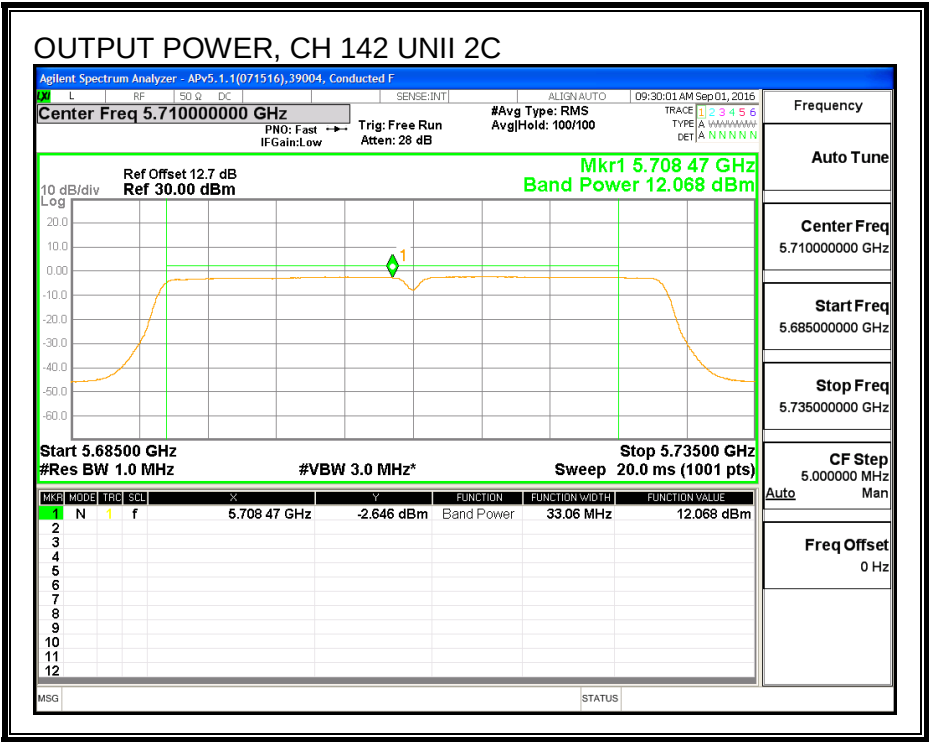


OUTPUT POWER, CHAIN 1

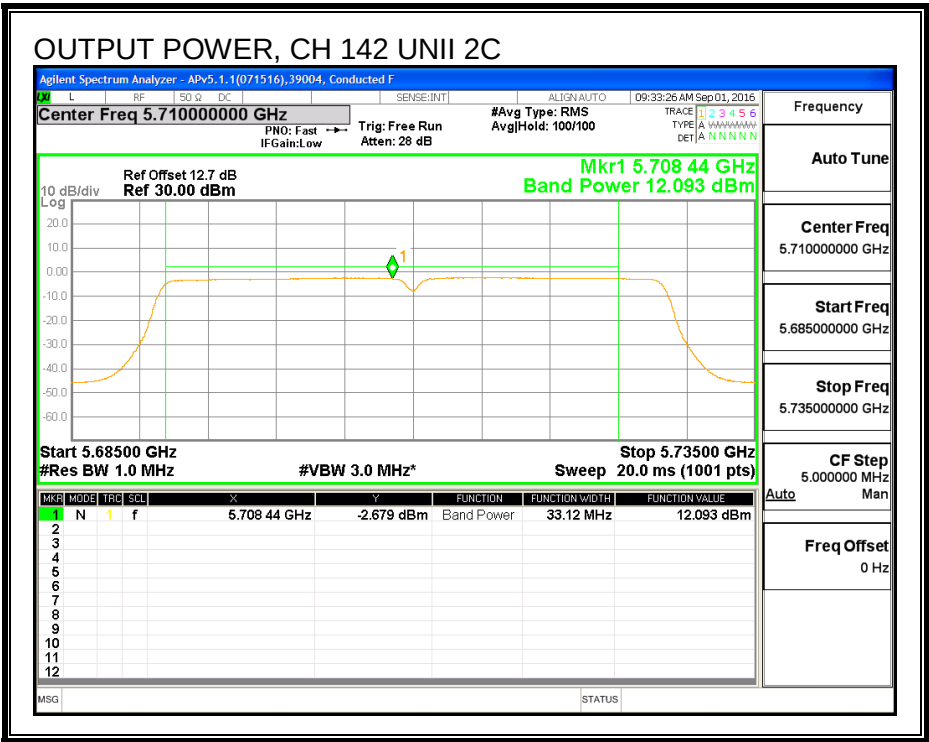

PSD, CHAIN 0

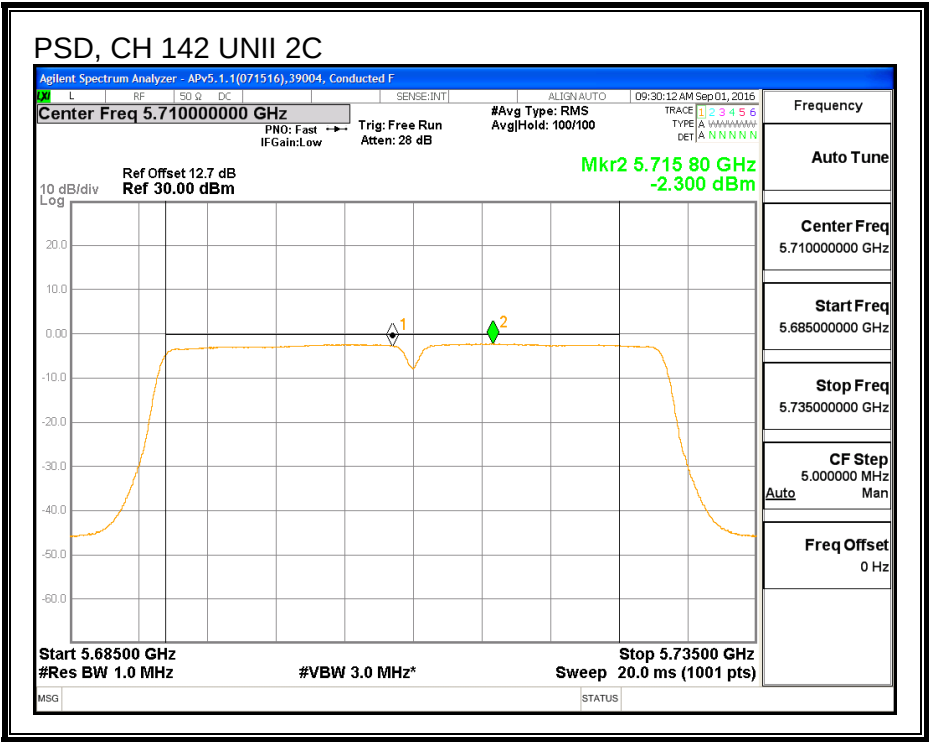

PSD, CHAIN 1

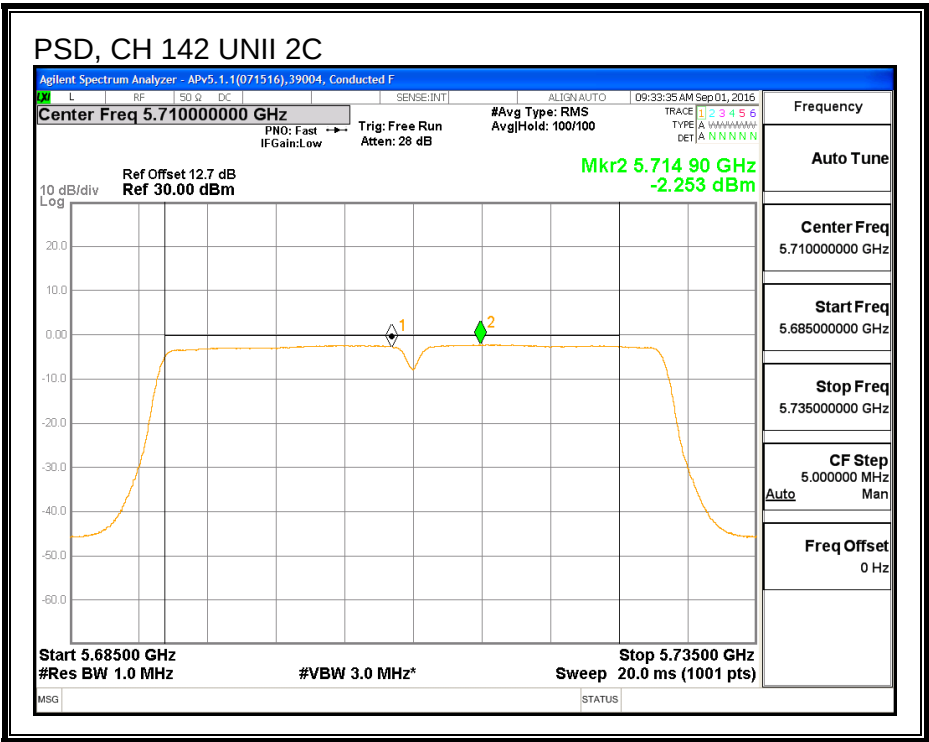

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	3.060	7.21	7.21	28.79	28.79

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	1.58	1.65	4.62	28.79	-24.17


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-5.49	-5.48	-2.48	28.79	-31.27


OUTPUT POWER, CHAIN 0

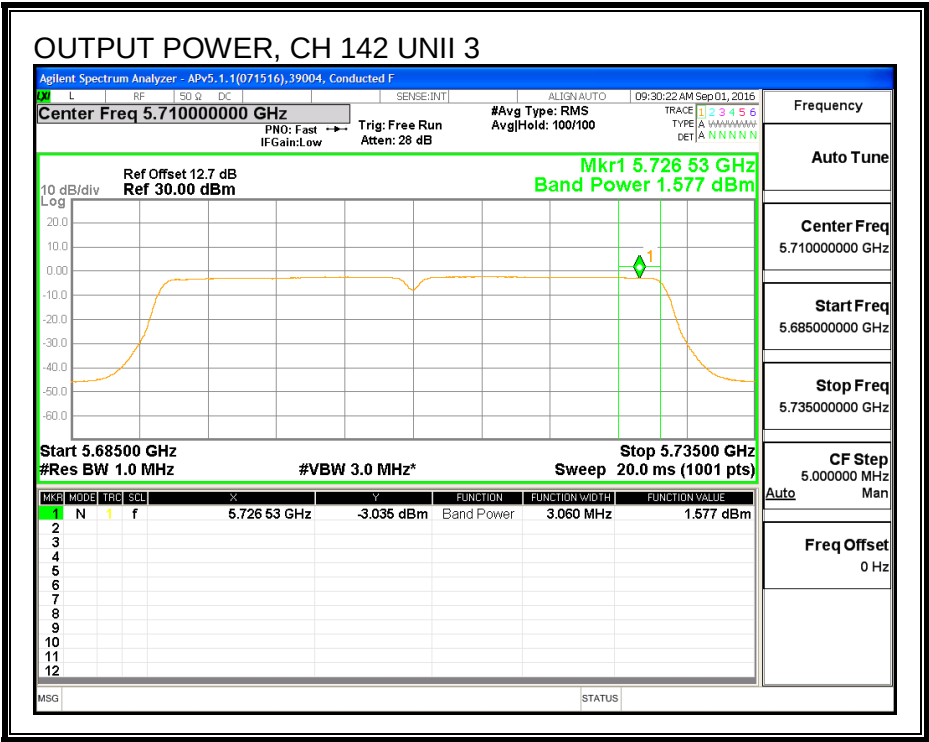


OUTPUT POWER, CHAIN 1

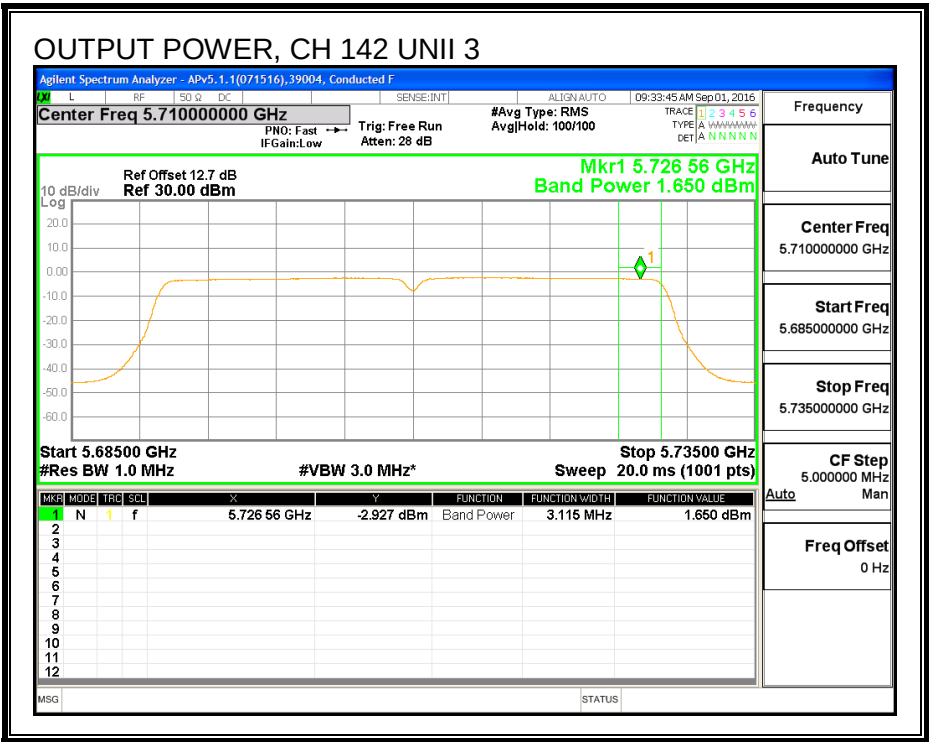

PSD, CHAIN 0

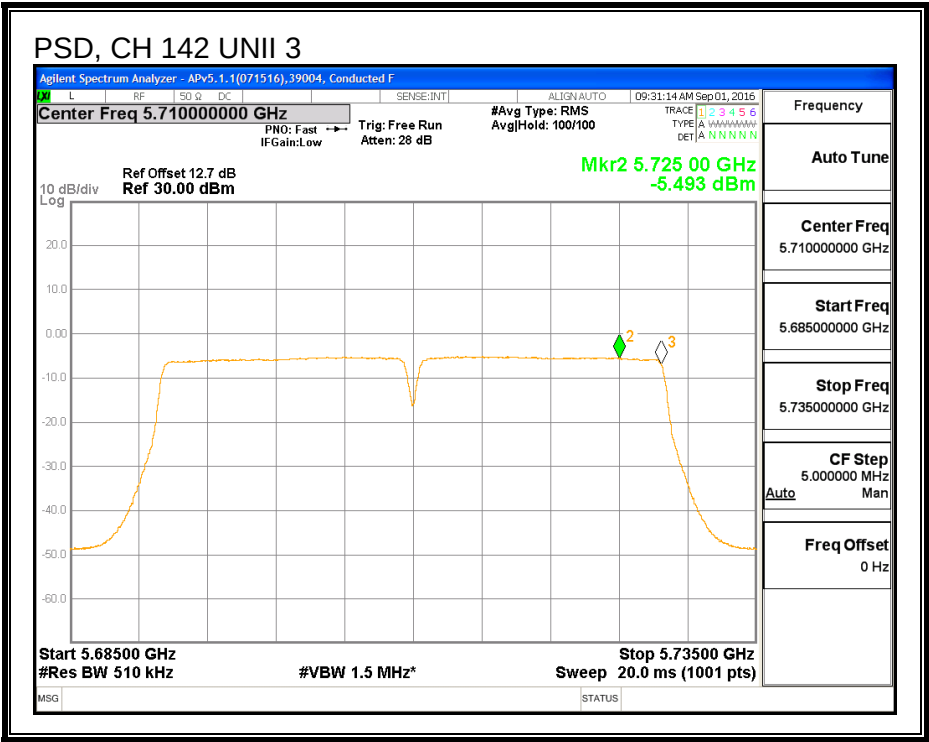

PSD, CHAIN 1

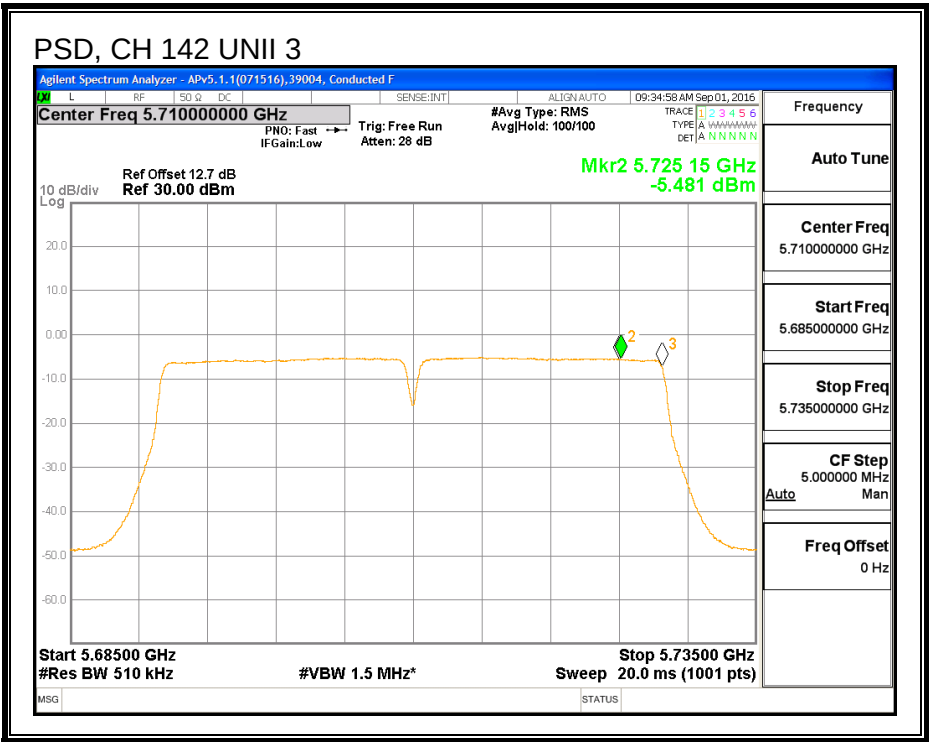

8.58.2. 6 dB BBANDWIDTH

IMITS

FCC §15.407 (e)


IC RSS-247 (6.2.4) (1)

The minimum 6 dB bandwidth shall be at least 500 kHz.


RESULTS

Channel	Frequency (MHz)	6 dB BW Chain 0 (MHz)	6 dB BW Chain 1 (MHz)
142	5710	3.19	3.30

CHAIN 0

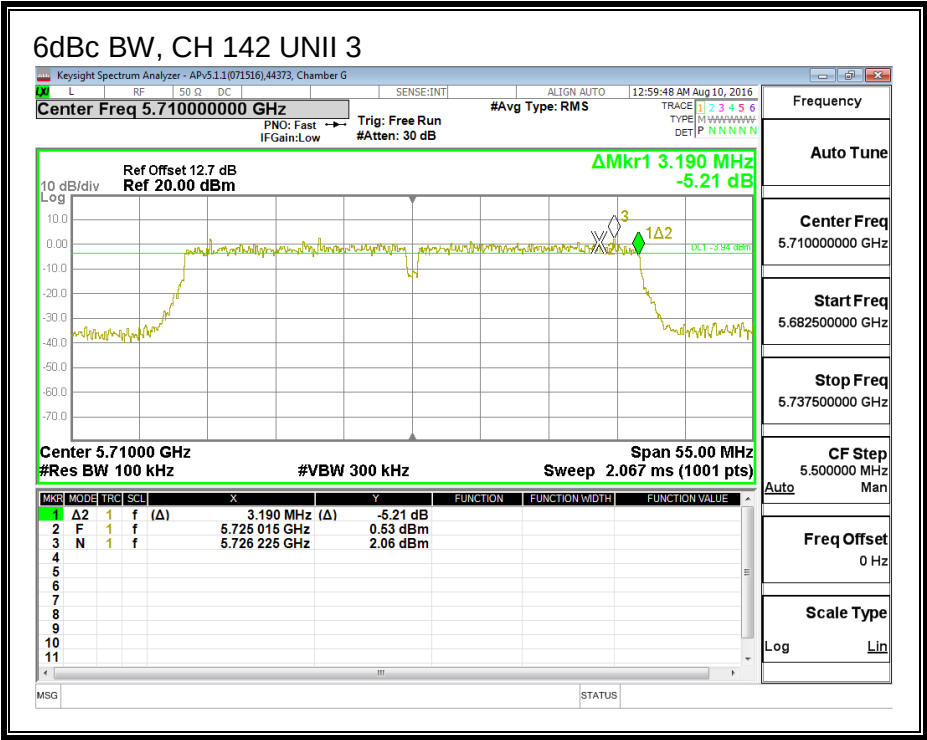

CHAIN 1

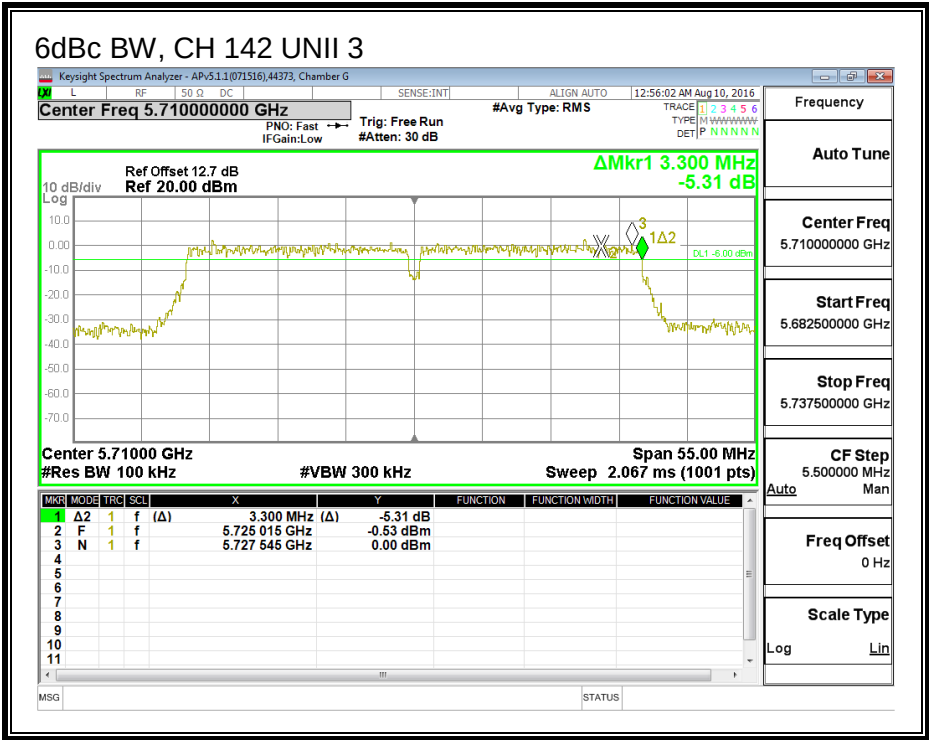

8.59. 802.11ac VHT40 2Tx BEAM FORMING MODE IN THE 5.6 GHz BAND

8.59.1. 26 dB BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS



Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5510	40.32	40.44
Mid	5550	40.32	40.08
High	5670	40.81	40.02
142	5710	40.57	41.17



26 dB BANDWIDTH, CHAIN 0

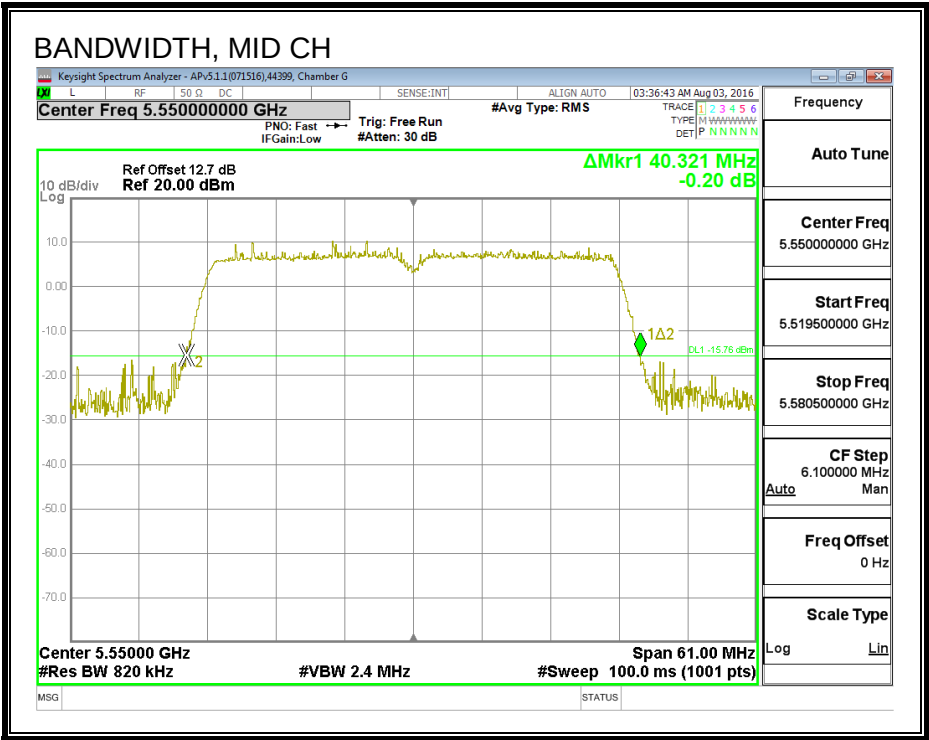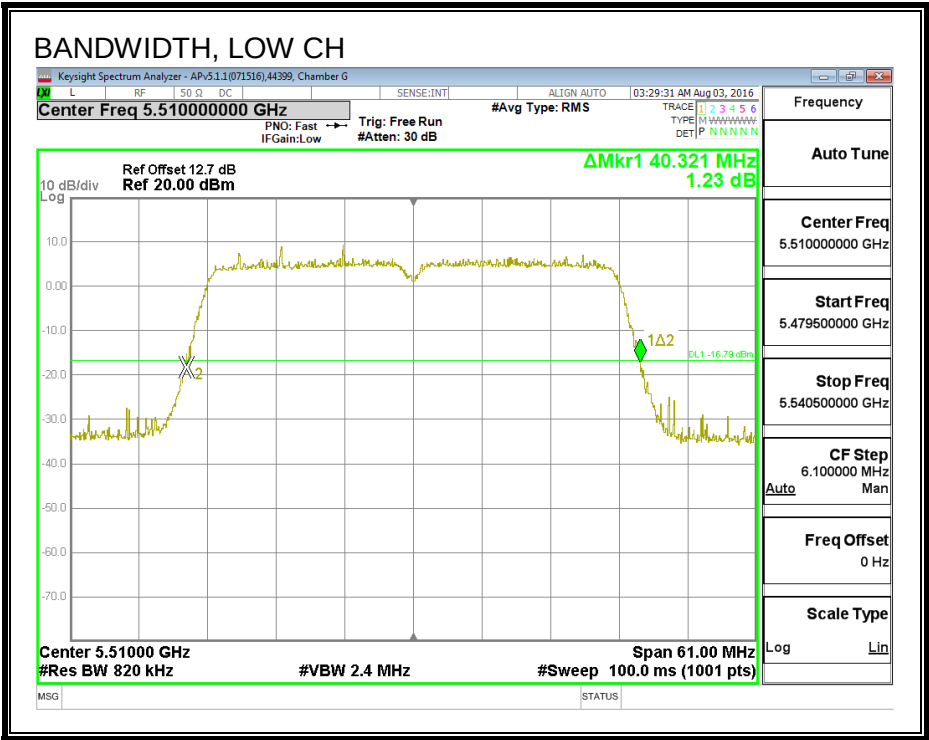

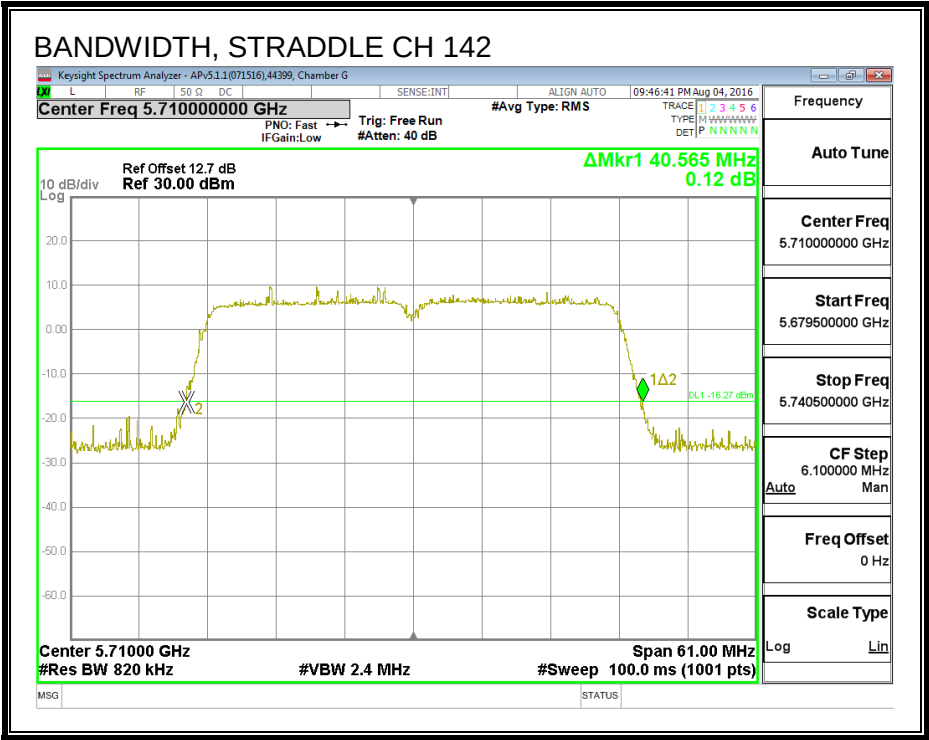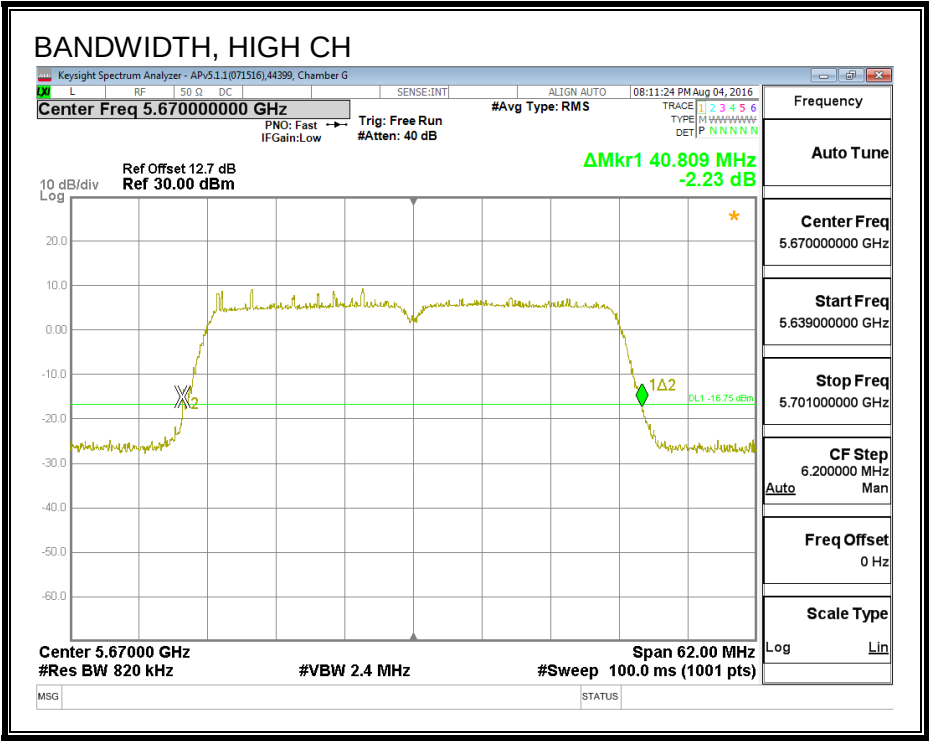

26 dB BANDWIDTH, CHAIN 1

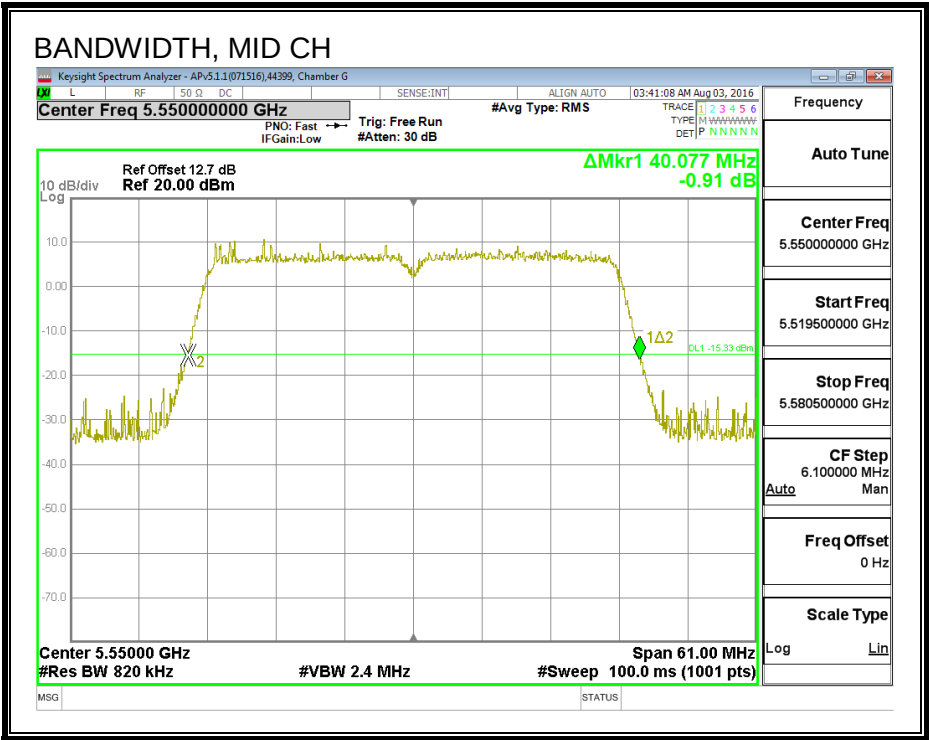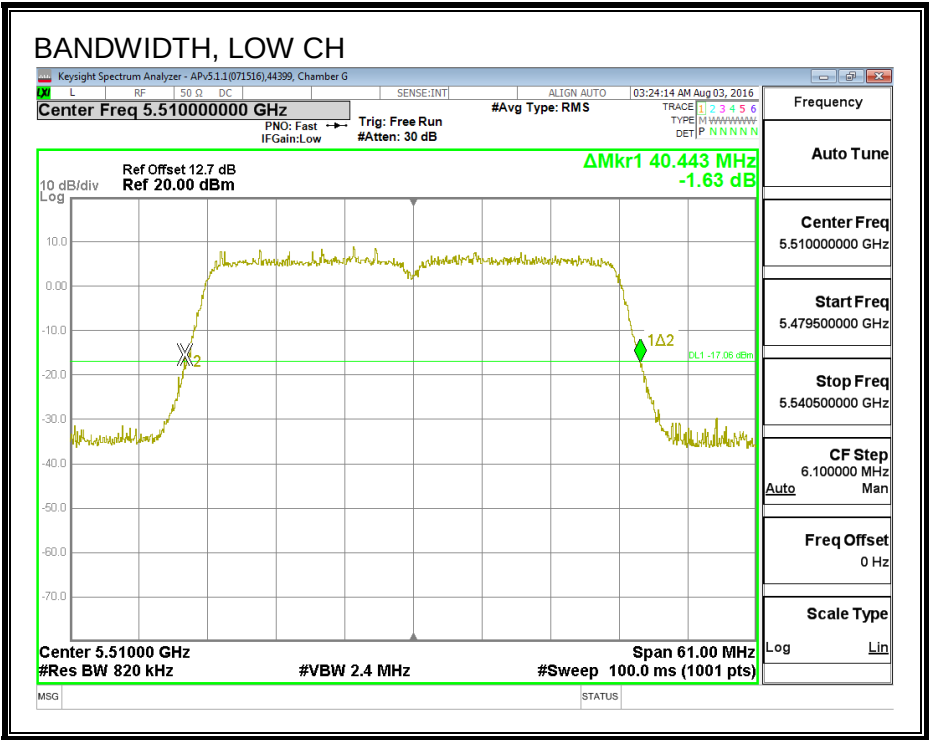

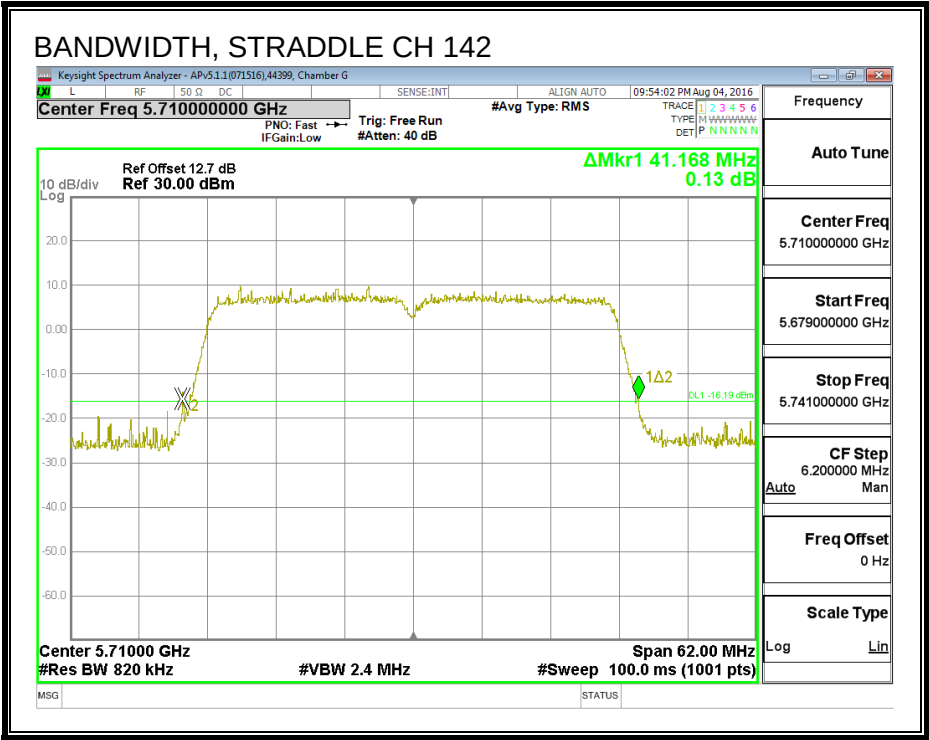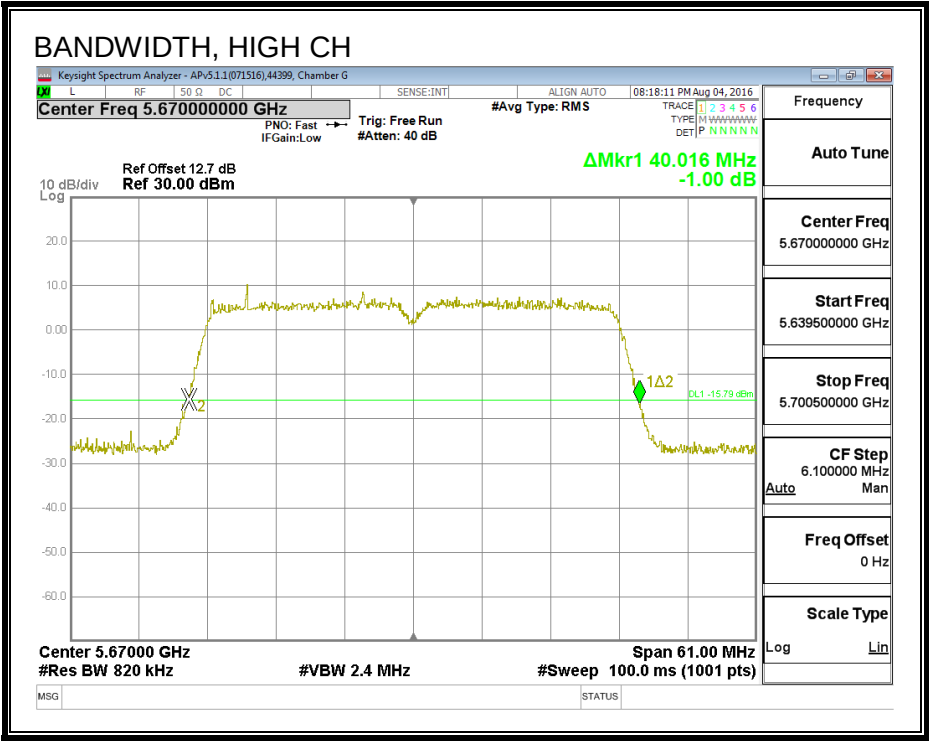

8.59.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS



Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5510	36.384	36.358
Mid	5550	36.435	36.501
High	5670	36.351	36.379
142	5710	36.275	35.766



99% BANDWIDTH, CHAIN 0

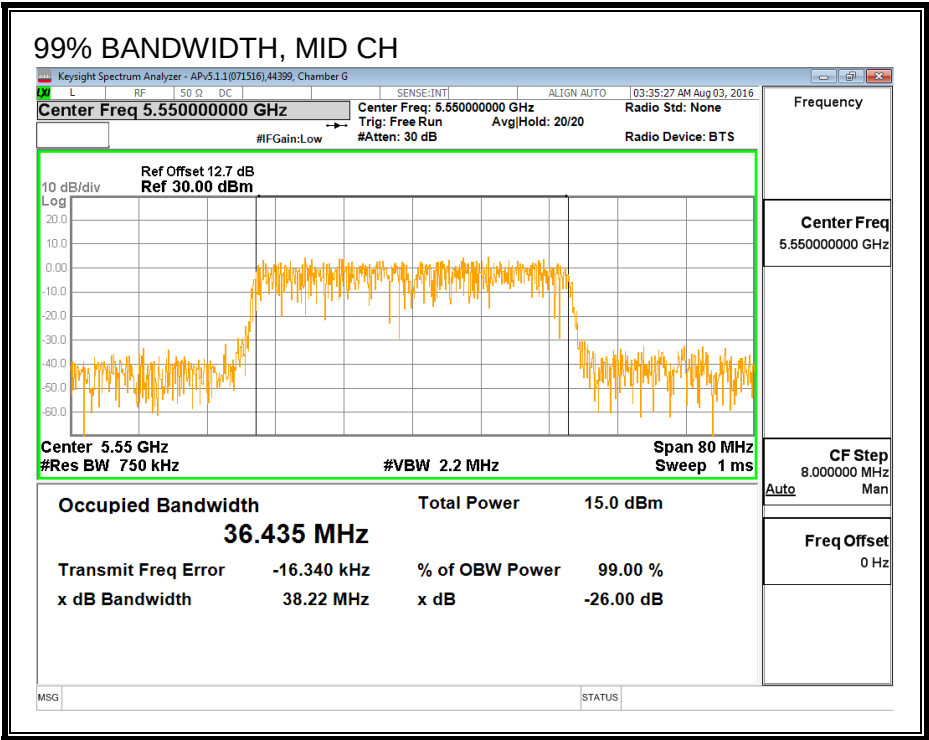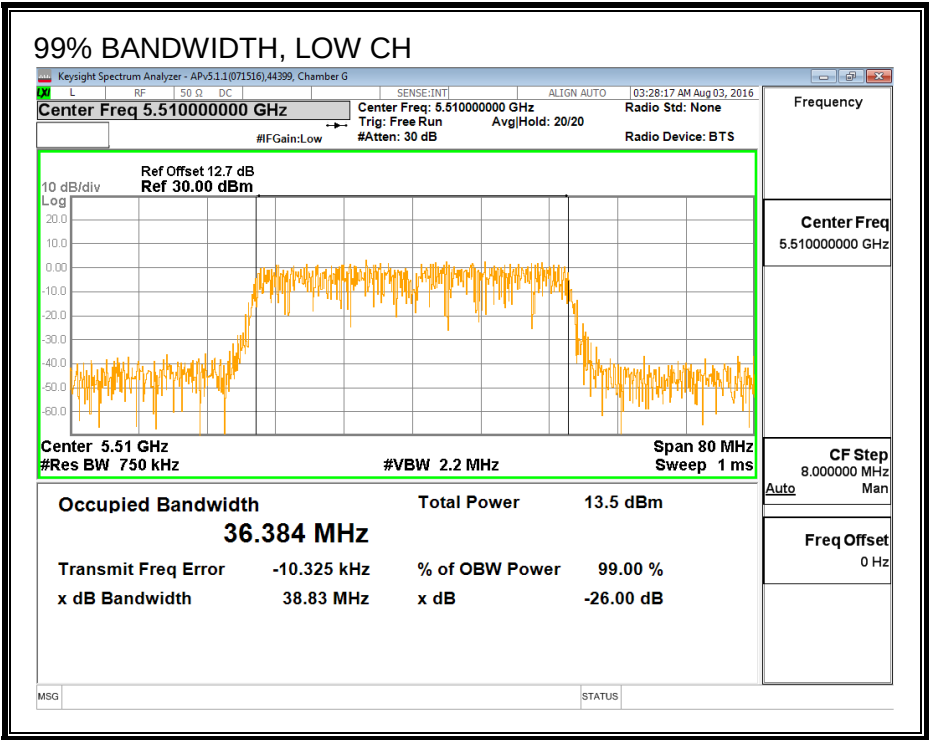

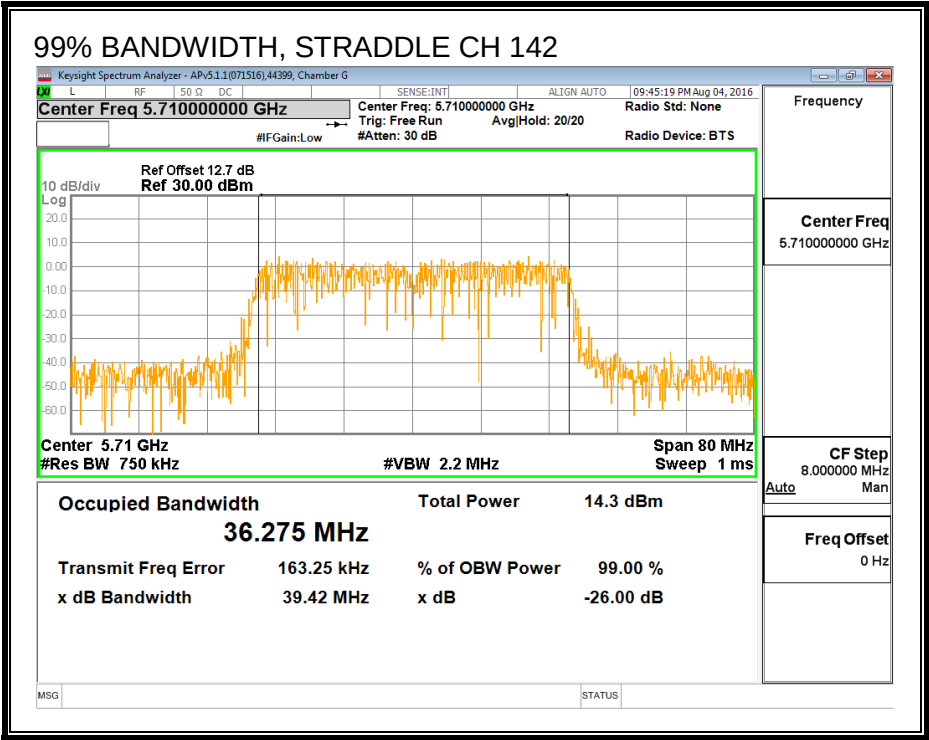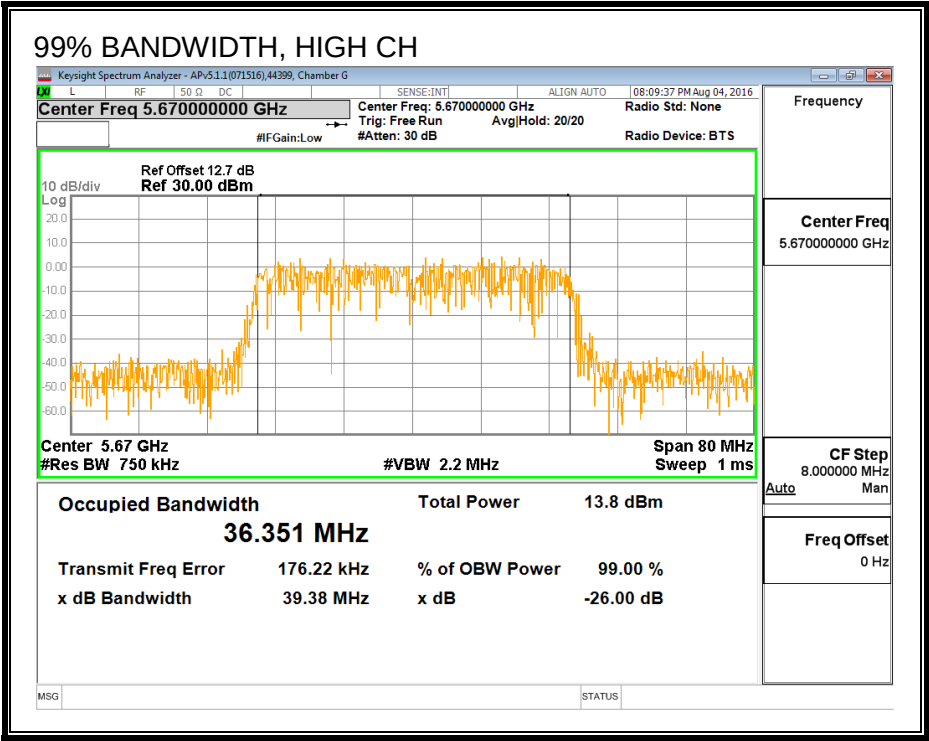

99% BANDWIDTH, CHAIN 1

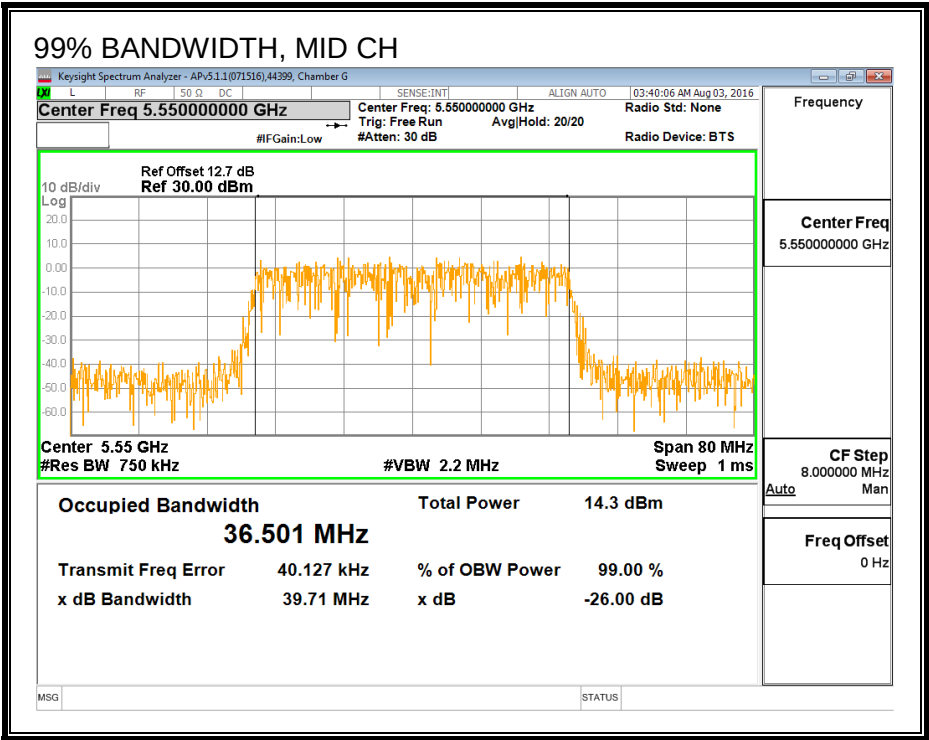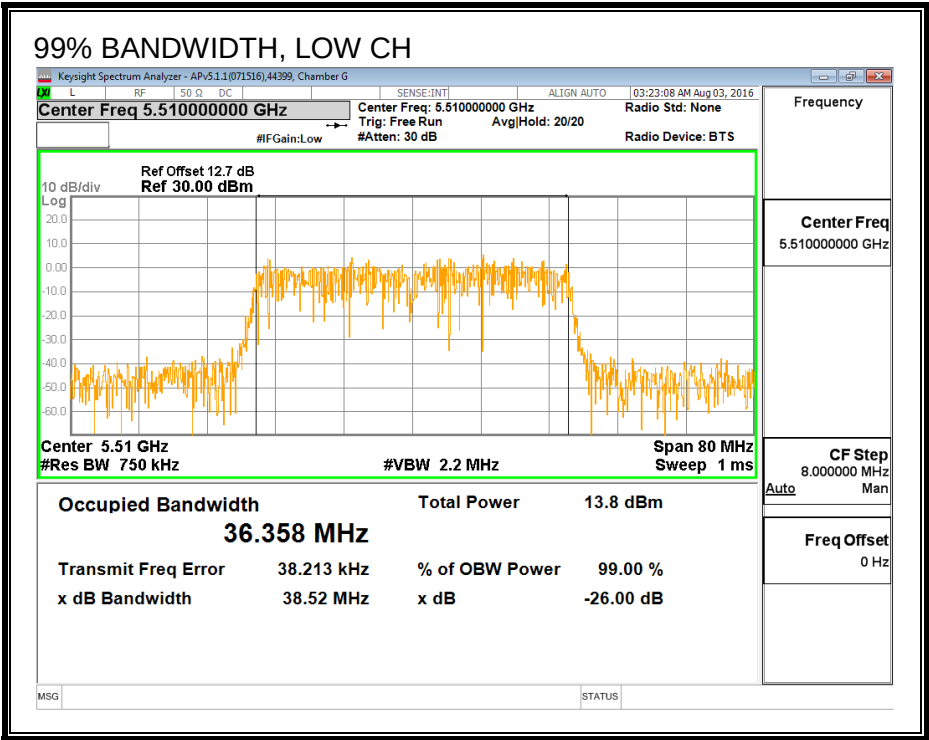

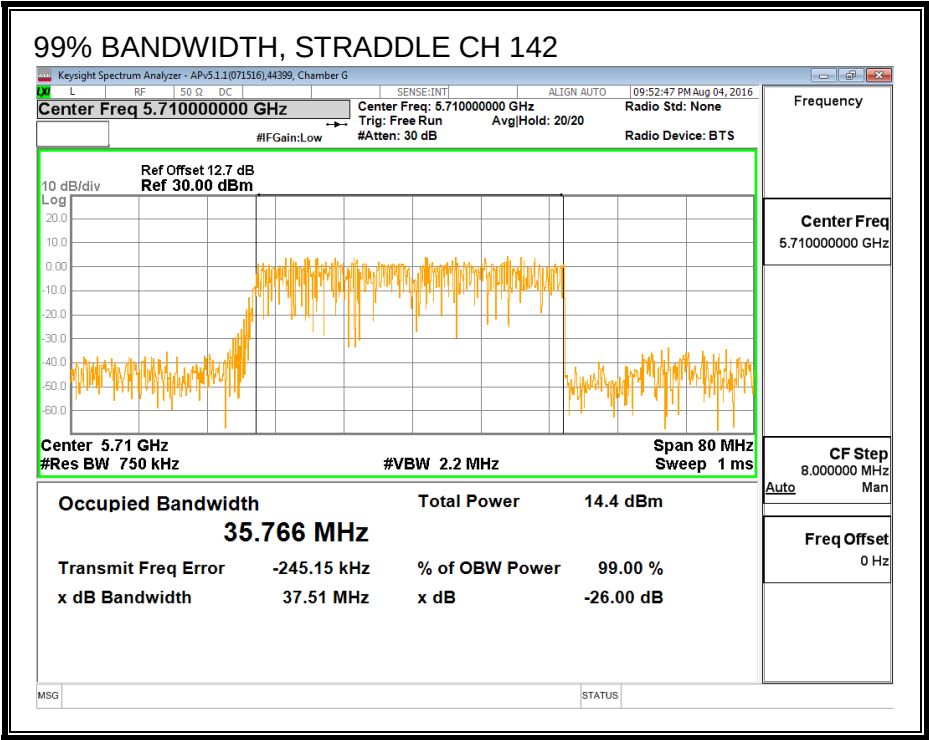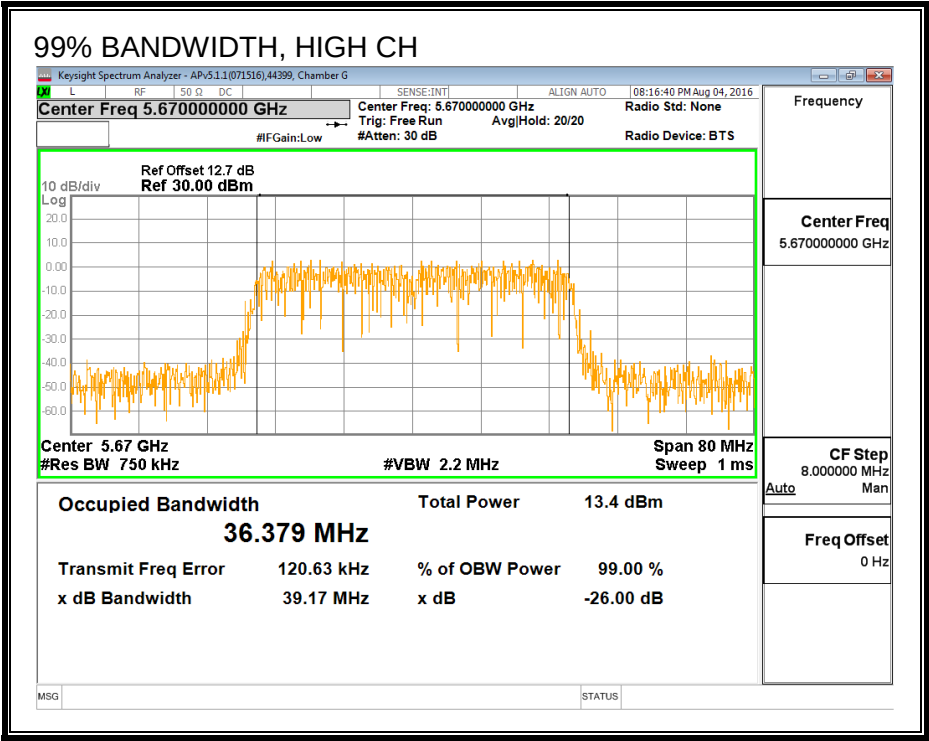

8.59.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Total Power (dBm)
Low	5510	12.37	12.32	15.36
Mid	5590	12.42	12.38	15.41
High	5670	12.46	12.43	15.46
142	5710	12.39	12.36	15.39

8.59.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 (6.2.3) (1)

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Straddle channel power is measured using PXA spectrum analyzer, duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
6.40	7.90	10.19

RESULTS

ID:	39005	Date:	8/3/16
------------	-------	--------------	--------

Bandwidth, Antenna Gain and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5510	40.32	36.384	10.19	10.19	22.42	6.81
Mid	5550	40.08	36.435	10.19	10.19	22.43	6.81
High	5670	40.02	36.351	10.19	10.19	22.42	6.81

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	12.37	12.32	15.36	22.42	-7.06
Mid	5550	12.42	12.38	15.41	22.43	-7.01
High	5670	12.46	12.43	15.46	22.42	-6.96

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5510	-2.72	-2.12	0.72	6.81	-6.09
Mid	5550	-1.72	-0.91	1.84	6.81	-4.97
High	5670	-1.63	-2.25	1.20	6.81	-5.61



PSD, CHAIN 0

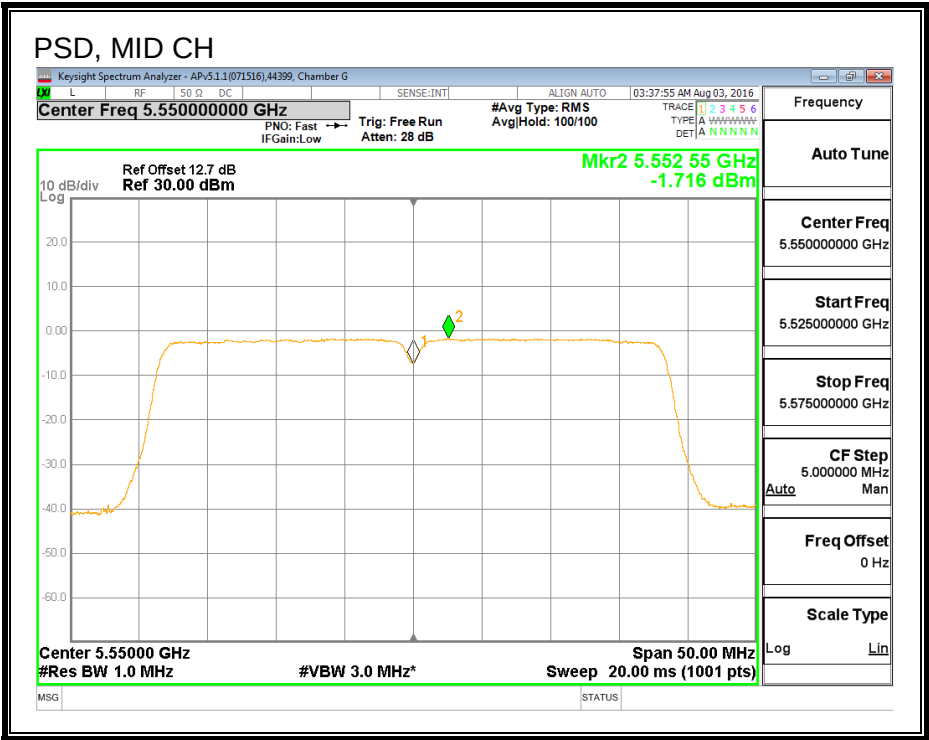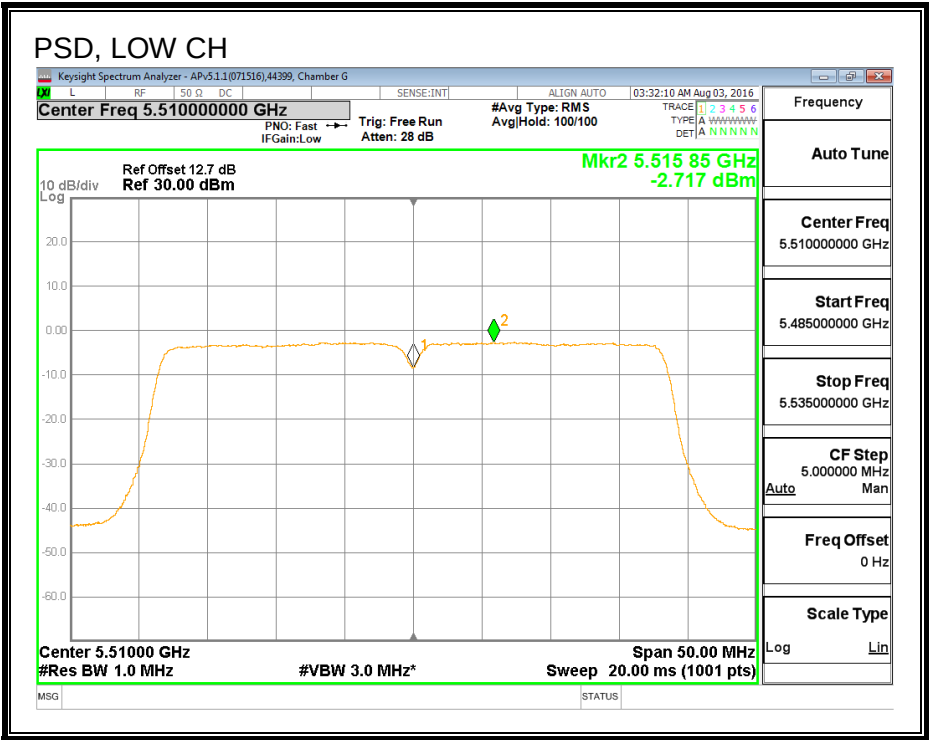

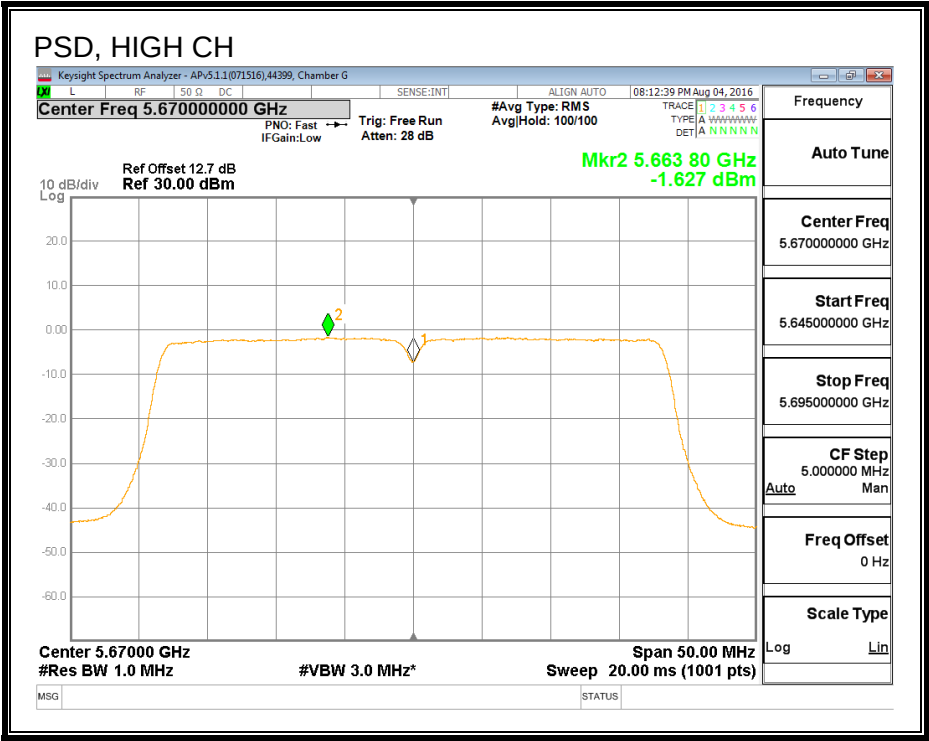

PSD, CHAIN 1

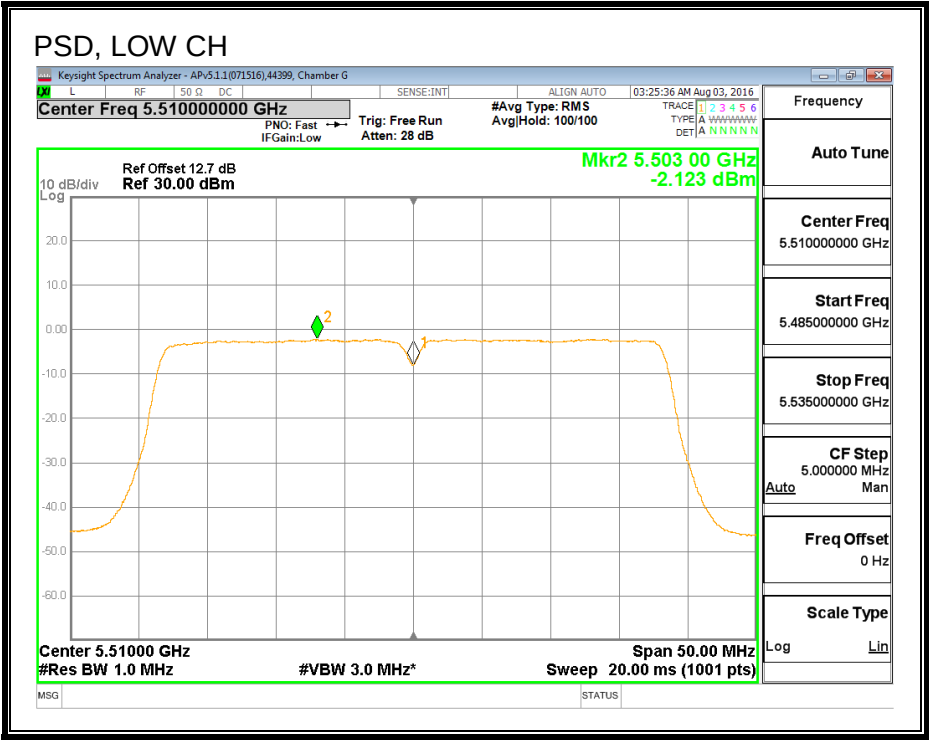

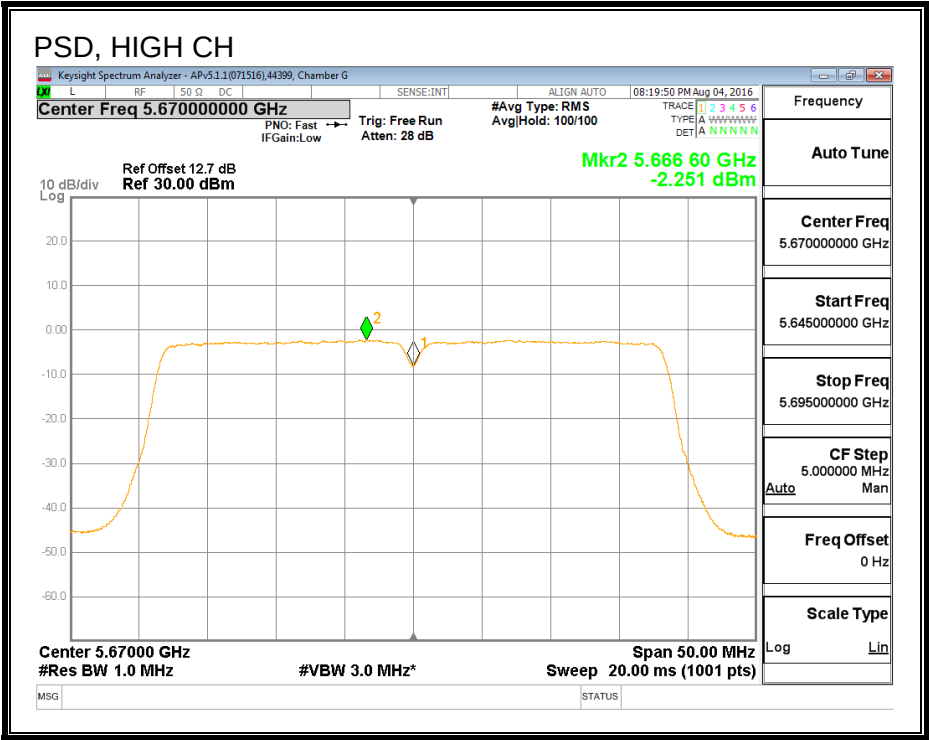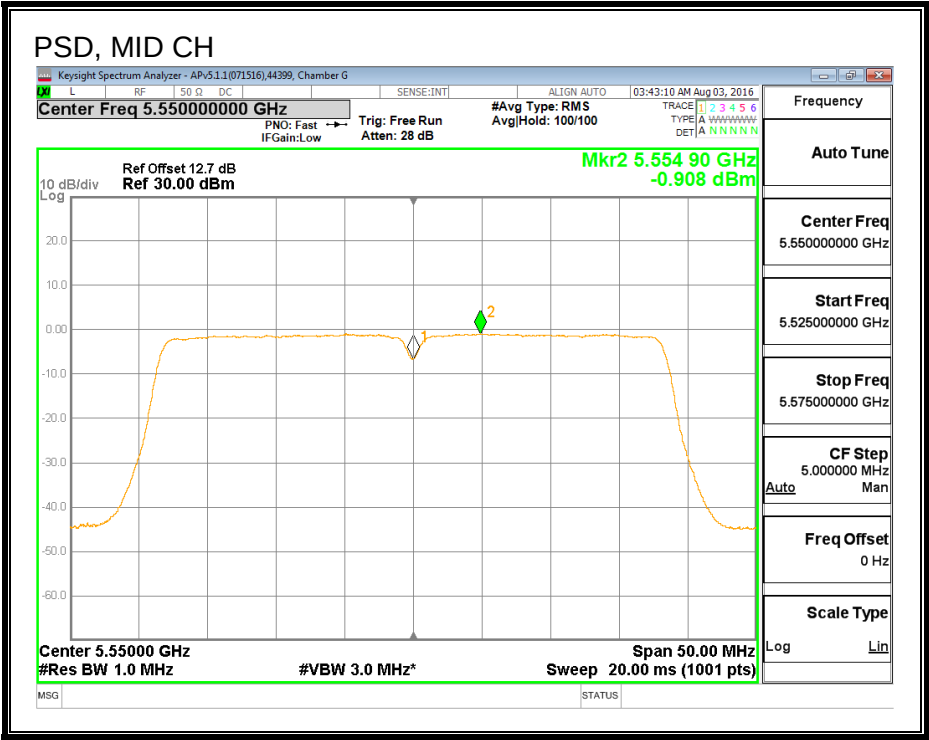

8.60. 802.11ac VHT40 2Tx BEAM FORMING STRADDLE CHANNEL 142 RESULTS (FCC)

8.60.1. OUTPUT POWER AND PSD

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	35.29	10.19	10.19	19.81	6.81

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	12.11	12.11	15.24	19.81	-4.57


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-2.29	-2.30	0.84	6.81	-5.97


OUTPUT POWER, CHAIN 0

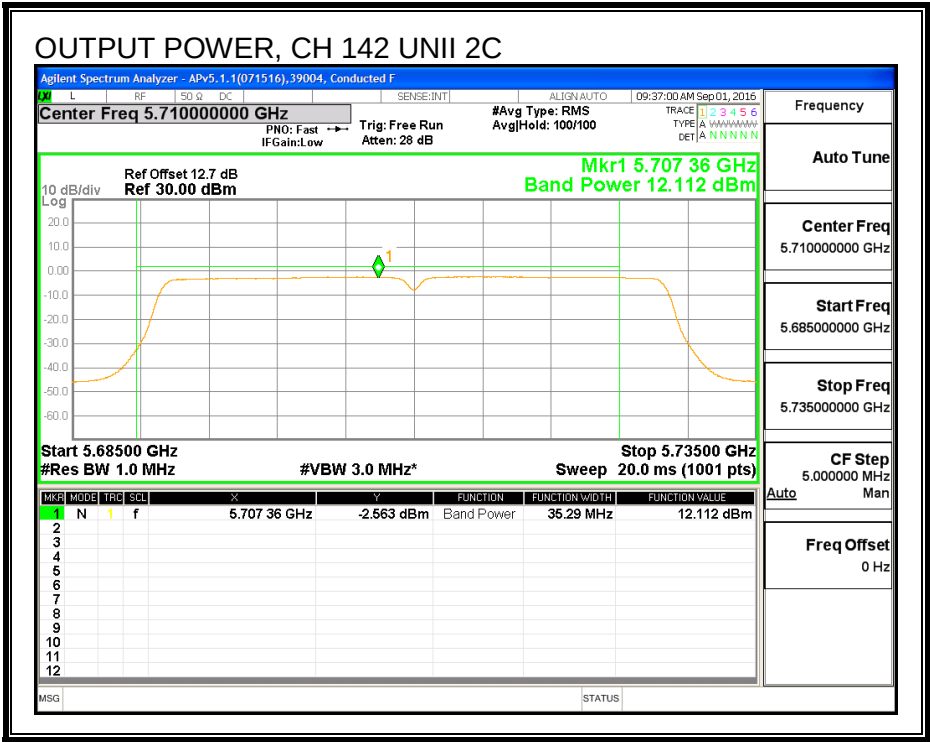


OUTPUT POWER, CHAIN 1

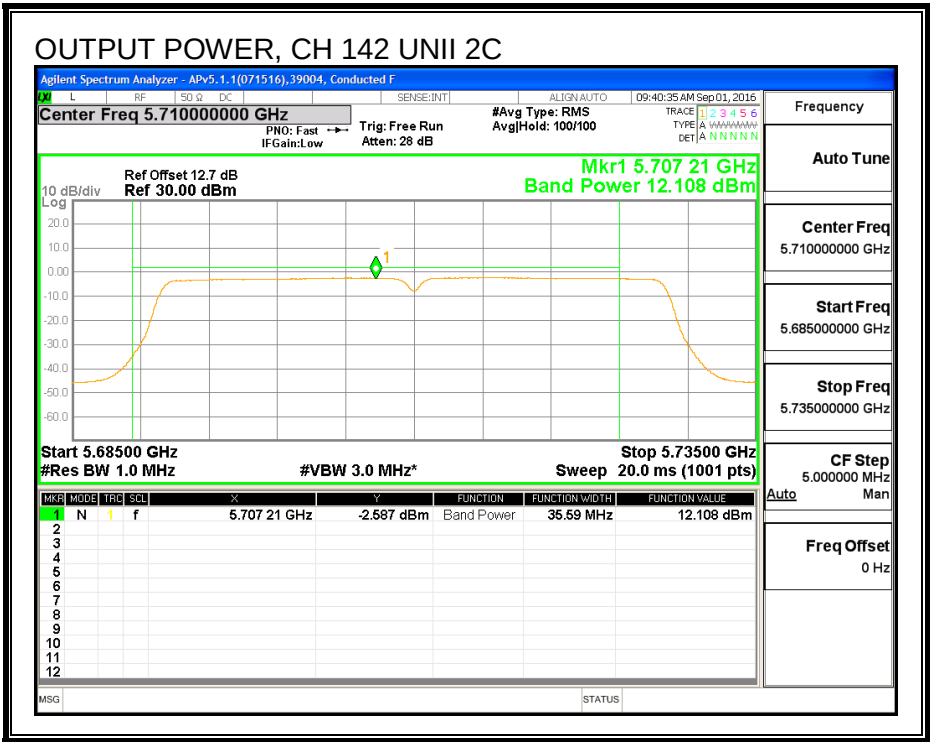

PSD, CHAIN 0

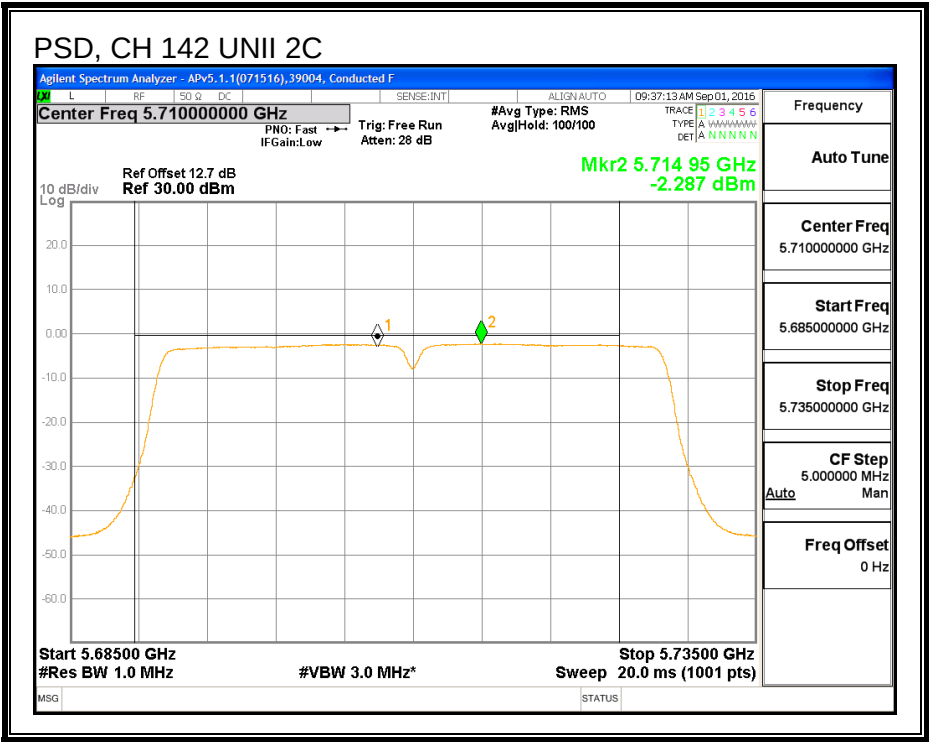

PSD, CHAIN 1

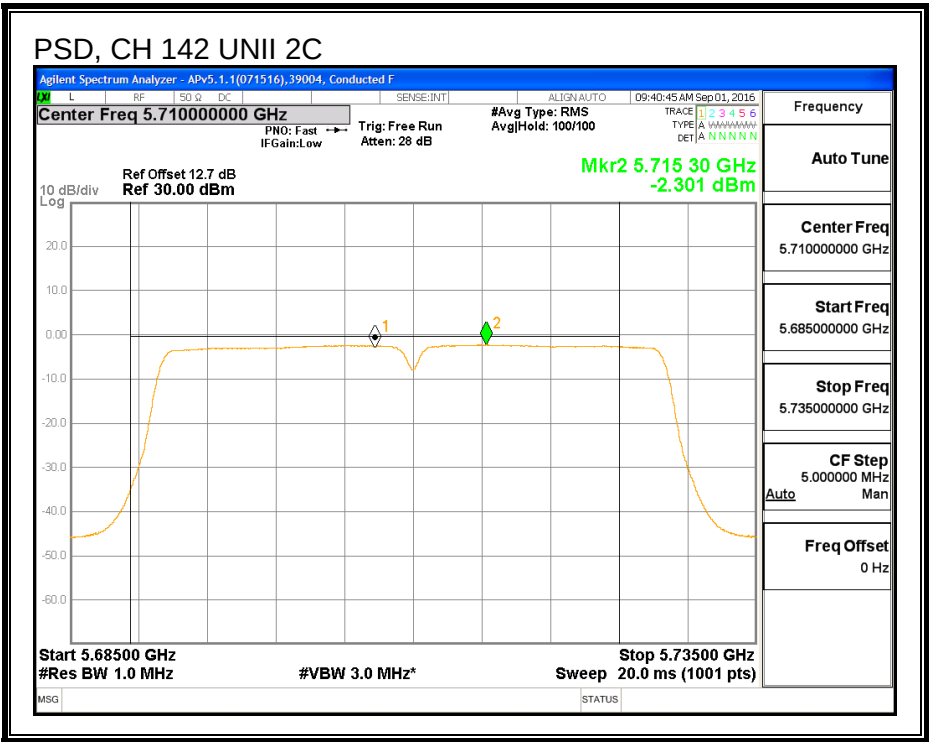

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	5.29	10.19	10.19	25.81	25.81

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	1.98	1.98	4.99	25.81	-20.82


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-5.55	-5.52	-2.53	25.81	-28.34


OUTPUT POWER, CHAIN 0

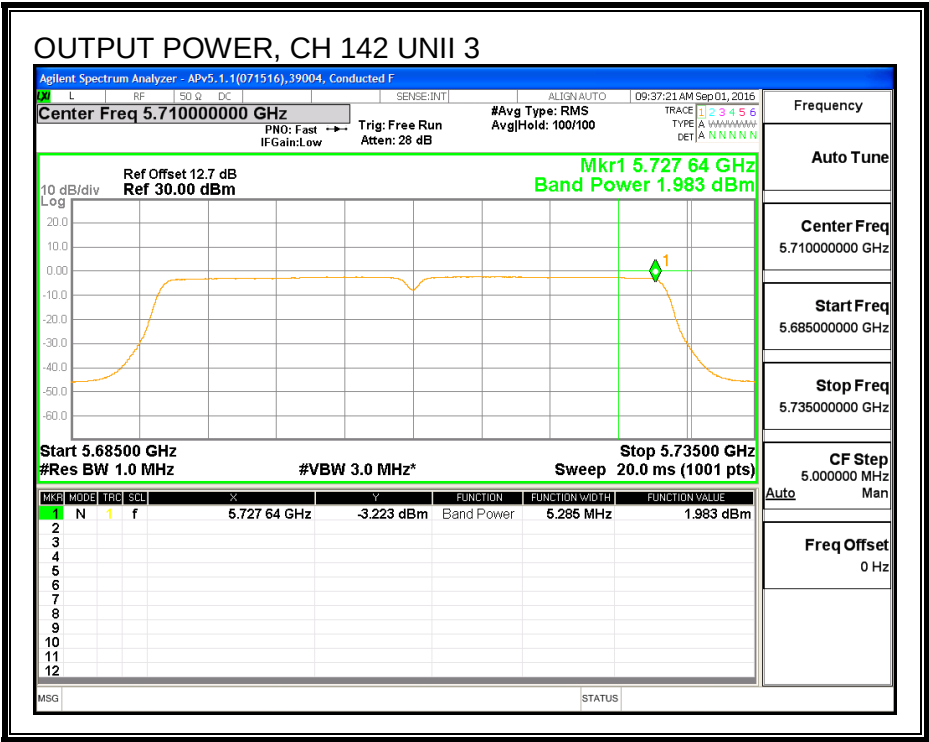


OUTPUT POWER, CHAIN 1

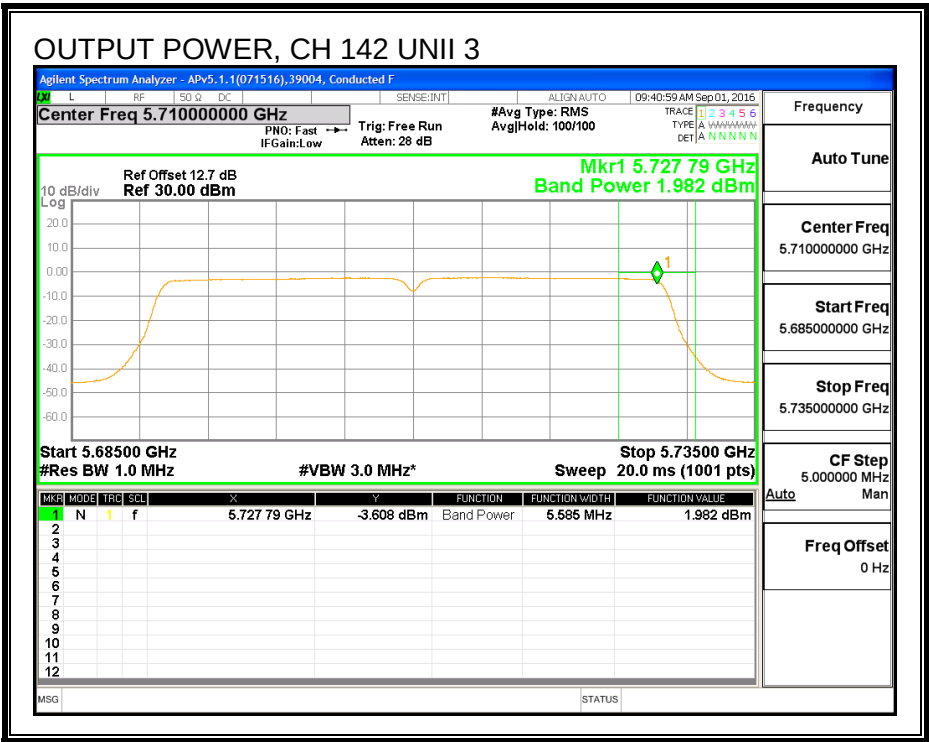

PSD, CHAIN 0

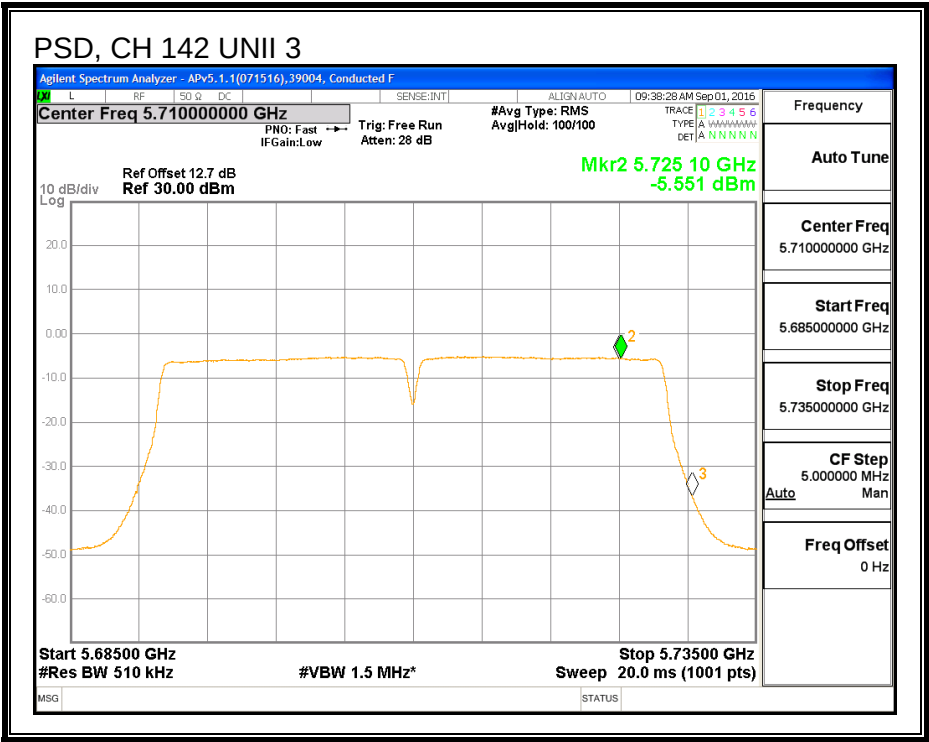

PSD, CHAIN 1

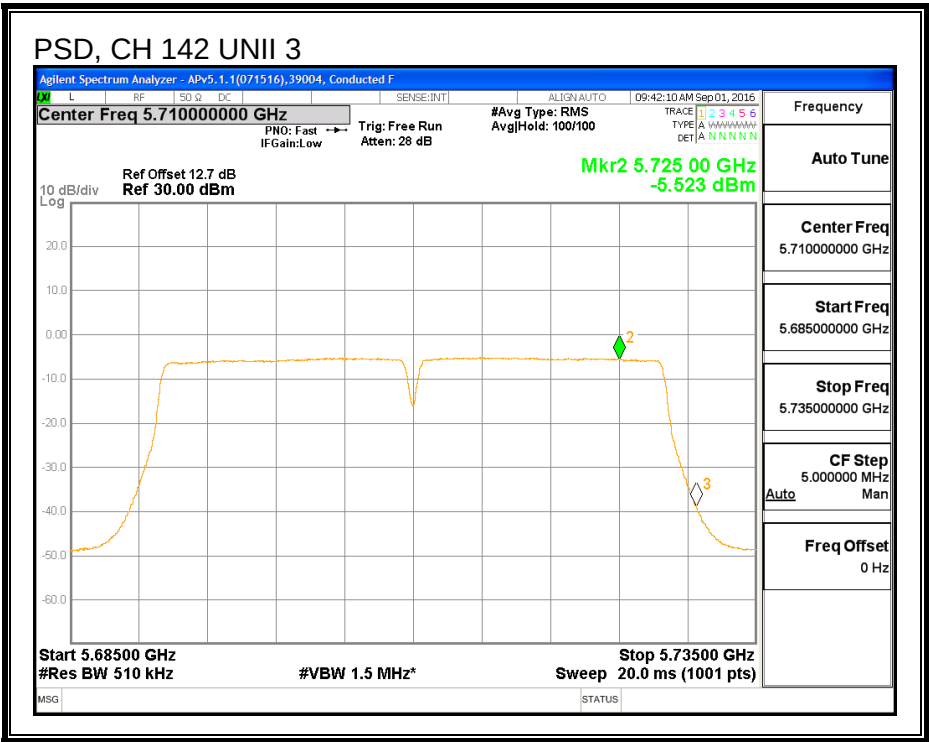

8.61. 802.11ac VHT40 2Tx BEAM FORMING STRADDLE CHANNEL 142 RESULTS (IC)

8.61.1. OUTPUT POWER AND PSD

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	32.890	10.19	10.19	19.81	6.81

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	12.08	12.06	15.20	19.81	-4.61


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-2.29	-2.30	0.84	6.81	-5.97


OUTPUT POWER, CHAIN 0

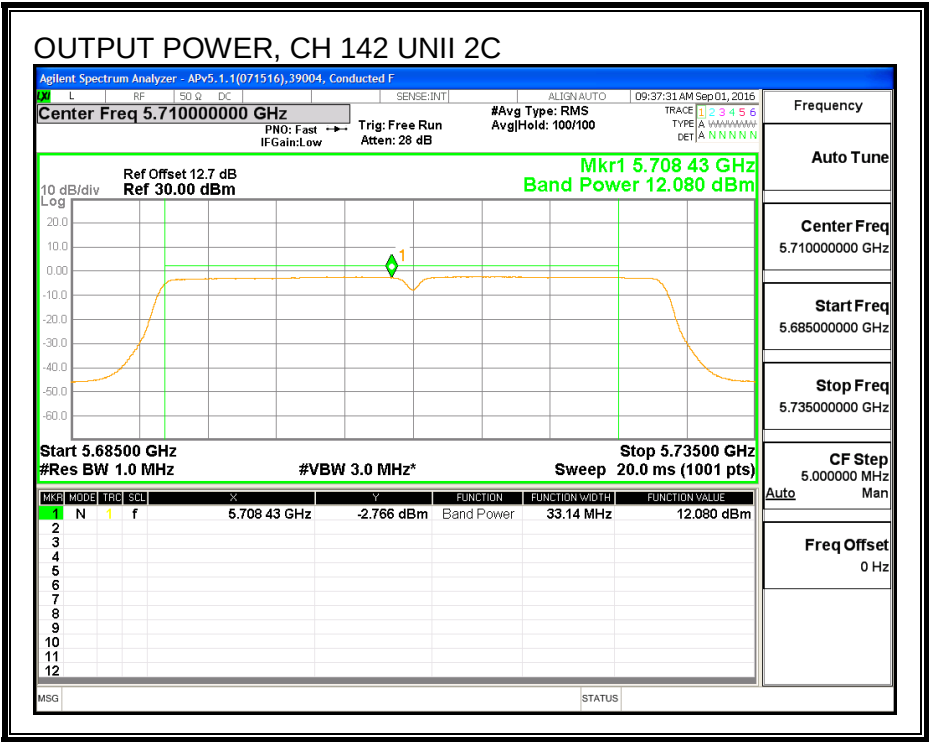


OUTPUT POWER, CHAIN 1

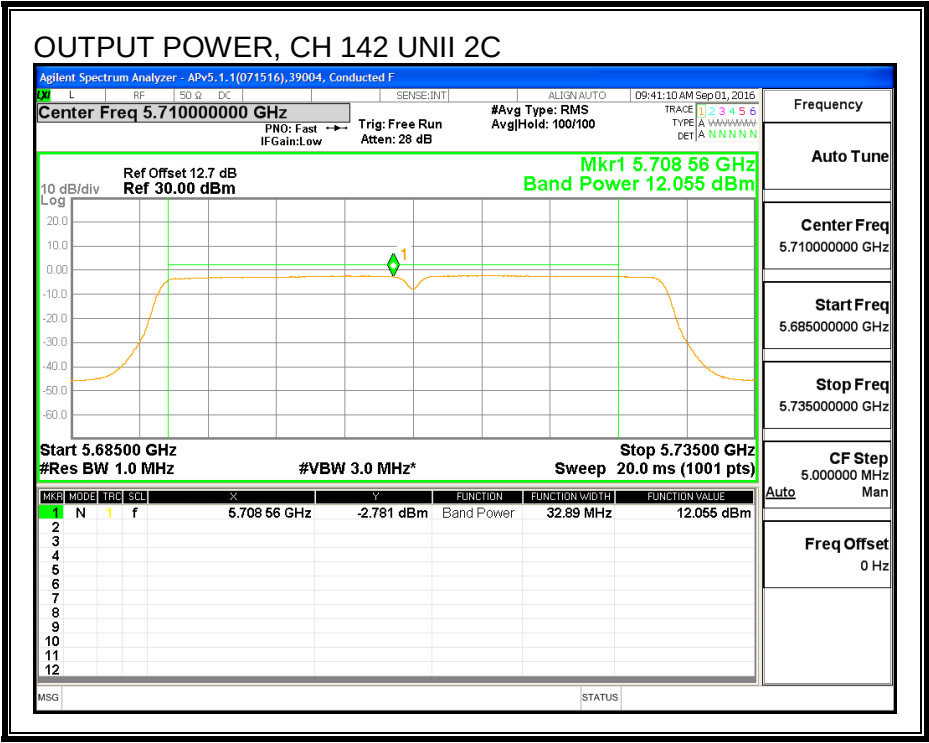

PSD, CHAIN 0

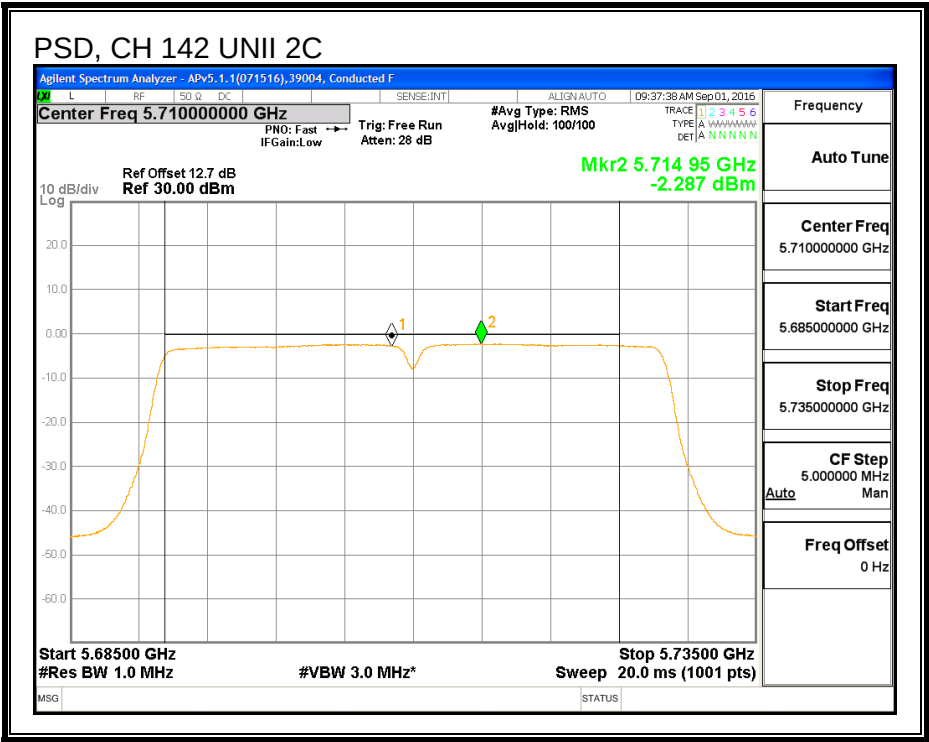

PSD, CHAIN 1

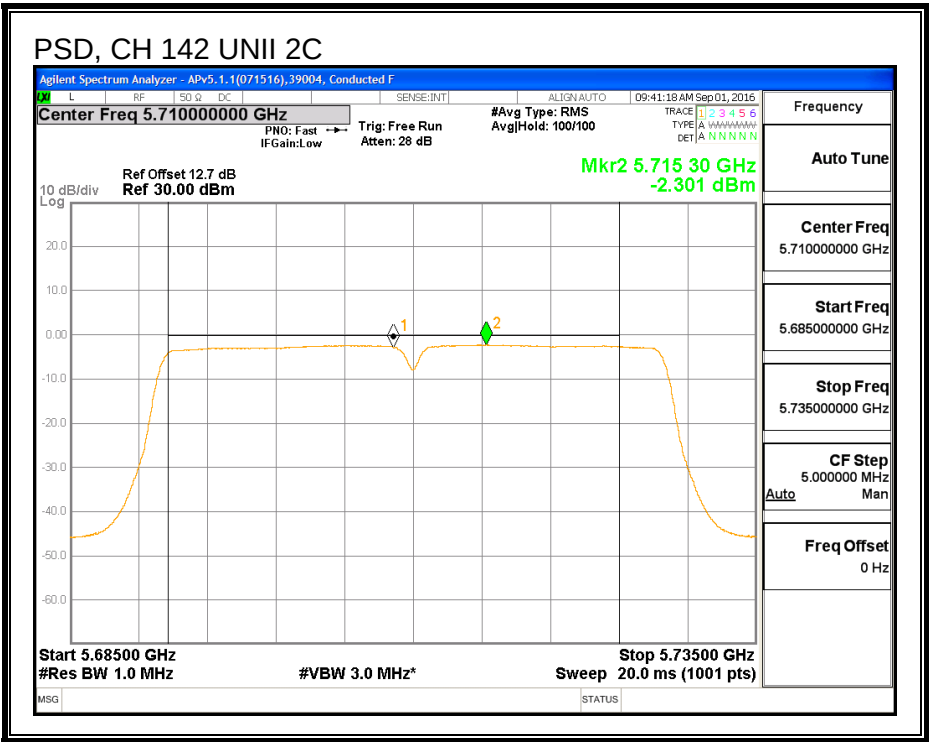

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	2.88	10.19	10.19	25.81	25.81

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	1.65	1.38	4.65	25.81	-21.16


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-5.55	-5.52	-2.41	25.81	-28.22


OUTPUT POWER, CHAIN 0

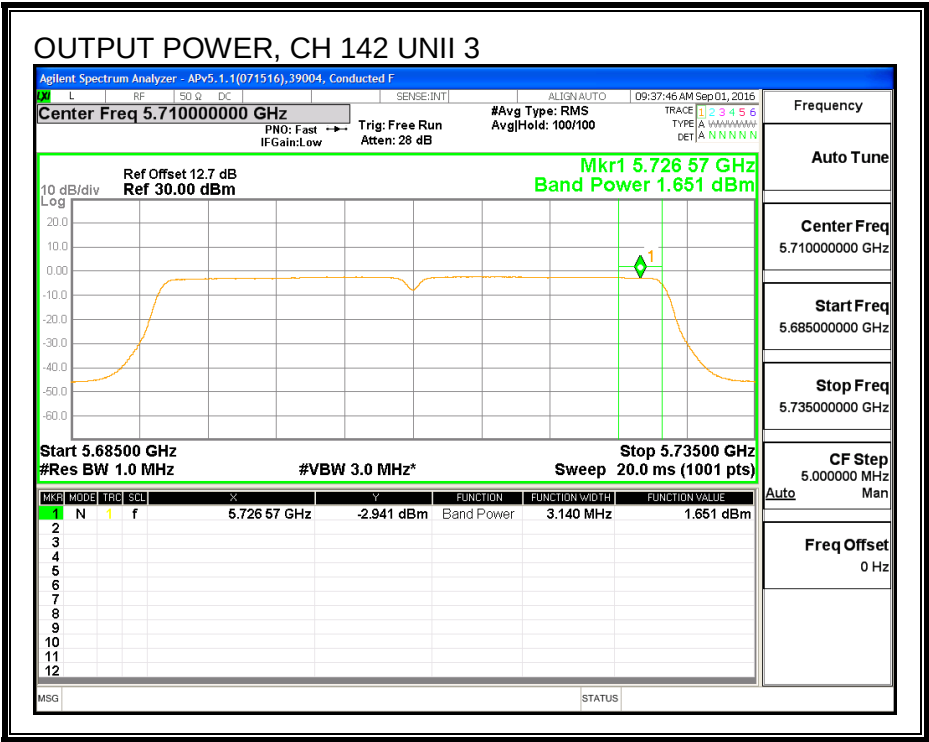


OUTPUT POWER, CHAIN 1

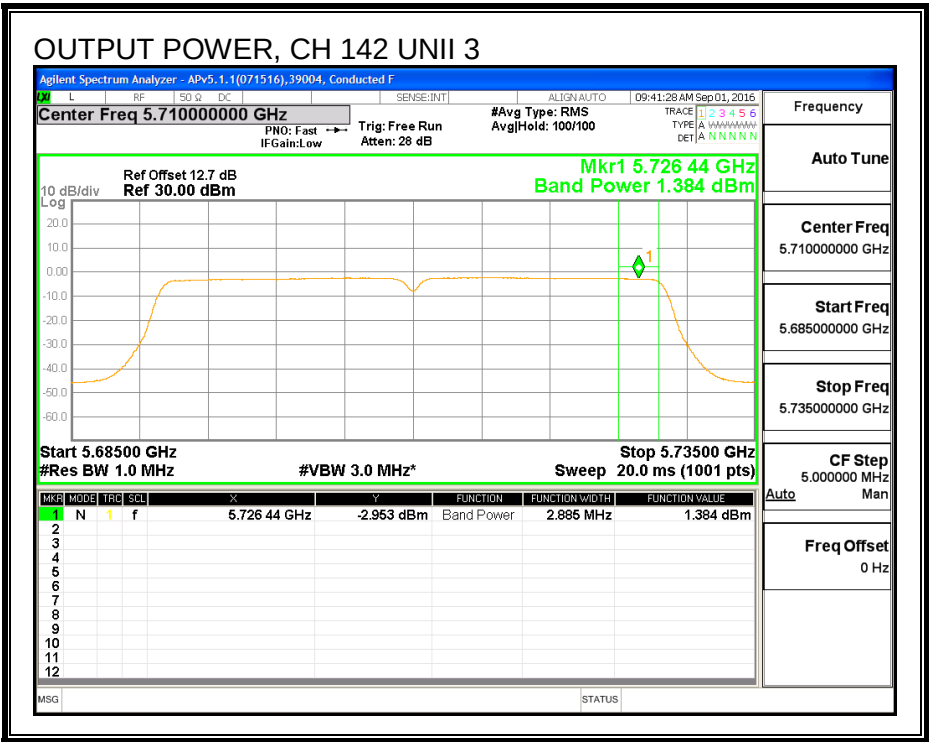

PSD, CHAIN 0

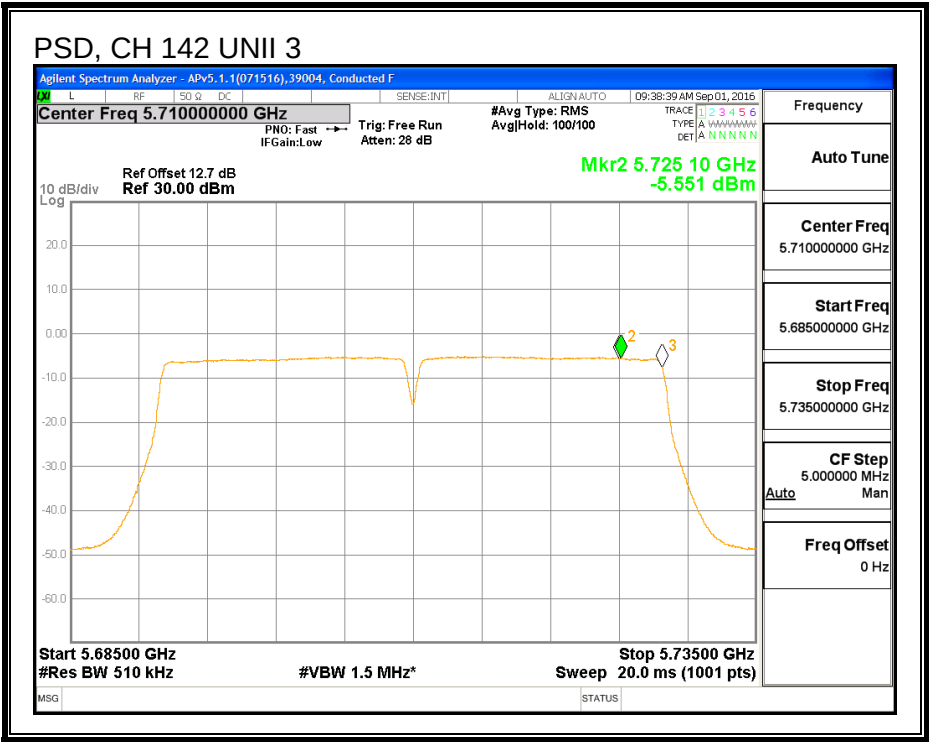

PSD, CHAIN 1

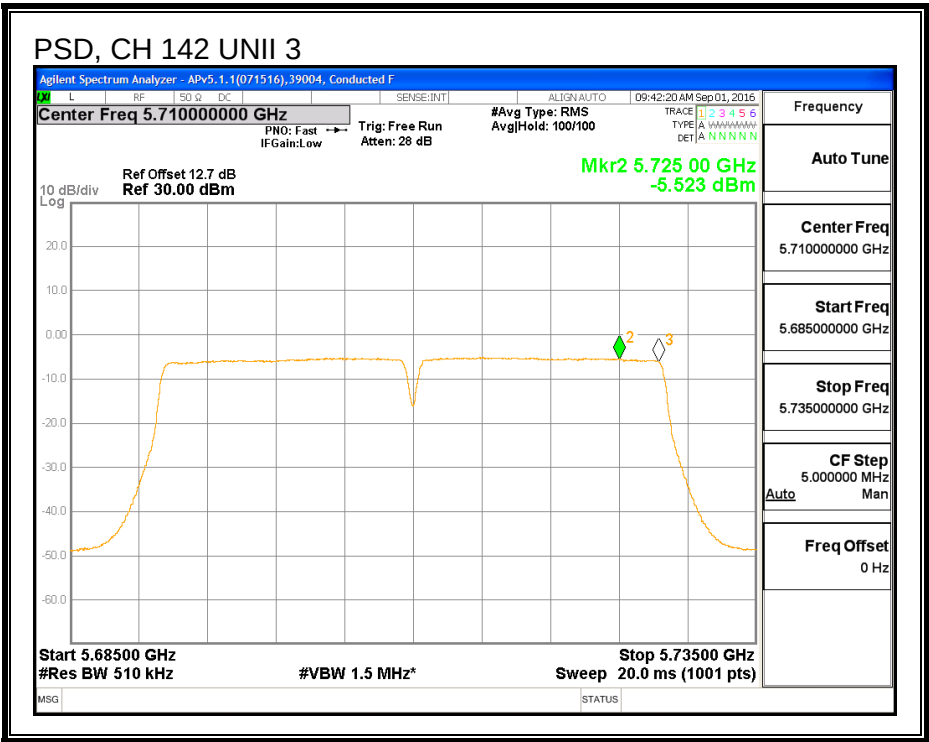

8.61.2. 6 dB BBANDWIDTH

LIMITS

FCC §15.407 (e)


IC RSS-247 (6.2.4) (1)

The minimum 6 dB bandwidth shall be at least 500 kHz.


RESULTS

Channel	Frequency (MHz)	6 dB BW Chain 0 (MHz)	6 dB BW Chain 1 (MHz)
142	5710	3.25	3.19

CHAIN 0

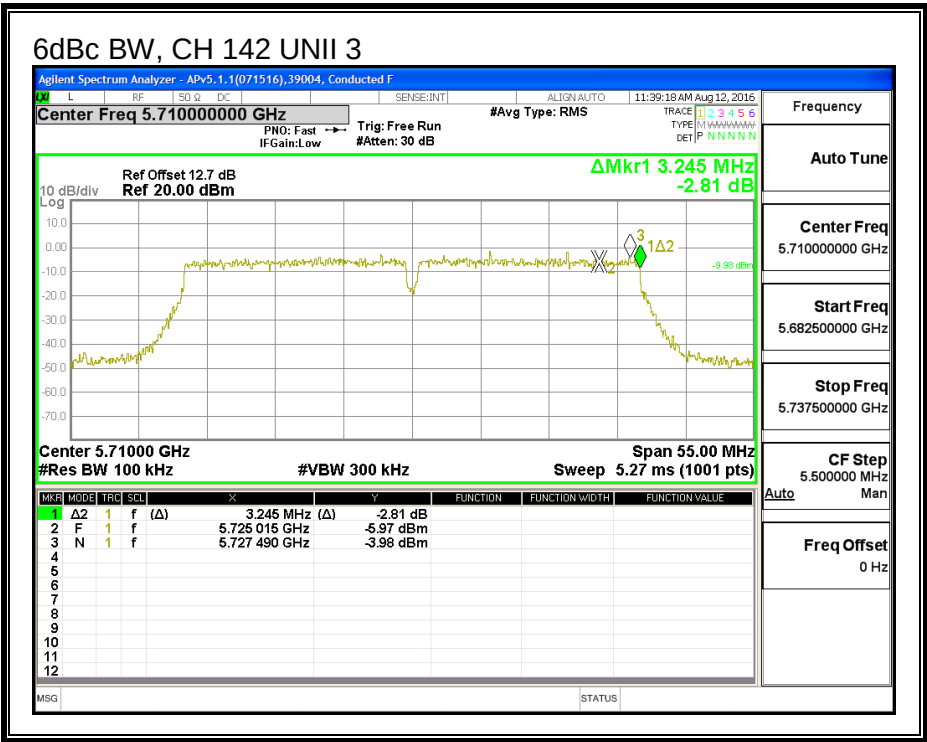

CHAIN 1

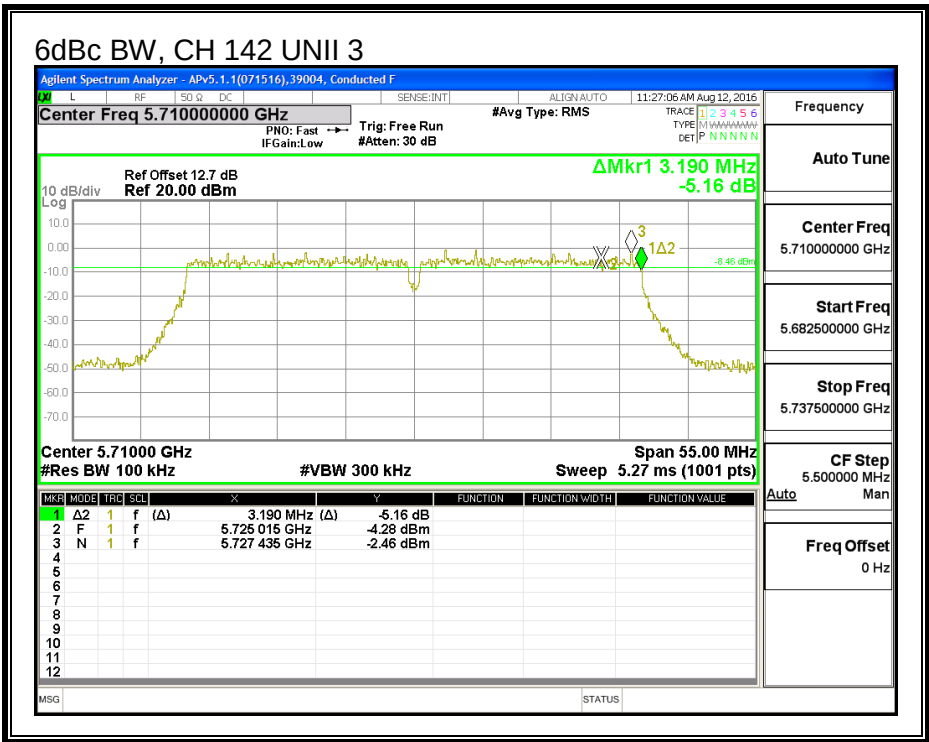

8.62. 802.11ac VHT80 CHAIN 0 MODE IN THE 5.6 GHz BAND

8.62.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5530	82.75
Mid	5610	82.75
High	5690	83.13

26 dB BANDWIDTH

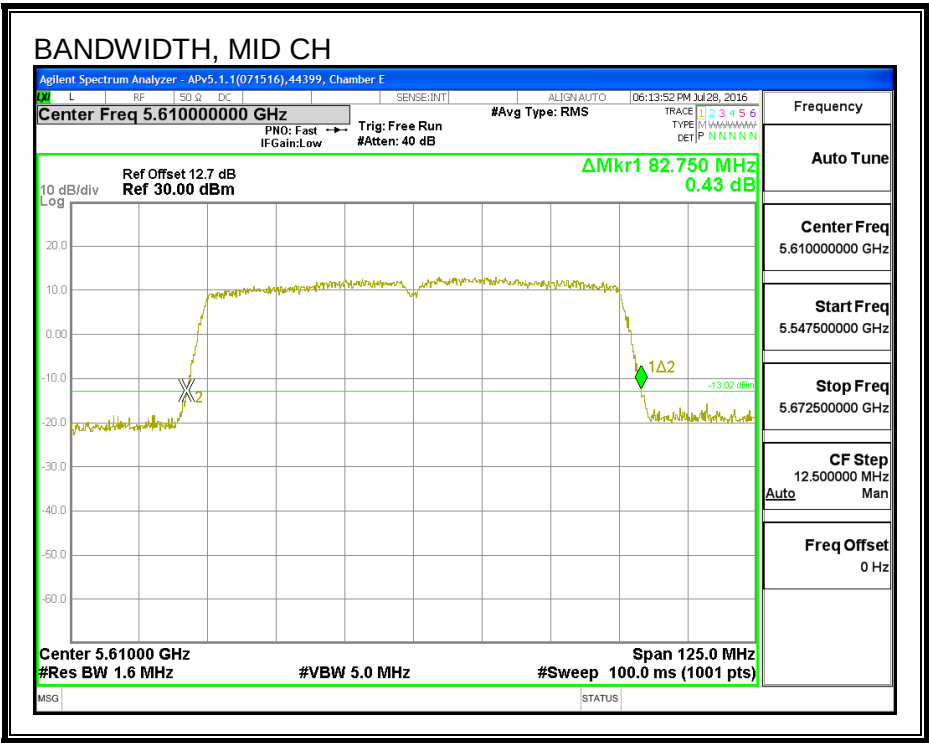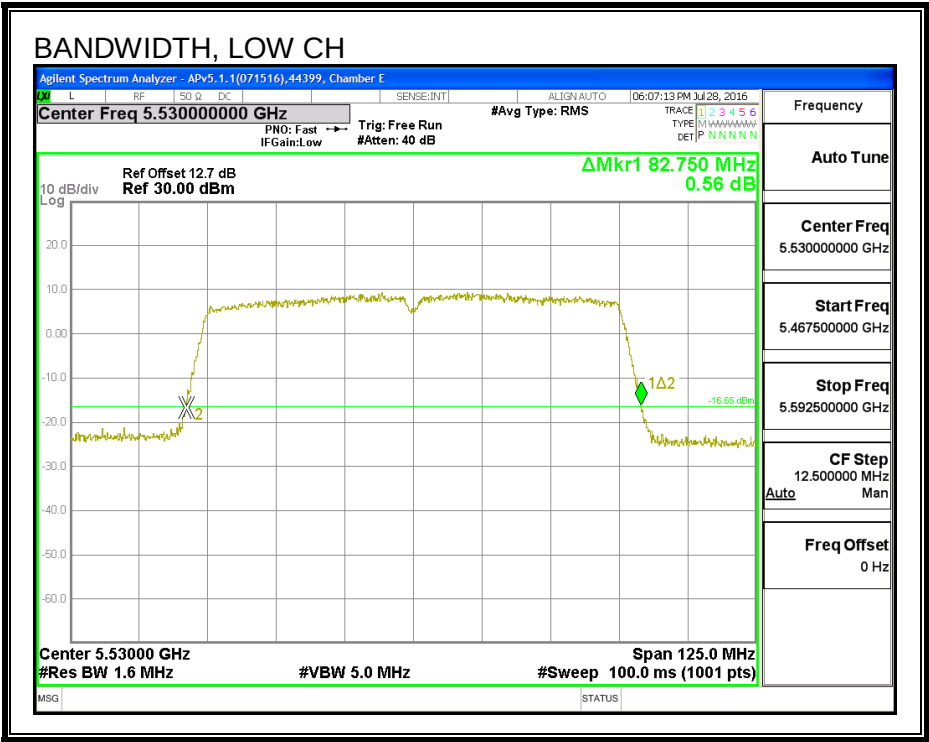

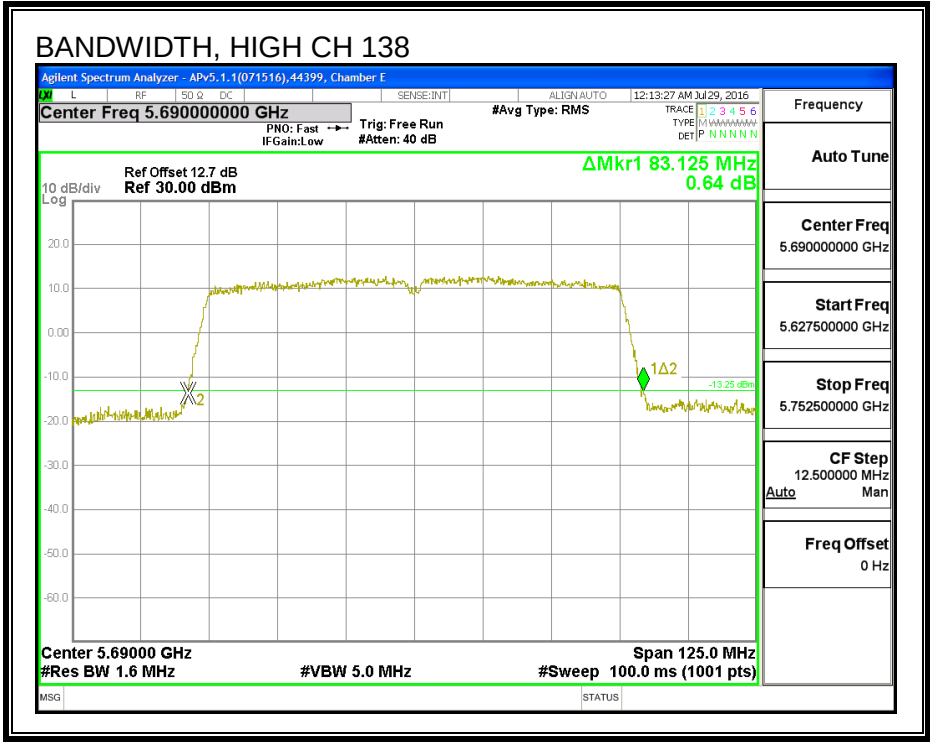

8.62.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Frequency (MHz)	99% Bandwidth (MHz)
5530	75.588
5610	75.634
5690	75.663

99% BANDWIDTH

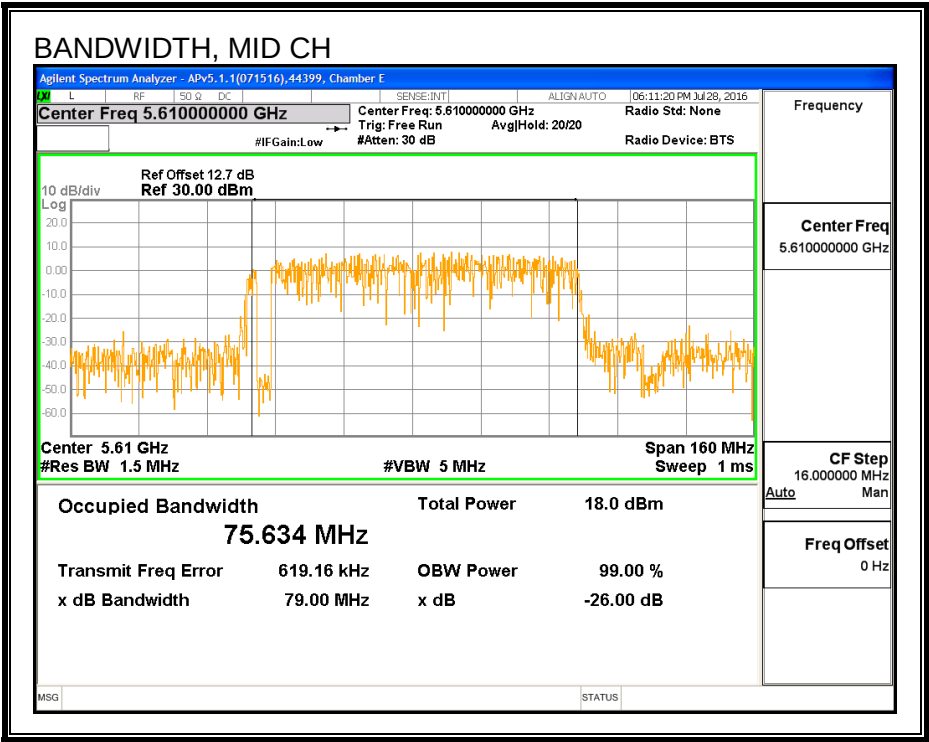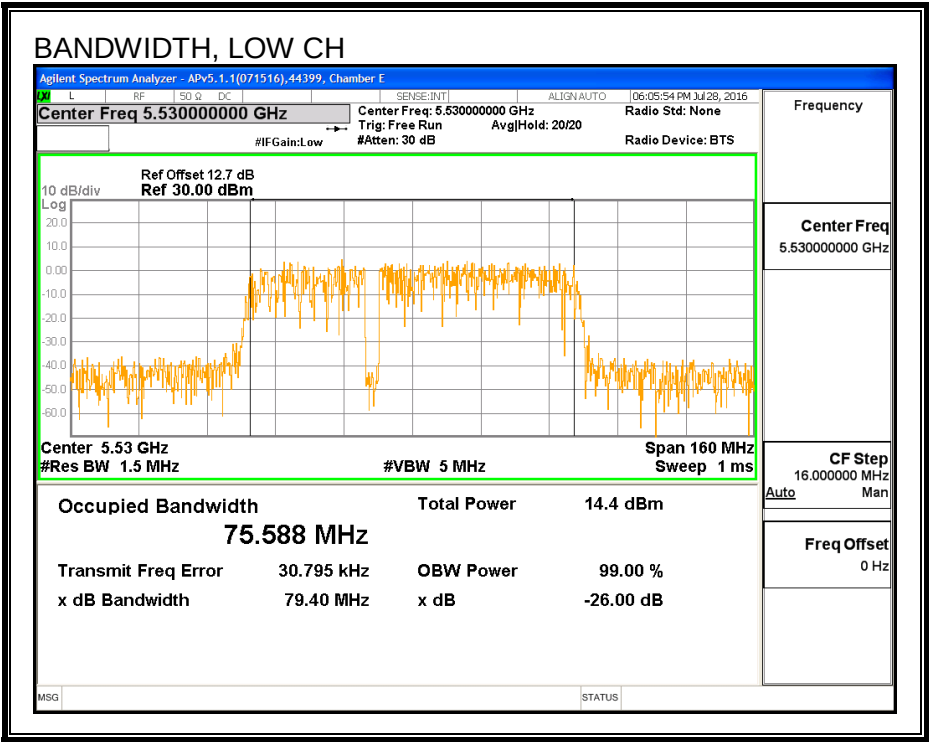

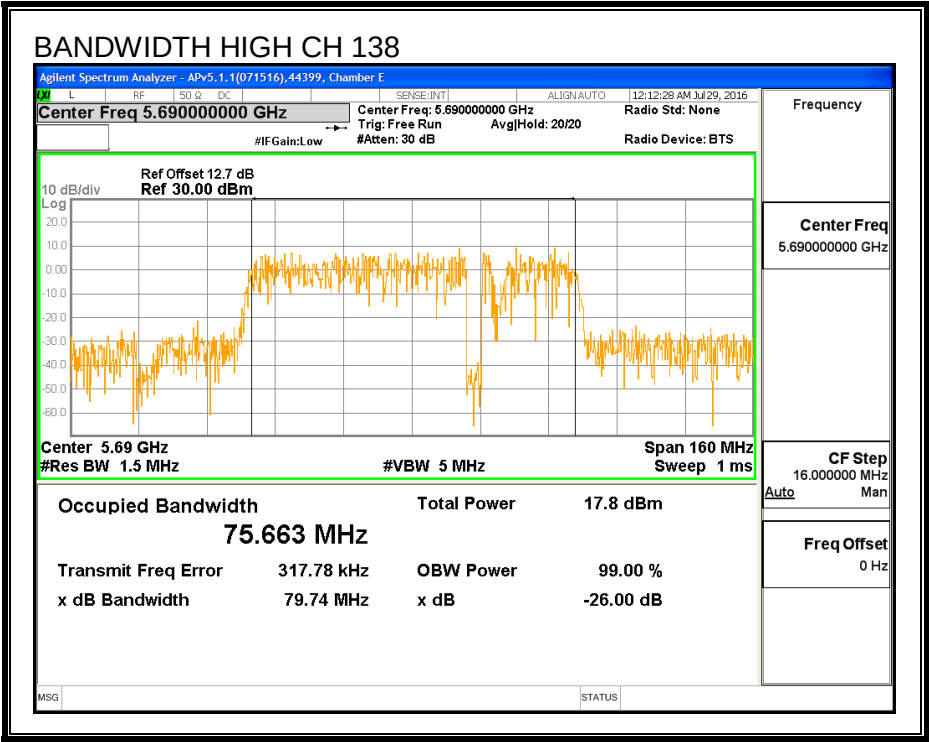

8.62.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

RESULTS

ID:	39004	Date:	9/2/16
------------	-------	--------------	--------

Channel	Frequency (MHz)	Power (dBm)
Low	5530	12.41
Mid	5610	12.45
High	5690	12.42

8.62.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 (6.2.3) (1)

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Straddle channel power is measured using PXA spectrum analyzer, duty cycle correction factor is required.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5530	82.75	75.59	6.40	24.00	10.60
Mid	5610	82.75	75.63	6.40	24.00	10.60

Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd PSD
--------------------	------	--



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	12.41	12.41	24.00	-11.59
Mid	5610	12.45	12.45	24.00	-11.55

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5530	-3.14	-2.92	10.60	-13.52
Mid	5610	0.61	0.83	10.60	-9.77

PSD

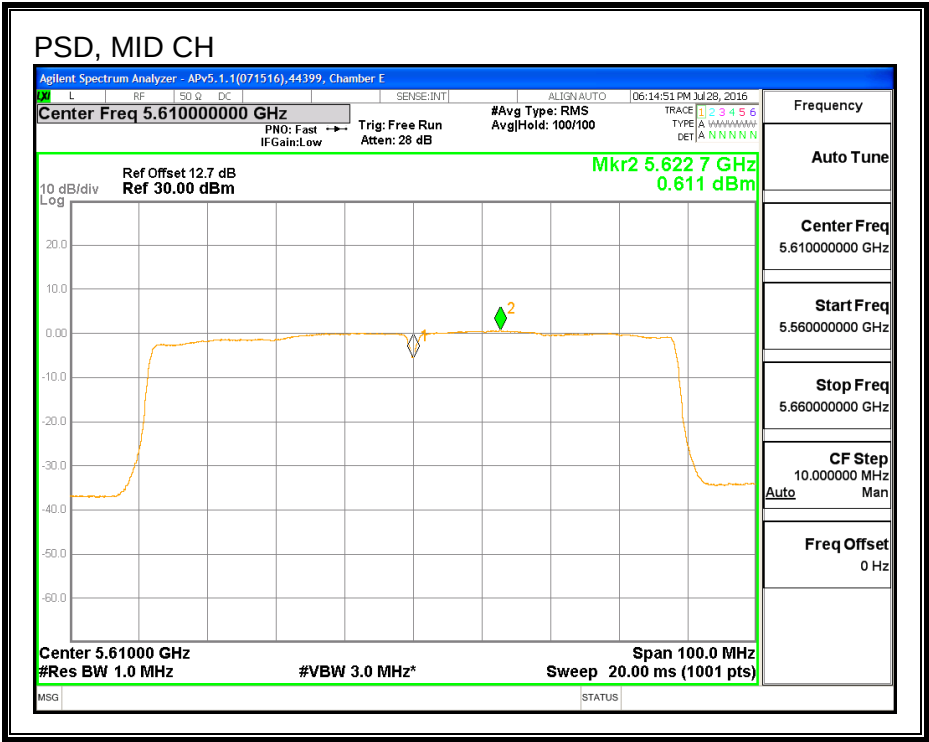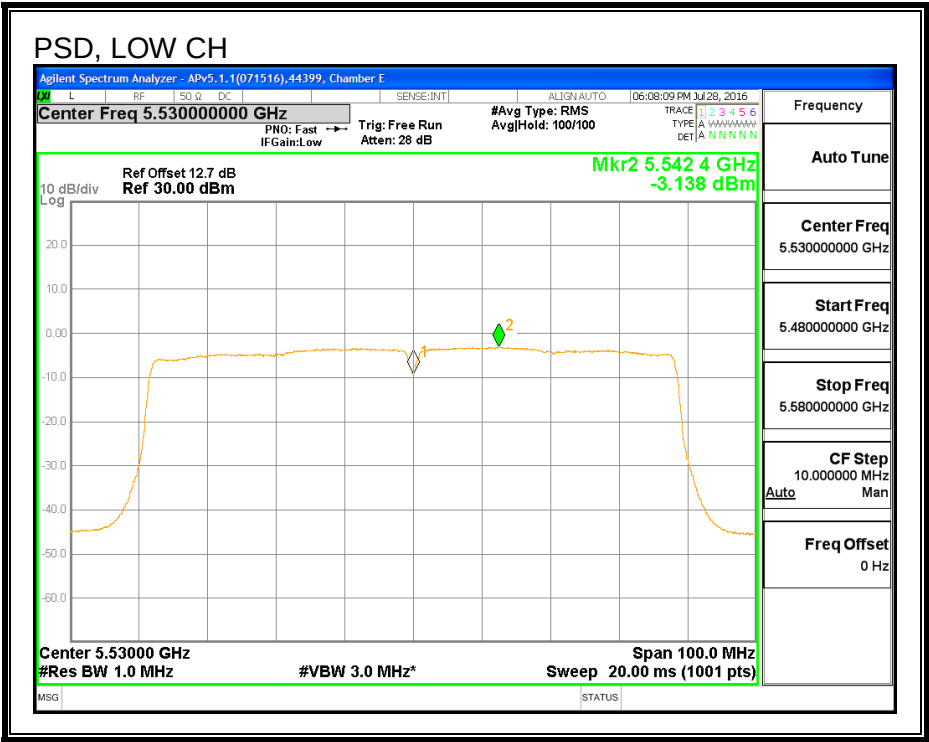

8.62.5. STRADDLE CHANNEL 138 RESULTS (FCC)

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	76.57	6.40	6.40	23.60	10.60



Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	11.66	11.88	23.60	-11.72

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-5.66	-5.44	10.60	-16.04

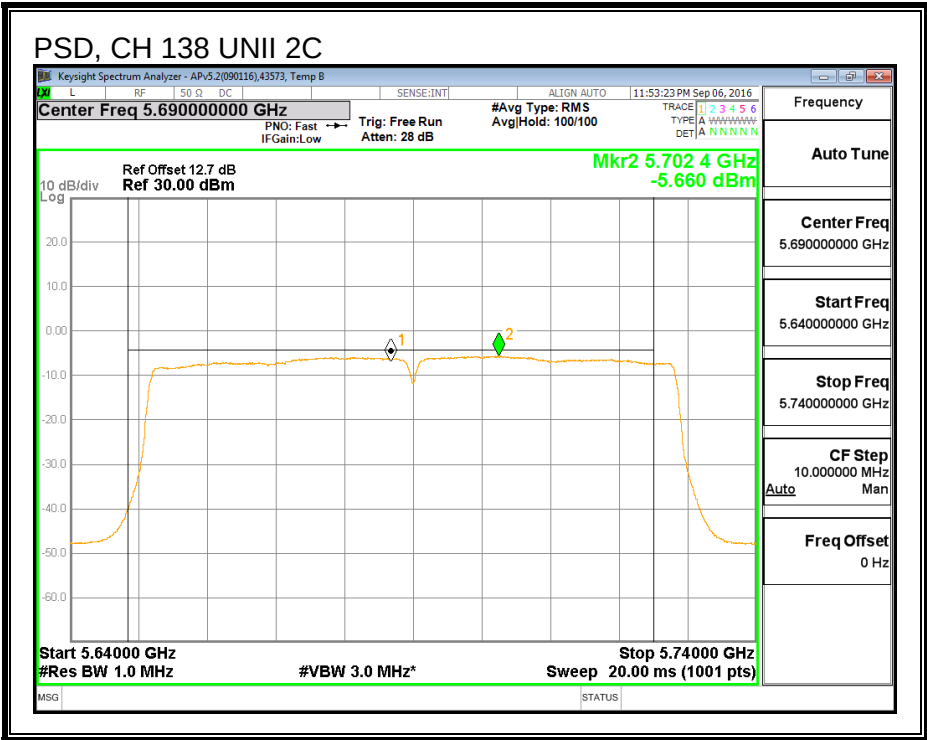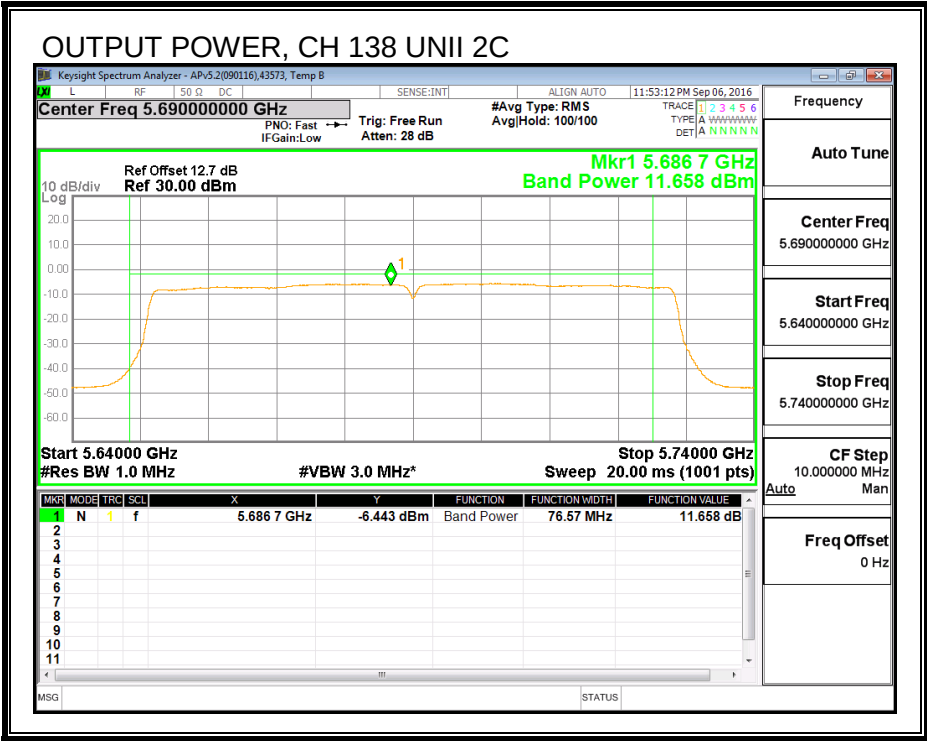

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	6.57	6.40	29.60	29.60



Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	-2.49	-2.27	29.60	-31.87

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-9.86	-9.64	29.60	-39.24

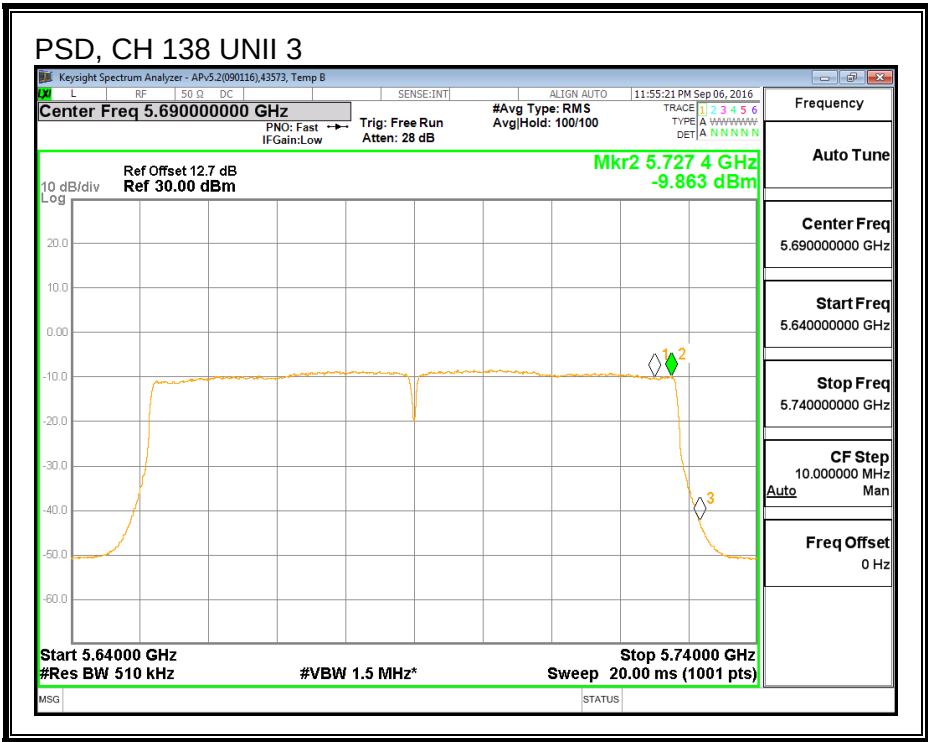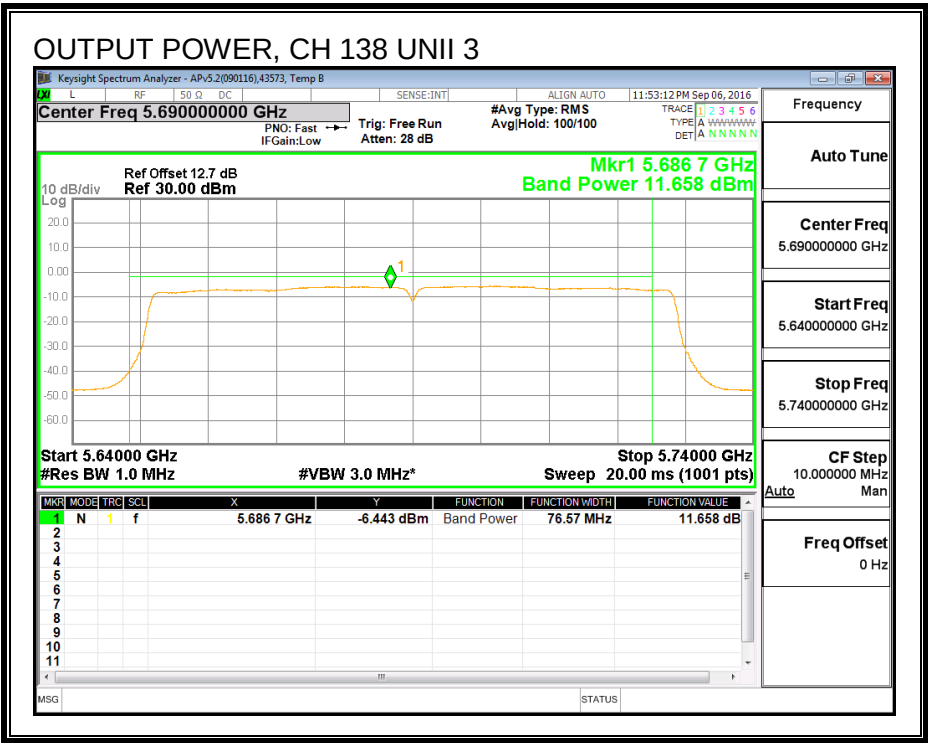

8.62.6. STRADDLE CHANNEL 138 RESULTS (IC)

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	72.83	6.40	6.40	23.60	10.60

Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	11.64	11.86	23.60	-11.74

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-5.66	-5.44	10.60	-16.04

