


频率范围(Frequency Range)	2400-2500MHz
增益 (Gain)	2.5dBi
电压驻波比 (VSWR)	<2.0
极化 (Polarzation)	Linear.Vertical
最大功率 (Mae power rating)	50W
特性阻抗 (Lmpedance)	50Ω
机械特性规格	
Mechanical Specifications	
接头种类(Connector Type)	SMA
重量 (Weight)	6G
外观颜色 (Coaxial Cable Color)	Black
辐射材料 (Radiator Material)	Copper
Operating temperature and humidity	-25℃-+75℃




总长48MM


金色SMA-JW

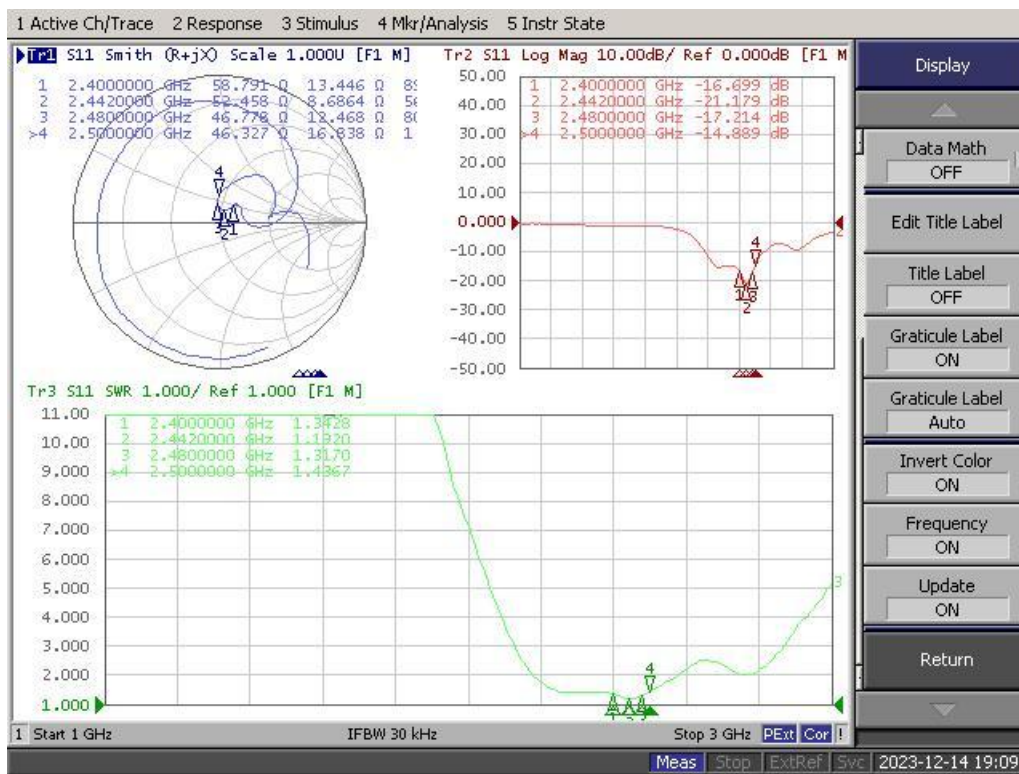


2D、3DRadiation Pattern

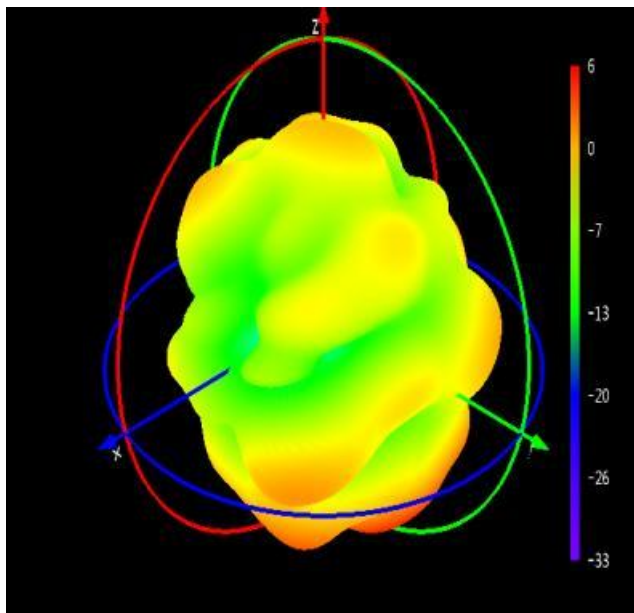


$\Phi=0$ Freq=2440MHz

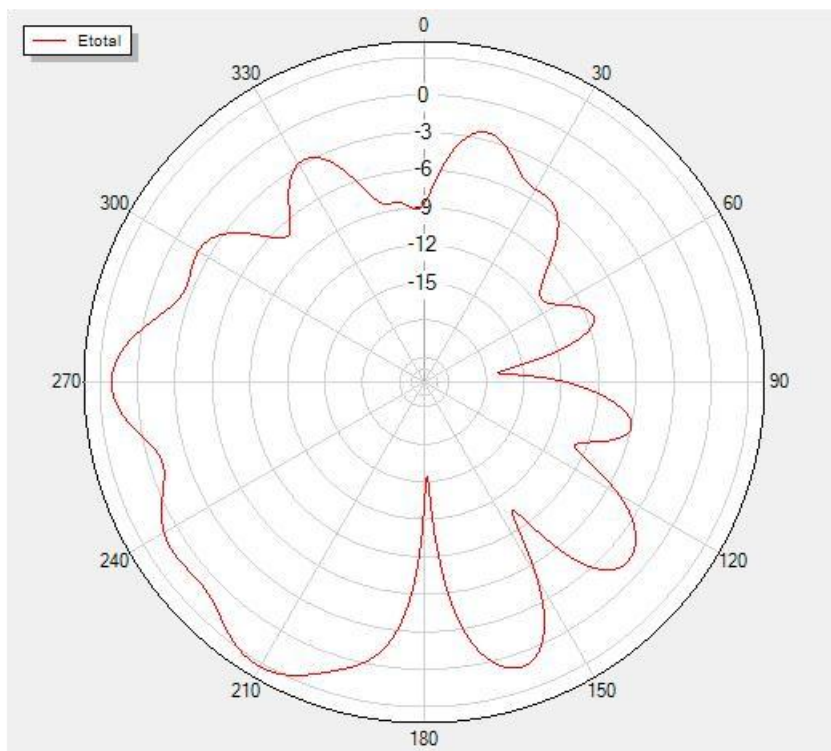

$\Theta=90$ Freq=2440MHz

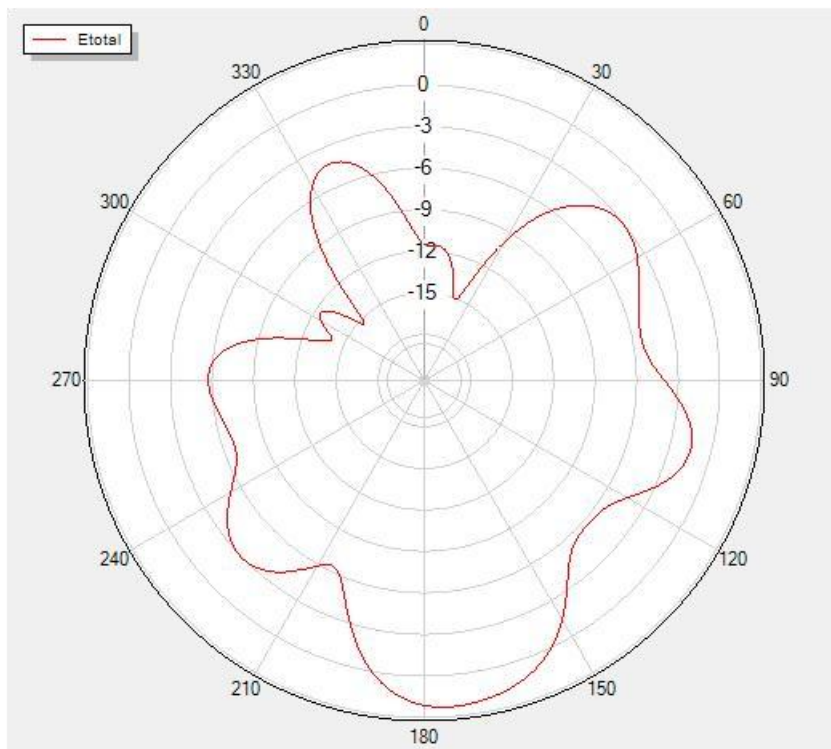

Phi=90 Freq=2440MHz

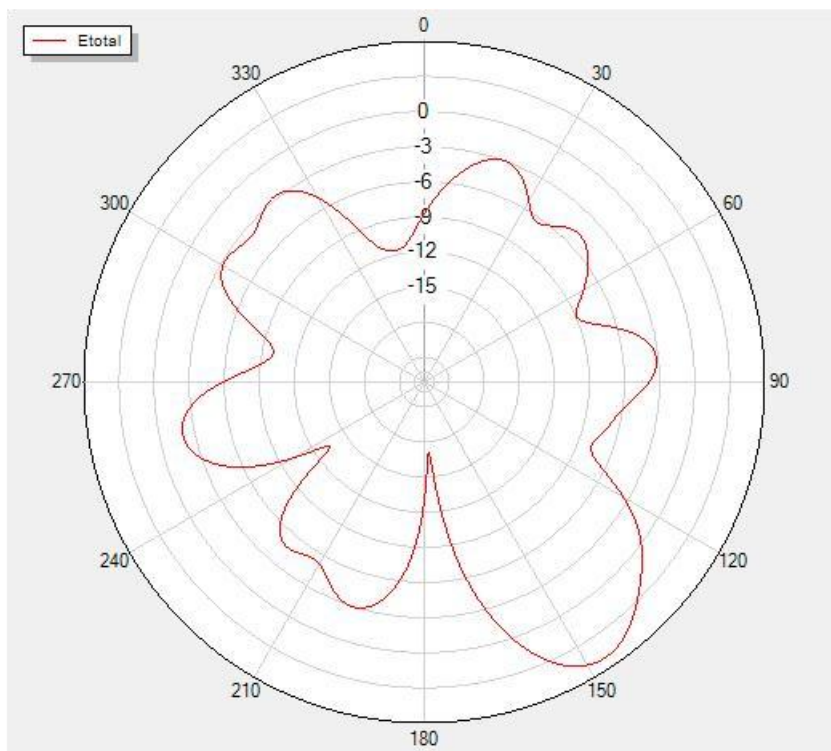

天线增益与效率

Frequency	Efficiency(%)	Gain.(dBi)
2400MHz	52.43	2.5
2410MHz	53.90	2.44
2420MHz	54.45	2.15
2430MHz	54.22	1.87
2440MHz	53.35	1.52
2450MHz	52.70	1.24
2460MHz	51.93	1.00
2470MHz	51.10	1.64
2480MHz	50.25	1.56