

TEST REPORT

Applicant Name: Polygroup Evergreen Limited
Address: Unit 606, 6th Floor, Fairmont House, No.8 Cotton Tree Drive,
Central, HongKong
Report Number: 2504Z04757E-RF-00A
FCC ID: 2A62O-PDT017

Test Standard (s)

FCC PART 15.249

Sample Description

Product Name: Remote Controller
Model No.: PDT-017-10-3V, PDT-017-01-3V, PDT-017-02-3V, PDT-017-03-3V,
PDT-017-04-3V, PDT-017-05-3V, PDT-017-06-3V, PDT-017-07-3V,
PDT-017-08-3V, PDT-017-09-3V, PDT-017-11-3V, PDT-017-12-3V,
PDT-017-13-3V, PDT-017-14-3V, PDT-017-15-3V
Trade Mark: N/A
Date Received: 2025-11-11
Report Date: 2026-01-21

Test Result:	The EUT complied with the standards above.
--------------	--

Prepared and Checked By:

Roger Ling

Roger Ling
EMC Engineer

Approved By:

Bob. Liao

Bob.Liao
EMC Engineer

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included but no need marked.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Tel: +86 755-26503290

Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY..... 3

GENERAL INFORMATION..... 4

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)4

 OBJECTIVE4

 TEST METHODOLOGY4

 TEST FACILITY5

SYSTEM TEST CONFIGURATION 6

 DESCRIPTION OF TEST CONFIGURATION6

 EUT EXERCISE SOFTWARE AND POWER LEVEL[#]6

 SPECIAL ACCESSORIES.....6

 EQUIPMENT MODIFICATIONS6

 SUPPORT EQUIPMENT LIST AND DETAILS6

 EXTERNAL I/O CABLE.....6

 BLOCK DIAGRAM OF TEST SETUP7

SUMMARY OF TEST RESULTS 8

TEST EQUIPMENT LIST 9

ANTENNA REQUIREMENT..... 10

 APPLICABLE STANDARD10

 ANTENNA CONNECTOR CONSTRUCTION10

RADIATED EMISSIONS 11

 APPLICABLE STANDARD11

 EUT SETUP11

 EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP13

 TEST PROCEDURE13

 CALCULATION.....14

 TEST DATA14

 TEST DATA19

20DB EMISSION BANDWIDTH..... 30

 APPLICABLE STANDARD30

 TEST PROCEDURE30

 TEST DATA31

EXHIBIT A-EUT PHOTOGRAPHS 34

EXHIBIT B-TEST SETUP PHOTOGRAPHS 35

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
Rev.00	2504Z04757E-RF-00A	Original Report	2026-01-21

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product Name	Remote Controller
Tested Model	PDT-017-10-3V
Multiple Model	PDT-017-01-3V, PDT-017-02-3V, PDT-017-03-3V, PDT-017-04-3V, PDT-017-05-3V, PDT-017-06-3V, PDT-017-07-3V, PDT-017-08-3V, PDT-017-09-3V, PDT-017-11-3V, PDT-017-12-3V, PDT-017-13-3V, PDT-017-14-3V, PDT-017-15-3V
Model Difference [#]	The difference among them is model numbers, appearance and the number of buttons. Please refer to DOS letter for details. The applicant provided model "PDT-017-10-3V" for testing.
Voltage Range [#]	DC 3V from battery

Frequency Range	2421-2455MHz
Maximum E-Field Strength (Peak)	99.59dBuV/m@3m
Modulation Technique	GFSK
Antenna Specification [#]	Internal Antenna, Antenna gain: -3.28dBi (It is provided by the applicant.)
Sample Serial Number	3CMM-1(Assigned by ATC, Shenzhen)
Sample/EUT Status	Good condition

Objective

This type approval report is in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.249 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices.

Unless otherwise stated there are no any additions to, deviations, or exclusions from the method.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5 %
RF output power, conducted		0.3 dB
Unwanted Emission, conducted		1.2 dB
Emissions, Radiated	9kHz - 30MHz	2.1 dB
	30MHz - 1GHz	4.3 dB
	1GHz - 18GHz	4.9 dB
	18GHz - 26.5GHz	5.2 dB
Temperature		1 °C
Humidity		7 %
Supply voltages		0.4 %

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

Frequency list[#]:

Channel	Freq. (MHz)
1	2421
2	2455

EUT was tested with Channel 1 and 2.

EUT Exercise Software and Power Level[#]

Exercise Software:	Key-press
Power Level:	Default

Note 1: The information in the above table is provided by the applicant.

Note2:All the keys of all the models have been pre-scanned.

Note3: According to applicant, all the keys with same power setting. Only the worst case on(button) power was recorded in report.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/


External I/O Cable

Cable Description	Shielding Type	Length (m)	From Port	To
/	/	/	/	/


Block Diagram of Test Setup

For radiation emission:

For Below 1GHz:

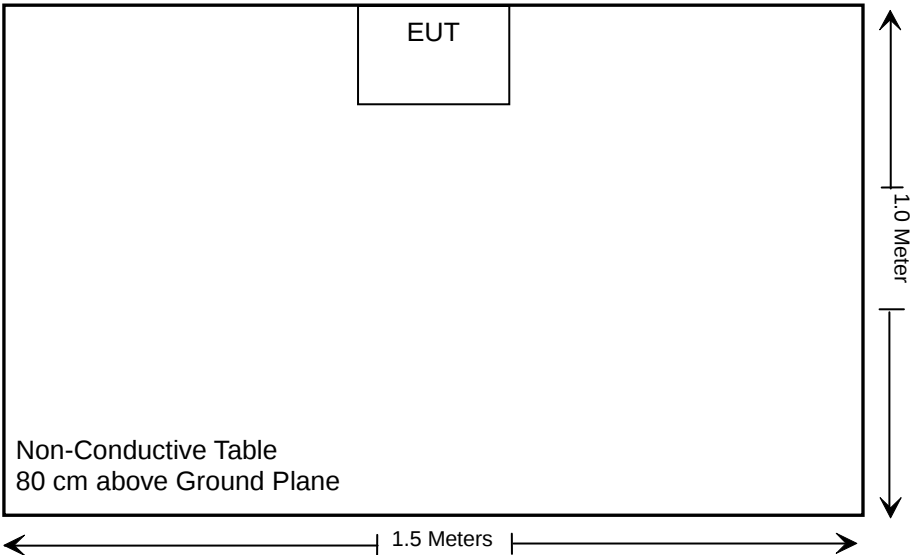

For Above 1GHz:

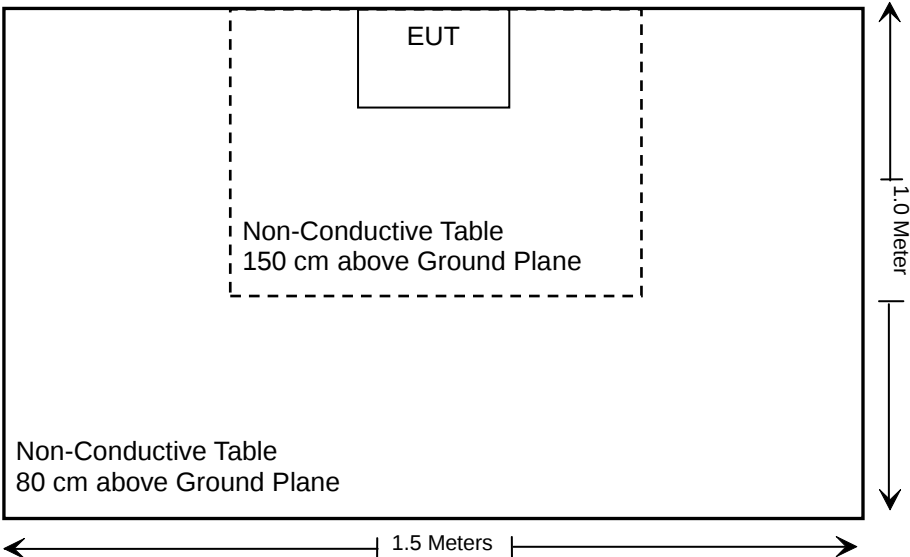

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Not Applicable
§15.205, §15.209, §15.249(a)(c)(d)	Radiated Emissions & Outside of Band Emission	Compliance
§15.215(c)	20dB Emission Bandwidth	Compliance

Not Applicable - The device powered by battery.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation Method Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2025/09/18	2026/09/17
SONOMA INSTRUMENT	Amplifier	310N	186131	2025/03/26	2026/03/25
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2024/08/08	2027/08/07
Unknown	RF Coaxial Cable	No.12	N040	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.13	N300	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.14	N800	2025/05/30	2026/05/29
BACL	LOOP ANTENNA	1313-1A	3110711	2024/01/16	2027/01/15
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2025/09/17	2026/09/16
Decentest	Filter Switch Unit	DT7220FSU	DQ77927	2025/09/18	2026/09/17
Decentest	Multiplex Switch Test Control Set	DT7220CSU	DQ77924	2025/09/18	2026/09/17
A.H. Systems, inc.	Preamplifier	PAM-0118	226	2025/03/20	2026/03/19
Schwarzbeck	Horn Antenna	BBHA9120D	837	2023/02/22	2026/02/21
Unknown	RF Coaxial Cable	No.10	N050	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.11	N1000	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.19	N500	2025/05/30	2026/05/29
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2023/12/12	2026/12/11
BACL	Amplifier	BACL-1313-A 1840	4012521	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.15	N600	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.16	N650	2025/05/30	2026/05/29
Test Software: e3 191218 (V9)					

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

RADIATED EMISSIONS

Applicable Standard

FCC§15.205, §15.209 & §15.249(a)(c)(d)

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500



As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

As per FCC§15.249 (d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

EUT Setup

9kHz - 30MHz:

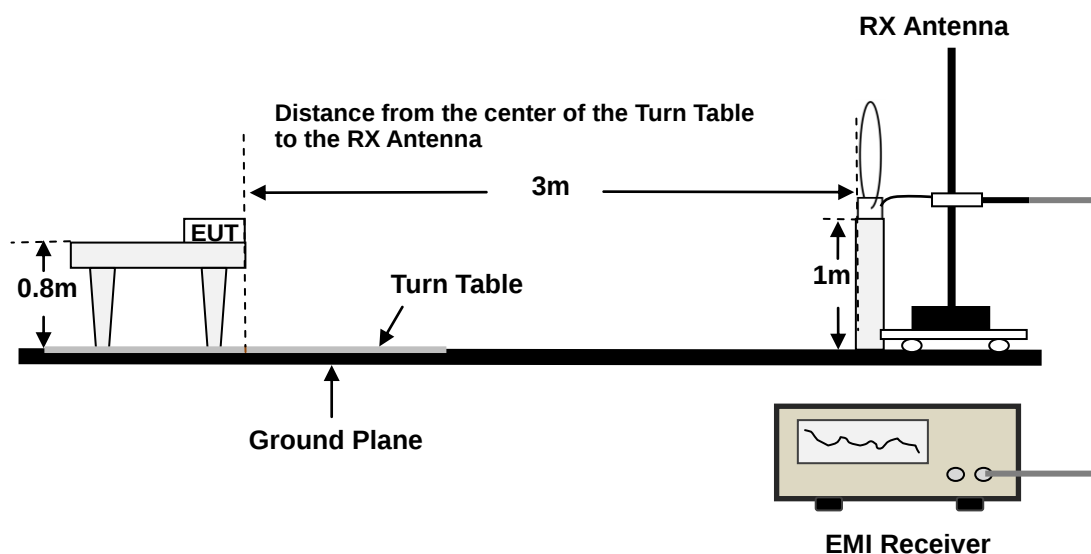

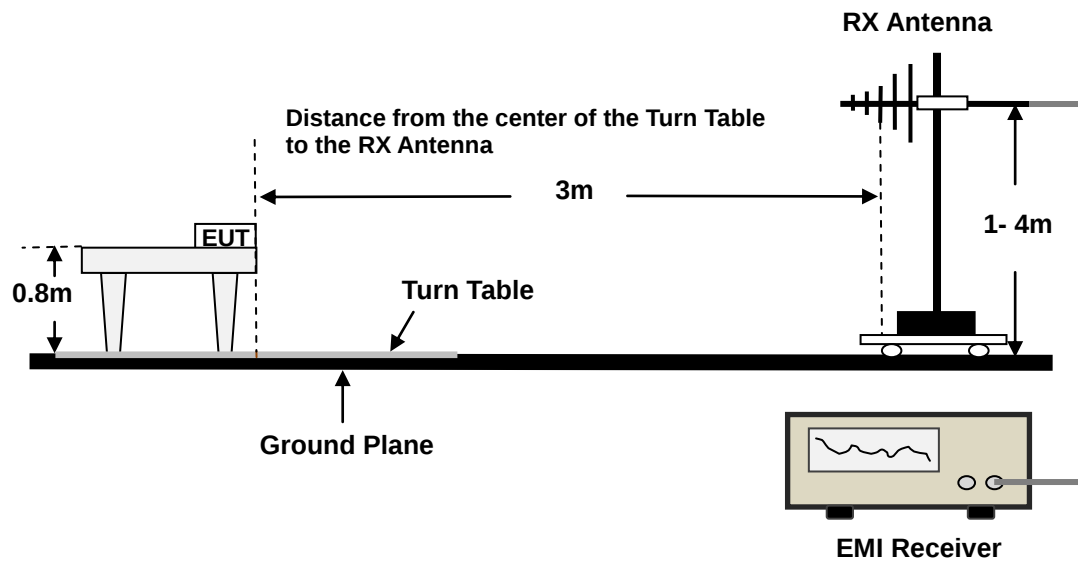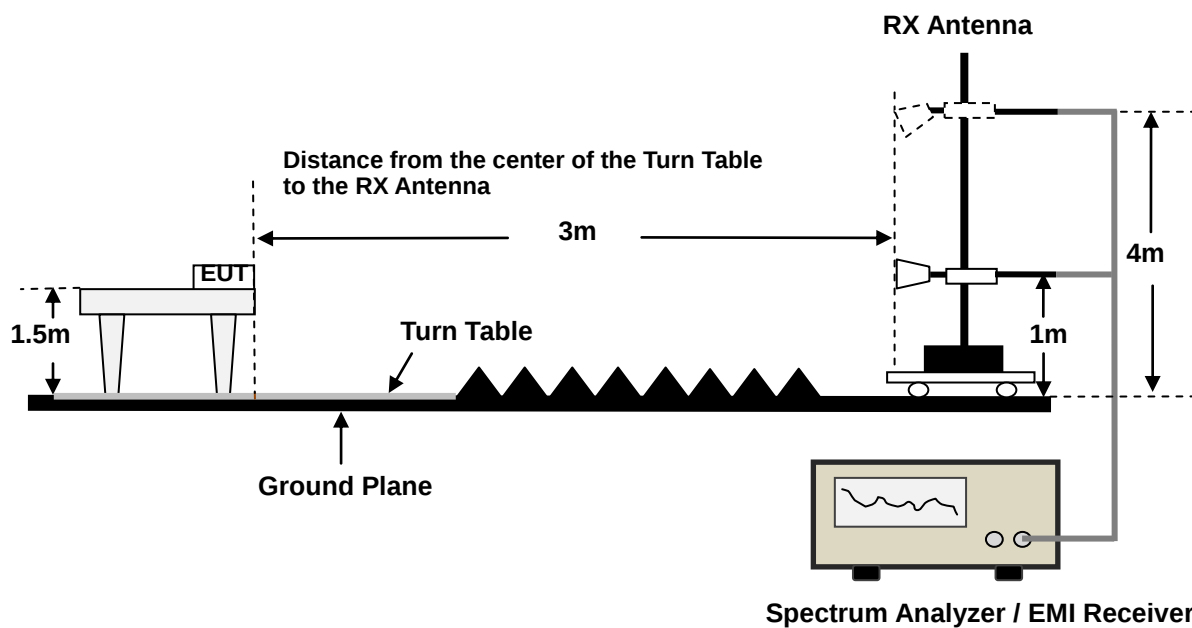30MHz - 1GHz:**Above 1GHz:**

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9kHz to 25GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz - 1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
9kHz - 150kHz	PK	0.3kHz	1kHz	/	PK
	QP/AV	/	/	200Hz	QP/AV
150kHz - 30MHz	PK	10kHz	30kHz	/	PK
	QP/AV	/	/	9kHz	QP/AV
30MHz - 1000MHz	PK	100kHz	300kHz	/	PK
	QP	/	/	120kHz	QP

1GHz -25GHz:

Pre-scan:

Measurement	Detector	RBW	Video B/W
PK	Peak	1MHz	3MHz
Ave.	Peak	1MHz	5kHz

Final measurement for emission identified during the pre-scan:

Measurement	Detector	RBW	Video B/W
PK	Peak	1MHz	3MHz
Ave.	Peak	1MHz	10Hz

Note 1: The 1GHz-18GHz testing use the notch filter.

Note 2: The band edge testing use 10dB attenuator.

Note 3: The filters and attenuators are all integrated within the filter switch unit.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

According to ANSI C63.10-2020, 9.2: For field strength measurements made at other than the distance specified by the limit, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance).

$$E_{SpecLimit} = E_{Meas} + 20 \log \left(\frac{D_{Meas}}{D_{SpecLimit}} \right)$$

where

$E_{SpecLimit}$	is the field strength of the emission at the distance specified by the limit, in dBuV/m
E_{Meas}	is the field strength of the emission at the measurement distance, in dBuV/m
D_{Meas}	is the measurement distance, in m
$D_{SpecLimit}$	is the distance specified by the limit, in m

Note 1: If the maximized peak measured value is under the QP/Average limit by more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Note 2: For above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.

Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: Pre-scan in the X, Y and Z axes of orientation, the worst case as setup photos was recorded.

Test Data

9kHz-1GHz


Environmental Conditions

Temperature:	23.7℃
Relative Humidity:	55%
ATM Pressure:	100.9kPa
Test Engineer:	Colin Lin
Test Date:	2025-12-10
EUT Operation Mode:	2.4GHz SRD Transmitting

Test Result: Compliance, please refer to the below data


Note : The maximum E-Field strength channel: Low Channel was tested.

9kHz~30MHz:

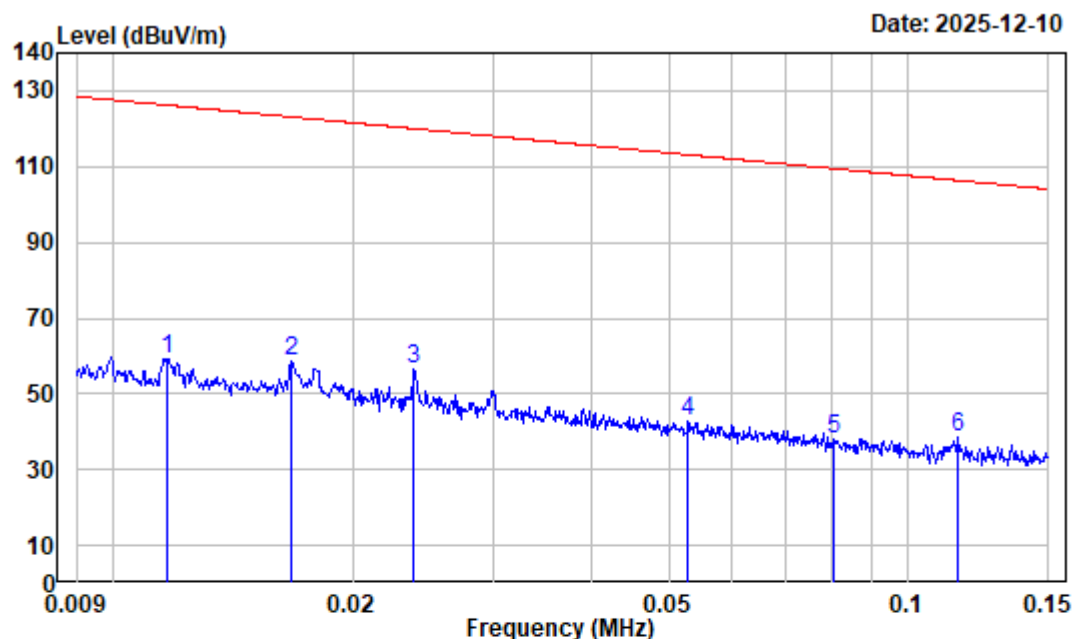

Site : chamber
Condition : 3m
Job No. : 2504Z04757E-RF
Polarization : Parallel Tester: Colin Lin
Test Mode : 2.4GHz SRD Transmitting
Receiver Setting: RBW:300Hz VBW:1kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.012	35.06	23.95	59.01	126.22	-67.21	Peak
2	0.017	32.83	25.67	58.50	123.12	-64.62	Peak
3	0.024	29.66	26.92	56.58	120.04	-63.46	Peak
4	0.053	22.41	20.50	42.91	113.15	-70.24	Peak
5	0.081	18.45	19.51	37.96	109.46	-71.50	Peak
6	0.115	15.75	22.91	38.66	106.38	-67.72	Peak

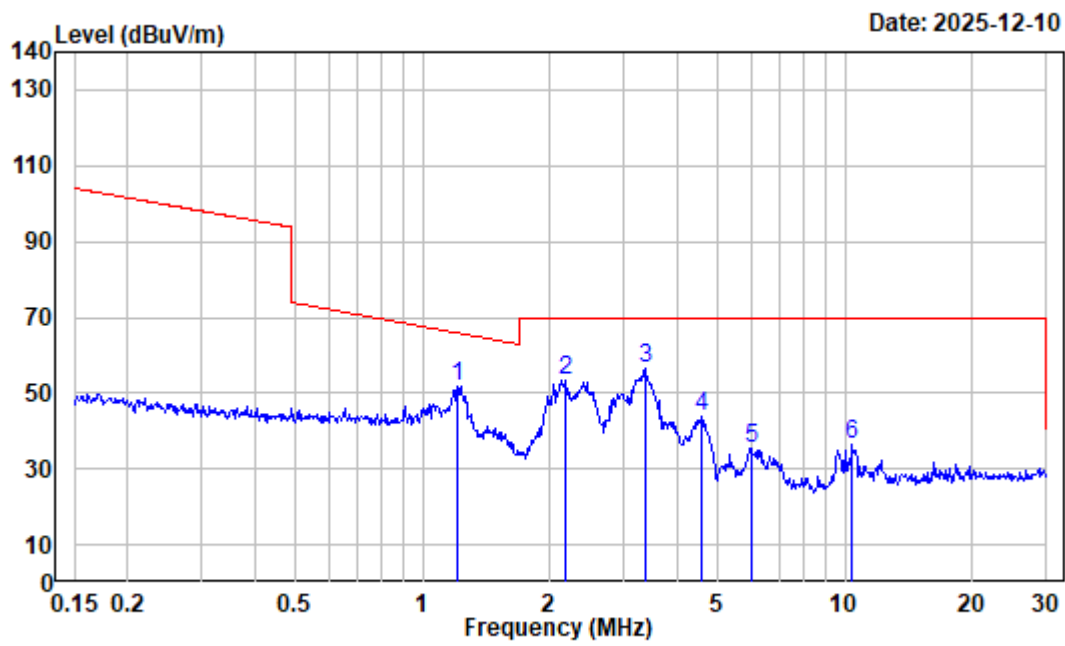

Site : chamber
Condition : 3m
Job No. : 2504Z04757E-RF
Polarization : Parallel Tester: Colin Lin
Test Mode : 2.4GHz SRD Transmitting
Receiver Setting: RBW:10kHz VBW:30kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1.210	-2.58	54.35	51.77	65.78	-14.01	Peak
2	2.190	-5.46	58.93	53.47	69.54	-16.07	Peak
3	3.364	-6.00	62.54	56.54	69.54	-13.00	Peak
4	4.598	-6.30	50.01	43.71	69.54	-25.83	Peak
5	5.993	-6.23	41.40	35.17	69.54	-34.37	Peak
6	10.397	-5.25	41.82	36.57	69.54	-32.97	Peak

30MHz~1GHz:

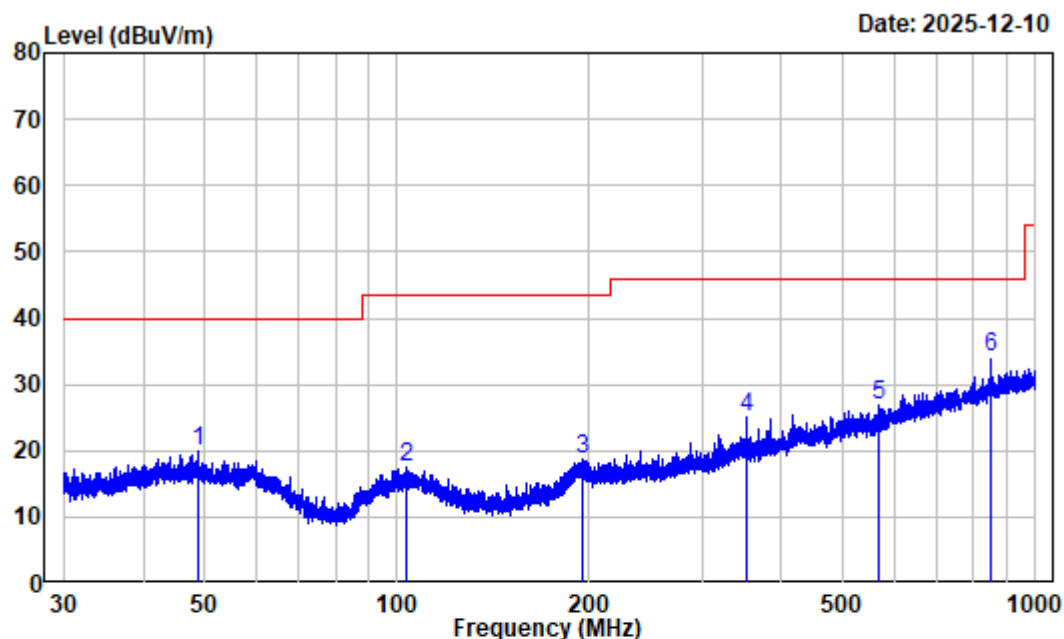

Site : chamber
Condition : 3m HORIZONTAL
Job No. : 2504Z04757E-RF Tester: Colin Lin
Test Mode : 2.4GHz SRD Transmitting
Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Limit Level	Over Line	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB		
1	48.907	-9.83	29.82	19.99	40.00	-20.01	Peak	
2	103.261	-11.22	28.81	17.59	43.50	-25.91	Peak	
3	194.880	-9.86	28.58	18.72	43.50	-24.78	Peak	
4	352.016	-6.88	31.88	25.00	46.00	-21.00	Peak	
5	569.860	-3.16	30.10	26.94	46.00	-19.06	Peak	
6	852.155	1.09	33.17	34.26	46.00	-11.74	Peak	

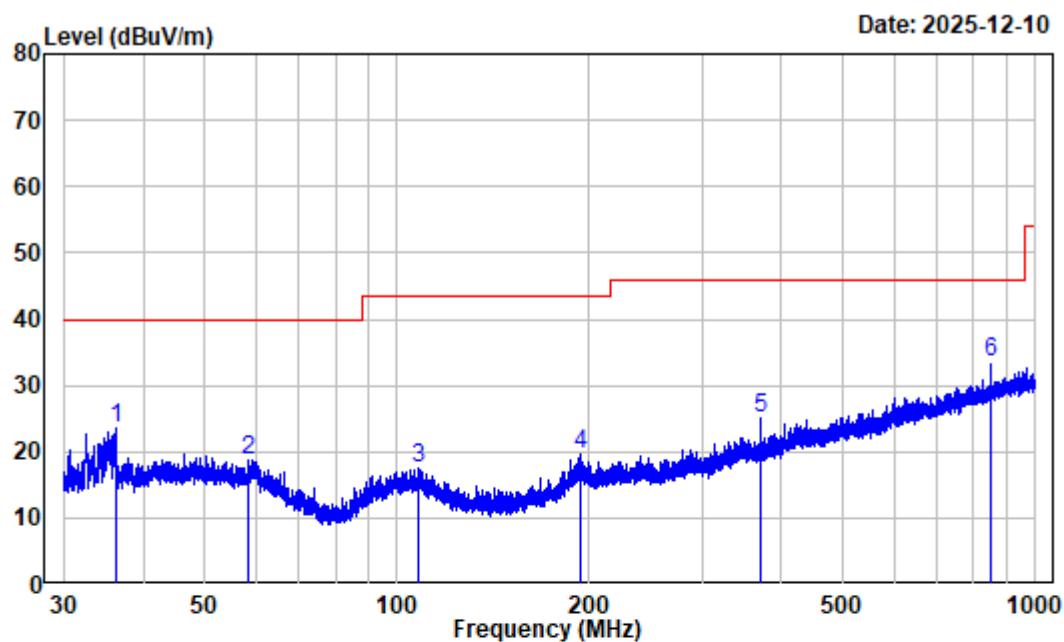

Site : chamber
Condition : 3m VERTICAL
Job No. : 2504Z04757E-RF Tester: Colin Lin
Test Mode : 2.4GHz SRD Transmitting
Receiver Setting: RBW:100kHz VBW:300kHz

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	36.159	-11.43	34.87	23.44	40.00	-16.56	Peak
2	58.587	-10.20	28.86	18.66	40.00	-21.34	Peak
3	108.124	-11.33	28.85	17.52	43.50	-25.98	Peak
4	194.113	-9.86	29.48	19.62	43.50	-23.88	Peak
5	371.190	-6.89	31.98	25.09	46.00	-20.91	Peak
6	852.155	1.09	32.45	33.54	46.00	-12.46	Peak

Test Data

1GHz-25GHz


Environmental Conditions

Temperature:	22.6-23.4℃
Relative Humidity:	44-46%
ATM Pressure:	100.9kPa
TestEngineer:	Angel Chen
TestDate:	2025-12-02~2025-12-30
EUT Operation Mode:	Transmitting

Test Result: Compliance, please refer to the below data.

Note : For 18GHz-25GHz, the maximum E-Field strength channel: Low Channel was tested.

2.4G SRD Low Channel 1GHz-18GHz_HORIZONTAL

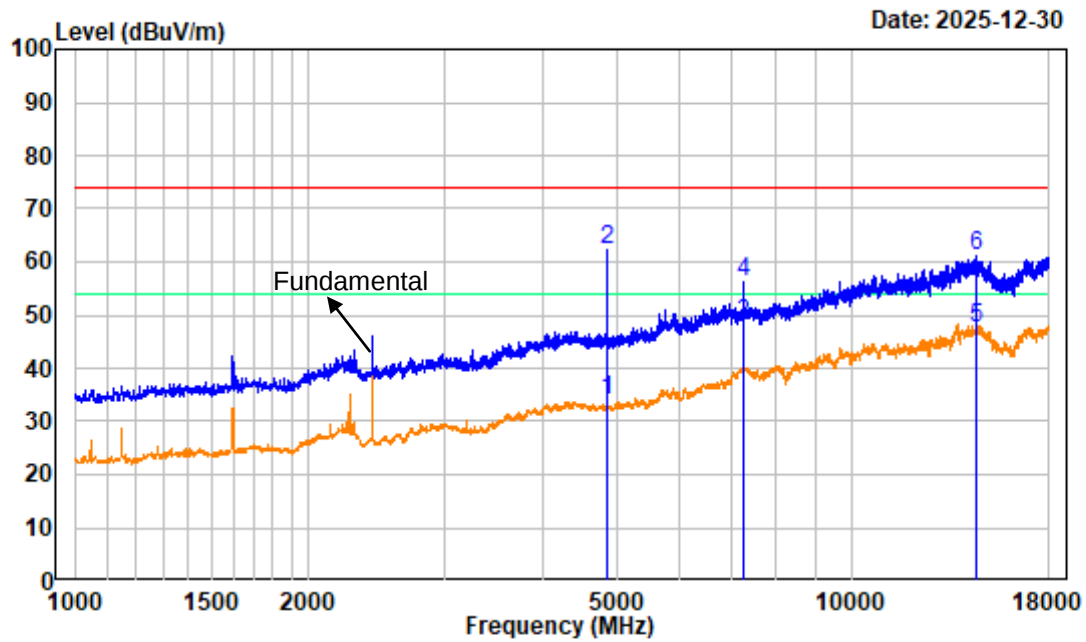

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504Z04757E-RF

Test Mode : Transmitting


Tester:Angel Chen

Note : 2.4G SRD Low Channel 2421MHz 1GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5KHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4842.000	-6.64	40.46	33.82	54.00	-20.18	Average
2	4842.000	-6.64	68.92	62.28	74.00	-11.72	Peak
3	7263.000	-1.24	49.40	48.16	54.00	-5.84	Average
4	7263.000	-1.24	57.56	56.32	74.00	-17.68	Peak
5	14523.500	8.66	38.89	47.55	54.00	-6.45	average
6	14523.500	8.66	52.41	61.07	74.00	-12.93	peak


2.4G SRD Low Channel 1GHz-18GHz_VERTICAL

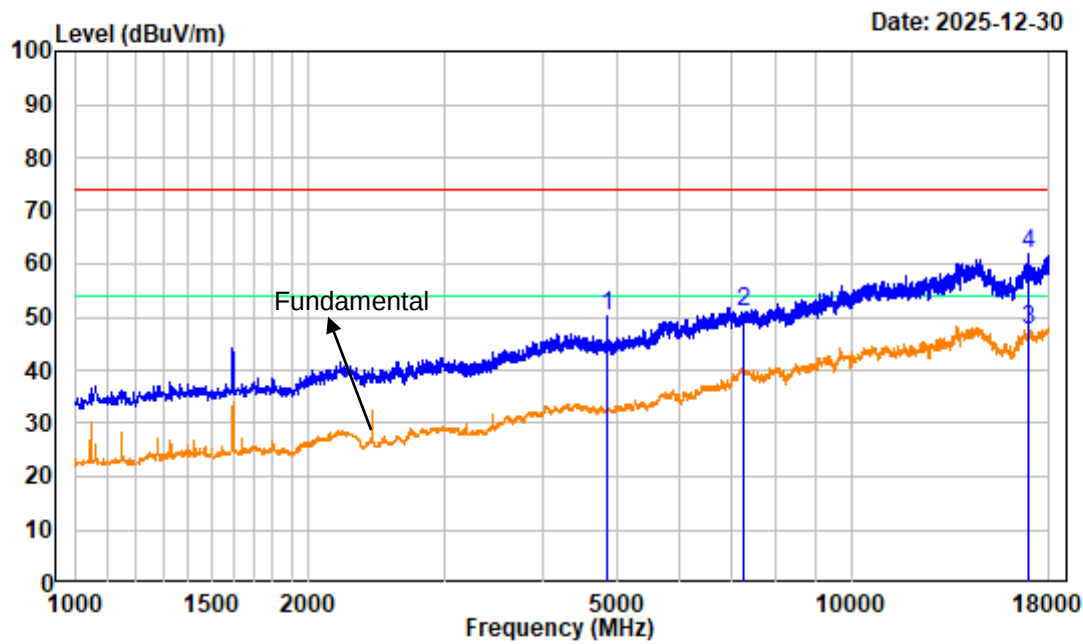

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504Z04757E-RF
Test Mode : Transmitting Tester:Angel Chen
Note : 2.4G SRD Low Channel 2421MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5KHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4842.000	-6.64	56.87	50.23	74.00	-23.77	Peak
2	7263.000	-1.24	52.12	50.88	74.00	-23.12	Peak
3	16954.500	8.12	39.49	47.61	54.00	-6.39	average
4	16954.500	8.12	53.61	61.73	74.00	-12.27	peak

2.4G SRD Low Channel 18GHz-25GHz_HORIZONTAL

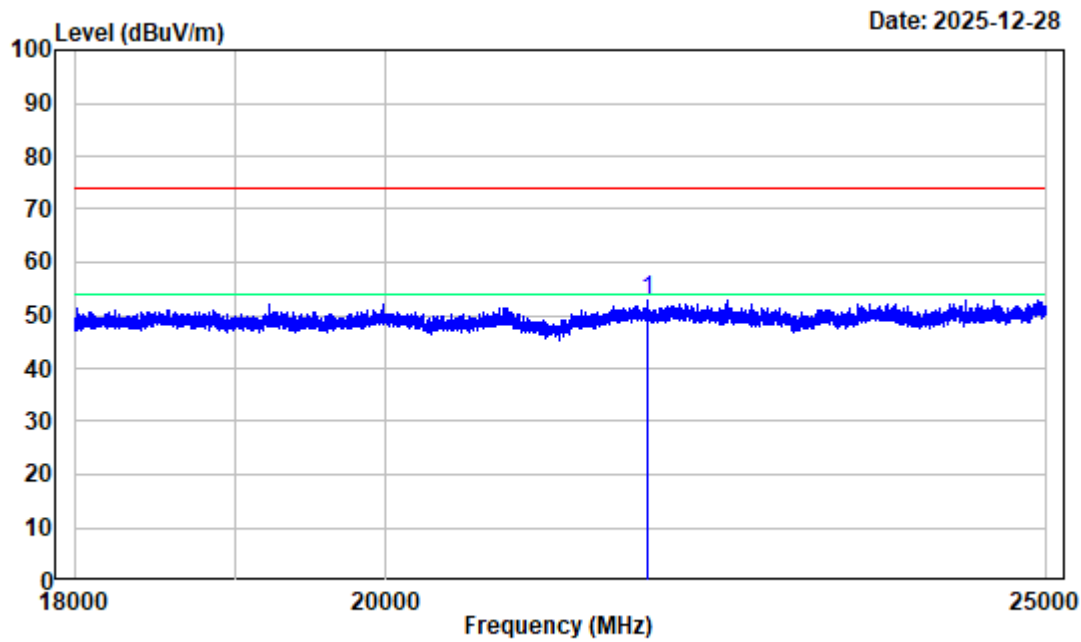

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504Z04757E-RF

Test Mode : Transmitting


Tester:Angel Chen

Note : 2.4G SRD Low Channel 18GHz-25GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 21852.630	0.30	52.64	52.94	74.00	-21.06	Peak


2.4G SRD Low Channel 18GHz-25GHz_ VERTICAL

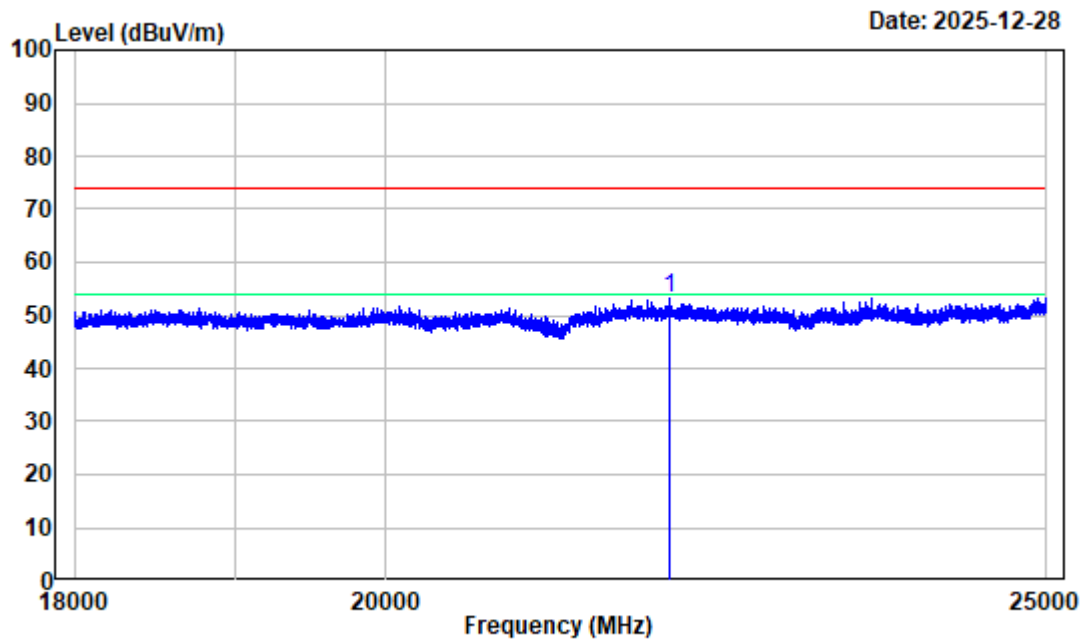

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504Z04757E-RF
Test Mode : Transmitting Tester:Angel Chen
Note : 2.4G SRD Low Channel 18GHz-25GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 22004.000	0.68	52.68	53.36	74.00	-20.64	Peak

2.4G SRD Low Channel Bandedge_HORIZONTAL

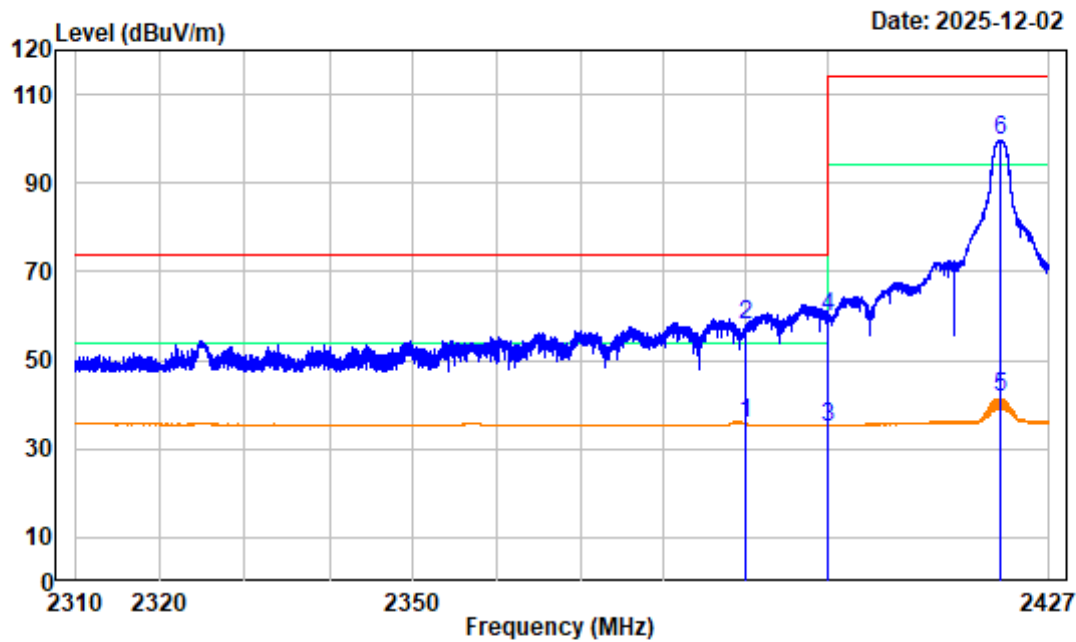

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504Z04757E-RF

Test Mode : Transmitting


Tester:Angel Chen

Note : 2.4G SRD Low Channel 2421MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:10Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.25	45.98	35.73	54.00	-18.27	Average
2	2390.000	-10.25	68.15	57.90	74.00	-16.10	peak
3	2400.000	-10.29	45.36	35.07	54.00	-18.93	Average
4	2400.000	-10.29	70.12	59.83	74.00	-14.17	peak
5	2421.048	-10.24	51.68	41.44	94.00	-52.56	Average
6	2421.048	-10.24	109.83	99.59	114.00	-14.41	Peak

2.4G SRD Low Channel Bandedge_VERTICAL

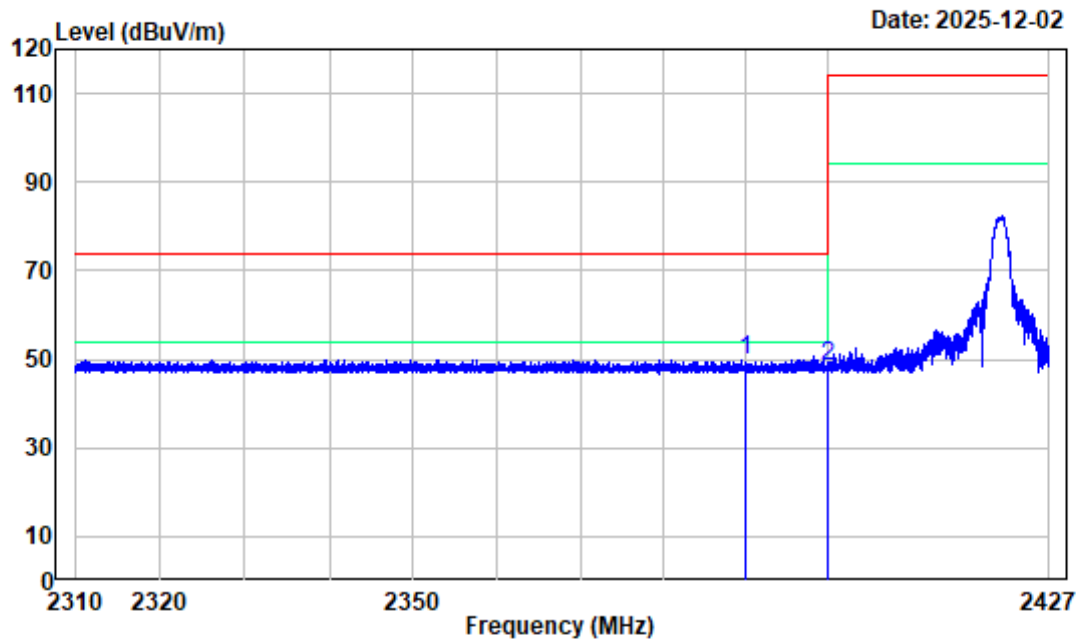

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504Z04757E-RF

Test Mode : Transmitting


Tester:Angel Chen

Note : 2.4G SRD Low Channel 2421MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	-10.25	60.19	49.94	74.00	-24.06	peak
2	2400.000	-10.29	58.67	48.38	74.00	-25.62	peak


2.4G SRD High Channel 1GHz-18GHz_HORIZONTAL

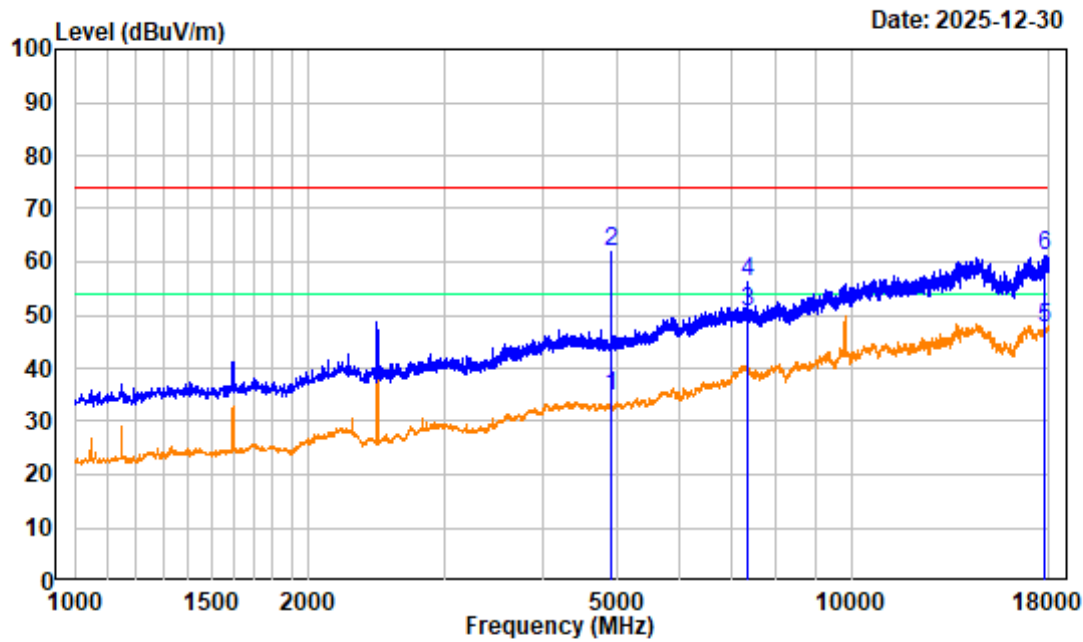

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504Z04757E-RF
Test Mode : Transmitting Tester:Angel Chen
Note : 2.4G SRD High Channel 2455MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5KHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4910.000	-6.50	41.14	34.64	54.00	-19.36	Average
2	4910.000	-6.50	68.21	61.71	74.00	-12.29	Peak
3	7365.000	-1.27	52.01	50.74	54.00	-3.26	Average
4	7365.000	-1.27	57.32	56.05	74.00	-17.95	Peak
5	17715.250	7.68	39.84	47.52	54.00	-6.48	average
6	17715.250	7.68	53.32	61.00	74.00	-13.00	peak


2.4G SRD High Channel 1GHz-18GHz_VERTICAL

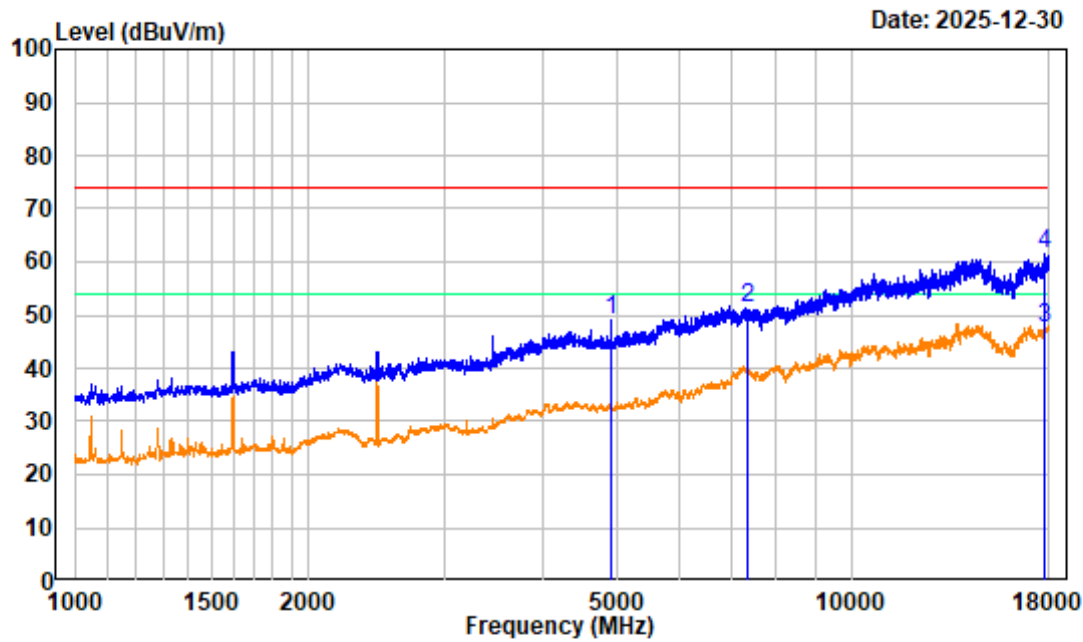

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504Z04757E-RF
Test Mode : Transmitting Tester:Angel Chen
Note : 2.4G SRD High Channel 2455MHz 1GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5KHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4910.000	-6.50	55.52	49.02	74.00	-24.98	Peak
2	7365.000	-1.27	52.59	51.32	74.00	-22.68	Peak
3	17766.250	7.71	39.70	47.41	54.00	-6.59	average
4	17766.250	7.71	53.77	61.48	74.00	-12.52	peak


2.4G SRD High Channel Bandedge_HORIZONTAL

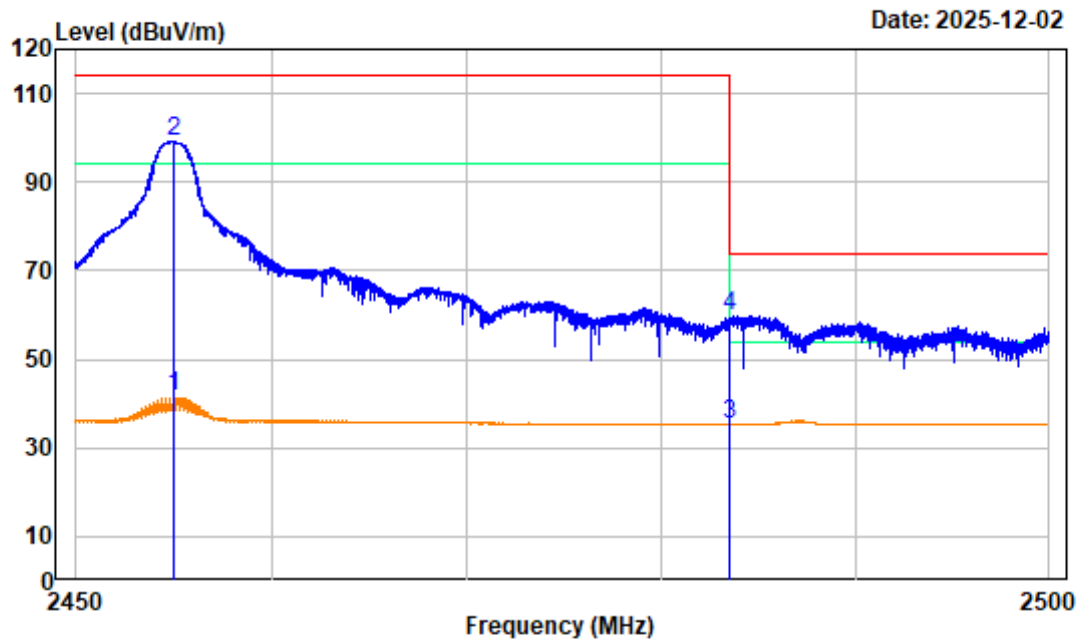

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504Z04757E-RF
Test Mode : Transmitting Tester:Angel Chen
Note : 2.4G SRD High Channel 2455MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:10Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2455.031	-10.19	51.72	41.53	94.00	-52.47	Average
2	2455.031	-10.19	109.30	99.11	114.00	-14.89	Peak
3	2483.500	-10.23	45.71	35.48	54.00	-18.52	average
4	2483.500	-10.23	69.90	59.67	74.00	-14.33	peak

2.4G SRD High Channel Bandedge_VERTICAL

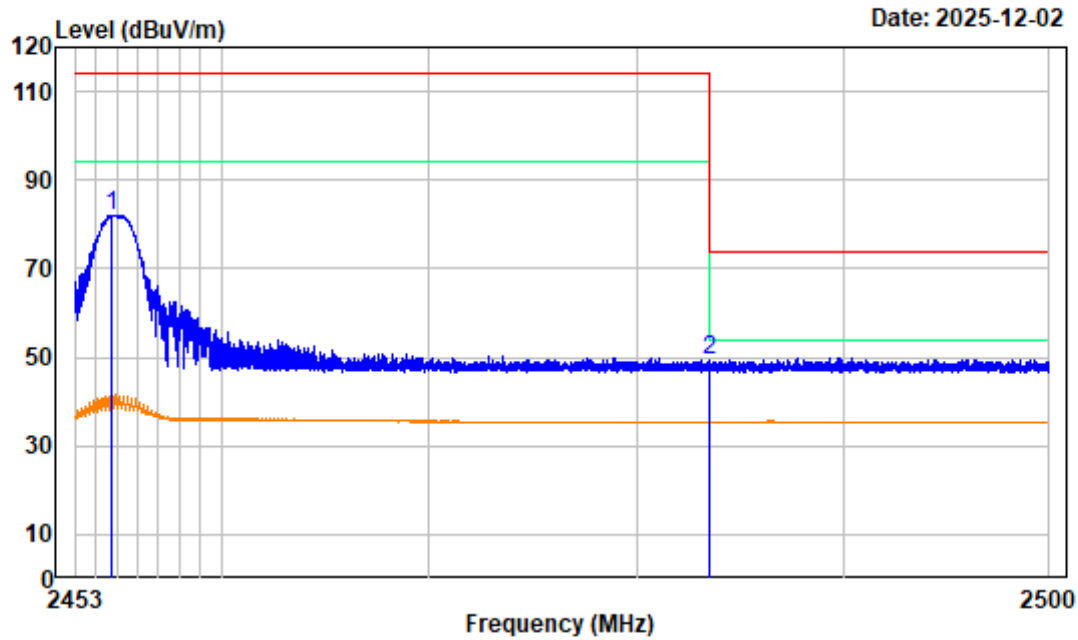

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504Z04757E-RF
Test Mode : Transmitting Tester:Angel Chen
Note : 2.4G SRD High Channel 2455MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:10Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2454.751	-10.17	92.33	82.16	114.00	-31.84	Peak
2	2483.500	-10.23	59.52	49.29	74.00	-24.71	peak

20dB EMISSION BANDWIDTH

Applicable Standard

According to FCC§15.215(c),


Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

According to ANSI C63.10-2020, section 6.9.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that indicated 20dB bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

EUT Setup

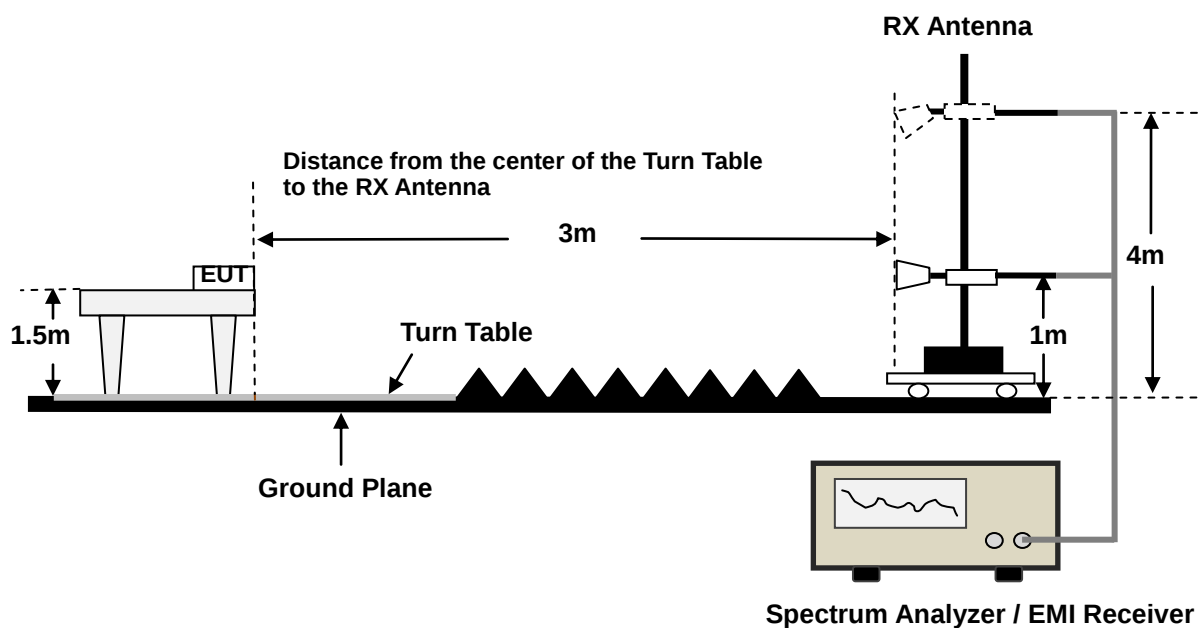

Test Data

Environmental Conditions


Temperature:	23.1℃
Relative Humidity:	46%
ATM Pressure:	101.8kPa
Test Engineer:	Colin Lin
TestDate:	2026.01.20
EUT Operation Mode:	Transmitting

Test Result: Compliance, please refer to the below data.

20dB EMISSION BANDWIDTH


Channel	Frequency (MHz)	20dB Bandwidth (kHz)
Low	2421	799.2
High	2455	788.1

Low Channel

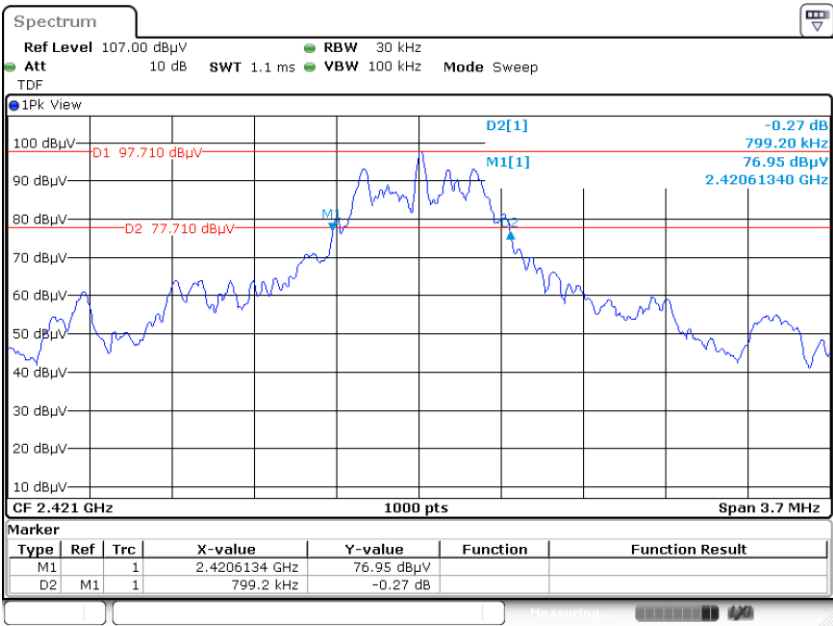

ProjectNo.:2504Z04757E-RF Tester:Colin Lin
Date: 20.JAN.2026 13:32:37

High Channel

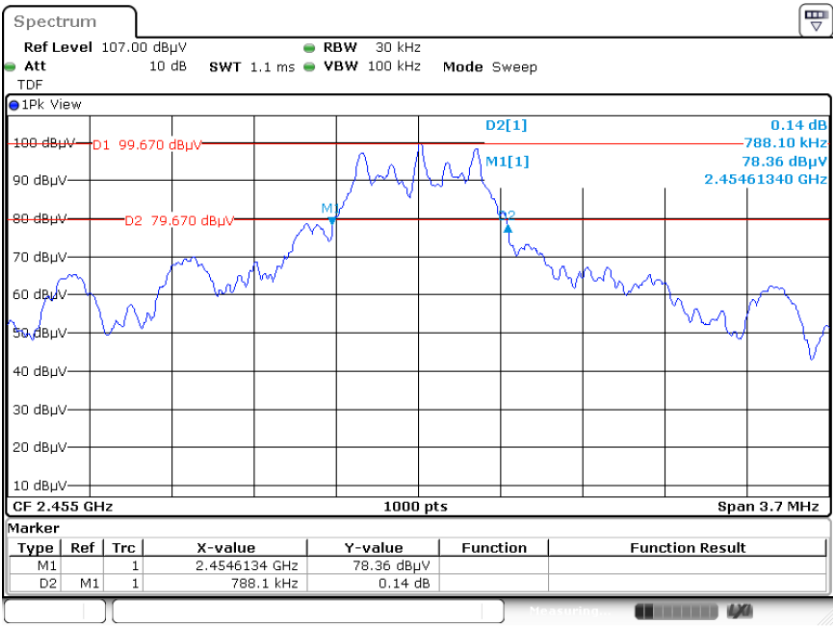

ProjectNo.:2504Z04757E-RF Tester:Colin Lin

Date: 20.JAN.2026 13:34:40

EXHIBIT A-EUT PHOTOGRAPHS

Please refer to the Attachment No.1 2504Z04757E-RF EUT External Photos and Attachment No.2 2504Z04757E-RF EUT Internal Photos.

EXHIBIT B-TEST SETUP PHOTOGRAPHS

Please refer to the Attachment No.3 2504Z04757E-RF Test Photos.

***** END OF REPORT *****