

TEST REPORT

Applicant Name : Polygroup Evergreen Limited
Address : Unit 606, 6th Floor, Fairmont House, No.8 Cotton Tree Drive, Central,
Hong Kong
Report Number: RA230301-09498E-RFA
FCC ID: 2A62O-TBC005
IC 28592-TBC005

Test Standard (s)

FCC PART 15.247;RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2; RSS-247, ISSUE 2,
FEBRUARY 2017

Sample Description

Product Type: Controller
Model No.: TBC005-24V
Multiple Model(s) No.: N/A
Trade Mark: N/A
Date Received: 2023/03/01
Report Date: 2023/04/18

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Approved By:



Nick Fang
EMC Engineer



Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
SPECIAL ACCESSORIES.....	7
EQUIPMENT MODIFICATIONS	7
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §15.247 (I) & §1.1307 (B) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
RSS-102 § 2.5.2 –EXEMPTION LIMITS FOR ROUTINE EVALUATION-RF EXPOSURE EVALUATION	14
APPLICABLE STANDARD	14
FCC §15.203 &RSS-GEN §6.8 – ANTENNA REQUIREMENT	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (A)&RSS-GEN § 8.8 – AC LINE CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP.....	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	16
CORRECTED FACTOR & MARGIN CALCULATION	17
TEST DATA	17
FCC §15.209, §15.205 & §15.247(D) &RSS-247 § 5.5 - SPURIOUS EMISSIONS	22
APPLICABLE STANDARD	22
EUT SETUP.....	22
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	23
TEST PROCEDURE	23
FACTOR& MARGIN CALCULATION	23
TEST DATA	23
FCC §15.247(A) (1)&RSS-247 § 5.1 (B) -CHANNEL SEPARATION TEST	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33

TEST DATA	33
FCC §15.247(A) (1)&RSS-247 §5.1 (A), RSS-GEN §6.7 –20DBEMISSION BANDWIDTH&99% OCCUPIED BANDWIDTH.....	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST DATA	35
TEST RESULT: COMPLIANT. PLEASE REFER TO THE APPENDIX.....	35
FCC §15.247(A) (1) (III) &RSS-247 §5.1 (D) - QUANTITY OF HOPPING CHANNEL TEST.....	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST DATA	36
FCC §15.247(A) (1) (III) &RSS-247 §5.1 (D) - TIME OF OCCUPANCY (DWELL TIME)	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST DATA	37
FCC §15.247(B) (1) &RSS-247 §5.1(B) & §5.4(B) - PEAK OUTPUT POWER MEASUREMENT	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST DATA	38
FCC §15.247(D) &RSS-247 §5.5 - BAND EDGES TESTING	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST DATA	40
APPENDIX	41
APPENDIX A: 20dB EMISSION BANDWIDTH.....	41
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	47
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	53
APPENDIX D: CARRIER FREQUENCY SEPARATION	58
APPENDIX E: TIME OF OCCUPANCY	61
APPENDIX F: NUMBER OF HOPPING CHANNELS	71
APPENDIX G: BAND EDGE MEASUREMENTS	74

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230301-09498E-RFA	Original Report	2023-04-18

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	TBC005-24V
FVIN	2.8.15
Frequency Range	Bluetooth: 2402-2480MHz
Maximum Conducted Peak Output Power	5.86 dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	3.42dBi(It is provided by the applicant)
Voltage Range	DC24V from adapter
Sample serial number	23UK_2 for Conducted and Radiated Emissions 23UK_1 for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter information	Model: TS-48W24V Input: AC 120V, 60Hz, 0.83A Output: DC 24.0V, 2.0A

Note: EUT with two different model Lamp bead models (Light 1: TW-TBC005-1200; Light 2: TW-TBC005-1440), the radio part (control box are the same), the detail information please refer the attestation letter and EUT photo.

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules and RSS-247, Issue 2, February 2017, RSS-GEN Issue 5, Feb. 2021Amendment 2 of the Innovation, Science and Economic Development Canada rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and RSS-247, Issue 2, February 2017, RSS-GEN Issue 5, Feb. 2021Amendment 2 of the Innovation, Science and Economic Development Canada rules.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz -26.5GHz	5.06dB
	26.5GHz-40GHz	4.72dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 30241.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

“EspRFTTestTool.exe ” exercise software was used, Power level is 4. The software and power level was provided by the applicant.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Local Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
/	/	/	/

Block Diagram of Test Setup

For conducted emission:

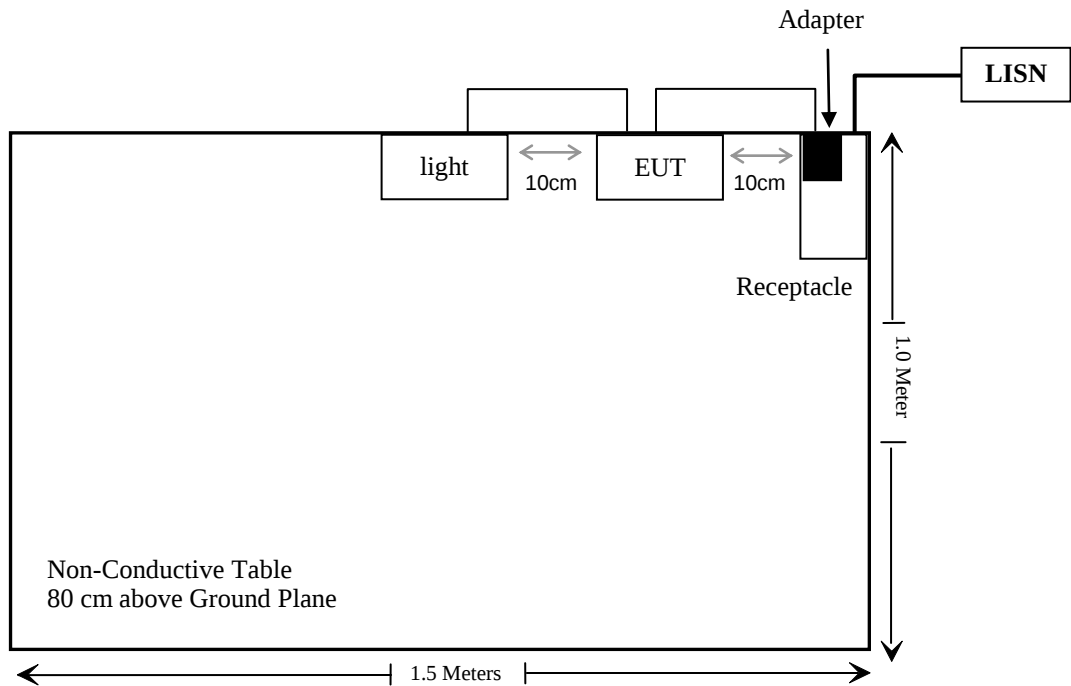

For radiated emission:

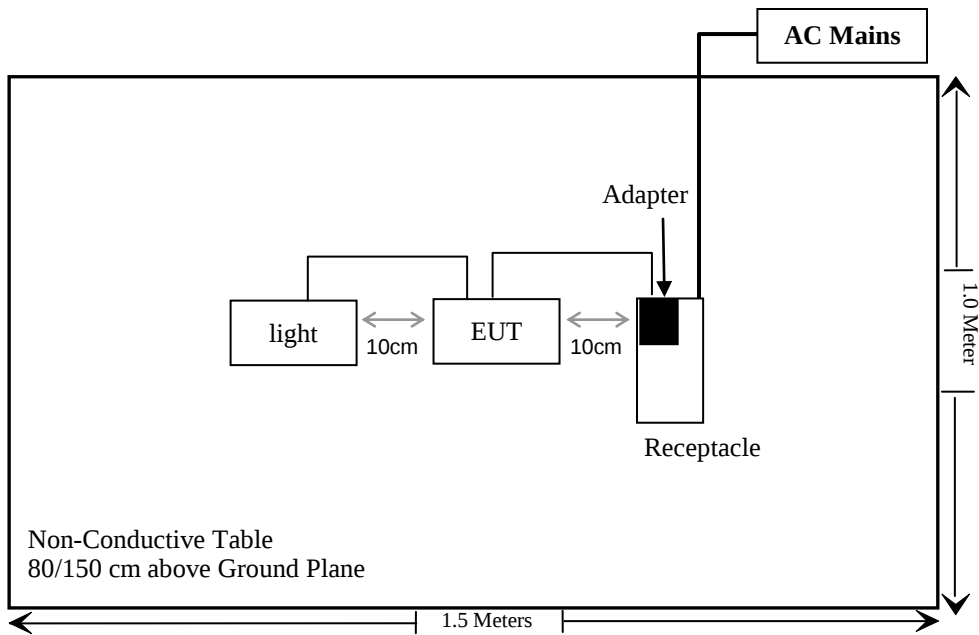

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.247 (i) & §1.1307 (b) (3) & §2.1091	MPE-Based Exemption	Compliant
RSS-102 § 2.5.2	Exemption Limits For Routine Evaluation-RF Exposure Evaluation	Compliant
FCC §15.203 RSS-Gen §6.8	Antenna Requirement	Compliant
FCC §15.207(a) RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
FCC §15.205, §15.209, §15.247(d) RSS-247 § 5.5, RSS-GEN § 8.10	Radiated Emissions	Compliant
FCC §15.247(a)(1) RSS-247 § 5.1(a), RSS-GEN § 6.7	20dBEmission Bandwidth&99% Occupied Bandwidth	Compliant
FCC §15.247(a)(1) RSS-247 § 5.1 (b)	Channel Separation Test	Compliant
FCC §15.247(a)(1)(iii) RSS-247 § 5.1 (d)	Time of Occupancy (Dwell Time)	Compliant
FCC §15.247(a)(1)(iii) RSS-247 § 5.1 (d)	Quantity of hopping channel Test	Compliant
FCC §15.247(b)(1) RSS-247 § 5.1(b) & § 5.4(b)	Peak Output Power Measurement	Compliant
FCC §15.247(d) RSS-247 § 5.5	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2022/11/25	2023/11/24
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2022/12/07	2023/12/06
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2022/11/30	2025/11/29
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2022/12/26	2025/12/25
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101590	2022/11/25	2023/11/24
Tonscend	RF Control Unit	JS0806-2	19G8060182	2022/10/24	2023/10/23
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	
Agilent	Power Sensor	U2021XA	MY5425003	2023/02/25	2024/02/24

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §1.1307 (b) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

Result

Mode	Frequency (MHz)	Tune up conducted power	Antenna Gain		ERP		Evaluation Distance (m)	ERP Limit (W)
		(dBm)	(dBi)	(dBd)	(dBm)	(W)		
BT	2402-2480	6.0	3.42	1.27	7.27	0.005	0.2	0.768
BLE	2402-2480	4.0	3.42	1.27	5.27	0.003	0.2	0.768
2.4G Wi-Fi	2412-2462	17.0	3.42	1.27	18.27	0.067	0.2	0.768

Note: 1. The tune up conducted power and antenna gain was declared by the applicant.

2. The BT cannot transmit at the same time with the Wi-Fi

3. 0dBd=2.15dBi

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

RSS-102 §2.5.2 –EXEMPTION LIMITS FOR ROUTINE EVALUATION-RF EXPOSURE EVALUATION

Applicable Standard

According to RSS-102 §(2.5.2):

2.5.2 Exemption Limits for Routine Evaluation — RF Exposure Evaluation

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz⁶ and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $22.48/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

Calculated Data:

Mode	Frequency (MHz)	Maximum tune-up conducted power	Antenna Gain (dBi)	Maximum tune-up EIRP		Evaluation Distance (cm)	Limit (W)
		(dBm)		(dBm)	(W)		
BT	2402-2480	6.0	3.42	9.42	0.009	20	2.68
BLE	2402-2480	4.0	3.42	7.42	0.006	20	2.68
2.4G Wi-Fi	2412-2462	17.0	3.42	20.42	0.110	20	2.68

Note: 1. The tune up conducted power and antenna gain was declared by the applicant.
2. The BT cannot transmit at the same time with the Wi-Fi

To maintain compliance with the ISED's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: The RF Exposure evaluation can be exempted.

FCC §15.203 & RSS-GEN §6.8 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to FCC § 15.203, the applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISCED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device. Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has one internal antenna arrangement which was permanently attached and the maximum antenna gain is 3.42dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	Antenna Gain	Impedance	Frequency Range
PCB	3.42dBi	50Ω	2.4~2.5GHz


Result: Compliance

FCC §15.207 (a)&RSS-GEN §8.8 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a), RSS-GEN §8.8

EUT Setup

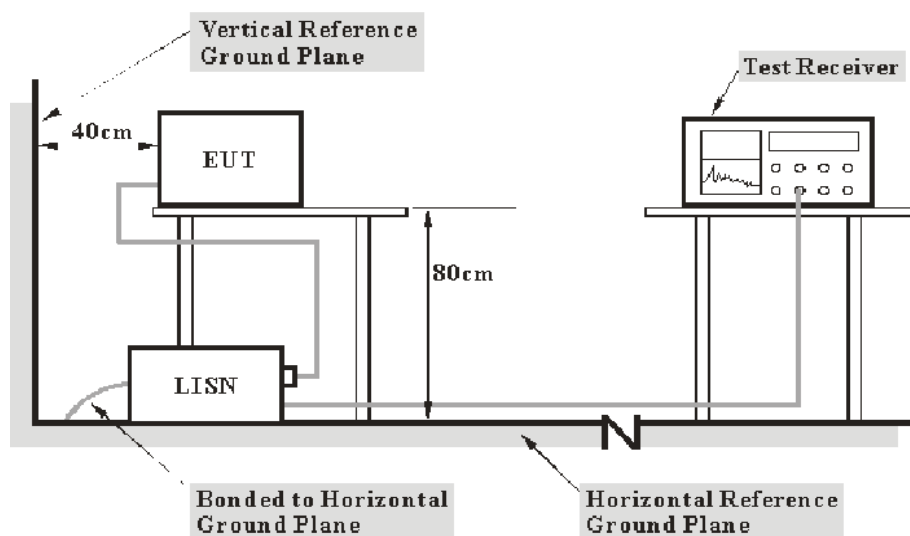

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207& RSS-Gen.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$


Test Data

Environmental Conditions

Temperature:	23C
Relative Humidity:	67%
ATM Pressure:	101.0 kPa

The testing was performed by Jerry on 2023-04-11.


EUT operation mode: Transmitting (the worst case is 8DPSK Mode, high channel)

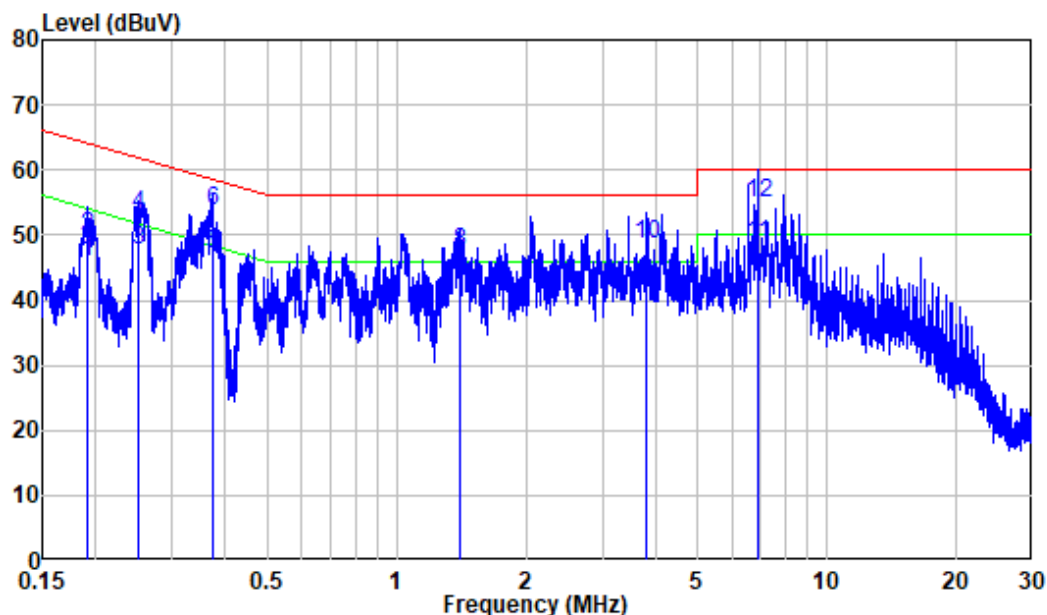For light 1**AC 120V/60 Hz, Line**

Site : Shielding Room
 Condition: Line
 Job No. : Light 1
 Mode : BT Transmitting
 Power : AC 120V 60Hz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.192	10.10	35.78	45.88	53.97	-8.09	Average
2	0.192	10.10	39.85	49.95	63.97	-14.02	QP
3	0.251	10.10	37.59	47.69	51.71	-4.02	Average
4	0.251	10.10	42.91	53.01	61.71	-8.70	QP
5	0.373	10.10	36.91	47.01	48.44	-1.43	Average
6	0.373	10.10	43.51	53.61	58.44	-4.83	QP
7	1.399	10.26	32.31	42.57	46.00	-3.43	Average
8	1.399	10.26	37.05	47.31	56.00	-8.69	QP
9	3.804	10.53	32.11	42.64	46.00	-3.36	Average
10	3.804	10.53	38.22	48.75	56.00	-7.25	QP
11	6.914	11.25	37.27	48.52	50.00	-1.48	Average
12	6.914	11.25	43.76	55.01	60.00	-4.99	QP

AC 120V/60 Hz, Neutral

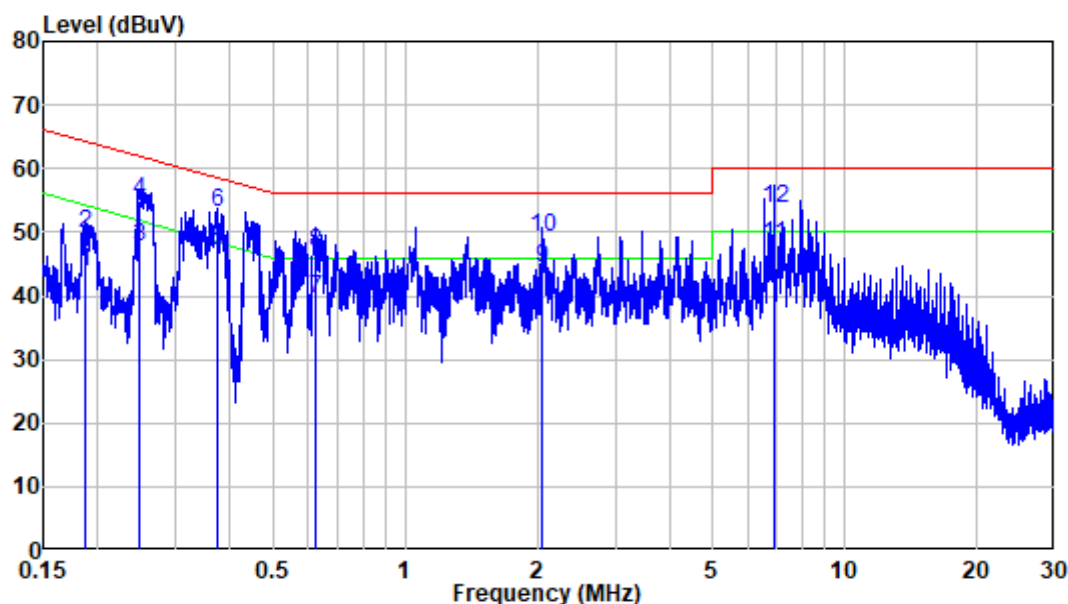


Site : Shielding Room
 Condition: Neutral
 Job No. : Light 1
 Mode : BT Transmitting
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.187	10.30	33.40	43.70	54.16	-10.46	Average
2	0.187	10.30	39.48	49.78	64.16	-14.38	QP
3	0.248	10.32	37.44	47.76	51.81	-4.05	Average
4	0.248	10.32	44.64	54.96	61.81	-6.85	QP
5	0.373	10.37	36.83	47.20	48.44	-1.24	Average
6	0.373	10.37	42.72	53.09	58.44	-5.35	QP
7	0.624	10.08	29.42	39.50	46.00	-6.50	Average
8	0.624	10.08	36.66	46.74	56.00	-9.26	QP
9	2.050	10.03	34.33	44.36	46.00	-1.64	Average
10	2.050	10.03	39.08	49.11	56.00	-6.89	QP
11	6.914	11.15	36.95	48.10	50.00	-1.90	Average
12	6.914	11.15	42.50	53.65	60.00	-6.35	QP

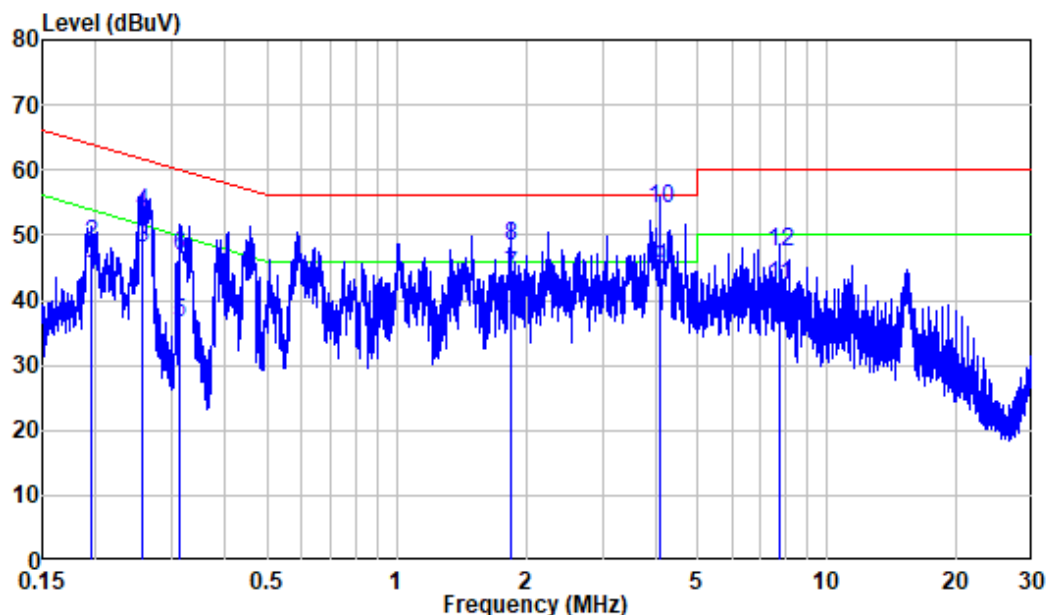For light 2**AC 120V/60 Hz, Line**

Site : Shielding Room
 Condition: Line
 Job No. : Light 2
 Mode : BT Transmitting
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.195	10.10	33.72	43.82	53.81	-9.99	Average
2	0.195	10.10	38.52	48.62	63.81	-15.19	QP
3	0.256	10.10	37.86	47.96	51.57	-3.61	Average
4	0.256	10.10	43.42	53.52	61.57	-8.05	QP
5	0.314	10.10	26.38	36.48	49.86	-13.38	Average
6	0.314	10.10	36.71	46.81	59.86	-13.05	QP
7	1.840	10.31	33.40	43.71	46.00	-2.29	Average
8	1.840	10.31	37.98	48.29	56.00	-7.71	QP
9	4.084	10.57	34.05	44.62	46.00	-1.38	Average
10	4.084	10.57	43.47	54.04	56.00	-1.96	QP
11	7.753	11.57	30.63	42.20	50.00	-7.80	Average
12	7.753	11.57	35.74	47.31	60.00	-12.69	QP


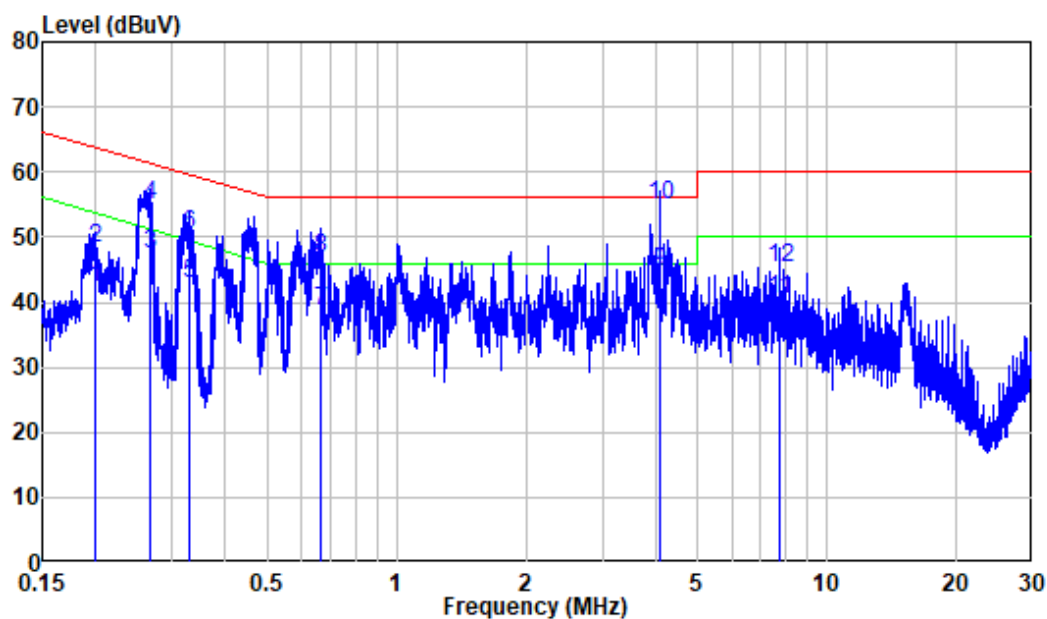
AC 120V/60 Hz, Neutral

Site : Shielding Room
 Condition: Neutral
 Job No. : Light 2
 Mode : BT Transmitting
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.199	10.30	31.84	42.14	53.65	-11.51	Average
2	0.199	10.30	37.95	48.25	63.65	-15.40	QP
3	0.266	10.33	37.19	47.52	51.24	-3.72	Average
4	0.266	10.33	44.56	54.89	61.24	-6.35	QP
5	0.331	10.35	32.55	42.90	49.44	-6.54	Average
6	0.331	10.35	40.11	50.46	59.44	-8.98	QP
7	0.667	9.98	28.79	38.77	46.00	-7.23	Average
8	0.667	9.98	36.85	46.83	56.00	-9.17	QP
9	4.087	10.37	34.44	44.81	46.00	-1.19	Average
10	4.087	10.37	44.46	54.83	56.00	-1.17	QP
11	7.753	11.47	28.95	40.42	50.00	-9.58	Average
12	7.753	11.47	33.91	45.38	60.00	-14.62	QP

FCC §15.209, §15.205 & §15.247(d) & RSS-247 §5.5 - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d); RSS-247 §5.5; RSS-GEN §8.10

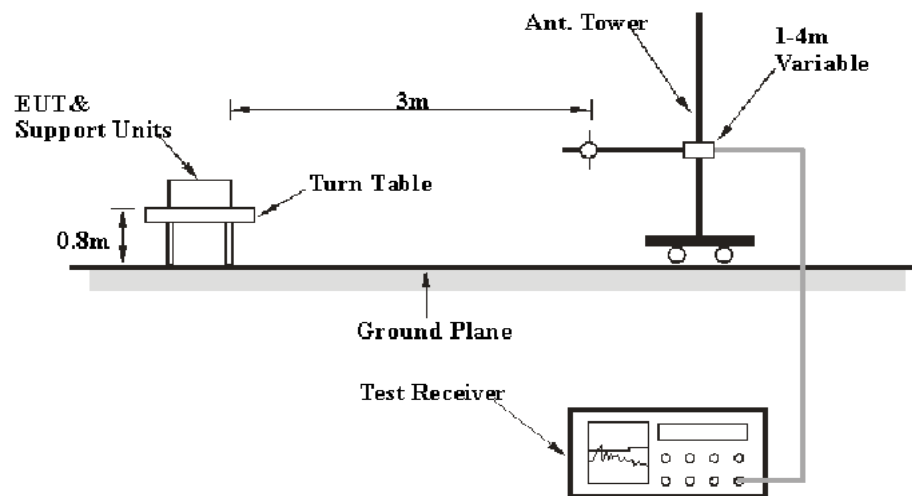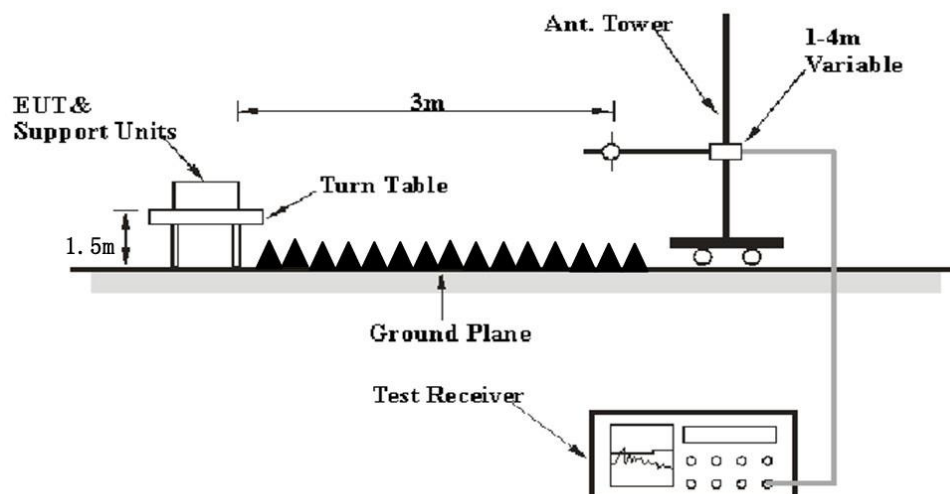EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3meters test site, using the setup accordance with the ANSI C63.10-2013& RSS-Gen. The specification used was the FCC 15.209, and FCC 15.247/RSS-247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK

For average measurement:

use the duty cycle factor correction factor method per 15.35(c).

Duty cycle=On time/100milliseconds, On time= $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$,

where N_1 is number of type 1 pulses, L_1 is length of type 1 pulse, etc.

Average Emission Level=Peak Emission Level+20*log(Duty cycle)

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Factor& Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	24~25.5℃
Relative Humidity:	52~56%
ATM Pressure:	101.0 kPa

The testing was performed by Jaosn Liu on 2023-04-12 for below 1GHz, Jimi Zhengon 2023-04-12 for above 1GHz.


EUT operation mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axes of orientation was recorded)

Below 1GHz: (the worst case is 8DPSK Mode, high channel)

Note: When the result of Peak less than the limit of QP by more than 6dB, just the peak value was recorded.

For light 1


Horizontal

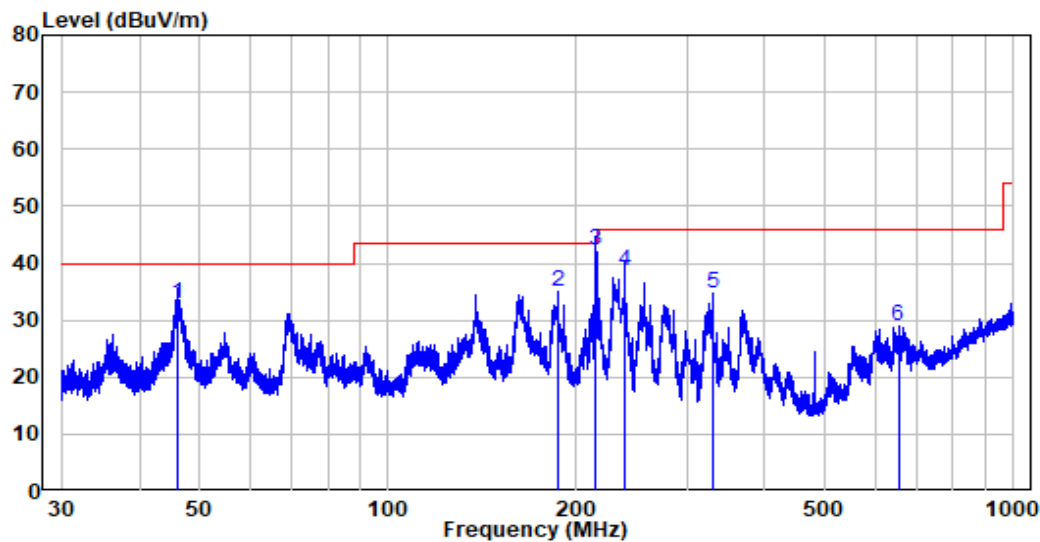

Site : chamber
Condition: 3m HORIZONTAL
Job No. : RA230301-09498E-RF
Test Mode: BT Transmitting
Note : EUT1

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	46.158	-14.29	47.06	32.77	40.00	-7.23	QP
2	187.096	-10.34	45.45	35.11	43.50	-8.39	Peak
3	214.797	-11.07	53.19	42.12	43.50	-1.38	QP
4	239.252	-11.89	50.47	38.58	46.00	-7.42	QP
5	329.906	-13.39	48.24	34.85	46.00	-11.15	Peak
6	654.232	-8.31	37.34	29.03	46.00	-16.97	Peak

Vertical

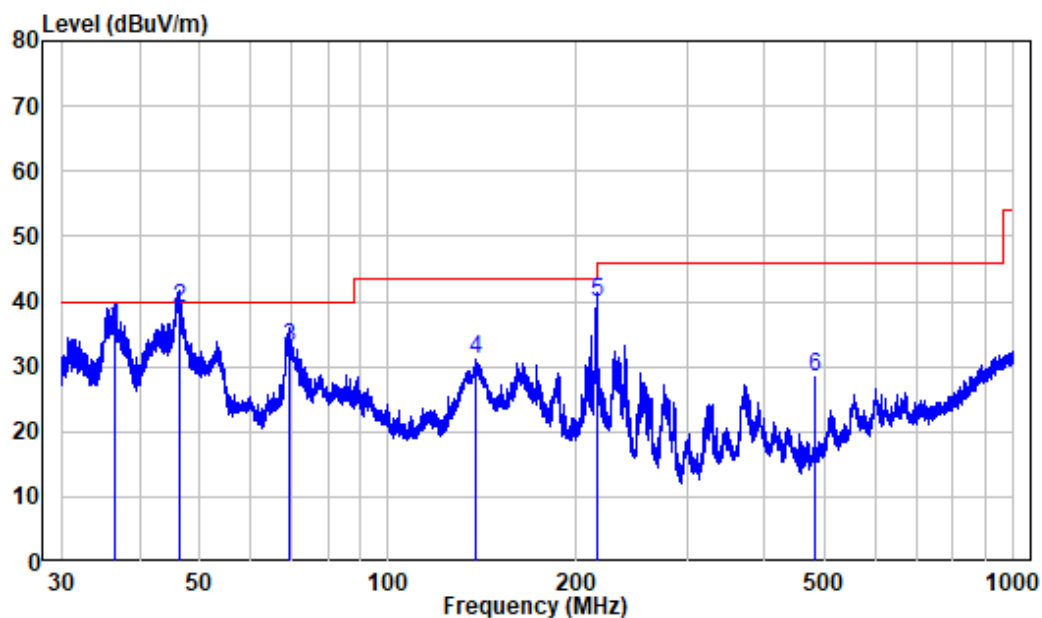

Site : chamber
Condition: 3m VERTICAL
Job No. : RA230301-09498E-RF
Test Mode: BT Transmitting
Note : EUT1


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	36.541	-14.48	50.30	35.82	40.00	-4.18	QP
2	46.219	-14.29	53.10	38.81	40.00	-1.19	QP
3	69.692	-13.77	46.56	32.79	40.00	-7.21	QP
4	137.782	-10.56	41.71	31.15	43.50	-12.35	Peak
5	215.646	-11.10	50.80	39.70	43.50	-3.80	QP
6	480.107	-14.50	42.83	28.33	46.00	-17.67	Peak

Below 1GHz: (the worst case is 8DPSK Mode, high channel)

Note: When the result of Peak less than the limit of QP by more than 6dB, just the peak value was recorded.

For light 2


Horizontal

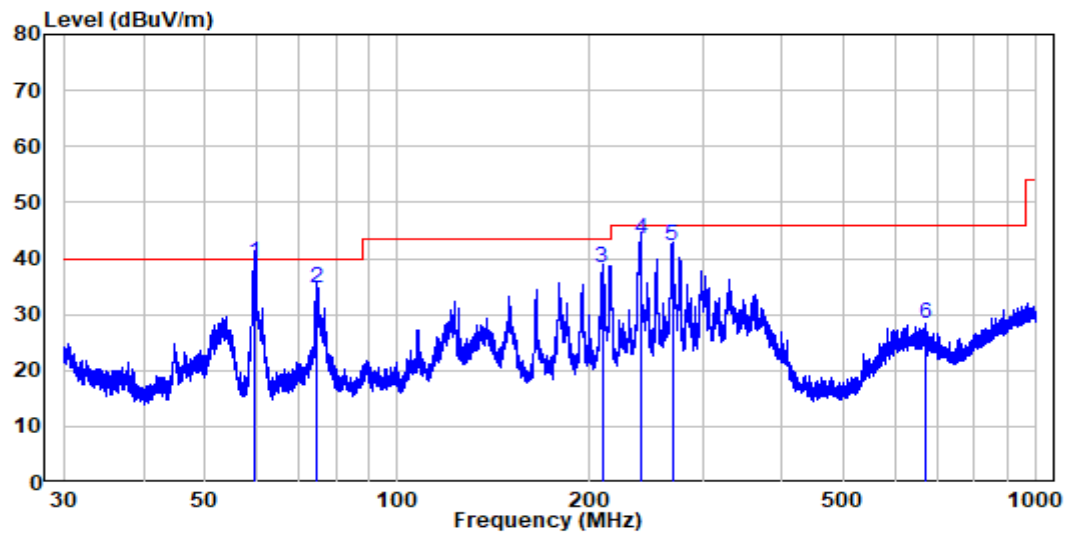

Site : chamber
Condition: 3m HORIZONTAL
Job No. : RA230301-09498E-RF
Test Mode: BT Transmitting
Note : EUT2

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	59.780	-13.83	53.00	39.17	40.00	-0.83	QP
2	74.821	-13.44	48.20	34.76	40.00	-5.24	QP
3	209.038	-10.91	49.10	38.19	43.50	-5.31	QP
4	239.882	-11.91	55.30	43.39	46.00	-2.61	QP
5	269.074	-14.52	56.80	42.28	46.00	-3.72	QP
6	672.255	-7.73	36.02	28.29	46.00	-17.71	Peak

Vertical

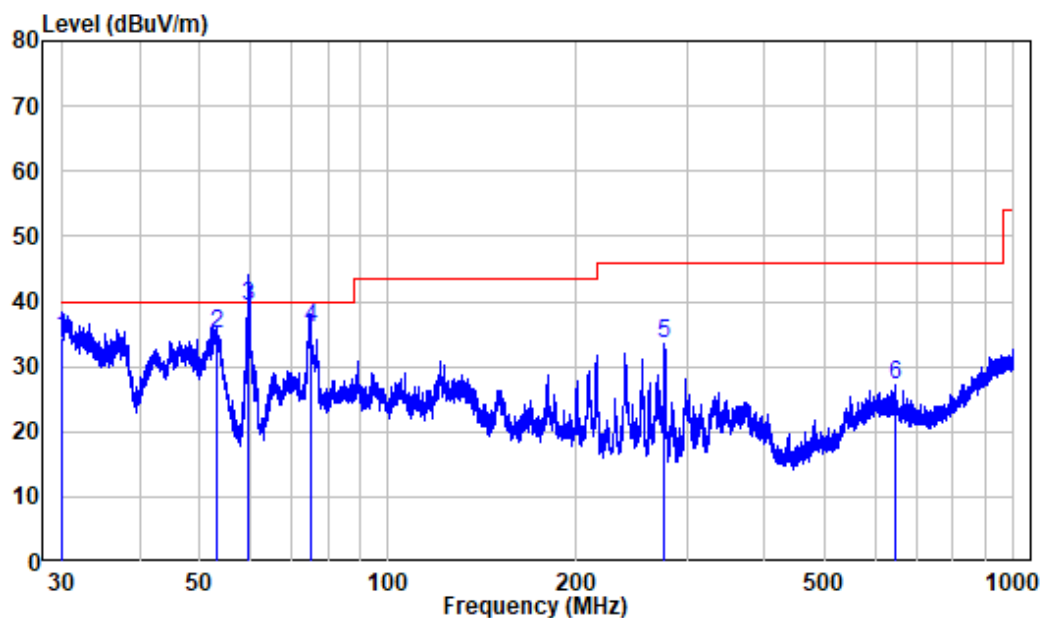

Site : chamber
Condition: 3m VERTICAL
Job No. : RA230301-09498E-RF
Test Mode: BT Transmitting
Note : EUT2

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.000	-14.30	48.60	34.30	40.00	-5.70	QP
2	53.225	-14.16	49.20	35.04	40.00	-4.96	QP
3	59.806	-13.83	53.10	39.27	40.00	-0.73	QP
4	75.083	-13.43	49.30	35.87	40.00	-4.13	QP
5	276.851	-15.10	48.60	33.50	46.00	-12.50	Peak
6	646.252	-8.62	35.78	27.16	46.00	-18.84	Peak

Above 1GHz: (worst case for 8DPSK, 3DH5, with Light 2 device)

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel 2402MHz									
2387.86	68.00	PK	347	1.1	H	-10.71	57.29	74	-16.71
2375.45	67.89	PK	166	1.9	V	-10.73	57.16	74	-16.84
2390	65.52	PK	357	2.2	H	-10.70	54.82	74	-19.18
2390	65.38	PK	177	2	V	-10.70	54.68	74	-19.32
4804	61.04	PK	329	2.3	H	-6.11	54.93	74	-19.07
4804	61.33	PK	144	2.3	V	-6.11	55.22	74	-18.78
Middle Channel 2441MHz									
4882	60.80	PK	124	1.9	H	-5.90	54.90	74	-19.10
4882	61.03	PK	136	1.9	V	-5.90	55.13	74	-18.87
High Channel2480MHz									
2483.5	66.63	PK	266	2.4	H	-10.55	56.08	74	-17.92
2483.5	66.49	PK	358	1.5	V	-10.55	55.94	74	-18.06
2487.28	69.11	PK	119	2.3	H	-10.52	58.59	74	-15.41
2484.83	68.96	PK	172	2.5	V	-10.54	58.42	74	-15.58
4960	60.27	PK	67	1.3	H	-5.47	54.80	74	-19.20
4960	60.53	PK	246	1.3	V	-5.47	55.06	74	-18.94

Field Strength of Average							
Frequency (MHz)	Peak Measurement @3m (dBµV/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247		
					Limit (dBµV/m)	Margin (dB)	Comment
Low Channel 2402MHz							
2387.86	57.29	H	-24.73	32.56	54	-21.44	Bandedge
2375.45	57.16	V	-24.73	32.43	54	-21.57	Bandedge
2390	54.82	H	-24.73	30.09	54	-23.91	Bandedge
2390	54.68	V	-24.73	29.95	54	-24.05	Bandedge
4804	54.93	H	-24.73	30.20	54	-23.80	Harmonic
4804	55.22	V	-24.73	30.49	54	-23.51	Harmonic
Middle Channel 2441MHz							
4882	54.90	H	-24.73	30.17	54	-23.83	Harmonic
4882	55.13	V	-24.73	30.40	54	-23.60	Harmonic
High Channel2480MHz							
2483.5	56.08	H	-24.73	31.35	54	-22.65	Bandedge
2483.5	55.94	V	-24.73	31.21	54	-22.79	Bandedge
2487.28	58.59	H	-24.73	33.86	54	-20.14	Bandedge
2484.83	58.42	V	-24.73	33.69	54	-20.31	Bandedge
4960	54.80	H	-24.73	30.07	54	-23.93	Harmonic
4960	55.06	V	-24.73	30.33	54	-23.67	Harmonic

Note:

AbsoluteLevel = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit


Average level= Peak level+ Duty Cycle Corrected Factor

For fundamental, the peak value compliance with the limit of Average.

Duty cycle = Ton/100ms = 2.899*2/100=0.05798


Duty Cycle Corrected Factor = 20lg (Duty cycle) = 20lg0.05798 = -24.73

Pulse information

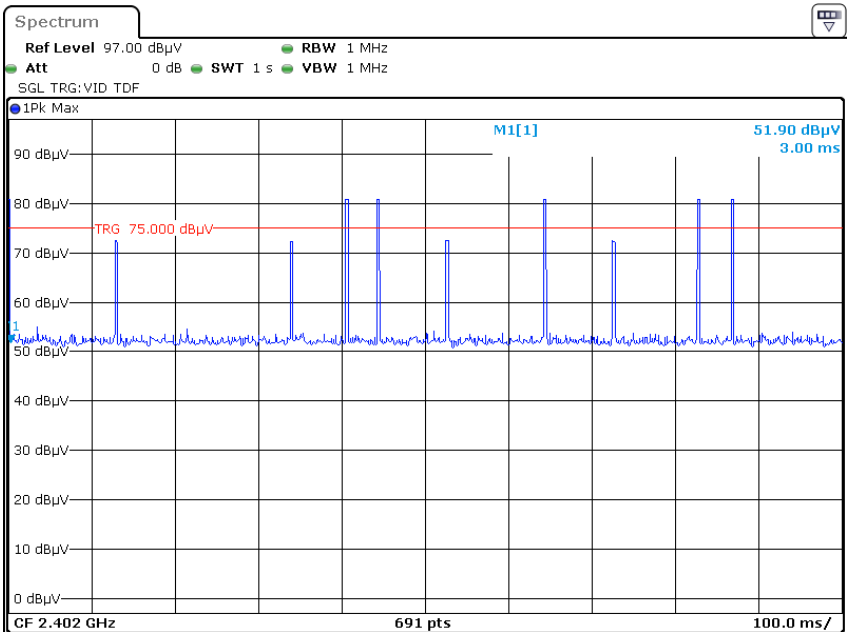

Date: 12.APR.2023 04:37:58

Maximum Pulse number in 100ms: 2; Pulse length: 2.899ms

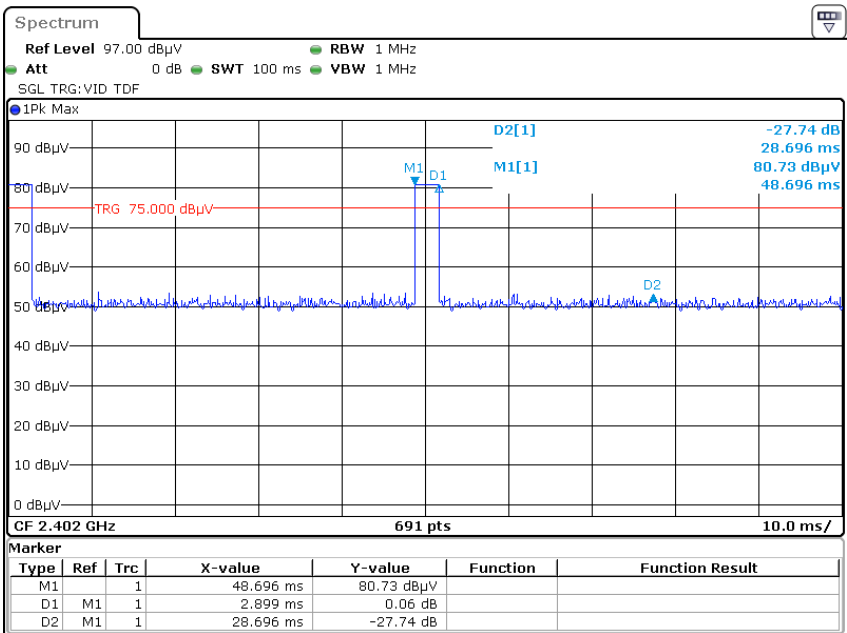


Date: 12.APR.2023 04:39:06


1 GHz - 18 GHz: (Pre-Scan plots)

Low channel

Horizontal

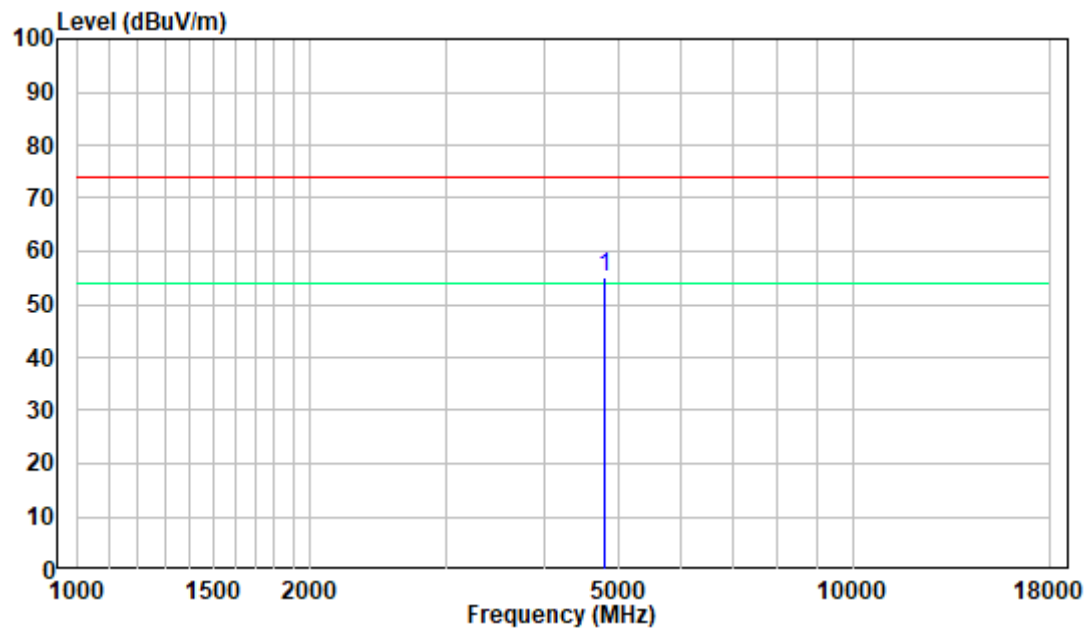


Vertical

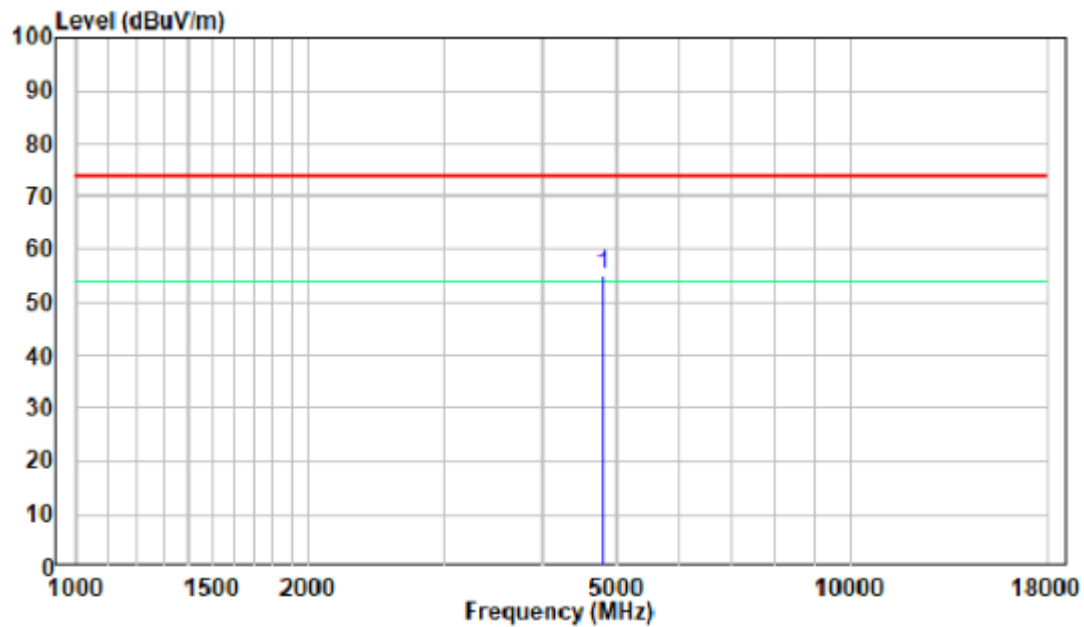


18-25GHz: (Pre-Scan plots)

Low channel

Horizontal

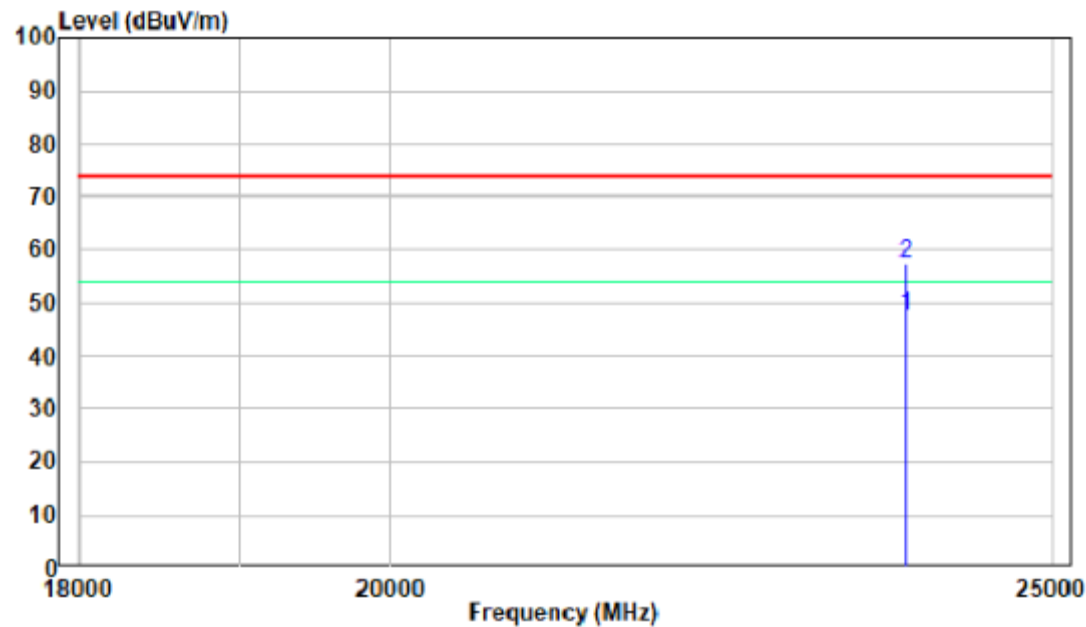

Vertical

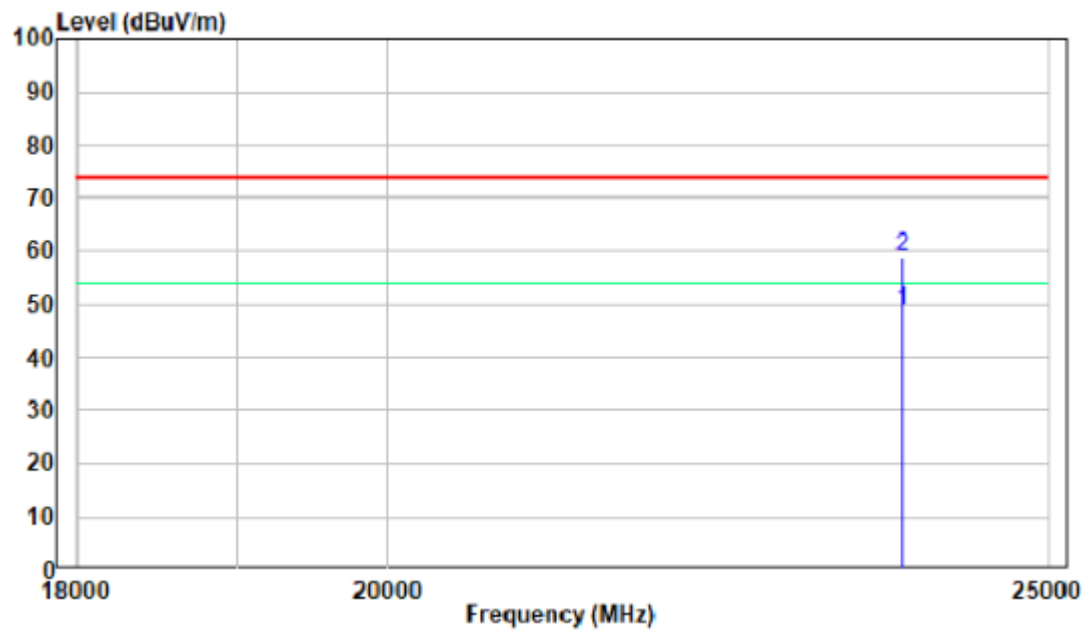

FCC §15.247(a) (1)&RSS-247 §5.1 (b) -CHANNEL SEPARATION TEST

Applicable Standard

According to FCC §15.247(a) (1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


According to RSS-247 §5.1 (b):

Frequency hopping systems (FHSs) shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.2

Set the EUT in transmitting mode, max hold the channel.
Set the adjacent channel of the EUT and max hold another trace.
Measure the channel separation.

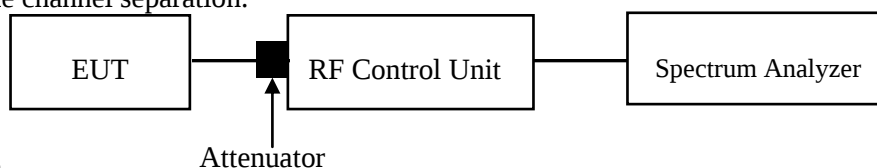

Test Data

Environmental Conditions

Temperature:	24~27℃
Relative Humidity:	52~55%
ATM Pressure:	101.0 kPa

The testing was performed by Nick Fang on 2023-04-12.
EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1)&RSS-247 §5.1 (a), RSS-GEN §6.7 –20dBEMISSION BANDWIDTH&99% OCCUPIED BANDWIDTH

Applicable Standard

According to FCC §15.247(a) (1):

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to RSS-247 §5.1 (a), RSS-GEN §6.7:

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “20 dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated 20 dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

Test Procedure


Test Method: ANSI C63.10-2013 Clause 7.8.7 & Clause 6.9.2

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

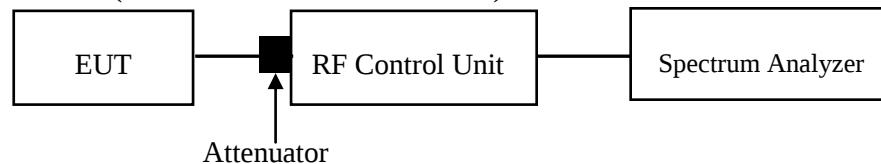

Test Data

Environmental Conditions

Temperature:	24~27°C
Relative Humidity:	52~55%
ATM Pressure:	101.0 kPa

The testing was performed by Nick Fang on 2023-04-12.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix

FCC §15.247(a) (1) (iii) & RSS-247 § 5.1 (d) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

According to FCC §15.247(a) (1) (iii):

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

According to RSS-247 § 5.1 (d):

Frequency hopping systems (FHSS) operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.


Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.3

Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.

Set the EUT in hopping mode from first channel to last.

By using the max-hold function record the quantity of the channel.

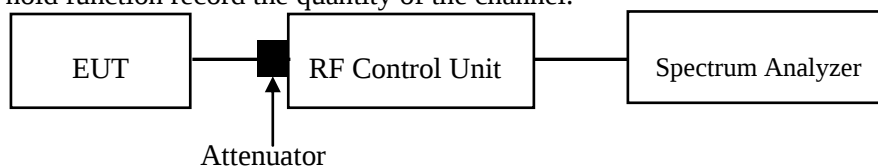

Test Data

Environmental Conditions

Temperature:	24~27°C
Relative Humidity:	52~55%
ATM Pressure:	101.0 kPa

The testing was performed by Nick Fang on 2023-04-12.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) (iii) & RSS-247 §5.1 (d) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

According to FCC §15.247(a) (1) (iii):

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

According to RSS-247 §5.1 (d):

Frequency hopping systems (FHSs) operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.4

The EUT was worked in channel hopping.

Set the RBW to: 1MHz.

Set the VBW $\geq 3 \times$ RBW.


Set the span to 0Hz.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

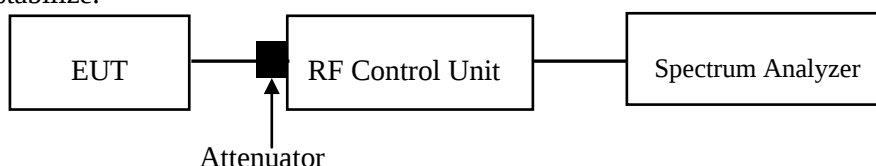

Test Data

Environmental Conditions

Temperature:	24~27°C
Relative Humidity:	52~55%
ATM Pressure:	101.0 kPa

The testing was performed by Nick Fang on 2023-04-12.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(b) (1) & RSS-247 § 5.1(b) & § 5.4(b) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to FCC §15.247(b) (1):

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

According to RSS-247 § 5.1(b) & § 5.4(b):


For frequency hopping systems (FHSs) operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W (see Section 5.4(e) for exceptions).

Frequency hopping systems (FHSs) shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.5

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

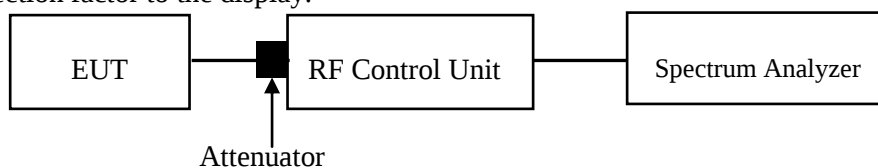

Test Data

Environmental Conditions

Temperature:	24~27°C
Relative Humidity:	52~55%
ATM Pressure:	101.0 kPa

The testing was performed by Nick Fang on 2023-04-12.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(d) & RSS-247 §5.5 - BAND EDGES TESTING

Applicable Standard

According to FCC §15.247(d).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 §5.5.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(e), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.6 & Clause 6.10


Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.

Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

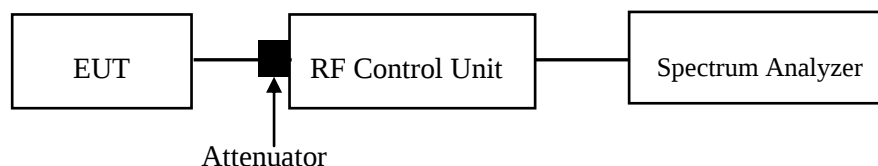

Test Data**Environmental Conditions**

Temperature:	24~27℃
Relative Humidity:	52~55%
ATM Pressure:	101.0 kPa

The testing was performed by Nick Fang on 2023-04-12.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix.


APPENDIX

Appendix A: 20dB Emission Bandwidth Test Result


Test Mode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.93	2401.53	2402.46	---	---
		2441	0.93	2440.53	2441.46	---	---
		2480	0.93	2479.53	2480.46	---	---
2DH1	Ant1	2402	1.27	2401.35	2402.62	---	---
		2441	1.28	2440.35	2441.63	---	---
		2480	1.30	2479.33	2480.62	---	---
3DH1	Ant1	2402	1.28	2401.35	2402.62	---	---
		2441	1.28	2440.35	2441.62	---	---
		2480	1.28	2479.35	2480.62	---	---

Test Graphs

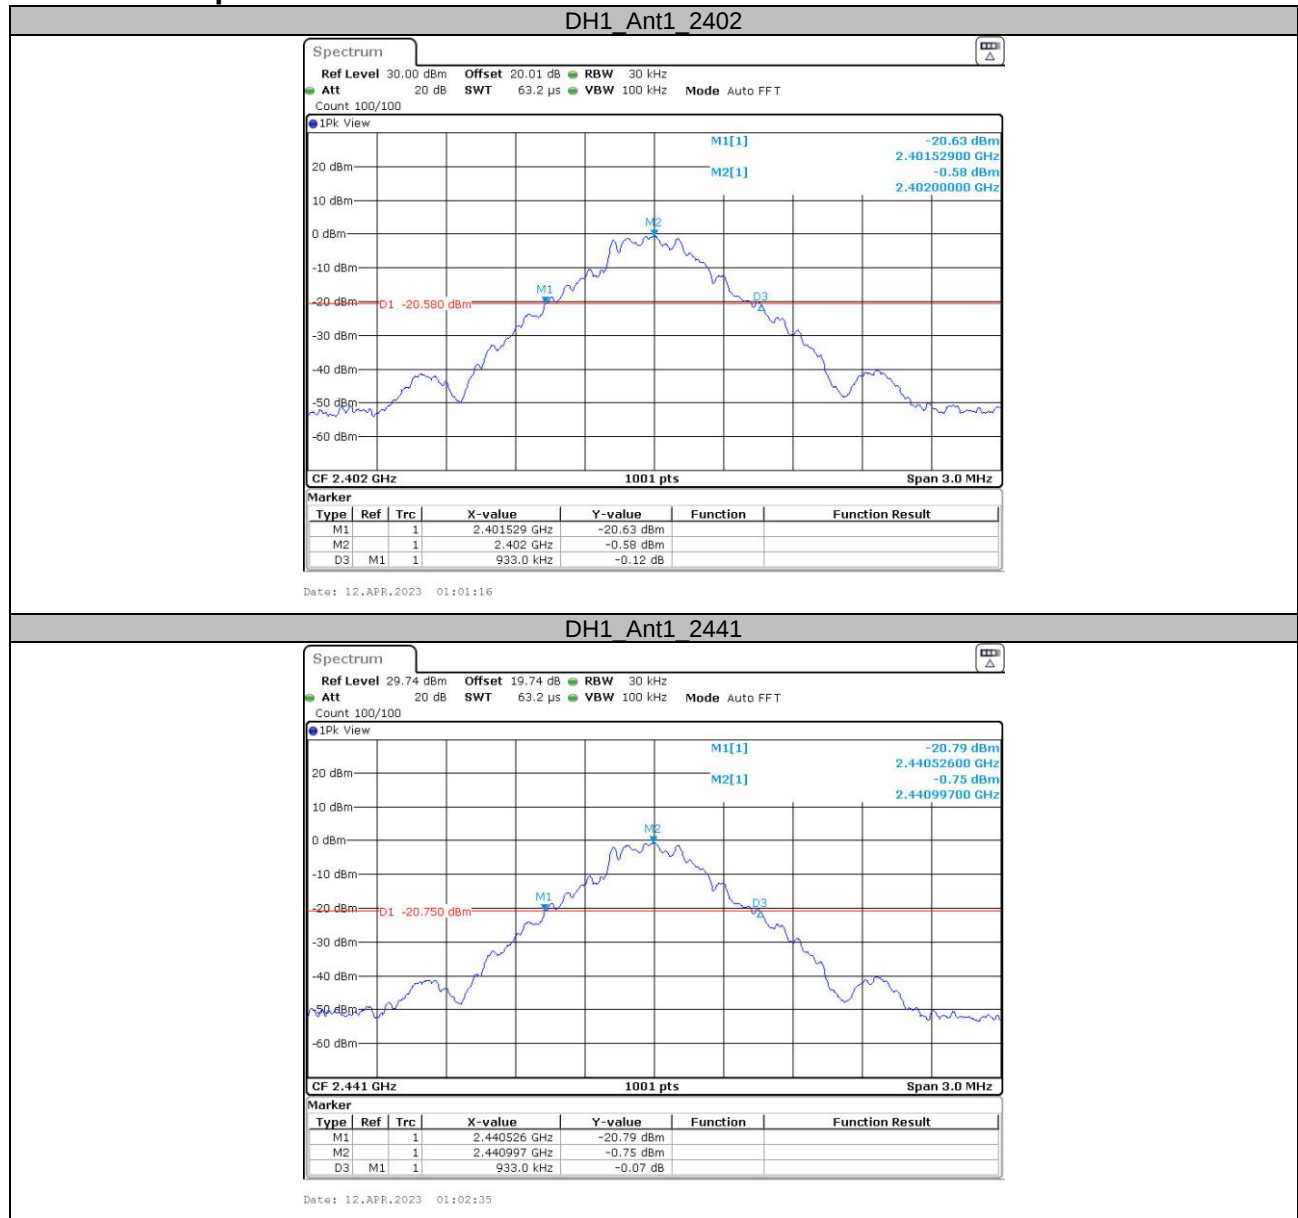

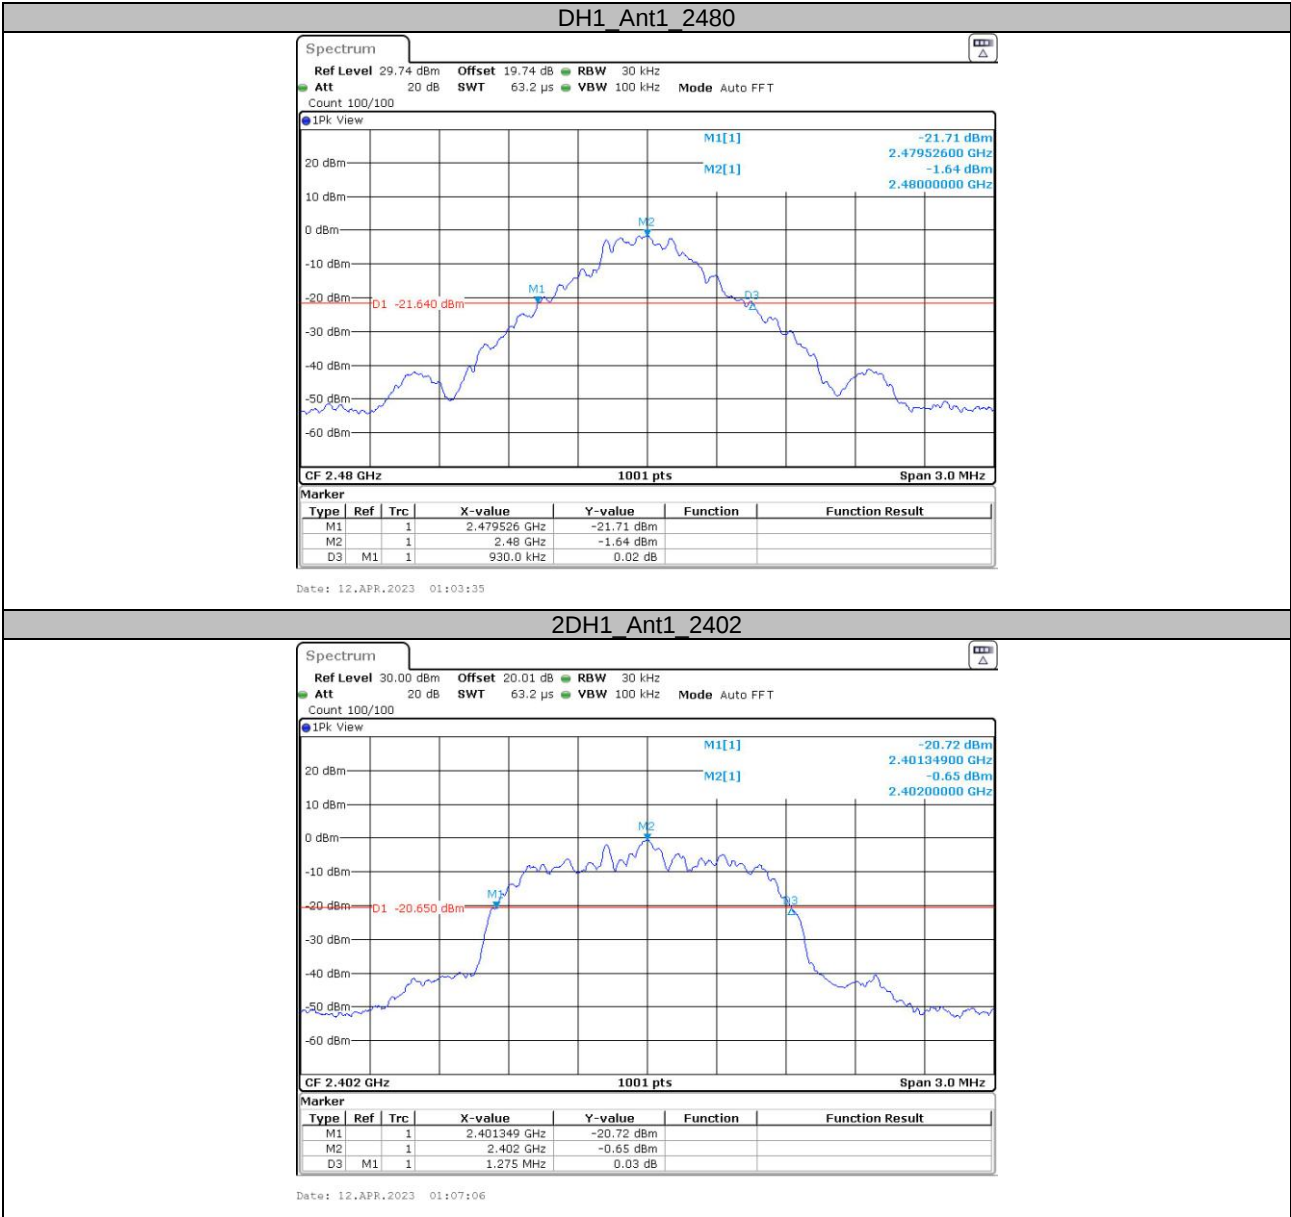


2DH1_Ant1_2441

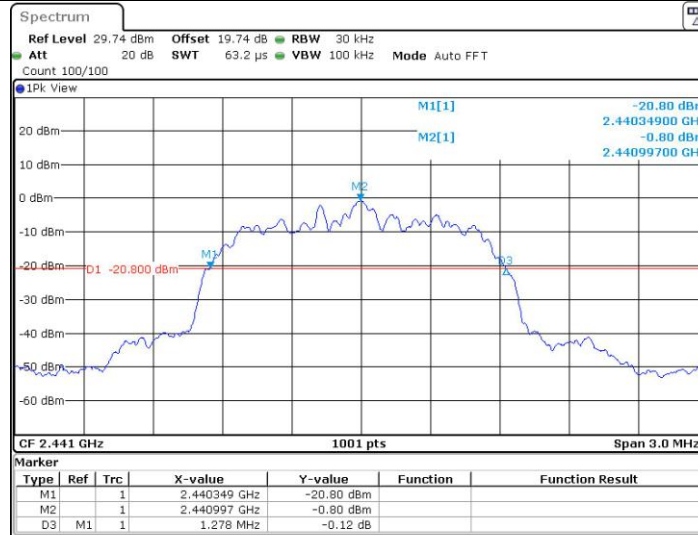



Date: 12.APR.2023 01:08:13

2DH1_Ant1_2480

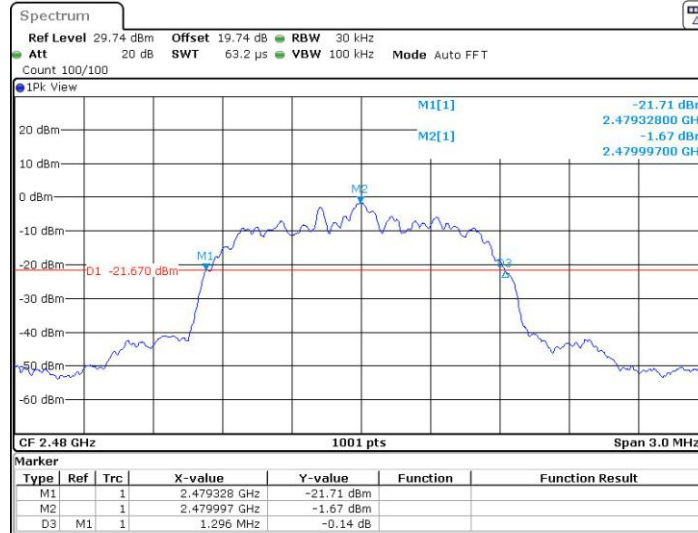

Date: 12.APR.2023 01:09:02

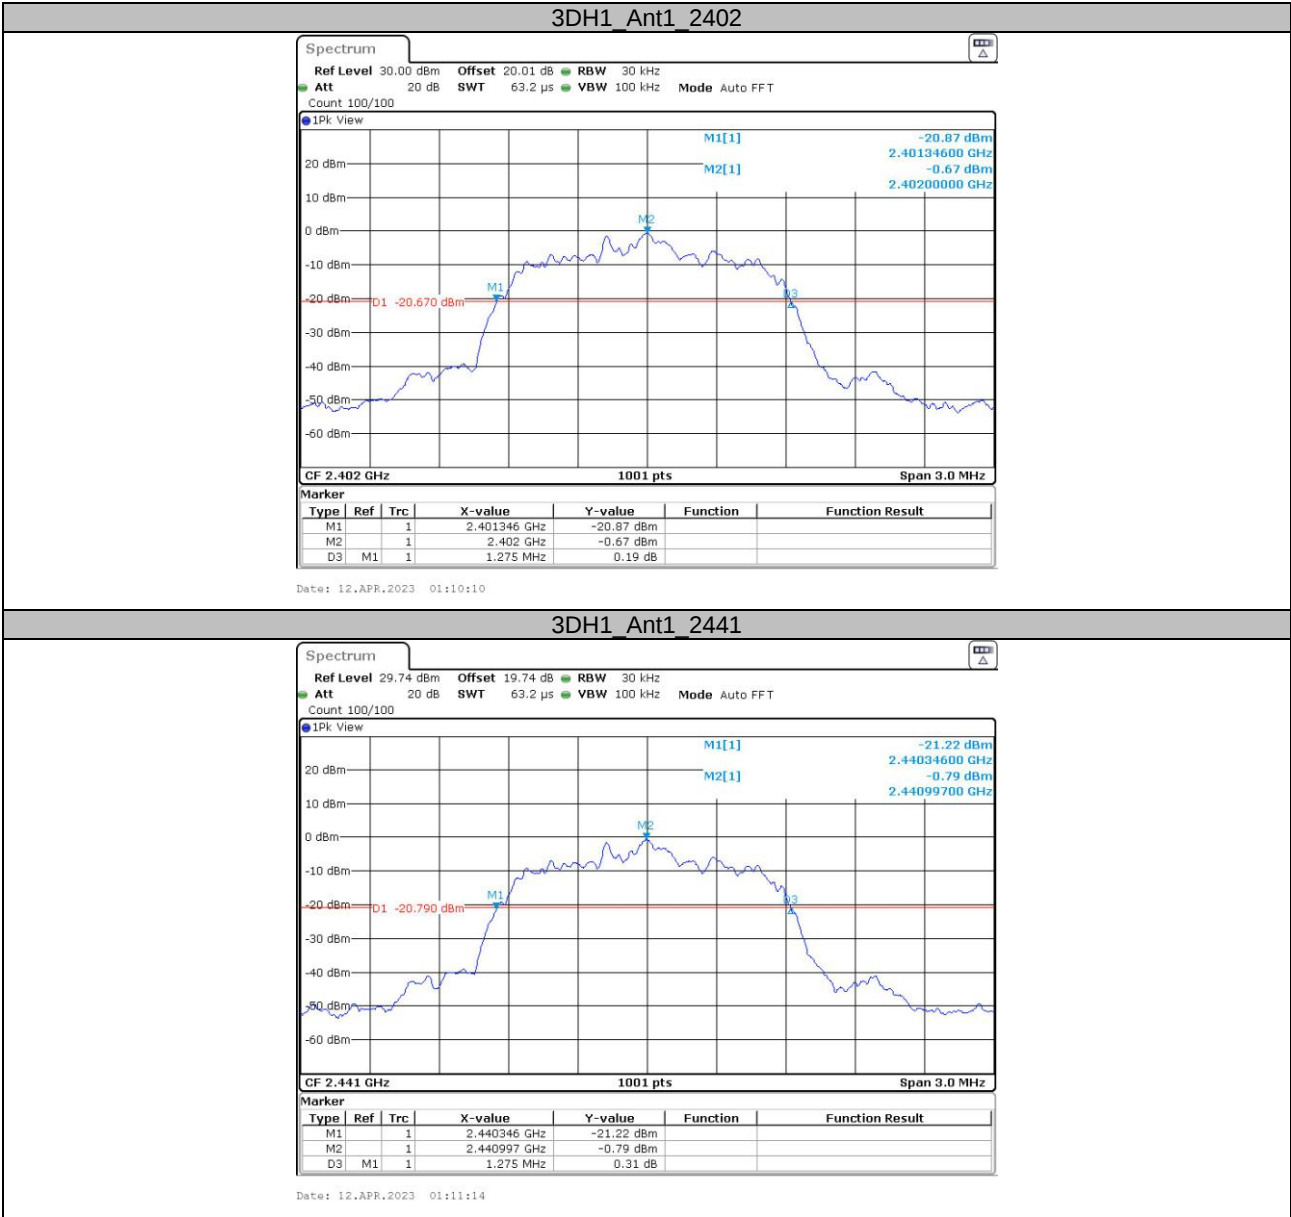


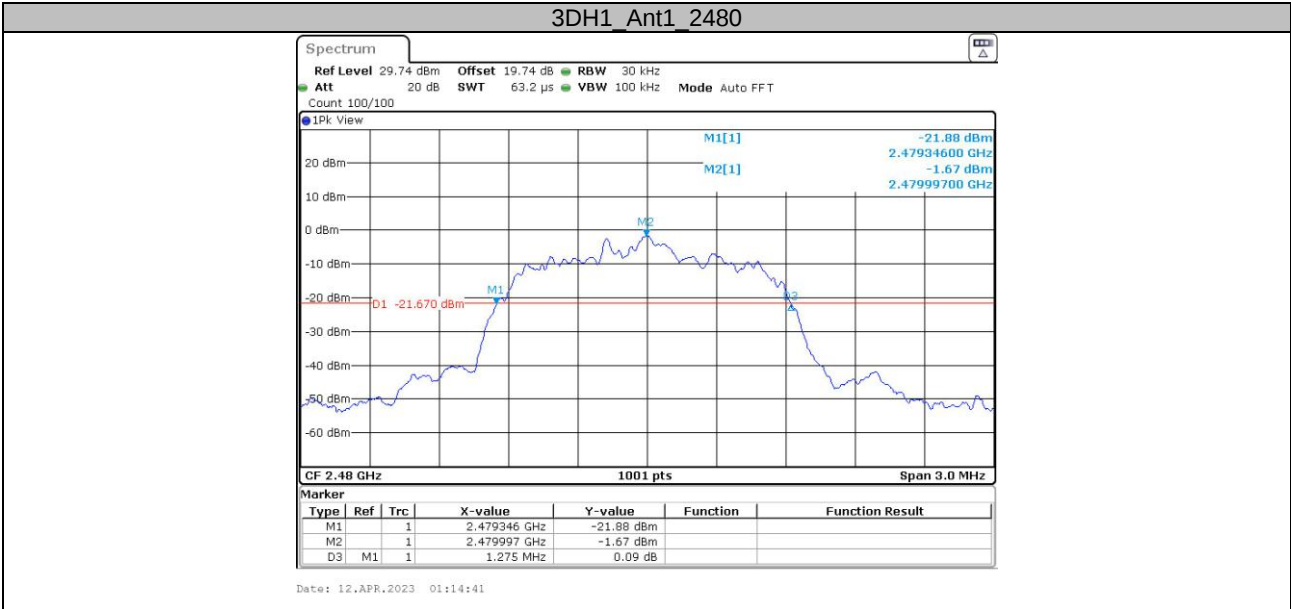


**Appendix B: Occupied Channel Bandwidth
Test Result**

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.815	2401.580	2402.396	---	---
		2441	0.818	2440.577	2441.396	---	---
		2480	0.815	2479.580	2480.396	---	---
2DH1	Ant1	2402	1.172	2401.395	2402.566	---	---
		2441	1.172	2440.395	2441.566	---	---
		2480	1.172	2479.395	2480.566	---	---
3DH1	Ant1	2402	1.16	2401.416	2402.575	---	---
		2441	1.16	2440.416	2441.575	---	---
		2480	1.16	2479.416	2480.575	---	---

Test Graphs

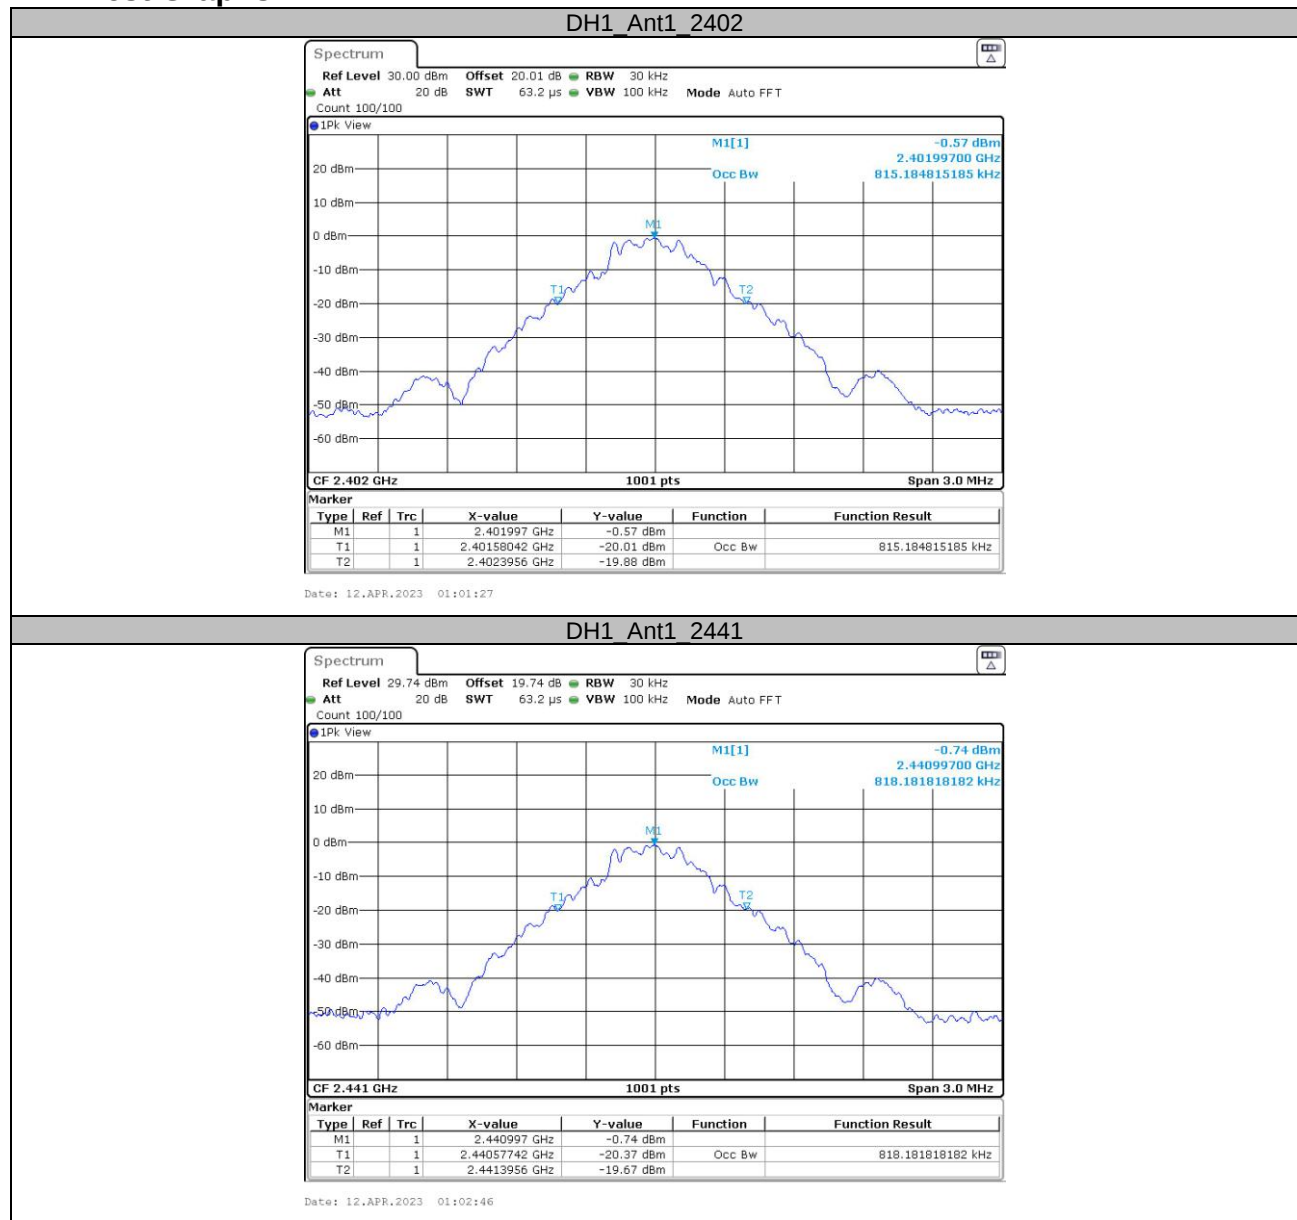


DH1_Ant1_2480

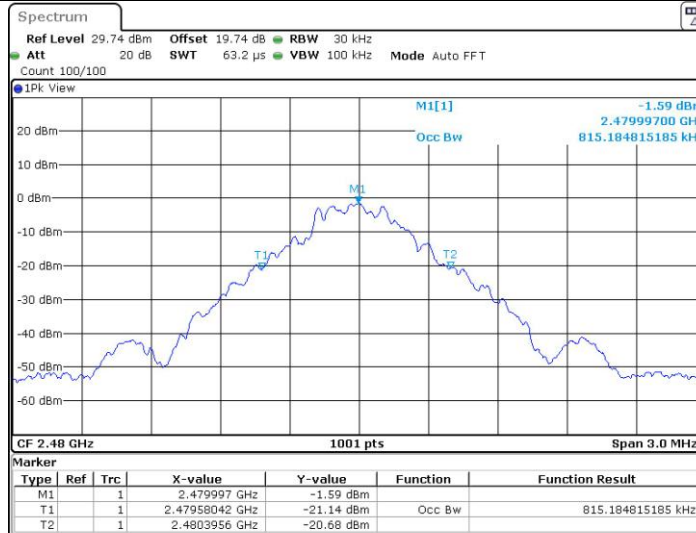


Date: 12.APR.2023 01:03:46


2DH1_Ant1_2402

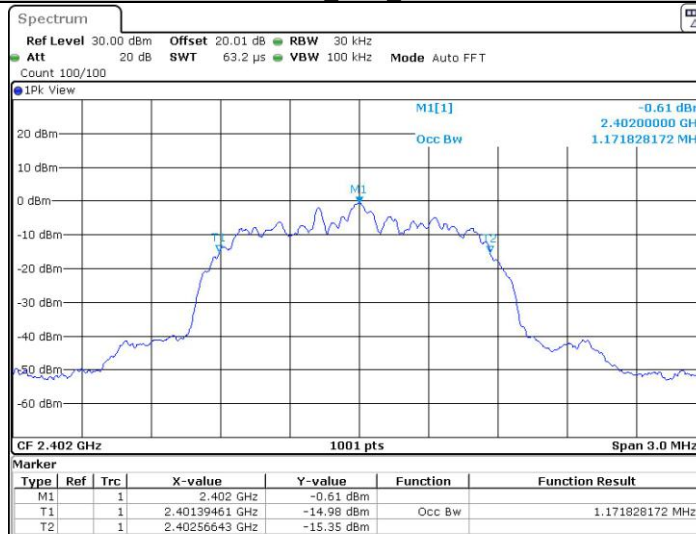

Date: 12.APR.2023 01:07:17

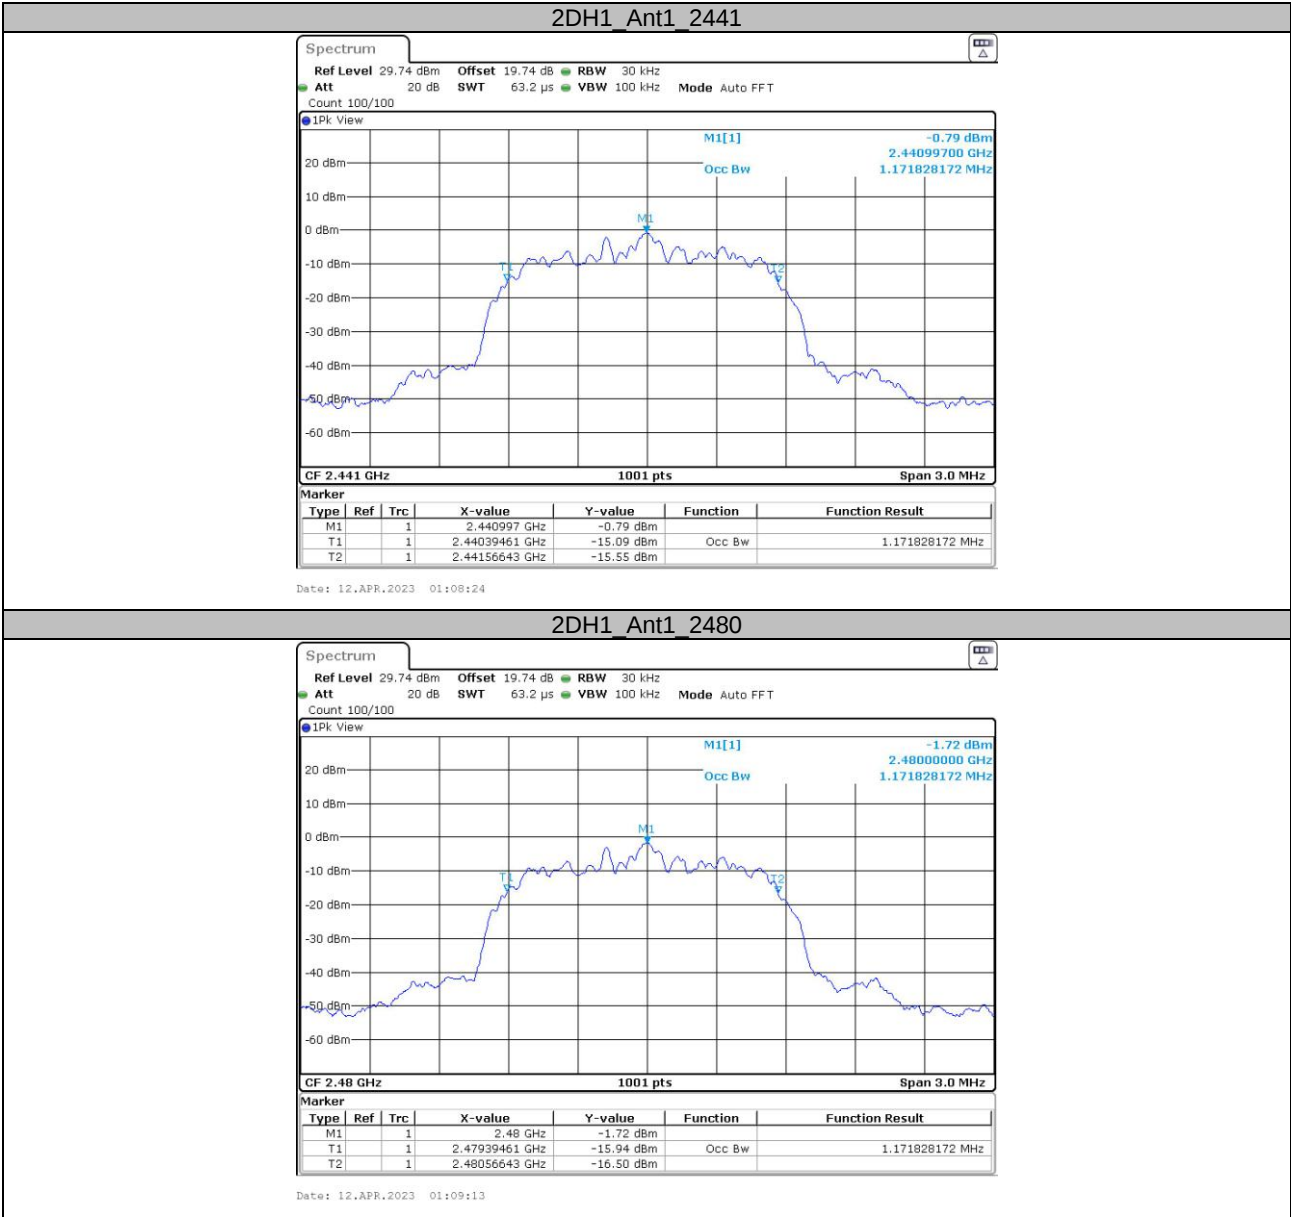


3DH1_Ant1_2402

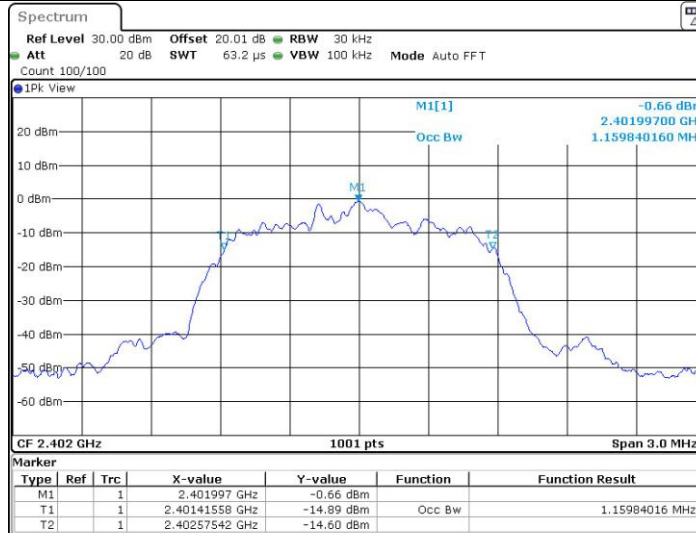


Date: 12.APR.2023 01:10:21

3DH1_Ant1_2441

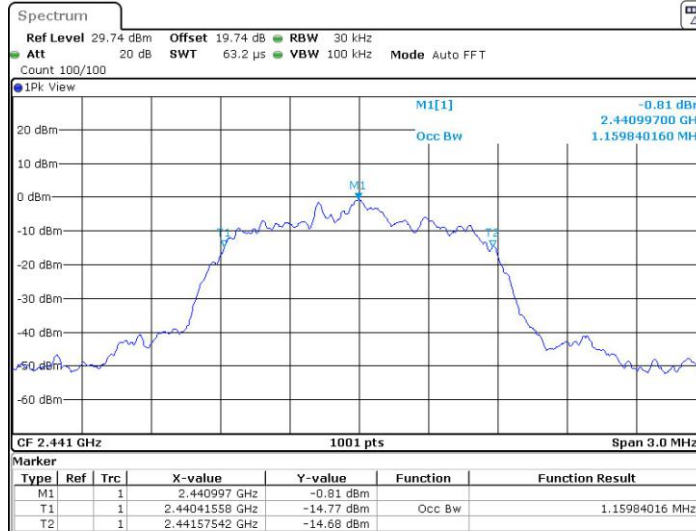

Date: 12.APR.2023 01:11:25

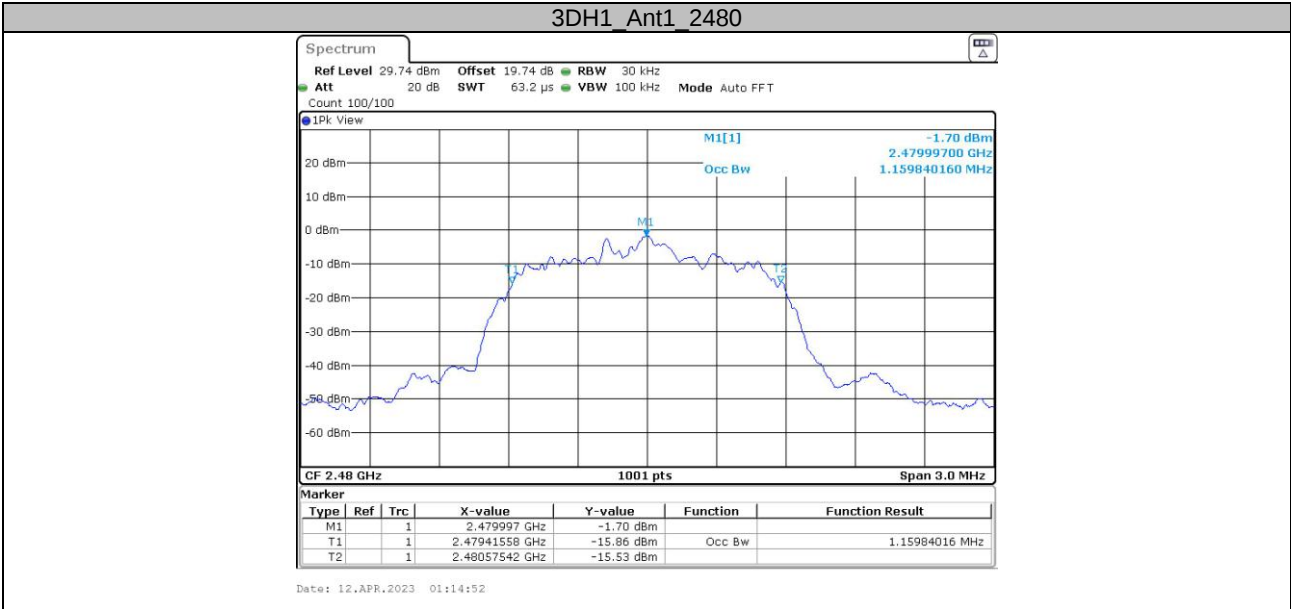


Appendix C: Maximum conducted output power

Test Result Peak


Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	FCC Conducted Limit[dBm]	Verdict
DH1	Ant1	2402	3.29	≤20.97	PASS
		2441	3.31	≤20.97	PASS
		2480	2.57	≤20.97	PASS
2DH1	Ant1	2402	5.4	≤20.97	PASS
		2441	5.45	≤20.97	PASS
		2480	4.7	≤20.97	PASS
3DH1	Ant1	2402	5.81	≤20.97	PASS
		2441	5.86	≤20.97	PASS
		2480	5.17	≤20.97	PASS

Note: Antenna Gain is 3.42 dBi, the max. EIRP is 9.28 dBm, the RSS-247 limit is 36dBm


Test Graphs

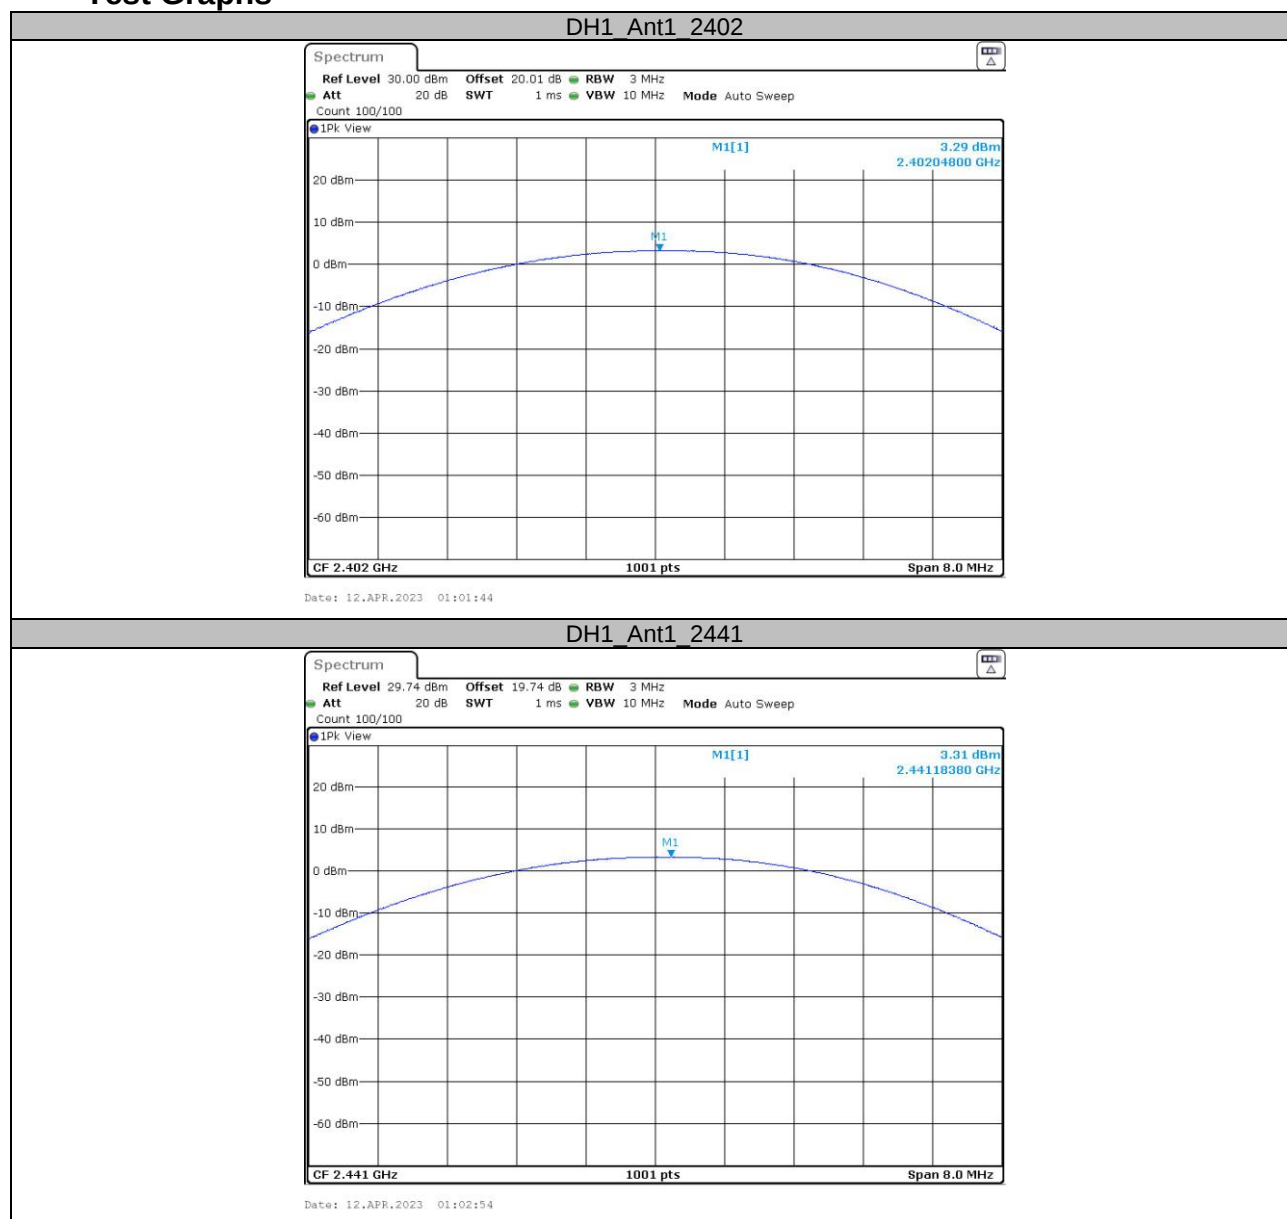


DH1_Ant1_2480

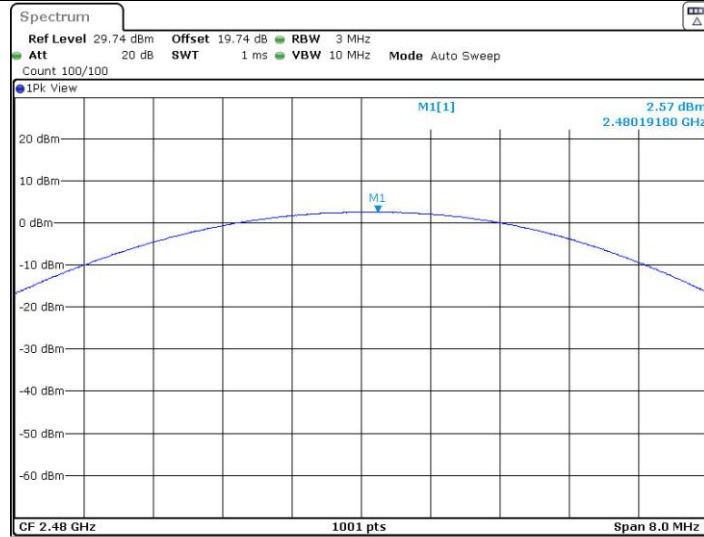

2DH1_Ant1_2402

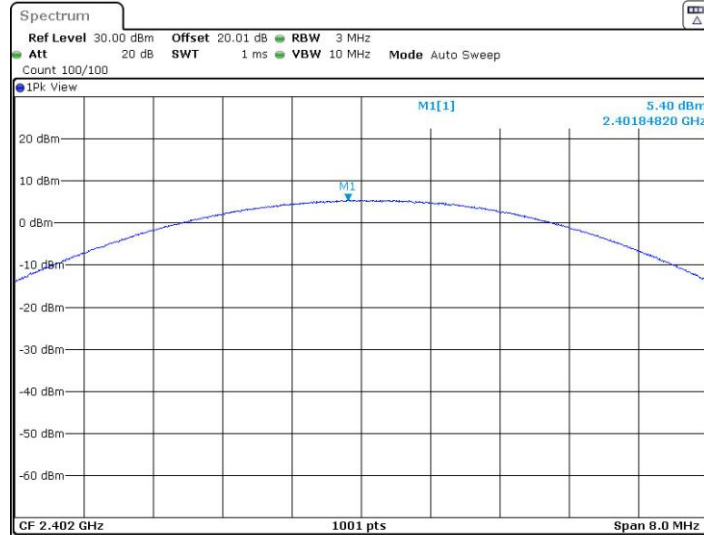

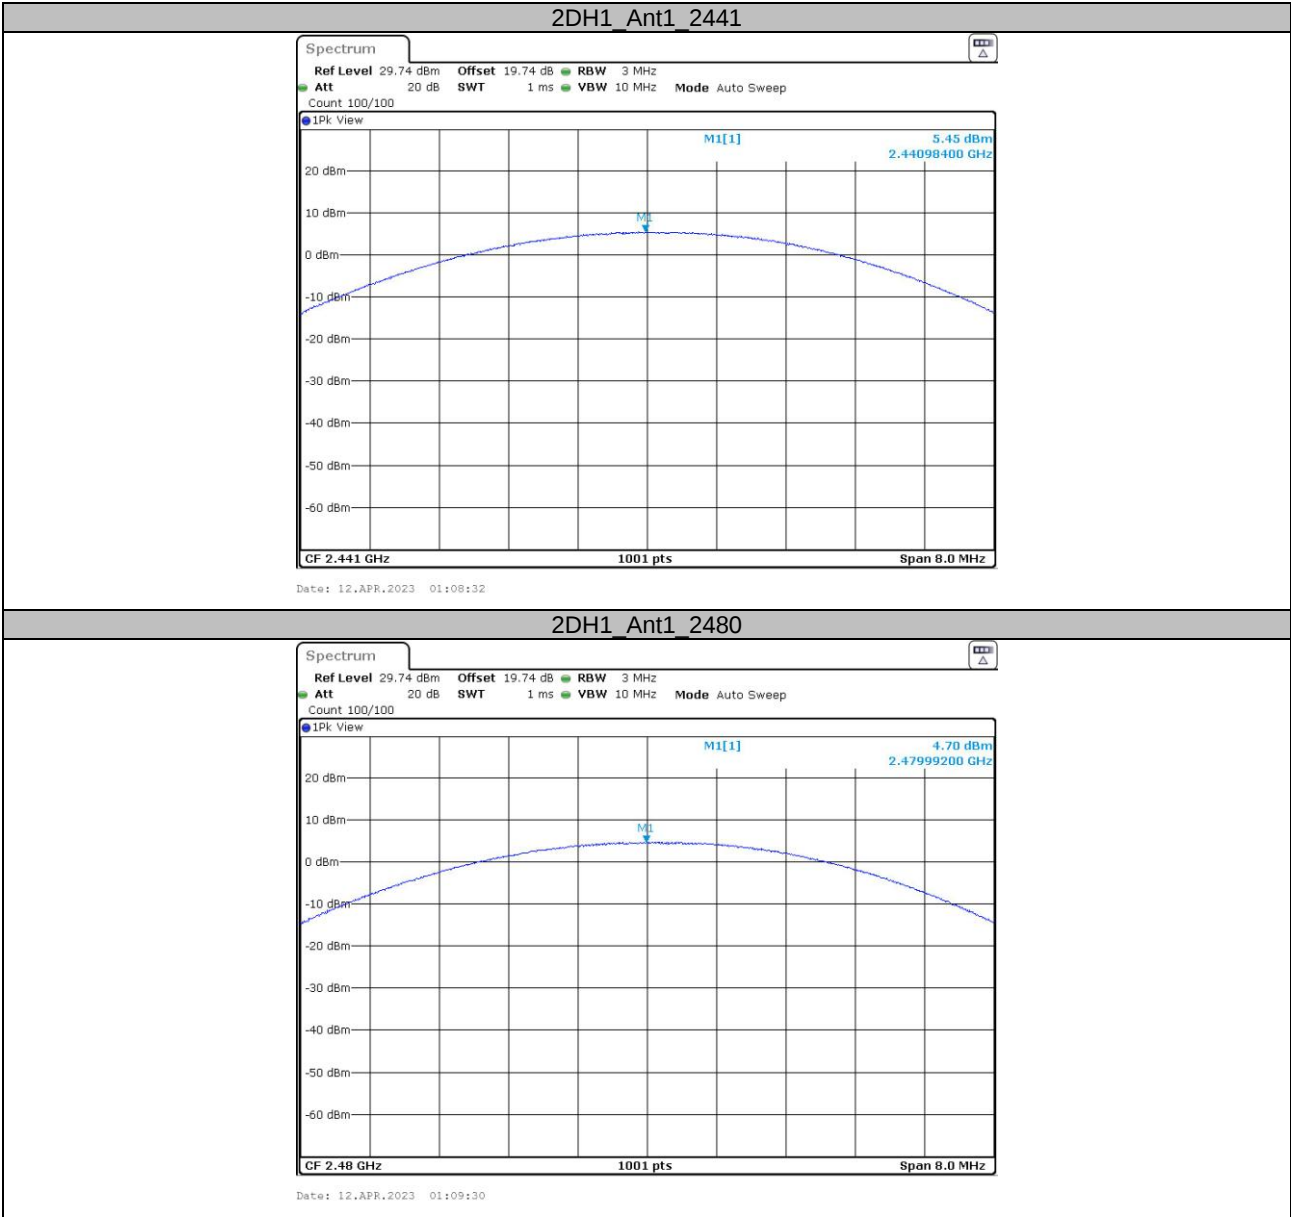


3DH1_Ant1_2402



3DH1_Ant1_2441



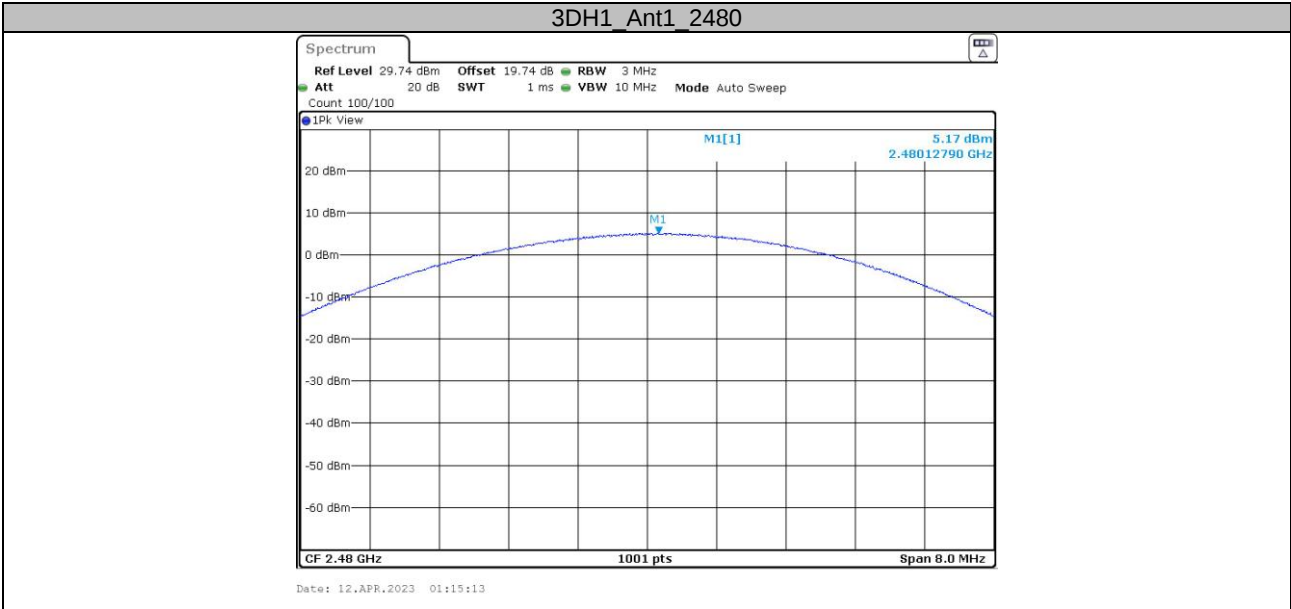


**Appendix D: Carrier frequency separation
Test Result**

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1.003	≥ 0.620	PASS
2DH1	Ant1	Hop	1.003	≥ 0.867	PASS
3DH1	Ant1	Hop	1	≥ 0.853	PASS

Test Graphs




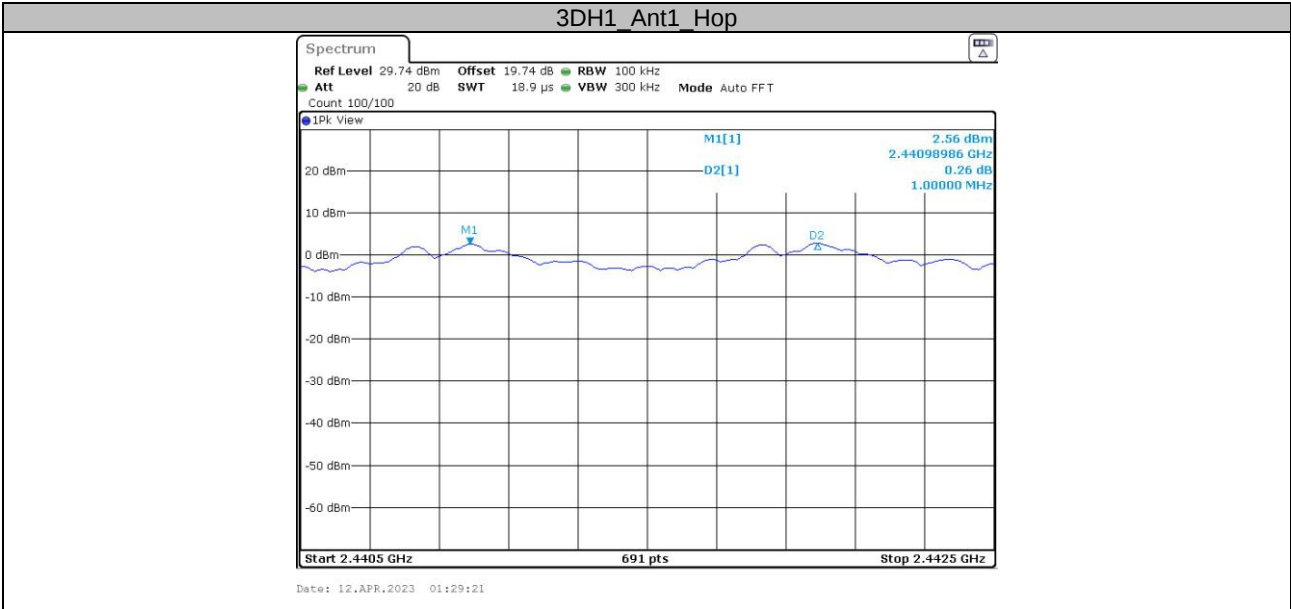



**Appendix E: Time of occupancy
Test Result**


TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.37	330	0.123	≤0.4	PASS
DH3	Ant1	Hop	1.62	160	0.26	≤0.4	PASS
DH5	Ant1	Hop	2.86	120	0.344	≤0.4	PASS
2DH1	Ant1	Hop	0.39	320	0.123	≤0.4	PASS
2DH3	Ant1	Hop	1.63	170	0.277	≤0.4	PASS
2DH5	Ant1	Hop	2.87	110	0.316	≤0.4	PASS
3DH1	Ant1	Hop	0.39	320	0.123	≤0.4	PASS
3DH3	Ant1	Hop	1.63	150	0.244	≤0.4	PASS
3DH5	Ant1	Hop	2.87	130	0.373	≤0.4	PASS


Test Graphs

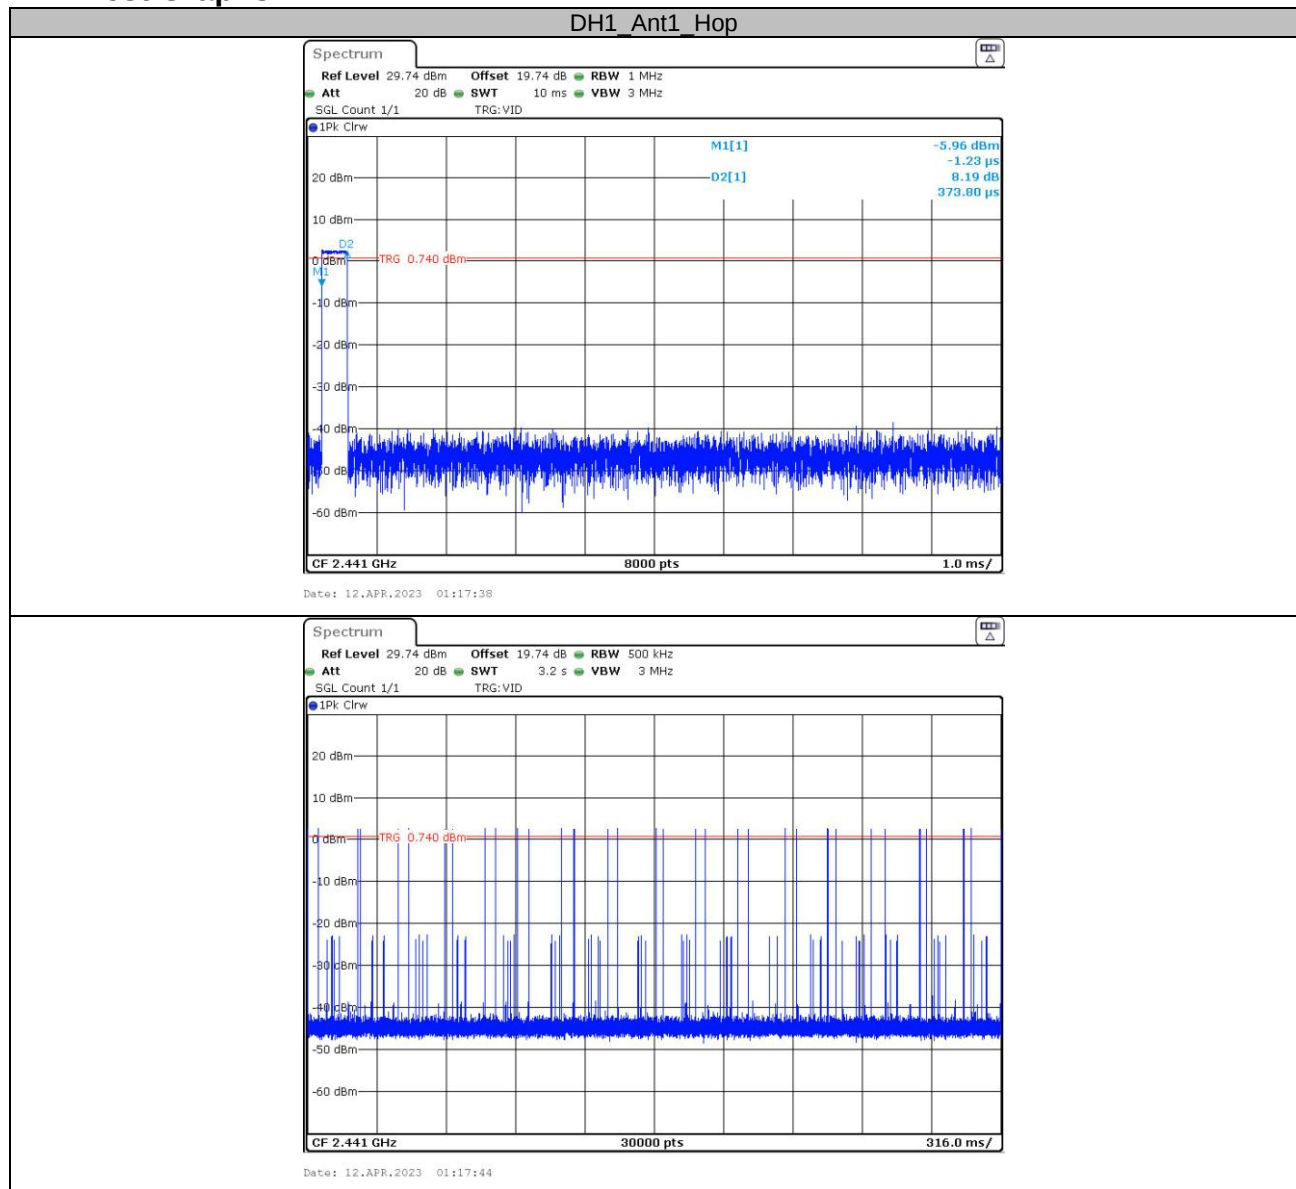


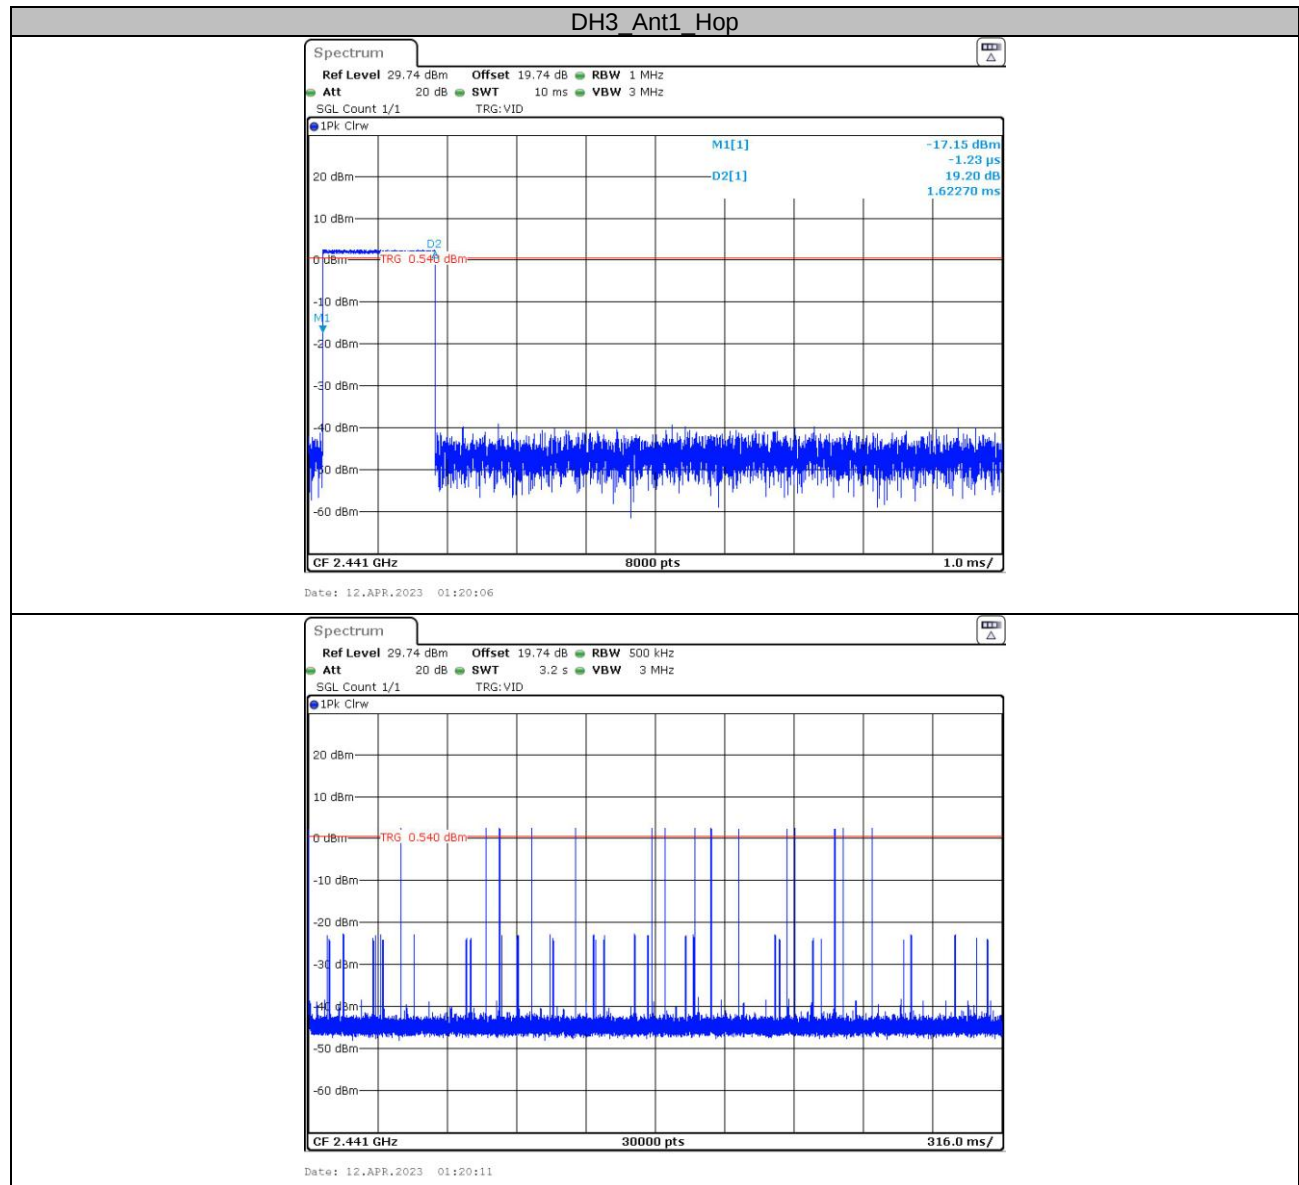


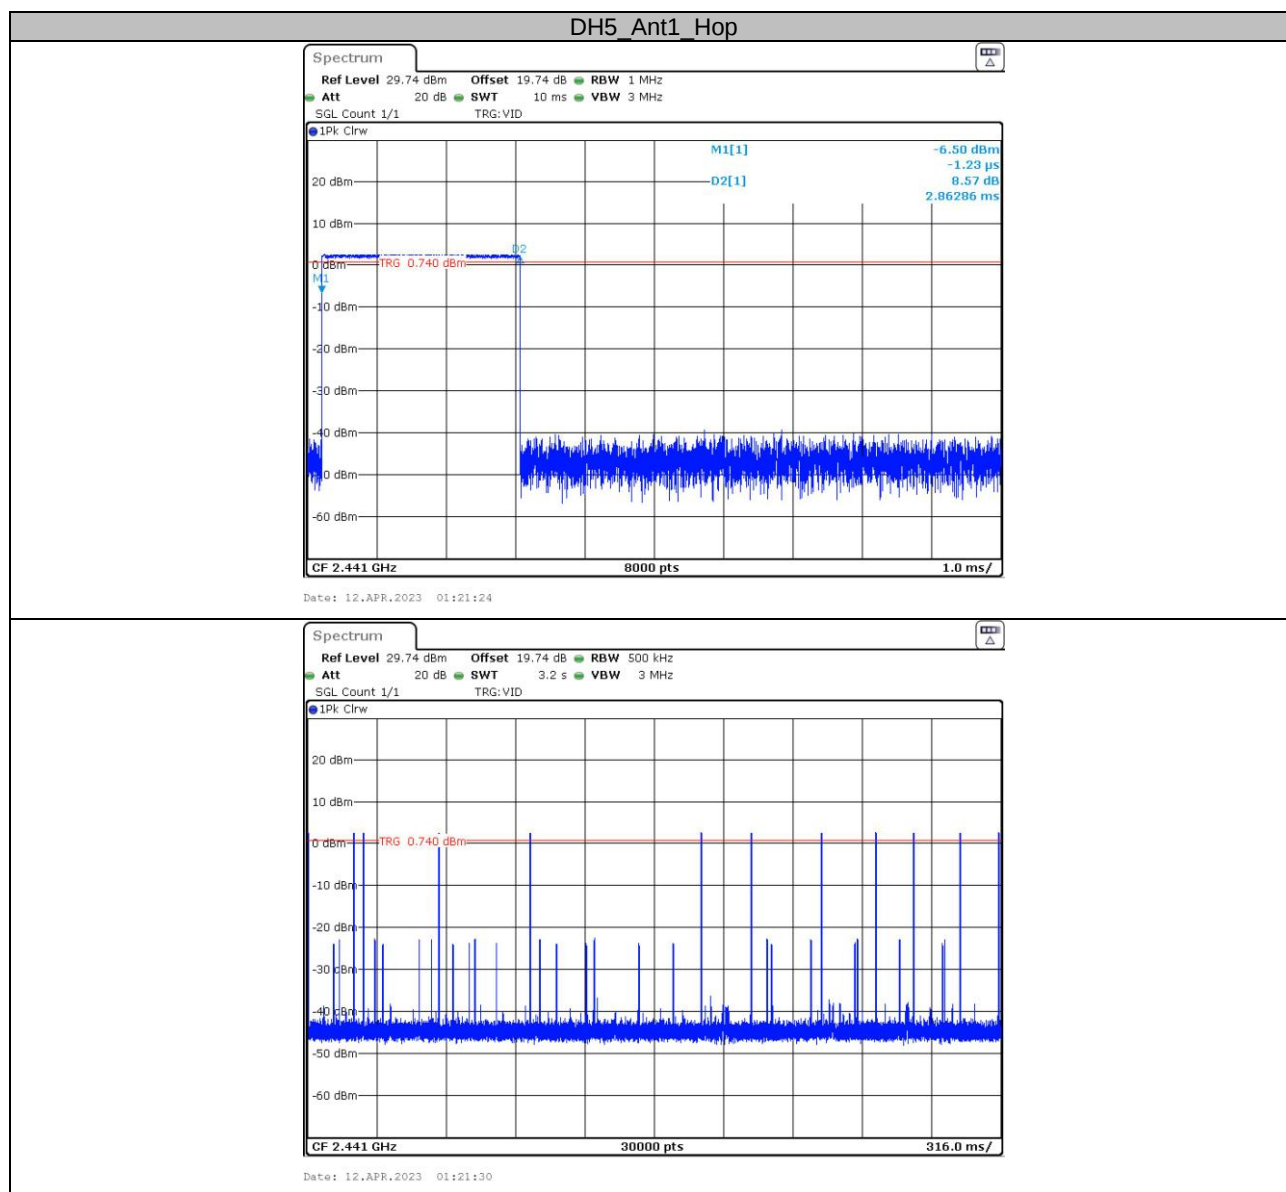


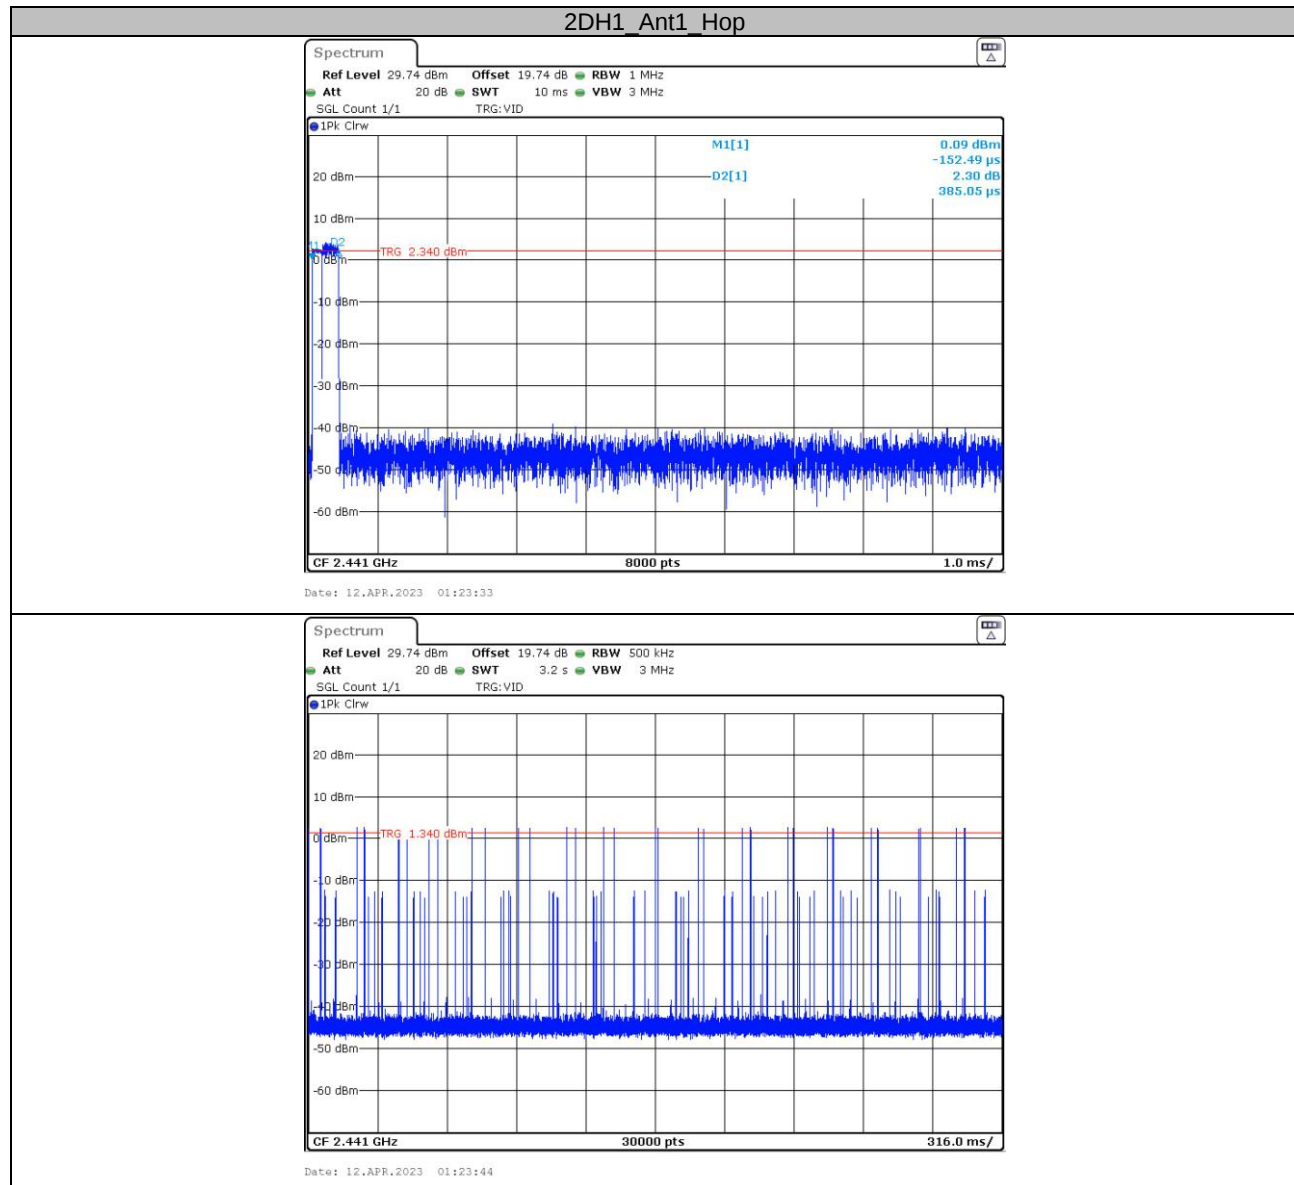


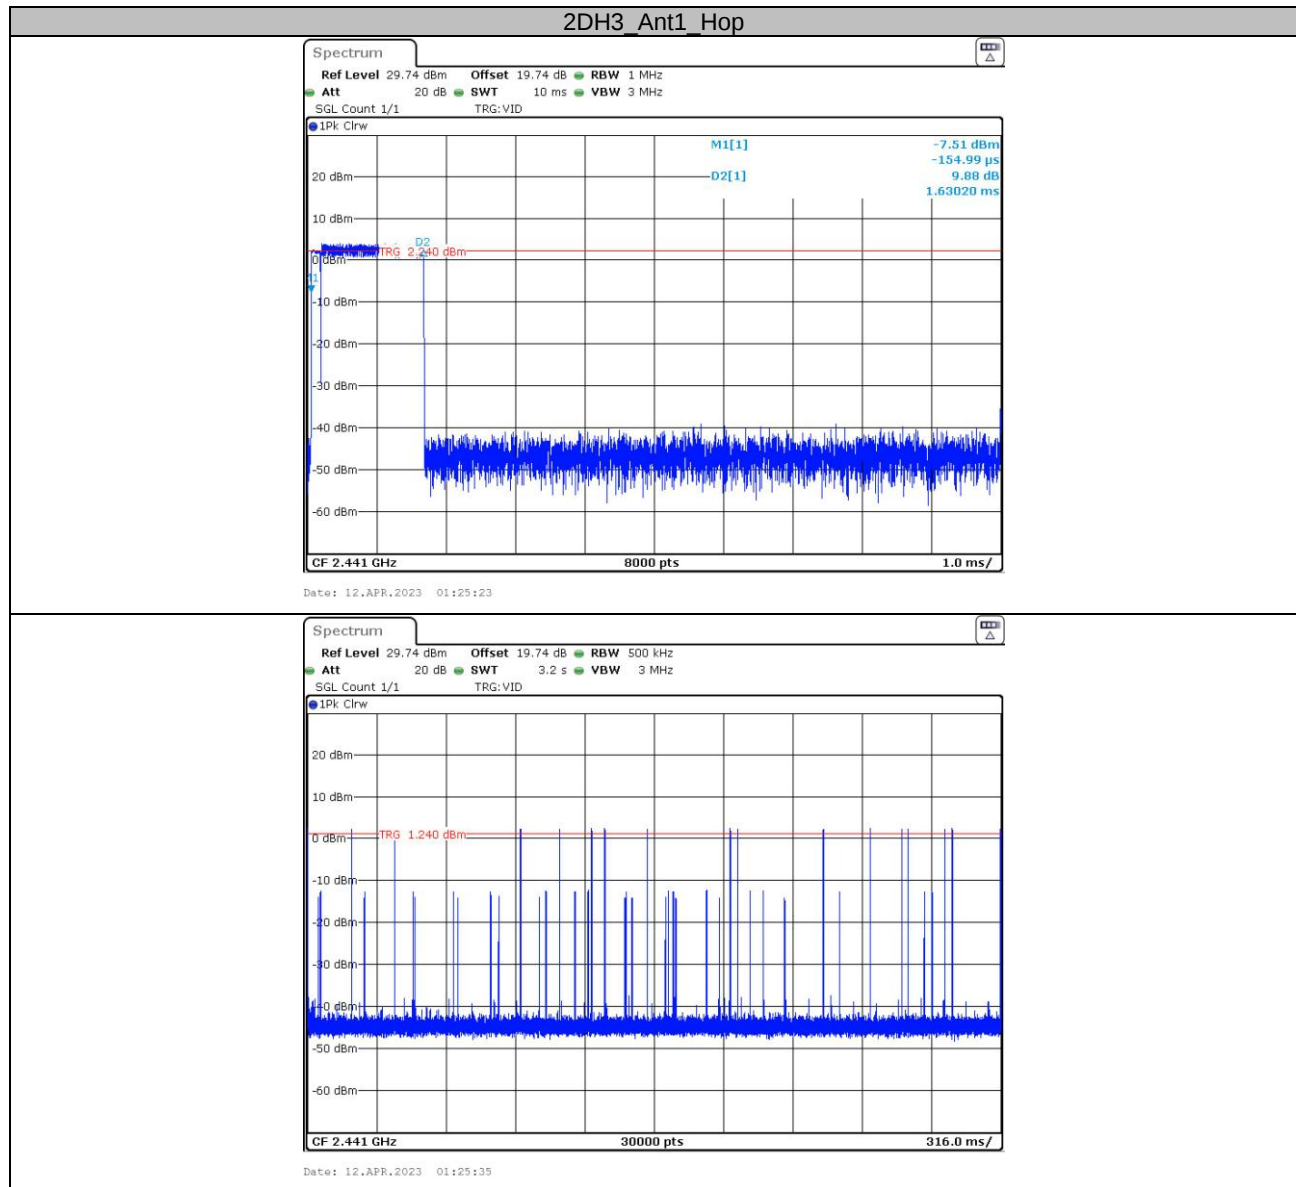

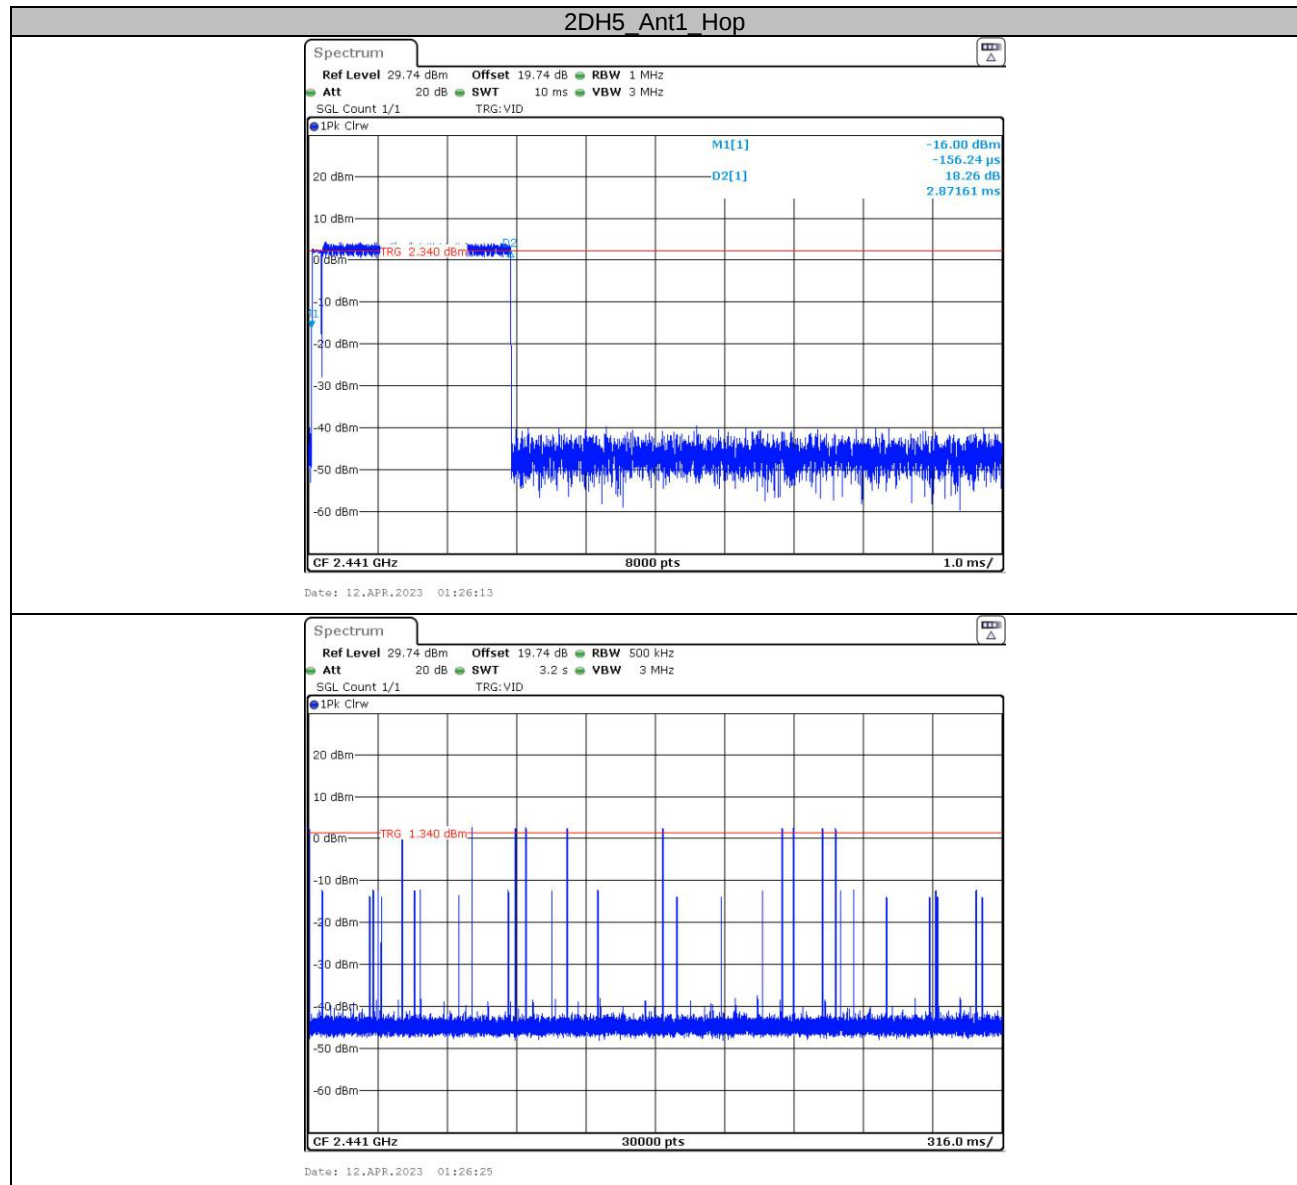

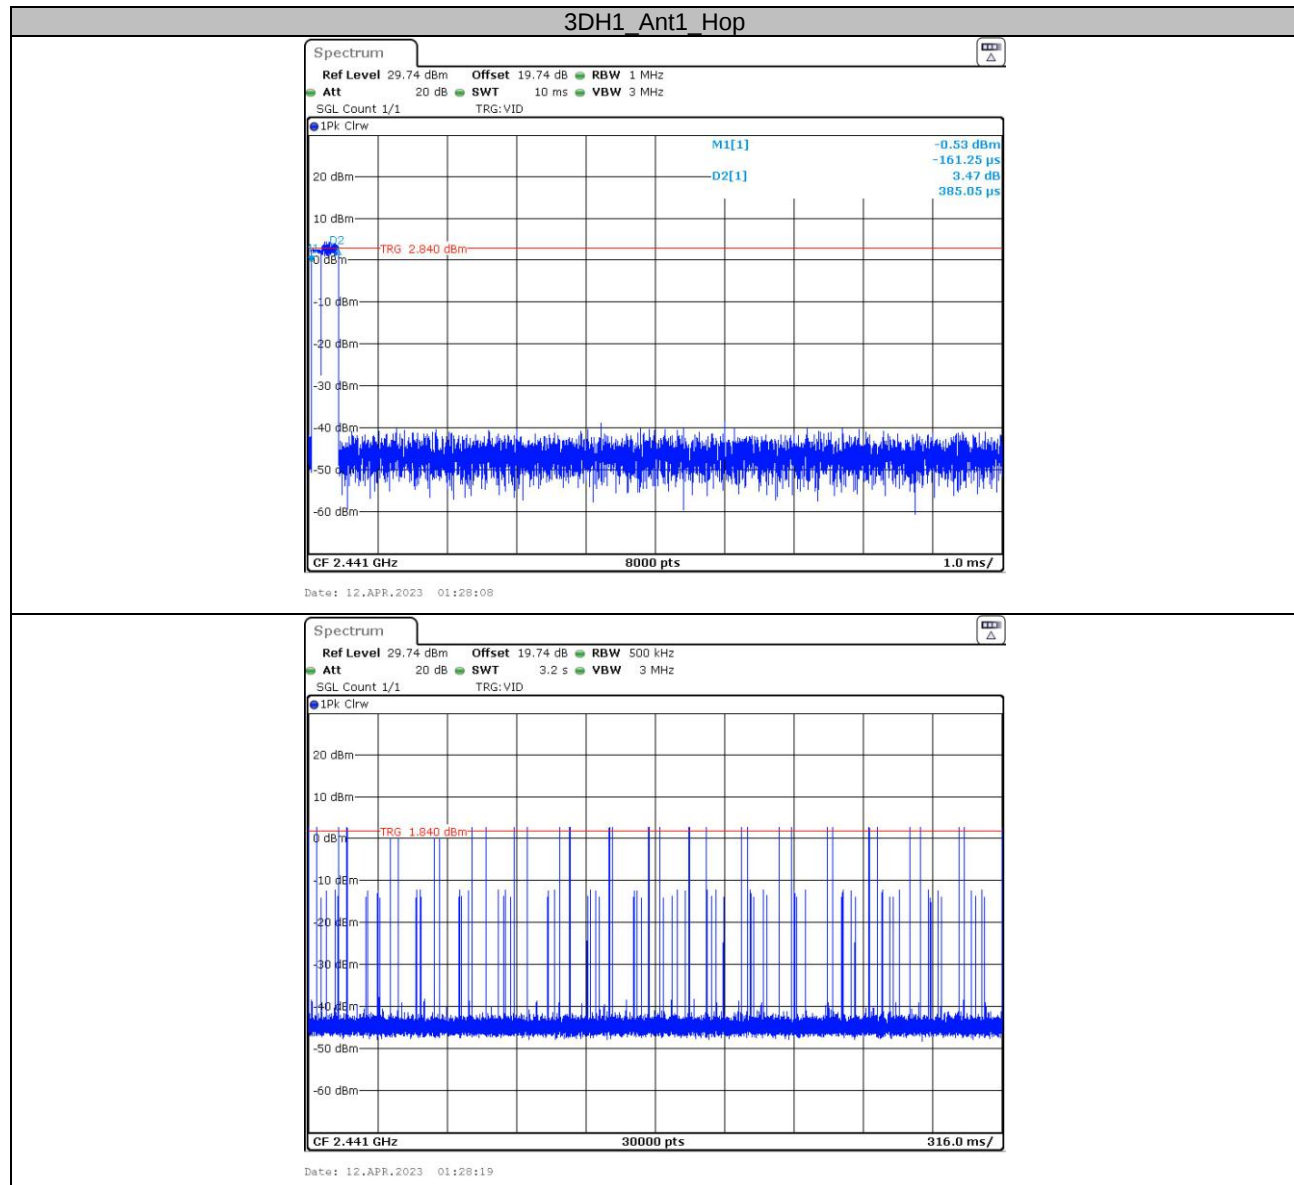

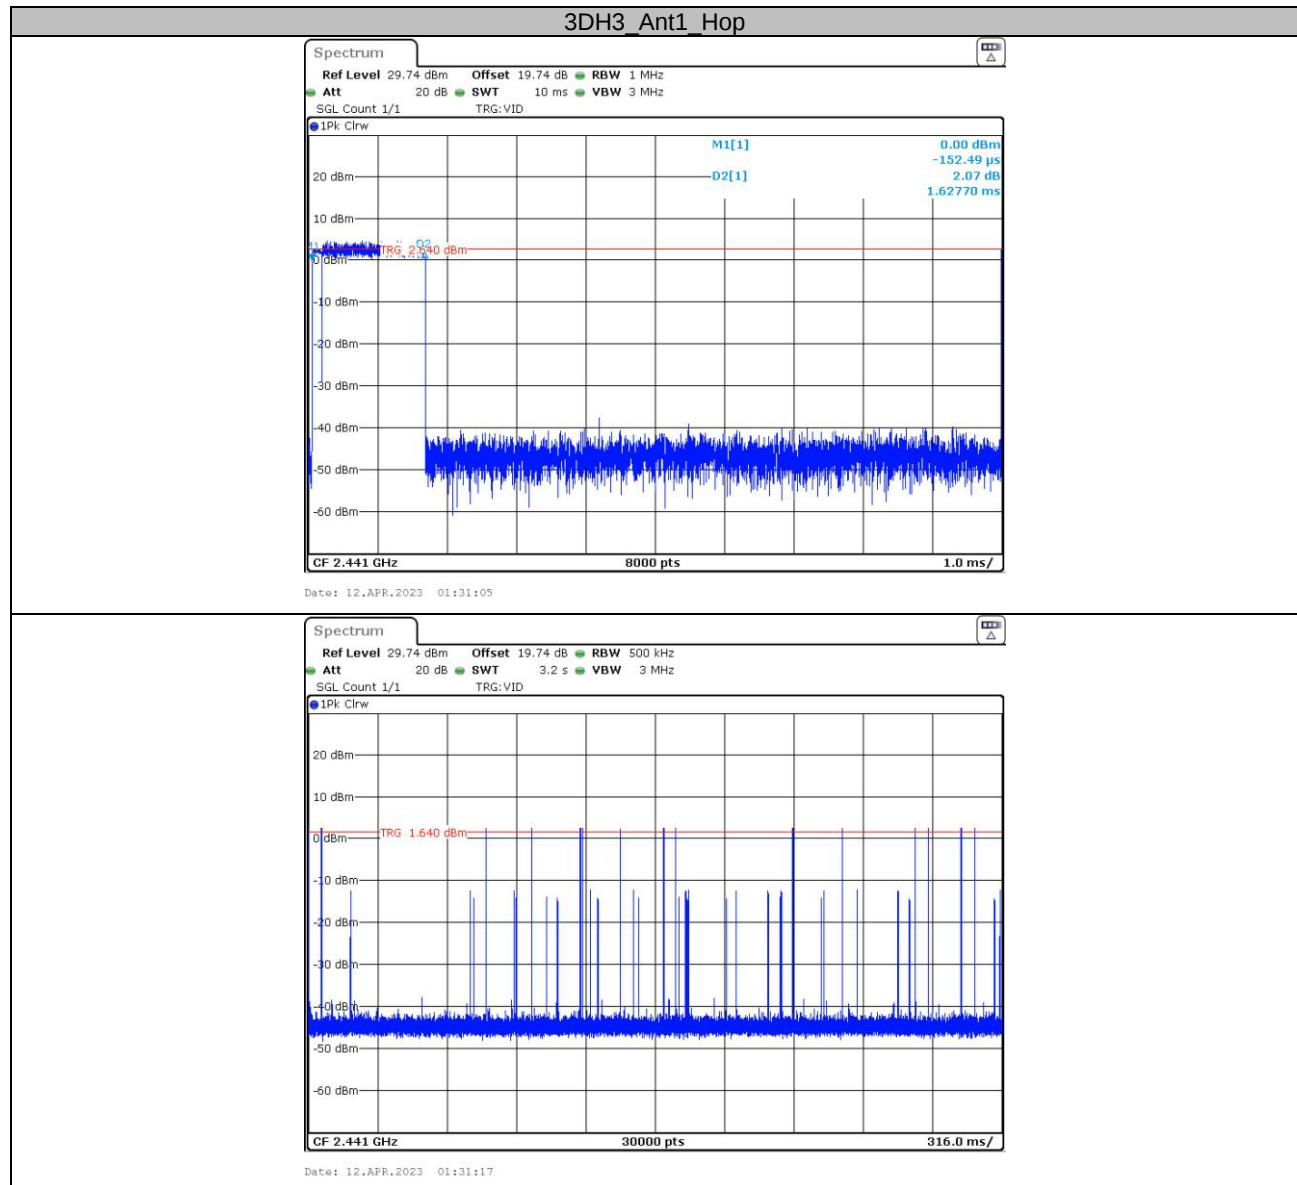


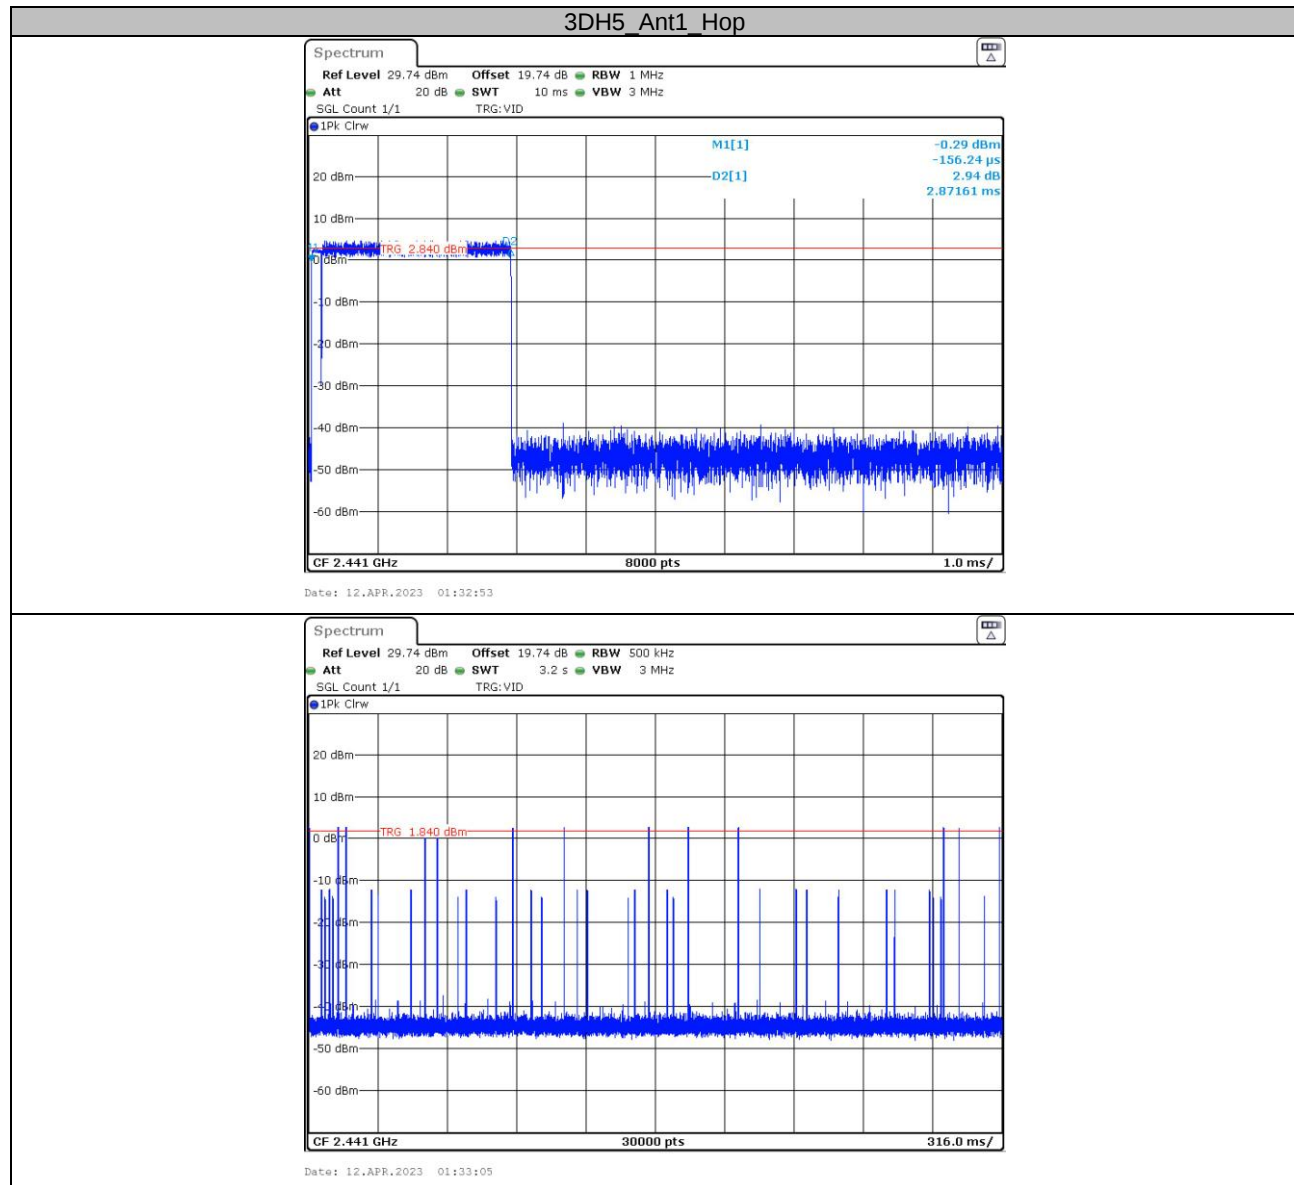


**Appendix F: Number of hopping channels
Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH1	Ant1	Hop	79	≥15	PASS
2DH1	Ant1	Hop	79	≥15	PASS
3DH1	Ant1	Hop	79	≥15	PASS


Test Graphs

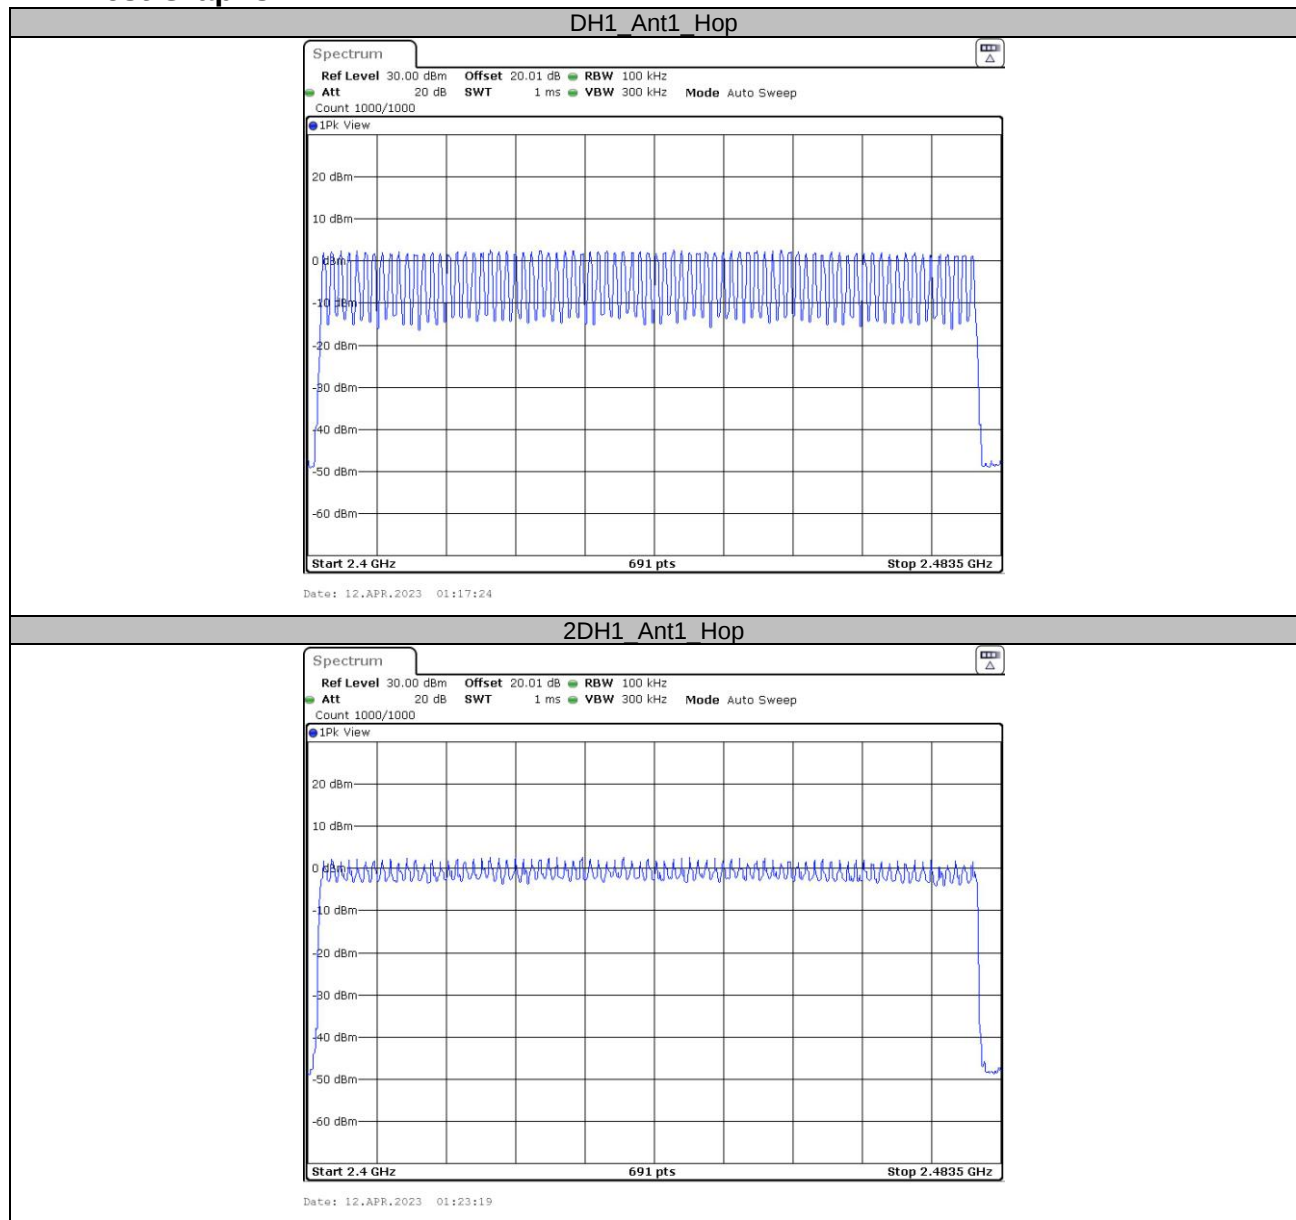

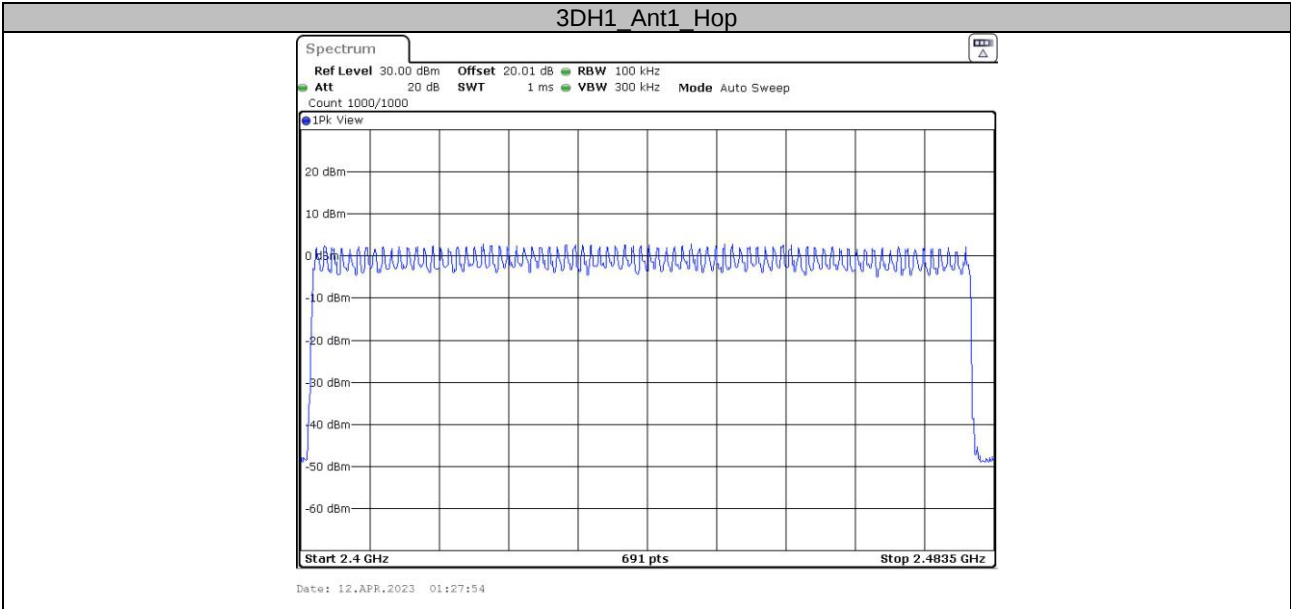


Appendix G: Band edge measurements

Test Graphs

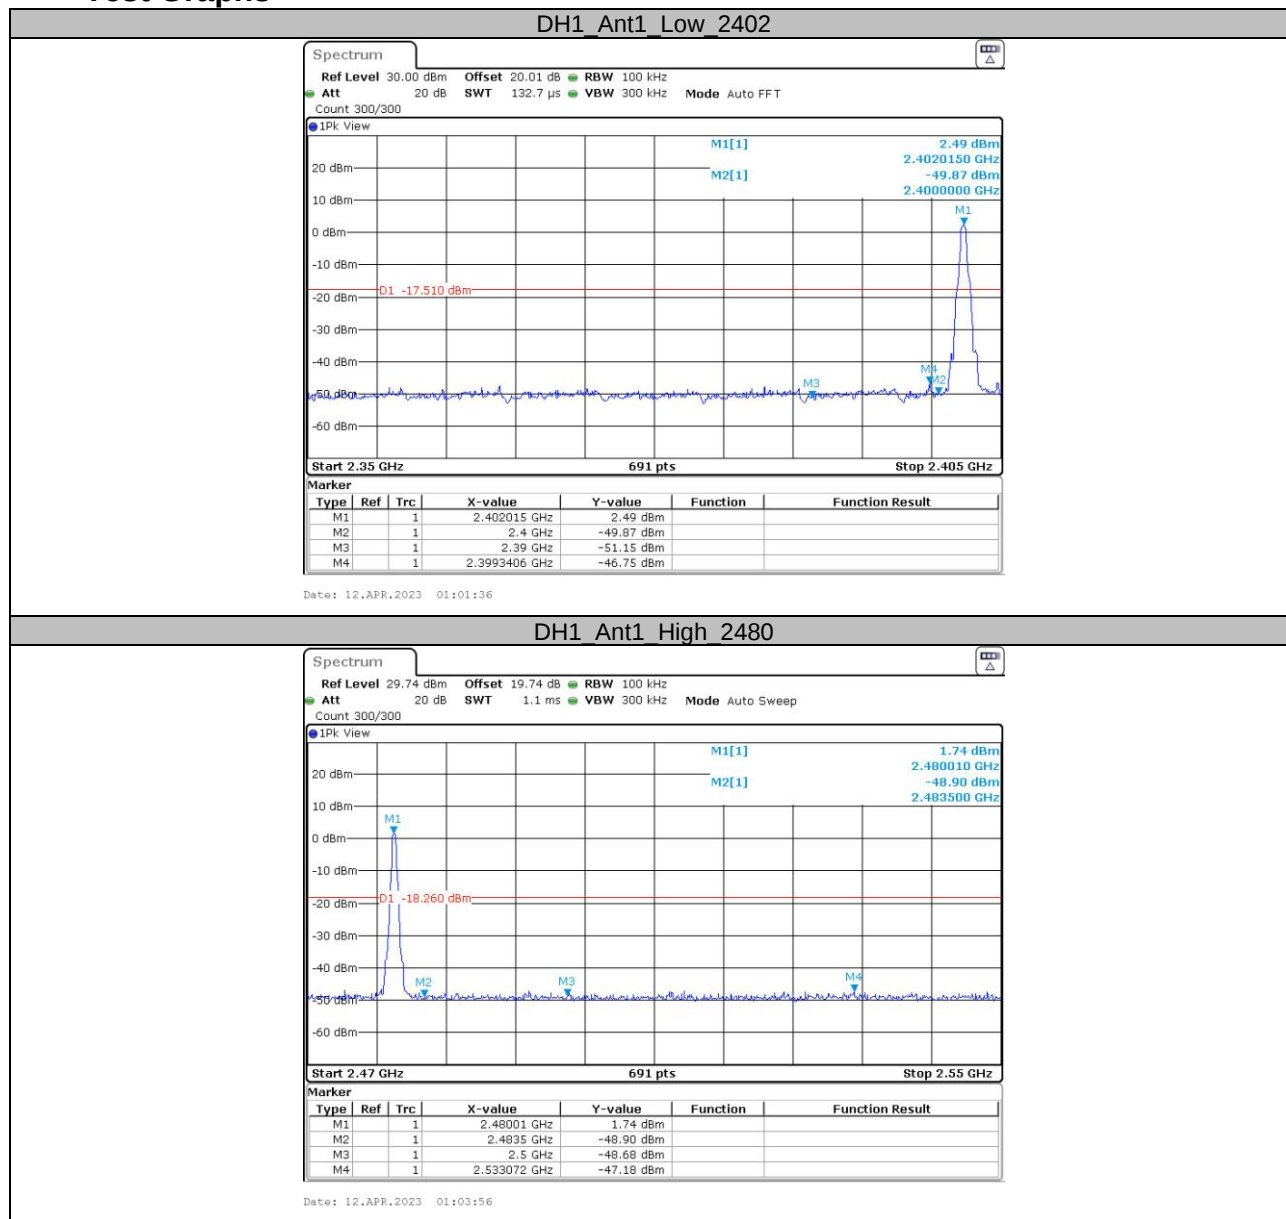


DH1 Ant1 Low Hop 2402

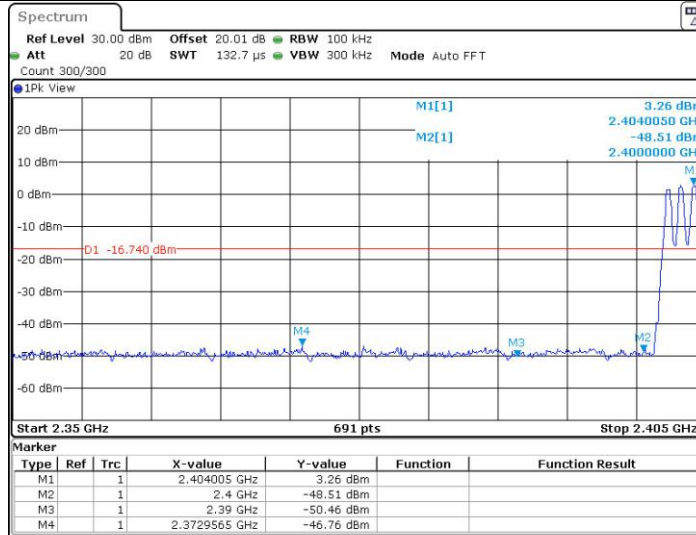


Date: 12.APR.2023 01:16:37

DH1 Ant1 High Hop 2480

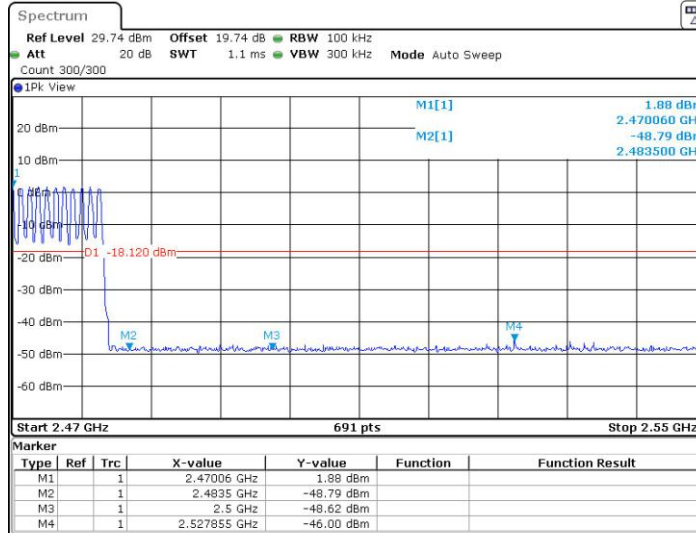


Date: 12.APR.2023 01:18:42

2DH1_Ant1_Low_2402

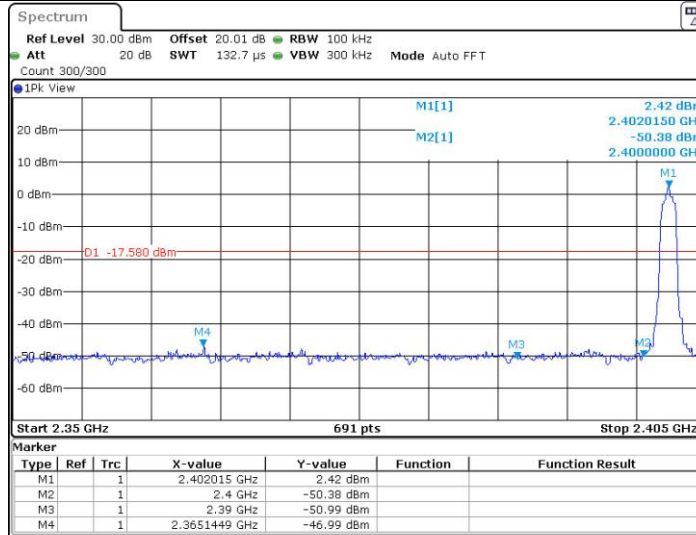


Date: 12.APR.2023 01:07:26

2DH1_Ant1_High_2480

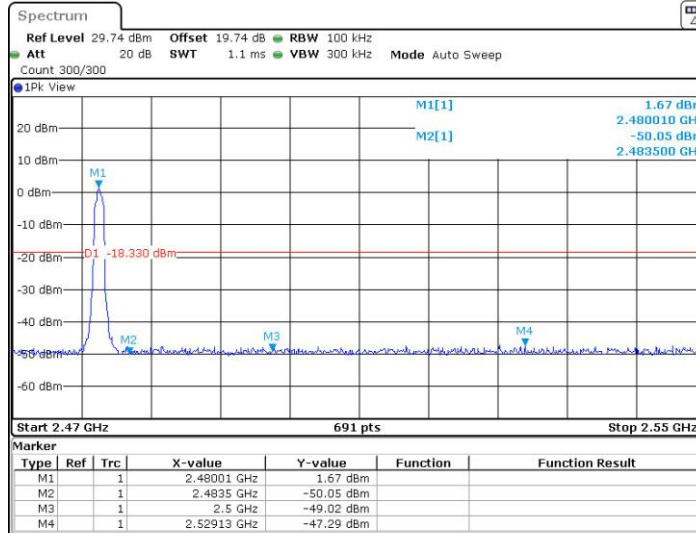


Date: 12.APR.2023 01:09:22

2DH1_Ant1_Low_Hop_2402

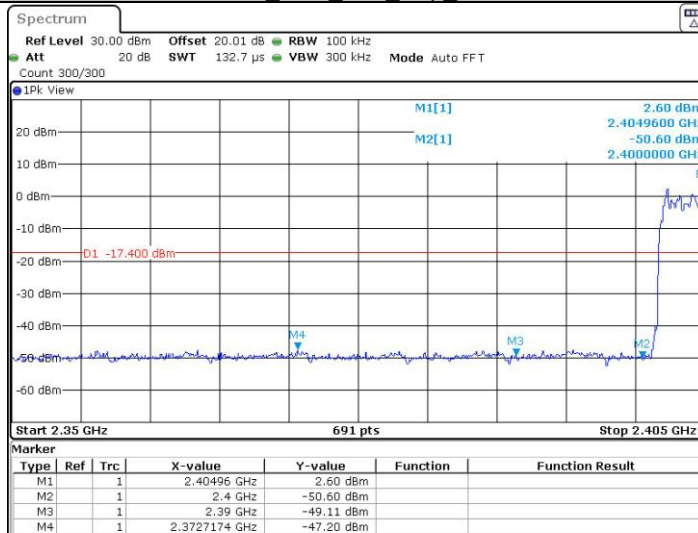



Date: 12.APR.2023 01:22:28

2DH1_Ant1_High_Hop_2480

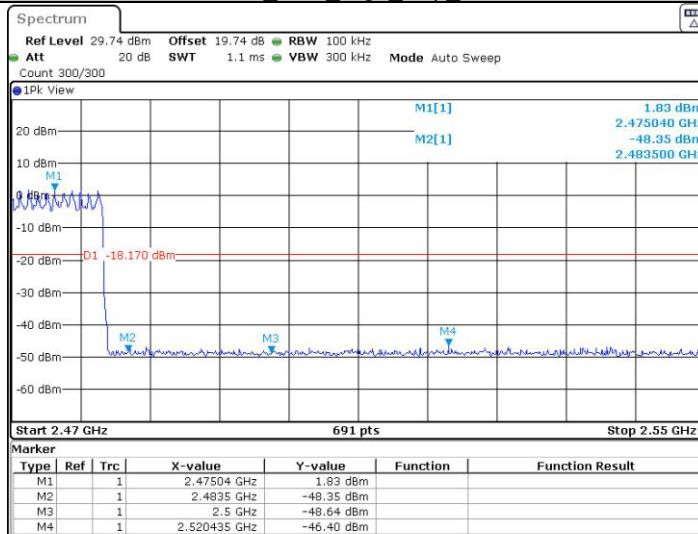

Date: 12.APR.2023 01:24:06

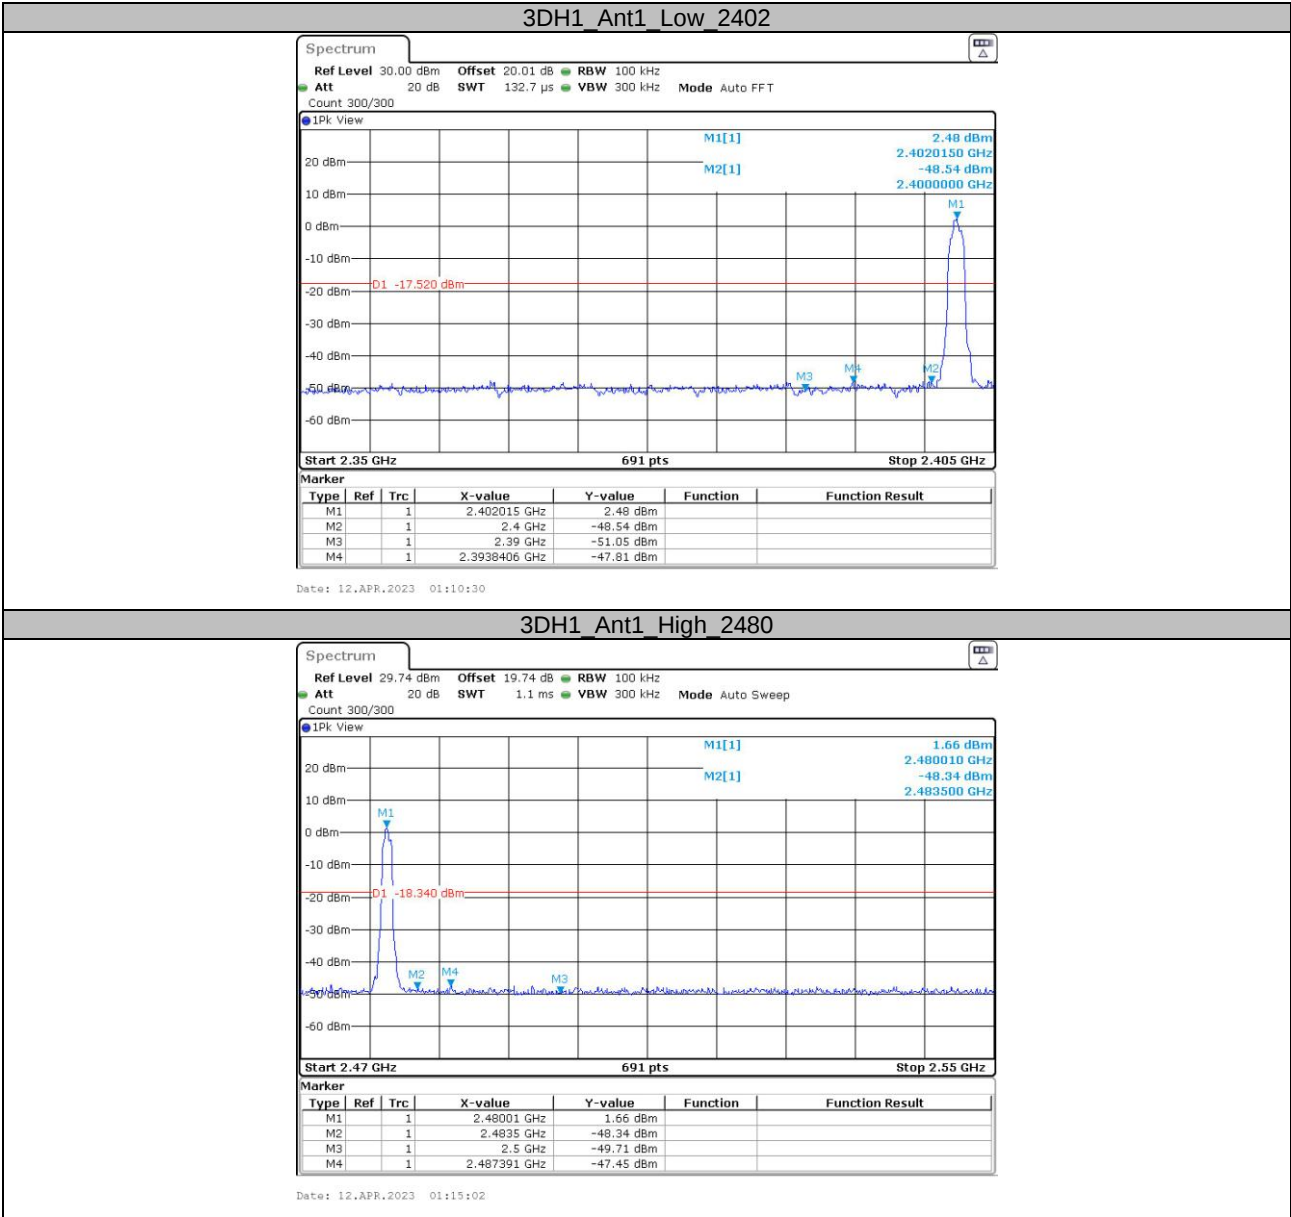

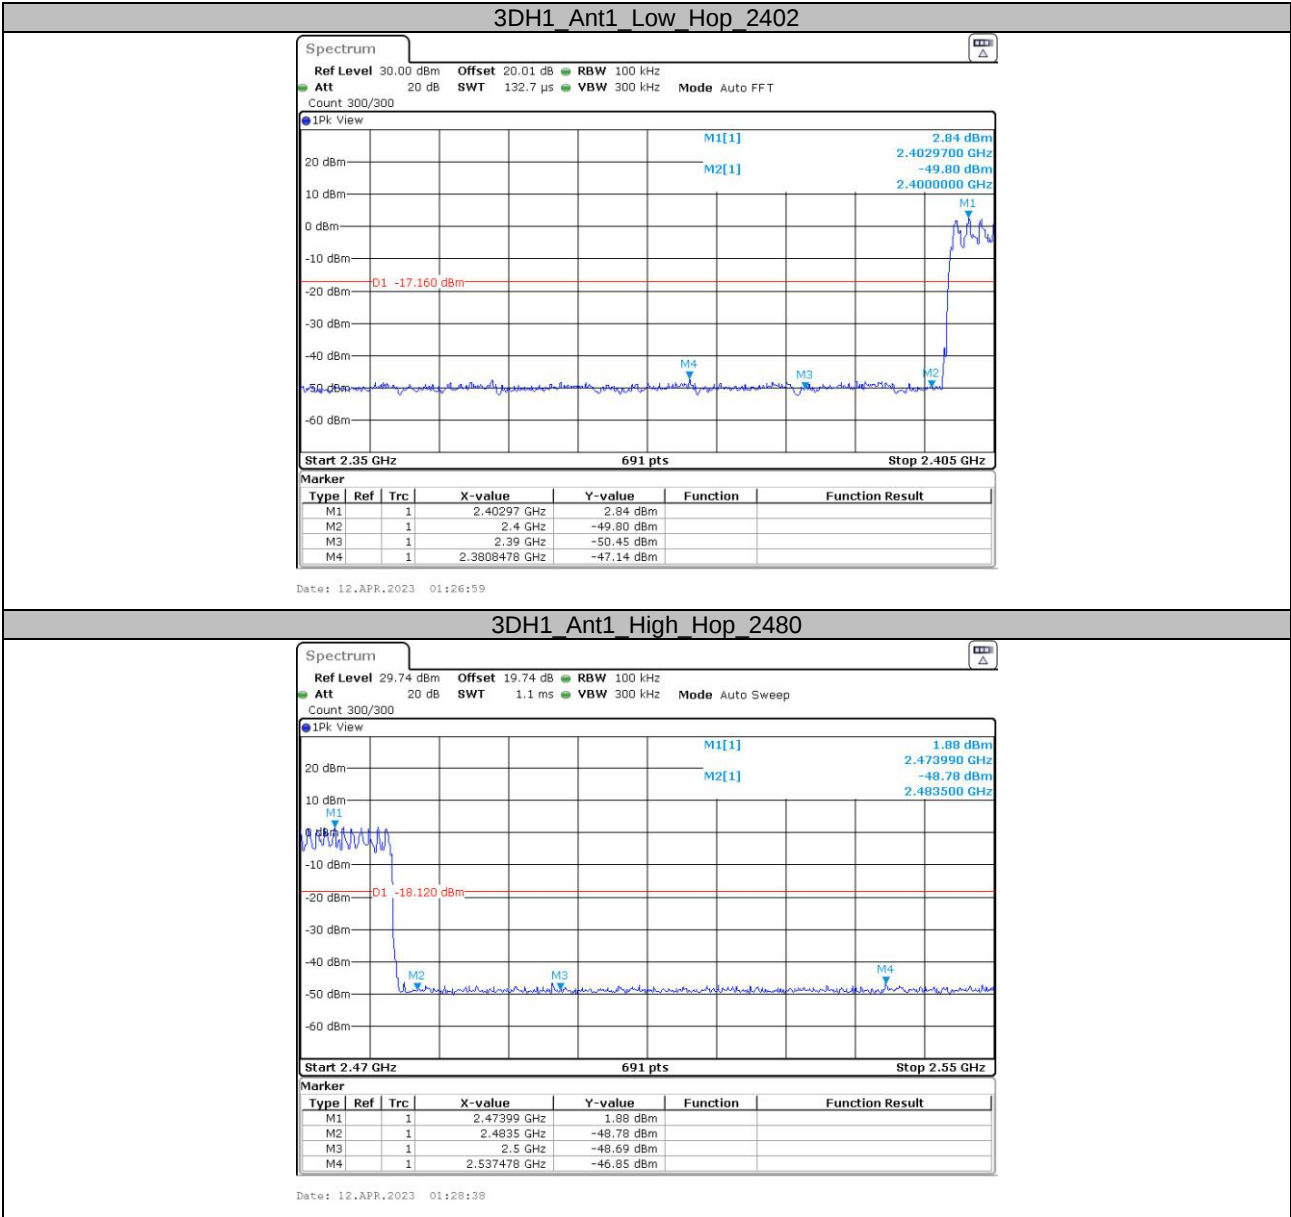

***** END OF REPORT *****