

TEST REPORT

FCC LTE B2 Test for TWG18ANECN
Class II Permissive Change

APPLICANT
LG Electronics Inc.

REPORT NO.
HCT-RF-2107-FC025

DATE OF ISSUE
July 9, 2021

Tested by
Jae Mun Do



Technical Manager
Jong Seok Lee



HCT CO., LTD.
BongJai Huh
BongJai Huh / CEO



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

TEST REPORT

FCC LTE Test for
TWG18ANECN

REPORT NO.

HCT-RF-2107-FC025

DATE OF ISSUE

July 09, 2021

Additional Model

TWG10ANEN

Applicant

LG Electronics Inc.

222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea

**Eut Type
Model Name**

Car telematics device

TWG18ANECN

FCC ID

BEJLTTWG10N

FCC Rule Part(s):

§ 24, § 2

FCC Classification:

PCS Licensed Transmitter (PCB)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	July 09, 2021	Initial Release

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)

If this report is required to confirmation of authenticity, please contact to www.hct.co.kr

CONTENTS

1. GENERAL INFORMATION	5
1.1. MAXIMUM OUTPUT POWER	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS	8
3.1 TEST PROCEDURE	8
3.2 CONDUCTED OUTPUT POWER	9
3.3 RADIATED POWER	10
3.4 RADIATED SPURIOUS EMISSIONS	11
3.5 PEAK- TO- AVERAGE RATIO	12
3.6 OCCUPIED BANDWIDTH.	14
3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	15
3.8 BAND EDGE	16
3.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	17
3.10 WORST CASE(RADIATED TEST)	18
3.11 WORST CASE(CONDUCTED TEST)	19
4. LIST OF TEST EQUIPMENT	20
5. MEASUREMENT UNCERTAINTY	21
6. SUMMARY OF TEST RESULTS	22
7. SAMPLE CALCULATION	23
8. TEST DATA	25
8.1 CONDUCTED OUTPUT POWER	25
8.2 EQUIVALENT ISOTROPIC RADIATED POWER	31
8.3 RADIATED SPURIOUS EMISSIONS	34
8.4 PEAK-TO-AVERAGE RATIO	40
8.5 OCCUPIED BANDWIDTH	41
8.6 CONDUCTED SPURIOUS EMISSIONS	42
8.7 BAND EDGE	42
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	43
9. TEST PLOTS	61
10 ANNEX A_ TEST SETUP PHOTO	158

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	LG Electronics Inc.
Address:	222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea
FCC ID:	BEJLTTWG10N
Application Type:	Class II Permissive Change
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule(s):	§ 24, § 2
EUT Type:	Car telematics device
Model(s):	TWG18ANECON
Additional Model:	TWG10ANEN
Tx Frequency:	1850.7 MHz – 1909.3 MHz (LTE – Band2 (1.4 MHz)) 1851.5 MHz – 1908.5 MHz (LTE – Band2 (3 MHz)) 1852.5 MHz – 1907.5 MHz (LTE – Band2 (5 MHz)) 1855.0 MHz – 1905.0 MHz (LTE – Band2 (10 MHz)) 1857.5 MHz – 1902.5 MHz (LTE – Band2 (15 MHz)) 1860.0 MHz – 1900.0 MHz (LTE – Band2 (20 MHz))
Date(s) of Tests:	May 03, 2021 ~ June 28, 2021
Serial number:	Radiated: TWG18ANECON-02 Conducted: TWG18ANECON-01

1.1. MAXIMUM OUTPUT POWER

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band2 (1.4)	1850.7 - 1909.3	1M09G7D	QPSK	0.072	18.55
		1M10W7D	16QAM	0.057	17.54
LTE – Band2 (3)	1851.5 - 1908.5	2M71G7D	QPSK	0.074	18.71
		2M71W7D	16QAM	0.059	17.74
LTE – Band2 (5)	1852.5 - 1907.5	4M51G7D	QPSK	0.078	18.90
		4M52W7D	16QAM	0.061	17.88
LTE – Band2 (10)	1855.0 - 1905.0	8M96G7D	QPSK	0.084	19.22
		8M97W7D	16QAM	0.065	18.16
LTE – Band2 (15)	1857.5 - 1902.5	13M4G7D	QPSK	0.082	19.15
		13M5W7D	16QAM	0.065	18.16
LTE – Band2 (20)	1860.0 - 1900.0	17M9G7D	QPSK	0.083	19.21
		17M9W7D	16QAM	0.065	18.13

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Car telematics device with GSM/GPRS/EGPRS/UMTS and LTE.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY


The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 – Section 5.2
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 CONDUCTED OUTPUT POWER

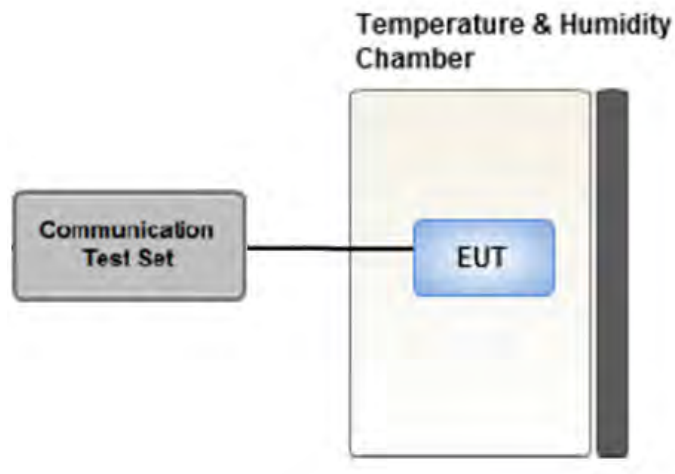

Test setup

Test Overview

When an average power meter is used to perform RF output power measurements, the fundamental condition that measurements be performed only over durations of active transmissions at maximum output power level applies.

Conducted Output Power was tested in accordance with KDB971168 D01 Power Meas License Digital Systems v03r01, Section 5.2.

3.3 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.4 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test dat
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.5 PEAK- TO- AVERAGE RATIO

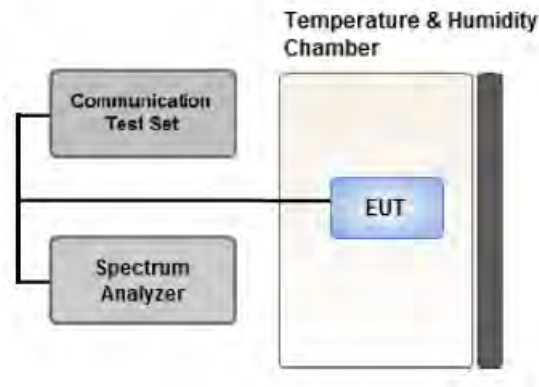

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW $\geq$ OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW $\geq$ OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \times \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \times \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25%.

3.6 OCCUPIED BANDWIDTH.

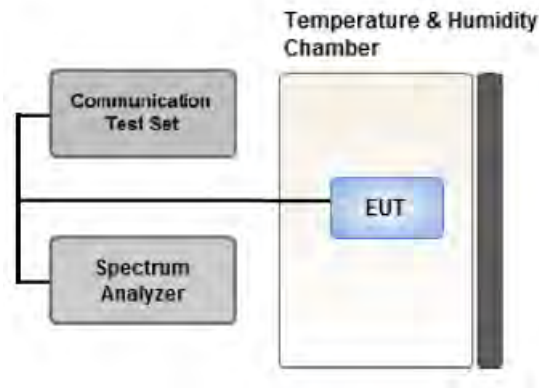

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq$ 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

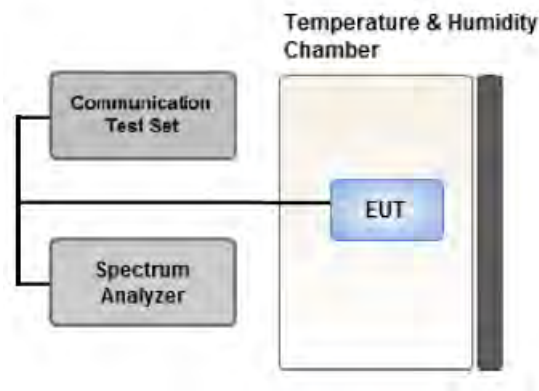

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep $\geq$ 2 x Span / RBW

3.8 BAND EDGE

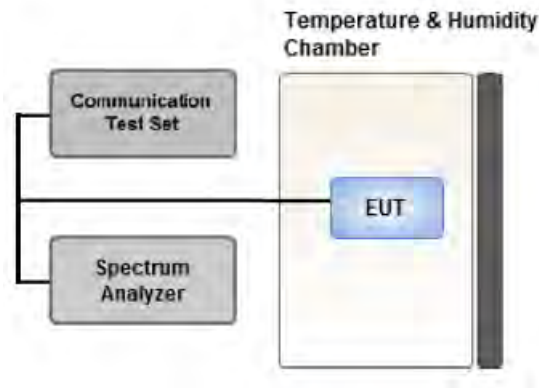

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \times \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

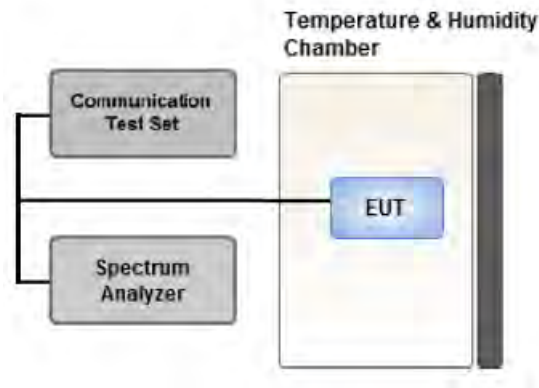

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.10 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
 - All modes of operation were investigated and the worst case configuration results are reported.
 - The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
 - Please refer to the table below.
 - TWG18ANECN & additional models were tested and the worst case results are reported.
- (Worst case : TWG18ANECN)

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	X

3.11 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- TWG18ANECN & additional models were tested and the worst case results are reported.

(Worst case : TWG18ANECN)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
		1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
T&M SYSTEM	FBSR-02B(WHK1.2/15G-10EF)/H.P.F	-	03/02/2021	Annual	03/02/2022
T&M SYSTEM	FBSR-02B(WHK3.3/18G-10EF)/H.P.F	-	03/02/2021	Annual	03/02/2022
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	04/07/2021	Annual	04/07/2022
Hewlett Packard	E3632A/DC Power Supply	MY40004427	09/16/2020	Annual	09/16/2021
Schwarzbeck	UHAP/ Dipole Antenna	557	04/05/2021	Biennial	04/05/2023
Schwarzbeck	UHAP/ Dipole Antenna	558	04/05/2021	Biennial	04/05/2023
ESPEC	SU-642 / Chamber	93008124	03/15/2021	Annual	03/15/2022
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	08/29/2019	Biennial	08/29/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	09/25/2019	Biennial	09/25/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	10/13/2020	Biennial	10/13/2022
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	02/11/2020	Biennial	02/11/2022
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY50200093	11/17/2020	Annual	11/17/2021
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/01/2021	Annual	06/01/2022
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/14/2020	Annual	10/14/2021
Agilent	8960 (E5515C)/ Base Station	MY48360800	08/26/2020	Annual	08/26/2021
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-333	03/19/2020	Biennial	03/19/2022
Schwarzbeck	VULB9160/ Bilog Antenna	3150	03/03/2021	Biennial	03/03/2023
Schwarzbeck	VULB9168/ Hybrid Antenna	760	02/22/2021	Biennial	02/22/2023
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6262116770	07/22/2020	Annual	07/22/2021
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/07/2021	Annual	01/07/2022
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/13/2020	Annual	07/13/2021
KEYSIGHT	N9030B / Signal Analyzer(5Hz~40.0GHz)	MY55480167	06/02/2021	Annual	06/02/2022
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 24.238(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	PASS
Peak- to- Average Ratio	§ 24.232(d)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§ 24.235	Emission must remain in band	PASS

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§ 24.232(c)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 24.238(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 CONDUCTED OUTPUT POWER

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)		
				18607	18900	19193
				1850.7 MHz	1880 MHz	1909.3 MHz
1.4 MHz	QPSK	1	0	23.34	23.19	23.16
		1	3	23.35	23.17	23.14
		1	5	23.39	23.16	23.16
		3	0	23.29	23.13	23.13
		3	1	23.33	23.11	23.14
		3	3	23.34	23.12	23.08
		6	0	22.31	22.27	22.10
	16QAM	1	0	22.25	22.16	22.01
		1	3	22.24	22.13	22.11
		1	5	22.32	22.16	22.01
		3	0	22.25	22.22	22.06
		3	1	22.23	22.12	22.07
		3	3	22.26	22.18	22.07
		6	0	21.40	21.30	21.19

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)		
				18615	18900	19185
				1851.5 MHz	1880 MHz	1908.5 MHz
3 MHz	QPSK	1	0	23.28	23.21	23.22
		1	7	23.32	23.05	23.09
		1	14	23.14	23.16	23.12
		8	0	22.32	22.30	22.13
		8	3	22.29	22.36	22.14
		8	7	22.24	22.29	22.10
		15	0	22.23	22.23	22.10
	16QAM	1	0	22.22	22.33	22.18
		1	7	22.28	22.21	22.10
		1	14	22.04	22.26	21.96
		8	0	21.40	21.30	21.24
		8	3	21.29	21.20	21.18
		8	7	21.31	21.30	21.13
		15	0	21.34	21.30	21.26

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)		
				18625	18900	19175
				1852.5 MHz	1880 MHz	1907.5 MHz
5 MHz	QPSK	1	0	23.30	23.35	23.20
		1	12	23.20	23.13	23.22
		1	24	23.33	23.20	23.11
		12	0	22.23	22.32	22.23
		12	6	22.26	22.33	22.23
		12	11	22.16	22.28	22.19
		25	0	22.26	22.27	22.24
	16QAM	1	0	22.21	22.47	22.15
		1	12	22.21	22.22	22.22
		1	24	22.23	22.21	22.10
		12	0	21.33	21.36	21.34
		12	6	21.29	21.34	21.32
		12	11	21.31	21.34	21.27
		25	0	21.34	21.33	21.34

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)		
				18650	18900	19150
				1855 MHz	1880 MHz	1905 MHz
10 MHz	QPSK	1	0	23.34	23.32	23.36
		1	24	23.35	23.09	23.25
		1	49	23.29	23.20	23.11
		25	0	22.23	22.28	22.30
		25	12	22.28	22.31	22.22
		25	24	22.26	22.23	22.18
		50	0	22.24	22.24	22.22
	16QAM	1	0	22.16	22.32	22.31
		1	24	22.29	22.10	22.25
		1	49	22.20	22.17	22.06
		25	0	21.39	21.37	21.39
		25	12	21.30	21.36	21.33
		25	24	21.38	21.34	21.34
		50	0	21.34	21.33	21.32

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)		
				18675	18900	19125
				1857.5 MHz	1880 MHz	1902.5 MHz
15 MHz	QPSK	1	0	23.34	23.43	23.39
		1	36	23.28	23.12	23.22
		1	74	23.30	23.11	23.08
		36	0	22.26	22.23	22.35
		36	18	22.27	22.23	22.26
		36	39	22.33	22.22	22.18
		75	0	22.21	22.20	22.25
	16QAM	1	0	22.24	22.42	22.42
		1	36	22.15	22.10	22.21
		1	74	22.18	22.25	21.98
		36	0	21.30	21.32	21.38
		36	18	21.41	21.30	21.28
		36	39	21.39	21.28	21.25
		75	0	21.25	21.27	21.35

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)		
				18700	18900	19100
				1860 MHz	1880 MHz	1900 MHz
20 MHz	QPSK	1	0	23.34	23.45	23.23
		1	49	23.31	23.06	23.37
		1	99	23.29	23.04	23.07
		50	0	22.22	22.38	22.37
		50	25	22.25	22.22	22.31
		50	49	22.44	22.16	22.19
		100	0	22.34	22.23	22.26
	16QAM	1	0	22.34	22.49	22.24
		1	49	22.17	22.03	22.26
		1	99	22.36	22.08	22.01
		50	0	21.33	21.36	21.39
		50	25	21.33	21.29	21.34
		50	49	21.48	21.19	21.29
		100	0	21.40	21.31	21.24

8.2 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1850.7	LTE B2/ 1.4 MHz	QPSK	-24.84	9.24	10.10	2.11	H	< 2.00	0.053	17.23
		16-QAM	-26.00	8.08	10.10	2.11	H		0.040	16.07
QPSK		-24.00	10.55	10.15	2.15	H	0.072		18.55	
16-QAM		-25.01	9.54	10.15	2.15	H	0.057		17.54	
QPSK		-24.39	10.15	10.23	2.15	H	0.067		18.23	
16-QAM		-25.57	8.97	10.23	2.15	H	0.051		17.05	
1880.0										
1909.3										

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1851.5	LTE B2/ 3 MHz	QPSK	-24.85	9.23	10.10	2.11	H	< 2.00	0.053	17.22
		16-QAM	-26.01	8.07	10.10	2.11	H		0.040	16.06
1880.0		QPSK	-23.84	10.71	10.15	2.15	H		0.074	18.71
		16-QAM	-24.81	9.74	10.15	2.15	H		0.059	17.74
1908.5		QPSK	-24.17	10.37	10.23	2.15	H		0.070	18.45
		16-QAM	-25.34	9.20	10.23	2.15	H		0.053	17.28

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1852.5	LTE B2/ 5 MHz	QPSK	-24.99	9.09	10.10	2.11	H	< 2.00	0.051	17.08
		16-QAM	-26.09	7.99	10.10	2.11	H		0.040	15.98
QPSK		-23.65	10.90	10.15	2.15	H	0.078		18.90	
16-QAM		-24.67	9.88	10.15	2.15	H	0.061		17.88	
1907.5		QPSK	-24.41	10.13	10.23	2.15	H		0.066	18.21
		16-QAM	-25.44	9.10	10.23	2.15	H		0.052	17.18

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1855.0	LTE B2/ 10 MHz	QPSK	-24.98	9.17	10.12	2.12	H	< 2.00	0.052	17.17
		16-QAM	-26.10	8.05	10.12	2.12	H		0.040	16.05
QPSK		-23.33	11.22	10.15	2.15	H	0.084		19.22	
16-QAM		-24.39	10.16	10.15	2.15	H	0.065		18.16	
QPSK		-23.91	10.75	10.22	2.15	H	0.076		18.82	
16-QAM		-25.03	9.63	10.22	2.15	H	0.059		17.70	
1880.0										
1905.0										

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1857.5	LTE B2/ 15 MHz	QPSK	-24.88	9.33	10.13	2.12	H	< 2.00	0.054	17.34
		16-QAM	-26.02	8.19	10.13	2.12	H		0.042	16.20
QPSK		-23.40	11.15	10.15	2.15	H	0.082		19.15	
16-QAM		-24.39	10.16	10.15	2.15	H	0.065		18.16	
1902.5		QPSK	-24.01	10.78	10.20	2.15	H		0.076	18.83
		16-QAM	-25.03	9.76	10.20	2.15	H		0.060	17.81

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1860.0	LTE B2/ 20 MHz	QPSK	-24.92	9.29	10.13	2.12	H	< 2.00	0.054	17.30
		16-QAM	-26.10	8.11	10.13	2.12	H		0.041	16.12
QPSK		-23.34	11.21	10.15	2.15	H	0.083		19.21	
16-QAM		-24.42	10.13	10.15	2.15	H	0.065		18.13	
QPSK		-23.93	10.86	10.20	2.15	H	0.078		18.91	
16-QAM		-24.92	9.87	10.20	2.15	H	0.062		17.92	
1880.0										
1900.0										

8.3 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY: 1880.0 MHz
- ▣ MEASURED OUTPUT POWER: 18.55 dBm = 0.072 W
- ▣ MODE: LTE B2
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10} (W) =$ 31.55 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
18607 (1850.7)	3 701.40	-54.75	12.40	-58.82	3.08	V	-49.50	68.05
	5 552.10	-49.00	13.10	-46.97	3.81	V	-37.68	56.23
	7 402.80	-55.98	11.10	-46.02	4.44	V	-39.36	57.91
	9 253.50	-54.69	10.70	-38.48	5.06	V	-32.84	51.39
18900 (1880.0)	3 760.00	-40.18	12.48	-44.05	3.10	V	-34.67	53.22
	5 640.00	-35.72	13.30	-33.55	3.85	V	-24.10	42.65
	7 520.00	-51.50	11.30	-40.93	4.46	V	-34.09	52.65
19193 (1909.3)	3 818.60	-31.79	12.40	-36.22	3.14	V	-26.96	45.51
	5 727.90	-32.07	13.35	-29.41	3.87	V	-19.93	38.48
	7 637.20	-49.46	11.65	-38.93	4.47	V	-31.75	50.30

□ OPERATING FREQUENCY: 1880.0 MHz
 □ MEASURED OUTPUT POWER: 18.71 dBm = 0.074 W
 □ MODE: LTE B2
 □ MODULATION SIGNAL: 3 MHz QPSK
 □ DISTANCE: 3 meters
 □ LIMIT: $43 + 10 \log_{10}(W) =$ 31.71 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
18615 (1851.5)	3 703.00	-55.33	12.40	-59.40	3.08	H	-50.08	68.79
	5 554.50	-50.55	13.18	-48.68	3.82	V	-39.32	58.03
	7 406.00	-56.62	11.12	-46.54	4.45	H	-39.88	58.59
	9 257.50	-55.06	10.65	-38.46	5.05	H	-32.86	51.57
18900 (1880.0)	3 760.00	-39.51	12.48	-43.38	3.10	V	-34.00	52.71
	5 640.00	-34.15	13.30	-31.98	3.85	V	-22.53	41.24
	7 520.00	-50.73	11.30	-40.16	4.46	V	-33.32	52.03
19185 (1908.5)	3 817.00	-31.06	12.40	-35.49	3.14	V	-26.23	44.94
	5 725.50	-34.34	13.35	-31.53	3.88	V	-22.05	40.76
	7 634.00	-49.18	11.63	-38.75	4.48	V	-31.60	50.31
	9 542.50	-51.86	10.98	-36.11	5.12	V	-30.25	48.96

□ OPERATING FREQUENCY: 1880.0 MHz
 □ MEASURED OUTPUT POWER: 18.90 dBm = 0.078 W
 □ MODE: LTE B2
 □ MODULATION SIGNAL: 5 MHz QPSK
 □ DISTANCE: 3 meters
 □ LIMIT: $43 + 10 \log_{10}(W) =$ 31.90 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
18625 (1852.5)	3 705.00	-53.77	12.42	-57.92	3.08	V	-48.58	67.48
	5 557.50	-49.91	13.15	-48.10	3.82	H	-38.77	57.67
	7 410.00	-57.02	11.13	-46.84	4.45	H	-40.16	59.06
	9 262.50	-53.43	10.65	-36.83	5.05	V	-31.23	50.13
18900 (1880.0)	3 760.00	-41.83	12.48	-45.70	3.10	V	-36.32	55.22
	5 640.00	-34.84	13.30	-32.67	3.85	V	-23.22	42.12
	7 520.00	-52.74	11.30	-42.17	4.46	V	-35.33	54.23
	9 400.00	-51.97	10.70	-35.47	5.07	V	-29.84	48.74
19175 (1907.5)	3 815.00	-31.92	12.40	-36.30	3.14	V	-27.04	45.94
	5 722.50	-31.33	13.35	-28.36	3.88	V	-18.89	37.79
	7 630.00	-49.00	11.60	-38.67	4.48	V	-31.55	50.45
	9 537.50	-53.18	10.98	-37.43	5.12	V	-31.57	50.47

□ OPERATING FREQUENCY: 1880.0 MHz
 □ MEASURED OUTPUT POWER: 19.22 dBm = 0.084 W
 □ MODE: LTE B2
 □ MODULATION SIGNAL: 10 MHz QPSK
 □ DISTANCE: 3 meters
 □ LIMIT: $43 + 10 \log_{10}(W) =$ 32.22 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
18650 (1855.0)	3 710.00	-54.12	12.43	-58.35	3.08	V	-49.00	68.22
	5 565.00	-49.21	13.18	-47.31	3.83	H	-37.96	57.18
	7 420.00	-56.80	11.15	-46.26	4.43	H	-39.54	58.76
18900 (1880.0)	3 760.00	-40.90	12.48	-44.77	3.10	V	-35.39	54.61
	5 640.00	-39.24	13.30	-37.07	3.85	V	-27.62	46.84
	7 520.00	-56.37	11.30	-45.80	4.46	H	-38.96	58.18
19150 (1905.0)	3 810.00	-30.96	12.40	-35.31	3.13	V	-26.04	45.26
	5 715.00	-31.53	13.37	-28.75	3.88	V	-19.27	38.49
	7 620.00	-49.42	11.60	-39.21	4.48	V	-32.09	51.31
	11 430.00	-53.86	11.35	-33.50	5.72	V	-27.87	47.09

□ OPERATING FREQUENCY: 1880.0 MHz
 □ MEASURED OUTPUT POWER: 19.15 dBm = 0.082 W
 □ MODE: LTE B2
 □ MODULATION SIGNAL: 15 MHz QPSK
 □ DISTANCE: 3 meters
 □ LIMIT: $43 + 10 \log_{10} (W) =$ 32.15 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
18675 (1857.5)	3 715.00	-54.59	12.44	-58.84	3.09	V	-49.49	68.64
	5 572.50	-48.70	13.20	-46.72	3.83	V	-37.35	56.50
	7 430.00	-55.78	11.15	-45.26	4.41	V	-38.52	57.67
	9 287.50	-54.53	10.55	-38.26	5.11	V	-32.82	51.97
18900 (1880.0)	3 760.00	-41.46	12.48	-45.33	3.10	V	-35.95	55.10
	5 640.00	-41.46	13.30	-39.29	3.85	H	-29.84	48.99
	7 520.00	-55.64	11.30	-45.07	4.46	H	-38.23	57.39
19125 (1902.5)	3 805.00	-32.59	12.40	-36.77	3.14	V	-27.51	46.66
	5 707.50	-32.15	13.38	-29.57	3.88	V	-20.07	39.22
	7 610.00	-50.52	11.55	-40.21	4.48	V	-33.14	52.29
	9 512.50	-53.20	10.93	-36.99	5.12	V	-31.18	50.33
	11 415.00	-53.35	11.37	-33.39	5.74	V	-27.76	46.91

□ OPERATING FREQUENCY: 1880.0 MHz
 □ MEASURED OUTPUT POWER: 19.21 dBm = 0.083 W
 □ MODE: LTE B2
 □ MODULATION SIGNAL: 20 MHz QPSK
 □ DISTANCE: 3 meters
 □ LIMIT: $43 + 10 \log_{10}(W) =$ 32.21 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
18700 (1860.0)	3 720.00	-54.43	12.45	-58.71	3.09	H	-49.35	68.56
	5 580.00	-51.25	13.20	-49.34	3.84	H	-39.98	59.19
	7 440.00	-55.62	11.18	-45.21	4.40	V	-38.43	57.64
	11 160.00	-54.54	11.35	-35.27	5.67	V	-29.59	48.80
18900 (1880.0)	3 760.00	-43.78	12.48	-47.65	3.10	V	-38.27	57.48
	5 640.00	-40.59	13.30	-38.42	3.85	V	-28.97	48.18
	7 520.00	-55.58	11.30	-45.01	4.46	V	-38.17	57.39
19100 (1900.0)	3 800.00	-33.24	12.40	-37.25	3.14	V	-27.99	47.21
	5 700.00	-30.89	13.40	-28.63	3.87	V	-19.10	38.31
	7 600.00	-51.27	11.50	-40.73	4.49	V	-33.72	52.93
	9 500.00	-55.77	10.90	-39.78	5.14	V	-34.02	53.23

8.4 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
2	1.4 MHz	1880.0	QPSK	6	0	5.86
			16-QAM	6	0	6.54
	3 MHz		QPSK	15	0	5.81
			16-QAM	15	0	6.51
	5 MHz		QPSK	25	0	5.66
			16-QAM	25	0	6.44
	10 MHz		QPSK	50	0	5.73
			16-QAM	50	0	6.41
	15 MHz		QPSK	75	0	5.64
			16-QAM	75	0	6.40
	20 MHz		QPSK	100	0	5.63
			16-QAM	100	0	6.42

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 110 ~ 121.

8.5 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
2	1.4 MHz	1880.0	QPSK	6	0	1.0940
			16-QAM	6	0	1.1013
	3 MHz		QPSK	15	0	2.7067
			16-QAM	15	0	2.7130
	5 MHz		QPSK	25	0	4.5139
			16-QAM	25	0	4.5182
	10 MHz		QPSK	50	0	8.9614
			16-QAM	50	0	8.9723
	15 MHz		QPSK	75	0	13.439
			16-QAM	75	0	13.455
	20 MHz		QPSK	100	0	17.899
			16-QAM	100	0	17.912

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 98 ~ 109.

8.6 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
2	1.4	1850.7	3.7029	28.976	-77.279	-48.303	-13.00
		1880.0	3.6970	28.976	-77.288	-48.312	
		1909.3	3.7024	28.976	-77.333	-48.357	
	3	1851.5	3.7079	28.976	-77.187	-48.211	
		1880.0	3.7169	28.976	-76.955	-47.979	
		1908.5	3.7039	28.976	-76.875	-47.899	
	5	1852.5	3.6840	28.976	-77.165	-48.189	
		1880.0	3.6780	28.976	-77.303	-48.327	
		1907.5	3.7079	28.976	-76.851	-47.875	
	10	1855.0	3.7074	28.976	-76.977	-48.001	
		1880.0	3.7039	28.976	-77.141	-48.165	
		1905.0	3.6765	28.976	-77.311	-48.335	
	15	1857.5	3.6750	28.976	-77.271	-48.295	
		1880.0	3.7044	28.976	-77.487	-48.511	
		1902.5	3.6855	28.976	-76.966	-47.990	
	20	1860.0	3.7005	28.976	-76.799	-47.823	
		1880.0	3.7109	28.976	-77.264	-48.288	
		1900.0	3.6800	28.976	-77.287	-48.311	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 122 ~ 157.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	26.270
1 – 5	28.976
5 – 10	29.591
10 – 15	30.116
15 – 20	30.489
Above 20(26.5)	31.131


8.7 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 62 ~ 97.

8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

MODE:	LTE B2
OPERATING FREQUENCY:	1850,700,000 Hz
CHANNEL:	18607 (1.4 MHz)
REFERENCE VOLTAGE:	12.000 VDC
DEVIATION LIMIT:	Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	12.000	+20(Ref)	1850 700 009	0.0	0.000 000	0.000
100%		-30	1850 700 017	8.4	0.000 000	0.005
100%		-20	1850 700 014	5.2	0.000 000	0.003
100%		-10	1850 700 017	8.3	0.000 000	0.004
100%		0	1850 700 020	11.2	0.000 001	0.006
100%		+10	1850 700 014	5.0	0.000 000	0.003
100%		+30	1850 700 017	8.3	0.000 000	0.004
100%		+40	1850 700 013	4.1	0.000 000	0.002
100%		+50	1850 700 014	5.1	0.000 000	0.003
Batt. Endpoint	10.200	+20	1850 700 013	4.4	0.000 000	0.002

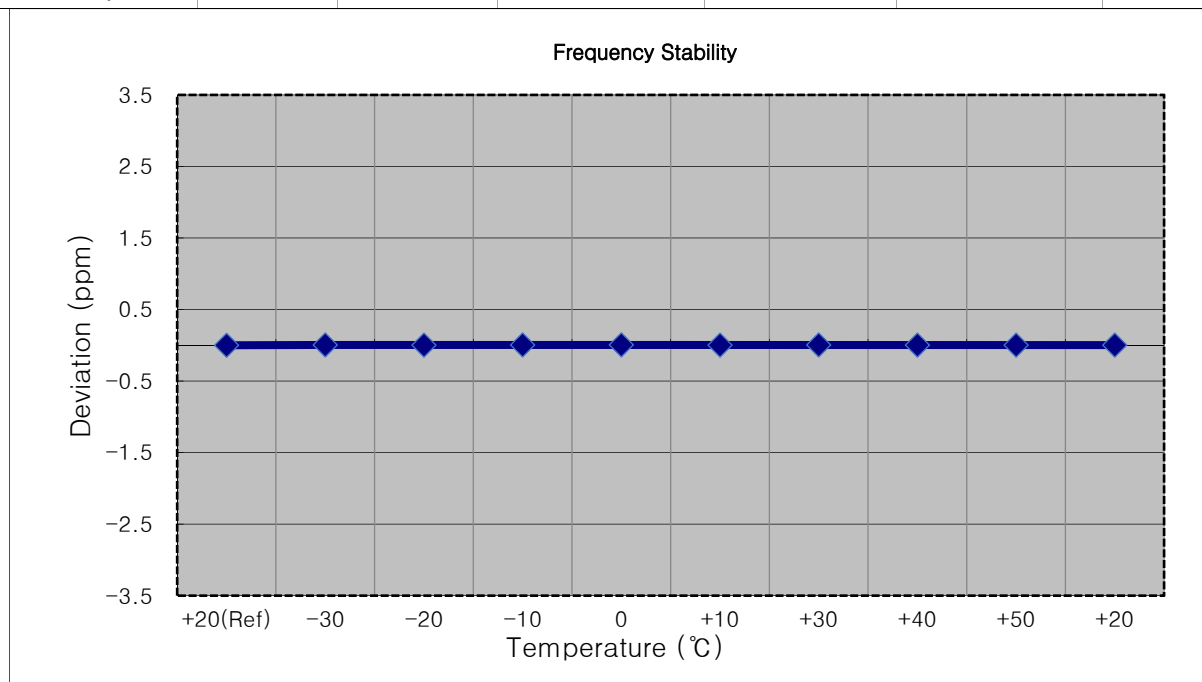

- MODE:

OPERATING FREQUENCY:

CHANNEL:

REFERENCE VOLTAGE:

DEVIATION LIMIT:

LTE B2


1851,500,000 Hz

18615 (3 MHz)

12.000 VDC

Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100%	12.000	+20(Ref)	1851 500 007	0.0	0.000 000	0.000
100%		-30	1851 500 016	9.4	0.000 001	0.005
100%		-20	1851 500 014	7.4	0.000 000	0.004
100%		-10	1851 500 014	6.9	0.000 000	0.004
100%		0	1851 500 015	7.8	0.000 000	0.004
100%		+10	1851 500 016	9.0	0.000 000	0.005
100%		+30	1851 500 013	5.8	0.000 000	0.003
100%		+40	1851 500 014	7.4	0.000 000	0.004
100%		+50	1851 500 014	6.6	0.000 000	0.004
Batt. Endpoint	10.200	+20	1851 500 018	10.8	0.000 001	0.006

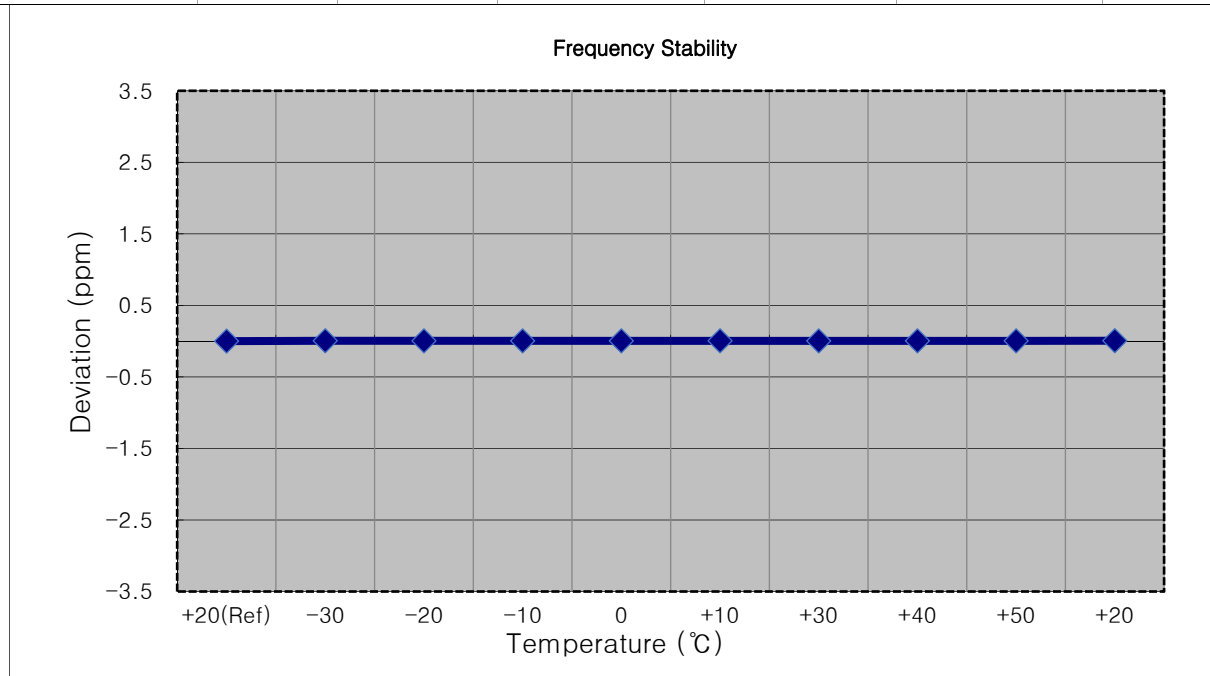

- MODE:

OPERATING FREQUENCY:

CHANNEL:

REFERENCE VOLTAGE:

DEVIATION LIMIT:

LTE B2


1852,500,000 Hz

18625 (5 MHz)

12.000 VDC

Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100%	12.000	+20(Ref)	1852 499 995	0.0	0.000 000	0.000
100%		-30	1852 499 990	-5.2	0.000 000	-0.003
100%		-20	1852 499 989	-6.3	0.000 000	-0.003
100%		-10	1852 499 988	-6.6	0.000 000	-0.004
100%		0	1852 499 991	-4.3	0.000 000	-0.002
100%		+10	1852 499 986	-9.0	0.000 000	-0.005
100%		+30	1852 499 990	-5.5	0.000 000	-0.003
100%		+40	1852 499 986	-8.7	0.000 000	-0.005
100%		+50	1852 499 990	-5.4	0.000 000	-0.003
Batt. Endpoint	10.200	+20	1852 499 989	-5.9	0.000 000	-0.003

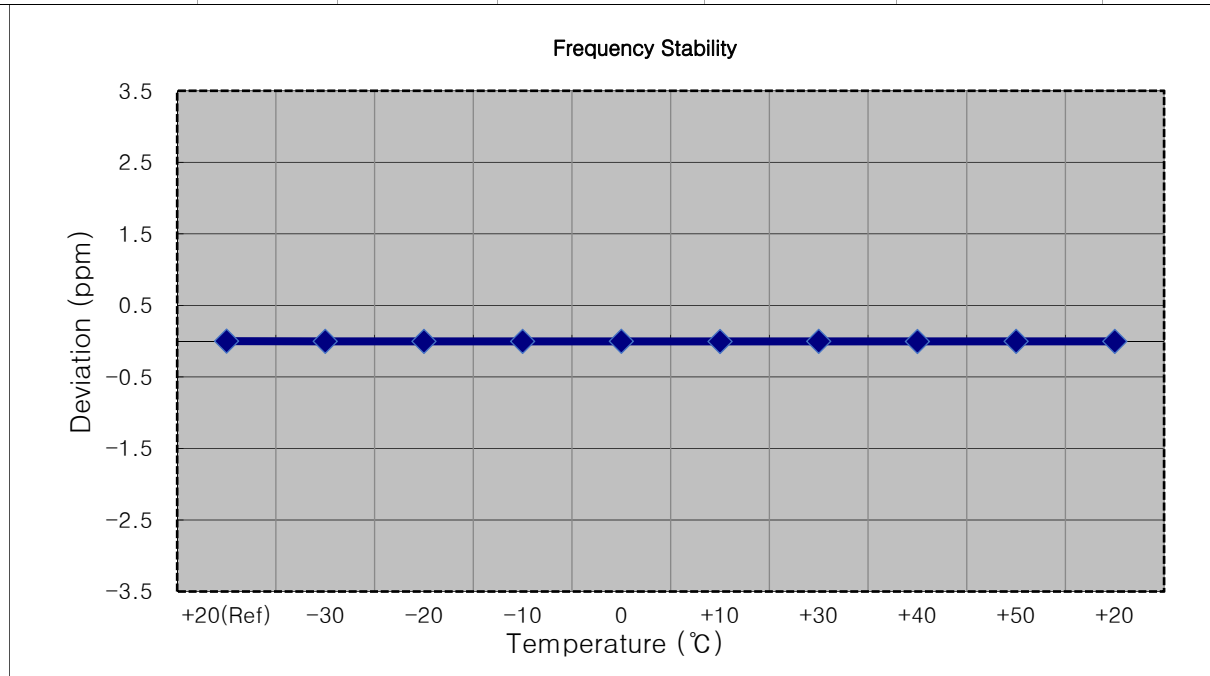

- MODE:

OPERATING FREQUENCY:

CHANNEL:

REFERENCE VOLTAGE:

DEVIATION LIMIT:

LTE B2


1855,000,000 Hz

18650 (10 MHz)

12.000 VDC

Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100%	12.000	+20(Ref)	1854 999 980	0.0	0.000 000	0.000
100%		-30	1854 999 959	-20.9	-0.000 001	-0.011
100%		-20	1854 999 959	-20.5	-0.000 001	-0.011
100%		-10	1854 999 961	-18.6	-0.000 001	-0.010
100%		0	1854 999 991	10.7	0.000 001	0.006
100%		+10	1854 999 991	11.3	0.000 001	0.006
100%		+30	1854 999 993	13.2	0.000 001	0.007
100%		+40	1854 999 989	8.8	0.000 000	0.005
100%		+50	1854 999 989	9.6	0.000 001	0.005
Batt. Endpoint	10.200	+20	1854 999 990	10.5	0.000 001	0.006

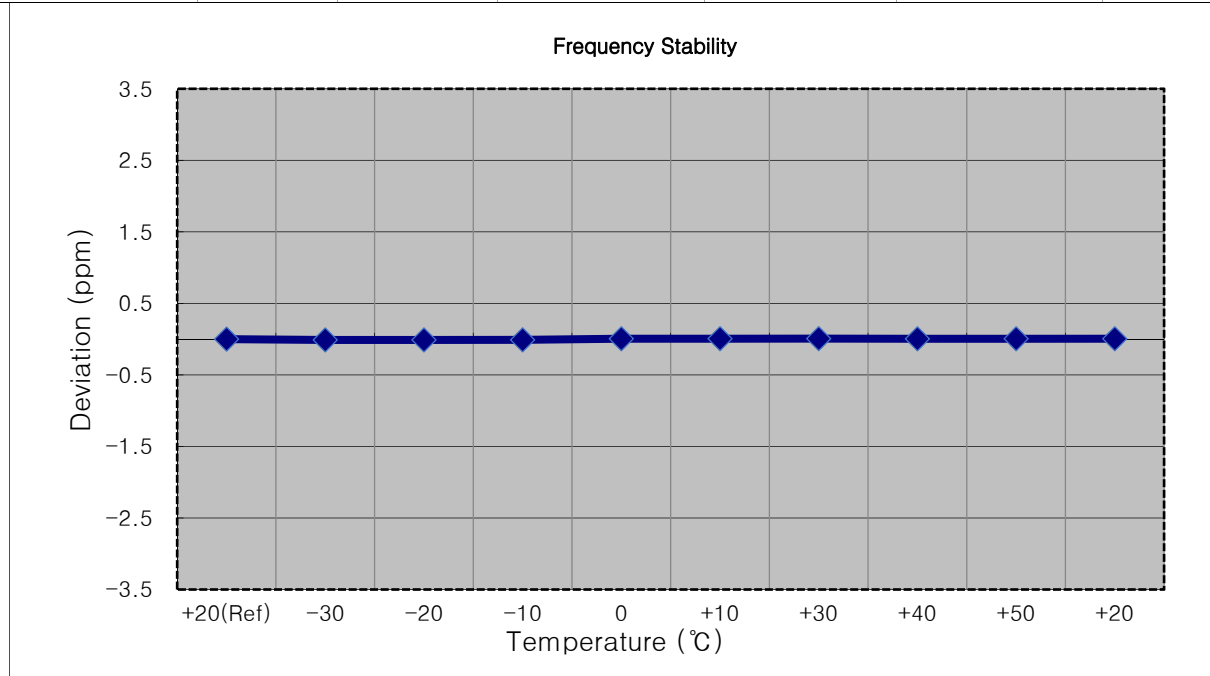

- ☐ MODE:

LTE B2
- ☐ OPERATING FREQUENCY:


1857,500,000 Hz
- ☐ CHANNEL:

18675 (15 MHz)
- ☐ REFERENCE VOLTAGE:

12.000 VDC
- ☐ DEVIATION LIMIT:

Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100%	12.000	+20(Ref)	1857 499 991	0.0	0.000 000	0.000
100%		-30	1857 499 980	-10.8	-0.000 001	-0.006
100%		-20	1857 499 982	-9.1	0.000 000	-0.005
100%		-10	1857 499 976	-14.9	-0.000 001	-0.008
100%		0	1857 499 971	-20.2	-0.000 001	-0.011
100%		+10	1857 499 973	-18.1	-0.000 001	-0.010
100%		+30	1857 499 970	-20.5	-0.000 001	-0.011
100%		+40	1857 500 003	12.2	0.000 001	0.007
100%		+50	1857 499 998	6.8	0.000 000	0.004
Batt. Endpoint	10.200	+20	1857 499 997	5.8	0.000 000	0.003

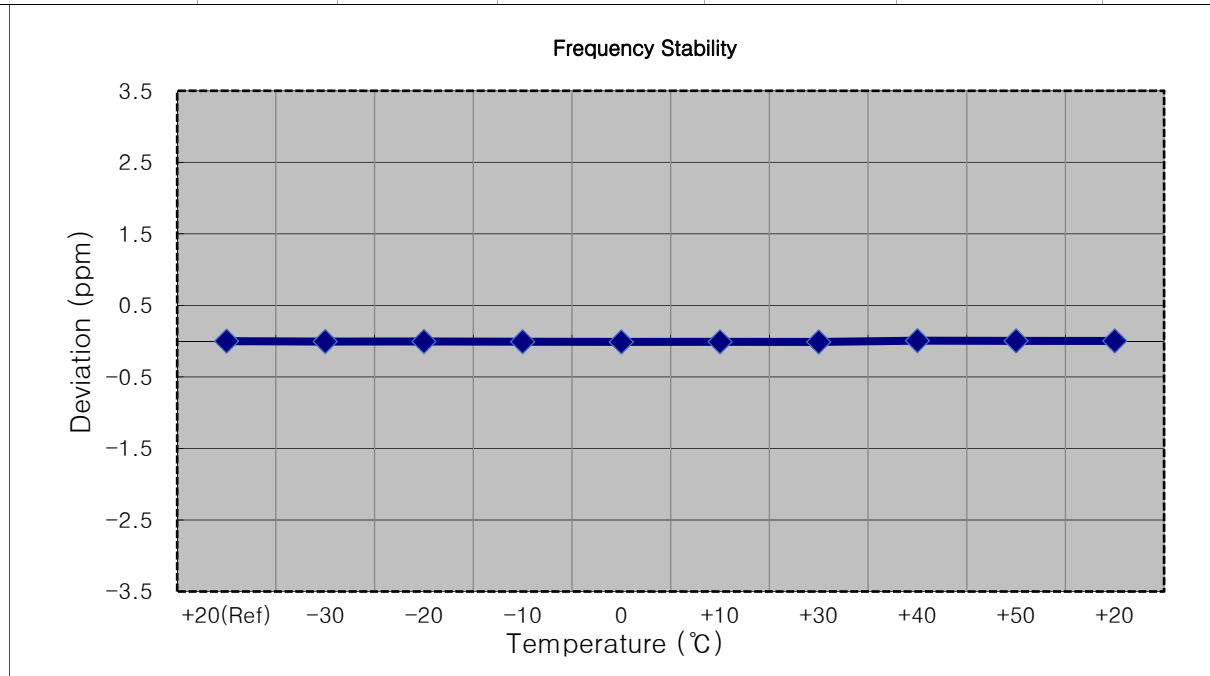

- MODE:

OPERATING FREQUENCY:

CHANNEL:

REFERENCE VOLTAGE:

DEVIATION LIMIT:

LTE B2


1860,000,000 Hz

18700 (20 MHz)

12.000 VDC

Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100%	12.000	+20(Ref)	1859 999 994	0.0	0.000 000	0.000
100%		-30	1859 999 987	-7.4	0.000 000	-0.004
100%		-20	1859 999 986	-8.8	0.000 000	-0.005
100%		-10	1859 999 988	-6.2	0.000 000	-0.003
100%		0	1859 999 983	-11.0	-0.000 001	-0.006
100%		+10	1859 999 986	-8.2	0.000 000	-0.004
100%		+30	1859 999 986	-8.0	0.000 000	-0.004
100%		+40	1859 999 984	-9.9	-0.000 001	-0.005
100%		+50	1859 999 985	-8.9	0.000 000	-0.005
Batt. Endpoint	10.200	+20	1859 999 985	-8.9	0.000 000	-0.005

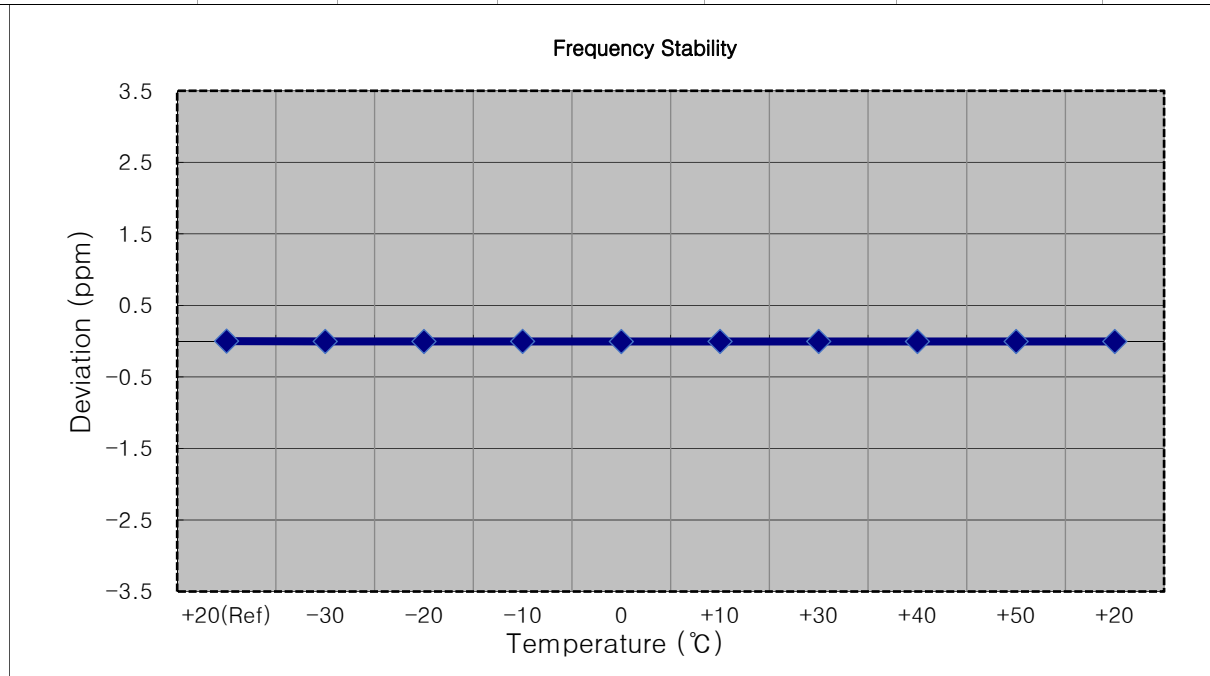

- ☐ MODE:

LTE B2
- ☐ OPERATING FREQUENCY:


1880,000,000 Hz
- ☐ CHANNEL:

18900 (1.4 MHz)
- ☐ REFERENCE VOLTAGE:

12.000 VDC
- ☐ DEVIATION LIMIT:

Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100%	12.000	+20(Ref)	1880 000 013	0.0	0.000 000	0.000
100%		-30	1880 000 018	5.3	0.000 000	0.003
100%		-20	1880 000 018	4.6	0.000 000	0.002
100%		-10	1880 000 020	6.9	0.000 000	0.004
100%		0	1880 000 022	8.9	0.000 000	0.005
100%		+10	1880 000 020	7.1	0.000 000	0.004
100%		+30	1880 000 022	8.6	0.000 000	0.005
100%		+40	1880 000 023	9.6	0.000 001	0.005
100%		+50	1880 000 023	10.2	0.000 001	0.005
Batt. Endpoint	10.200	+20	1880 000 021	7.7	0.000 000	0.004

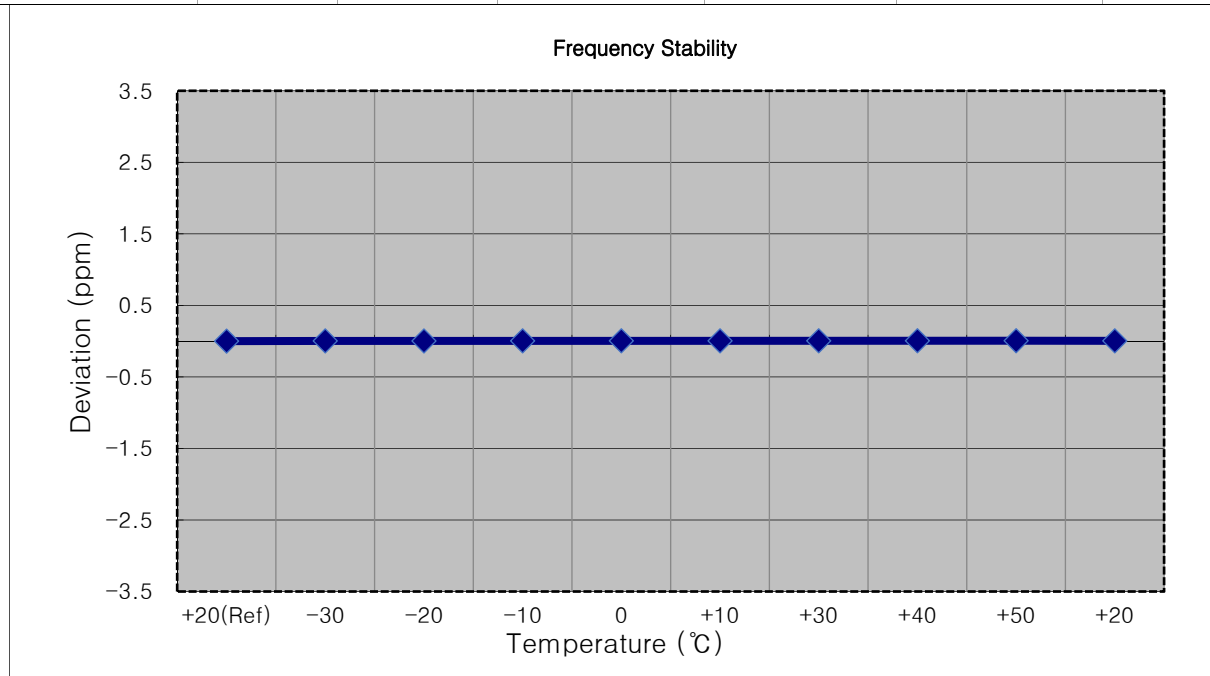

- MODE:

LTE B2
- OPERATING FREQUENCY:


1880,000,000 Hz
- CHANNEL:

18900 (3 MHz)
- REFERENCE VOLTAGE:

12.000 VDC
- DEVIATION LIMIT:

Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100%	12.000	+20(Ref)	1879 999 987	0.0	0.000 000	0.000
100%		-30	1879 999 973	-14.3	-0.000 001	-0.008
100%		-20	1879 999 978	-9.1	0.000 000	-0.005
100%		-10	1879 999 976	-11.6	-0.000 001	-0.006
100%		0	1879 999 979	-8.5	0.000 000	-0.005
100%		+10	1879 999 978	-9.6	-0.000 001	-0.005
100%		+30	1879 999 981	-6.0	0.000 000	-0.003
100%		+40	1879 999 978	-9.1	0.000 000	-0.005
100%		+50	1879 999 983	-4.4	0.000 000	-0.002
Batt. Endpoint	10.200	+20	1879 999 982	-5.6	0.000 000	-0.003

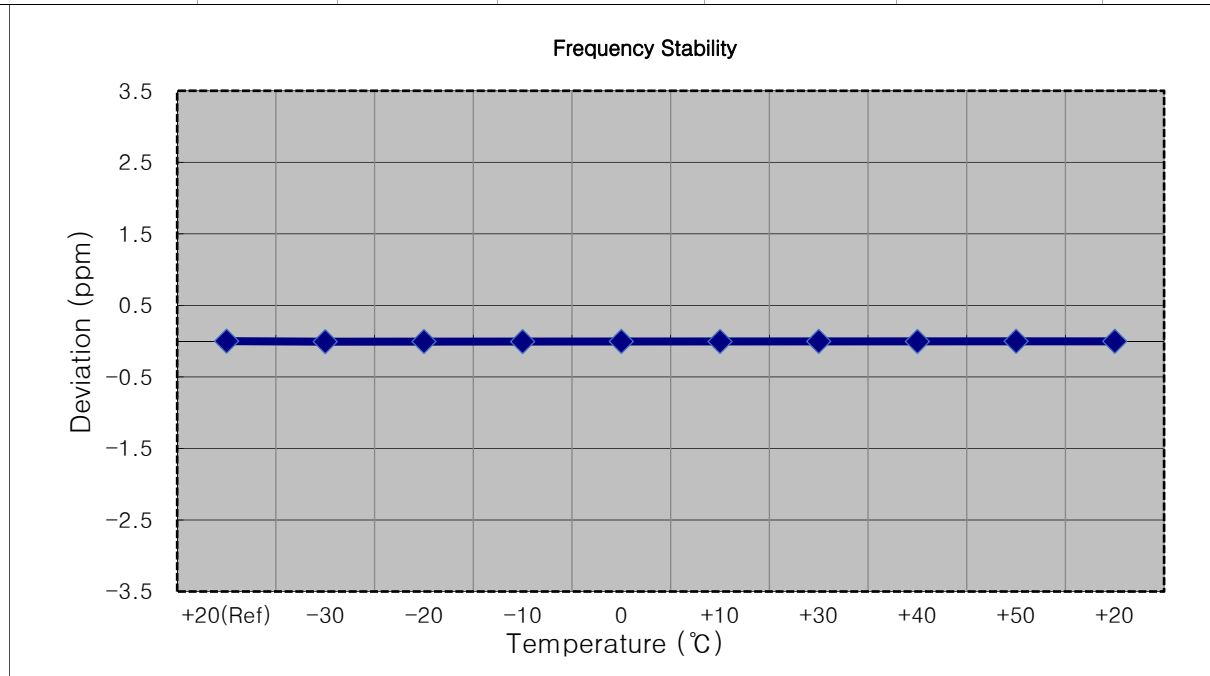

- MODE:

OPERATING FREQUENCY:

CHANNEL:

REFERENCE VOLTAGE:

DEVIATION LIMIT:

LTE B2


1880,000,000 Hz

18900 (5 MHz)

12.000 VDC

Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100%	12.000	+20(Ref)	1880 000 006	0.0	0.000 000	0.000
100%		-30	1880 000 014	7.6	0.000 000	0.004
100%		-20	1880 000 015	8.7	0.000 000	0.005
100%		-10	1880 000 017	10.3	0.000 001	0.005
100%		0	1880 000 016	9.2	0.000 000	0.005
100%		+10	1880 000 014	7.2	0.000 000	0.004
100%		+30	1879 999 980	-26.8	-0.000 001	-0.014
100%		+40	1879 999 982	-24.0	-0.000 001	-0.013
100%		+50	1879 999 984	-22.1	-0.000 001	-0.012
Batt. Endpoint	10.200	+20	1879 999 984	-22.6	-0.000 001	-0.012

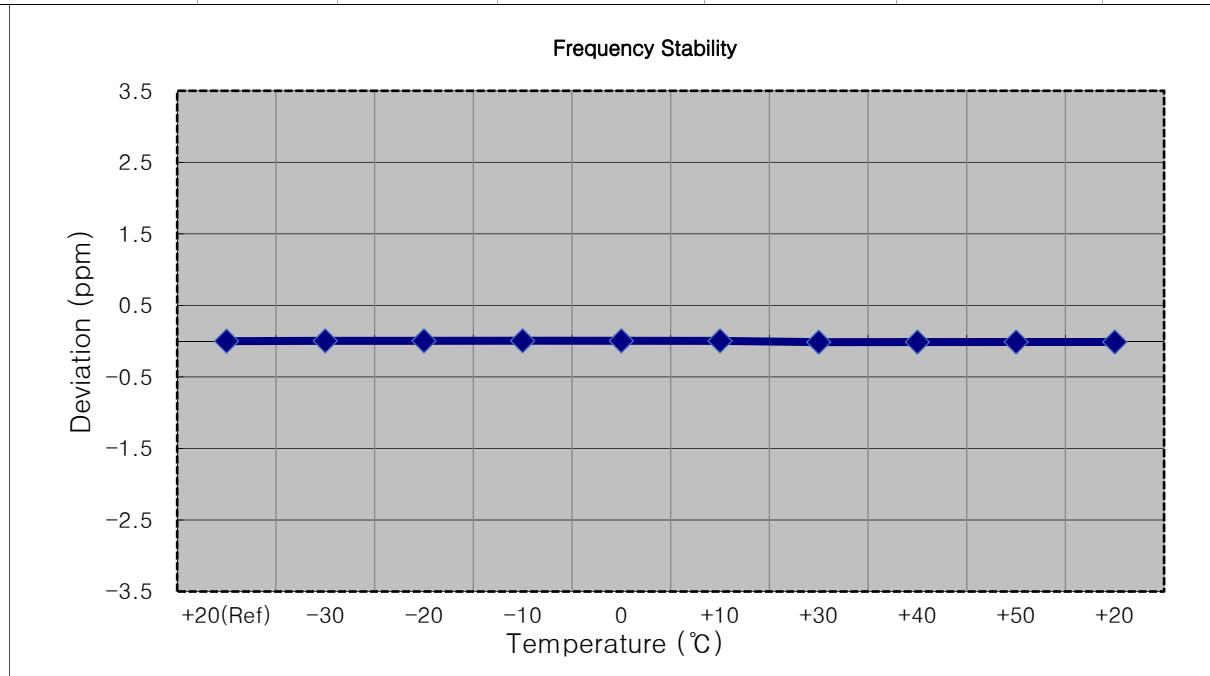

- MODE:

OPERATING FREQUENCY:

CHANNEL:

REFERENCE VOLTAGE:

DEVIATION LIMIT:

LTE B2


1880,000,000 Hz

18900 (10 MHz)

12.000 VDC

Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100%	12.000	+20(Ref)	1879 999 981	0.0	0.000 000	0.000
100%		-30	1879 999 966	-15.9	-0.000 001	-0.008
100%		-20	1879 999 965	-16.2	-0.000 001	-0.009
100%		-10	1879 999 961	-20.2	-0.000 001	-0.011
100%		0	1879 999 966	-15.7	-0.000 001	-0.008
100%		+10	1879 999 963	-18.6	-0.000 001	-0.010
100%		+30	1879 999 965	-16.6	-0.000 001	-0.009
100%		+40	1879 999 965	-16.7	-0.000 001	-0.009
100%		+50	1879 999 965	-16.6	-0.000 001	-0.009
Batt. Endpoint	10.200	+20	1879 999 967	-14.3	-0.000 001	-0.008

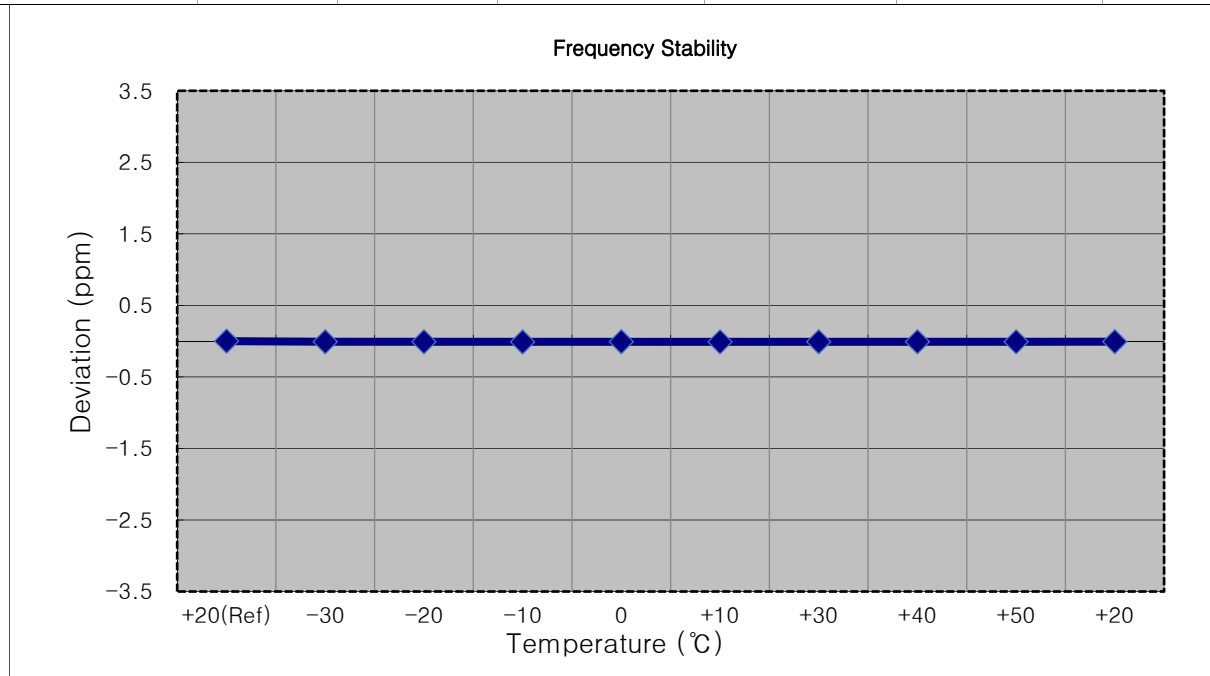

- MODE:

LTE B2
- OPERATING FREQUENCY:


1880,000,000 Hz
- CHANNEL:

18900 (15 MHz)
- REFERENCE VOLTAGE:

12.000 VDC
- DEVIATION LIMIT:


Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100%	12.000	+20(Ref)	1880 000 006	0.0	0.000 000	0.000
100%		-30	1880 000 010	4.9	0.000 000	0.003
100%		-20	1880 000 009	3.9	0.000 000	0.002
100%		-10	1880 000 009	3.7	0.000 000	0.002
100%		0	1879 999 998	-7.4	0.000 000	-0.004
100%		+10	1880 000 010	4.3	0.000 000	0.002
100%		+30	1880 000 003	-2.3	0.000 000	-0.001
100%		+40	1880 000 001	-4.6	0.000 000	-0.002
100%		+50	1880 000 010	4.8	0.000 000	0.003
Batt. Endpoint	10.200	+20	1880 000 009	3.3	0.000 000	0.002

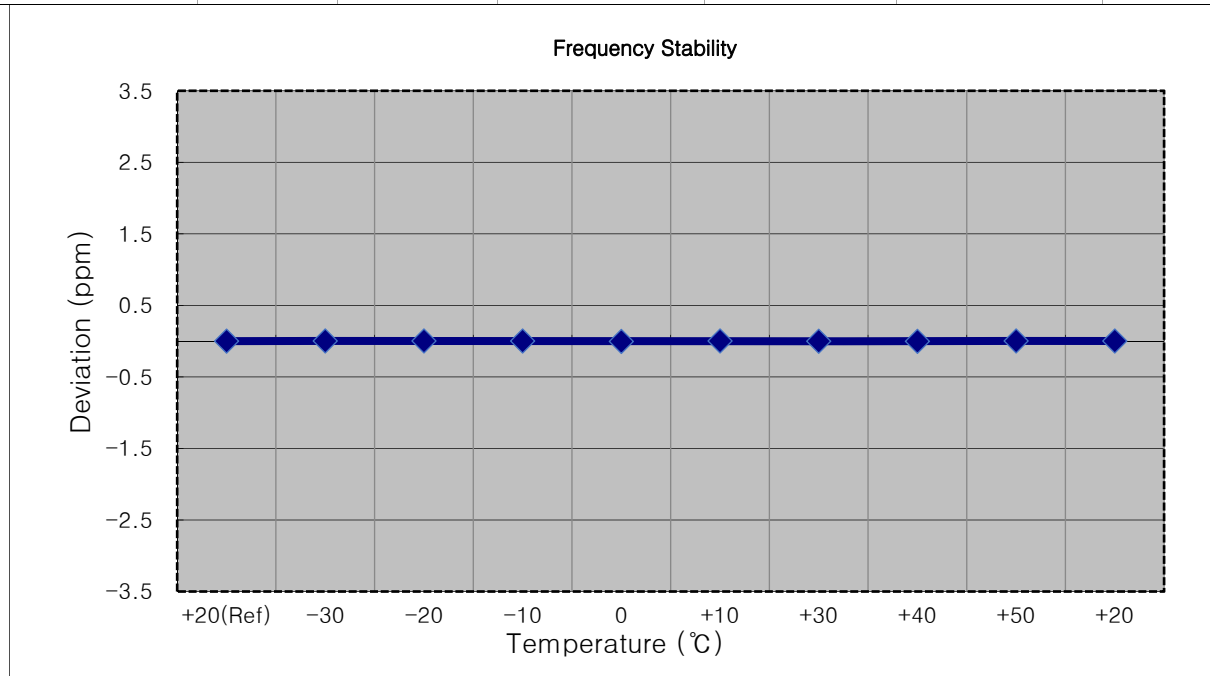

- MODE:
LTE B2
- OPERATING FREQUENCY:
1880,000,000 Hz
- CHANNEL:
18900 (20 MHz)
- REFERENCE VOLTAGE:
12.000 VDC
- DEVIATION LIMIT:
Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100%	12.000	+20(Ref)	1880 000 006	0.0	0.000 000	0.000
100%		-30	1880 000 012	5.3	0.000 000	0.003
100%		-20	1880 000 015	9.1	0.000 000	0.005
100%		-10	1880 000 013	6.5	0.000 000	0.003
100%		0	1880 000 013	6.9	0.000 000	0.004
100%		+10	1880 000 013	6.5	0.000 000	0.003
100%		+30	1880 000 014	7.5	0.000 000	0.004
100%		+40	1880 000 017	11.0	0.000 001	0.006
100%		+50	1880 000 014	7.4	0.000 000	0.004
Batt. Endpoint	10.200	+20	1880 000 015	8.4	0.000 000	0.004

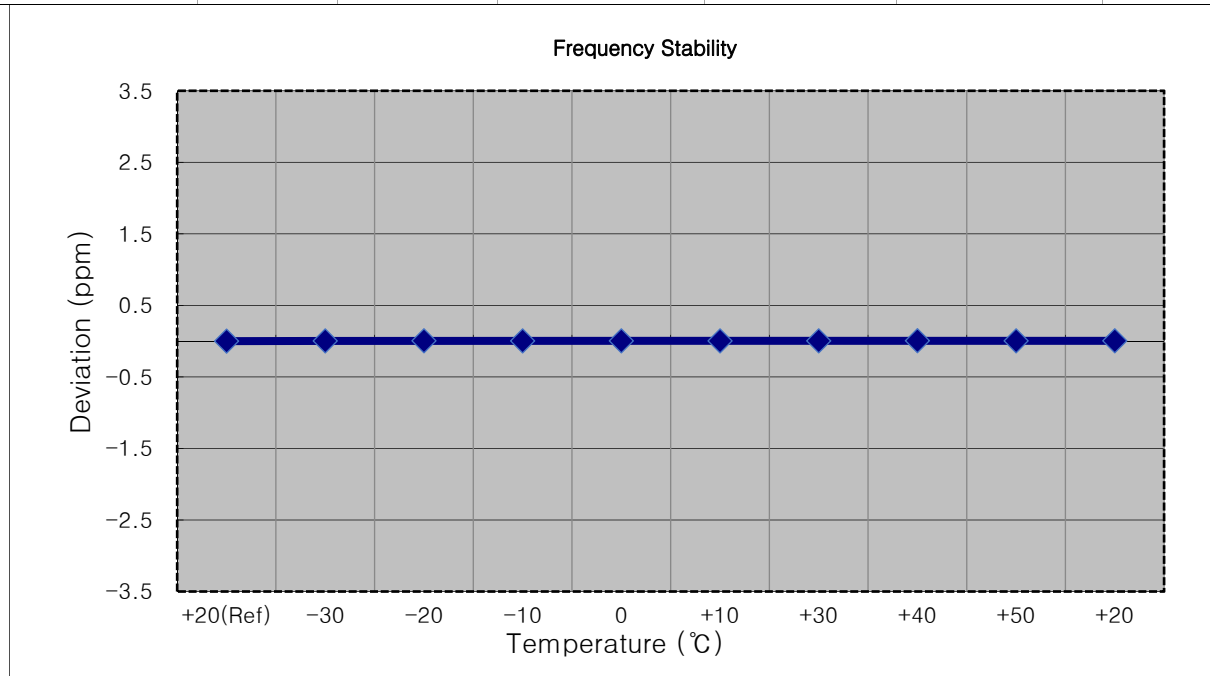

- MODE:

LTE B2
- OPERATING FREQUENCY:


1909,300,000 Hz
- CHANNEL:

19193 (1.4 MHz)
- REFERENCE VOLTAGE:

12.000 VDC
- DEVIATION LIMIT:

Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100%	12.000	+20(Ref)	1909 299 984	0.0	0.000 000	0.000
100%		-30	1909 299 965	-19.3	-0.000 001	-0.010
100%		-20	1909 299 961	-22.7	-0.000 001	-0.012
100%		-10	1909 299 997	13.3	0.000 001	0.007
100%		0	1909 299 993	9.3	0.000 000	0.005
100%		+10	1909 299 995	10.4	0.000 001	0.005
100%		+30	1909 299 991	7.0	0.000 000	0.004
100%		+40	1909 299 992	7.4	0.000 000	0.004
100%		+50	1909 299 979	-4.8	0.000 000	-0.003
Batt. Endpoint	10.200	+20	1909 299 976	-7.7	0.000 000	-0.004

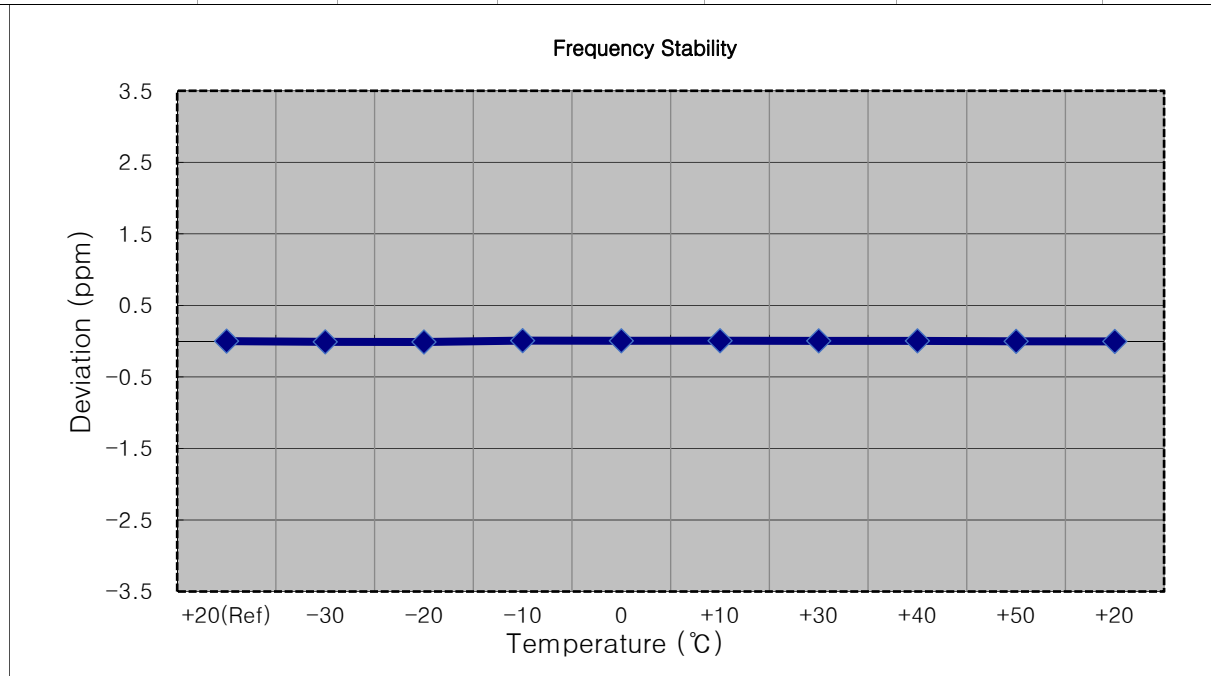

- MODE:

OPERATING FREQUENCY:

CHANNEL:

REFERENCE VOLTAGE:

DEVIATION LIMIT:

LTE B2


1908,500,000 Hz

19185 (3 MHz)

12.000 VDC

Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100%	12.000	+20(Ref)	1908 499 986	0.0	0.000 000	0.000
100%		-30	1908 499 971	-14.7	-0.000 001	-0.008
100%		-20	1908 499 969	-17.0	-0.000 001	-0.009
100%		-10	1908 499 964	-21.6	-0.000 001	-0.011
100%		0	1908 499 961	-24.9	-0.000 001	-0.013
100%		+10	1908 499 962	-23.9	-0.000 001	-0.013
100%		+30	1908 499 962	-24.4	-0.000 001	-0.013
100%		+40	1908 499 997	11.3	0.000 001	0.006
100%		+50	1908 499 996	9.6	0.000 001	0.005
Batt. Endpoint	10.200	+20	1908 499 976	-10.5	-0.000 001	-0.006

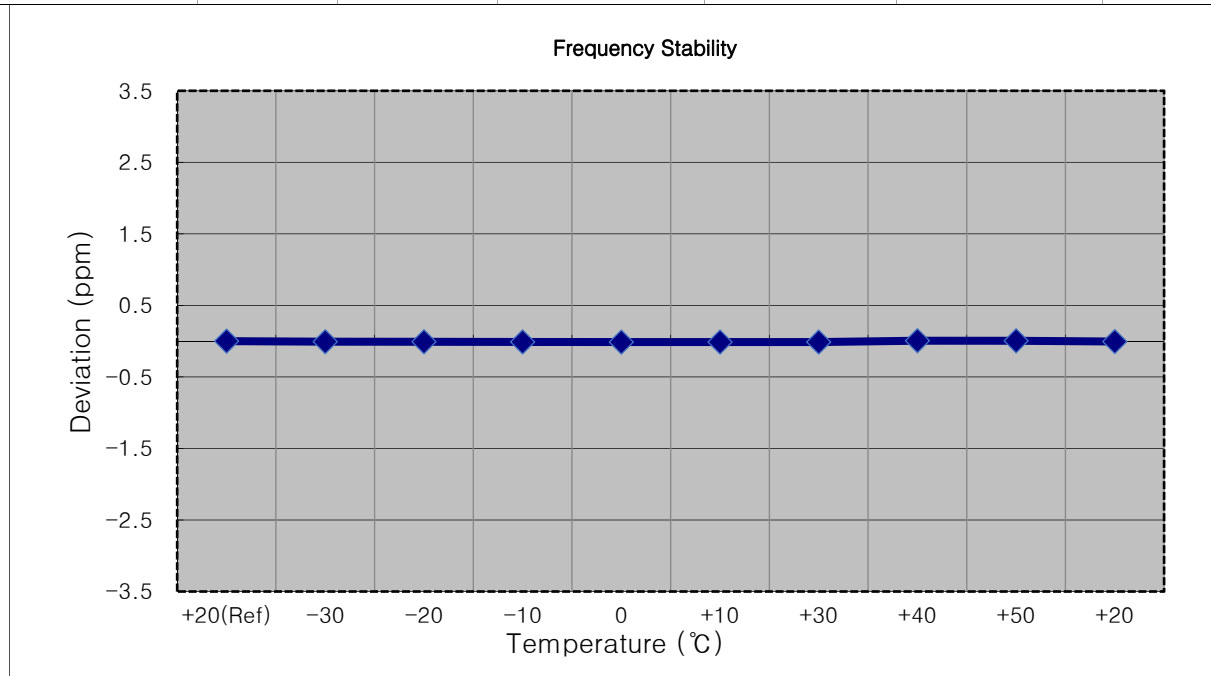

- MODE:

OPERATING FREQUENCY:

CHANNEL:

REFERENCE VOLTAGE:

DEVIATION LIMIT:

LTE B2


1907,500,000 Hz

19175 (5 MHz)

12.000 VDC

Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100%	12.000	+20(Ref)	1907 500 008	0.0	0.000 000	0.000
100%		-30	1907 500 001	-6.9	0.000 000	-0.004
100%		-20	1907 499 998	-9.5	0.000 000	-0.005
100%		-10	1907 499 998	-9.4	0.000 000	-0.005
100%		0	1907 499 997	-11.1	-0.000 001	-0.006
100%		+10	1907 499 997	-11.2	-0.000 001	-0.006
100%		+30	1907 499 995	-12.6	-0.000 001	-0.007
100%		+40	1907 499 994	-13.9	-0.000 001	-0.007
100%		+50	1907 499 993	-15.2	-0.000 001	-0.008
Batt. Endpoint	10.200	+20	1907 499 988	-19.6	-0.000 001	-0.010

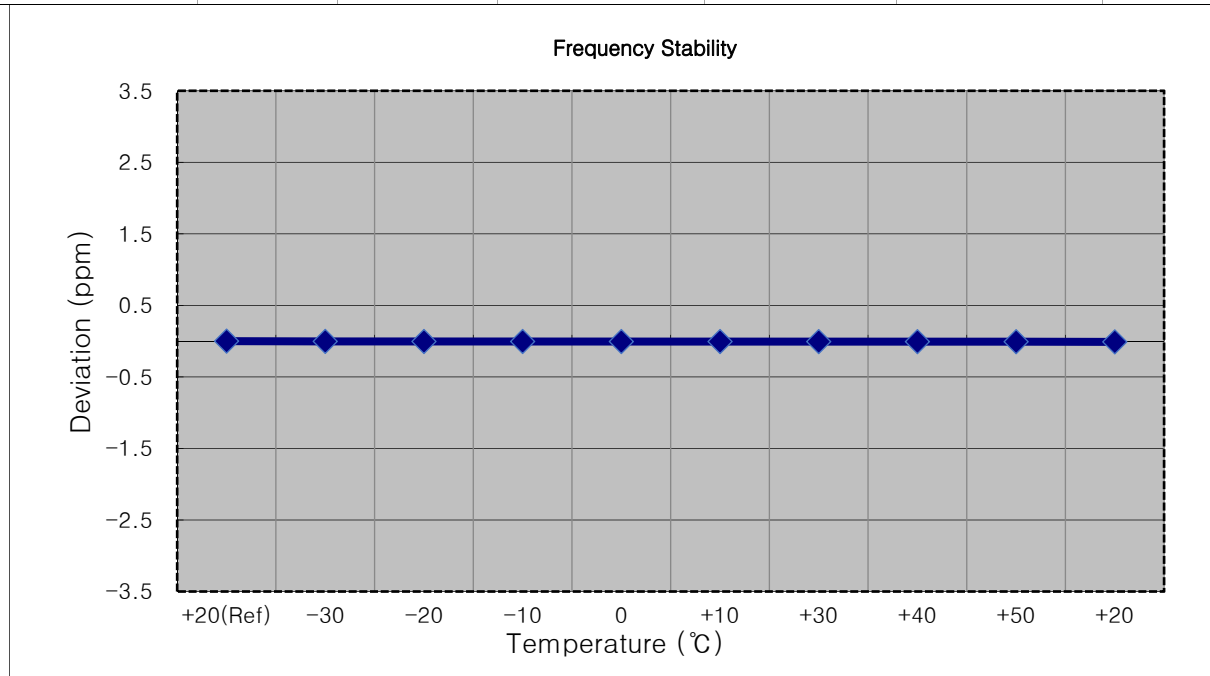

- ☐ MODE:

LTE B2
- ☐ OPERATING FREQUENCY:


1905,000,000 Hz
- ☐ CHANNEL:

19150 (10 MHz)
- ☐ REFERENCE VOLTAGE:

12.000 VDC
- ☐ DEVIATION LIMIT:

Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100%	12.000	+20(Ref)	1904 999 983	0.0	0.000 000	0.000
100%		-30	1904 999 997	13.3	0.000 001	0.007
100%		-20	1904 999 996	12.7	0.000 001	0.007
100%		-10	1904 999 997	13.7	0.000 001	0.007
100%		0	1904 999 988	4.8	0.000 000	0.003
100%		+10	1904 999 987	3.6	0.000 000	0.002
100%		+30	1904 999 979	-4.0	0.000 000	-0.002
100%		+40	1904 999 975	-8.7	0.000 000	-0.005
100%		+50	1904 999 972	-10.8	-0.000 001	-0.006
Batt. Endpoint	10.200	+20	1904 999 968	-15.2	-0.000 001	-0.008

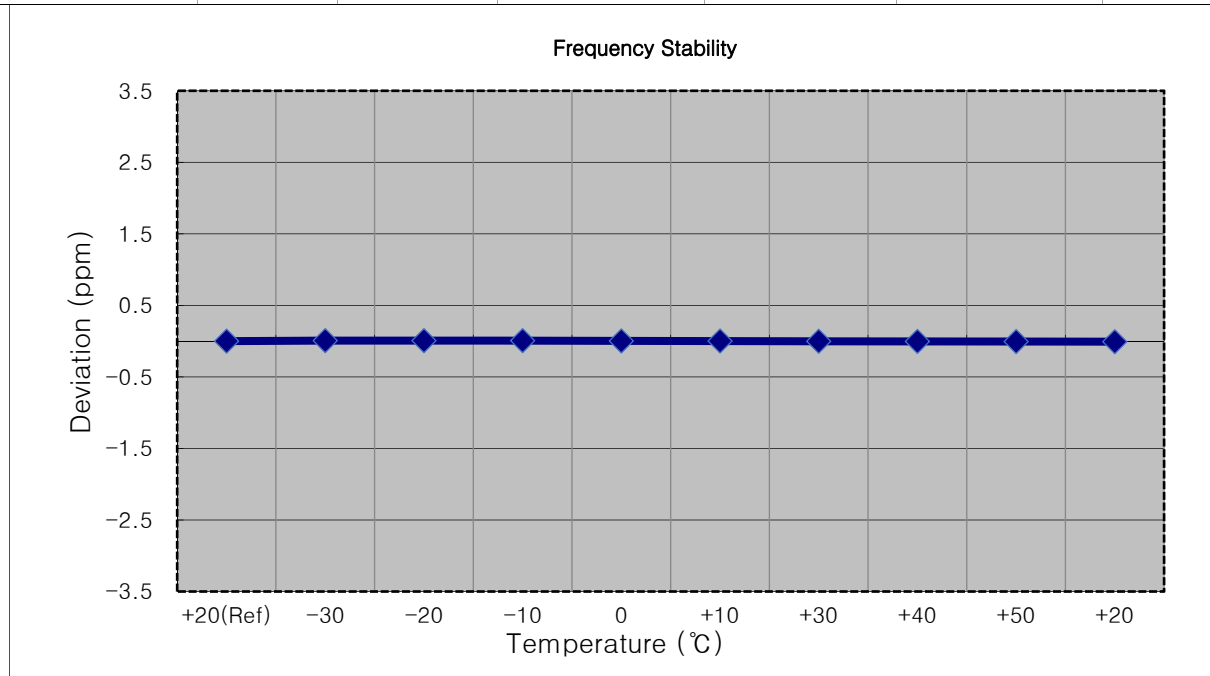

- MODE:

LTE B2
- OPERATING FREQUENCY:


1902,500,000 Hz
- CHANNEL:

19125 (15 MHz)
- REFERENCE VOLTAGE:

12.000 VDC
- DEVIATION LIMIT:

Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100%	12.000	+20(Ref)	1902 499 980	0.0	0.000 000	0.000
100%		-30	1902 499 960	-19.8	-0.000 001	-0.010
100%		-20	1902 499 990	10.0	0.000 001	0.005
100%		-10	1902 499 986	6.2	0.000 000	0.003
100%		0	1902 499 971	-8.6	0.000 000	-0.005
100%		+10	1902 499 971	-9.1	0.000 000	-0.005
100%		+30	1902 499 970	-10.2	-0.000 001	-0.005
100%		+40	1902 499 966	-13.9	-0.000 001	-0.007
100%		+50	1902 499 963	-16.9	-0.000 001	-0.009
Batt. Endpoint	10.200	+20	1902 499 961	-19.0	-0.000 001	-0.010

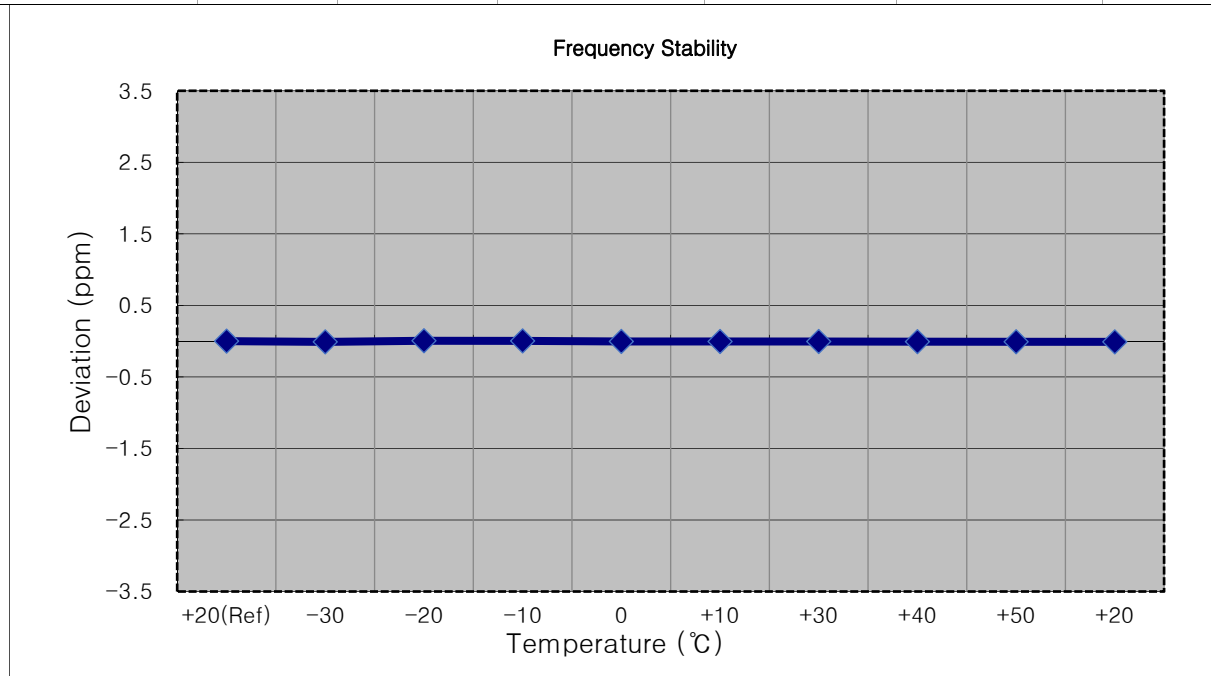

- MODE:

LTE B2
- OPERATING FREQUENCY:


1900,000,000 Hz
- CHANNEL:

19100 (20 MHz)
- REFERENCE VOLTAGE:

12.000 VDC
- DEVIATION LIMIT:

Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100%	12.000	+20(Ref)	1900 000 005	0.0	0.000 000	0.000
100%		-30	1899 999 999	-6.0	0.000 000	-0.003
100%		-20	1900 000 010	4.5	0.000 000	0.002
100%		-10	1899 999 997	-8.3	0.000 000	-0.004
100%		0	1899 999 997	-8.2	0.000 000	-0.004
100%		+10	1899 999 993	-12.3	-0.000 001	-0.006
100%		+30	1899 999 990	-15.5	-0.000 001	-0.008
100%		+40	1899 999 990	-15.8	-0.000 001	-0.008
100%		+50	1899 999 987	-18.2	-0.000 001	-0.010
Batt. Endpoint	10.200	+20	1899 999 984	-20.9	-0.000 001	-0.011

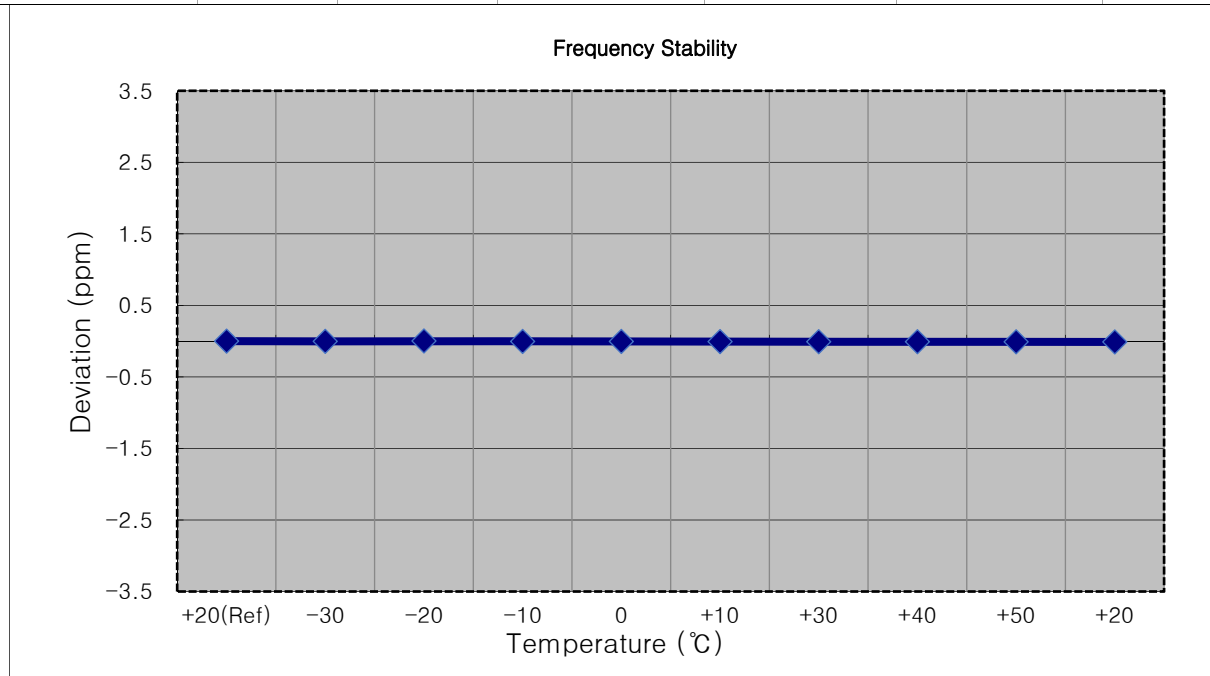




9. TEST PLOTS

BW1.4M_BandEdge_Lowest Channel_QPSK_FullRB(1)



BW1.4M_BandEdge_Lowest Channel_QPSK_FullRB(2)

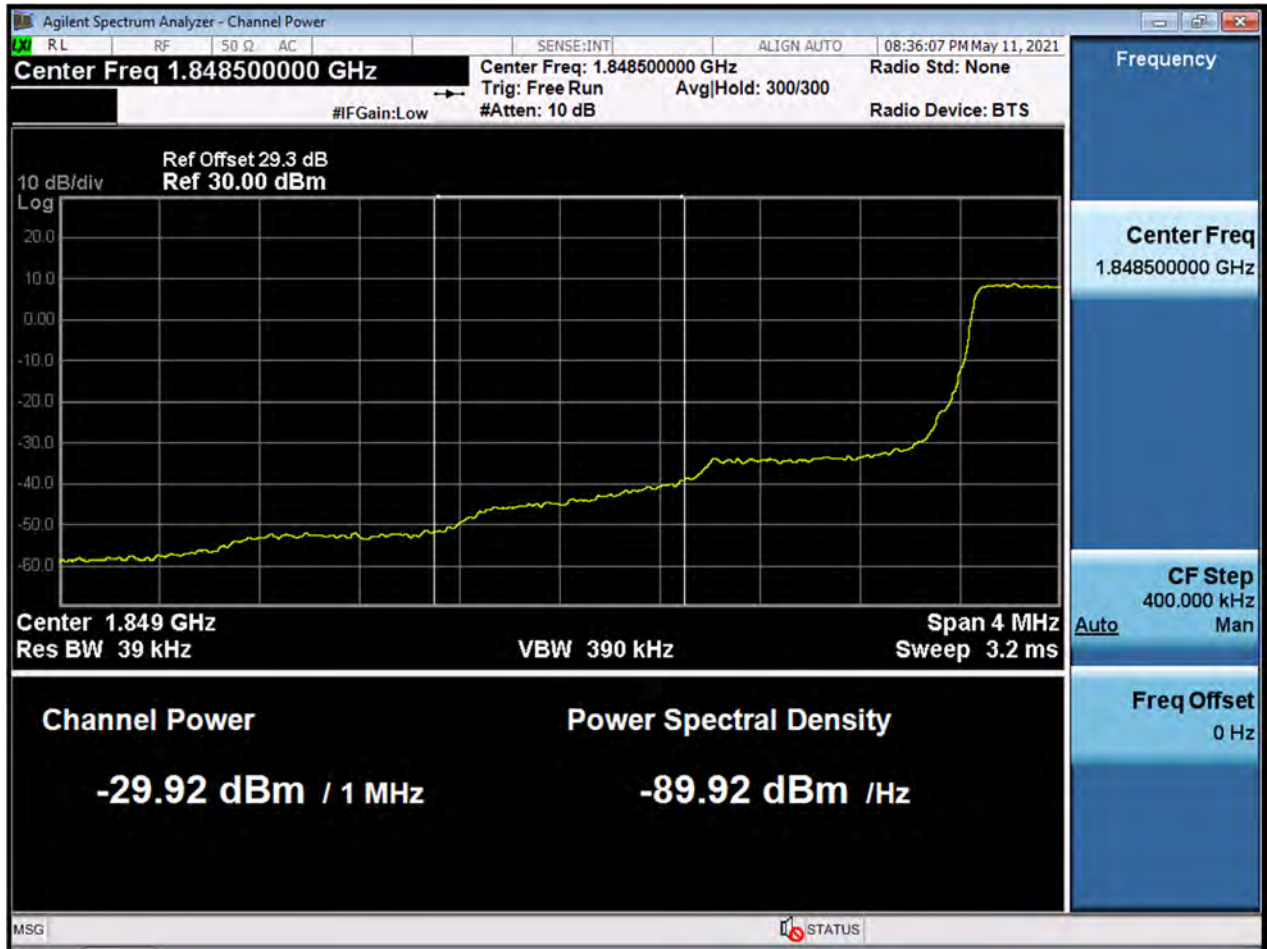


BW1.4M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW1.4M_BandEdge_Highest Channel_QPSK_FullRB(2)



BW1.4M_BandEdge_Lowest Channel_QPSK_1RB

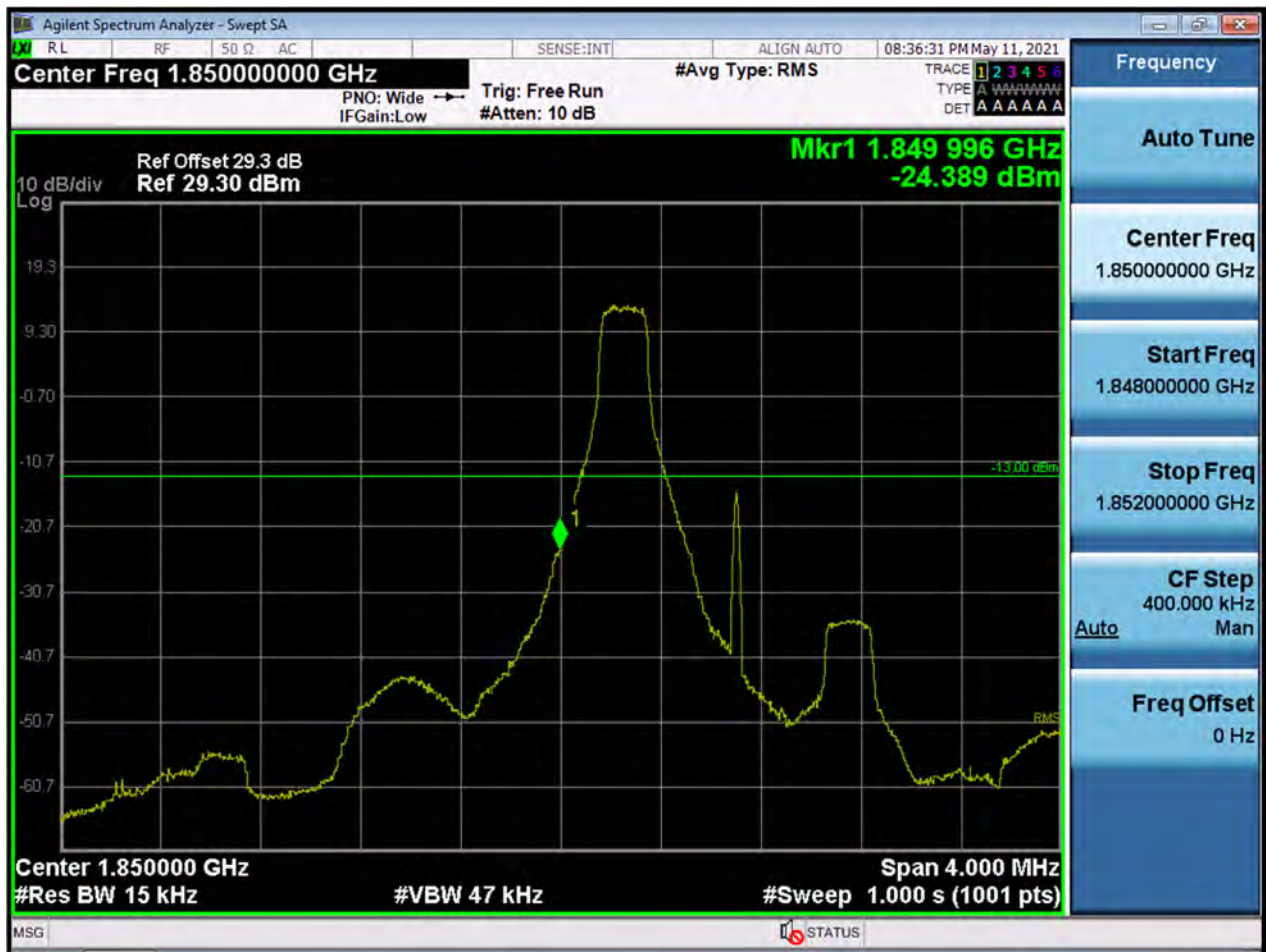


BW1.4M_BandEdge_Highest Channel_QPSK_1RB



BW3M_BandEdge_Lowest Channel_QPSK_FullRB(1)




BW3M_BandEdge_Lowest Channel_QPSK_FullRB(2)

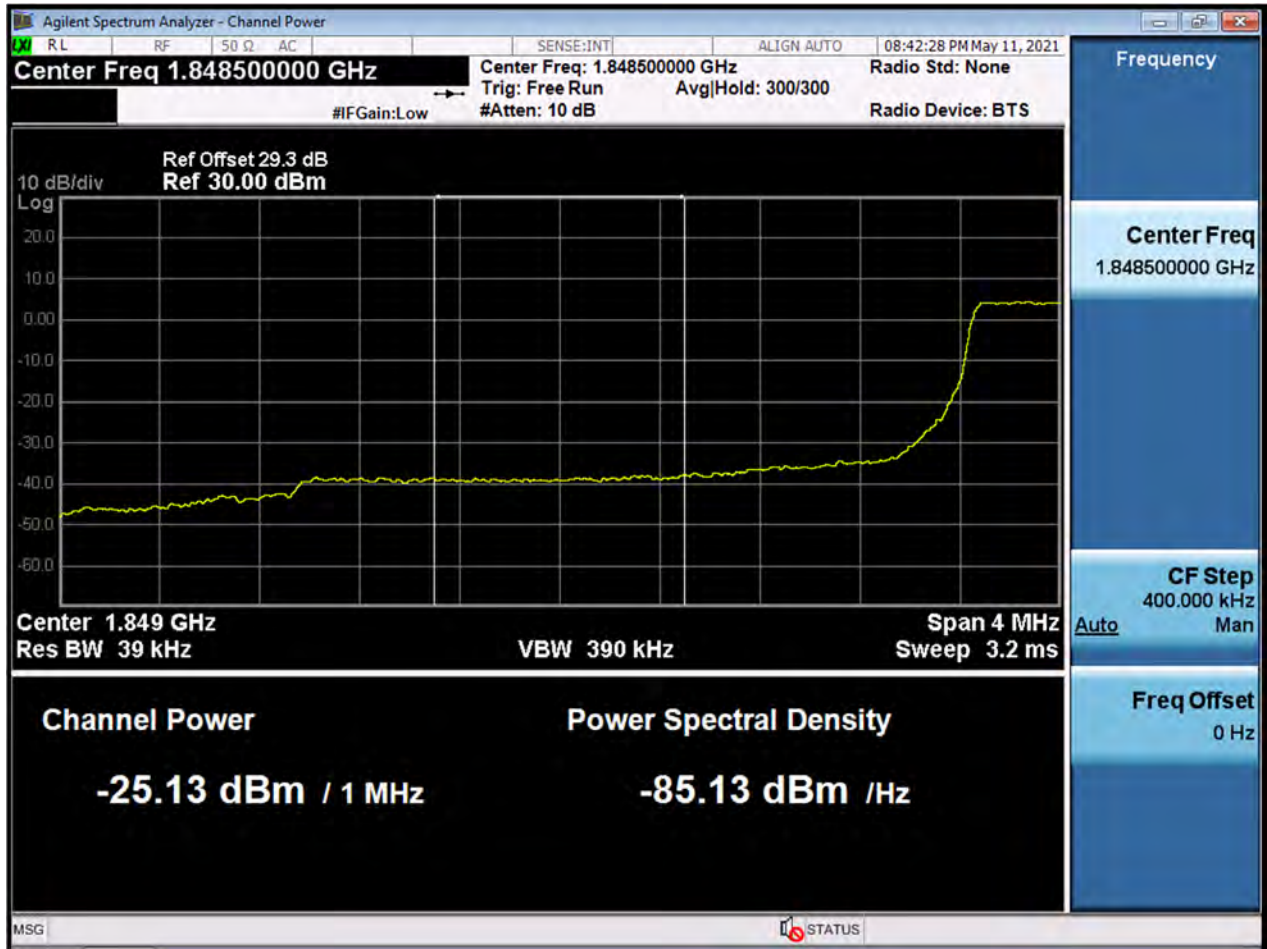


BW3M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW3M_BandEdge_Highest Channel_QPSK_FullRB(2)

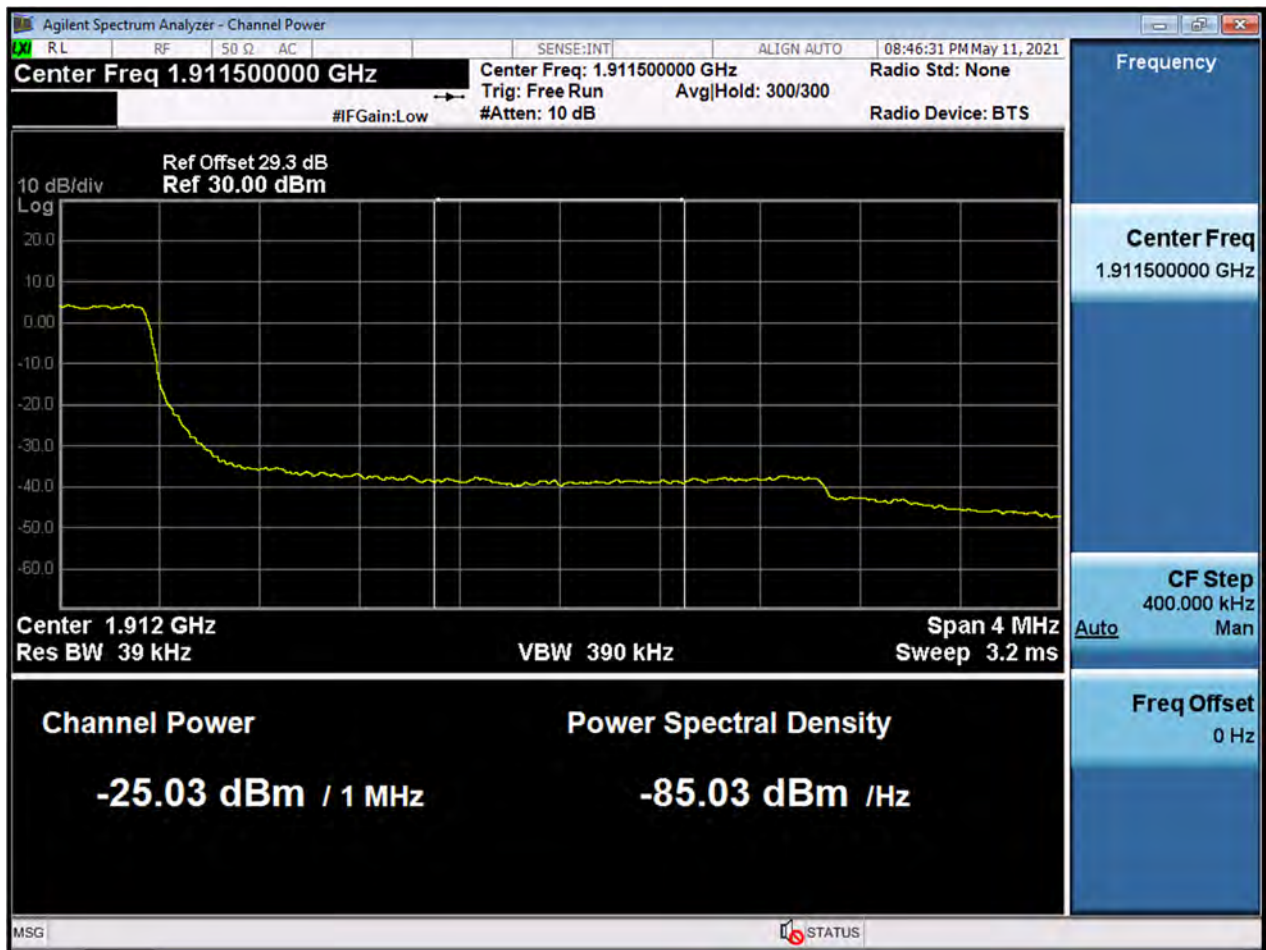

BW3M_BandEdge_Lowest Channel_QPSK_1RB

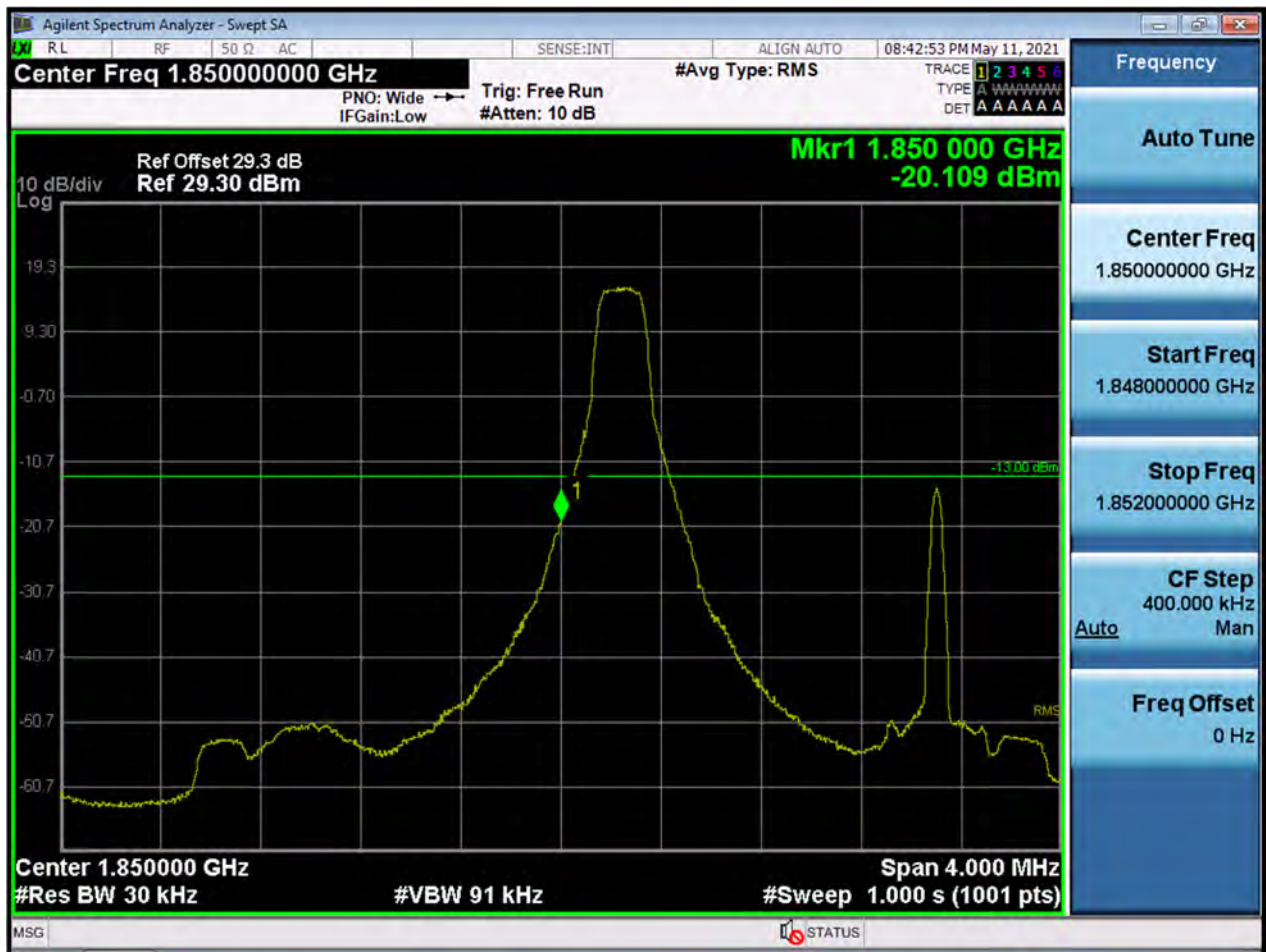

BW3M_BandEdge_Highest Channel_QPSK_1RB



BW5M_BandEdge_Lowest Channel_QPSK_FullRB(1)




BW5M_BandEdge_Lowest Channel_QPSK_FullRB(2)




BW5M_BandEdge_Highest Channel_QPSK_FullRB(1)




BW5M_BandEdge_Highest Channel_QPSK_FullRB(2)

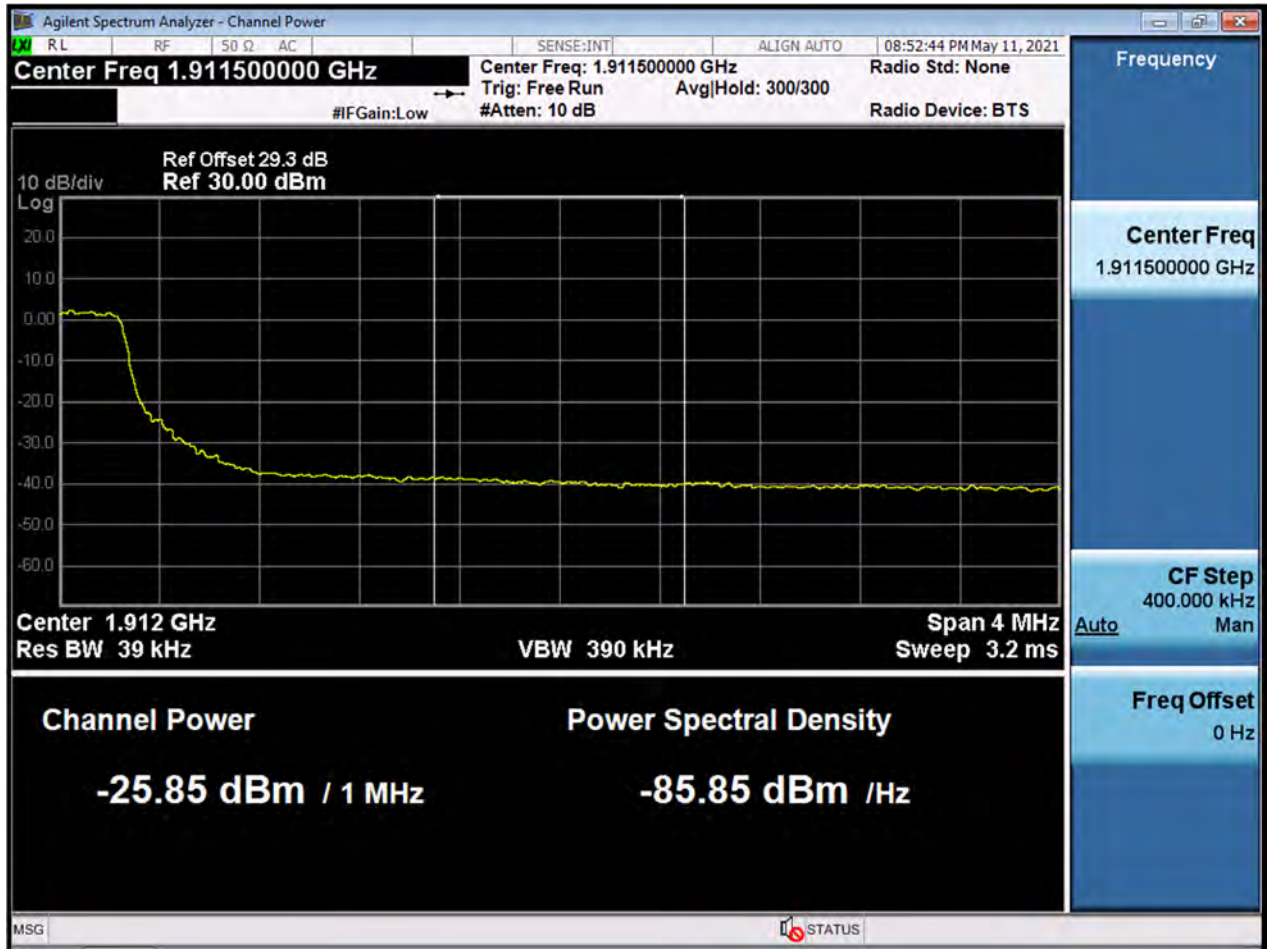

BW5M_BandEdge_Lowest Channel_QPSK_1RB

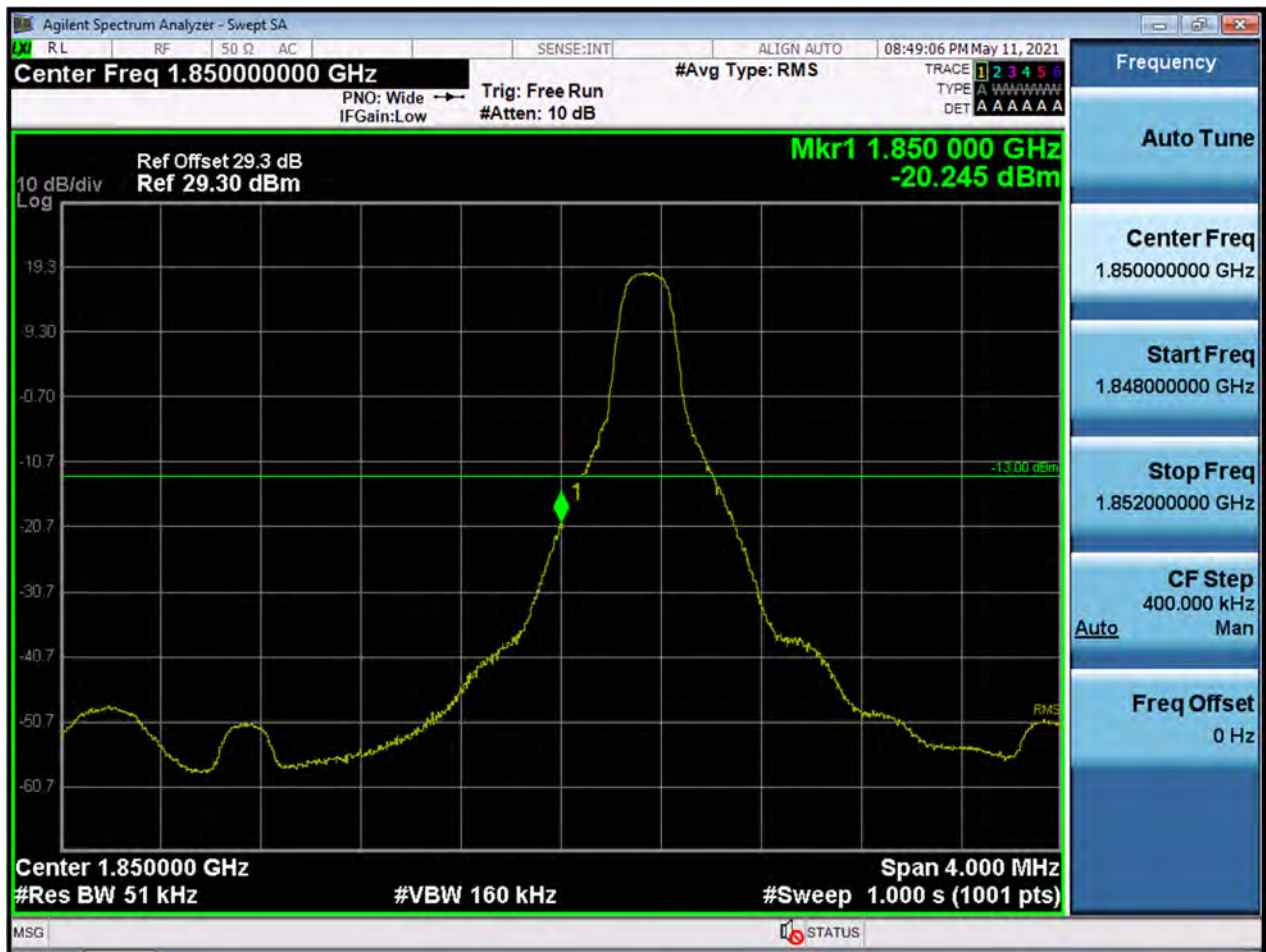


BW5M_BandEdge_Highest Channel_QPSK_1RB

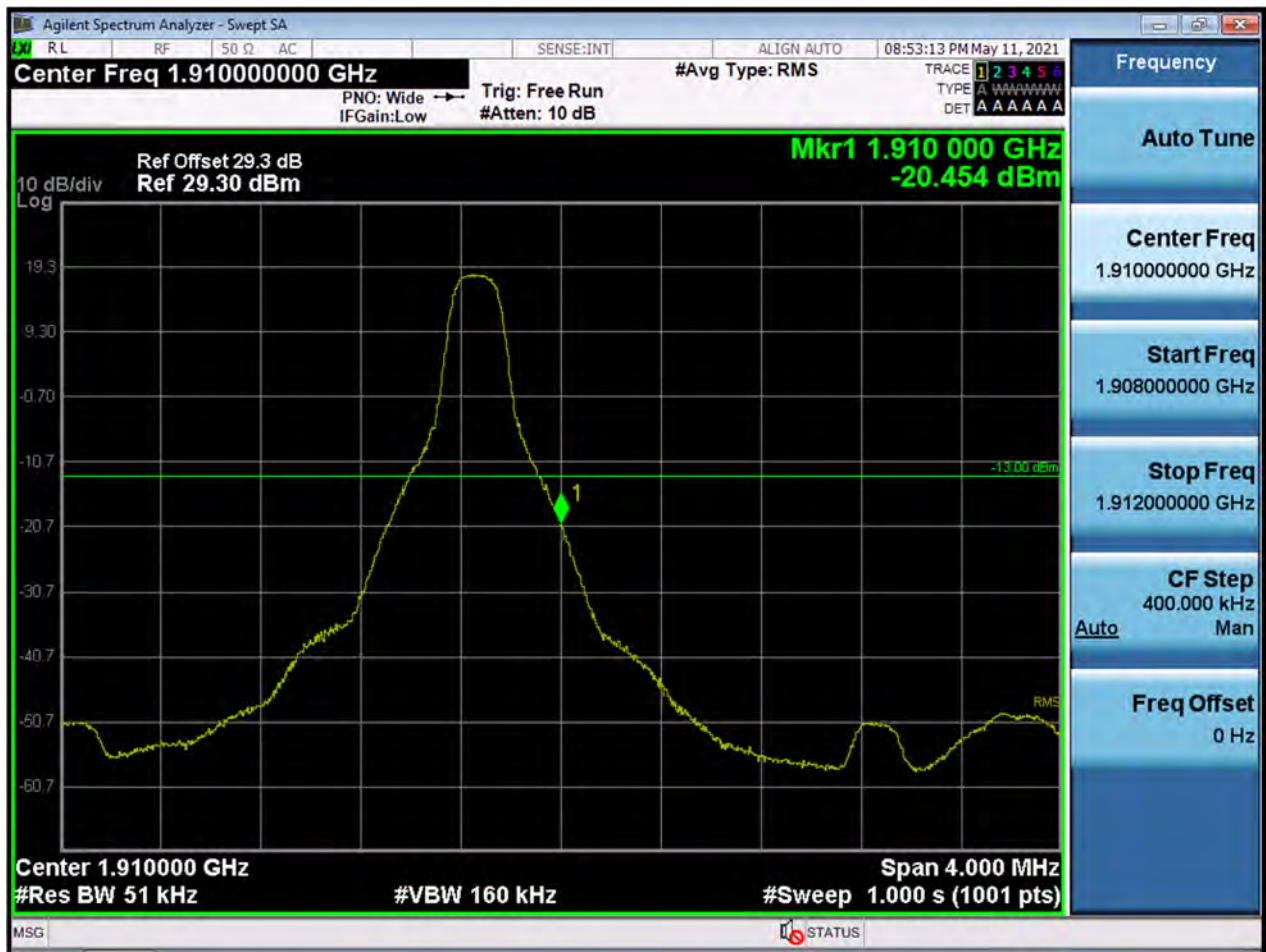

BW10M_BandEdge_Lowest Channel_QPSK_FullRB(1)



BW10M_BandEdge_Lowest Channel_QPSK_FullRB(2)

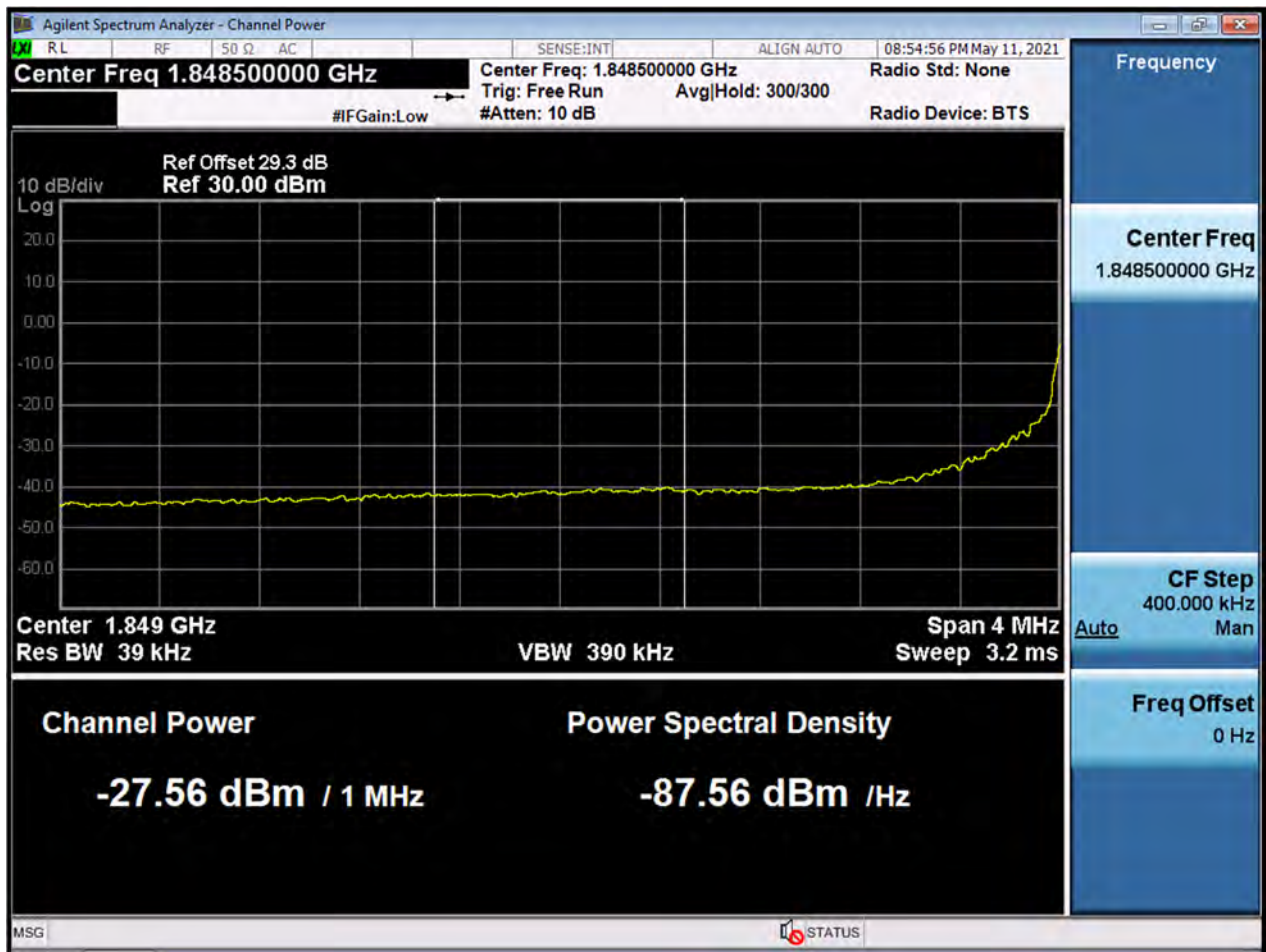


BW10M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW10M_BandEdge_Highest Channel_QPSK_FullRB(2)



BW10M_BandEdge_Lowest Channel_QPSK_1RB

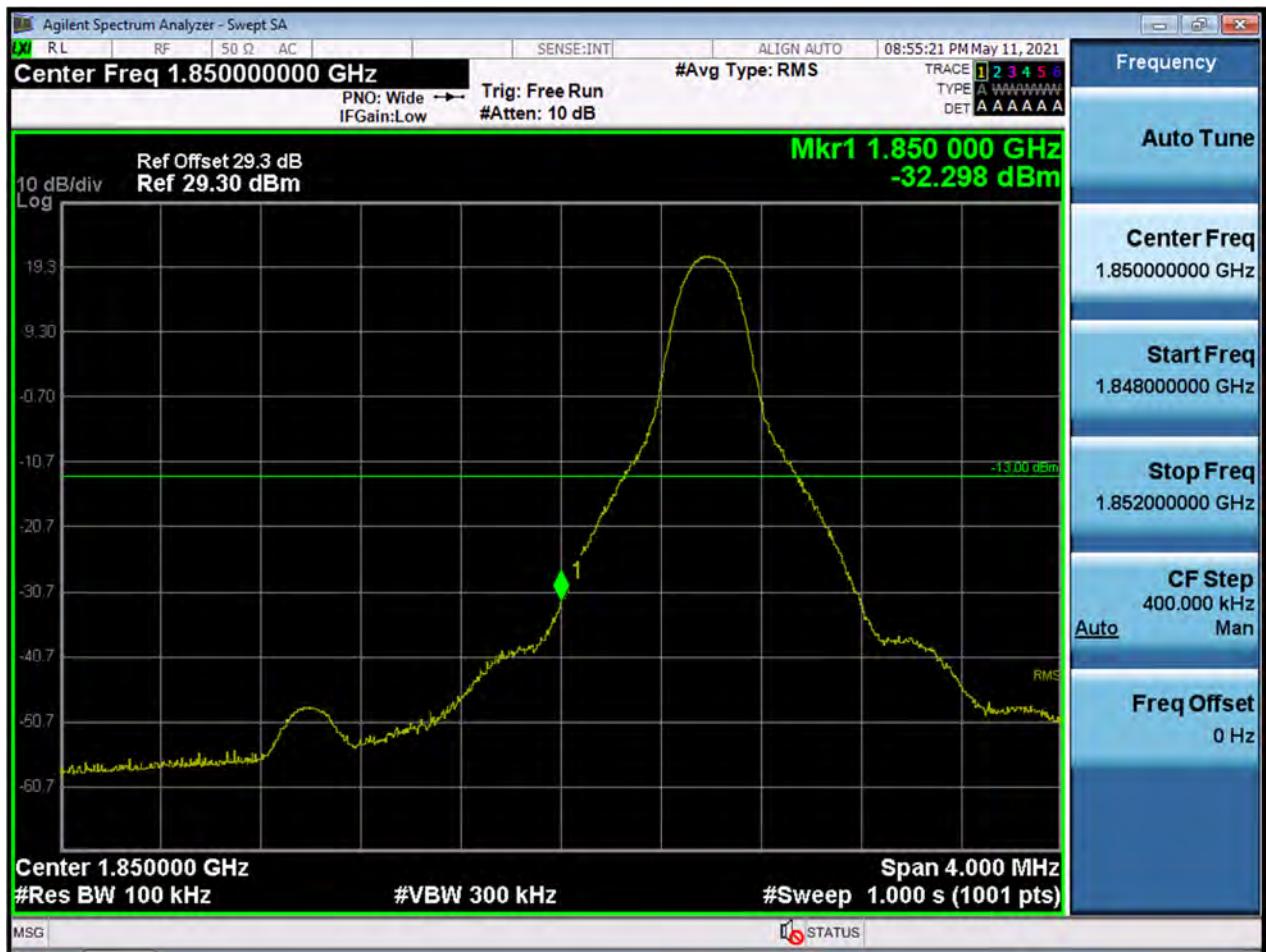


BW10M_BandEdge_Highest Channel_QPSK_1RB



BW15M_BandEdge_Lowest Channel_QPSK_FullRB(1)




BW15M_BandEdge_Lowest Channel_QPSK_FullRB(2)

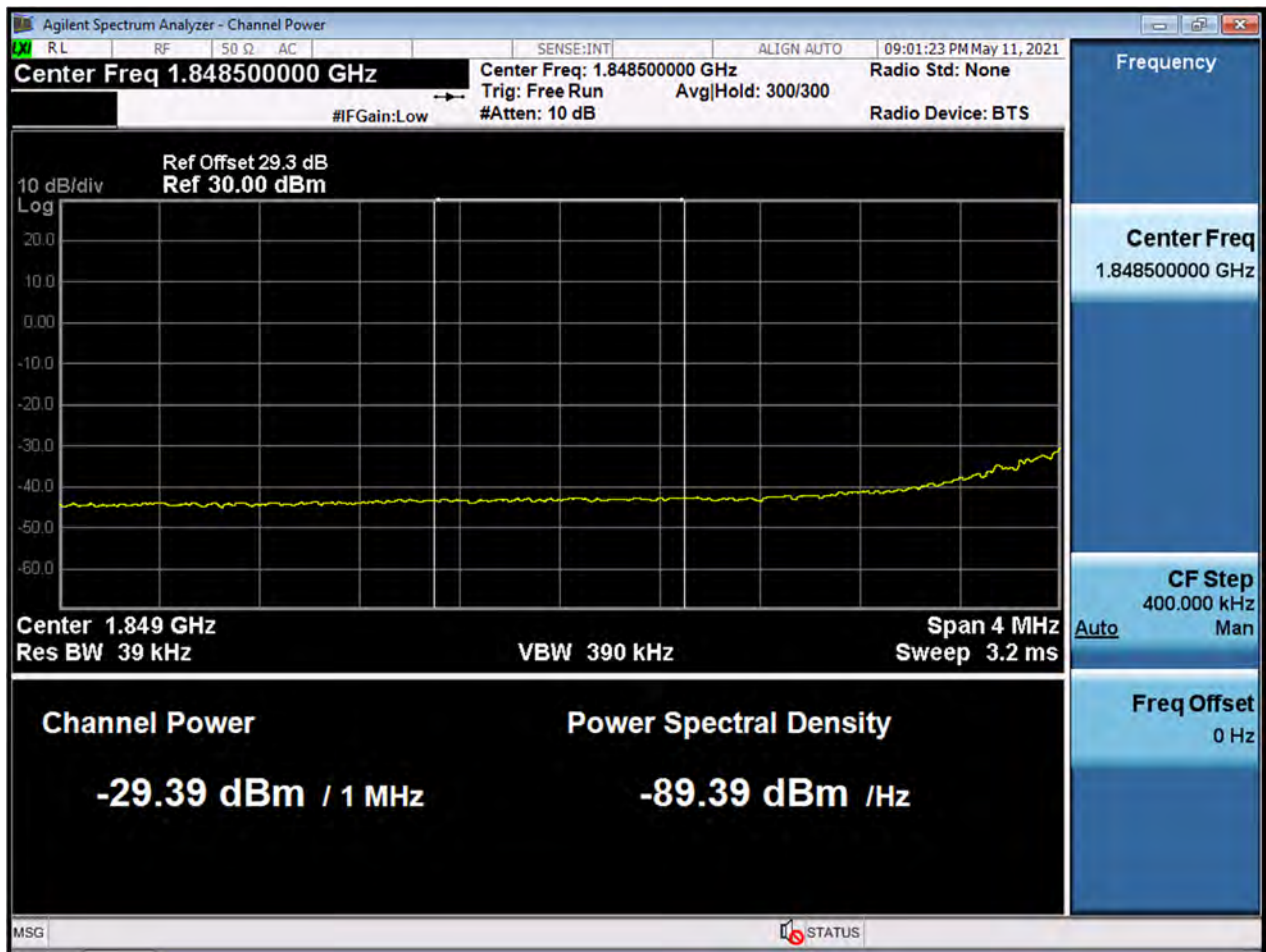

BW15M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW15M_BandEdge_Highest Channel_QPSK_FullRB(2)

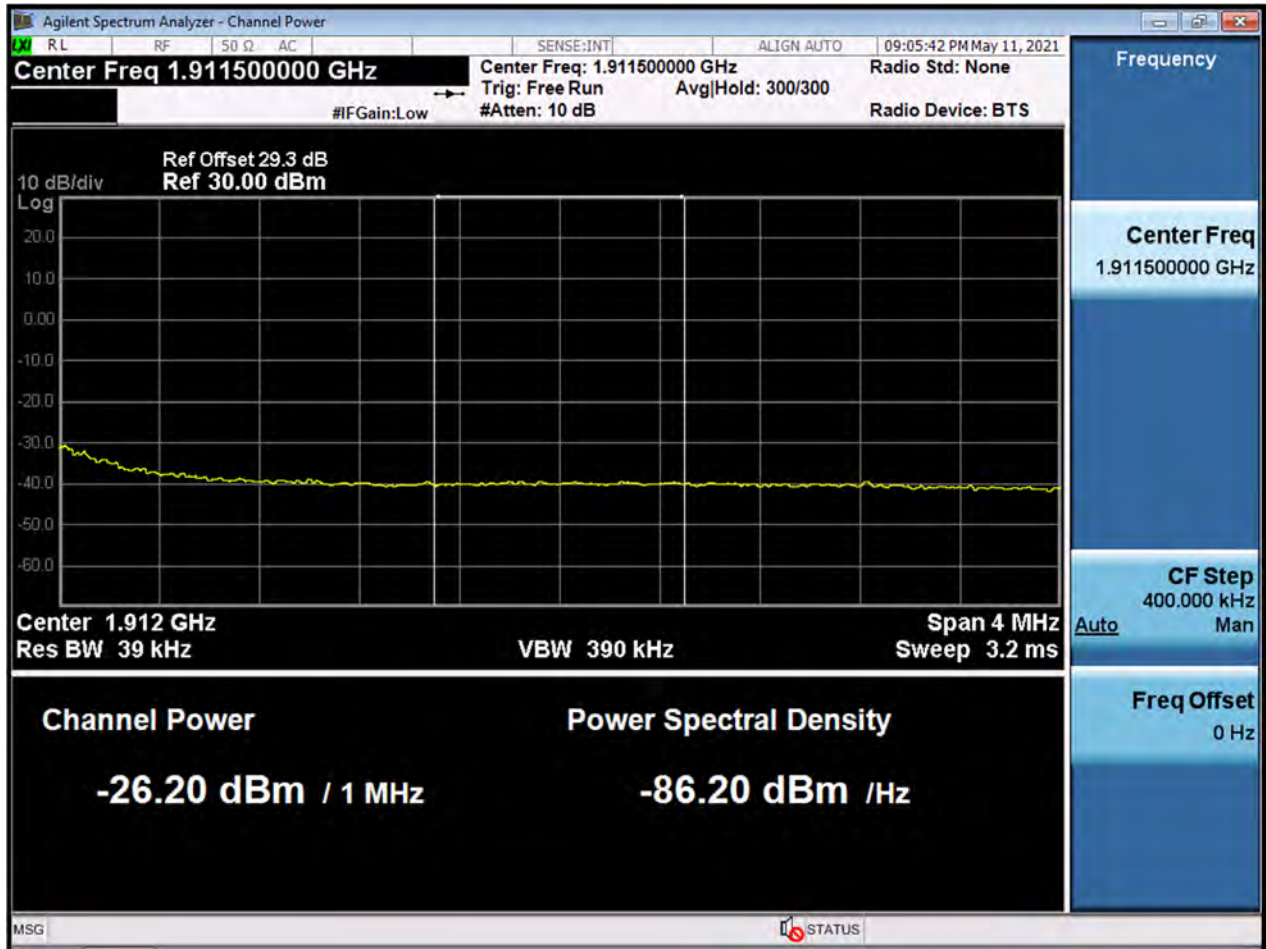

BW15M_BandEdge_Lowest Channel_QPSK_1RB




BW15M_BandEdge_Highest Channel_QPSK_1RB



BW20M_BandEdge_Lowest Channel_QPSK_FullRB(1)



BW20M_BandEdge_Lowest Channel_QPSK_FullRB(2)

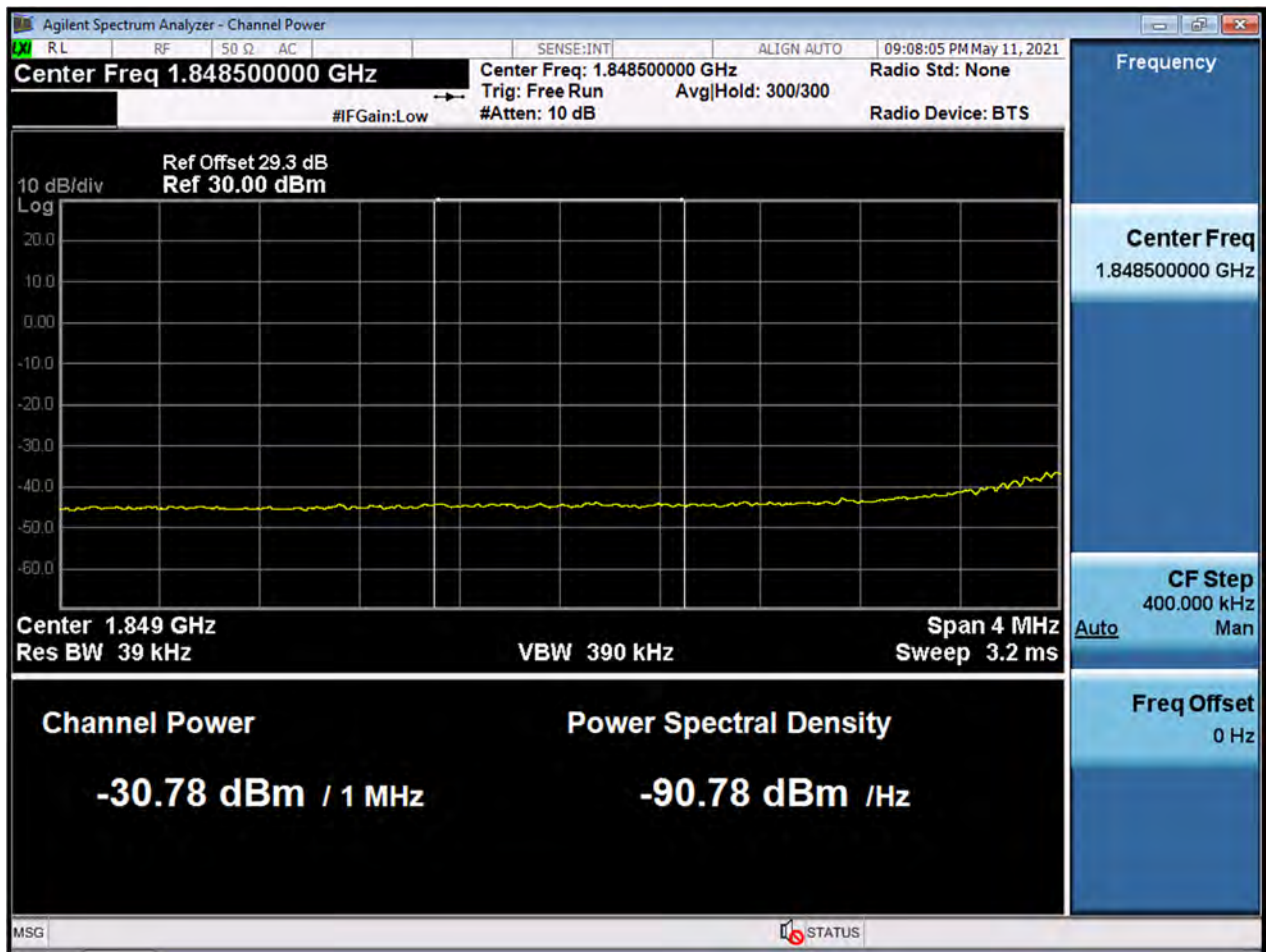

BW20M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW20M_BandEdge_Highest Channel_QPSK_FullRB(2)




BW20M_BandEdge_Lowest Channel_QPSK_1RB




BW20M_BandEdge_Highest Channel_QPSK_1RB




BW1.4M_OBW_Middle Channel_QPSK_FullRB

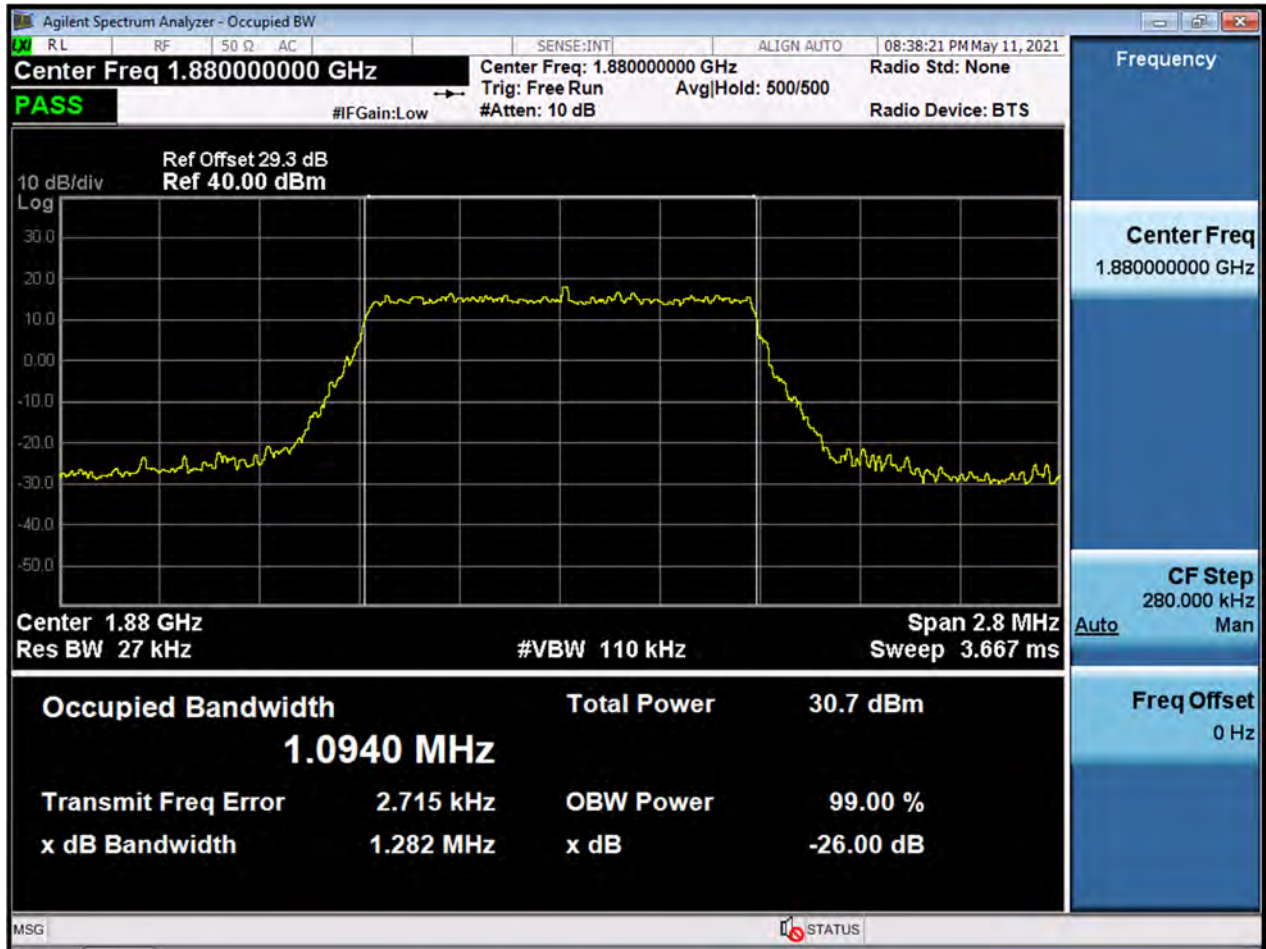


BW1.4M_OBW_Middle Channel_16QAM_FullRB

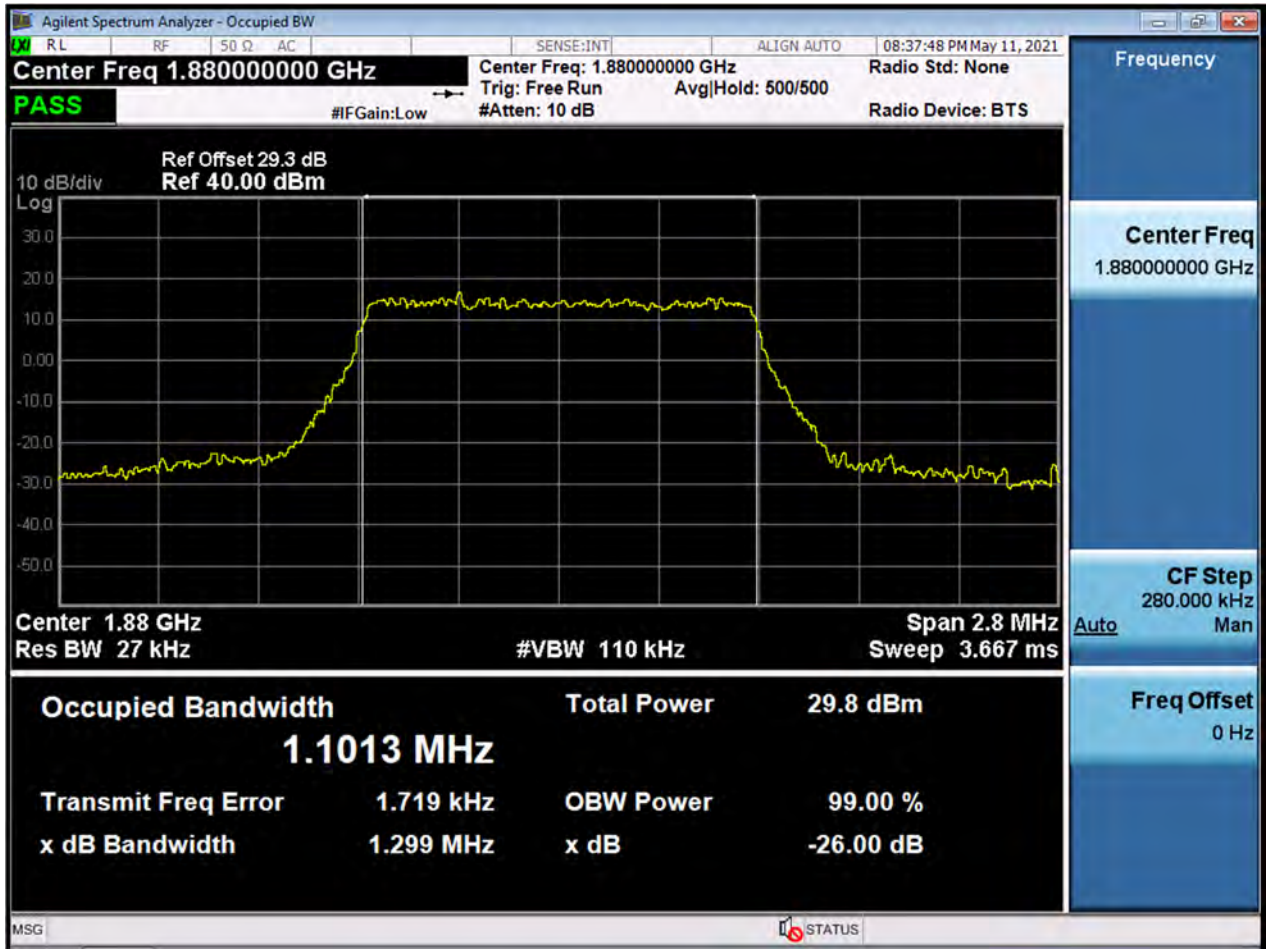


BW3M_OBW_Middle Channel_QPSK_FullRB

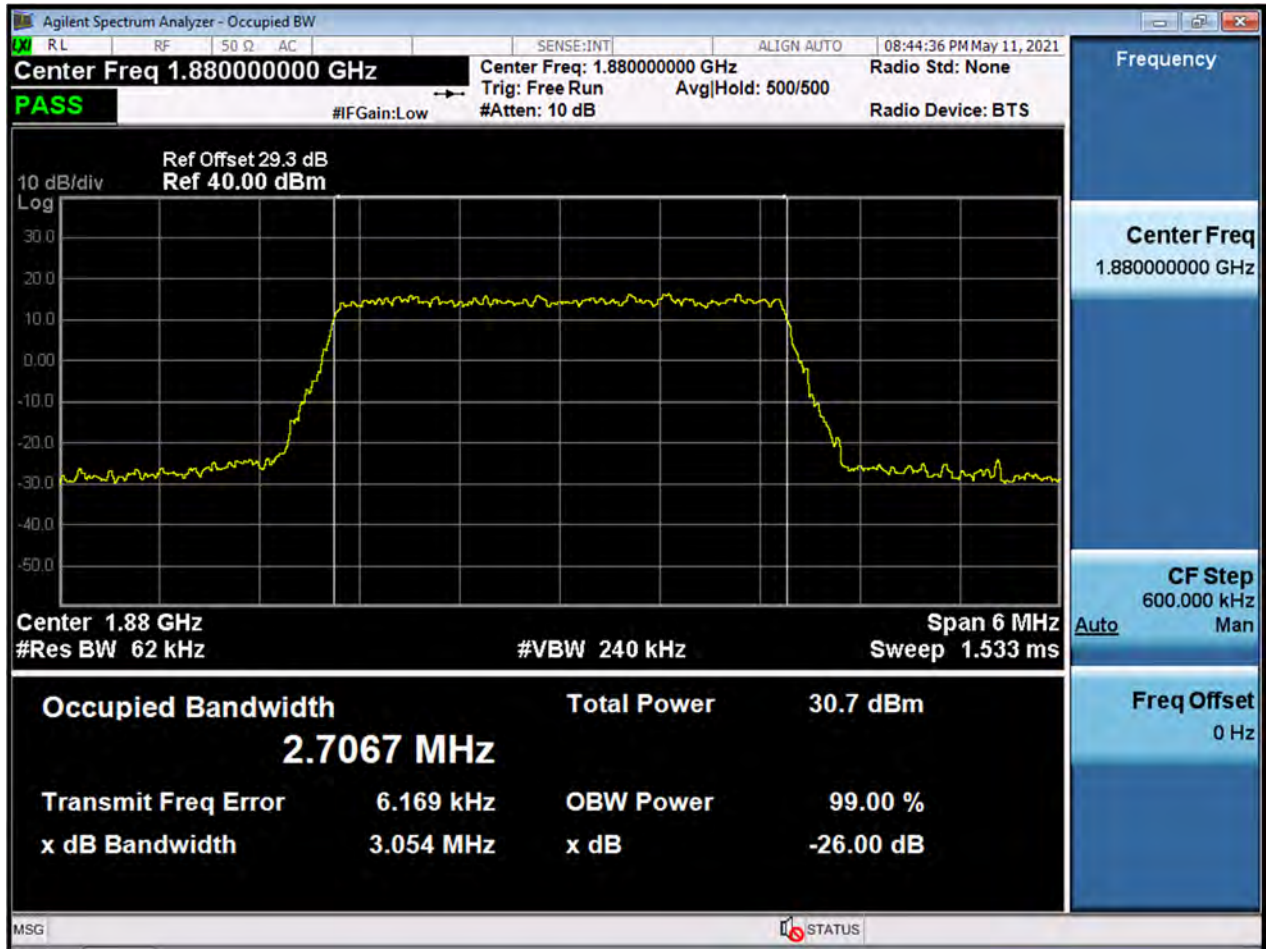


BW3M_OBW_Middle Channel_16QAM_FullRB

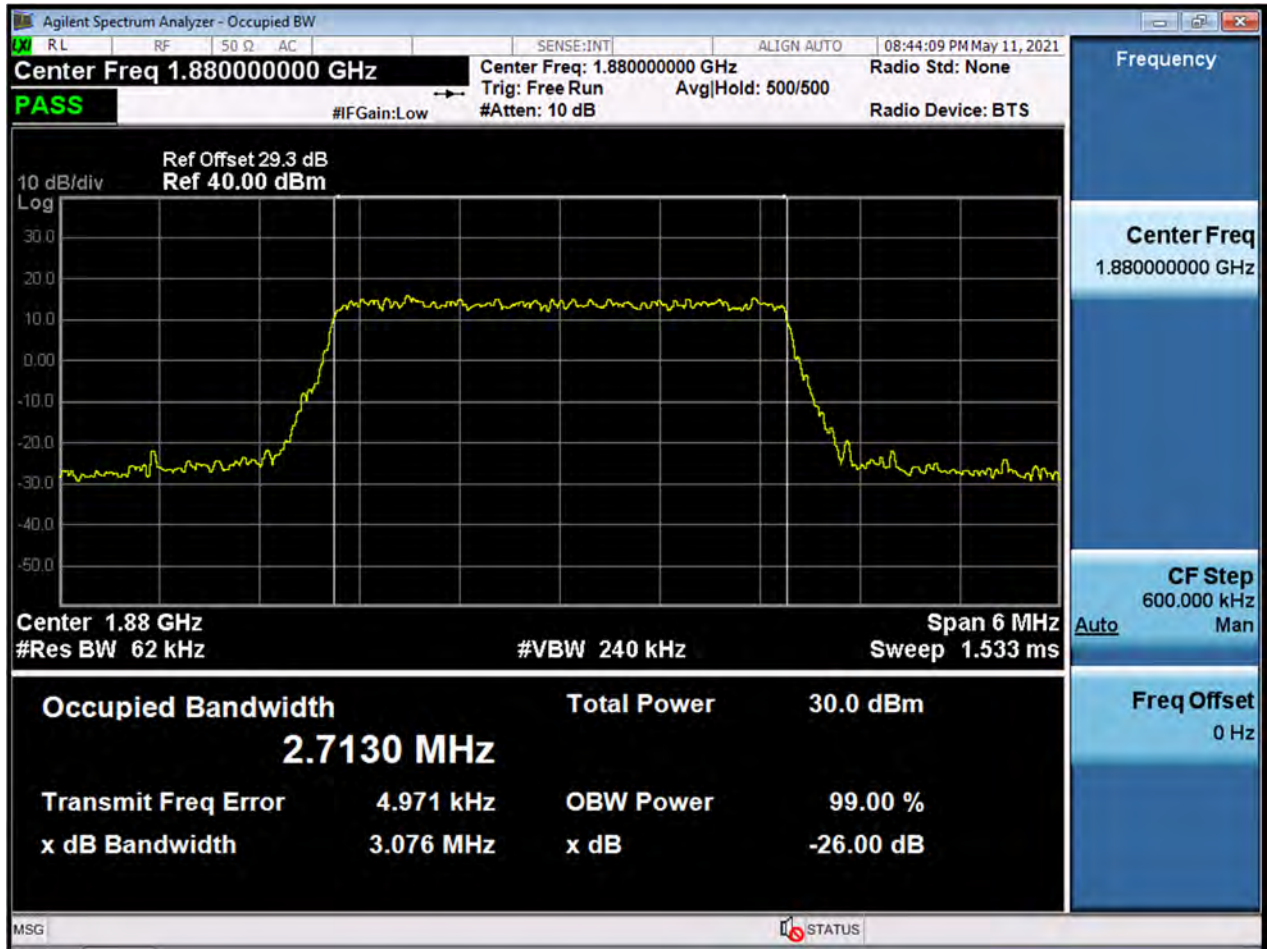


BW5M_OBW_Middle Channel_QPSK_FullRB

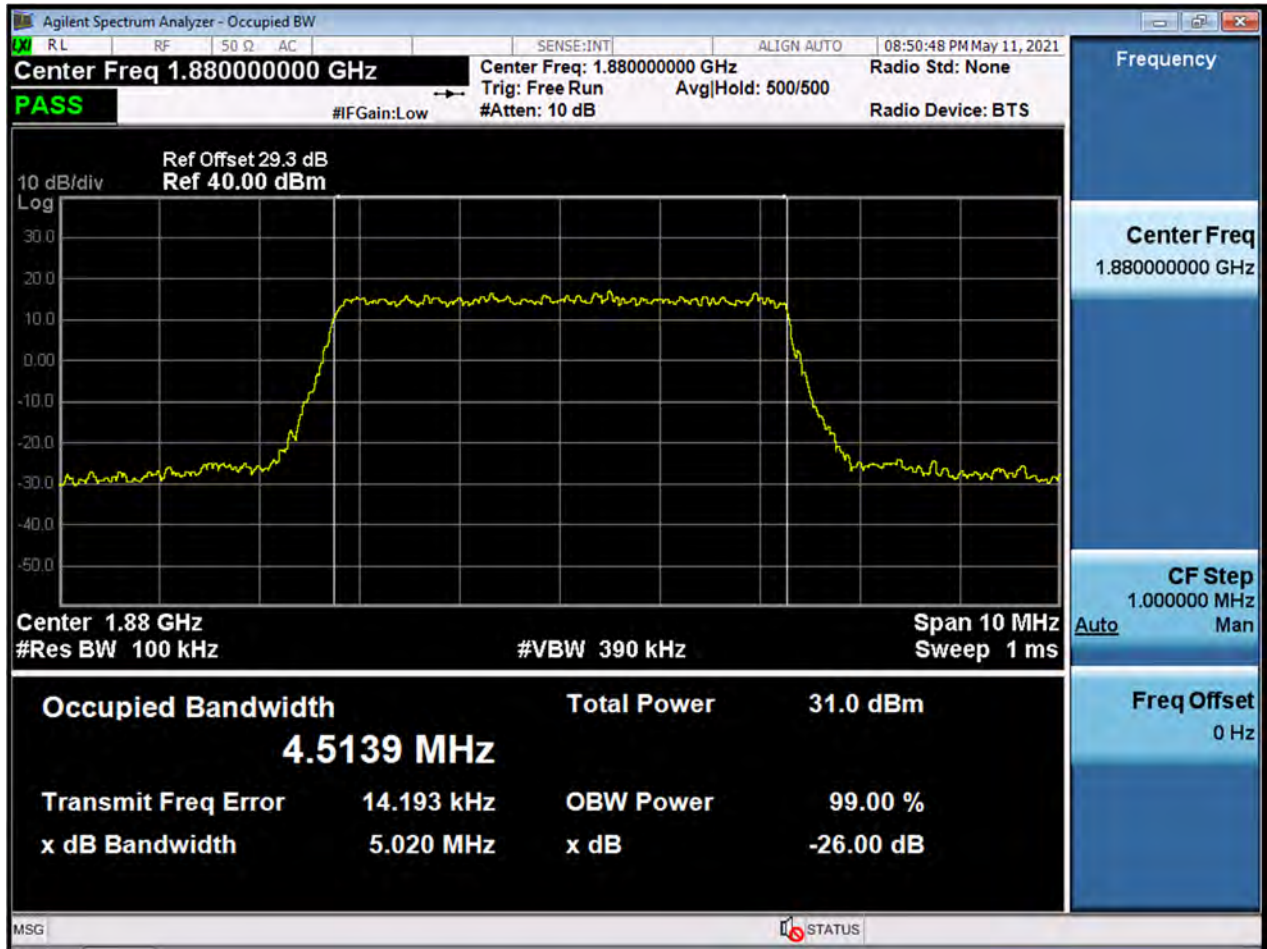


BW5M_OBW_Middle Channel_16QAM_FullRB

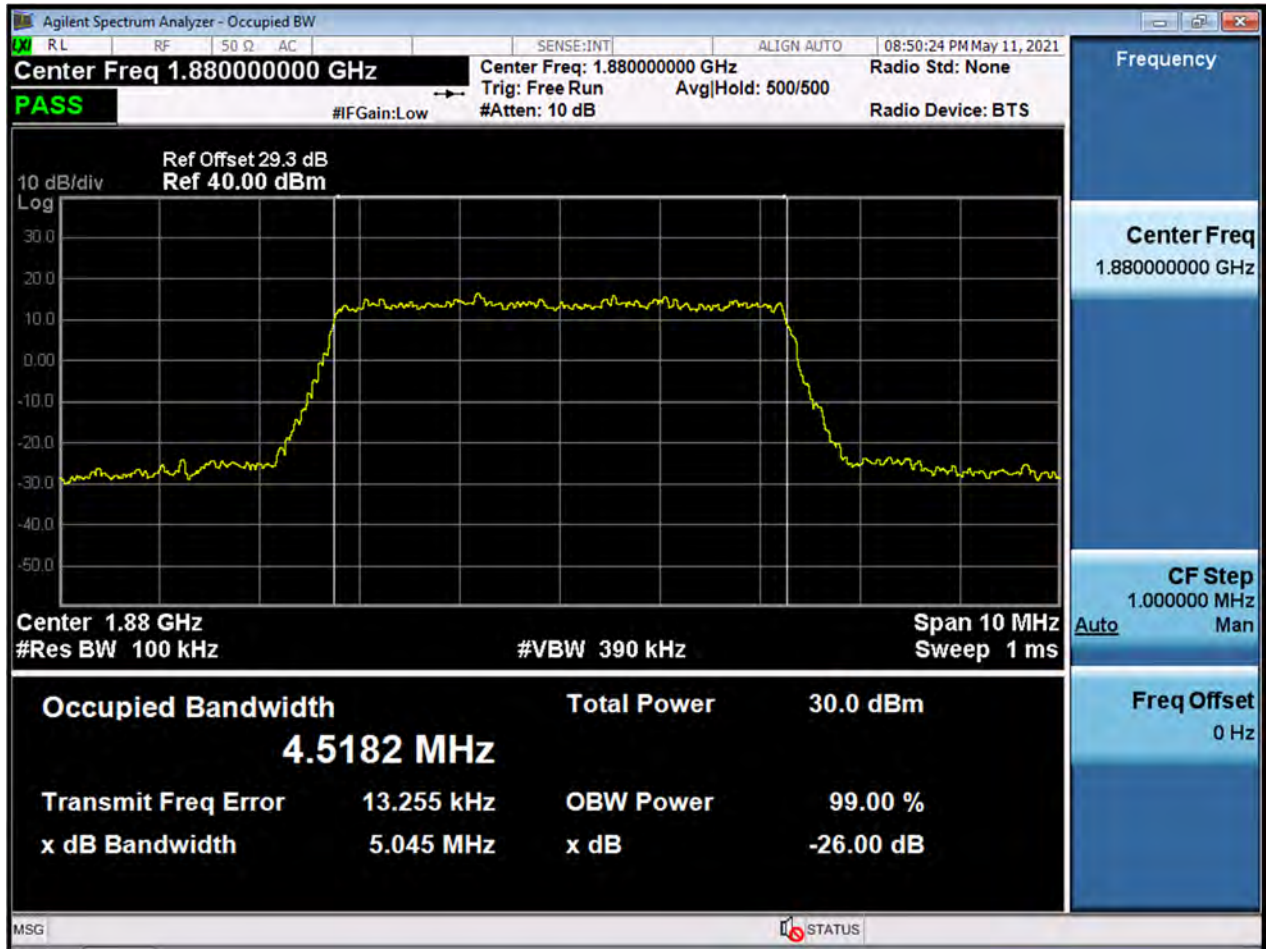


BW10M_OBW_Middle Channel_QPSK_FullRB

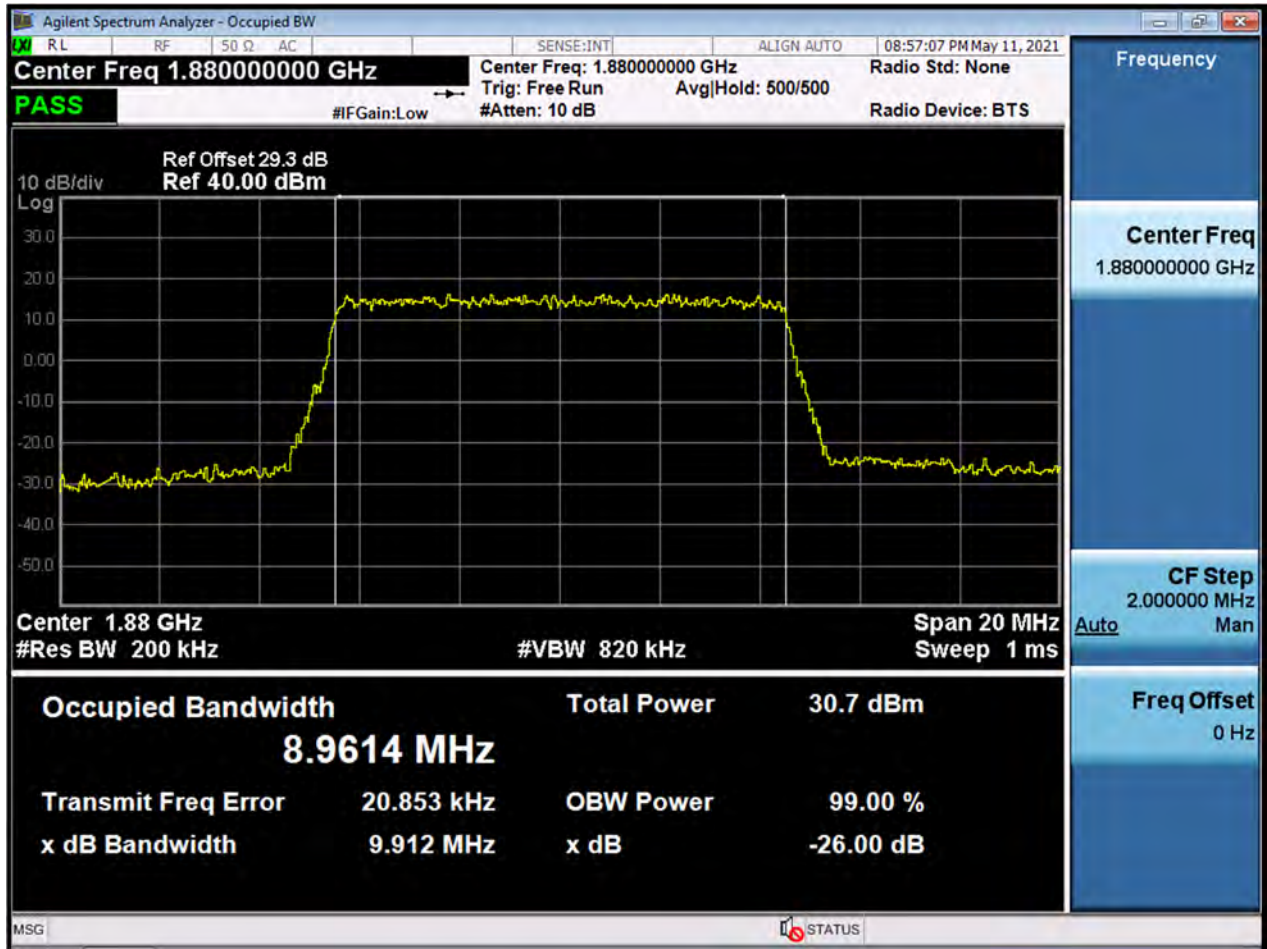


BW10M_OBW_Middle Channel_16QAM_FullRB

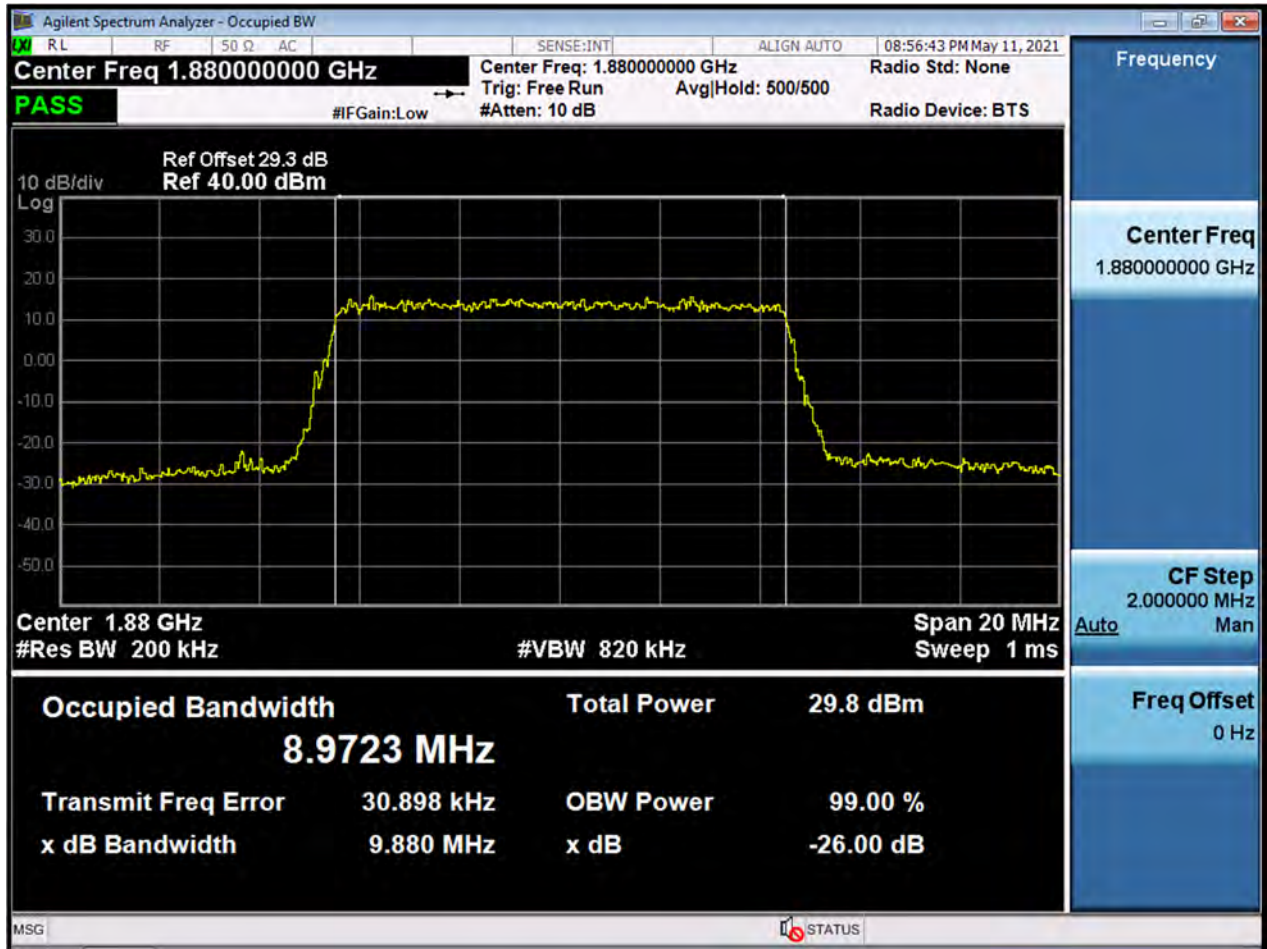


BW15M_OBW_Middle Channel_QPSK_FullRB

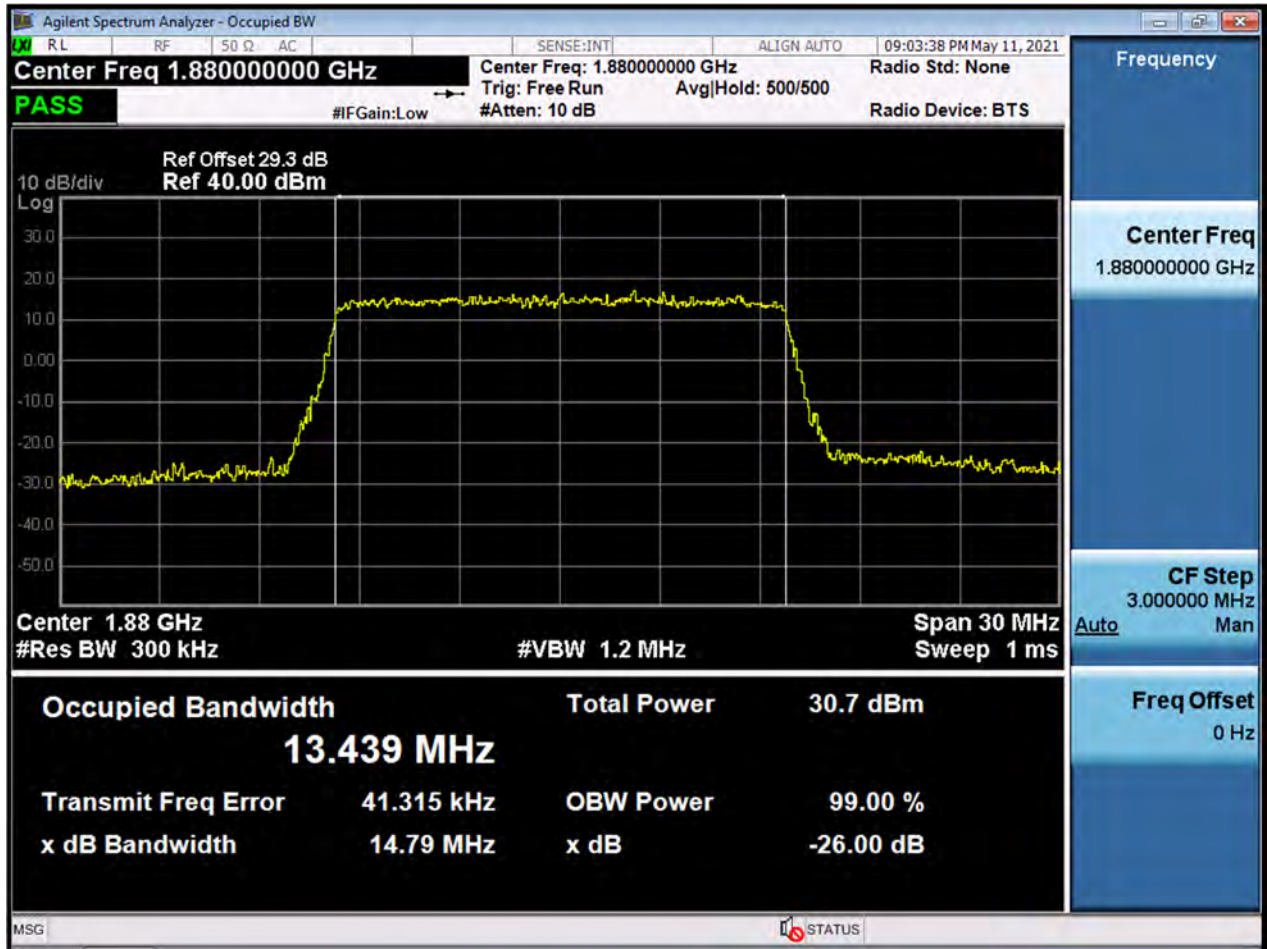


BW15M_OBW_Middle Channel_16QAM_FullRB

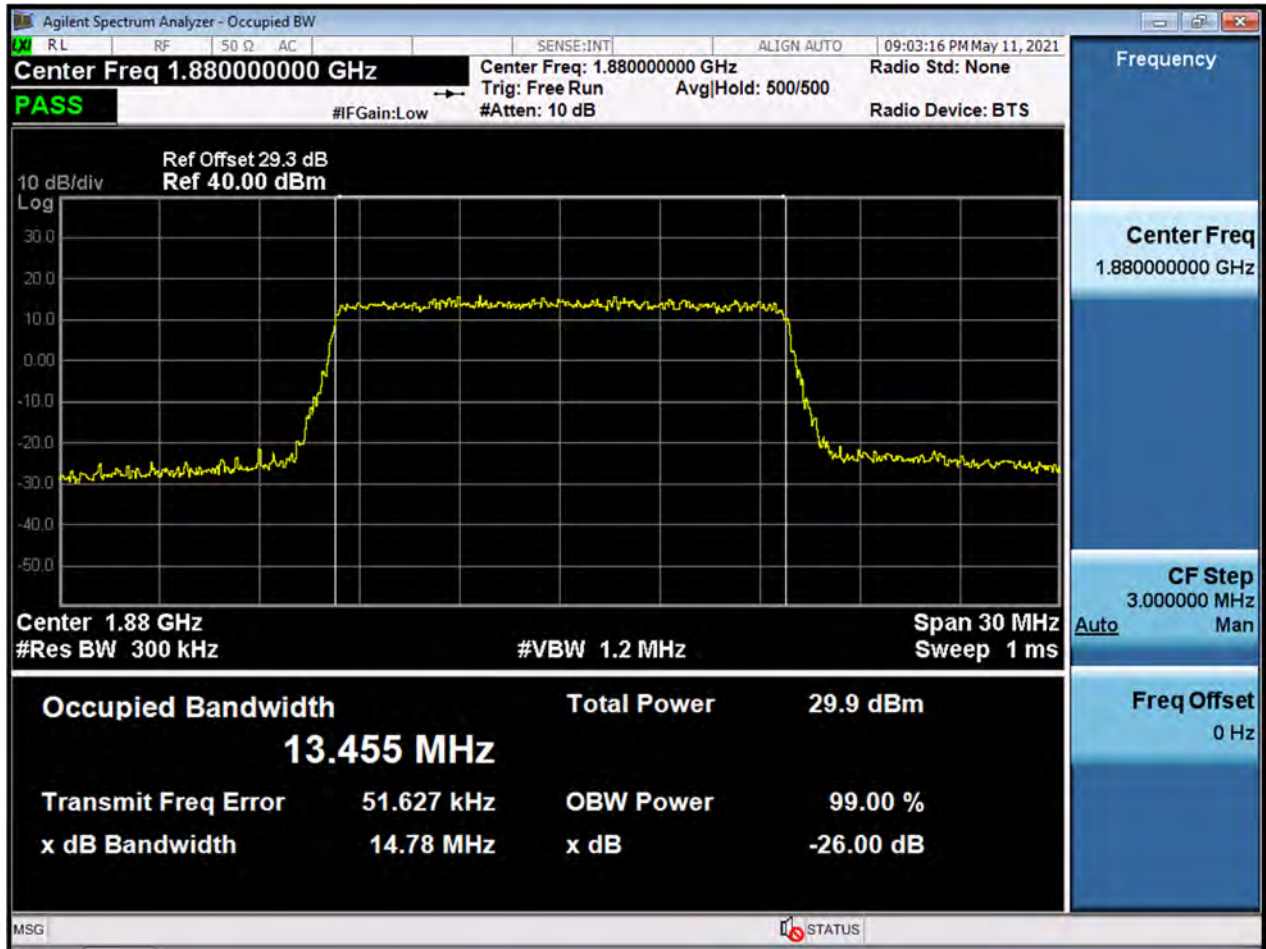


BW20M_OBW_Middle Channel_QPSK_FullRB

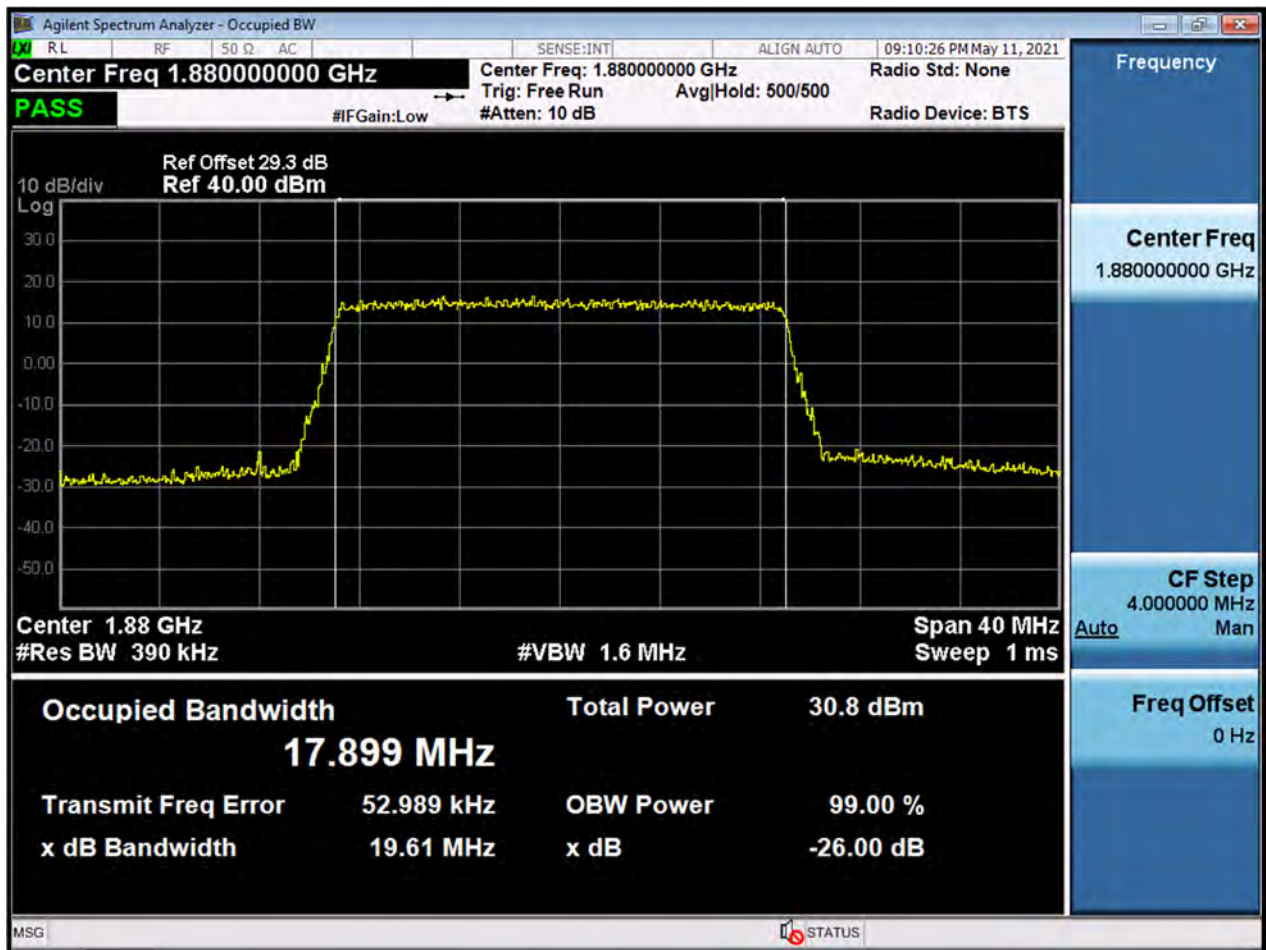


BW20M_OBW_Middle Channel_16QAM_FullRB

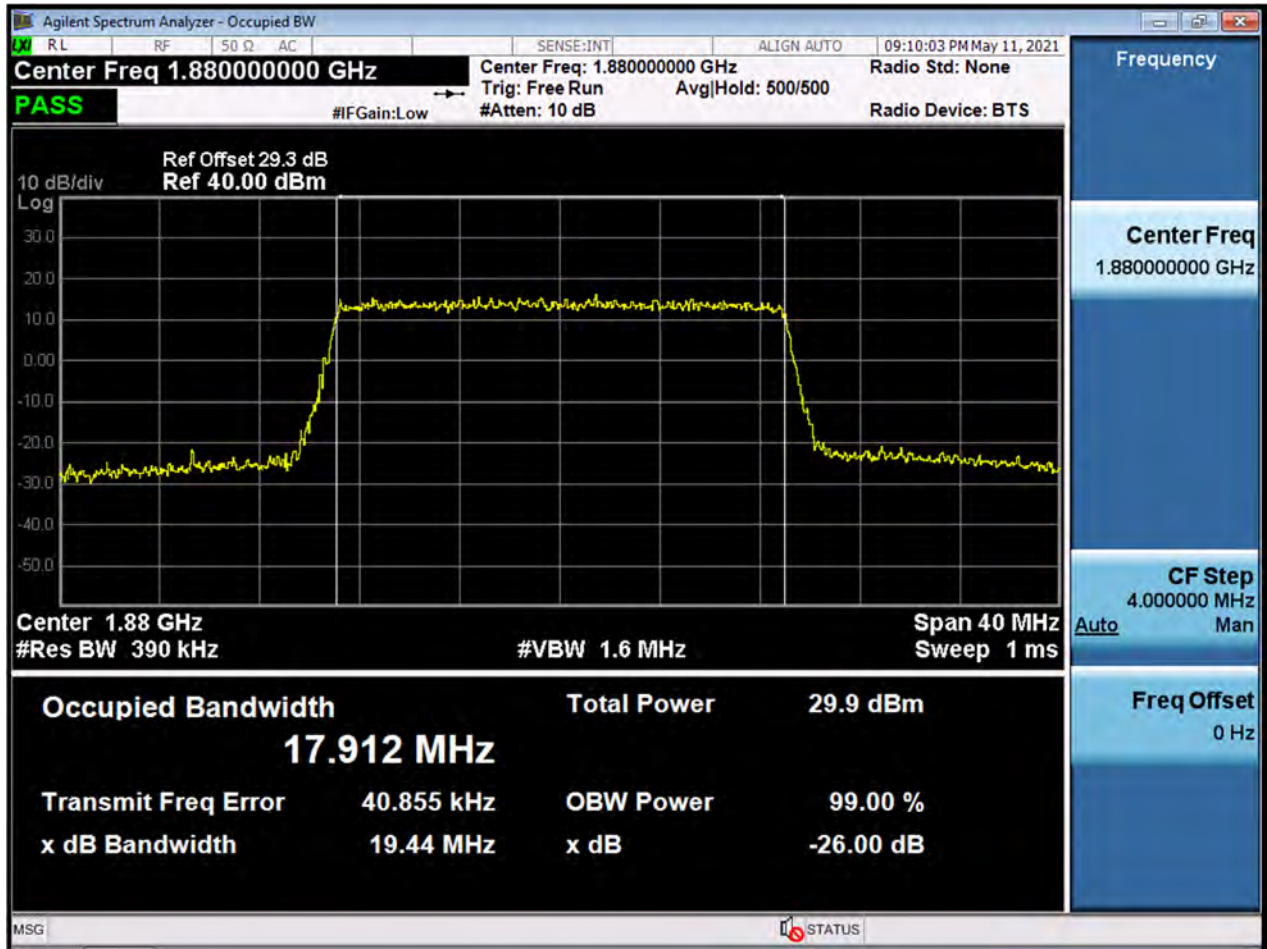


BW1.4M_PAR_Middle Channel_QPSK_FullRB

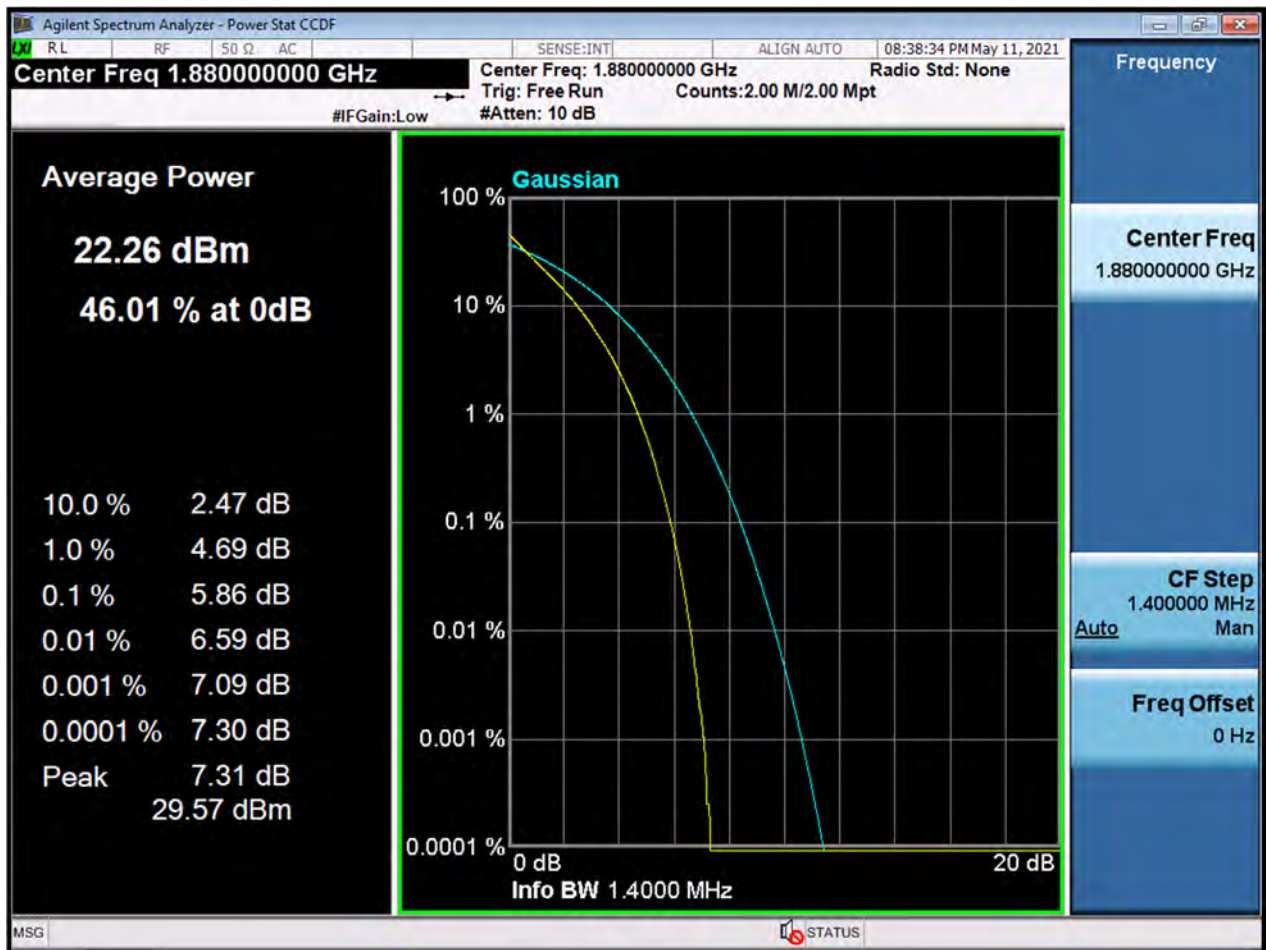


BW1.4M_PAR_Middle Channel_16QAM_FullRB

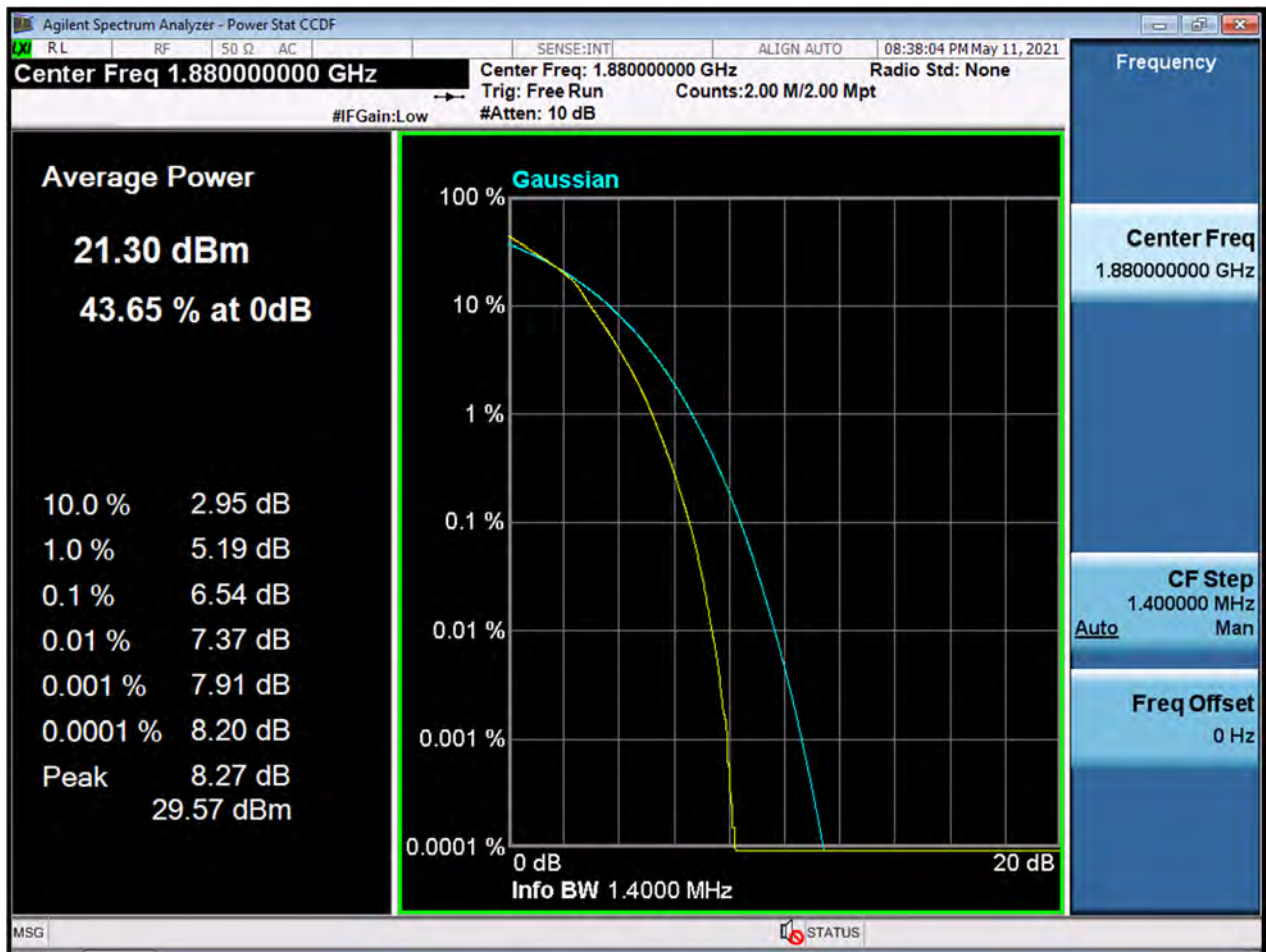


BW3M_PAR_Middle Channel_QPSK_FullRB

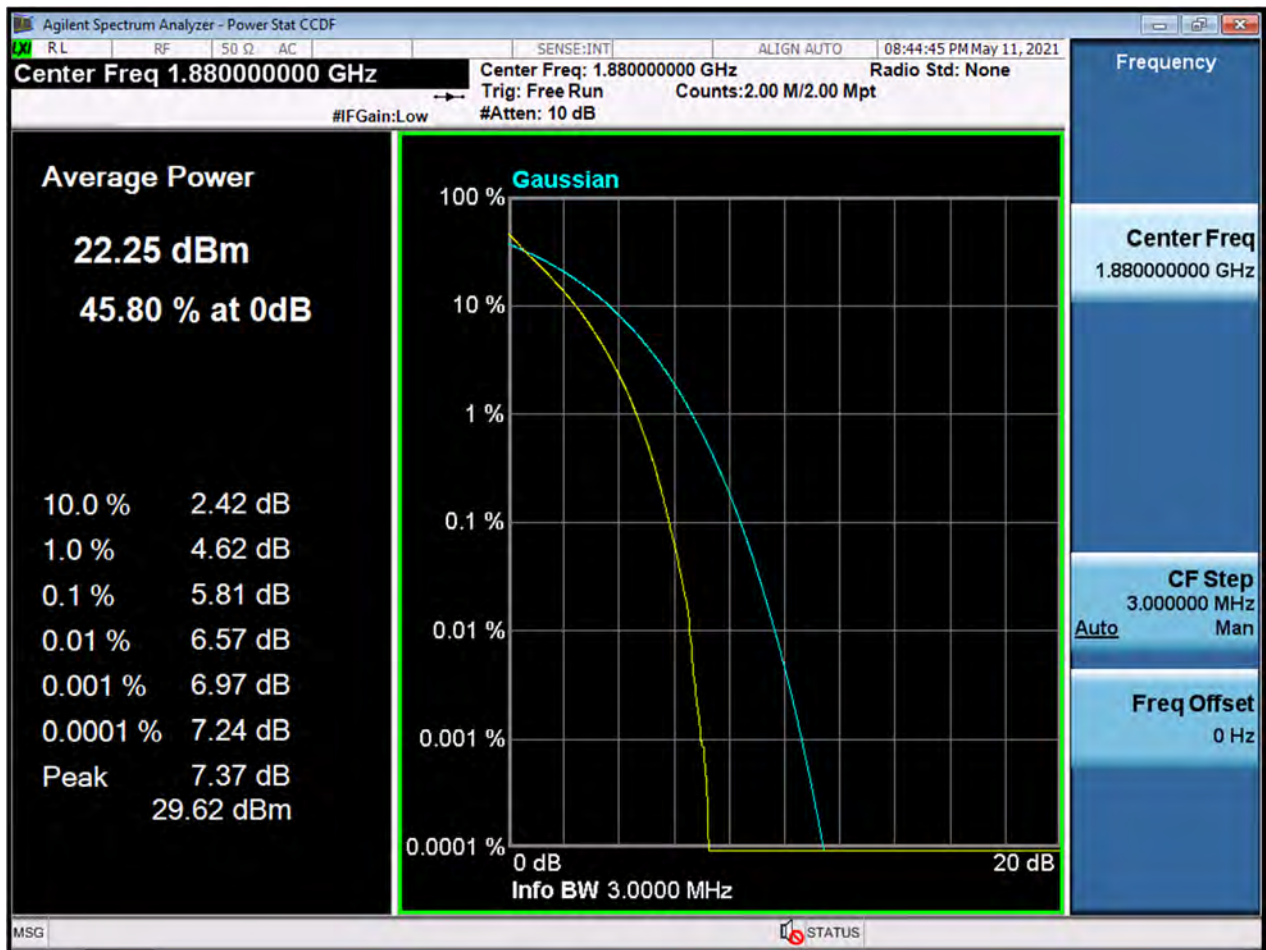


BW3M_PAR_Middle Channel_16QAM_FullRB

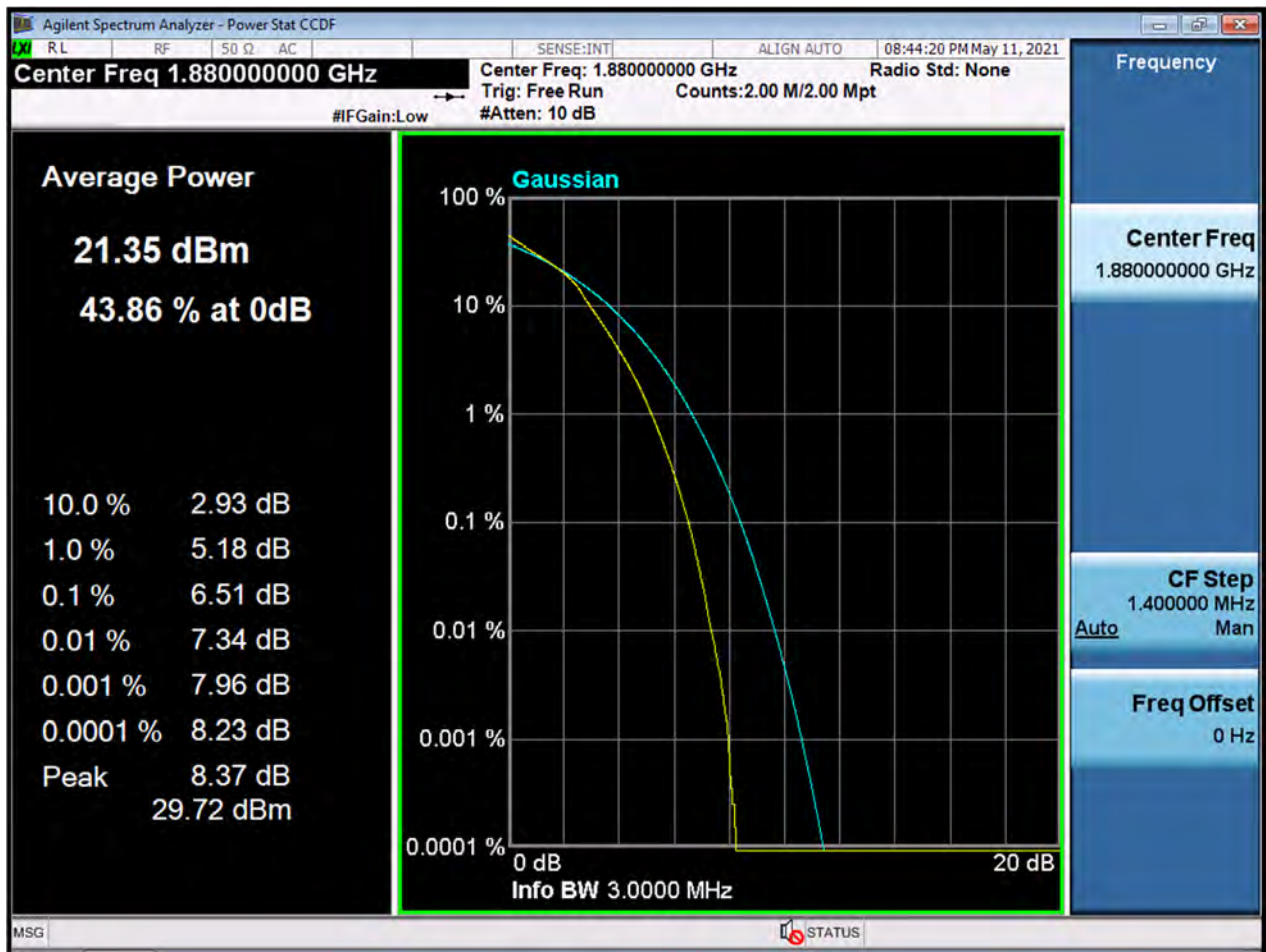


BW5M_PAR_Middle Channel_QPSK_FullRB

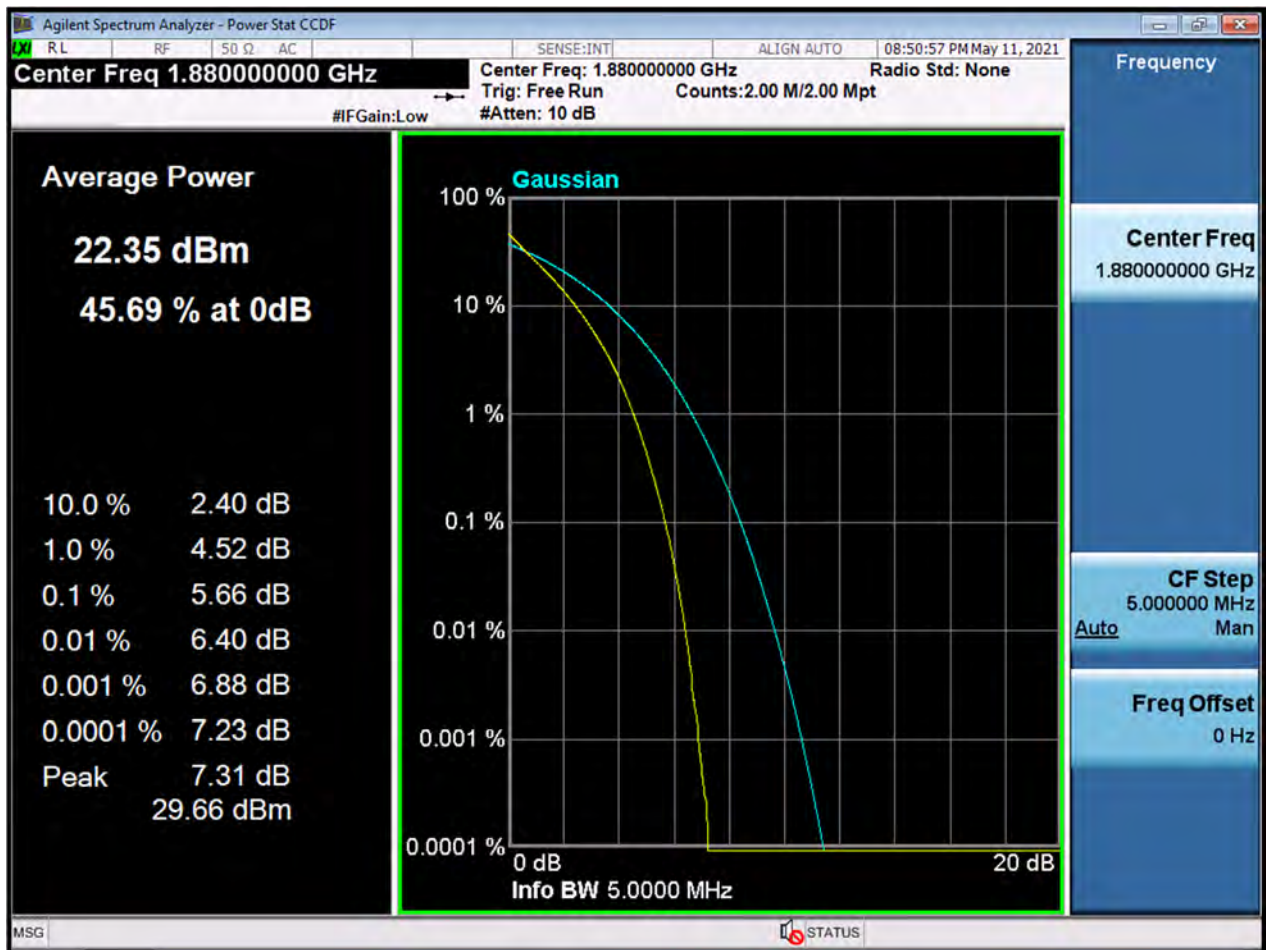


BW5M_PAR_Middle Channel_16QAM_FullRB

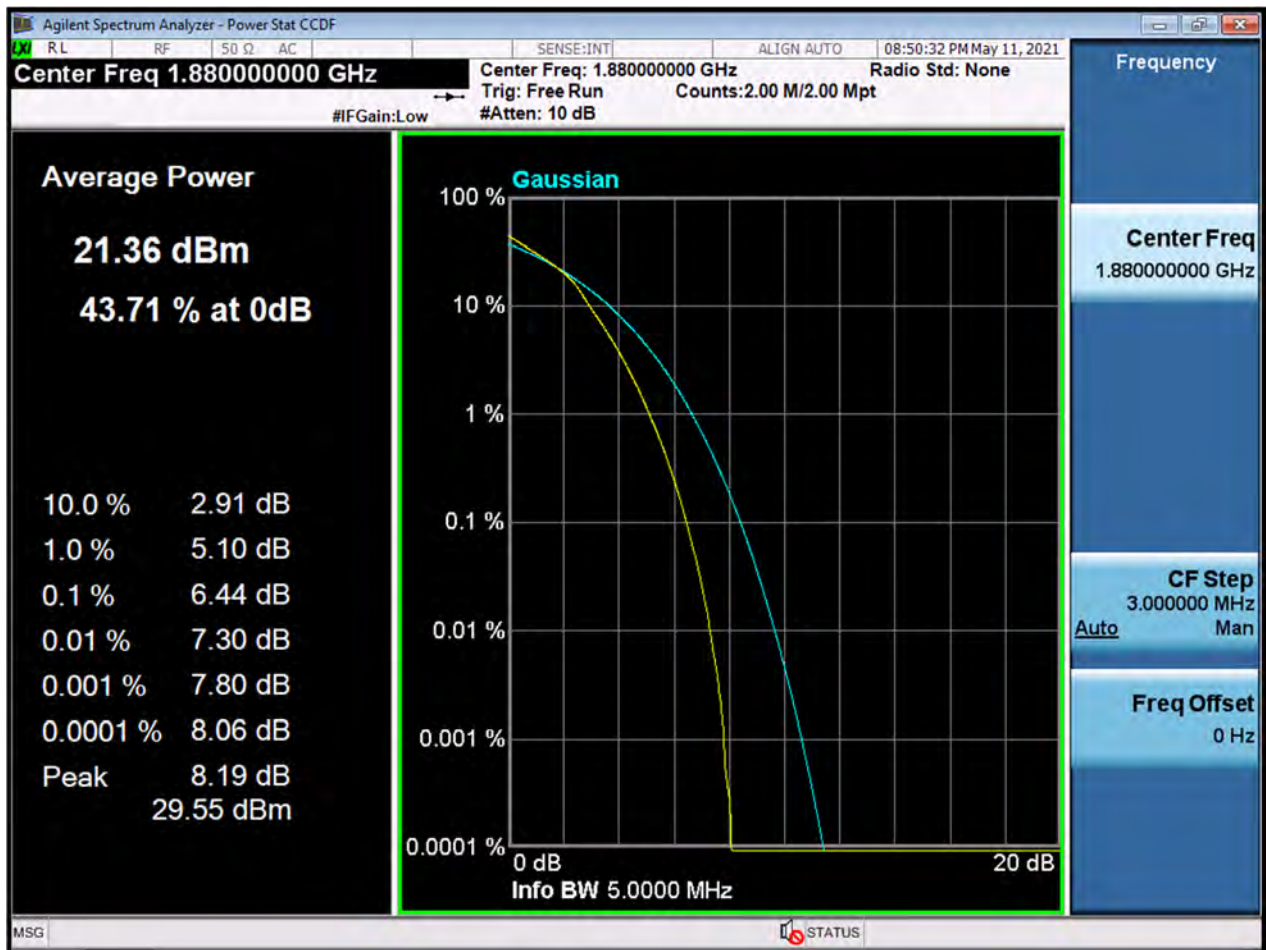


BW10M_PAR_Middle Channelz_QPSK_FullRB

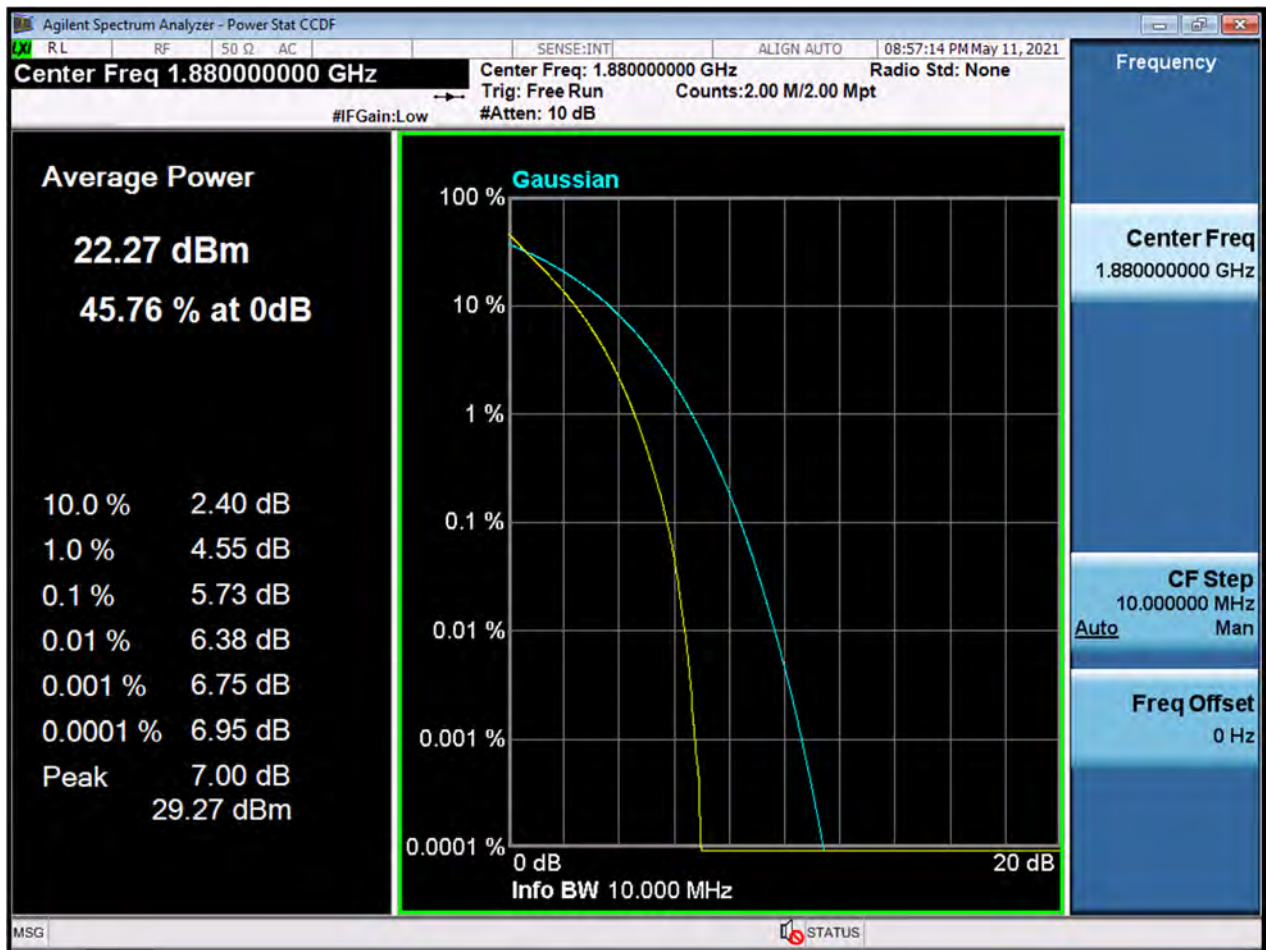


BW10M_PAR_Middle Channel_16QAM_FullRB

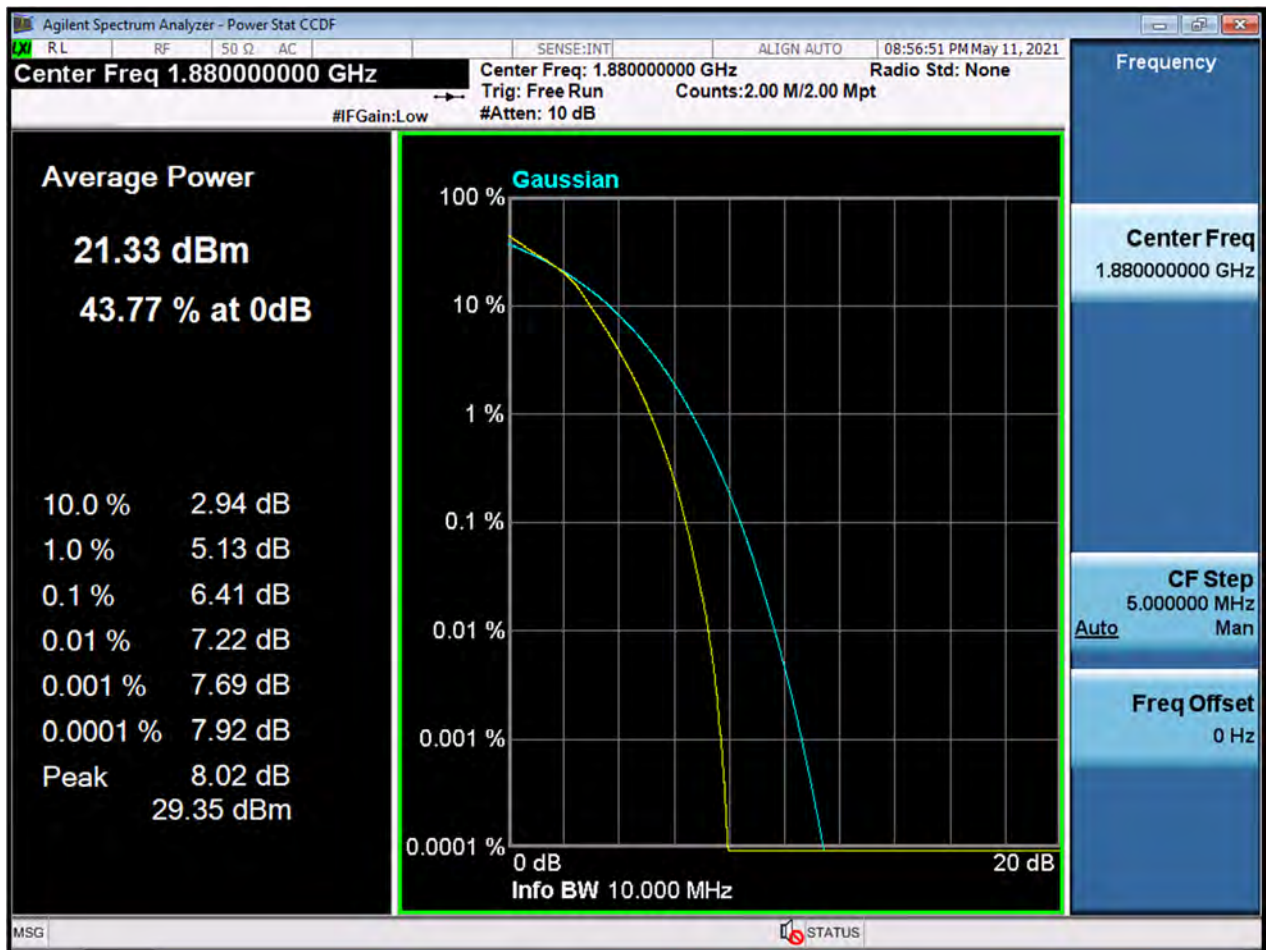


BW15M_PAR_Middle Channel_QPSK_FullRB

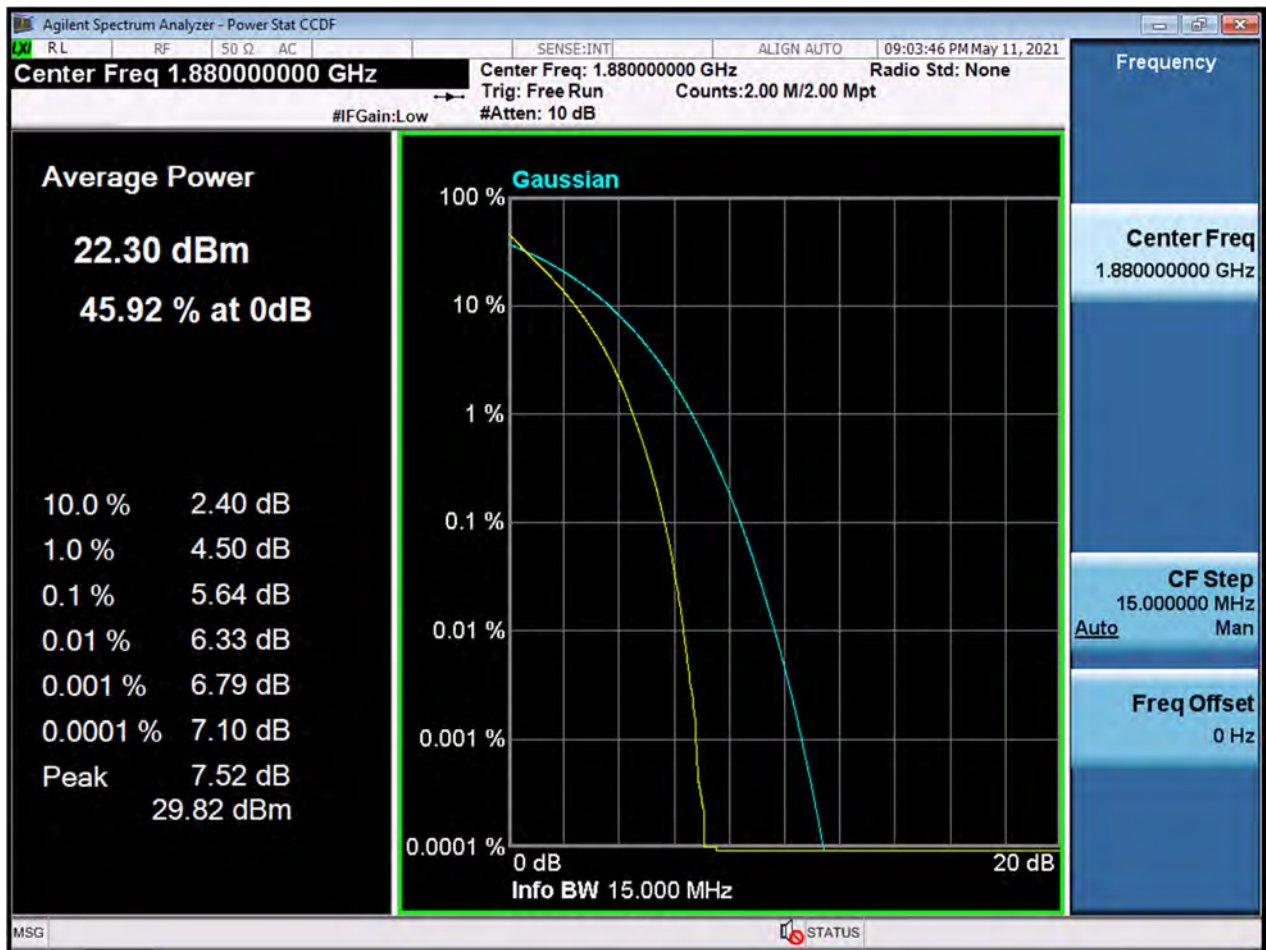


BW15M_PAR_Middle Channel_16QAM_FullRB

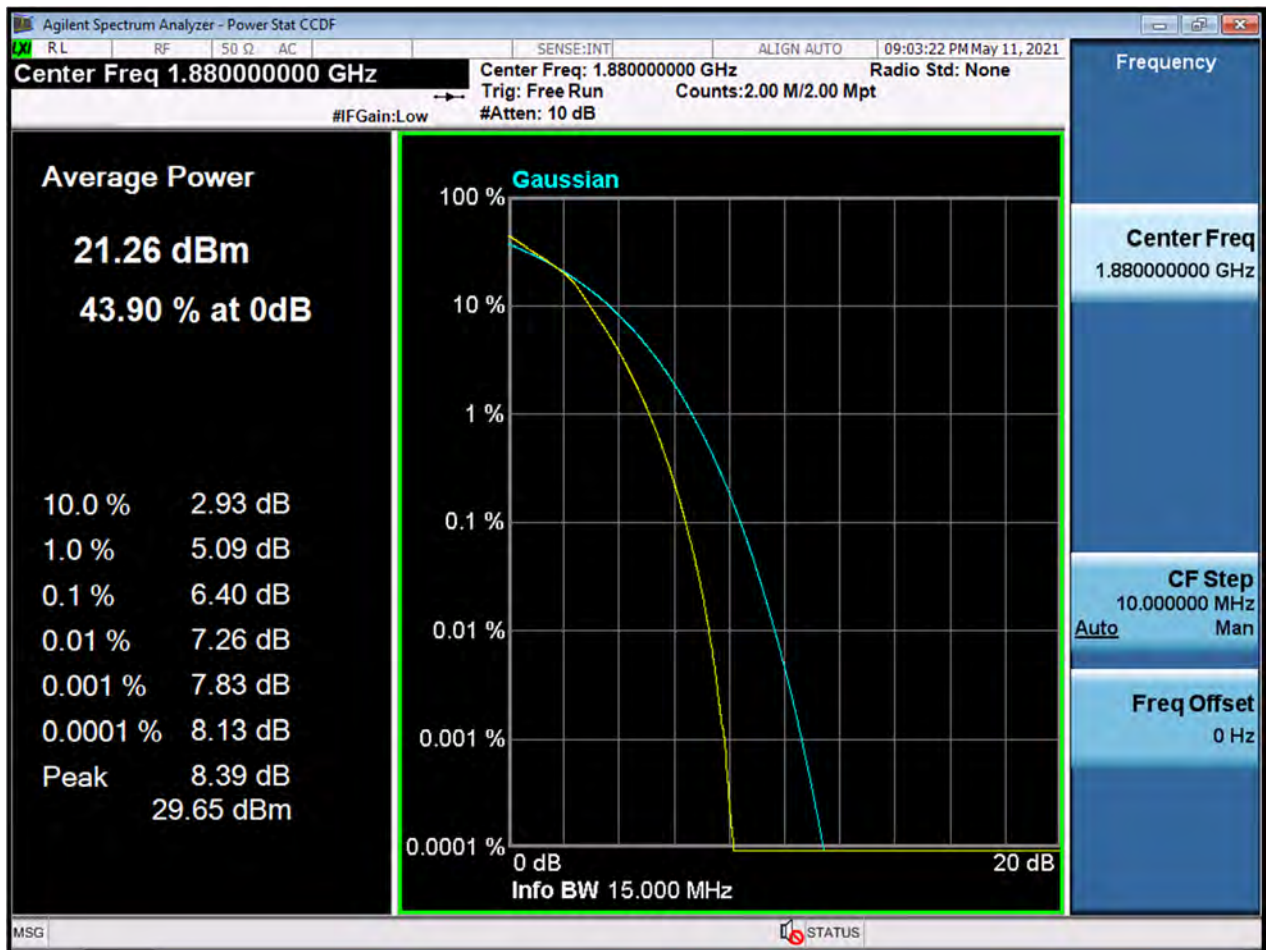


BW20M_PAR_Middle Channel_QPSK_FullRB

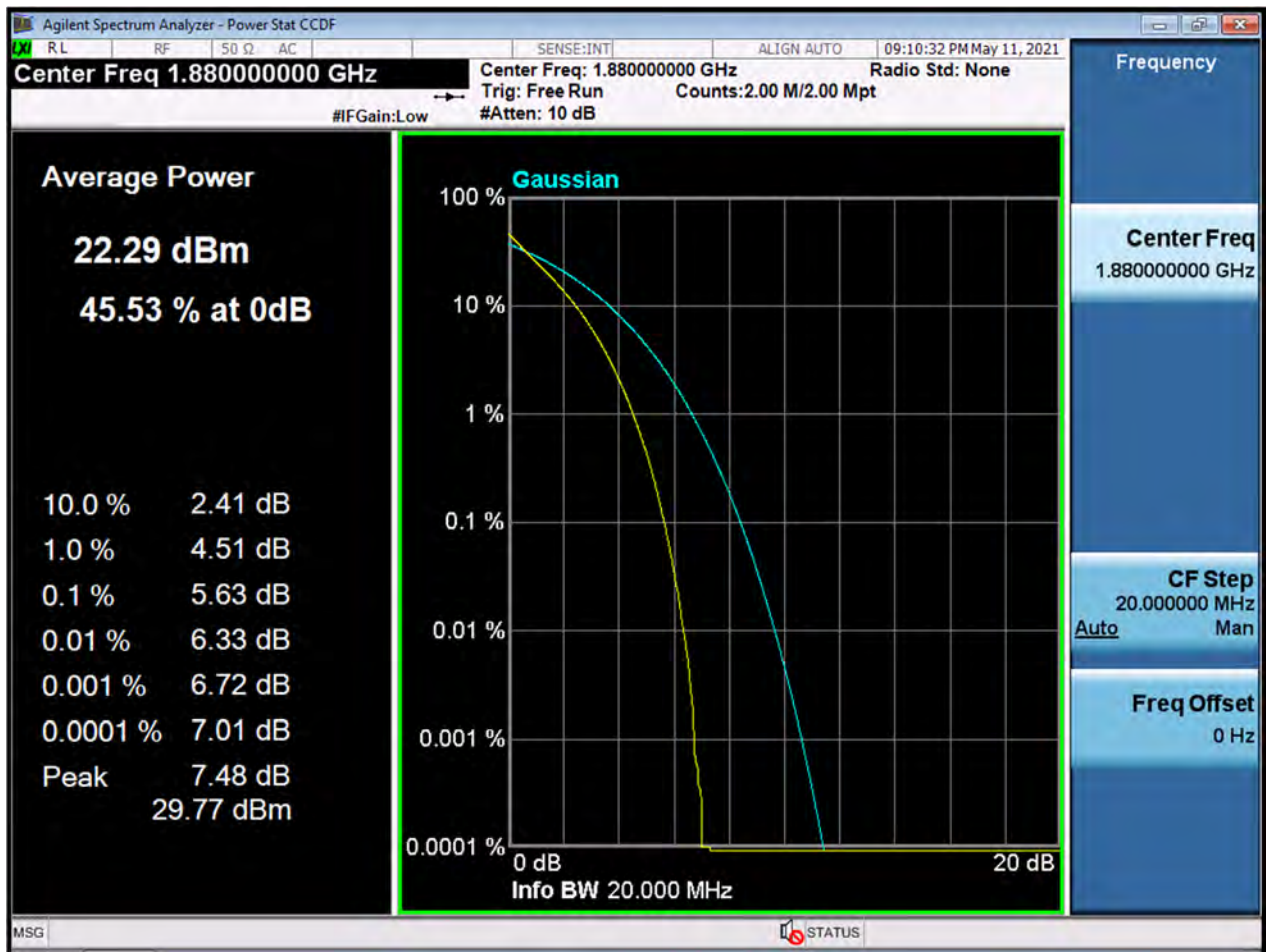


BW20M_PAR_Middle Channel_16QAM_FullRB

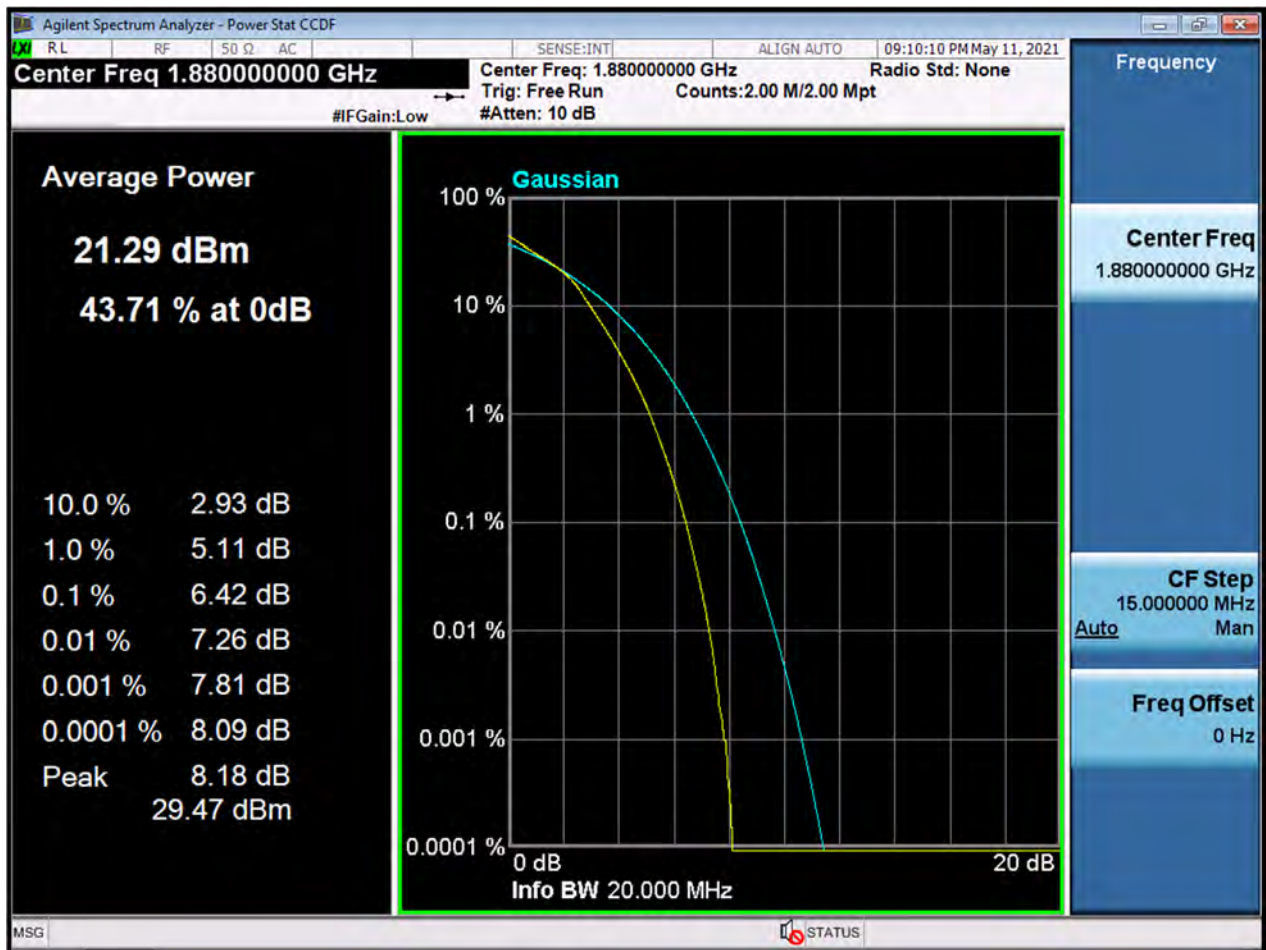


BW1.4M_CSE(30M-10G)_Lowest Channel_QPSK_1RB

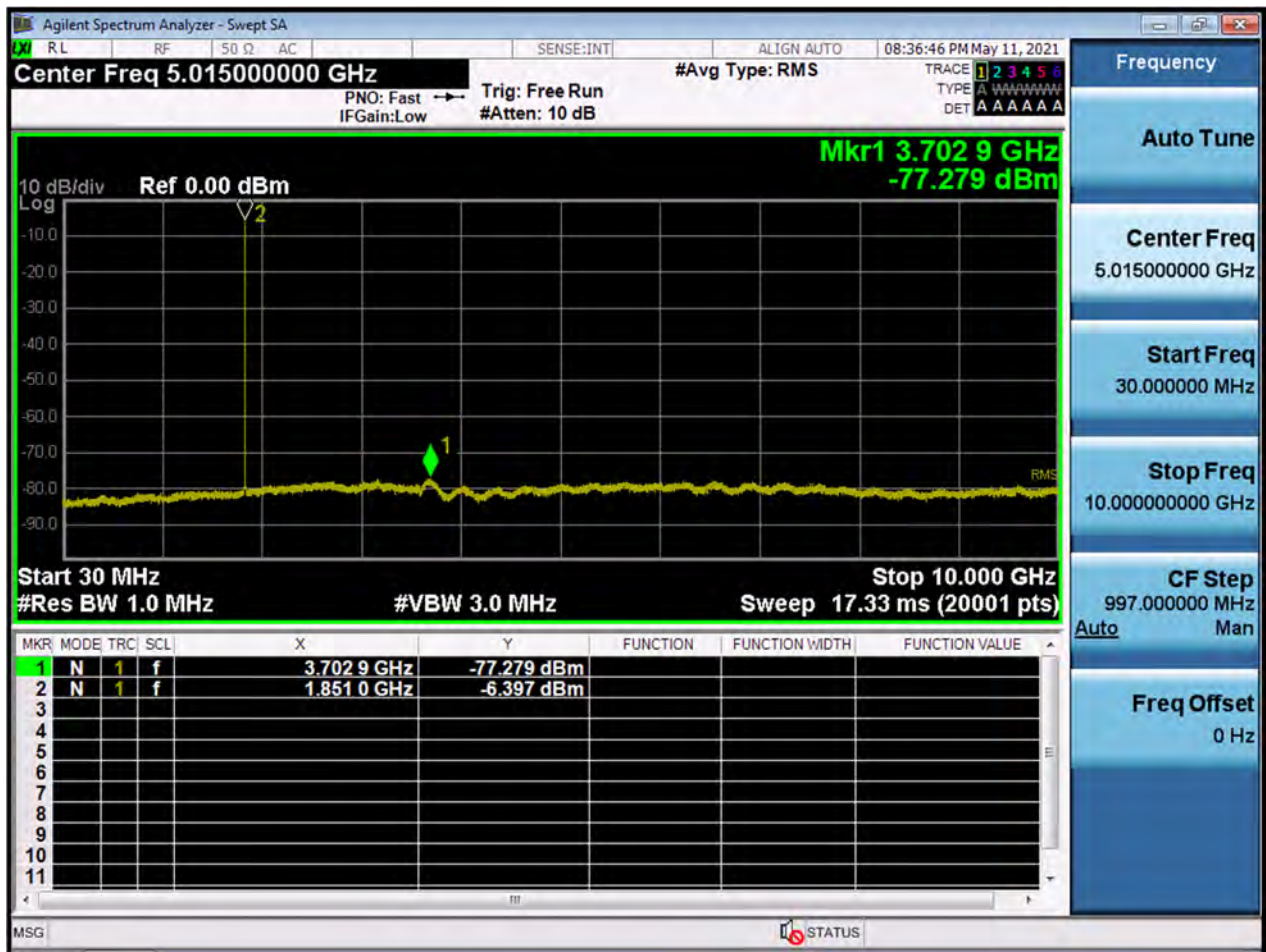


BW1.4M_CSE(30M-10G)_Middle Channel_QPSK_1RB

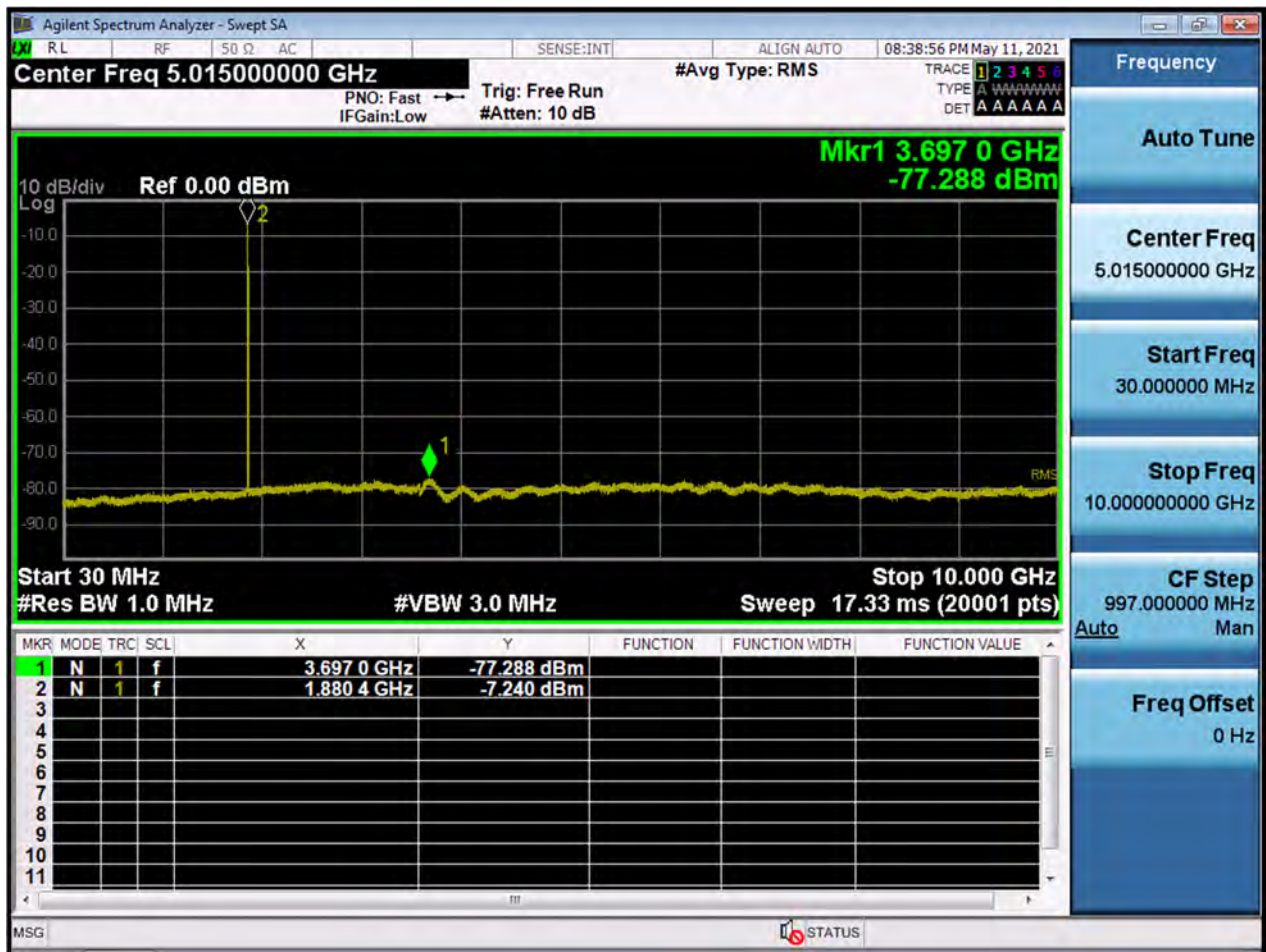


BW1.4M_CSE(30M-10G)_Highest Channel_QPSK_1RB

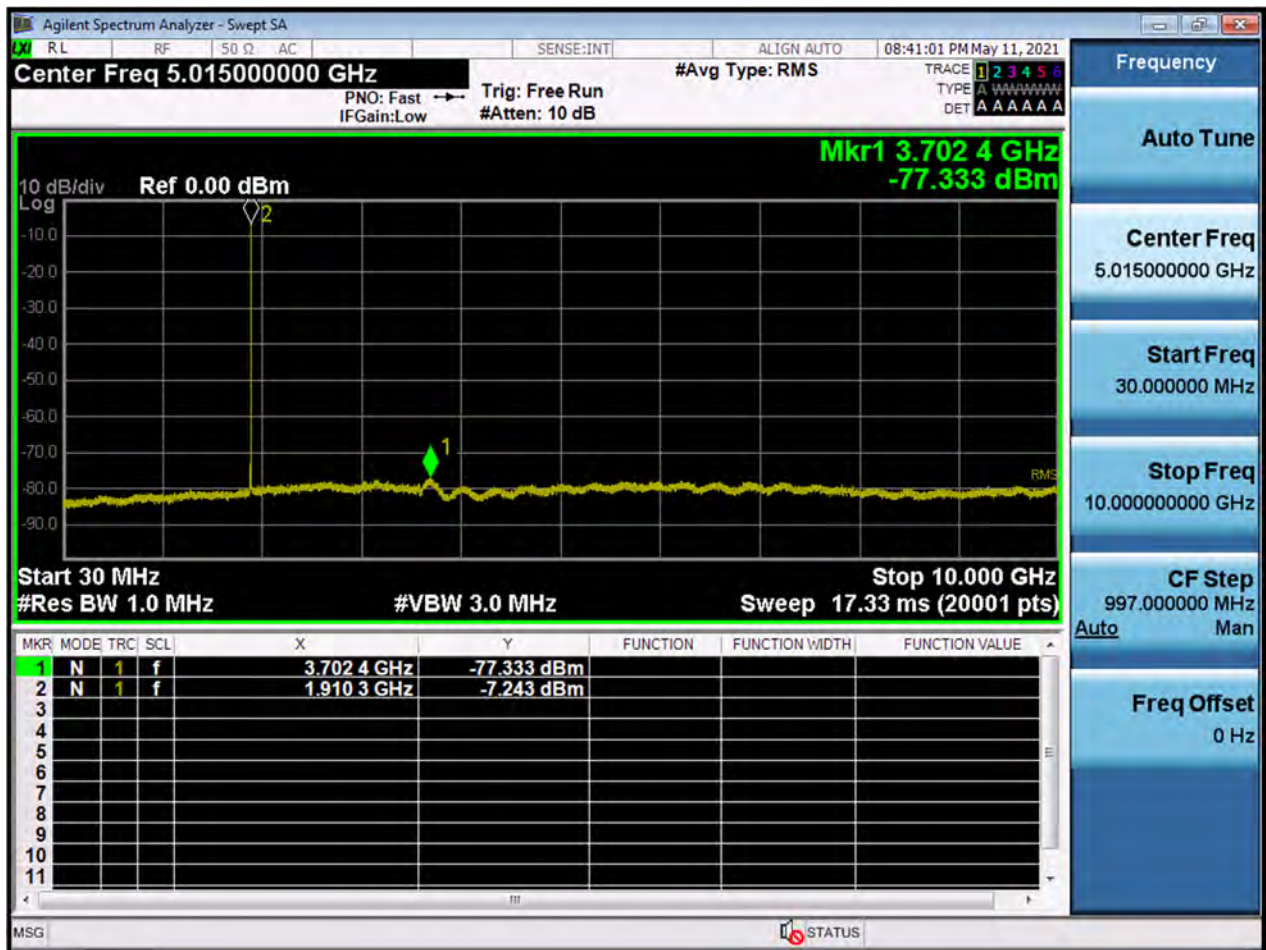


BW3M_CSE(30M-10G)_Lowest Channel_QPSK_1RB

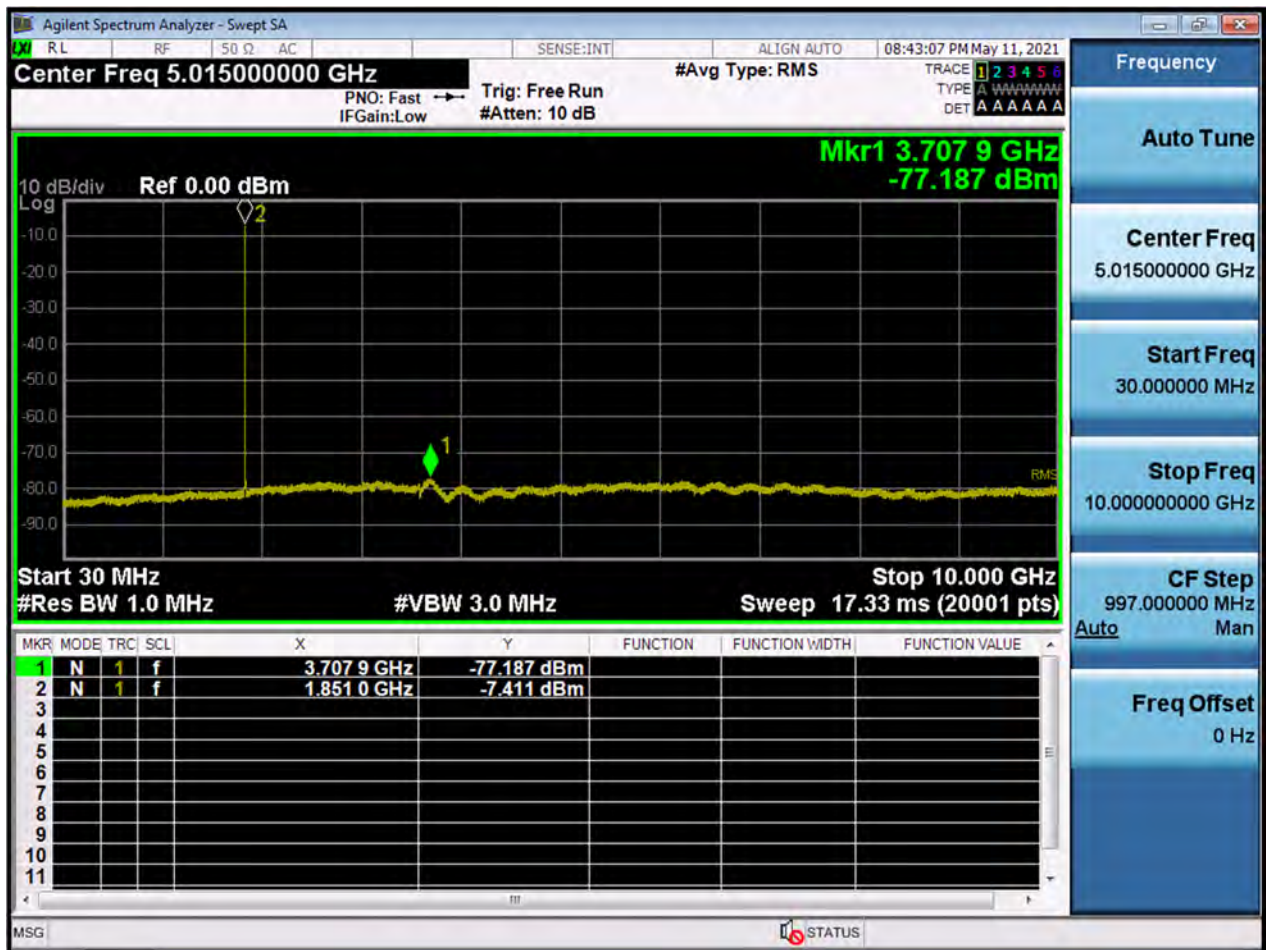


BW3M_CSE(30M-10G)_Middle Channel_QPSK_1RB

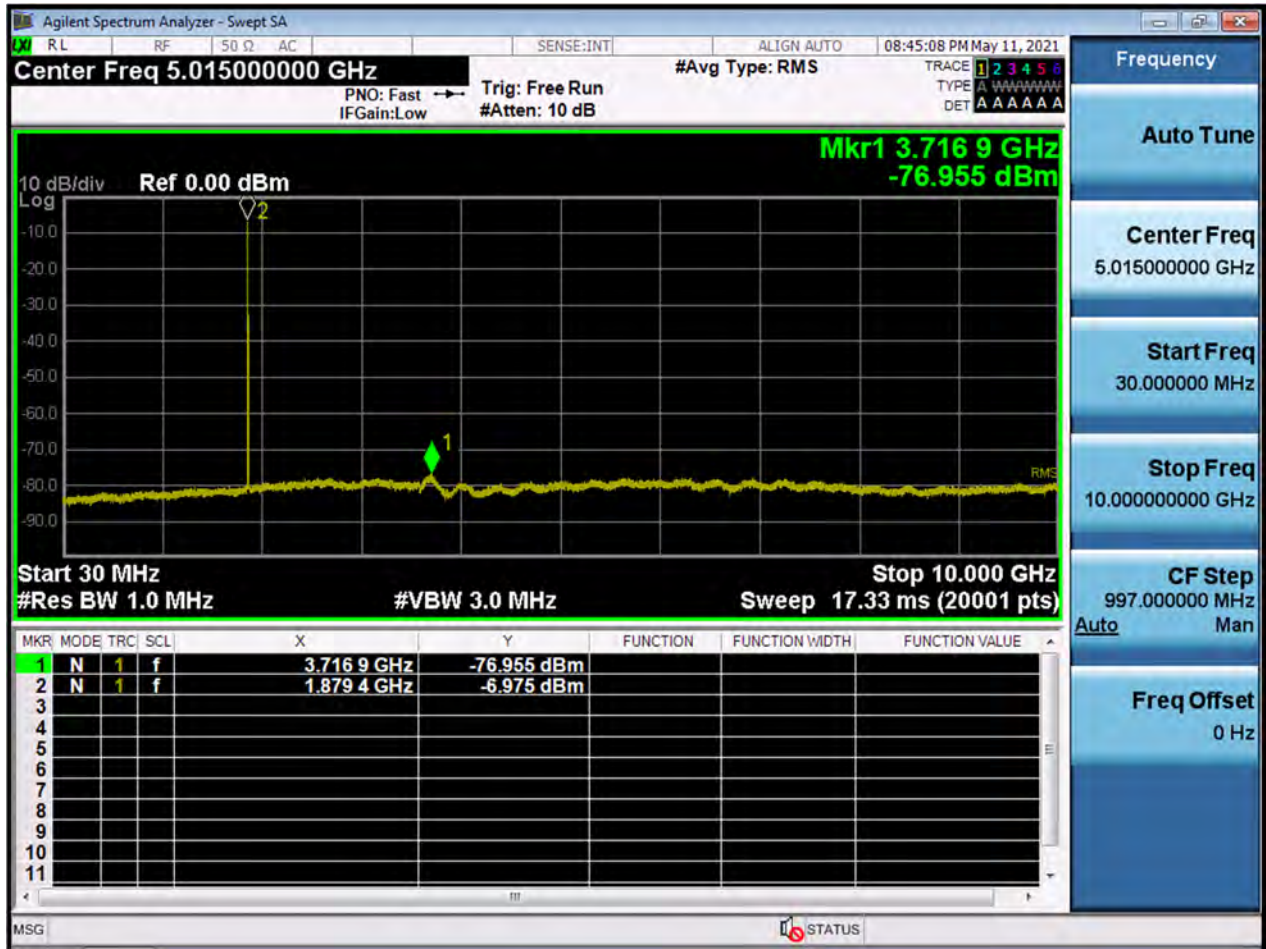


BW3M_CSE(30M-10G)_Highest Channel_QPSK_1RB

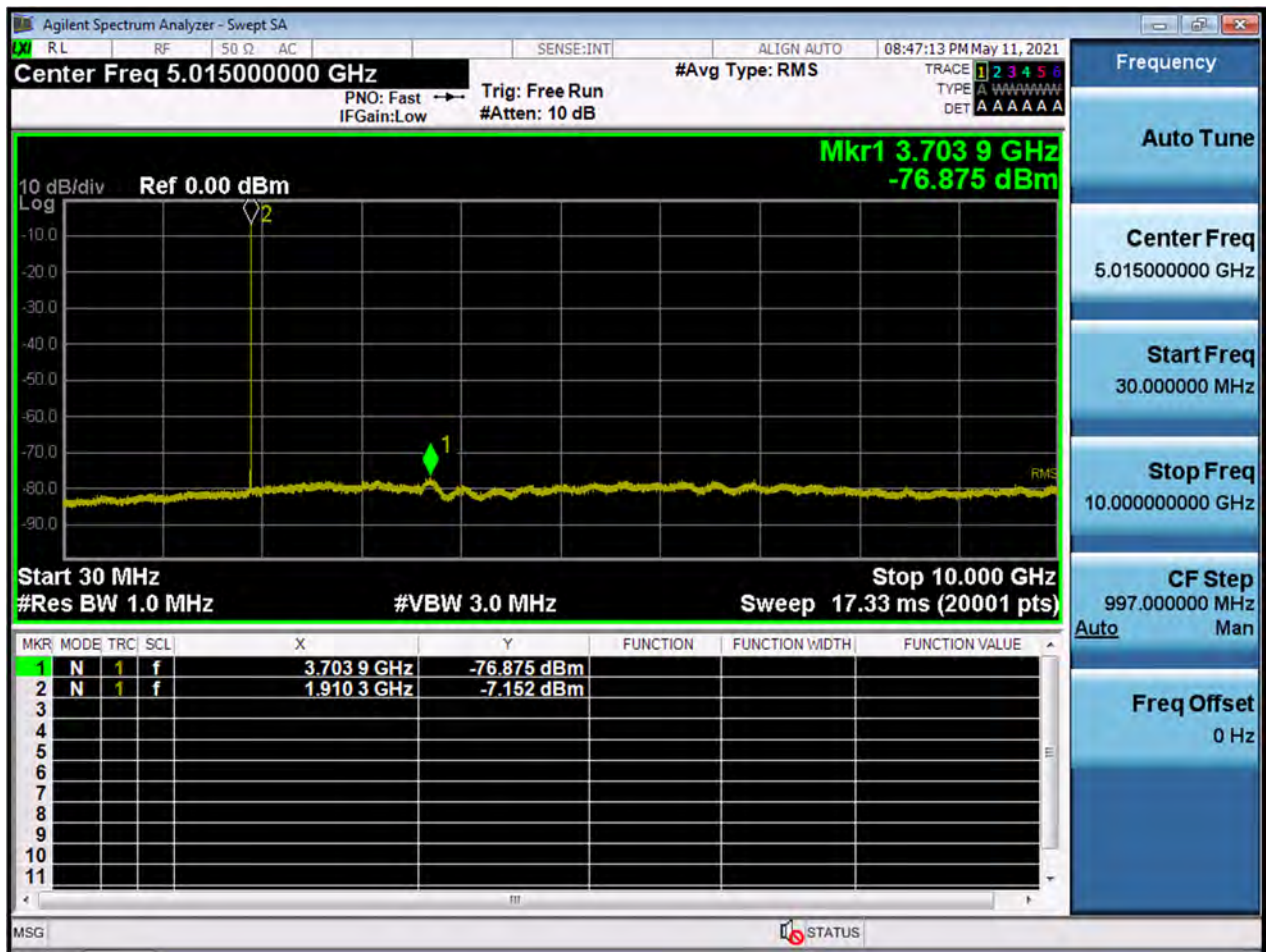


BW5M_CSE(30M-10G)_Lowest Channel_QPSK_1RB

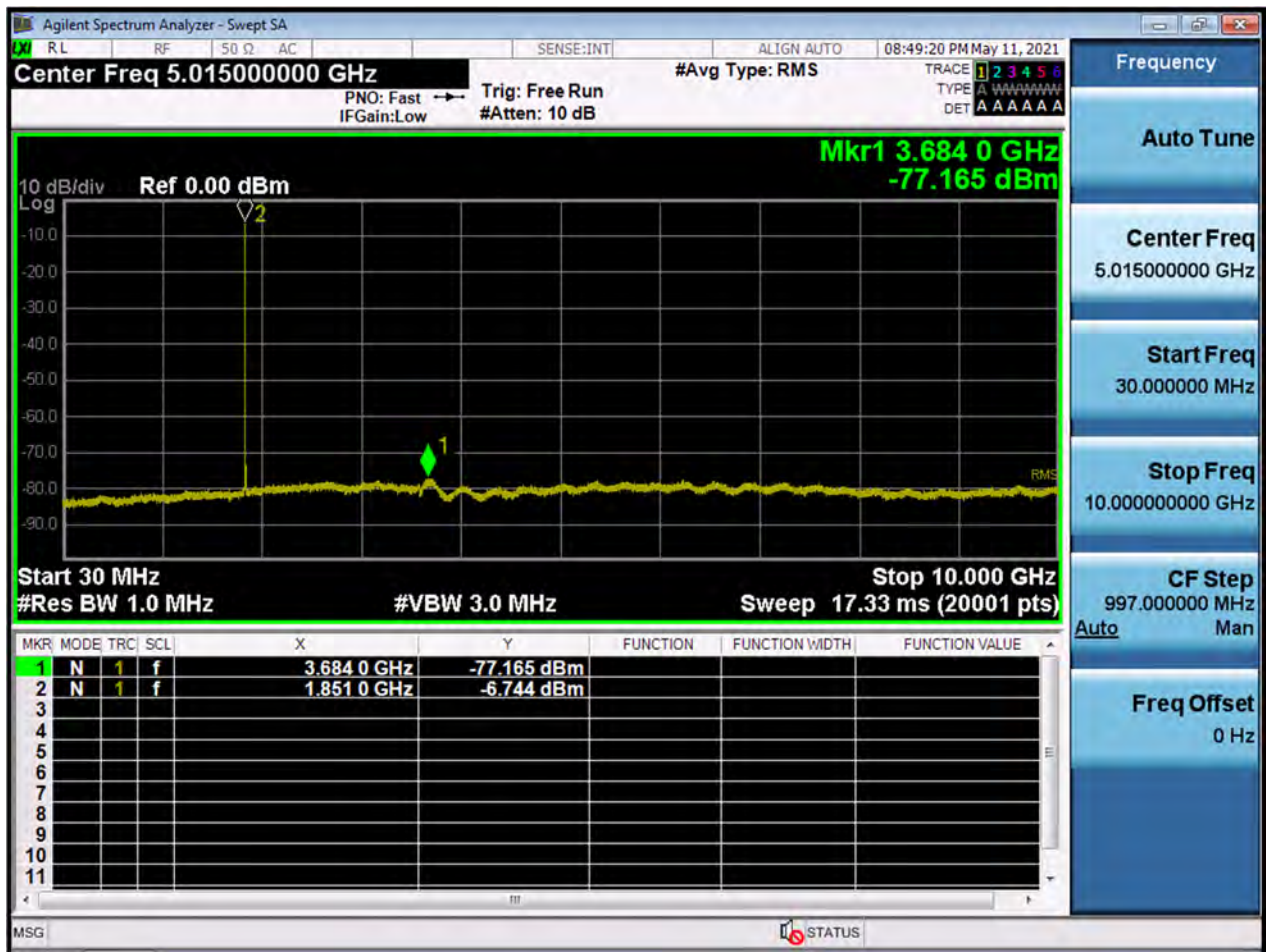


BW5M_CSE(30M-10G)_Middle Channel_QPSK_1RB

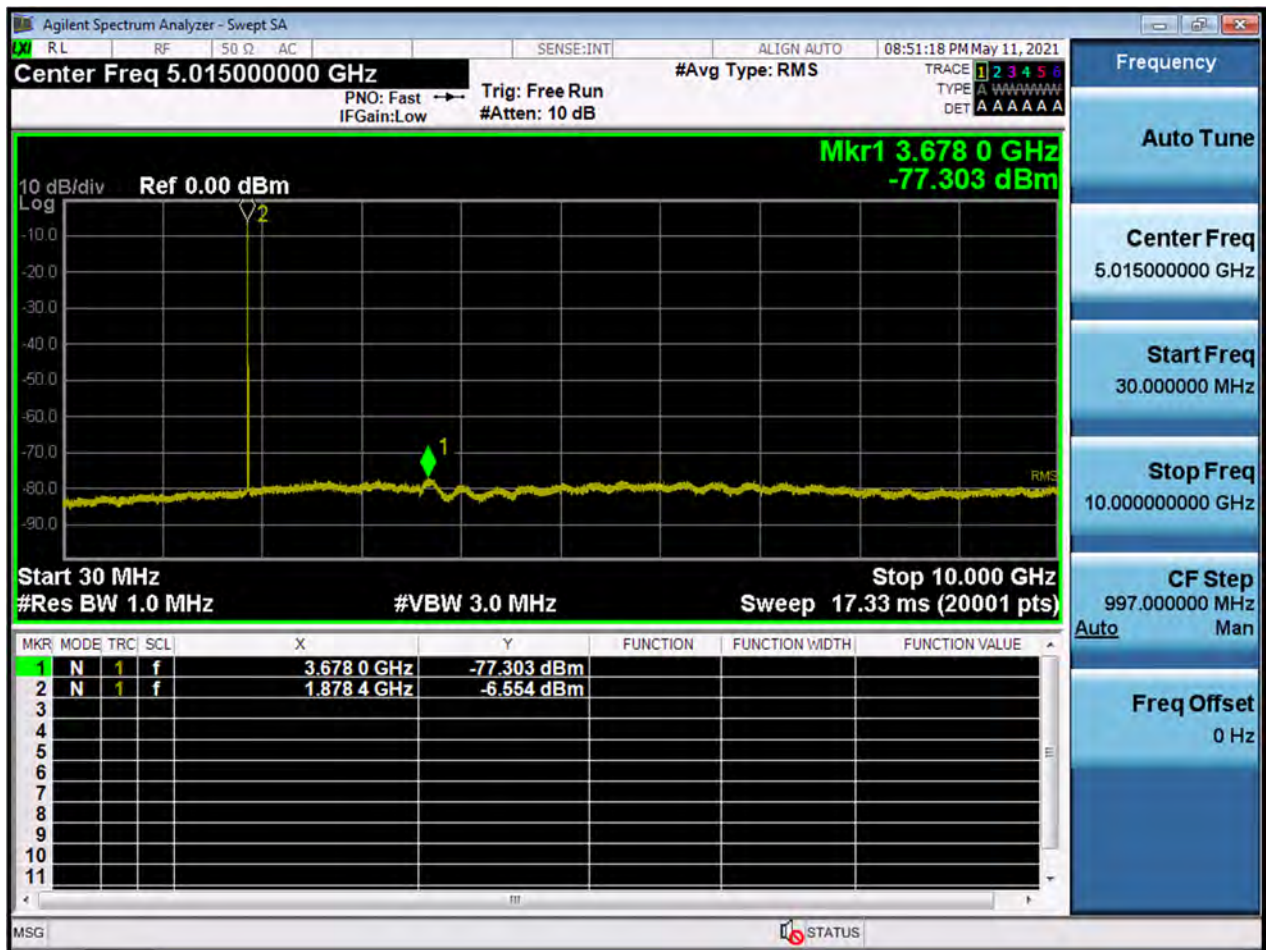


BW5M_CSE(30M-10G)_Highest Channel_QPSK_1RB

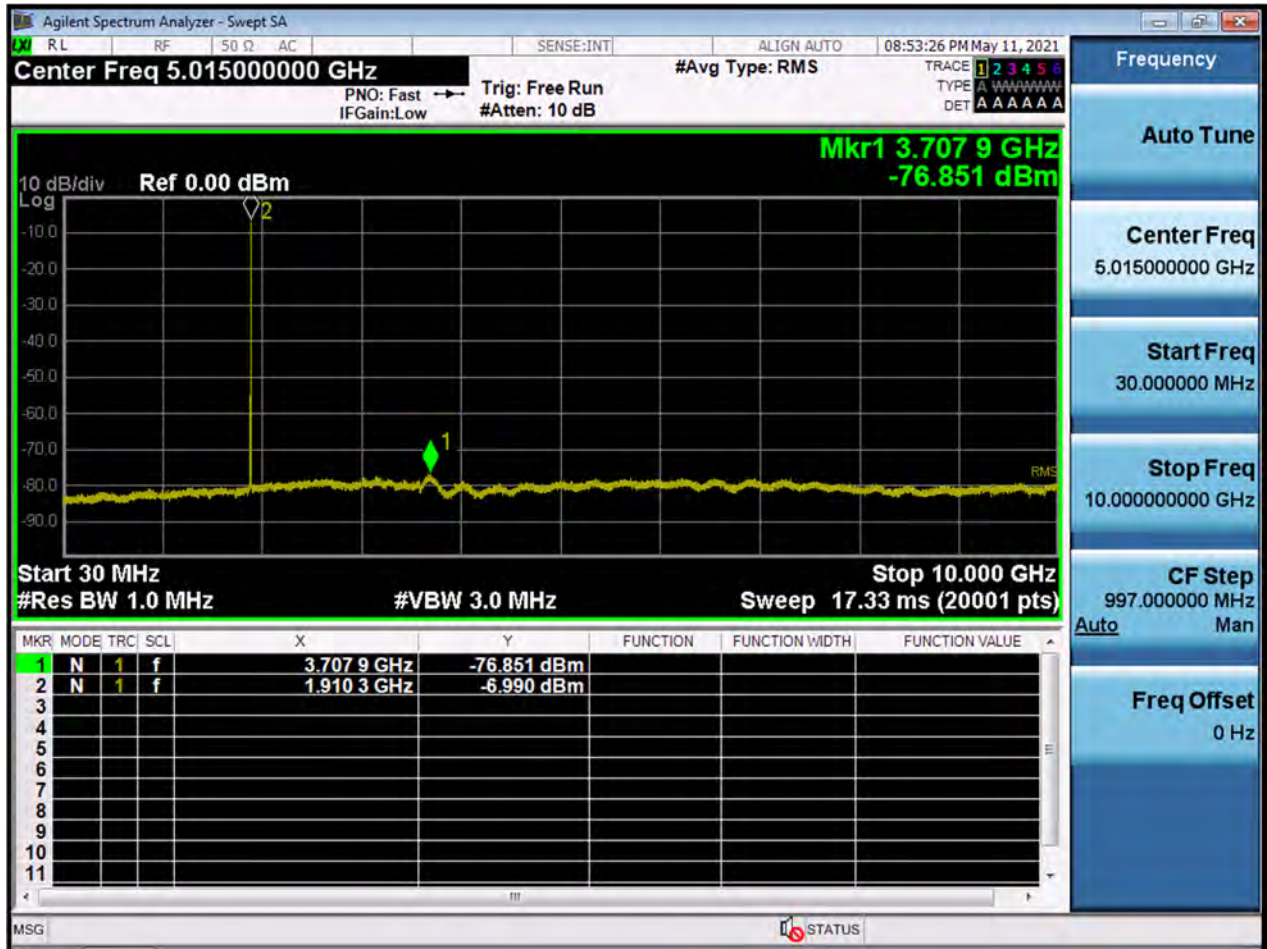


BW10M_CSE(30M-10G)_Lowest Channel_QPSK_1RB

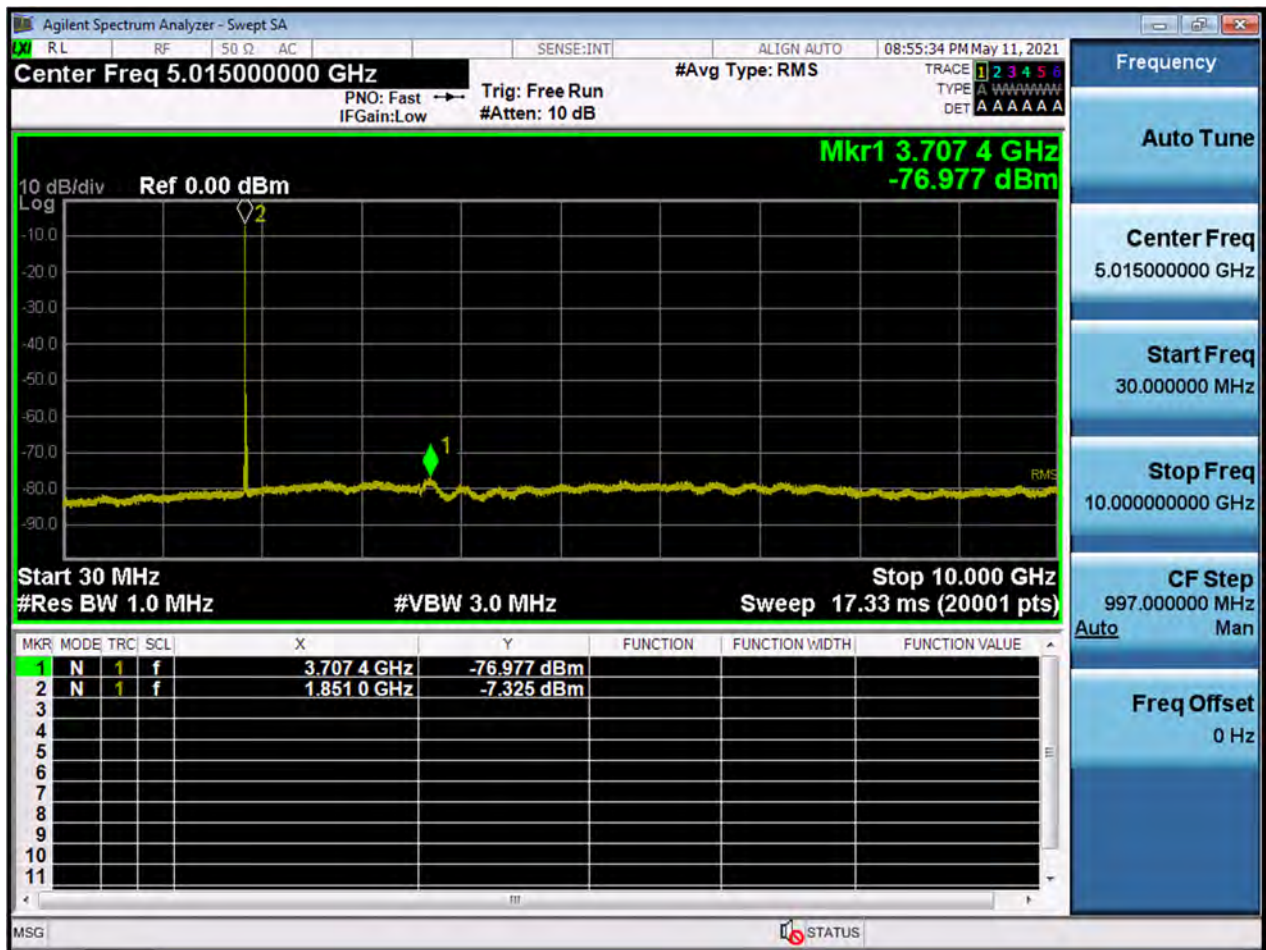


BW10M_CSE(30M-10G)_Middle Channel_QPSK_1RB

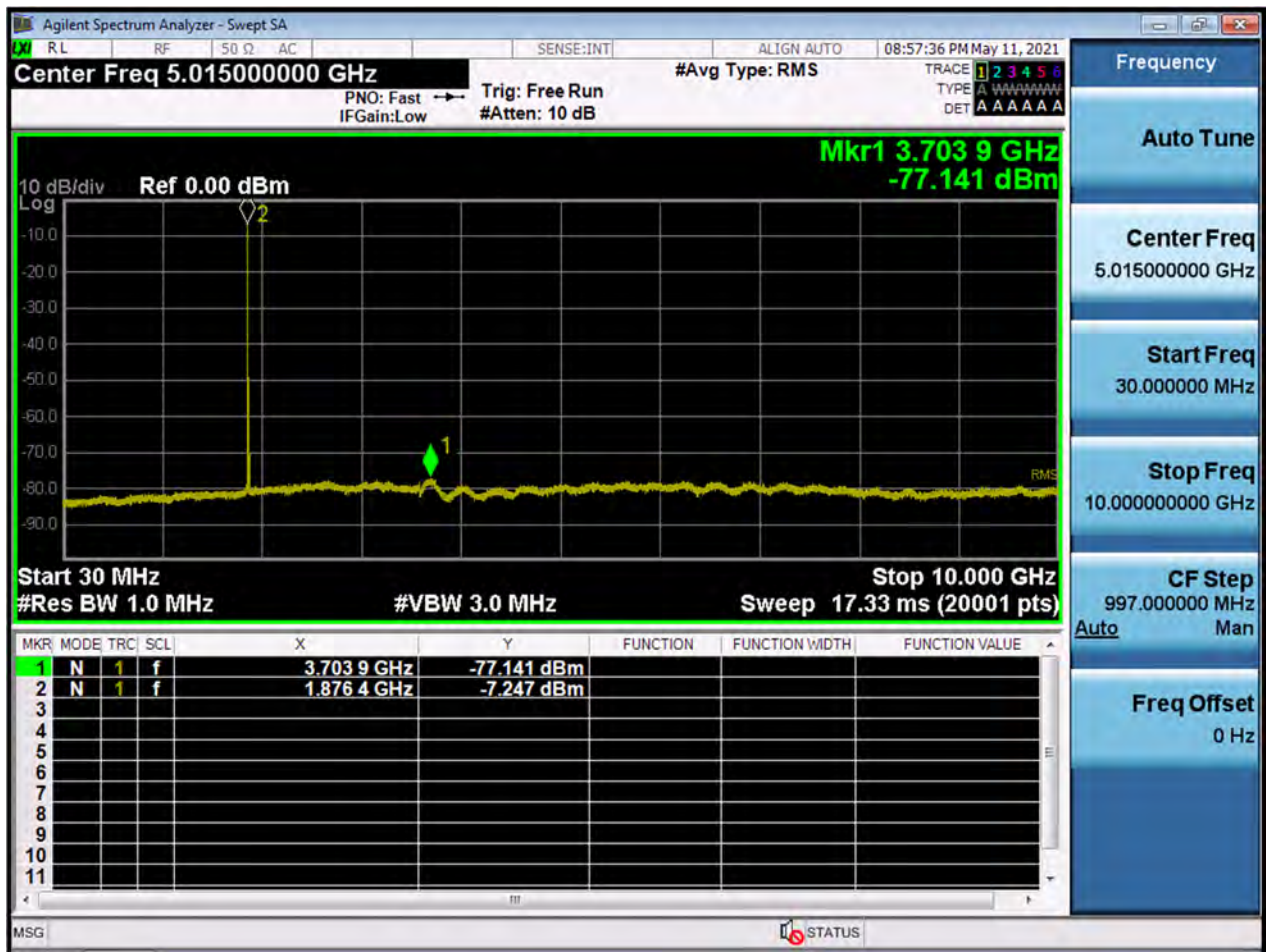


BW10M_CSE(30M-10G)_Highest Channel_QPSK_1RB

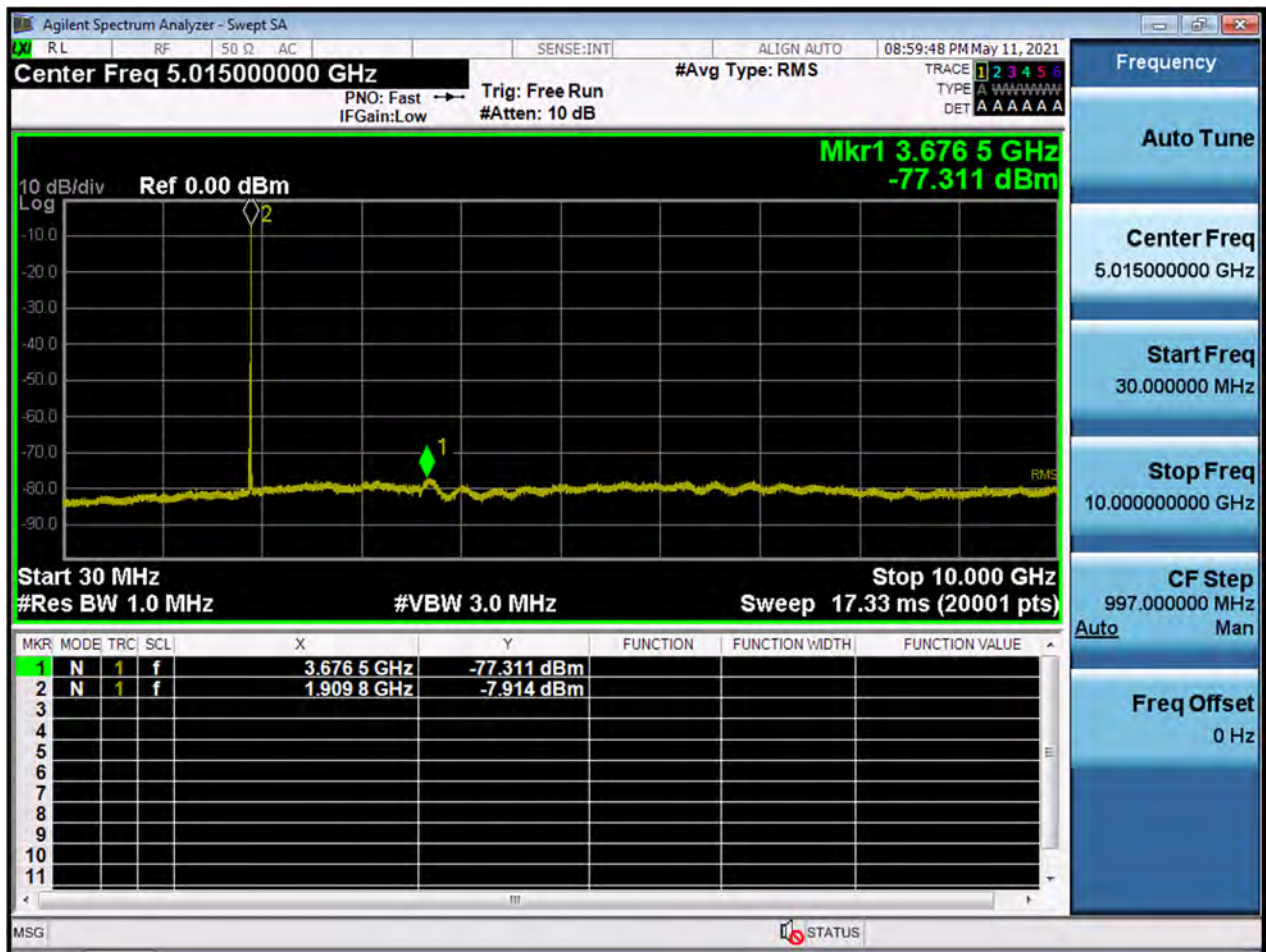


BW15M_CSE(30M-10G)_Lowest Channel_QPSK_1RB

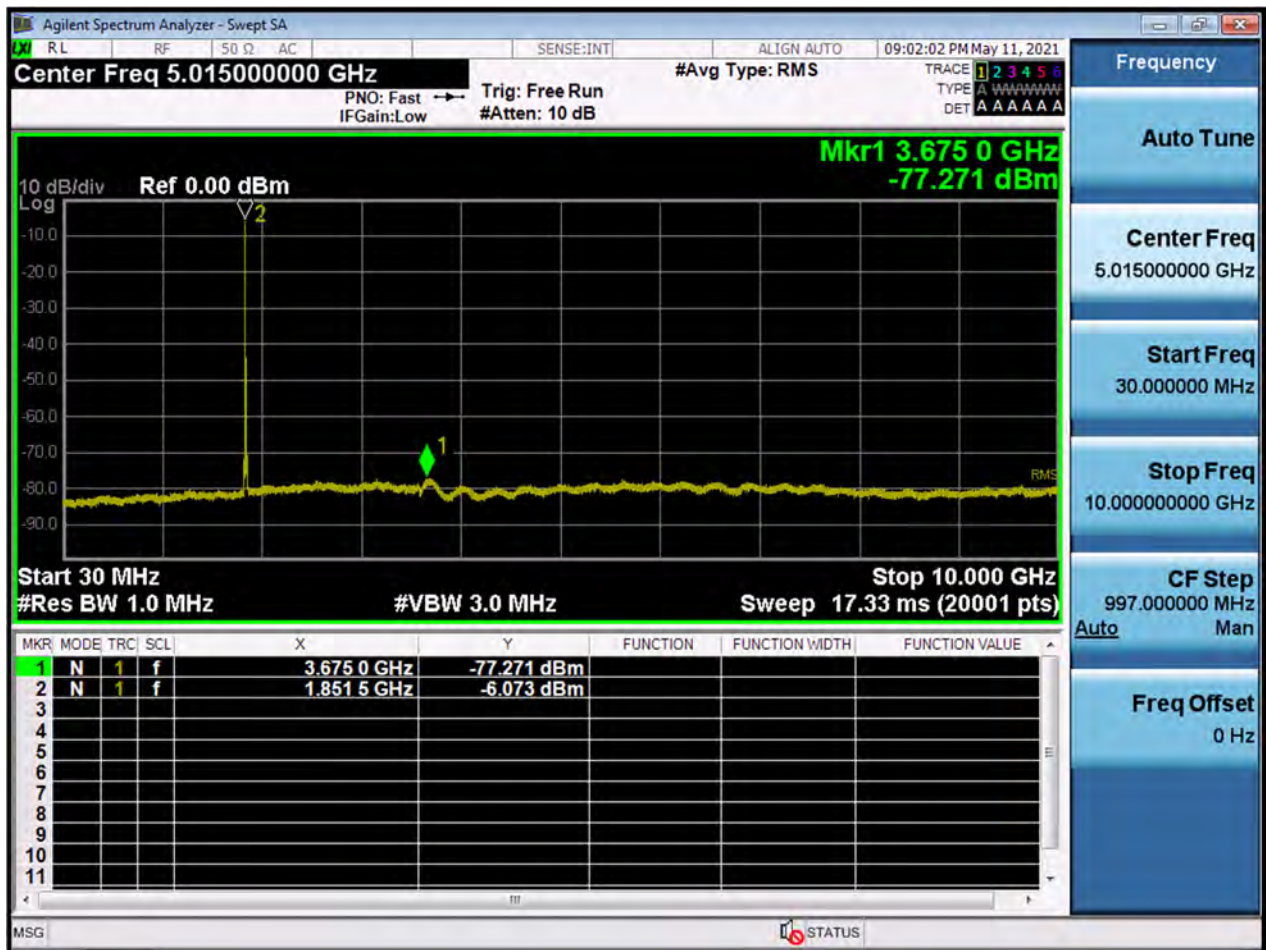


BW15M_CSE(30M-10G)_Middle Channel_QPSK_1RB

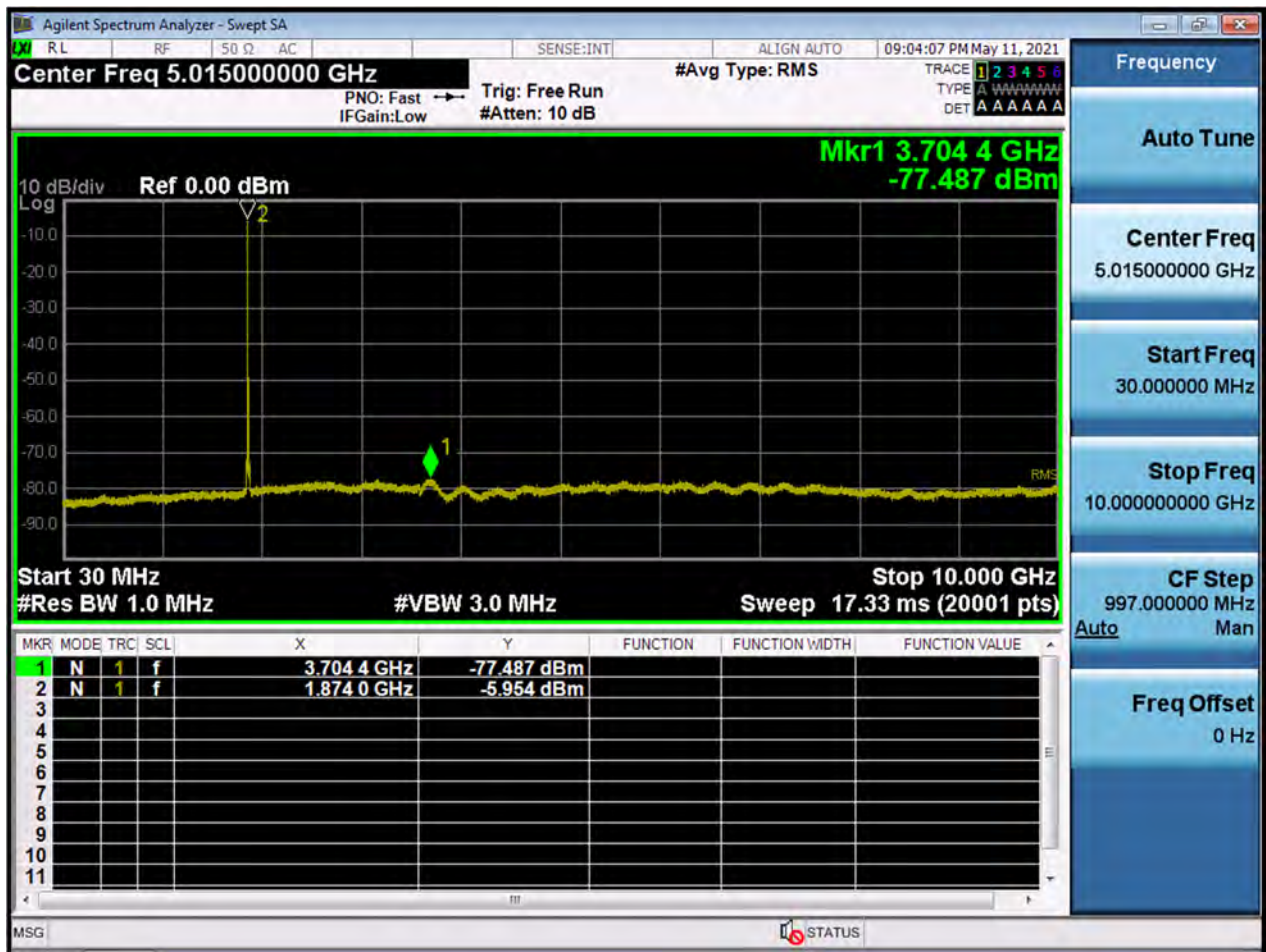


BW15M_CSE(30M-10G)_Highest Channel_QPSK_1RB

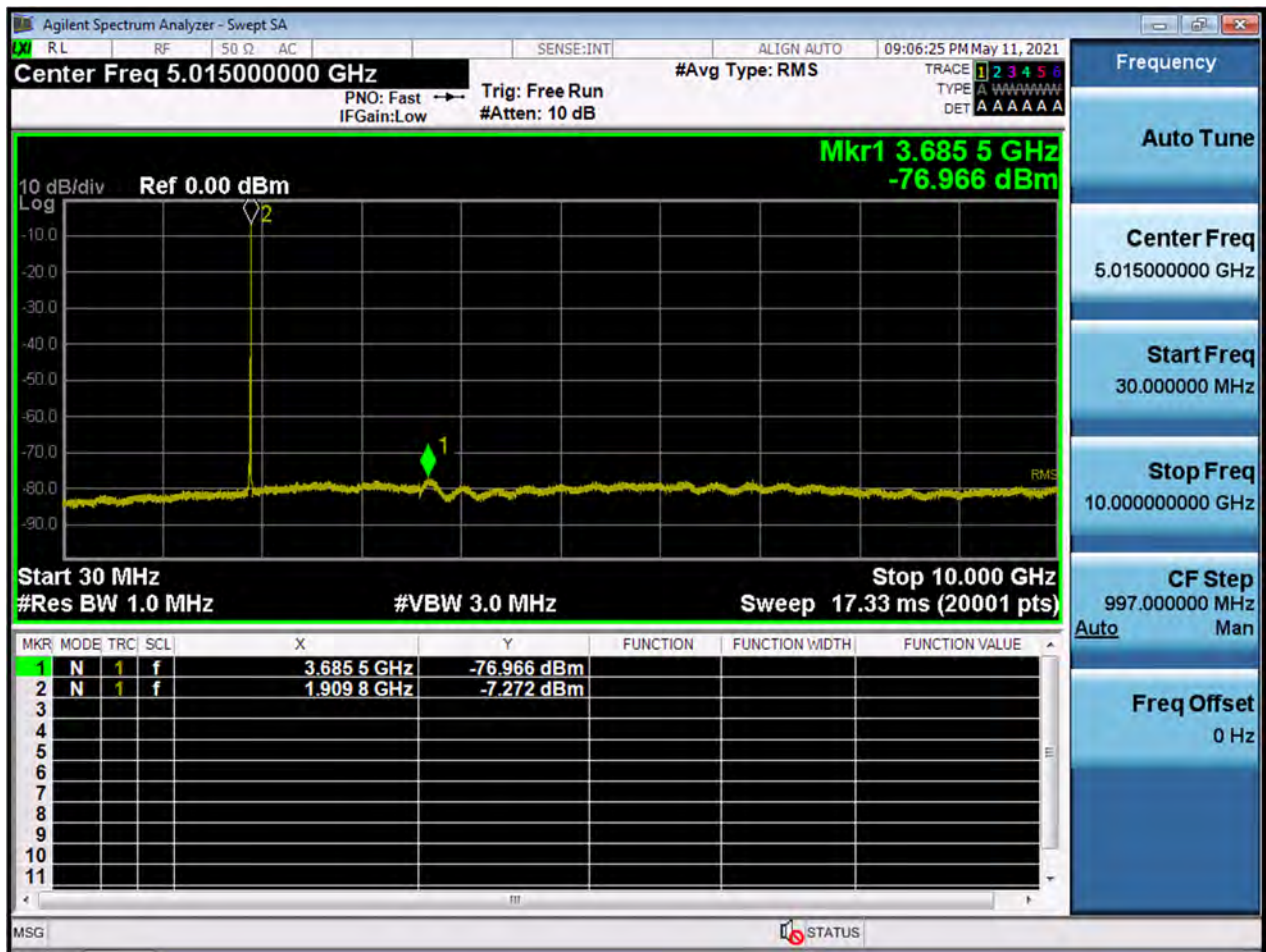


BW20M_CSE(30M-10G)_Lowest Channel_QPSK_1RB

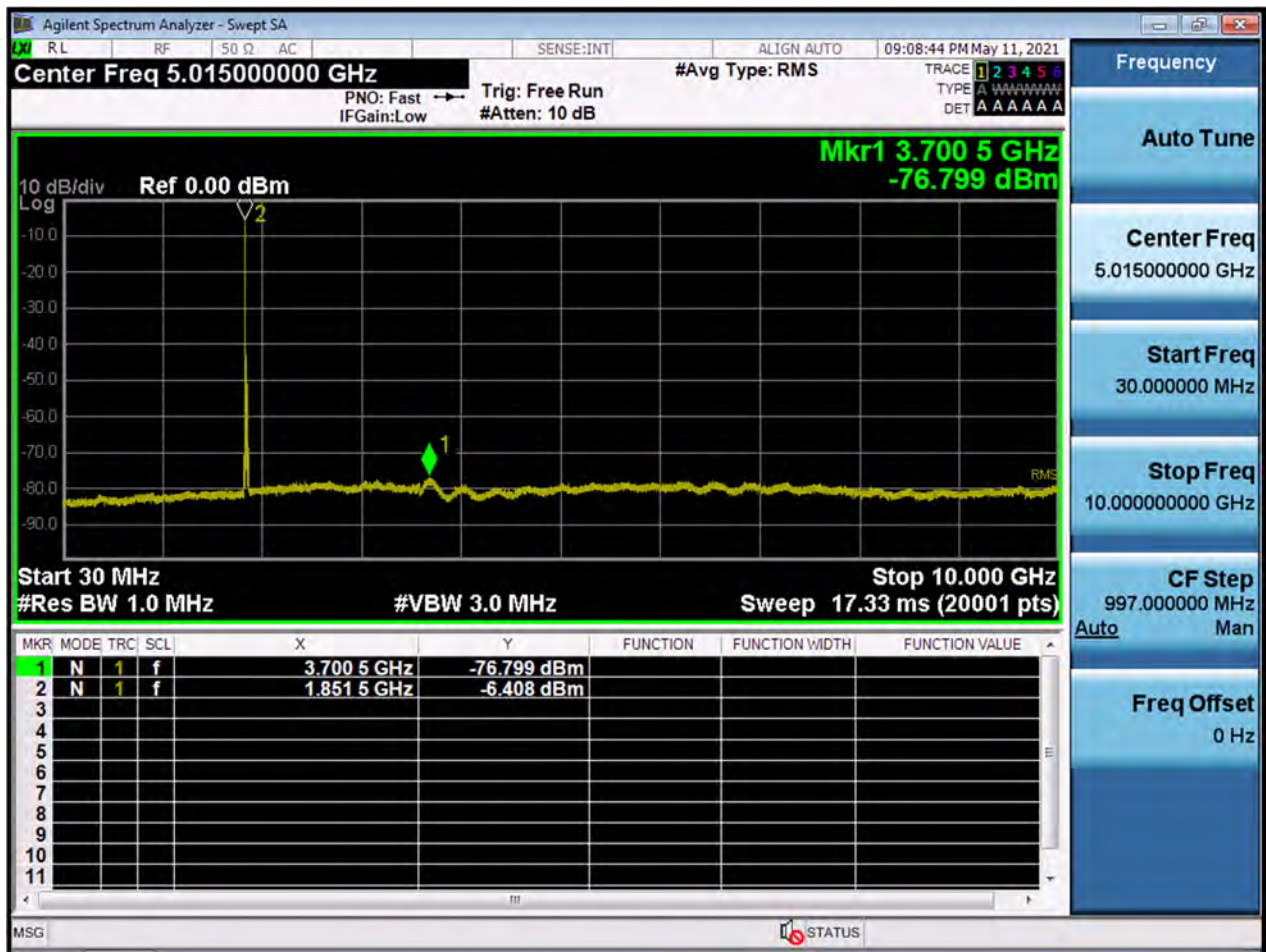

BW20M_CSE(30M-10G)_Middle Channel_QPSK_1RB

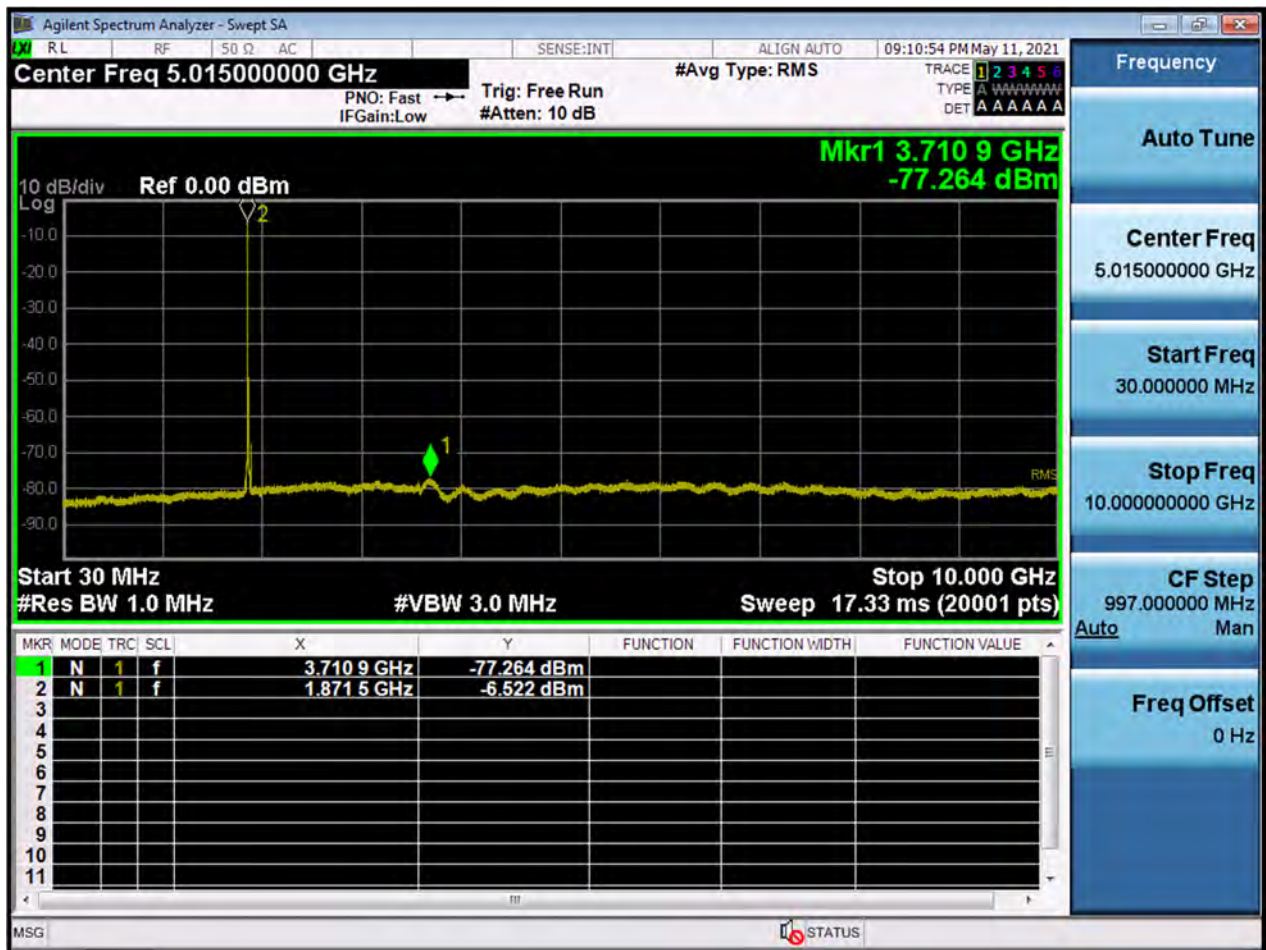

BW20M_CSE(30M-10G)_Highest Channel_QPSK_1RB

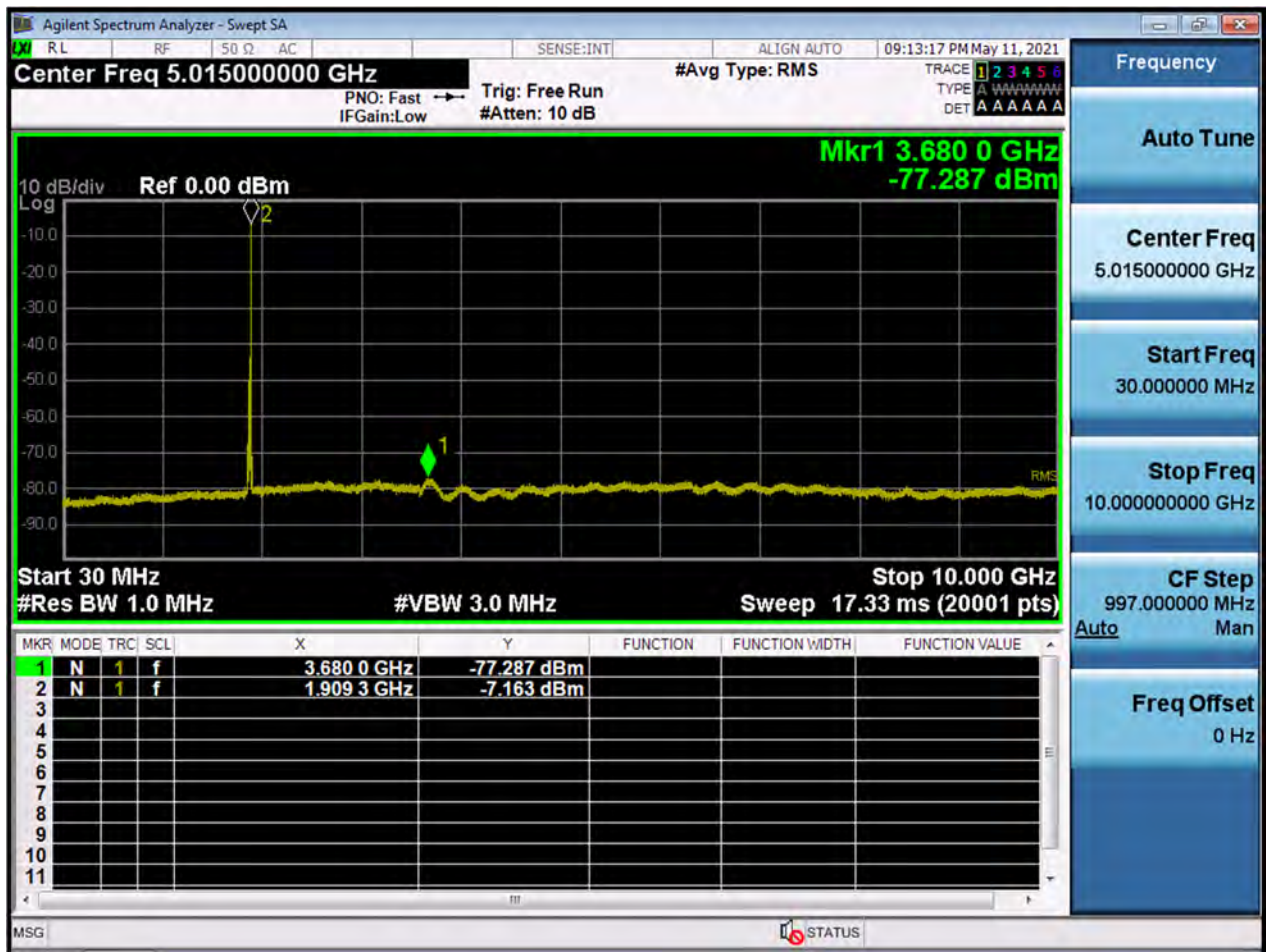

BW1.4M_CSE(10G-26.5G)_Lowest Channel_QPSK_1RB



BW1.4M_CSE(10G-26.5G)_Middle Channel_QPSK_1RB



BW1.4M_CSE(10G-26.5G)_Highest Channel_QPSK_1RB



BW3M_CSE(10G-26.5G)_Lowest Channel_QPSK_1RB



BW3M_CSE(10G-26.5G)_Middle Channel_QPSK_1RB



BW3M_CSE(10G-26.5G)_Highest Channel_QPSK_1RB



BW5M_CSE(10G-26.5G)_Lowest Channel_QPSK_1RB



BW5M_CSE(10G-26.5G)_Middle Channel_QPSK_1RB



BW5M_CSE(10G-26.5G)_Highest Channel_QPSK_1RB



BW10M_CSE(10G-26.5G)_Lowest Channel_QPSK_1RB



BW10M_CSE(10G-26.5G)_Middle Channel_QPSK_1RB



BW10M_CSE(10G-26.5G)_Highest Channel_QPSK_1RB



BW15M_CSE(10G-26.5G)_Lowest Channel_QPSK_1RB



BW15M_CSE(10G-26.5G)_Middle Channel_QPSK_1RB



BW15M_CSE(10G-26.5G)_Highest Channel_QPSK_1RB



BW20M_CSE(10G-26.5G)_Lowest Channel_QPSK_1RB



BW20M_CSE(10G-26.5G)_Middle Channel_QPSK_1RB



BW20M_CSE(10G-26.5G)_Highest Channel_QPSK_1RB



10 ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2107-FC025-P