

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.4 MAXIMUM PEAK OUTPUT POWER

Test Date	2025/02/05~14	Temp./Hum.	18~20°C/56~58%
Cable Loss	2.35dB	Tested By	Sean Wang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.4.1 Peak Output Power

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max Peak Output Power		Antenna Gain (dBi)		E.I.R.P. ^{Note 2}		Limit
		Aux	Main	(dBm)	(W)	Aux	Main	(dBm)	(W)	
802.11b	2412	18.01	19.01	19.01	0.080	2.10	2.10	21.11	0.129	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P.)
	2417	18.31	18.91	18.91	0.078	2.10	2.10	21.01	0.126	
	2422	18.36	18.75	18.75	0.075	2.10	2.10	20.85	0.122	
	2442	18.42	19.03	19.03	0.080	2.10	2.10	21.13	0.130	
	2467	18.71	18.90	18.90	0.078	2.10	2.10	21.00	0.126	
	2472	18.70	18.96	18.96	0.079	2.10	2.10	21.06	0.128	
802.11g	2412	21.21	21.82	21.82	0.152	2.10	2.10	23.92	0.247	
	2417	21.38	21.69	21.69	0.148	2.10	2.10	23.79	0.239	
	2442	21.27	21.81	21.81	0.152	2.10	2.10	23.91	0.246	
	2462	21.23	21.85	21.85	0.153	2.10	2.10	23.95	0.248	
	2467	19.07	20.23	20.23	0.105	2.10	2.10	22.33	0.171	
	2472	22.94	24.15	24.15	0.260	2.10	2.10	26.25	0.422	

Note: 1. The results have been included cable loss.

2. E.I.R.P.= The Max. of Peak Output Power (AUX or Main)(dBm)+ Antenna Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power ^{No 1e 2}		Directional Gain ^{No 1e 2} (dBi)	E.I.R.P ^{No 1e 4}		Limit
		Aux	Main	(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	21.07	21.77	24.44	0.278	2.10	26.54	0.451	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2417	21.11	21.96	24.57	0.286	2.10	26.67	0.464	
	2442	21.09	21.89	24.52	0.283	2.10	26.62	0.459	
	2462	21.21	21.97	24.62	0.290	2.10	26.72	0.470	
	2467	17.69	17.85	20.78	0.120	2.10	22.88	0.194	
	2472	22.16	22.72	25.46	0.352	2.10	27.56	0.570	
802.11n-HT40	2422	22.03	22.78	25.43	0.349	2.10	27.53	0.566	
	2427	22.08	22.70	25.41	0.348	2.10	27.51	0.564	
	2432	22.24	22.75	25.51	0.356	2.10	27.61	0.577	
	2437	22.24	22.77	25.52	0.357	2.10	27.62	0.579	
	2442	22.35	22.86	25.62	0.365	2.10	27.72	0.592	
	2447	22.23	22.75	25.51	0.355	2.10	27.61	0.577	
	2452	22.30	22.80	25.57	0.360	2.10	27.67	0.584	
	2462	22.23	22.77	25.52	0.356	2.10	27.62	0.578	
802.11ax-HE20	2412	20.96	21.91	24.47	0.280	2.10	26.57	0.454	
	2417	21.39	21.86	24.64	0.291	2.10	26.74	0.472	
	2442	21.27	21.75	24.53	0.284	2.10	26.63	0.460	
	2462	21.24	21.78	24.53	0.284	2.10	26.63	0.460	
	2467	17.42	17.60	20.52	0.113	2.10	22.62	0.183	
	2472	22.19	22.67	25.45	0.351	2.10	27.55	0.568	
802.11ax-HE40	2422	22.02	22.81	25.44	0.350	2.10	27.54	0.568	
	2427	22.30	22.88	25.61	0.364	2.10	27.71	0.590	
	2432	22.40	22.73	25.58	0.361	2.10	27.68	0.586	
	2437	22.33	22.67	25.51	0.356	2.10	27.61	0.577	
	2442	22.46	22.84	25.66	0.369	2.10	27.76	0.598	
	2447	22.14	22.64	25.41	0.347	2.10	27.51	0.563	
	2452	22.19	22.80	25.52	0.356	2.10	27.62	0.578	
	2462	22.10	22.66	25.40	0.347	2.10	27.50	0.562	
802.11be-EHT20	2412	21.13	21.83	24.50	0.282	2.10	26.60	0.458	
	2417	21.22	21.88	24.57	0.287	2.10	26.67	0.465	
	2442	21.16	21.67	24.43	0.278	2.10	26.53	0.450	
	2462	21.20	21.76	24.50	0.282	2.10	26.60	0.457	
	2467	17.57	17.77	20.68	0.117	2.10	22.78	0.190	
	2472	22.14	22.69	25.43	0.349	2.10	27.53	0.567	
802.11be-EHT40	2422	22.09	22.71	25.42	0.348	2.10	27.52	0.565	
	2427	22.12	22.80	25.48	0.353	2.10	27.58	0.573	
	2432	22.25	22.63	25.45	0.351	2.10	27.55	0.569	
	2437	22.14	22.80	25.49	0.354	2.10	27.59	0.574	
	2442	22.35	22.83	25.61	0.364	2.10	27.71	0.590	
	2447	22.07	22.68	25.40	0.346	2.10	27.50	0.562	
	2452	22.07	22.93	25.53	0.357	2.10	27.63	0.580	
	2462	22.18	22.71	25.46	0.352	2.10	27.56	0.571	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{2.1/10} + 10^{2.1/10})/2] = 2.10$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	RU Configuration	Peak Output Power (dBm)		Total Peak Output Power ^{Note 2}		Directional Gain ^{Note 2} (dBi)	E.I.R.P ^{Note 4}		Limit
			Aux	Main	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	26/0	20.62	20.96	23.80	0.240	2.10	25.90	0.389	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
		52/37	20.41	21.09	23.77	0.238	2.10	25.87	0.387	
		106/53	20.47	20.94	23.72	0.236	2.10	25.82	0.382	
	2472	26/8	16.12	16.38	19.26	0.084	2.10	21.36	0.137	
		52/40	15.10	15.42	18.27	0.067	2.10	20.37	0.109	
		106/54	20.42	20.66	23.55	0.227	2.10	25.65	0.367	
802.11ax-HE40	2422	242/61	21.02	21.86	24.47	0.280	2.10	26.57	0.454	
	2462	242/62	23.94	24.32	27.14	0.518	2.10	29.24	0.840	
802.11be-EHT20	2412	26/0	20.62	20.86	23.75	0.237	2.10	25.85	0.385	
		52/37	20.41	20.91	23.68	0.233	2.10	25.78	0.378	
		106/53	20.33	20.82	23.59	0.229	2.10	25.69	0.371	
	2472	26/8	14.14	14.73	17.46	0.056	2.10	19.56	0.090	
		52/40	13.32	13.80	16.58	0.045	2.10	18.68	0.074	
		106/54	19.63	19.89	22.77	0.189	2.10	24.87	0.307	
802.11be-EHT4	2422	242/61	21.12	21.84	24.51	0.282	2.10	26.61	0.458	
	2462	242/62	22.81	23.12	25.98	0.396	2.10	28.08	0.642	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{2.1/10} + 10^{2.1/10})/2] = 2.10$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).

Mode	Centre Frequency (MHz)	Max Peak Output Power		Antenna Gain (dBi)	E.I.R.P ^{Note 2}		Limit
		(dBm)	(W)		(dBm)	(W)	
BLE (1Mbps)	2402	13.12	0.021	2.10	15.22	0.033	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2440	13.18	0.021	2.10	15.28	0.034	
	2480	13.11	0.020	2.10	15.21	0.033	
BLE (2Mbps)	2402	12.91	0.020	2.10	15.01	0.032	
	2440	13.31	0.021	2.10	15.41	0.035	
	2480	13.33	0.022	2.10	15.43	0.035	
BLE (PHY Coded S2)	2402	11.43	0.014	2.10	13.53	0.023	
	2440	11.75	0.015	2.10	13.85	0.024	
	2480	11.61	0.014	2.10	13.71	0.023	
BLE (PHY Coded S8)	2402	10.85	0.012	2.10	12.95	0.020	
	2440	11.22	0.013	2.10	13.32	0.021	
	2480	10.86	0.012	2.10	12.96	0.020	

Note: 1. The results have been included cable loss.

2. E.I.R.P.= The Peak Output Power (dBm)+ Antenna Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.4.2 Average Output Power (Reporting only)

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Duty cycle factor (dB) 10log (1/x)	Max Average Output Power		Antenna Gain (dBi)		E.I.R.P. ^{Note 2}		Limit
		Aux	Main		(dBm)	(W)	Aux	Main	(dBm)	(W)	
802.11b	2412	15.89	16.88	N/A	16.88	0.049	2.10	2.10	18.98	0.079	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P.)
	2417	16.21	16.93	N/A	16.93	0.049	2.10	2.10	19.03	0.080	
	2422	16.26	16.62	N/A	16.62	0.046	2.10	2.10	18.72	0.074	
	2442	16.30	16.79	N/A	16.79	0.048	2.10	2.10	18.89	0.077	
	2467	16.62	16.78	N/A	16.78	0.048	2.10	2.10	18.88	0.077	
	2472	16.57	16.68	N/A	16.68	0.047	2.10	2.10	18.78	0.076	
802.11g	2412	16.25	16.86	N/A	16.86	0.049	2.10	2.10	18.96	0.079	
	2417	16.26	16.85	N/A	16.85	0.048	2.10	2.10	18.95	0.079	
	2442	16.37	16.79	N/A	16.79	0.048	2.10	2.10	18.89	0.077	
	2462	16.45	16.89	N/A	16.89	0.049	2.10	2.10	18.99	0.079	
	2467	14.25	15.27	N/A	15.27	0.034	2.10	2.10	17.37	0.055	
	2472	12.67	13.70	N/A	13.70	0.023	2.10	2.10	15.80	0.038	

Note: 1. The results have been included cable loss.

2. E.I.R.P.= The Max. of Peak Output Power (AUX or Main)(dBm)+ Antenna Gain (dBi).

3. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Duty cycle factor (dB) 10 log (1/x)	Total Average Output Power ^{Note 2}		Directional Gain ^{Note 2} (dBi)	E.I.R.P ^{Note 4}		Limit
		Aux	Main		(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	16.09	16.76	N/A	19.45	0.088	2.10	21.55	0.143	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2417	16.12	16.74	N/A	19.45	0.088	2.10	21.55	0.143	
	2442	16.18	16.65	N/A	19.43	0.088	2.10	21.53	0.142	
	2462	16.21	16.75	N/A	19.50	0.089	2.10	21.60	0.145	
	2467	12.51	12.67	N/A	15.60	0.036	2.10	17.70	0.059	
	2472	11.56	11.72	N/A	14.65	0.029	2.10	16.75	0.047	
802.11n-HT40	2422	16.28	16.87	N/A	19.60	0.091	2.10	21.70	0.148	
	2427	16.25	16.93	N/A	19.61	0.091	2.10	21.71	0.148	
	2432	16.26	16.84	N/A	19.57	0.091	2.10	21.67	0.147	
	2437	16.30	16.87	N/A	19.60	0.091	2.10	21.70	0.148	
	2442	16.44	16.88	N/A	19.68	0.093	2.10	21.78	0.151	
	2447	16.25	16.77	N/A	19.53	0.090	2.10	21.63	0.145	
	2452	16.38	16.95	N/A	19.68	0.093	2.10	21.78	0.151	
802.11ax-HE20	2462	11.92	12.16	N/A	15.05	0.032	2.10	17.15	0.052	
	2412	16.00	16.63	N/A	19.34	0.086	2.10	21.44	0.139	
	2417	16.05	16.67	N/A	19.38	0.087	2.10	21.48	0.141	
	2442	16.09	16.56	N/A	19.34	0.086	2.10	21.44	0.139	
	2462	16.21	16.70	N/A	19.47	0.089	2.10	21.57	0.144	
	2467	12.50	12.59	N/A	15.56	0.036	2.10	17.66	0.058	
802.11ax-HE40	2472	11.56	11.67	N/A	14.63	0.029	2.10	16.73	0.047	
	2422	16.27	16.79	N/A	19.55	0.090	2.10	21.65	0.146	
	2427	16.21	16.84	N/A	19.55	0.090	2.10	21.65	0.146	
	2432	16.23	16.73	N/A	19.50	0.089	2.10	21.60	0.144	
	2437	16.29	16.80	N/A	19.56	0.090	2.10	21.66	0.147	
	2442	16.35	16.79	N/A	19.59	0.091	2.10	21.69	0.147	
	2447	16.20	16.72	N/A	19.48	0.089	2.10	21.58	0.144	
	2452	16.32	16.84	N/A	19.60	0.091	2.10	21.70	0.148	
802.11be-EHT20	2462	11.85	12.09	N/A	14.98	0.031	2.10	17.08	0.051	
	2412	16.02	16.60	N/A	19.33	0.086	2.10	21.43	0.139	
	2417	16.04	16.65	N/A	19.37	0.086	2.10	21.47	0.140	
	2442	16.10	16.56	N/A	19.35	0.086	2.10	21.45	0.140	
	2462	16.19	16.69	N/A	19.46	0.088	2.10	21.56	0.143	
	2467	12.48	12.58	N/A	15.54	0.036	2.10	17.64	0.058	
802.11be-EHT40	2472	11.55	11.68	N/A	14.63	0.029	2.10	16.73	0.047	
	2422	16.25	16.81	N/A	19.55	0.090	2.10	21.65	0.146	
	2427	16.21	16.84	N/A	19.55	0.090	2.10	21.65	0.146	
	2432	16.21	16.73	N/A	19.49	0.089	2.10	21.59	0.144	
	2437	16.26	16.79	N/A	19.54	0.090	2.10	21.64	0.146	
	2442	16.37	16.80	N/A	19.60	0.091	2.10	21.70	0.148	
	2447	16.17	16.70	N/A	19.45	0.088	2.10	21.55	0.143	
	2452	16.30	16.85	N/A	19.59	0.091	2.10	21.69	0.148	
	2462	11.85	12.11	N/A	14.99	0.032	2.10	17.09	0.051	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{2.1/10} + 10^{2.1/10})/2] = 2.10 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	RU Configuration	Average Output Power(dBm)		Duty cycle factor (dB) 10log (1/x)	Total Average Output Power ^{Note 2}		Directional Gain ^{Note 2} (dBi)	E.I.R.P ^{Note 4}		Limit
			Aux	Main		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	26/0	15.92	16.59	0.097	19.38	0.087	2.10	21.48	0.140	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
		52/37	16.11	16.79	0.097	19.57	0.091	2.10	21.67	0.147	
		106/53	16.10	16.80	0	19.47	0.089	2.10	21.57	0.144	
	2472	26/8	2.13	2.39	0.097	5.37	0.003	2.10	7.47	0.006	
		52/40	1.50	1.76	0.097	4.74	0.003	2.10	6.84	0.005	
		106/54	7.52	7.99	0	10.77	0.012	2.10	12.87	0.019	
802.11ax-HE40	2422	242/61	16.02	16.68	0.097	19.47	0.089	2.10	21.57	0.144	
	2462	242/62	11.73	11.57	0.097	14.76	0.030	2.10	16.86	0.049	
802.11be-EHT20	2412	26/0	15.92	16.64	0.097	19.40	0.087	2.10	21.50	0.141	
		52/37	16.09	16.82	0.097	19.58	0.091	2.10	21.68	0.147	
		106/53	16.12	16.83	0.097	19.60	0.091	2.10	21.70	0.148	
	2472	26/8	2.15	2.38	0.097	5.37	0.003	2.10	7.47	0.006	
		52/40	1.47	1.75	0.097	4.72	0.003	2.10	6.82	0.005	
		106/54	7.54	7.96	0.097	10.86	0.012	2.10	12.96	0.020	
802.11be-EHT4	2422	242/61	16.01	16.69	0	19.37	0.087	2.10	21.47	0.140	
	2462	242/62	11.57	11.71	0	14.65	0.029	2.10	16.75	0.047	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{2.1/10} + 10^{2.1/10})/2] = 2.10$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).

Mode	Centre Frequency (MHz)	Average Output Power (dBm)	Duty cycle factor (dB) 10log (1/x)	Max Average Output Power		Antenna Gain (dBi)	E.I.R.P ^{Note 2}		Limit
				(dBm)	(W)		(dBm)	(W)	
BLE (1Mbps)	2402	10.60	2.076	12.68	0.019	2.10	14.78	0.030	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2440	10.76	2.076	12.84	0.019	2.10	14.94	0.031	
	2480	10.53	2.076	12.61	0.018	2.10	14.71	0.030	
BLE (2Mbps)	2402	10.39	2.441	12.83	0.019	2.10	14.93	0.031	
	2440	10.75	2.441	13.19	0.021	2.10	15.29	0.034	
	2480	10.78	2.441	13.22	0.021	2.10	15.32	0.034	
BLE (PHY Coded S2)	2402	10.02	0.400	10.42	0.011	2.10	12.52	0.018	
	2440	10.21	0.400	10.61	0.012	2.10	12.71	0.019	
	2480	10.09	0.400	10.49	0.011	2.10	12.59	0.018	
BLE (PHY Coded S8)	2402	9.77	0.814	10.58	0.011	2.10	12.68	0.019	
	2440	10.12	0.814	10.93	0.012	2.10	13.03	0.020	
	2480	9.80	0.814	10.61	0.012	2.10	12.71	0.019	

Note: 1. The results have been included cable loss.


2. E.I.R.P.= The Max. of Peak Output Power (AUX or Main)(dBm)+ Antenna Gain (dBi).


3. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● Measurement Plots (Peak Output Power of BLE Mode)

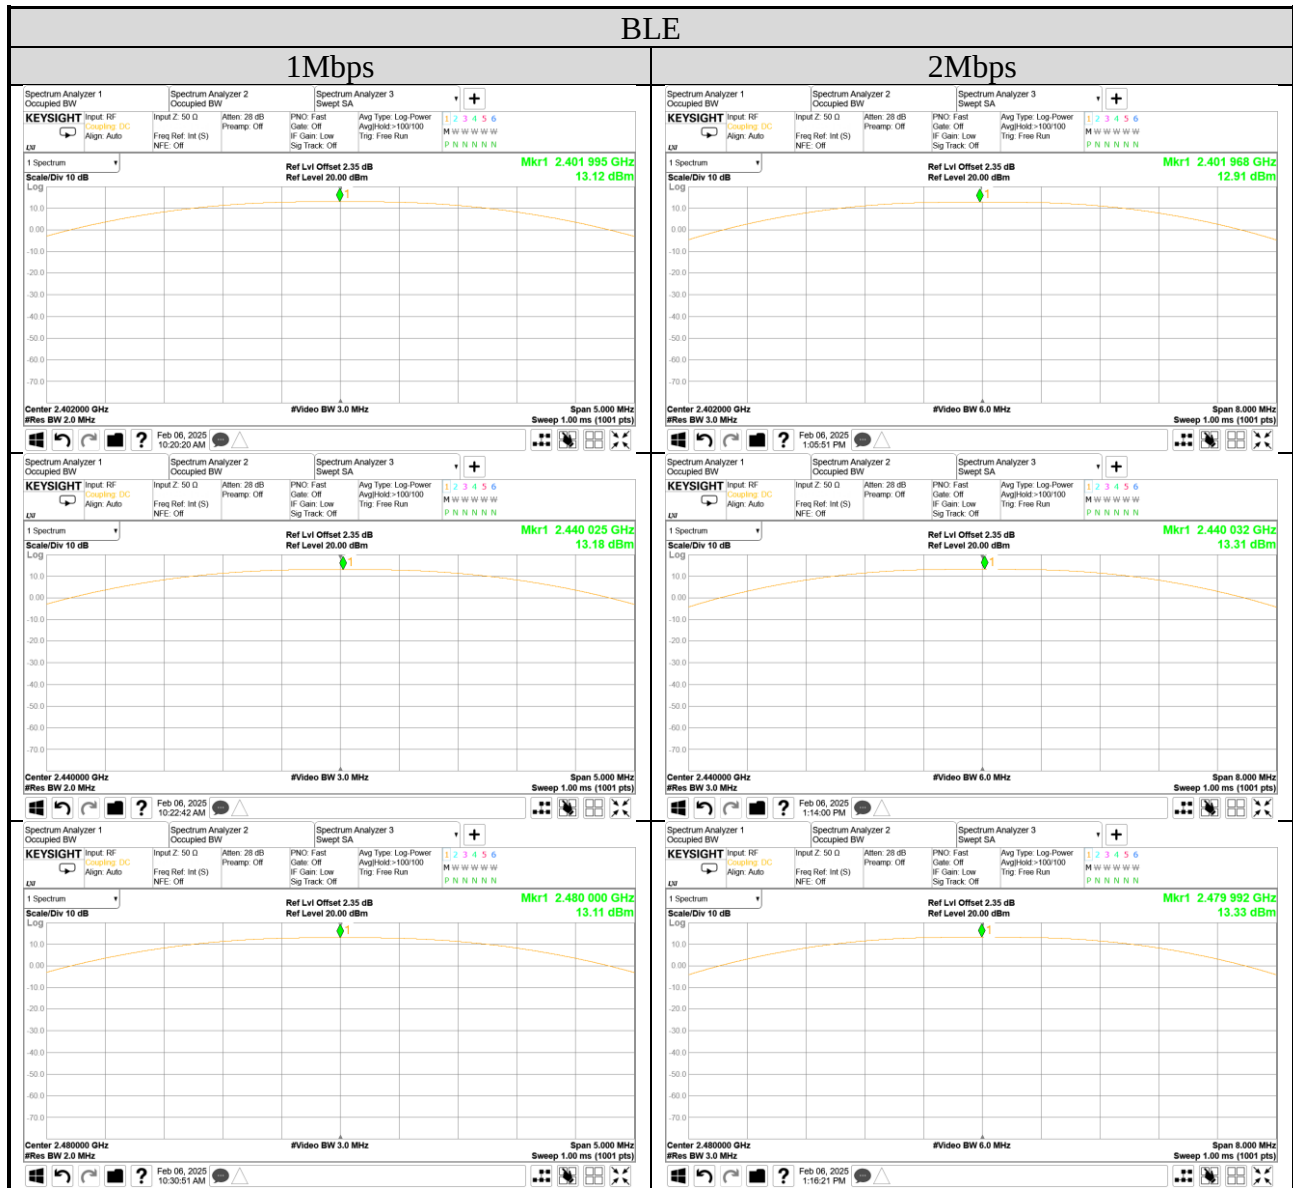

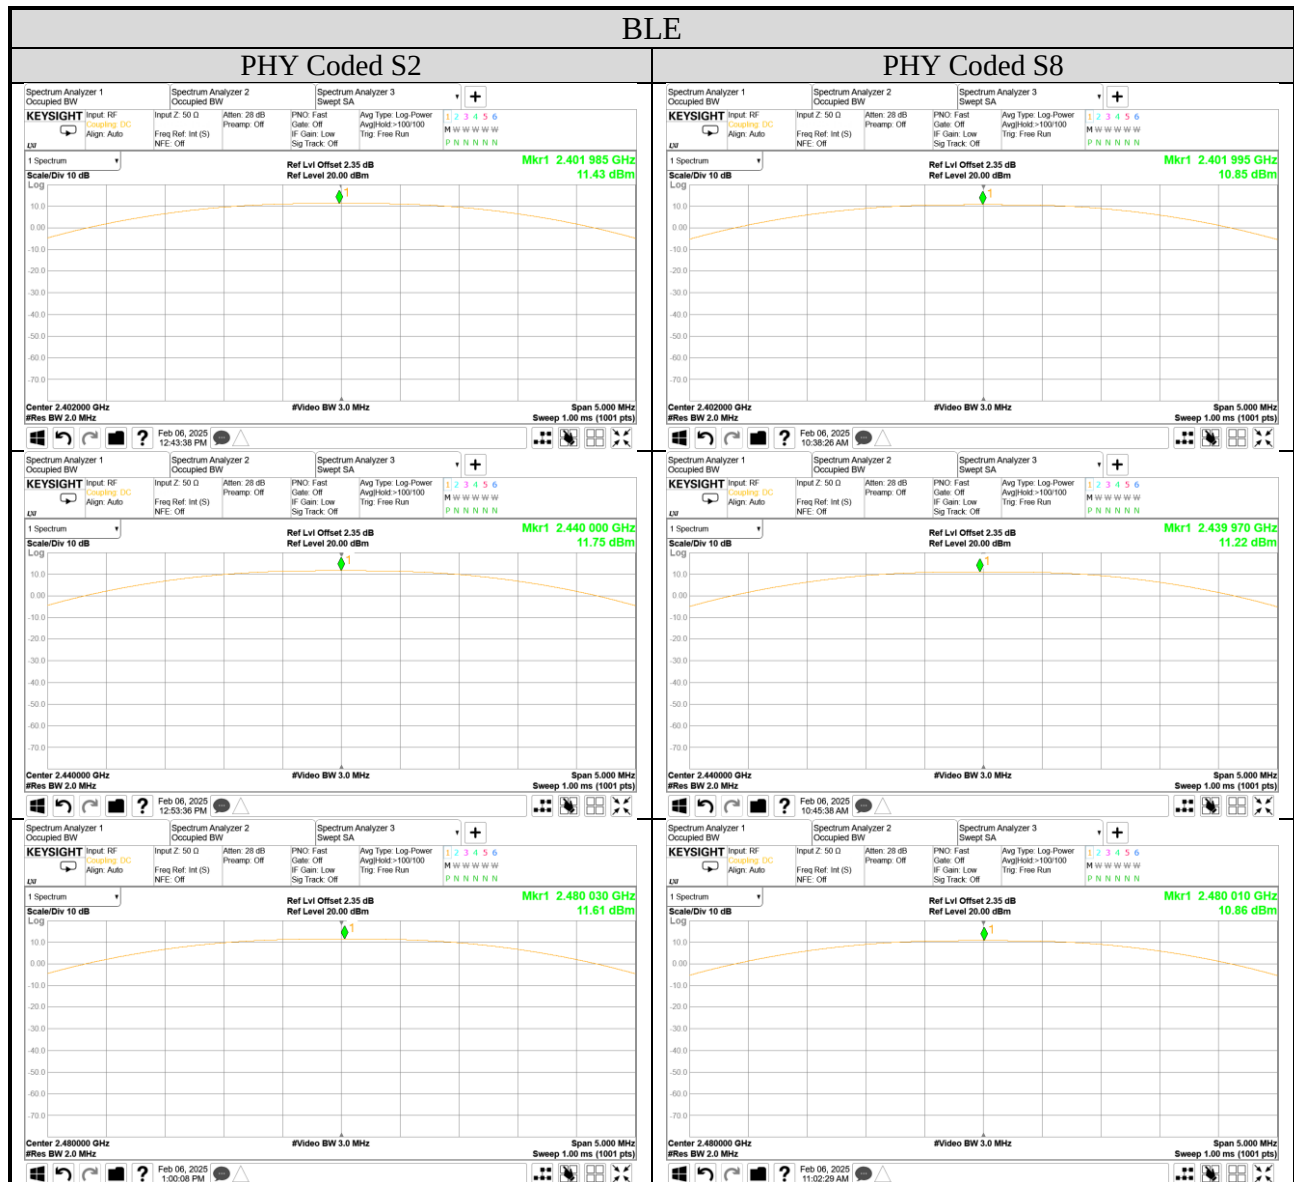


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


A.5 EMISSION LIMITATIONS

Test Date	2025/02/06~24	Temp./Hum.	19~20°C/55~65%
Cable Loss	2.35dB	Tested By	Sean Wang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

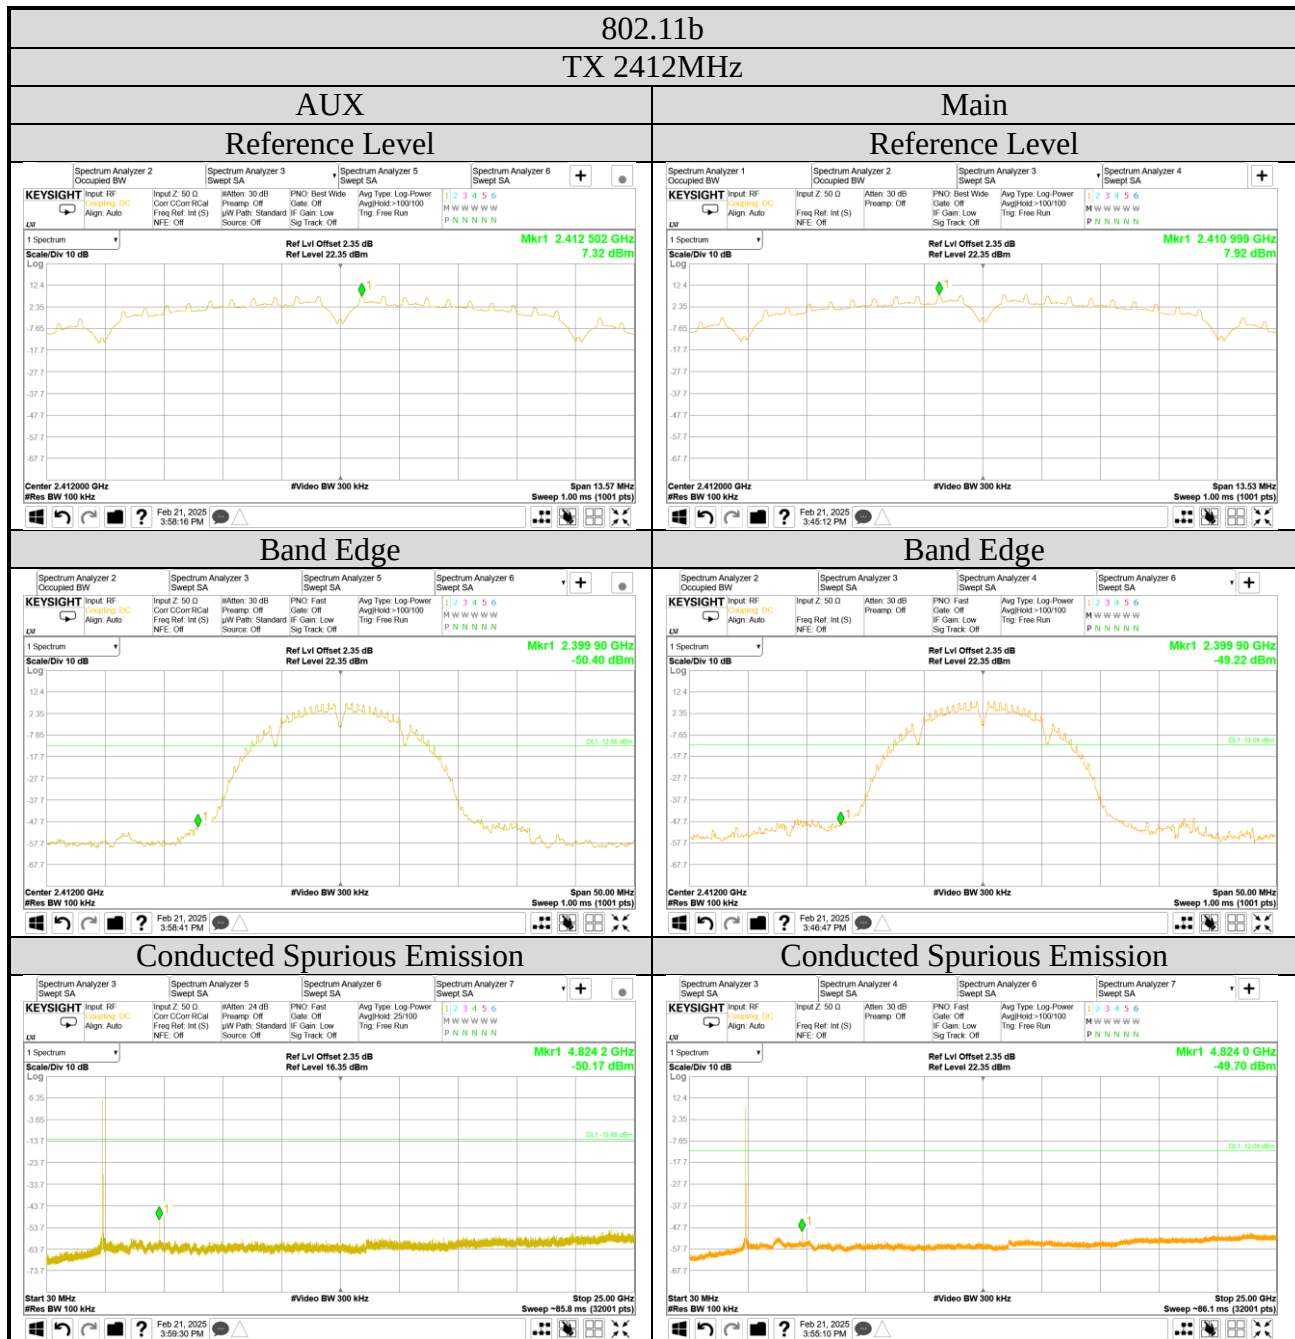


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

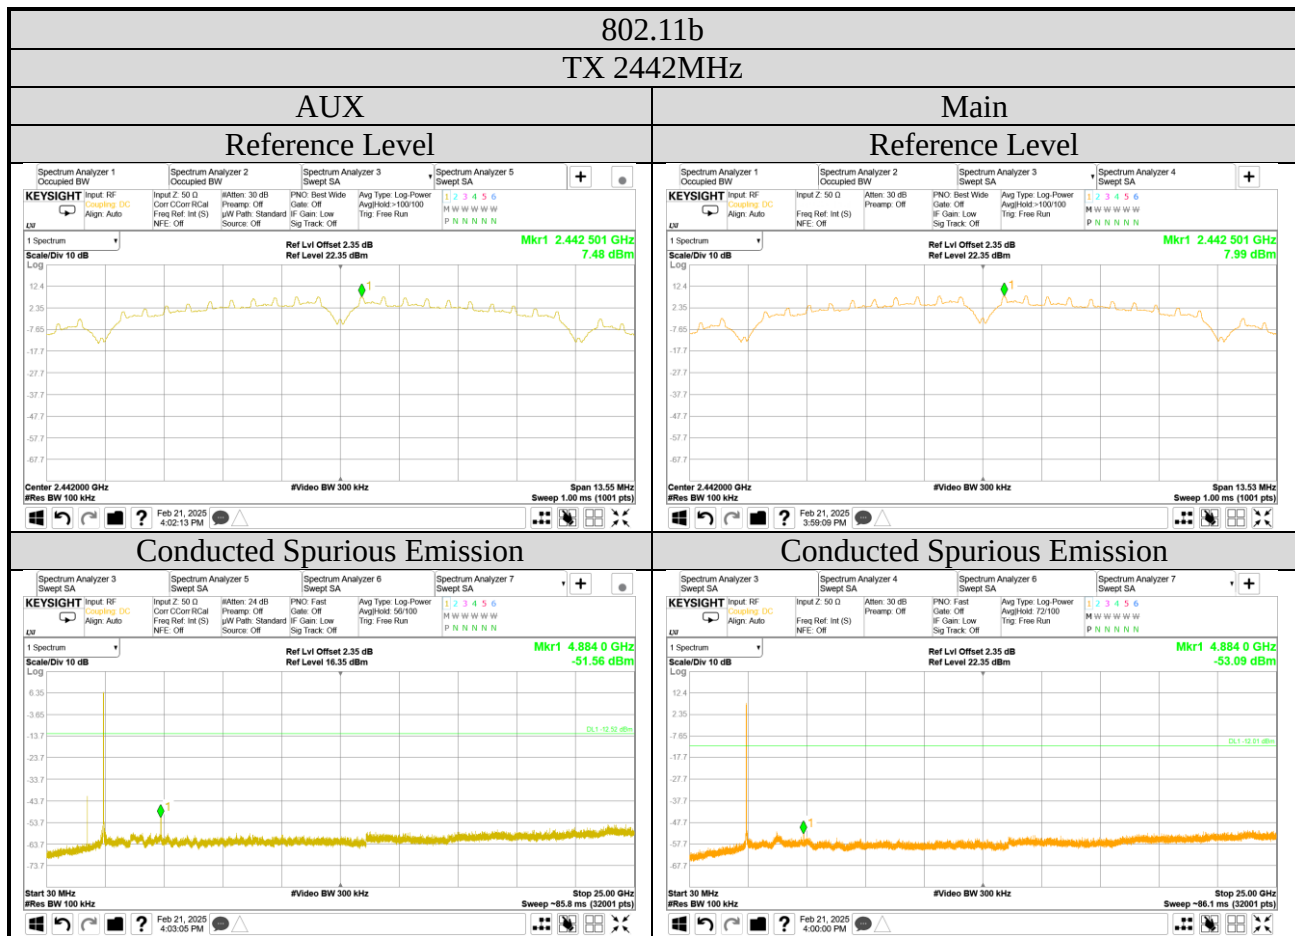


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

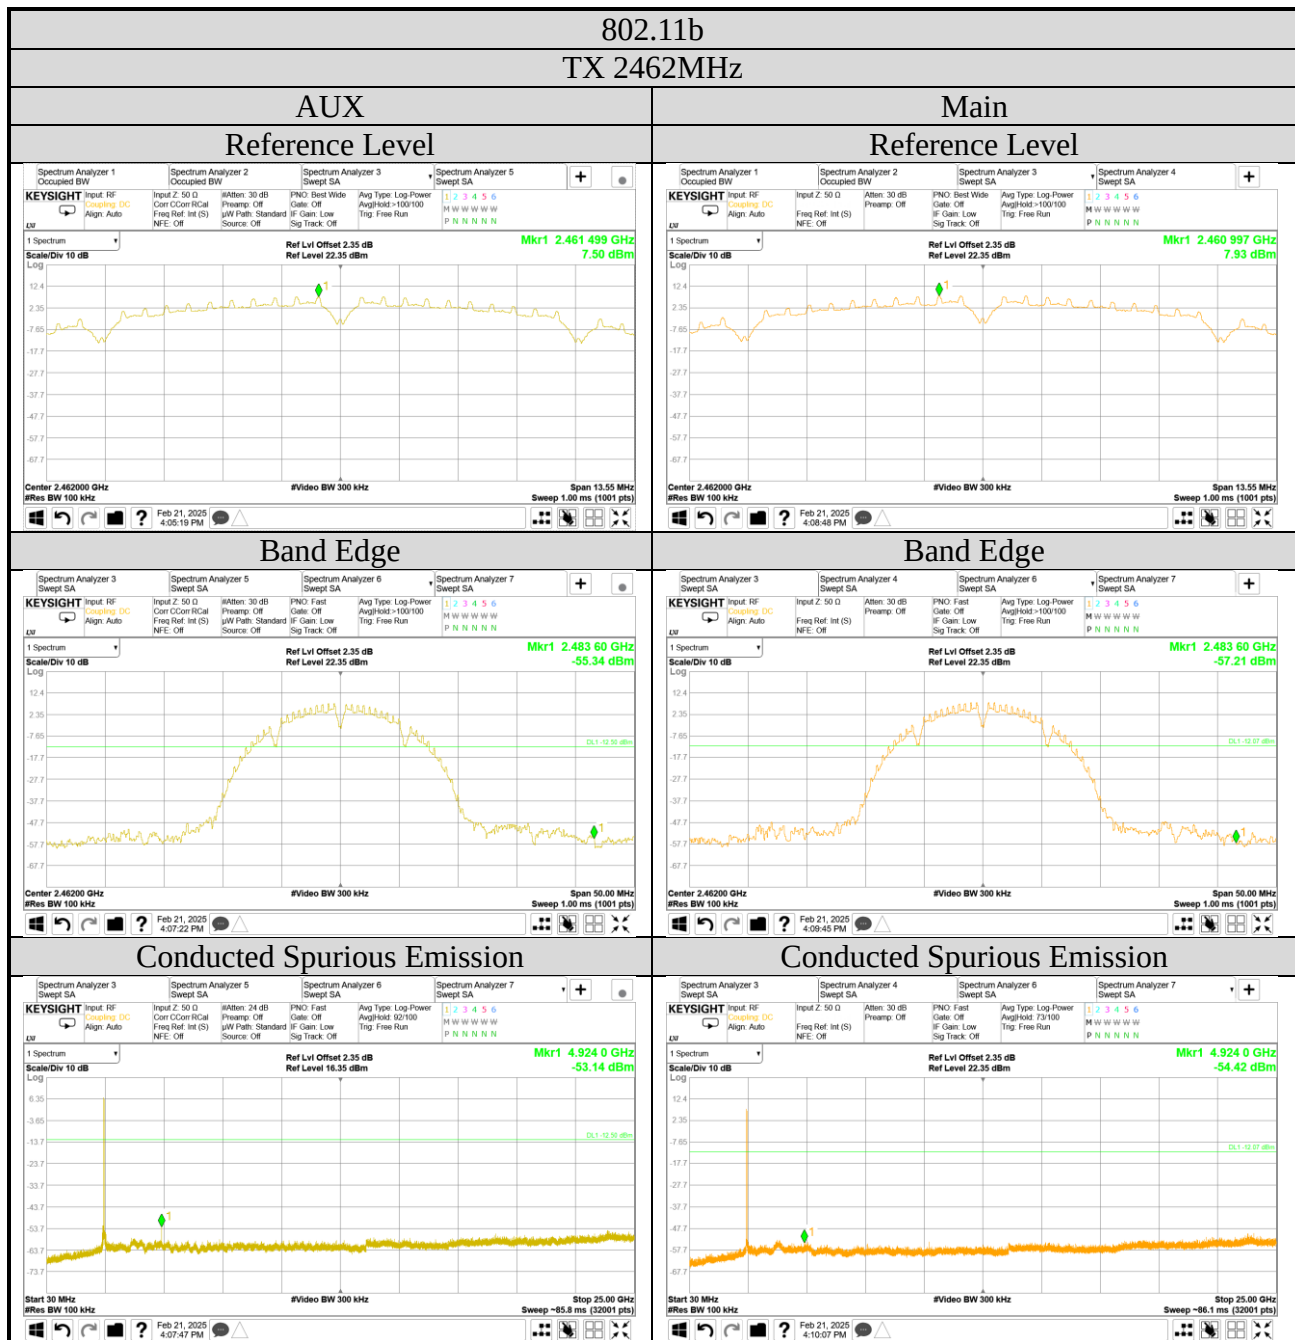


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

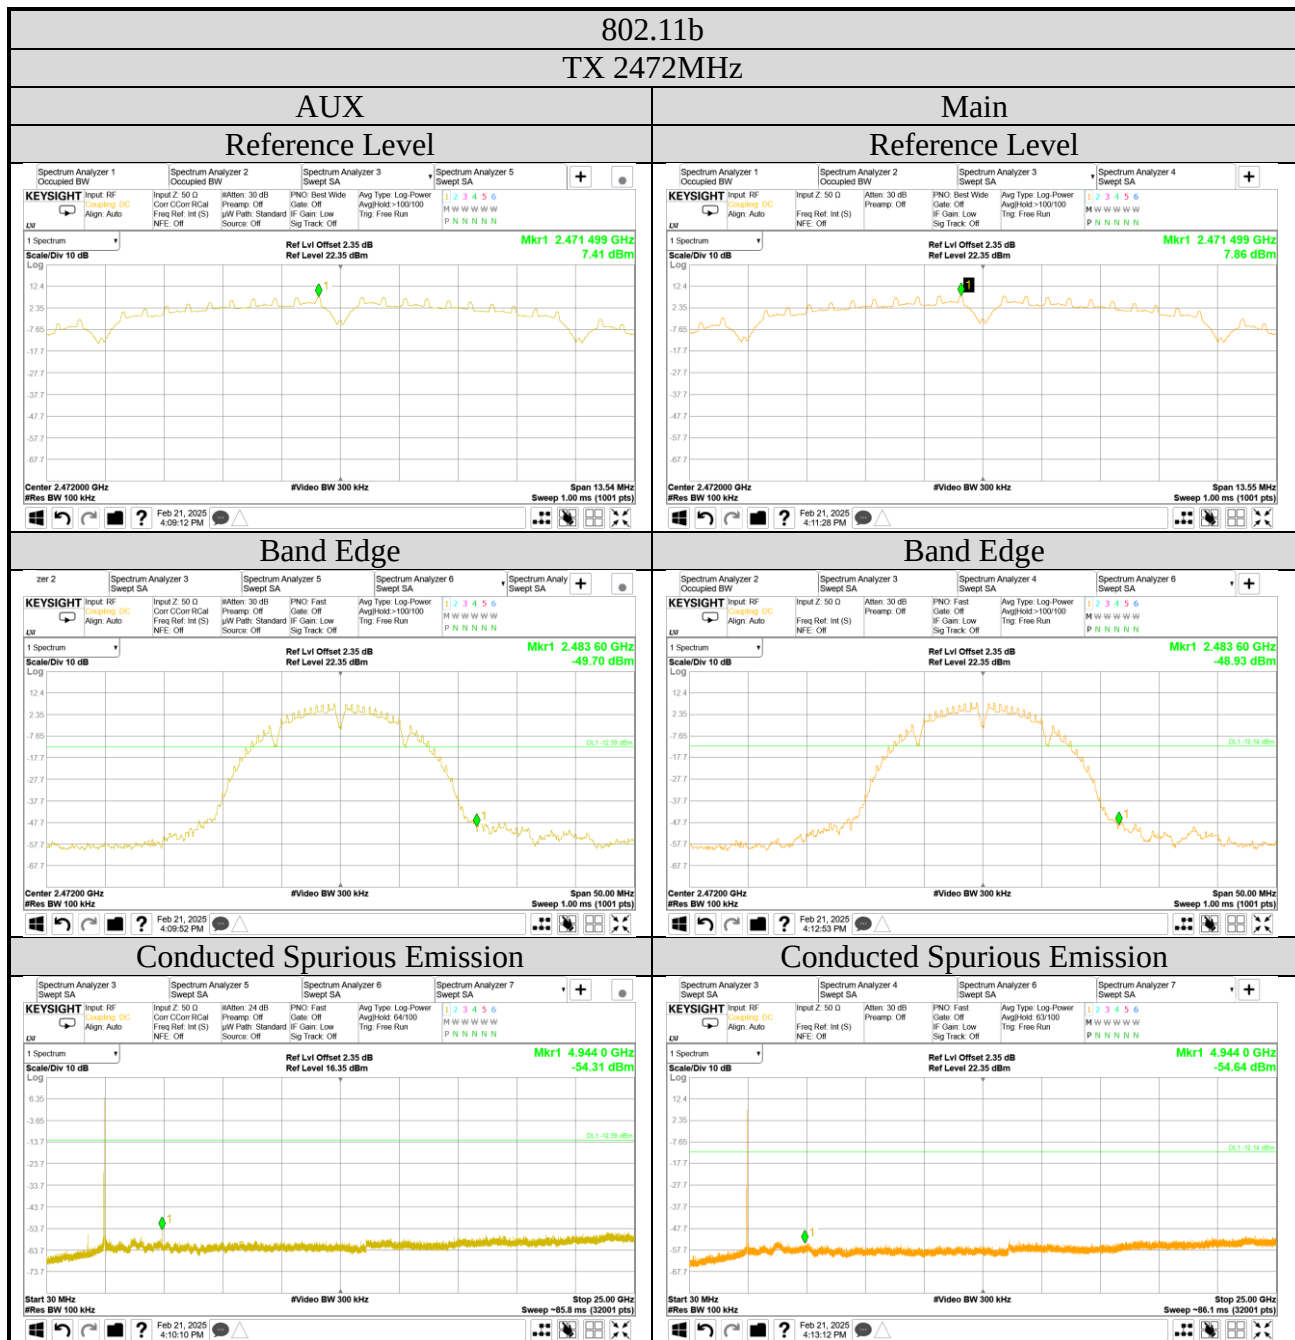


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

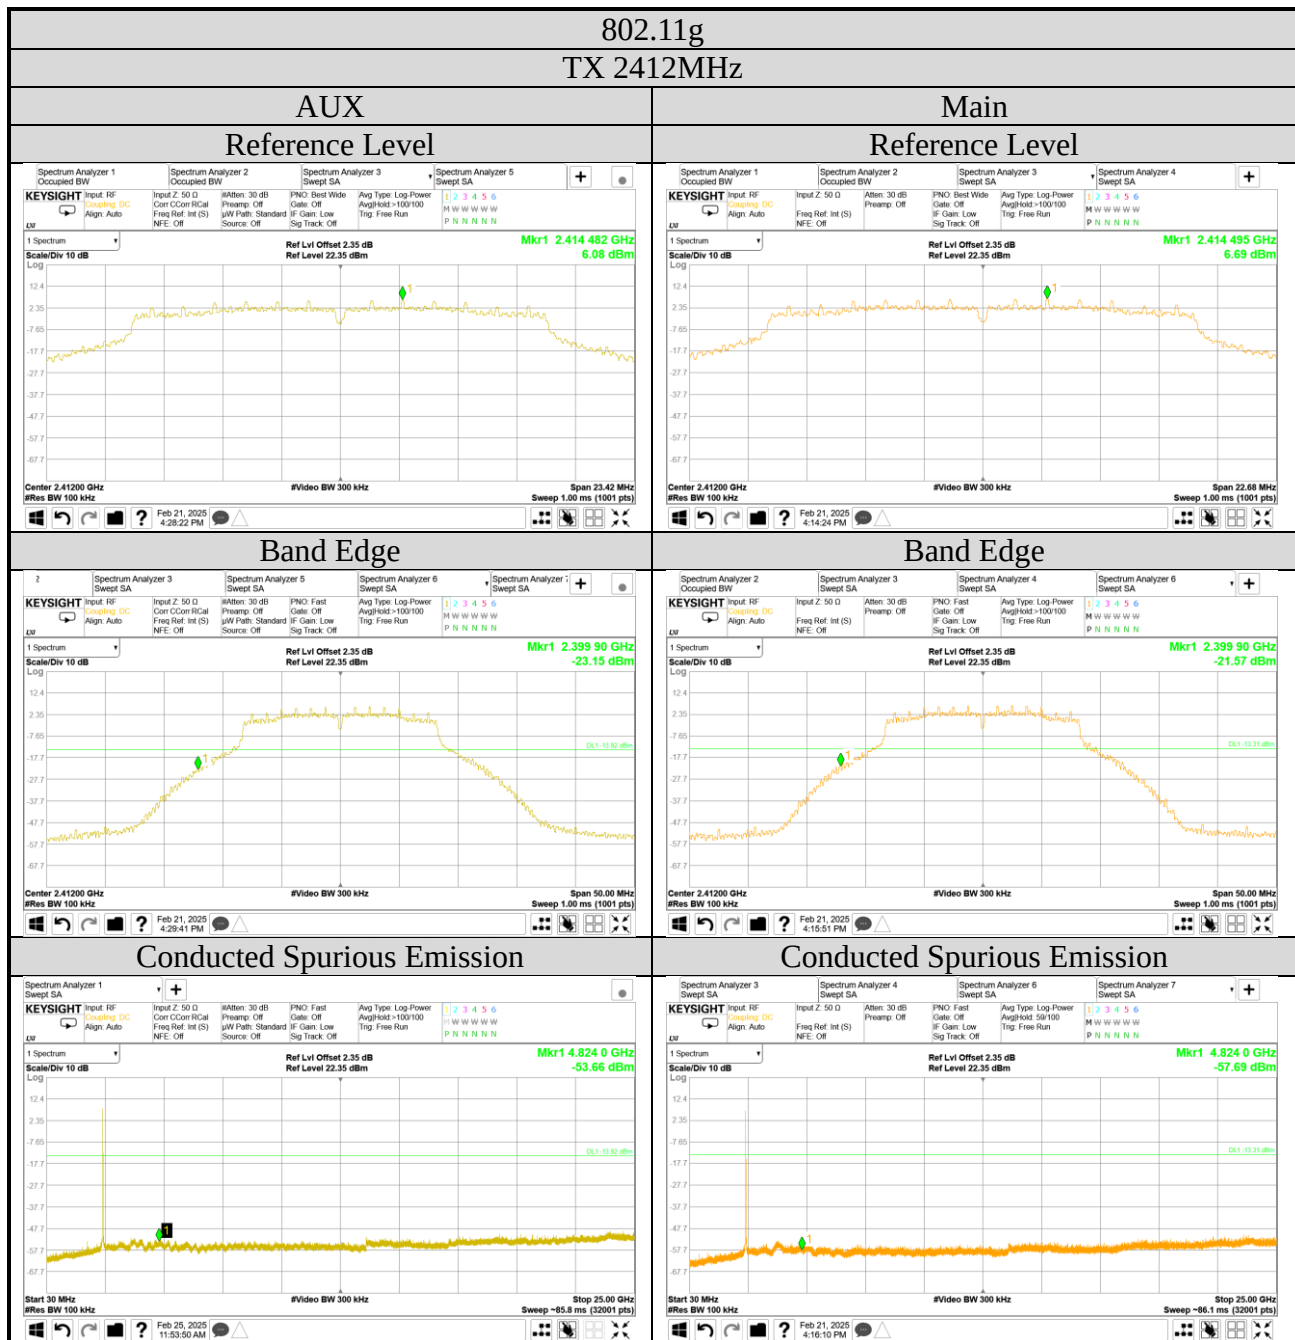


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

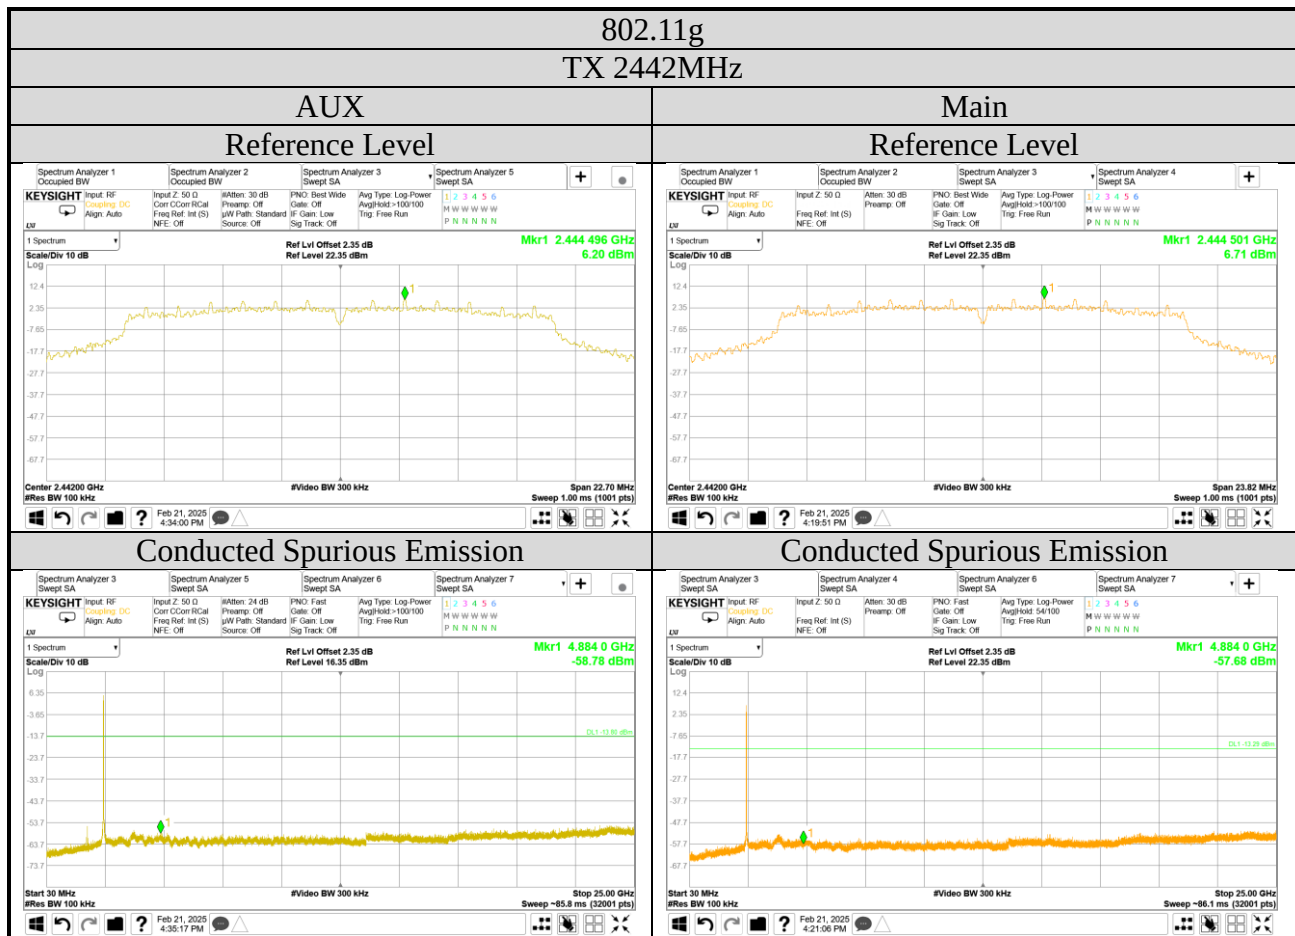


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

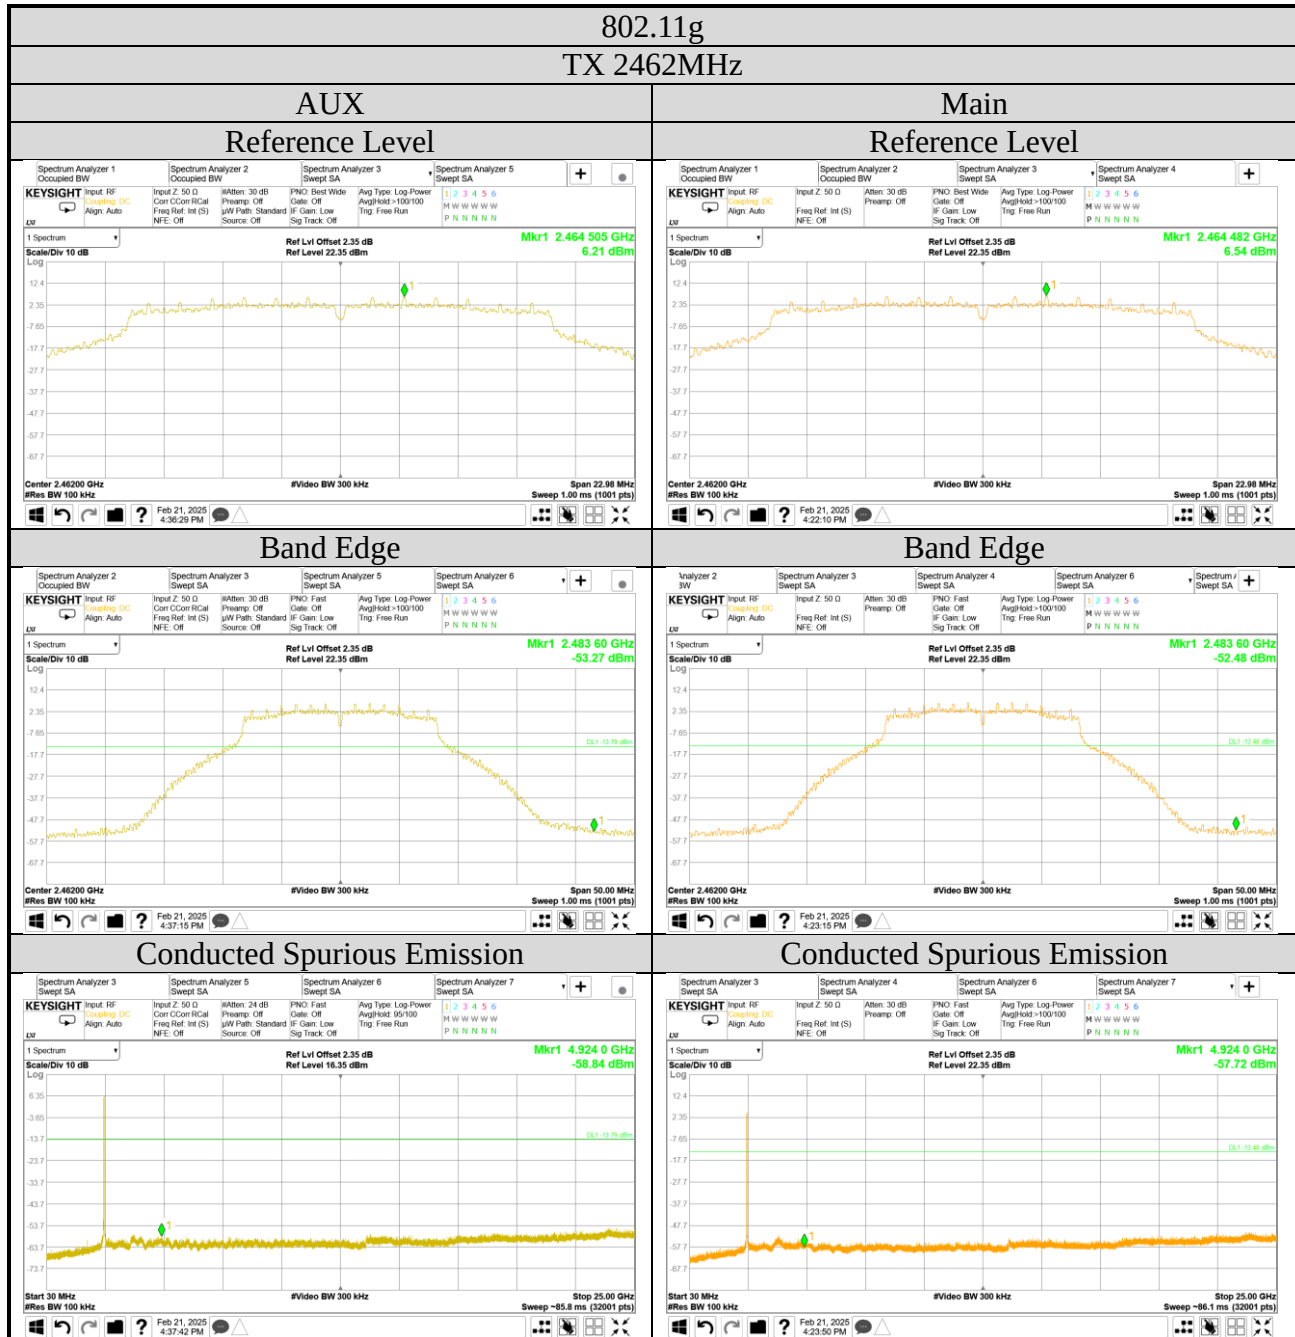


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

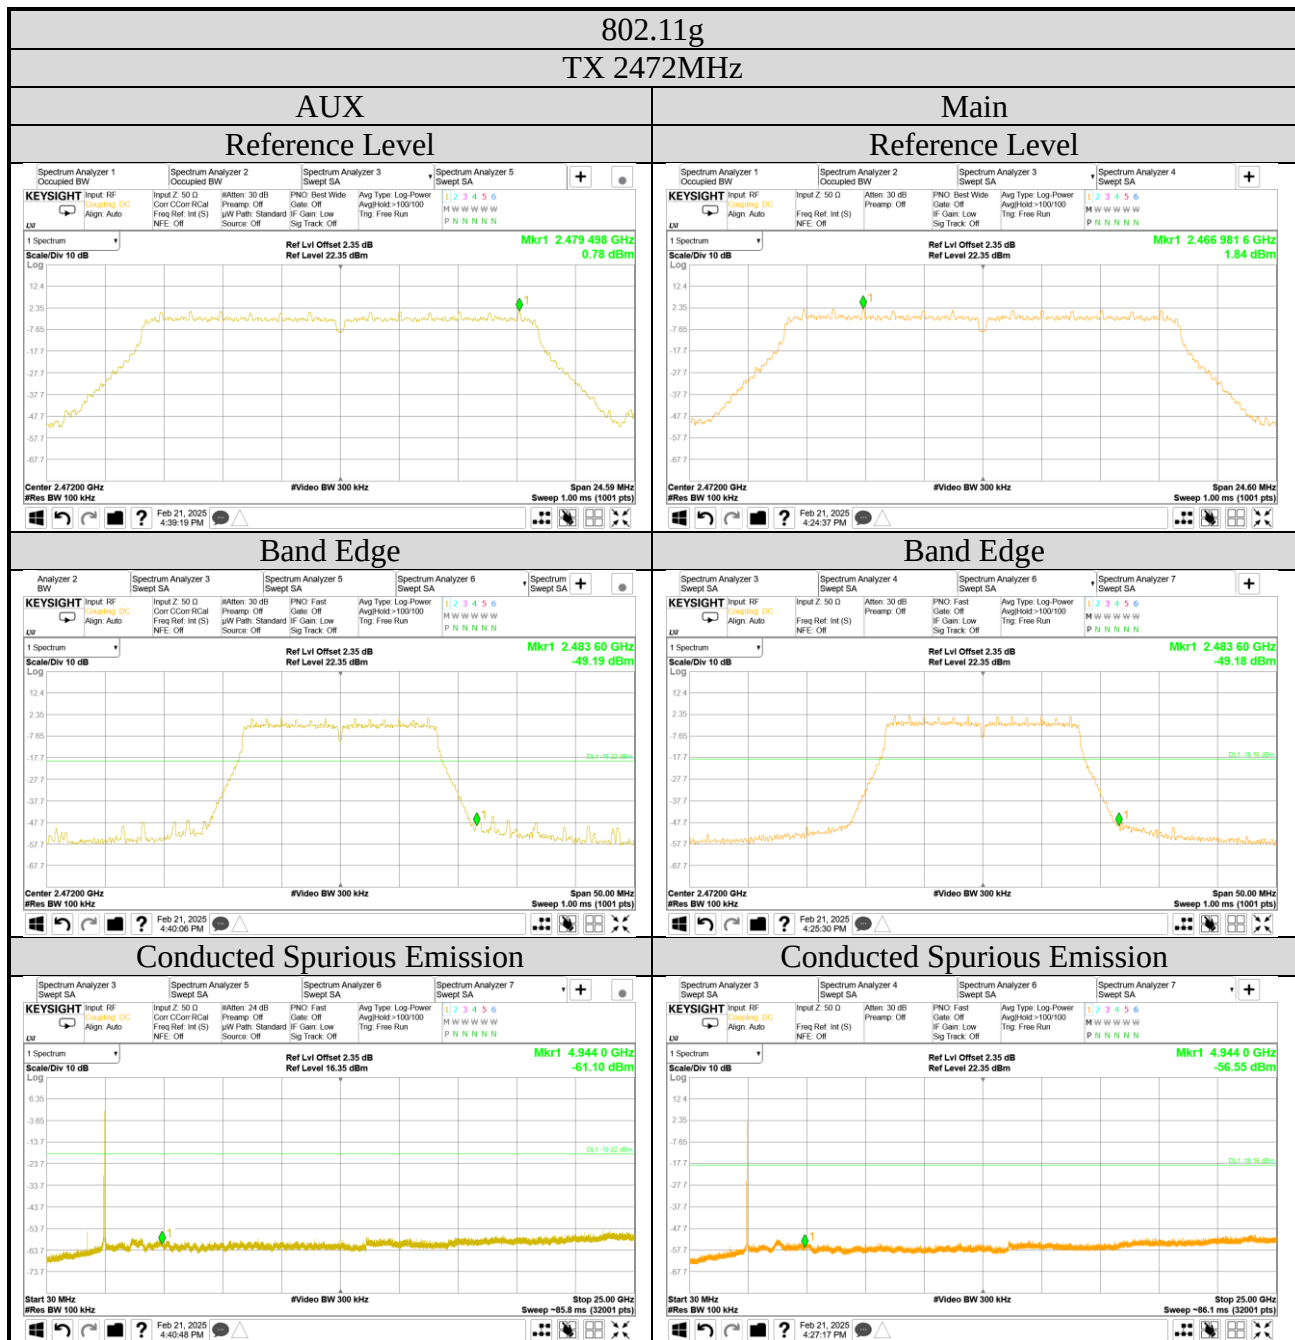


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

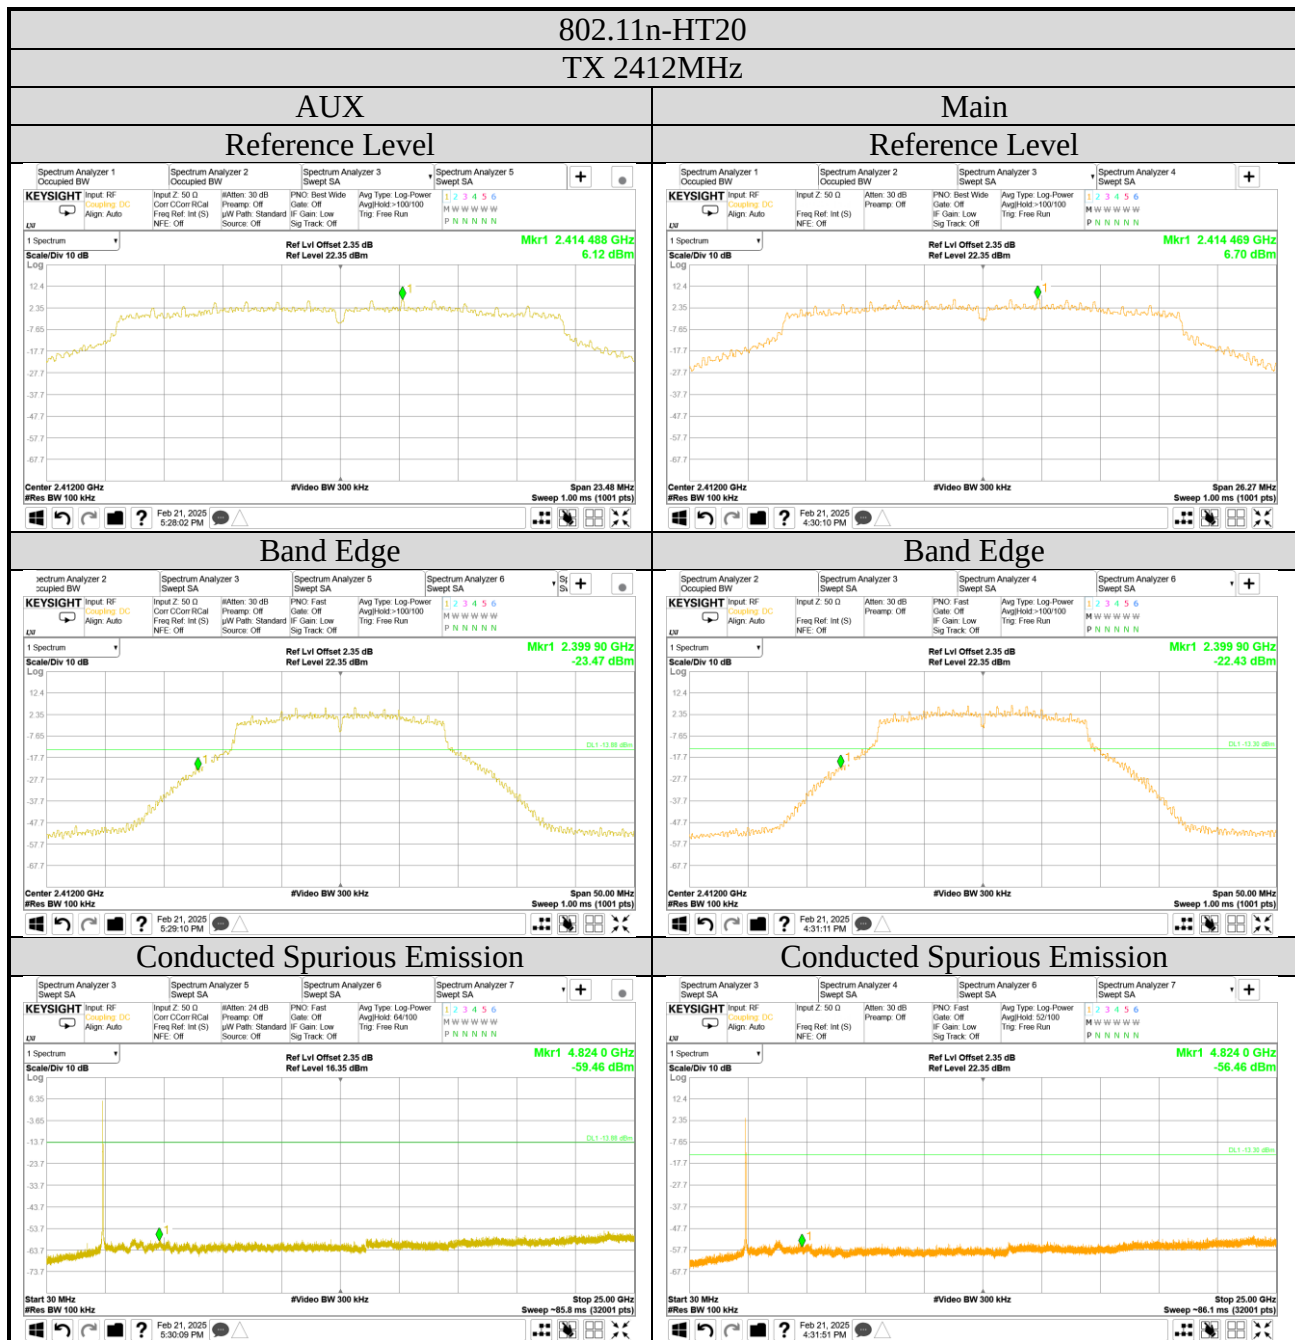


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

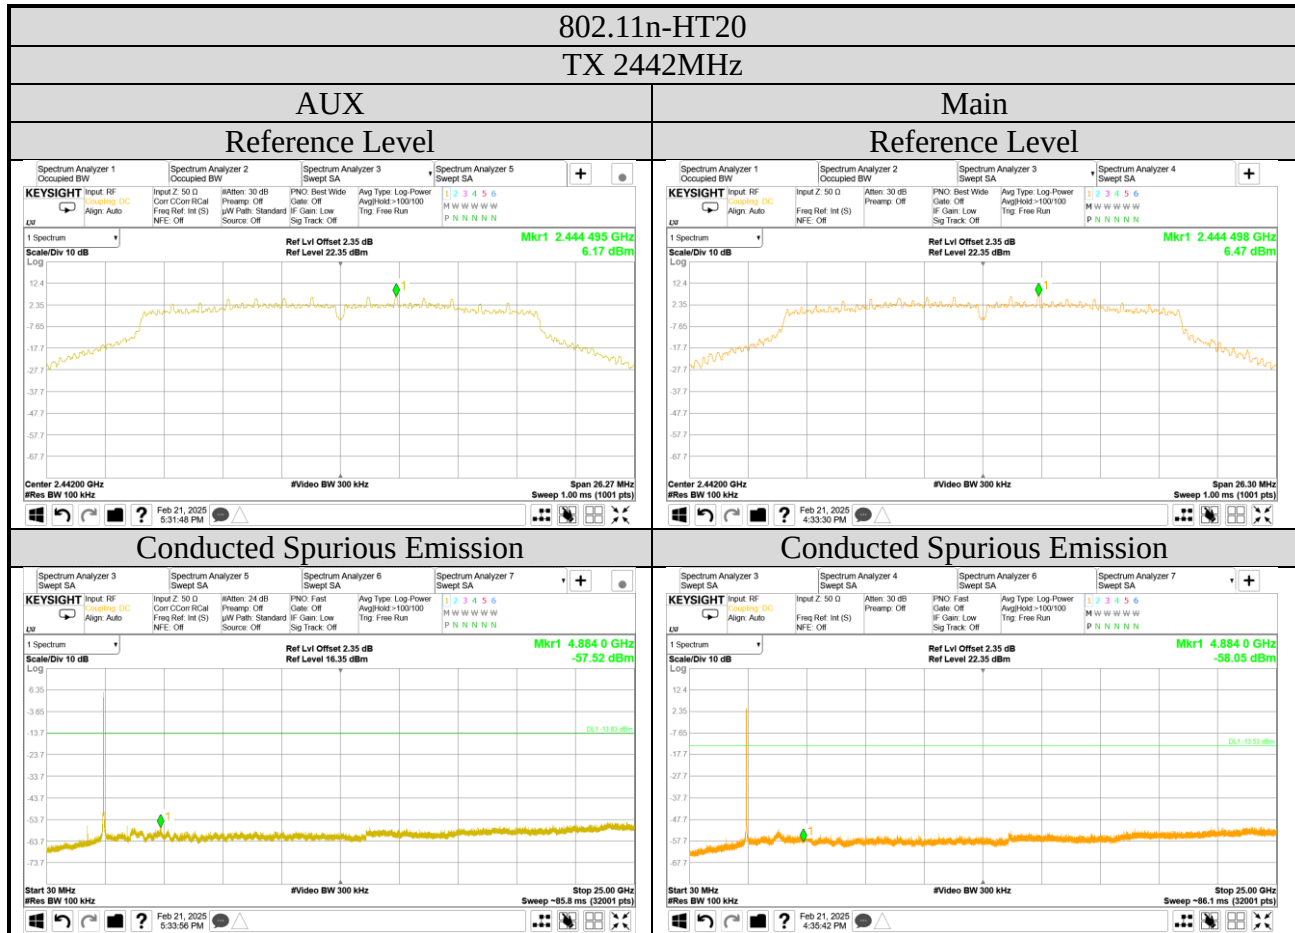


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

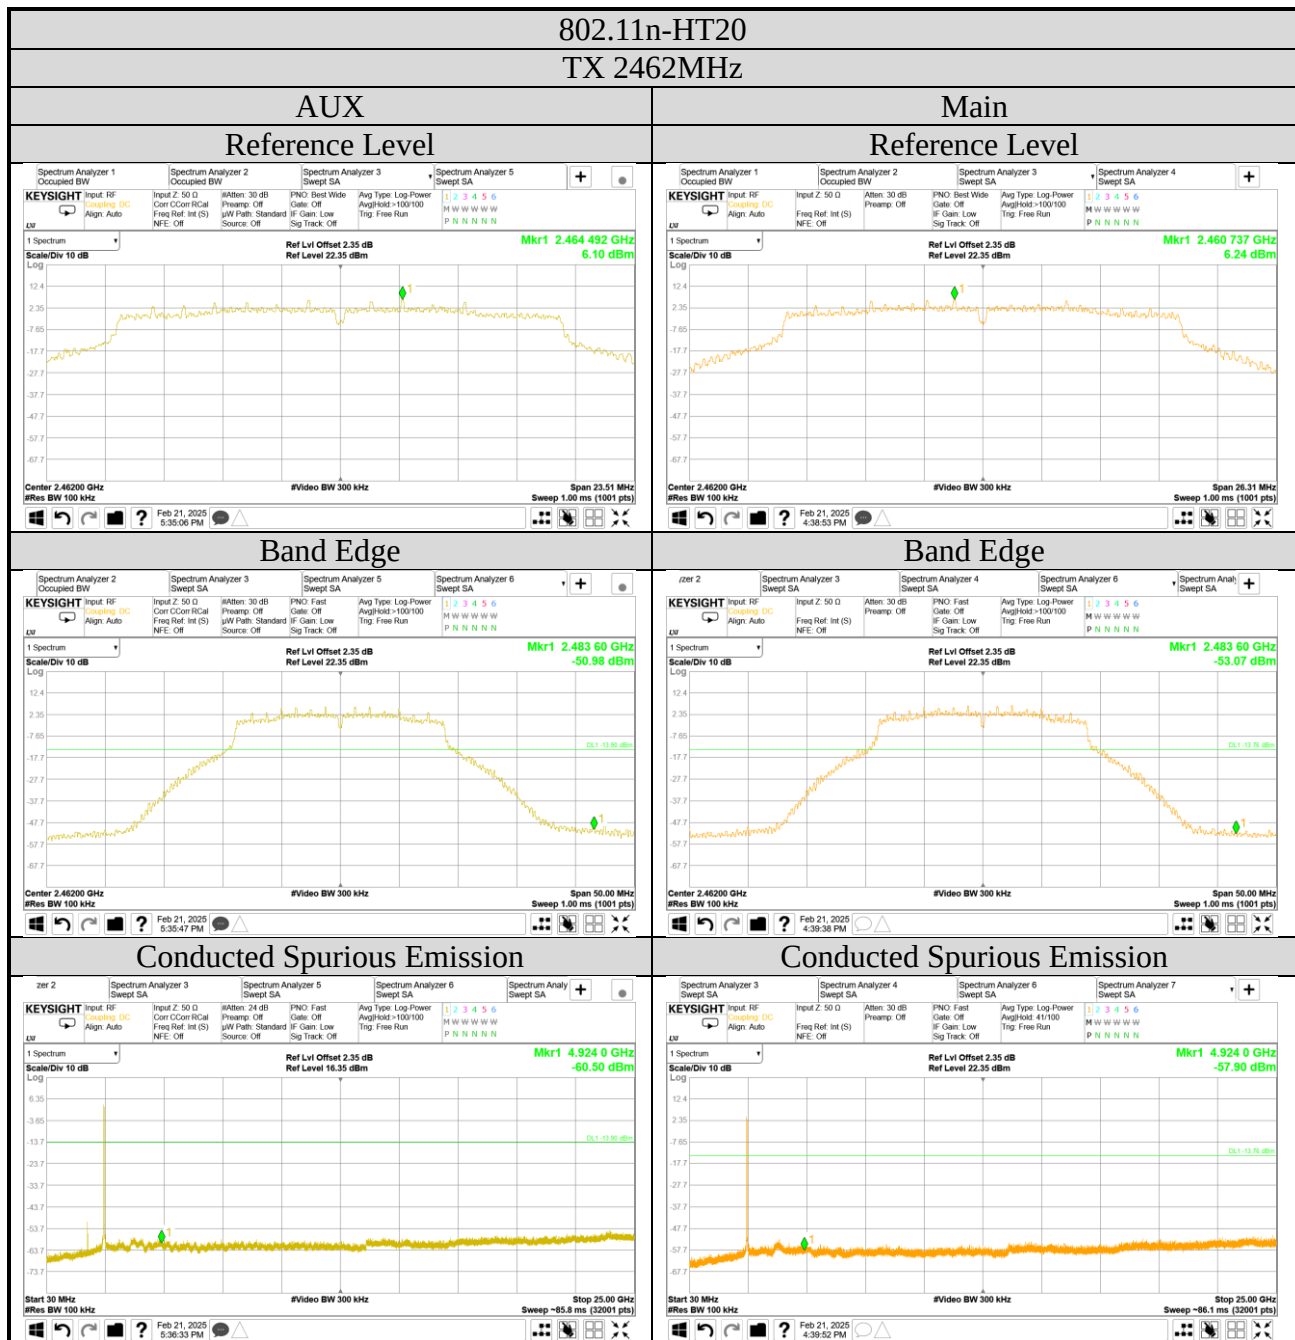


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

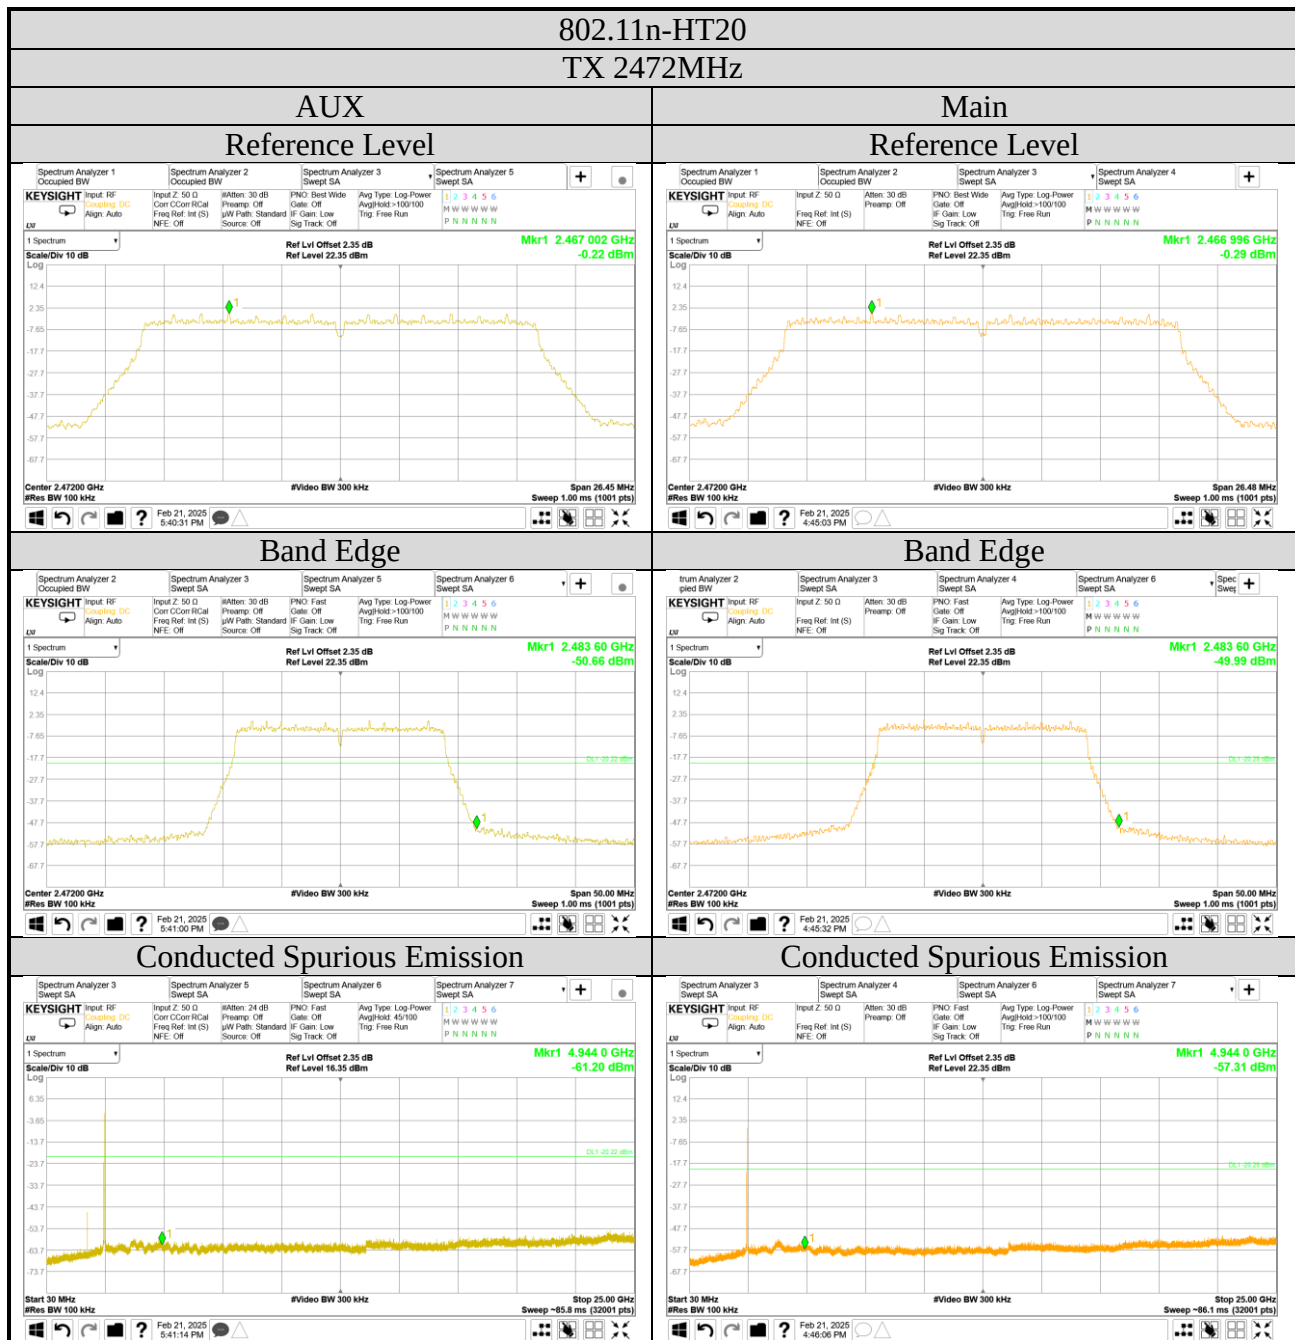


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

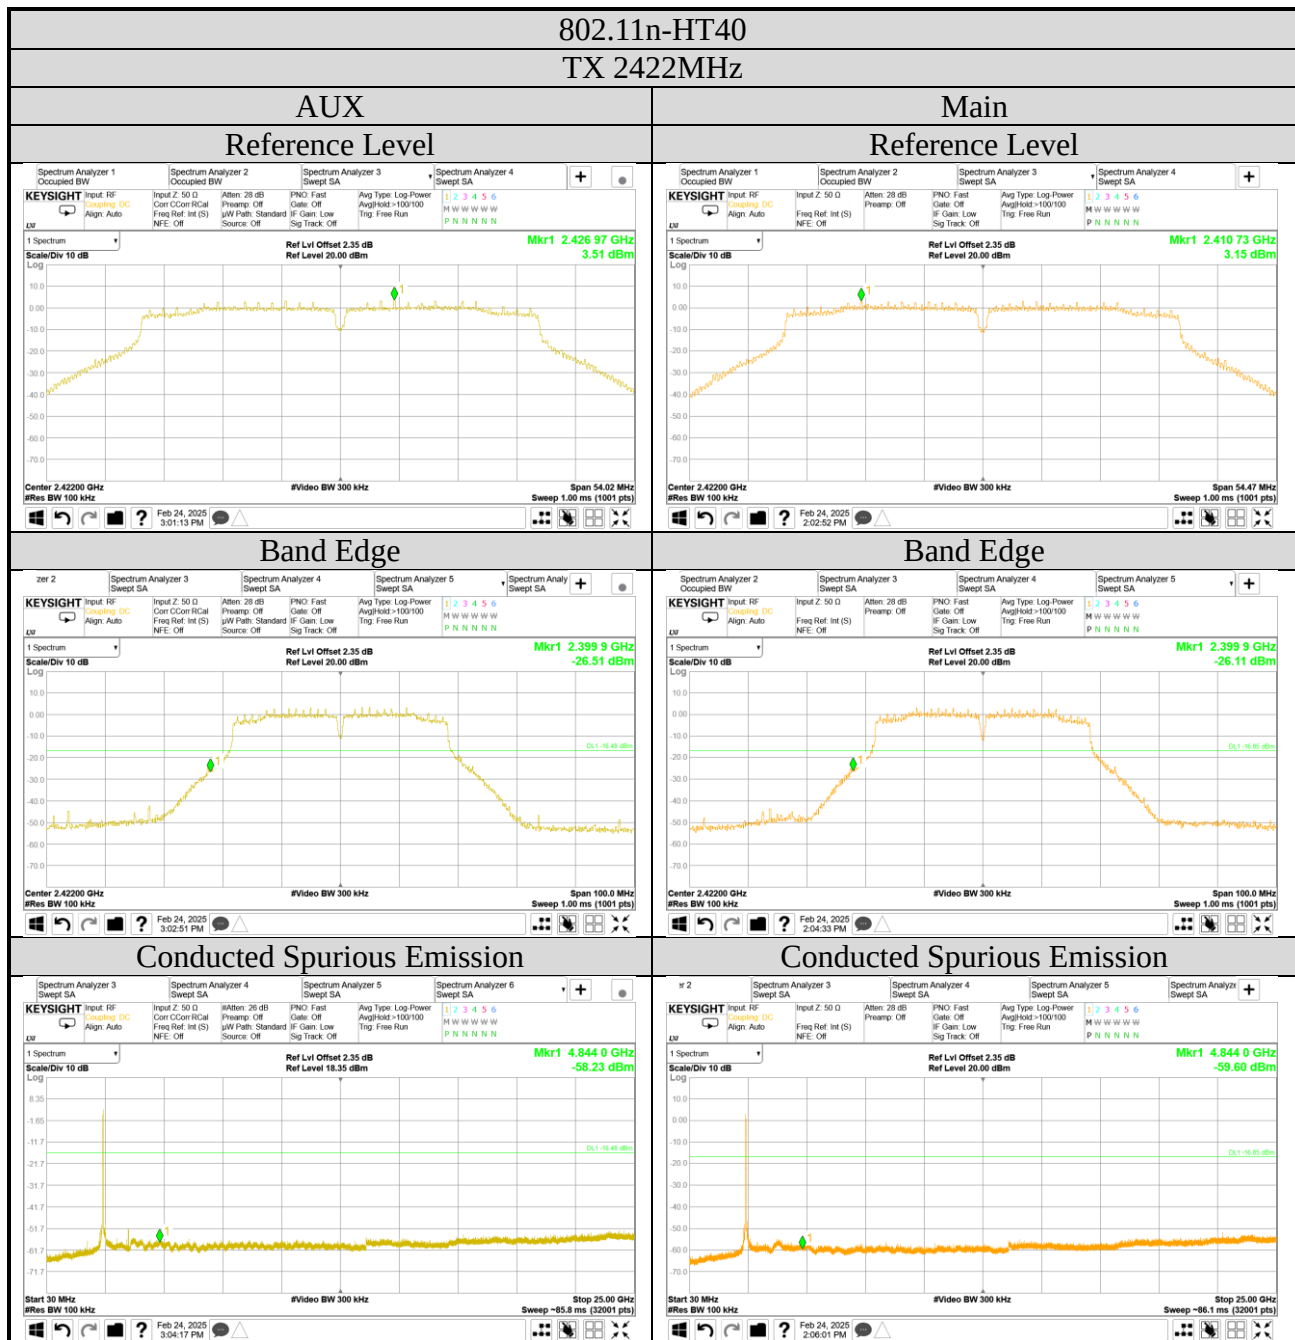


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

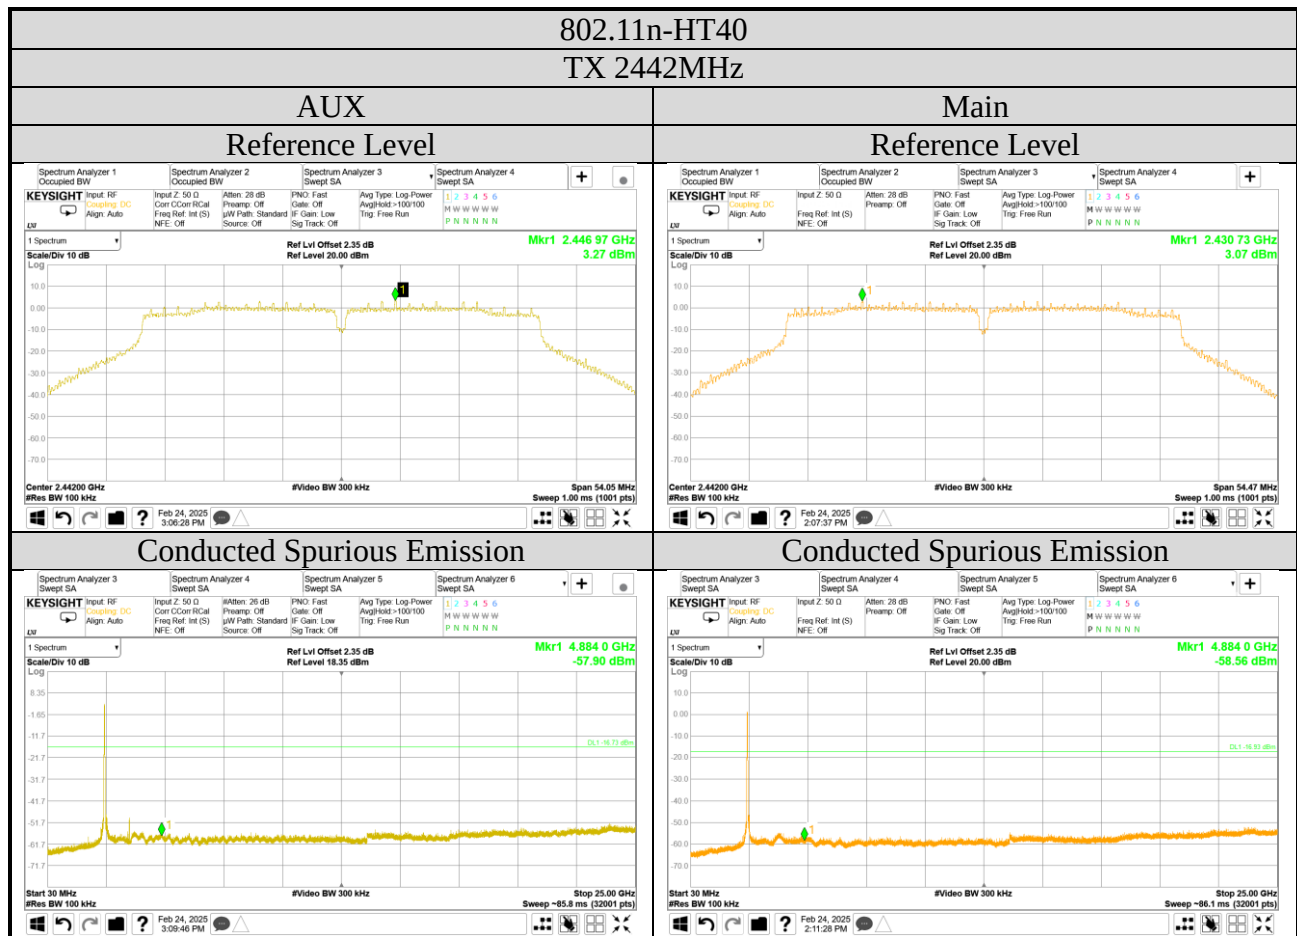

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

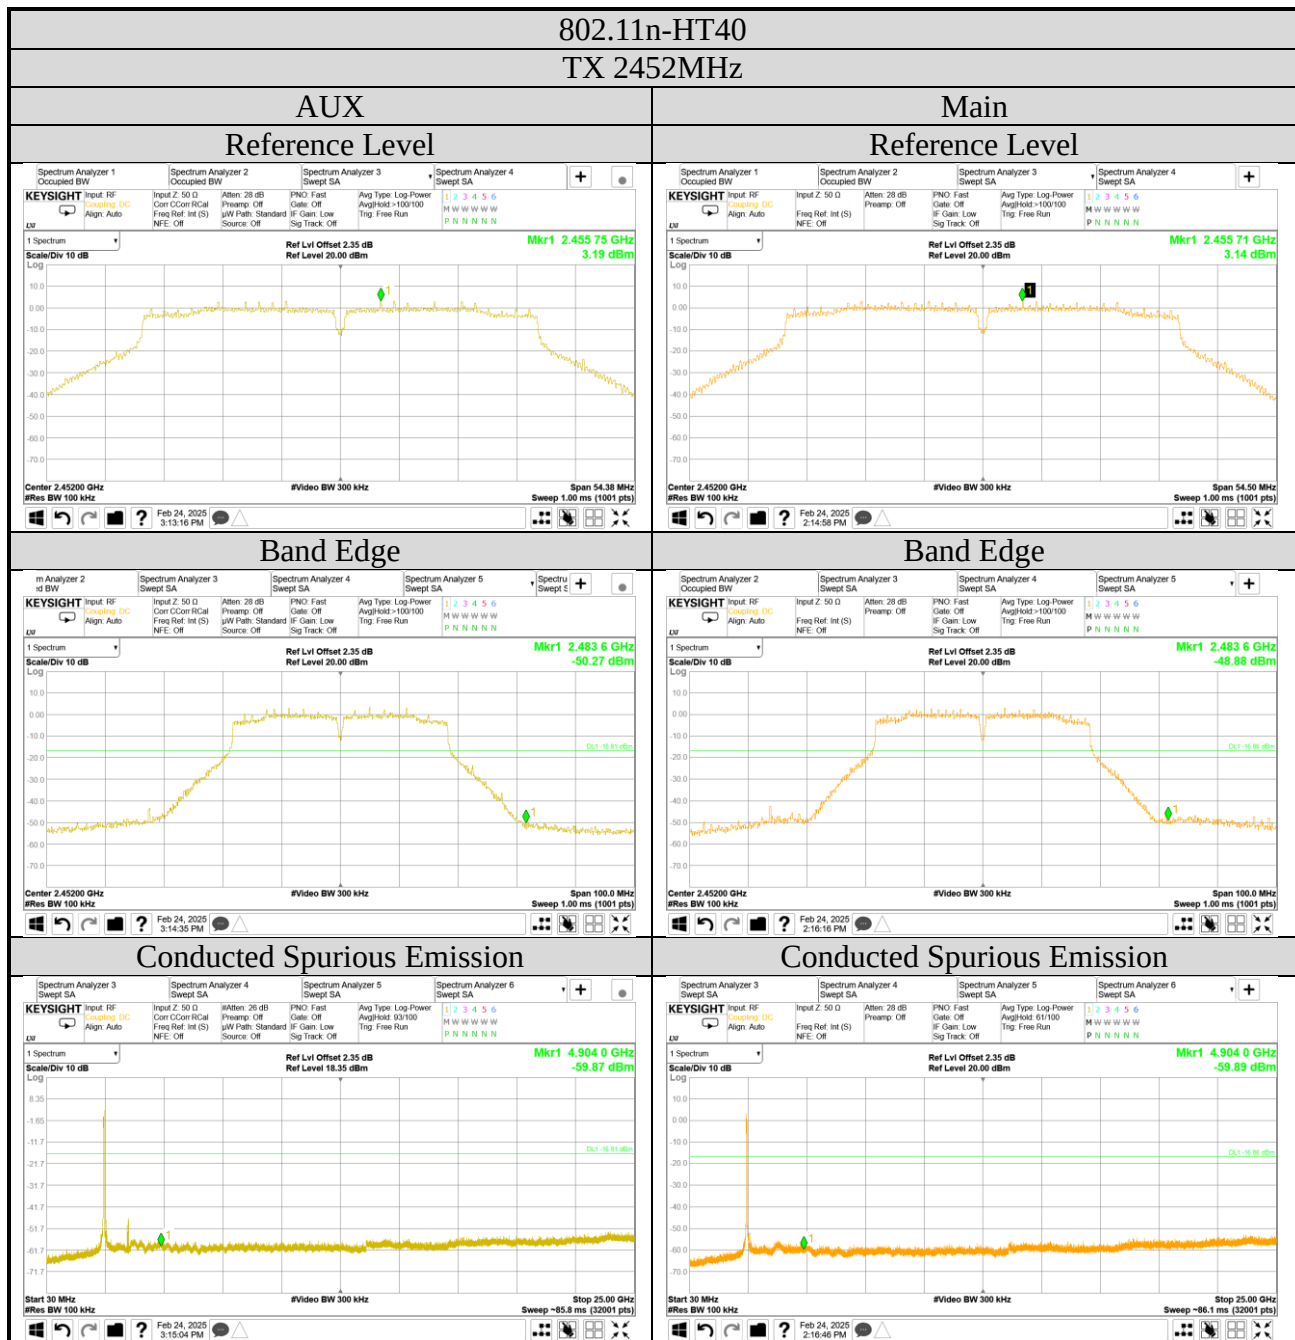

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

