

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	126
A.2.3 Emissions in Non-restricted Frequency Bands.....	143
A.3 MAXIMUM POWER SPECTRAL DENSITY	144
A.3.1 Power Spectral Density Result	144
A.3.2 Measurement Plots	149
A.4 MAXIMUM CONDUCTED OUTPUT POWER.....	176
A.4.1 Conducted Output Power Result	176
A.4.2 Measurement Plots	227
A.5 EMISSION/OCCUPIED BANDWIDTH.....	374
A.5.1 Emission/Occupied Bandwidth Result	374
A.5.2 Measurement Plots	376
A.6 UNDESIRABLE EMISSION LIMITS: SPURIOUS EMISSION (CONDUCTED)	394
A.7 IN-BAND EMISSION (CHANNEL MASK).....	412
A.8 CONTENTION BASED PROTOCOL	452
A.8.1 Contention-based Protocol.....	452
A.8.2 Measurement Plots	455

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2025/02/18	Temp./Hum.	20°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du

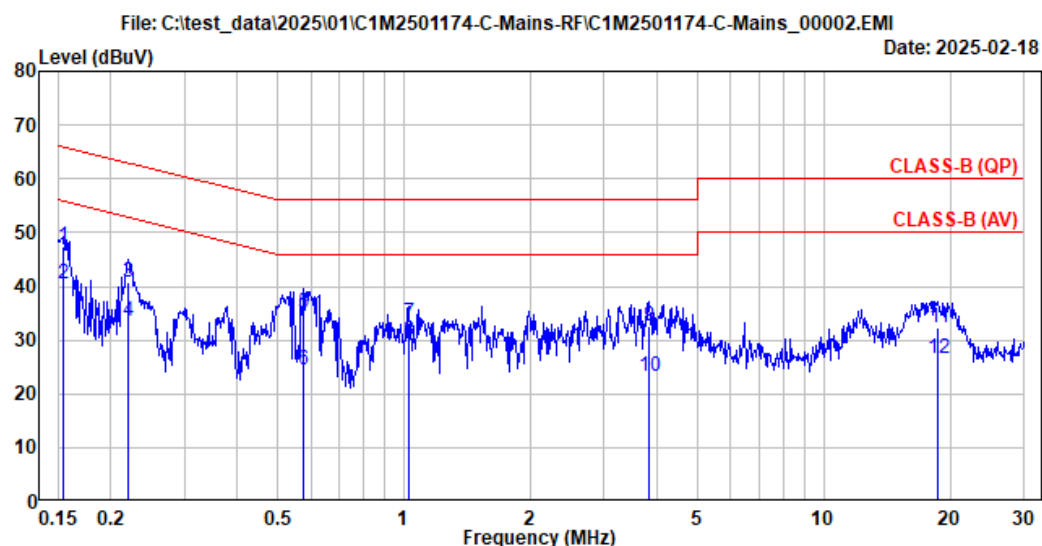

Site No. : No.8 Shielded Room Data No. : 2
Instrument 1 : Receiver ESR(774)
Instrument 2 : ENV432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B (QP) Phase : Neutral
Environment : 20°C/52% Test Rating : 120Vac/60Hz
EUT Model : 17Z90TR Engineer : Nick Du
Test Mode : OPERATING


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.154	10.27	0.03	9.87	27.19	47.36	65.79	18.43	QP
2	0.154	10.27	0.03	9.87	20.40	40.57	55.79	15.22	Average
3	0.220	10.26	0.03	9.86	20.73	40.88	62.81	21.93	QP
4	0.220	10.26	0.03	9.86	13.36	33.51	52.81	19.30	Average
5	0.576	10.26	0.03	9.88	14.88	35.05	56.00	20.95	QP
6	0.576	10.26	0.03	9.88	4.14	24.31	46.00	21.69	Average
7	1.027	10.27	0.04	9.89	12.88	33.08	56.00	22.92	QP
8	1.027	10.27	0.04	9.89	9.55	29.75	46.00	16.25	Average
9	3.829	10.34	0.08	9.90	12.36	32.68	56.00	23.32	QP
10	3.829	10.34	0.08	9.90	2.89	23.21	46.00	22.79	Average
11	18.778	10.86	0.19	10.00	11.25	32.30	60.00	27.70	QP
12	18.778	10.86	0.19	10.00	5.55	26.60	50.00	23.40	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2025/02/18	Temp./Hum.	20°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du

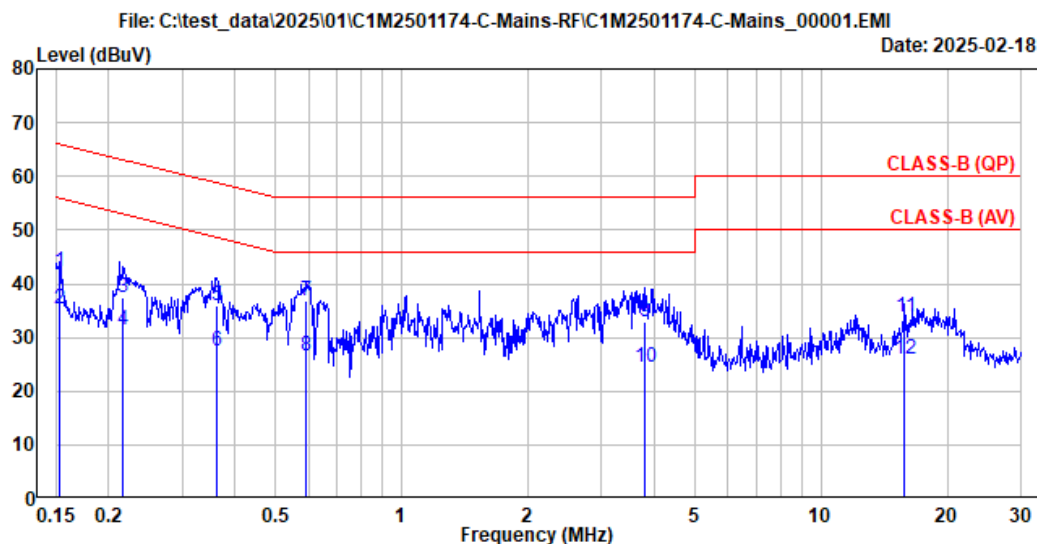

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 20°C/52%	Test Rating	: 120Vac/60Hz
EUT Model	: 17Z90TR	Engineer	: Nick Du
Test Mode	: OPERATING		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.153	10.26	0.03	9.87	22.05	42.21	65.83	23.62	QP
2	0.153	10.26	0.03	9.87	15.28	35.44	55.83	20.39	Average
3	0.217	10.25	0.03	9.86	17.37	37.51	62.94	25.43	QP
4	0.217	10.25	0.03	9.86	11.32	31.46	52.94	21.48	Average
5	0.362	10.25	0.03	9.88	15.69	35.85	58.67	22.82	QP
6	0.362	10.25	0.03	9.88	7.30	27.46	48.67	21.21	Average
7	0.594	10.25	0.03	9.88	16.77	36.93	56.00	19.07	QP
8	0.594	10.25	0.03	9.88	6.47	26.63	46.00	19.37	Average
9	3.810	10.31	0.08	9.90	12.68	32.97	56.00	23.03	QP
10	3.810	10.31	0.08	9.90	4.26	24.55	46.00	21.45	Average
11	15.851	10.57	0.18	9.99	13.01	33.75	60.00	26.25	QP
12	15.851	10.57	0.18	9.99	5.10	25.84	50.00	24.16	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2025/02/12 ~ 18	Temp./Hum.	20~24°C/51~56%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Harry Huang


A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11be-EHT320	U-NII Band	6
		Frequency	TX 6585MHz

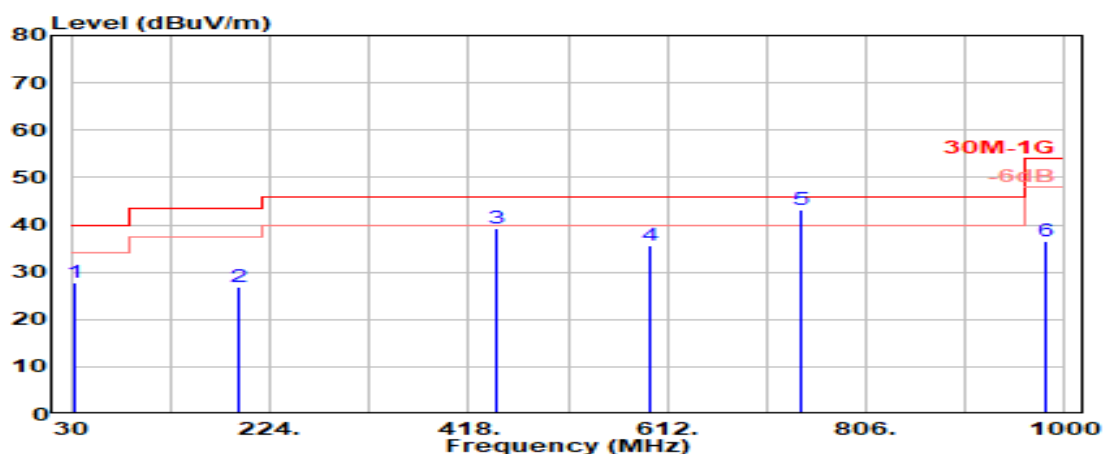


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.000	22.25	1.42	26.46	30.47	27.68	40.00	12.32	Peak
194.500	14.88	3.50	25.81	34.35	26.91	43.50	16.59	Peak
445.500	21.93	6.20	26.73	37.94	39.33	46.00	6.67	Peak
594.000	24.00	6.80	27.36	32.31	35.75	46.00	10.25	Peak
742.500	24.75	7.53	27.32	38.29	43.24	46.00	2.76	Peak
980.500	26.84	8.90	26.76	27.63	36.61	54.00	17.39	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT320	U-NII Band	6
		Frequency	TX 6585MHz

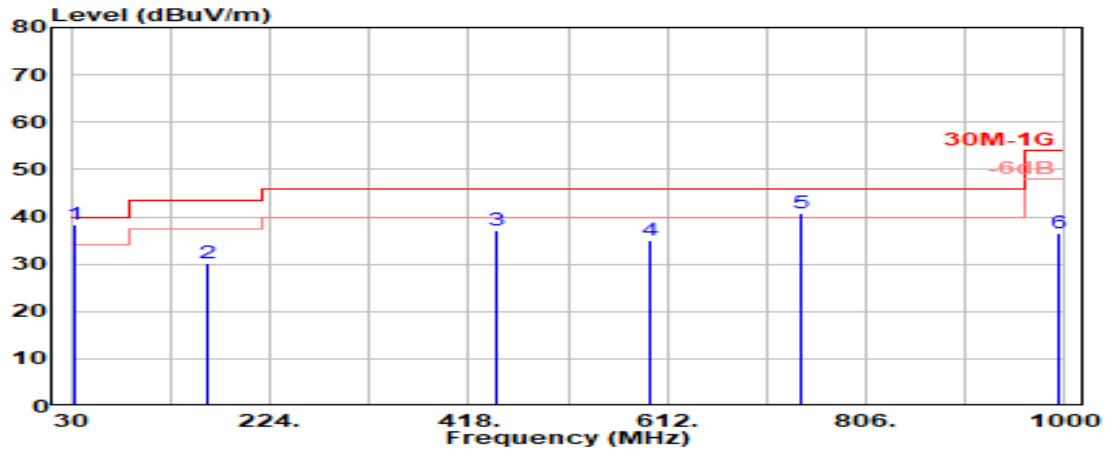

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.500	22.05	1.43	26.46	41.36	38.38	40.00	1.62	Peak
162.500	15.48	3.19	25.93	37.39	30.13	43.50	13.37	Peak
445.500	21.93	6.20	26.73	35.69	37.08	46.00	8.92	Peak
594.000	24.00	6.80	27.36	31.68	35.11	46.00	10.89	Peak
742.500	24.75	7.53	27.32	35.80	40.75	46.00	5.25	Peak
995.000	26.97	8.98	26.71	27.15	36.39	54.00	17.61	Peak


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Band Edge


● OFDM Modulation

Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

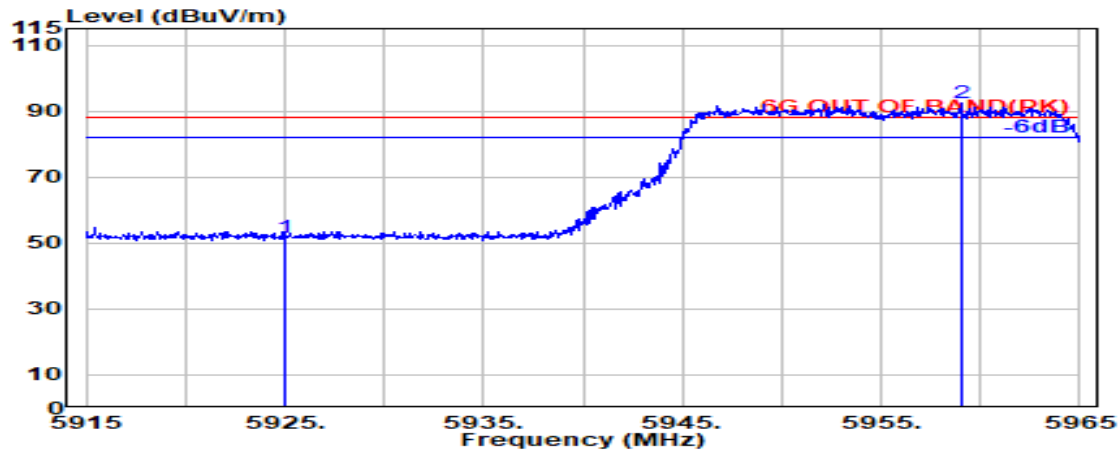

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.83	51.80	88.20	36.40	Peak
@ 5959.000	34.08	9.13	39.24	88.38	92.35	---	---	Peak

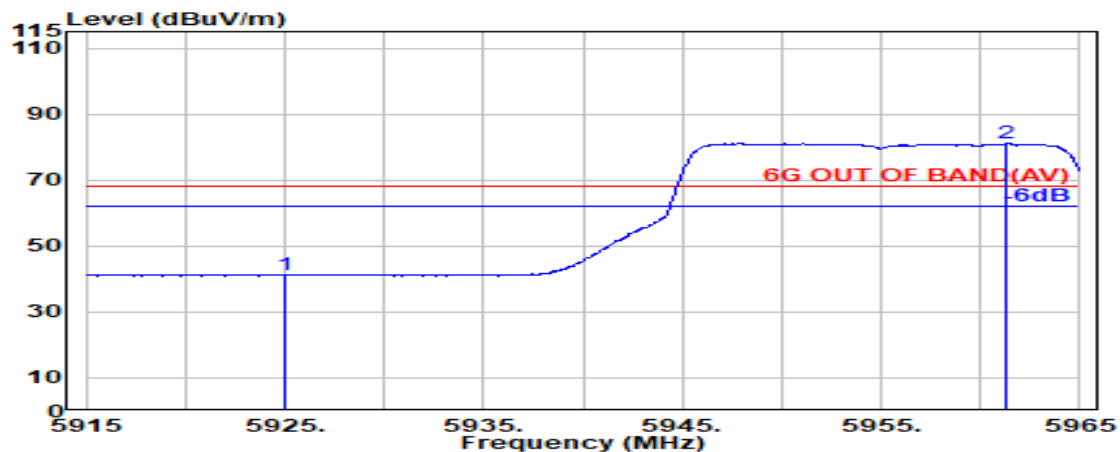

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.15	41.12	68.20	27.08	Average
@ 5961.350	34.08	9.14	39.24	77.22	81.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

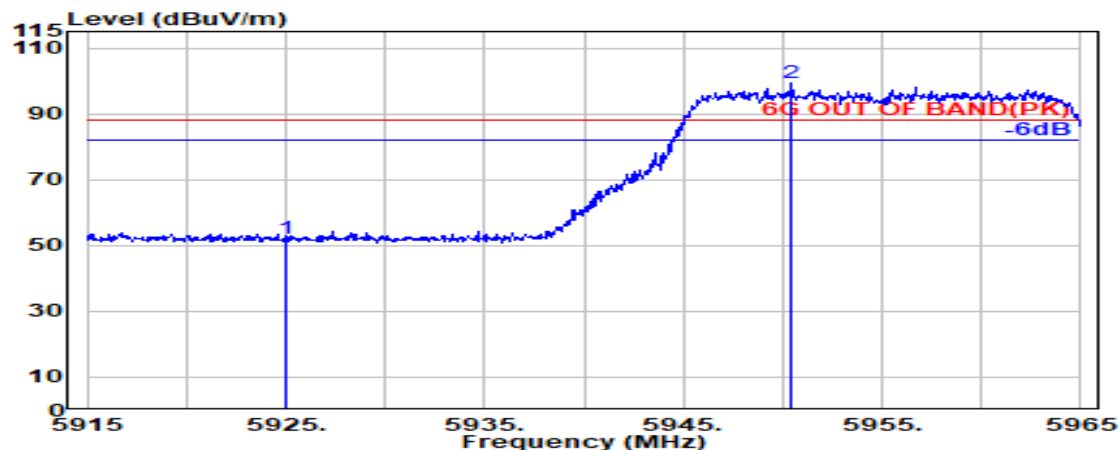

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	48.16	52.13	88.20	36.07	Peak
@ 5950.450	34.10	9.13	39.24	95.24	99.23	---	---	Peak

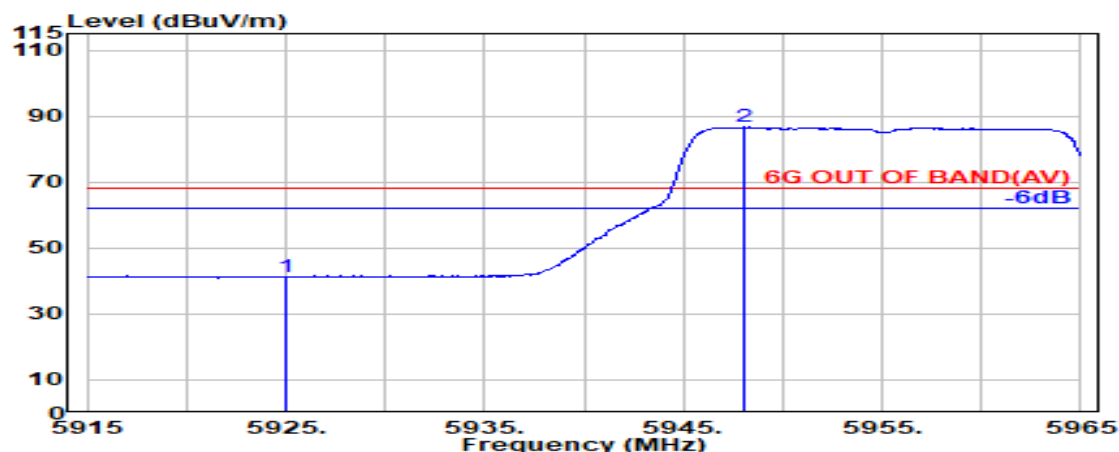

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.16	41.13	68.20	27.07	Average
@ 5948.050	34.10	9.12	39.24	82.63	86.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	8
		Frequency	TX 7115MHz

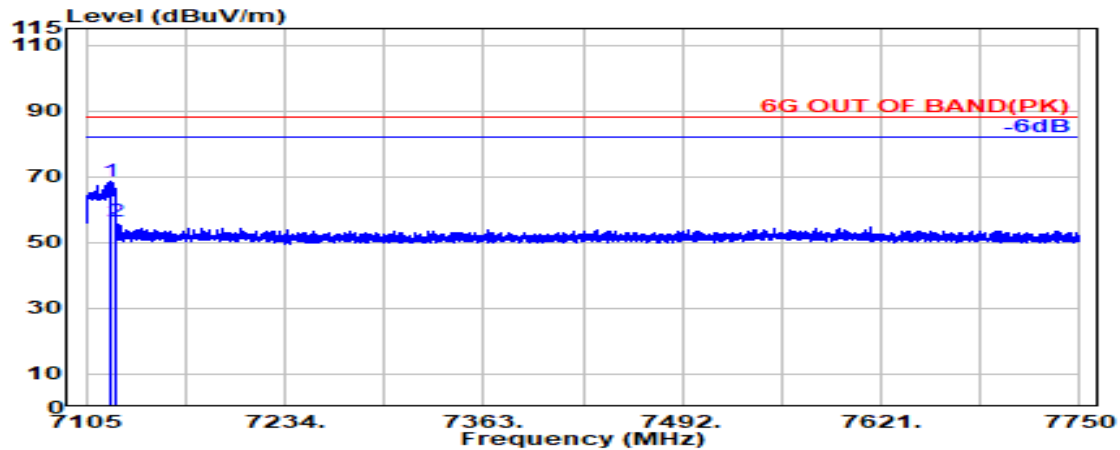

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7121.300	35.69	9.99	39.38	62.07	68.36	---	---	Peak
7125.000	35.70	9.99	39.38	49.98	56.29	88.20	31.91	Peak

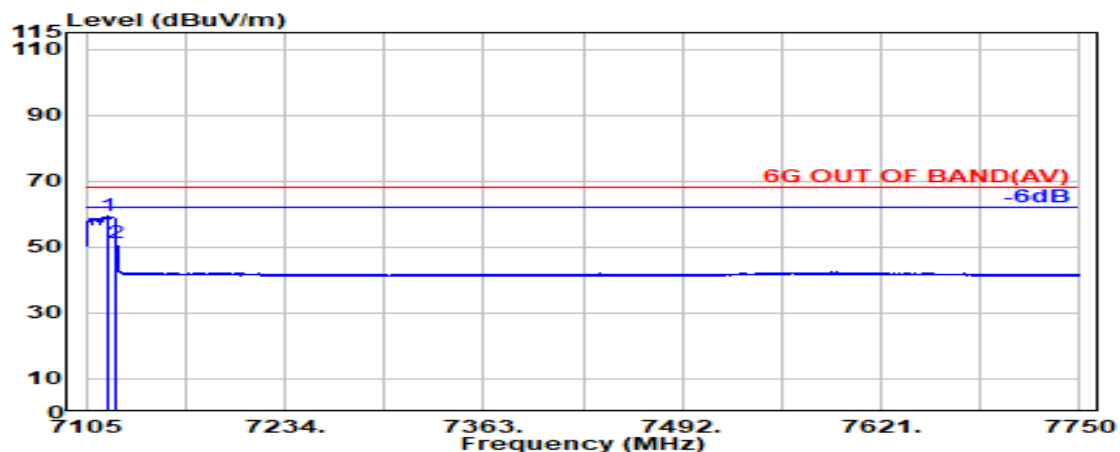

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7119.100	35.68	9.98	39.38	52.98	59.26	---	---	Average
7125.000	35.70	9.99	39.38	44.94	51.24	68.20	16.96	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	8
		Frequency	TX 7115MHz

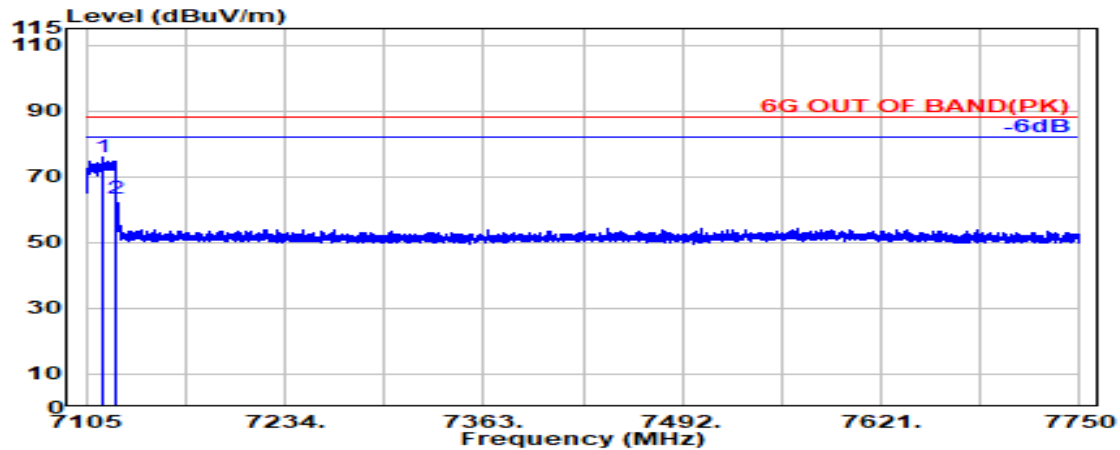

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7115.600	35.66	9.98	39.38	69.73	75.99	---	---	Peak
7125.000	35.70	9.99	39.38	56.85	63.16	88.20	25.04	Peak

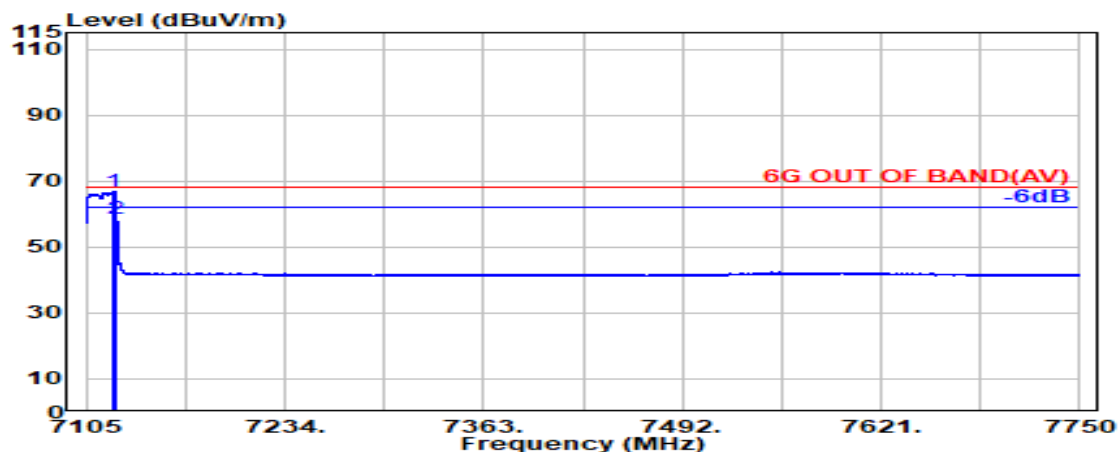

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7122.500	35.69	9.99	39.38	60.54	66.83	---	---	Average
7125.000	35.70	9.99	39.38	52.38	58.68	68.20	9.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

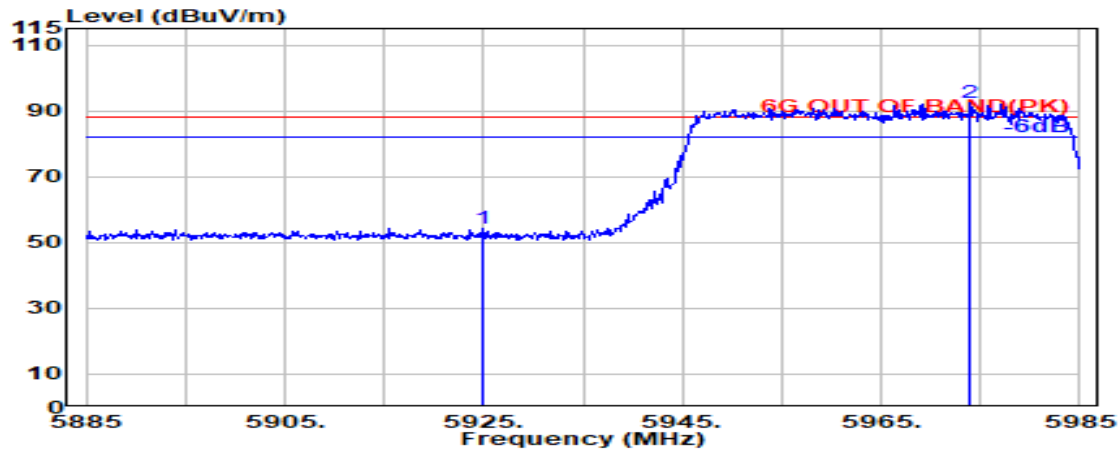

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	50.17	54.14	88.20	34.06	Peak
@ 5974.000	34.05	9.15	39.25	88.45	92.41	---	---	Peak

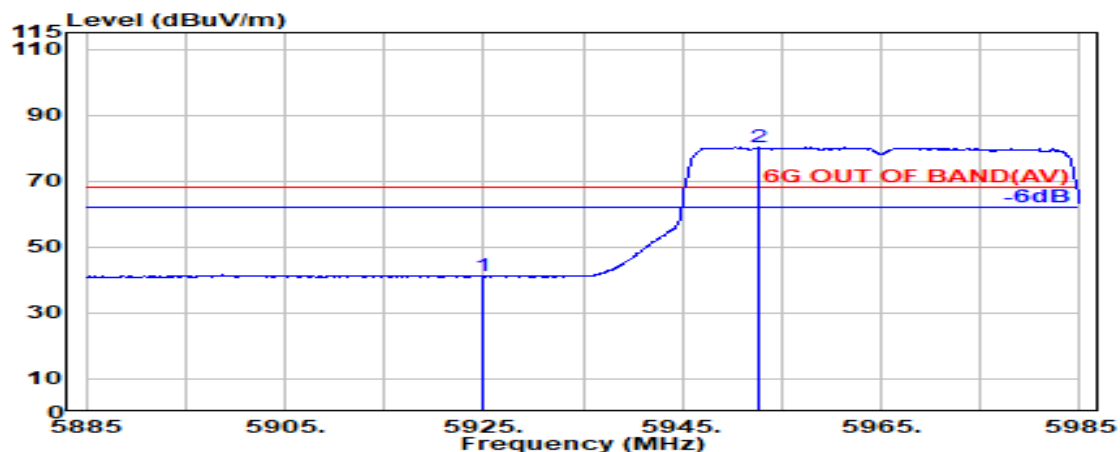

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.09	41.05	68.20	27.15	Average
@ 5952.600	34.09	9.13	39.24	76.21	80.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

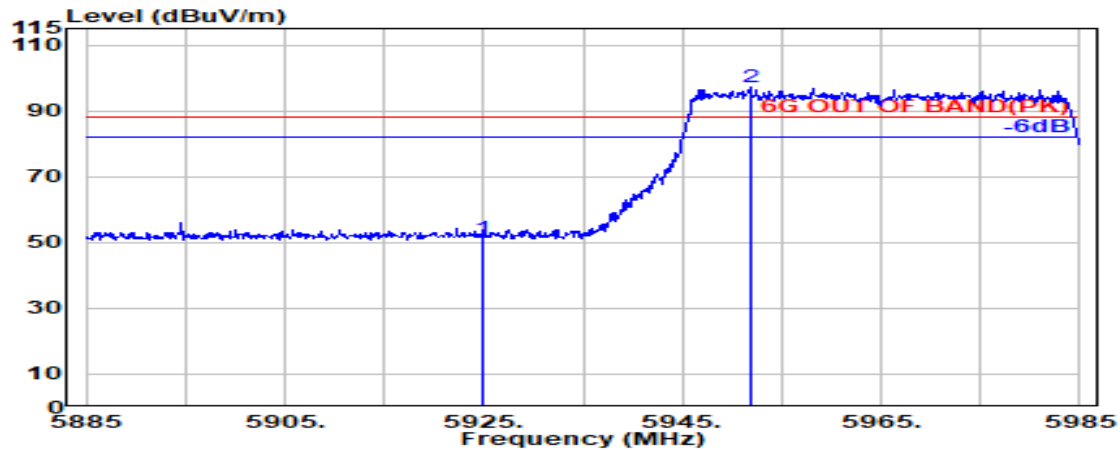

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.41	51.38	88.20	36.82	Peak
@ 5951.800	34.10	9.13	39.24	93.04	97.02	---	---	Peak

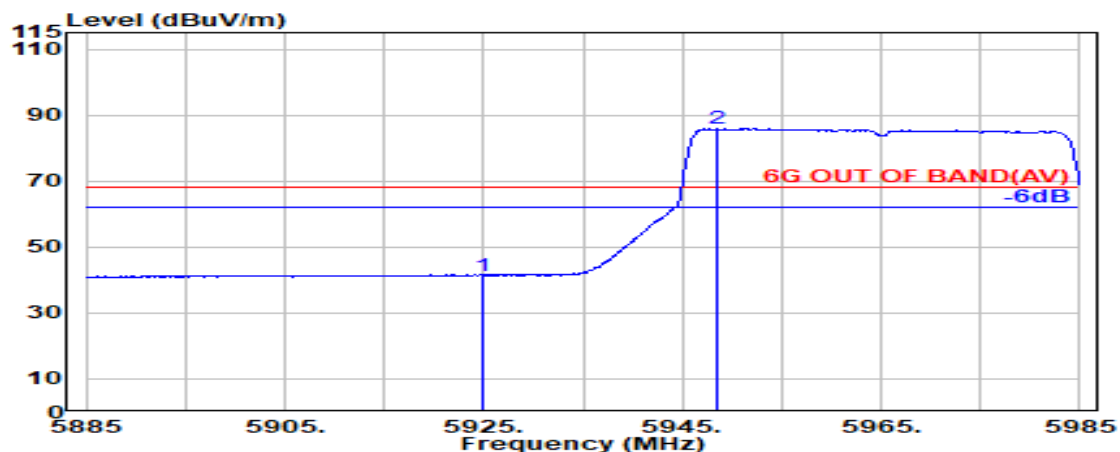

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.44	41.40	68.20	26.80	Average
@ 5948.600	34.10	9.13	39.24	81.88	85.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

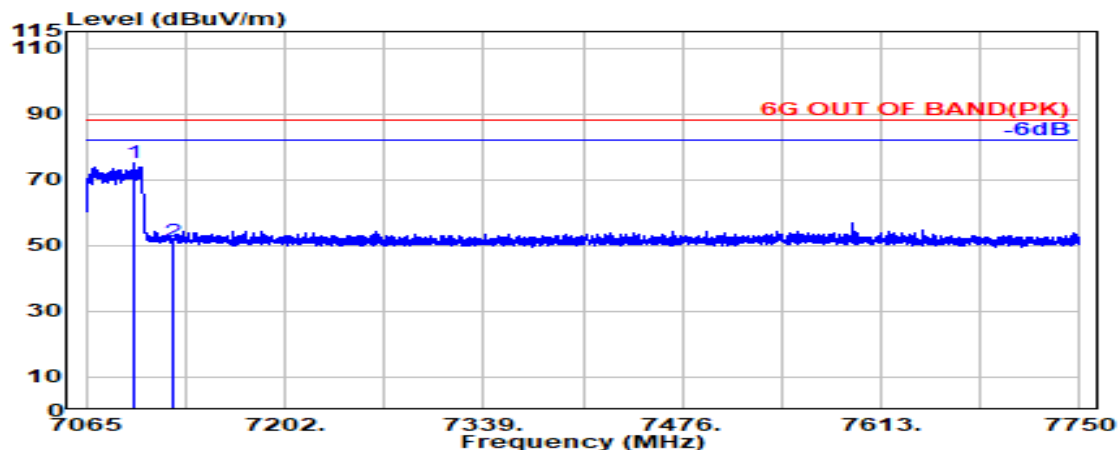

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7098.300	35.59	9.97	39.38	68.87	75.06	---	---	Peak
7125.000	35.70	9.99	39.38	44.88	51.18	88.20	37.02	Peak

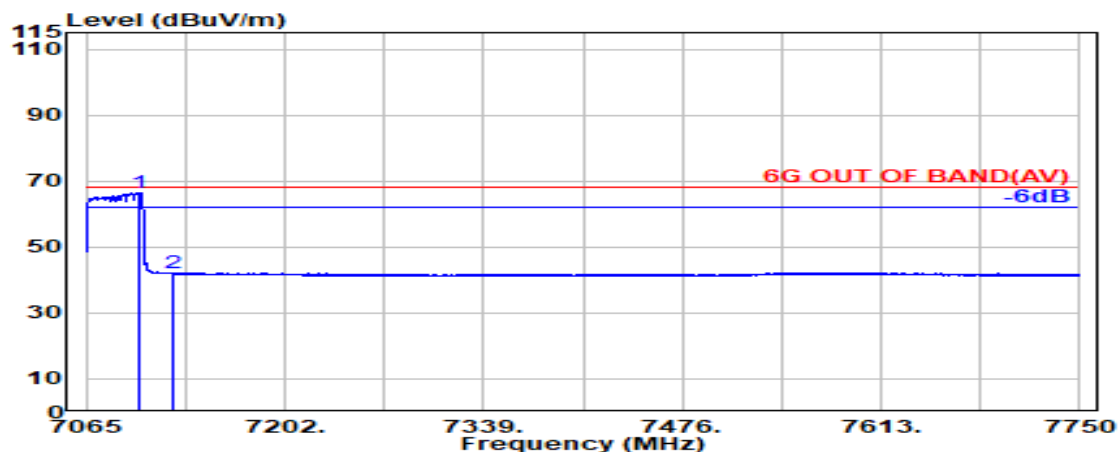

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7102.200	35.61	9.98	39.38	60.34	66.54	---	---	Average
7125.000	35.70	9.99	39.38	35.79	42.09	68.20	26.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

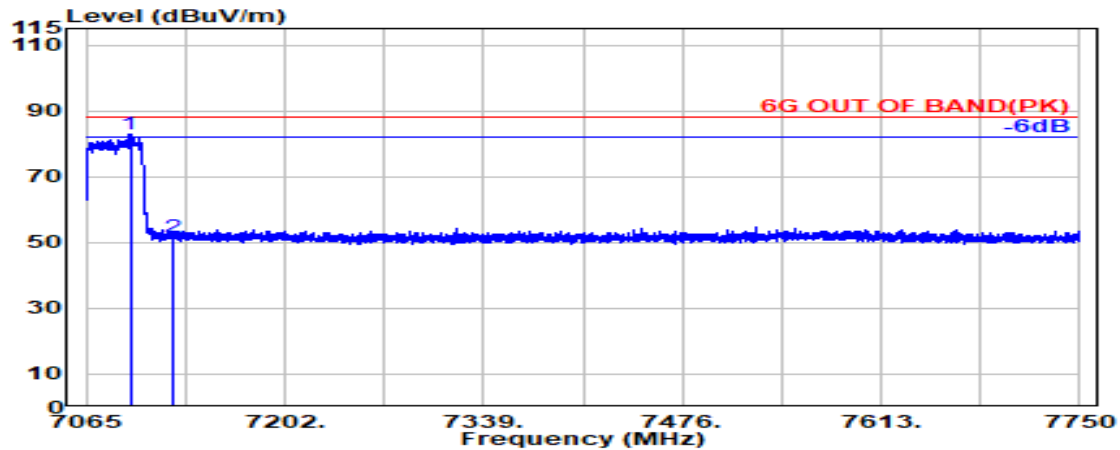

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7095.300	35.57	9.97	39.38	76.76	82.93	---	---	Peak
7125.000	35.70	9.99	39.38	45.14	51.45	88.20	36.75	Peak

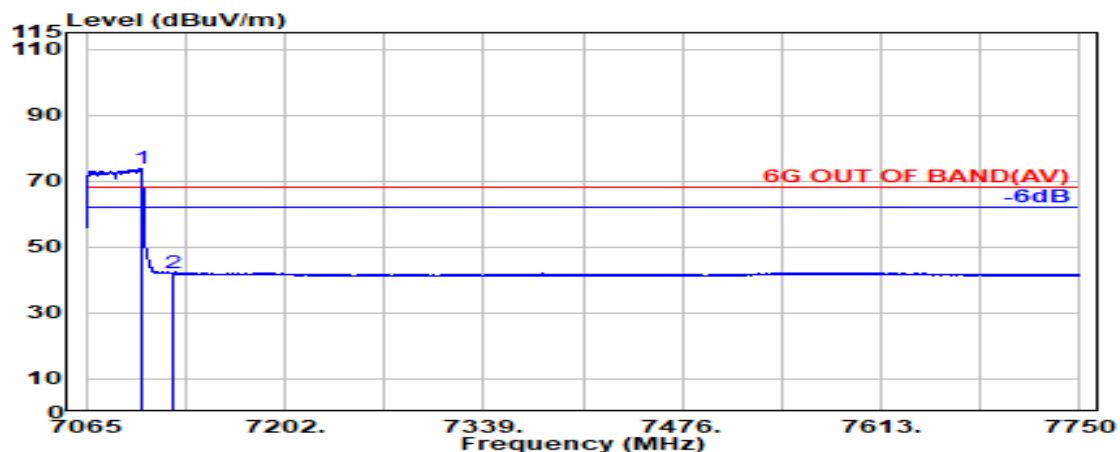

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7102.800	35.61	9.98	39.38	67.54	73.75	---	---	Average
7125.000	35.70	9.99	39.38	35.58	41.89	68.20	26.31	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

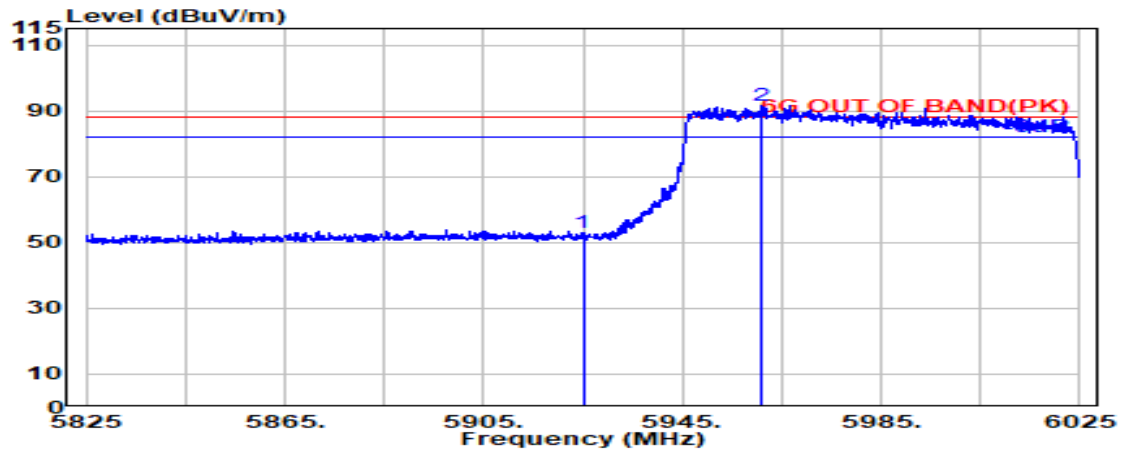

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	49.02	52.98	88.20	35.22	Peak
@ 5961.000	34.08	9.14	39.24	87.56	91.53	---	---	Peak

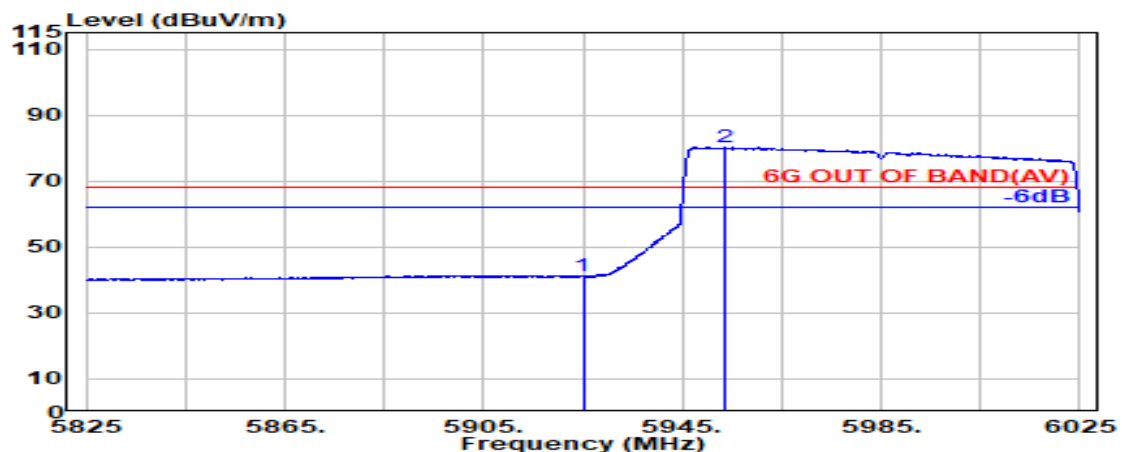

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.14	41.11	68.20	27.09	Average
@ 5953.500	34.09	9.13	39.24	76.23	80.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

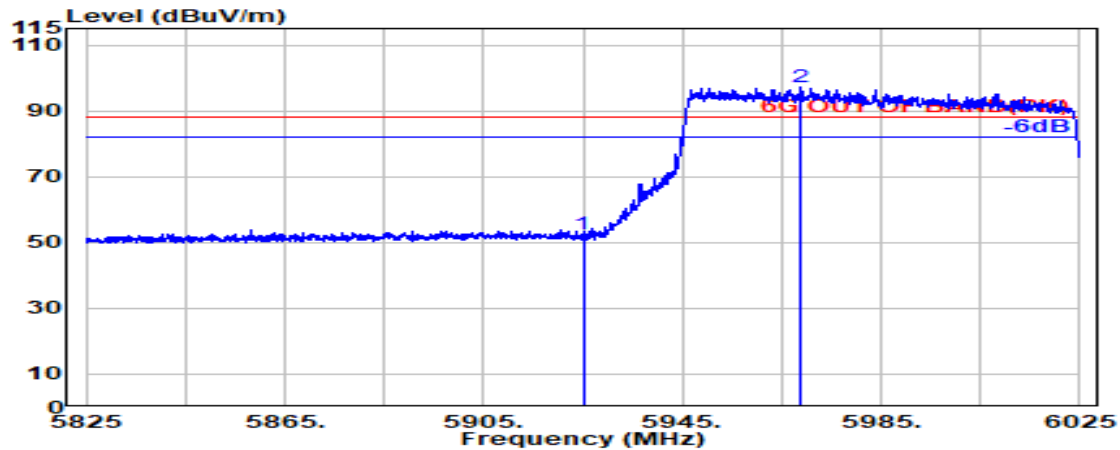

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	48.62	52.58	88.20	35.62	Peak
@ 5968.800	34.06	9.14	39.24	93.46	97.42	---	---	Peak

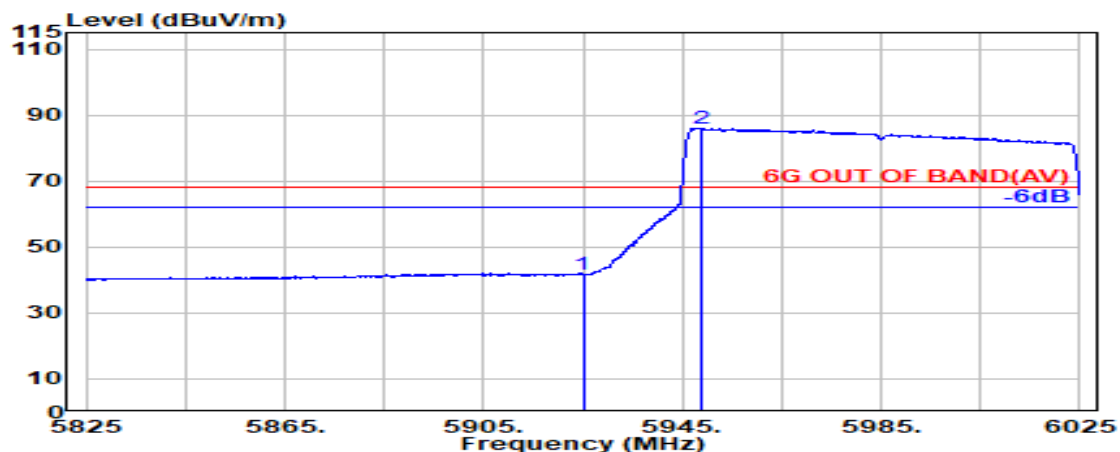

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.79	41.76	68.20	26.44	Average
@ 5948.900	34.10	9.13	39.24	81.92	85.91	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

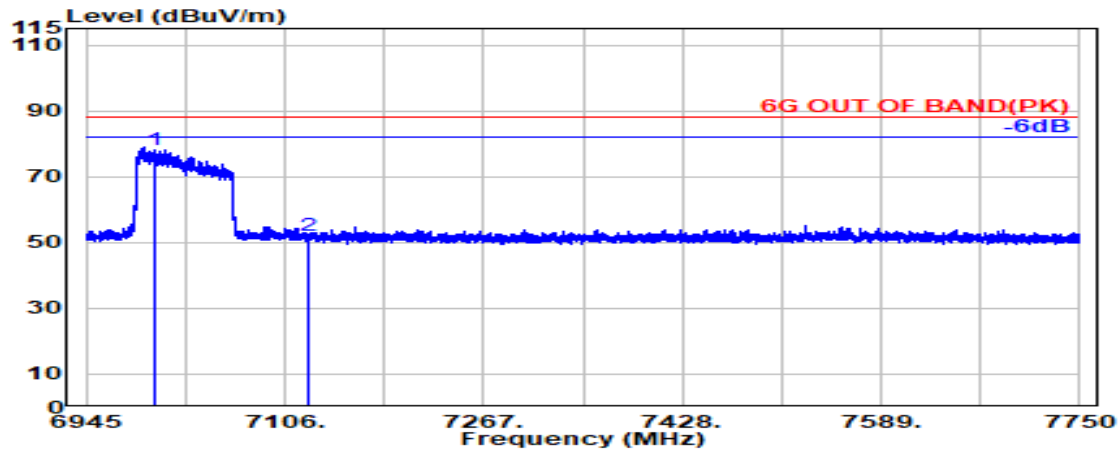

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7000.900	35.30	9.92	39.35	72.40	78.27	---	---	Peak
7125.000	35.70	9.99	39.38	45.62	51.92	88.20	36.28	Peak

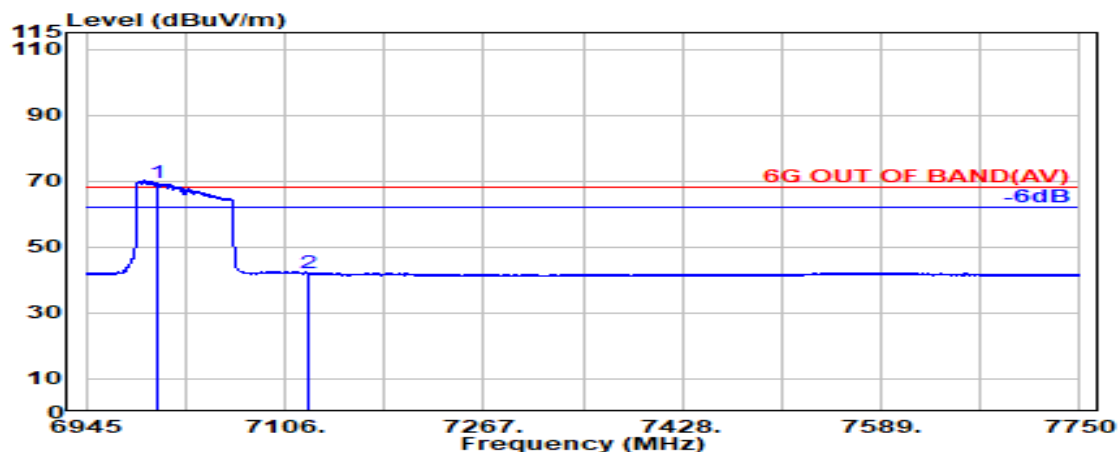

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7002.800	35.30	9.92	39.35	63.72	69.59	---	---	Average
7125.000	35.70	9.99	39.38	35.68	41.99	68.20	26.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

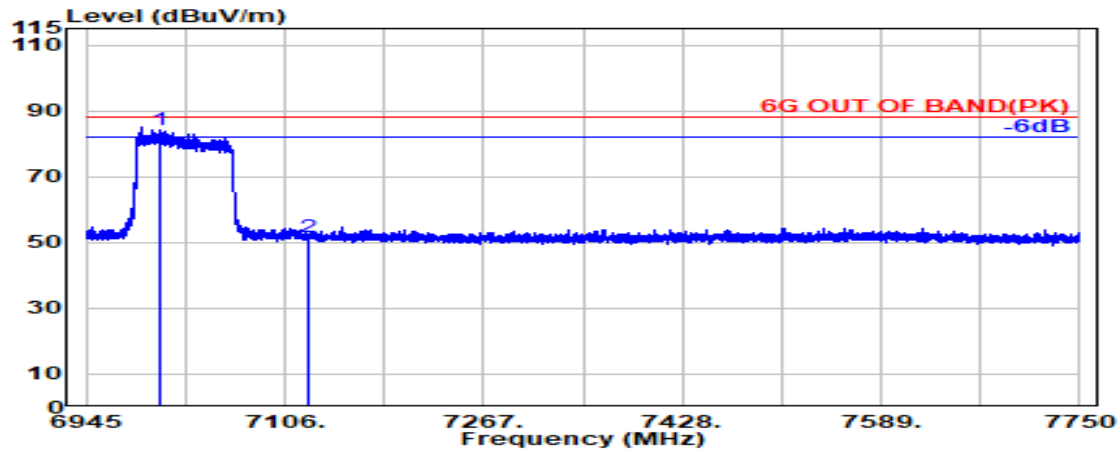

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7005.600	35.30	9.92	39.35	78.52	84.39	---	---	Peak
7125.000	35.70	9.99	39.38	45.21	51.52	88.20	36.68	Peak

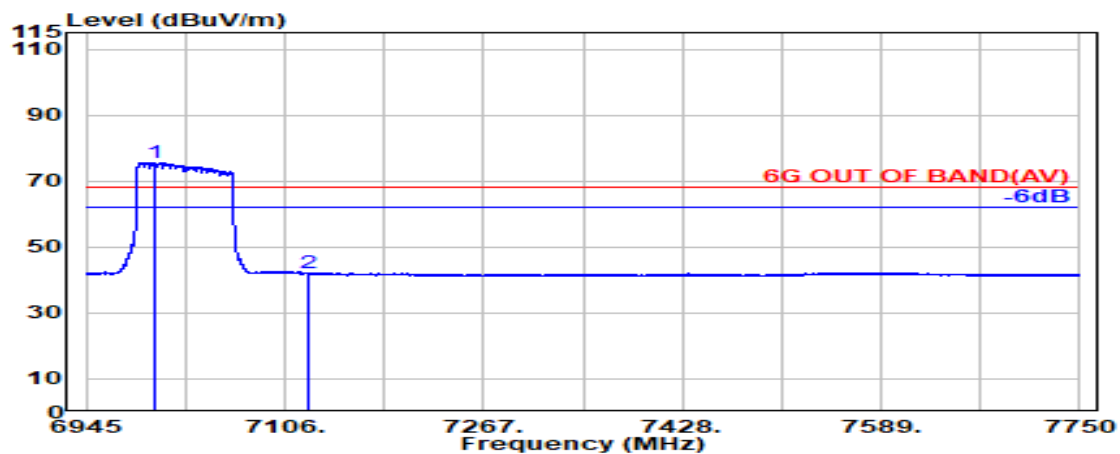

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7001.200	35.30	9.92	39.35	69.66	75.53	---	---	Average
7125.000	35.70	9.99	39.38	35.80	42.11	68.20	27.99	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

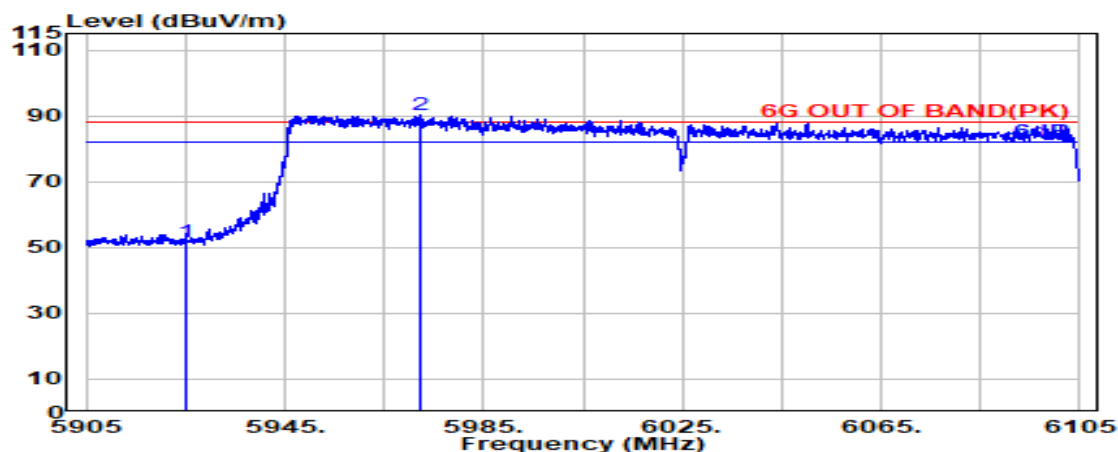

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.88	51.85	88.20	36.35	Peak
@ 5972.200	34.06	9.15	39.24	86.19	90.15	---	---	Peak

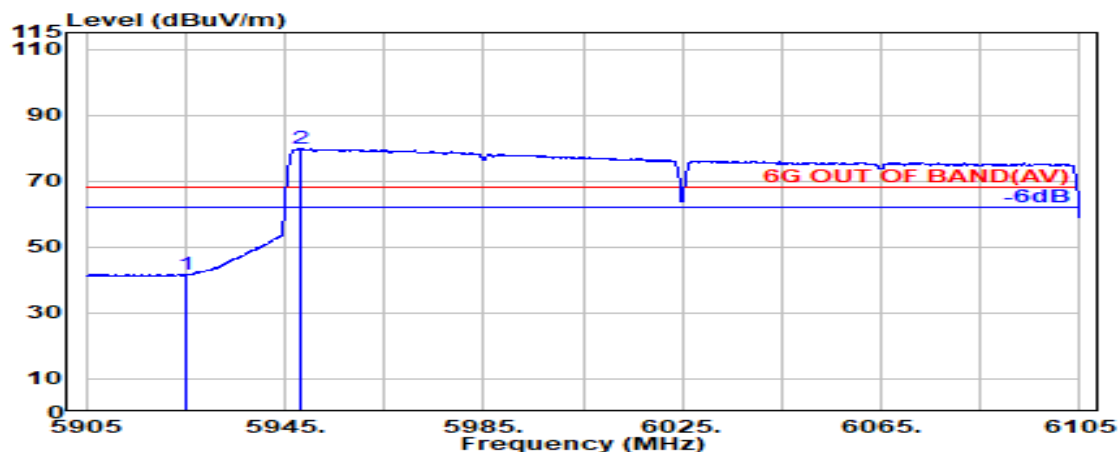

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.67	41.64	68.20	26.56	Average
@ 5948.200	34.10	9.12	39.24	75.92	79.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

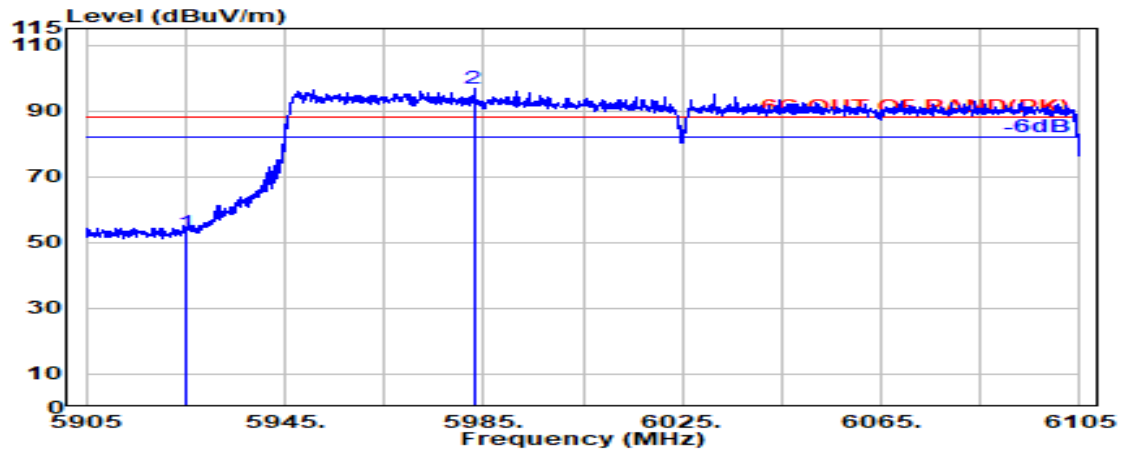

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	49.03	53.00	88.20	35.20	Peak
@ 5983.000	34.03	9.16	39.25	93.03	96.97	---	---	Peak

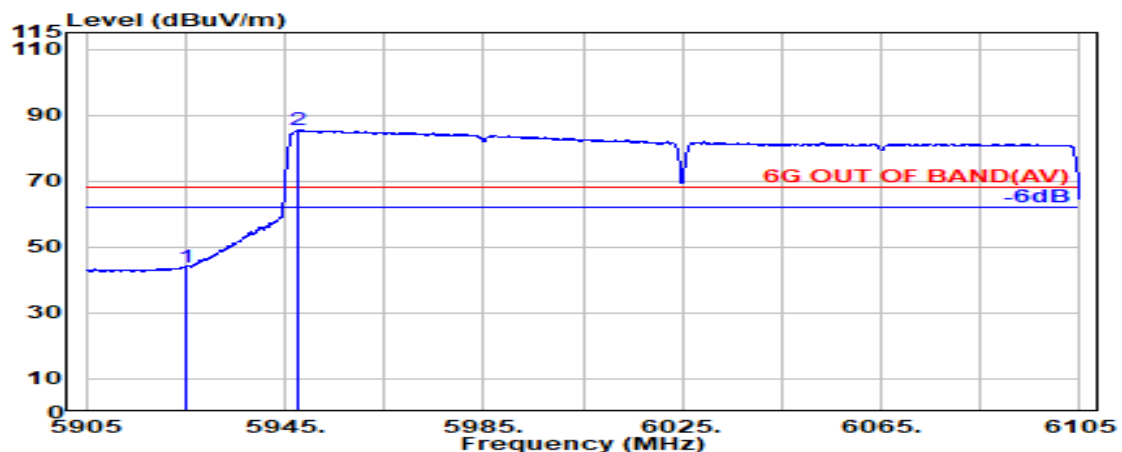

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	39.96	43.93	68.20	24.27	Average
@ 5947.700	34.10	9.12	39.24	81.59	85.57	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 6985MHz

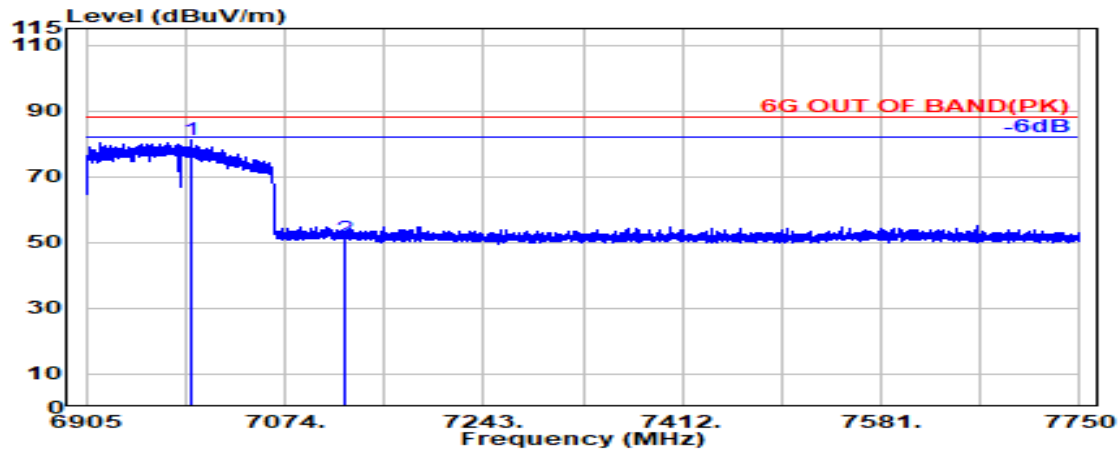

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 6994.700	35.29	9.92	39.35	75.38	81.23	---	---	Peak
7125.000	35.70	9.99	39.38	44.73	51.03	88.20	37.17	Peak

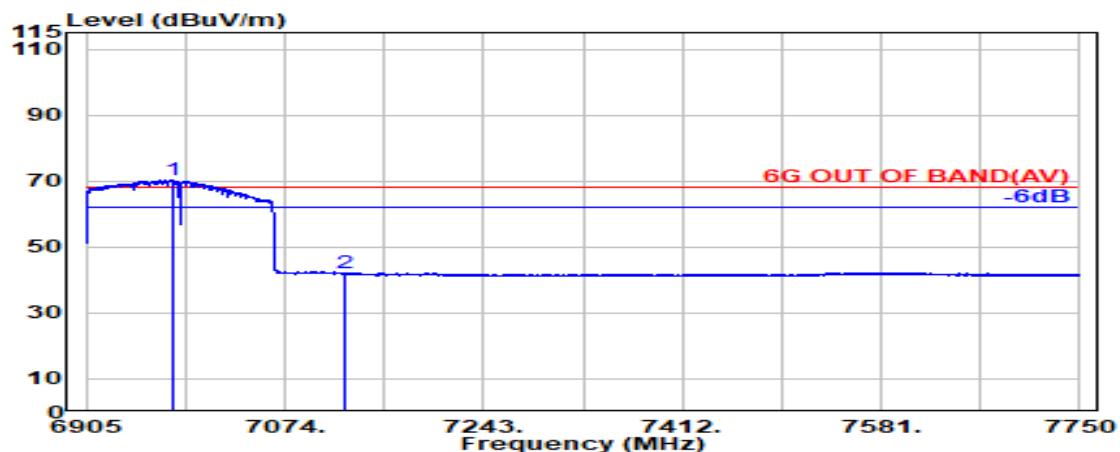

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 6978.100	35.26	9.90	39.35	64.36	70.17	---	---	Average
7125.000	35.70	9.99	39.38	35.71	42.01	68.20	26.19	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 6985MHz

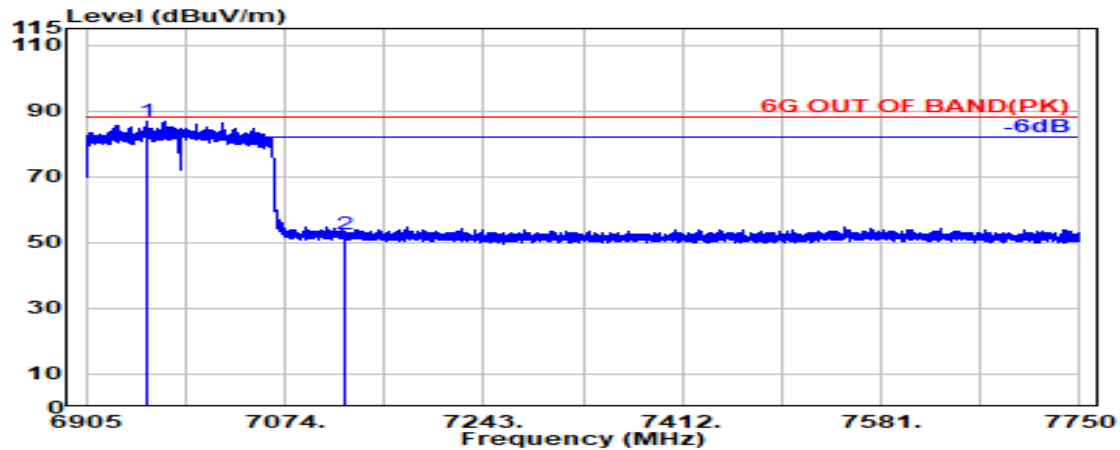

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 6956.800	35.21	9.89	39.35	81.11	86.87	88.20	---	Peak
7125.000	35.70	9.99	39.38	46.28	52.58	88.20	35.62	Peak

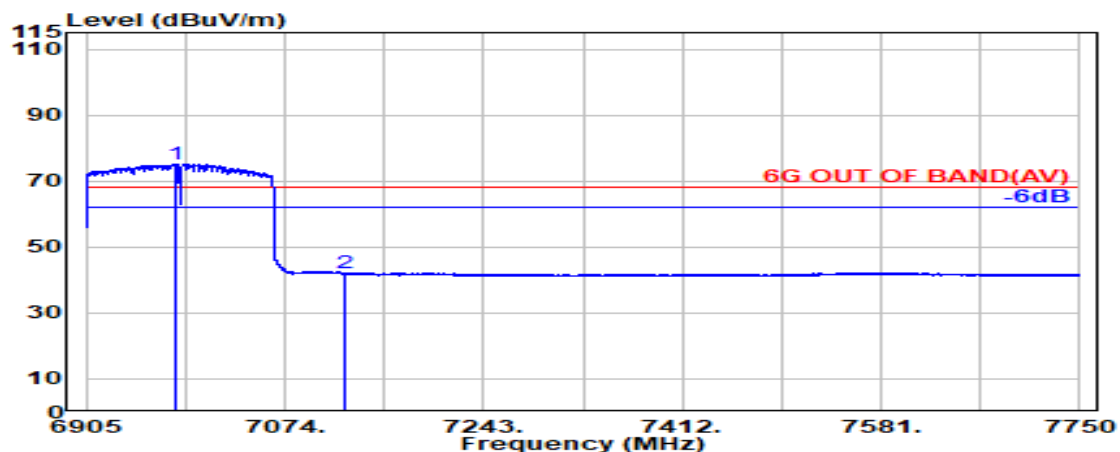

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 6981.800	35.26	9.91	39.35	69.42	75.24	---	---	Average
7125.000	35.70	9.99	39.38	35.79	42.10	68.20	26.10	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	5
		Frequency	TX 5955MHz

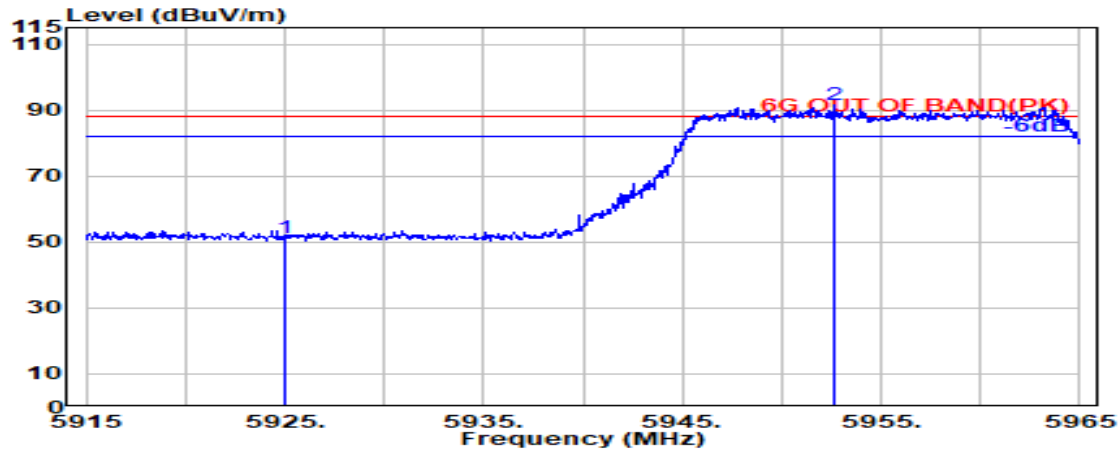

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.38	51.35	88.20	36.85	Peak
@ 5952.700	34.09	9.13	39.24	87.37	91.35	---	---	Peak

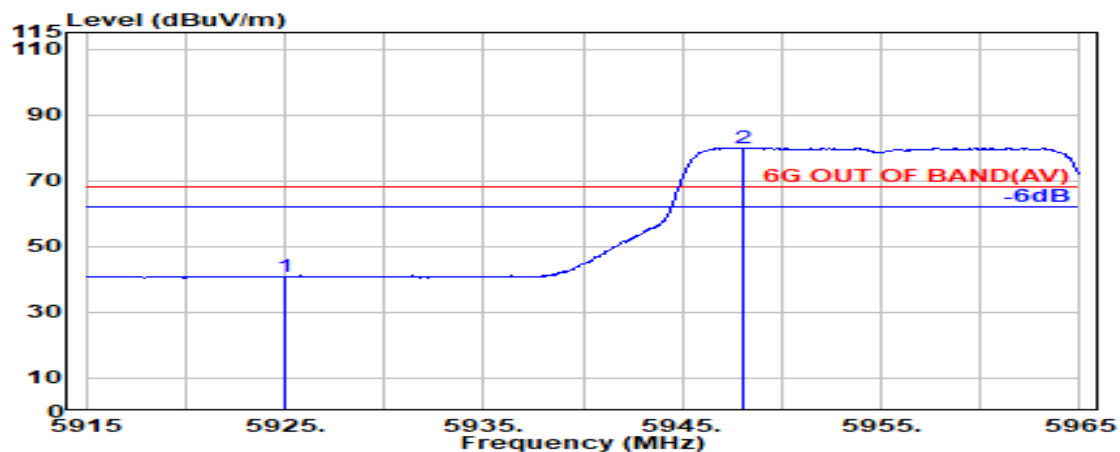

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.79	40.76	68.20	27.44	Average
@ 5948.100	34.10	9.12	39.24	76.04	80.02	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	5
		Frequency	TX 5955MHz

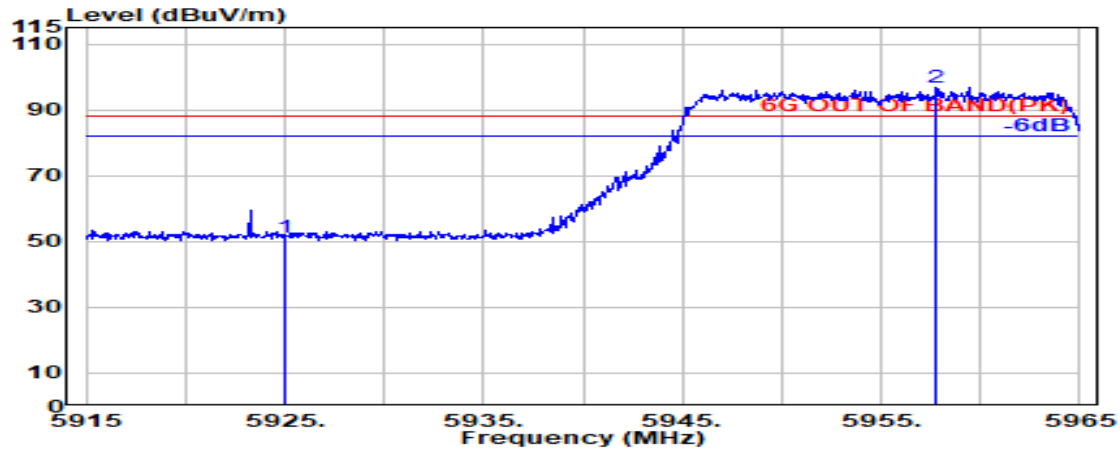

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.30	51.27	88.20	36.93	Peak
@ 5957.800	34.08	9.13	39.24	92.93	96.91	---	---	Peak

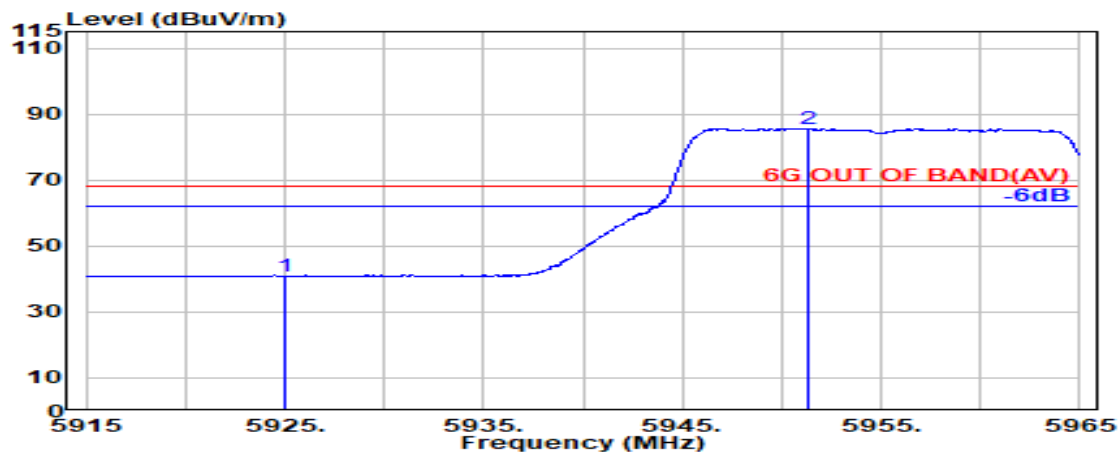

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.82	40.79	68.20	27.41	Average
@ 5951.350	34.10	9.13	39.24	81.60	85.58	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	8
		Frequency	TX 7115MHz

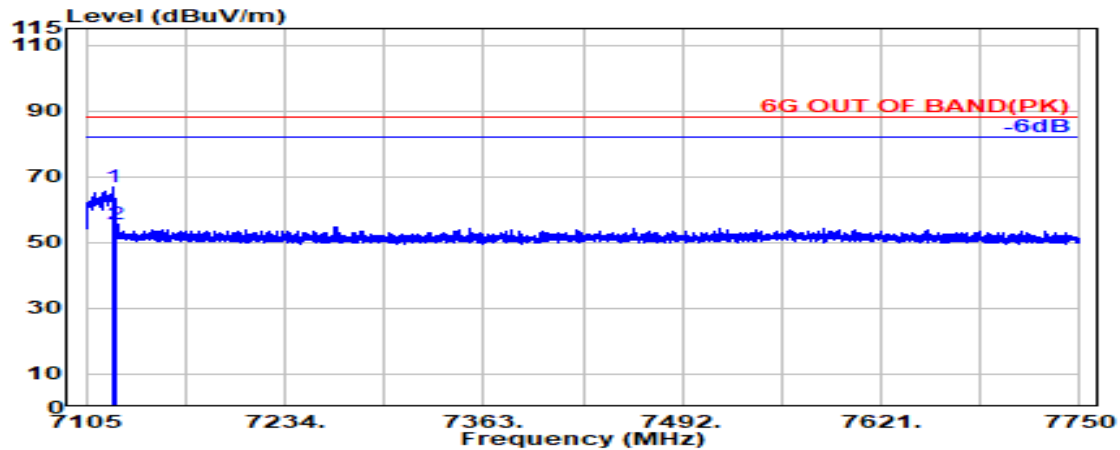

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7122.500	35.69	9.99	39.38	60.33	66.62	---	---	Peak
7125.000	35.70	9.99	39.38	49.11	55.42	88.20	32.78	Peak

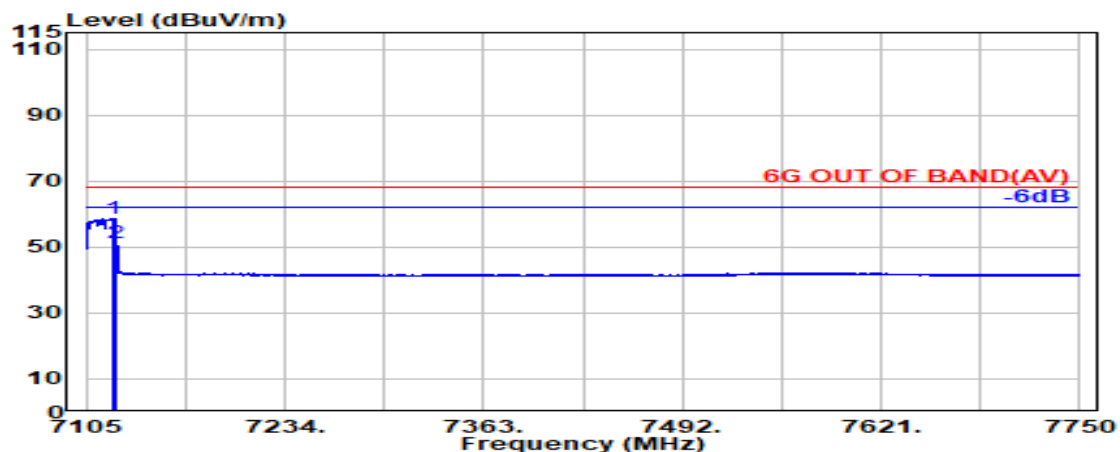

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7121.800	35.69	9.99	39.38	52.49	58.78	---	---	Average
7125.000	35.70	9.99	39.38	44.73	51.03	68.20	17.17	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	8
		Frequency	TX 7115MHz

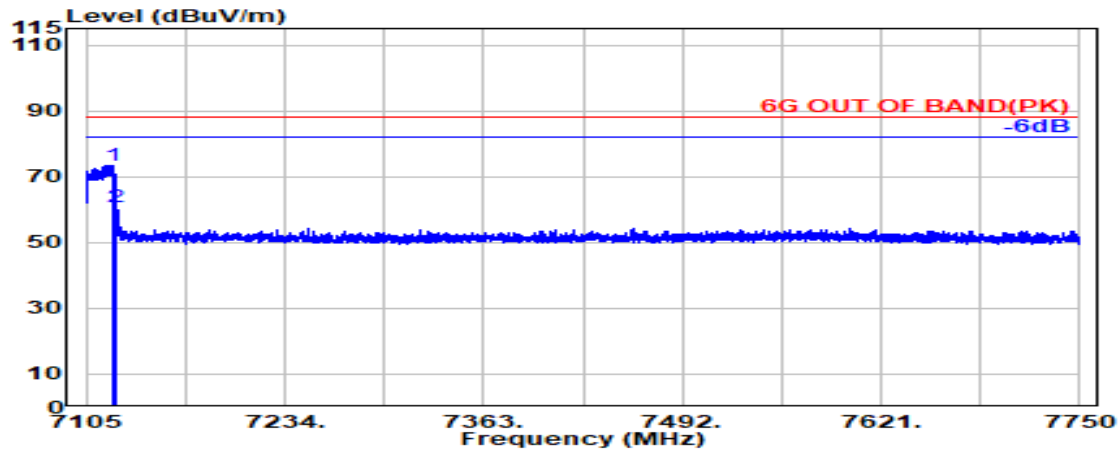

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7121.900	35.69	9.99	39.38	67.13	73.42	---	---	Peak
7125.000	35.70	9.99	39.38	54.52	60.83	88.20	27.37	Peak

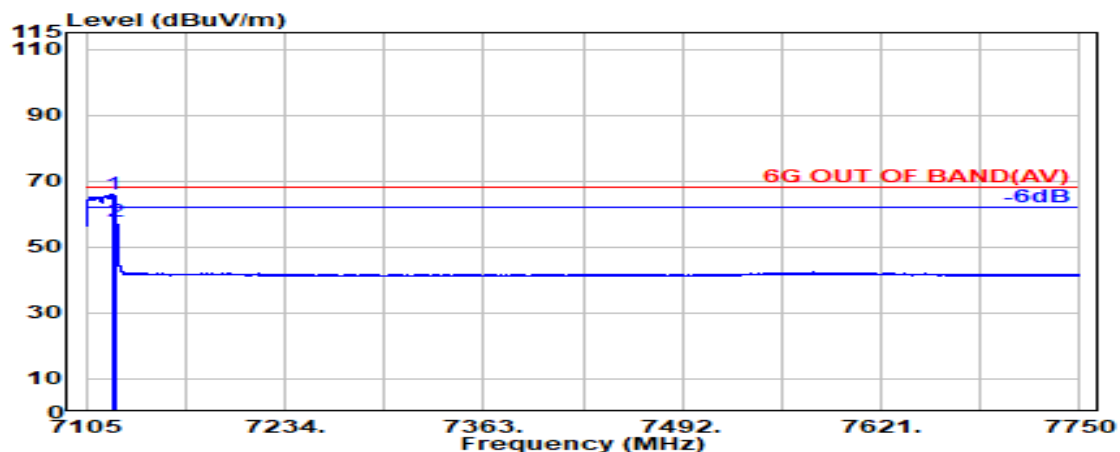

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7122.200	35.69	9.99	39.38	59.71	66.01	---	---	Average
7125.000	35.70	9.99	39.38	51.30	57.60	68.20	10.60	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	5
		Frequency	TX 5965MHz

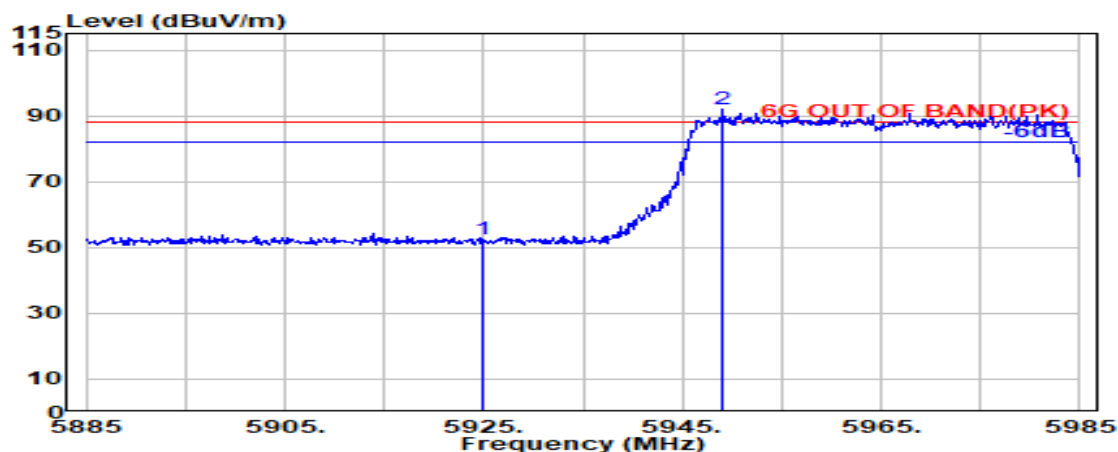

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	48.69	52.66	88.20	35.54	Peak
@ 5949.000	34.10	9.13	39.24	88.00	91.98	---	---	Peak

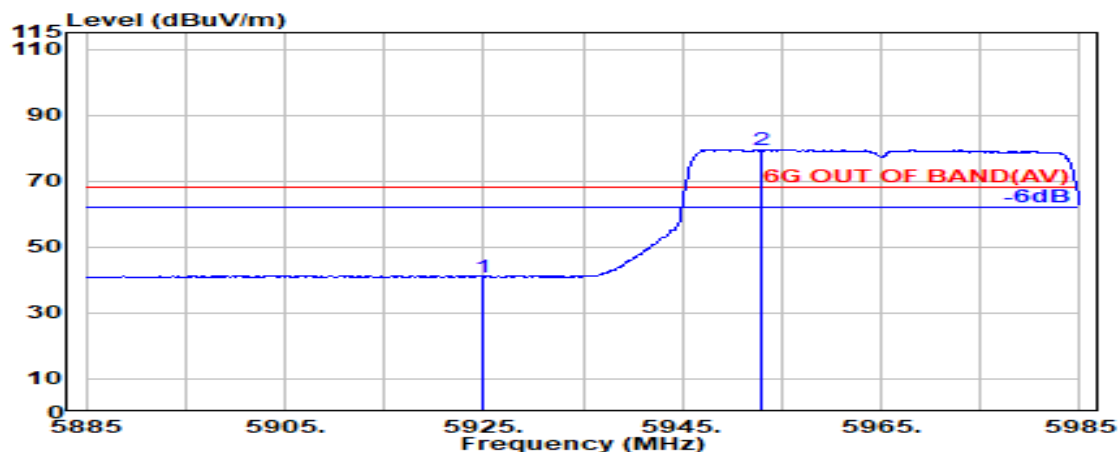

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.99	40.96	68.20	27.24	Average
@ 5953.000	34.09	9.13	39.24	75.56	79.55	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	5
		Frequency	TX 5965MHz

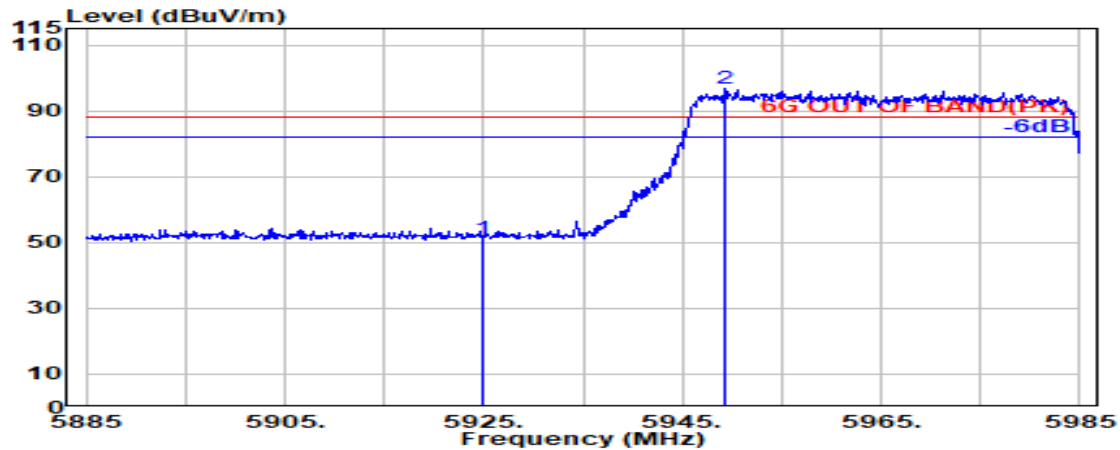

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.39	51.36	88.20	36.84	Peak
@ 5949.400	34.10	9.13	39.24	93.00	96.99	---	---	Peak

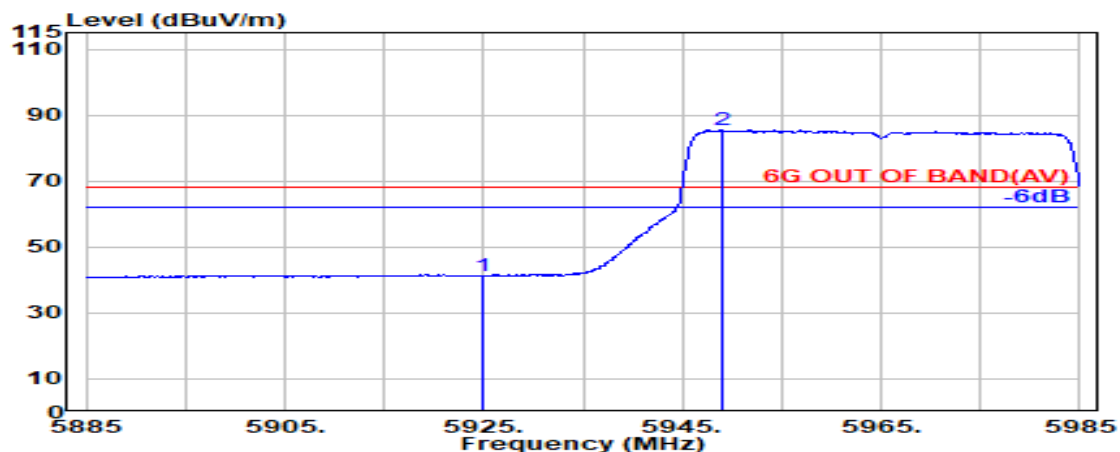

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.41	41.38	68.20	26.82	Average
@ 5948.900	34.10	9.13	39.24	81.43	85.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	8
		Frequency	TX 7085MHz

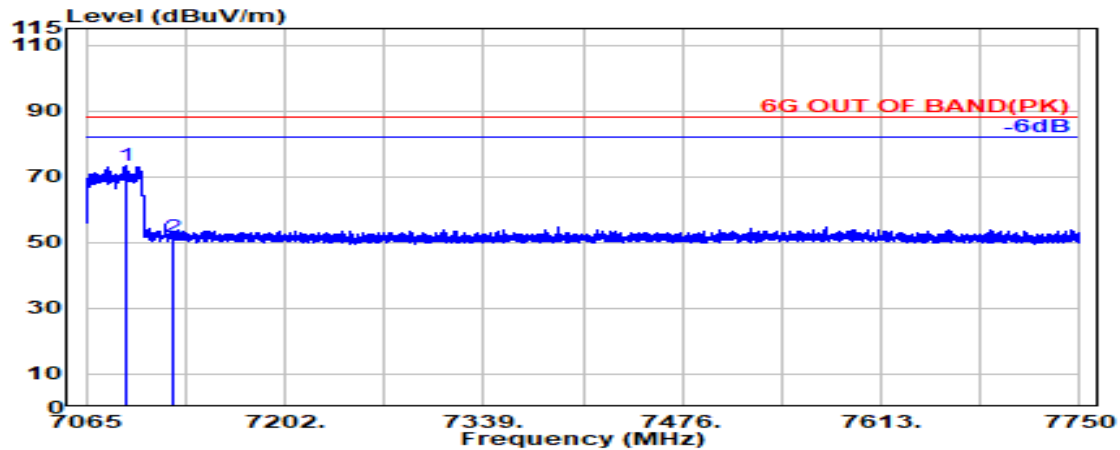

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7093.000	35.56	9.97	39.37	67.13	73.28	---	---	Peak
7125.000	35.70	9.99	39.38	45.49	51.80	88.20	36.40	Peak

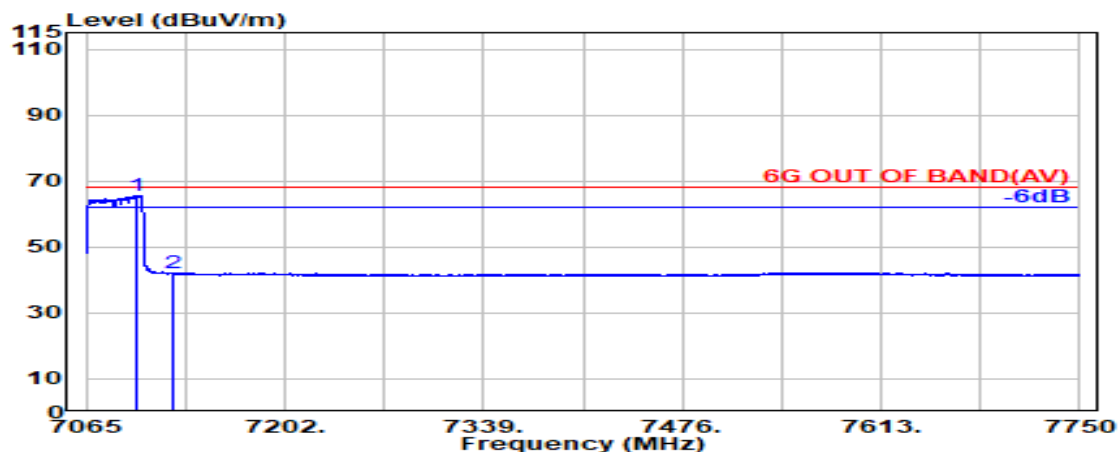

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7100.500	35.60	9.97	39.38	59.45	65.65	---	---	Average
7125.000	35.70	9.99	39.38	35.64	41.94	68.20	26.26	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	8
		Frequency	TX 7085MHz

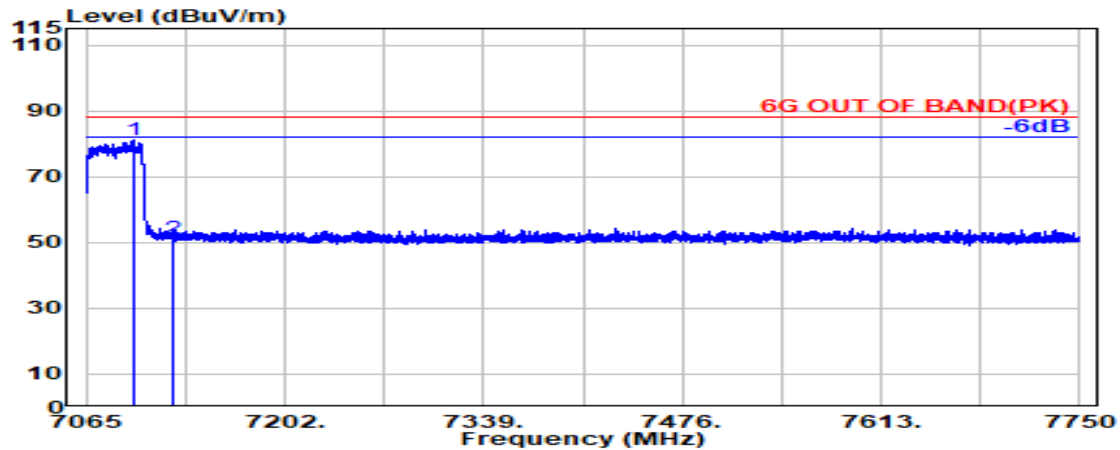

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7098.700	35.59	9.97	39.38	74.94	81.13	---	---	Peak
7125.000	35.70	9.99	39.38	44.77	51.07	88.20	37.13	Peak

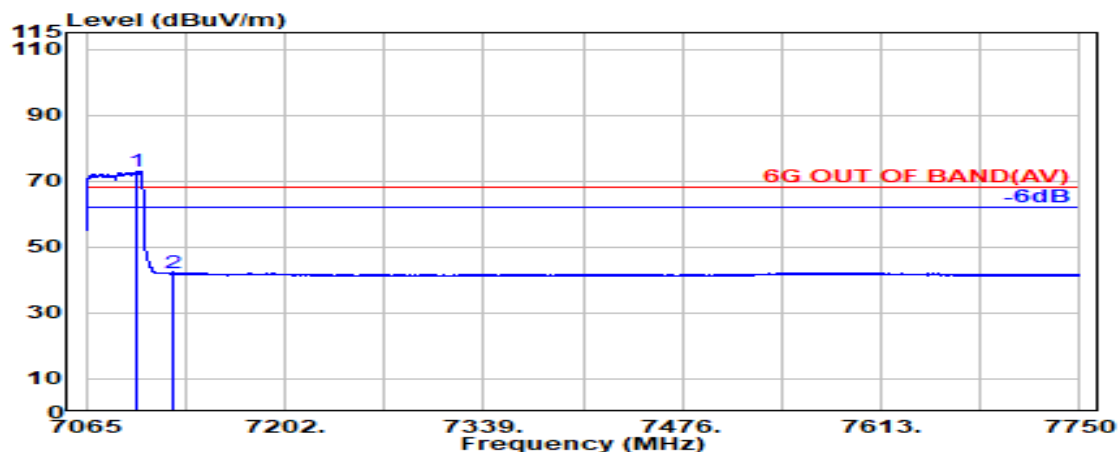

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7099.600	35.60	9.97	39.38	66.63	72.82	---	---	Average
7125.000	35.70	9.99	39.38	35.80	42.11	68.20	26.09	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	5
		Frequency	TX 5985MHz

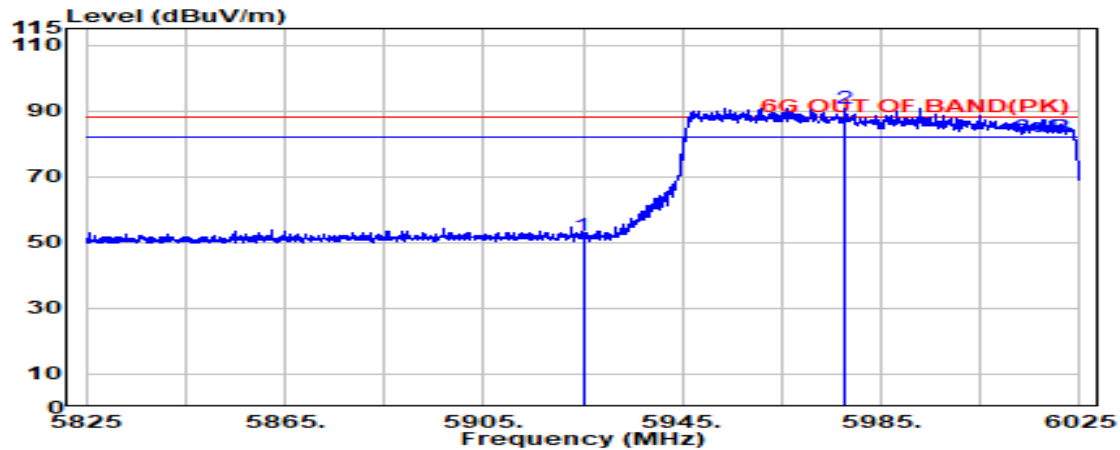

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.93	51.90	88.20	36.30	Peak
@ 5977.800	34.04	9.15	39.25	86.96	90.91	---	---	Peak

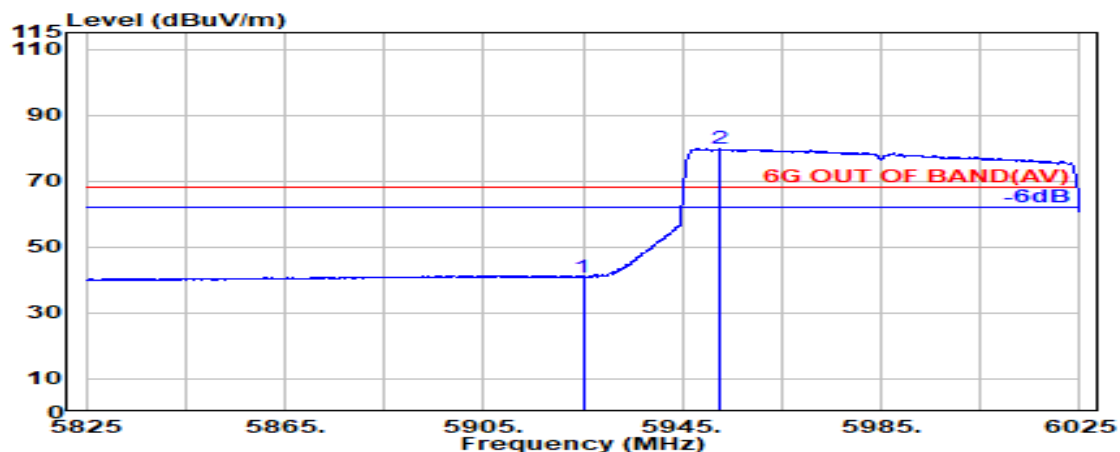

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.02	40.99	68.20	27.21	Average
@ 5952.400	34.10	9.13	39.24	75.76	79.74	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	5
		Frequency	TX 5985MHz

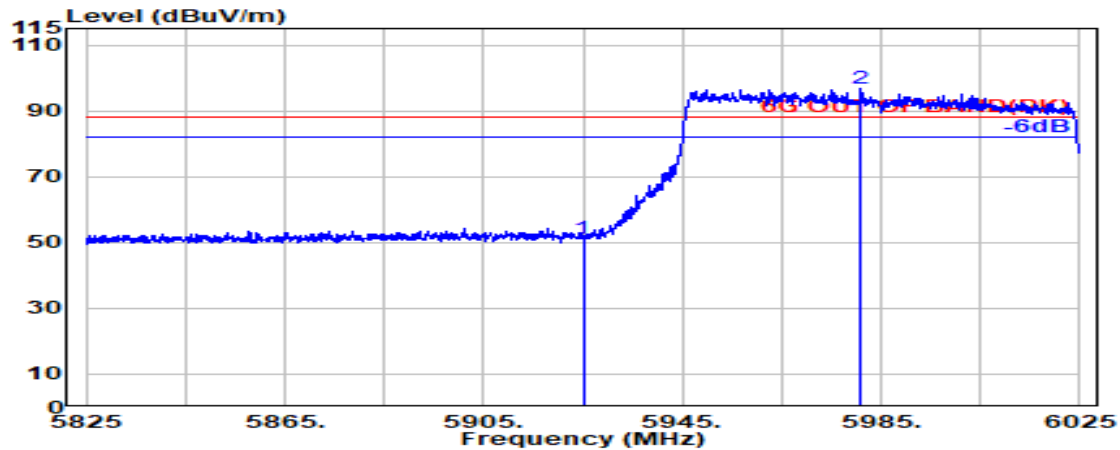

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.13	51.10	88.20	37.10	Peak
@ 5981.000	34.04	9.15	39.25	92.80	96.75	---	---	Peak

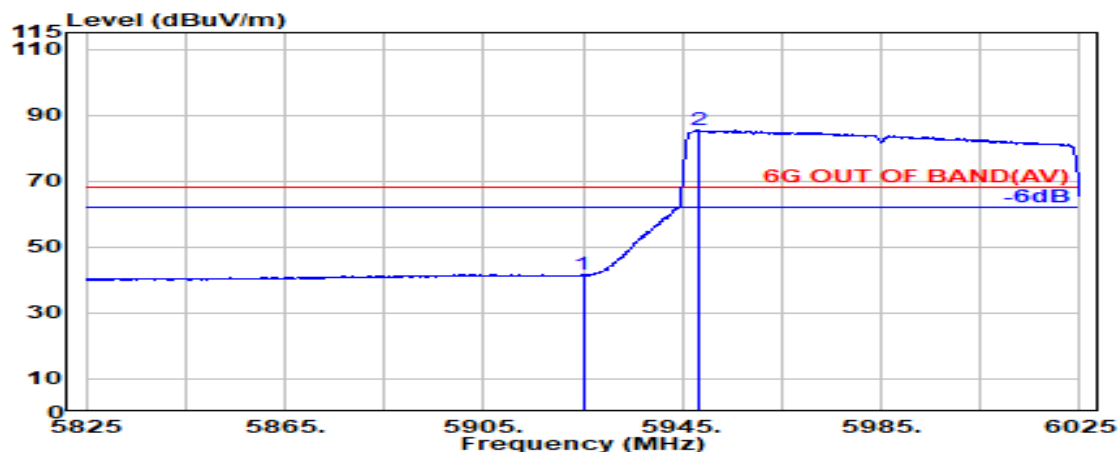

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.50	41.47	68.20	26.73	Average
@ 5948.100	34.10	9.12	39.24	81.57	85.56	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	8
		Frequency	TX 7025MHz

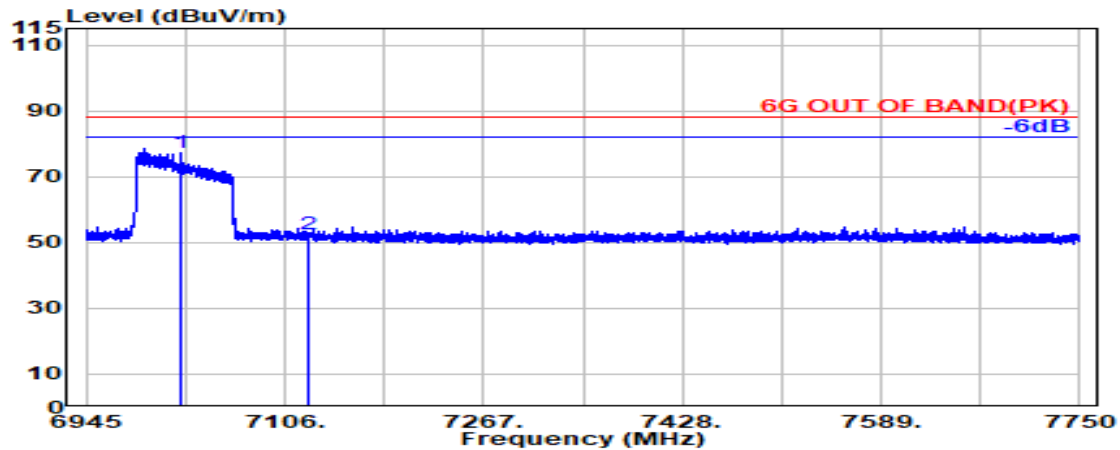

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7021.900	35.30	9.93	39.36	71.27	77.14	---	---	Peak
7125.000	35.70	9.99	39.38	46.33	52.63	88.20	35.57	Peak

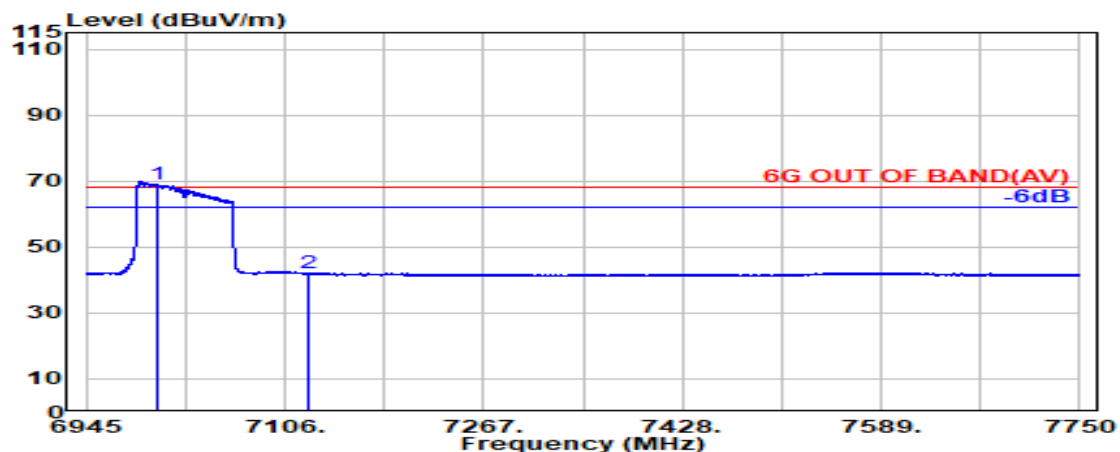

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7002.000	35.30	9.92	39.35	63.07	68.94	---	---	Average
7125.000	35.70	9.99	39.38	35.68	41.99	68.20	26.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	8
		Frequency	TX 7025MHz

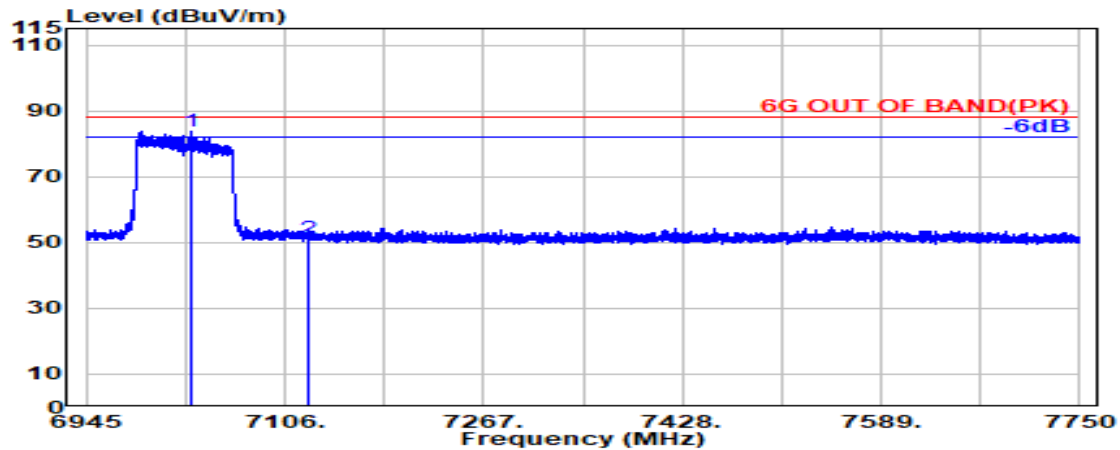

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7030.200	35.30	9.94	39.36	78.04	83.92	---	---	Peak
7125.000	35.70	9.99	39.38	45.06	51.36	88.20	36.84	Peak

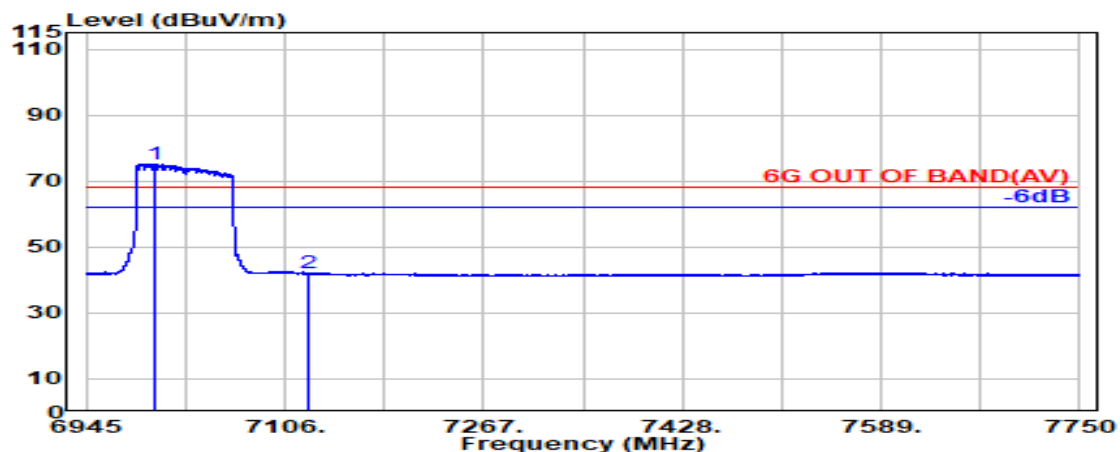

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7001.200	35.30	9.92	39.35	69.23	75.10	---	---	Average
7125.000	35.70	9.99	39.38	35.68	41.98	68.20	26.22	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	5
		Frequency	TX 6025MHz

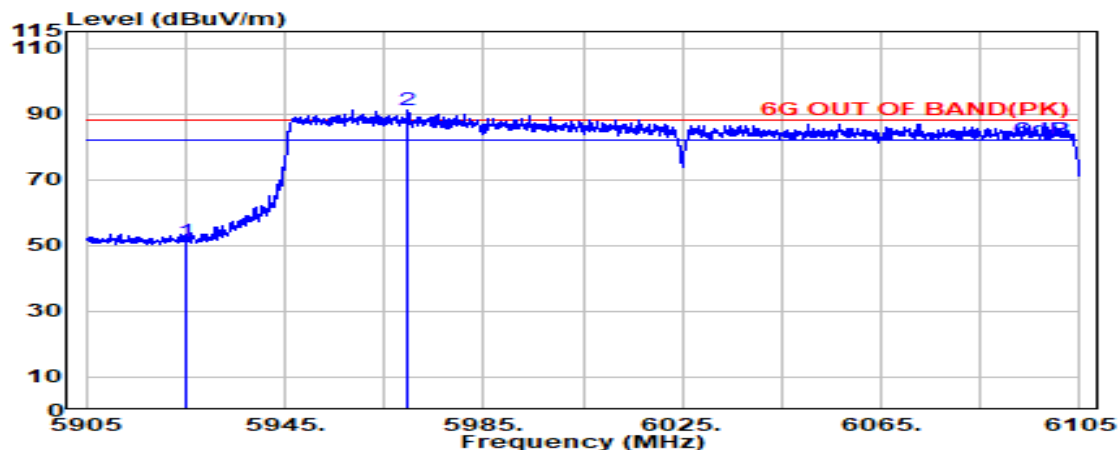

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.44	51.41	88.20	36.79	Peak
@ 5969.800	34.06	9.14	39.24	87.08	91.04	---	---	Peak

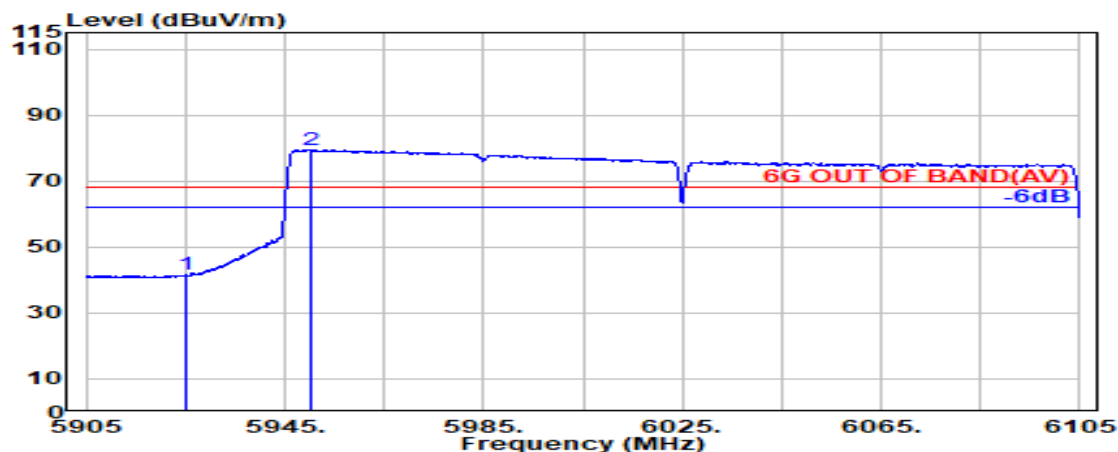

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.50	41.47	68.20	26.73	Average
@ 5950.100	34.10	9.13	39.24	75.48	79.46	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	5
		Frequency	TX 6025MHz

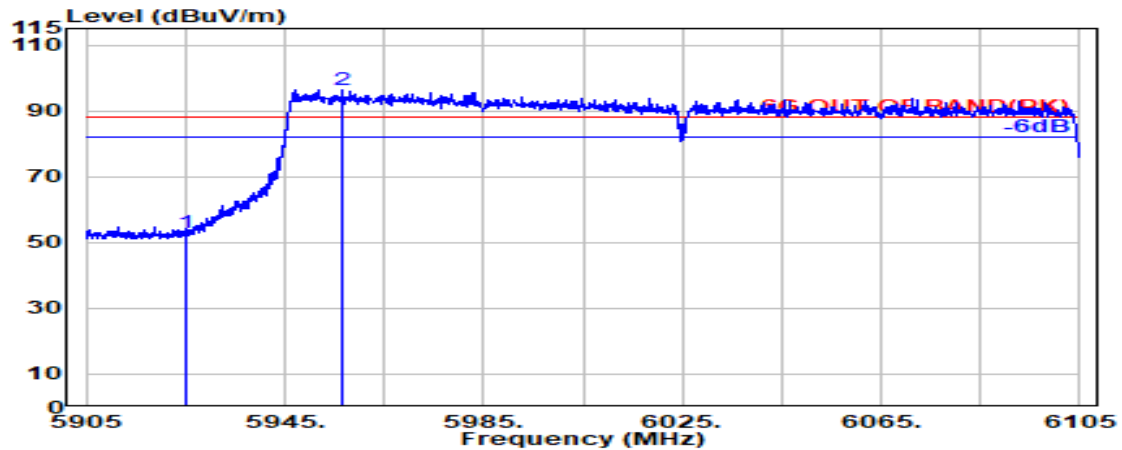

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	48.93	52.90	88.20	35.30	Peak
@ 5956.700	34.09	9.13	39.24	92.38	96.36	---	---	Peak

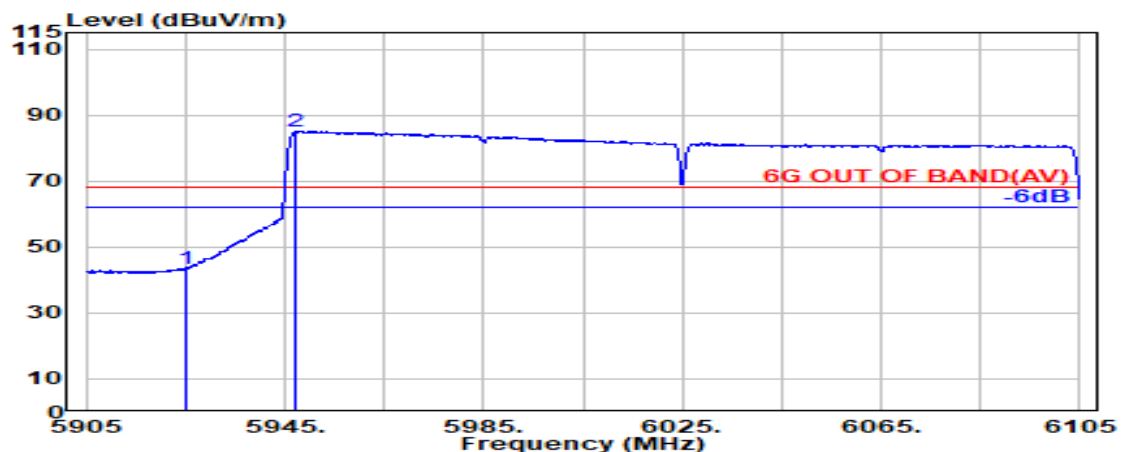

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	39.52	43.49	68.20	24.71	Average
@ 5947.300	34.10	9.12	39.24	81.17	85.15	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	8
		Frequency	TX 6985MHz

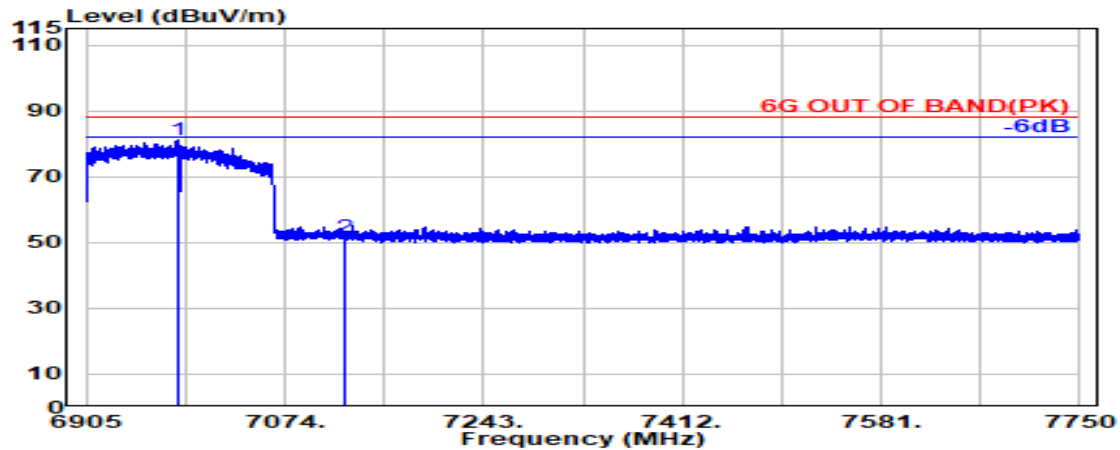

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6982.700	35.27	9.91	39.35	75.30	81.12	---	---	Peak
7125.000	35.70	9.99	39.38	45.23	51.54	88.20	36.66	Peak

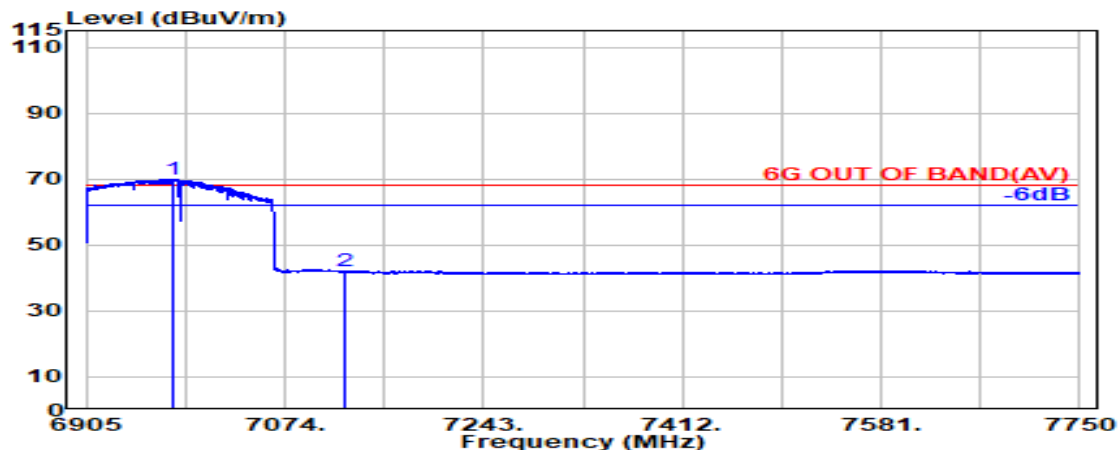

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6977.900	35.26	9.90	39.35	64.24	70.05	---	---	Average
7125.000	35.70	9.99	39.38	35.59	41.90	68.20	26.30	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	8
		Frequency	TX 6985MHz

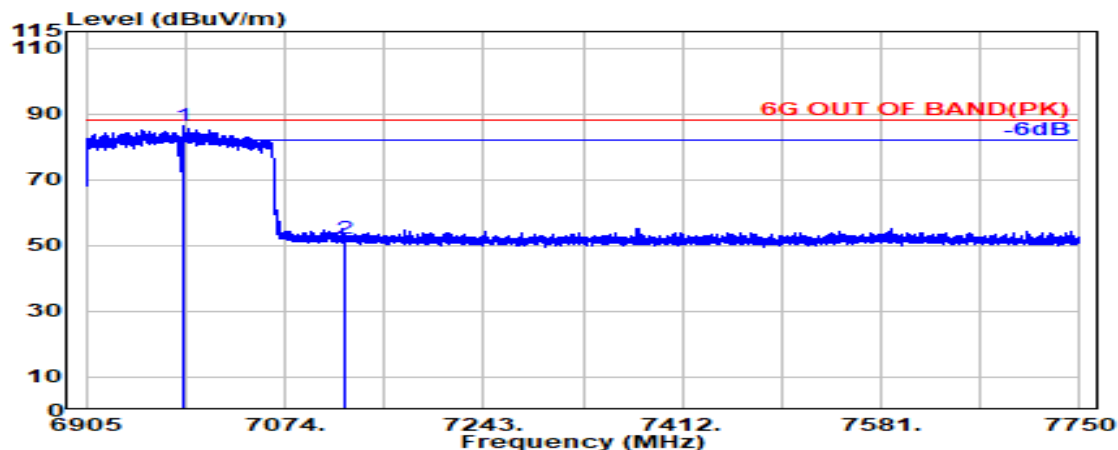

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6988.500	35.28	9.91	39.35	80.50	86.34	---	---	Peak
7125.000	35.70	9.99	39.38	45.86	52.16	88.20	36.04	Peak

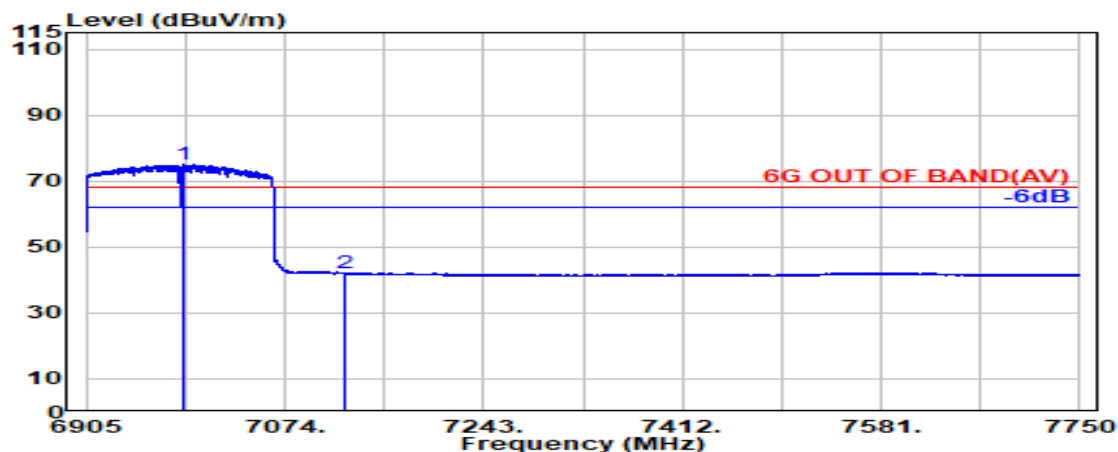

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6987.900	35.28	9.91	39.35	69.17	75.00	68.20	---	Average
7125.000	35.70	9.99	39.38	35.86	42.16	68.20	26.04	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT320	U-NII Band	5
		Frequency	TX 6105MHz

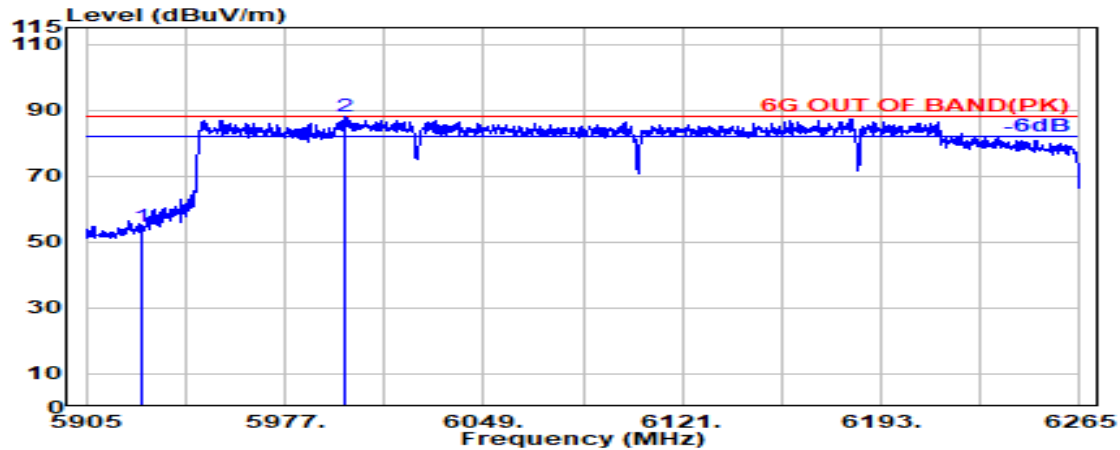

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	50.78	54.75	88.20	33.45	Peak
@ 5999.140	34.00	9.17	39.25	84.03	87.95	---	---	Peak

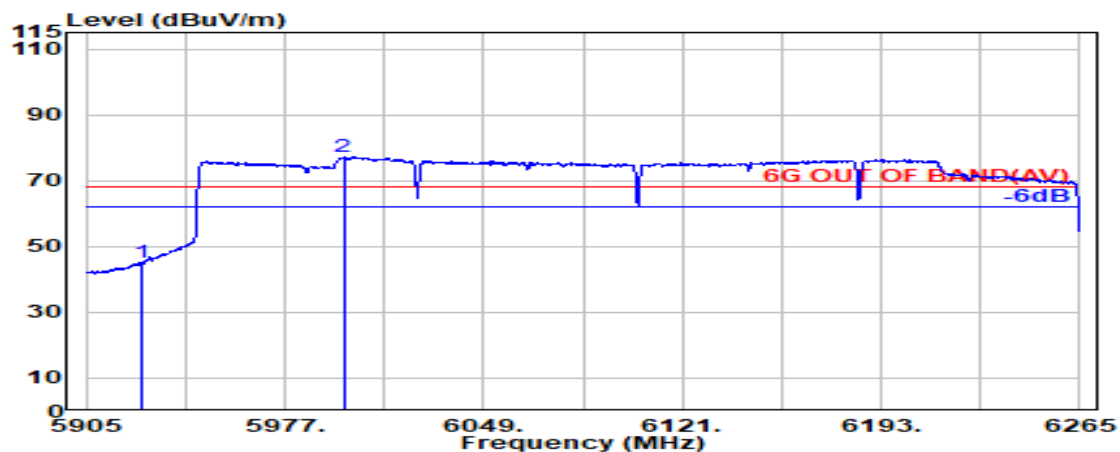

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	41.12	45.09	68.20	23.11	Average
@ 5998.240	34.00	9.17	39.25	73.32	77.24	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT320	U-NII Band	5
		Frequency	TX 6105MHz

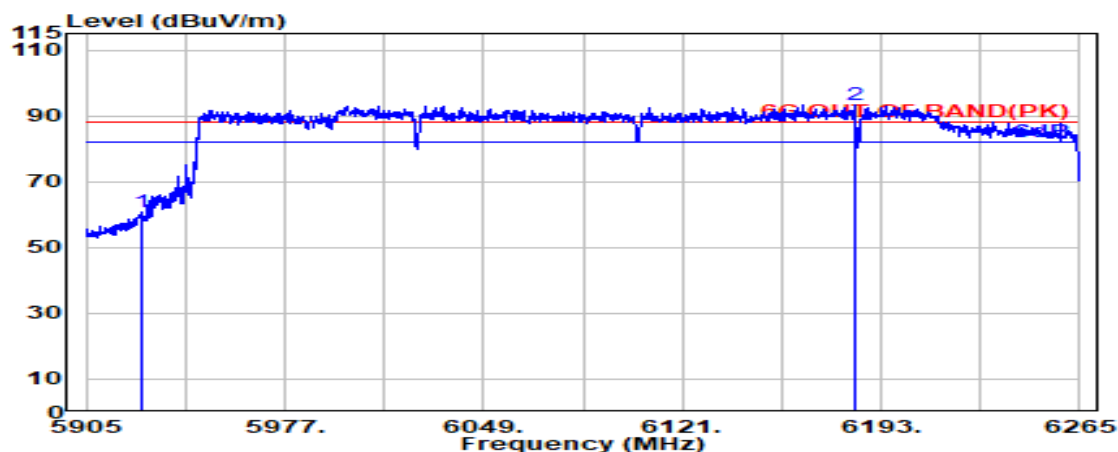

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	56.62	60.59	88.20	27.61	Peak
@ 6183.280	34.40	9.32	39.27	89.06	93.51	---	---	Peak

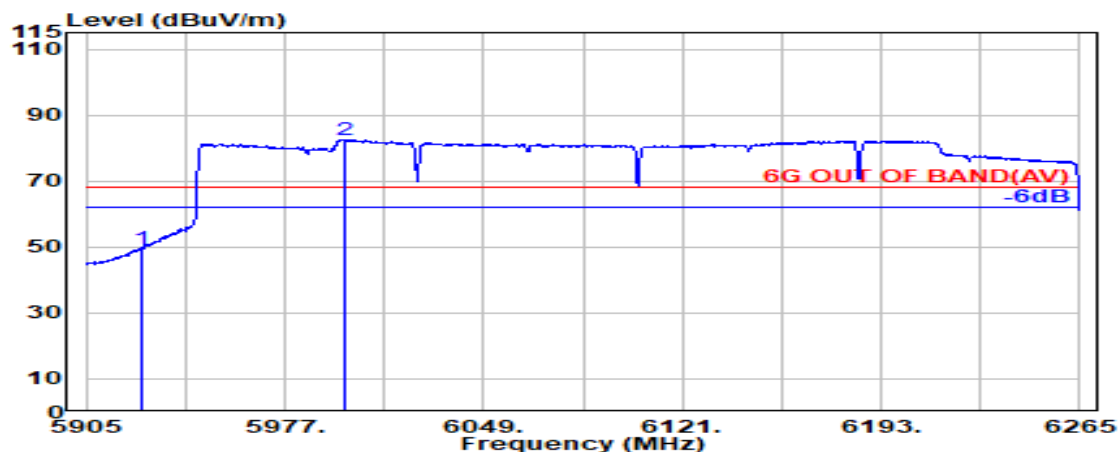

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	45.70	49.67	68.20	18.53	Average
@ 5998.780	34.00	9.17	39.25	78.65	82.57	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

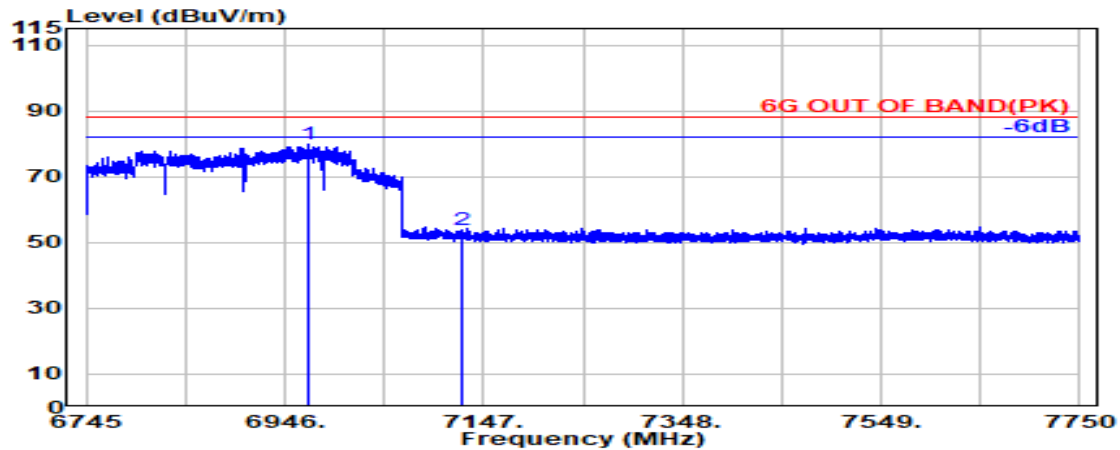

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6970.263	35.24	9.90	39.35	74.04	79.83	---	---	Peak
7125.000	35.70	9.99	39.38	47.64	53.95	88.20	34.25	Peak

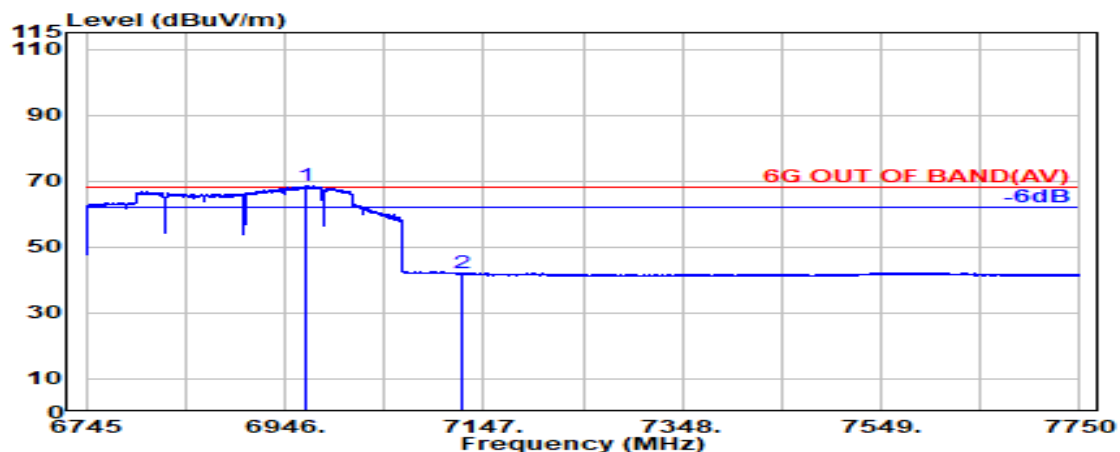

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6967.051	35.23	9.90	39.35	62.76	68.54	---	---	Average
7125.000	35.70	9.99	39.38	35.80	42.10	68.20	26.10	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

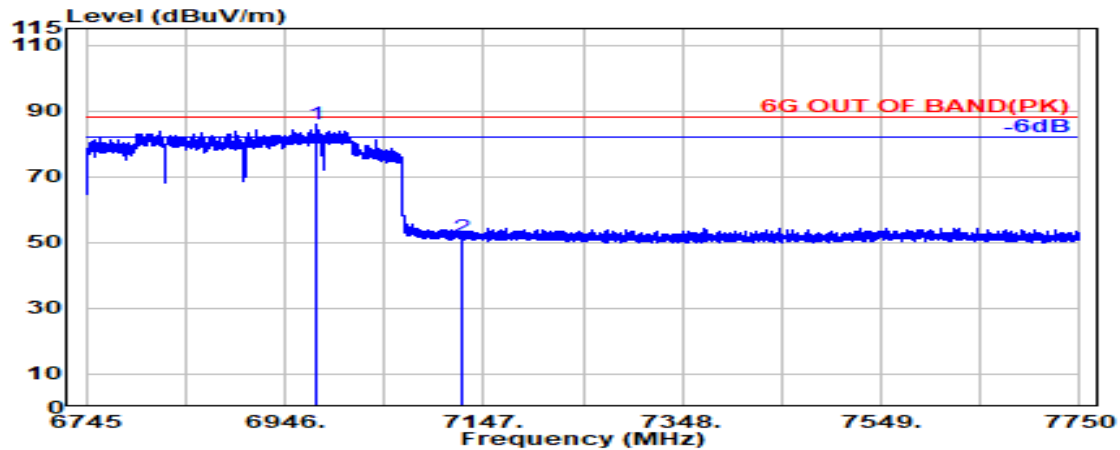

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 6976.566	35.25	9.90	39.35	79.95	85.76	---	---	Peak
7125.000	35.70	9.99	39.38	45.39	51.70	88.20	36.50	Peak

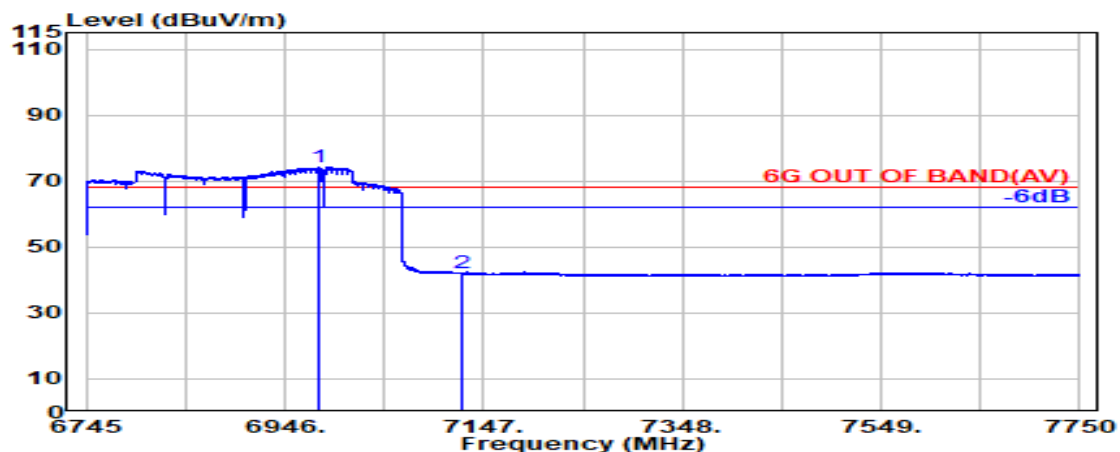

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 6979.777	35.26	9.91	39.35	68.34	74.16	---	---	Average
7125.000	35.70	9.99	39.38	35.60	41.90	68.20	26.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


● OFDMA Modulation

Tones	26T	RU Index	0
Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

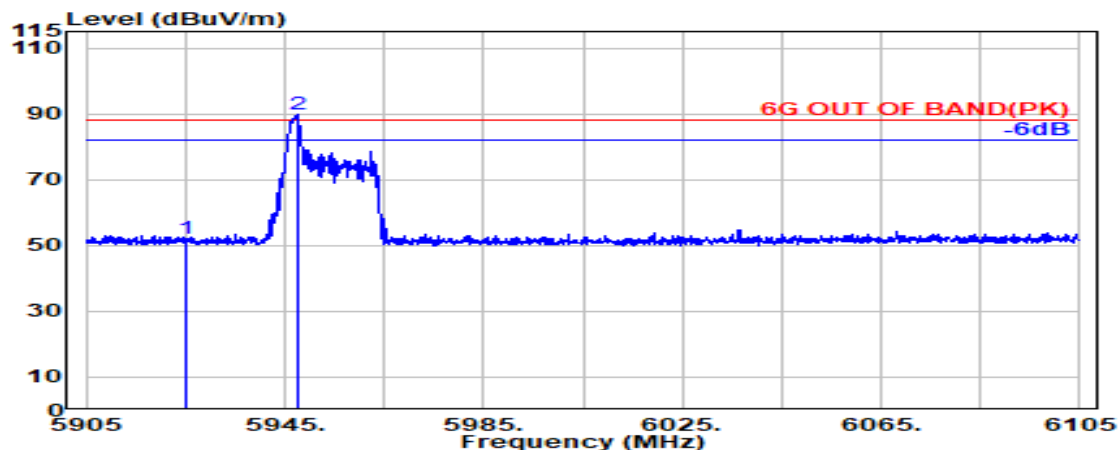

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	48.23	52.20	88.20	36.00	Peak
@ 5947.400	34.10	9.12	39.24	85.78	89.77	---	---	Peak

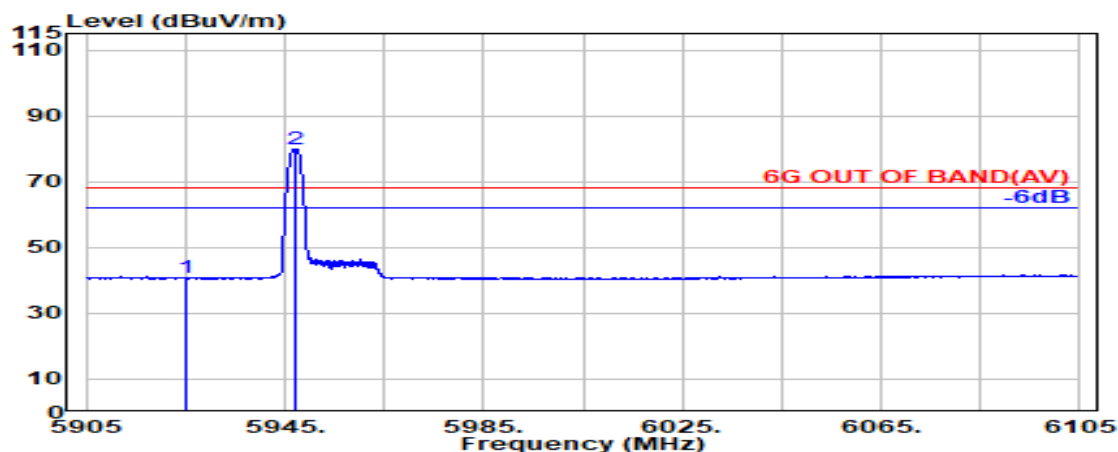

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.79	40.76	68.20	27.44	Average
@ 5947.000	34.10	9.12	39.24	75.98	79.96	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	26T	RU Index	0
Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

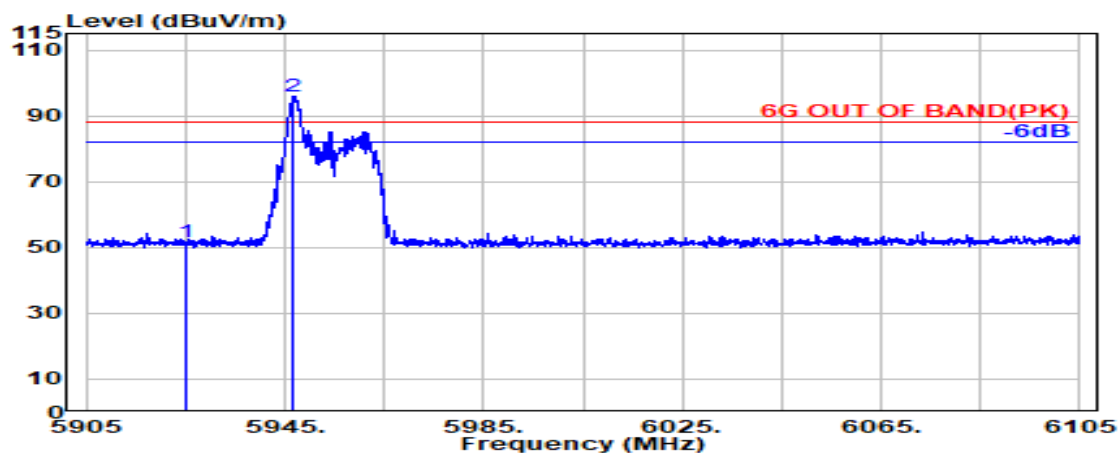

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.50	51.47	88.20	36.73	Peak
@ 5946.600	34.10	9.12	39.24	91.90	95.88	---	---	Peak

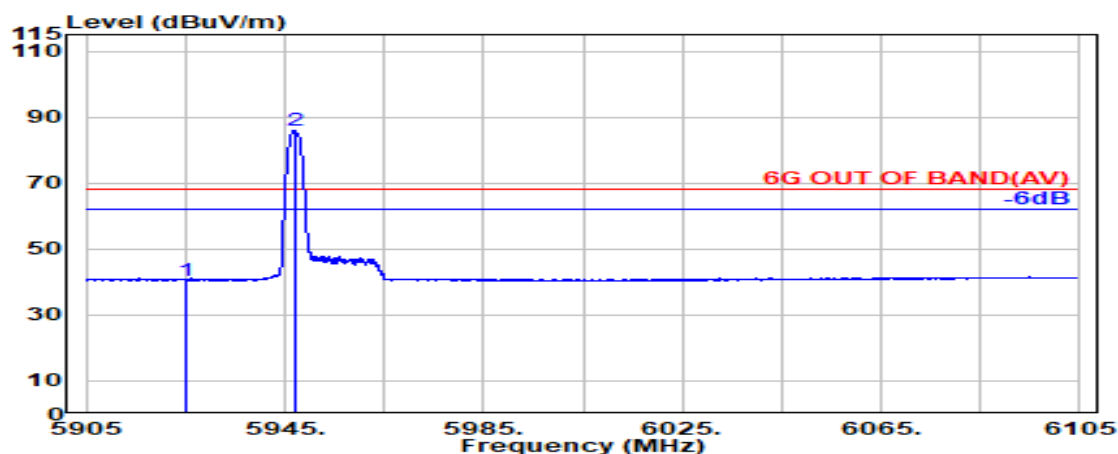

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.58	40.55	68.20	27.65	Average
@ 5946.900	34.10	9.12	39.24	81.83	85.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	26T	RU Index	36
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

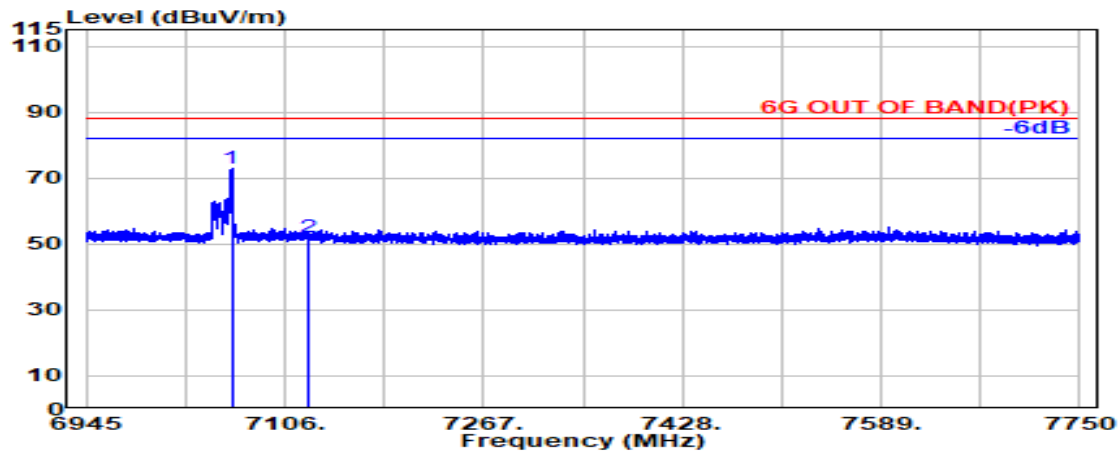

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7062.900	35.38	9.95	39.37	66.81	72.78	---	---	Peak
@ 7125.000	35.70	9.99	39.38	45.61	51.92	88.20	36.28	Peak

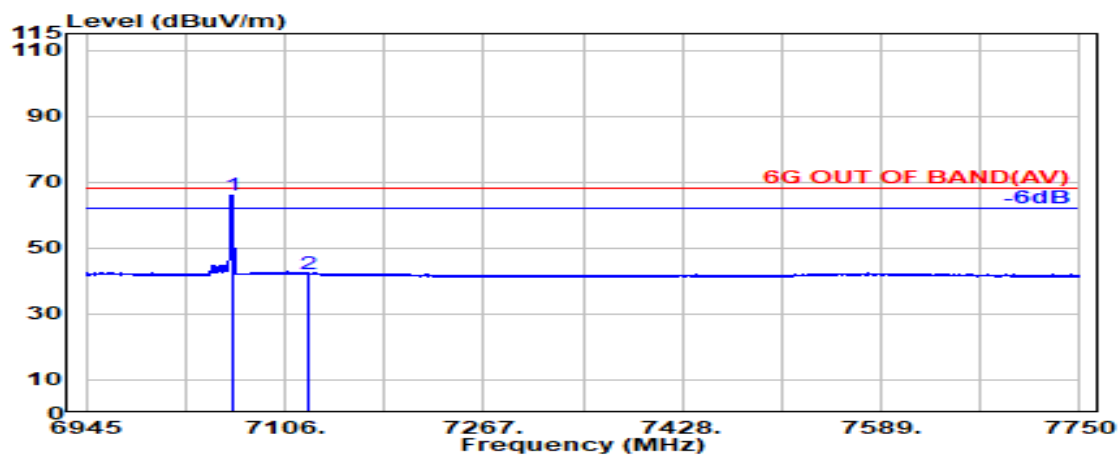

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7063.400	35.38	9.95	39.37	60.03	66.00	---	---	Average
@ 7125.000	35.70	9.99	39.38	35.68	41.98	68.20	26.22	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	26T	RU Index	36
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

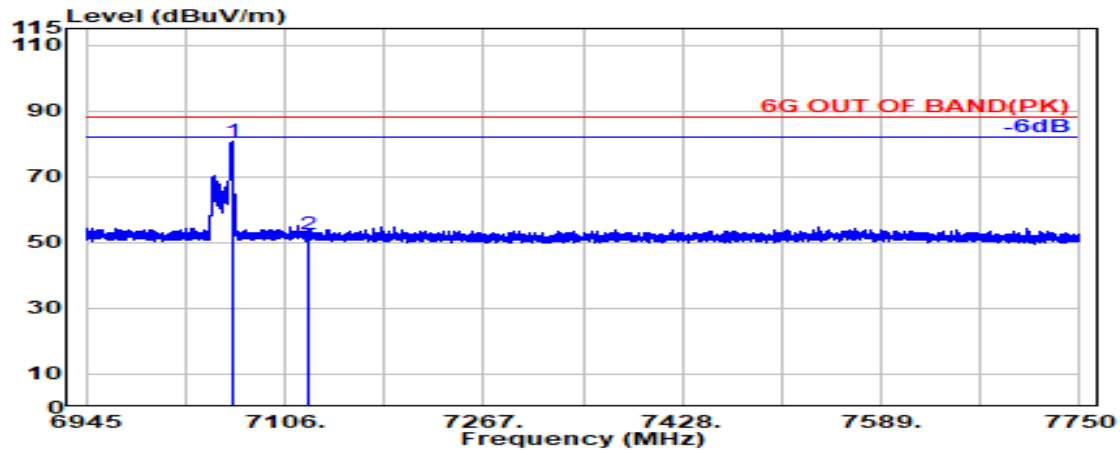

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7063.100	35.38	9.95	39.37	74.92	80.89	---	---	Peak
@ 7125.000	35.70	9.99	39.38	46.07	52.38	88.20	35.82	Peak

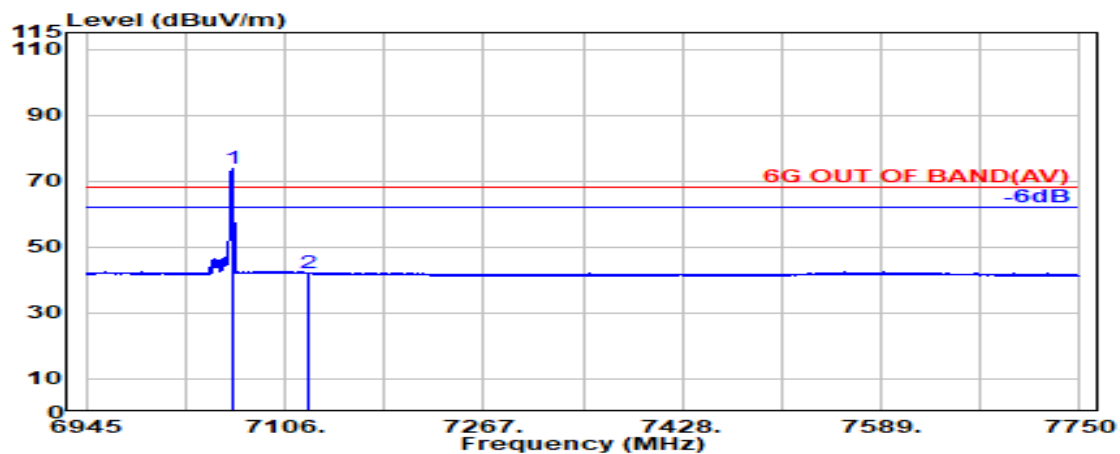

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7063.100	35.38	9.95	39.37	67.69	73.66	---	---	Average
@ 7125.000	35.70	9.99	39.38	35.62	41.93	68.20	26.27	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	52T	RU Index	37
Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

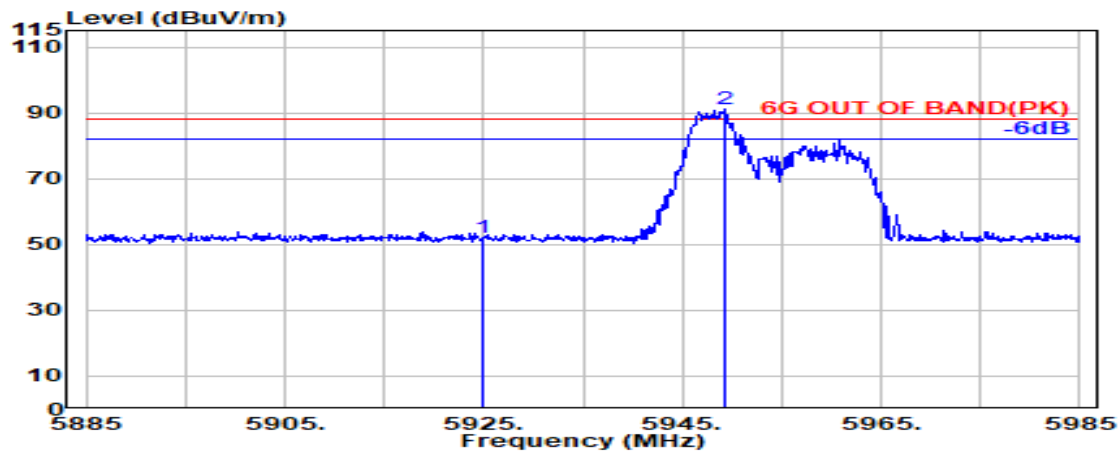

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	48.15	52.12	88.20	36.08	Peak
@ 5949.300	34.10	9.13	39.24	87.24	91.23	---	---	Peak

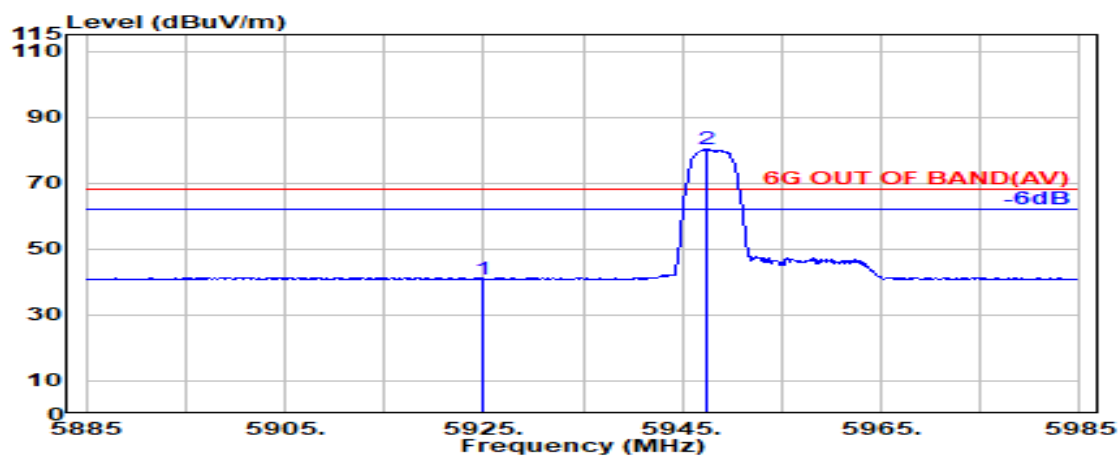

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.02	40.99	68.20	27.21	Average
@ 5947.400	34.10	9.12	39.24	76.20	80.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	52T	RU Index	37
Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

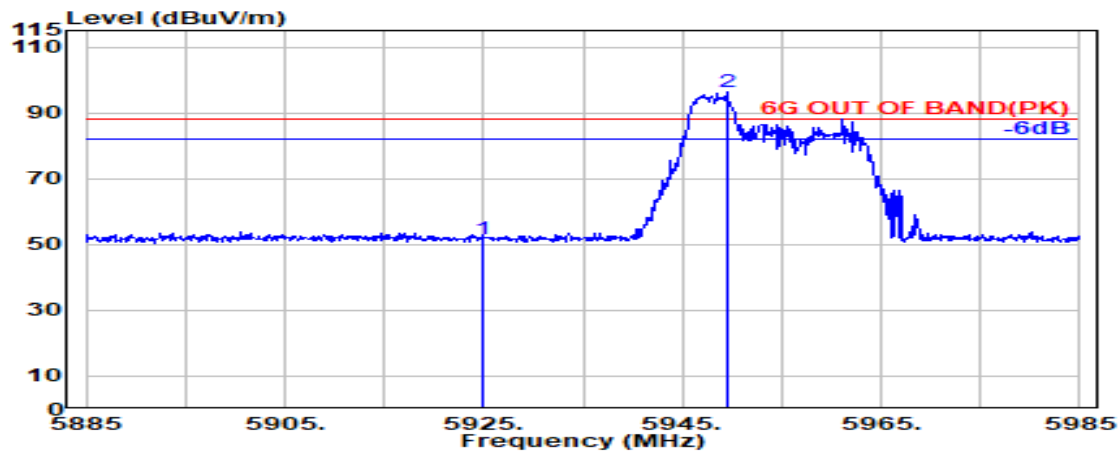

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.61	51.58	88.20	36.62	Peak
@ 5949.500	34.10	9.13	39.24	92.40	96.39	---	---	Peak

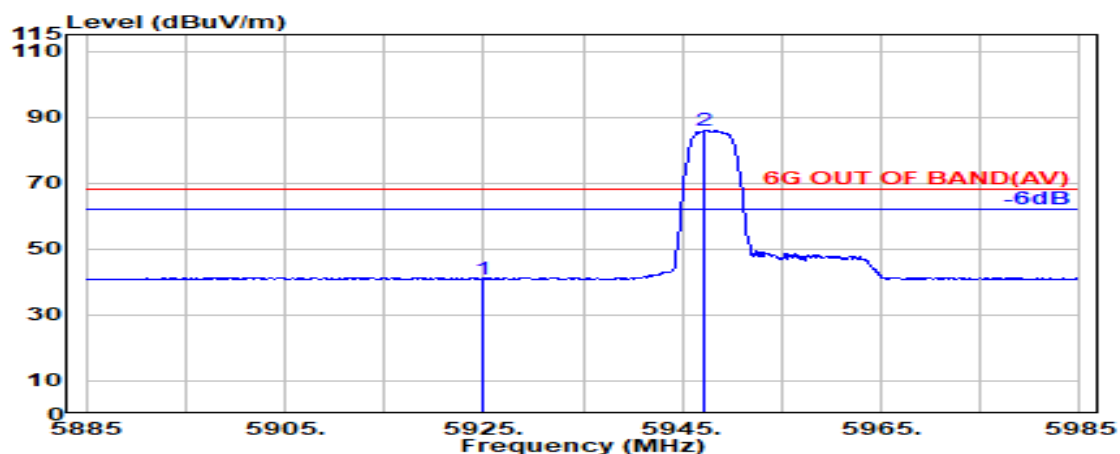

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.99	40.96	68.20	27.24	Average
@ 5947.300	34.10	9.12	39.24	81.92	85.91	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	52T	RU Index	52
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

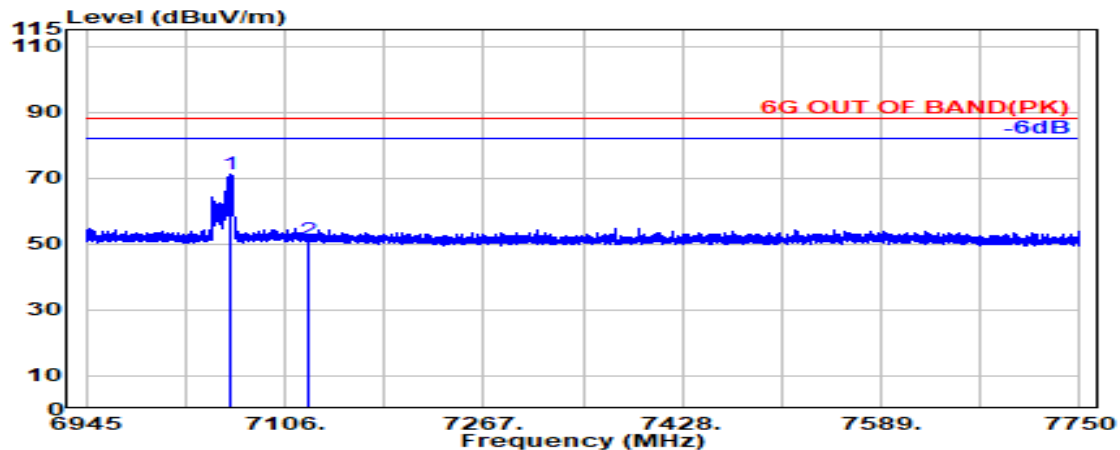

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7061.200	35.37	9.95	39.37	65.41	71.37	---	---	Peak
7125.000	35.70	9.99	39.38	44.70	51.00	88.20	37.20	Peak

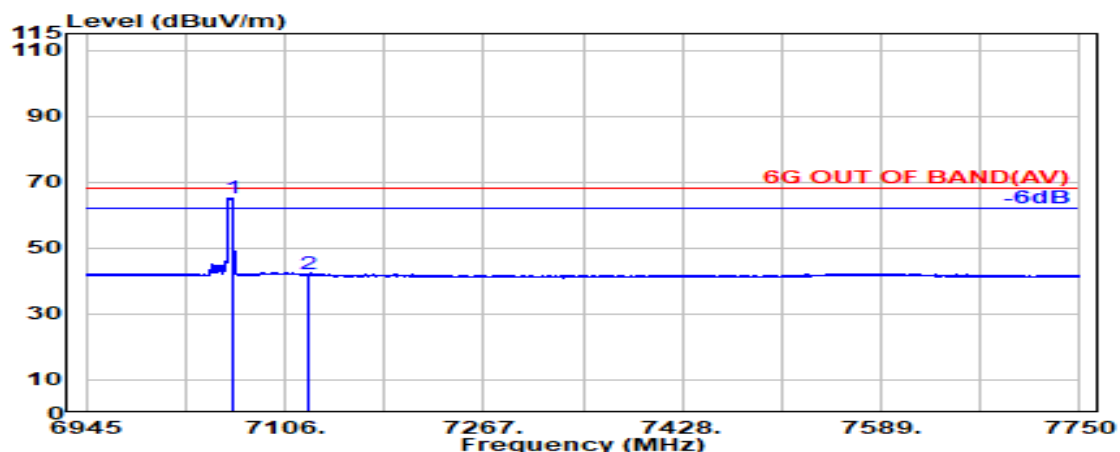

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7063.000	35.38	9.95	39.37	59.13	65.09	---	---	Average
7125.000	35.70	9.99	39.38	35.67	41.97	68.20	26.23	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	52T	RU Index	52
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

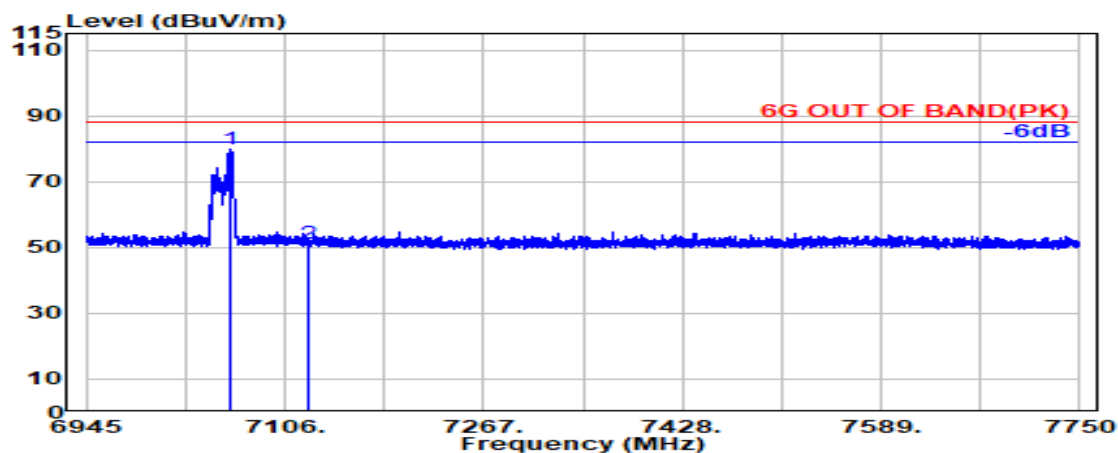

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7061.200	35.37	9.95	39.37	73.92	79.88	---	---	Peak
7125.000	35.70	9.99	39.38	44.78	51.08	88.20	37.12	Peak

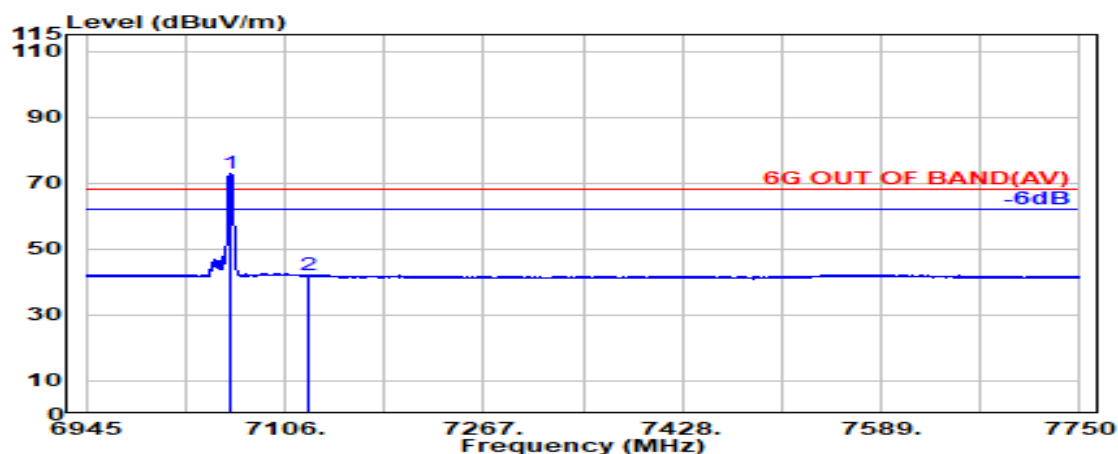

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7061.500	35.37	9.95	39.37	67.00	72.96	---	---	Average
7125.000	35.70	9.99	39.38	35.65	41.95	68.20	26.25	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	106T	RU Index	53
Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

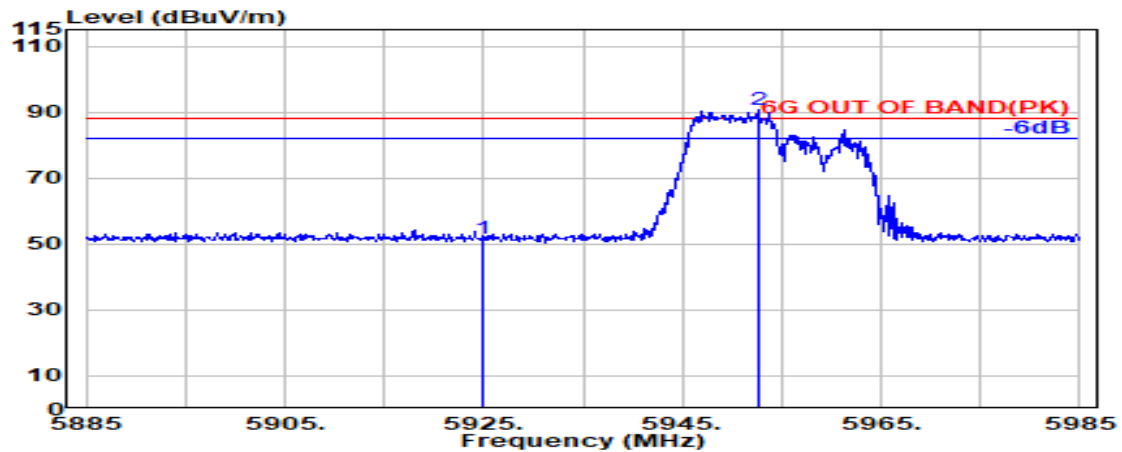

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.65	51.62	88.20	36.58	Peak
@ 5952.600	34.09	9.13	39.24	86.70	90.69	---	---	Peak

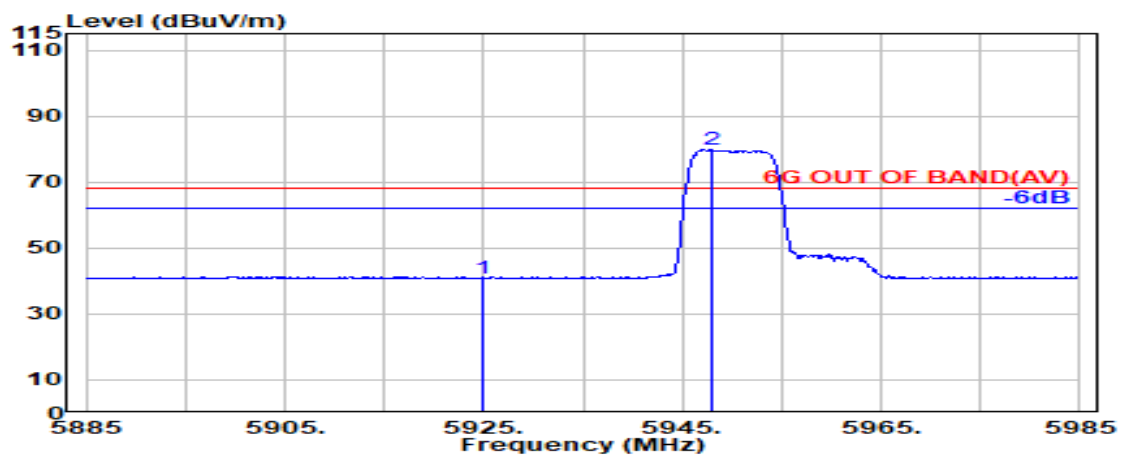

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.92	40.88	68.20	27.32	Average
@ 5948.000	34.10	9.12	39.24	75.80	79.78	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	106T	RU Index	53
Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

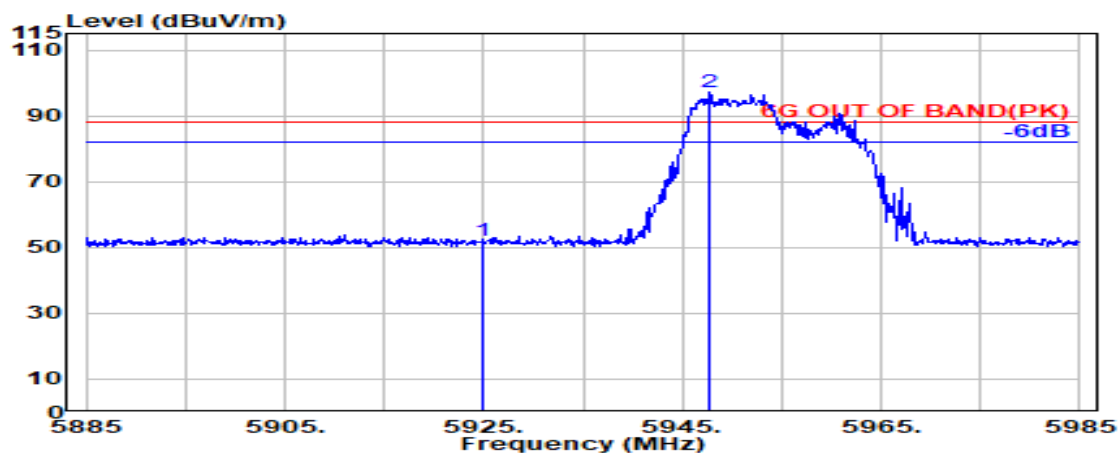

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.95	51.91	88.20	36.29	Peak
@ 5947.700	34.10	9.12	39.24	93.21	97.19	---	---	Peak

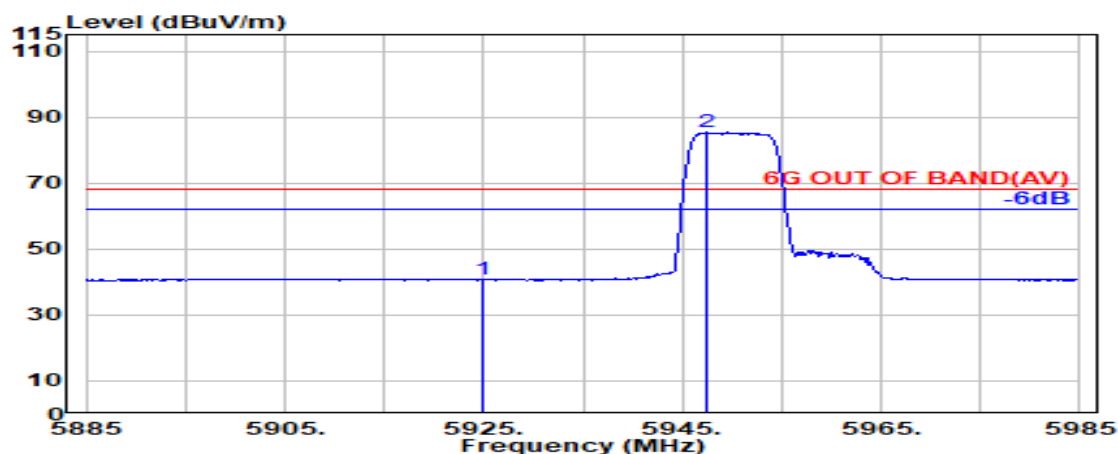

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.68	40.65	68.20	27.55	Average
@ 5947.500	34.10	9.12	39.24	81.33	85.31	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	106T	RU Index	60
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

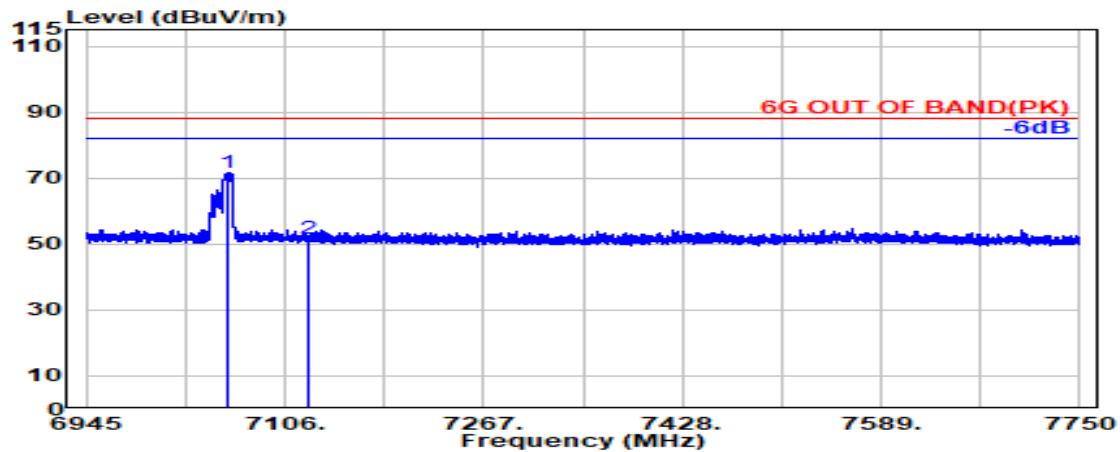

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7059.000	35.35	9.95	39.37	65.82	71.76	---	---	Peak
7125.000	35.70	9.99	39.38	45.38	51.68	88.20	36.52	Peak

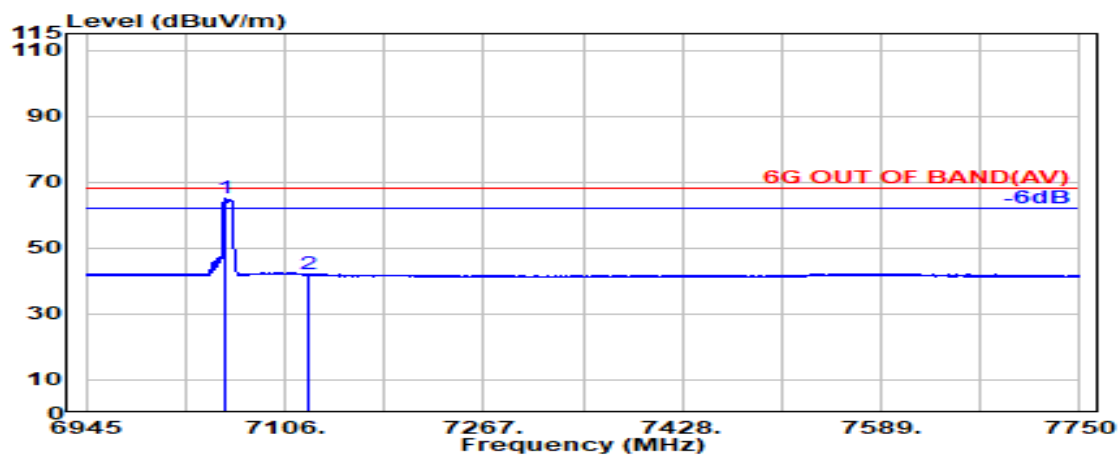

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7058.200	35.35	9.95	39.37	59.08	65.01	---	---	Average
7125.000	35.70	9.99	39.38	35.69	41.99	68.20	26.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	106T	RU Index	60
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

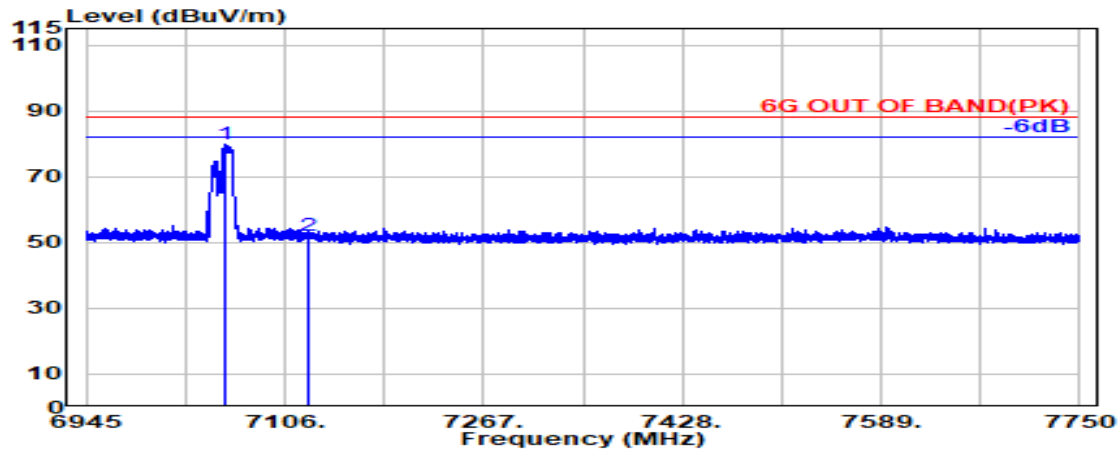

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7057.900	35.35	9.95	39.37	73.87	79.80	---	---	Peak
7125.000	35.70	9.99	39.38	45.62	51.93	88.20	36.27	Peak

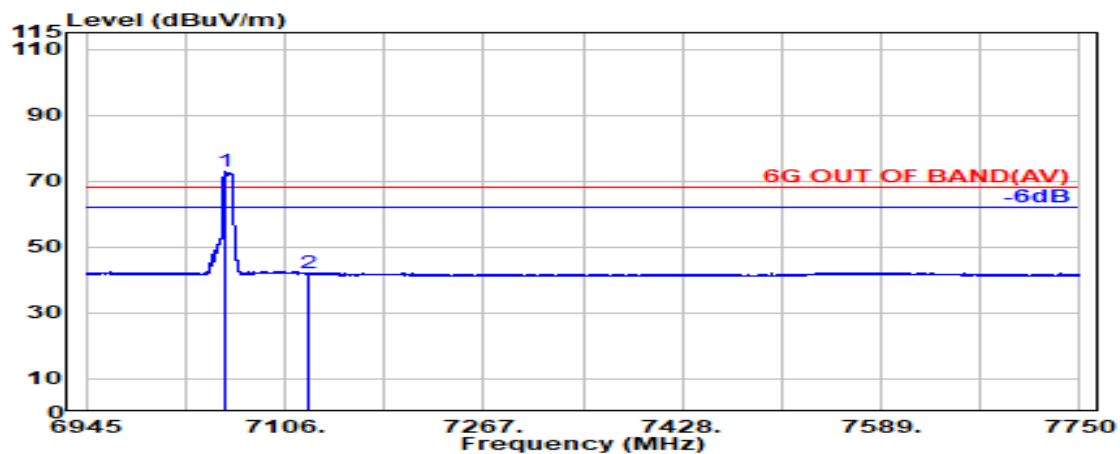

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7057.400	35.34	9.95	39.37	66.77	72.70	---	---	Average
7125.000	35.70	9.99	39.38	35.58	41.89	68.20	26.31	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	242T	RU Index	61
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

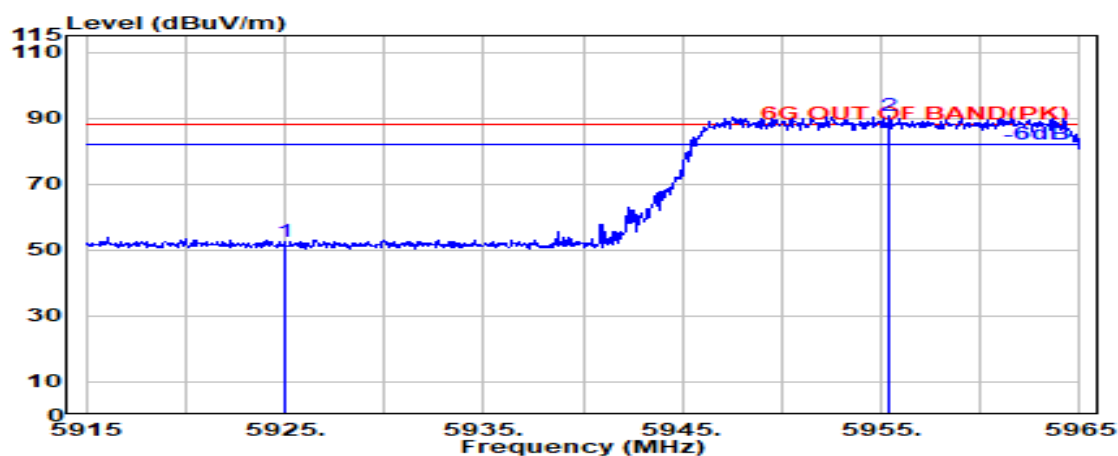

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	48.40	52.37	88.20	35.83	Peak
@ 5955.450	34.09	9.13	39.24	86.74	90.72	---	---	Peak

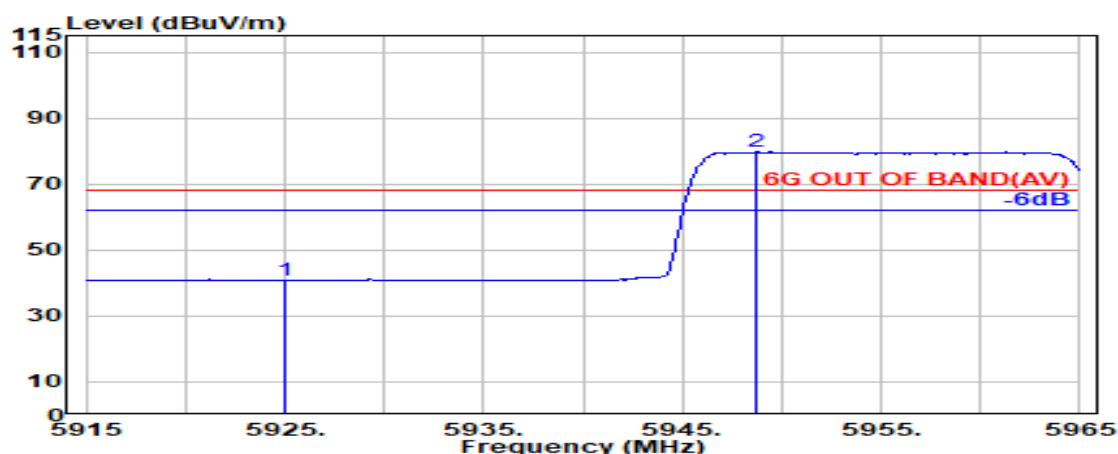

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.77	40.74	68.20	27.46	Average
@ 5948.700	34.10	9.13	39.24	75.89	79.88	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	242T	RU Index	61
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

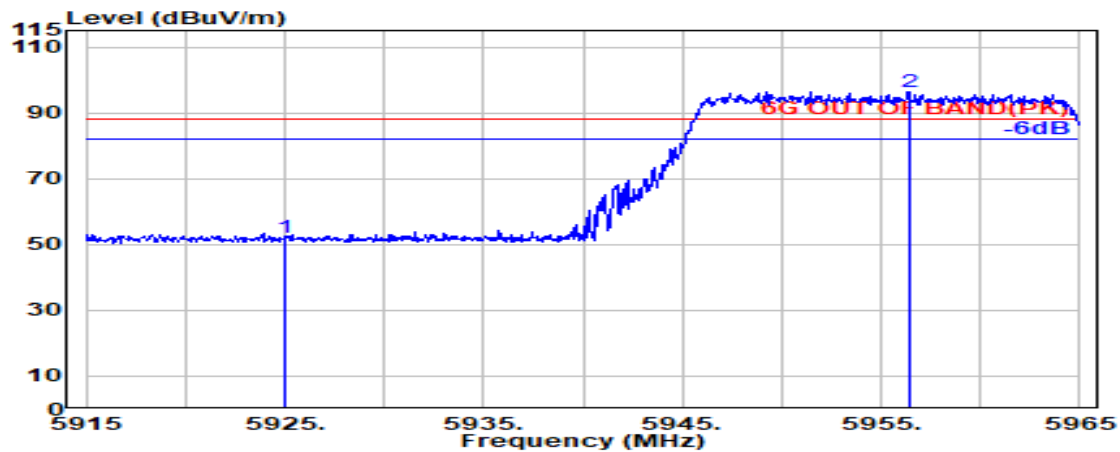

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	48.29	52.26	88.20	35.94	Peak
@ 5956.400	34.09	9.13	39.24	92.57	96.54	---	---	Peak

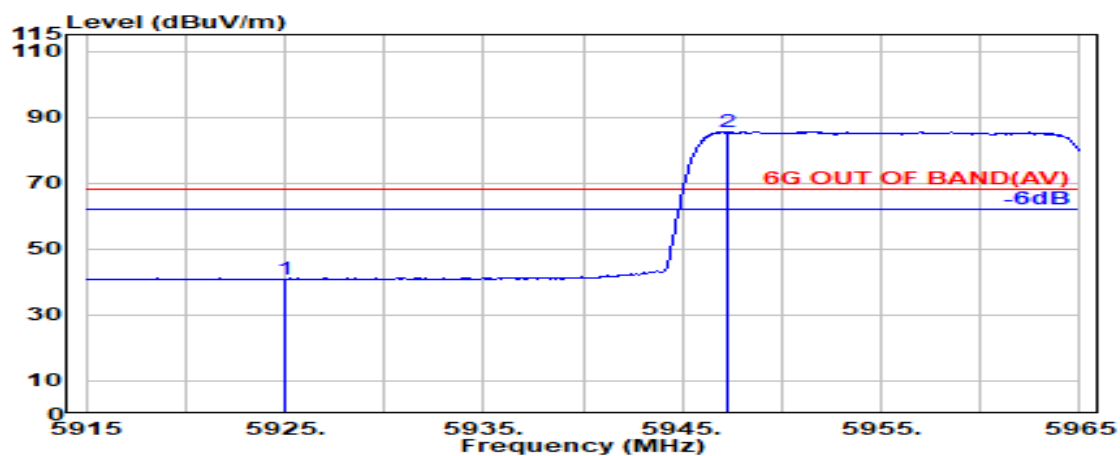

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.96	40.92	68.20	27.28	Average
@ 5947.300	34.10	9.12	39.24	81.62	85.61	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	242T	RU Index	64
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

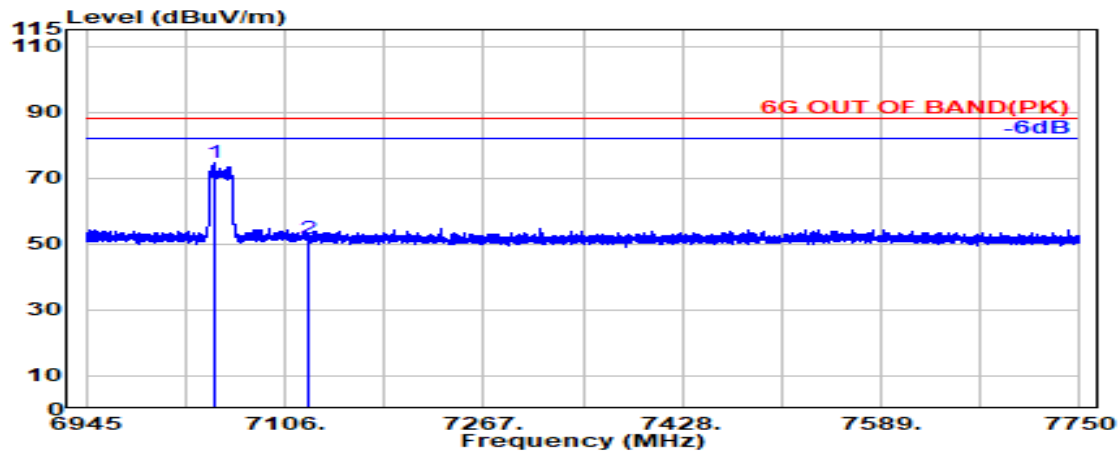

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7048.200	35.30	9.95	39.36	68.80	74.68	---	---	Peak
7125.000	35.70	9.99	39.38	45.47	51.77	88.20	36.43	Peak

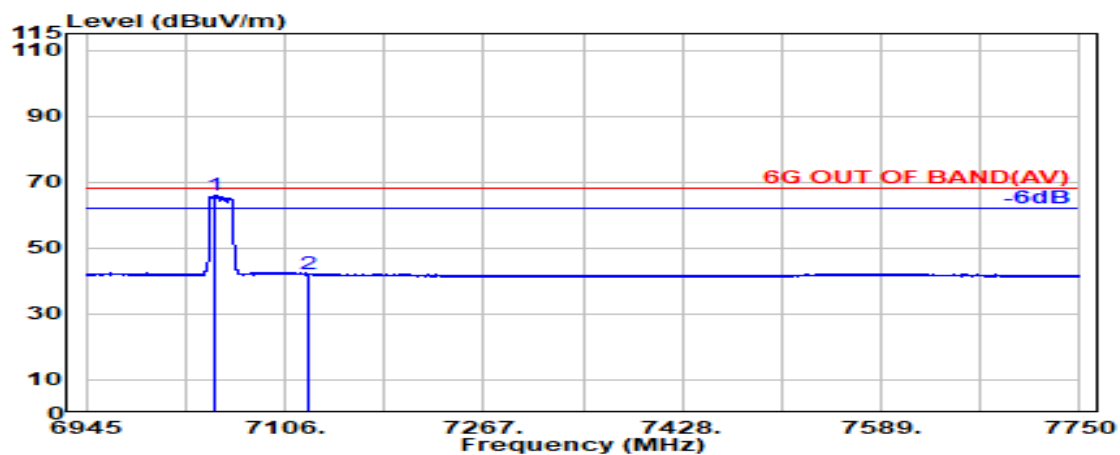

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7049.100	35.30	9.95	39.36	59.96	65.85	---	---	Average
7125.000	35.70	9.99	39.38	35.70	42.01	68.20	26.19	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	242T	RU Index	64
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

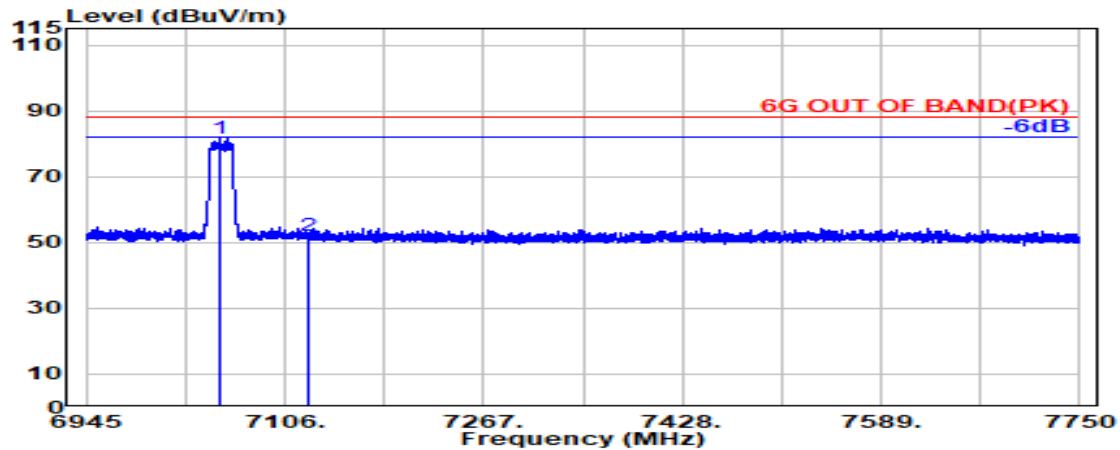

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7052.700	35.32	9.95	39.36	75.64	81.54	---	---	Peak
7125.000	35.70	9.99	39.38	45.71	52.01	88.20	36.19	Peak

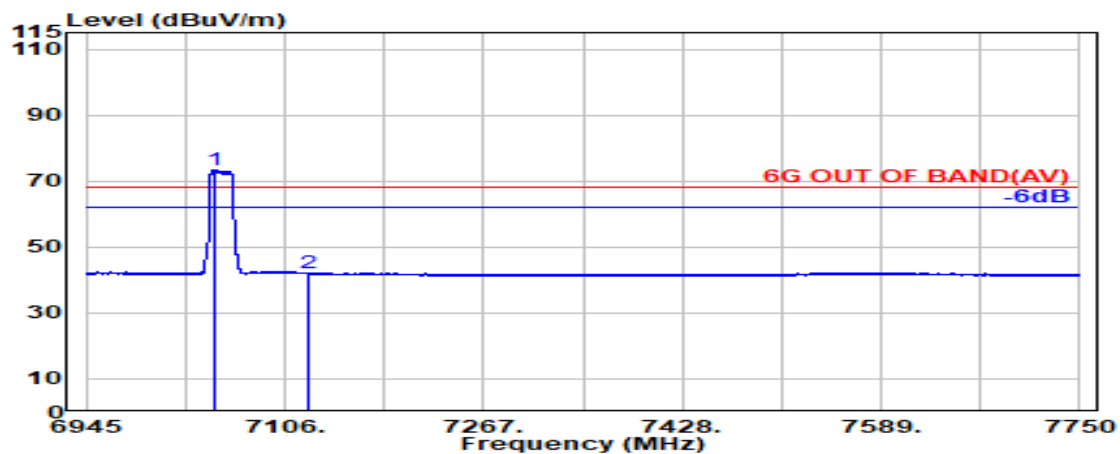

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7048.400	35.30	9.95	39.36	67.55	73.43	---	---	Average
7125.000	35.70	9.99	39.38	35.81	42.11	68.20	26.09	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	484T	RU Index	65
Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX5965MHz

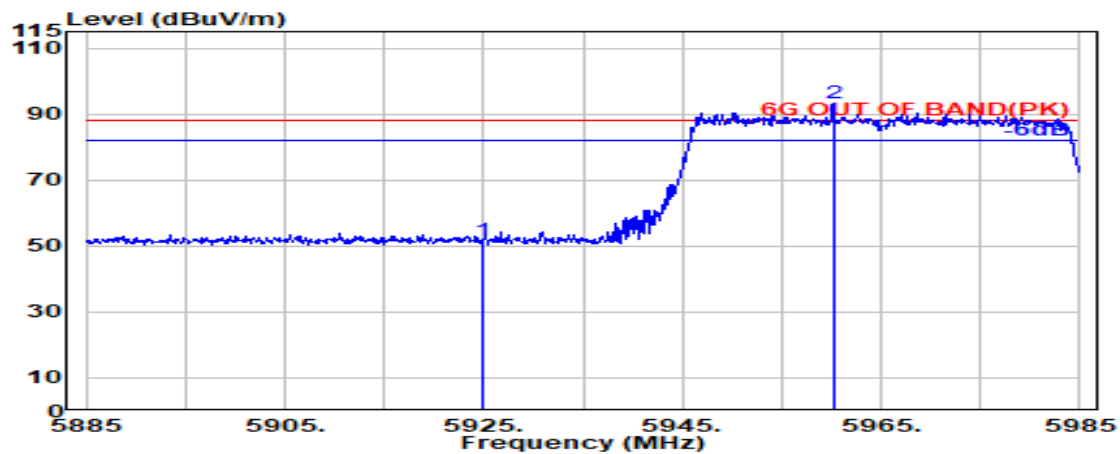

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.67	51.64	88.20	36.56	Peak
@ 5960.200	34.08	9.14	39.24	89.15	93.12	---	---	Peak

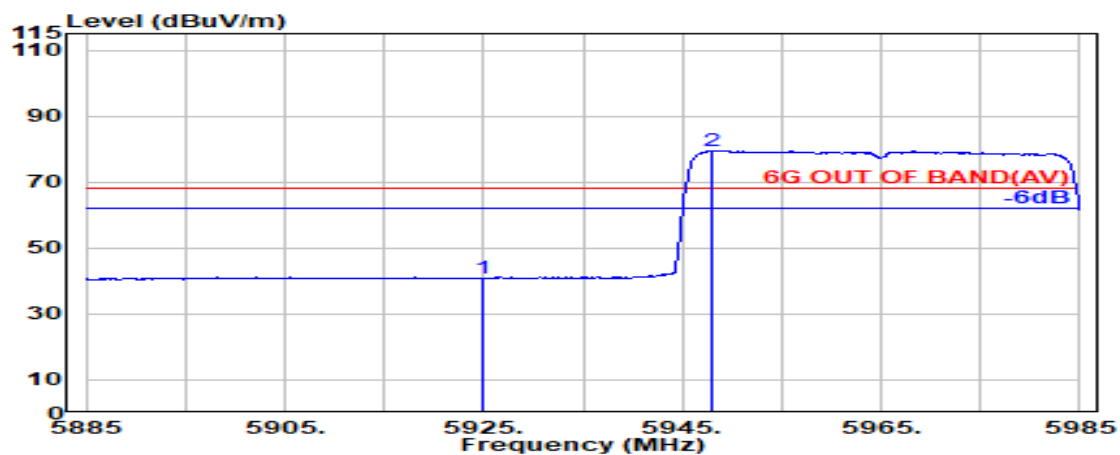

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.81	40.77	68.20	27.43	Average
@ 5947.900	34.10	9.12	39.24	75.60	79.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	484T	RU Index	65
Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX5965MHz

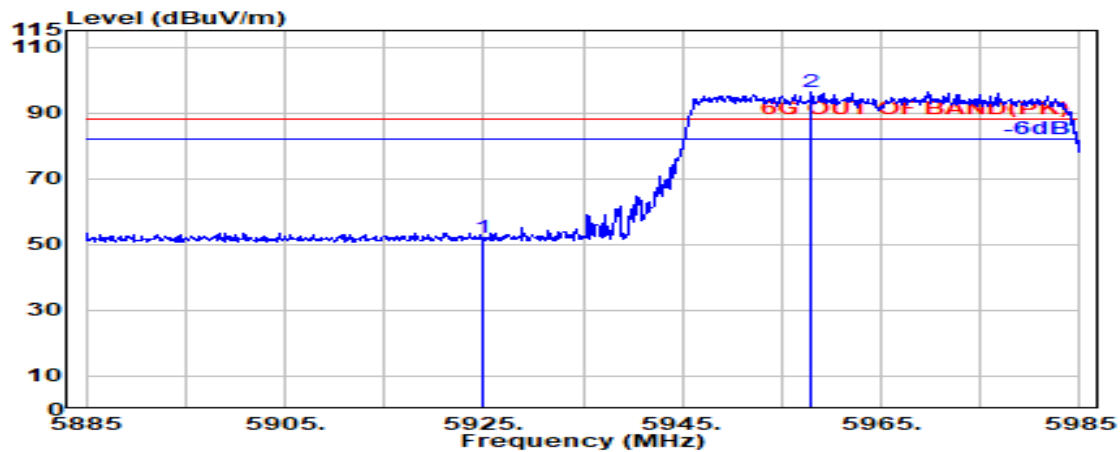

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	48.18	52.15	88.20	36.05	Peak
@ 5958.000	34.08	9.13	39.24	92.35	96.33	---	---	Peak

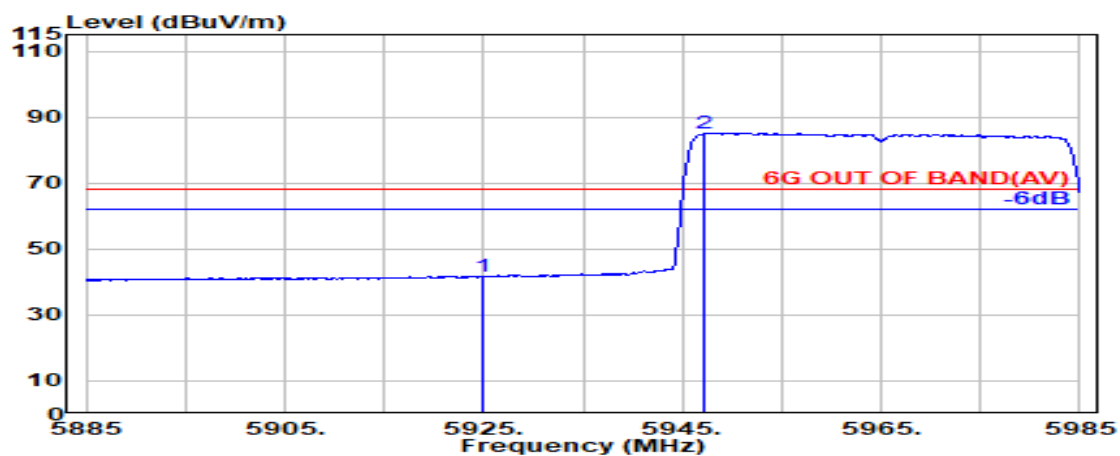

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.64	41.61	68.20	26.59	Average
@ 5947.200	34.10	9.12	39.24	81.23	85.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	484T	RU Index	66
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

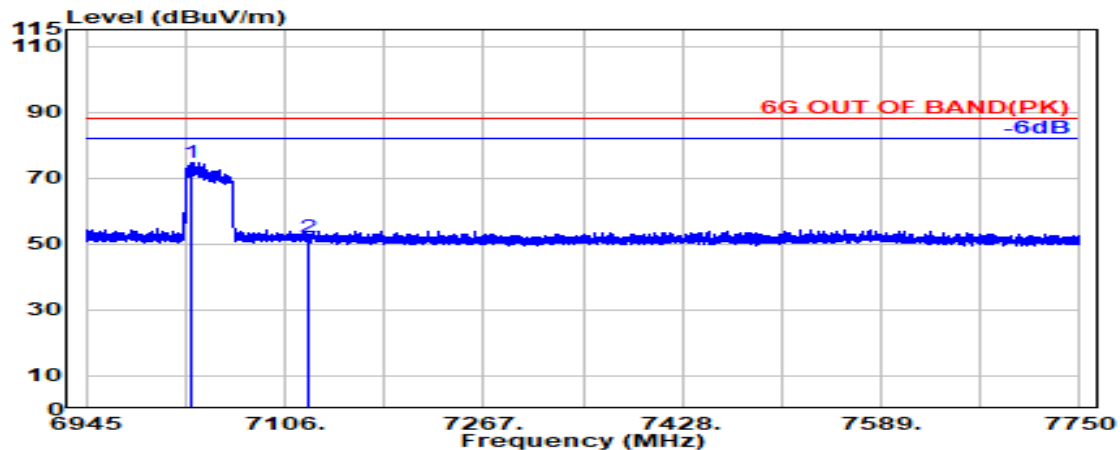

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7029.600	35.30	9.94	39.36	68.94	74.82	---	---	Peak
7125.000	35.70	9.99	39.38	45.89	52.19	88.20	36.01	Peak

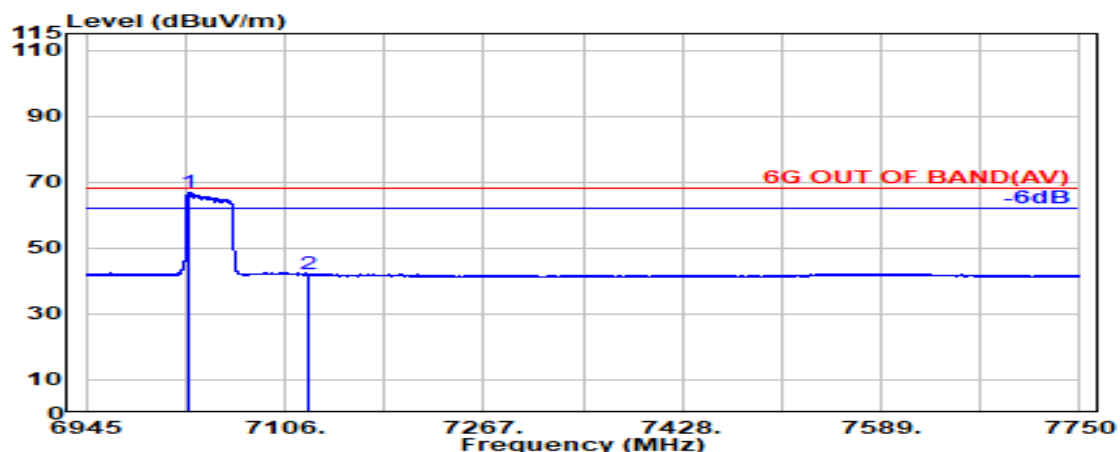

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7027.200	35.30	9.93	39.36	60.79	66.66	---	---	Average
7125.000	35.70	9.99	39.38	35.70	42.00	68.20	26.20	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	484T	RU Index	66
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

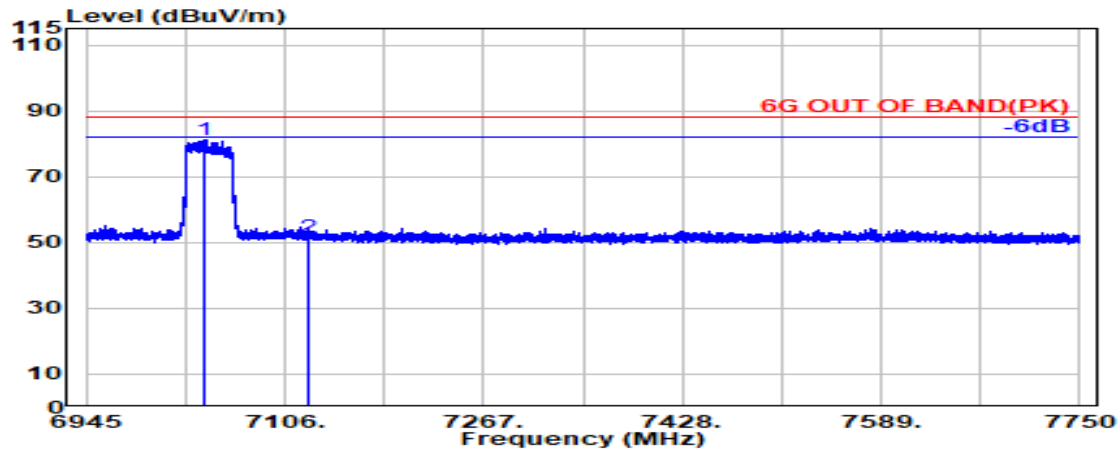

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7041.500	35.30	9.94	39.36	75.10	80.98	---	---	Peak
7125.000	35.70	9.99	39.38	45.43	51.73	88.20	36.47	Peak

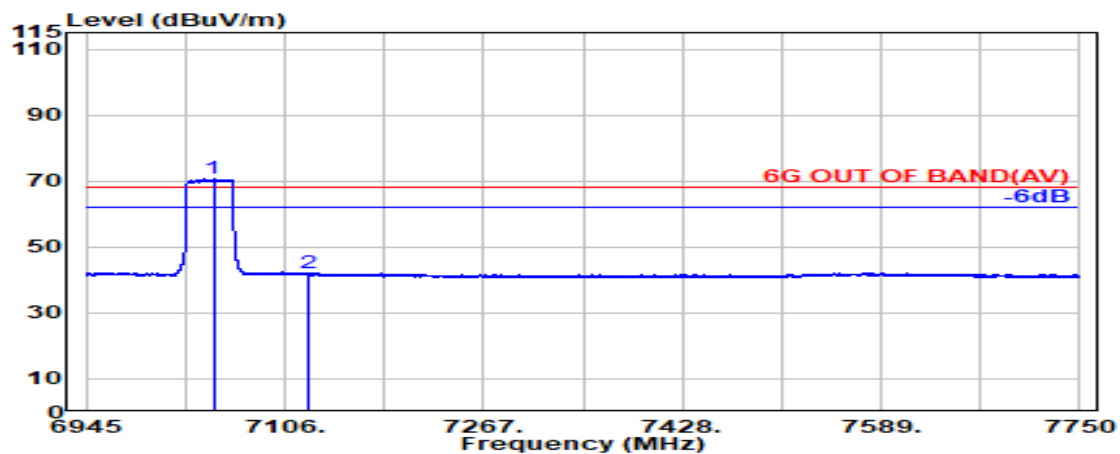

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7048.100	35.30	9.95	39.36	64.74	70.62	---	---	Average
7125.000	35.70	9.99	39.38	35.77	42.07	68.20	26.13	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T	RU Index	67
Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

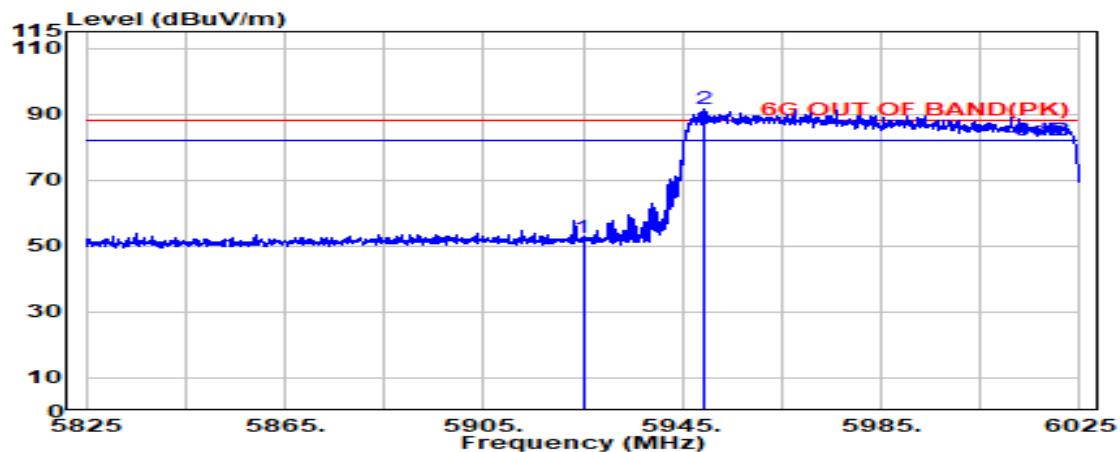

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	48.58	52.55	88.20	35.65	Peak
@ 5949.600	34.10	9.13	39.24	87.76	91.74	---	---	Peak

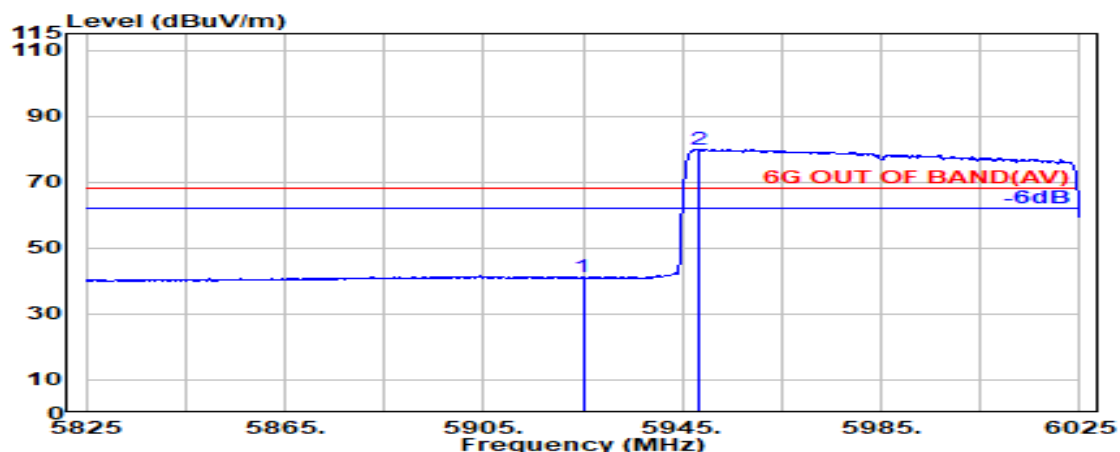

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.17	41.14	68.20	27.06	Average
@ 5948.500	34.10	9.13	39.24	75.97	79.96	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T	RU Index	67
Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

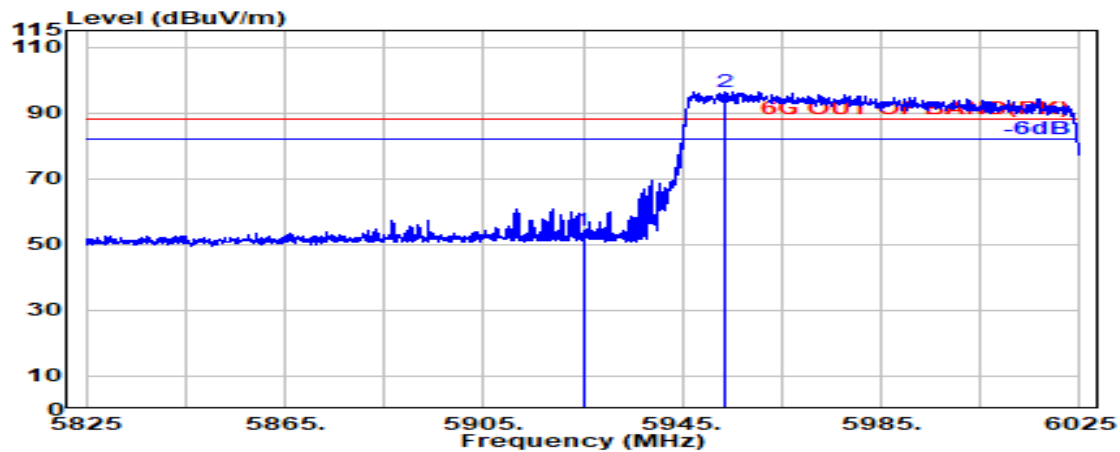

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	50.45	54.42	88.20	33.78	Peak
@ 5953.800	34.09	9.13	39.24	92.46	96.44	---	---	Peak

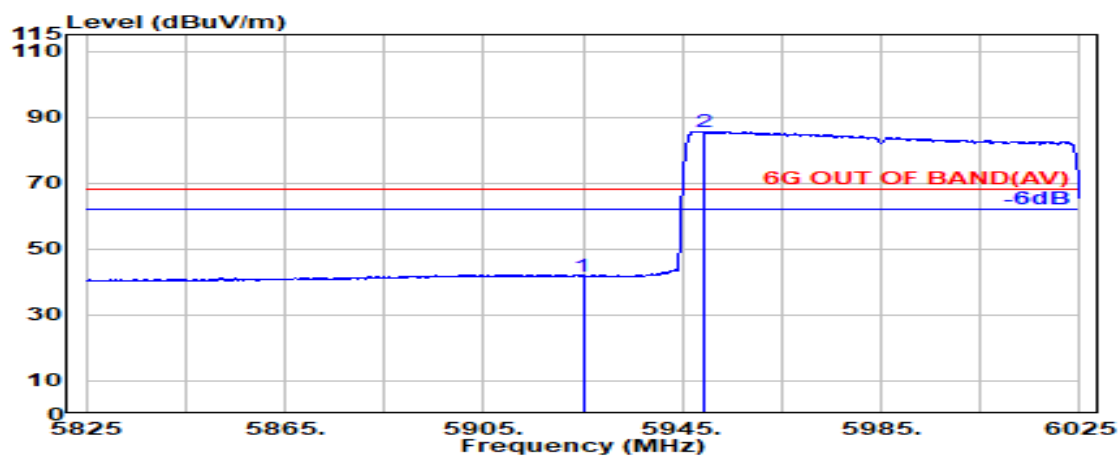

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.79	41.76	68.20	26.44	Average
@ 5949.200	34.10	9.13	39.24	81.69	85.68	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T	RU Index	S67
Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 7025MHz

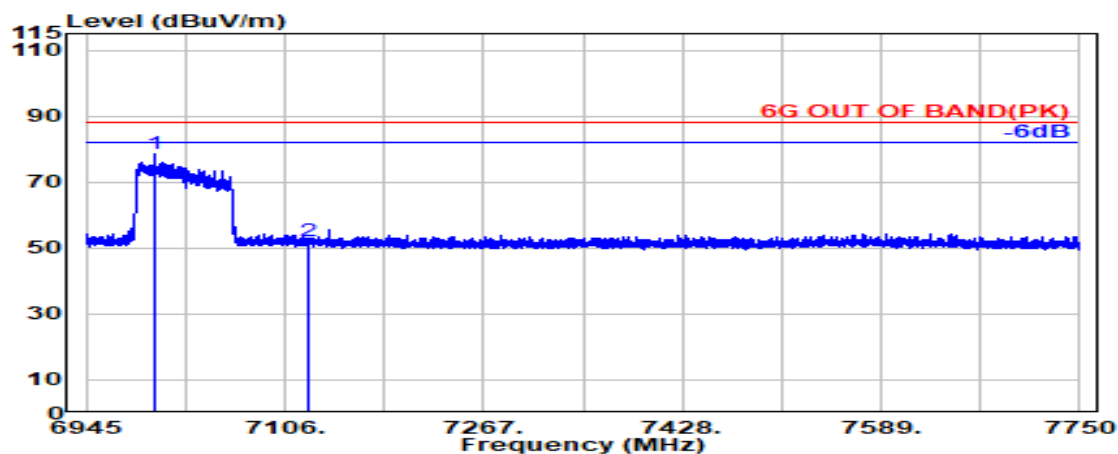

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7001.400	35.30	9.92	39.35	72.58	78.45	---	---	Peak
7125.000	35.70	9.99	39.38	45.65	51.96	88.20	36.24	Peak

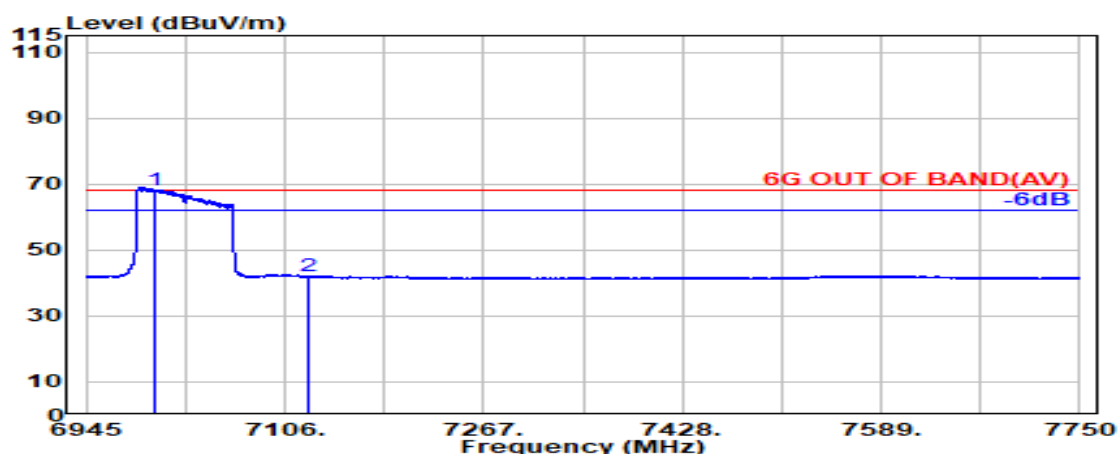

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7000.700	35.30	9.92	39.35	62.46	68.33	---	---	Average
7125.000	35.70	9.99	39.38	35.64	41.94	68.20	26.26	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	996T	RU Index	S67
Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 7025MHz

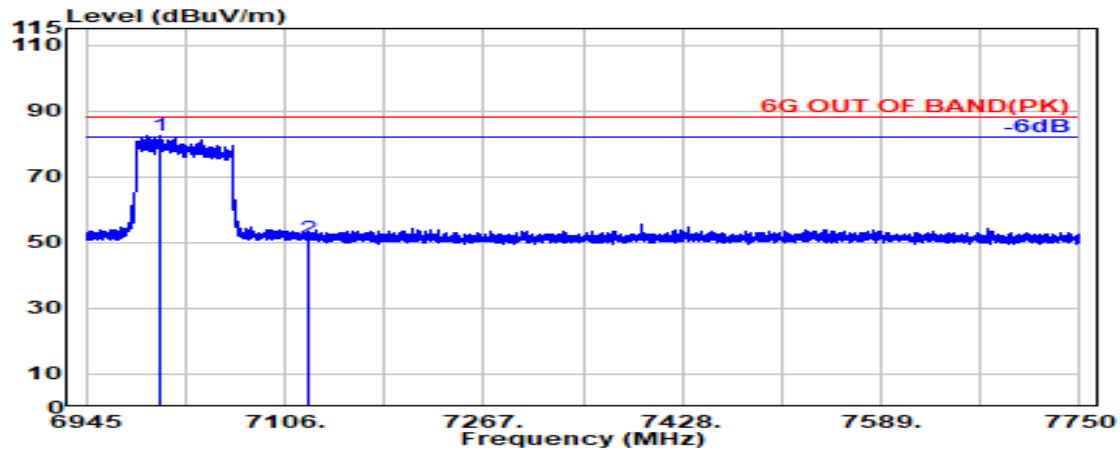

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7005.700	35.30	9.92	39.35	76.58	82.45	---	---	Peak
7125.000	35.70	9.99	39.38	44.91	51.21	88.20	36.99	Peak

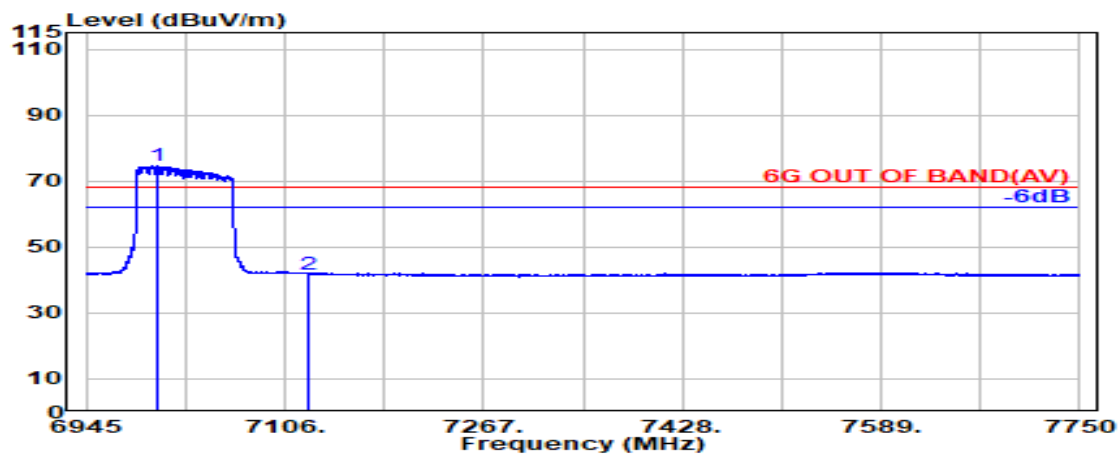

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7002.500	35.30	9.92	39.35	68.61	74.48	---	---	Average
7125.000	35.70	9.99	39.38	35.47	41.77	68.20	26.43	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	26T	RU Index	0
Mode	802.11be-EHT160	U-NII Band	5
		Frequency	TX 6025MHz

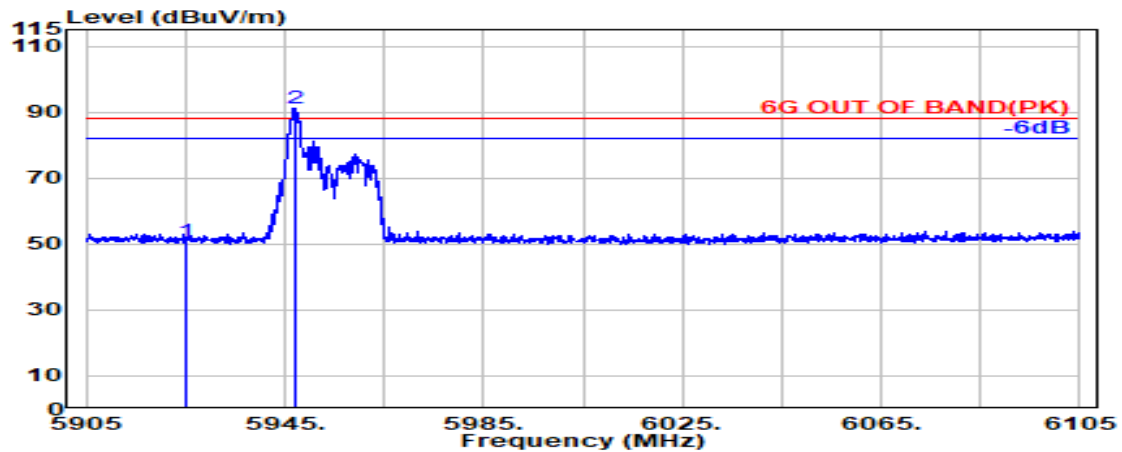

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	46.71	50.68	88.20	37.52	Peak
@ 5946.900	34.10	9.12	39.24	87.23	91.22	---	---	Peak

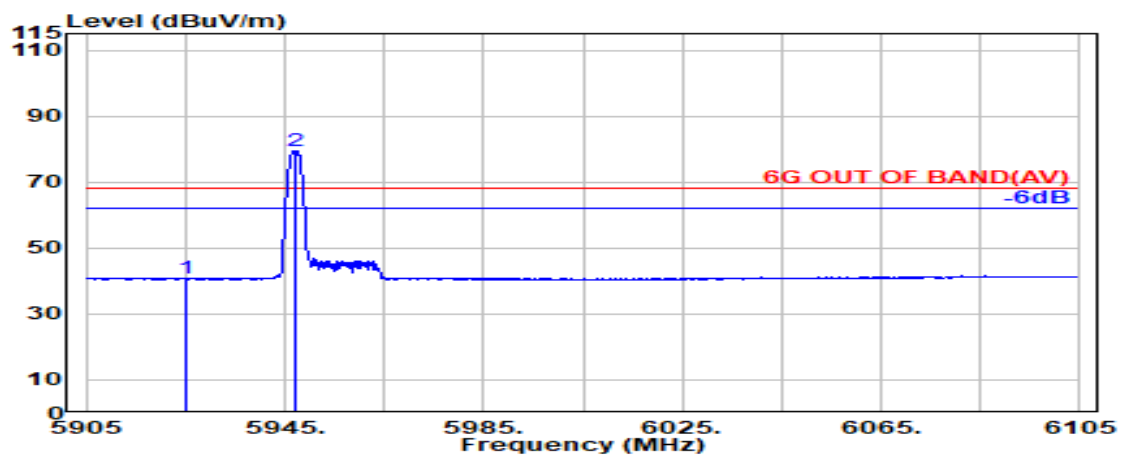

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.62	40.59	68.20	27.61	Average
@ 5947.200	34.10	9.12	39.24	75.54	79.52	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	26T	RU Index	0
Mode	802.11be-EHT160	U-NII Band	5
		Frequency	TX 6025MHz

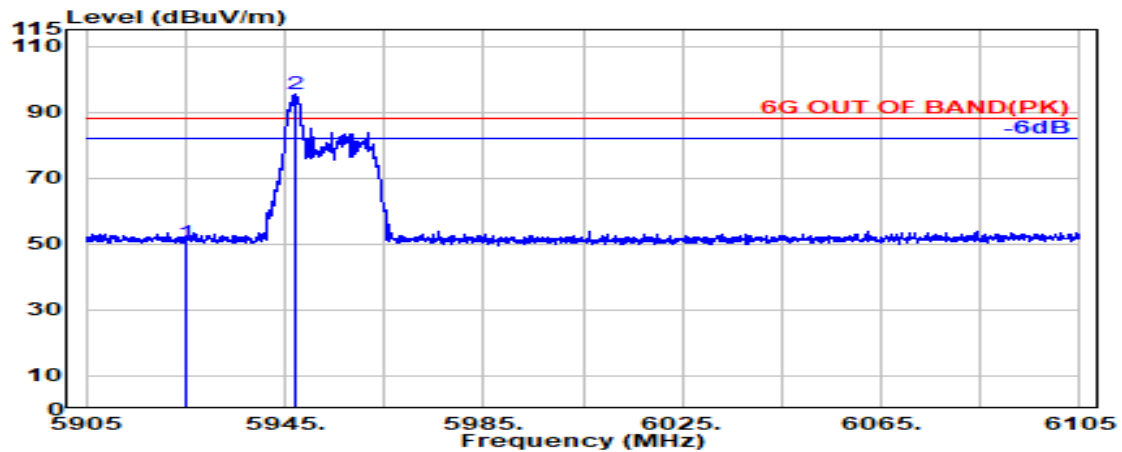

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	46.40	50.37	88.20	37.83	Peak
@ 5946.900	34.10	9.12	39.24	91.54	95.52	---	---	Peak

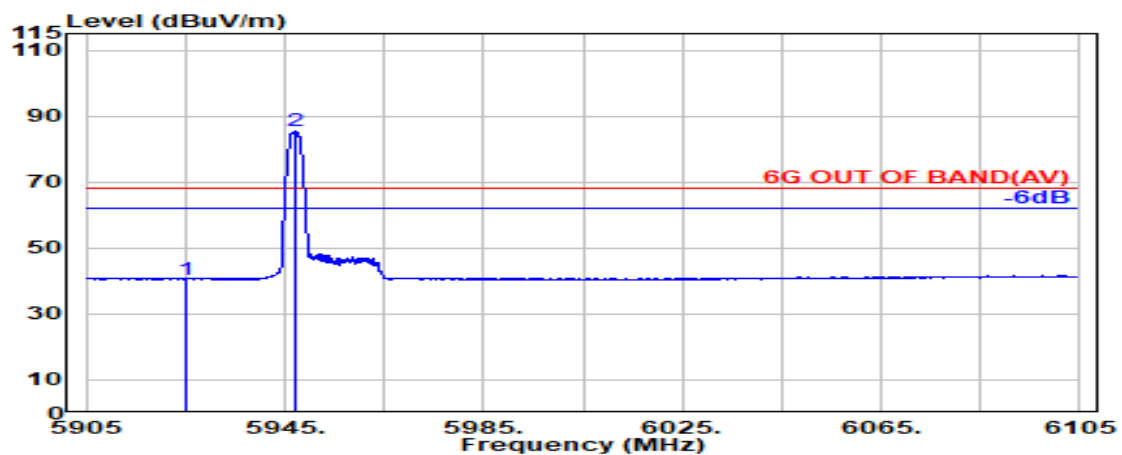

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.56	40.53	68.20	27.67	Average
@ 5947.000	34.10	9.12	39.24	81.34	85.32	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	26T	RU Index	W36
Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

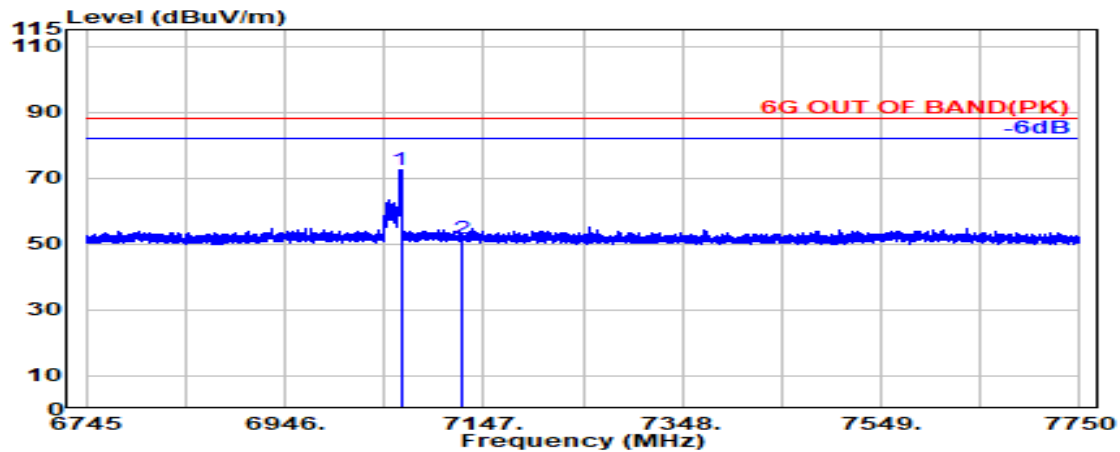

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7063.270	35.38	9.95	39.37	66.60	72.56	---	---	Peak
@ 7125.000	35.70	9.99	39.38	45.33	51.63	88.20	36.57	Peak

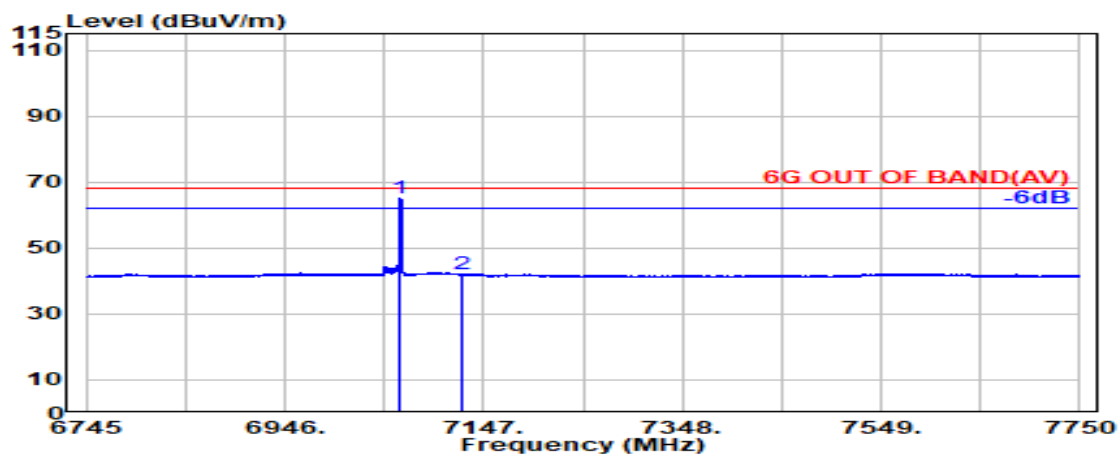

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7063.032	35.38	9.95	39.37	58.99	64.96	---	---	Average
@ 7125.000	35.70	9.99	39.38	35.73	42.04	68.20	26.16	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	26T	RU Index	W36
Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

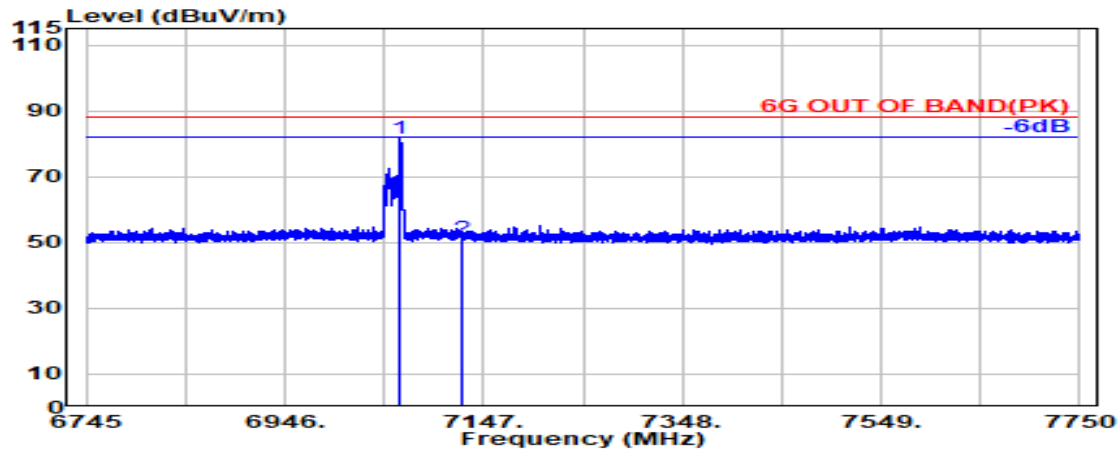

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7063.032	35.38	9.95	39.37	75.49	81.45	---	---	Peak
@ 7125.000	35.70	9.99	39.38	45.03	51.34	88.20	36.86	Peak

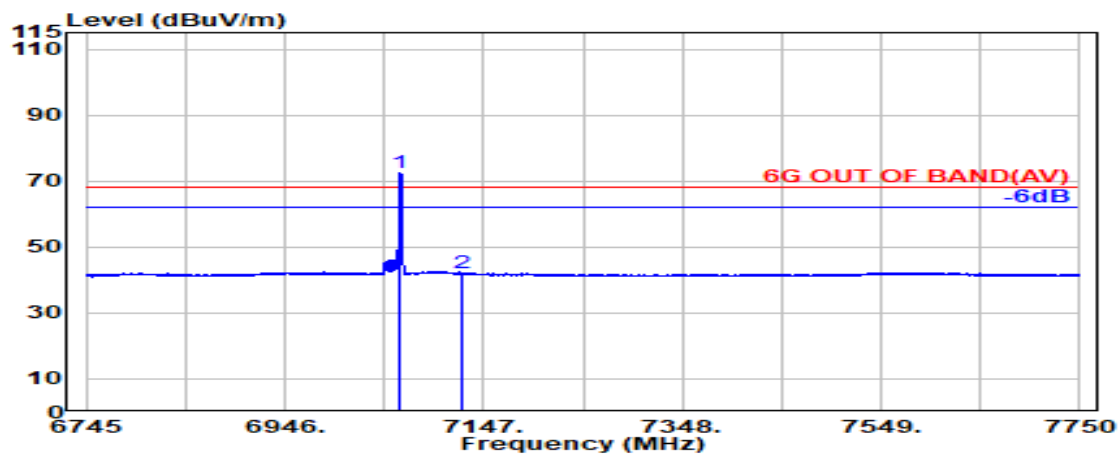

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7062.913	35.38	9.95	39.37	66.45	72.41	---	---	Average
@ 7125.000	35.70	9.99	39.38	35.70	42.00	68.20	26.20	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	52T	RU Index	37
Mode	802.11be-EHT160	U-NII Band	5
		Frequency	TX 6025MHz

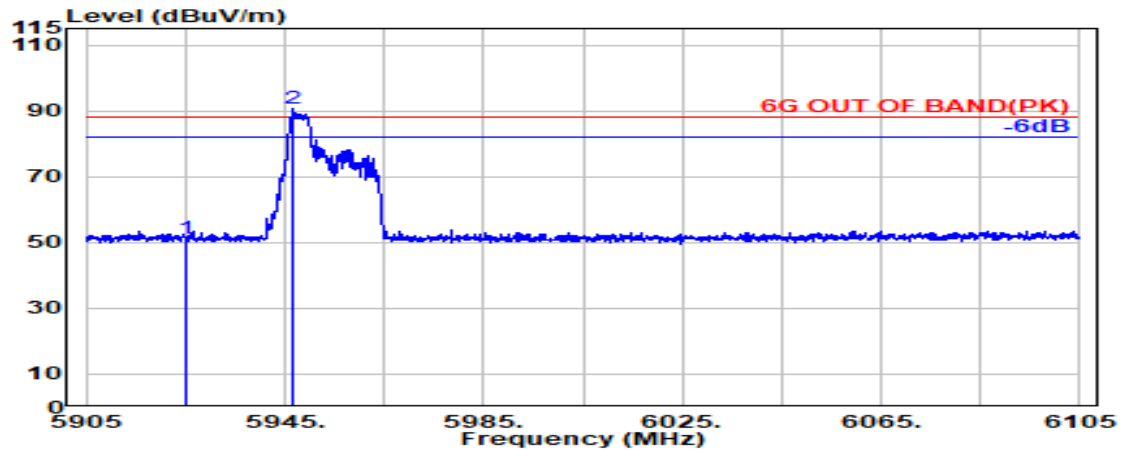

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.04	51.01	88.20	37.19	Peak
@ 5946.600	34.10	9.12	39.24	86.87	90.85	---	---	Peak

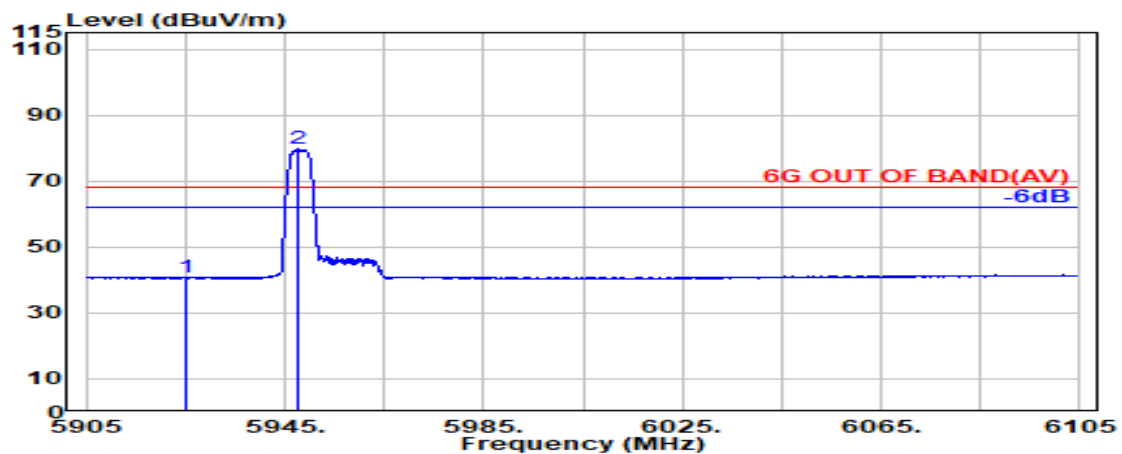

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.69	40.66	68.20	27.54	Average
@ 5947.500	34.10	9.12	39.24	75.71	79.70	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	52T	RU Index	37
Mode	802.11be-EHT160	U-NII Band	5
		Frequency	TX 6025MHz

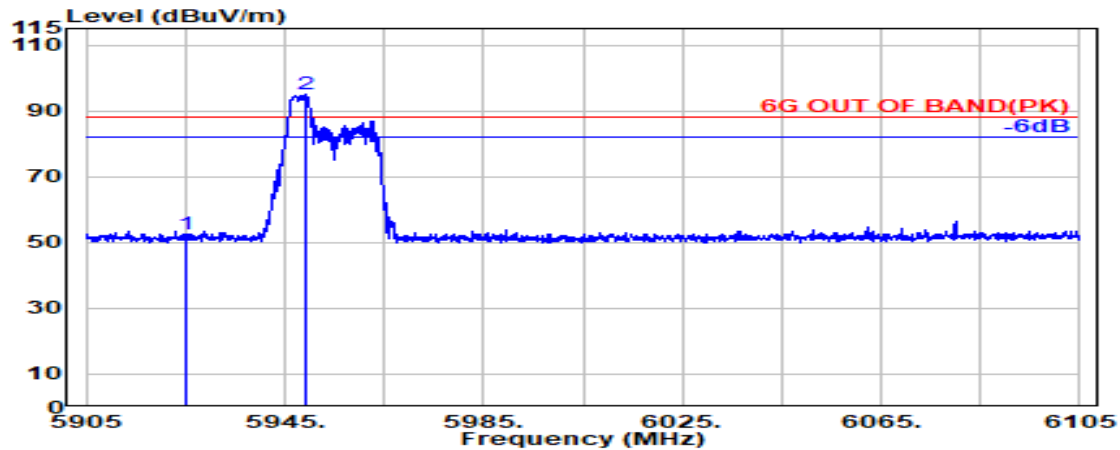

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	48.34	52.31	88.20	35.89	Peak
@ 5949.400	34.10	9.13	39.24	91.19	95.17	---	---	Peak

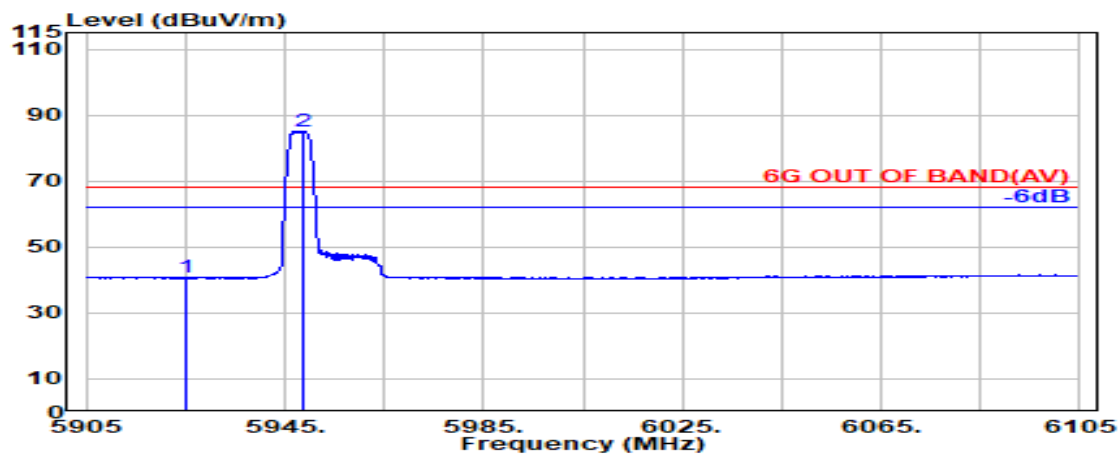

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.74	40.71	68.20	27.49	Average
@ 5948.800	34.10	9.13	39.24	81.21	85.20	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	52T	RU Index	W52
Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

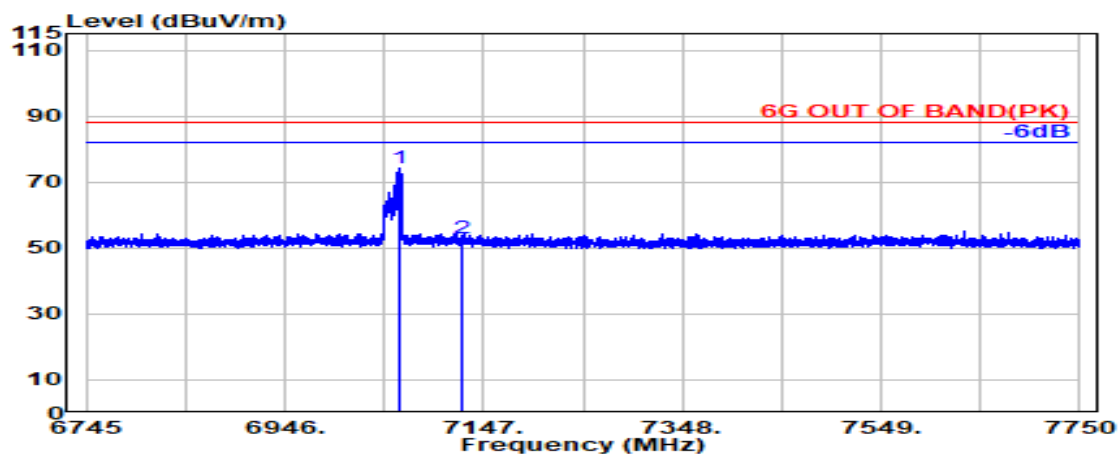

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7061.248	35.37	9.95	39.37	68.46	74.42	---	---	Peak
7125.000	35.70	9.99	39.38	46.42	52.73	88.20	35.47	Peak

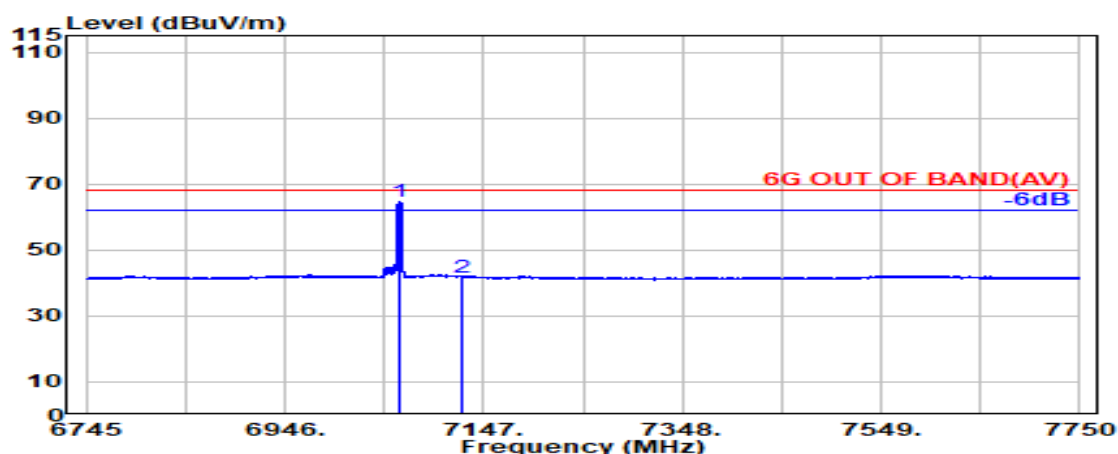

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7061.010	35.37	9.95	39.37	58.76	64.72	---	---	Average
7125.000	35.70	9.99	39.38	35.51	41.82	68.20	26.38	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	52T	RU Index	W52
Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

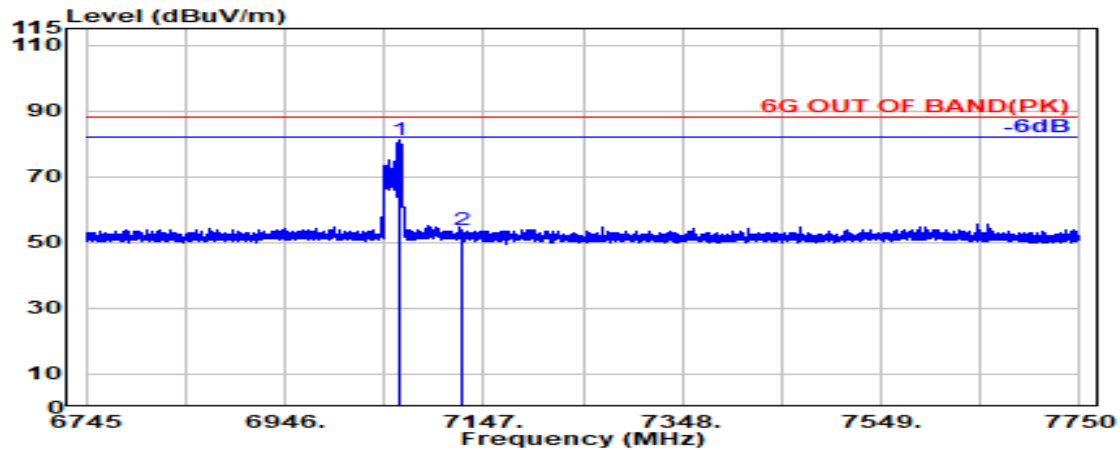

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7062.794	35.38	9.95	39.37	75.19	81.15	---	---	Peak
7125.000	35.70	9.99	39.38	47.40	53.70	88.20	34.50	Peak

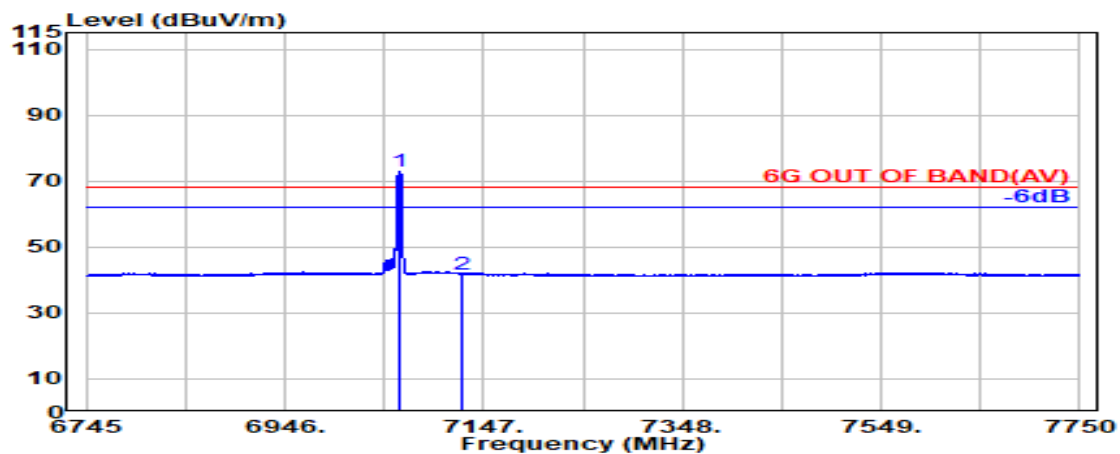

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7061.604	35.37	9.95	39.37	66.95	72.91	---	---	Average
7125.000	35.70	9.99	39.38	35.51	41.81	68.20	26.39	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	106T	RU Index	53
Mode	802.11be-EHT40	U-NII Band	5
		Frequency	TX 5965MHz

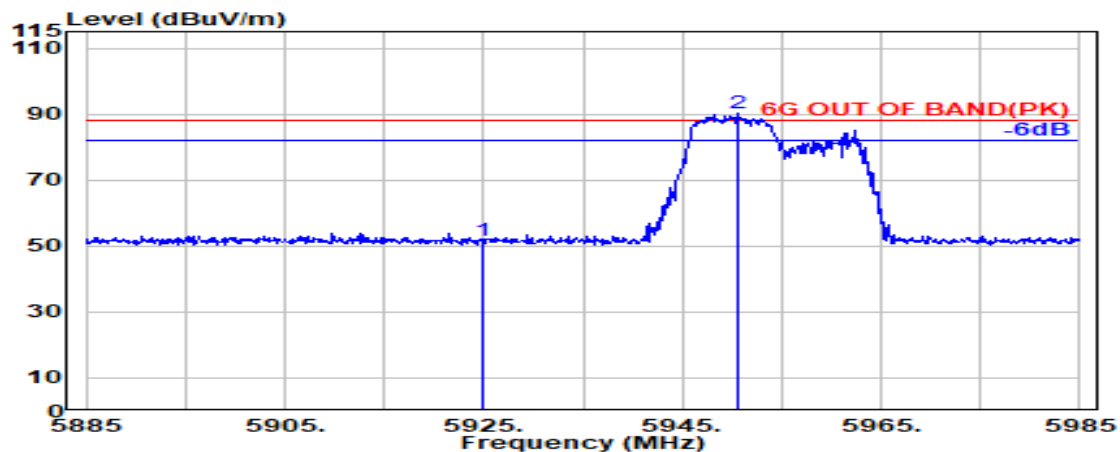

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.78	51.75	88.20	36.45	Peak
@ 5950.500	34.10	9.13	39.24	86.08	90.06	---	---	Peak

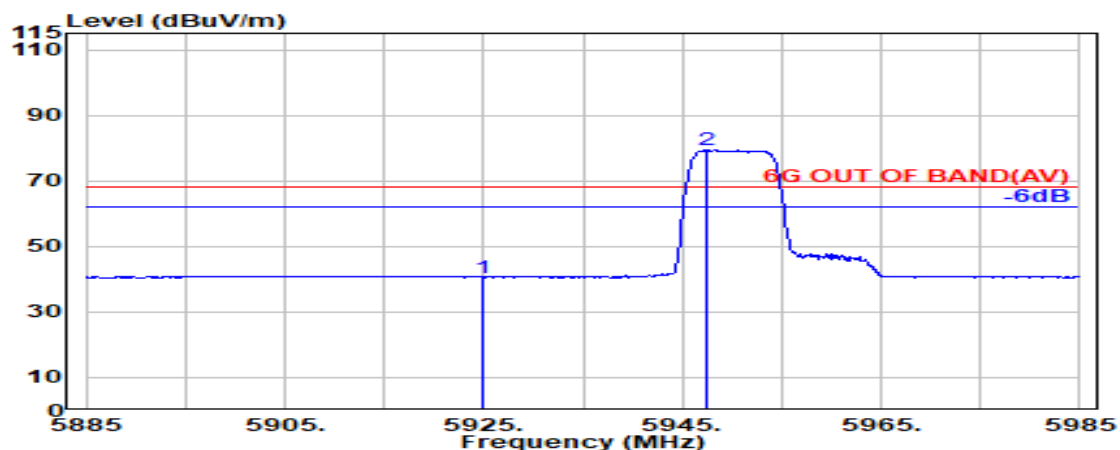

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.59	40.55	68.20	27.65	Average
@ 5947.400	34.10	9.12	39.24	75.53	79.52	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	106T	RU Index	53
Mode	802.11be-EHT40	U-NII Band	5
		Frequency	TX 5965MHz

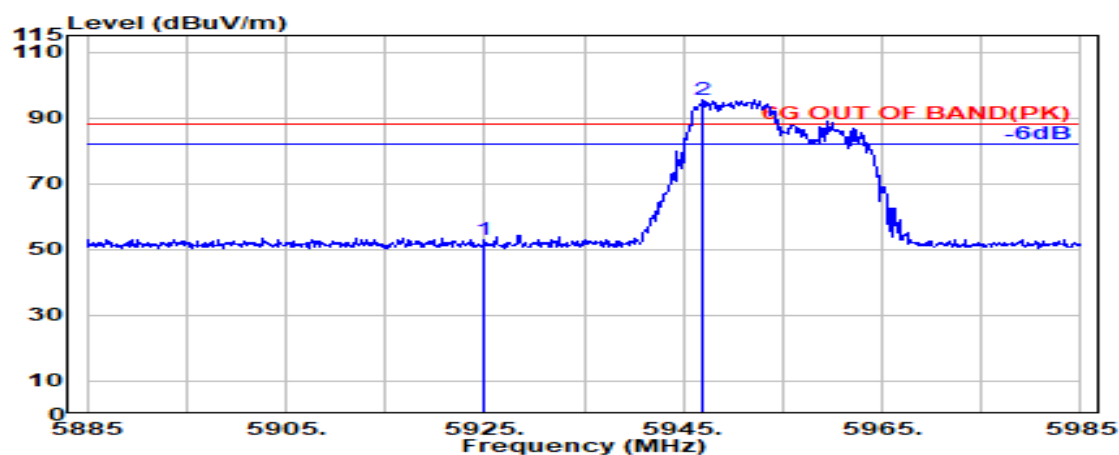

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	48.82	52.79	88.20	35.41	Peak
@ 5947.000	34.10	9.12	39.24	91.33	95.31	---	---	Peak

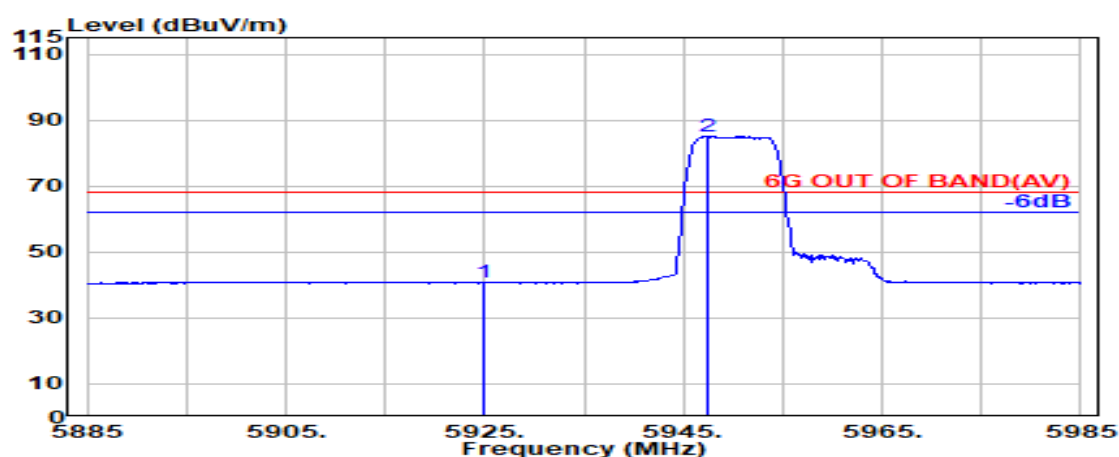

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.75	40.72	68.20	27.48	Average
@ 5947.500	34.10	9.12	39.24	81.14	85.12	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	106T	RU Index	60
Mode	802.11be-EHT80	U-NII Band	8
		Frequency	TX 7025MHz

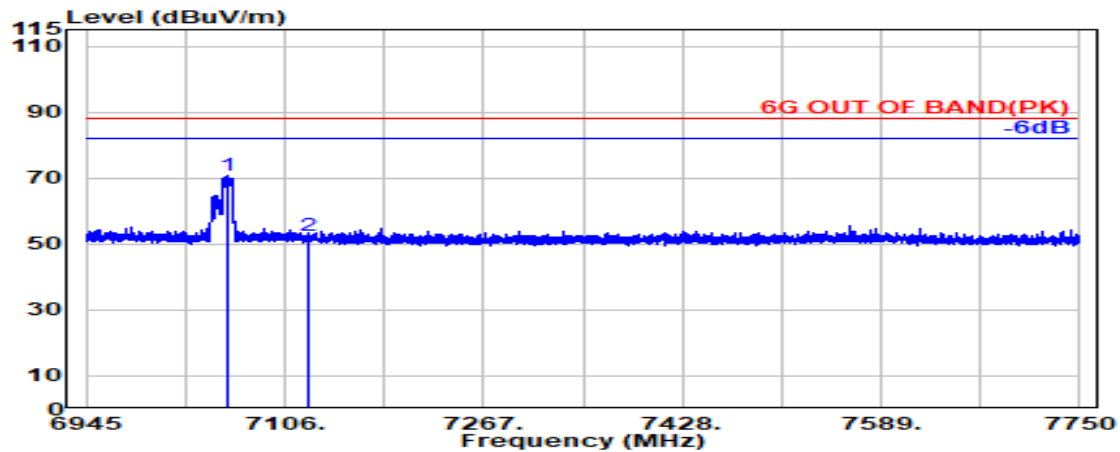

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7060.000	35.36	9.95	39.37	64.84	70.78	---	---	Peak
7125.000	35.70	9.99	39.38	46.22	52.52	88.20	35.68	Peak

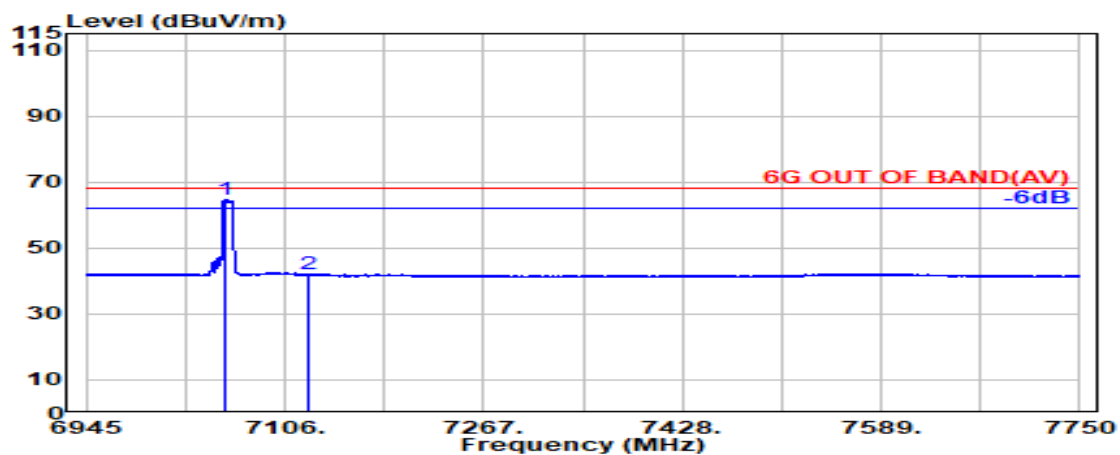

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7058.300	35.35	9.95	39.37	58.84	64.77	---	---	Average
7125.000	35.70	9.99	39.38	35.79	42.10	68.20	26.10	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	106T	RU Index	60
Mode	802.11be-EHT80	U-NII Band	8
		Frequency	TX 7025MHz

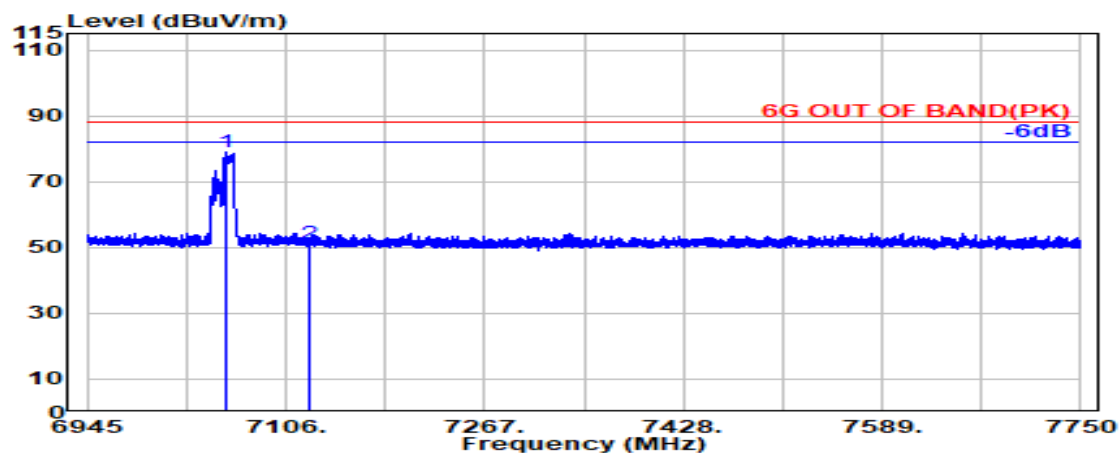

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7057.400	35.34	9.95	39.37	72.85	78.78	---	---	Peak
7125.000	35.70	9.99	39.38	45.01	51.31	88.20	36.89	Peak

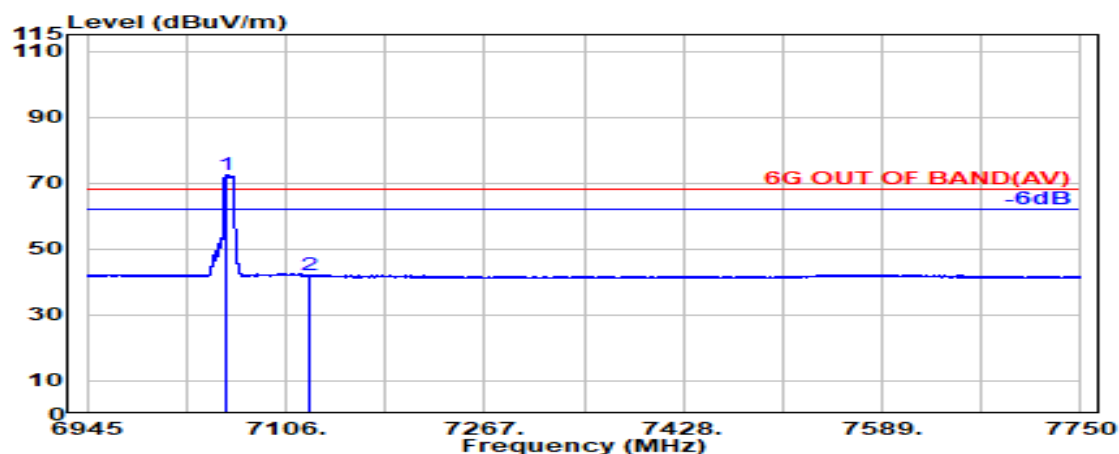

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7058.500	35.35	9.95	39.37	66.48	72.42	---	---	Average
7125.000	35.70	9.99	39.38	35.83	42.13	68.20	26.07	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	242T	RU Index	61
Mode	802.11be-EHT40	U-NII Band	5
		Frequency	TX 5965MHz

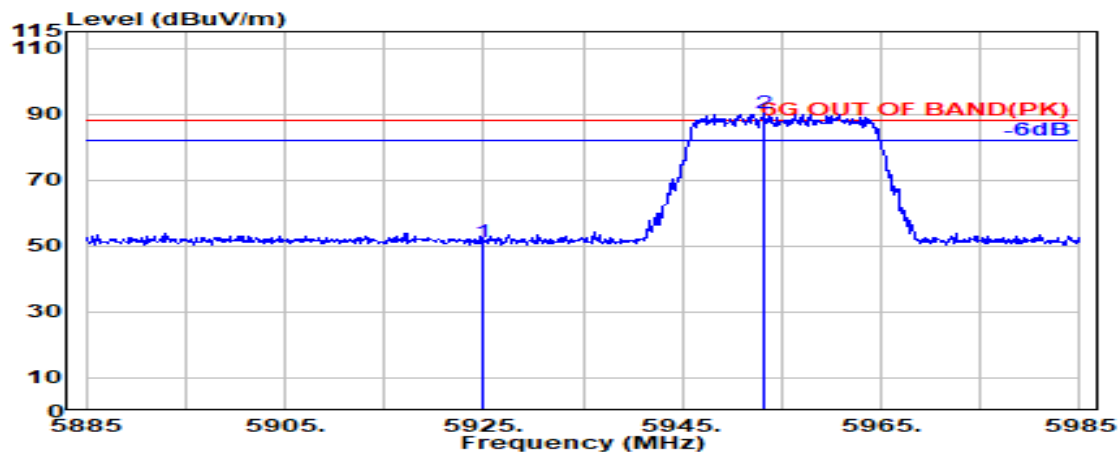

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.36	51.33	88.20	36.87	Peak
@ 5953.300	34.09	9.13	39.24	86.42	90.40	---	---	Peak

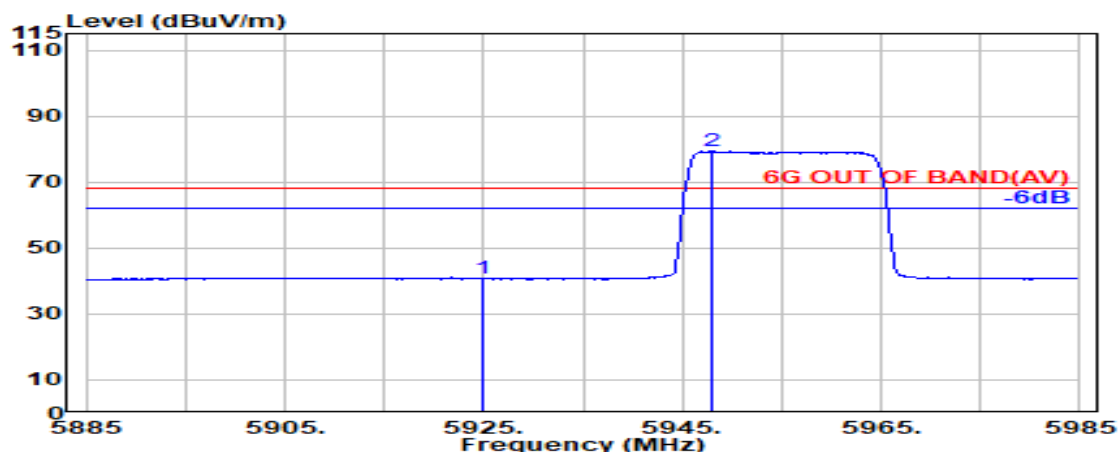

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.77	40.74	68.20	27.46	Average
@ 5947.900	34.10	9.12	39.24	75.31	79.29	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	242T	RU Index	61
Mode	802.11be-EHT40	U-NII Band	5
		Frequency	TX 5965MHz

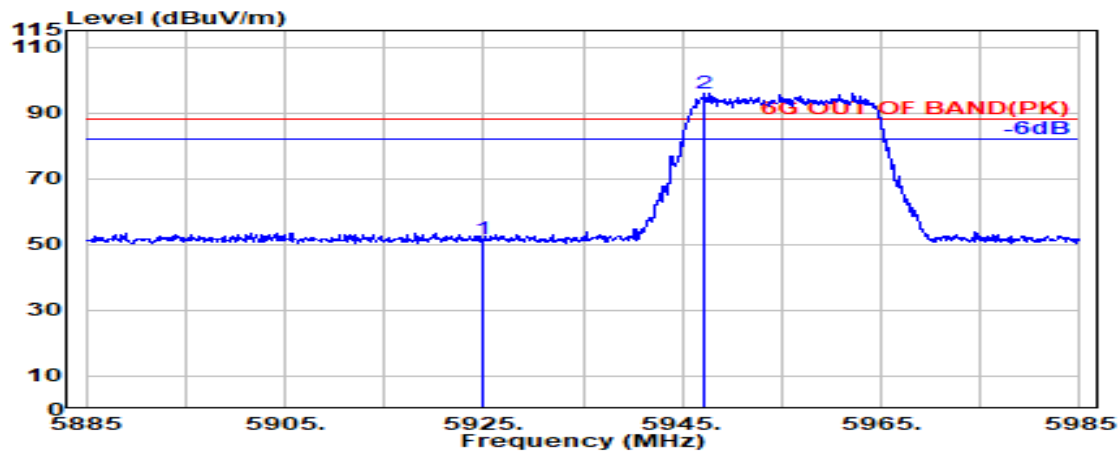

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.55	51.52	88.20	36.68	Peak
@ 5947.300	34.10	9.12	39.24	92.10	96.09	---	---	Peak

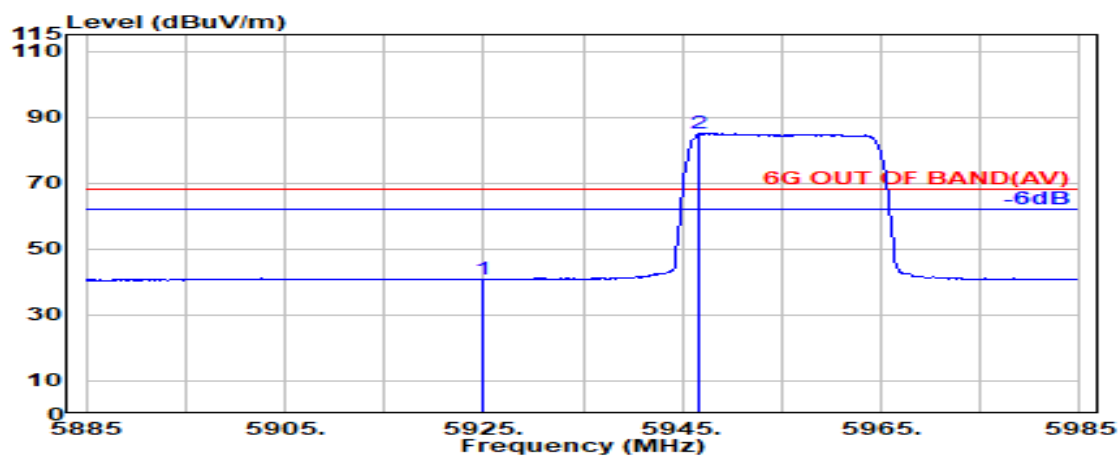

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.80	40.77	68.20	27.43	Average
@ 5946.700	34.10	9.12	39.24	81.08	85.06	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	242T	RU Index	64
Mode	802.11be-EHT80	U-NII Band	8
		Frequency	TX 7025MHz

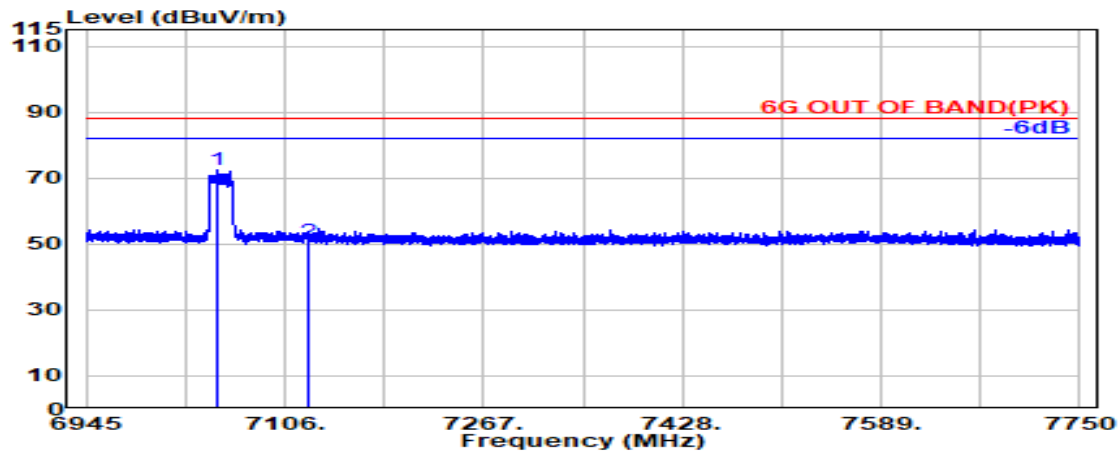

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7051.400	35.31	9.95	39.36	66.45	72.34	---	---	Peak
7125.000	35.70	9.99	39.38	44.63	50.94	88.20	37.26	Peak

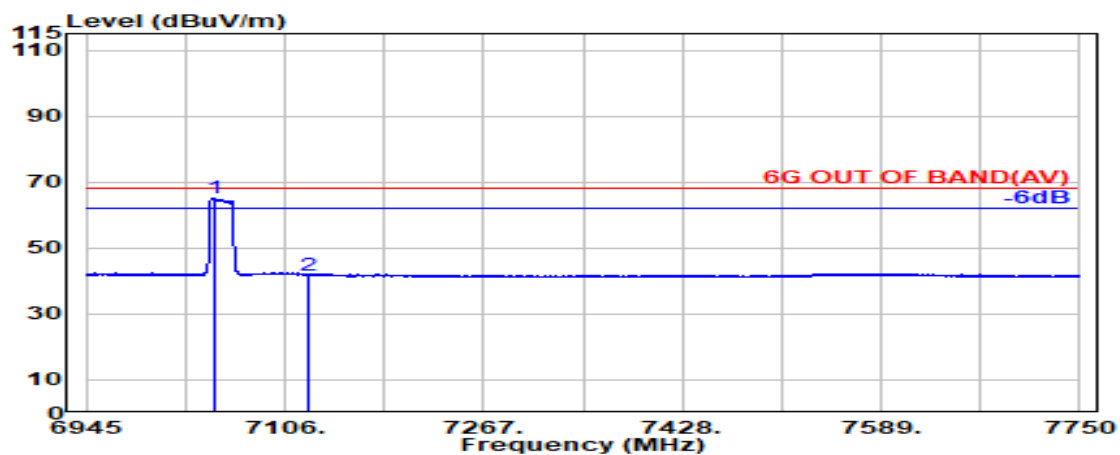

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7048.500	35.30	9.95	39.36	59.26	65.14	---	---	Average
7125.000	35.70	9.99	39.38	35.52	41.83	68.20	26.37	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	242T	RU Index	64
Mode	802.11be-EHT80	U-NII Band	8
		Frequency	TX 7025MHz

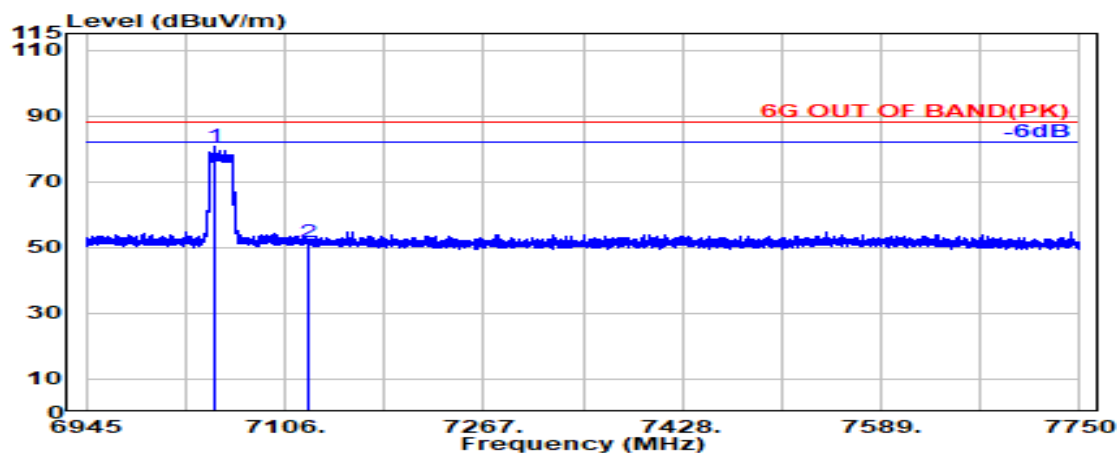

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7048.500	35.30	9.95	39.36	74.80	80.68	---	---	Peak
7125.000	35.70	9.99	39.38	45.30	51.61	88.20	36.59	Peak

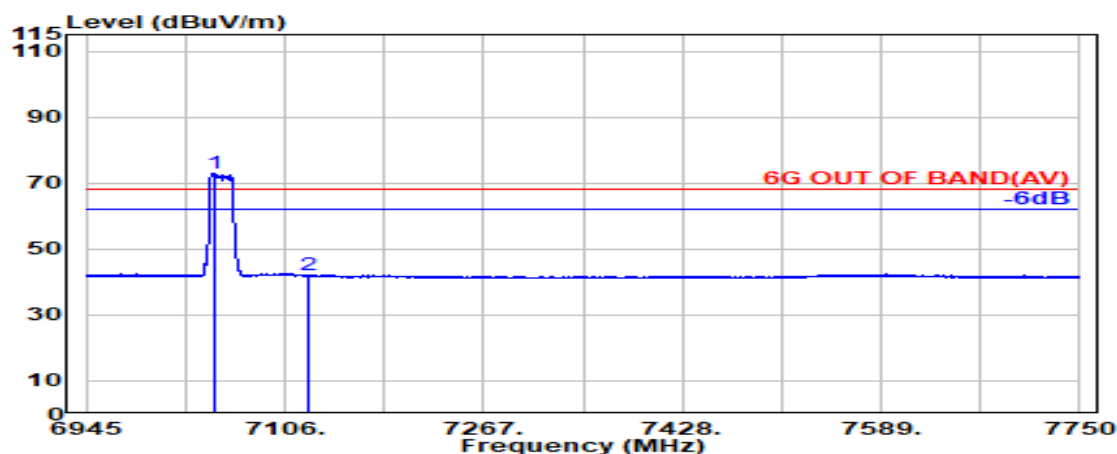

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7049.200	35.30	9.95	39.36	66.89	72.77	---	---	Average
7125.000	35.70	9.99	39.38	35.59	41.89	68.20	26.31	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	484T	RU Index	65
Mode	802.11be-EHT40	U-NII Band	5
		Frequency	TX 5965MHz

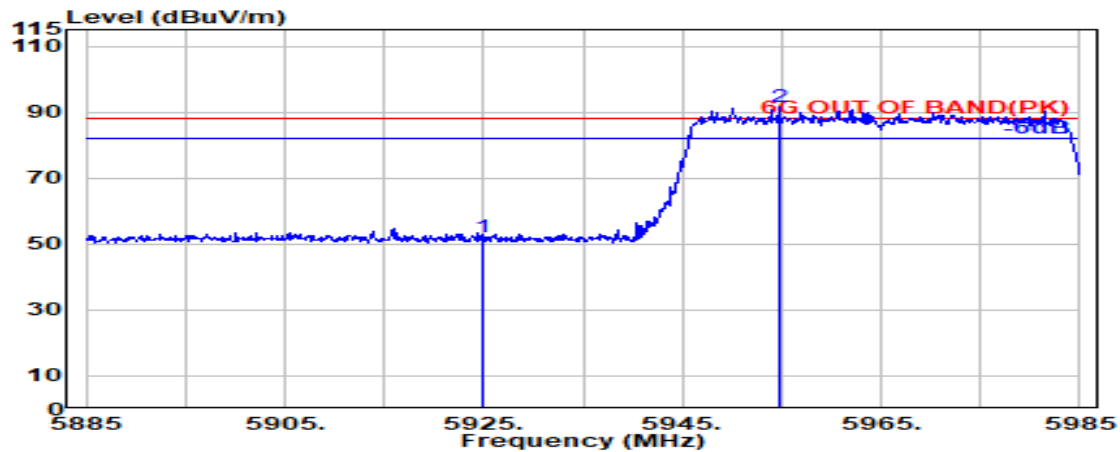

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	48.16	52.13	88.20	36.07	Peak
@ 5954.700	34.09	9.13	39.24	87.45	91.43	---	---	Peak

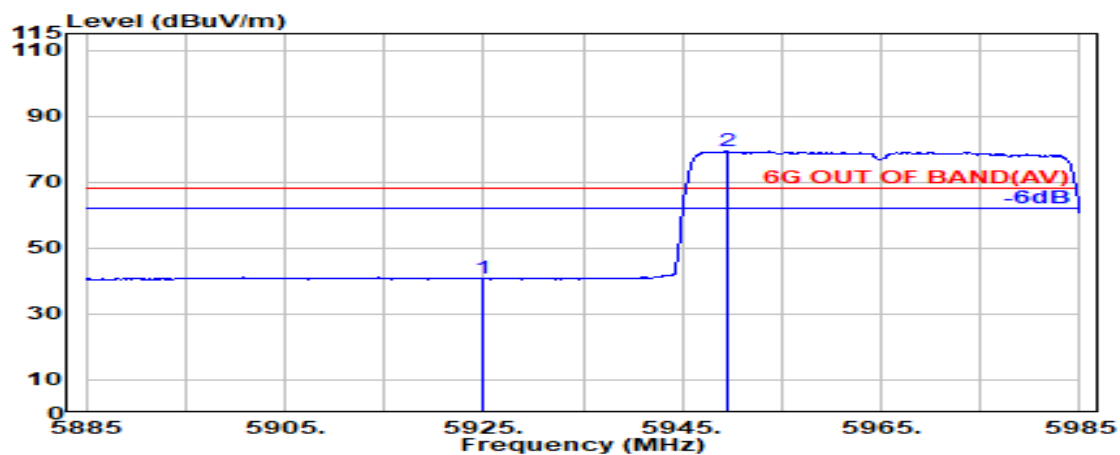

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.71	40.68	68.20	27.52	Average
@ 5949.500	34.10	9.13	39.24	75.36	79.34	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	484T	RU Index	65
Mode	802.11be-EHT40	U-NII Band	5
		Frequency	TX 5965MHz

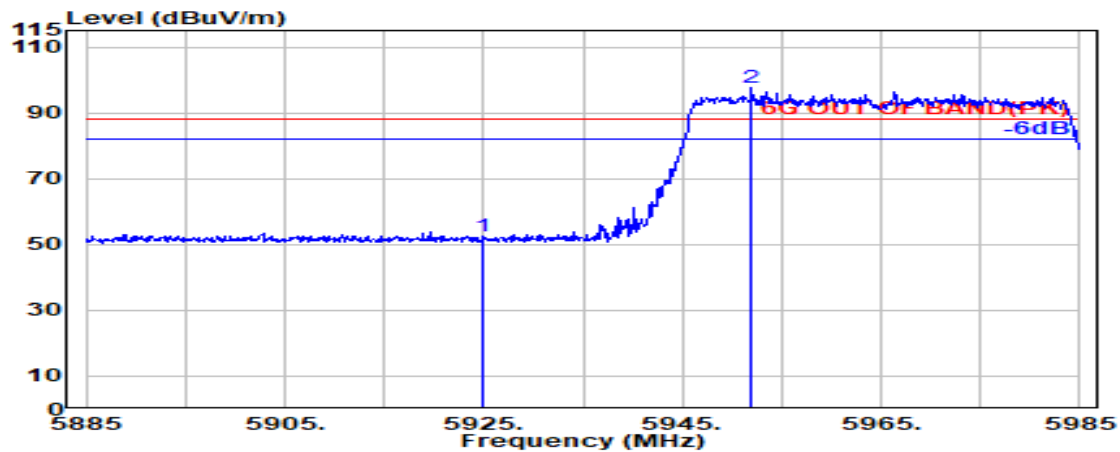

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	48.36	52.33	88.20	35.87	Peak
@ 5952.000	34.10	9.13	39.24	93.56	97.55	---	---	Peak

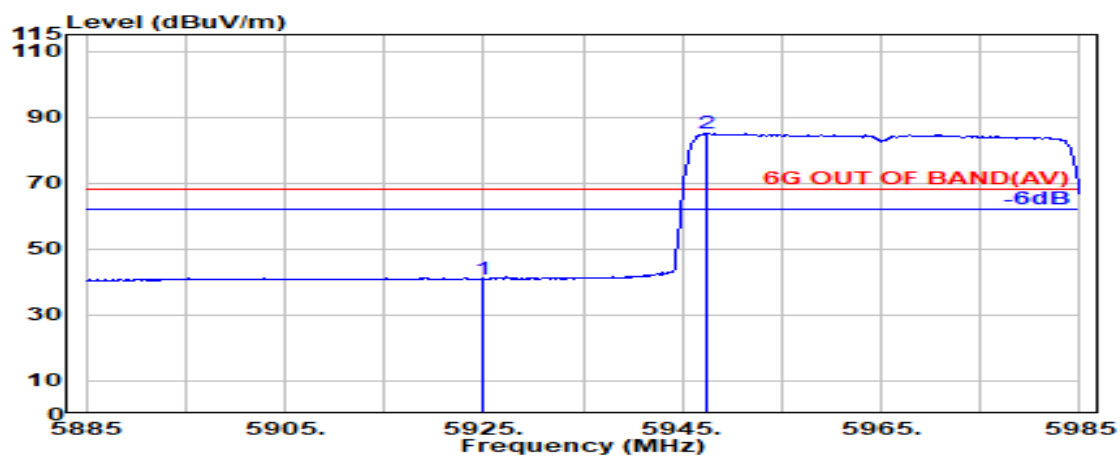

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.97	40.94	68.20	27.26	Average
@ 5947.400	34.10	9.12	39.24	81.01	85.00	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	484T	RU Index	66
Mode	802.11be-EHT80	U-NII Band	8
		Frequency	TX 7025MHz

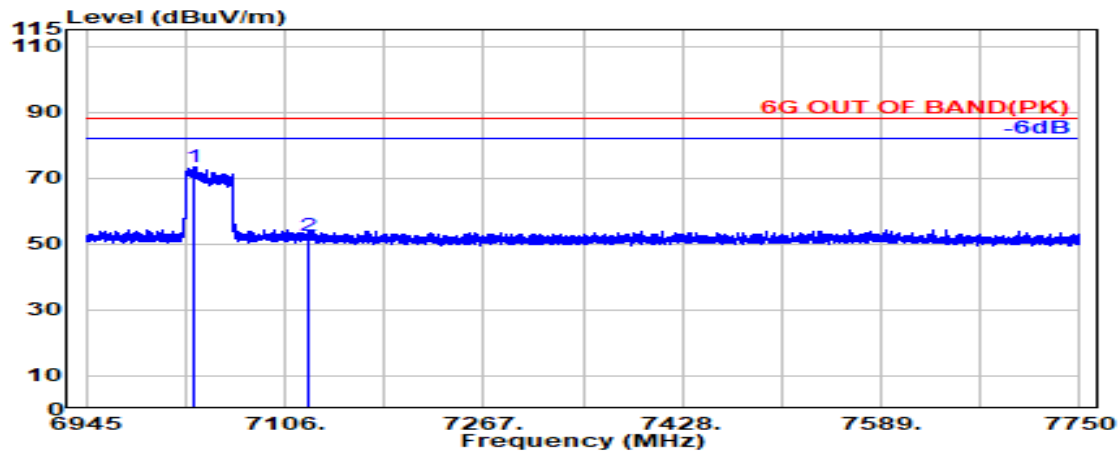

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7031.800	35.30	9.94	39.36	67.31	73.19	---	---	Peak
7125.000	35.70	9.99	39.38	46.29	52.59	88.20	35.61	Peak

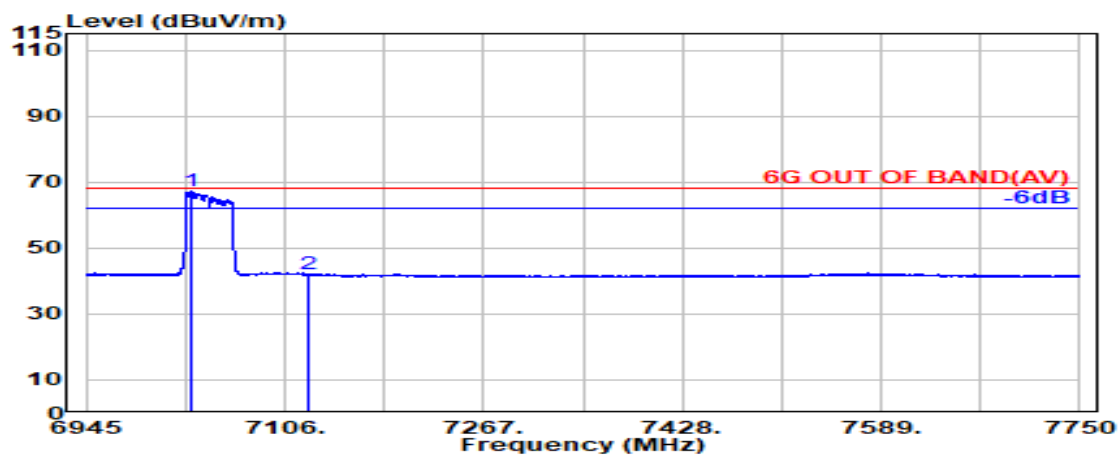

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7029.600	35.30	9.94	39.36	61.19	67.07	---	---	Average
7125.000	35.70	9.99	39.38	35.77	42.08	68.20	26.12	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	484T	RU Index	66
Mode	802.11be-EHT80	U-NII Band	8
		Frequency	TX 7025MHz

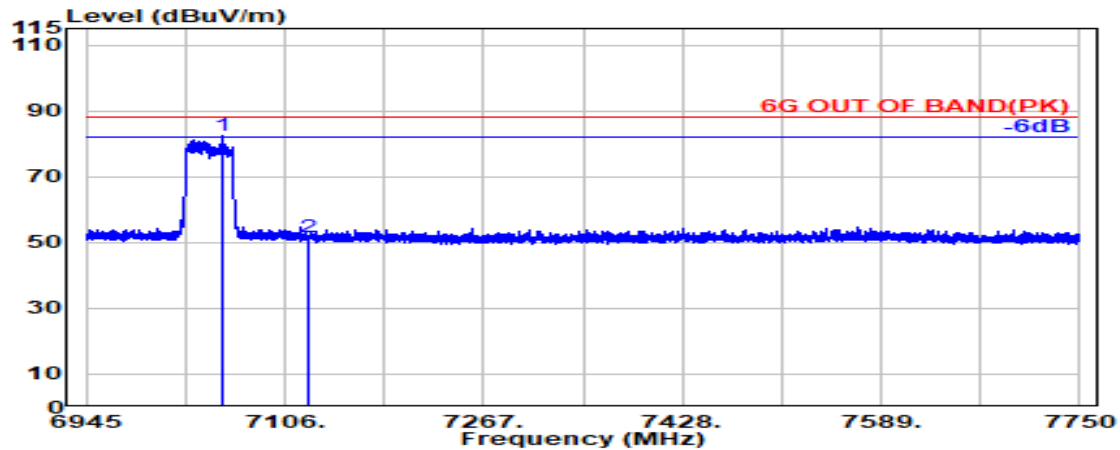

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7054.500	35.33	9.95	39.36	76.58	82.49	---	---	Peak
7125.000	35.70	9.99	39.38	45.42	51.72	88.20	36.48	Peak

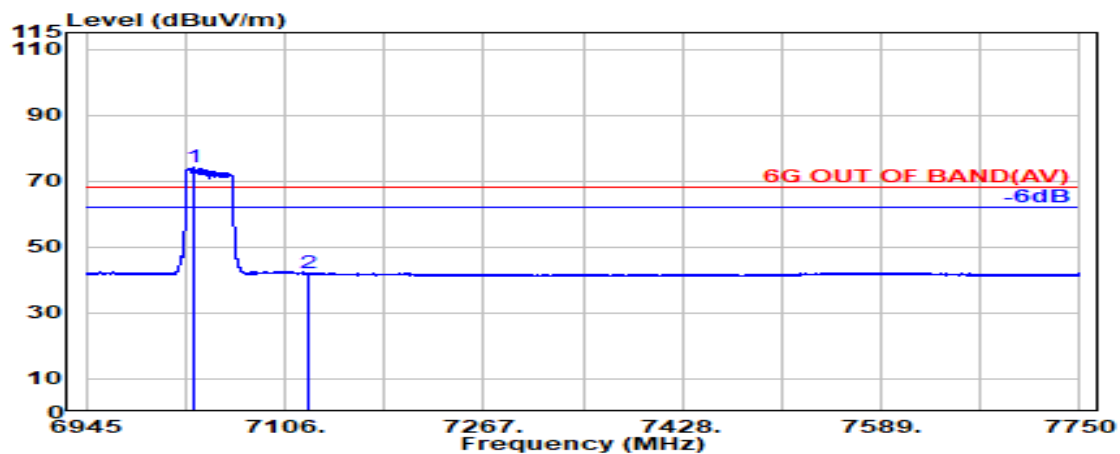

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7031.600	35.30	9.94	39.36	68.39	74.27	---	---	Average
7125.000	35.70	9.99	39.38	35.66	41.96	68.20	26.24	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T	RU Index	67
Mode	802.11be-EHT320	U-NII Band	5
		Frequency	TX 6105MHz

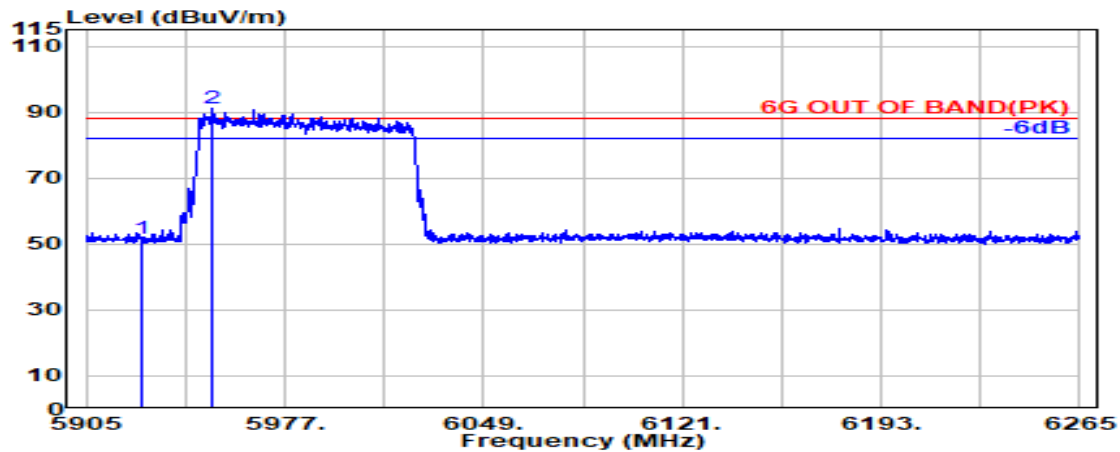

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.57	51.54	88.20	36.66	Peak
@ 5951.080	34.10	9.13	39.24	87.07	91.06	---	---	Peak

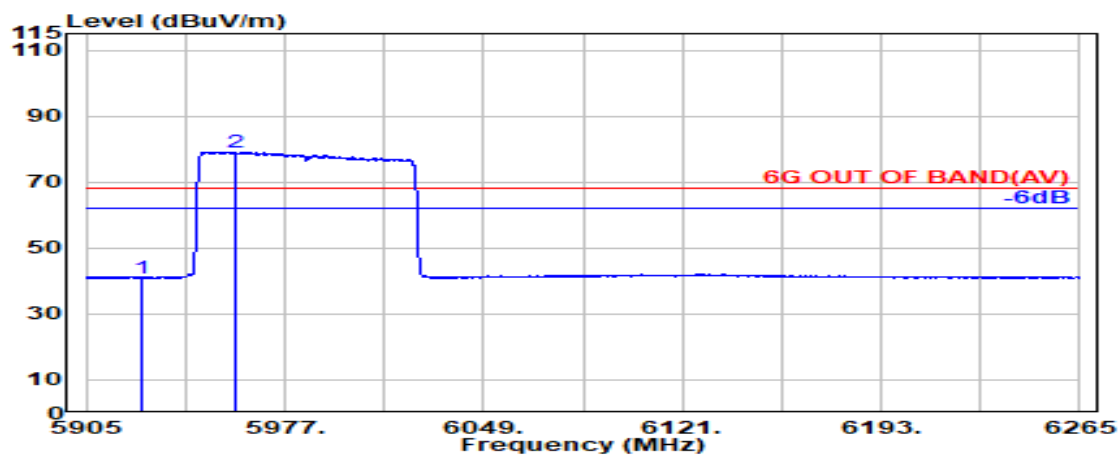

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.03	41.00	68.20	27.20	Average
@ 5958.820	34.08	9.13	39.24	75.21	79.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	996T	RU Index	67
Mode	802.11be-EHT320	U-NII Band	5
		Frequency	TX 6105MHz

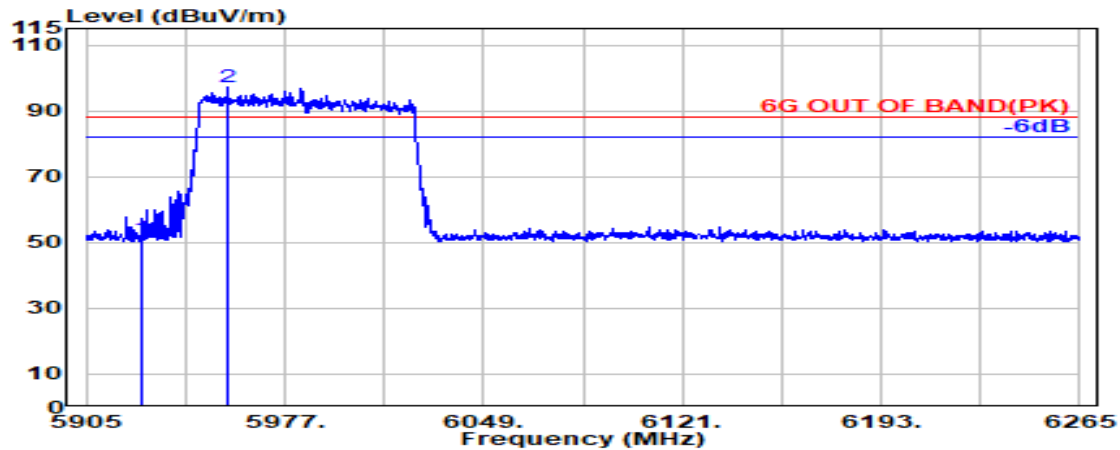

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.06	51.03	88.20	37.17	Peak
@ 5956.120	34.09	9.13	39.24	93.15	97.13	---	---	Peak

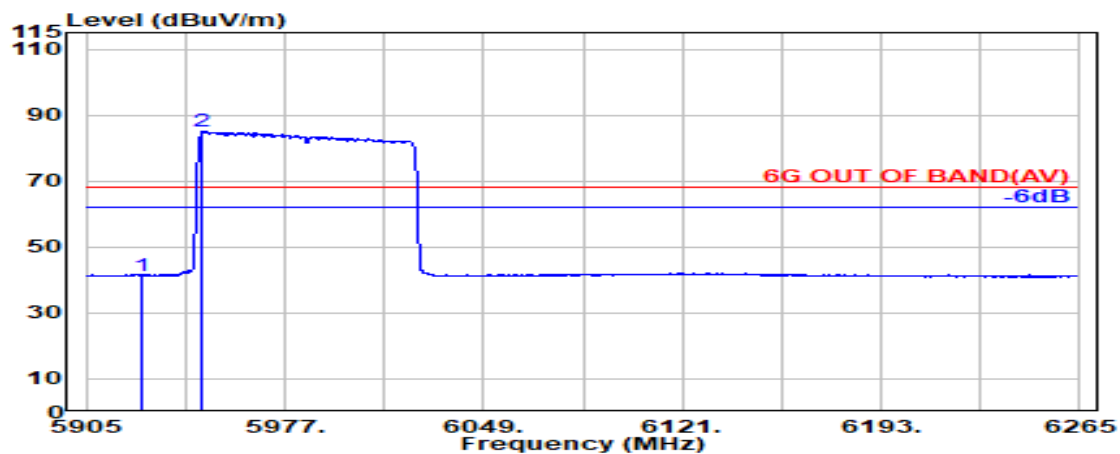

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.36	41.33	68.20	26.87	Average
@ 5947.300	34.10	9.12	39.24	80.98	84.97	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	996T	RU Index	W67
Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

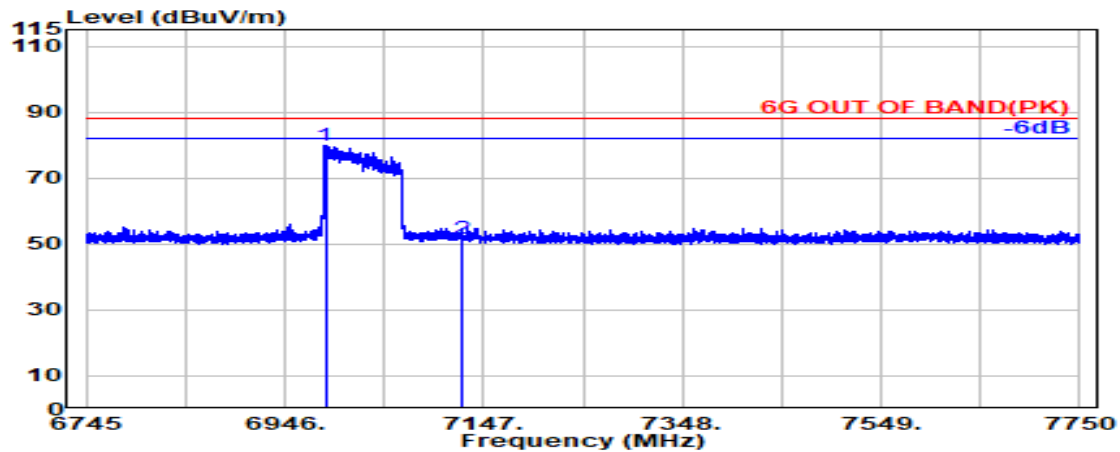

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6986.914	35.27	9.91	39.35	74.08	79.92	---	---	Peak
7125.000	35.70	9.99	39.38	45.42	51.73	88.20	36.47	Peak

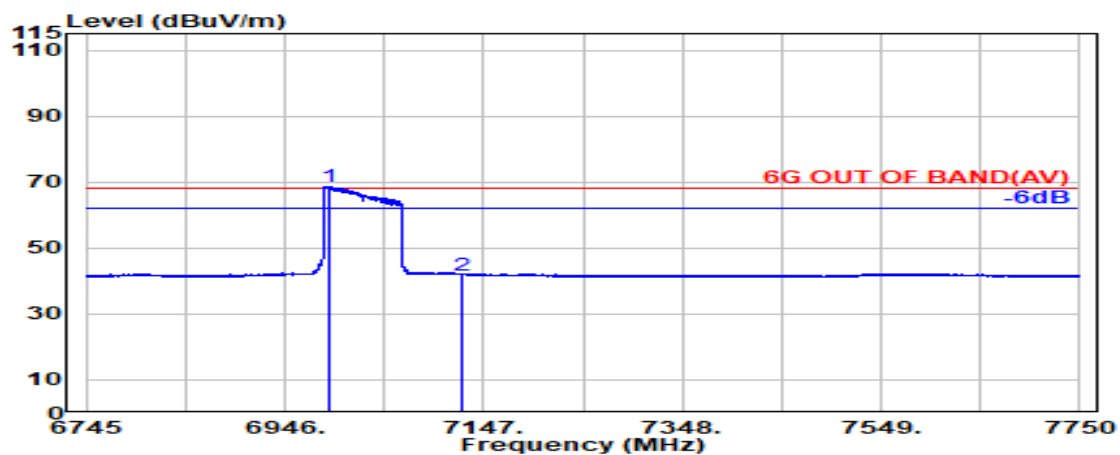

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6991.433	35.28	9.91	39.35	62.79	68.64	---	---	Average
7125.000	35.70	9.99	39.38	35.50	41.80	68.20	26.40	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T	RU Index	W67
Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

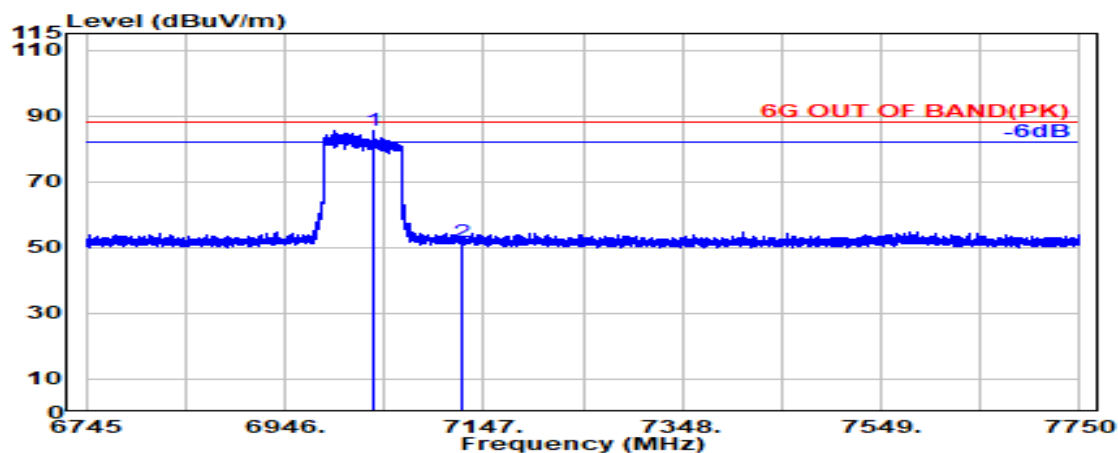

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7035.915	35.30	9.94	39.36	79.67	85.55	---	---	Peak
7125.000	35.70	9.99	39.38	45.29	51.60	88.20	36.60	Peak

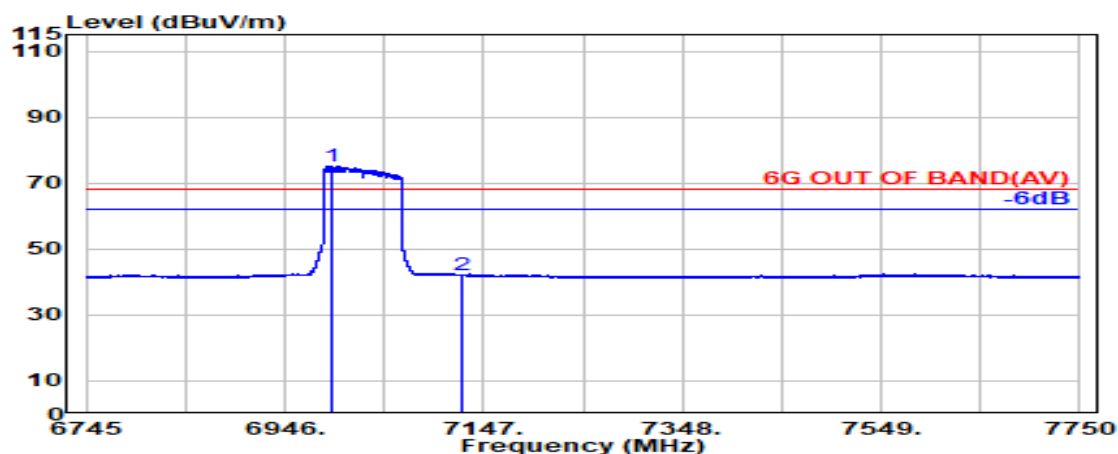

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6993.455	35.29	9.92	39.35	69.29	75.14	---	---	Average
7125.000	35.70	9.99	39.38	35.73	42.04	68.20	26.16	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	996T*2	RU Index	S68
Mode	802.11be-EHT320	U-NII Band	5
		Frequency	TX 6105MHz

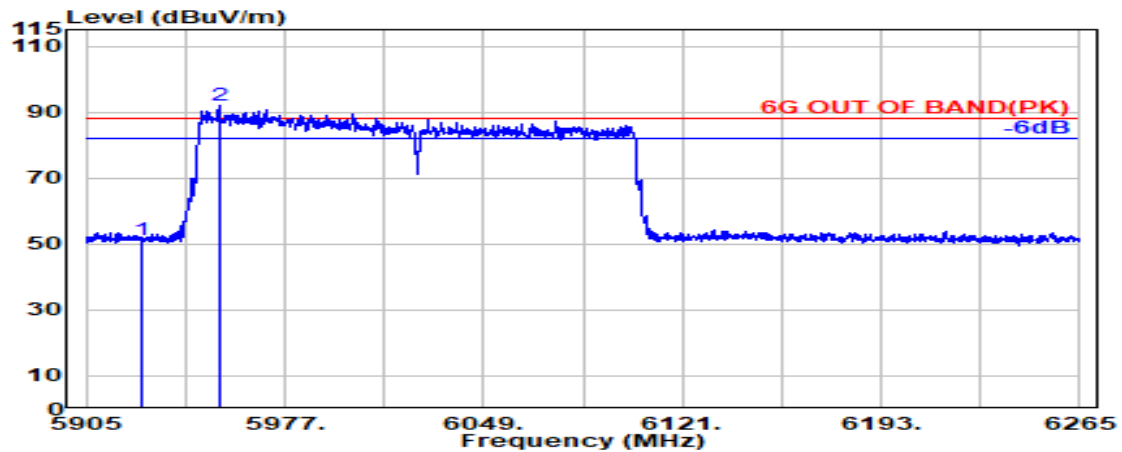

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.37	51.34	88.20	36.86	Peak
@ 5953.600	34.09	9.13	39.24	87.85	91.83	---	---	Peak

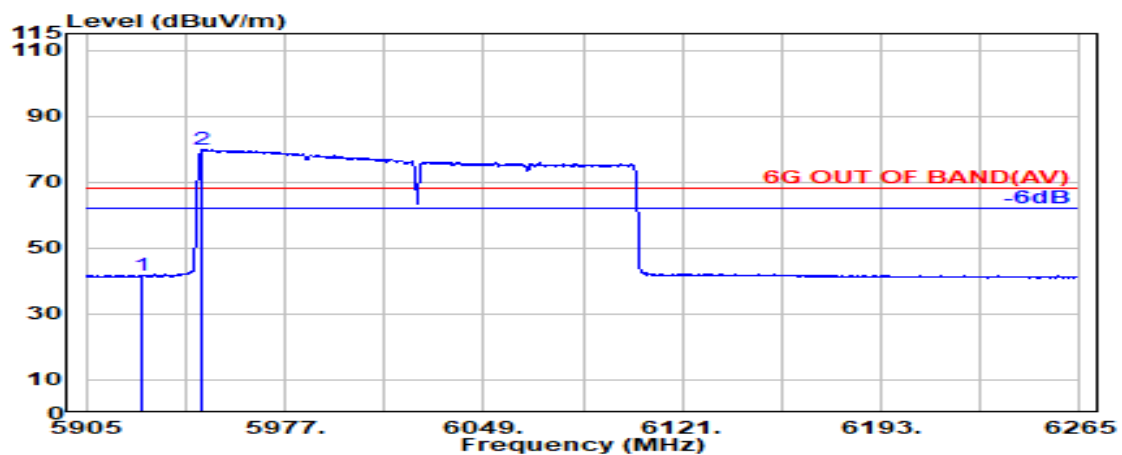

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.49	41.46	68.20	26.74	Average
@ 5947.300	34.10	9.12	39.24	75.93	79.91	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T*2	RU Index	S68
Mode	802.11be-EHT320	U-NII Band	5
		Frequency	TX 6105MHz

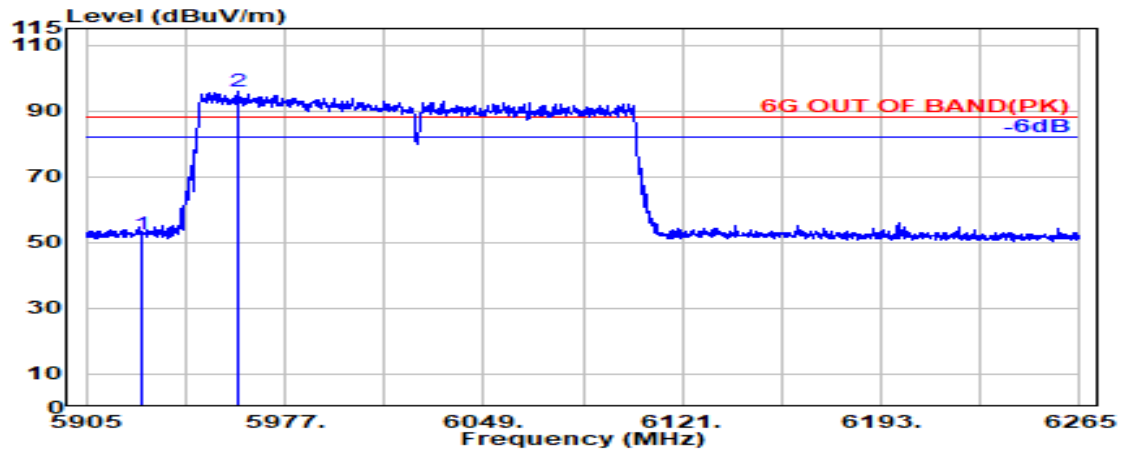

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	48.41	52.38	88.20	35.82	Peak
@ 5959.900	34.08	9.14	39.24	91.89	95.86	---	---	Peak

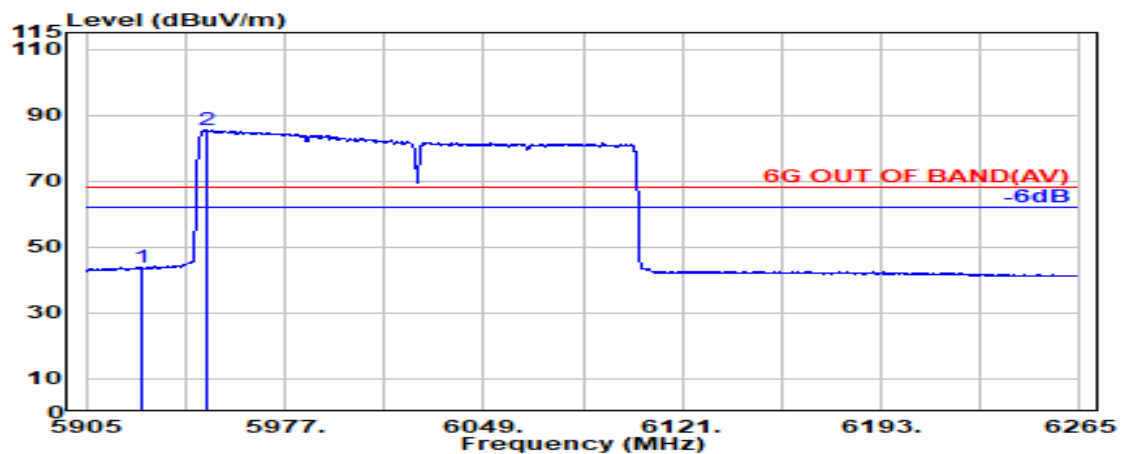

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	39.81	43.78	68.20	24.42	Average
@ 5948.740	34.10	9.13	39.24	81.38	85.36	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	996T*2	RU Index	W68
Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

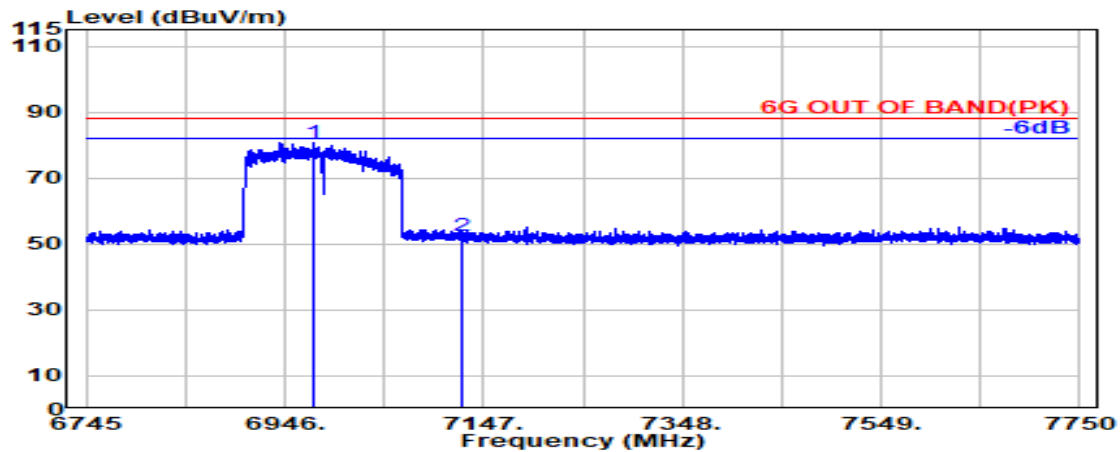

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6975.496	35.25	9.90	39.35	75.08	80.89	---	---	Peak
7125.000	35.70	9.99	39.38	46.20	52.50	88.20	35.70	Peak

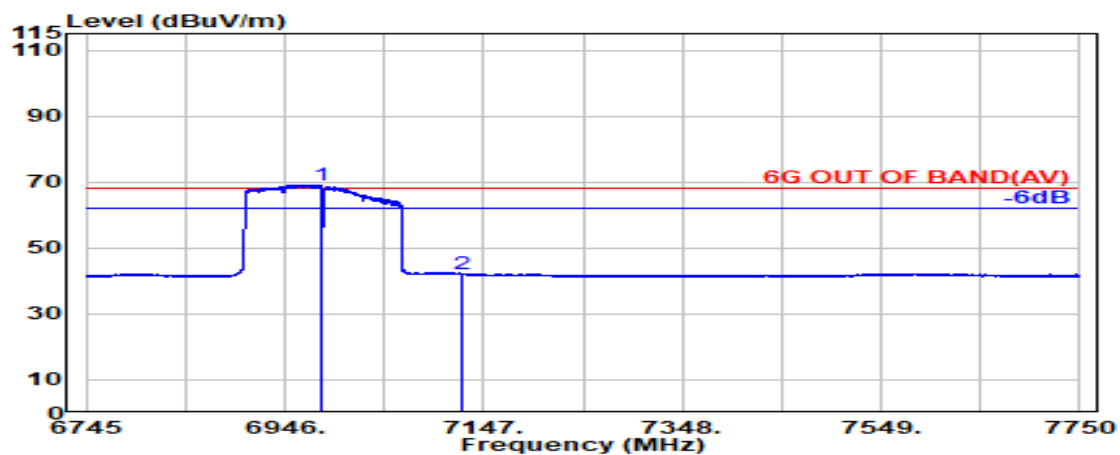

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6982.156	35.26	9.91	39.35	63.36	69.19	---	---	Average
7125.000	35.70	9.99	39.38	35.76	42.06	68.20	26.14	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T*2	RU Index	W68
Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

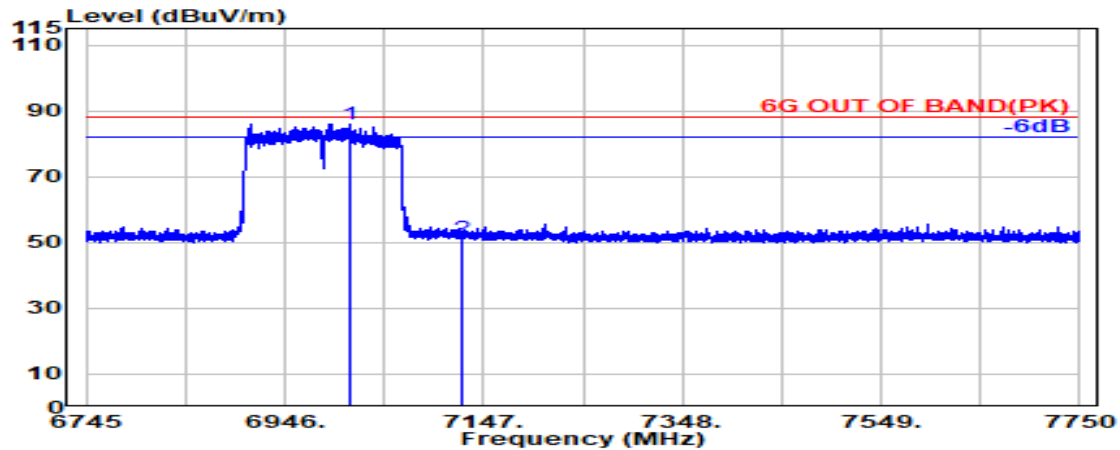

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7012.247	35.30	9.93	39.35	80.10	85.97	---	---	Peak
7125.000	35.70	9.99	39.38	44.78	51.09	88.20	37.11	Peak

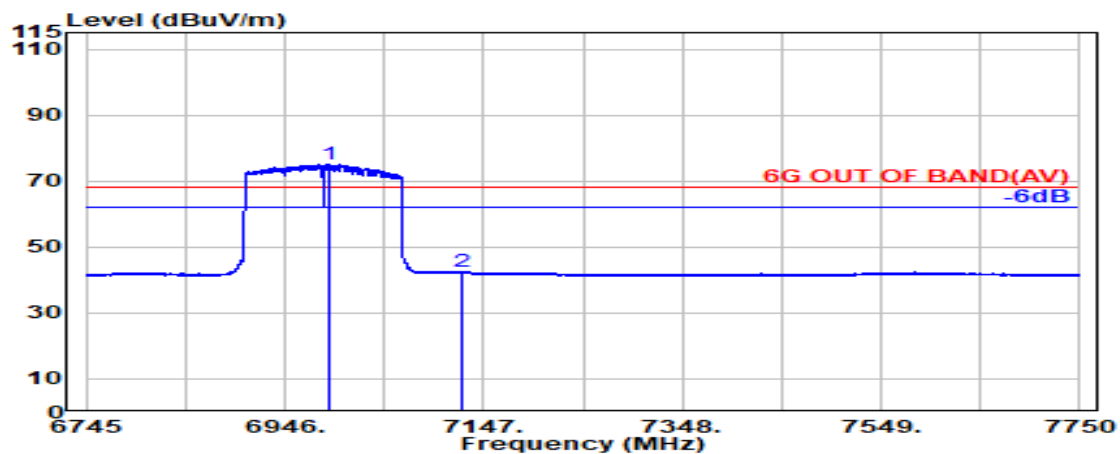

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6990.006	35.28	9.91	39.35	69.35	75.20	---	---	Average
7125.000	35.70	9.99	39.38	36.01	42.32	68.20	25.88	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T+484T+242T	RU Index	S99
Mode	802.11be-EHT160	U-NII Band	5
		Frequency	TX 6025MHz

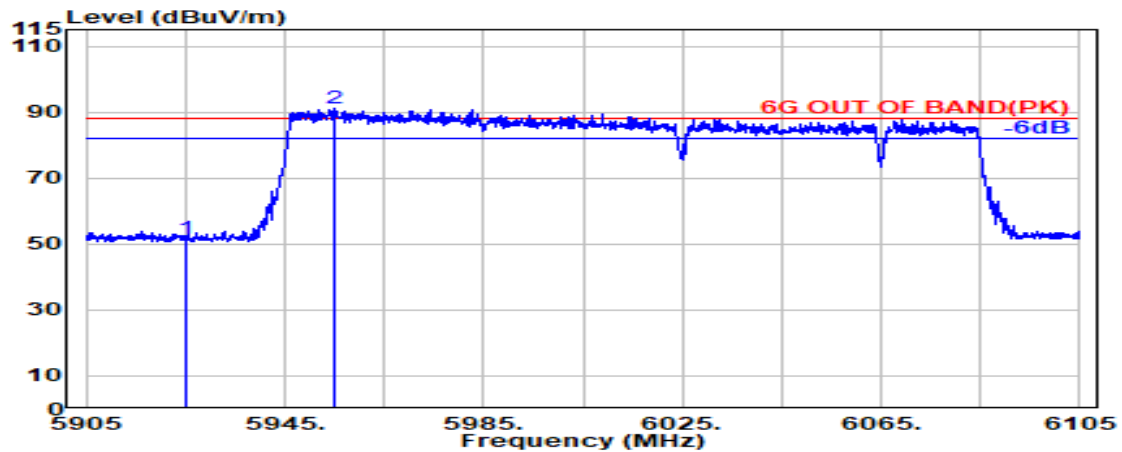

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.75	51.72	88.20	36.48	Peak
@ 5955.200	34.09	9.13	39.24	87.24	91.22	---	---	Peak

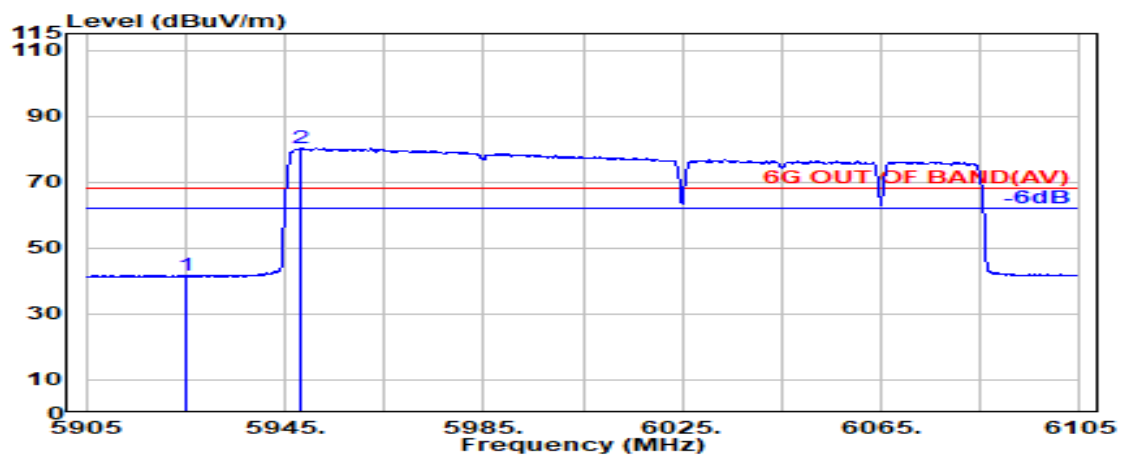

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.69	41.66	68.20	26.54	Average
@ 5948.200	34.10	9.12	39.24	76.23	80.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T+484T+242T	RU Index	S99
Mode	802.11be-EHT160	U-NII Band	5
		Frequency	TX 6025MHz

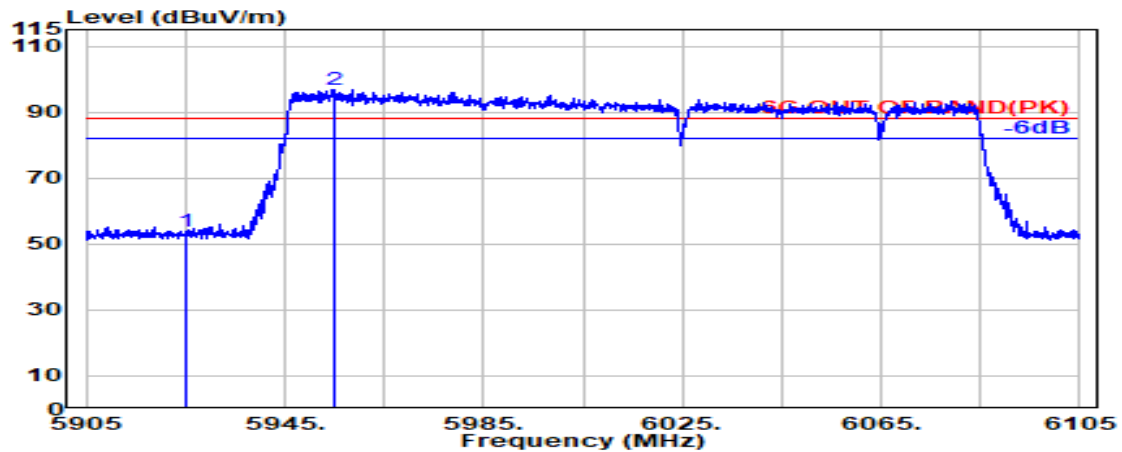

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	49.64	53.61	88.20	34.59	Peak
@ 5954.800	34.09	9.13	39.24	92.89	96.87	---	---	Peak

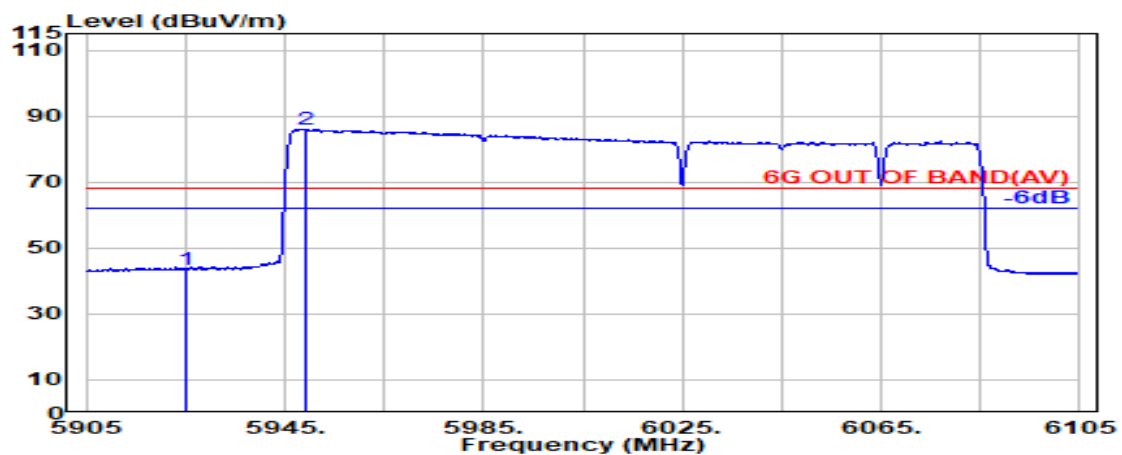

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	39.57	43.54	68.20	24.66	Average
@ 5949.100	34.10	9.13	39.24	81.95	85.94	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T+484T+242T	RU Index	S98
Mode	802.11be-EHT160	U-NII Band	8
		Frequency	TX 6985MHz

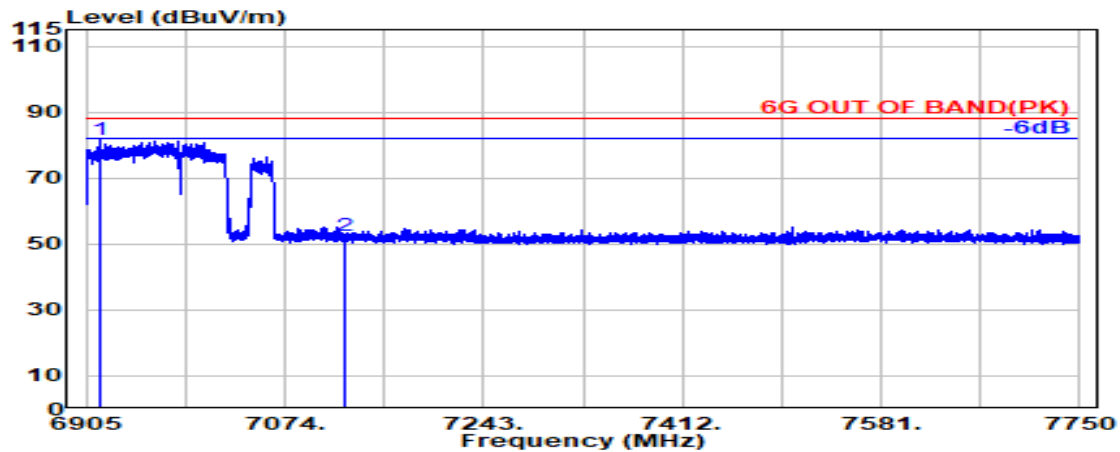

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6917.100	35.20	9.86	39.34	75.69	81.41	---	---	Peak
7125.000	35.70	9.99	39.38	46.06	52.37	88.20	35.83	Peak

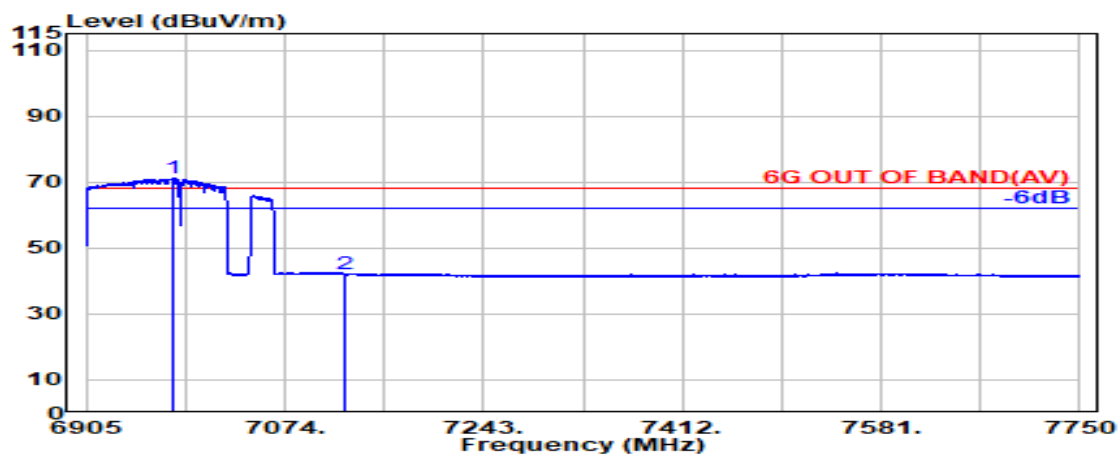

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6979.500	35.26	9.91	39.35	65.35	71.17	---	---	Average
7125.000	35.70	9.99	39.38	35.73	42.03	68.20	26.17	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	996T+484T+242T	RU Index	S98
Mode	802.11be-EHT160	U-NII Band	8
		Frequency	TX 6985MHz

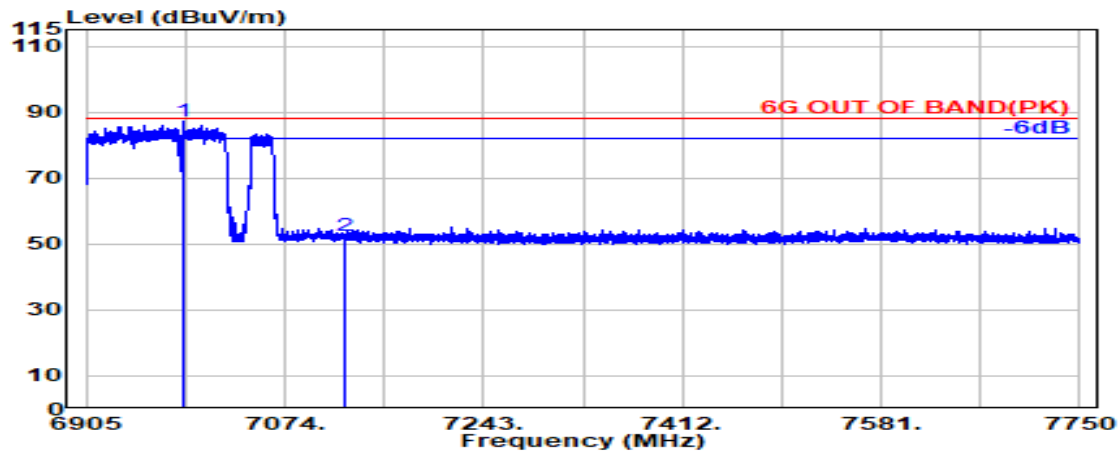

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6987.000	35.27	9.91	39.35	81.47	87.30	---	---	Peak
7125.000	35.70	9.99	39.38	46.16	52.46	88.20	35.74	Peak

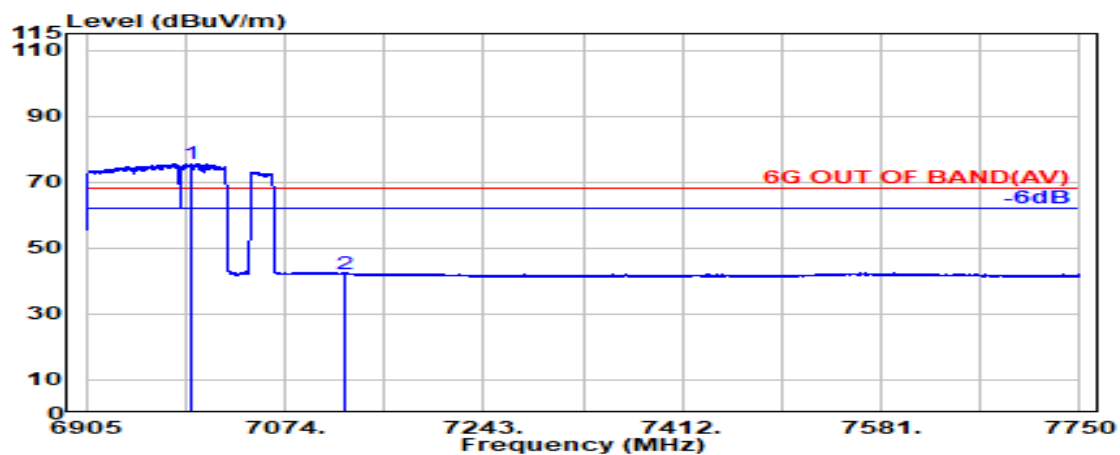

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6995.300	35.29	9.92	39.35	69.68	75.54	---	---	Average
7125.000	35.70	9.99	39.38	35.89	42.20	68.20	26.00	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	26T+52T	RU Index	70
Mode	802.11be-EHT40	U-NII Band	5
		Frequency	TX 5965MHz

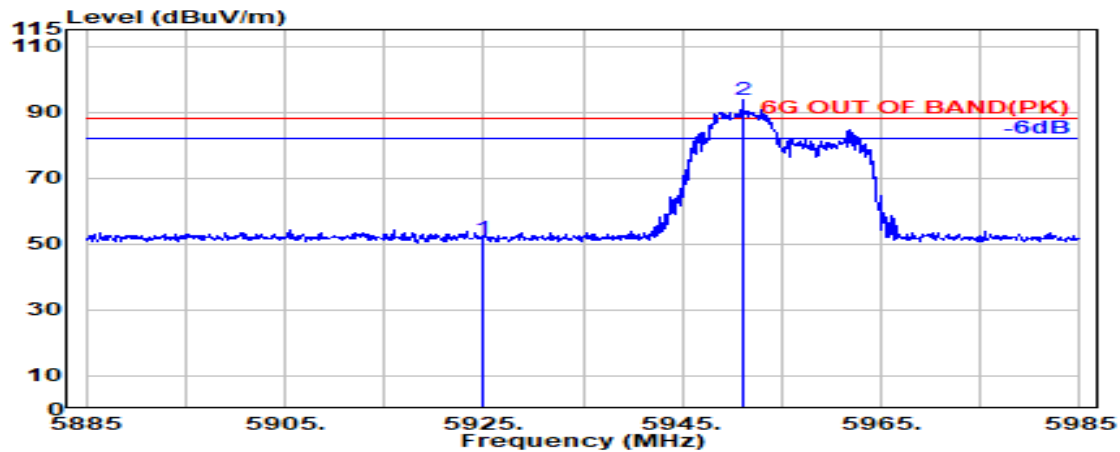

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.61	51.58	88.20	36.62	Peak
@ 5951.100	34.10	9.13	39.24	89.55	93.53	---	---	Peak

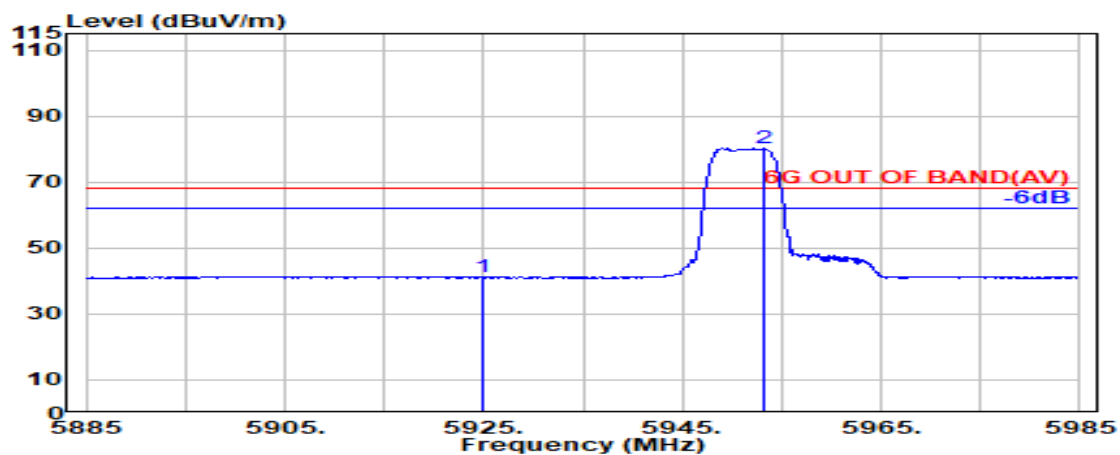

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.11	41.08	68.20	27.12	Average
@ 5953.200	34.09	9.13	39.24	76.23	80.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	26T+52T	RU Index	70
Mode	802.11be-EHT40	U-NII Band	5
		Frequency	TX 5965MHz

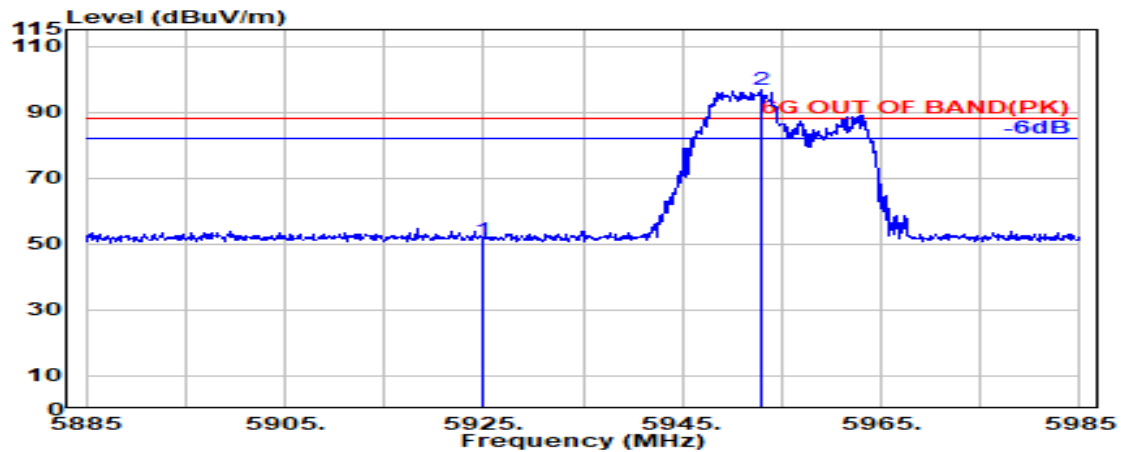

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.43	51.40	88.20	36.80	Peak
@ 5953.000	34.09	9.13	39.24	92.69	96.68	---	---	Peak

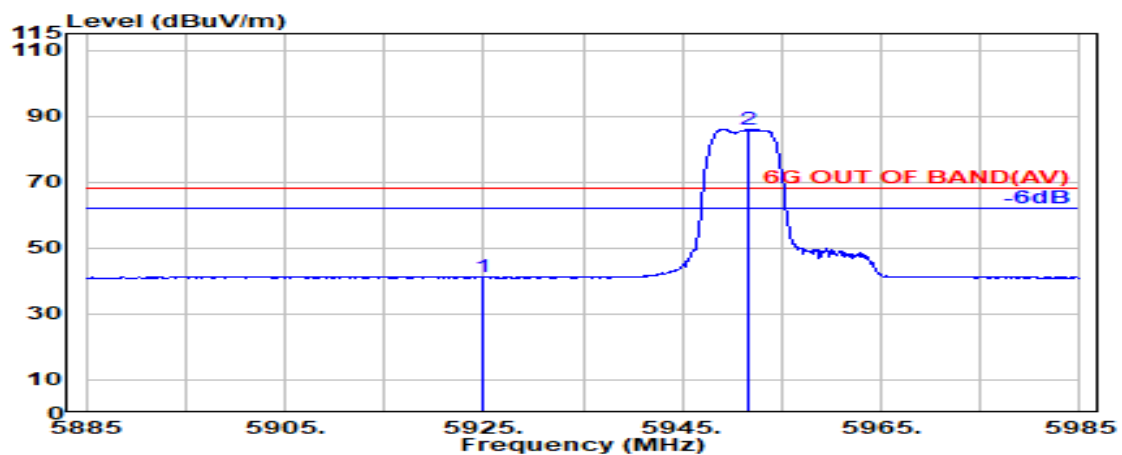

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.06	41.03	68.20	27.17	Average
@ 5951.700	34.10	9.13	39.24	82.10	86.09	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	26T+52T	RU Index	75
Mode	802.11be-EHT40	U-NII Band	8
		Frequency	TX 7085MHz

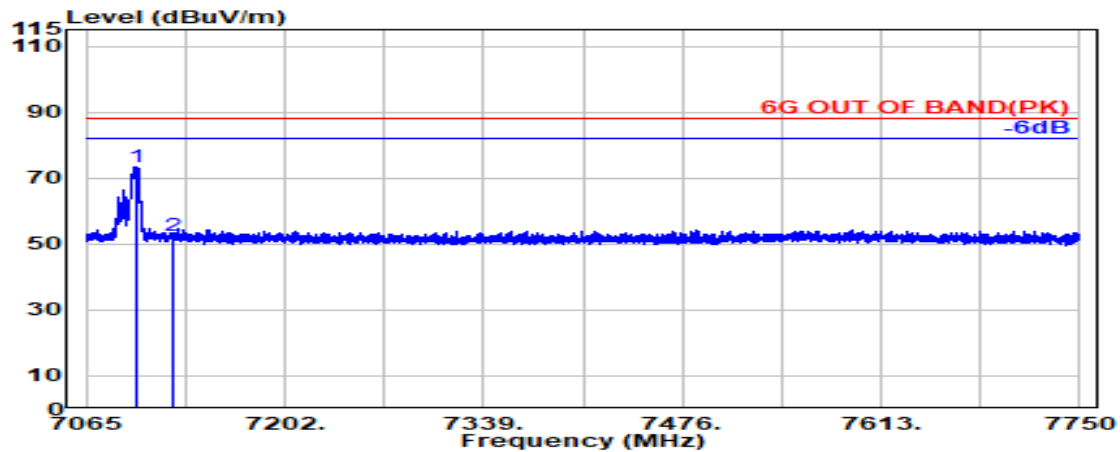

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7099.200	35.60	9.97	39.38	67.34	73.53	---	---	Peak
7125.000	35.70	9.99	39.38	46.25	52.55	88.20	35.65	Peak

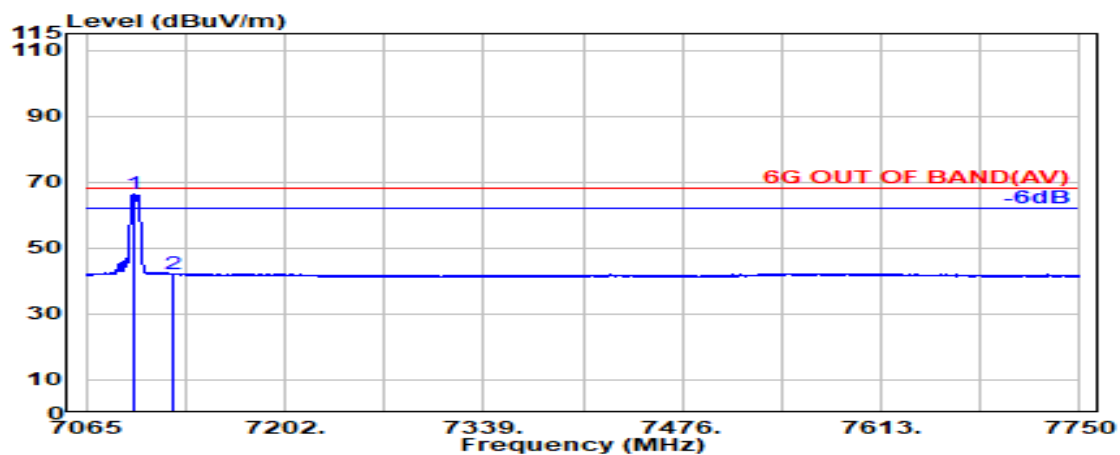

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7097.800	35.59	9.97	39.38	60.12	66.30	---	---	Average
7125.000	35.70	9.99	39.38	35.70	42.01	68.20	26.19	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	26T+52T	RU Index	75
Mode	802.11be-EHT40	U-NII Band	8
		Frequency	TX 7085MHz

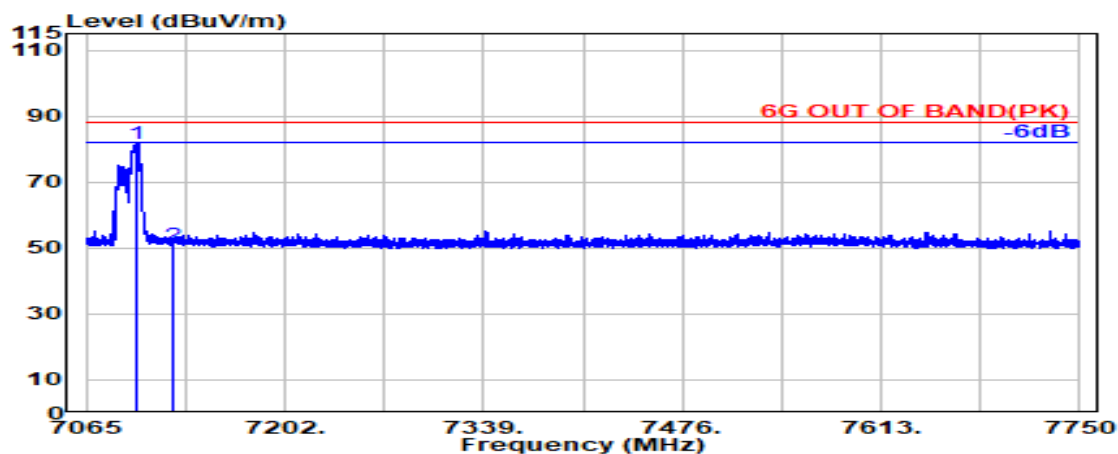

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7099.900	35.60	9.97	39.38	75.49	81.68	---	---	Peak
7125.000	35.70	9.99	39.38	44.43	50.74	88.20	37.46	Peak

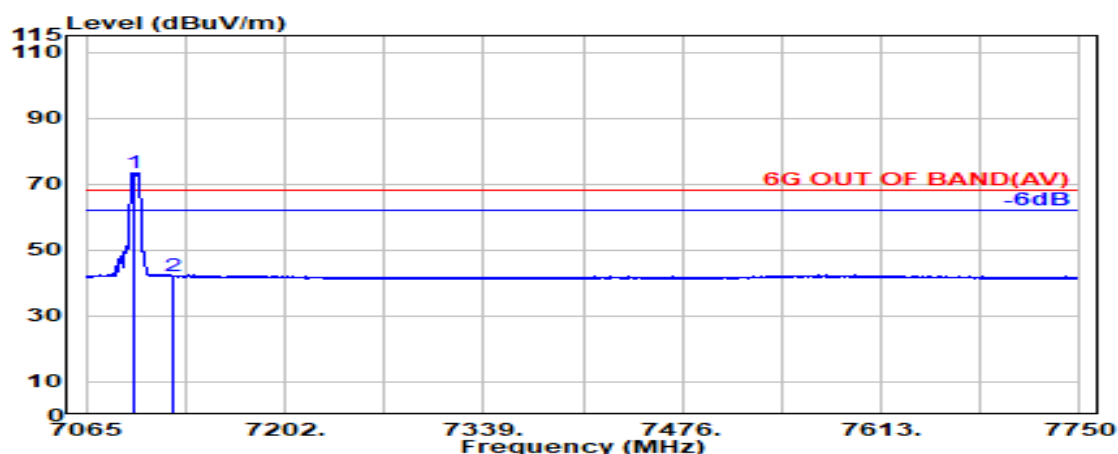


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7097.500	35.59	9.97	39.38	67.12	73.30	---	---	Average
7125.000	35.70	9.99	39.38	35.74	42.05	68.20	26.15	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	26T+106T	RU Index	82
Mode	802.11be-EHT40	U-NII Band	5
		Frequency	TX 5965MHz

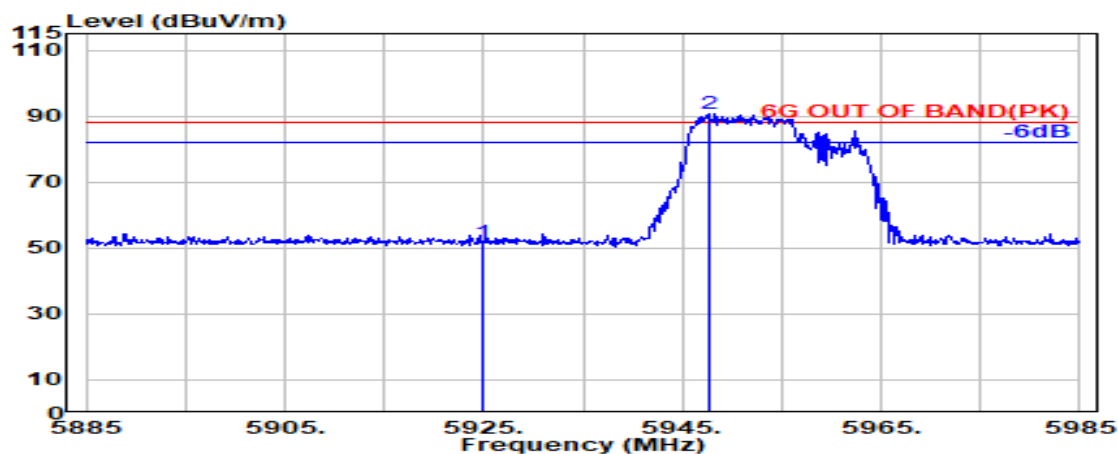

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.59	51.56	88.20	36.64	Peak
@ 5947.600	34.10	9.12	39.24	86.58	90.56	---	---	Peak

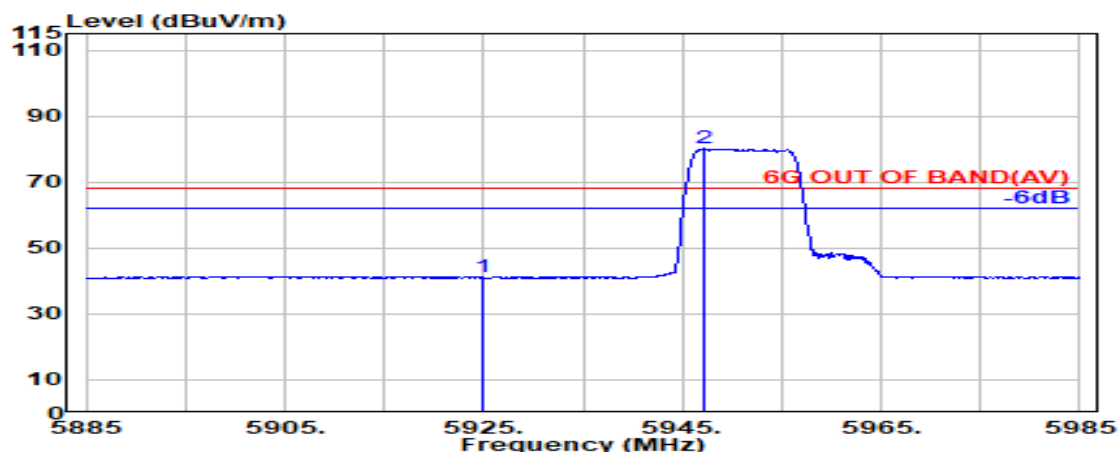

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.07	41.04	68.20	27.16	Average
@ 5947.200	34.10	9.12	39.24	76.13	80.11	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	26T+106T	RU Index	82
Mode	802.11be-EHT40	U-NII Band	5
		Frequency	TX 5965MHz

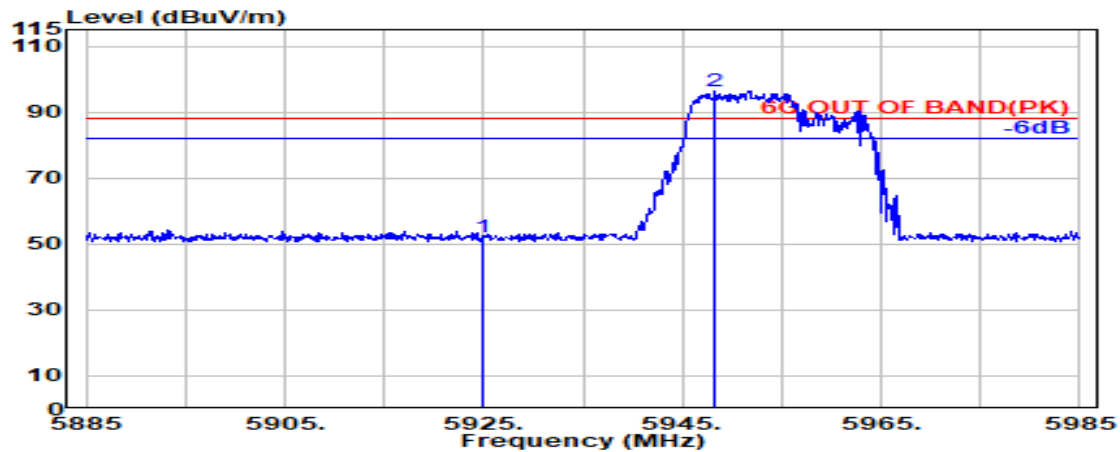

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.95	51.91	88.20	36.29	Peak
@ 5948.200	34.10	9.12	39.24	92.54	96.52	---	---	Peak

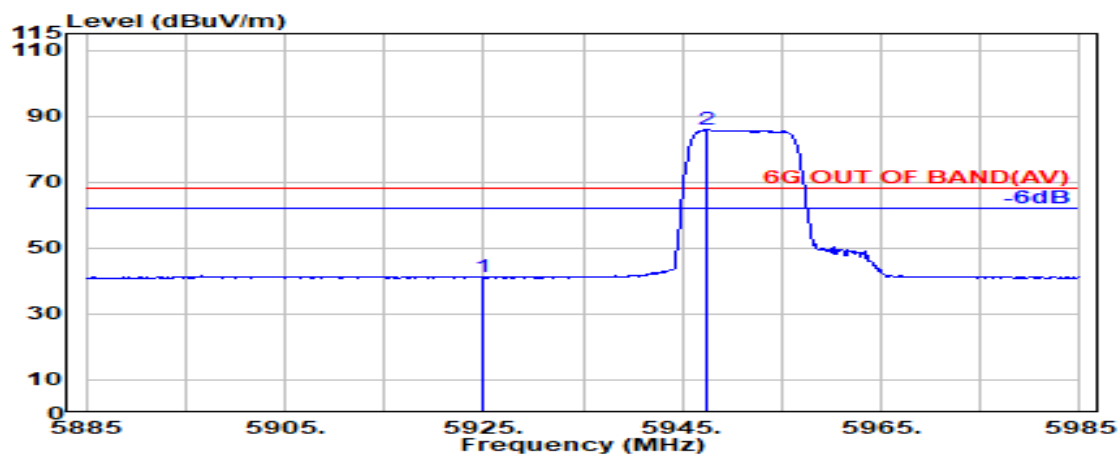

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.05	41.02	68.20	27.18	Average
@ 5947.500	34.10	9.12	39.24	81.86	85.85	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	26T+106T	RU Index	85
Mode	802.11be-EHT40	U-NII Band	8
		Frequency	TX 7085MHz

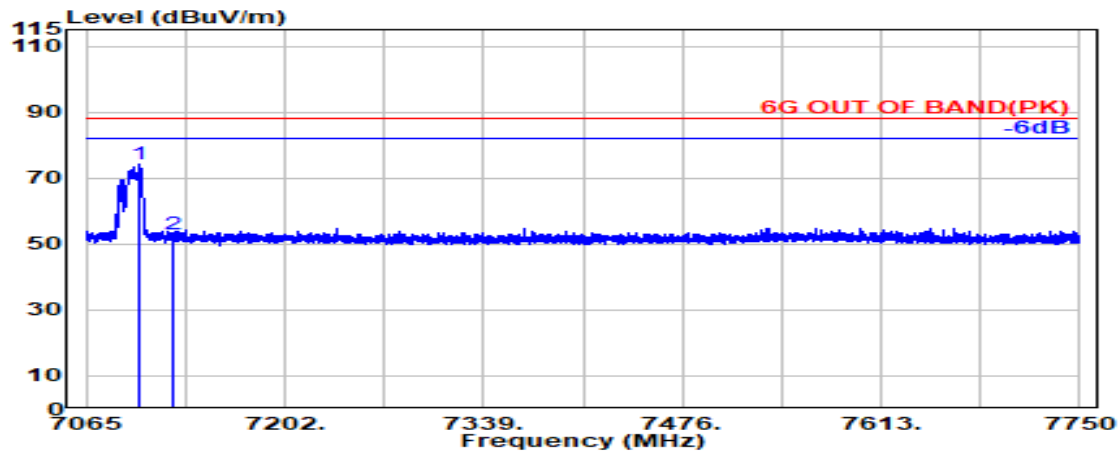

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7101.800	35.61	9.98	39.38	67.87	74.08	---	---	Peak
7125.000	35.70	9.99	39.38	46.66	52.97	88.20	35.23	Peak

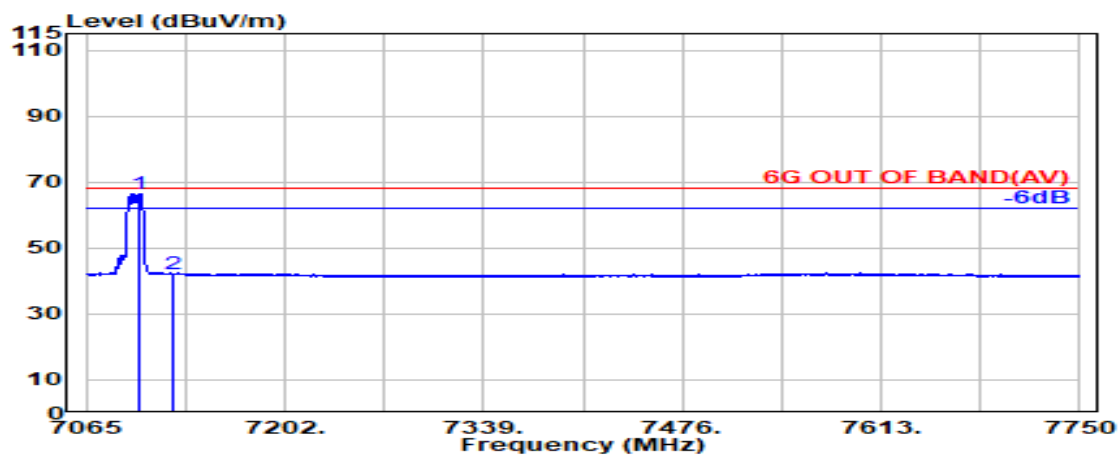

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7101.900	35.61	9.98	39.38	60.41	66.61	---	---	Average
7125.000	35.70	9.99	39.38	35.72	42.03	68.20	26.17	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	26T+106T	RU Index	85
Mode	802.11be-EHT40	U-NII Band	8
		Frequency	TX 7085MHz

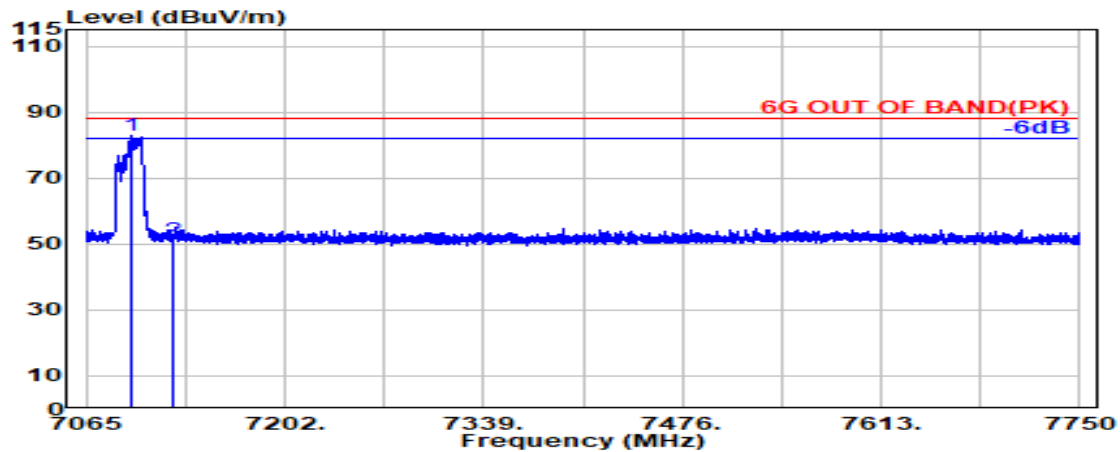

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7096.800	35.58	9.97	39.38	76.58	82.76	---	---	Peak
7125.000	35.70	9.99	39.38	45.10	51.40	88.20	36.80	Peak

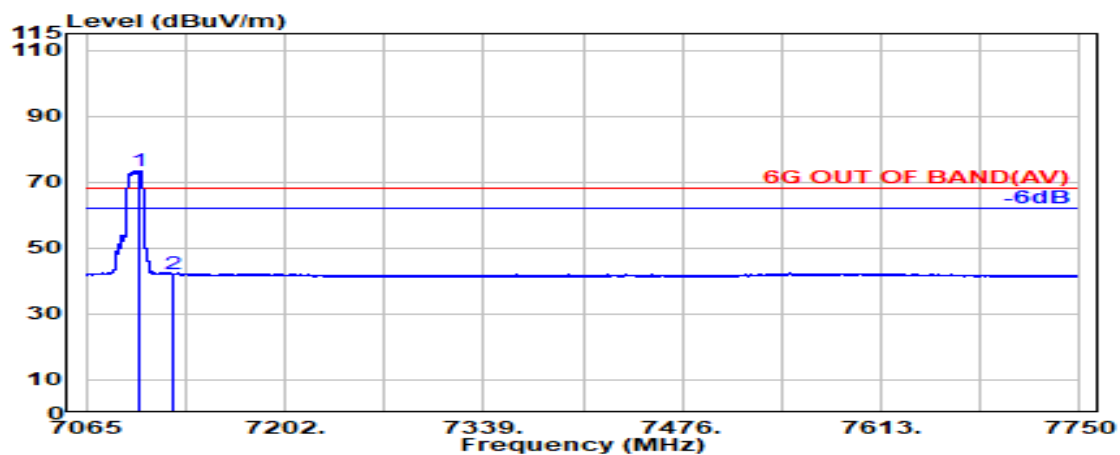

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7102.400	35.61	9.98	39.38	67.02	73.23	---	---	Average
7125.000	35.70	9.99	39.38	35.77	42.08	68.20	26.12	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	484T+242T	RU Index	92
Mode	802.11be-EHT80	U-NII Band	5
		Frequency	TX 5985MHz

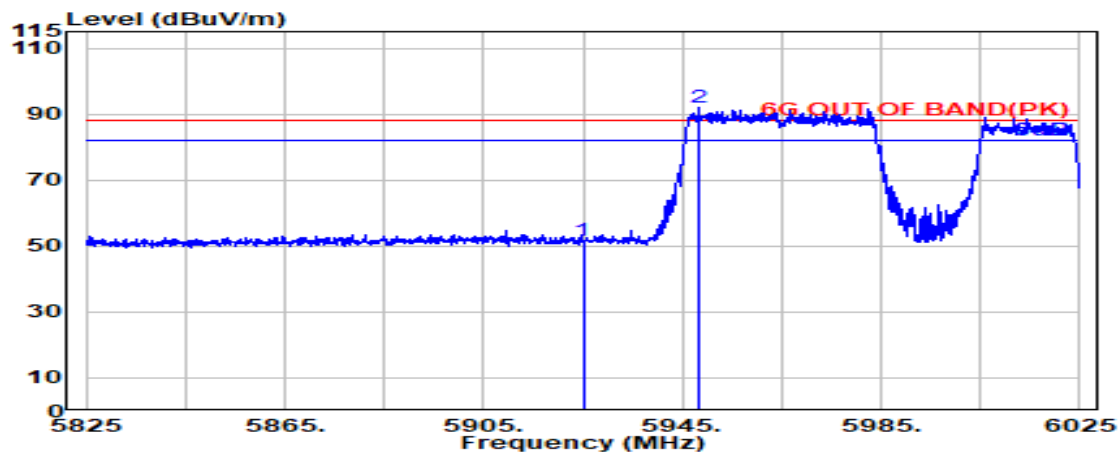

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.70	51.67	88.20	36.53	Peak
@ 5948.300	34.10	9.12	39.24	88.01	92.00	---	---	Peak

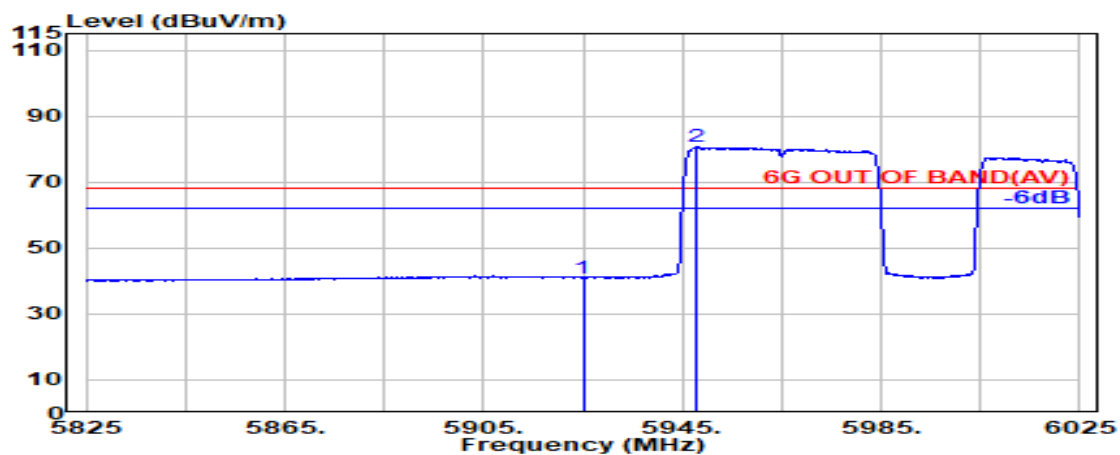

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	36.99	40.96	68.20	27.24	Average
@ 5947.900	34.10	9.12	39.24	76.63	80.61	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	484T+242T	RU Index	92
Mode	802.11be-EHT80	U-NII Band	5
		Frequency	TX 5985MHz

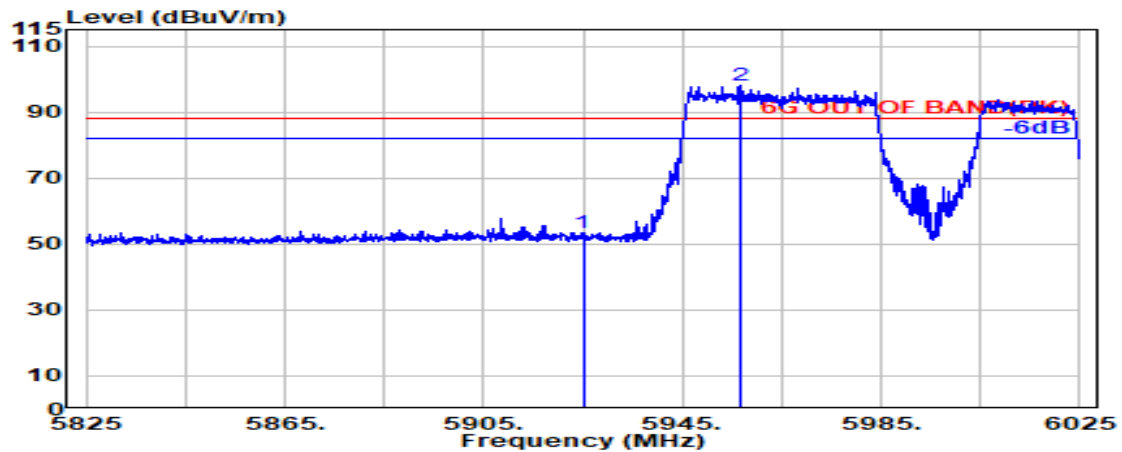

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	49.19	53.16	88.20	35.04	Peak
@ 5956.500	34.09	9.13	39.24	94.04	98.02	---	---	Peak

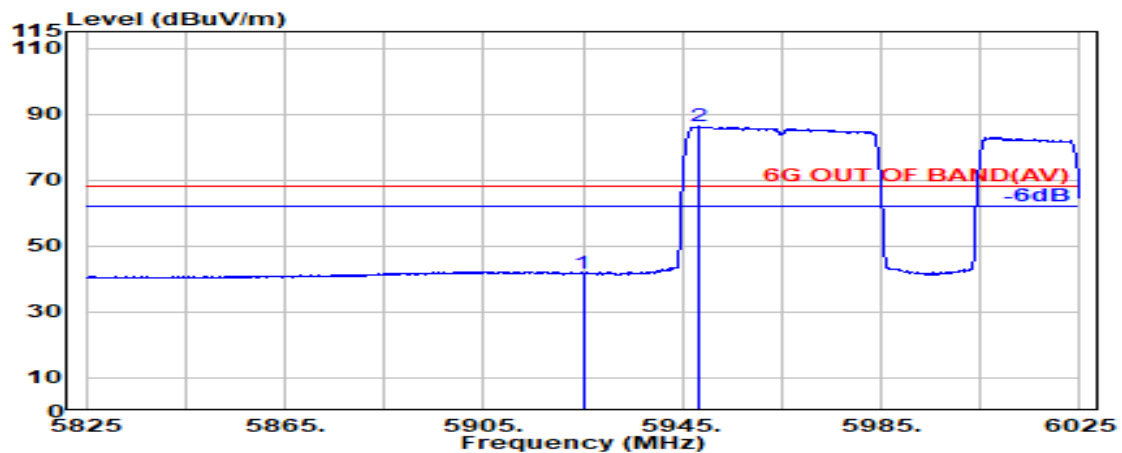

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.59	41.56	68.20	26.64	Average
@ 5948.500	34.10	9.13	39.24	82.27	86.25	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	484T+242T	RU Index	92
Mode	802.11be-EHT80	U-NII Band	8
		Frequency	TX 7025MHz

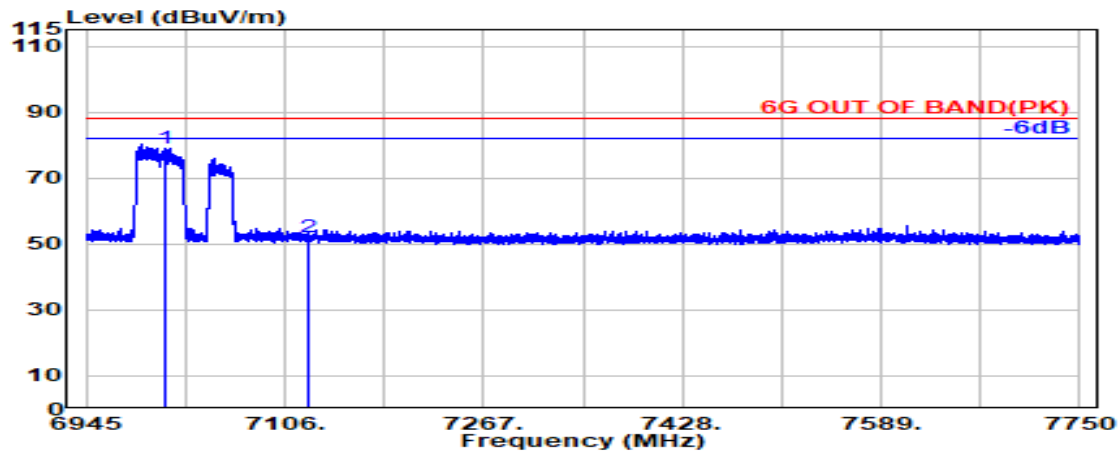

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7010.000	35.30	9.93	39.35	72.98	78.85	---	---	Peak
7125.000	35.70	9.99	39.38	45.88	52.18	88.20	36.02	Peak

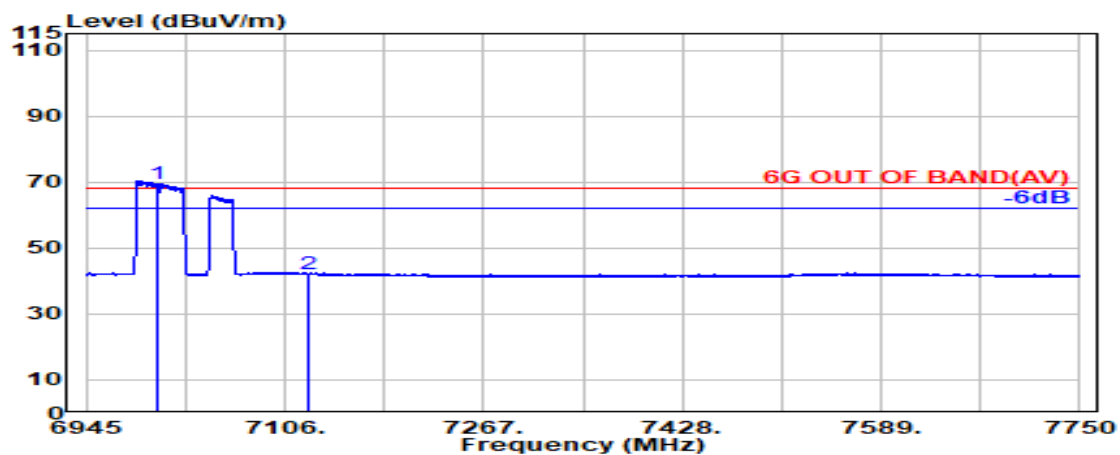

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7002.800	35.30	9.92	39.35	63.65	69.52	---	---	Average
7125.000	35.70	9.99	39.38	35.83	42.14	68.20	26.06	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	484T+242T	RU Index	92
Mode	802.11be-EHT80	U-NII Band	8
		Frequency	TX 7025MHz

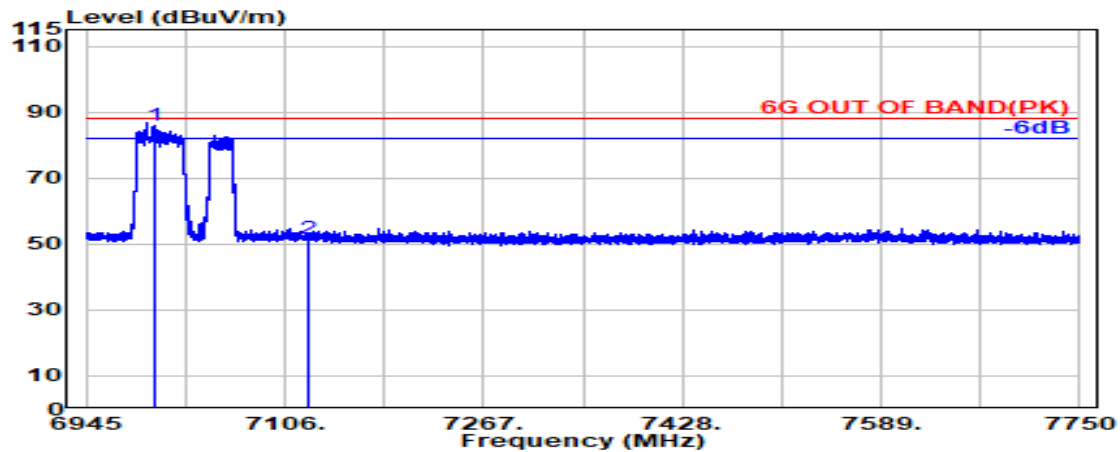

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7001.200	35.30	9.92	39.35	80.03	85.90	---	---	Peak
7125.000	35.70	9.99	39.38	45.36	51.67	88.20	36.53	Peak

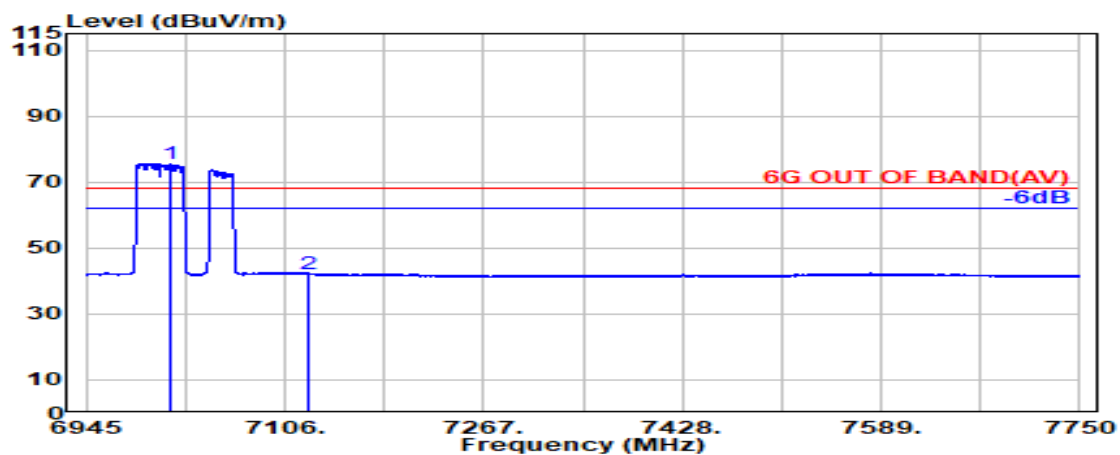

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7012.600	35.30	9.93	39.35	69.59	75.46	---	---	Average
7125.000	35.70	9.99	39.38	35.83	42.14	68.20	26.06	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	996T+484T	RU Index	S95
Mode	802.11be-EHT160	U-NII Band	5
		Frequency	TX 6025MHz

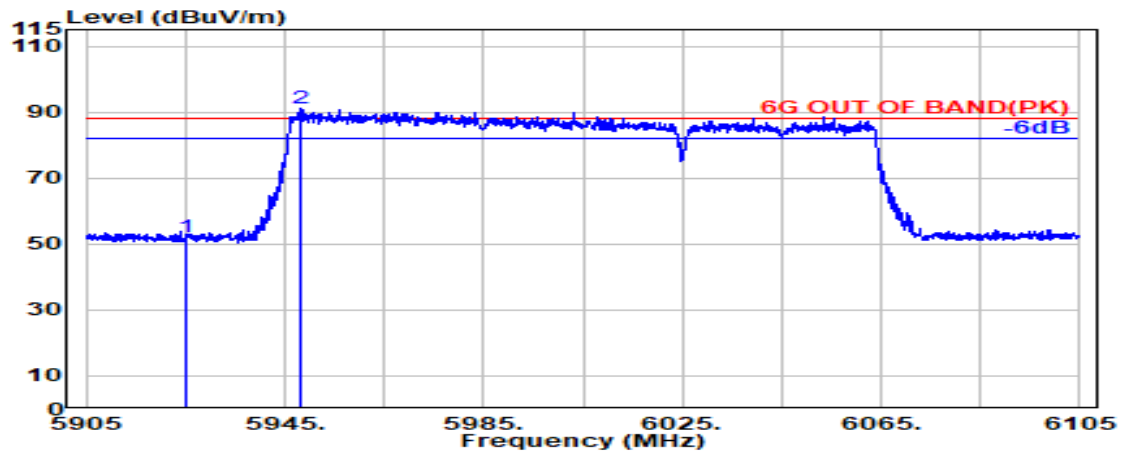

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	48.18	52.15	88.20	36.05	Peak
@ 5948.400	34.10	9.12	39.24	87.26	91.24	---	---	Peak

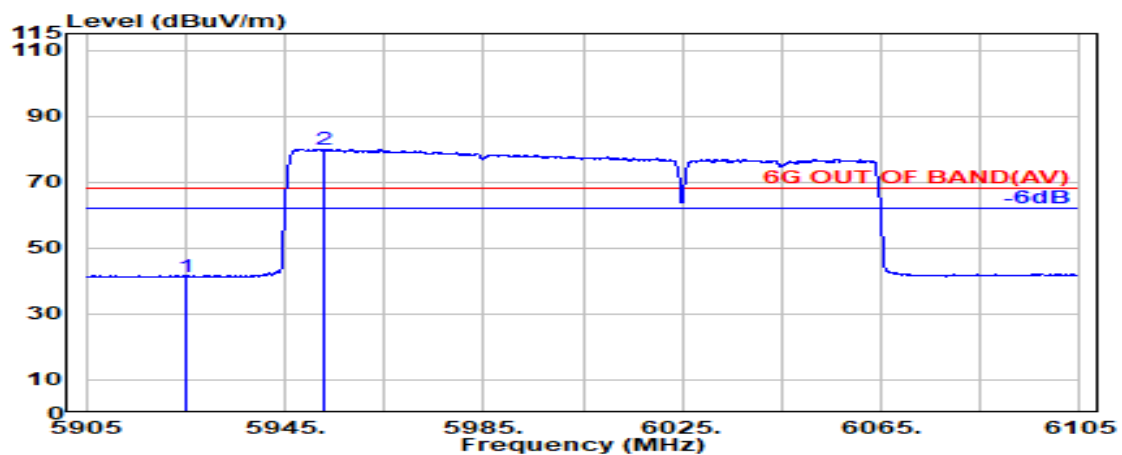

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	37.30	41.27	68.20	26.93	Average
@ 5953.100	34.09	9.13	39.24	75.95	79.93	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	996T+484T	RU Index	S95
Mode	802.11be-EHT160	U-NII Band	5
		Frequency	TX 6025MHz

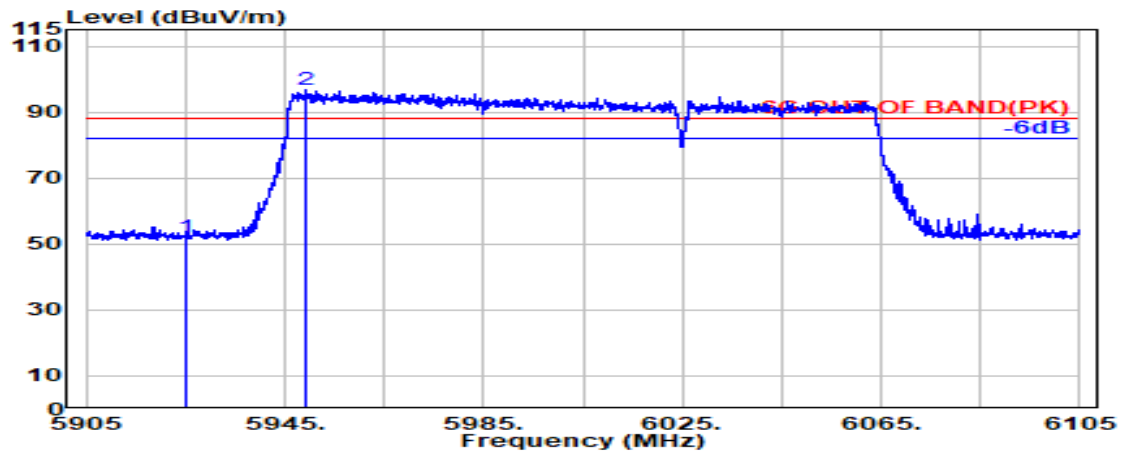

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	47.93	51.90	88.20	36.30	Peak
@ 5949.400	34.10	9.13	39.24	92.71	96.69	---	---	Peak

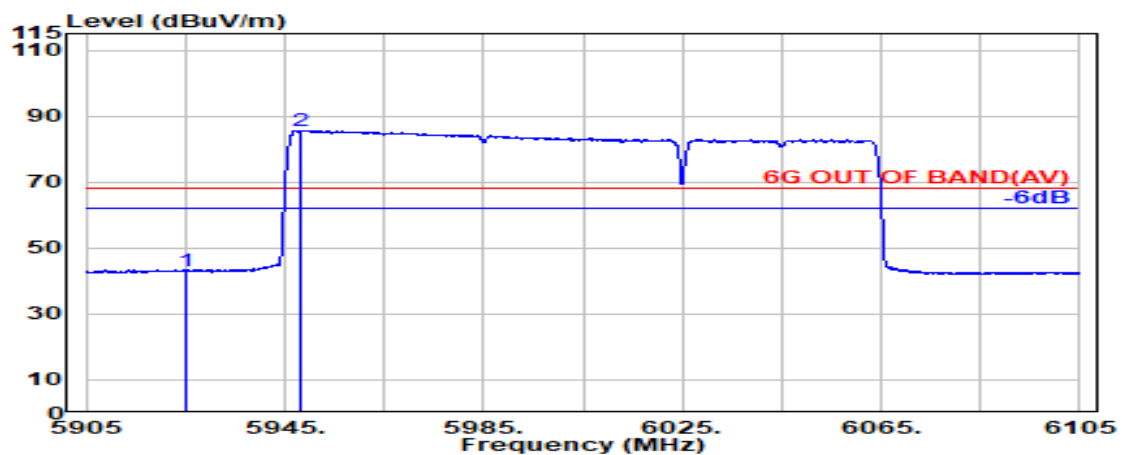

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	38.97	42.94	68.20	25.26	Average
@ 5948.200	34.10	9.12	39.24	81.71	85.70	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T+484T	RU Index	S94
Mode	802.11be-EHT160	U-NII Band	8
		Frequency	TX 6985MHz

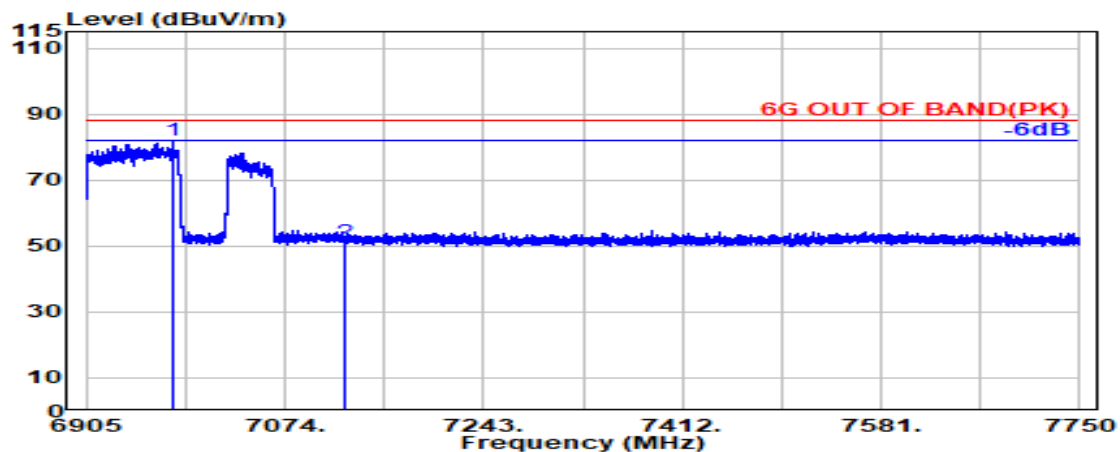

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6979.100	35.26	9.91	39.35	76.10	81.91	---	---	Peak
7125.000	35.70	9.99	39.38	44.88	51.18	88.20	37.02	Peak

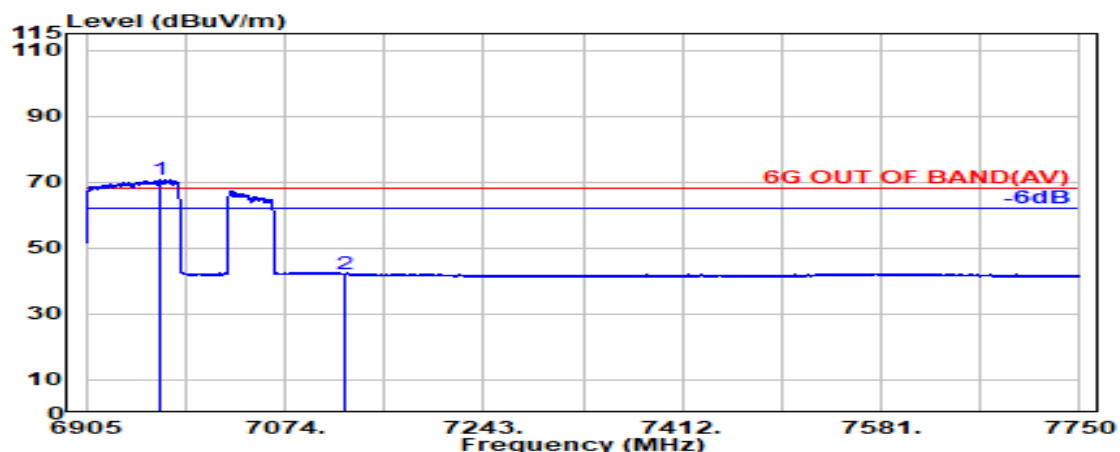

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6968.100	35.24	9.90	39.35	64.80	70.58	---	---	Average
7125.000	35.70	9.99	39.38	35.75	42.06	68.20	26.14	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	996T+484T	RU Index	S94
Mode	802.11be-EHT160	U-NII Band	8
		Frequency	TX 6985MHz

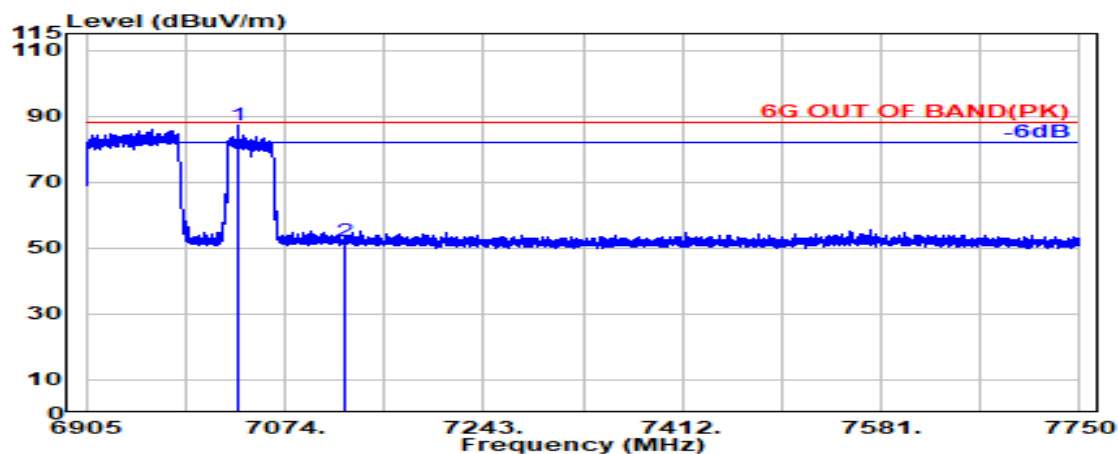

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7034.500	35.30	9.94	39.36	81.22	87.10	---	---	Peak
7125.000	35.70	9.99	39.38	45.82	52.13	88.20	36.07	Peak

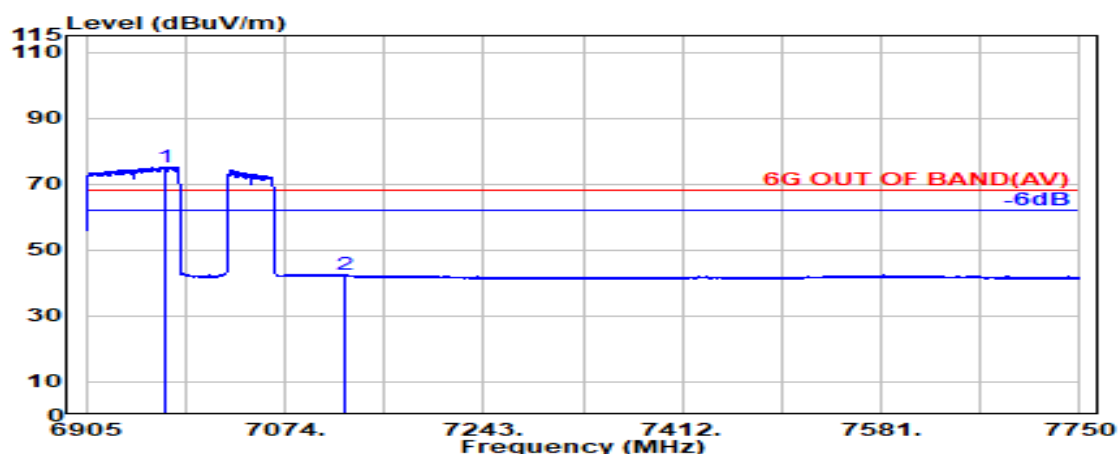

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6972.700	35.25	9.90	39.35	69.44	75.24	---	---	Average
7125.000	35.70	9.99	39.38	36.08	42.38	68.20	25.82	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T*2+484T	RU Index	S101
Mode	802.11be-EHT320	U-NII Band	5
		Frequency	TX 6025MHz

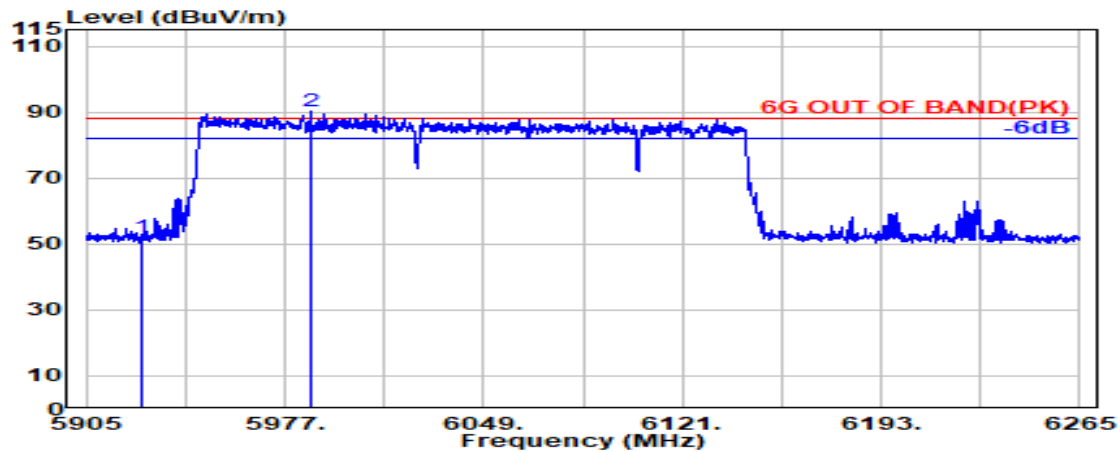

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	48.04	52.01	88.20	36.19	Peak
@ 5986.180	34.03	9.16	39.25	86.14	90.08	---	---	Peak

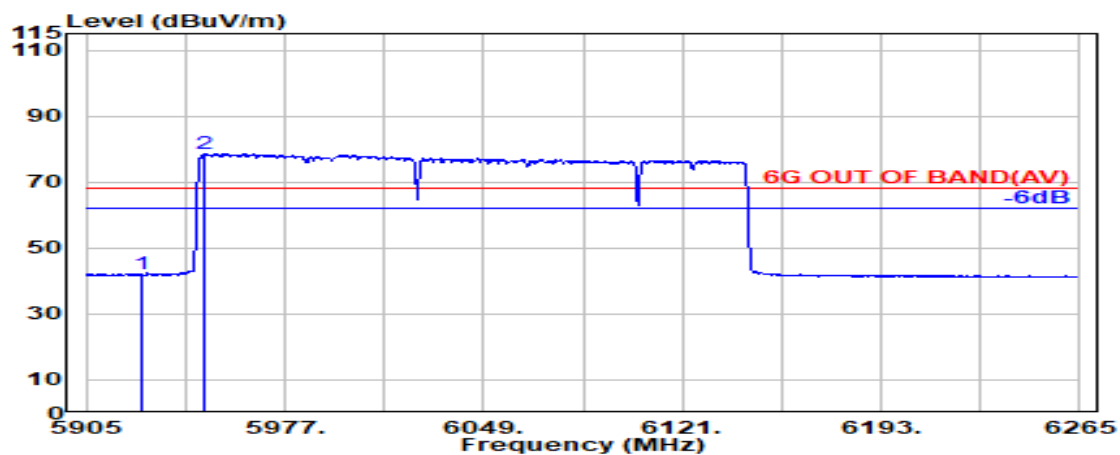

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	38.07	42.03	68.20	26.17	Average
@ 5947.840	34.10	9.12	39.24	74.58	78.57	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	996T*2+484T	RU Index	S101
Mode	802.11be-EHT320	U-NII Band	5
		Frequency	TX 6105MHz

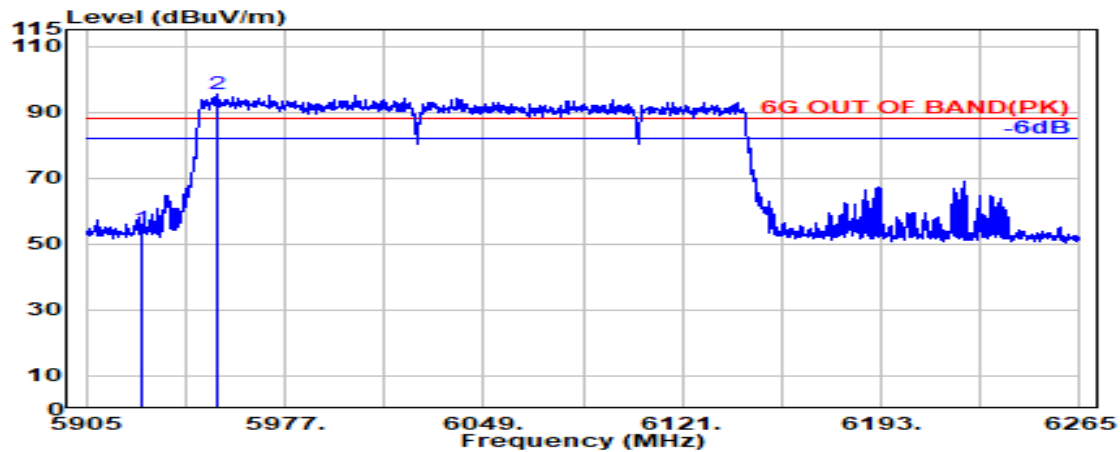

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	50.88	54.85	88.20	33.35	Peak
@ 5952.160	34.10	9.13	39.24	91.37	95.35	---	---	Peak

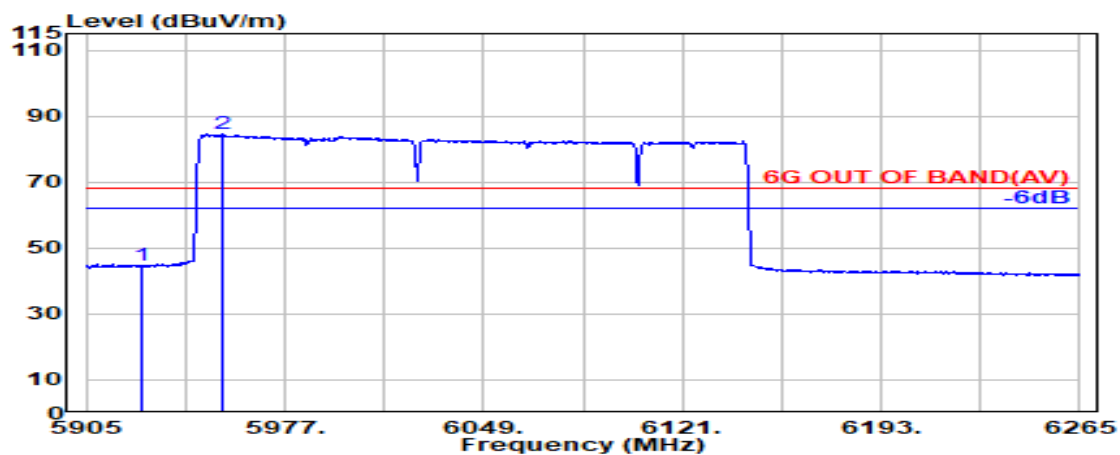

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	40.66	44.63	68.20	23.57	Average
@ 5954.140	34.09	9.13	39.24	80.62	84.60	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T*2+484T	RU Index	W102
Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

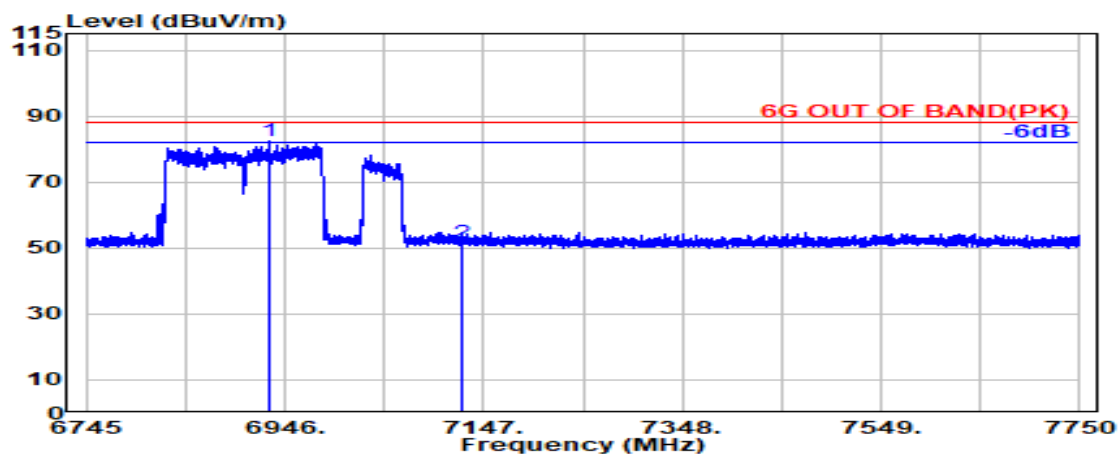

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6929.706	35.20	9.87	39.34	76.84	82.57	---	---	Peak
7125.000	35.70	9.99	39.38	45.34	51.64	88.20	36.56	Peak

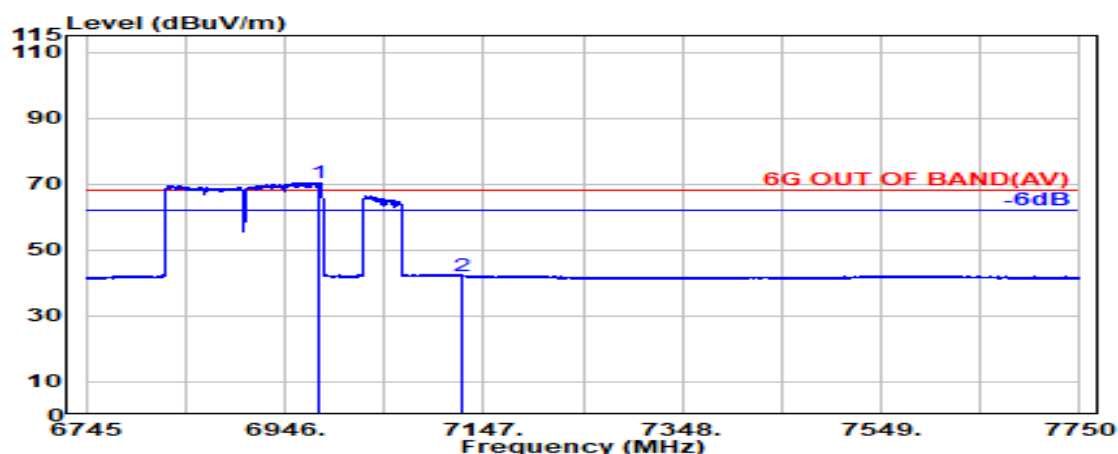

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6979.183	35.26	9.91	39.35	64.64	70.46	---	---	Average
7125.000	35.70	9.99	39.38	35.71	42.01	68.20	26.19	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T*2+484T	RU Index	W102
Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

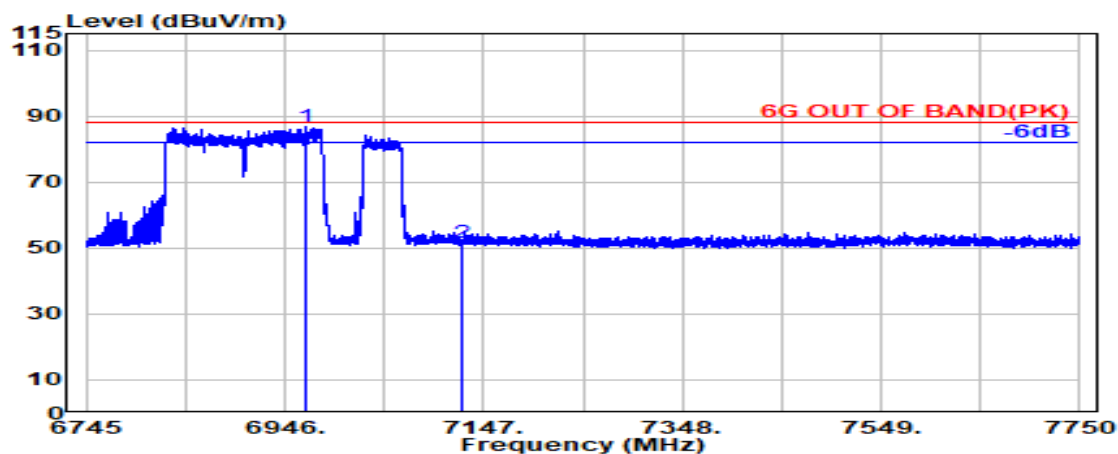

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6968.241	35.24	9.90	39.35	81.11	86.90	---	---	Peak
7125.000	35.70	9.99	39.38	45.38	51.69	88.20	36.51	Peak

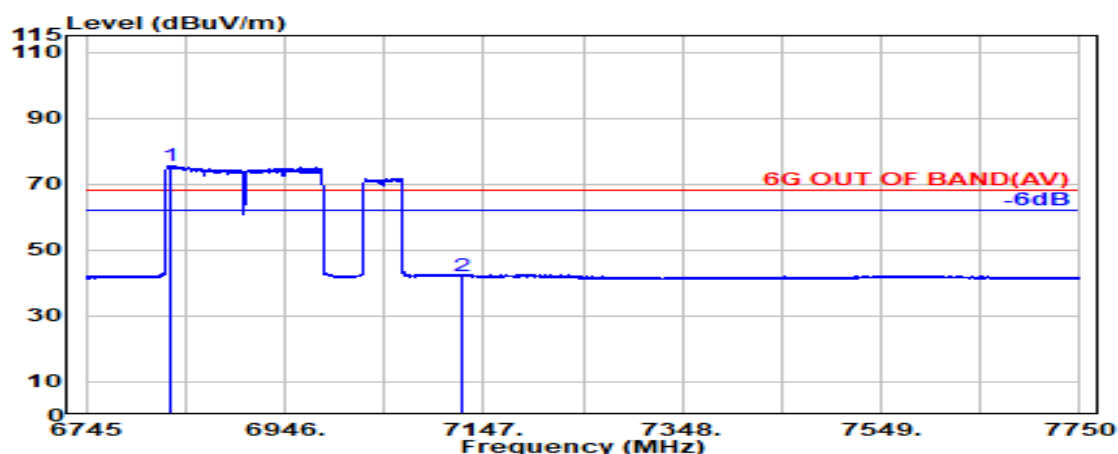

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6829.682	35.28	9.80	39.34	69.80	75.54	---	---	Average
7125.000	35.70	9.99	39.38	35.86	42.17	68.20	26.03	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	996T*3	RU Index	W104
Mode	802.11be-EHT320	U-NII Band	5
		Frequency	TX 6105MHz

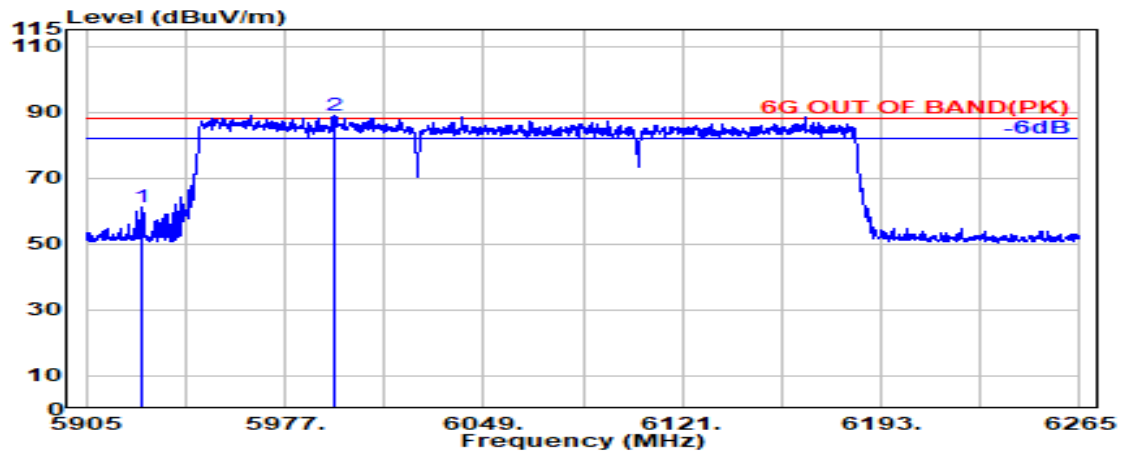

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	57.29	61.26	88.20	26.94	Peak
@ 5994.640	34.01	9.17	39.25	84.98	88.90	---	---	Peak

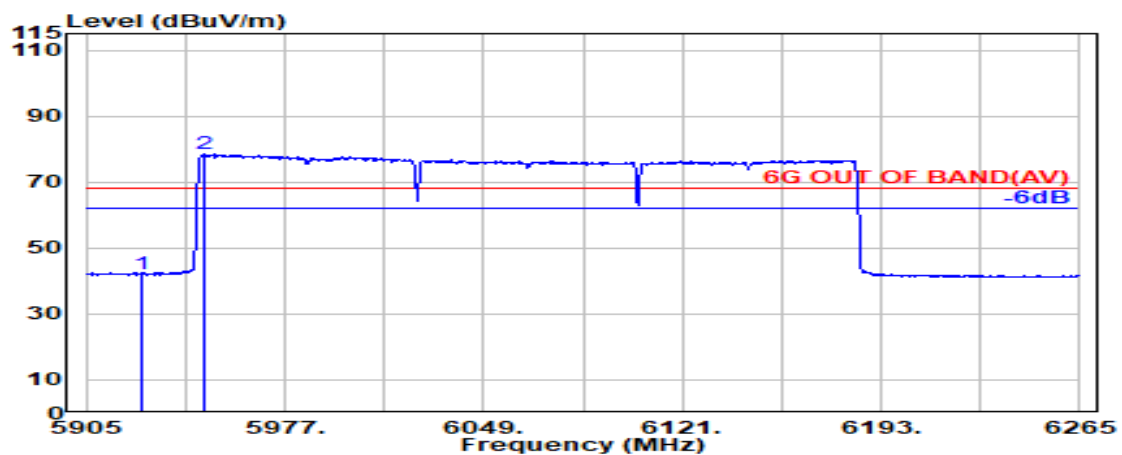

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	38.27	42.24	68.20	25.96	Average
@ 5948.020	34.10	9.12	39.24	74.40	78.39	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	996T*3	RU Index	W104
Mode	802.11be-EHT320	U-NII Band	5
		Frequency	TX 6105MHz

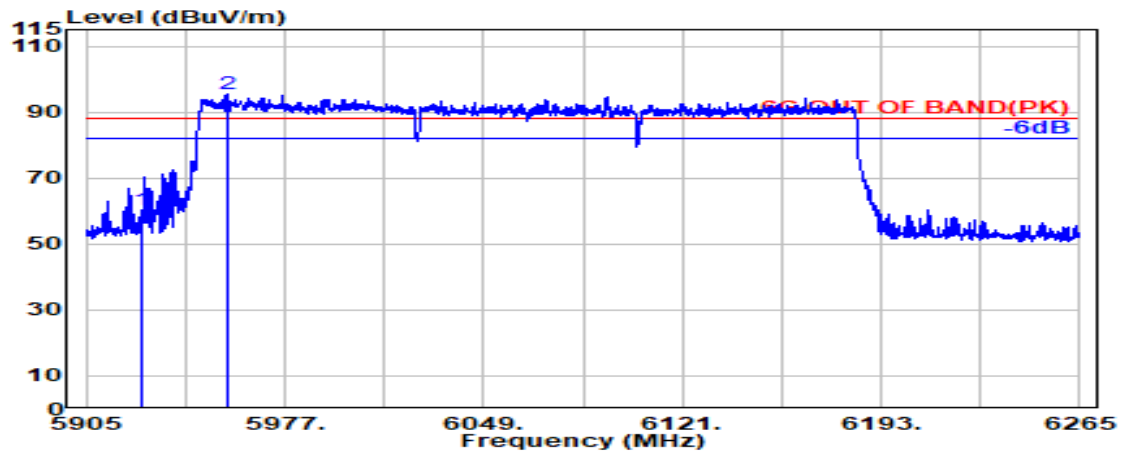

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	56.31	60.28	88.20	27.92	Peak
@ 5955.940	34.09	9.13	39.24	91.33	95.31	---	---	Peak

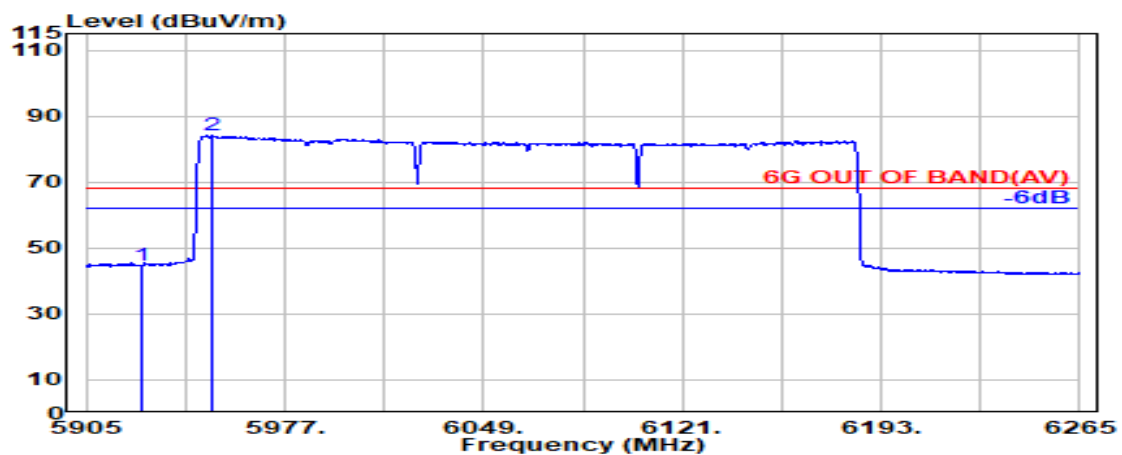

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	40.66	44.63	68.20	23.57	Average
@ 5950.900	34.10	9.13	39.24	80.29	84.27	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	996T*3	RU Index	104
Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

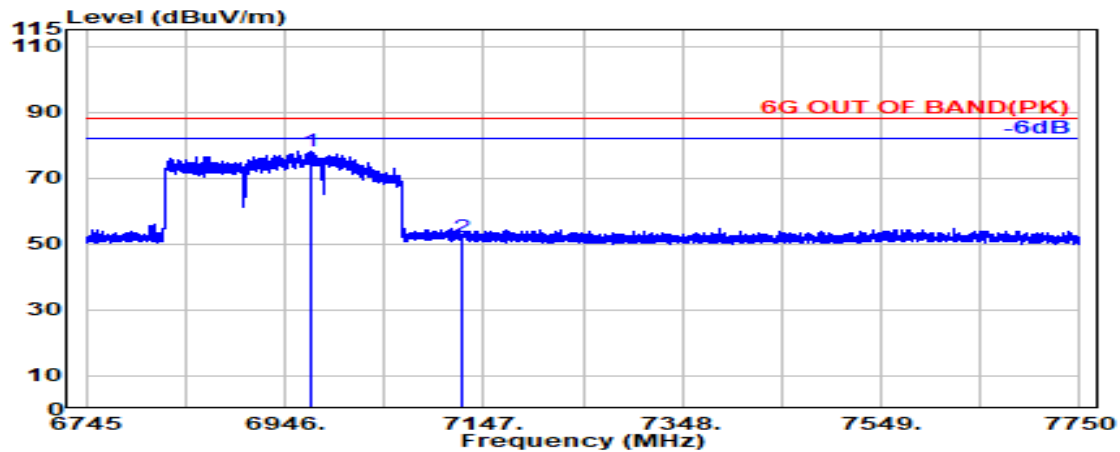

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6971.571	35.24	9.90	39.35	72.42	78.22	---	---	Peak
7125.000	35.70	9.99	39.38	45.74	52.05	88.20	36.15	Peak

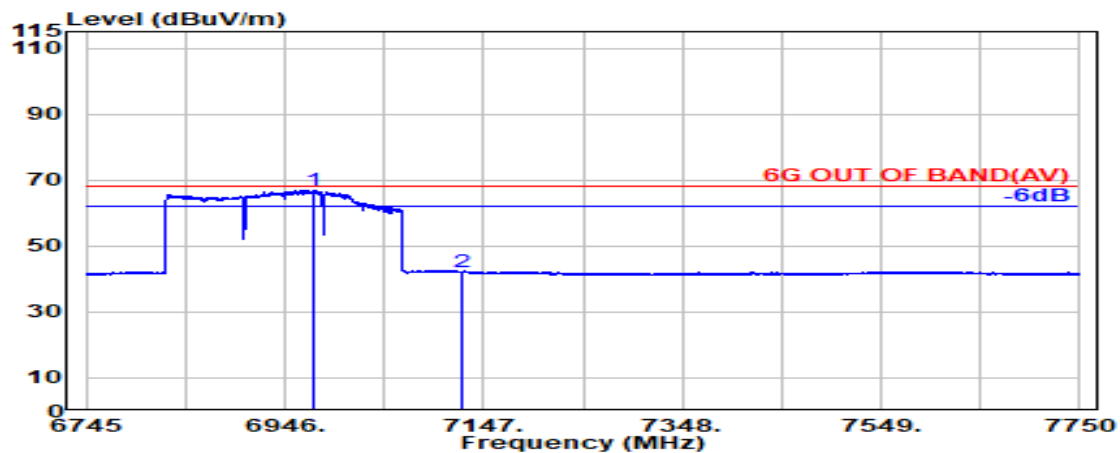

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6976.090	35.25	9.90	39.35	61.12	66.92	---	---	Average
7125.000	35.70	9.99	39.38	35.87	42.18	68.20	26.02	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Tones	996T*3	RU Index	104
Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

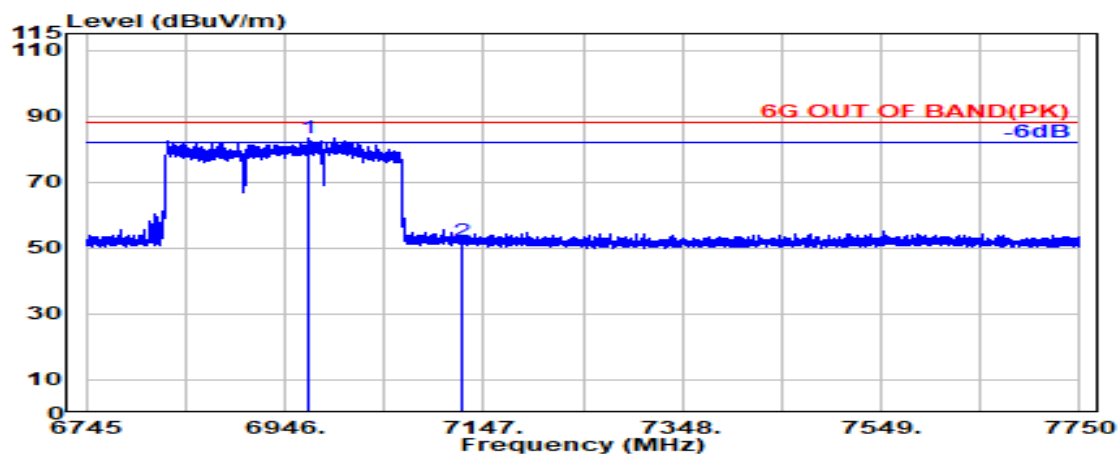

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6970.382	35.24	9.90	39.35	77.53	83.32	---	---	Peak
7125.000	35.70	9.99	39.38	45.78	52.08	88.20	36.12	Peak

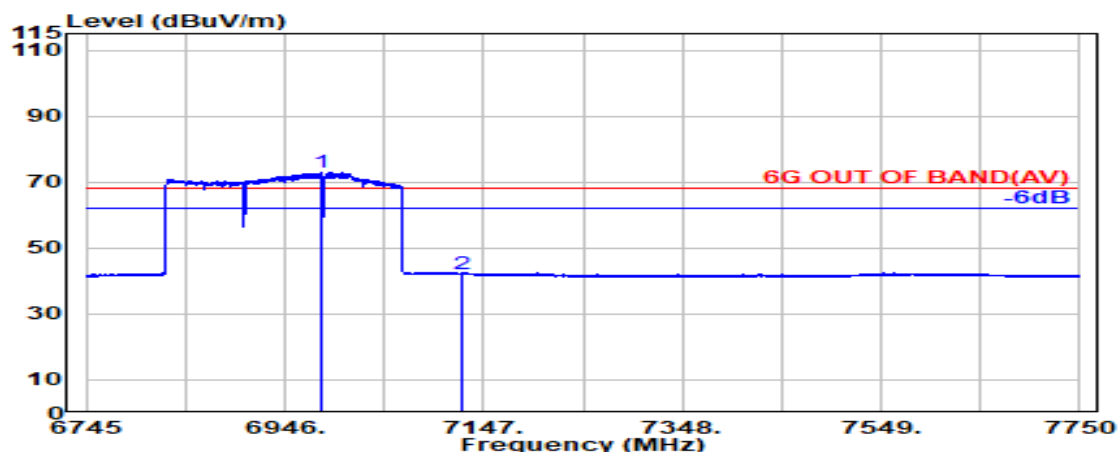

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6982.870	35.27	9.91	39.35	67.01	72.84	---	---	Average
7125.000	35.70	9.99	39.38	35.69	41.99	68.20	26.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T*3+484T	RU Index	W106
Mode	802.11be-EHT320	U-NII Band	5
		Frequency	TX 6105MHz

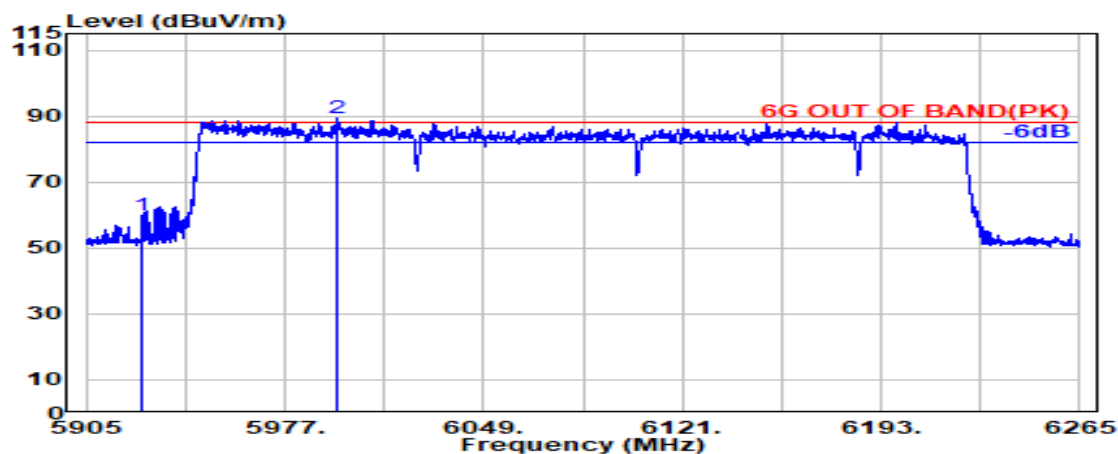

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	56.06	60.02	88.20	28.18	Peak
@ 5996.260	34.01	9.17	39.25	85.53	89.46	---	---	Peak

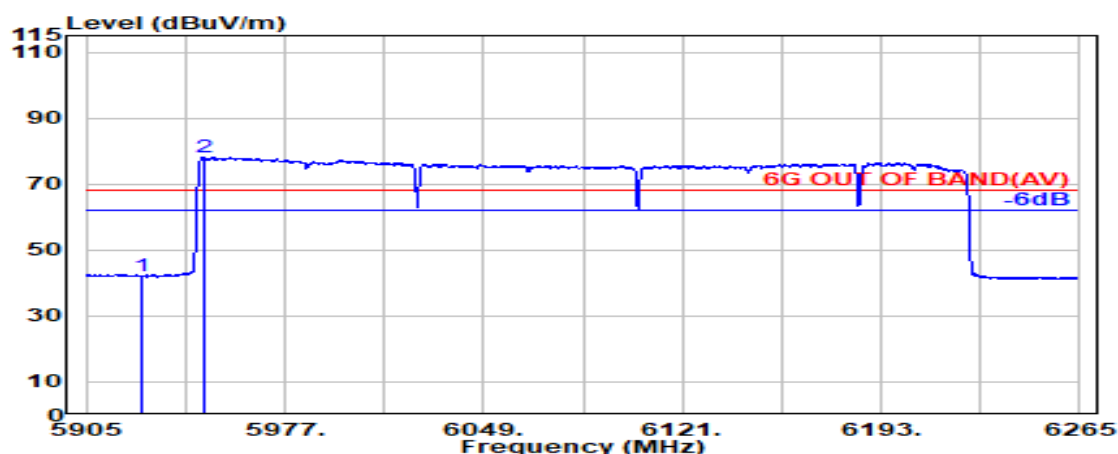


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	38.16	42.13	68.20	26.07	Average
@ 5947.840	34.10	9.12	39.24	74.02	78.01	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	996T*3+484T	RU Index	W106
Mode	802.11be-EHT320	U-NII Band	5
		Frequency	TX 6105MHz

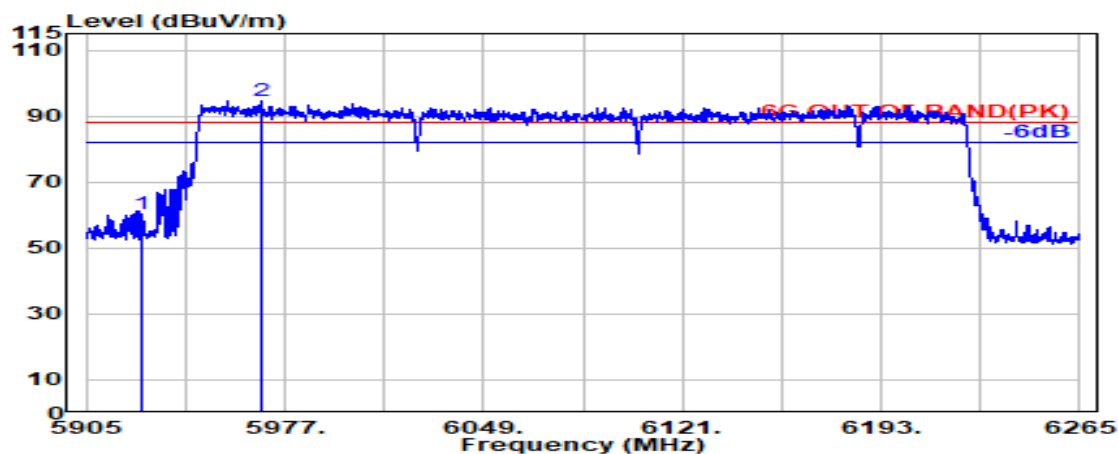

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	56.29	60.26	88.20	27.94	Peak
@ 5968.180	34.06	9.14	39.24	90.57	94.53	---	---	Peak

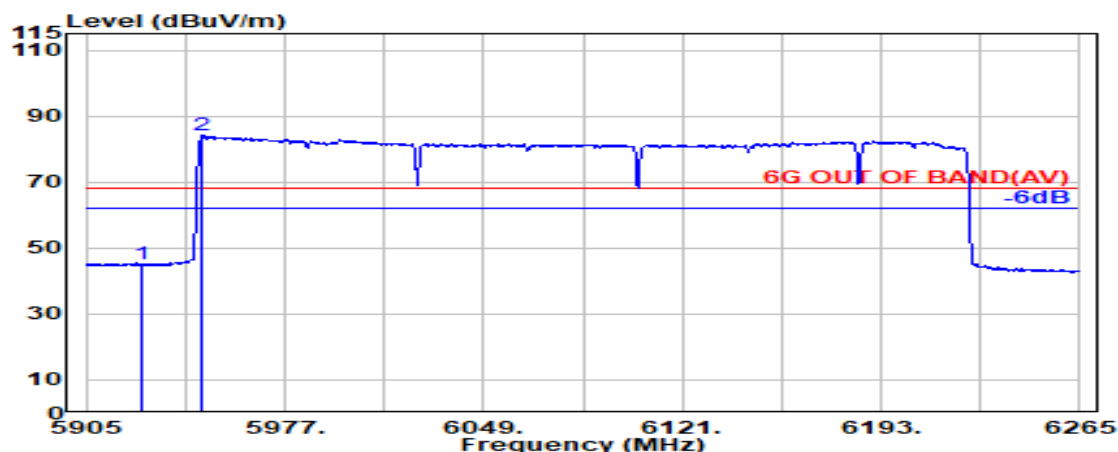

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.10	9.10	39.24	41.31	45.28	68.20	22.92	Average
@ 5947.300	34.10	9.12	39.24	80.14	84.13	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T*3+484T	RU Index	105
Mode	802.11be-EHT320	U-NII Band	5
		Frequency	TX 6105MHz

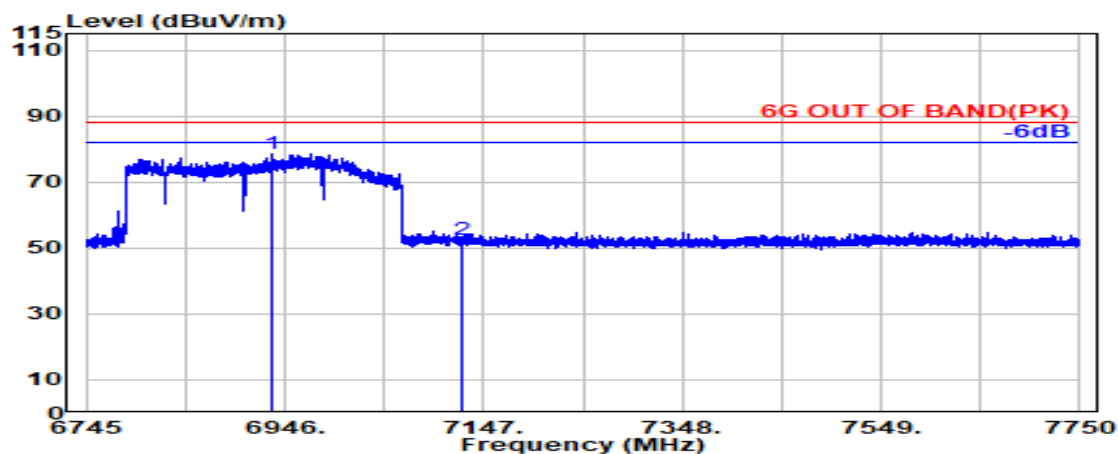

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6932.561	35.20	9.87	39.34	73.01	78.74	---	---	Peak
7125.000	35.70	9.99	39.38	46.31	52.62	88.20	35.58	Peak

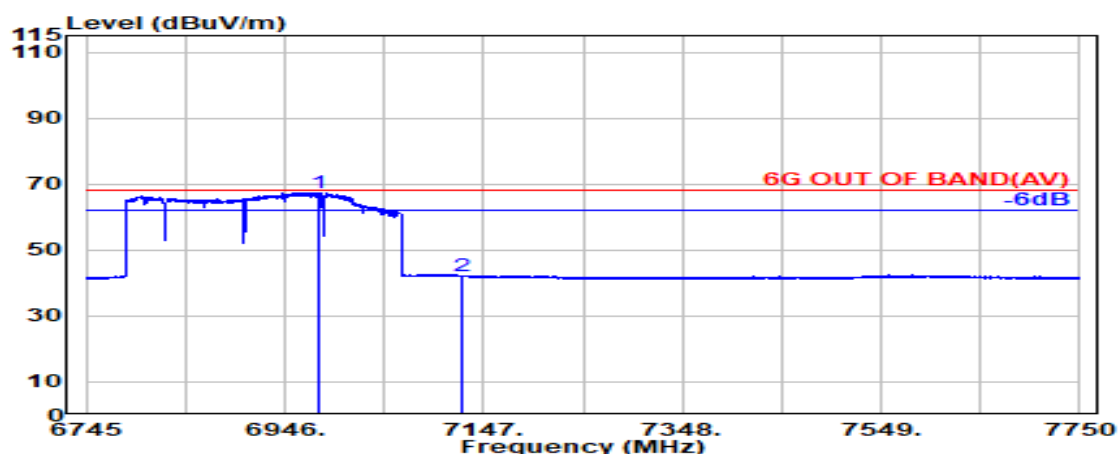

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6980.848	35.26	9.91	39.35	61.64	67.46	---	---	Average
7125.000	35.70	9.99	39.38	35.75	42.05	68.20	26.15	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Tones	996T*3+484T	RU Index	105
Mode	802.11be-EHT320	U-NII Band	5
		Frequency	TX 6105MHz

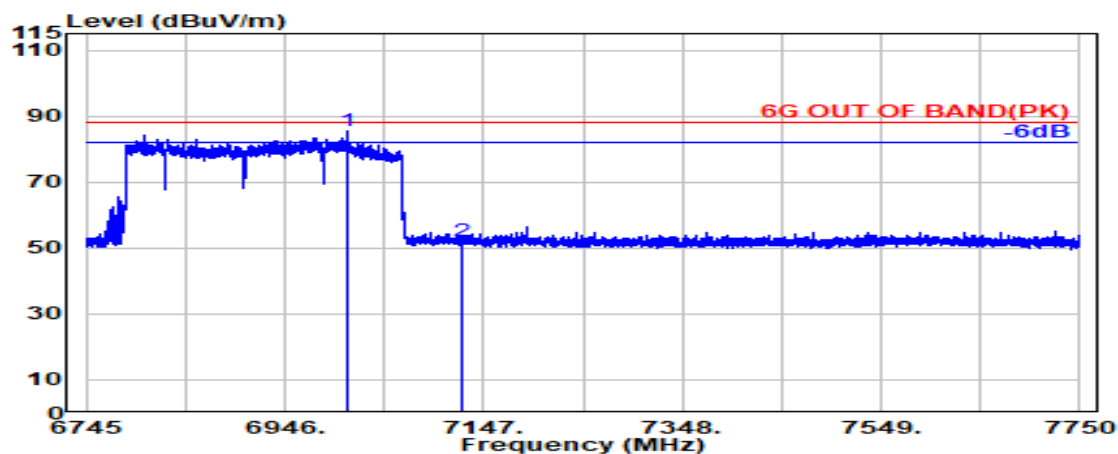

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7009.630	35.30	9.93	39.35	79.44	85.31	---	---	Peak
7125.000	35.70	9.99	39.38	45.74	52.05	88.20	36.15	Peak

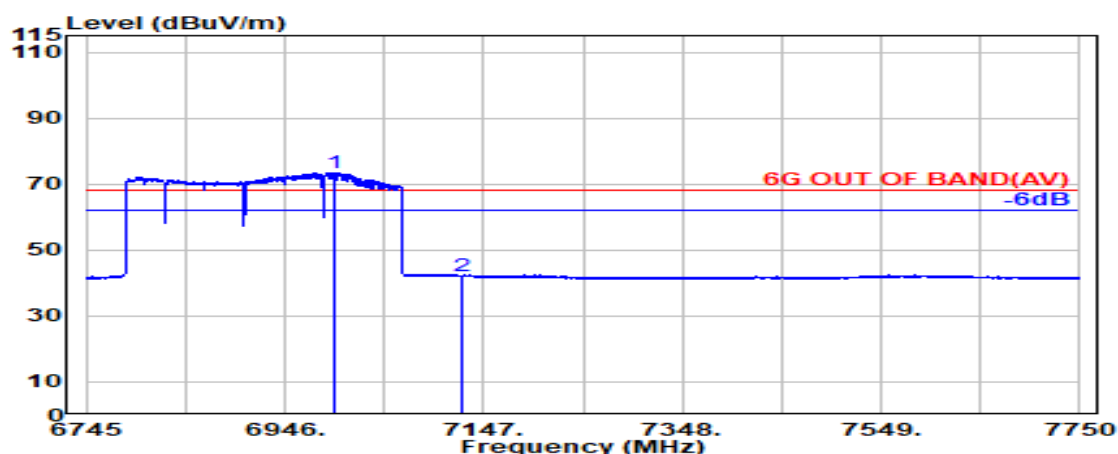

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 6996.190	35.29	9.92	39.35	67.55	73.41	---	---	Average
7125.000	35.70	9.99	39.38	35.96	42.27	68.20	25.93	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

● OFDM Modulation

Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	38.88	13.74	39.22	34.34	47.74	54.00	6.26	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	38.88	13.74	39.22	35.13	48.53	54.00	5.47	Peak

Mode	802.11ax-HE20	U-NII Band	6
		Frequency	TX 6515MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13030.000	39.66	14.71	37.54	30.62	47.44	54.00	6.56	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13030.000	39.66	14.71	37.54	32.28	49.10	54.00	4.90	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	7
		Frequency	TX 6695MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13390.000	40.69	14.92	37.01	30.31	48.91	54.00	5.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13390.000	40.69	14.92	37.01	30.22	48.82	54.00	5.18	Peak

Mode	802.11ax-HE20	U-NII Band	8
		Frequency	TX 6875MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13750.000	41.15	15.13	36.91	31.29	50.66	54.00	3.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13750.000	41.15	15.13	36.91	31.66	51.03	54.00	2.97	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11930.000	38.84	13.77	39.23	34.75	48.12	54.00	5.88	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11930.000	38.84	13.77	39.23	35.26	48.63	54.00	5.37	Peak

Mode	802.11ax-HE40	U-NII Band	6
		Frequency	TX 6445MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12890.000	39.37	14.60	37.83	31.23	47.38	54.00	6.62	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12890.000	39.37	14.60	37.83	31.42	47.57	54.00	6.43	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	7
		Frequency	TX 6685MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13370.000	40.67	14.91	37.04	30.38	48.92	54.00	5.08	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13370.000	40.67	14.91	37.04	29.80	48.34	54.00	5.66	Peak

Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 6885MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13770.000	41.21	15.14	36.91	31.86	51.30	54.00	2.70	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13770.000	41.21	15.14	36.91	31.41	50.85	54.00	3.15	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11970.000	38.76	13.82	39.25	33.98	47.31	54.00	6.69	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11970.000	38.76	13.82	39.25	34.37	47.69	54.00	6.31	Peak

Mode	802.11ax-HE80	U-NII Band	6
		Frequency	TX 6545MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13090.000	39.78	14.74	37.45	30.73	47.80	54.00	6.20	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13090.000	39.78	14.74	37.45	31.15	48.22	54.00	5.78	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	7
		Frequency	TX 6625MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13250.000	40.50	14.84	37.22	30.77	48.89	54.00	5.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13250.000	40.50	14.84	37.22	31.33	49.45	54.00	4.55	Peak

Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 6865MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13730.000	41.09	15.12	36.90	30.83	50.14	54.00	3.86	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13730.000	41.09	15.12	36.90	31.94	51.24	54.00	2.76	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12050.000	38.55	13.90	39.21	33.98	47.22	54.00	6.78	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12050.000	38.55	13.90	39.21	33.68	46.93	54.00	7.07	Peak

Mode	802.11ax-HE160	U-NII Band	6
		Frequency	TX 6505MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13010.000	39.62	14.70	37.57	31.67	48.41	54.00	5.59	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13010.000	39.62	14.70	37.57	32.08	48.83	54.00	5.17	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE160	U-NII Band	7
		Frequency	TX 6825MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13650.000	41.05	15.07	36.88	30.85	50.09	54.00	3.91	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13650.000	41.05	15.07	36.88	30.99	50.23	54.00	3.77	Peak

Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 6985MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13970.000	41.91	15.25	36.95	33.09	53.30	54.00	0.70	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13970.000	41.91	15.25	36.95	32.63	52.84	54.00	1.16	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	5
		Frequency	TX 5955MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	38.88	13.74	39.22	34.39	47.79	54.00	6.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	38.88	13.74	39.22	34.02	47.42	54.00	6.58	Peak

Mode	802.11be-EHT20	U-NII Band	6
		Frequency	TX 6515MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13030.000	39.66	14.71	37.54	31.53	48.35	54.00	5.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13030.000	39.66	14.71	37.54	32.28	49.10	54.00	4.90	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	7
		Frequency	TX 6695MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13390.000	40.69	14.92	37.01	30.80	49.40	54.00	4.60	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13390.000	40.69	14.92	37.01	30.01	48.61	54.00	5.39	Peak

Mode	802.11be-EHT20	U-NII Band	8
		Frequency	TX 6875MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13750.000	41.15	15.13	36.91	31.38	50.75	54.00	3.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13750.000	41.15	15.13	36.91	32.35	51.72	54.00	2.28	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	5
		Frequency	TX 5965MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11930.000	38.84	13.77	39.23	33.81	47.18	54.00	6.82	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11930.000	38.84	13.77	39.23	34.83	48.21	54.00	5.79	Peak

Mode	802.11be-EHT40	U-NII Band	6
		Frequency	TX 6445MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12890.000	39.37	14.60	37.83	33.82	49.96	54.00	4.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12890.000	39.37	14.60	37.83	33.71	49.85	54.00	4.15	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11be-EHT40	U-NII Band	7
		Frequency	TX 6685MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13370.000	40.67	14.91	37.04	30.91	49.45	54.00	4.55	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13370.000	40.67	14.91	37.04	30.77	49.31	54.00	4.69	Peak

Mode	802.11be-EHT40	U-NII Band	8
		Frequency	TX 6885MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13770.000	41.21	15.14	36.91	32.42	51.86	54.00	2.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13770.000	41.21	15.14	36.91	30.55	49.99	54.00	4.01	Peak

Mode	802.11be-EHT80	U-NII Band	5
		Frequency	TX 5985MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11970.000	38.76	13.82	39.25	33.36	46.68	54.00	7.32	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11970.000	38.76	13.82	39.25	34.69	48.01	54.00	5.99	Peak

Mode	802.11be-EHT80	U-NII Band	6
		Frequency	TX 6545MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13090.000	39.78	14.74	37.45	31.48	48.55	54.00	5.45	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13090.000	39.78	14.74	37.45	31.83	48.90	54.00	5.10	Peak

Mode	802.11be-EHT80	U-NII Band	7
		Frequency	TX 6625MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13250.000	40.50	14.84	37.22	30.63	48.75	54.00	5.25	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13250.000	40.50	14.84	37.22	30.41	48.53	54.00	5.47	Peak

Mode	802.11be-EHT80	U-NII Band	8
		Frequency	TX 6865MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13730.000	41.09	15.12	36.90	31.32	50.62	54.00	3.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13730.000	41.09	15.12	36.90	31.50	50.81	54.00	3.19	Peak

Mode	802.11be-EHT160	U-NII Band	5
		Frequency	TX 6025MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12050.000	38.55	13.90	39.21	34.94	48.19	54.00	5.81	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12050.000	38.55	13.90	39.21	34.37	47.61	54.00	6.39	Peak

Mode	802.11be-EHT160	U-NII Band	6
		Frequency	TX 6505MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13010.000	39.62	14.70	37.57	31.94	48.68	54.00	5.32	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13010.000	39.62	14.70	37.57	32.36	49.10	54.00	4.90	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	7
		Frequency	TX 6825MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13650.000	41.05	15.07	36.88	30.73	49.97	54.00	4.03	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13650.000	41.05	15.07	36.88	31.14	50.37	54.00	3.63	Peak

Mode	802.11be-EHT160	U-NII Band	8
		Frequency	TX 6985MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13970.000	41.91	15.25	36.95	32.60	52.81	54.00	1.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13970.000	41.91	15.25	36.95	31.45	51.66	54.00	2.34	Peak

Mode	802.11be-EHT320	U-NII Band	5
		Frequency	TX 6105MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12210.000	38.50	14.04	39.02	34.55	48.06	54.00	5.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12210.000	38.50	14.04	39.02	33.84	47.35	54.00	6.65	Peak

Mode	802.11be-EHT320	U-NII Band	6
		Frequency	TX 6585MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13170.000	40.22	14.79	37.34	30.65	48.33	54.00	5.67	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13170.000	40.22	14.79	37.34	30.78	48.46	54.00	5.54	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT320	U-NII Band	7
		Frequency	TX 6745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13490.000	40.79	14.98	36.86	30.68	49.58	54.00	4.42	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13490.000	40.79	14.98	36.86	32.40	51.31	54.00	2.69	Peak

Mode	802.11be-EHT320	U-NII Band	8
		Frequency	TX 6905MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13810.000	41.34	15.16	36.92	32.35	51.93	54.00	2.07	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13810.000	41.34	15.16	36.92	31.99	51.58	54.00	2.42	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.3 MAXIMUM POWER SPECTRAL DENSITY

Test Date	2025/02/17~25	Temp./Hum.	20 ~ 21℃/58 ~ 64%
Cable Loss	1.9dB	Tested By	Sam Chang
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

A.3.1 Power Spectral Density Result

● OFDM Modulation

Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) ^{Note3}	Total Power Spectral Density (dBm/1 MHz) ^{Note 2}	Limit (dBm/MHz)
			AUX	Main				
802.11ax-HE20	5	5955	-11.294	-11.374	N/A	1.59	-6.73	-1
		6175	-11.709	-12.196		1.59	-7.35	
		6415	-10.958	-11.161		1.59	-6.46	
	6	6435	-11.121	-11.249		2.76	-5.41	
		6475	-10.964	-12.474		2.76	-5.88	
		6515	-10.693	-12.104		2.76	-5.57	
	7	6535	-10.750	-11.596		2.24	-5.90	
		6695	-11.027	-11.897		2.24	-6.19	
		6855	-10.910	-11.627		2.24	-6.00	
	8	6875	-10.823	-11.503		2.10	-6.04	
		6995	-11.101	-11.487		2.10	-6.18	
		7115	-19.986	-19.690		2.10	-14.73	
802.11ax-HE40	5	5965	-10.837	-10.947	N/A	1.59	-6.29	-1
		6165	-11.393	-11.513		1.59	-6.85	
		6405	-11.023	-11.082		1.59	-6.45	
	6	6445	-11.094	-11.344		2.76	-5.45	
		6485	-11.335	-11.208		2.76	-5.50	
		6525	-10.875	-10.967		2.24	-5.67	
	7	6685	-10.979	-11.163		2.24	-5.82	
		6845	-10.948	-10.981		2.24	-5.71	
		6885	-10.775	-10.873		2.10	-5.71	
	8	7005	-11.170	-11.188		2.10	-6.07	
		7085	-11.616	-11.238		2.10	-6.31	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

5925~6425MHz: Directional gain = $10 \log[(10^{0.6/10} + 10^{2.4/10})/2] = 1.59$ dBi

6425~6525MHz: Directional gain = $10 \log[(10^{3.1/10} + 10^{2.4/10})/2] = 2.76$ dBi

6525~6875MHz: Directional gain = $10 \log[(10^{2.8/10} + 10^{1.6/10})/2] = 2.24$ dBi

6875~7125MHz: Directional gain = $10 \log[(10^{2.7/10} + 10^{1.4/10})/2] = 2.10$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) ^{Note3}	Total Power Spectral Density (dBm/1MHz) ^{Note2}	Limit (dBm/MHz)
			AUX	Main				
802.11ax-HE80	5	5985	-11.077	-11.091	N/A	1.59	-6.48	-1
		6145	-11.724	-11.544		1.59	-7.03	
		6385	-11.432	-11.416		1.59	-6.82	
	6	6465	-11.590	-11.439		2.76	-5.74	
		6545	-11.715	-11.200		2.76	-5.68	
		6625	-11.262	-11.201		2.24	-5.98	
	7	6705	-11.580	-11.600		2.24	-6.34	
		6785	-11.598	-11.524		2.24	-6.31	
	8	6865	-11.490	-11.187		2.10	-6.23	
		6945	-11.450	-11.333		2.10	-6.28	
		7025	-11.593	-11.255		2.10	-6.31	
802.11ax-HE160	5	6025	-11.389	-11.467	N/A	1.59	-6.83	
		6185	-11.788	-12.020		1.59	-7.30	
		6345	-12.106	-11.833		1.59	-7.37	
	6	6505	-11.460	-11.495		2.76	-5.71	
		6665	-11.466	-11.554		2.24	-6.26	
		6825	-11.716	-11.605		2.24	-6.41	
	8	6985	-11.427	-11.444		2.10	-6.33	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

5925~6425MHz: Directional gain = $10 \log[(10^{0.6/10} + 10^{2.4/10})/2] = 1.59$ dBi

6425~6525MHz: Directional gain = $10 \log[(10^{3.1/10} + 10^{2.4/10})/2] = 2.76$ dBi

6525~6875MHz: Directional gain = $10 \log[(10^{2.8/10} + 10^{1.6/10})/2] = 2.24$ dBi

6875~7125MHz: Directional gain = $10 \log[(10^{2.7/10} + 10^{-1.4/10})/2] = 2.10$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) ^{Note3}	Total Power Spectral Density (dBm/1MHz) ^{Note 2}	Limit (dBm/MHz)
			AUX	Main				
802.11be-EHT20	5	5955	-10.696	-10.975	N/A	1.59	-6.23	-1
		6175	-11.257	-11.684		1.59	-6.86	
		6415	-10.465	-10.871		1.59	-6.06	
	6	6435	-10.856	-11.172		2.76	-5.24	
		6475	-10.975	-11.440		2.76	-5.43	
		6515	-10.850	-11.176		2.76	-5.24	
	7	6535	-10.759	-10.916		2.24	-5.59	
		6695	-11.025	-11.249		2.24	-5.89	
		6855	-10.692	-11.002		2.24	-5.59	
	8	6875	-10.785	-10.769		2.10	-5.67	
		6995	-10.958	-10.830		2.10	-5.78	
		7115	-19.572	-19.142		2.10	-14.24	
802.11be-EHT40	5	5965	-10.946	-10.912	N/A	1.59	-6.33	-1
		6165	-11.182	-11.416		1.59	-6.70	
		6405	-10.908	-11.028		1.59	-6.37	
	6	6445	-11.009	-10.932		2.76	-5.20	
		6485	-11.116	-11.135		2.76	-5.36	
	7	6525	-10.959	-10.561		2.24	-5.51	
		6685	-10.963	-10.855		2.24	-5.66	
		6845	-10.721	-10.935		2.24	-5.58	
	8	6885	-10.764	-10.541		2.10	-5.54	
		7005	-11.045	-10.978		2.10	-5.90	
		7085	-11.639	-11.014		2.10	-6.20	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

5925~6425MHz: Directional gain = $10 \log[(10^{0.6/10} + 10^{2.4/10})/2] = 1.59$ dBi

6425~6525MHz: Directional gain = $10 \log[(10^{3.1/10} + 10^{2.4/10})/2] = 2.76$ dBi

6525~6875MHz: Directional gain = $10 \log[(10^{2.8/10} + 10^{1.6/10})/2] = 2.24$ dBi

6875~7125MHz: Directional gain = $10 \log[(10^{2.7/10} + 10^{1.4/10})/2] = 2.10$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) ^{Note3}	Total Power Spectral Density (dBm/1MHz) ^{Note2}	Limit (dBm/MHz)
			AUX	Main				
802.11be-EHT80	5	5985	-11.088	-11.222	N/A	1.59	-6.55	-1
		6145	-11.460	-11.631		1.59	-6.94	
		6385	-11.017	-11.255		1.59	-6.53	
	6	6465	-11.429	-11.134		2.76	-5.51	
		6545	-11.149	-11.154		2.76	-5.38	
		6625	-11.016	-11.308		2.24	-5.91	
	7	6705	-11.278	-11.499		2.24	-6.14	
		6785	-11.247	-11.396		2.24	-6.07	
	8	6865	-11.250	-11.126		2.10	-6.08	
		6945	-11.097	-11.083		2.10	-5.98	
		7025	-11.327	-11.275		2.10	-6.19	
802.11be-EHT160	5	6025	-11.347	-11.390	N/A	1.59	-6.77	-1
		6185	-11.889	-12.089		1.59	-7.39	
		6345	-12.008	-11.751		1.59	-7.28	
	6	6505	-11.585	-11.602		2.76	-5.82	
		6665	-11.424	-11.591		2.24	-6.26	
		6825	-11.757	-11.236		2.24	-6.24	
	8	6985	-11.682	-11.509		2.10	-6.48	
802.11be-EHT320	5	6105	-11.470	-10.994	N/A	1.59	-6.63	-1
		6265	-11.597	-11.807		1.59	-7.10	
		6425	-11.362	-11.105		1.59	-6.63	
	6	6585	-10.919	-11.014		2.76	-5.20	
		6745	-10.965	-11.105		2.24	-5.78	
		6905	-12.395	-12.205		2.10	-7.19	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

5925~6425MHz: Directional gain = $10 \log[(10^{0.6/10} + 10^{2.4/10})/2] = 1.59$ dBi

6425~6525MHz: Directional gain = $10 \log[(10^{3.1/10} + 10^{2.4/10})/2] = 2.76$ dBi

6525~6875MHz: Directional gain = $10 \log[(10^{2.8/10} + 10^{1.6/10})/2] = 2.24$ dBi

6875~7125MHz: Directional gain = $10 \log[(10^{2.7/10} + 10^{-1.4/10})/2] = 2.10$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

● OFDMA Modulation

Tones	RU Index	Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) Note3	Total Power Spectral Density (dBm/1MHz) Note 2	Limit (dBm/MHz)
					AUX	Main				
26T	18	802.11ax-HE80	6	6545	-8.816	-9.172	N/A	2.76	-3.22	-1
52T	52	802.11ax-HE80	6	6545	-10.673	-10.951	N/A	2.76	-5.04	
106T	60	802.11ax-HE80	6	6545	-10.785	-10.908	N/A	2.76	-5.08	
242T	S62	802.11ax-HE160	6	6505	-10.351	-10.488	N/A	2.76	-4.65	
484T	66	802.11ax-HE80	6	6545	-10.369	-10.737	N/A	2.76	-4.78	
996T	67	802.11ax-HE80	6	6545	-10.727	-9.693	N/A	2.76	-4.41	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

5925~6425MHz: Directional gain = $10 \log[(10^{0.6/10} + 10^{2.4/10})/2] = 1.59$ dBi

6425~6525MHz: Directional gain = $10 \log[(10^{3.1/10} + 10^{2.4/10})/2] = 2.76$ dBi

6525~6875MHz: Directional gain = $10 \log[(10^{2.8/10} + 10^{1.6/10})/2] = 2.24$ dBi

6875~7125MHz: Directional gain = $10 \log[(10^{2.7/10} + 10^{-1.4/10})/2] = 2.10$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Tones	RU Index	Modulation Type	U-NII Band	Centre Frequency (MHz)	Power Spectral Density (dBm/MHz)		Duty Cycle Factor (dB) 10log(1/X)	Directional Gain (dBi) Note3	Total Power Spectral Density (dBm/1MHz) Note 2	Limit (dBm/MHz)
					AUX	Main				
26	T36	802.11be-EHT320	6	6585	-10.890	-10.590	N/A	2.76	-4.97	-1
52	T52	802.11be-EHT320	6	6585	-11.192	-11.172	N/A	2.76	-5.41	
106	T56	802.11be-EHT320	6	6585	-10.359	-11.038	N/A	2.76	-4.91	
242	T64	802.11be-EHT320	6	6585	-10.621	-10.702	N/A	2.76	-4.89	
484	T66	802.11be-EHT320	6	6585	-10.171	-10.873	N/A	2.76	-4.74	
996	T67	802.11be-EHT320	6	6585	-10.770	-9.825	N/A	2.76	-4.50	
996x2	W68	802.11be-EHT320	6	6585	-10.345	-11.042	N/A	2.76	-4.91	
26+52	72	802.11be-EHT20	6	6515	-10.599	-10.653	N/A	2.76	-4.86	
26+52	70	802.11be-EHT40	7	6685	-10.730	-10.329	N/A	2.24	-5.27	
26+106	83	802.11be-EHT20	6	6515	-10.541	-10.344	N/A	2.76	-4.67	
26+106	82	802.11be-EHT40	7	6685	-10.708	-10.344	N/A	2.24	-5.27	
484+242	93	802.11be-EHT80	6	6545	-10.609	-10.046	N/A	2.76	-4.55	
996+484	94	802.11be-EHT160	6	6505	-10.541	-11.475	N/A	2.76	-5.21	
996+484+242	S99	802.11be-EHT160	6	6505	-10.929	-10.053	N/A	2.76	-4.70	
996x2+484	W103	802.11be-EHT320	6	6585	-10.378	-10.462	N/A	2.76	-4.65	
996x3	104	802.11be-EHT320	6	6585	-10.882	-11.858	N/A	2.76	-5.57	
996x3+484	W106	802.11be-EHT320	6	6585	-13.115	-13.780	N/A	2.76	-7.66	

Note: 1. All results have been included cable loss [Please refer to KDB 662911 E 2) c)]

2. According to KDB 662911 D01 E)2)a), Total Power Spectral Density (dBm/1MHz) = Sum to individual PSD (dBm/1MHz) + Duty Cycle Factor (dB) when duty cycle is less than 98%. + Directional Gain.

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

5925~6425MHz: Directional gain = $10 \log[(10^{0.6/10} + 10^{2.4/10})/2] = 1.59$ dBi

6425~6525MHz: Directional gain = $10 \log[(10^{3.1/10} + 10^{2.4/10})/2] = 2.76$ dBi

6525~6875MHz: Directional gain = $10 \log[(10^{2.8/10} + 10^{1.6/10})/2] = 2.24$ dBi

6875~7125MHz: Directional gain = $10 \log[(10^{2.7/10} + 10^{-1.4/10})/2] = 2.10$ dBi


The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


A.3.2 Measurement Plots


● OFDM Modulation

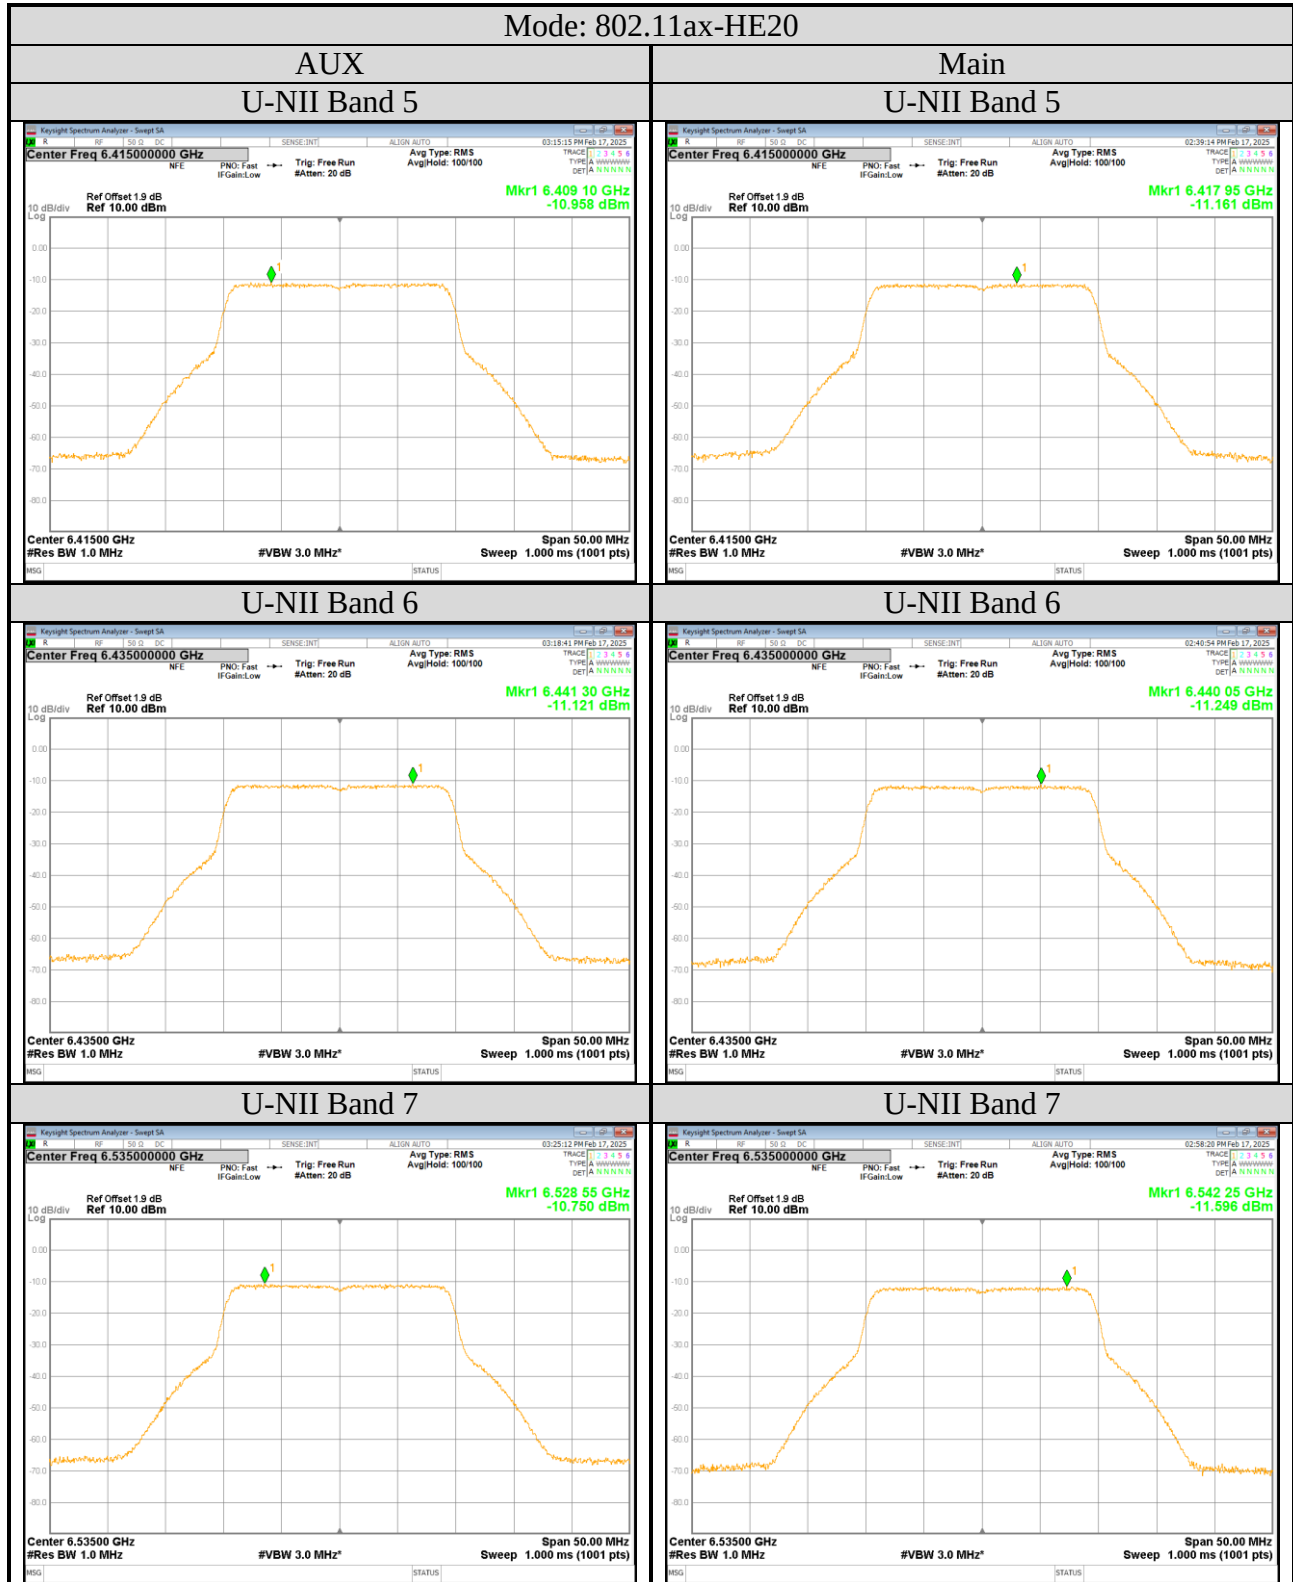

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

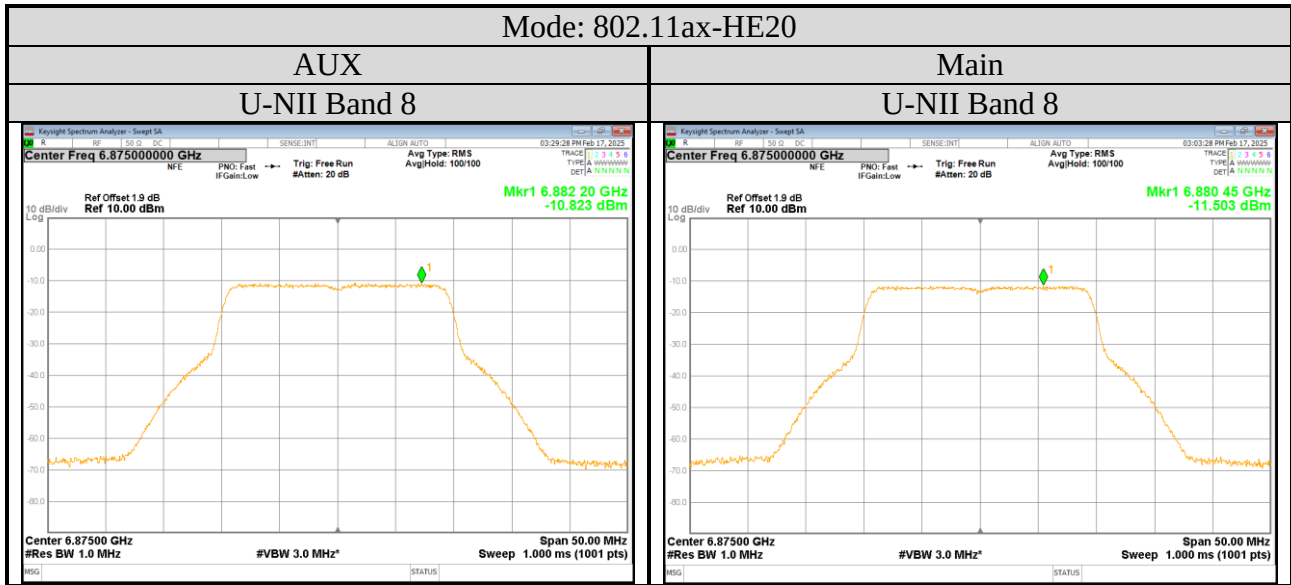


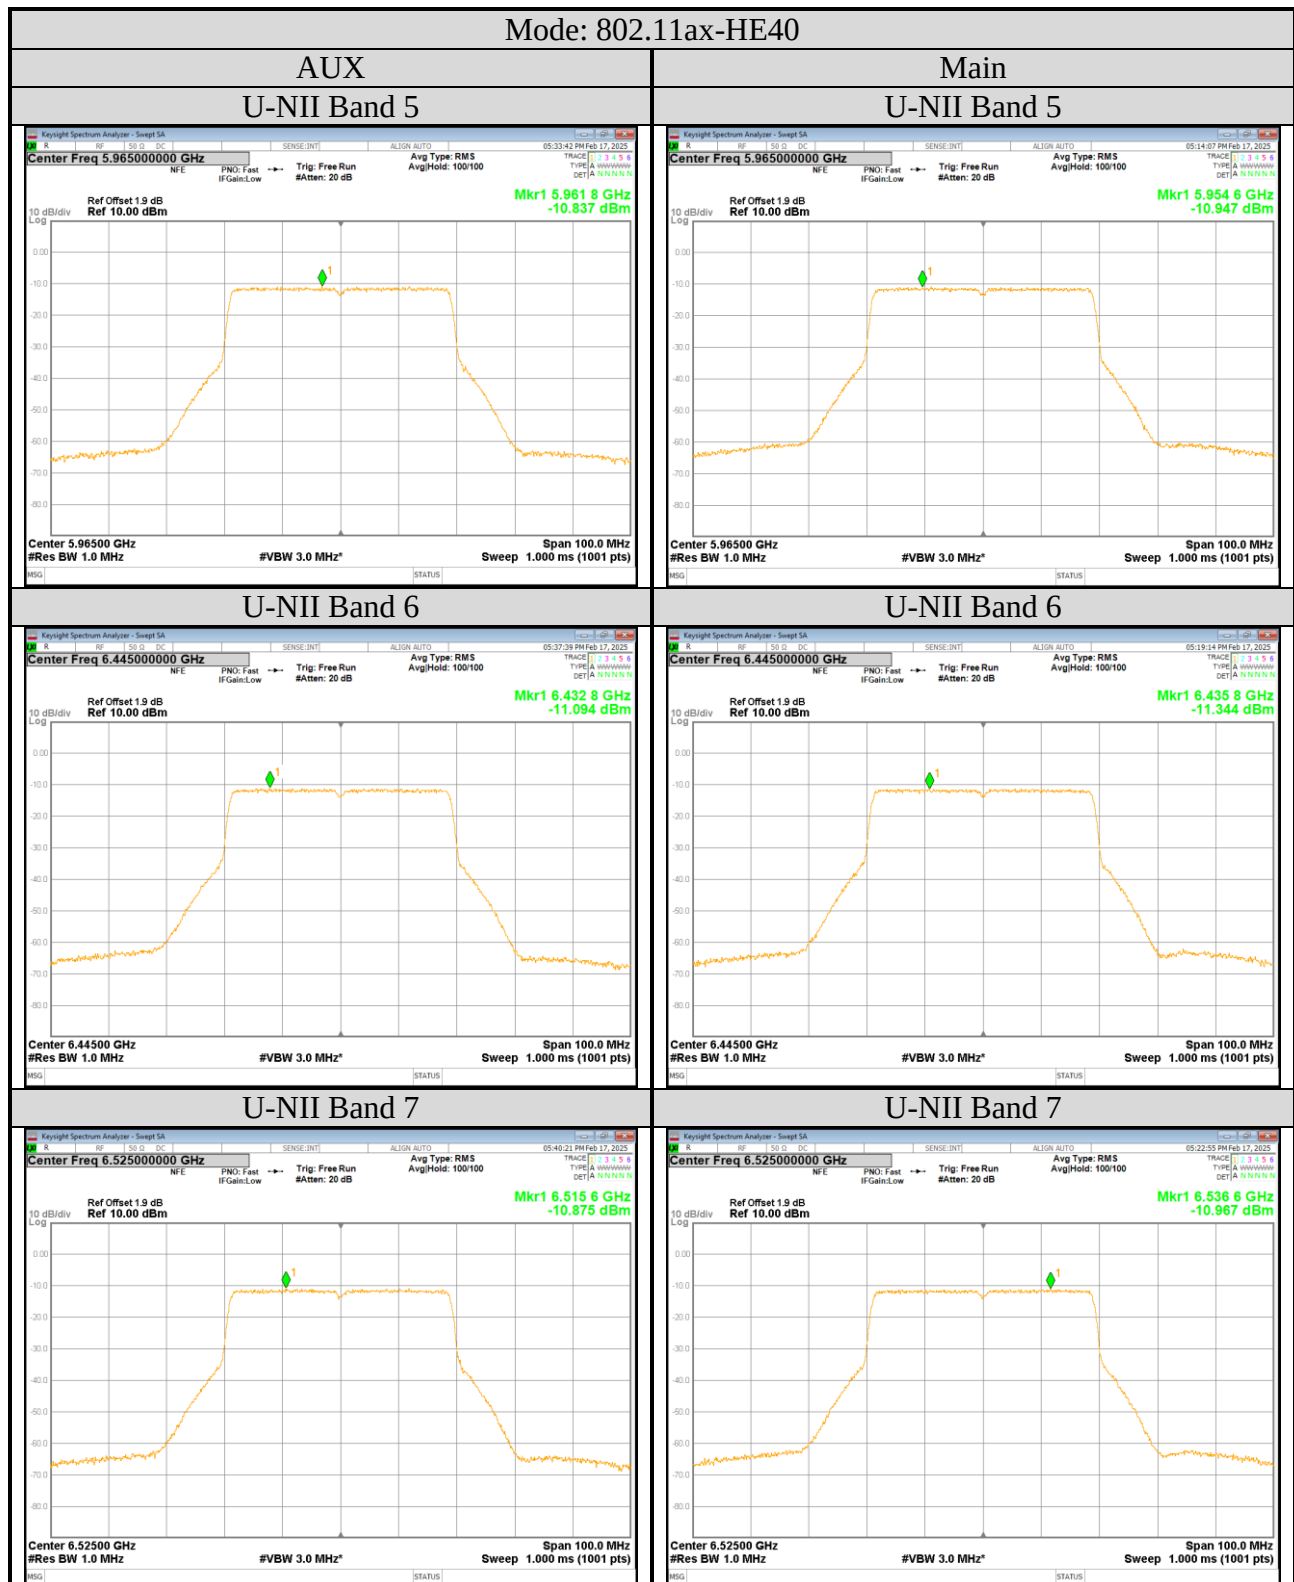

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

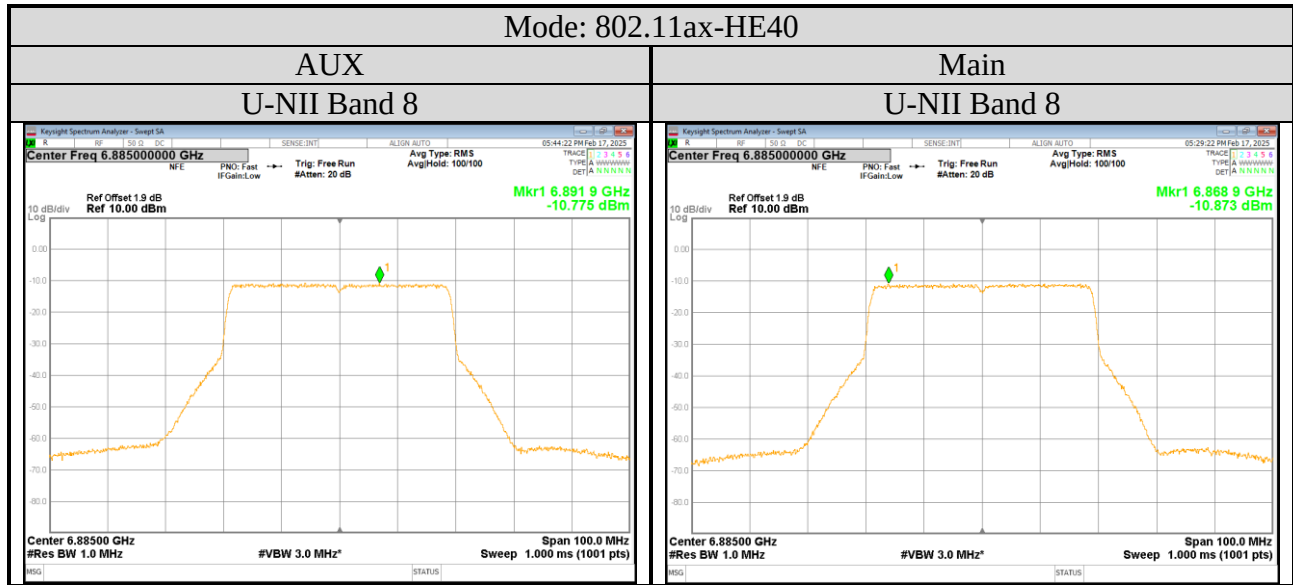

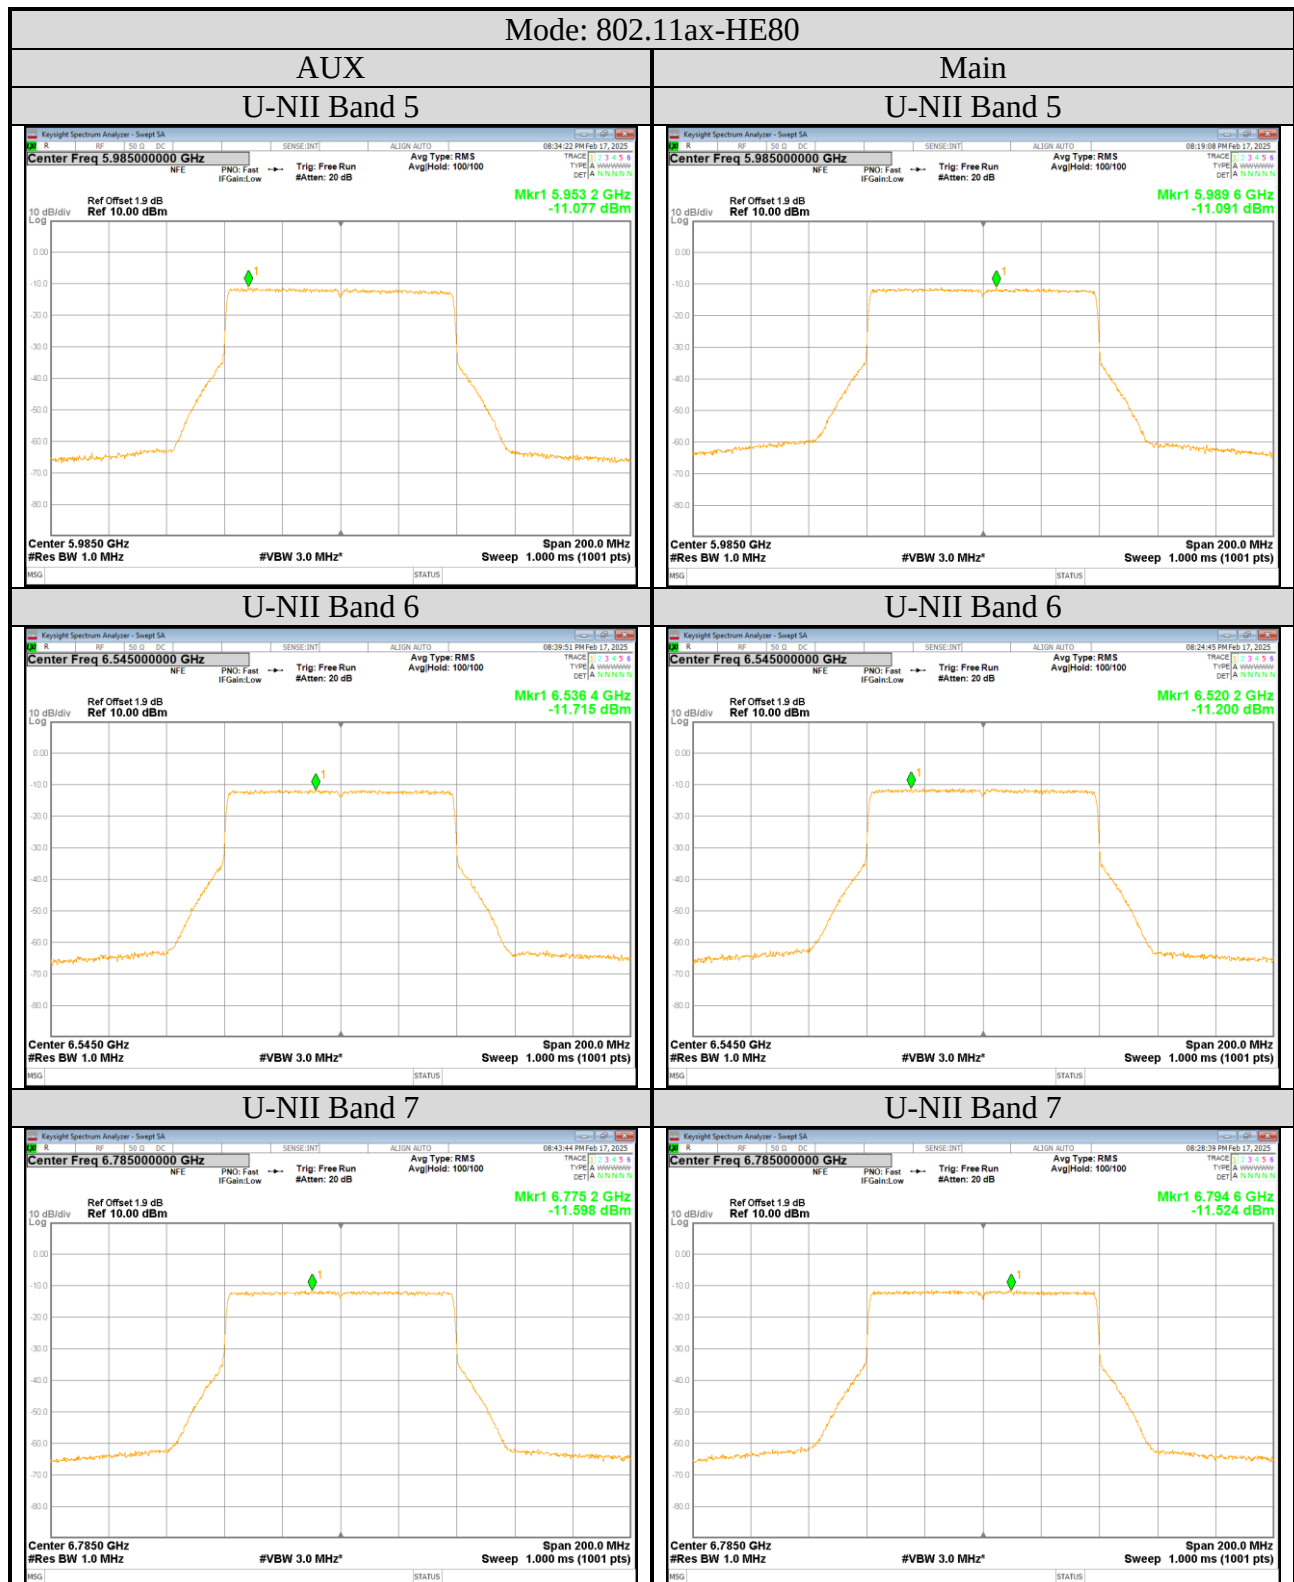

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

