

## HEARING AID COMPATIBILITY

**Applicant Name:**

LG Electronics USA  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**

8/10/2010 - 8/12/2010

**Test Site/Location:**

PCTEST Lab, Columbia, MD, USA

**Test Report Serial No.:**

0Y1008021258.BEJ

**FCC ID:**

**BEJVS760**

**APPLICANT:**

**LG ELECTRONICS USA**

**Application Type:**

Certification

**FCC Rule Part(s):**

§ 20.19(b), §6.3(v), §7.3(v)

**HAC Standard:**

ANSI C63.19-2007;

**FCC Classification:**

Licensed Transmitter Held to Ear (PCE)

Digital Transmission System (DTS)

**EUT Type:**

Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and 1900

WCDMA/HSPA Phone with Bluetooth and WLAN

**Model(s):**

VS760, LG-VS760

**Tx Frequency:**

824.20 - 848.80 MHz (GSM 850)

1850.20 - 1909.80 MHz (GSM 1900)

1852.4 - 1907.6 MHz (UMTS II)

824.70 - 848.31 MHz (Cellular CDMA)

1851.25 - 1908.75 MHz (PCS CDMA)

**Test Device Serial No.:**

Pre-Production Sample [S/N: HAC RFE]

**C63.19-2007 HAC Category:**

**M3 (RF EMISSIONS CATEGORY)**

This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2007 and had been tested in accordance with the specified measurement procedures. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

*PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.*

  
Randy Orlanez  
President

|                                      |                                                                                     |                                                                                                               |                                                                                       |                                        |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                         | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                       | Page 1 of 84                           |

# TABLE OF CONTENTS

---

|     |                                               |    |
|-----|-----------------------------------------------|----|
| 1.  | INTRODUCTION .....                            | 3  |
| 2.  | TEST SITE LOCATION .....                      | 4  |
| 3.  | EUT DESCRIPTION .....                         | 5  |
| 4.  | ANSI/IEEE C63.19 PERFORMANCE CATEGORIES ..... | 6  |
| 5.  | SYSTEM SPECIFICATIONS .....                   | 7  |
| 6.  | TEST PROCEDURE .....                          | 13 |
| 7.  | SYSTEM CHECK .....                            | 15 |
| 8.  | MODULATION FACTOR .....                       | 18 |
| 9.  | FCC 3G MEASUREMENT PROCEDURES .....           | 21 |
| 10. | OVERALL MEASUREMENT SUMMARY .....             | 23 |
| 11. | EQUIPMENT LIST .....                          | 28 |
| 12. | MEASUREMENT UNCERTAINTY .....                 | 29 |
| 13. | TEST DATA .....                               | 30 |
| 14. | CALIBRATION CERTIFICATES .....                | 45 |
| 15. | CONCLUSION .....                              | 79 |
| 16. | REFERENCES .....                              | 80 |
| 17. | TEST PHOTOGRAPHS .....                        | 82 |

|                                      |                                                                                                                                   |                                                                                                               |                                                                                                 |                                        |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                                                                       | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                                 | Page 2 of 84                           |

## 1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-8658<sup>1</sup> to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide suffer from hearing loss.

### Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- RF Magnetic-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.



Figure 1-1 Hearing Aid *in-vitu*

<sup>1</sup> FCC Rule & Order, WT Docket 01-309 RM-8658


|                                      |                                                                                                                                   |                                                                                                               |                                                                                                 |                                        |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                                                                       | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                                 | Page 3 of 84                           |

## 2. TEST SITE LOCATION

### 2.1 INTRODUCTION

The map at the right shows the location of the PCTEST LABORATORY in Columbia, Maryland. It is in proximity to the FCC Laboratory, the Baltimore-Washington International (BWI) airport, the city of Baltimore and Washington, DC (See Figure 2).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49' 38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on January 27, 2006 and Industry Canada.




**Figure 2-1**

Map of the Greater Baltimore and Metropolitan Washington, D.C. area

### 2.2 Test Facility / Accreditations:

Measurements were performed at an independent accredited PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.



- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing-Aid Compatibility (HAC), CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC-2451).
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and all Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS and CDMA, and EvDO mobile phones.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO Data, CDMA 1xRTT Data.

|                                      |                                                                                     |                                                                                                               |                                                                                       |                                        |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                         | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                       | Page 4 of 84                           |

### 3. EUT DESCRIPTION



**FCC ID:** BEJVS760  
**Manufacturer:** LG Electronics USA  
 1000 Sylvan Avenue  
 Englewood Cliffs, NJ 07632  
 United States  
**Trade Name:** LG Electronics  
**Model(s):** VS760, LG-VS760  
**Serial Number:** HAC RFE  
**Tx Frequencies:** 824.20 - 848.80 MHz (GSM 850)  
 1850.20 - 1909.80 MHz (GSM 1900)  
 1852.4 - 1907.6 MHz (UMTS II)  
 824.70 - 848.31 MHz (Cellular CDMA)  
 1851.25 - 1908.75 MHz (PCS CDMA)  
**Antenna Configurations:** Internal Antenna  
**Maximum Conducted Power (EMC/SAR):** 32.68 dBm (GSM 850), 29.79 dBm (GSM 1900), 22.98 dBm (UMTS II), 25.25 dBm (Cellular CDMA), 25.00 dBm (PCS CDMA)  
**Maximum Conducted Power (HAC):** 32.68 dBm (GSM 850), 29.79 dBm (GSM 1900), 22.98 dBm (UMTS II), 25.09 dBm (Cellular CDMA), 25.09 dBm (PCS CDMA)  
**HAC Test Configurations:** GSM 850, 128, 190, 251, BT Off, WLAN Off  
 GSM 1900, 512, 661, 810, BT Off, WLAN Off  
 UMTS II, 9262, 9400, 9538, BT Off, WLAN Off  
 Cell. CDMA, 1013, 384, 777, BT Off, WLAN Off  
 PCS CDMA, 25, 600, 1175, BT Off, WLAN Off  
**FCC Classification:** Licensed Transmitter Held to Ear (PCE)  
 Digital Transmission System (DTS)  
**EUT Type:** Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and 1900 WCDMA/HSPA Phone with Bluetooth and WLAN



**Figure 3-1**  
**HAC Assessment System**

|                                      |                                               |                                                                                                               |           |                                        |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         | <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010   | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |           | Page 5 of 84                           |

## 4. ANSI/IEEE C63.19 PERFORMANCE CATEGORIES

### I. RF EMISSIONS

The ANSI Standard presents performance requirements for acceptable interoperability of hearing aids with wireless communications devices. When these parameters are met, a hearing aid operates acceptably in close proximity to a wireless communications device.

| Category                                                                                                         | Telephone RF Parameters            |                                    |
|------------------------------------------------------------------------------------------------------------------|------------------------------------|------------------------------------|
| Near field Category                                                                                              | E-field emissions<br>CW<br>dB(V/m) | H-field emissions<br>CW<br>dB(A/m) |
| <b>f &lt; 960 MHz</b>                                                                                            |                                    |                                    |
| <b>M1</b>                                                                                                        | 56 to 61 + 0.5 x AWF               | 5.6 to 10.6 +0.5 x AWF             |
| <b>M2</b>                                                                                                        | 51 to 56 + 0.5 x AWF               | 0.6 to 5.6 +0.5 x AWF              |
| <b>M3</b>                                                                                                        | 46 to 51 + 0.5 x AWF               | -4.4 to 0.6 +0.5 x AWF             |
| <b>M4</b>                                                                                                        | < 46 + 0.5 x AWF                   | < -4.4 + 0.5 x AWF                 |
| <b>f &gt; 960 MHz</b>                                                                                            |                                    |                                    |
| <b>M1</b>                                                                                                        | 46 to 51 + 0.5 x AWF               | -4.4 to 0.6 +0.5 x AWF             |
| <b>M2</b>                                                                                                        | 41 to 46 + 0.5 x AWF               | -9.4 to -4.4 +0.5 x AWF            |
| <b>M3</b>                                                                                                        | 36 to 41 + 0.5 x AWF               | -14.4 to -9.4 +0.5 x AWF           |
| <b>M4</b>                                                                                                        | < 36 + 0.5 x AWF                   | < -14.4 + 0.5 x AWF                |
| <b>Table 4-1</b><br><b>Hearing aid and WD near-field categories</b><br><b>as defined in ANSI C63.19-2007 [2]</b> |                                    |                                    |

### II. ARTICULATION WEIGHTING FACTOR (AWF)


| Standard                                                  | Technology          | Articulation Weighing Factor (AWF) |
|-----------------------------------------------------------|---------------------|------------------------------------|
| T1/T1P1/3GPP                                              | UMTS (WCDMA)        | 0                                  |
| TIA/EIA/IS-2000                                           | CDMA                | 0                                  |
| iDEN™                                                     | TDMA (22 and 11 Hz) | 0                                  |
| J-STD-007                                                 | GSM (217 Hz)        | -5                                 |
| <b>Table 4-2</b><br><b>Articulation Weighting Factors</b> |                     |                                    |

|                               |                                                                                                                                   |                                                                                                        |                                                                                          |                                 |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | HAC (RF EMISSIONS) TEST REPORT                                                                         |  LG | Reviewed by:<br>Quality Manager |
| Filename:<br>0Y1008021258.BEJ | Test Dates:<br>8/10/2010 - 8/12/2010                                                                                              | EUT Type:<br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN | Page 6 of 84                                                                             |                                 |

## 5. SYSTEM SPECIFICATIONS

### ER3DV6 E-Field Probe Description


|               |                                                                                                                              |
|---------------|------------------------------------------------------------------------------------------------------------------------------|
| Construction: | One dipole parallel, two dipoles normal to probe axis<br>Built-in shielding against static charges                           |
| Calibration:  | In air from 100 MHz to 3.0 GHz<br>(absolute accuracy $\pm 6.0\%$ , $k=2$ )                                                   |
| Frequency:    | 100 MHz to $> 6$ GHz;<br>Linearity: $\pm 0.2$ dB (100 MHz to 3 GHz)                                                          |
| Directivity   | $\pm 0.2$ dB in air (rotation around probe axis)<br>$\pm 0.4$ dB in air (rotation normal to probe axis)                      |
| Dynamic Range | 2 V/m to $> 1000$ V/m<br>(M3 or better device readings fall well below diode compression point)                              |
| Linearity:    | $\pm 0.2$ dB                                                                                                                 |
| Dimensions    | Overall length: 330 mm (Tip: 16 mm)<br>Tip diameter: 8 mm (Body: 12 mm)<br>Distance from probe tip to dipole centers: 2.5 mm |



**Figure 5-1**  
E-field Free-space  
Probe

### H3DV6 H-Field Probe Description

|                       |                                                                                                                                                                 |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction:         | Three concentric loop sensors with 3.8 mm loop diameters<br>Resistively loaded detector diodes for linear response<br>Built-in shielding against static charges |
| Frequency:            | 200 MHz to 3 GHz (absolute accuracy $\pm 6.0\%$ , $k=2$ );<br>Output linearized                                                                                 |
| Directivity:          | $\pm 0.25$ dB (spherical isotropy error)                                                                                                                        |
| Dynamic Range:        | 10 mA/m to 2 A/m at 1 GHz<br>(M3 or better device readings fall well below diode compression point)                                                             |
| Dimensions:           | Overall length: 330 mm (Tip: 40 mm)<br>Tip diameter: 6 mm (Body: 12 mm)<br>Distance from probe tip to dipole centers: 3 mm                                      |
| E-Field Interference: | $< 10\%$ at 3 GHz (for plane wave)                                                                                                                              |



**Figure 5-2**  
H-Field Free-space  
Probe

### Probe Tip Description

HAC field measurements take place in the close near field with high gradients. Increasing the measuring distance from the source will generally decrease the measured field values (in case of the validation dipole approx. 10% per mm).


Magnetic field sensors are measuring the integral of the H-field across their sensor area surrounded by the loop. They are calibrated in a precise, homogeneous field. When measuring a gradient field, the result will be very close to the field in the center of the loop which is equivalent to the value of a homogeneous field equivalent to the center value. But it will be different from the field at the border of the loop.

|                                      |                                                                                                                                   |                                                                                                               |                                                                                                 |                                        |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                                                                       | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN | Page 7 of 84                                                                                    |                                        |

Consequently, two sensors with different loop diameters - both calibrated ideally - would give different results when measuring from the edge of the probe sensor elements. The behavior for electrically small E-field sensors is equivalent.

The magnetic field loops of the H3D probes are concentric, with the center 3mm from the tip for H3DV6. Their radius is 1.9mm.

The electric field probes have a more irregular internal geometry because it is physically not possible to have the 3 orthogonal sensors situated with the same center. The effect of the different sensor centers is accounted for in the HAC uncertainty budget ("sensor displacement"). Their geometric center is at 2.5mm from the tip, and the element ends are 1.1mm closer to the tip.

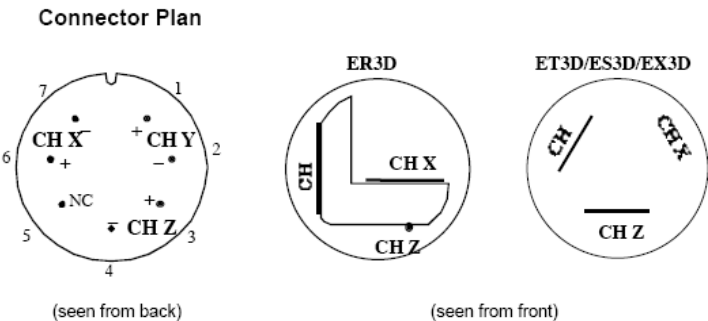

The antistatic shielding inside the probe is connected to the probe connector case.


### Instrumentation Chain

**Equation 1**  
**Conversion of Connector Voltage  $u_i$  to E-Field  $E_i$**

$$E_i = \sqrt{\frac{u_i + (u_i^2 \cdot CF) / (DCP)}{Norm_i \cdot ConvF}}$$

- whereby
- $E_i$ : electric field in V/m
  - $u_i$ : voltage of channel i at the connector in  $\mu V$
  - $Norm_i$ : sensitivity of channel i in  $\mu V / (V/m)^2$
  - $ConvF$ : enhancement factor in liquid (ConvF=1 for Air)
  - $DCP$ : diode compression point in  $\mu V$
  - $CF$ : signal crest factor (peak power/average power)

### Conditions of Calibration

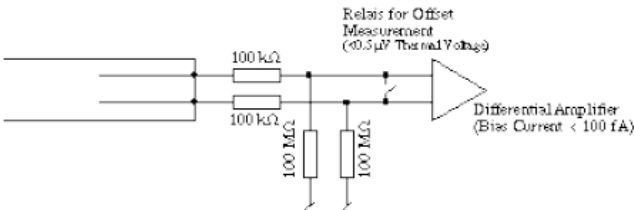

- Please note:
- a lower input impedance of the amplifier will result in different sensitivity factors  $Norm_i$  and  $DCP$
  - larger bias currents will cause higher offset


|                               |                                                                                                                                   |                                                                                                        |                                                                                          |                                 |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | HAC (RF EMISSIONS) TEST REPORT                                                                         |  LG | Reviewed by:<br>Quality Manager |
| Filename:<br>0Y1008021258.BEJ | Test Dates:<br>8/10/2010 - 8/12/2010                                                                                              | EUT Type:<br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                          | Page 8 of 84                    |

## Probe Response to Frequency

The E-field sensors have inherently a very flat frequency response. They are calibrated with a number of frequencies resulting in a common calibration factor, with the frequency behavior documented in the calibration certificate (See also below).

### Frequency Response of E-Field

(TEM-Cell:if110 EXX, Waveguide R22)

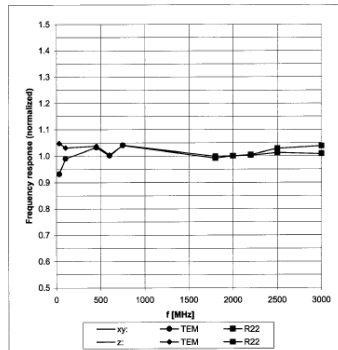


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

**Figure 5-3 E-Field Probe Frequency Response**

H-field sensors have a frequency dependent sensitivity which is evaluated for a series of frequencies also visible in the probe calibration certificate. The calibration factors result from a fitting algorithm. The proper conversion is calculated by the DASY4 software depending on the frequency setting in the procedure. See below for H-field frequency response:

### Frequency Response of H-Field

(TEM-Cell:if110, Waveguide R22)

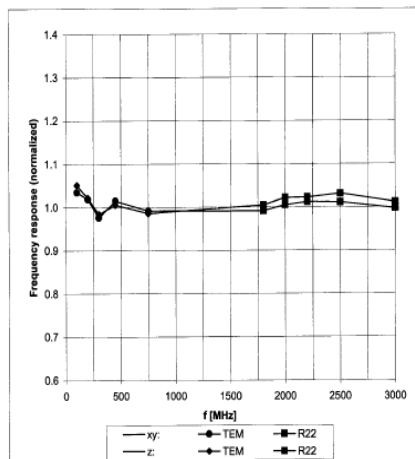

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

**Figure 5-4 H-Field Probe Frequency Response**

|                               |                                                                                                                                   |                                                                                                        |                                                                                          |                                 |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | HAC (RF EMISSIONS) TEST REPORT                                                                         |  LG | Reviewed by:<br>Quality Manager |
| Filename:<br>0Y1008021258.BEJ | Test Dates:<br>8/10/2010 - 8/12/2010                                                                                              | EUT Type:<br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                          | Page 9 of 84                    |

## Conversion to Peak

Peak is defined as Peak Envelope Power. All raw measurements from the HAC measurement system are RMS values. The DASY4 system incorporates the crest factor of the signal in the computation of the RMS values (See Equation 1). Although the software also has capability to estimate the peak field by applying a square root of crest factor value to the readings, the probe modulation factor was applied manually instead per C63.19 in the measurement tables in this report. The equation to convert the raw measurements in the data tables are:

$$\text{Peak Field} = 20 \cdot \log (\text{Raw} \cdot \text{PMF})$$

### Where:

Peak Field = Peak field (in dBV/m or dBA/m)

Raw = Raw field measurement from the measurement system (in V/m or A/m).

PMF = Probe Modulation Factor (in linear units).

## SPEAG Robotic System

E-field and H-field measurements are performed using the DASY4 automated dosimetric assessment system. The DASY4 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Pentium 4 computer, near-field probe, probe alignment sensor, and the HAC phantom. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF).



**Figure 5-5**  
SPEAG Robotic System

## System Hardware


A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the Gateway Pentium 4 2.53 GHz computer with Windows XP system and RF Measurement Software DASY4 v4.5 (with HAC Extension), A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler

|                                      |                                                                                     |                                                                                                               |                                                                                       |                                        |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                         | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                       | Page 10 of 84                          |

(EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

### System Electronics

The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

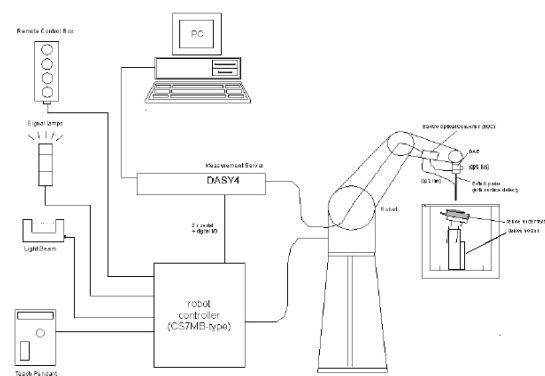

**Figure 5-6**  
SPEAG Robotic System Diagram

### DASY4 Instrumentation Chain

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

|      |         |                                   |                  |
|------|---------|-----------------------------------|------------------|
| with | $V_i$   | = compensated signal of channel i | (i = x, y, z)    |
|      | $U_i$   | = input signal of channel i       | (i = x, y, z)    |
|      | $cf$    | = crest factor of exciting field  | (DASY parameter) |
|      | $dcp_i$ | = diode compression point         | (DASY parameter) |

|                               |                                                                                                                                   |                                                                                                        |                                                                                          |                                 |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | HAC (RF EMISSIONS) TEST REPORT                                                                         |  LG | Reviewed by:<br>Quality Manager |
| Filename:<br>0Y1008021258.BEJ | Test Dates:<br>8/10/2010 - 8/12/2010                                                                                              | EUT Type:<br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                          | Page 11 of 84                   |

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E - field probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H - field probes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with  $V_i$  = compensated signal of channel i (i = x, y, z)  
 $\text{Norm}_i$  = sensor sensitivity of channel i (i = x, y, z)  
 $\mu\text{V}/(\text{V/m})^2$  for E-field Probes  
 $\text{ConvF}$  = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 $f$  = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in V/m  
 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

The measurement/integration time per point, as specified by the system manufacturer is >500 ms.

The signal response time is evaluated as the time required by the system to reach 90% of the expected final value after an on/off switch of the power source with an integration time of 500 ms and a probe response time of <5 ms. In the current implementation, DASY4 waits longer than 100 ms after having reached the grid point before starting a measurement, i.e., the response time uncertainty is negligible.

If the device under test does not emit a CW signal, the integration time applied to measure the electric field at a specific point may introduce additional uncertainties due to the discretization. The tolerances for the different systems had the worst-case of 2.6%.

|                                      |                                                                                                                                   |                                                                                                               |                                                                                                 |                                        |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                                                                       | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN | Page 12 of 84                                                                                   |                                        |

## 6. TEST PROCEDURE

### I. RF EMISSIONS


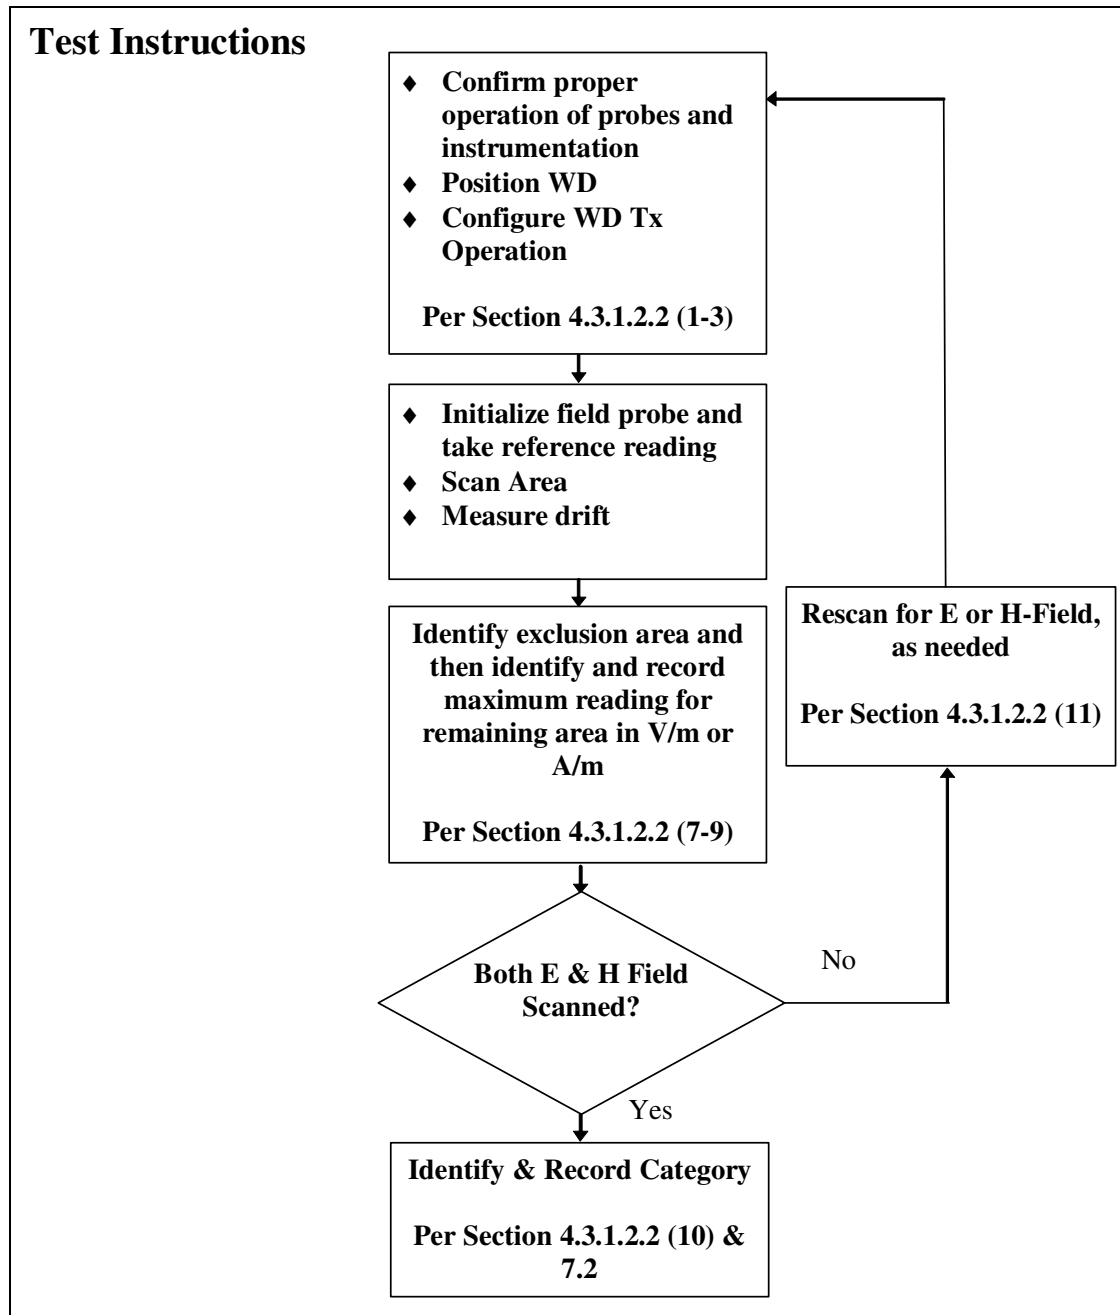


Figure 6-1 RF Emissions Flow Chart


|                               |                                                                                                                                   |                                                                                                        |                                                                                          |                                 |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | HAC (RF EMISSIONS) TEST REPORT                                                                         |  LG | Reviewed by:<br>Quality Manager |
| Filename:<br>0Y1008021258.BEJ | Test Dates:<br>8/10/2010 - 8/12/2010                                                                                              | EUT Type:<br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                          | Page 13 of 84                   |

## Test Setup

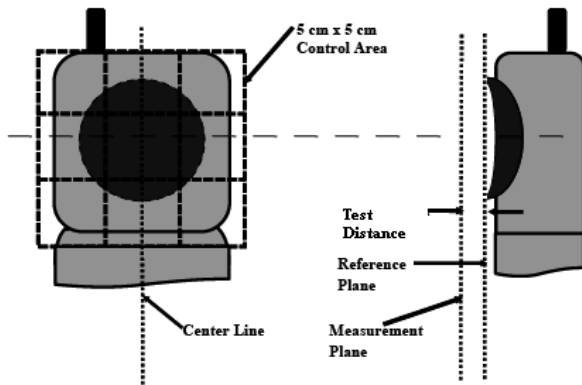

**Figure 6-2**

E/H-Field Emissions Test Setup Diagram (See Test Photographs for actual WD scan grid overlay)

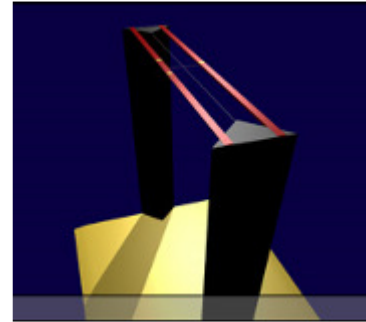

**Figure 6-3**  
HAC Phantom

## RF Emissions Test Procedure:

The following illustrate a typical RF emissions test scan over a wireless communications device:

1. Proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed.
2. WD is positioned in its intended test position, acoustic output point of the device perpendicular to the field probe.
3. The WD operation for maximum rated RF output power was configured and confirmed with the base station simulator, at the test channel and other normal operating parameters as intended for the test. The battery was ensured to be fully charged before each test.
4. The center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The WD audio output was positioned tangent (as physically possible) to the measurement plane.
5. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the HAC Phantom.
6. The measurement system measured the field strength at the reference location.
7. Measurements at 2mm or 5mm increments in the 5 x 5 cm region were performed at a distance 15 mm from the center point of the probe measurement element to the WD. A 360° rotation about the azimuth axis at the maximum interpolated position was measured. For the worst-case condition, the peak reading from this rotation was used in re-evaluating the HAC category.
8. The system performed a drift evaluation by measuring the field at the reference location.
9. Steps 1-8 were done for both the E and H-Field measurements.


|                                      |                                                                                                                                   |                                                                                                               |                                                                                                 |                                        |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                                                                       | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN | Page 14 of 84                                                                                   |                                        |

## 7. SYSTEM CHECK

### I. System Check Parameters

The input signal was an un-modulated continuous wave. The following points were taken into consideration in performing this check:

- Average Input Power  $P = 100\text{mW RMS}$  (20dBm RMS) after adjustment for return loss
- The test fixture must meet the 2 wavelength separation criterion
- The proper measurement of the 1 cm probe to dipole separation, which is measured from top surface of the dipole to the calibration reference point of the sensor, defined by the probe manufacturer is shown in the following diagram:

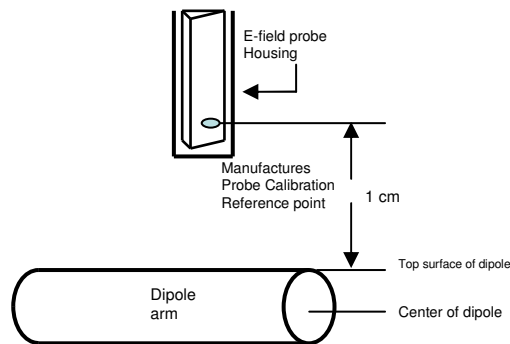

**Figure 7-1**  
Separation Distance from Dipole to Field Probe

RF power was recorded using both an average reading meter and a peak reading meter. Readings of the probe are provided by the measurement system.

To assure proper operation of the near-field measurement probe the input power to the dipole shall be commensurate with the full rated output power of the wireless device (e.g. - for a cellular phone wireless device the average peak antenna input power will be on the order of 100mW (i.e. - 20dBm) RMS after adjustment for any mismatch.

### II. Validation Procedure

A dipole antenna meeting the requirements given in C63.19 was placed in the position normally occupied by the WD.

The length of the dipole was scanned with both E-field and H-field probes and the maximum values for each were recorded.


#### Measurement of CW

Using the near-field measurement system, scan the antenna over the radiating dipole and record the greatest field reading observed. Due to the nature of E-fields about free-space dipoles, the two E-field peaks measured over the dipole are averaged to compensate for non-parallelity of the setup (

|                                      |                                                                                                                                   |                                                                                                               |                                                                                                 |                                        |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                                                                       | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                                 | Page 15 of 84                          |


see manufacturer method on dipole calibration certificates, page 2). Field strength measurements shall be made only when the probe is stationary.

RF power was recorded using both an average and a peak power reading meter.

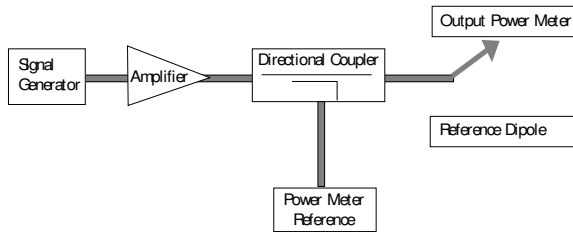

**Figure 7-2**

Setup for Desired Output Power to Dipole

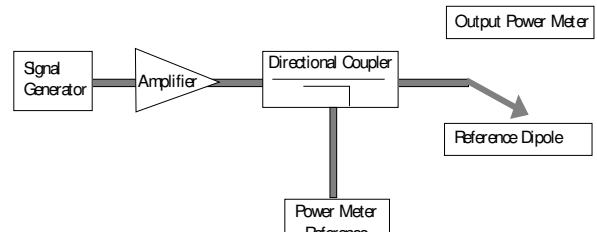


**Figure 7-3**

Setup to Dipole


Using this setup configuration, the signal generator was adjusted for the desired output power (100mW) at a specified frequency. The reference power from the coupled port of the directional coupler is recorded. Next, the output cable is connected to the reference dipole, as shown in Figure 7-3.

The input signal level was adjusted until the reference power from the coupled port of the directional coupler was the same as previously recorded, to compensate for the impedance mismatch between the output cable and the reference dipole. To assure proper operation of the near-field measurement probe the input power to the reference dipole was verified to the full rated output power of the wireless device. The dipole was secured in a holder in a manner to meet the 20 dB reflection. The near-field measurement probe was positioned over the dipole. The antenna was scanned over the appropriate sized area to cover the dipole from end to end. SPEAG uses 2D interpolation algorithms between the measured points. Please see below two dimensional plots showing that the interpolated values interpolate smoothly between 5mm steps for a free-space RF dipole:




**Figure 7-4**

2-D Raw Data from scan along dipole axis




**Figure 7-5**

2-D Interpolated points from scan along dipole axis



**Figure 7-6**

2-D Raw Data from scan along transverse axis



**Figure 7-7**

2-D Interpolated points from scan along transverse axis

|                                      |                                               |                                                                                                               |           |                                        |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         | <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010   | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |           | Page 16 of 84                          |


### III. System Check Results

#### Validation Results

| Frequency (MHz) | Input Power (dBm) | E-field Result (V/m) | Target Field (V/m) | % Deviation |
|-----------------|-------------------|----------------------|--------------------|-------------|
| 835             | 20.0              | 169.1                | 164                | 3.1%        |
| 1880            | 20.0              | 134.5                | 134.5              | 0.0%        |

| Frequency (MHz) | Input Power (dBm) | H-field Result (A/m) | Target Field (A/m) | % Deviation |
|-----------------|-------------------|----------------------|--------------------|-------------|
| 835             | 20.0              | 0.450                | 0.452              | -0.4%       |
| 1880            | 20.0              | 0.448                | 0.475              | -5.7%       |

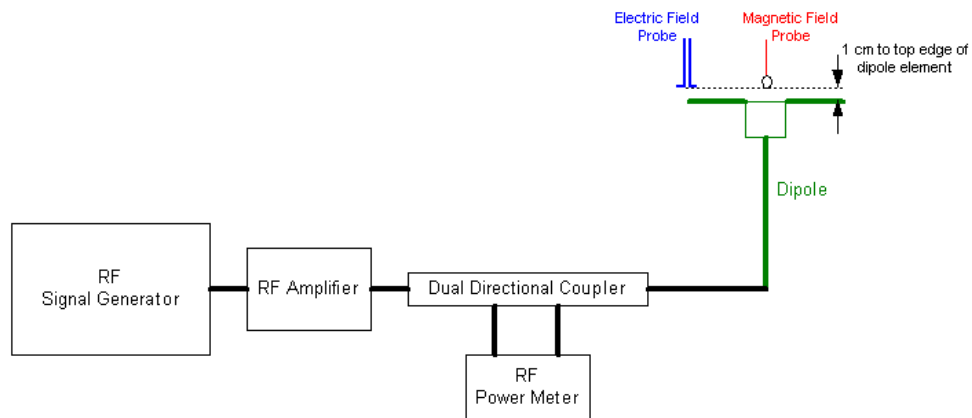

**Figure 7-8**  
System Check Setup

|                                      |                                                                                                                                   |                                                                                                               |                                                                                                 |                                        |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                                                                       | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                                 | Page 17 of 84                          |

## 8. MODULATION FACTOR

A calibration was made of the modulation response of the probe and its instrumentation chain. This calibration was performed with the field probe, attached to its instrumentation. The response of the probe system to a CW field at the frequency of interest is compared to its response to a modulated signal with equal peak amplitude to that of a CW signal. The field level of the test signals are ensured to be more than 10 dB above the ambient level and the noise floor of the instrumentation being used. The ratio of the CW reading to that taken with a modulated reading was applied to the DUT measurements.

All voice modes for this device have been investigated in this section of the report. According to the FCC 3G Measurement Procedures, May 2006 for RF Emissions, variations in peak field and power readings.

**This was done using the following procedure:**

1. The probe was illuminated with a CW signal at the intended measurement frequency and wireless device power.
2. The probe was positioned at the field maxima over the dipole antenna (determined after an area scan over the dipole) illuminated with the CW signal.
3. The reading of the probe measurement system of the CW signal at the maximum point was recorded.
4. Using a Spectrum Analyzer, the modulated signal adjusted with the same peak level of the CW signal was determined.
5. The probe measurement system reading was recorded with the modulated signal. The appropriate system crest factors for the modulation type were configured in the software to the system measurements.
6. The ratio of the CW reading to modulated signal reading is the probe modulation factor (PMF) for the modulation and field probe combination. This was repeated for 80% AM.
7. Steps 1-6 were repeated at all frequency bands and for both E and H field probes.

The modulation factors obtained were applied to readings taken of the actual wireless device, in order to obtain an accurate peak field reading using the formula:

$$\text{Peak} = 20 \cdot \log (\text{Raw} \cdot \text{PMF})$$

**Modulation Factors:**

| f (MHz) | Protocol | E-Field (V/m) | H-Field (A/m) | E-Field Modulation Factor | H-Field Modulation Factor |
|---------|----------|---------------|---------------|---------------------------|---------------------------|
| 835     | AM       | 629.3         | 2.212         | 1.290                     | 0.910                     |
| 835     | GSM      | 287           | 1.033         | 2.829                     | 1.948                     |
| 835     | CW       | 811.8         | 2.012         |                           |                           |
| 1880    | AM       | 390.8         | 1.215         | 1.319                     | 1.115                     |
| 1880    | GSM      | 184.8         | 0.5843        | 2.790                     | 2.319                     |
| 1880    | CW       | 515.6         | 1.355         |                           |                           |

| f (MHz) | Protocol | E-Field (V/m) | H-Field (A/m) | E-Field Modulation Factor | H-Field Modulation Factor |
|---------|----------|---------------|---------------|---------------------------|---------------------------|
| 835     | AM       | 204.50        | 0.5971        | 1.411                     | 1.326                     |
| 835     | CDMA     | 311.00        | 0.9799        | 0.928                     | 0.808                     |
| 835     | CW       | 288.60        | 0.7915        |                           |                           |
| 1880    | AM       | 155.40        | 0.6561        | 1.445                     | 1.501                     |
| 1880    | CDMA     | 226.80        | 1.2010        | 0.990                     | 0.820                     |
| 1880    | CW       | 224.50        | 0.9846        |                           |                           |

| f (MHz) | Protocol   | E-Field (V/m) | E-Field Modulation Factor |
|---------|------------|---------------|---------------------------|
| 1880    | CDMA / SO3 | 72.17         | 2.765                     |
| 1880    | CW         | 199.55        |                           |


**Figure 8-1**  
Modulation Factors

|                                      |                                                                                     |                                                                                                               |                                                                                       |                                        |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                         | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                       | Page 18 of 84                          |


## Spectrum Analyzer Plots of ESG-D Signal used for PMF measurements:




**Figure 8-2 GSM850 CW Signal**

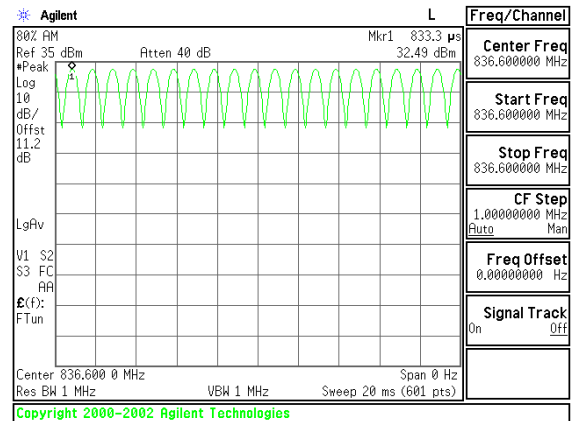

**Figure 8-3 GSM850 80% AM Signal**

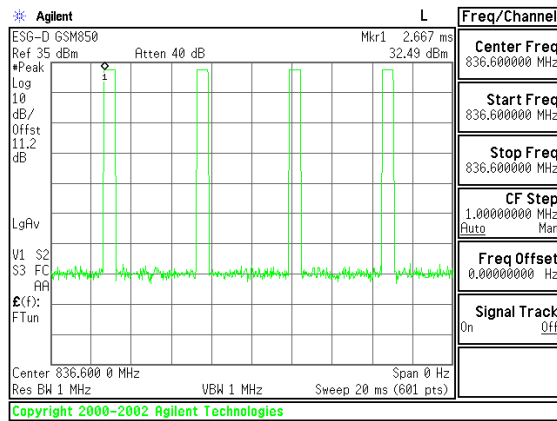


**Figure 8-4 GSM850 Signal**

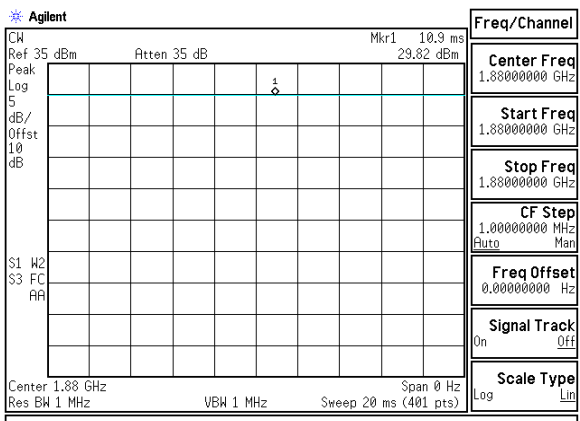

**Figure 8-5 PCS CW Signal**







**Figure 8-6 PCS GSM Signal**

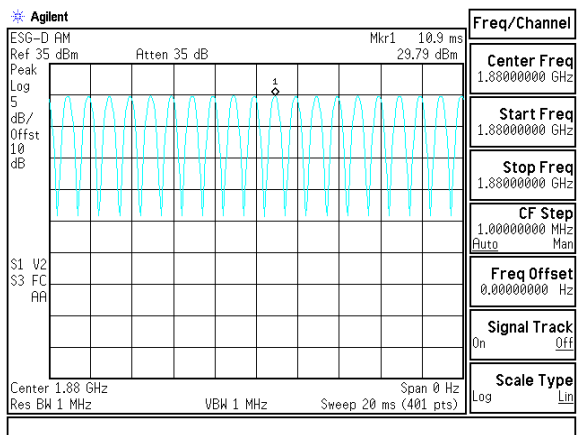

**Figure 8-7 PCS 80% AM Signal**

|                               |                                                                                                                                   |                                                                                                        |                                                                                                 |                                 |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | HAC (RF EMISSIONS) TEST REPORT                                                                         |  <b>LG</b> | Reviewed by:<br>Quality Manager |
| Filename:<br>0Y1008021258.BEJ | Test Dates:<br>8/10/2010 - 8/12/2010                                                                                              | EUT Type:<br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                                 | Page 19 of 84                   |

## CW and Modulated Signal Zero-Span plots:

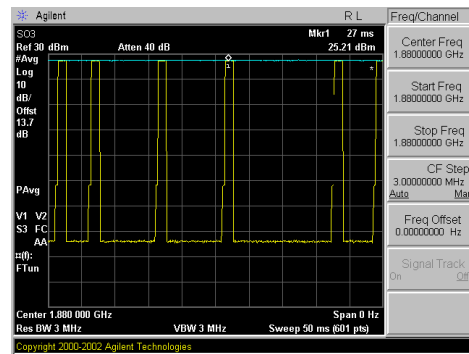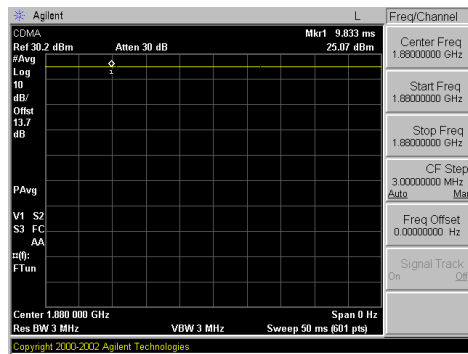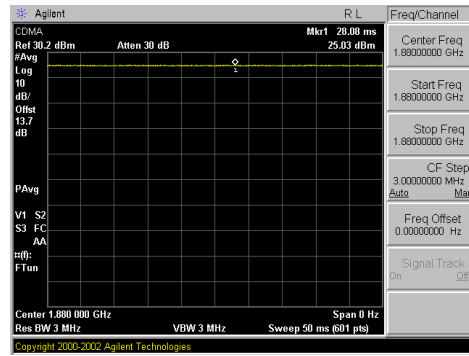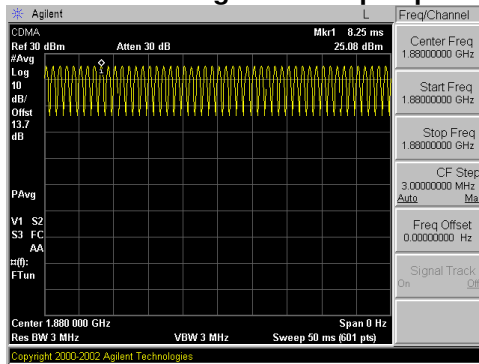

|                               |                                                                                                                                   |                                                                                                        |                                                                                          |                                 |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | HAC (RF EMISSIONS) TEST REPORT                                                                         |  LG | Reviewed by:<br>Quality Manager |
| Filename:<br>0Y1008021258.BEJ | Test Dates:<br>8/10/2010 - 8/12/2010                                                                                              | EUT Type:<br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                          | Page 20 of 84                   |


## 9. FCC 3G MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

Sample pre-testing of the various modes were performed at the worst case probe location as part of subset testing justification. See below for measured conducted power for applicable device modes:

### I. CDMA Conducted RF Output Power Measurements:

| Band     | Channel      | SO2 [dBm] | SO2 [dBm] | SO2 [dBm] | SO55 [dBm] | SO55 [dBm] | SO9 [dBm] | SO9 [dBm] | SO3 [dBm] | SO3 [dBm] | SO3 [dBm] |
|----------|--------------|-----------|-----------|-----------|------------|------------|-----------|-----------|-----------|-----------|-----------|
|          | F-RC         | RC1       | RC3       | RC4       | RC1        | RC3        | RC2       | RC5       | RC1       | RC3       | RC4       |
|          | Vocoder Rate | Full      | Full      | Full      | Full       | Full       | Full      | Full      | EVRC      | Full      | Full      |
| Cellular | 1013         | 25.35     | 25.12     | 25.03     | 25.33      | 25.25      | 25.21     | 25.14     | 25.33     | 25.20     | 25.09     |
|          | 384          | 24.91     | 24.84     | 24.79     | 24.97      | 24.82      | 24.92     | 24.78     | 24.99     | 24.72     | 24.78     |
|          | 777          | 25.24     | 25.00     | 25.02     | 25.23      | 25.02      | 25.09     | 25.04     | 25.30     | 24.99     | 25.02     |
| PCS      | 25           | 25.14     | 25.03     | 25.04     | 25.17      | 25.00      | 25.18     | 25.09     | 25.18     | 25.02     | 25.09     |
|          | 600          | 24.90     | 24.75     | 24.78     | 24.96      | 24.93      | 25.05     | 24.99     | 25.04     | 24.80     | 24.94     |
|          | 1175         | 24.80     | 24.69     | 24.80     | 24.87      | 24.83      | 24.90     | 24.83     | 24.93     | 24.72     | 24.71     |

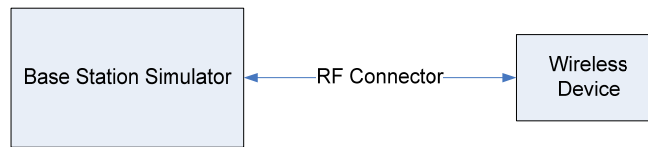

**Figure 9-1**  
Power Measurement Setup

### II. Worst-Case Probe Location Measurements

Below are RC/SO mode investigation results of the device at the worst-case (maximum) field point location. The worst-case RC/SO was used for HAC testing.

**Table 9-1**  
Handset 3G mode variation on RF Emissions

| Mode | Channel | Backlight | RC/SO    | Scan Center | Battery  | Time Avg. Field (V/m) | Peak Field (dBV/m) | FCC Limit (dBV/m) | FCC MARGIN (dB) | RESULT | Excl Blocks per 4.4 |
|------|---------|-----------|----------|-------------|----------|-----------------------|--------------------|-------------------|-----------------|--------|---------------------|
| PCS  | 25      | off       | SO3/RC1  | Acoustic    | Standard | 15.54                 | 32.7               | 41.0              | -8.34           | M4     | none                |
| PCS  | 25      | off       | SO3/RC3  | Acoustic    | Standard | 42.60                 | 32.5               | 41.0              | -8.50           | M4     | none                |
| PCS  | 25      | on        | SO3/RC4  | Acoustic    | Standard | 42.97                 | 32.6               | 41.0              | -8.43           | M4     | none                |
| PCS  | 25      | off       | SO55/RC3 | Acoustic    | Standard | 39.95                 | 31.9               | 41.0              | -9.06           | M4     | none                |
| PCS  | 25      | off       | SO55/RC1 | Acoustic    | Standard | 40.91                 | 32.1               | 41.0              | -8.85           | M4     | none                |
| PCS  | 25      | off       | SO2/RC1  | Acoustic    | Standard | 40.77                 | 32.1               | 41.0              | -8.88           | M4     | none                |
| PCS  | 25      | off       | SO2/RC3  | Acoustic    | Standard | 41.40                 | 32.3               | 41.0              | -8.75           | M4     | none                |
| PCS  | 25      | off       | SO9/RC2  | Acoustic    | Standard | 41.08                 | 32.2               | 41.0              | -8.82           | M4     | none                |
| PCS  | 25      | off       | SO9/RC5  | Acoustic    | Standard | 41.79                 | 32.3               | 41.0              | -8.67           | M4     | none                |

|                               |                                               |                                                                                                        |           |                                 |
|-------------------------------|-----------------------------------------------|--------------------------------------------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: BEJVS760              | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | HAC (RF EMISSIONS) TEST REPORT                                                                         | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Filename:<br>0Y1008021258.BEJ | Test Dates:<br>8/10/2010 - 8/12/2010          | EUT Type:<br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |           | Page 21 of 84                   |

### III. Procedures Used to Establish RF Signal for HAC Testing

The handset was placed into a simulated call using a base station simulator in a shielded chamber. Such test signals offer a consistent means for testing HAC and are recommended for evaluating HAC. Measurements were taken with a fully charged battery. In order to verify that the device was tested and maintained at full power, this was configured with the base station simulator. The HAC measurement software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5% occurred, the tests were repeated.

### IV. HAC Measurement Conditions for UMTS

#### Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1s".

#### HAC Measurements

HAC is measured using the 12.2 kbps RMC with TPC bits configured to all "1s".

| 3GPP Release Version | Mode  | 3GPP 34.121 Subtest | PCS Band [dBm] |       |       | $\beta_c$ | $\beta_d$ | $\beta_c/\beta_d$ | HSDPA FRC | MPR |
|----------------------|-------|---------------------|----------------|-------|-------|-----------|-----------|-------------------|-----------|-----|
|                      |       |                     | 9262           | 9400  | 9538  |           |           |                   |           |     |
| 99                   | WCDMA | 12.2 kbps RMC       | 22.30          | 22.81 | 22.98 | -         | -         | -                 | -         | -   |
| 99                   |       | 12.2 kbps AMR       | 22.35          | 22.73 | 22.86 | -         | -         | -                 | -         | -   |
| 6                    | HSDPA | Subtest 1           | 22.27          | 22.72 | 22.83 | 2/15      | 15/15     | 2/15              | H-SET 1   | 0   |
| 6                    |       | Subtest 2           | 22.14          | 22.60 | 22.75 | 12/15     | 15/15     | 12/15             | H-SET 1   | 0   |
| 6                    |       | Subtest 3           | 21.75          | 22.28 | 22.39 | 15/15     | 8/15      | 15/8              | H-SET 1   | 0.5 |
| 6                    |       | Subtest 4           | 21.74          | 22.23 | 22.37 | 15/15     | 4/15      | 15/4              | H-SET 1   | 0.5 |
| 6                    | HSUPA | Subtest 1           | 22.20          | 22.75 | 22.84 | 11/15     | 15/15     | 11/15             | H-SET 1   | 0   |
| 6                    |       | Subtest 2           | 22.20          | 22.70 | 22.77 | 6/15      | 15/15     | 6/15              | H-SET 1   | 2   |
| 6                    |       | Subtest 3           | 21.77          | 22.29 | 22.41 | 15/15     | 9/15      | 15/9              | H-SET 1   | 1   |
| 6                    |       | Subtest 4           | 22.33          | 22.77 | 22.95 | 2/15      | 15/15     | 2/15              | H-SET 1   | 2   |
| 6                    |       | Subtest 5           | 21.68          | 22.25 | 22.43 | 15/15     | 15/15     | 15/15             | H-SET 1   | 0   |

**Figure 9-2**  
Conducted Power Measurements for VS760, LG-VS760

### V. GSM Conducted RF Output Power Measurements:

| Band     | Channel | GSM [dBm] CS (1 Slot) |
|----------|---------|-----------------------|
| Cellular | 128     | 32.68                 |
|          | 190     | 32.60                 |
|          | 251     | 32.52                 |
| PCS      | 512     | 29.50                 |
|          | 661     | 29.69                 |
|          | 810     | 29.79                 |

|                               |                                                                                                                                   |                                                                                                        |                                                                                          |                                 |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | HAC (RF EMISSIONS) TEST REPORT                                                                         |  LG | Reviewed by:<br>Quality Manager |
| Filename:<br>0Y1008021258.BEJ | Test Dates:<br>8/10/2010 - 8/12/2010                                                                                              | EUT Type:<br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                          | Page 22 of 84                   |

## 10. OVERALL MEASUREMENT SUMMARY

|         |                 |
|---------|-----------------|
| FCC ID: | BEJVS760        |
| Model:  | VS760, LG-VS760 |
| S/N:    | HAC RFE         |

### I. E-FIELD EMISSIONS:


Table 10-1  
HAC Data Summary for E-field

| Mode                     | Channel | Backlight | Scan Center | Conducted Power at BS (dBm) | Time Avg. Field (V/m) | Peak Field (dBV/m) | FCC Limit (dBV/m) | FCC MARGIN (dB) | RESULT | Excl Blocks per 4.4 |
|--------------------------|---------|-----------|-------------|-----------------------------|-----------------------|--------------------|-------------------|-----------------|--------|---------------------|
| <b>E-field Emissions</b> |         |           |             |                             |                       |                    |                   |                 |        |                     |
| GSM850                   | 128     | off       | Acoustic    | 32.68                       | 24.95                 | 36.97              | 48.50             | -11.53          | M4     | none                |
| GSM850                   | 190     | off       | Acoustic    | 32.60                       | 25.14                 | 37.04              | 48.50             | -11.46          | M4     | none                |
| GSM850                   | 251     | off       | Acoustic    | 32.52                       | 29.22                 | 38.34              | 48.50             | -10.16          | M4     | none                |
| GSM1900                  | 512     | off       | Acoustic    | 29.50                       | 16.58                 | 33.30              | 38.50             | -5.20           | M4     | none                |
| GSM1900                  | 661     | off       | Acoustic    | 29.69                       | 14.20                 | 31.96              | 38.50             | -6.54           | M4     | none                |
| GSM1900                  | 810     | off       | Acoustic    | 29.79                       | 15.68                 | 32.82              | 38.50             | -5.68           | M4     | none                |

| Mode                     | Channel | Backlight | Scan Center | Conducted Power at BS (dBm) | Time Avg. Field (V/m) | Peak Field (dBV/m) | FCC Limit (dBV/m) | FCC MARGIN (dB) | RESULT | Excl Blocks per 4.4 |
|--------------------------|---------|-----------|-------------|-----------------------------|-----------------------|--------------------|-------------------|-----------------|--------|---------------------|
| <b>E-field Emissions</b> |         |           |             |                             |                       |                    |                   |                 |        |                     |
| WCDMA1900                | 9262    | off       | Acoustic    | 22.30                       | 28.03                 | 28.7               | 41.0              | -12.29          | M4     | none                |
| WCDMA1900                | 9400    | off       | Acoustic    | 22.81                       | 29.01                 | 29.0               | 41.0              | -12.00          | M4     | none                |
| WCDMA1900                | 9538    | off       | Acoustic    | 22.98                       | 30.43                 | 29.4               | 41.0              | -11.58          | M4     | none                |

|                               |                                                                                                                                   |                                                                                                        |                                                                                          |                                 |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | HAC (RF EMISSIONS) TEST REPORT                                                                         |  LG | Reviewed by:<br>Quality Manager |
| Filename:<br>0Y1008021258.BEJ | Test Dates:<br>8/10/2010 - 8/12/2010                                                                                              | EUT Type:<br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                          | Page 23 of 84                   |

| Band                     | Channel | Backlight | RC/SO   | Scan Center | Battery  | Antenna | Conducted Power at BS (dBm) | Time Avg. Field (V/m) | Peak Field (dBV/m) | FCC Limit (dBV/m) | FCC MARGIN (dB) | RESULT | Excl Blocks per 4.4 |
|--------------------------|---------|-----------|---------|-------------|----------|---------|-----------------------------|-----------------------|--------------------|-------------------|-----------------|--------|---------------------|
| <b>E-field Emissions</b> |         |           |         |             |          |         |                             |                       |                    |                   |                 |        |                     |
| CDMA                     | 1013    | off       | SO3/RC4 | Acoustic    | Standard | Fixed   | 25.09                       | 56.73                 | 34.4               | 51.0              | -16.57          | M4     | none                |
| CDMA                     | 384     | off       | SO3/RC4 | Acoustic    | Standard | Fixed   | 24.78                       | 54.53                 | 34.1               | 51.0              | -16.92          | M4     | none                |
| CDMA                     | 777     | off       | SO3/RC4 | Acoustic    | Standard | Fixed   | 25.02                       | 54.30                 | 34.0               | 51.0              | -16.95          | M4     | none                |
| PCS                      | 25      | off       | SO3/RC4 | Acoustic    | Standard | Fixed   | 25.09                       | 40.70                 | 32.1               | 41.0              | -8.90           | M4     | none                |
| PCS                      | 600     | off       | SO3/RC4 | Acoustic    | Standard | Fixed   | 24.94                       | 38.84                 | 31.7               | 41.0              | -9.30           | M4     | none                |
| PCS                      | 1175    | off       | SO3/RC4 | Acoustic    | Standard | Fixed   | 24.71                       | 40.00                 | 32.0               | 41.0              | -9.05           | M4     | none                |

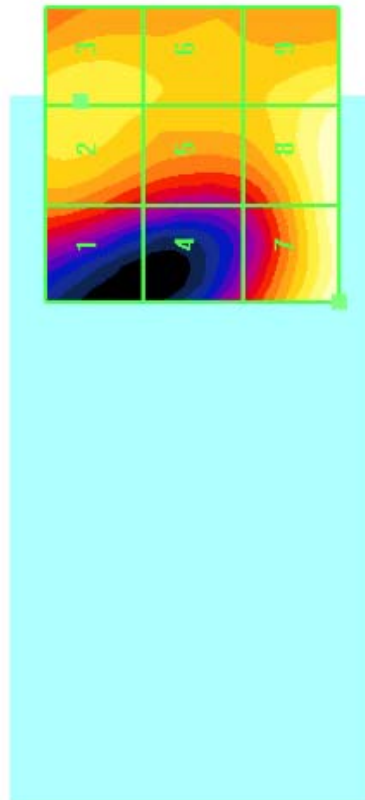

**Figure 10-1**  
Sample E-field Scan Overlay  
(See Test Setup Photographs for actual WD overlay)

|                                      |                                                                                     |                                                                                                               |                                                                                       |                                        |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                         | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                       | Page 24 of 84                          |

|                |                 |
|----------------|-----------------|
| <b>FCC ID:</b> | BEJVS760        |
| <b>Model:</b>  | VS760, LG-VS760 |
| <b>S/N:</b>    | HAC RFE         |

## II. H-FIELD EMISSIONS:


**Table 10-2**  
**HAC Data Summary for H-field**

| Mode                     | Channel | Backlight | Scan Center | Conducted Power at BS (dBm) | Time Avg. Field (A/m) | Peak Field (dBA/m) | FCC Limit (dBA/m) | FCC MARGIN (dB) | RESULT | Excl Blocks per 4.4 |
|--------------------------|---------|-----------|-------------|-----------------------------|-----------------------|--------------------|-------------------|-----------------|--------|---------------------|
| <b>H-field Emissions</b> |         |           |             |                             |                       |                    |                   |                 |        |                     |
| GSM850                   | 128     | off       | Acoustic    | 32.68                       | 0.0659                | -17.8              | -1.9              | -15.93          | M4     | none                |
| GSM850                   | 190     | off       | Acoustic    | 32.60                       | 0.0589                | -18.8              | -1.9              | -16.91          | M4     | none                |
| GSM850                   | 251     | off       | Acoustic    | 32.52                       | 0.0751                | -16.7              | -1.9              | -14.80          | M4     | none                |
| GSM1900                  | 512     | off       | Acoustic    | 29.50                       | 0.0497                | -18.8              | -11.9             | -6.88           | M4     | none                |
| GSM1900                  | 661     | off       | Acoustic    | 29.69                       | 0.0389                | -20.9              | -11.9             | -8.99           | M4     | none                |
| GSM1900                  | 810     | off       | Acoustic    | 29.79                       | 0.0438                | -19.9              | -11.9             | -7.97           | M4     | none                |

| Mode                     | Channel | Backlight | Scan Center | Conducted Power at BS (dBm) | Time Avg. Field (A/m) | Peak Field (dBA/m) | FCC Limit (dBA/m) | FCC MARGIN (dB) | RESULT | Excl Blocks per 4.4 |
|--------------------------|---------|-----------|-------------|-----------------------------|-----------------------|--------------------|-------------------|-----------------|--------|---------------------|
| <b>H-field Emissions</b> |         |           |             |                             |                       |                    |                   |                 |        |                     |
| WCDMA1900                | 9262    | off       | Acoustic    | 22.30                       | 0.0578                | -25.3              | -9.4              | -15.90          | M4     | none                |
| WCDMA1900                | 9400    | off       | Acoustic    | 22.81                       | 0.0486                | -26.8              | -9.4              | -17.40          | M4     | none                |
| WCDMA1900                | 9538    | off       | Acoustic    | 22.98                       | 0.0459                | -27.3              | -9.4              | -17.90          | M4     | none                |

|                                      |                                                                                                                                   |                                                                                                               |                                                                                                 |                                        |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                                                                       | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                                 | Page 25 of 84                          |

| Mode                     | Channel | Backlight | RC/SO   | Scan Center | Battery  | Antenna | Conducted Power at BS (dBm) | Time Avg. Field (A/m) | Peak Field (dBA/m) | FCC Limit (dBA/m) | FCC MARGIN (dB) | RESULT | Excl Blocks per 4.4 |
|--------------------------|---------|-----------|---------|-------------|----------|---------|-----------------------------|-----------------------|--------------------|-------------------|-----------------|--------|---------------------|
| <b>H-field Emissions</b> |         |           |         |             |          |         |                             |                       |                    |                   |                 |        |                     |
| CDMA                     | 1013    | off       | SO3/RC4 | Acoustic    | Standard | Fixed   | 25.09                       | 0.1399                | -18.9              | 0.6               | -19.54          | M4     | none                |
| CDMA                     | 384     | off       | SO3/RC4 | Acoustic    | Standard | Fixed   | 24.78                       | 0.1271                | -19.8              | 0.6               | -20.37          | M4     | none                |
| CDMA                     | 777     | off       | SO3/RC4 | Acoustic    | Standard | Fixed   | 25.02                       | 0.1429                | -18.8              | 0.6               | -19.35          | M4     | none                |
| PCS                      | 25      | off       | SO3/RC4 | Acoustic    | Standard | Fixed   | 25.09                       | 0.1219                | -20.0              | -9.4              | -10.61          | M4     | none                |
| PCS                      | 600     | off       | SO3/RC4 | Acoustic    | Standard | Fixed   | 24.94                       | 0.1092                | -21.0              | -9.4              | -11.56          | M4     | none                |
| PCS                      | 1175    | off       | SO3/RC4 | Acoustic    | Standard | Fixed   | 24.71                       | 0.1070                | -21.1              | -9.4              | -11.74          | M4     | none                |

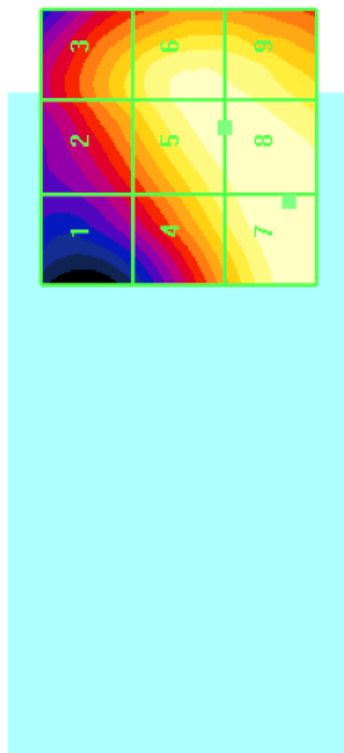

**Figure 10-2**  
Sample H-field Scan Overlay  
(See Test Setup Photographs for actual WD overlay)


|                                      |                                                                                                                                   |                                                                                                               |                                                                                                 |                                        |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                                                                       | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                                 | Page 26 of 84                          |

|         |                 |
|---------|-----------------|
| FCC ID: | BEJVS760        |
| Model:  | VS760, LG-VS760 |
| S/N:    | HAC RFE         |

### III. Worst-case Configuration Evaluation

**Table 10-3**  
**Peak Reading 360° Probe Rotation at Azimuth axis**

| Mode                                | Channel | Backlight | Scan Center | Time Avg. Field (V/m) | Peak Field (dBV/m) | FCC Limit (dBV/m) | FCC MARGIN (dB) | RESULT |
|-------------------------------------|---------|-----------|-------------|-----------------------|--------------------|-------------------|-----------------|--------|
| <b>Probe Rotation at Worst-Case</b> |         |           |             |                       |                    |                   |                 |        |
| GSM1900                             | 512     | off       | Acoustic    | 17.11                 | 33.58              | 38.50             | -4.92           | M3     |

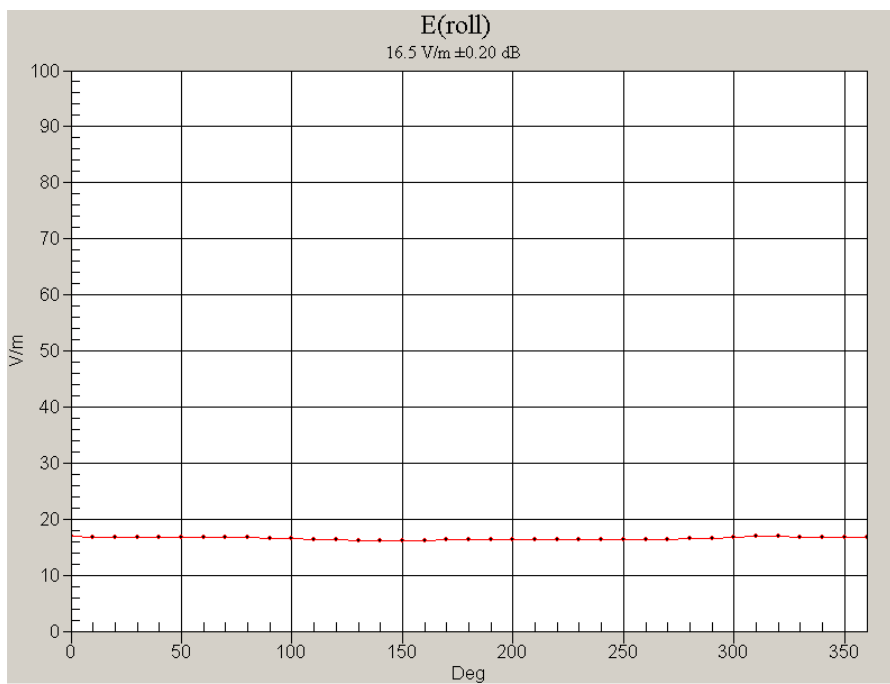

**Figure 10-3**  
**Worst-Case Probe Rotation about Azimuth axis**

\* Note: Location of probe rotation is shown in Figure 10-1 or Figure 10-2

|                               |                                                                                                                                   |                                                                                                        |                                                                                          |                                 |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | HAC (RF EMISSIONS) TEST REPORT                                                                         |  LG | Reviewed by:<br>Quality Manager |
| Filename:<br>0Y1008021258.BEJ | Test Dates:<br>8/10/2010 - 8/12/2010                                                                                              | EUT Type:<br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                          | Page 27 of 84                   |

## 11. EQUIPMENT LIST

| Manufacturer    | Model    | Description                       | Cal Date  | Cal Interval | Cal Due   | Serial Number |
|-----------------|----------|-----------------------------------|-----------|--------------|-----------|---------------|
| Agilent         | 8648D    | (9kHz-4GHz) Signal Generator      | 9/19/2009 | Biennial     | 9/19/2011 | 3613A00315    |
| Agilent         | E4407B   | ESA Spectrum Analyzer             | 3/30/2010 | Annual       | 3/30/2011 | US39210313    |
| Agilent         | E4432B   | ESG-D Series Signal Generator     | 9/10/2009 | Annual       | 9/10/2010 | US40053896    |
| Agilent         | E5515C   | Wireless Communications Test Set  | 9/10/2009 | Annual       | 9/10/2010 | GB46110872    |
| Agilent         | E5515C   | Wireless Communications Test Set  | 9/11/2009 | Annual       | 9/11/2010 | GB46310798    |
| Agilent         | E5515C   | Wireless Communications Test Set  | 8/25/2009 | Annual       | 8/25/2010 | GB41450275    |
| Rohde & Schwarz | CMU200   | Base Station Simulator            | 6/21/2010 | Annual       | 6/21/2011 | 833855/0010   |
| Rohde & Schwarz | CMU200   | Base Station Simulator            | 9/4/2009  | Annual       | 9/4/2010  | 109892        |
| Rohde & Schwarz | NRVD     | Dual Channel Power Meter          | 8/20/2008 | Biennial     | 8/20/2010 | 101695        |
| Rohde & Schwarz | NRV-Z32  | Peak Power Sensor (100uW-2W)      | 12/5/2008 | Biennial     | 12/5/2010 | 100155        |
| Rohde & Schwarz | NRV-Z33  | Peak Power Sensor (1mW-20W)       | 12/5/2008 | Biennial     | 12/5/2010 | 100004        |
| SPEAG           | CD1880V3 | Freespace 1880 MHz Dipole         | 1/21/2009 | Biennial     | 1/21/2011 | 1002          |
| SPEAG           | CD1880V3 | Freespace 1880 MHz Dipole         | 6/16/2010 | Biennial     | 6/16/2012 | 1064          |
| SPEAG           | CD835V3  | Freespace 835 MHz Dipole          | 7/13/2010 | Biennial     | 7/13/2012 | 1082          |
| SPEAG           | CD835V3  | Freespace 835 MHz Dipole          | 1/14/2009 | Biennial     | 1/14/2011 | 1003          |
| SPEAG           | DAE3     | Dasy Data Acquisition Electronics | 9/17/2009 | Annual       | 9/17/2010 | 455           |
| SPEAG           | DAE4     | Dasy Data Acquisition Electronics | 3/22/2010 | Annual       | 3/22/2011 | 704           |
| SPEAG           | DAE4     | Dasy Data Acquisition Electronics | 4/21/2010 | Annual       | 4/21/2011 | 665           |
| SPEAG           | DAE4     | Dasy Data Acquisition Electronics | 1/22/2010 | Annual       | 1/22/2011 | 649           |
| SPEAG           | ER3DV6   | Freespace E-field Probe           | 1/8/2010  | Annual       | 1/8/2011  | 2353          |
| SPEAG           | H3DV6    | Freespace H-field Probe           | 1/8/2010  | Annual       | 1/8/2011  | 6207          |
| SPEAG           | CD700V3  | Freespace 700MHz Dipole           | 7/13/2010 | Biennial     | 7/13/2012 | 1003          |
| SPEAG           | DAE4     | Dasy Data Acquisition Electronics | 7/8/2010  | Annual       | 7/8/2011  | 859           |
| Agilent         | E5515C   | Wireless Communications Tester    | 4/14/2010 | Annual       | 4/14/2011 | US41140256    |
| SPEAG           | CD1880V3 | Freespace 1880 MHz Dipole         | 4/7/2010  | Biennial     | 4/7/2012  | 1137          |

**Table 11-1**  
Equipment List

\*Calibration traceable to the National Institute of Standards and Technology (NIST).

|                                      |                                                                                                                                   |                                                                                                               |                                                                                                 |                                        |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                                                                       | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                                 | Page 28 of 84                          |

## 12. MEASUREMENT UNCERTAINTY

| Wireless Communications Device Near-Field Measurement |           |           |             |         |        |        |           |                |
|-------------------------------------------------------|-----------|-----------|-------------|---------|--------|--------|-----------|----------------|
| Uncertainty Estimation                                |           |           |             |         |        |        |           |                |
| Uncertainty Component                                 | Data (dB) | Data Type | Prob. Dist. | Divisor | Ci (E) | Ci (H) | Unc. (dB) | Notes/Comments |
| <b>Measurement System</b>                             |           |           |             |         |        |        |           |                |
| RF System Reflections                                 | 0.50      | Tolerance | N           | 1.00    | 1      | 1      | 0.50      | Ref. < -20 dB  |
| Field Probe Calibration                               | 0.21      | Tolerance | N           | 1.00    | 1      | 1      | 0.21      |                |
| Field Probe Isotropy                                  | 0.01      | Tolerance | N           | 1.00    | 1      | 1      | 0.01      |                |
| Field Probe Frequency Response                        | 0.135     | Tolerance | N           | 1.00    | 1      | 1      | 0.14      |                |
| Field Probe Linearity                                 | 0.013     | Tolerance | N           | 1.00    | 1      | 1      | 0.01      |                |
| Probe Modulation Factor                               | 0.270     | Accuracy  | R           | 1.73    | 1      | 1      | 0.16      |                |
| Boundary Effects                                      | 0.105     | Accuracy  | R           | 1.73    | 1      | 1      | 0.06      | *              |
| Probe Positioning Accuracy                            | 0.20      | Accuracy  | R           | 1.73    | 1      | 0.670  | 0.12      | *              |
| Probe Positioner                                      | 0.050     | Accuracy  | R           | 1.73    | 1      | 0.670  | 0.03      | *              |
| Extrapolation/Interpolation                           | 0.045     | Tolerance | R           | 1.73    | 1      | 1      | 0.03      | *              |
| Resolution to 2mm error                               | 0.210     | Tolerance | N           | 1.00    | 1      | 1      | 0.21      |                |
| System Detection Limit                                | 0.05      | Tolerance | R           | 1.73    | 1      | 1      | 0.03      | *              |
| Readout Electronics                                   | 0.015     | Tolerance | N           | 1.00    | 1      | 1      | 0.02      | *              |
| Integration Time                                      | 0.11      | Tolerance | R           | 1.73    | 1      | 1      | 0.06      | *              |
| Response Time                                         | 0.033     | Tolerance | R           | 1.73    | 1      | 1      | 0.02      | *              |
| Phantom Thickness                                     | 0.10      | Tolerance | R           | 1.73    | 1      | 1      | 0.06      | *              |
| System Repeatability (Field x 2=power)                | 0.17      | Tolerance | N           | 1.00    | 1      | 1      | 0.17      |                |
| <b>Test Sample Related</b>                            |           |           |             |         |        |        |           |                |
| Device Positioning Vertical                           | 0.2       | Tolerance | R           | 1.73    | 1      | 1      | 0.12      | *              |
| Device Positioning Lateral                            | 0.045     | Tolerance | R           | 1.73    | 1      | 1      | 0.03      | *              |
| Device Holder and Phantom                             | 0.1       | Tolerance | R           | 1.73    | 1      | 1      | 0.06      | *              |
| Power Drift                                           | 0.21      | Tolerance | R           | 1.73    | 1      | 1      | 0.12      |                |
| Combined Standard Uncertainty (k=1)                   |           |           |             |         |        |        | 0.66      | 16.5%          |
| Expanded Uncertainty [95% confidence] (k=2)           |           |           |             |         |        |        | 1.33      | 32.3%          |
| Expanded Uncertainty [95% confidence] on Field        |           |           |             |         |        |        | 0.66      | 16.2%          |

**Table 12-1**  
Uncertainty Estimation Table

Notes:

1. Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297. All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.
2. \* Uncertainty specifications from Schmidt & Partner Engineering AG (not site specific)

Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid immunity tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

|                                      |                                                                                                                                   |                                                                                                               |                                                                                                 |                                        |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                                                                       | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN | Page 29 of 84                                                                                   |                                        |

## 13. TEST DATA

See following Attached Pages for Test Data.

|                                      |                                                                                     |                                                                                                               |                                                                                          |                                        |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  LG | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                         | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN | Page 30 of 84                                                                            |                                        |



# PCTEST Hearing-Aid Compatibility Facility

## DUT: CD835V3 - SN1082

Type: CD835V3

Serial: 1082

Duty Cycle: 1:1

**Communication System: CW; Frequency: 835 MHz;**

Measurement Standard: DASYS (IEEE/EC)

DASY5 Configuration:

- Probe: ER3DV6 - SN2353; Calibrated: 1/8/2010
- Sensor Surface: 0mm (Fix Surface)
- Electronics: DAE4-Sn859; Calibrated: 7/8/2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125;

### 835 MHz / 100mW HAC Dipole Validation at 10mm/Hearing Aid Compatibility Test (41x361x1):


Measurement grid: dx=5mm, dy=5mm

Probe Modulation Factor = 1

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 104.0 V/m; Power Drift = 0.231 dB

Average value of Total (interpolated) = 169.1 V/m

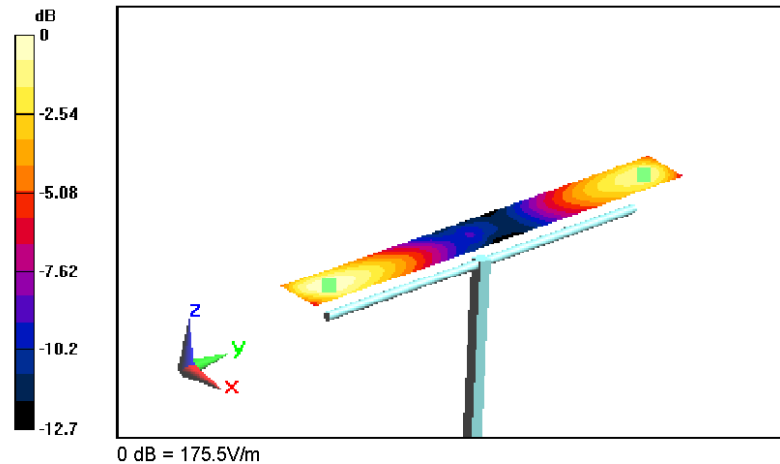

2010 PCTEST

|                                      |                                             |                                                                                                               |    |                                        |
|--------------------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------|----|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |                                             | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         | LG | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010 | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |    | Page 31 of 84                          |



**PCTEST Hearing-Aid Compatibility Facility**

**DUT: CD835V3 - SN1082**

Type: CD835V3

Serial: 1082

Duty Cycle: 1:1

**Communication System: CW; Frequency: 835 MHz;**

Measurement Standard: DASYS (IEEE/EC)

DASY5 Configuration:

- Probe: H3DV6 - SN6207; Calibrated: 1/8/2010
- Sensor Surface: 0mm (Fix Surface)
- Electronics: DAE4-Sn859; Calibrated: 7/8/2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125;

**835 MHz / 100 mW HAC Validation at 10 mm/Hearing Aid Compatibility Test (41x361x1):**


Measurement grid: dx=5mm, dy=5mm

Probe Modulation Factor = 1

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.473 A/m; Power Drift = 0.017 dB

Maximum value of Total (interpolated) = 0.450 A/m

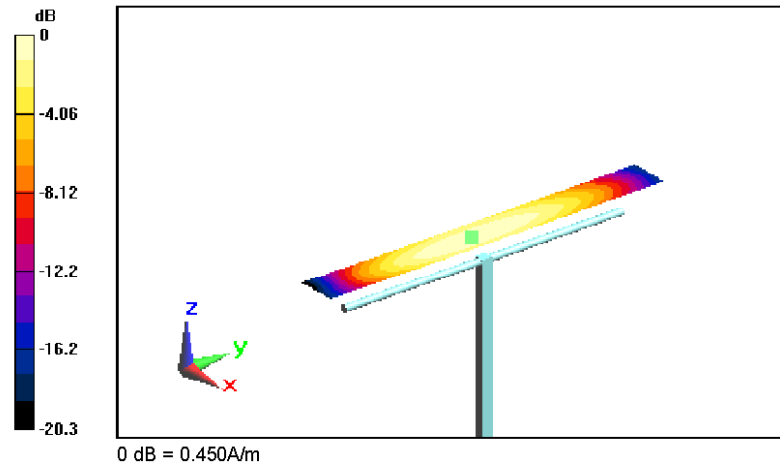

2010 PCTEST

|                                      |                                               |                                                                                                               |           |                                        |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         | <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010   | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |           | Page 32 of 84                          |



# PCTEST Hearing-Aid Compatibility Facility

## DUT: CD1880V3 - SN1064

Type: CD1880V3

Serial: 1064

Duty Cycle: 1:1

**Communication System: CW; Frequency: 1880 MHz;**

Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6 - SN2353; Calibrated: 1/8/2010
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4-Sn859; Calibrated: 7/8/2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125;

## 1880 MHz / 100mW HAC Dipole Validation at 10mm/Hearing Aid Compatibility Test (41x181x1):


Measurement grid: dx=5mm, dy=5mm

Probe Modulation Factor = 1

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 144.6 V/m; Power Drift = 0.013 dB

Average value of Total (interpolated) = 134.5 V/m

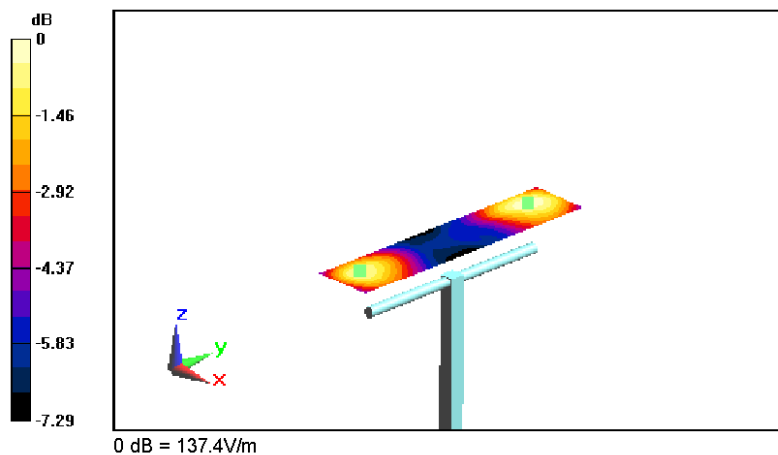

2010 PCTEST

|                                      |                                               |                                                                                                               |           |                                        |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         | <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010   | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |           | Page 33 of 84                          |



# PCTEST Hearing-Aid Compatibility Facility

## DUT: CD1880V3 - SN1064

Type: CD1880V3

Serial: 1064

Duty Cycle: 1:1

**Communication System: CW; Frequency: 1880 MHz;**

Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6207; Calibrated: 1/8/2010
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn859; Calibrated: 7/8/2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125;

## 1880 MHz / 100 mW HAC Validation at 10 mm/Hearing Aid Compatibility Test (41x181x1):


Measurement grid: dx=5mm, dy=5mm

Probe Modulation Factor = 1

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.469 A/m; Power Drift = 0.017 dB

Maximum value of Total (interpolated) = 0.448 A/m

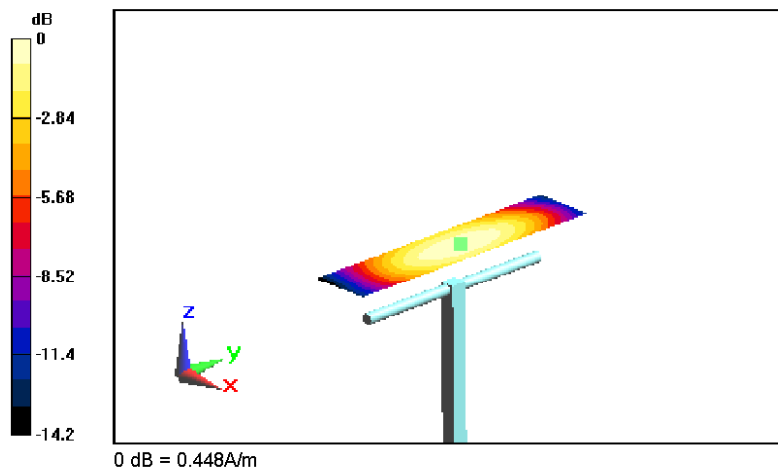

2010 PCTEST

|                                      |                                               |                                                                                                               |           |                                        |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         | <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010   | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |           | Page 34 of 84                          |

**DUT: BEJVS760**

Type: Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and 1900 WCDMA/HSPA Phone with Bluetooth and WLAN

Serial: HAC RFE

Backlight off

Duty Cycle: 1:8.3

**Communication System: GSM850; Frequency: 848.8 MHz;**

Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6 - SN2353; Calibrated: 1/8/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn859; Calibrated: 7/8/2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125;

**GSM850 High Channel****Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 82.7 V/m

Probe Modulation Factor = 2.83


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 29.9 V/m; Power Drift = -0.086 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

Peak E-field in V/m

| Grid 1         | Grid 2         | Grid 3         |
|----------------|----------------|----------------|
| <b>64.7 M4</b> | <b>78.2 M4</b> | <b>80.4 M4</b> |
| Grid 4         | Grid 5         | Grid 6         |
| <b>64.9 M4</b> | <b>79.2 M4</b> | <b>82.7 M4</b> |
| Grid 7         | Grid 8         | Grid 9         |
| <b>61.0 M4</b> | <b>74.9 M4</b> | <b>78.9 M4</b> |

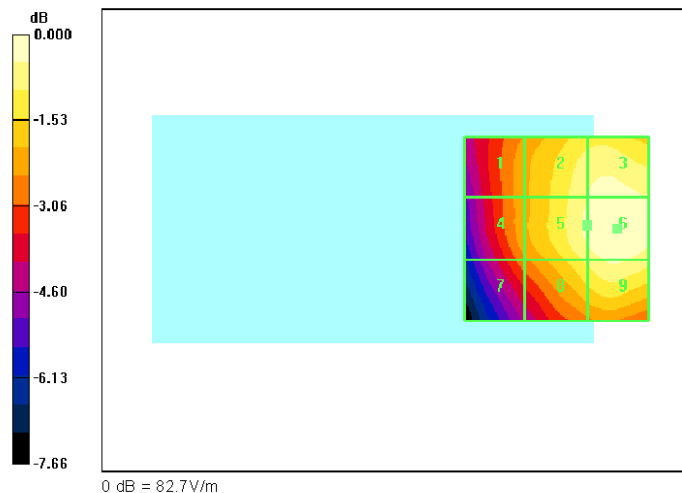

|                                      |                                               |                                                                                                               |           |                                        |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         | <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010   | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |           | Page 35 of 84                          |



### PCTEST Hearing-Aid Compatibility Facility

#### DUT: BEJVS760

Type: Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and 1900 WCDMA/HSPA Phone with Bluetooth and WLAN

Serial: HAC RFE

Backlight off

Duty Cycle: 1:8.3

**Communication System: GSM850; Frequency: 848.8 MHz;**

Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6207; Calibrated: 1/8/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sr859; Calibrated: 7/8/2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125;

#### GSM850 High Channel

**Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.146 A/m

Probe Modulation Factor = 1.95


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.074 A/m; Power Drift = -0.127 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

Peak H-field in A/m

|                 |                 |                 |
|-----------------|-----------------|-----------------|
| Grid 1          | Grid 2          | Grid 3          |
| <b>0.141 M4</b> | <b>0.122 M4</b> | <b>0.103 M4</b> |
| Grid 4          | Grid 5          | Grid 6          |
| <b>0.145 M4</b> | <b>0.135 M4</b> | <b>0.110 M4</b> |
| Grid 7          | Grid 8          | Grid 9          |
| <b>0.146 M4</b> | <b>0.135 M4</b> | <b>0.109 M4</b> |

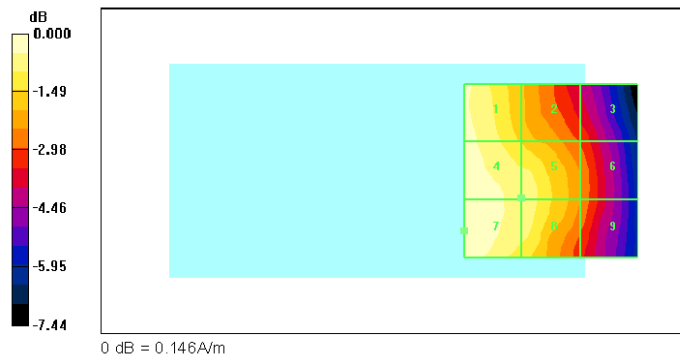

|                                      |                                             |                                                                                                               |  |                                        |
|--------------------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------|--|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |                                             | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010 | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |  | Page 36 of 84                          |

Date: 8/12/2010



**DUT: BEJVS760**

Type: Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and 1900 WCDMA/HSPA Phone with Bluetooth and WLAN  
Serial: HAC RFE  
Backlight off  
Duty Cycle: 1:8.3

**Communication System: GSM1900; Frequency: 1850.2 MHz;**

Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6 - SN2353; Calibrated: 1/8/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sr659; Calibrated: 7/8/2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125;

**PCS GSM Low Channel**

**Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 46.3 V/m

Probe Modulation Factor = 2.79


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 14.8 V/m; Power Drift = 0.082 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

Peak E-field in V/m

|                |                |                |
|----------------|----------------|----------------|
| Grid 1         | Grid 2         | Grid 3         |
| <b>32.6 M4</b> | <b>39.1 M4</b> | <b>38.9 M4</b> |
| Grid 4         | Grid 5         | Grid 6         |
| <b>28.4 M4</b> | <b>36.1 M4</b> | <b>36.2 M4</b> |
| Grid 7         | Grid 8         | Grid 9         |
| <b>46.0 M4</b> | <b>46.3 M4</b> | <b>41.6 M4</b> |

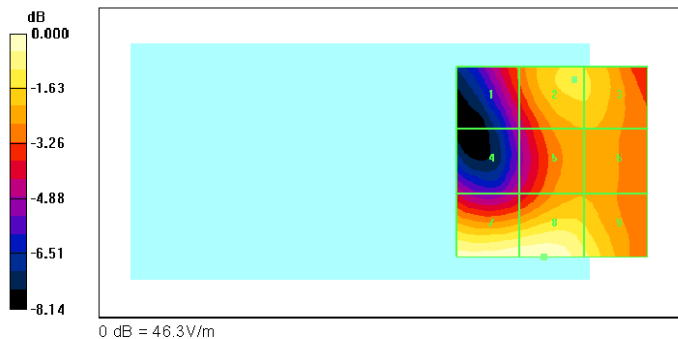

|                                      |                                               |                                                                                                               |           |                                        |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         | <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010   | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |           | Page 37 of 84                          |



**PCTEST Hearing-Aid Compatibility Facility**

**DUT: BEJVS760**

Type: Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and 1900 WCDMA/HSPA Phone with Bluetooth and WLAN

Serial: HAC RFE

Backlight off

Duty Cycle: 1:8.3

**Communication System: GSM1900; Frequency: 1850.2 MHz;**

Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6207; Calibrated: 1/8/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn659; Calibrated: 7/8/2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125;

**PCS GSM Low Channel**

**Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.115 A/m

Probe Modulation Factor = 2.32


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.050 A/m; Power Drift = -0.069 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

Peak H-field in A/m

|                 |                 |                 |
|-----------------|-----------------|-----------------|
| Grid 1          | Grid 2          | Grid 3          |
| <b>0.076 M4</b> | <b>0.086 M4</b> | <b>0.085 M4</b> |
| Grid 4          | Grid 5          | Grid 6          |
| <b>0.101 M4</b> | <b>0.109 M4</b> | <b>0.104 M4</b> |
| Grid 7          | Grid 8          | Grid 9          |
| <b>0.115 M4</b> | <b>0.111 M4</b> | <b>0.105 M4</b> |

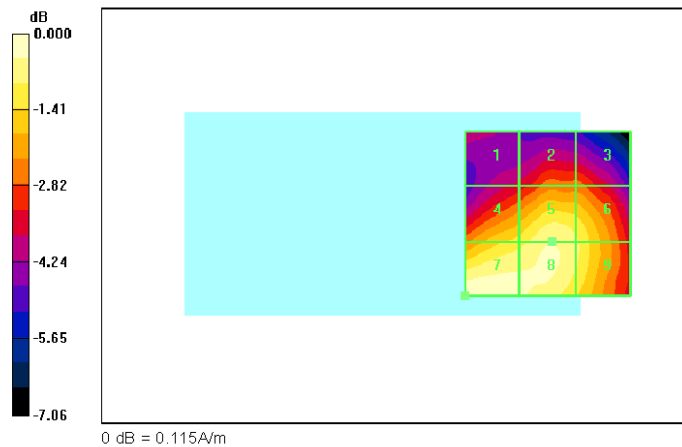

|                                      |                                             |                                                                                                               |  |                                        |
|--------------------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------|--|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |                                             | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010 | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |  | Page 38 of 84                          |



### PCTEST Hearing-Aid Compatibility Facility

#### DUT: BEJVS760

Type: Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and 1900 WCDMA/HSPA Phone with Bluetooth and WLAN

Serial: HAC RFE

Backlight off

Duty Cycle: 1:1

**Communication System: WCDMA1900; Frequency: 1907.6 MHz;**

Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6 - SN2353; Calibrated: 1/8/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn659; Calibrated: 7/8/2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY5, V5.0 Build 125;

#### WCDMA1900 High Channel

**Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 29.6 V/m

Probe Modulation Factor = 0.972


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 24.4 V/m; Power Drift = -0.196 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

|         |         |         |
|---------|---------|---------|
| Grid 1  | Grid 2  | Grid 3  |
| 17.1 M4 | 22.8 M4 | 22.8 M4 |
| Grid 4  | Grid 5  | Grid 6  |
| 17.2 M4 | 21.1 M4 | 21.4 M4 |
| Grid 7  | Grid 8  | Grid 9  |
| 29.2 M4 | 29.6 M4 | 25.9 M4 |

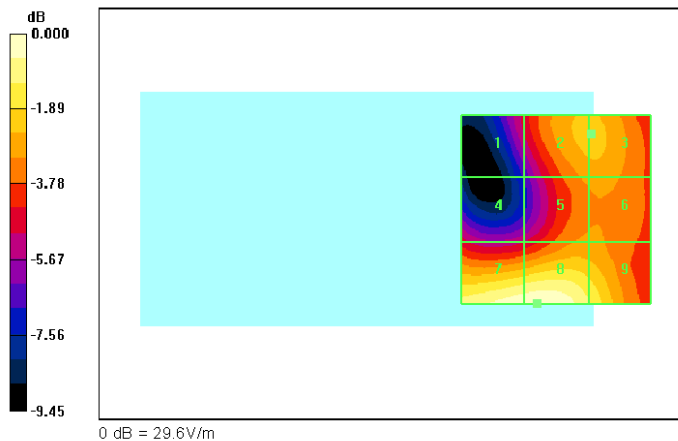

|                                      |                                             |                                                                                                               |  |                                        |
|--------------------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------|--|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |                                             | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010 | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |  | Page 39 of 84                          |

Date: 8/12/2010



**DUT: BEJVS760**

Type: Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and 1900 WCDMA/HSPA Phone with Bluetooth and WLAN

Serial: HAC RFE

Backlight off

Duty Cycle: 1:1

**Communication System: WCDMA1900; Frequency: 1852.4 MHz;**

Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6207; Calibrated: 1/8/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 S8659; Calibrated: 7/8/2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASYS, V5.0 Build 125;

**WCDMA1900 Low Channel**

**Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.054 A/m

Probe Modulation Factor = 0.940


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.061 A/m; Power Drift = -0.050 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

|                 |                 |                 |
|-----------------|-----------------|-----------------|
| Grid 1          | Grid 2          | Grid 3          |
| <b>0.040 M4</b> | <b>0.044 M4</b> | <b>0.044 M4</b> |
| Grid 4          | Grid 5          | Grid 6          |
| <b>0.051 M4</b> | <b>0.054 M4</b> | <b>0.052 M4</b> |
| Grid 7          | Grid 8          | Grid 9          |
| <b>0.053 M4</b> | <b>0.054 M4</b> | <b>0.053 M4</b> |

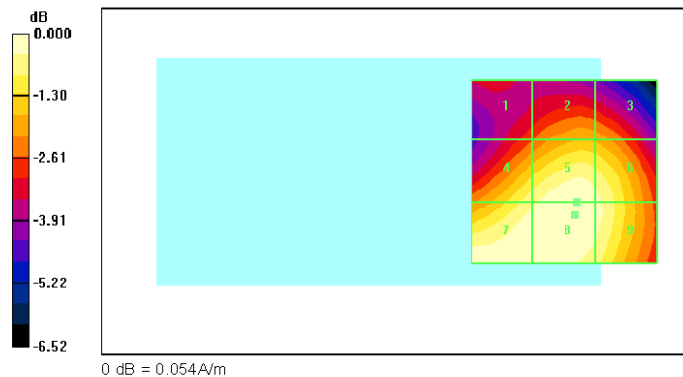

|                                      |                                               |                                                                                                               |               |                                        |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         | <b>LG</b>     | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010   | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN | Page 40 of 84 |                                        |

**DUT: BEJVS760**

Type: Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and 1900 WCDMA/HSPA Phone with Bluetooth and WLAN

Serial: HAC RFE

Backlight off

Duty Cycle: 1:1

**Communication System: Cell CDMA; Frequency: 824.7 MHz;**

Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: ER3DV6 - SN2353; Calibrated: 1/8/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn859; Calibrated: 7/8/2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80;

**Cell. CDMA Low Channel****Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 52.6 V/m

Probe Modulation Factor = 0.928


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 68.2 V/m; Power Drift = -0.639 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

| Grid 1         | Grid 2         | Grid 3         |
|----------------|----------------|----------------|
| <b>45.2 M4</b> | <b>50.6 M4</b> | <b>51.0 M4</b> |
| Grid 4         | Grid 5         | Grid 6         |
| <b>45.8 M4</b> | <b>52.0 M4</b> | <b>52.6 M4</b> |
| Grid 7         | Grid 8         | Grid 9         |
| <b>43.8 M4</b> | <b>50.6 M4</b> | <b>51.3 M4</b> |

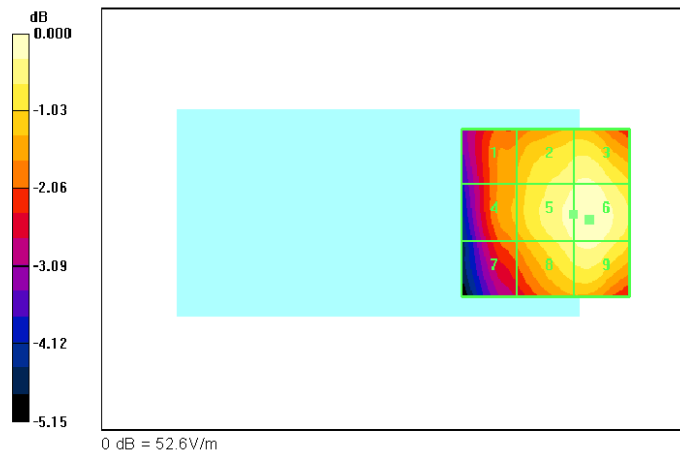

|                                      |                                               |                                                                                                               |           |                                        |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         | <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010   | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |           | Page 41 of 84                          |



### PCTEST Hearing-Aid Compatibility Facility

#### DUT: BEJVS760

Type: Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and 1900 WCDMA/HSPA Phone with Bluetooth and WLAN

Serial: HAC RFE

Backlight off

Duty Cycle: 1:1

**Communication System: Cell CDMA; Frequency: 848.31 MHz;**

Measurement Standard: DASYS (IEEE/IEC)

DASY5 Configuration:

- Probe: H3DV6 - SN6207; Calibrated: 1/8/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn659; Calibrated: 7/8/2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.7 Build 80;

#### Cell. CDMA High Channel

**Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.115 A/m

Probe Modulation Factor = 0.808


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.148 A/m; Power Drift = 0.098 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

|                 |                 |                 |
|-----------------|-----------------|-----------------|
| Grid 1          | Grid 2          | Grid 3          |
| <b>0.108 M4</b> | <b>0.103 M4</b> | <b>0.092 M4</b> |
| Grid 4          | Grid 5          | Grid 6          |
| <b>0.114 M4</b> | <b>0.108 M4</b> | <b>0.097 M4</b> |
| Grid 7          | Grid 8          | Grid 9          |
| <b>0.115 M4</b> | <b>0.108 M4</b> | <b>0.095 M4</b> |

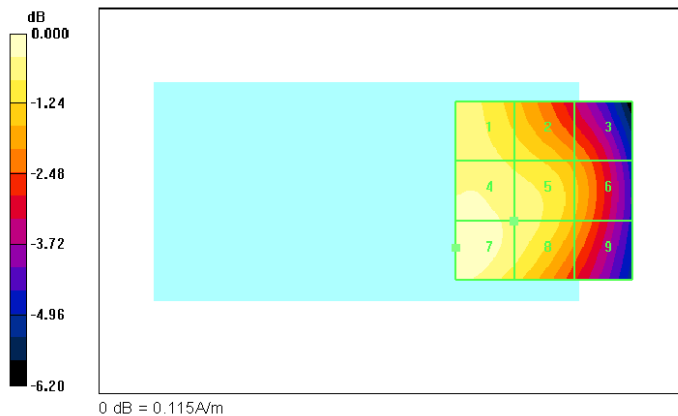

|                                      |                                             |                                                                                                               |  |                                        |
|--------------------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------|--|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |                                             | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010 | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |  | Page 42 of 84                          |



### PCTEST Hearing-Aid Compatibility Facility

#### DUT: BEJVS760

Type: Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and 1900 WCDMA/HSPA Phone with Bluetooth and WLAN

Serial: HAC RFE

Backlight off

Duty Cycle: 1:1

**Communication System: PCS CDMA; Frequency: 1851.25 MHz;**

Measurement Standard: DASYS (IEEE/IEC)

DASYS Configuration:

- Probe: ER3DV6 - SN2353; Calibrated: 1/8/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn859; Calibrated: 7/8/2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASYS 4, V4.7 Build 80;

#### PCS CDMA Low Channel

**Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 40.3 V/m

Probe Modulation Factor = 0.990


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 38.2 V/m; Power Drift = 0.212 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

| Grid 1         | Grid 2         | Grid 3         |
|----------------|----------------|----------------|
| <b>29.4 M4</b> | <b>35.5 M4</b> | <b>35.6 M4</b> |
| Grid 4         | Grid 5         | Grid 6         |
| <b>25.0 M4</b> | <b>33.7 M4</b> | <b>34.0 M4</b> |
| Grid 7         | Grid 8         | Grid 9         |
| <b>40.3 M4</b> | <b>40.2 M4</b> | <b>37.9 M4</b> |

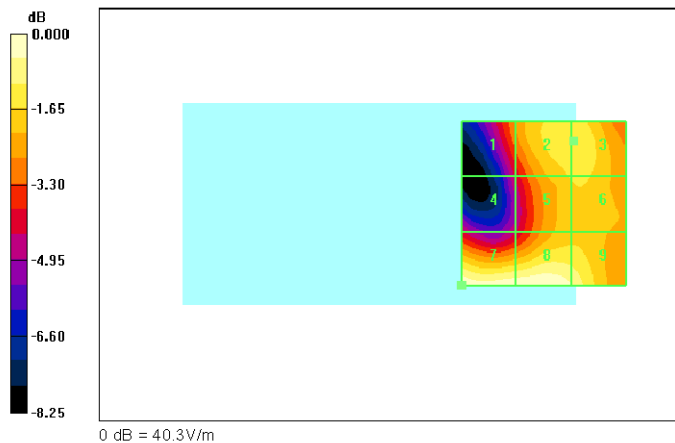

|                                      |                                               |                                                                                                               |           |                                        |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         | <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010   | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |           | Page 43 of 84                          |

Date: 8/12/2010



**PCTEST Hearing-Aid Compatibility Facility**

**DUT: BEJVS760**

Type: Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and 1900 WCDMA/HSPA Phone with Bluetooth and WLAN

Serial: HAC RFE

Backlight off

Duty Cycle: 1:1

**Communication System: PCS CDMA; Frequency: 1851.25 MHz;**

Measurement Standard: DASYS (IEEE/IEC)

DASYS Configuration:

- Probe: H3DV6 - SN6207; Calibrated: 1/8/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn659; Calibrated: 7/8/2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASYS 4, V4.7 Build 80;

**PCS CDMA Low Channel**

**Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.100 A/m

Probe Modulation Factor = 0.820


Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.129 A/m; Power Drift = 0.162 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

|                 |                 |                 |
|-----------------|-----------------|-----------------|
| Grid 1          | Grid 2          | Grid 3          |
| <b>0.073 M4</b> | <b>0.088 M4</b> | <b>0.089 M4</b> |
| Grid 4          | Grid 5          | Grid 6          |
| <b>0.094 M4</b> | <b>0.098 M4</b> | <b>0.097 M4</b> |
| Grid 7          | Grid 8          | Grid 9          |
| <b>0.100 M4</b> | <b>0.100 M4</b> | <b>0.097 M4</b> |

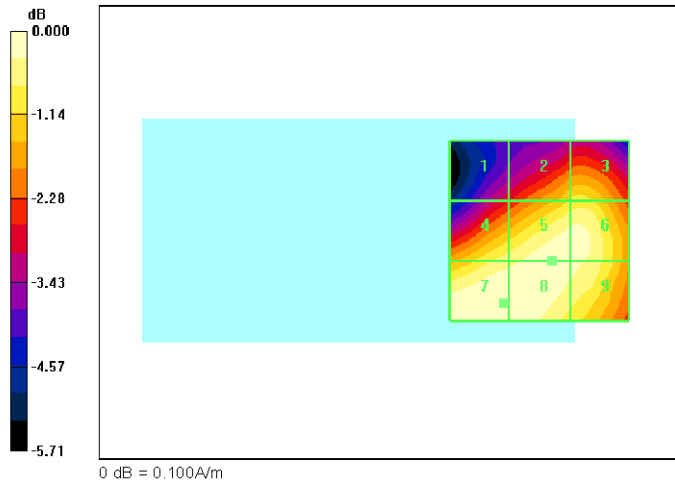

|                                      |                                                                                     |                                                                                                               |                                                                                       |                                        |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                         | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                       | Page 44 of 84                          |

## 14. CALIBRATION CERTIFICATES

The following pages include the probe calibration used to evaluate HAC for the DUT.

|                                      |                                                                                     |                                                                                                               |                                                                                          |                                        |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  LG | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                         | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN | Page 45 of 84                                                                            |                                        |

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **ER3-2353\_Jan10**

## CALIBRATION CERTIFICATE

Object **ER3DV6 - SN:2353**

Calibration procedure(s) **QA CAL-02.v5 and QA CAL-25.v2  
Calibration procedure for E-field probes optimized for close near field  
evaluations in air**

Calibration date: **January 8, 2010**

✓ ok  
1/11/10

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID #            | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 1-Apr-09 (No. 217-01030)          | Apr-10                 |
| Power sensor E4412A        | MY41495277      | 1-Apr-09 (No. 217-01030)          | Apr-10                 |
| Power sensor E4412A        | MY41498087      | 1-Apr-09 (No. 217-01030)          | Apr-10                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 31-Mar-09 (No. 217-01026)         | Mar-10                 |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 31-Mar-09 (No. 217-01028)         | Mar-10                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 31-Mar-09 (No. 217-01027)         | Mar-10                 |
| Reference Probe ER3DV6     | SN: 2328        | 3-Oct-09 (No. ER3-2328_Oct09)     | Oct-10                 |
| DAE4                       | SN: 789         | 23-Dec-09 (No. DAE4-789_Dec09)    | Dec-10                 |
| Secondary Standards        | ID #            | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Oct-09)  | In house check: Oct-11 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-09) | In house check: Oct-10 |

|                |               |                   |           |
|----------------|---------------|-------------------|-----------|
|                | Name          | Function          | Signature |
| Calibrated by: | Katja Pokovic | Technical Manager |           |
| Approved by:   | Niels Kuster  | Quality Manager   |           |

Issued: January 8, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: ER3-2353\_Jan10

Page 1 of 10

|                  |                       |                                                                                           |                 |
|------------------|-----------------------|-------------------------------------------------------------------------------------------|-----------------|
|                  |                       |                                                                                           | by:             |
|                  |                       |                                                                                           | Quality Manager |
| Filename:        | Test Dates:           | EUT Type:                                                                                 | Page 46 of 84   |
| 0Y1008021258.BEJ | 8/10/2010 - 8/12/2010 | Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                 |

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

#### Glossary:

**NORM<sub>x,y,z</sub>** sensitivity in free space  
**DCP** diode compression point  
**CF** crest factor (1/duty\_cycle) of the RF signal  
**A, B, C** modulation dependent linearization parameters  
**Polarization  $\phi$**   $\phi$  rotation around probe axis  
**Polarization  $\vartheta$**   $\vartheta$  rotation around an axis that is in the plane normal to probe axis (at measurement center),  
i.e.,  $\vartheta = 0$  is normal to probe axis  
**Connector Angle** information used in DASY system to align probe sensor X to the robot coordinate system

#### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

#### Methods Applied and Interpretation of Parameters:

- **NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  for XY sensors and  $\vartheta = 90$  for Z sensor ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).
- **NORM( $f$ )<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart).
- **DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **Spherical isotropy (3D deviation from isotropy)**: in a locally homogeneous field realized using an open waveguide setup.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

Certificate No: ER3-2353\_Jan10

Page 2 of 10

|                                      |                                             |                                                                                                               |                               |
|--------------------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------|
|                                      |                                             |                                                                                                               | <b>by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010 | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN | Page 47 of 84                 |

# Probe ER3DV6

## SN:2353

Manufactured: March 8, 2005  
Last calibrated: July 17, 2008  
Recalibrated: January 8, 2010

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

|                                      |                                             |                                                                                                               |
|--------------------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------|
|                                      |                                             | by:                                                                                                           |
|                                      |                                             | Quality Manager                                                                                               |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010 | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |
|                                      |                                             | Page 48 of 84                                                                                                 |

**DASY - Parameters of Probe: ER3DV6 SN:2353****Basic Calibration Parameters**

|                          | Sensor X | Sensor Y | Sensor Z | Unc (k=2)    |
|--------------------------|----------|----------|----------|--------------|
| Norm ( $\mu V/(V/m)^2$ ) | 1.56     | 1.76     | 1.88     | $\pm 10.1\%$ |
| DCP (mV) <sup>A</sup>    | 94.7     | 94.4     | 94.9     |              |

**Modulation Calibration Parameters**

| UID   | Communication System Name | PAR  |   | A<br>dB | B<br>dBuV | C    | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-------|---------------------------|------|---|---------|-----------|------|----------|---------------------------|
| 10000 | CW                        | 0.00 | X | 0.00    | 0.00      | 1.00 | 300      | $\pm 1.5\%$               |
|       |                           |      | Y | 0.00    | 0.00      | 1.00 | 300      |                           |
|       |                           |      | Z | 0.00    | 0.00      | 1.00 | 300      |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.


<sup>A</sup> numerical linearization parameter; uncertainty not required

<sup>E</sup> Uncertainty is determined using the maximum deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

|                                      |                                             |                                                                                                               |               |
|--------------------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------|
|                                      |                                             | by:<br>Quality Manager                                                                                        |               |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010 | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN | Page 49 of 84 |

## Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide R22)

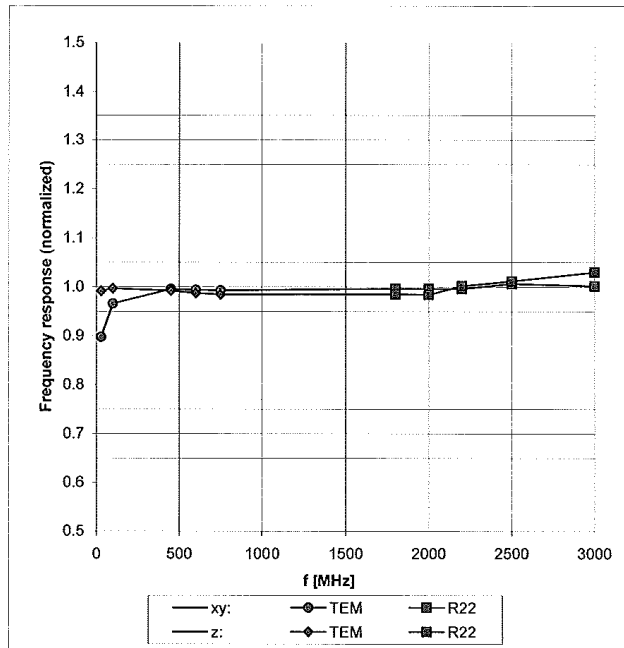

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

|                               |                                      |                                                                                                        |               |
|-------------------------------|--------------------------------------|--------------------------------------------------------------------------------------------------------|---------------|
|                               |                                      | by: Quality Manager                                                                                    |               |
| Filename:<br>0Y1008021258.BEJ | Test Dates:<br>8/10/2010 - 8/12/2010 | EUT Type:<br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN | Page 50 of 84 |

**DASY - Parameters of Probe: ER3DV6 SN:2353****Basic Calibration Parameters**

|                          | Sensor X | Sensor Y | Sensor Z | Unc (k=2)    |
|--------------------------|----------|----------|----------|--------------|
| Norm ( $\mu V/(V/m)^2$ ) | 1.56     | 1.76     | 1.88     | $\pm 10.1\%$ |
| DCP (mV) <sup>A</sup>    | 94.7     | 94.4     | 94.9     |              |

**Modulation Calibration Parameters**

| UID   | Communication System Name | PAR  |   | A<br>dB | B<br>dBuV | C    | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-------|---------------------------|------|---|---------|-----------|------|----------|---------------------------|
| 10000 | CW                        | 0.00 | X | 0.00    | 0.00      | 1.00 | 300      | $\pm 1.5\%$               |
|       |                           |      | Y | 0.00    | 0.00      | 1.00 | 300      |                           |
|       |                           |      | Z | 0.00    | 0.00      | 1.00 | 300      |                           |


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> numerical linearization parameter; uncertainty not required



<sup>E</sup> Uncertainty is determined using the maximum deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



|                                      |                                             |                                                                                                               |               |
|--------------------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------|
|                                      |                                             | by:<br>Quality Manager                                                                                        |               |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010 | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN | Page 51 of 84 |

Frequency Response of E-Field  
(TEM-Cell:ifi110 EXX, Waveguide R22)

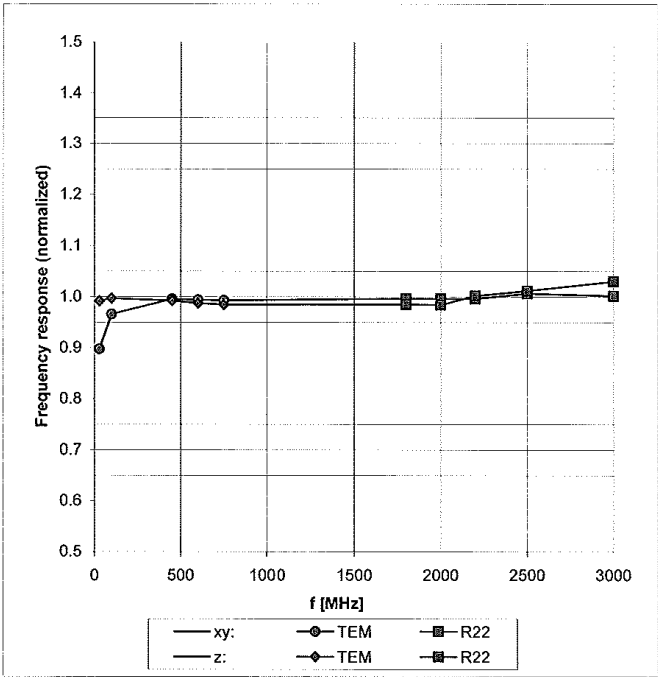


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

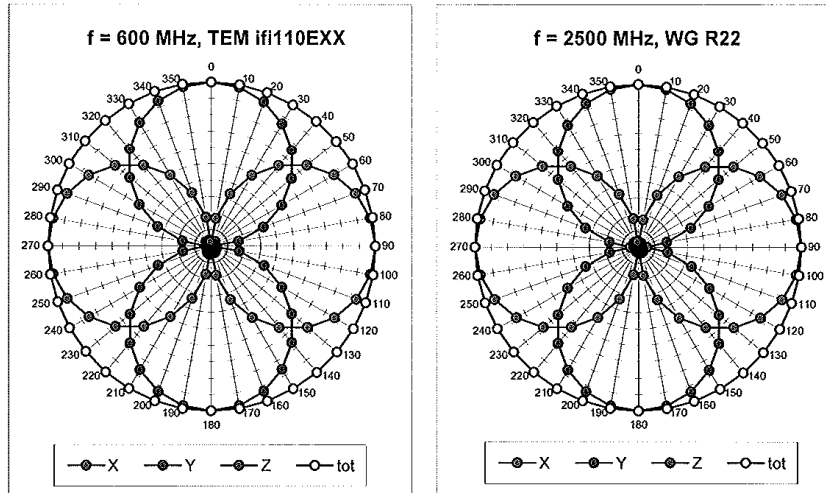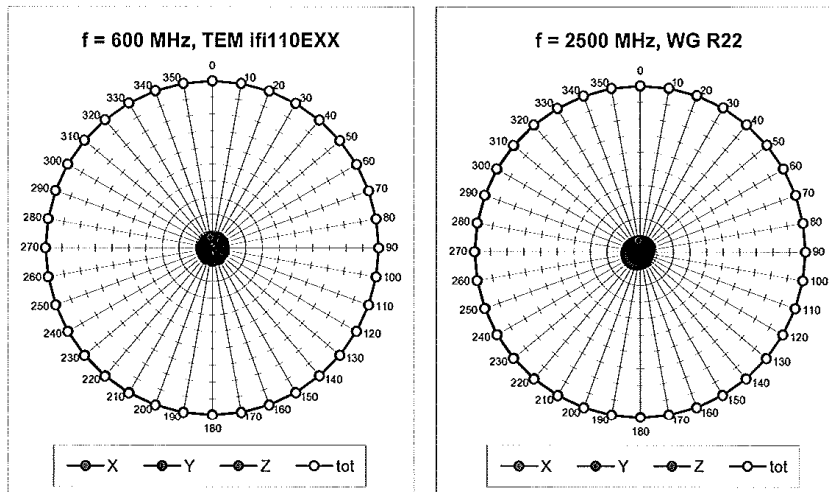Receiving Pattern ( $\phi$ ),  $\vartheta = 0^\circ$ Receiving Pattern ( $\phi$ ),  $\vartheta = 90^\circ$ 

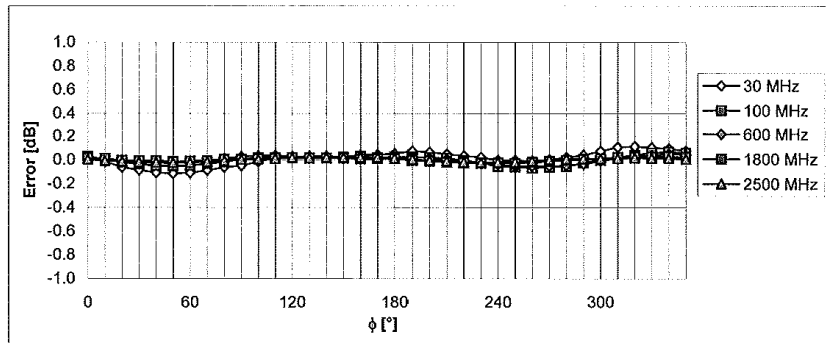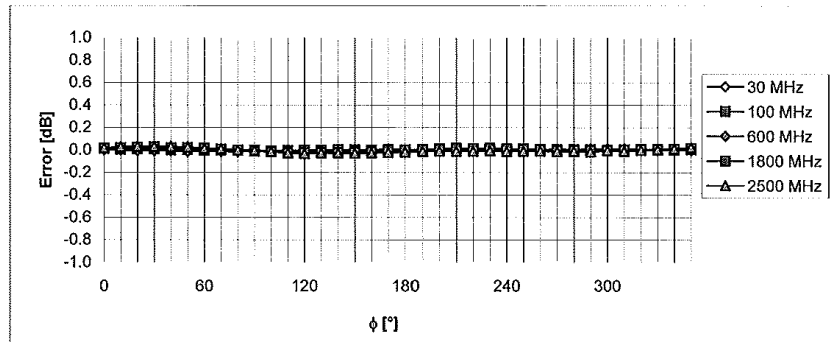Receiving Pattern ( $\phi$ ),  $\vartheta = 0^\circ$ Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )Receiving Pattern ( $\phi$ ),  $\vartheta = 90^\circ$ Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

Deviation from Isotropy in Air  
Error ( $\phi, \vartheta$ ),  $f = 900\text{ MHz}$

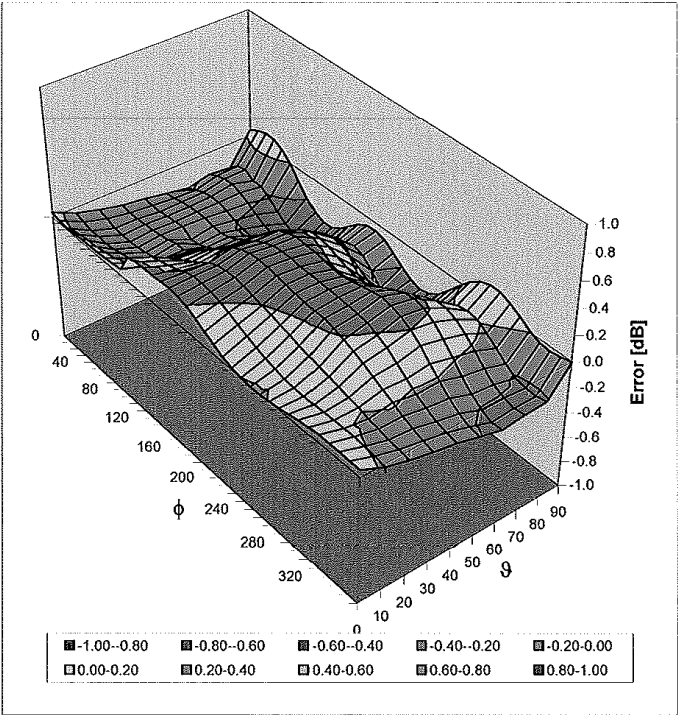

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )

**Other Probe Parameters**

|                                         |             |
|-----------------------------------------|-------------|
| Sensor Arrangement                      | Rectangular |
| Connector Angle (°)                     | 31.1        |
| Mechanical Surface Detection Mode       | enabled     |
| Optical Surface Detection Mode          | disabled    |
| Probe Overall Length                    | 337 mm      |
| Probe Body Diameter                     | 10 mm       |
| Tip Length                              | 10 mm       |
| Tip Diameter                            | 8.0 mm      |
| Probe Tip to Sensor X Calibration Point | 2.5 mm      |
| Probe Tip to Sensor Y Calibration Point | 2.5 mm      |
| Probe Tip to Sensor Z Calibration Point | 2.5 mm      |

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zougbastrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client: **PG Test**

Certificate No.: **H3-6207, Jan10**

## CALIBRATION CERTIFICATE

Object

**H3DV6 SN:6207**

Calibration procedure(s)

**QA-CAL-03.v5 and QA-CAL-25.v2**

**Calibration procedure for H-field probes optimized for close near-field  
evaluations in air**

Calibration date:

**January 8, 2010**

✓ 012  
2  
1/11/10

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID #            | Cal Date (Certificate No.)     | Scheduled Calibration |
|----------------------------|-----------------|--------------------------------|-----------------------|
| Power meter E4118B         | GB41293874      | 1-Apr-09 (No. 217-01030)       | Apr-10                |
| Power sensor E4412A        | MY41485277      | 1-Apr-09 (No. 217-01030)       | Apr-10                |
| Power sensor E4412A        | MY41498087      | 1-Apr-09 (No. 217-01030)       | Apr-10                |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 31-Mar-09 (No. 217-01026)      | Mar-10                |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 31-Mar-09 (No. 217-01028)      | Mar-10                |
| Reference 30 dB Attenuator | SN: S5126 (30b) | 31-Mar-09 (No. 217-01027)      | Mar-10                |
| Reference Probe H3DV6      | SN: 6182        | 3-Oct-09 (No. H3-6182_Oct09)   | Oct-10                |
| DAE4                       | SN: 788         | 23-Dec-09 (No. DAE4-788_Dec09) | Dec-10                |

| Secondary Standards       | ID #         | Check Date (in house)             | Scheduled Check        |
|---------------------------|--------------|-----------------------------------|------------------------|
| RF generator HP 8648C     | US3642U01700 | 4-Aug-09 (in house check Oct-09)  | In house check: Oct-11 |
| Network Analyzer HP 8753E | US37390585   | 18-Oct-01 (in house check Oct-09) | In house check: Oct-10 |

Calibrated by: **Kajko Pokorny** Technical Manager

Approved by: **Niels Kuster** Quality Manager

Issued: January 8, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No.: **H3-6207, Jan10**

Page 1 of 10

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: SCS 108

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

#### Glossary:

|                       |                                                                                                                                                   |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| NORM <sub>x,y,z</sub> | sensitivity in free space                                                                                                                         |
| DCP                   | diode compression point                                                                                                                           |
| CF                    | crest factor ( $V_{peak}/V_{rms}$ ) of the RF signal                                                                                              |
| A, B, C               | modulation dependent linearization parameters                                                                                                     |
| Polarization $\phi$   | $\phi$ rotation around probe axis                                                                                                                 |
| Polarization $\theta$ | $\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\theta = 0$ is normal to probe axis |
| Connector Angle       | information used in DASY system to align probe sensor X to the robot coordinate system                                                            |

#### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

#### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>: Assessed for E-field polarization  $\theta = 0$  for XY sensors and  $\theta = 90$  for Z sensor ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).
- $X, Y, Z(f)_{a0a1a2} = X, Y, Z_{a0a1a2} \cdot \text{frequency\_response}$  (see Frequency Response Chart).
- DCP<sub>x,y,z</sub>: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- $A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}; A, B, C$  are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- Spherical isotropy (3D deviation from isotropy): in a locally homogeneous field realized using an open waveguide setup.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the  $X_{a0a1a2}$  (no uncertainty required).

# Probe H3DV6

## SN:6207

|                  |                 |
|------------------|-----------------|
| Manufactured:    | June 12, 2006   |
| Last calibrated: | July 17, 2008   |
| Recalibrated:    | January 8, 2010 |

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

**DASY - Parameters of Probe: H3DV6 SN:6207****Basic Calibration Parameters**

|                              |    | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|------------------------------|----|----------|----------|----------|-----------|
| Norm (A/m / $\sqrt{\mu V}$ ) | a0 | 2.39E-3  | 2.36E-3  | 2.95E-3  | ± 5.1%    |
| Norm (A/m / $\sqrt{\mu V}$ ) | a1 | 1.88E-4  | 6.01E-4  | 1.55E-5  | ± 5.1%    |
| Norm (A/m / $\sqrt{\mu V}$ ) | a2 | 1.33E-4  | 2.11E-4  | 1.94E-4  | ± 5.1%    |
| DCP (mV) <sup>A</sup>        |    | 83.5     | 87.1     | 83.7     |           |

**Modulation Calibration Parameters**

| UID   | Communication System Name | PAR  |   | A<br>dB | B<br>dBuV | C    | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-------|---------------------------|------|---|---------|-----------|------|----------|---------------------------|
| 10000 | CW                        | 0.00 | X | 0.00    | 0.00      | 1.00 | 300      | ± 1.5 %                   |
|       |                           |      | Y | 0.00    | 0.00      | 1.00 | 300      |                           |
|       |                           |      | Z | 0.00    | 0.00      | 1.00 | 300      |                           |


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> numerical linearization parameter; uncertainty not required



<sup>E</sup> Uncertainty is determined using the maximum deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



# Frequency Response of H-Field

(TEM-Cell: ifi110 EXX, Waveguide R22)

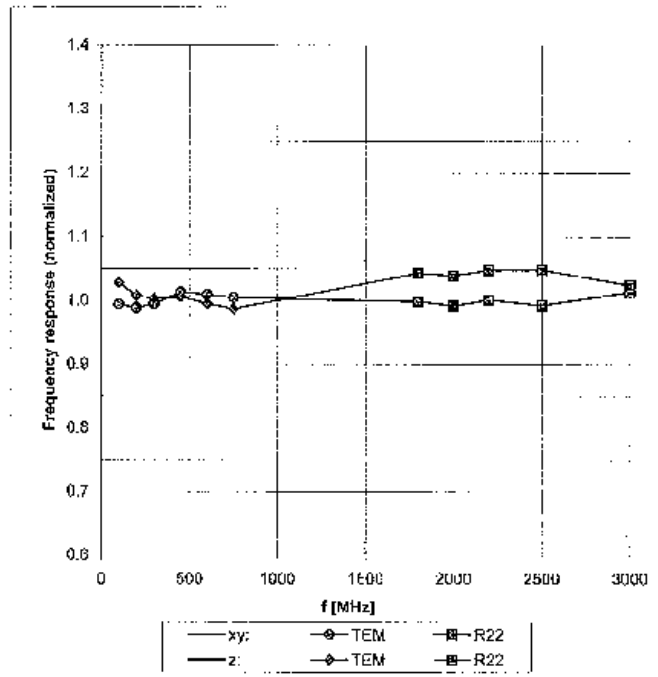


Uncertainty of Frequency Response of H-field:  $\pm 6.3\%$  ( $k=2$ )

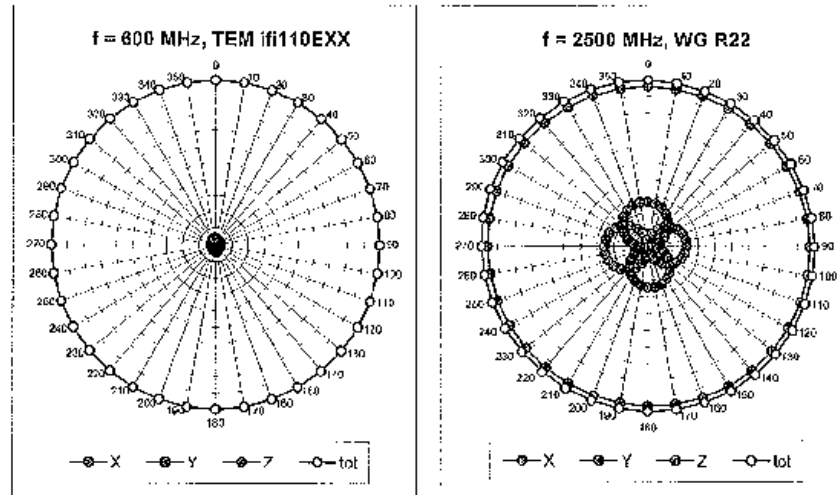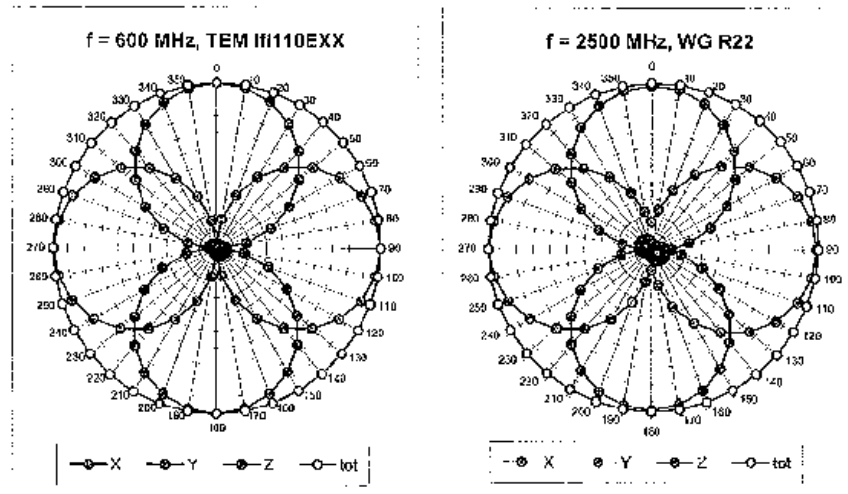Receiving Pattern ( $\phi$ ),  $\vartheta = 90^\circ$ Receiving Pattern ( $\phi$ ),  $\vartheta = 0^\circ$ 

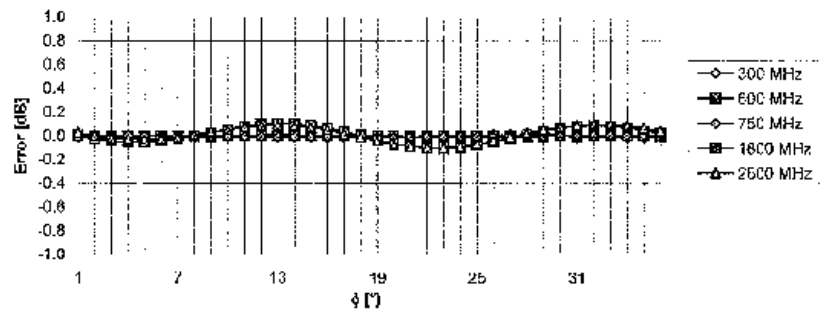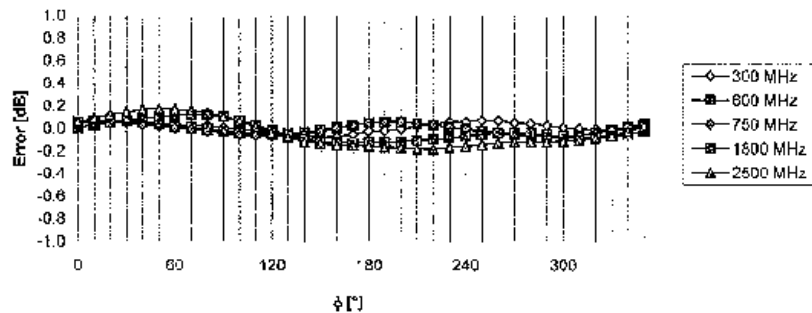Receiving Pattern ( $\phi$ ),  $\theta = 90^\circ$ Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )Receiving Pattern ( $\phi$ ),  $\theta = 0^\circ$ Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )


### Dynamic Range f(H-field)

(Waveguide R22,  $f = 1800$  MHz)

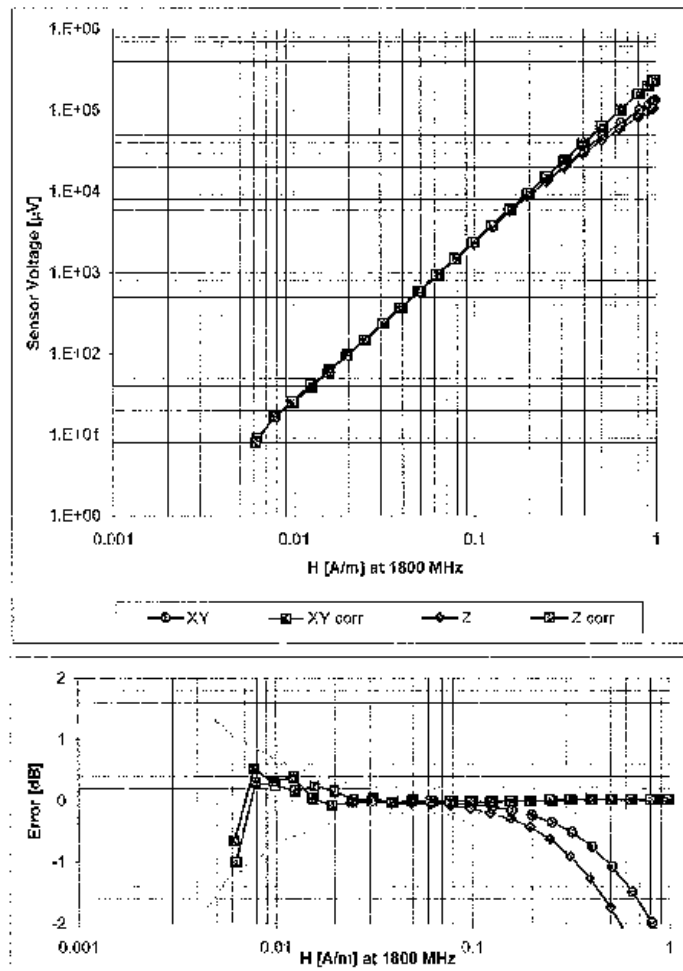

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

# Deviation from Isotropy in Air Error ( $\phi, \theta$ ), $f = 900$ MHz

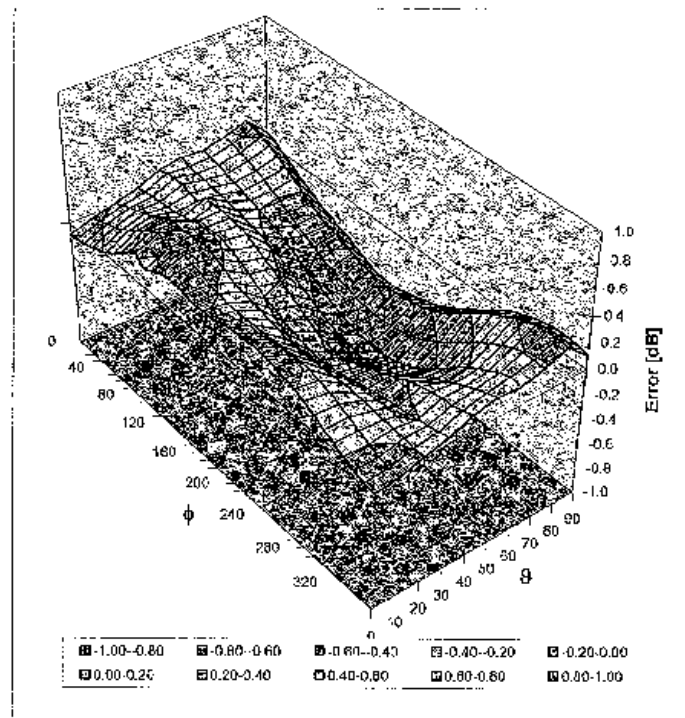

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )

**Other Probe Parameters**

|                                         |             |
|-----------------------------------------|-------------|
| Sensor Arrangement                      | Rectangular |
| Connector Angle (°)                     | -177.4      |
| Mechanical Surface Detection Mode       | enabled     |
| Optical Surface Detection Mode          | disabled    |
| Probe Overall Length                    | 337 mm      |
| Probe Body Diameter                     | 10 mm       |
| Tip Length                              | 20 mm       |
| Tip Diameter                            | 6.0 mm      |
| Probe Tip to Sensor X Calibration Point | 3 mm        |
| Probe Tip to Sensor Y Calibration Point | 3 mm        |
| Probe Tip to Sensor Z Calibration Point | 3 mm        |

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zauggstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **CD835V3-1082\_Jul10**

## CALIBRATION CERTIFICATE

Object **CD835V3 - SN: 1082**

Calibration procedure(s) **QA CAL-20.v5  
Calibration procedure for dipoles in air**

Calibration date: **July 13, 2010**

✓ KOK  
7/26/10

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards         | ID #           | Cal Date (Certificate No.)        | Scheduled Calibration  |
|---------------------------|----------------|-----------------------------------|------------------------|
| Power meter EPM-442A      | GB37480704     | 06-Oct-09 (No. 217-01086)         | Oct-10                 |
| Power sensor HP 8481A     | US37292783     | 06-Oct-09 (No. 217-01086)         | Oct-10                 |
| Probe ER3DV6              | SN: 2336       | 30-Dec-09 (No. ER3-2336_Dec09)    | Dec-10                 |
| Probe H3DV6               | SN: 6065       | 30-Dec-09 (No. H3-6065_Dec09)     | Dec-10                 |
| DAE4                      | SN: 781        | 22-Jan-10 (No. DAE4-781_Jan10)    | Jan-11                 |
| Secondary Standards       | ID #           | Check Date (in house)             | Scheduled Check        |
| Power meter Agilent 4418B | SN: GB42420191 | 09-Oct-09 (in house check Oct-09) | In house check: Oct-10 |
| Power sensor HP 8482H     | SN: 3318A09450 | 09-Oct-09 (in house check Oct-09) | In house check: Oct-10 |
| Power sensor HP 8482A     | SN: US37295597 | 09-Oct-09 (in house check Oct-09) | In house check: Oct-10 |
| Network Analyzer HP 8753E | US37390595     | 18-Oct-01 (in house check Oct-09) | In house check: Oct-10 |
| RF generator E4433B       | MY 41000675    | 03-Nov-04 (in house check Oct-09) | In house check: Oct-11 |

|                |             |                       |                    |
|----------------|-------------|-----------------------|--------------------|
|                | <b>Name</b> | <b>Function</b>       | <b>Signature</b>   |
| Calibrated by: | Mike Meili  | Laboratory Technician | <i>[Signature]</i> |

|              |              |                    |                    |
|--------------|--------------|--------------------|--------------------|
|              | <b>Name</b>  | <b>Function</b>    | <b>Signature</b>   |
| Approved by: | Fin Bornholt | Technical Director | <i>[Signature]</i> |

Issued: July 15, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: CD835V3-1082\_Jul10

Page 1 of 6

0Y1008021258.BEJ

8/10/2010 - 8/12/2010

Cellular / GSM / GPRS / EDGE / UWB / BLE and  
1900 WCDMA/HSPA Phone with Bluetooth and WLAN

© 2010 PCTEST Engineering Laboratory, Inc.

REV 8.2U  
04/05/10



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

#### References

- [1] ANSI-C63.19-2006  
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] ANSI-C63.19-2007  
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

#### Methods Applied and Interpretation of Parameters:

- **Coordinate System:** y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1, 2], the measurement planes (probe sensor center) are selected to be at a distance of 10 mm above the top edge of the dipole arms.
- **Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- **Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- **Feed Point Impedance and Return Loss:** These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminated by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- **E-field distribution:** E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1, 2], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 10 mm (in z) above the top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, 10mm above the dipole surface.
- **H-field distribution:** H-field is measured with an isotropic H-field probe with 100mW forward power to the antenna feed point, in the x-y-plane. The scan area and sensor distance is equivalent to the E-field scan. The maximum of the field is available at the center (subgrid 5) above the feed point. The H-field value stated as calibration value represents the maximum of the interpolated H-field, 10mm above the dipole surface at the feed point.

Certificate No: CD835V3-1082 Jul10

Page 2 of 6

|                                      |                                                                                     |                                                                                                               |                                                                                       |                                        |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                         | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                       | Page 68 of 84                          |

## 1 Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                           |                     |                      |
|-------------------------------------------|---------------------|----------------------|
| <b>DASY Version</b>                       | DASY5               | V52.2 B0             |
| <b>DASY PP Version</b>                    | SEMCAD X            | V14.2 B2             |
| <b>Phantom</b>                            | HAC Test Arch       | SD HAC P01 BA, #1070 |
| <b>Distance Dipole Top - Probe Center</b> | 10 mm               |                      |
| <b>Scan resolution</b>                    | dx, dy = 5 mm       | area = 20 x 180 mm   |
| <b>Frequency</b>                          | 835 MHz $\pm$ 1 MHz |                      |
| <b>Forward power at dipole connector</b>  | 20.0 dBm = 100mW    |                      |
| <b>Input power drift</b>                  | < 0.05 dB           |                      |

## 2 Maximum Field values

| H-field 10 mm above dipole surface | condition            | interpolated maximum |
|------------------------------------|----------------------|----------------------|
| Maximum measured                   | 100 mW forward power | <b>0.452 A/m</b>     |

Uncertainty for H-field measurement: 8.2% (k=2)

| E-field 10 mm above dipole surface | condition            | Interpolated maximum |
|------------------------------------|----------------------|----------------------|
| Maximum measured above high end-   | 100 mW forward power | 167.4 V/m            |
| Maximum measured above low end     | 100 mW forward power | 160.6 V/m            |
| Averaged maximum above arm         | 100 mW forward power | <b>164.0 V/m</b>     |

Uncertainty for E-field measurement: 12.8% (k=2)

## 3 Appendix

### 3.1 Antenna Parameters

| Frequency      | Return Loss    | Impedance                  |
|----------------|----------------|----------------------------|
| 800 MHz        | 16.2 dB        | ( 42.6 – j12.4 ) Ohm       |
| <b>835 MHz</b> | <b>26.8 dB</b> | <b>( 50.4 + j4.6 ) Ohm</b> |
| 900 MHz        | 16.2 dB        | ( 56.6 – j15.4 ) Ohm       |
| 950 MHz        | 21.6 dB        | ( 44.5 + j5.6 ) Ohm        |
| 960 MHz        | 16.5 dB        | ( 49.7 + j15.0 ) Ohm       |

### 3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.


Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

|                                      |                                                                                                                                   |                                                                                                               |                                                                                                 |                                        |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                                                                       | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                                 | Page 69 of 84                          |

### 3.3 Measurement Sheets

#### 3.3.1 Return Loss and Smith Chart

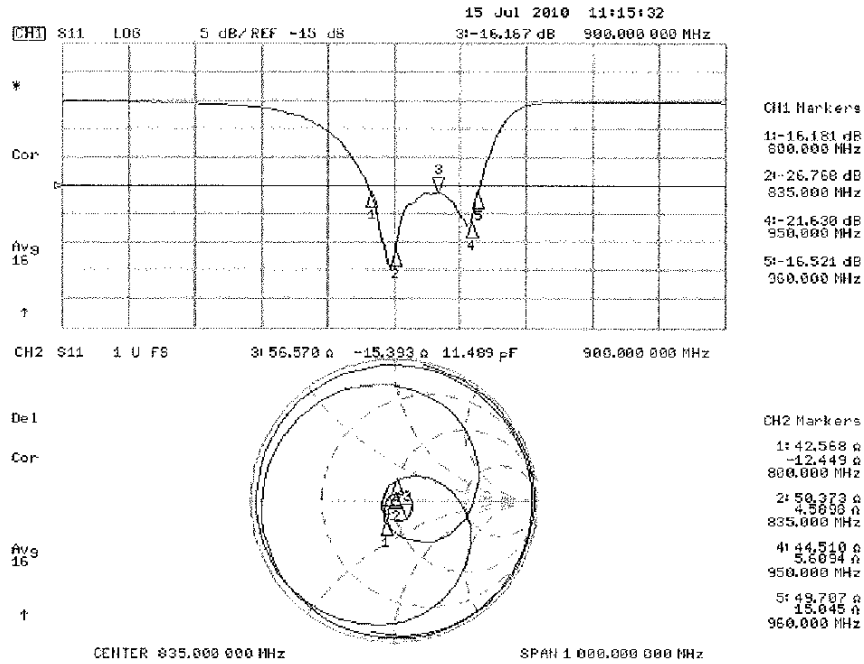

|                               |                                                                                                                                   |                                                                                                        |                                                                                          |                                 |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | HAC (RF EMISSIONS) TEST REPORT                                                                         |  LG | Reviewed by:<br>Quality Manager |
| Filename:<br>0Y1008021258.BEJ | Test Dates:<br>8/10/2010 - 8/12/2010                                                                                              | EUT Type:<br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                          | Page 70 of 84                   |

### 3.3.2 DASY4 H-field Result

Date/Time: 12.07.2010 11:03:52

Test Laboratory: SPEAG Lab2

**DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: 1082**

Communication System: CW; Communication System Band: CD835 (835.0 MHz); Frequency: 835

MHz; Communication System PAR: 0 dB

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: H3DV6 - SN6065; ; Calibrated: 30.12.2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 22.01.2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2Version 14.2.2 (1685)

**Dipole H-Field measurement @ 835MHz/H Scan - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1):**

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.452 A/m

Probe Modulation Factor = 1


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.479 A/m; Power Drift = -0.00202 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

|                       |                       |                       |
|-----------------------|-----------------------|-----------------------|
| Grid 1<br>0.396<br>M4 | Grid 2<br>0.404<br>M4 | Grid 3<br>0.365<br>M4 |
| Grid 4<br>0.439<br>M4 | Grid 5<br>0.452<br>M4 | Grid 6<br>0.416<br>M4 |
| Grid 7<br>0.387<br>M4 | Grid 8<br>0.401<br>M4 | Grid 9<br>0.372<br>M4 |

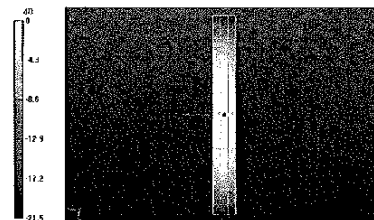

0 dB = 0.452A/m

|                                      |                                                                                                                                   |                                                                                                               |                                                                                                 |                                        |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                                                                       | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN | Page 71 of 84                                                                                   |                                        |

### 3.3.3 DASY4 E-field Result

Date/Time: 13.07.2010 13:05:45

Test Laboratory: SPEAG Lab2

**DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: 1082**

Communication System: CW; Communication System Band: CD835 (835.0 MHz); Frequency: 835 MHz; Communication System PAR: 0 dB

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 30.12.2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 22.01.2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2Version 14.2.2 (1685)

**Dipole E-Field measurement @ 835MHz/E Scan - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1):**

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 167.4 V/m

Probe Modulation Factor = 1


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 105.9 V/m; Power Drift = -0.033 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

|        |        |        |
|--------|--------|--------|
| Grid 1 | Grid 2 | Grid 3 |
| 158.5  | 160.6  | 153.9  |
| M4     | M4     | M4     |
| Grid 4 | Grid 5 | Grid 6 |
| 84.6   | 86.1   | 83.1   |
| M4     | M4     | M4     |
| Grid 7 | Grid 8 | Grid 9 |
| 156.7  | 167.4  | 165.6  |
| M4     | M4     | M4     |

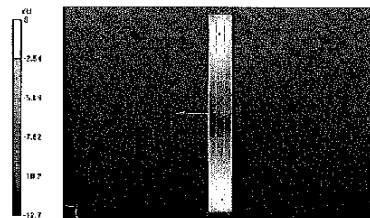

0 dB = 167.4 V/m

|                                      |                                                                                                                                   |                                                                                                               |                                                                                                 |                                        |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                                                                       | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN | Page 72 of 84                                                                                   |                                        |

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **CD1880V3-1064\_Jun10**

## CALIBRATION CERTIFICATE

Object **CD1880V3 - SN: 1064**

Calibration procedure(s) **QA CAL-20.v5  
 Calibration procedure for dipoles in air**

Calibration date: **June 16, 2010**

*✓ ok  
 16.06.2010*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards         | ID #           | Cal Date (Certificate No.)        | Scheduled Calibration  |
|---------------------------|----------------|-----------------------------------|------------------------|
| Power meter EPM-442A      | GB37480704     | 06-Oct-09 (No. 217-01086)         | Oct-10                 |
| Power sensor HP 8481A     | US37292783     | 06-Oct-09 (No. 217-01086)         | Oct-10                 |
| Probe ER3DV6              | SN: 2336       | 30-Dec-09 (No. ER3-2336_Dec09)    | Dec-10                 |
| Probe H3DV6               | SN: 6066       | 30-Dec-09 (No. H3-6066_Dec09)     | Dec-10                 |
| DAE4                      | SN: 781        | 22-Jan-10 (No. DAE4-781_Jan10)    | Jan-11                 |
| Secondary Standards       | ID #           | Check Date (in house)             | Scheduled Check        |
| Power meter Agilent 4416B | SN: GB42420191 | 09-Oct-09 (in house check Oct-09) | In house check: Oct-10 |
| Power sensor HP 8482H     | SN: 3318A09460 | 09-Oct-09 (in house check Oct-09) | In house check: Oct-10 |
| Power sensor HP 8482A     | SN: US37295597 | 09-Oct-09 (in house check Oct-09) | In house check: Oct-10 |
| Network Analyzer HP 8753E | US37390585     | 18-Oct-01 (in house check Oct-09) | In house check: Oct-10 |
| RF generator E4433B       | MY 41000675    | 03-Nov-04 (in house check Oct-09) | In house check: Oct-11 |

|                |                 |                       |                    |
|----------------|-----------------|-----------------------|--------------------|
|                | Name            | Function              | Signature          |
| Calibrated by: | Claudio Leubler | Laboratory Technician | <i>[Signature]</i> |
| Approved by:   | Fin Bornholt    | Technical Director    | <i>[Signature]</i> |

Issued: June 17, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: CD1880V3-1064\_Jun10

Page 1 of 6

|                  |                       |                                                                                           |               |
|------------------|-----------------------|-------------------------------------------------------------------------------------------|---------------|
| Filename:        | Test Dates:           | ECI type:                                                                                 | Page 73 of 84 |
| 0Y1008021258.BEJ | 8/10/2010 - 8/12/2010 | Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |               |



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

#### References

- [1] ANSI-C63.19-2007  
American National Standard for Methods of Measurement of Compatibility between Wireless  
Communications Devices and Hearing Aids.

#### Methods Applied and Interpretation of Parameters:

- **Coordinate System:** y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 10 mm above the top edge of the dipole arms.
- **Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- **Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- **Feed Point Impedance and Return Loss:** These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminated by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- **E-field distribution:** E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 10 mm (in z) above the top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, 10mm above the dipole surface.
- **H-field distribution:** H-field is measured with an isotropic H-field probe with 100mW forward power to the antenna feed point, in the x-y-plane. The scan area and sensor distance is equivalent to the E-field scan. The maximum of the field is available at the center (subgrid 5) above the feed point. The H-field value stated as calibration value represents the maximum of the interpolated H-field, 10mm above the dipole surface at the feed point.

|                                      |                                             |                                                                                                               |                                                                                                                                                                                                                     |
|--------------------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010 | <b>EUT type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN | <div style="border: 1px solid black; padding: 2px; text-align: center;">         :<br/>ger       </div> <div style="border: 1px solid black; padding: 2px; text-align: center;">         Page 74 of 84       </div> |
|--------------------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### 1. Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                    |                      |                      |
|------------------------------------|----------------------|----------------------|
| DASY Version                       | DASY5                | V5.2 B162            |
| DASY PP Version                    | SEMCAD X             | V14.0 B59            |
| Phantom                            | HAC Test Arch        | SD HAC P01 BA, #1070 |
| Distance Dipole Top - Probe Center | 10 mm                |                      |
| Scan resolution                    | dx, dy = 5 mm        | area = 20 x 90 mm    |
| Frequency                          | 1730 MHz $\pm$ 1 MHz |                      |
| Forward power at dipole connector  | 20.0 dBm = 100mW     |                      |
| Input power drift                  | < 0.05 dB            |                      |

### 2. Maximum Field values

| H-field 10 mm above dipole surface | condition            | Interpolated maximum |
|------------------------------------|----------------------|----------------------|
| Maximum measured                   | 100 mW forward power | 0.487 A/m            |

Uncertainty for H-field measurement: 8.2% (k=2)

| E-field 10 mm above dipole surface | condition            | Interpolated maximum |
|------------------------------------|----------------------|----------------------|
| Maximum measured above high end    | 100 mW forward power | 153.4 V/m            |
| Maximum measured above low end     | 100 mW forward power | 147.0 V/m            |
| Averaged maximum above arm         | 100 mW forward power | 150.2 V/m            |

Uncertainty for E-field measurement: 12.8% (k=2)

### 3. Appendix

#### 3.1 Antenna Parameters

| Frequency | Return Loss | Impedance            |
|-----------|-------------|----------------------|
| 1730 MHz  | 24.0 dB     | ( 49.3 + j6.2 ) Ohm  |
| 1880 MHz  | 19.3 dB     | ( 50.3 + j10.9 ) Ohm |
| 1900 MHz  | 19.9 dB     | ( 52.8 + j10.1 ) Ohm |
| 1950 MHz  | 26.8 dB     | ( 54.4 + j1.9 ) Ohm  |
| 2000 MHz  | 21.7 dB     | ( 42.6 + j1.9 ) Ohm  |

#### 3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.


Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

|                  |                       |                                                                                           |               |
|------------------|-----------------------|-------------------------------------------------------------------------------------------|---------------|
| Filename:        | Test Dates:           | ECI type:                                                                                 | Page 75 of 84 |
| 0Y1008021258.BEJ | 8/10/2010 - 8/12/2010 | Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |               |

### 3.3 Measurement Sheets

#### 3.3.1 Return Loss and Smith Chart

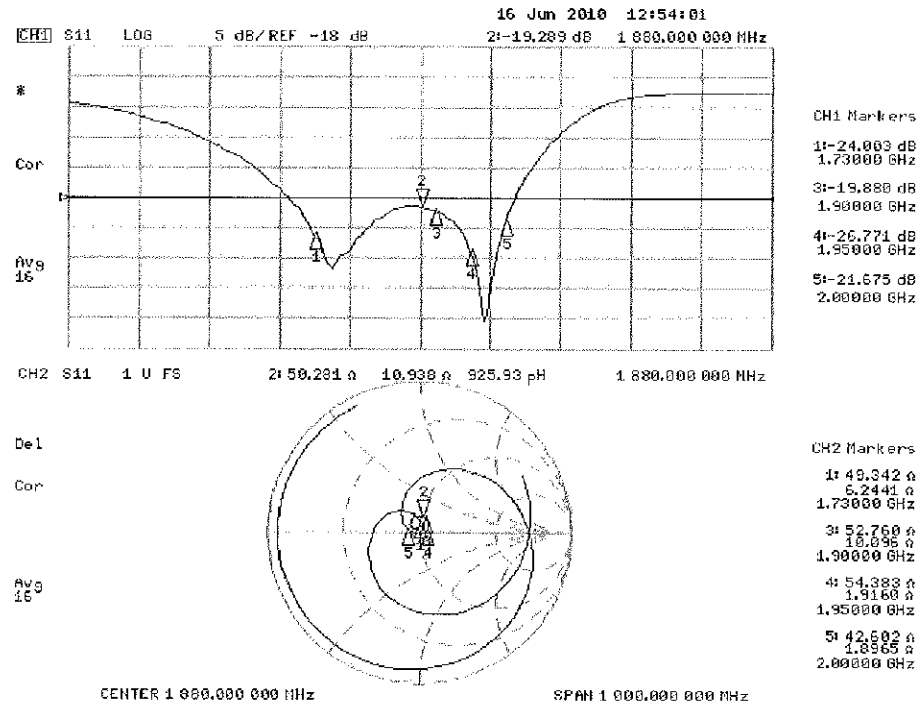

|                  |                       |                                                                                        |               |
|------------------|-----------------------|----------------------------------------------------------------------------------------|---------------|
| Filename:        | Test Dates:           | EDT type:                                                                              | Page 76 of 84 |
| 0Y1008021258.BEJ | 8/10/2010 - 8/12/2010 | Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and 1900 WCDMA/HSPA Phone with Bluetooth and WLAN |               |

### 3.3.2 DASY4 H-Field Result

Date/Time: 16.06.2010 09:57:31

Test Laboratory: SPEAG Lab2

**HAC RF CD1880\_H\_1064\_100616\_CL**

**DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1064**

Communication System: CW; Communication System Band: CD1880 (1730.0 MHz); Frequency: 1730 MHz;

Communication System PAR: 0 dB

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Phantom section: RF Section

Measurement Standard: DASY5 (IEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: H3DV6 - SN6065; ; Calibrated: 30.12.2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAB4 Sn781; Calibrated: 22.01.2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY5, V5.2 Build 162; SLMCAD X Version 14.0 Build 59

**Dipole H-Field measurement @ 1880MHz/11 Scan - measurement distance from the probe sensor center to CD1880**

**Dipole = 10mm @ 1730 MHz/Hearing Aid Compatibility Test (41x181x1):**

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.487 A/m

Probe Modulation Factor = 1


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.517 A/m; Power Drift = 0.00119 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak H-field in A/m

|                              |                              |                              |
|------------------------------|------------------------------|------------------------------|
| Grid 1<br><b>0.401</b><br>M2 | Grid 2<br><b>0.431</b><br>M2 | Grid 3<br><b>0.420</b><br>M2 |
| Grid 4<br><b>0.449</b><br>M2 | Grid 5<br><b>0.487</b><br>M2 | Grid 6<br><b>0.473</b><br>M2 |
| Grid 7<br><b>0.389</b><br>M2 | Grid 8<br><b>0.423</b><br>M2 | Grid 9<br><b>0.408</b><br>M2 |

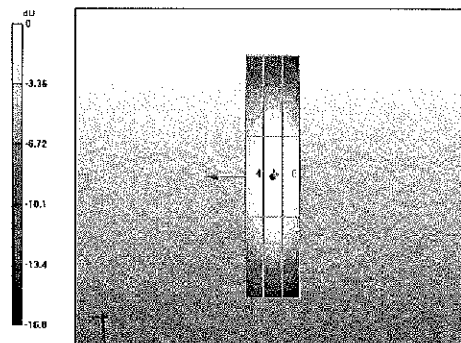

0 dB = 0.487A/m

### 3.3.3 DASY4 E-Field Result

Date/Time: 16.06.2010 09:34:20

Test Laboratory: SPEAG Lab2

#### HAC RF\_CD1880\_E\_1064\_100616\_CL

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1064

Communication System: CW; Communication System Band: CD1880 (1730.0 MHz); Frequency: 1730 MHz;

Communication System PAR: 0 dB

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ER3DV6 - SN2336; Conv1(1, 1, 1); Calibrated: 30.12.2009
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Su781; Calibrated: 22.01.2010
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

Dipole E-Field measurement @ 1880MHz/E Scan - measurement distance from the probe sensor center to CD1880

Dipole = 10mm @ 1730 MHz/Hearing Aid Compatibility Test (41x181x1);

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 153.4 V/m

Probe Modulation Factor = 1


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 172.7 V/m; Power Drift = -0.00464 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak E-field in V/m

|                              |                              |                              |
|------------------------------|------------------------------|------------------------------|
| Grid 1<br><b>142.4</b><br>M2 | Grid 2<br><b>147.0</b><br>M2 | Grid 3<br><b>143.1</b><br>M2 |
| Grid 4<br><b>99.9</b><br>M3  | Grid 5<br><b>102.1</b><br>M3 | Grid 6<br><b>97.8</b><br>M3  |
| Grid 7<br><b>147.7</b><br>M2 | Grid 8<br><b>153.4</b><br>M2 | Grid 9<br><b>147.6</b><br>M2 |

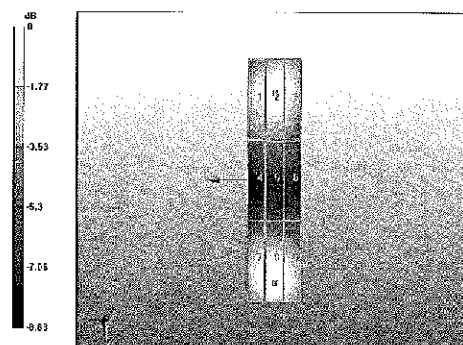

0 dB = 153.4V/m

Certificate No: CD1880V3-1064\_Jun10

Page 6 of 6

|                  |                       |                                                                                        |               |
|------------------|-----------------------|----------------------------------------------------------------------------------------|---------------|
|                  |                       |                                                                                        | :             |
|                  |                       |                                                                                        | ger           |
| Filename:        | Test Dates:           | EUT type:                                                                              | Page 78 of 84 |
| 0Y1008021258.BEJ | 8/10/2010 - 8/12/2010 | Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and 1900 WCDMA/HSPA Phone with Bluetooth and WLAN |               |

## 15. CONCLUSION

The measurements indicate that the wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

Please note that the M-rating for this equipment only represents the field interference possible against a hypothetical and typical hearing aid. The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.

|                                      |                                                                                                                                   |                                                                                                               |                                                                                                 |                                        |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                                                                       | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                                 | Page 79 of 84                          |

## 16. REFERENCES

1. ANSI/IEEE C63.19-2007, American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids.", New York, NY, IEEE, June 2007
2. FCC Public Notice DA 06-1215, *Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard*, June 6, 2006
3. Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
4. Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
5. Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices," IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
6. Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
7. Byrne, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
8. Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells," U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
9. Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
10. EHIMA GSM Project, Development phase, Project Report (1<sup>st</sup> part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
11. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.
12. EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
13. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
14. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.

|                                      |                                                                                                                                   |                                                                                                               |                                                                                                 |                                        |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  <b>LG</b> | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                                                                       | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                                 | Page 80 of 84                          |

15. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
16. Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
17. Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
18. Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Construction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
19. Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7<sup>th</sup> International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.
20. Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
21. Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
22. Ma, M. A., Sreenivashiah, I. , and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1040, July 1981.
23. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
24. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
25. Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
26. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
27. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

|                                      |                                                                                     |                                                                                                               |                                                                                       |                                        |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> BEJVS760              |  | <b>HAC (RF EMISSIONS) TEST REPORT</b>                                                                         |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Filename:</b><br>0Y1008021258.BEJ | <b>Test Dates:</b><br>8/10/2010 - 8/12/2010                                         | <b>EUT Type:</b><br>Cellular/PCS GSM/GPRS/EDGE/CDMA/EVDO and<br>1900 WCDMA/HSPA Phone with Bluetooth and WLAN |                                                                                       | Page 81 of 84                          |