

TEST REPORT

Applicant Name : Pwnage, LLC
Address : 9661 Irvine Center Drive,Irvine,CA 92618,USA
Report Number: RA230510-25326E-RF-00A
FCC ID: 2A65F-PSBR

Test Standard (s)

FCC PART 15.249

Sample Description

Product Type: High speed USB Receiver Pyramid
Model No.: PSBR
Trade Mark:



Date Received: 2023-05-04
Date of Test: 2023-05-15 to 2023-05-26
Report Date: 2023-05-26

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:



Dave Liang
EMC Engineer

Approved By:



Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503290 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
SUPPORT CABLE DESCRIPTIONS.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS.....	9
TEST EQUIPMENT LIST	10
FCC §1.1307 (B) & §2.1093 – RF EXPOSURE.....	11
FCC§15.203 - ANTENNA REQUIREMENT.....	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP.....	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	14
FACTOR & OVER LIMIT CALCULATION.....	14
TEST DATA	14
FCC§15.205, §15.209 & §15.249(D) - RADIATED EMISSIONS.....	17
APPLICABLE STANDARD	17
TEST EQUIPMENT SETUP	17
EUT SETUP	18
TEST PROCEDURE	19
CORRECTED AMPLITUDE & MARGIN CALCULATION	19
TEST RESULTS SUMMARY	19
TEST DATA	19
FCC§15.215(C) - 20DB EMISSION BANDWIDTH	25
APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST DATA	25

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230510-25326E-RF-00A	Original Report	2023-05-26

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	High speed USB Receiver Pyramid
Tested Model	PSBR
Frequency Range	SRD: 2402-2480MHz
Maximum E-Field Strength (Peak)	93.98dBuV/m@3m
Modulation Technique	GFSK
Antenna Specification*	Internal Antenna (It is provided by the applicant)
Voltage Range	DC 5V from USB port
Sample serial number	RA230510-25326E-RF-S1 (CE&RE Test) RA230510-25326E-RF-S2 (RF Conducted Test) (Assigned by ATC, Shenzhen)
Sample/EUT Status	Good condition

Objective

This type approval report is in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.249 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.71dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.74dB
Emissions, Radiated	30MHz - 1GHz	5.08dB
	1GHz - 18GHz	4.96dB
	18GHz - 26.5GHz	5.16dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 30241.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing by manufacturer.

Frequency list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
...	...	...	...
...	...	...	...
...	...	...	...
18	2438	38	2478
19	2440	39	2480

Channel 1, Channel 19 and Channel 39 were selected for testing.

EUT Exercise Software

Software “nRFgo Studio”* was used during testing and the power level was default *.

Special Accessories

No special accessory.

Equipment Modifications

No modifications were made to the unit tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
LENOVO	Notebook	ThinkPad X240	SL10F31638JS
Unknown	Adapter	ADLX65NDC3A	Unknown

Support Cable Descriptions


Cable Description	Length (m)	From/Port	To
Un-shielding Un-Detachable USB Cable	1.75	Notebook	EUT
Un-shielding Un-Detachable DC Cable	1.2	Notebook Adapter	Notebook

Block Diagram of Test Setup

For Conducted Emission:

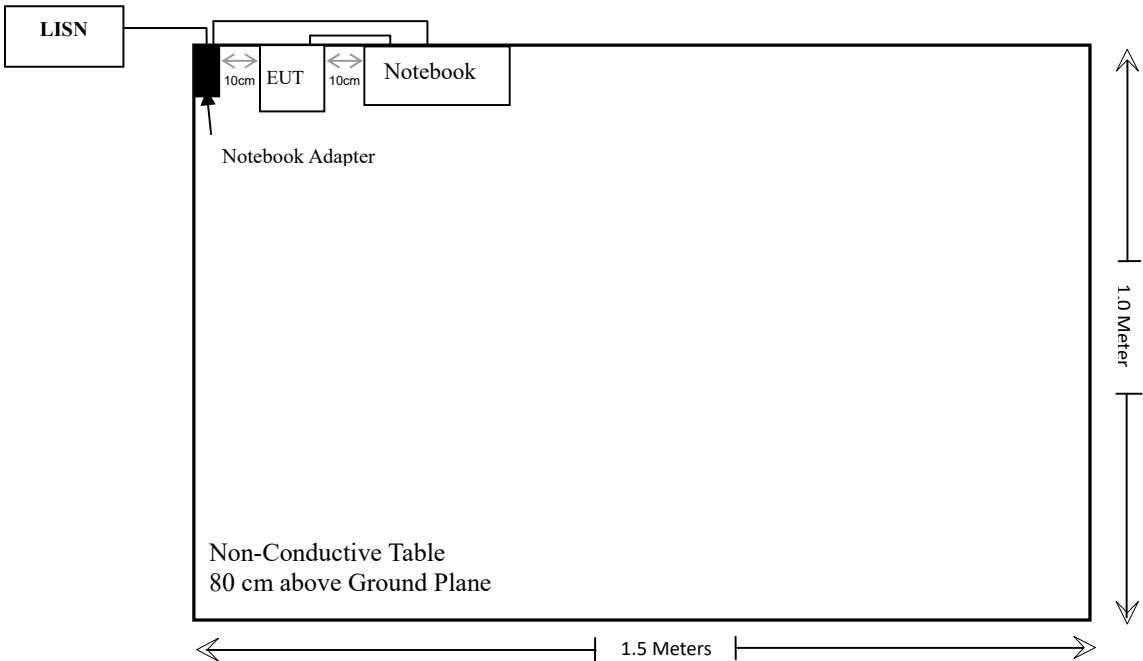

For Radiated Emission:

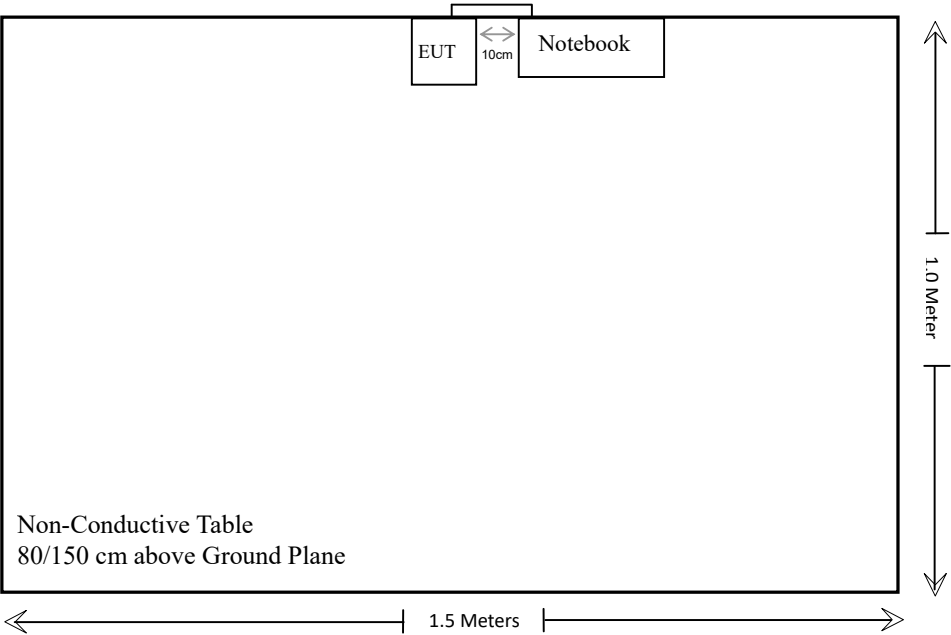

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §1.1307 (b) & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	Conduction Emissions	Compliant
15.205, §15.209, §15.249(d)	Radiated Emissions& Outside of Band Emission	Compliant
§15.215 (c)	20dB Bandwidth	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
R & S	L.I.S.N.	ENV216	101314	2022/11/25	2023/11/24
Anritsu Corp	50Ω Coaxial Switch	MP59B	6100237248	2022/12/07	2023/12/06
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Conducted Emission Test Software: e3 191218 (V9)					
Radiated Emissions Test					
Rohde & Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	837	2023/02/22	2026/02/21
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2022/12/26	2025/12/25
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24
Radiated Emission Test Software:e3 191218 (V9)					
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2022/11/25	2023/11/24
Rohde & Schwarz	Open Switch and ControlUnit	OSP120 + OSP-B157	101244 + 100866	2022/11/25	2023/11/24
WEINSCHTEL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.33	RF-03	Each time	

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307 (b) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.2 – 1-mW test Exemption:

Per § 1.1307(b)(3)(i)(A), a single RF source is exempt RF device (from the requirement to show data demonstrating compliance to RF exposure limits, as previously mentioned) if the available maximum time-averaged power is no more than 1 mW, regardless of separation distance.

This exemption applies to all operating configurations and exposure conditions, for the frequency range 100 kHz to 100 GHz, regardless of fixed, mobile, or portable device exposure conditions. This is a standalone exemption, and it cannot be applied in conjunction with any other test exemption.

Test Result:

For worst case:

Mode	Frequency	Maximum Power (EIRP)	Maximum Power (ERP)		1-mW test Exemption
	(MHz)	(dBm)	(dBm)	(mW)	
SRD	2402-2480	-1	-3.15	0.48	Yes

Note 1: $E(\text{dBuV/m}) = \text{EIRP}(\text{dBm}) - 95.2$ for distance 3m
so the $\text{EIRP} = 93.98 \text{ dBuV/m} - 95.2 = -1.22 \text{ dBm}$

Note 2: The tune-up EIRP is -1 dBm, which was declared by the applicant.

Note 3: $\text{ERP}(\text{dBm}) = \text{EIRP}(\text{dBm}) - 2.15 \text{ dB}$

Result: Compliant.

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

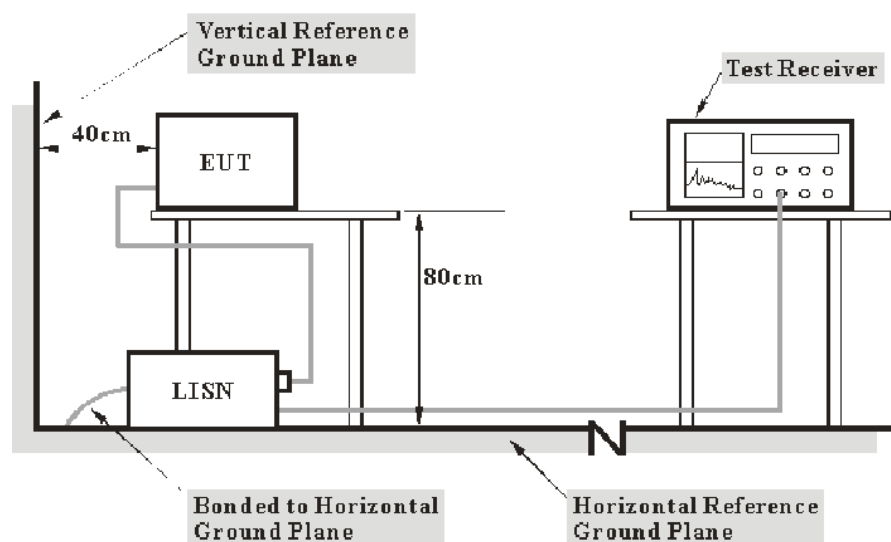

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Data

Environmental Conditions


Temperature:	23°C
Relative Humidity:	49 %
ATM Pressure:	101.0 kPa

The testing was performed by Jerry Wu on 2023-05-17.

EUT operation mode: Transmitting (worst case is low channel)

Test Result: Please refer the below plots.


AC 120V/60 Hz, Line

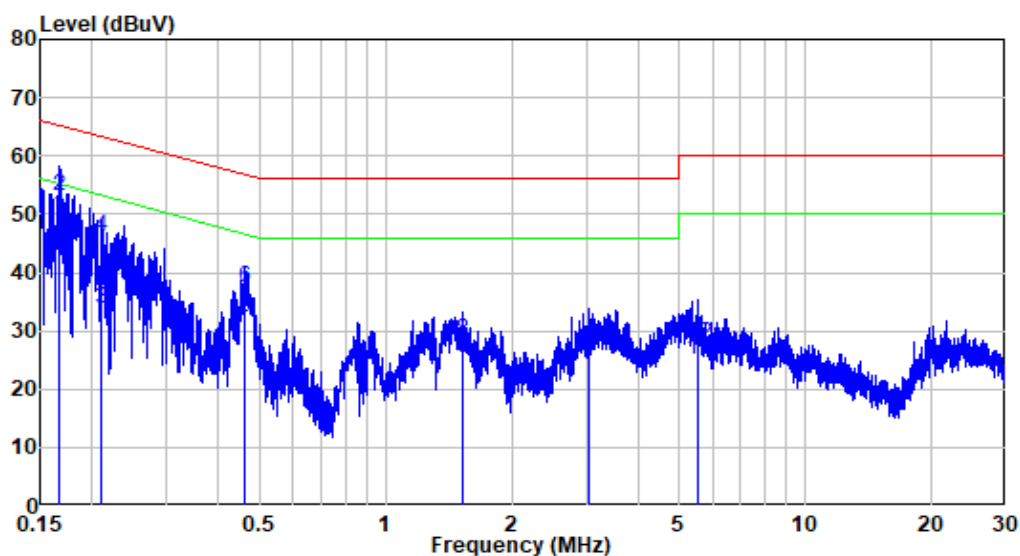

Site : Shielding Room
 Condition: Line
 Job No. : RA230510-25326E-RF
 Mode : Transmitting
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.167	10.34	39.38	49.72	55.09	-5.37	Average
2	0.167	10.34	42.72	53.06	65.09	-12.03	QP
3	0.211	10.30	23.42	33.72	53.18	-19.46	Average
4	0.211	10.30	35.80	46.10	63.18	-17.08	QP
5	0.462	10.54	21.88	32.42	46.65	-14.23	Average
6	0.462	10.54	26.85	37.39	56.65	-19.26	QP
7	1.520	10.42	14.81	25.23	46.00	-20.77	Average
8	1.520	10.42	18.02	28.44	56.00	-27.56	QP
9	3.062	10.49	14.90	25.39	46.00	-20.61	Average
10	3.062	10.49	16.56	27.05	56.00	-28.95	QP
11	5.542	10.57	14.62	25.19	50.00	-24.81	Average
12	5.542	10.57	17.28	27.85	60.00	-32.15	QP

AC 120V/60 Hz, Neutral

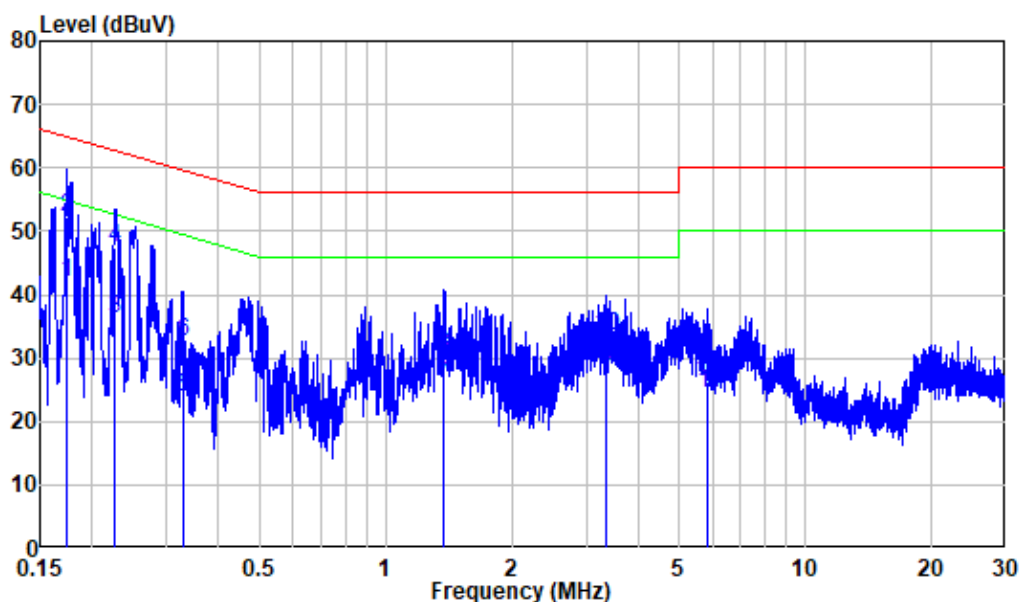

Site : Shielding Room
 Condition: Neutral
 Job No. : RA230510-25326E-RF
 Mode : Transmitting
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.174	10.28	31.82	42.10	54.78	-12.68	Average
2	0.174	10.28	41.98	52.26	64.78	-12.52	QP
3	0.227	10.30	25.86	36.16	52.56	-16.40	Average
4	0.227	10.30	37.19	47.49	62.56	-15.07	QP
5	0.328	10.37	13.58	23.95	49.50	-25.55	Average
6	0.328	10.37	22.14	32.51	59.50	-26.99	QP
7	1.379	10.42	15.98	26.40	46.00	-19.60	Average
8	1.379	10.42	20.16	30.58	56.00	-25.42	QP
9	3.364	10.53	17.82	28.35	46.00	-17.65	Average
10	3.364	10.53	23.12	33.65	56.00	-22.35	QP
11	5.867	10.51	13.94	24.45	50.00	-25.55	Average
12	5.867	10.51	15.68	26.19	60.00	-33.81	QP

FCC§15.205, §15.209 & §15.249(d) - RADIATED EMISSIONS**Applicable Standard**

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

As per FCC§15.249 (d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Test Equipment Setup

The spectrum analyzer or receiver is set as:

Below 1000MHz:

RBW = 100 kHz / VBW = 300 kHz / Sweep = Auto

Above 1000MHz:


Peak: RBW = 1MHz / VBW = 1MHz / Sweep = Auto

Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto


If the maximized peak measured value complies with the limit, then it is unnecessary to perform QP/Average measurement.

EUT Setup

Below 1GHz:

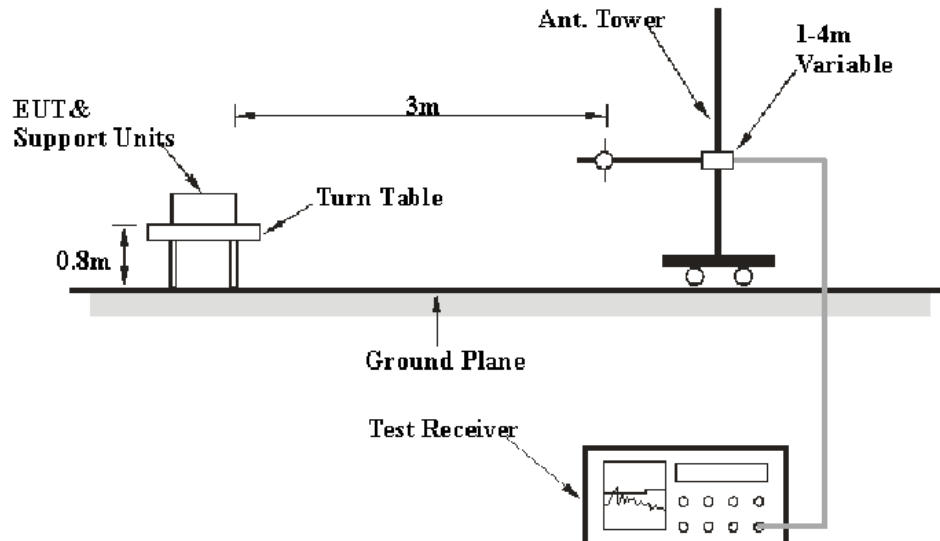

Above 1GHz:

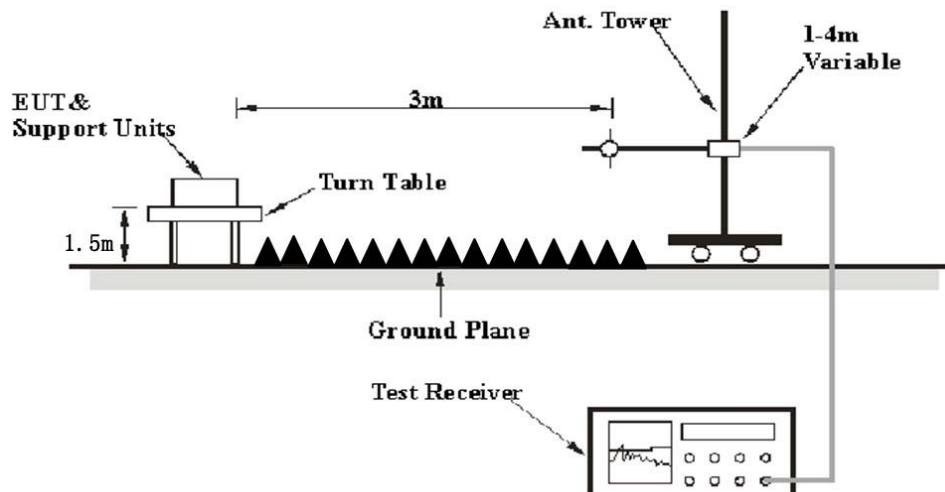

The radiated emission and out of band emission tests were performed in the 3meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 meter, and the EUT is placed on a turntable, which is 0.8 meter above ground plane for below 1GHz or 1.5 meter for above 1GHz, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

Corrected Amplitude & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Results Summary

According to the EUT complied with the FCC Part 15.205, 15.209 & §15.249

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	56 %
ATM Pressure:	101 kPa


The testing was performed by Jason Liu on 2023-05-15 for below 1G.

The testing was performed by Jimi Zheng on 2023-05-15 for above 1G.

Test Mode: Transmitting (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Below 1GHz: (worst case is low channel)


Horizontal

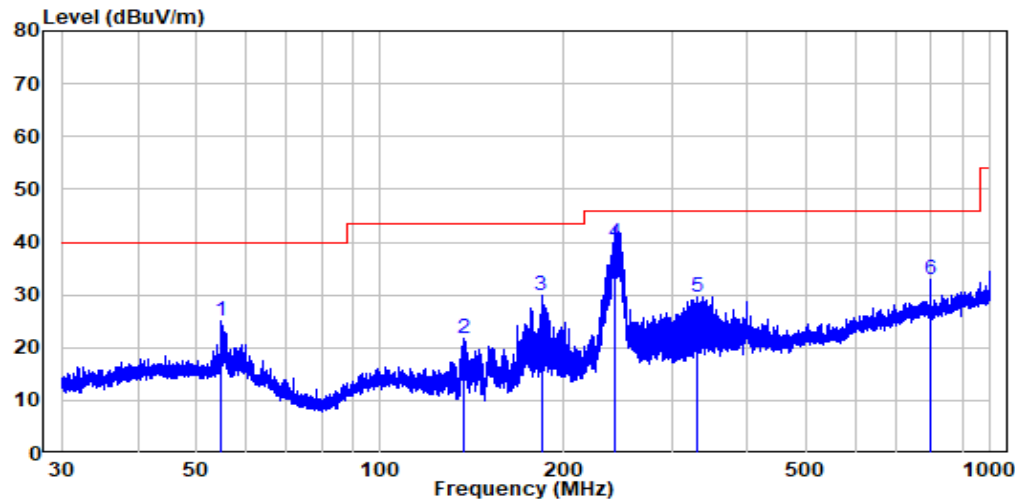

Site : chamber
Condition: 3m HORIZONTAL
Job No. : RA230510-25326E-RF
Test Mode: Transmitting

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	54.619	-10.31	35.25	24.94	40.00	-15.06	Peak
2	137.240	-15.25	36.85	21.60	43.50	-21.90	Peak
3	183.522	-12.35	42.23	29.88	43.50	-13.62	Peak
4	241.570	-10.81	50.60	39.79	46.00	-6.21	QP
5	331.210	-7.90	37.56	29.66	46.00	-16.34	Peak
6	796.881	-0.28	33.20	32.92	46.00	-13.08	Peak

Vertical

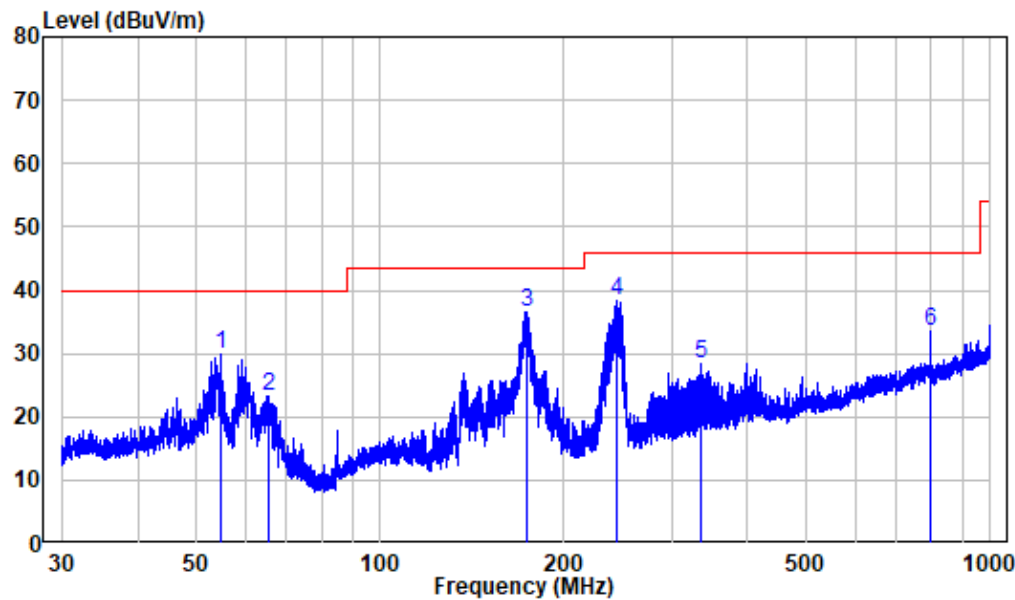

Site : chamber
Condition: 3m VERTICAL
Job No. : RA230510-25326E-RF
Test Mode: Transmitting

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	54.619	-10.31	40.12	29.81	40.00	-10.19	Peak
2	65.401	-12.66	36.04	23.38	40.00	-16.62	Peak
3	173.433	-13.24	49.79	36.55	43.50	-6.95	Peak
4	244.768	-10.59	48.92	38.33	46.00	-7.67	Peak
5	335.741	-7.59	36.06	28.47	46.00	-17.53	Peak
6	796.532	-0.28	33.90	33.62	46.00	-12.38	Peak

Above 1 GHz:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel									
2402	102.57	PK	359	1.8	H	-10.59	93.98	114	-20.02
2402	101.98	PK	149	1.9	V	-10.59	87.39	114	-26.61
2310	56.45	PK	126	1.2	H	-10.32	46.13	74	-27.87
2310	55.66	PK	315	1.9	V	-10.32	45.34	74	-28.66
2390	56.65	PK	298	1.7	H	-10.62	46.03	74	-27.97
2390	56.38	PK	13	1.4	V	-10.62	45.76	74	-28.24
2400	72.78	PK	298	1.7	H	-10.58	62.2	74	-11.8
2400	62.3	AV	13	1.4	H	-10.58	51.72	54	-2.28
2400	71.26	PK	126	1.2	V	-10.58	60.68	74	-13.32
2400	59	AV	315	1.9	V	-10.58	48.42	54	-5.58
4804	49.14	PK	149	1.9	H	-5.58	43.56	74	-30.44
4804	48.94	PK	266	2.0	V	-5.58	43.36	74	-30.64
Middle Channel									
2440	105.17	PK	329	1.2	H	-10.72	93.45	114	-20.55
2440	97.38	PK	76	1.7	V	-10.72	86.66	114	-27.34
4880	48.47	PK	220	1.9	H	-5.24	43.23	74	-30.77
4880	48	PK	152	1.8	V	-5.24	42.76	74	-31.24
High Channel									
2480	105.43	PK	136	1.5	H	-10.49	93.94	114	-20.06
2480	98.53	PK	199	1.9	V	-10.49	88.04	114	-25.96
2483.5	63.8	PK	154	1.3	H	-10.46	53.34	74	-20.66
2483.5	57.35	PK	3	1.5	V	-10.46	46.89	74	-27.11
2500	56.73	PK	154	1.3	H	-10.32	46.41	74	-27.59
2500	55.53	PK	3	1.5	V	-10.32	45.21	74	-28.79
4960	48.58	PK	199	1.9	H	-4.9	43.68	74	-30.32
4960	50.77	PK	344	1.7	V	-4.9	45.87	74	-28.13

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Absolute Level (Corrected Amplitude) = Factor + Reading

Margin = Absolute Level (Corrected Amplitude) – Limit


The other spurious emission which is in the noise floor level was not recorded.

For above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.


Pre-scan plots:

1-18GHz: (worst case is High channel)

Horizontal

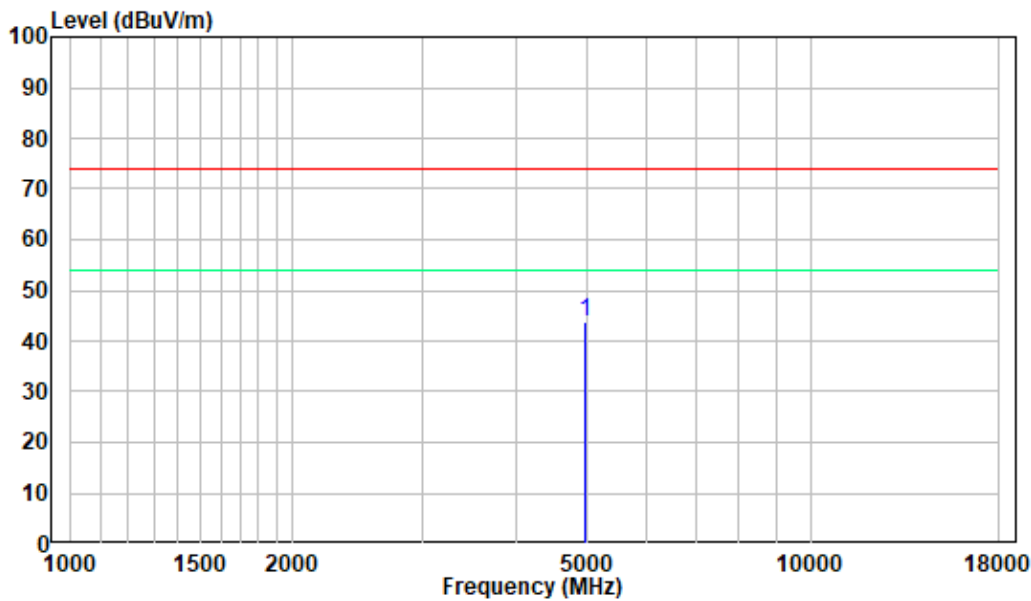


Vertical

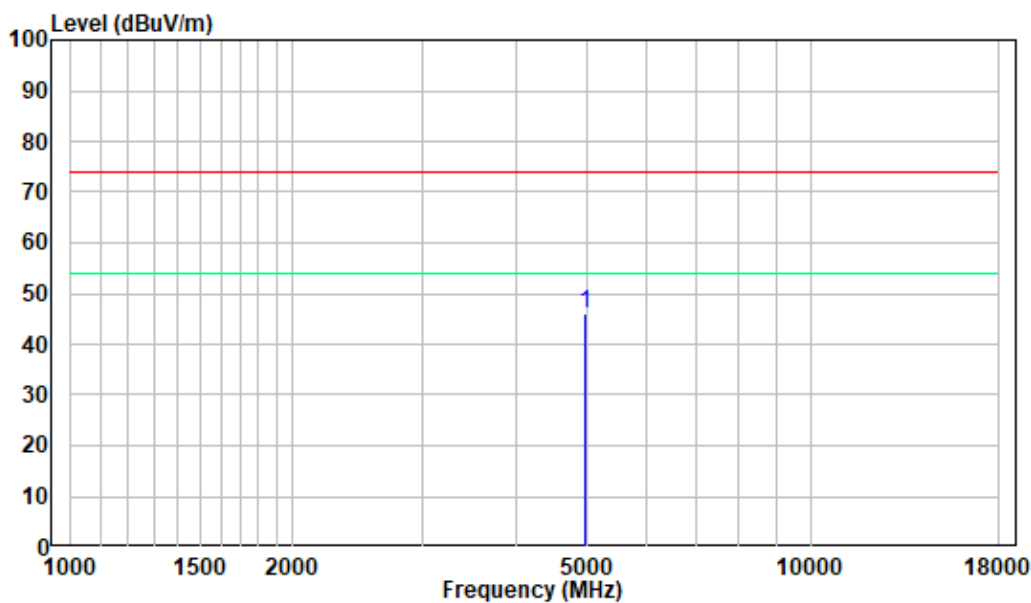


18-25GHz: (worst case is High channel)

Horizontal

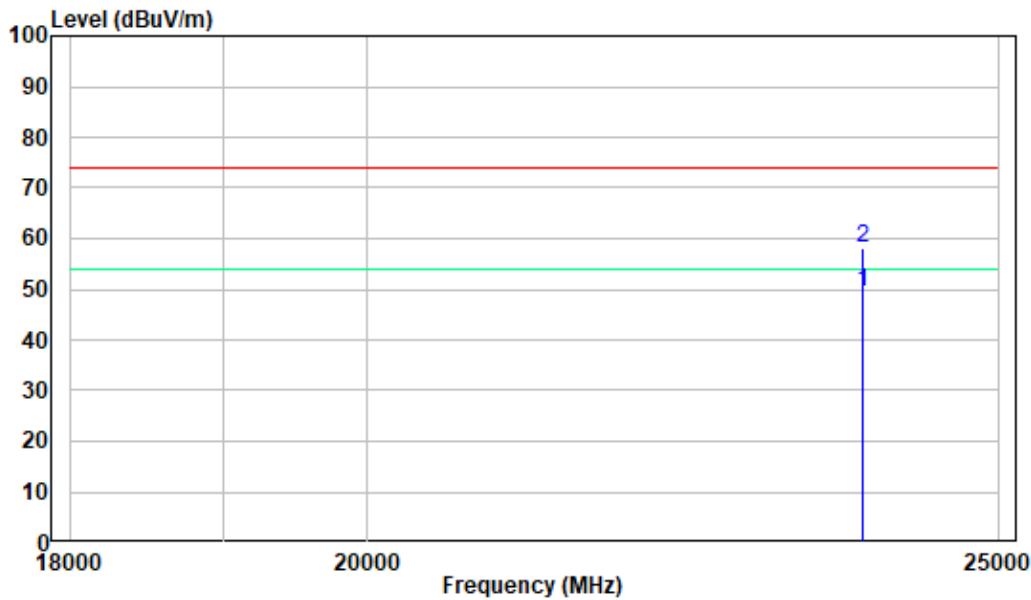

Vertical

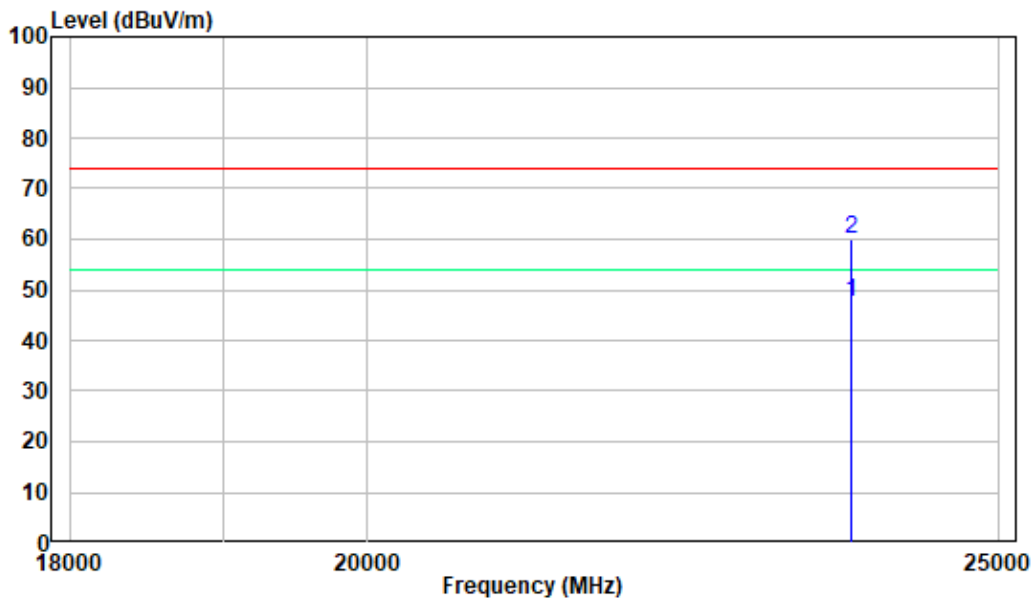

FCC§15.215(c) - 20dB EMISSION BANDWIDTH


Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

According to ANSI C63.10-2013, section 6.9.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that indicated 20dB bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	23°C
Relative Humidity:	51-53%
ATM Pressure:	101.0 kPa


The testing was performed by Matt Liang on 2023-05-24 and 2023-05-26.

Test Mode: Transmitting

Test Result: Please refer to the following table and plots.


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	1114.3
Middle	2440	1121.6
High	2480	1143.3

Low Channel

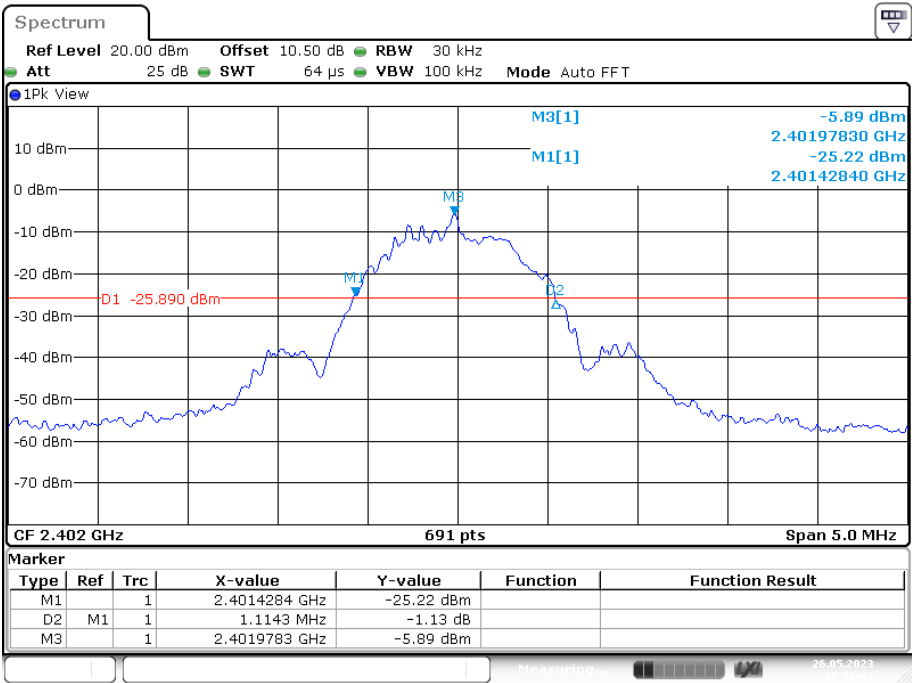


Date: 26.MAY.2023 15:51:41

Middle Channel

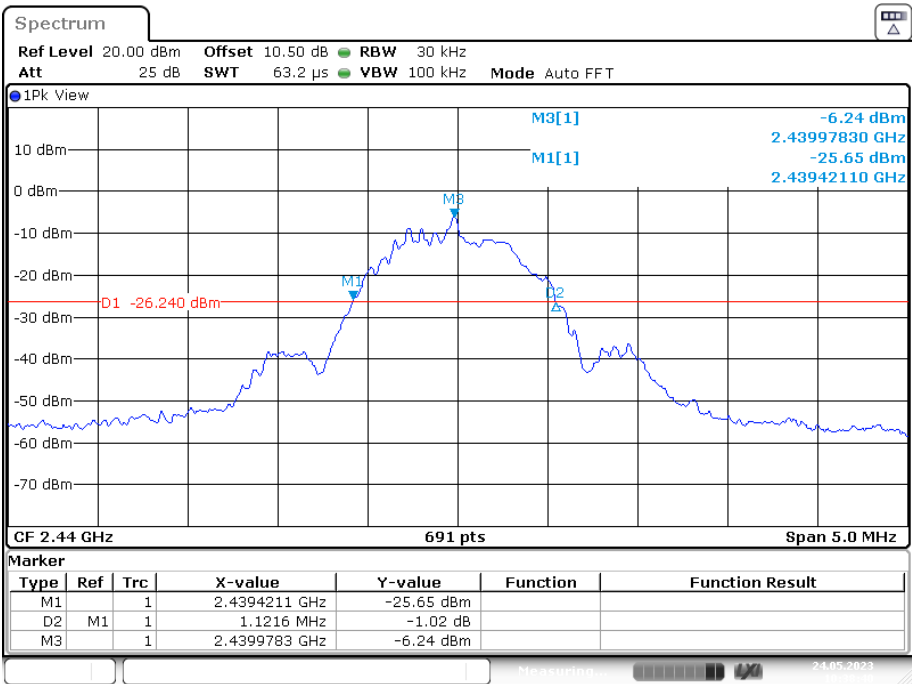

Date: 24.MAY.2023 10:38:40

High Channel

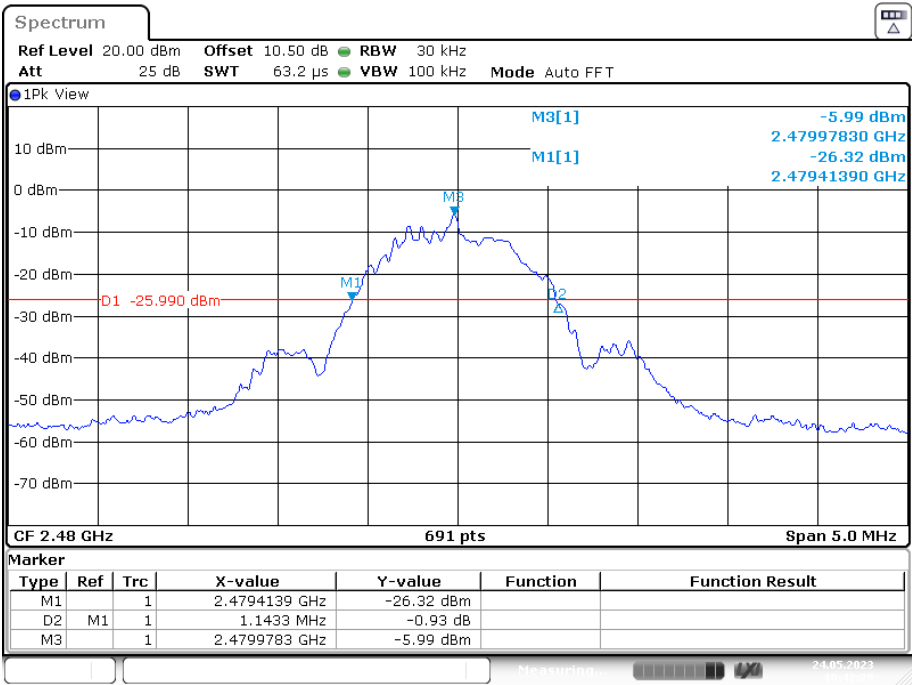

Date: 24.MAY.2023 10:42:30

***** END OF REPORT *****