




Antenna Specification

specifications



		specification
Working Frequency Range	工作频率范围	2400-2500 MHz
Gain	增益	(-2 dBi) Typical
VSWR	驻波比	≤ 3
Polarization	极化方式	Linear
Azimuth Beamwidth	方位波束宽度	Omni-directional
Impedance	阻抗	50 Ω
Operation Temperature	工作温度	(-40°C~+85°C)


天线型号: XLX58328-M25

ANT

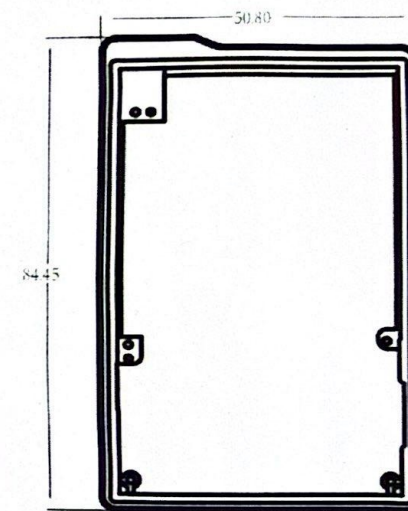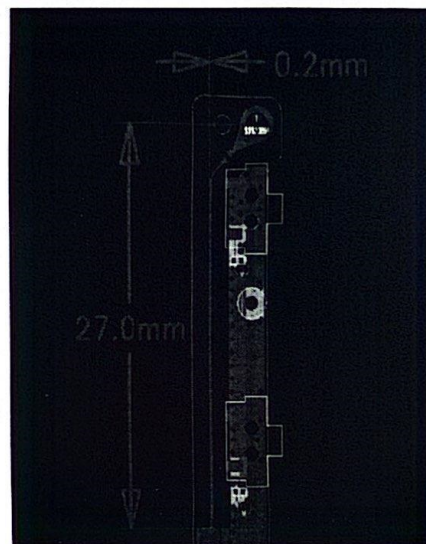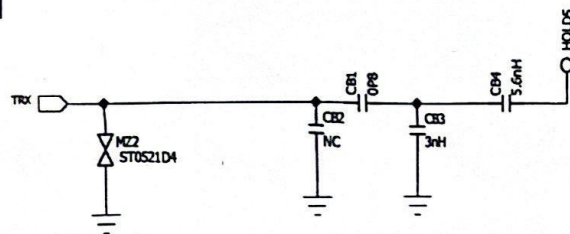


Passive Test For BT2.4			
Freq	Effi	Gain	Directivity
(MHz)	(%)	(dBi)	(dBi)
2400	27.38	-2.88	5.63
2450	32.67	-2	4.86
2500	32.96	-2.08	4.82

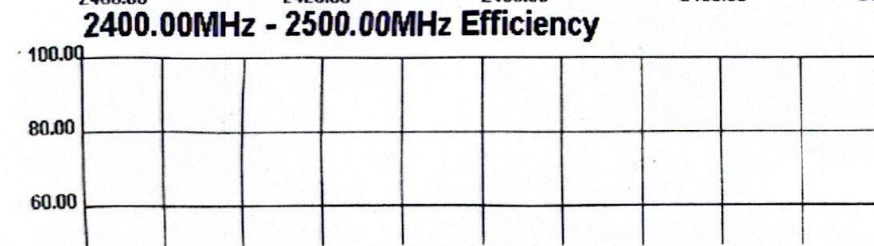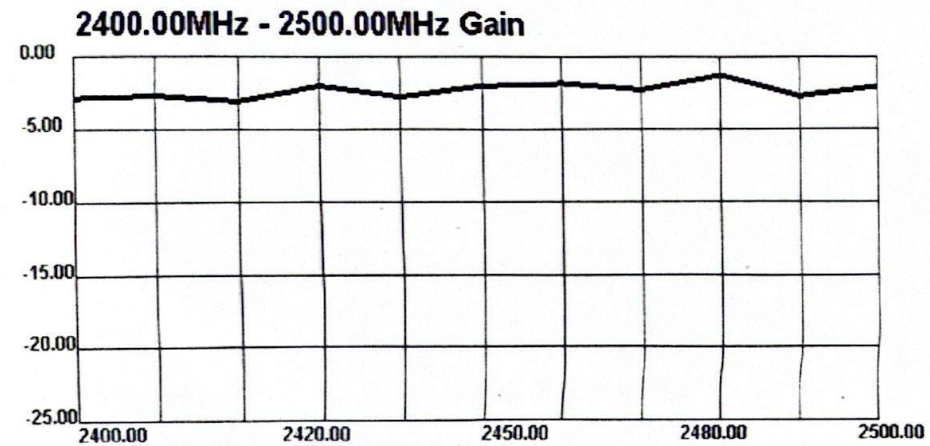


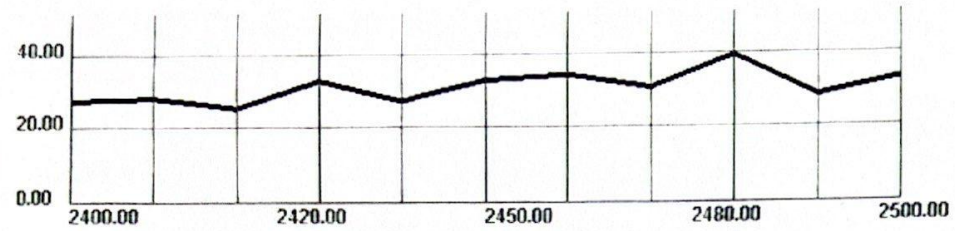


2400.000MHz




2400.000MHz H

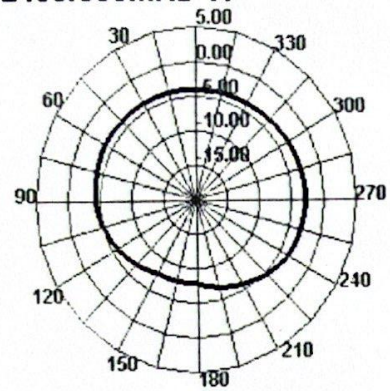

2400.000MHz E1


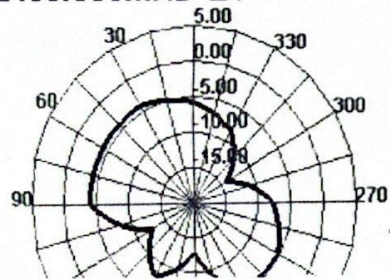


2400.000MHz E2

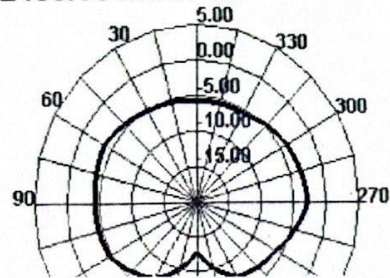





2450.000MHz

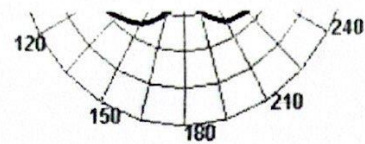


2450.000MHz H

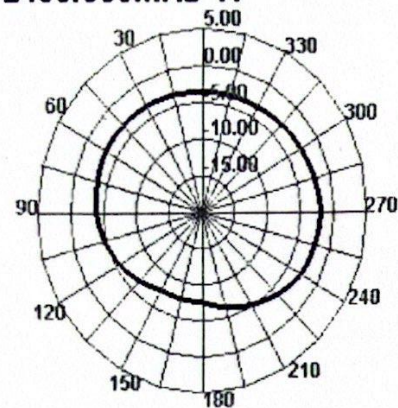

2450.000MHz E1

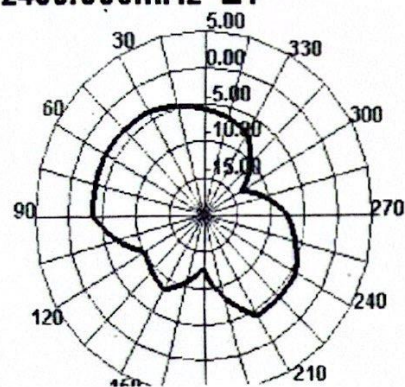

2450.000MHz E2

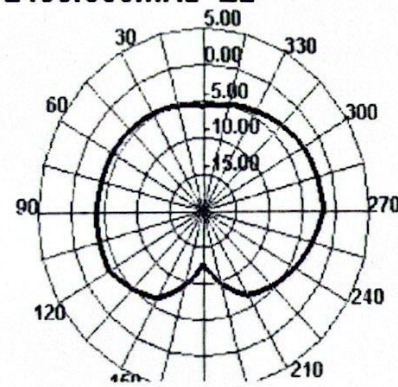


150 180 210

2500.000MHz




150 180 210


2500.000MHz H

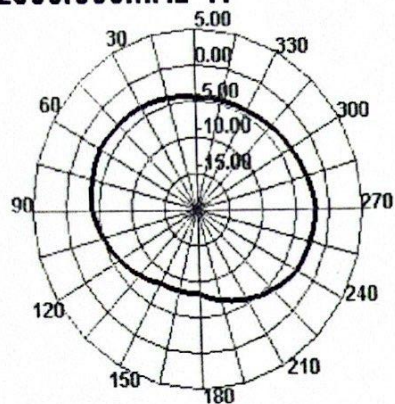

2500.000MHz E1

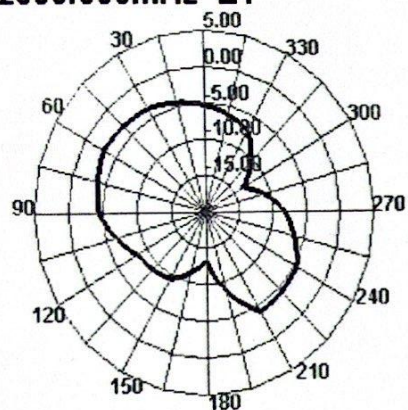

2500.000MHz E2

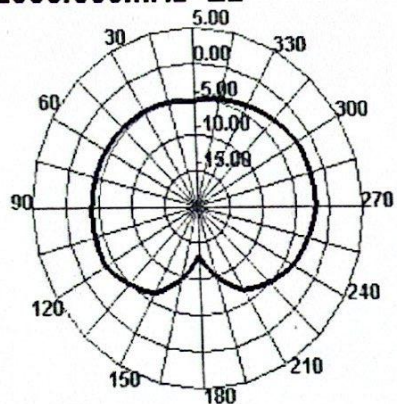

制造商: 深圳市智芯电子科技有限公司 Manufacturer: Shenzhen Zhixin Electronic Technology Co., Ltd.

地址: 深圳市宝安区沙井街道南环路446号星展广场A座6楼

Address: 6th Floor, Building A, Xingzhan Plaza, No. 446 South Ring Road, Shajing Street, Bao'an District, Shenzhen City

测试员: 邓士国