



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: OLLI Technology Corporation

Address: 96 Nguyen Thi Minh Khai Street, Vo Thi Sau Ward, District 3, Ho Chi Minh City, Vietnam

FCC ID: 2A67HMK100B

Product Name: OLLI MAIKA SPEAKER

Model Number: MK100B

Standard(s): 47 CFR Part 15, Subpart E(15.407)

ANSI C63.10-2013

KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

The above equipment has been tested and found compliance with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR22020089-00B

Date Of Issue: 2022-05-26

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China

Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 DESCRIPTION OF TEST CONFIGURATION.....	8
1.2.2 Support Equipment List and Details	9
1.2.3 Support Cable List and Details	10
1.2.4 Block Diagram of Test Setup.....	10
1.3 MEASUREMENT UNCERTAINTY	11
2. SUMMARY OF TEST RESULTS	12
3. REQUIREMENTS AND TEST PROCEDURES	13
3.1 AC LINE CONDUCTED EMISSIONS.....	13
3.1.1 Applicable Standard.....	13
3.1.2 EUT Setup.....	14
3.1.3 EMI Test Receiver Setup	14
3.1.4 Test Procedure	15
3.1.5 Corrected Amplitude & Margin Calculation.....	15
3.2 RADIATION SPURIOUS EMISSIONS.....	16
3.2.1 Applicable Standard.....	16
3.2.2 EUT Setup.....	17
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	18
3.2.4 Test Procedure	18
3.2.5 Corrected Amplitude & Margin Calculation.....	19
3.3 EMISSION BANDWIDTH:	20
3.3.1 Applicable Standard.....	20
3.3.2 EUT Setup.....	20
3.3.3 Test Procedure	20
3.4 MAXIMUM CONDUCTED OUTPUT POWER:.....	22
3.4.1 Applicable Standard.....	22
3.4.2 EUT Setup.....	22
3.4.3 Test Procedure	22
3.5 MAXIMUM POWER SPECTRAL DENSITY:	23
3.5.1 Applicable Standard.....	23
3.5.2 EUT Setup.....	23
3.5.3 Test Procedure	23
3.7 DUTY CYCLE:.....	24
3.7.1 EUT Setup.....	24
3.7.2 Test Procedure	24
3.8 ANTENNA REQUIREMENT.....	25
3.8.1 Applicable Standard.....	25
3.8.2 Judgment.....	25

4. Test DATA AND RESULTS	26
4.1 AC LINE CONDUCTED EMISSIONS.....	26
4.2 RADIATION SPURIOUS EMISSIONS.....	29
4.3 EMISSION BANDWIDTH:	53
4.4 MAXIMUM CONDUCTED OUTPUT POWER:	84
4.5 MAXIMUM POWER SPECTRAL DENSITY:	87
4.6 DUTY CYCLE:.....	119
5. RF EXPOSURE EVALUATION	121
5.1 MAXIMUM PERMISSIBLE EXPOSURE (MPE)	121
5.1.1 APPLICABLE STANDARD.....	121
5.1.2 PROCEDURE.....	121
5.1.3 CALCULATED RESULT	121

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

1.1.1 General:

EUT Name:	OLLI MAIKA SPEAKER
Test Model:	MK100B
Operation Frequency:	5180-5240 MHz (802.11a/n ht20/ac vht20) 5190-5230 MHz(802.11n ht40/ac vht40) 5210 MHz(802.11ac vht80) 5260-5320 MHz (802.11a/n ht20/ac vht20) 5270-5310 MHz(802.11n ht40/ac vht40) 5290 MHz(802.11ac vht80) 5500-5720 MHz (802.11a/n ht20/ac vht20) 5510-5710 MHz(802.11n ht40/ac vht40) 5530-5690 MHz(802.11ac vht80) 5745-5825 MHz (802.11a/n ht20/ac vht20) 5755-5795 MHz(802.11n ht40/ac vht40) 5775 MHz(802.11ac vht80)
Maximum Average Output Power (Conducted):	15.52dBm (5150-5250 MHz) 15.59 dBm (5250-5350 MHz) 15.85 dBm (5470-5725 MHz) 15.77 dBm (5725-5850 MHz)
Modulation Type:	802.11a/n:OFDM-BPSK, QPSK, 16QAM, 64QAM
Rated Input Voltage:	DC 12V
Serial Number:	CR22020089-RF-S1
EUT Received Date:	2022.3.1
EUT Received Status:	Good

1.1.2 Operation Frequency Detail:

For 802.11a/n ht20/ac vht20:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
40	5200	56	5280	104	5520	153	5765
44	5220	60	5300	108	5540	157	5785
48	5240	64	5320	112	5560	161	5805
/	/	/	/	116	5580	165	5825
/	/	/	/	120	5600	/	/
/	/	/	/	124	5620	/	/
/	/	/	/	128	5640	/	/
/	/	/	/	132	5660	/	/
/	/	/	/	136	5680	/	/
/	/	/	/	140	5700	/	/
/	/	/	/	144	5720	/	/

Per section 15.31(m), the below channels were performed the test as below:

Test Channel	Test Frequency (MHz)			
	5150-5250MHz Band	5250-5350 MHz Band	5470-5725 MHz Band	5725-5850MHz Band
Lowest	5180	5260	5500	5745
Middle	5200	5280	5580	5785
Highest	5240	5320	5700	5825
Additional	/	/	5720	/

For 802.11n ht40/ac vht40:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
46	5230	62	5310	110	5550	159	5795
/	/	/	/	118	5590	/	/
/	/	/	/	126	5630	/	/
/	/	/	/	134	5670	/	/
/	/	/	/	142	5710	/	/

Per section 15.31(m), the below channels were performed the test as below:

Test Channel	Test Frequency (MHz)			
	5150-5250MHz Band	5250-5350 MHz Band	5470-5725 MHz Band	5725-5850MHz Band
Lowest	5190	5270	5510	5755
Middle	/	/	5550	/
Highest	5230	5310	5670	5795
Additional	/	/	5710	/

For 802.11ac vht80:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
/	/	/	/	122	5610	/	/
/	/	/	/	138	5690	/	/

Per section 15.31(m), the below channels were performed the test as below:

Test Channel	Test Frequency (MHz)			
	5150-5250MHz Band	5250-5350 MHz Band	5470-5725 MHz Band	5725-5850MHz Band
Lowest	/	/	5530	/
Middle	5210	5290	5610	5775
Highest	/	/	/	/
Additional	/	/	5690	/

Note: Addition channels cross the band 5470-5725MHz and 5725-5850 MHz, Conducted output power/ Power Spectral Density/bandwidth test with the addition channel to compliance with stricter limit of their two bands(5470-5725MHz more stricter).

1.1.3 Antenna Information Detail▲:

Antenna Chain	Manufacturer	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range	§15.203 Requirement
0	MOLEX	FPC	50	3.6dBi/ 2.4~2.5GHz 3.6dBi/ 5.15~5.85GHz	Compliant
1		FPC	50	3.6dBi/ 2.4~2.5GHz 3.6dBi/ 5.15~5.85GHz	Compliant

The Method of §15.203 Compliant:

- ☒ Antenna must be permanently attached to the unit.
☐ Antenna must use a unique type of connector to attach to the EUT.
☐ Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

1.1.4 Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter	VIETNAM HONOR HIGH TECH COMPANY LIMITED	ADS-26FSG-12 12024EPCU	Input: 100-240V~50/60Hz 0.7A Output: 12.0V 2.0A 24.0W

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:			The system was configured for testing in Engineering Mode, which was provided by the manufacturer.		
Equipment Modifications:			No		
EUT Exercise Software:			QATool_Dbg		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲ :					
5150-5250 MHz Band:					
Test Modes	Test Channels	Test Frequency	Data rate	Power Level Setting	
				Chain 0	Chain 1
802.11a	Lowest	5180	6Mbps	1C	19
	Middle	5200	6Mbps	1A	1A
	Highest	5240	6Mbps	1C	1C
802.11n ht20	Lowest	5180	MCS0	17	19
	Middle	5200	MCS0	17	19
	Highest	5240	MCS0	19	19
802.11n ht40	Lowest	5190	MCS0	13	13
	Highest	5230	MCS0	13	13
802.11ac vht80	Middle	5210	MCS0	19	19
5250-5350 MHz Band:					
Test Modes	Test Channels	Test Frequency	Data rate	Power Level Setting	
				Chain 0	Chain 1
802.11a	Lowest	5260	6Mbps	1F	1F
	Middle	5280	6Mbps	1F	1F
	Highest	5320	6Mbps	18	18
802.11n ht20	Lowest	5260	MCS0	1B	1B
	Middle	5280	MCS0	1B	1B
	Highest	5320	MCS0	18	18
802.11n ht40	Lowest	5270	MCS0	17	17
	Highest	5310	MCS0	17	17
802.11ac vht80	Middle	5290	MCS0	19	19

5470-5725 MHz Band:

Test Modes	Test Channels	Test Frequency	Data rate	Power Level Setting	
				Chain 0	Chain 1
802.11a	Lowest	5500	6Mbps	22	21
	Middle	5580	6Mbps	22	22
	Highest	5700	6Mbps	1B	16
	Ccross	5720	6Mbps	25	24
802.11n ht20	Lowest	5500	MCS0	1B	1B
	Middle	5580	MCS0	1B	1B
	Highest	5700	MCS0	18	18
	Ccross	5720	MCS0	20	1C
802.11n ht40	Lowest	5510	MCS0	16	16
	Middle	5550	MCS0	16	16
	Highest	5670	MCS0	16	16
	Ccross	5710	MCS0	20	1E
802.11ac vht80	Lowest	5530	MCS0	1E	1E
	Highest	5610	MCS0	24	24
	Ccross	5690	MCS0	1E	1E

5725-5850 MHz Band:

Test Modes	Test Channels	Test Frequency	Data rate	Power Level Setting	
				Chain 0	Chain 1
802.11a	Lowest	5745	6Mbps	1D	1D
	Middle	5785	6Mbps	23	23
	Highest	5825	6Mbps	23	23
802.11n ht20	Lowest	5745	MCS0	1F	1E
	Middle	5785	MCS0	1D	1D
	Highest	5825	MCS0	1D	1D
802.11n ht40	Lowest	5755	MCS0	1F	1E
	Highest	5795	MCS0	1E	1D
802.11ac vht80	Middle	5775	MCS0	21	21

The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.

The device supports SISO in all modes, and MIMO 2T2R in 802.11n/ac modes, per pretest, 2T2R mode was the worst mode and reported for 802.11n/ac modes.

The system support 802.11a/n ht20/n ht40/ac vht20/ac vht40/ac vht80, the vht20/vht40 were reduced since the identical parameters with 802.11n ht20 and ht40.

1.2.2 Support Equipment List and Details

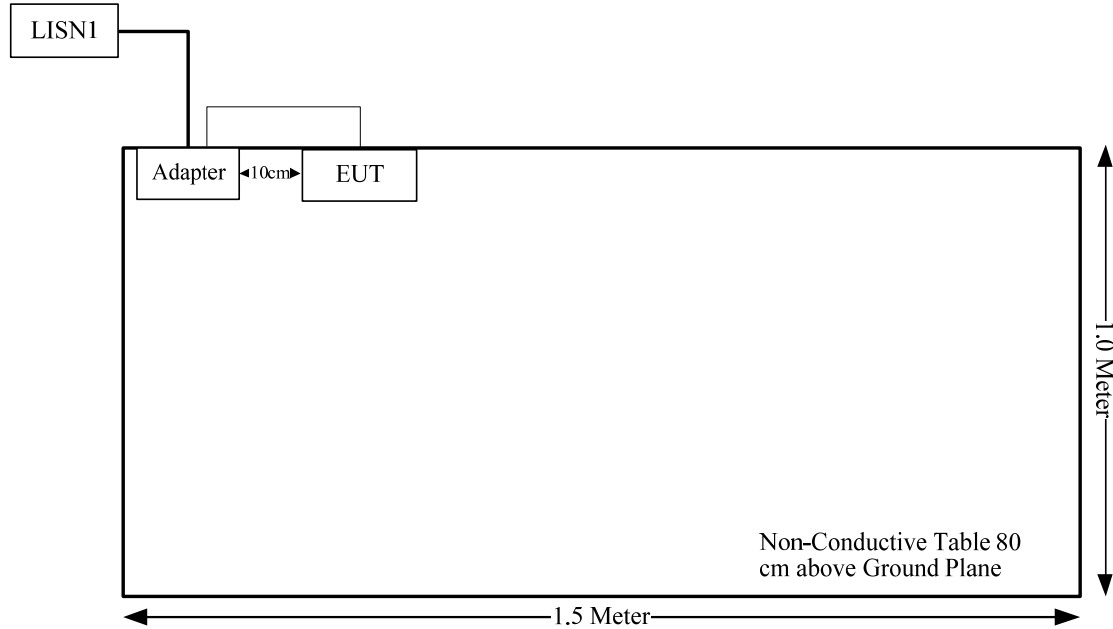
Manufacturer	Description	Model	Serial Number
/	/	/	/

1.2.3 Support Cable List and Details

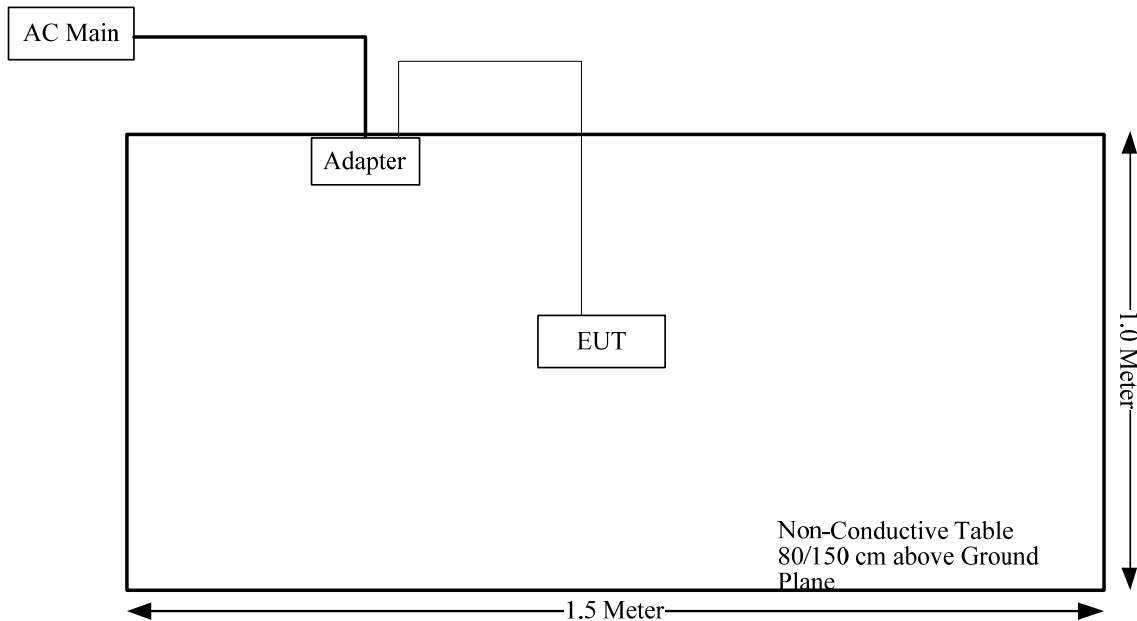
Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
DC Cable	No	No	1.2	Adapter	EUT

1.2.4 Block Diagram of Test Setup

AC line conducted emissions:



Spurious Emissions:



1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
FCC§15.207(a)	AC line conducted emissions	Compliant
FCC§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliant
FCC§15.407(h) (e)	Emission Bandwidth	Compliant
FCC§15.407(a)	Conducted Transmitter Output Power	Compliant
FCC§15.407 (a)	Power Spectral Density	Compliant
FCC§15.203	Antenna Requirement	Compliant
FCC §15.407 (f) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliant with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

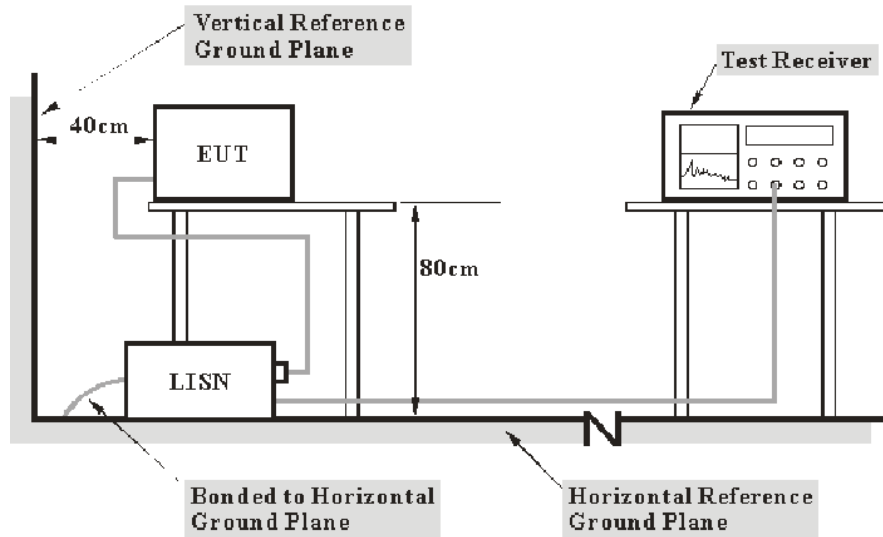
(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup



Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions

3.2.1 Applicable Standard

FCC §15.407 (b);

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(4) For transmitters operating solely in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of - 27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.

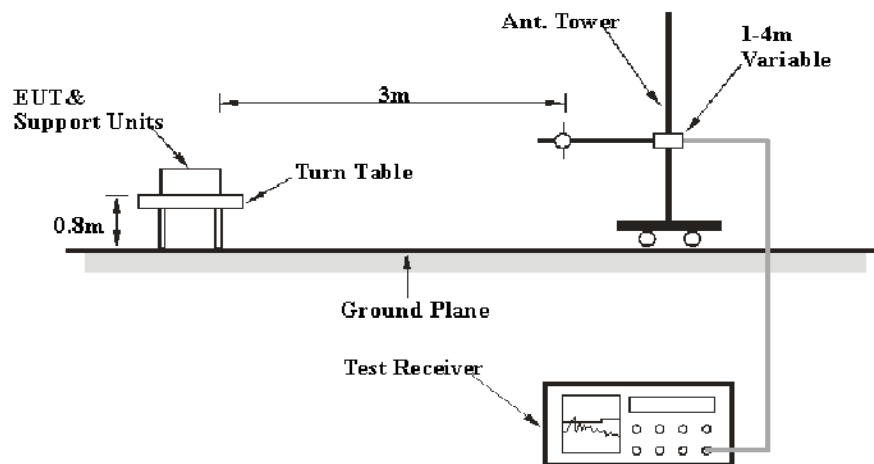
(10) The provisions of § 15.205 apply to intentional radiators operating under this section.

(11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

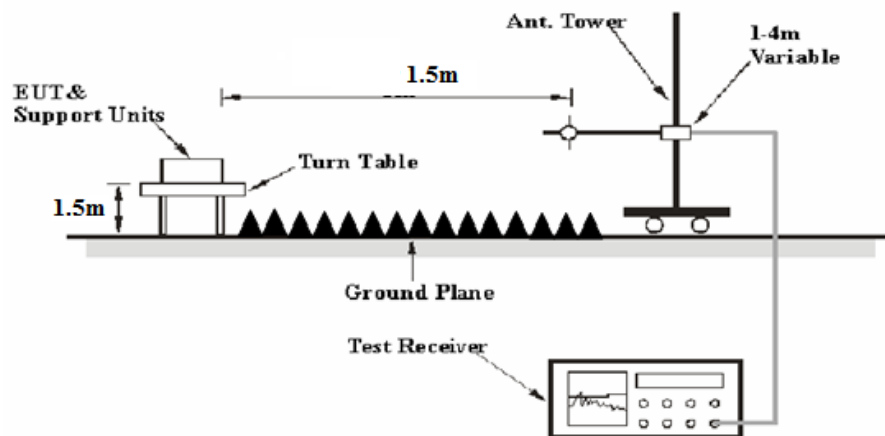
(c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

3.2.2 EUT Setup

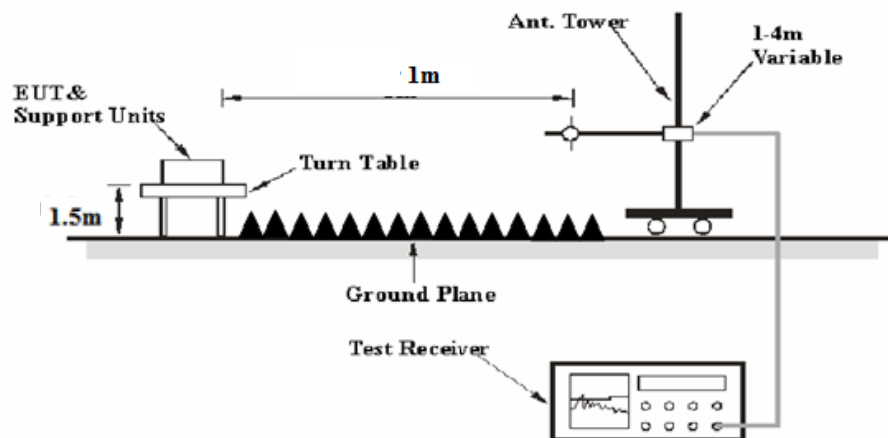
Below 1GHz:



1-26.5 GHz:



26.5-40 GHz:



The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m or 1m

Distance extrapolation Factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$ dB= 6.02 dB
or

Distance extrapolation Factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1m])$ dB= 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

For 30MHz-1GHz:

$$\text{Result} = \text{Reading} + \text{Factor}$$

For 1GHz-40GHz

$$\text{Result} = \text{Reading} + \text{Factor} - \text{Distance extrapolation Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Result}$$

3.3 Emission Bandwidth:

3.3.1 Applicable Standard

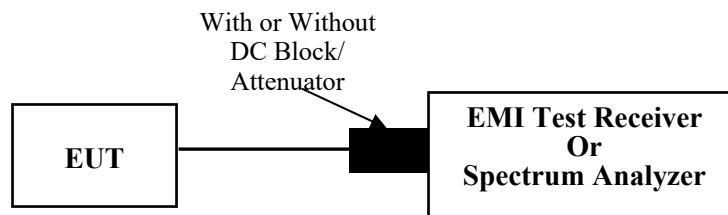
FCC §15.407 (h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.3.2 EUT Setup



3.3.3 Test Procedure

26dB Emission Bandwidth:

According to ANSI C63.10-2013 Section 12.4.1

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99% Occupied Bandwidth:

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

6 dB emission bandwidth:

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) ≥ 3 RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

3.4 Maximum conducted output power:

3.4.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

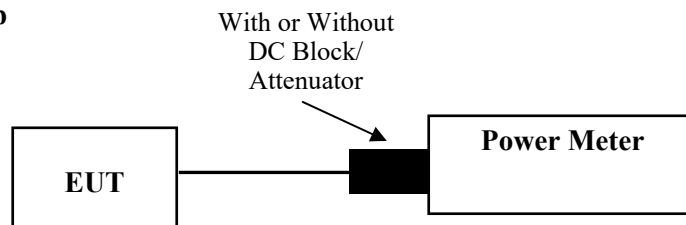
FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.4.2 EUT Setup



3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 11.9.1.3

Method PM-G is measurement using a gated RF average power meter.

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.5 Maximum power spectral density:

3.5.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

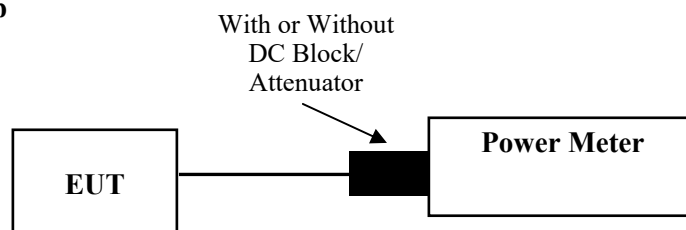
FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.5.2 EUT Setup



3.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Method SA-3 (power averaging (rms) detection with max hold):

- (i) Set span to encompass the entire EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set sweep trigger to “free run.”
- (iii) Set RBW = 1 MHz.
- (iv) Set VBW $\geq$ 3 MHz
- (v) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so

that narrowband signals are not lost between frequency bins.)

(vi) Sweep time $\leq$ (number of points in sweep) $\times T$, where T is defined in II.B.1.a).

Note: If this results in a sweep time less than the auto sweep time of the analyzer, Method SA-3

Alternative shall not be used. (The purpose of this step is to ensure that averaging time in each bin is less than or equal to the minimum time of a transmission.)

(vii) Detector = power averaging (rms).

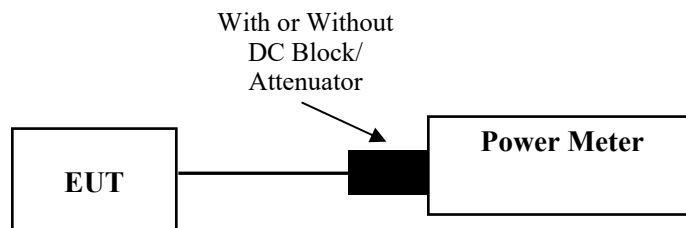
(viii) Trace mode = max hold.

(ix) Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

For devices operating in the band 5.725–5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used.

3.7 Duty Cycle:

3.7.1 EUT Setup



3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

3.8 Antenna Requirement

3.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.8.2 Judgment

Please refer to the Antenna Information detail in Section 1.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	CR22020089-RF-S1	Test Date:	2022-03-31
Test Site:	CE	Test Mode:	Transmitting (802.11a Chain 0 5785MHz was the worst)
Tester:	Nick Tang	Test Result:	Pass

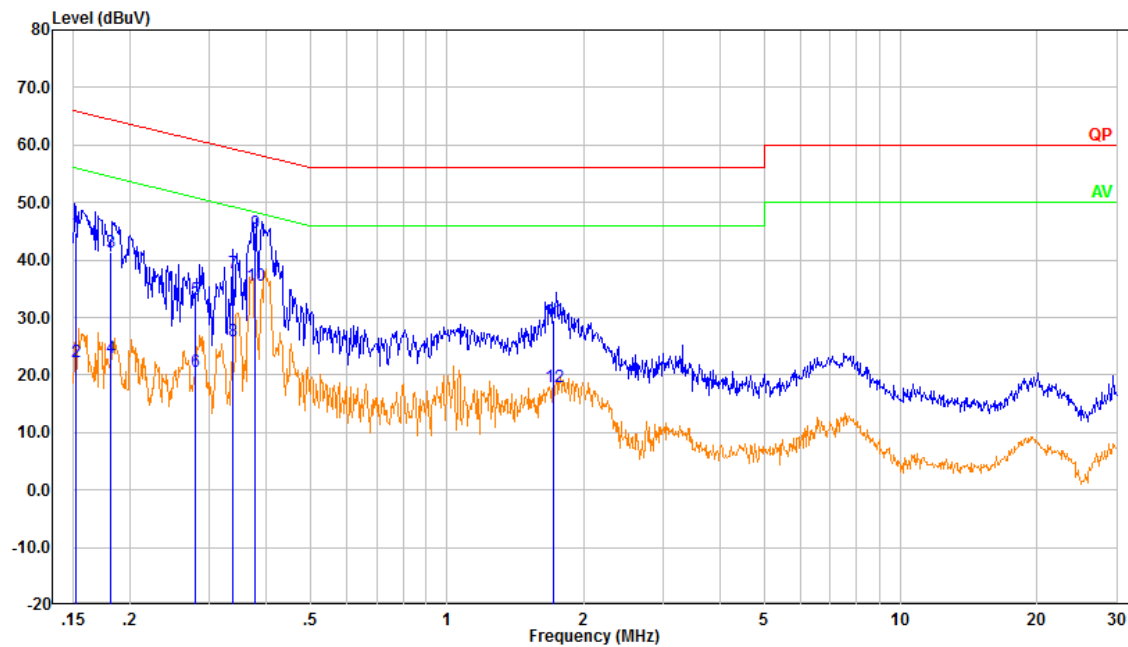
Environmental Conditions:

Temperature: (°C)	23.1	Relative Humidity: (%)	74	ATM Pressure: (kPa)	101.0
----------------------	------	------------------------------	----	------------------------	-------

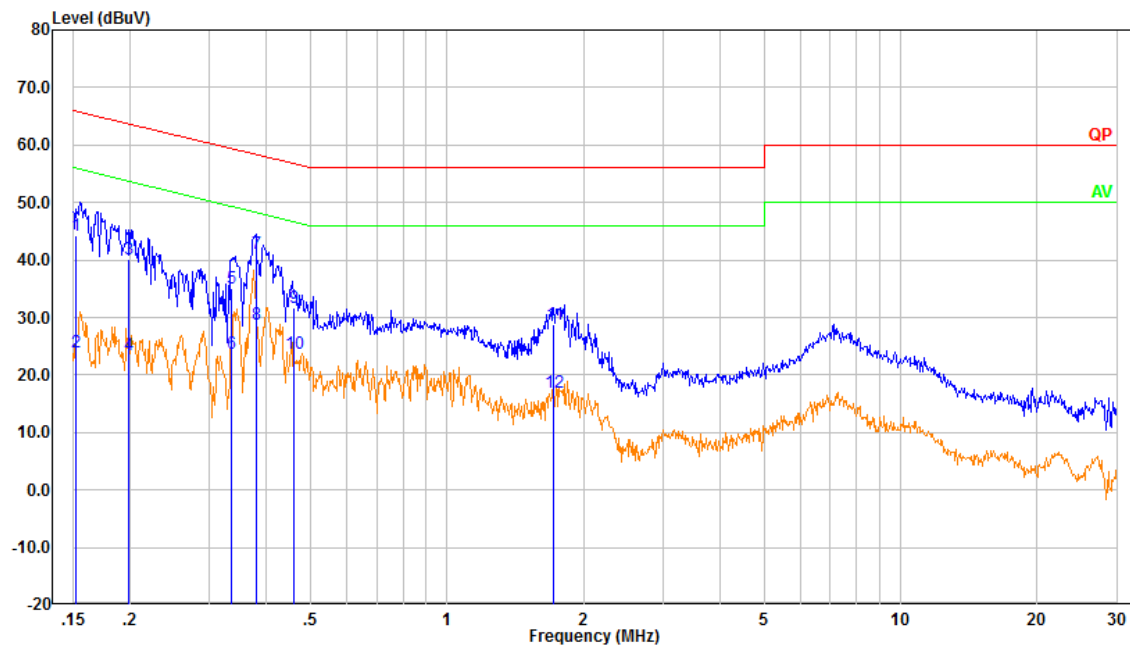
Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2021-04-25	2022-04-24
R&S	EMI Test Receiver	ESR3	102726	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2021-08-08	2022-08-07
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Line:

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.152	35.10	9.61	44.71	65.89	21.18	QP
2	0.152	12.73	9.61	22.34	55.89	33.55	Average
3	0.182	31.82	9.61	41.43	64.40	22.97	QP
4	0.182	13.39	9.61	23.00	54.40	31.40	Average
5	0.279	23.57	9.61	33.18	60.86	27.68	QP
6	0.279	11.02	9.61	20.63	50.86	30.23	Average
7	0.338	28.13	9.61	37.74	59.26	21.52	QP
8	0.338	16.38	9.61	25.99	49.26	23.27	Average
9	0.378	35.07	9.61	44.68	58.32	13.64	QP
10	0.378	25.95	9.61	35.56	48.32	12.76	Average
11	1.722	19.93	9.63	29.56	56.00	26.44	QP
12	1.722	8.34	9.63	17.96	46.00	28.04	Average

Neutral:

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.152	34.72	9.61	44.33	65.88	21.55	QP
2	0.152	14.37	9.61	23.98	55.88	31.90	Average
3	0.199	30.63	9.61	40.24	63.66	23.42	QP
4	0.199	13.80	9.61	23.41	53.66	30.25	Average
5	0.335	25.56	9.61	35.17	59.32	24.15	QP
6	0.335	14.16	9.61	23.77	49.32	25.55	Average
7	0.381	31.52	9.61	41.13	58.26	17.13	QP
8	0.381	19.23	9.61	28.84	48.26	19.42	Average
9	0.459	22.01	9.61	31.62	56.71	25.09	QP
10	0.459	14.13	9.61	23.74	46.71	22.97	Average
11	1.723	19.24	9.63	28.87	56.00	27.13	QP
12	1.723	7.43	9.63	17.05	46.00	28.95	Average

4.2 Radiation Spurious Emissions

Serial Number:	CR22020089-RF-S1	Test Date:	2022-03-31~2022-04-12
Test Site:	966-1,966-2	Test Mode:	Transmitting
Tester:	Carl Liang, Tommy Luo,Adam Guo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.5~23.6	Relative Humidity: (%)	51~55	ATM Pressure: (kPa)	101.0~101.8
----------------------	-----------	------------------------------	-------	------------------------	-------------

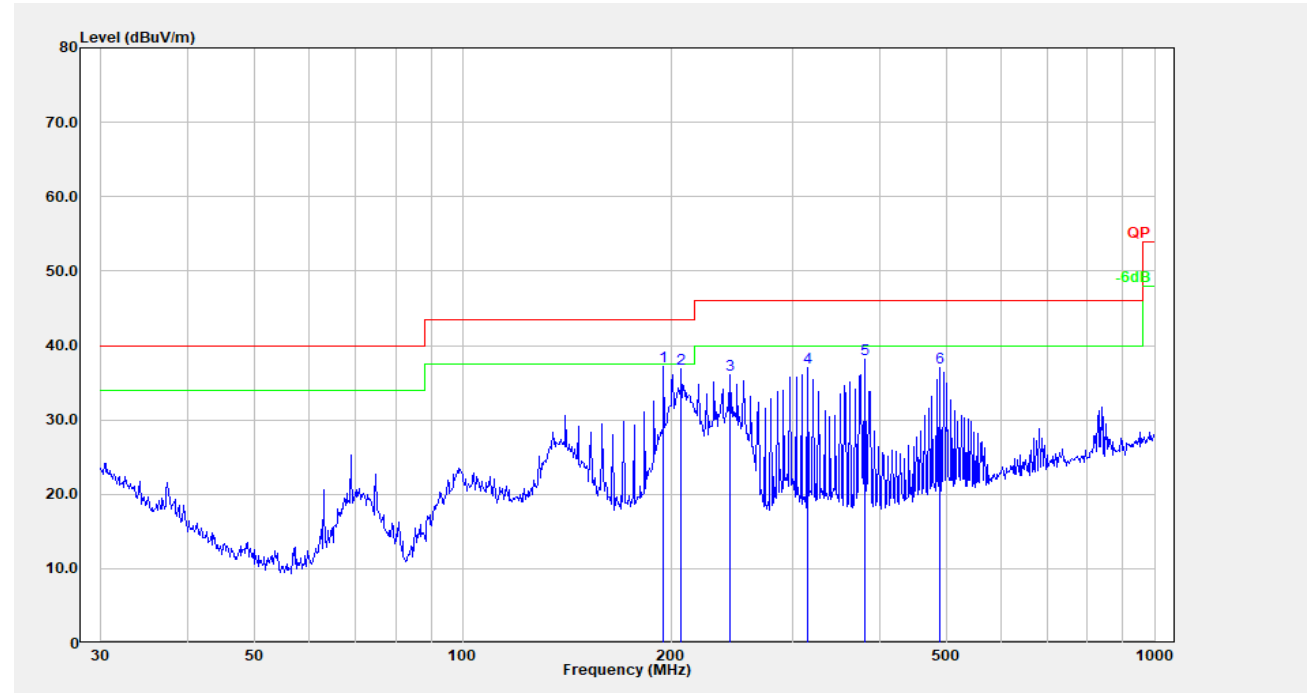
Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2021-07-22	2022-07-21
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2021-07-18	2022-07-17
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2021-07-18	2022-07-17
Sonoma	Amplifier	310N	186165	2021-07-18	2022-07-17
Audix	Test Software	E3	201021 (V9)	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021-02-05	2024-02-04
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021-02-05	2024-02-04
R&S	Spectrum Analyzer	FSV40	101591	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2021-08-08	2022-08-07
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-11-10	2022-11-09
AH	Preamplifier	PAM-1840VH	190	2021-11-19	2022-11-18
Mini Circuits	High Pass Filter	VHF-6010+	31119	2021-08-08	2022-08-07
E-Microwave	Band Rejection Filter	5150-5850MHz	OE01902423	2021-08-08	2022-08-07

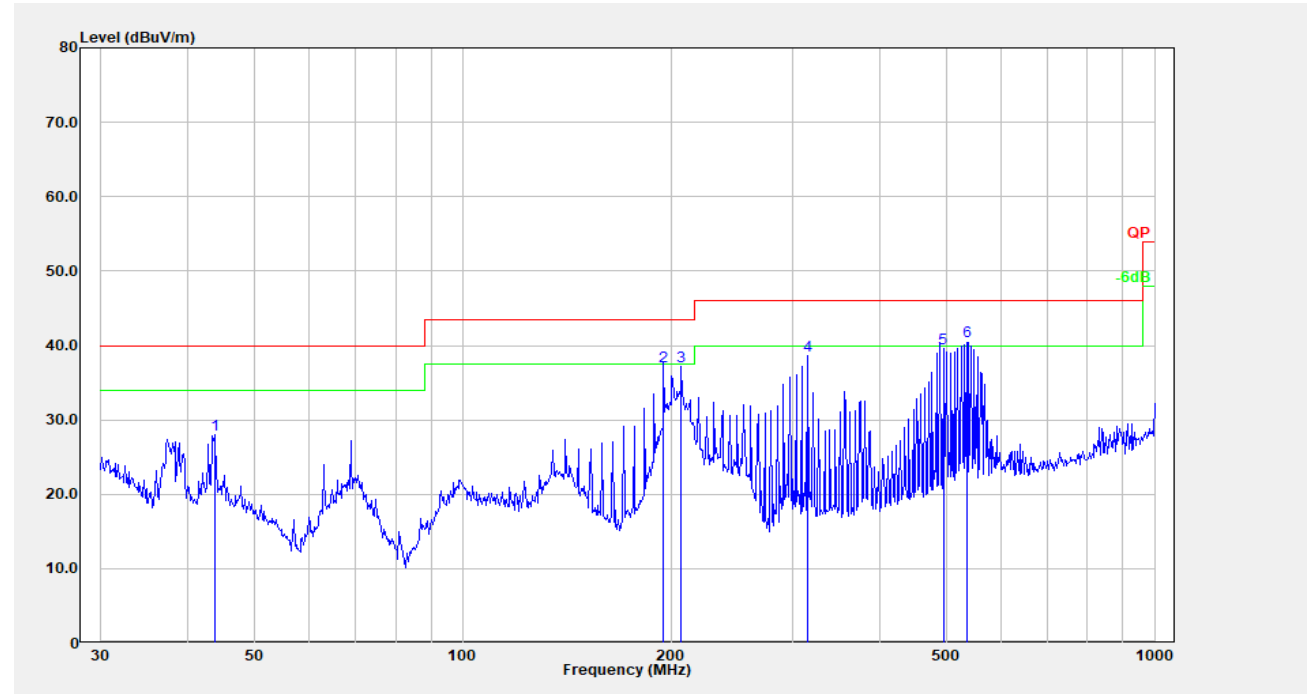
* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table and plots.

1) 30MHz-1GHz(802.11a chain 0 5745MHz was the worst)**Horizontal:**

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	195.137	50.17	-12.91	37.26	43.50	6.24	Peak
2	207.123	49.48	-12.56	36.92	43.50	6.58	Peak
3	243.377	49.24	-13.14	36.10	46.00	9.90	Peak
4	315.481	47.77	-10.82	36.95	46.00	9.05	Peak
5	381.249	47.48	-9.31	38.18	46.00	7.82	Peak
6	489.027	43.55	-6.50	37.06	46.00	8.94	Peak

Vertical:

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	43.812	41.88	-13.80	28.08	40.00	11.92	Peak
2	195.012	50.11	-12.93	37.18	43.50	6.32	QP
3	207.123	49.78	-12.56	37.22	43.50	6.28	Peak
4	315.481	49.43	-10.82	38.60	46.00	7.40	Peak
5	495.006	45.99	-6.40	39.59	46.00	6.41	QP
6	537.009	46.72	-6.23	40.49	46.00	5.51	QP

2) 1GHz-40GHz:**5150-5250MHz:****802.11a:****Chain 0**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5180MHz							
5180.00	75.82	PK	H	38.68	108.48	N/A	N/A
5180.00	65.61	AV	H	38.68	98.27	N/A	N/A
5180.00	76.89	PK	V	38.68	109.55	N/A	N/A
5180.00	66.68	AV	V	38.68	99.34	N/A	N/A
5150.00	37.99	PK	V	38.64	70.61	74.00	3.39
5150.00	19.60	AV	V	38.64	52.22	54.00	1.78
10360.00	33.50	PK	V	19.18	46.66	68.20	21.54
15540.00	34.78	PK	V	22.44	51.20	74.00	22.80
15540.00	21.10	AV	V	22.44	37.52	54.00	16.48
Middle Channel: 5200 MHz							
5200.00	75.69	PK	H	38.70	108.37	N/A	N/A
5200.00	65.92	AV	H	38.70	98.60	N/A	N/A
5200.00	78.73	PK	V	38.70	111.41	N/A	N/A
5200.00	68.44	AV	V	38.70	101.12	N/A	N/A
10400.00	35.12	PK	V	19.16	48.26	68.20	19.94
15600.00	35.07	PK	V	22.41	51.46	74.00	22.54
15600.00	24.12	AV	V	22.41	40.51	54.00	13.49
High Channel: 5240 MHz							
5240.00	75.09	PK	H	38.85	107.92	N/A	N/A
5240.00	64.50	AV	H	38.85	97.33	N/A	N/A
5240.00	76.43	PK	V	38.85	109.26	N/A	N/A
5240.00	65.75	AV	V	38.85	98.58	N/A	N/A
5350.00	29.77	PK	V	39.03	62.78	74.00	11.22
5350.00	16.62	AV	V	39.03	49.63	54.00	4.37
10480.00	36.85	PK	V	18.86	49.69	68.20	18.51
15720.00	36.28	PK	V	22.28	52.54	74.00	21.46
15720.00	24.89	AV	V	22.28	41.15	54.00	12.85

Chain 1:

Channel 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector					
Low Channel: 5180MHz							
5180.00	73.24	PK	H	38.68	105.90	N/A	N/A
5180.00	64.70	AV	H	38.68	97.36	N/A	N/A
5180.00	78.42	PK	V	38.68	111.08	N/A	N/A
5180.00	68.09	AV	V	38.68	100.75	N/A	N/A
5150.00	35.27	PK	V	38.64	67.89	74.00	6.11
5150.00	20.11	AV	V	38.64	52.73	54.00	1.27
10360.00	36.77	PK	V	19.18	49.93	68.20	18.27
15540.00	34.26	PK	V	22.44	50.68	74.00	23.32
15540.00	21.58	AV	V	22.44	38.00	54.00	16.00
Middle Channel: 5200 MHz							
5200.00	72.84	PK	H	38.70	105.52	N/A	N/A
5200.00	63.71	AV	H	38.70	96.39	N/A	N/A
5200.00	79.36	PK	V	38.70	112.04	N/A	N/A
5200.00	69.05	AV	V	38.70	101.73	N/A	N/A
10400.00	37.69	PK	V	19.16	50.83	68.20	17.37
15600.00	37.11	PK	V	22.41	53.50	74.00	20.50
15600.00	25.12	AV	V	22.41	41.51	54.00	12.49
High Channel: 5240 MHz							
5240.00	74.80	PK	H	38.85	107.63	N/A	N/A
5240.00	65.84	AV	H	38.85	98.67	N/A	N/A
5240.00	78.90	PK	V	38.85	111.73	N/A	N/A
5240.00	70.10	AV	V	38.85	102.93	N/A	N/A
5350.00	30.21	PK	V	39.03	63.22	74.00	10.78
5350.00	16.80	AV	V	39.03	49.81	54.00	4.19
10480.00	40.01	PK	V	18.86	52.85	68.20	15.35
15720.00	39.88	PK	V	22.28	56.14	74.00	17.86
15720.00	27.12	AV	V	22.28	43.38	54.00	10.62

802.11n ht20 Mode(2TX was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5180MHz							
5180.00	75.26	PK	H	38.68	107.92	N/A	N/A
5180.00	65.89	AV	H	38.68	98.55	N/A	N/A
5180.00	81.90	PK	V	38.68	114.56	N/A	N/A
5180.00	70.66	AV	V	38.68	103.32	N/A	N/A
5150.00	36.62	PK	V	38.64	69.24	74.00	4.76
5150.00	19.86	AV	V	38.64	52.48	54.00	1.52
10360.00	34.07	PK	V	19.18	47.23	68.20	20.97
15540.00	36.92	PK	V	22.44	53.34	74.00	20.66
15540.00	24.55	AV	V	22.44	40.97	54.00	13.03
Middle Channel: 5200 MHz							
5200.00	75.05	PK	H	38.70	107.73	N/A	N/A
5200.00	63.98	AV	H	38.70	96.66	N/A	N/A
5200.00	81.13	PK	V	38.70	113.81	N/A	N/A
5200.00	69.65	AV	V	38.70	102.33	N/A	N/A
10400.00	33.30	PK	V	19.16	46.44	68.20	21.76
15600.00	37.75	PK	V	22.41	54.14	74.00	19.86
15600.00	25.34	AV	V	22.41	41.73	54.00	12.27
High Channel: 5240 MHz							
5240.00	75.77	PK	H	38.85	108.60	N/A	N/A
5240.00	63.82	AV	H	38.85	96.65	N/A	N/A
5240.00	80.06	PK	V	38.85	112.89	N/A	N/A
5240.00	69.05	AV	V	38.85	101.88	N/A	N/A
5350.00	30.05	PK	V	39.03	63.06	74.00	10.94
5350.00	16.75	AV	V	39.03	49.76	54.00	4.24
10480.00	35.38	PK	V	18.86	48.22	68.20	19.98
15720.00	39.90	PK	V	22.28	56.16	74.00	17.84
15720.00	27.46	AV	V	22.28	43.72	54.00	10.28

802.11n ht40 Mode(2TX was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5190 MHz							
5190.00	68.52	PK	H	38.69	101.19	N/A	N/A
5190.00	57.32	AV	H	38.69	89.99	N/A	N/A
5190.00	74.43	PK	V	38.69	107.10	N/A	N/A
5190.00	62.53	AV	V	38.69	95.20	N/A	N/A
5150.00	37.00	PK	V	38.64	69.62	74.00	4.38
5150.00	19.27	AV	V	38.64	51.89	54.00	2.11
10380.00	34.61	PK	V	19.17	47.76	68.20	20.44
15570.00	35.41	PK	V	22.43	51.82	74.00	22.18
15570.00	23.27	AV	V	22.43	39.68	54.00	14.32
High Channel: 5230 MHz							
5230.00	69.15	PK	H	38.81	101.94	N/A	N/A
5230.00	57.12	AV	H	38.81	89.91	N/A	N/A
5230.00	74.70	PK	V	38.81	107.49	N/A	N/A
5230.00	61.81	AV	V	38.81	94.60	N/A	N/A
5350.00	30.08	PK	V	39.03	63.09	74.00	10.91
5350.00	16.60	AV	V	39.03	49.61	54.00	4.39
10460.00	33.05	PK	V	18.94	45.97	68.20	22.23
15690.00	36.26	PK	V	22.29	52.53	74.00	21.47
15690.00	24.59	AV	V	22.29	40.86	54.00	13.14

802.11ac vht80 Mode(2TX was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel: 5210 MHz							
5210.00	65.14	PK	H	38.74	97.86	N/A	N/A
5210.00	47.06	AV	H	38.74	79.78	N/A	N/A
5210.00	71.55	PK	V	38.74	104.27	N/A	N/A
5210.00	51.39	AV	V	38.74	84.11	N/A	N/A
5150.00	37.25	PK	V	38.64	69.87	74.00	4.13
5150.00	18.14	AV	V	38.64	50.76	54.00	3.24
5350.00	30.04	PK	V	39.03	63.05	74.00	10.95
5350.00	16.73	AV	V	39.03	49.74	54.00	4.26
10420.00	33.16	PK	V	19.09	46.23	68.20	21.97
15630.00	36.19	PK	V	22.37	52.54	74.00	21.46
15630.00	24.86	AV	V	22.37	41.21	54.00	12.79

5250-5350MHz :**802.11a, Chain 0:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5260MHz							
5260.00	78.81	PK	H	38.90	111.69	N/A	N/A
5260.00	70.07	AV	H	38.90	102.95	N/A	N/A
5260.00	78.85	PK	V	38.90	111.73	N/A	N/A
5260.00	69.05	AV	V	38.90	101.93	N/A	N/A
5150.00	30.12	PK	V	38.64	62.74	74.00	11.26
5150.00	17.12	AV	V	38.64	49.74	54.00	4.26
10520.00	36.19	PK	V	18.93	49.10	68.20	19.10
15780.00	36.96	PK	V	22.26	53.20	74.00	20.80
15780.00	24.21	AV	V	22.26	40.45	54.00	13.55
16000.00	37.23	PK	V	22.06	53.27	74.00	20.73
Middle Channel: 5280 MHz							
5280.00	79.86	PK	H	38.91	112.75	N/A	N/A
5280.00	70.38	AV	H	38.91	103.27	N/A	N/A
5280.00	82.20	PK	V	38.91	115.09	N/A	N/A
5280.00	72.75	AV	V	38.91	105.64	N/A	N/A
10560.00	37.12	PK	V	19.20	50.30	68.20	17.90
15840.00	40.07	PK	V	22.34	56.39	74.00	17.61
15840.00	26.20	AV	V	22.34	42.52	54.00	11.48
2944.00	54.00	PK	V	5.80	53.78	68.20	14.42
High Channel: 5320 MHz							
5320.00	73.16	PK	H	38.97	106.11	N/A	N/A
5320.00	63.87	AV	H	38.97	96.82	N/A	N/A
5320.00	76.94	PK	V	38.97	109.89	N/A	N/A
5320.00	67.83	AV	V	38.97	100.78	N/A	N/A
5350.00	32.44	PK	V	39.03	65.45	74.00	8.55
5350.00	17.86	AV	V	39.03	50.87	54.00	3.13
10640.00	45.08	PK	V	19.50	58.56	74.00	15.44
10640.00	30.13	AV	V	19.50	43.61	54.00	10.39
15960.00	36.65	PK	V	22.22	52.85	74.00	21.15
15960.00	25.32	AV	V	22.22	41.52	54.00	12.48

Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5260MHz							
5260.00	76.42	PK	H	38.90	109.30	N/A	N/A
5260.00	67.48	AV	H	38.90	100.36	N/A	N/A
5260.00	82.45	PK	V	38.90	115.33	N/A	N/A
5260.00	73.51	AV	V	38.90	106.39	N/A	N/A
5150.00	30.11	PK	V	38.64	62.73	74.00	11.27
5150.00	17.02	AV	V	38.64	49.64	54.00	4.36
10520.00	36.34	PK	V	18.93	49.25	68.20	18.95
15780.00	41.33	PK	V	22.26	57.57	74.00	16.43
15780.00	28.15	AV	V	22.26	44.39	54.00	9.61
Middle Channel: 5280 MHz							
5280.00	78.23	PK	H	38.91	111.12	N/A	N/A
5280.00	68.68	AV	H	38.91	101.57	N/A	N/A
5280.00	83.08	PK	V	38.91	115.97	N/A	N/A
5280.00	73.57	AV	V	38.91	106.46	N/A	N/A
10560.00	35.44	PK	V	19.20	48.62	68.20	19.58
15840.00	38.44	PK	V	22.34	54.76	74.00	19.24
15840.00	26.35	AV	V	22.34	42.67	54.00	11.33
High Channel: 5320 MHz							
5320.00	72.50	PK	H	38.97	105.45	N/A	N/A
5320.00	63.36	AV	H	38.97	96.31	N/A	N/A
5320.00	78.34	PK	V	38.97	111.29	N/A	N/A
5320.00	68.43	AV	V	38.97	101.38	N/A	N/A
5350.00	33.19	PK	V	39.03	66.20	74.00	7.80
5350.00	18.45	AV	V	39.03	51.46	54.00	2.54
10640.00	34.65	PK	V	19.50	48.13	74.00	25.87
10640.00	22.54	AV	V	19.50	36.02	54.00	17.98
15960.00	36.57	PK	V	22.22	52.77	74.00	21.23
15960.00	26.60	AV	V	22.22	42.80	54.00	11.20

802.11n ht20 Mode(2TX was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5260MHz							
5260.00	75.92	PK	H	38.90	108.80	N/A	N/A
5260.00	65.37	AV	H	38.90	98.25	N/A	N/A
5260.00	80.97	PK	V	38.90	113.85	N/A	N/A
5260.00	69.47	AV	V	38.90	102.35	N/A	N/A
5150.00	30.25	PK	V	38.64	62.87	74.00	11.13
5150.00	17.29	AV	V	38.64	49.91	54.00	4.09
10520.00	41.90	PK	V	18.93	54.81	68.20	13.39
15780.00	37.10	PK	V	22.26	53.34	74.00	20.66
15780.00	24.83	AV	V	22.26	41.07	54.00	12.93
Middle Channel: 5280 MHz							
5280.00	76.06	PK	H	38.91	108.95	N/A	N/A
5280.00	65.68	AV	H	38.91	98.57	N/A	N/A
5280.00	80.45	PK	V	38.91	113.34	N/A	N/A
5280.00	68.76	AV	V	38.91	101.65	N/A	N/A
10560.00	43.68	PK	V	19.20	56.86	68.20	11.34
15840.00	36.58	PK	V	22.34	52.90	74.00	21.10
15840.00	24.10	AV	V	22.34	40.42	54.00	13.58
High Channel: 5320 MHz							
5320.00	75.97	PK	H	38.97	108.92	N/A	N/A
5320.00	64.24	AV	H	38.97	97.19	N/A	N/A
5320.00	81.26	PK	V	38.97	114.21	N/A	N/A
5320.00	70.31	AV	V	38.97	103.26	N/A	N/A
5350.00	36.91	PK	V	39.03	69.92	74.00	4.08
5350.00	19.43	AV	V	39.03	52.44	54.00	1.56
10640.00	50.10	PK	V	19.50	63.58	74.00	10.42
10640.00	36.90	AV	V	19.50	50.38	54.00	3.62
15960.00	37.31	PK	V	22.22	53.51	74.00	20.49
15960.00	24.89	AV	V	22.22	41.09	54.00	12.91

802.11n ht40 Mode(2TX was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5270 MHz							
5270.00	70.38	PK	H	38.91	103.27	N/A	N/A
5270.00	59.33	AV	H	38.91	92.22	N/A	N/A
5270.00	74.81	PK	V	38.91	107.70	N/A	N/A
5270.00	62.43	AV	V	38.91	95.32	N/A	N/A
5150.00	29.54	PK	V	38.64	62.16	74.00	11.84
5150.00	16.95	AV	V	38.64	49.57	54.00	4.43
10540.00	37.21	PK	V	19.07	50.26	68.20	17.94
15810.00	36.40	PK	V	22.28	52.66	74.00	21.34
15810.00	24.03	AV	V	22.28	40.29	54.00	13.71
High Channel: 5310 MHz							
5310.00	70.05	PK	H	38.95	102.98	N/A	N/A
5310.00	58.25	AV	H	38.95	91.18	N/A	N/A
5310.00	76.05	PK	V	38.95	108.98	N/A	N/A
5310.00	63.98	AV	V	38.95	96.91	N/A	N/A
5350.00	39.37	PK	V	39.03	72.38	74.00	1.62
5350.00	19.34	AV	V	39.03	52.35	54.00	1.65
10620.00	44.88	PK	V	19.49	58.35	74.00	15.65
10620.00	28.54	AV	V	19.49	42.01	54.00	11.99
15930.00	36.00	PK	V	22.33	52.31	74.00	21.69
15930.00	23.57	AV	V	22.33	39.88	54.00	14.12

802.11ac vht80 Mode(2TX was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
, Low Channel: 5290 MHz							
5290.00	66.59	PK	H	38.92	99.49	N/A	N/A
5290.00	46.42	AV	H	38.92	79.32	N/A	N/A
5290.00	70.29	PK	V	38.92	103.19	N/A	N/A
5290.00	50.40	AV	V	38.92	83.30	N/A	N/A
5150.00	30.11	PK	V	38.64	62.73	74.00	11.27
5150.00	16.69	AV	V	38.64	49.31	54.00	4.69
5350.00	38.98	PK	V	39.03	71.99	74.00	2.01
5350.00	17.14	AV	V	39.03	50.15	54.00	3.85
10580.00	39.37	PK	V	19.34	52.69	68.20	15.51
15870.00	34.76	PK	V	22.39	51.13	74.00	22.87
15870.00	22.25	AV	V	22.39	38.62	54.00	15.38

5470-5725MHz :

802.11a, Chain 0:

CH11F3, Chan 6.

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5500MHz							
5500.00	79.88	PK	V	39.32	113.18	N/A	N/A
5500.00	70.21	AV	V	39.32	103.51	N/A	N/A
5500.00	79.06	PK	H	39.32	112.36	N/A	N/A
5500.00	69.31	AV	H	39.32	102.61	N/A	N/A
5470.00	30.91	PK	V	39.27	64.16	68.20	4.04
11000.00	32.18	PK	V	19.83	45.99	74.00	28.01
11000.00	19.61	AV	V	19.83	33.42	54.00	20.58
16500.00	35.88	PK	V	22.73	52.59	68.20	15.61
Middle Channel: 5580 MHz							
5580.00	78.15	PK	V	39.43	111.56	N/A	N/A
5580.00	68.58	AV	V	39.43	101.99	N/A	N/A
5580.00	77.03	PK	H	39.43	110.44	N/A	N/A
5580.00	67.32	AV	H	39.43	100.73	N/A	N/A
11160.00	36.78	PK	V	19.97	50.73	74.00	23.27
11160.00	23.13	AV	V	19.97	37.08	54.00	16.92
16740.00	35.91	PK	V	23.68	53.57	68.20	14.63
High Channel: 5700 MHz							
5700.00	71.70	PK	V	39.51	105.19	N/A	N/A
5700.00	62.57	AV	V	39.51	96.06	N/A	N/A
5700.00	70.57	PK	H	39.51	104.06	N/A	N/A
5700.00	59.16	AV	H	39.51	92.65	N/A	N/A
5725.00	33.07	PK	V	39.48	66.53	68.20	1.67
11400.00	36.86	PK	V	20.93	51.77	74.00	22.23
11400.00	24.54	AV	V	20.93	39.45	54.00	14.55
17100.00	35.15	PK	V	26.19	55.32	68.20	12.88

Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5500MHz							
5500.00	79.12	PK	H	39.32	112.42	N/A	N/A
5500.00	70.12	AV	H	39.32	103.42	N/A	N/A
5500.00	82.45	PK	V	39.32	115.75	N/A	N/A
5500.00	72.74	AV	V	39.32	106.04	N/A	N/A
5470.00	30.81	PK	V	39.27	64.06	68.20	4.14
11000.00	32.23	PK	V	19.83	46.04	74.00	27.96
11000.00	18.45	AV	V	19.83	32.26	54.00	21.74
16500.00	34.84	PK	V	22.73	51.55	68.20	16.65
Middle Channel: 5580 MHz							
5580.00	80.21	PK	H	39.43	113.62	N/A	N/A
5580.00	70.65	AV	H	39.43	104.06	N/A	N/A
5580.00	81.89	PK	V	39.43	115.30	N/A	N/A
5580.00	71.64	AV	V	39.43	105.05	N/A	N/A
11160.00	43.78	PK	V	19.97	57.73	74.00	16.27
11160.00	31.01	AV	V	19.97	44.96	54.00	9.04
16740.00	38.51	PK	V	23.68	56.17	68.20	12.03
High Channel: 5700 MHz							
5700.00	67.45	PK	H	39.51	100.94	N/A	N/A
5700.00	57.89	AV	H	39.51	91.38	N/A	N/A
5700.00	72.94	PK	V	39.51	106.43	N/A	N/A
5700.00	63.43	AV	V	39.51	96.92	N/A	N/A
5725.00	31.96	PK	V	39.48	65.42	68.20	2.78
11400.00	39.40	PK	V	20.93	54.31	74.00	19.69
11400.00	27.12	AV	V	20.93	42.03	54.00	11.97
17100.00	34.12	PK	V	26.19	54.29	68.20	13.91

802.11n ht20 Mode(2TX was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
802.11n ht20,Low Channel: 5500MHz							
5500.00	72.94	PK	H	39.32	106.24	N/A	N/A
5500.00	61.89	AV	H	39.32	95.19	N/A	N/A
5500.00	77.09	PK	V	39.32	110.39	N/A	N/A
5500.00	65.52	AV	V	39.32	98.82	N/A	N/A
5470.00	32.98	PK	V	39.27	66.23	68.20	1.97
11000.00	33.50	PK	V	19.83	47.31	74.00	26.69
11000.00	21.17	AV	V	19.83	34.98	54.00	19.02
16500.00	34.74	PK	V	22.73	51.45	68.20	16.75
802.11n ht20, Middle Channel: 5580 MHz							
5580.00	72.45	PK	H	39.43	105.86	N/A	N/A
5580.00	61.62	AV	H	39.43	95.03	N/A	N/A
5580.00	77.50	PK	V	39.43	110.91	N/A	N/A
5580.00	66.02	AV	V	39.43	99.43	N/A	N/A
11160.00	36.04	PK	V	19.97	49.99	74.00	24.01
11160.00	23.59	AV	V	19.97	37.54	54.00	16.46
16740.00	35.96	PK	V	23.68	53.62	68.20	14.58
802.11n ht20, High Channel: 5700 MHz							
5700.00	71.51	PK	H	39.51	105.00	N/A	N/A
5700.00	60.04	AV	H	39.51	93.53	N/A	N/A
5700.00	74.89	PK	V	39.51	108.38	N/A	N/A
5700.00	63.59	AV	V	39.51	97.08	N/A	N/A
5725.00	32.51	PK	V	39.48	65.97	68.20	2.23
11400.00	39.12	PK	V	20.93	54.03	74.00	19.97
11400.00	25.45	AV	V	20.93	40.36	54.00	13.64
17100.00	34.47	PK	V	26.19	54.64	68.20	13.56

802.11n ht40 Mode(2TX was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5510 MHz							
5510.00	67.66	PK	H	39.35	100.99	N/A	N/A
5510.00	56.23	AV	H	39.35	89.56	N/A	N/A
5510.00	72.94	PK	V	39.35	106.27	N/A	N/A
5510.00	60.71	AV	V	39.35	94.04	N/A	N/A
5470.00	33.06	PK	V	39.27	66.31	68.20	1.89
11020.00	32.91	PK	V	19.85	46.74	74.00	27.26
11020.00	20.56	AV	V	19.85	34.39	54.00	19.61
16530.00	34.22	PK	V	23.02	51.22	68.20	16.98
Middle Channel: 5550 MHz							
5550.00	67.96	PK	H	39.46	101.40	N/A	N/A
5550.00	56.00	AV	H	39.46	89.44	N/A	N/A
5550.00	72.04	PK	V	39.46	105.48	N/A	N/A
5550.00	59.93	AV	V	39.46	93.37	N/A	N/A
11100.00	33.51	PK	V	19.95	47.44	74.00	26.56
11100.00	21.04	AV	V	19.95	34.97	54.00	19.03
16650.00	37.04	PK	V	23.65	54.67	68.20	13.53
High Channel: 5670 MHz							
5670.00	65.14	PK	H	39.50	98.62	N/A	N/A
5670.00	52.45	AV	H	39.50	85.93	N/A	N/A
5670.00	69.07	PK	V	39.50	102.55	N/A	N/A
5670.00	57.26	AV	V	39.50	90.74	N/A	N/A
5725.00	31.25	PK	V	39.48	64.71	68.20	3.49
11340.00	35.23	PK	V	20.77	49.98	74.00	24.02
11340.00	22.68	AV	V	20.77	37.43	54.00	16.57
17010.00	34.62	PK	V	25.56	54.16	68.20	14.04

802.11ac vht80 Mode(2TX was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
802.11ac vht80,Low Channel: 5530 MHz							
5530.00	64.10	PK	H	39.40	97.48	N/A	N/A
5530.00	45.43	AV	H	39.40	78.81	N/A	N/A
5530.00	69.71	PK	V	39.40	103.09	N/A	N/A
5530.00	50.26	AV	V	39.40	83.64	N/A	N/A
5470.00	32.52	PK	V	39.27	65.77	68.20	2.43
11060.00	33.85	PK	V	19.90	47.73	74.00	26.27
11060.00	21.26	AV	V	19.90	35.14	54.00	18.86
16590.00	34.95	PK	V	23.59	52.52	68.20	15.68
802.11ac vht80, High Channel: 5610 MHz							
5610.00	63.29	PK	H	39.43	96.70	N/A	N/A
5610.00	44.49	AV	H	39.43	77.90	N/A	N/A
5610.00	67.37	PK	V	39.43	100.78	N/A	N/A
5610.00	48.44	AV	V	39.43	81.85	N/A	N/A
5725.00	31.30	PK	V	39.48	64.76	68.20	3.44
11220.00	39.36	PK	V	20.13	53.47	74.00	20.53
11220.00	21.60	AV	V	20.13	35.71	54.00	18.29
16830.00	34.80	PK	V	24.13	52.91	68.20	15.29

5725-5850MHz:**802.11a, Chain 0:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5745MHz							
5745.00	77.73	PK	V	39.46	111.17	N/A	N/A
5745.00	68.21	AV	V	39.46	101.65	N/A	N/A
5745.00	75.67	PK	H	39.46	109.11	N/A	N/A
5745.00	65.96	AV	H	39.46	99.40	N/A	N/A
5725.00	58.42	PK	V	39.48	91.88	122.20	30.32
5720.00	49.98	PK	V	39.49	83.45	110.80	27.35
5700.00	35.12	PK	V	39.51	68.61	105.20	36.59
5650.00	31.37	PK	V	39.49	64.84	68.20	3.36
11490.00	35.39	PK	V	20.67	50.04	74.00	23.96
11490.00	24.21	AV	V	20.67	38.86	54.00	15.14
17235.00	33.99	PK	V	26.76	54.73	68.20	13.47
Middle Channel: 5785 MHz							
5785.00	77.64	PK	V	39.44	111.06	N/A	N/A
5785.00	67.28	AV	V	39.44	100.70	N/A	N/A
5785.00	74.65	PK	H	39.44	108.07	N/A	N/A
5785.00	65.20	AV	H	39.44	98.62	N/A	N/A
11570.00	33.87	PK	V	20.83	48.68	74.00	25.32
11570.00	20.46	AV	V	20.83	35.27	54.00	18.73
17355.00	32.68	PK	V	27.74	54.40	68.20	13.80
High Channel: 5825 MHz							
5825.00	76.42	PK	V	39.46	109.86	N/A	N/A
5825.00	66.93	AV	V	39.46	100.37	N/A	N/A
5825.00	74.84	PK	H	39.46	108.28	N/A	N/A
5825.00	65.41	AV	H	39.46	98.85	N/A	N/A
5850.00	46.61	PK	V	39.49	80.08	122.20	42.12
5855.00	42.73	PK	V	39.51	76.22	110.80	34.58
5875.00	32.06	PK	V	39.60	65.64	105.20	39.56
5925.00	31.37	PK	V	39.68	65.03	68.20	3.17
11650.00	33.77	PK	V	21.07	48.82	74.00	25.18
11650.00	27.50	AV	V	21.07	42.55	54.00	11.45
17475.00	34.58	PK	V	28.61	57.17	68.20	11.03

Chain 1

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5745MHz							
5745.00	73.48	PK	H	39.46	106.92	N/A	N/A
5745.00	63.91	AV	H	39.46	97.35	N/A	N/A
5745.00	75.30	PK	V	39.46	108.74	N/A	N/A
5745.00	65.71	AV	V	39.46	99.15	N/A	N/A
5725.00	53.09	PK	V	39.48	86.55	122.20	35.65
5720.00	45.80	PK	V	39.49	79.27	110.80	31.53
5700.00	32.42	PK	V	39.51	65.91	105.20	39.29
5650.00	31.10	PK	V	39.49	64.57	68.20	3.63
11490.00	35.49	PK	V	20.67	50.14	74.00	23.86
11490.00	23.65	AV	V	20.67	38.30	54.00	15.70
17235.00	33.41	PK	V	26.76	54.15	68.20	14.05
Middle Channel: 5785 MHz							
5785.00	72.73	PK	H	39.44	106.15	N/A	N/A
5785.00	63.62	AV	H	39.44	97.04	N/A	N/A
5785.00	79.04	PK	V	39.44	112.46	N/A	N/A
5785.00	69.79	AV	V	39.44	103.21	N/A	N/A
11570.00	33.82	PK	V	20.83	48.63	74.00	25.37
11570.00	21.45	AV	V	20.83	36.26	54.00	17.74
17355.00	36.58	PK	V	27.74	58.30	68.20	9.90
High Channel: 5825 MHz							
5825.00	72.01	PK	H	39.46	105.45	N/A	N/A
5825.00	62.10	AV	H	39.46	95.54	N/A	N/A
5825.00	78.63	PK	V	39.46	112.07	N/A	N/A
5825.00	69.31	AV	V	39.46	102.75	N/A	N/A
5850.00	50.22	PK	V	39.49	83.69	122.20	38.51
5855.00	47.61	PK	V	39.51	81.10	110.80	29.70
5875.00	32.30	PK	V	39.60	65.88	105.20	39.32
5925.00	31.41	PK	V	39.68	65.07	68.20	3.13
11650.00	33.13	PK	V	21.07	48.18	74.00	25.82
11650.00	20.45	AV	V	21.07	35.50	54.00	18.50
17475.00	33.82	PK	V	28.61	56.41	68.20	11.79

802.11n ht20 Mode(2TX was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
802.11n ht20,Low Channel: 5745MHz							
5745.00	77.23	PK	H	39.46	110.67	N/A	N/A
5745.00	66.52	AV	H	39.46	99.96	N/A	N/A
5745.00	80.38	PK	V	39.46	113.82	N/A	N/A
5745.00	68.85	AV	V	39.46	102.29	N/A	N/A
5725.00	56.91	PK	V	39.48	90.37	122.20	31.83
5720.00	51.24	PK	V	39.49	84.71	110.80	26.09
5700.00	40.53	PK	V	39.51	74.02	105.20	31.18
5650.00	31.14	PK	V	39.49	64.61	68.20	3.59
11490.00	37.98	PK	V	20.67	52.63	74.00	21.37
11490.00	24.62	AV	V	20.67	39.27	54.00	14.73
17235.00	34.57	PK	V	26.76	55.31	68.20	12.89
802.11n ht20, Middle Channel: 5785 MHz							
5785.00	76.64	PK	H	39.44	110.06	N/A	N/A
5785.00	65.62	AV	H	39.44	99.04	N/A	N/A
5785.00	79.43	PK	V	39.44	112.85	N/A	N/A
5785.00	68.73	AV	V	39.44	102.15	N/A	N/A
11570.00	38.07	PK	V	20.83	52.88	74.00	21.12
11570.00	26.12	AV	V	20.83	40.93	54.00	13.07
17355.00	34.36	PK	V	27.74	56.08	68.20	12.12
802.11n ht20, High Channel: 5825 MHz							
5825.00	75.89	PK	H	39.46	109.33	N/A	N/A
5825.00	64.69	AV	H	39.46	98.13	N/A	N/A
5825.00	78.64	PK	V	39.46	112.08	N/A	N/A
5825.00	68.32	AV	V	39.46	101.76	N/A	N/A
5850.00	47.52	PK	V	39.49	80.99	122.20	41.21
5855.00	46.40	PK	V	39.51	79.89	110.80	30.91
5875.00	30.20	PK	V	39.60	63.78	105.20	41.42
5925.00	32.16	PK	V	39.68	65.82	68.20	2.38
11650.00	36.67	PK	V	21.07	51.72	74.00	22.28
11650.00	23.49	AV	V	21.07	38.54	54.00	15.46
17475.00	33.60	PK	V	28.61	56.19	68.20	12.01

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
802.11n ht40,Low Channel: 5755 MHz							
5755.00	76.86	PK	H	39.45	110.29	N/A	N/A
5755.00	63.75	AV	H	39.45	97.18	N/A	N/A
5755.00	77.40	PK	V	39.45	110.83	N/A	N/A
5755.00	64.48	AV	V	39.45	97.91	N/A	N/A
5725.00	55.58	PK	V	39.48	89.04	122.20	33.16
5720.00	55.21	PK	V	39.49	88.68	110.80	22.12
5700.00	43.20	PK	V	39.51	76.69	105.20	28.51
5650.00	31.83	PK	V	39.49	65.30	68.20	2.90
11510.00	38.79	PK	V	20.67	53.44	74.00	20.56
11510.00	26.88	AV	V	20.67	41.53	54.00	12.47
17265.00	33.28	PK	V	26.94	54.20	68.20	14.00
802.11n ht40, High Channel: 5795 MHz							
5795.00	74.20	PK	H	39.43	107.61	N/A	N/A
5795.00	64.06	AV	H	39.43	97.47	N/A	N/A
5795.00	76.99	PK	V	39.43	110.40	N/A	N/A
5795.00	64.22	AV	V	39.43	97.63	N/A	N/A
5850.00	44.21	PK	V	39.49	77.68	122.20	44.52
5855.00	42.00	PK	V	39.51	75.49	110.80	35.31
5875.00	36.33	PK	V	39.60	69.91	105.20	35.29
5925.00	31.54	PK	V	39.68	65.20	68.20	3.00
11590.00	34.16	PK	V	20.88	49.02	74.00	24.98
11590.00	22.12	AV	V	20.88	36.98	54.00	17.02
17385.00	34.56	PK	V	28.07	56.61	68.20	11.59

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
802.11ac vht80, Low Channel: 5775 MHz							
5775.00	65.46	PK	H	39.44	98.88	N/A	N/A
5775.00	42.82	AV	H	39.44	76.24	N/A	N/A
5775.00	69.31	PK	V	39.44	102.73	N/A	N/A
5775.00	50.28	AV	V	39.44	83.70	N/A	N/A
5725.00	36.57	PK	V	39.48	70.03	122.20	52.17
5720.00	36.77	PK	V	39.49	70.24	110.80	40.56
5700.00	35.78	PK	V	39.51	69.27	105.20	35.93
5650.00	31.51	PK	V	39.49	64.98	68.20	3.22
5850.00	36.67	PK	V	39.49	70.14	122.20	52.06
5855.00	33.53	PK	V	39.51	67.02	110.80	43.78
5875.00	34.07	PK	V	39.60	67.65	105.20	37.55
5925.00	31.46	PK	V	39.68	65.12	68.20	3.08
11550.00	33.95	PK	V	20.78	48.71	74.00	25.29
11550.00	22.54	AV	V	20.78	37.30	54.00	16.70
17325.00	33.99	PK	V	27.41	55.38	68.20	12.82

Note:

Result = Reading + Factor- Distance extrapolation Factor

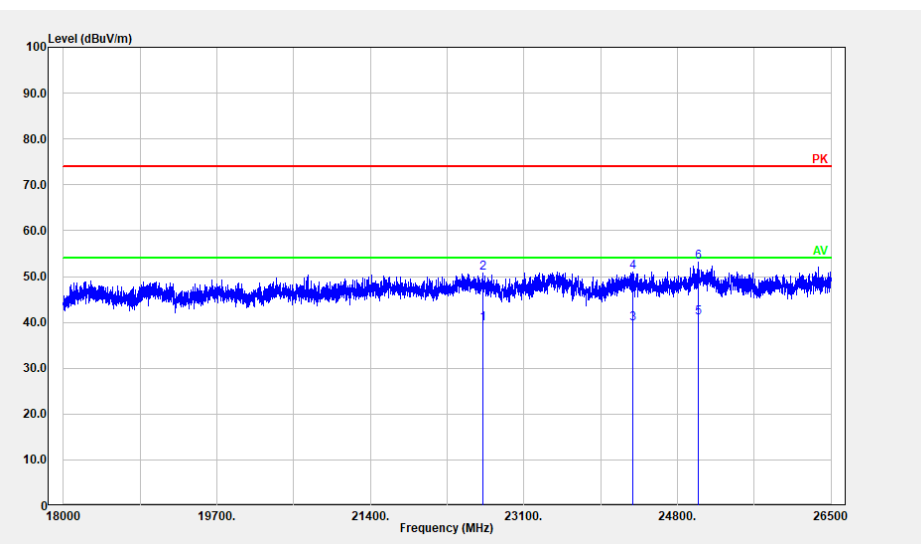
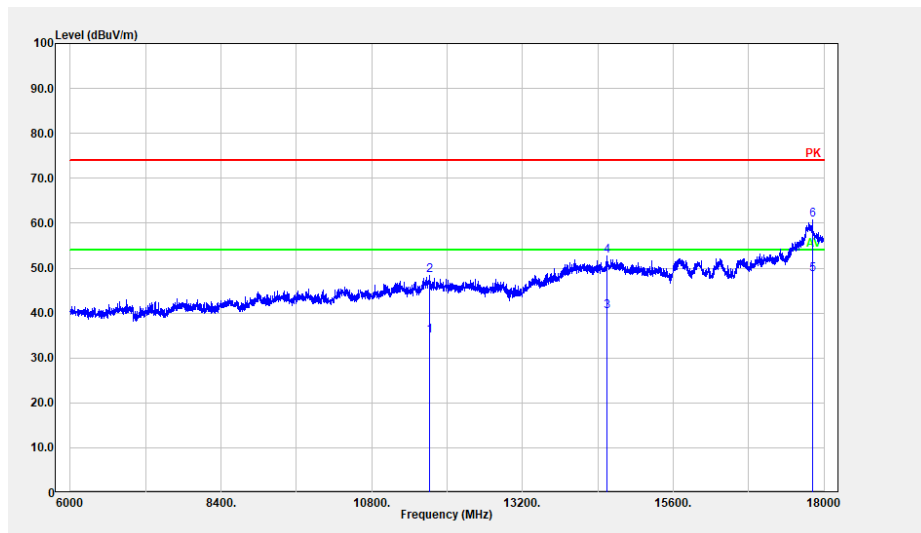
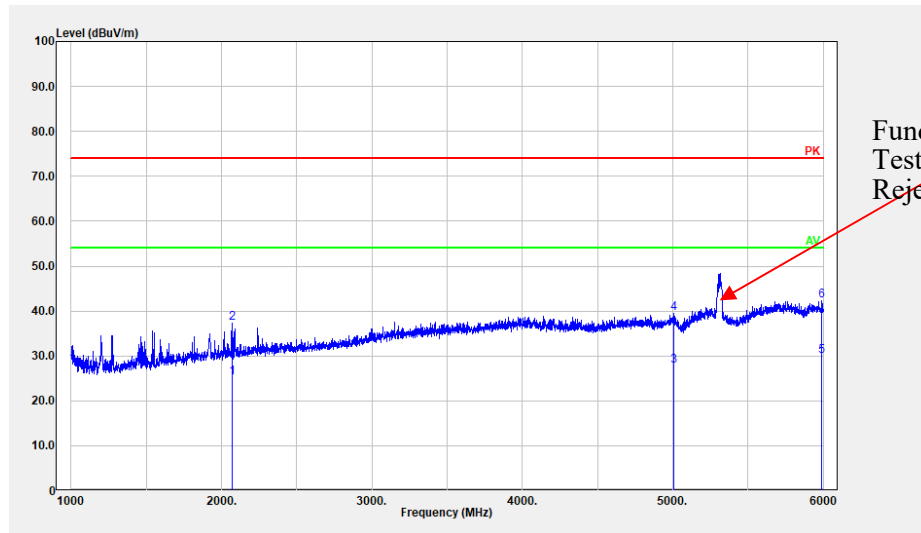
For 1-26.5GHz:

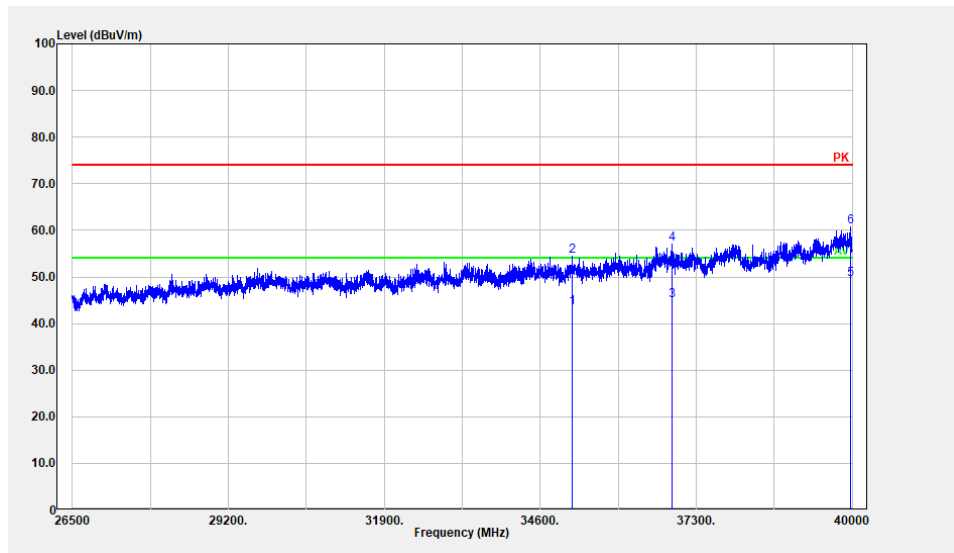
Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB= 6.02 dB

For 26.5-40GHz:

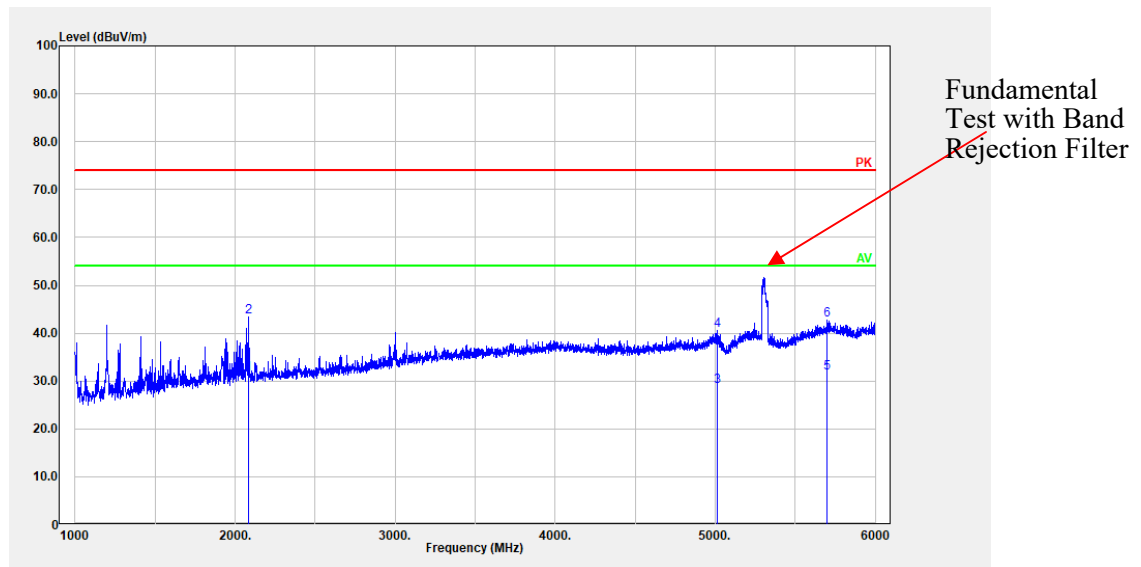
Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1m]})$ dB= 9.54 dB

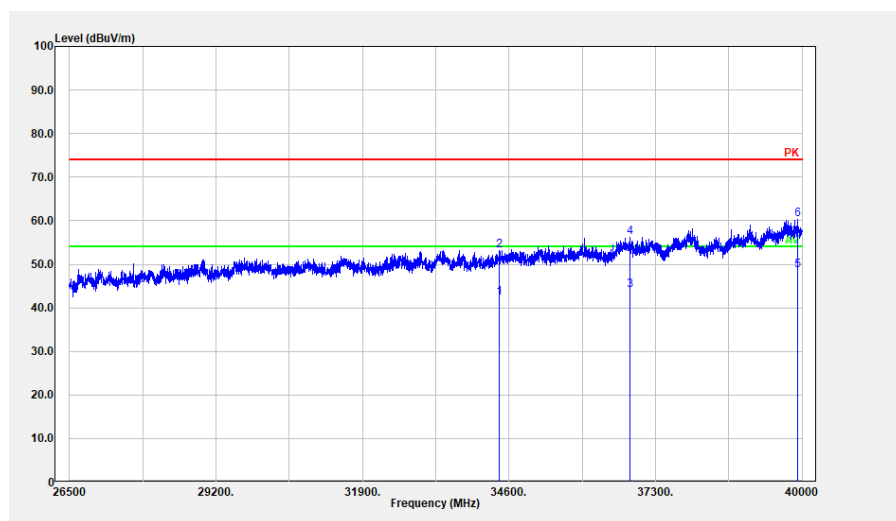
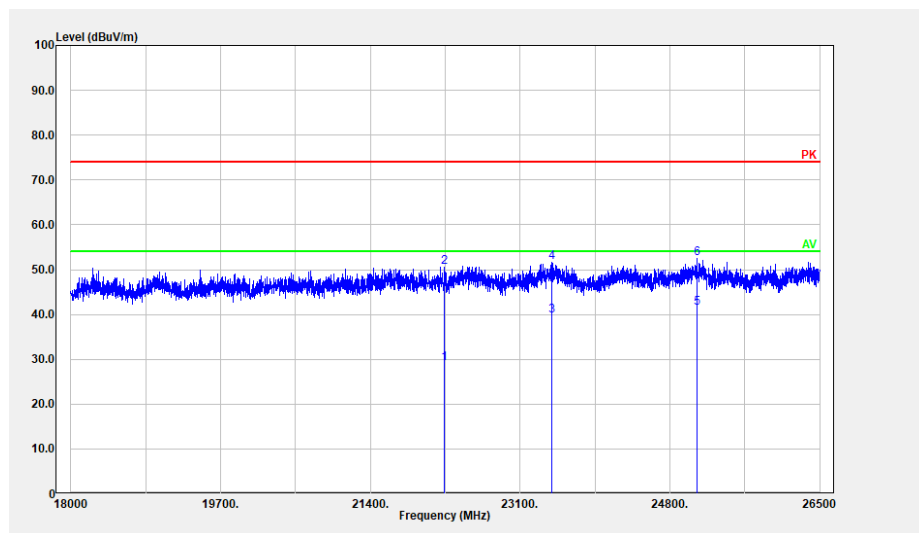
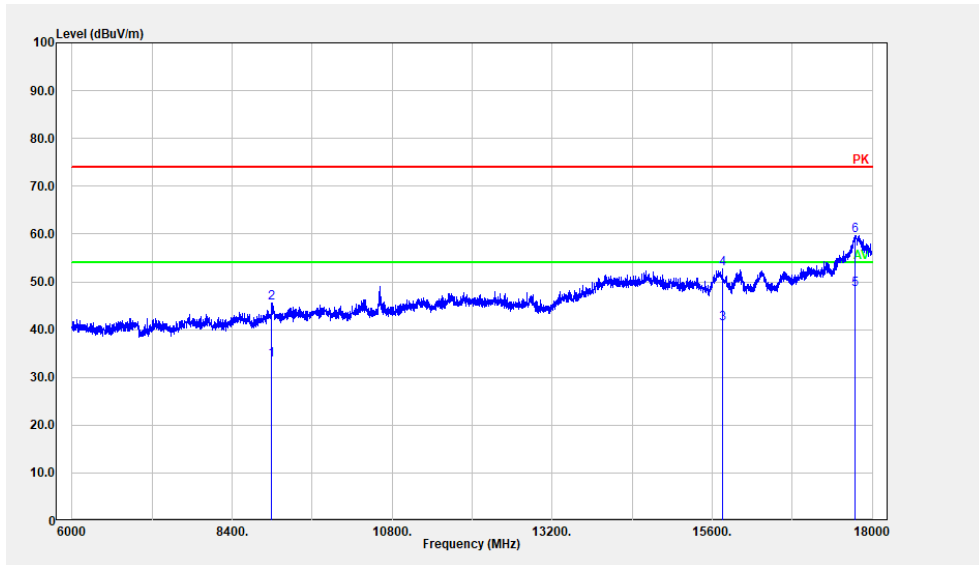
Worst Test plots(802.11a 5180 MHz was the worst)
Horizontal:





Vertical:





4.3 Emission Bandwidth:

Serial Number:	CR22020089-RF-S1	Test Date:	2022-04-20
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.3	Relative Humidity: (%)	55	ATM Pressure: (kPa)	101.1
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2021-07-22	2022-07-21
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180	29.200	17.120
	5200	25.680	17.040
	5240	25.200	17.040
802.11n ht20	5180	22.320	17.920
	5200	22.480	17.840
	5240	23.120	17.920
802.11n ht40	5190	40.640	36.480
	5230	40.800	36.480
802.11ac vht80	5210	82.240	76.480
Note: Test only was performed at Chain 0. The 99% Occupied Bandwidths are not fall into the range of 5250-5350MHz			

5250-5350 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5260	30.560	17.840
	5280	31.280	17.840
	5320	23.920	17.040
802.11n ht20	5260	23.120	17.920
	5280	24.160	17.920
	5320	22.960	17.920
802.11n ht40	5270	40.800	36.480
	5310	40.640	36.480
802.11ac vht80	5290	82.240	76.480
Note: Test only was performed at Chain 0.			

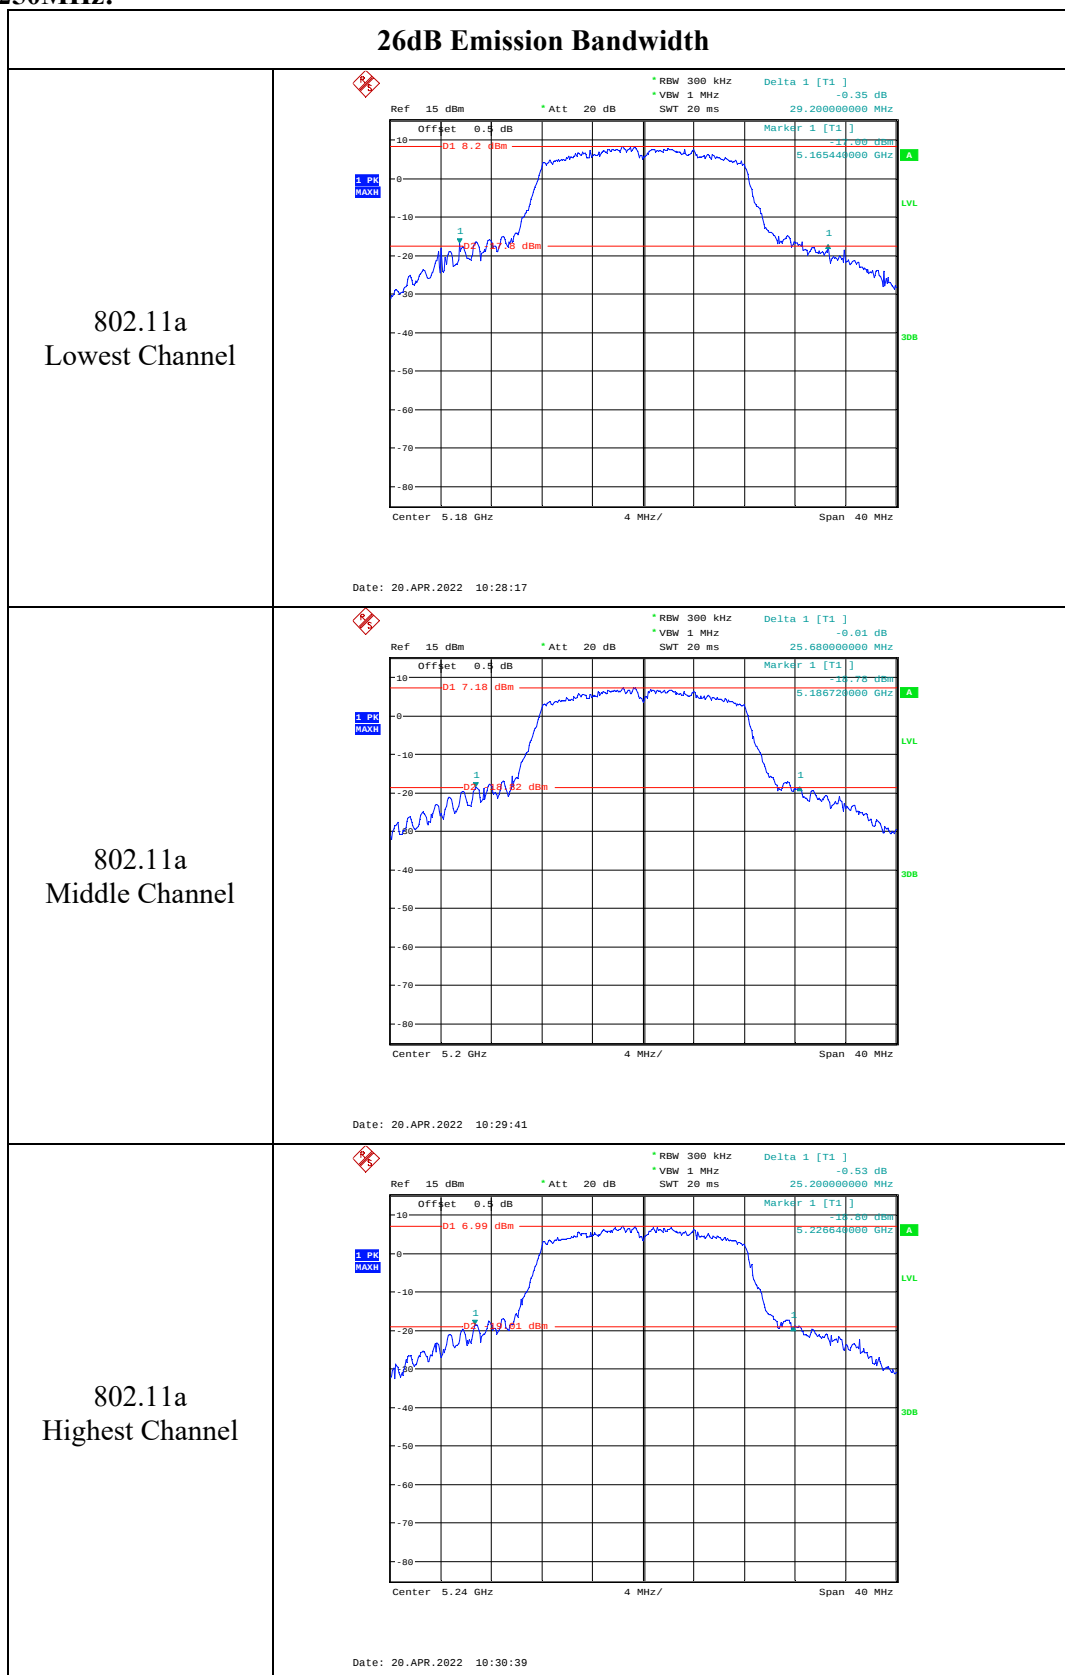
5470-5725 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5500	27.680	17.360
	5580	31.920	18.880
	5700	21.520	17.040
	5720	29.859	22.32
802.11n ht20	5500	20.800	17.840
	5580	26.080	17.920
	5700	20.880	17.840
	5720	29.885	18.16
802.11n ht40	5510	40.800	36.480
	5550	40.640	36.480
	5670	40.800	36.480
	5710	54.692	36.96
802.11ac vht80	5530	82.560	76.800
	5610	82.978	76.8
	5690	82.560	76.480
Note: Test only was performed at Chain 0.			

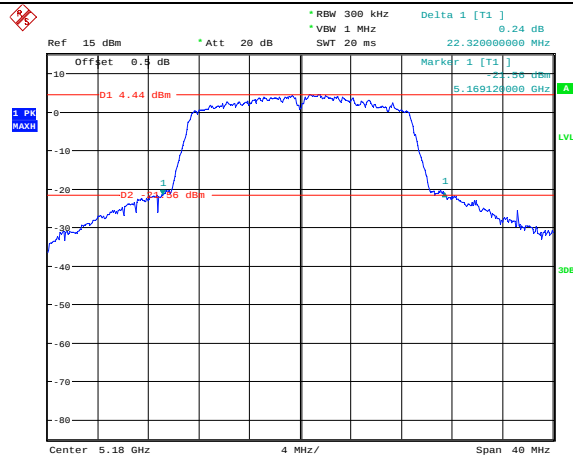
5725-5850 MHz:

Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5745	15.200	17.040
	5785	15.200	17.840
	5825	15.280	17.680
802.11n ht20	5745	15.280	18.000
	5785	15.120	17.840
	5825	15.200	17.840
802.11n ht40	5755	35.520	36.640
	5795	35.520	36.480
802.11ac vht80	5775	76.480	76.800
Note: 6dB Emission Bandwidth Limit: ≥ 0.5 MHz Test only was performed at Chain 0. The 99% Occupied Bandwidths are not fall into the range of 5470-5725MHz			

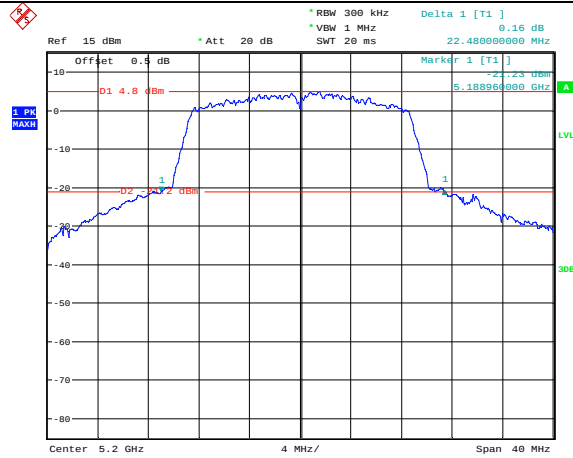
5150-5250MHz:



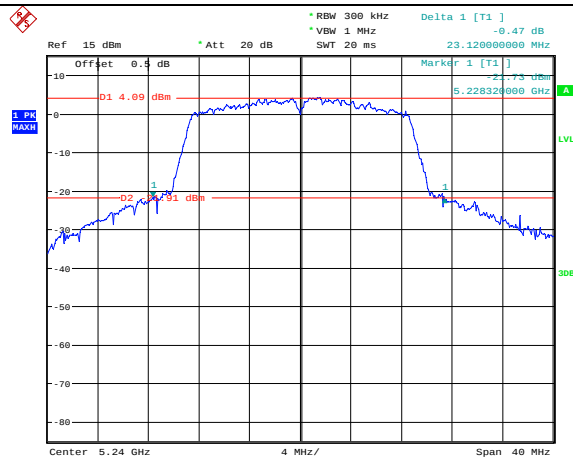
26dB Emission Bandwidth

802.11n ht20
Lowest Channel

Date: 20.APR.2022 10:32:10

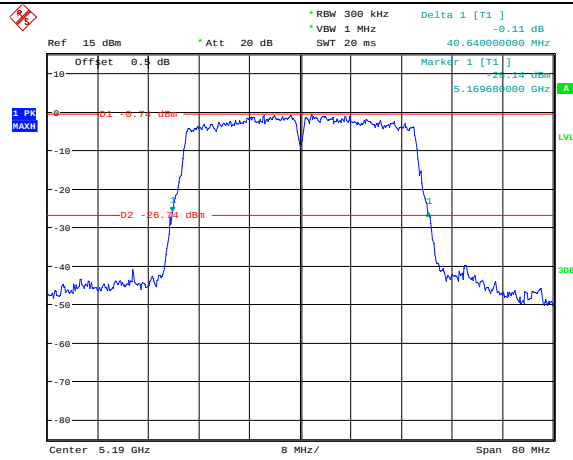
802.11n ht20
Middle Channel

Date: 20.APR.2022 10:33:16

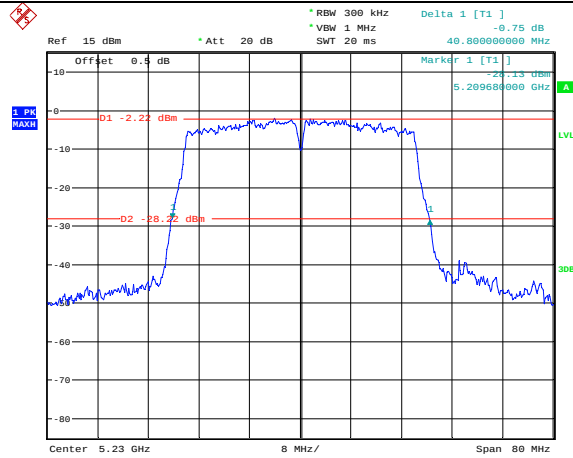
802.11n ht20
Highest Channel

Date: 20.APR.2022 10:34:31

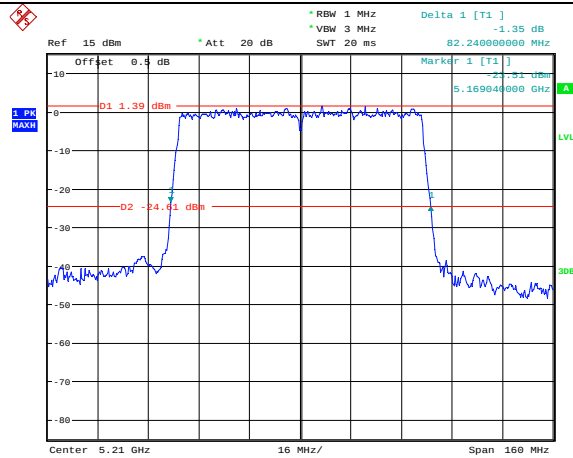
26dB Emission Bandwidth

802.11n ht40
Lowest Channel

Date: 20.APR.2022 10:36:14

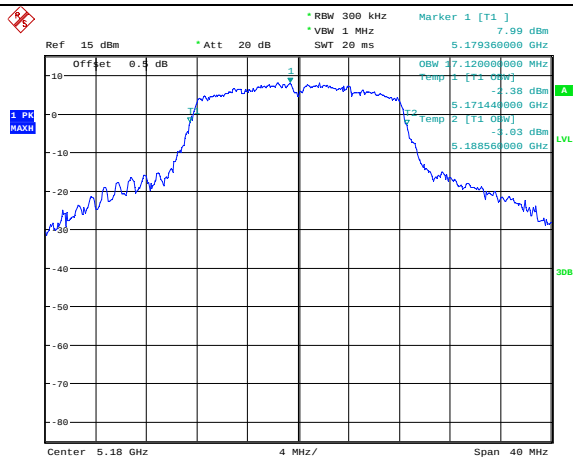
802.11n ht40
Highest Channel

Date: 20.APR.2022 10:37:14

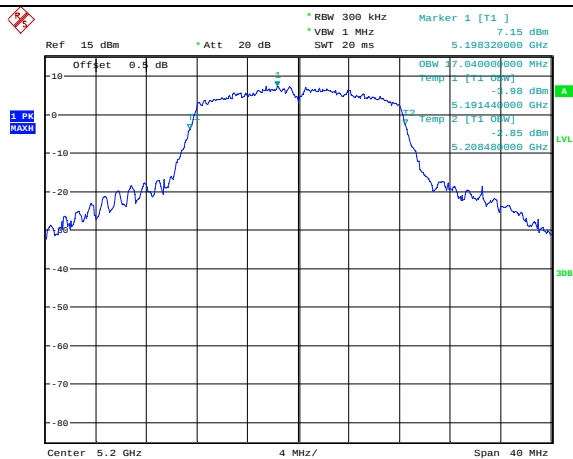
802.11ac vht80
Middle Channel

Date: 20.APR.2022 10:38:34

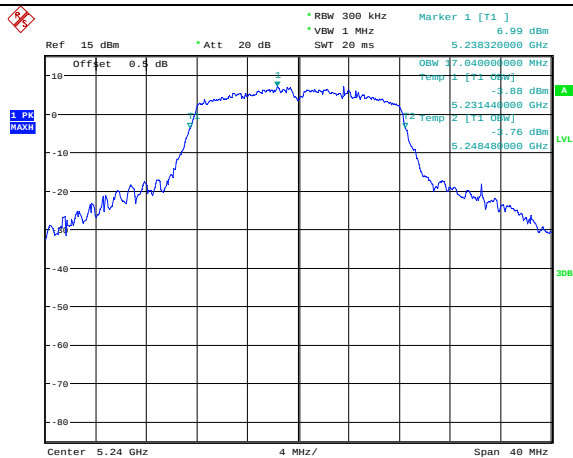
99% Emission Bandwidth

802.11a
Lowest Channel

Date: 20.APR.2022 10:28:32

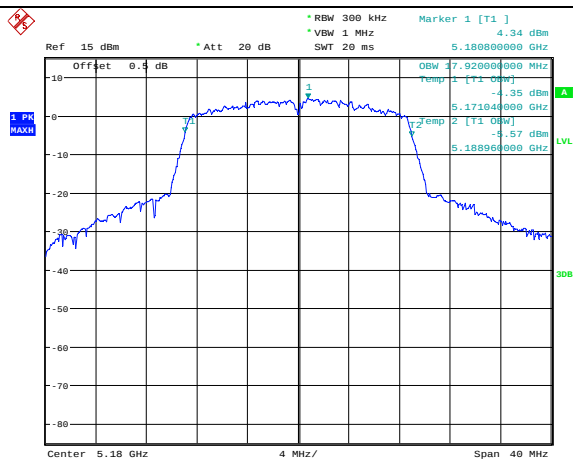
802.11a
Middle Channel

Date: 20.APR.2022 10:29:55

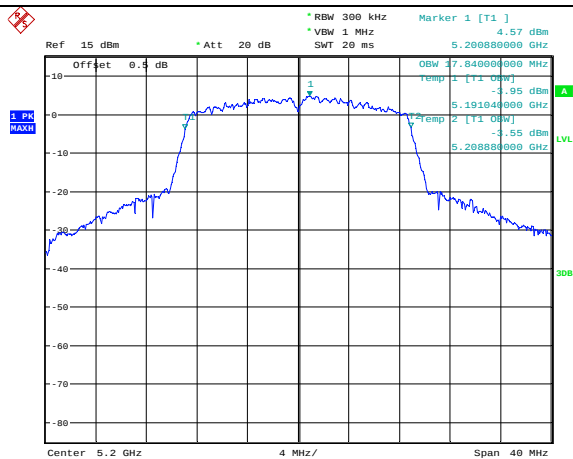
802.11a
Highest Channel

Date: 20.APR.2022 10:30:53

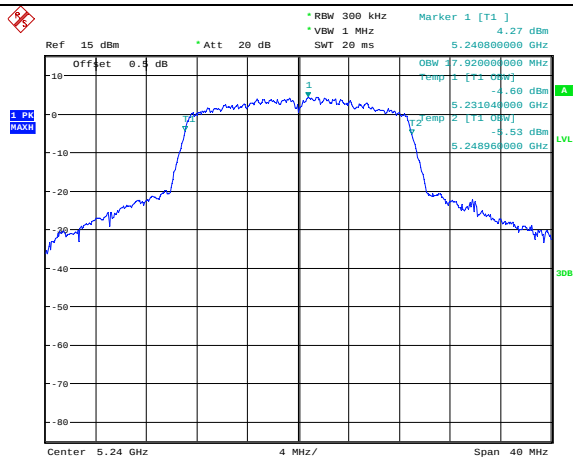
99% Emission Bandwidth

802.11n ht20
Lowest Channel

Date: 20.APR.2022 10:32:24

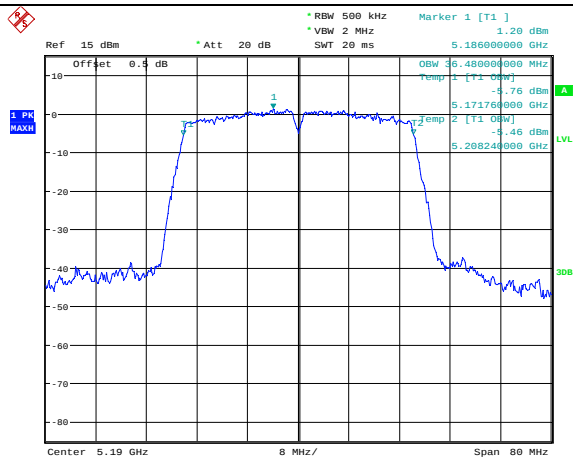
802.11n ht20
Middle Channel

Date: 20.APR.2022 10:33:30

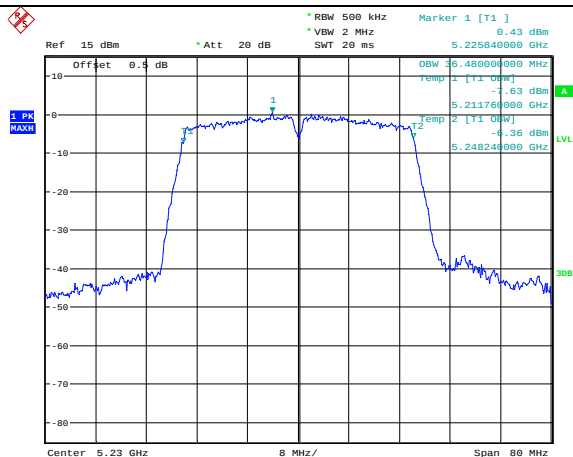
802.11n ht20
Highest Channel

Date: 20.APR.2022 10:34:48

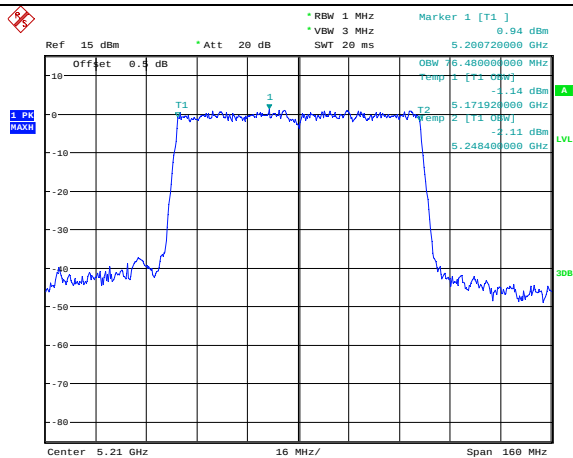
99% Emission Bandwidth

802.11n ht40
Lowest Channel

Date: 20.APR.2022 10:36:28

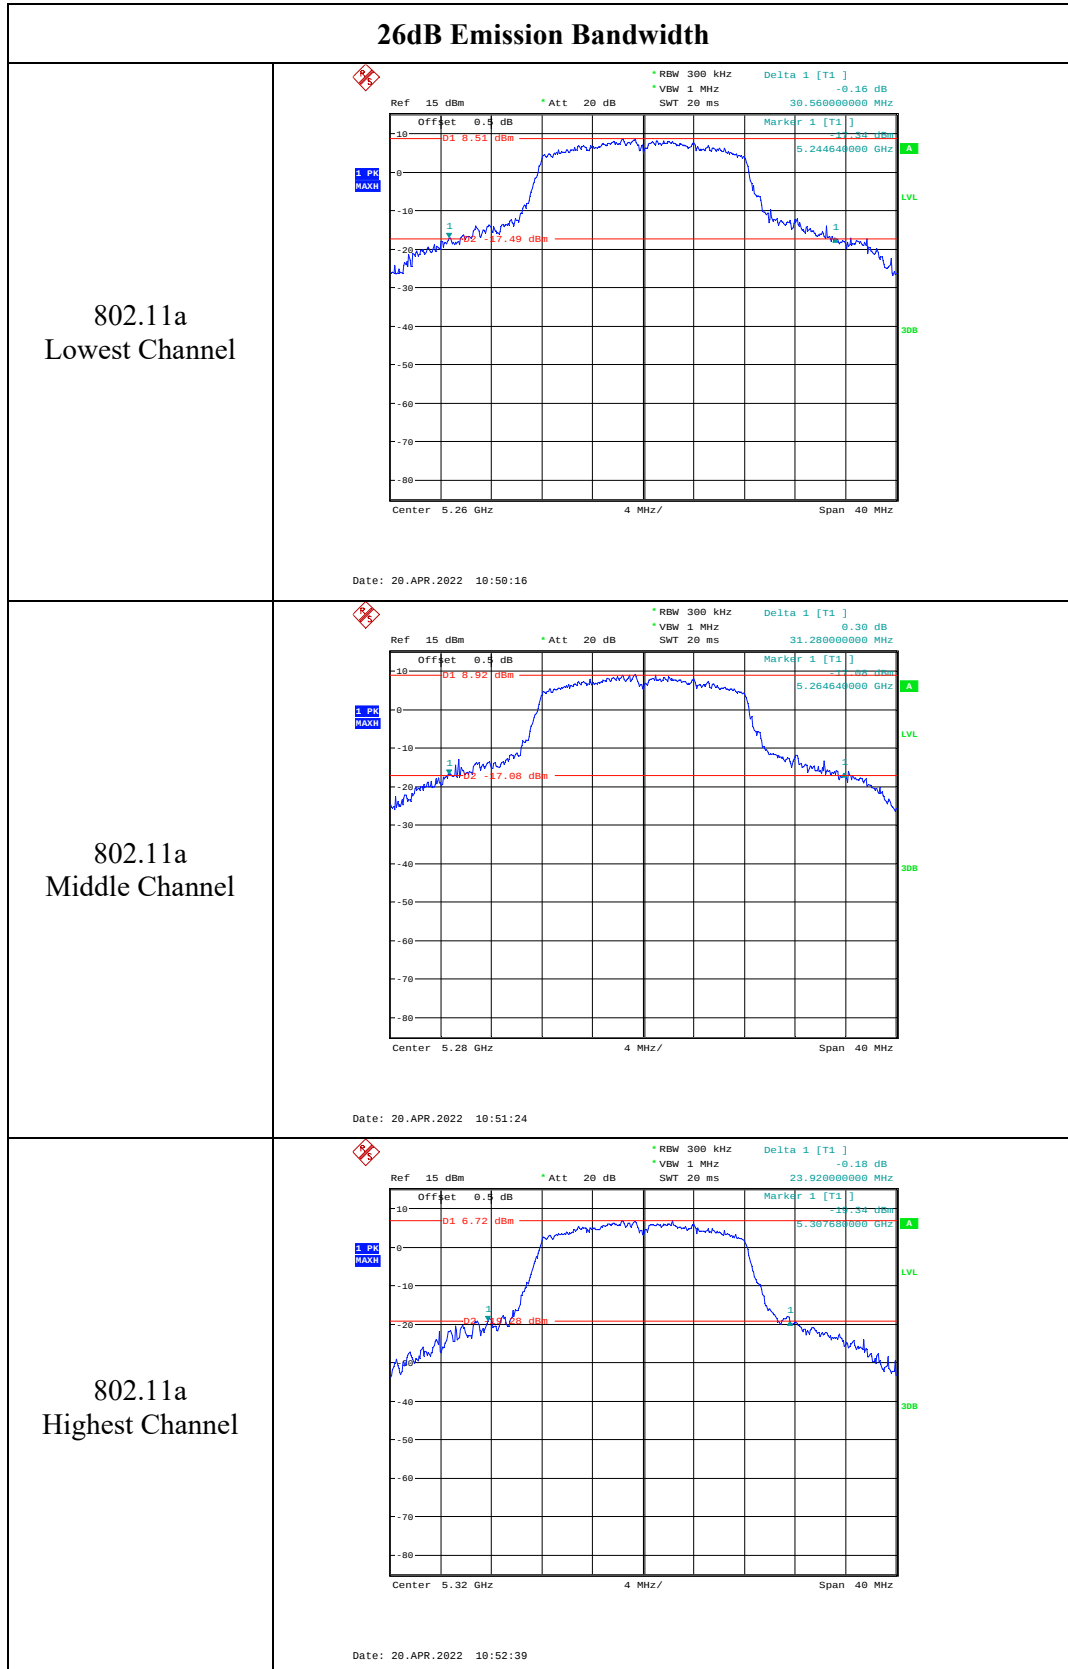
802.11n ht40
Highest Channel

Date: 20.APR.2022 10:37:28

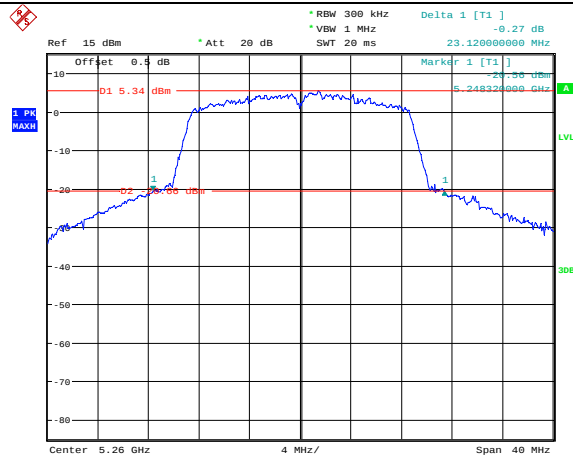
802.11ac vht80
Middle Channel

Date: 20.APR.2022 10:38:48

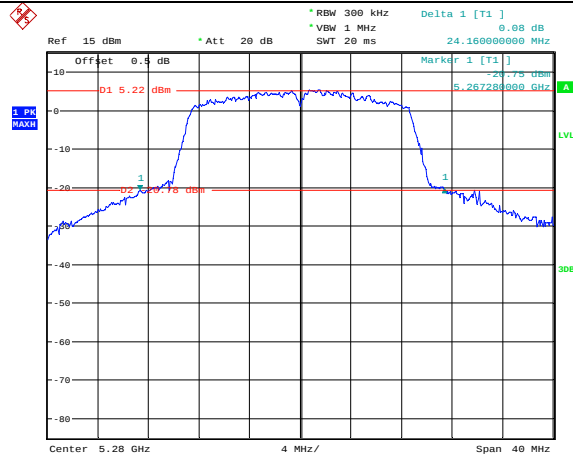
5250-5350MHz:



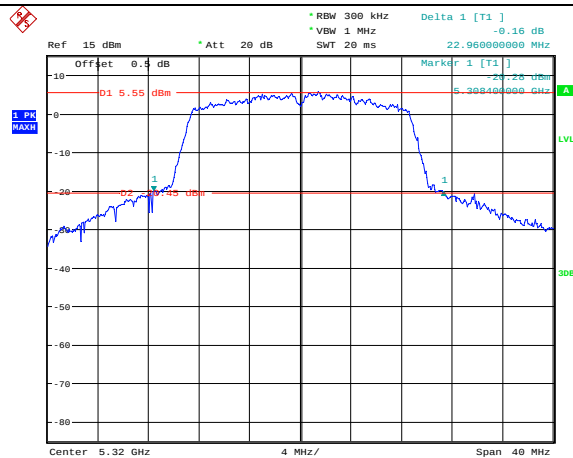
26dB Emission Bandwidth

802.11n ht20
Lowest Channel

Date: 20.APR.2022 10:54:25

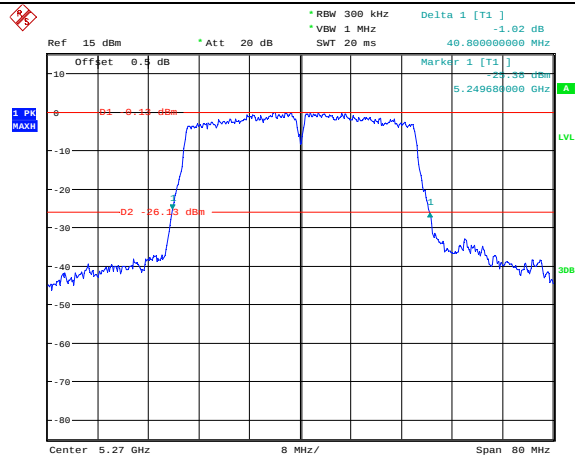
802.11n ht20
Middle Channel

Date: 20.APR.2022 10:55:26

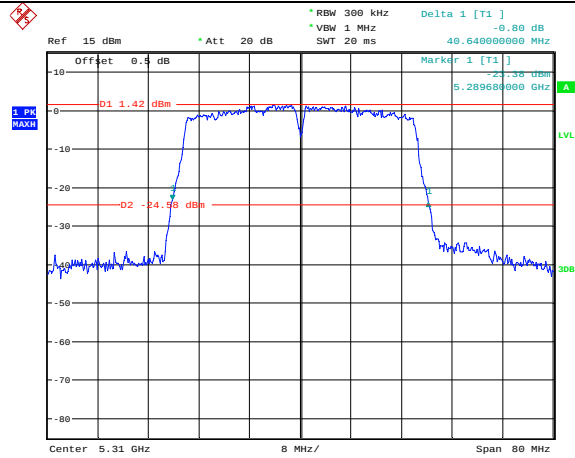
802.11n ht20
Highest Channel

Date: 20.APR.2022 10:56:22

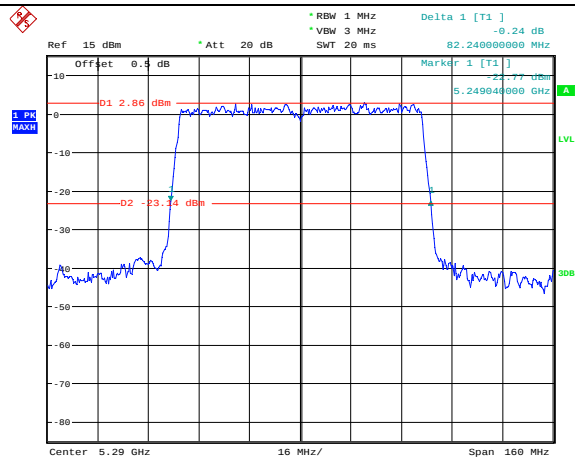
26dB Emission Bandwidth

802.11n ht40
Lowest Channel

Date: 20.APR.2022 10:57:54

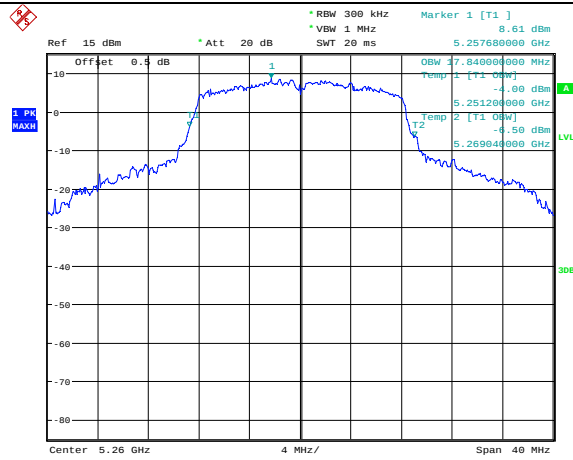
802.11n ht40
Highest Channel

Date: 20.APR.2022 10:58:47

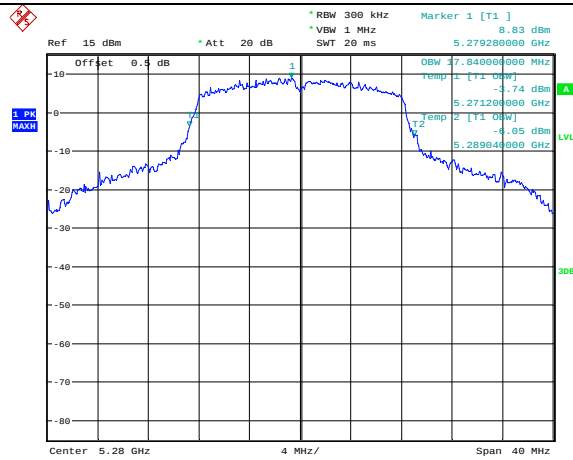
802.11ac vht80
Middle Channel

Date: 20.APR.2022 11:00:11

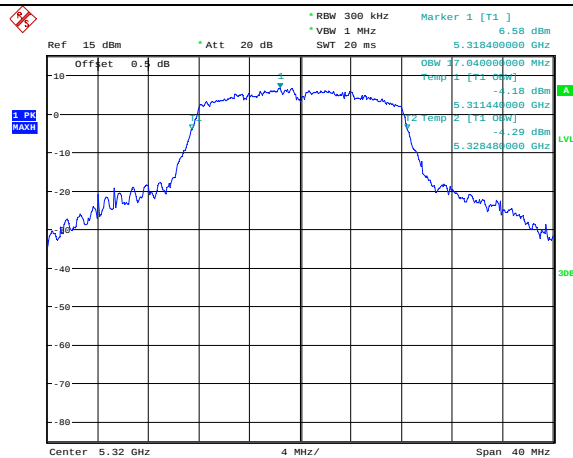
99% Emission Bandwidth

802.11a
Lowest Channel

Date: 20.APR.2022 10:50:30

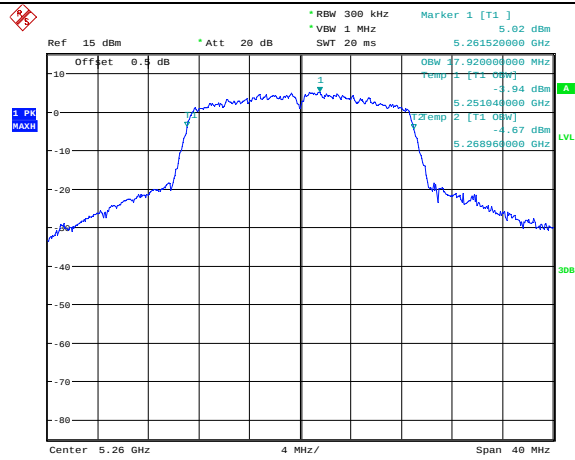
802.11a
Middle Channel

Date: 20.APR.2022 10:51:38

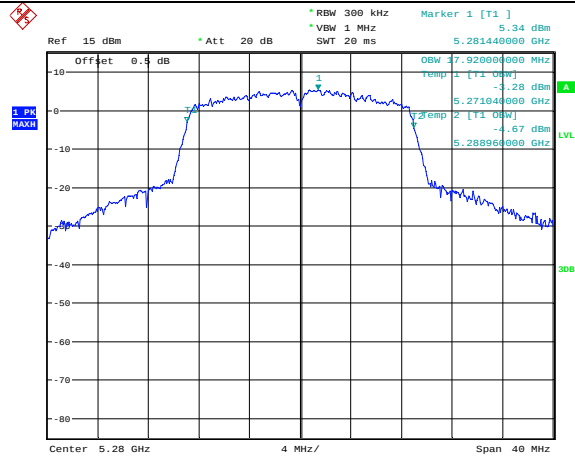
802.11a
Highest Channel

Date: 20.APR.2022 10:52:53

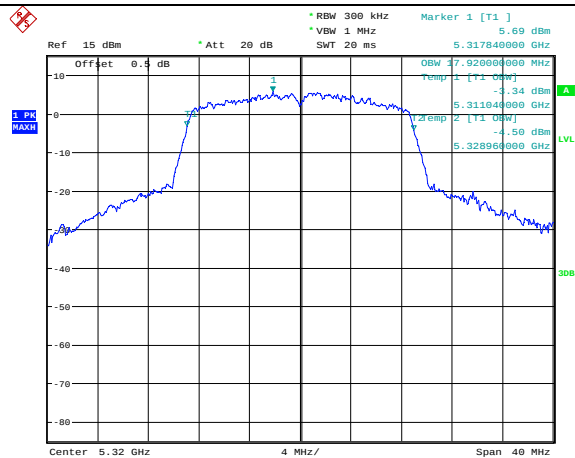
99% Emission Bandwidth

802.11n ht20
Lowest Channel

Date: 20.APR.2022 10:54:39

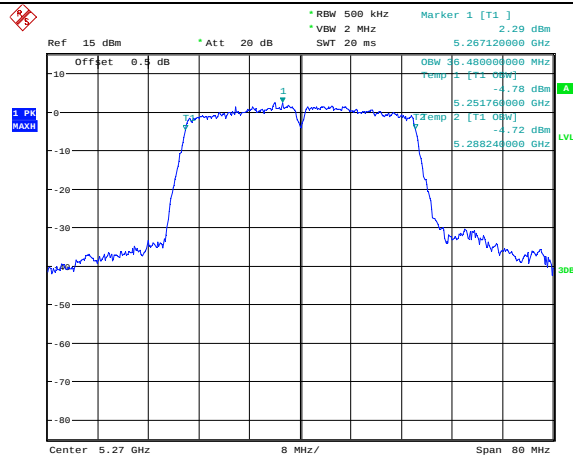
802.11n ht20
Middle Channel

Date: 20.APR.2022 10:55:49

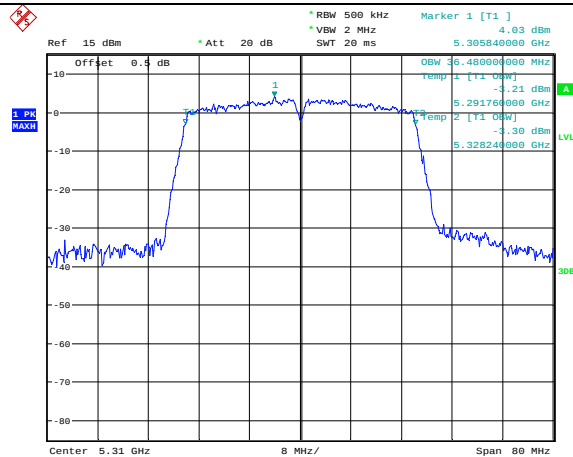
802.11n ht20
Highest Channel

Date: 20.APR.2022 10:56:36

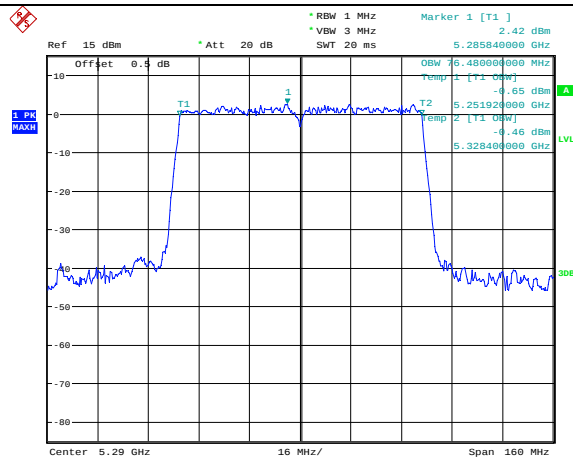
99% Emission Bandwidth

802.11n ht40
Lowest Channel

Date: 20.APR.2022 10:58:08

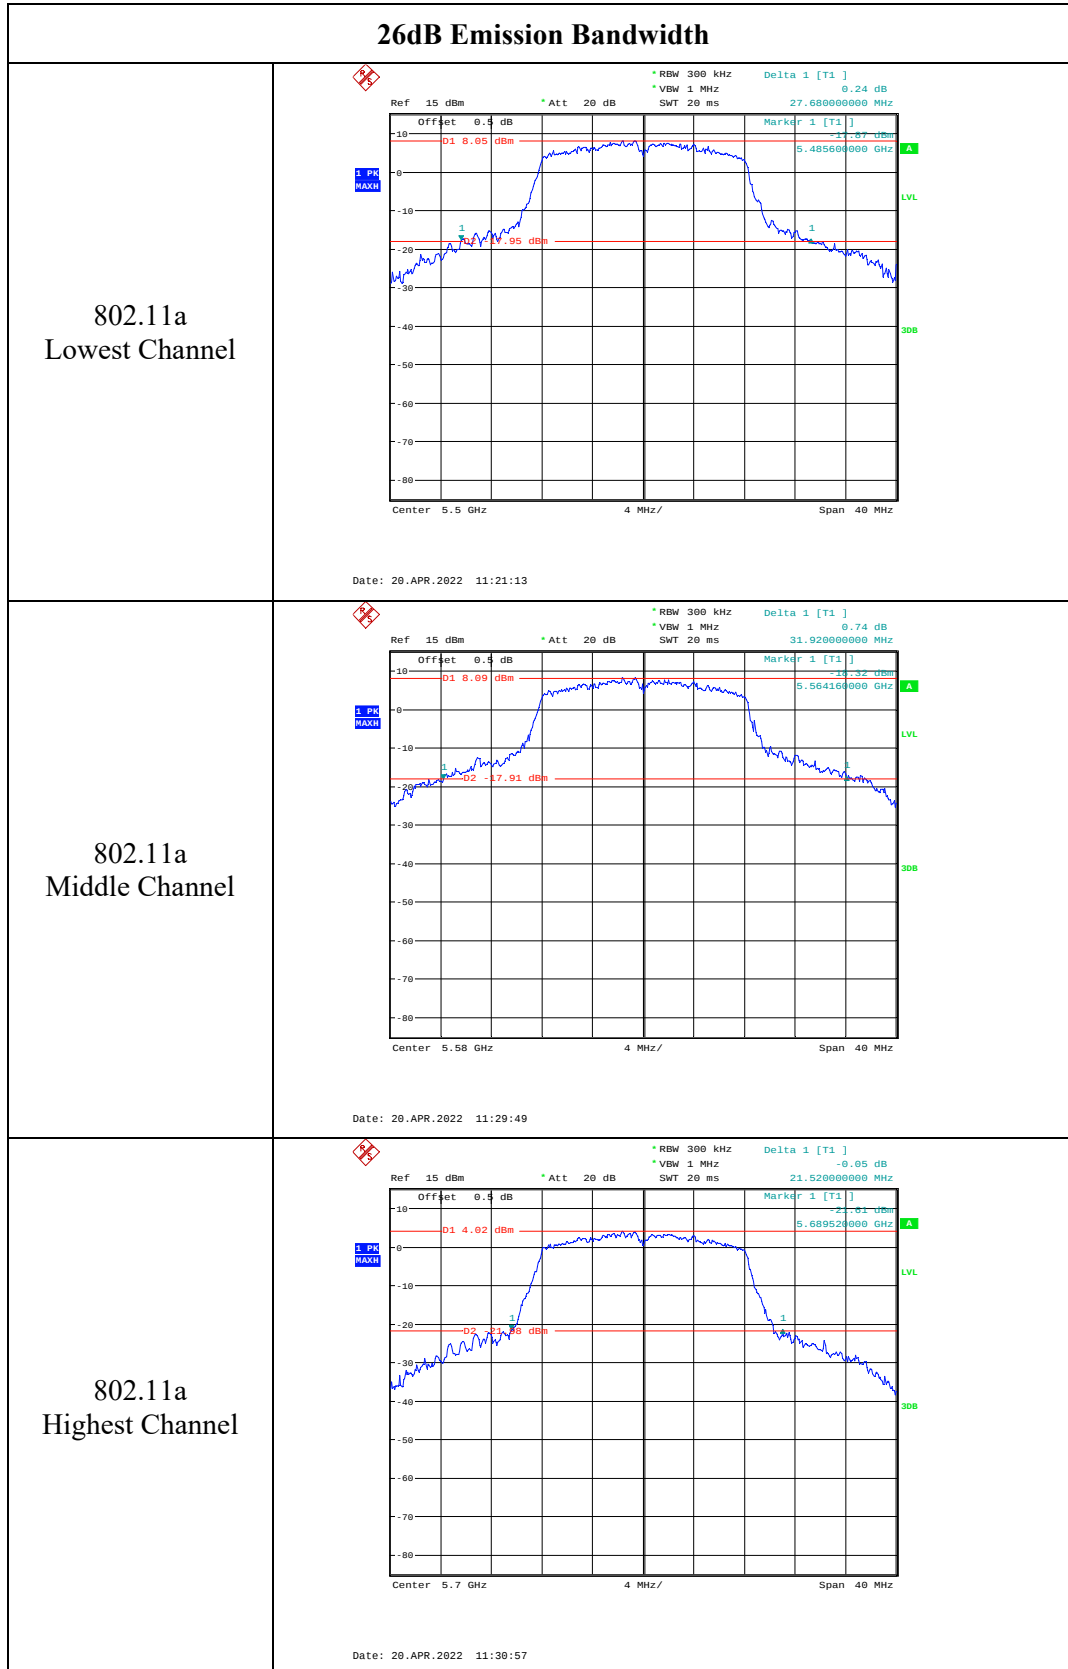
802.11n ht40
Highest Channel

Date: 20.APR.2022 10:59:02

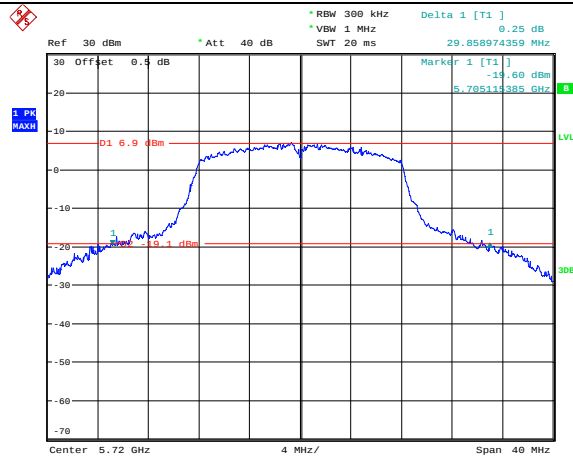
802.11ac vht80
Middle Channel

Date: 20.APR.2022 11:00:26

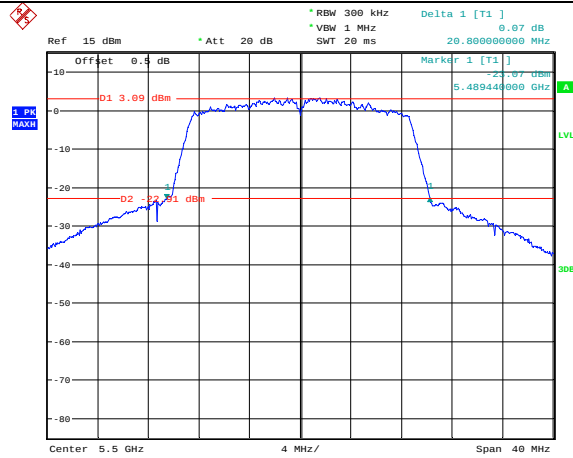
5470-5725MHz:



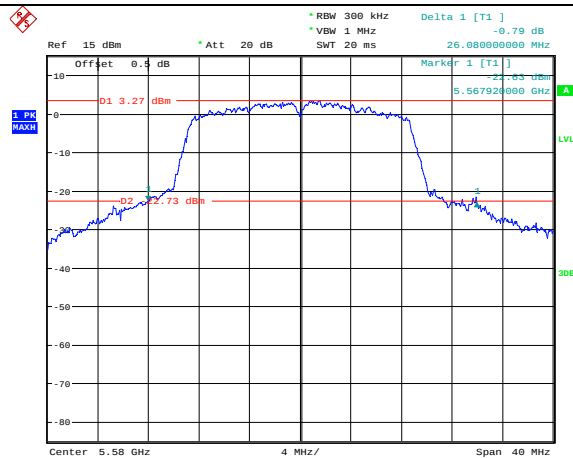
26dB Emission Bandwidth

802.11a
Additional Channel

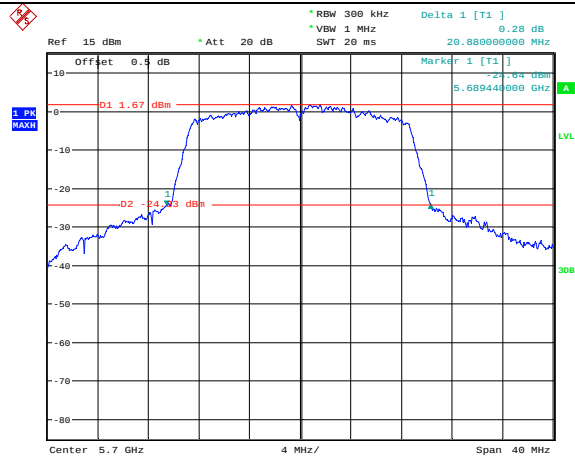
Date: 20.APR.2022 16:12:23

802.11n ht20
Lowest Channel

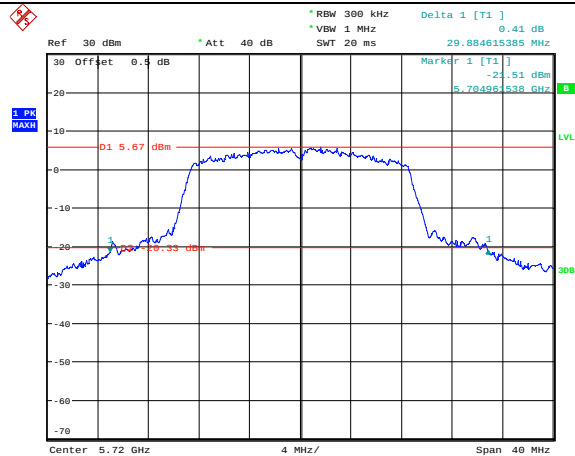
Date: 20.APR.2022 11:32:42

802.11n ht20
Middle Channel

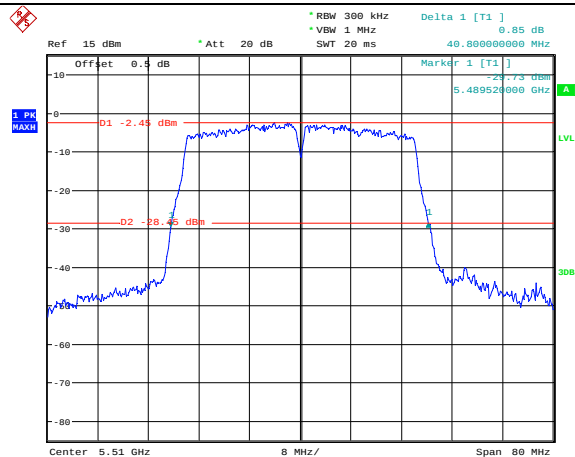
Date: 20.APR.2022 11:33:44

802.11n ht20
Highest Channel

Date: 20.APR.2022 11:34:54

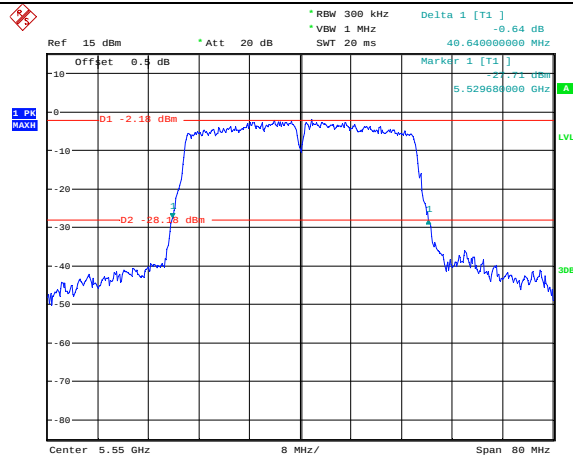
802.11n ht20
Additional Channel

Date: 20.APR.2022 16:18:58

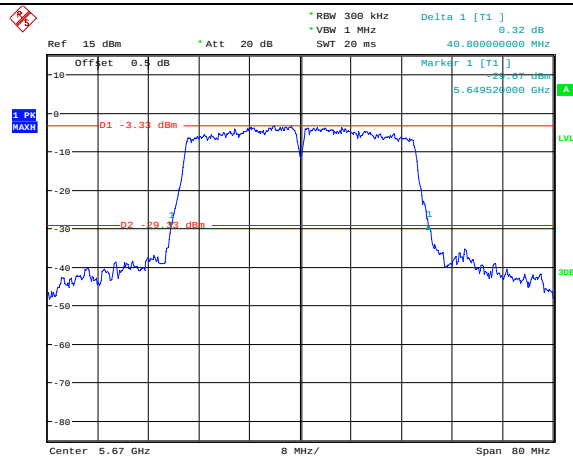
802.11n ht40
Lowest Channel

Date: 20.APR.2022 11:36:35

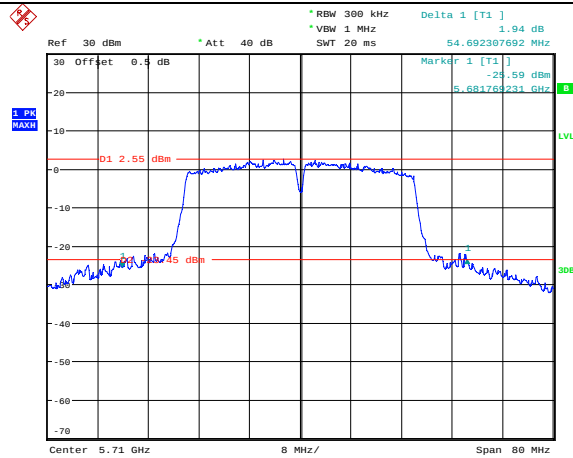
26dB Emission Bandwidth

802.11n ht40
Middle Channel

Date: 20.APR.2022 11:38:03

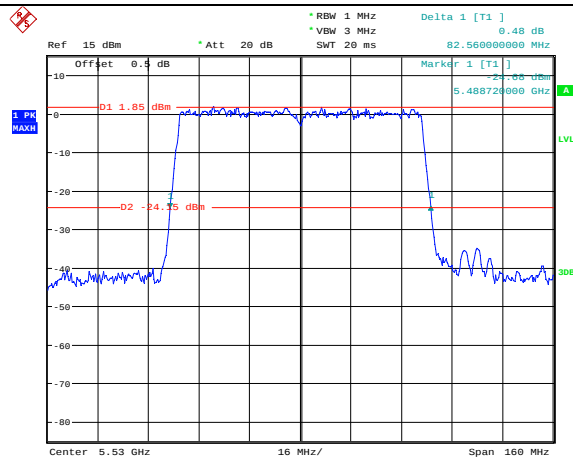
802.11n ht40
Highest Channel

Date: 20.APR.2022 11:39:14

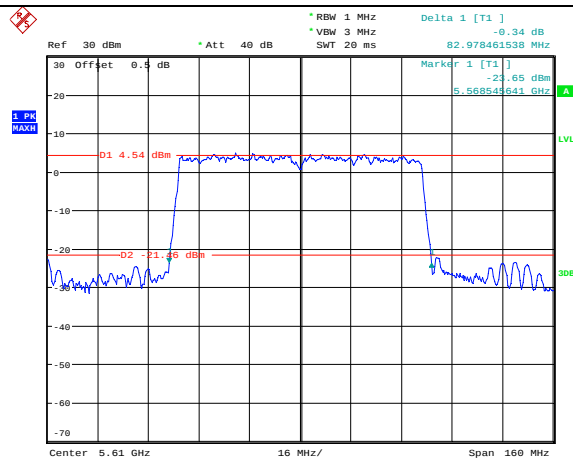
802.11n ht40
Additional Channel

Date: 20.APR.2022 16:21:20

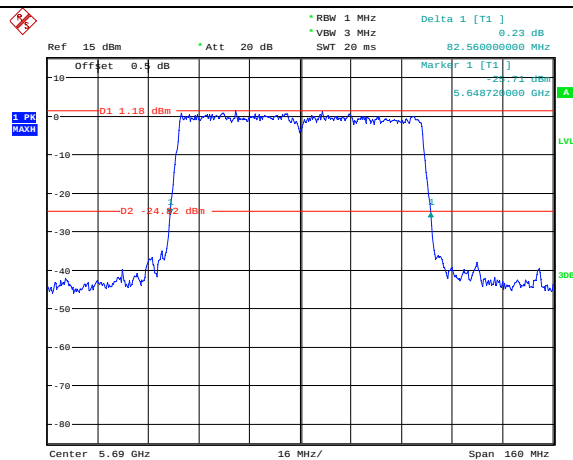
26dB Emission Bandwidth

802.11ac vht80
Lowest Channel

Date: 20.APR.2022 11:41:08

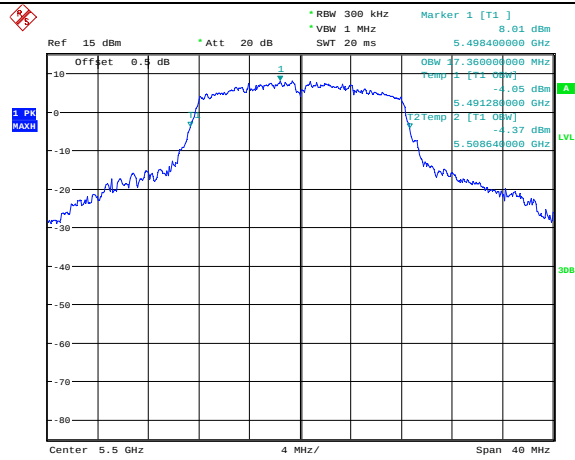
802.11ac vht80
Middle Channel

Date: 20.APR.2022 15:28:45

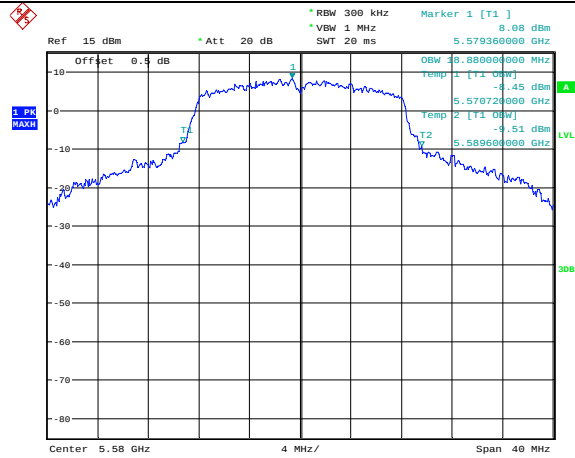
802.11ac vht80
Additional Channel

Date: 20.APR.2022 11:42:27

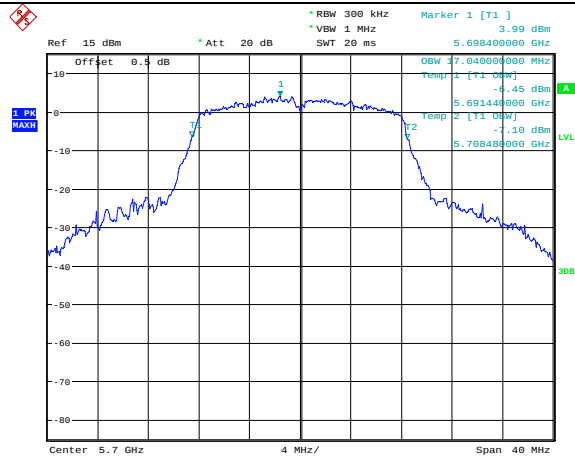
99% Emission Bandwidth

802.11a
Lowest Channel

Date: 20.APR.2022 11:21:28

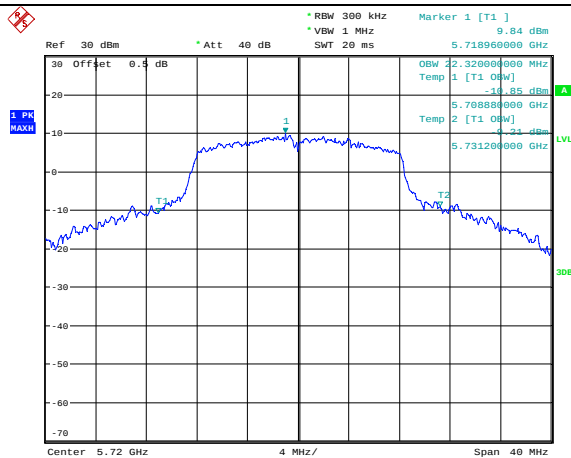
802.11a
Middle Channel

Date: 20.APR.2022 11:30:05

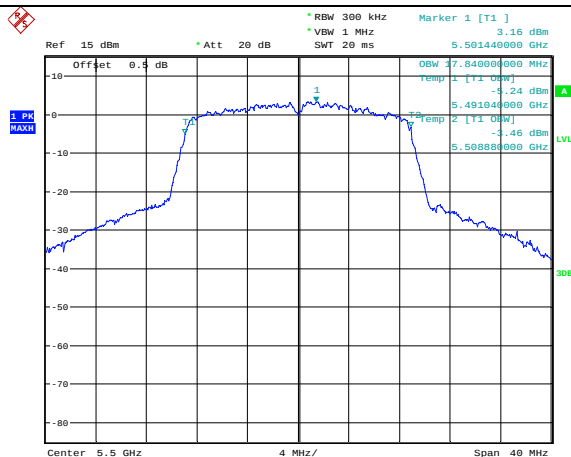
802.11a
Highest Channel

Date: 20.APR.2022 11:31:12

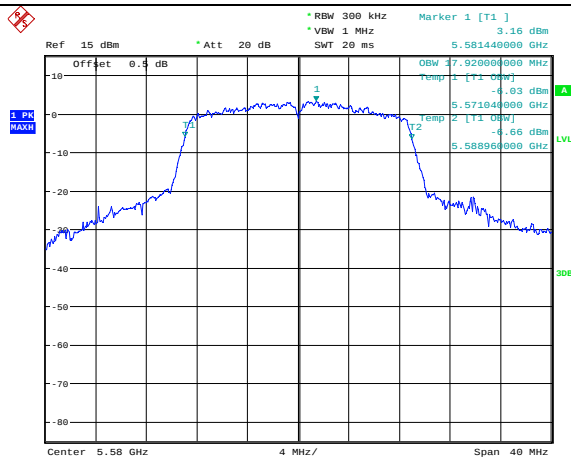
99% Emission Bandwidth

802.11a
Additional Channel

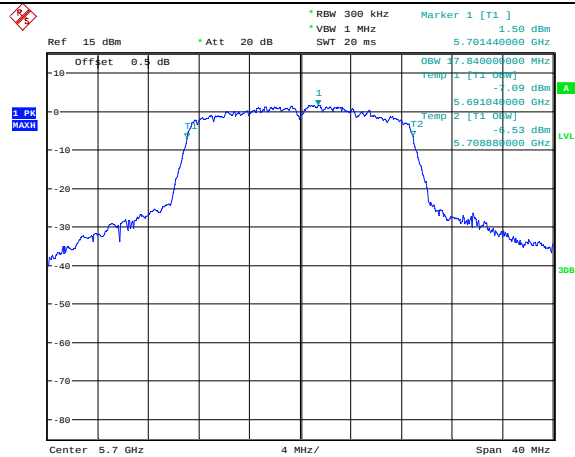
Date: 20.APR.2022 15:11:48

802.11n ht20
Lowest Channel

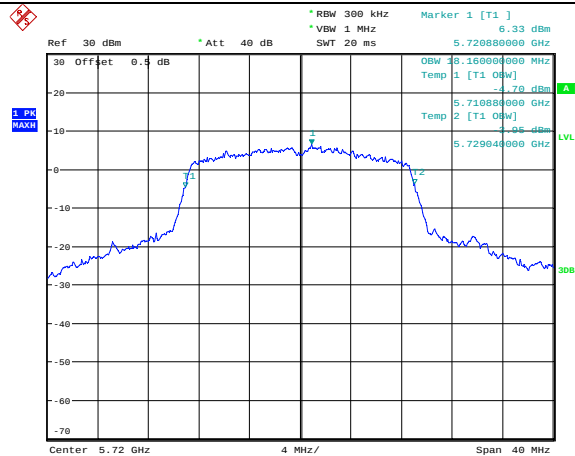
Date: 20.APR.2022 11:33:00

802.11n ht20
Middle Channel

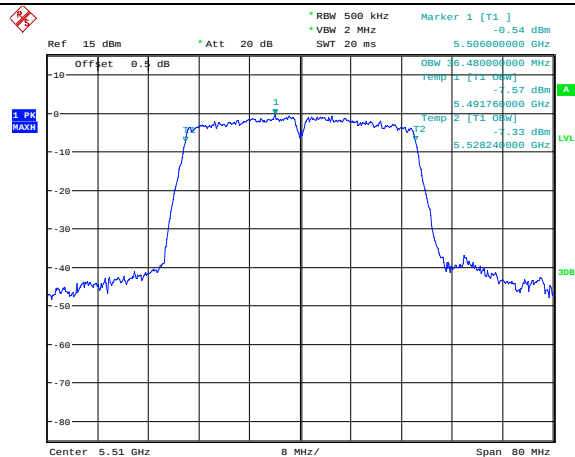
Date: 20.APR.2022 11:33:58

802.11n ht20
Highest Channel

Date: 20.APR.2022 11:35:08

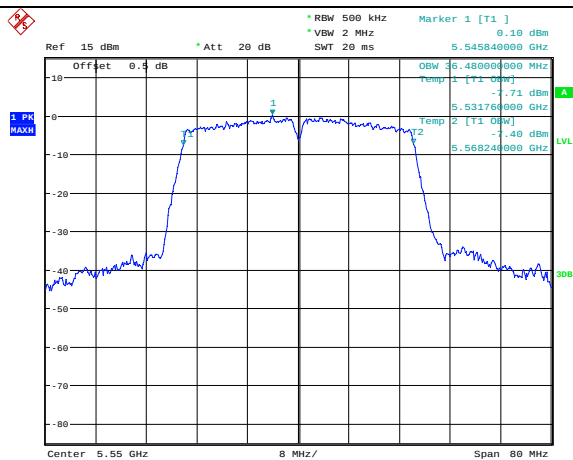
802.11n ht20
Additional Channel

Date: 20.APR.2022 15:14:48

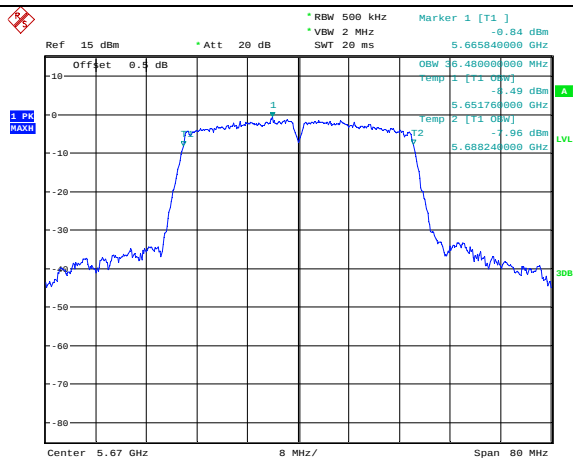
802.11n ht40
Lowest Channel

Date: 20.APR.2022 11:36:50

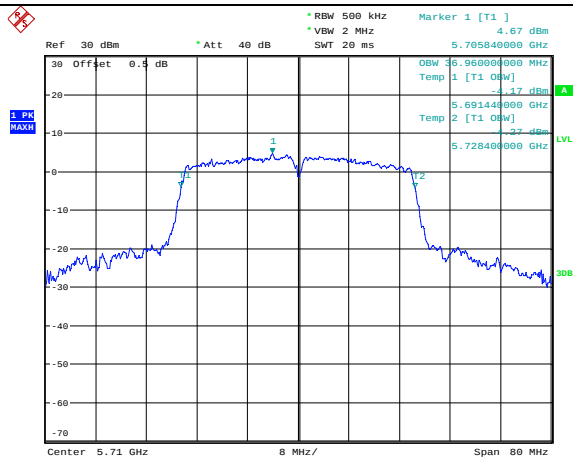
99% Emission Bandwidth

802.11n ht40
Middle Channel

Date: 20.APR.2022 11:38:18

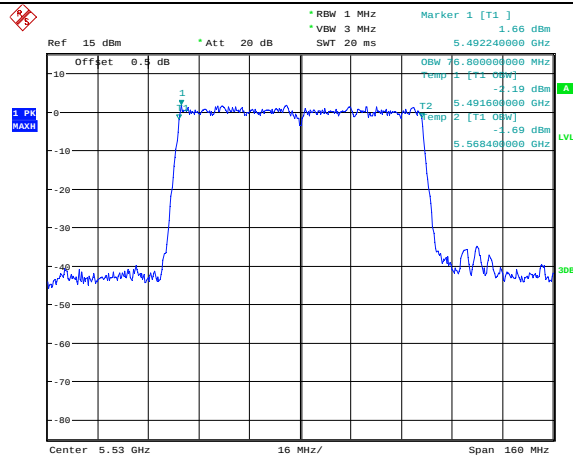
802.11n ht40
Highest Channel

Date: 20.APR.2022 11:39:28

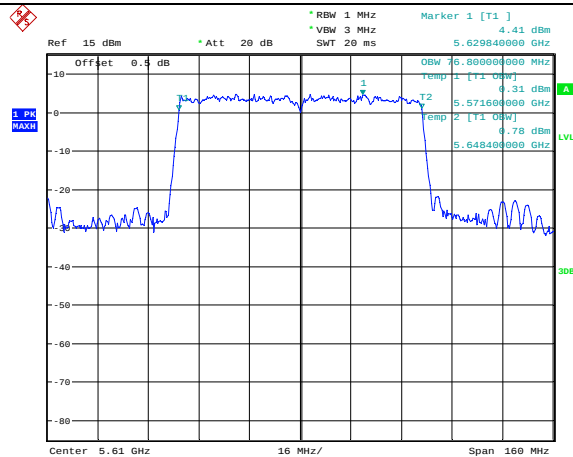
802.11n ht40
Additional Channel

Date: 20.APR.2022 15:16:06

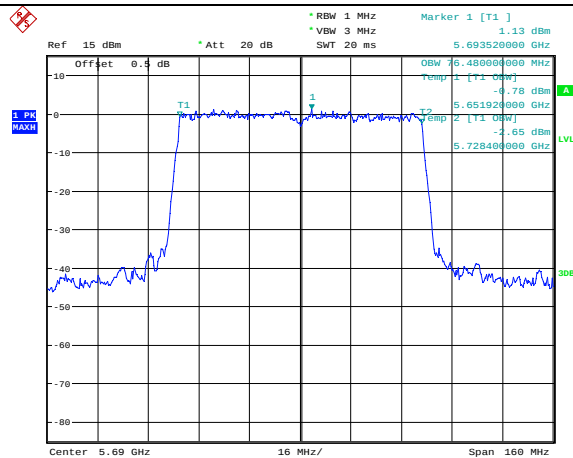
99% Emission Bandwidth

802.11ac vht80
Lowest Channel

Date: 20.APR.2022 11:41:22

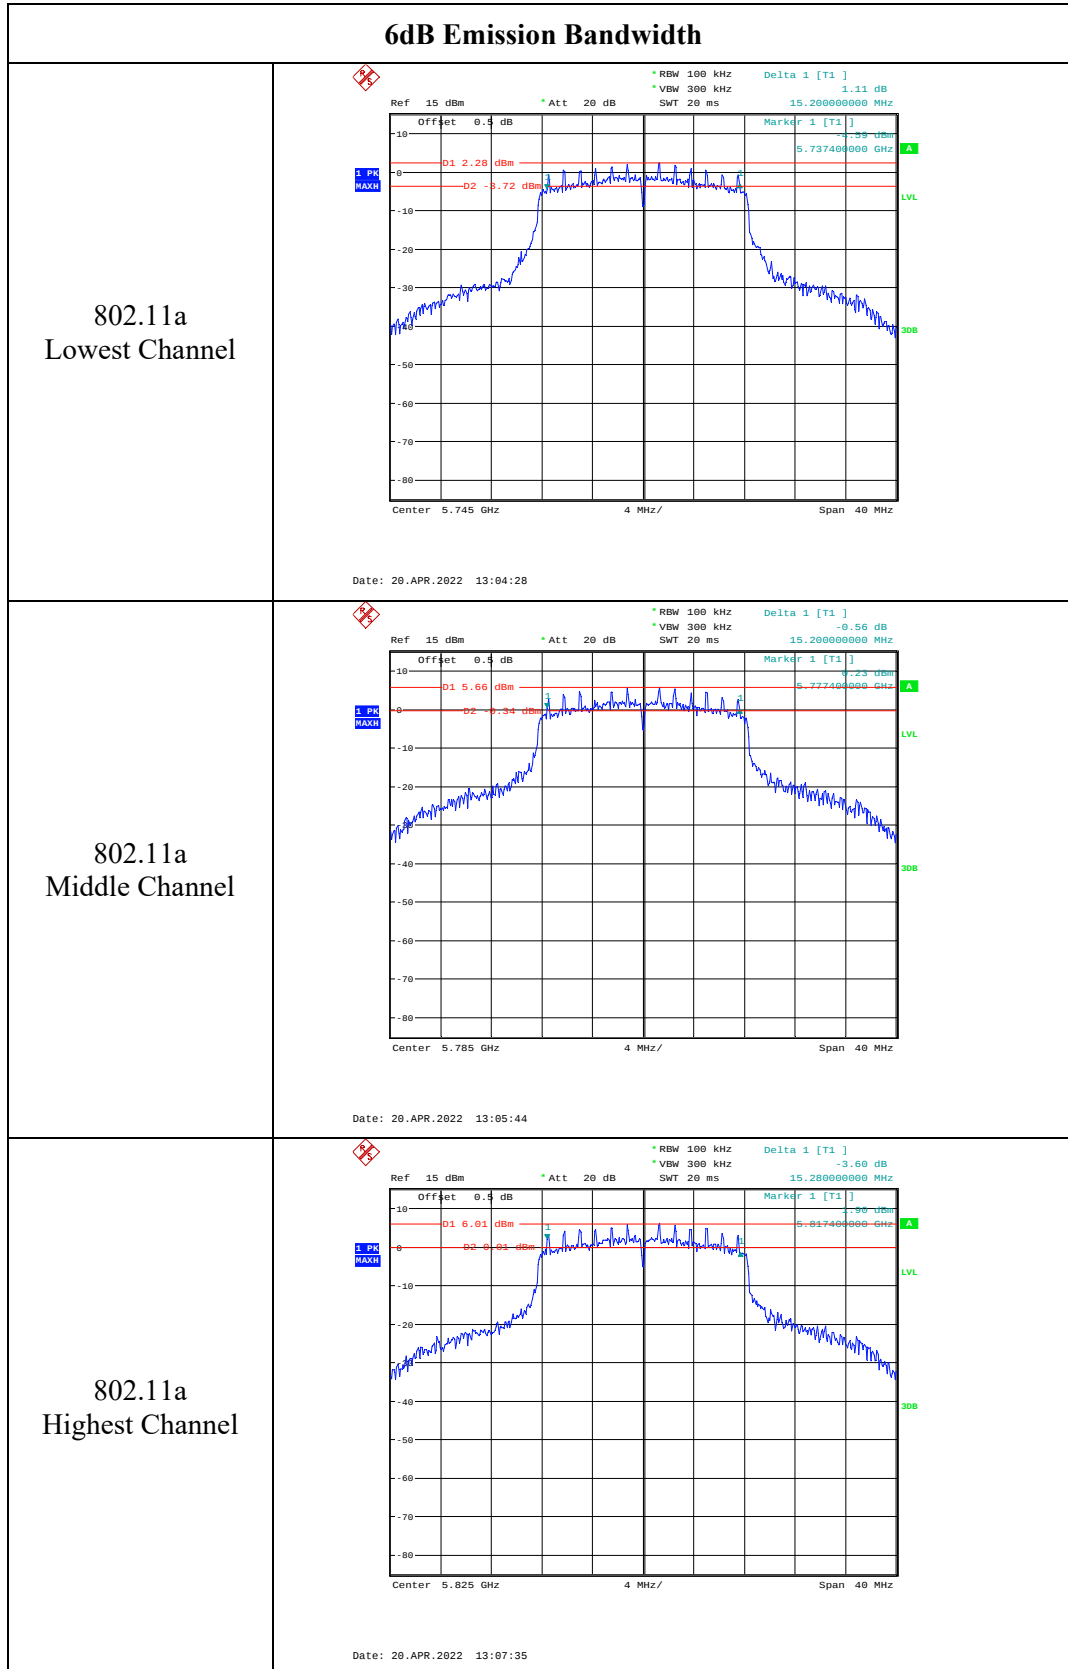
802.11ac vht80
Middle Channel

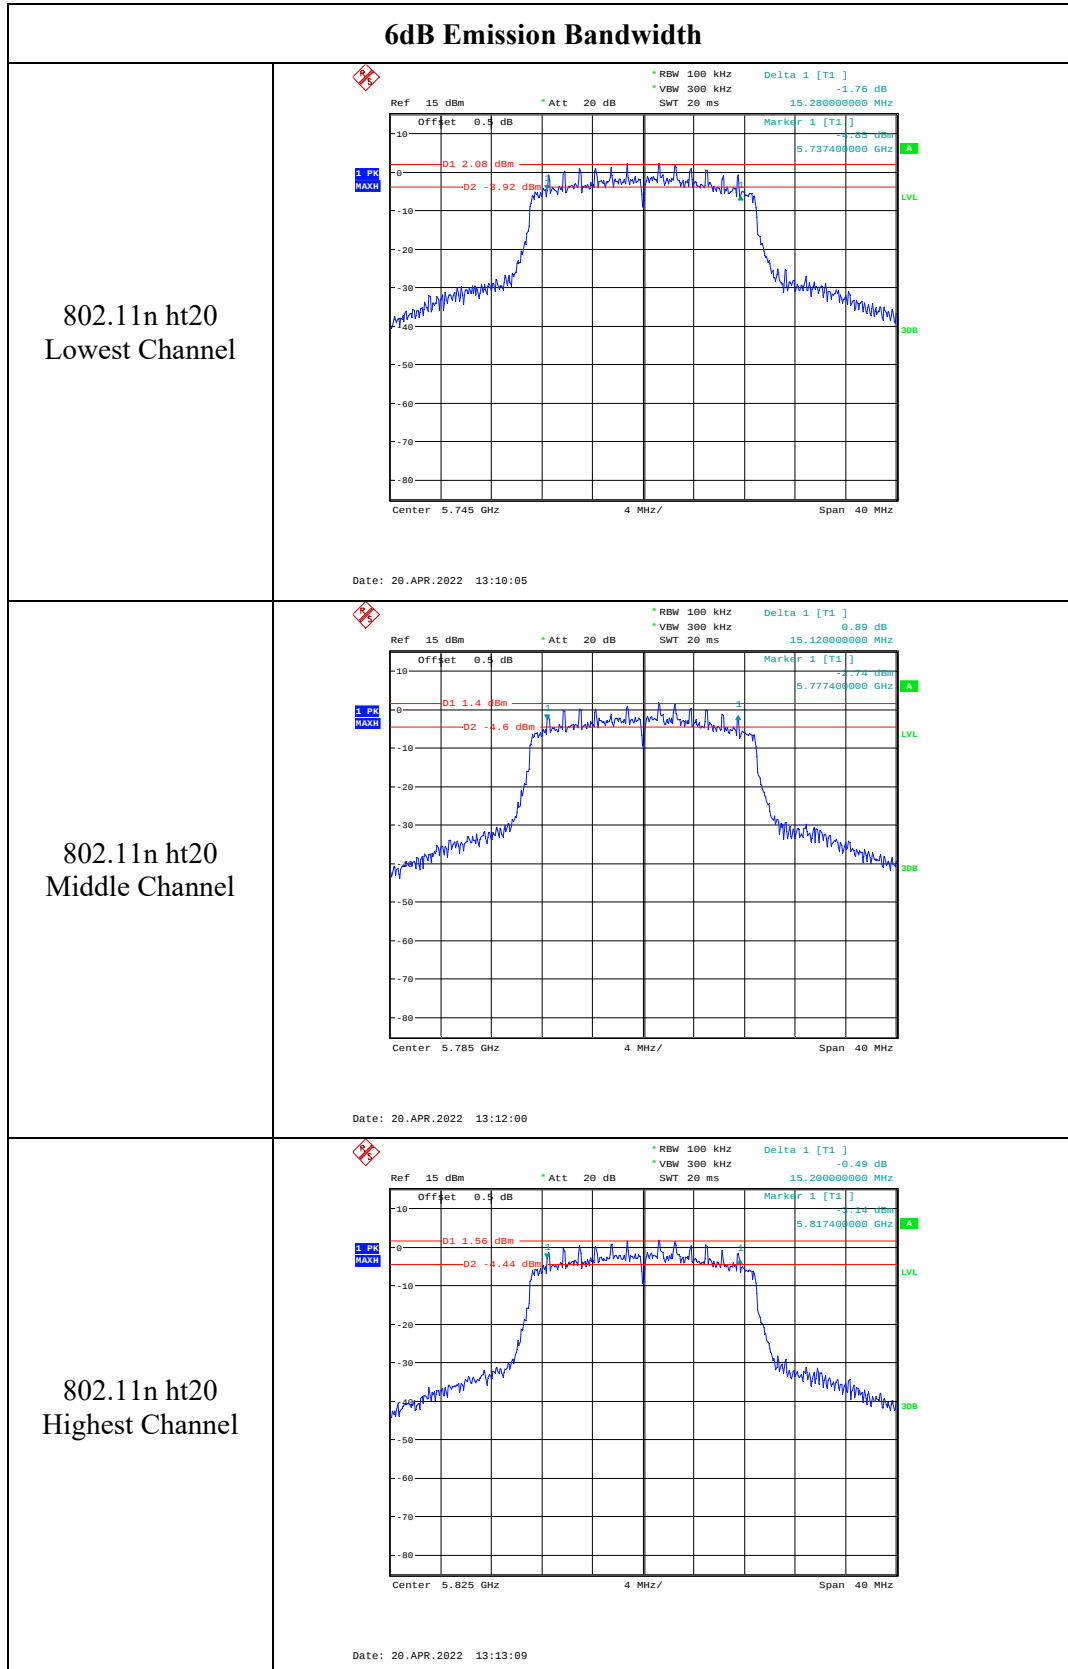
Date: 20.APR.2022 15:04:10

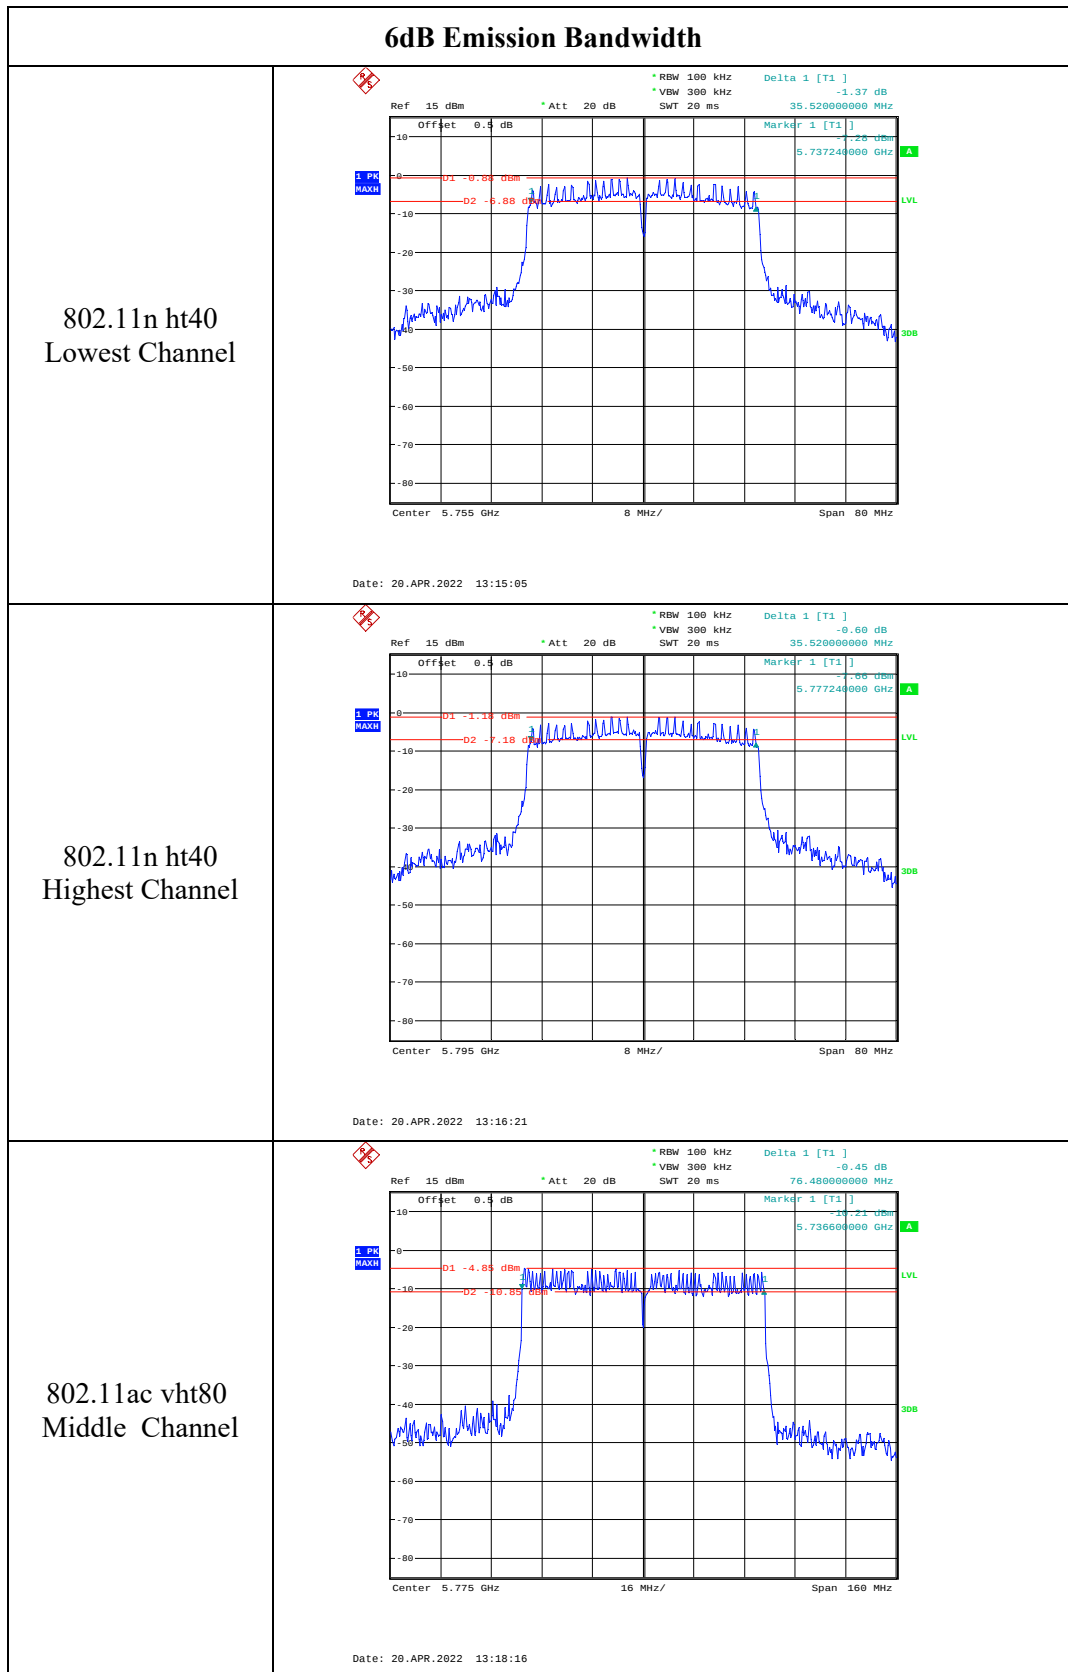
802.11ac vht80
Additional Channel

Date: 20.APR.2022 11:42:45

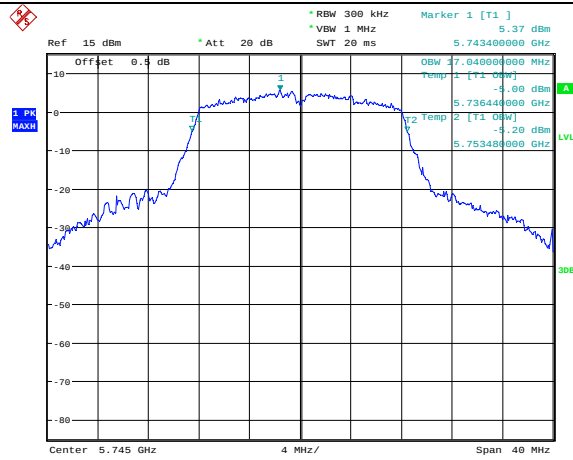
5725-5850MHz:



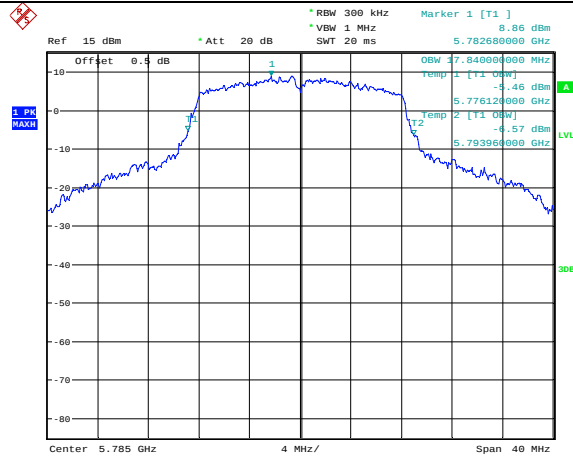




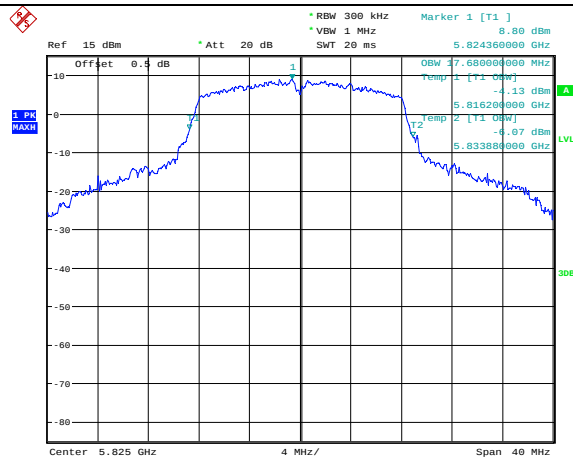
99% Emission Bandwidth

802.11a
Lowest Channel

Date: 20.APR.2022 13:04:43

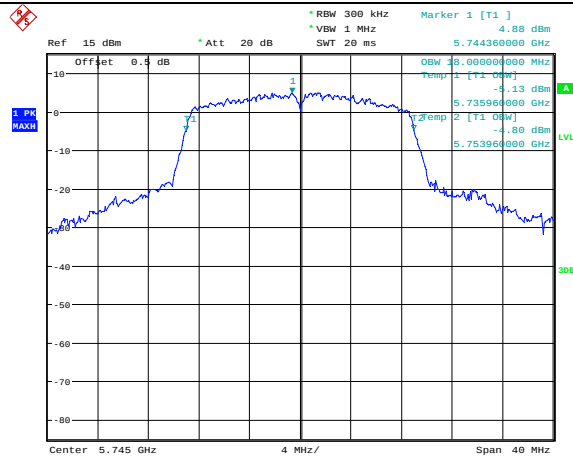
802.11a
Middle Channel

Date: 20.APR.2022 13:05:58

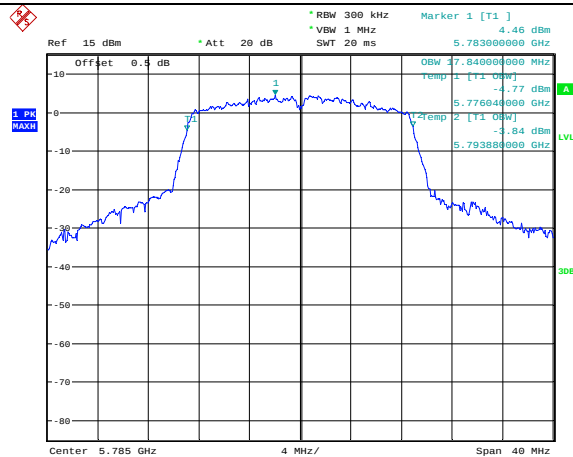
802.11a
Highest Channel

Date: 20.APR.2022 13:07:49

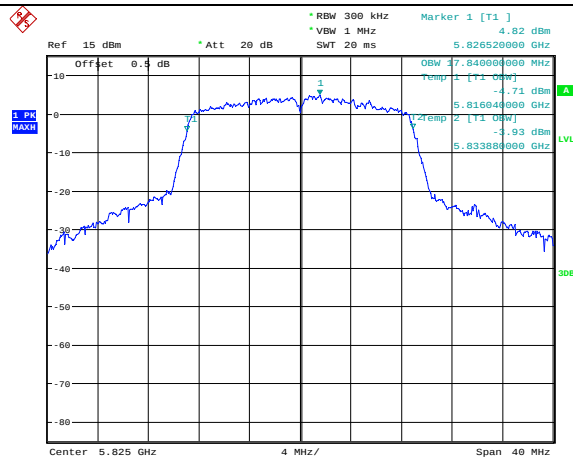
99% Emission Bandwidth

802.11n ht20
Lowest Channel

Date: 20.APR.2022 13:10:19

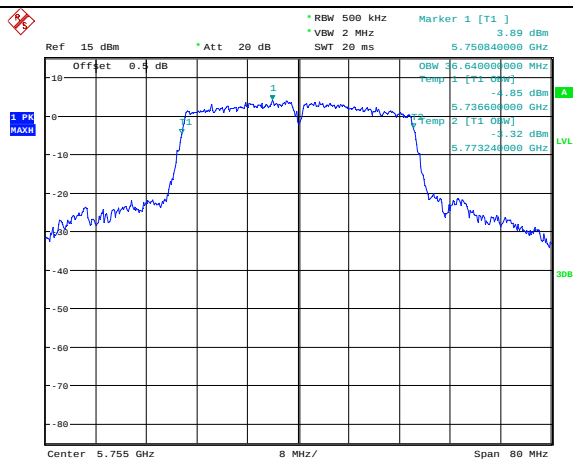
802.11n ht20
Middle Channel

Date: 20.APR.2022 13:12:14

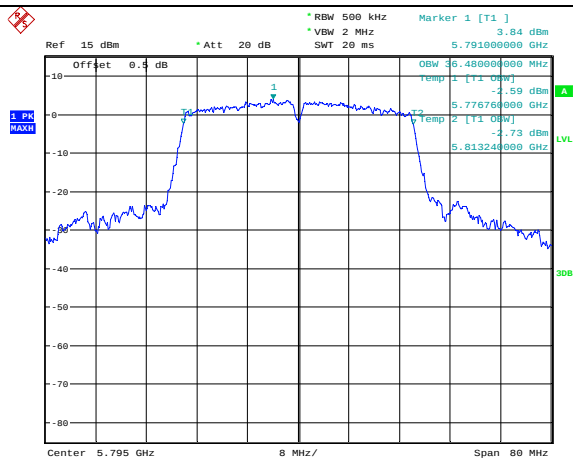
802.11n ht20
Highest Channel

Date: 20.APR.2022 13:13:24

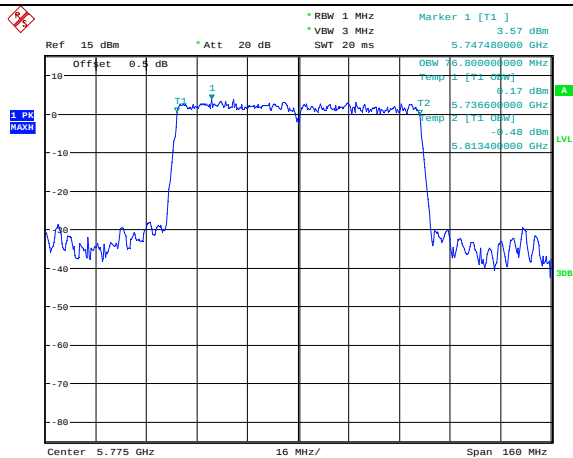
99% Emission Bandwidth

802.11n ht40
Lowest Channel

Date: 20.APR.2022 13:15:20

802.11n ht40
Highest Channel

Date: 20.APR.2022 13:16:35

802.11ac vht80
Middle Channel

Date: 20.APR.2022 13:18:30

4.4 Maximum Conducted Output Power:

Serial Number:	CR22020089-RF-S1	Test Date:	2022-04-20
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.3	Relative Humidity: (%)	55	ATM Pressure: (kPa)	101.1
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2021XA	MY54080015	2021-07-22	2022-07-21
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power (dBm)			
		Chain 0	Chain 1	Total	Limit
802.11a	5180	15.52	13.71	/	24
	5200	14.49	14.07	/	24
	5240	14.21	15.18	/	24
802.11n ht20	5180	11.52	11.74	14.64	24
	5200	11.46	11.63	14.56	24
	5240	11.34	11.6	14.48	24
802.11n ht40	5190	8.76	8.09	11.45	24
	5230	7.61	8.08	10.86	24
802.11ac vht80	5210	6.52	6.39	9.47	24

Note: The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$

The device is a client device.

5250-5350 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power (dBm)			
		Chain 0	Chain 1	Total	Limit
802.11a	5260	15.26	15.33	/	24
	5280	15.59	15.5	/	24
	5320	13	12.59	/	24
802.11n ht20	5260	11.8	11.54	14.68	24
	5280	11.46	11.6	14.54	24
	5320	11.7	11.11	14.43	24
802.11n ht40	5270	8.67	8.39	11.54	24
	5310	10.07	8.96	12.56	24
802.11ac vht80	5290	6.63	6.09	9.38	24

Note: The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:
 Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$

5470-5725 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power (dBm)			
		Chain 0	Chain 1	Total	Limit
802.11a	5500	15.13	15.7	/	24
	5580	15.21	15.59	/	24
	5700	9.36	8.16	/	24
	5720	15.44	15.85	/	24
802.11n ht20	5500	9.58	11.63	13.74	24
	5580	9.41	10.61	13.06	24
	5700	7.07	8.14	10.65	24
	5720	11.75	11.25	14.52	24
802.11n ht40	5510	6.68	7.8	10.29	24
	5550	6.78	7.32	10.07	24
	5670	5.36	5.96	8.68	24
	5710	11.83	11.94	14.90	24
802.11ac vht80	5530	6.00	6.59	9.32	24
	5610	10.38	10.33	13.37	24
	5690	4.99	5.16	8.09	24

Note: The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:
 Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power (dBm)			
		Chain 0	Chain 1	Total	Limit
802.11a	5745	11.91	12.38	/	30
	5785	15.59	15.77	/	30
	5825	15.72	15.69	/	30
802.11n ht20	5745	11.79	11.57	14.69	30
	5785	11.07	11.56	14.33	30
	5825	11.35	11.7	14.54	30
802.11n ht40	5755	11.67	11.89	14.79	30
	5795	11.55	11.18	14.38	30
802.11ac vht80	5775	7.61	8.38	11.02	30
Note: The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices: Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$					

4.5 Maximum power spectral density:

Serial Number:	CR22020089-RF-S1	Test Date:	2022-04-20
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	25.3	Relative Humidity: (%)	55	ATM Pressure: (kPa)	101.1

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2021-07-22	2022-07-21
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			
		Chain 0	Chain 1	Total	Limit
802.11a	5180	5.80	4.00	/	11
	5200	4.89	4.58	/	11
	5240	4.53	5.63	/	11
802.11n ht20	5180	2.41	2.67	5.55	10.4
	5200	2.66	2.75	5.72	10.4
	5240	2.14	3.08	5.65	10.4
802.11n ht40	5190	-3.30	-3.61	-0.44	10.4
	5230	-4.41	-3.77	-1.08	10.4
802.11ac vht80	5210	-6.21	-6.29	-3.24	10.4

Note:

The device is a Client device.

Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.

The maximum antenna gain is 3.6 dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$

So:

$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 3.6 + 10 \log(2/1) = 6.6 \text{ dBi}$$

5250-5350 MHz:

Test Modes	Test Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			
		Chain 0	Chain 1	Total	Limit
802.11a	5260	6.09	6.17	/	11
	5280	6.48	6.45	/	11
	5320	4.22	3.79	/	11
802.11n ht20	5260	2.98	3.38	6.19	10.4
	5280	3.13	3.79	6.48	10.4
	5320	3.45	2.89	6.19	10.4
802.11n ht40	5270	-2.56	-2.46	0.50	10.4
	5310	-0.82	-1.61	1.81	10.4
802.11ac vht80	5290	-5.62	-6.11	-2.85	10.4

Note :

Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test. The maximum antenna gain is 3.6 dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$

So:

$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 3.6 + 10 \cdot \log(2/1) = 6.6 \text{ dBi}$$

5470-5725 MHz:

Test Modes	Test Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			
		Chain 0	Chain 1	Total	Limit
802.11a	5500	5.34	5.73	/	11
	5580	5.72	5.68	/	11
	5700	1.43	0.19	/	11
	5720	6.16	5.76	/	11
802.11n ht20	5500	1.20	2.51	4.91	10.4
	5580	0.99	1.77	4.41	10.4
	5700	-0.40	0.78	3.24	10.4
	5720	2.85	2.13	5.52	10.4
802.11n ht40	5510	-5.10	-3.89	-1.44	10.4
	5550	-4.86	-4.08	-1.44	10.4
	5670	-5.70	-5.10	-2.38	10.4
	5710	-0.92	-0.31	2.41	10.4
802.11ac vht80	5530	-6.36	-5.92	-3.12	10.4
	5610	-4.9	-4.64	-1.76	10.4
	5690	-7.04	-6.78	-3.90	10.4

Note :

Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test. The maximum antenna gain is 3.6 dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$

So:

$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 3.6 + 10 \cdot \log(2/1) = 6.6 \text{ dBi}$$

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Reading (dBm/300kHz)		Maximum Power Spectral Density (dBm/500kHz)			
		Chain 0	Chain 1	Chain 0	Chain 1	Total	Limit
802.11a	5745	-0.52	-0.82	1.7	1.4	/	30
	5785	2.73	2.50	4.95	4.72	/	30
	5825	2.93	1.80	5.15	4.02	/	30
802.11n ht20	5745	0.26	-0.40	2.48	1.82	5.17	29.4
	5785	-0.42	-0.75	1.8	1.47	4.65	29.4
	5825	-0.34	-1.29	1.88	0.93	4.44	29.4
802.11n ht40	5755	-3.63	-3.71	-1.41	-1.49	1.56	29.4
	5795	-3.78	-4.23	-1.56	-2.01	1.23	29.4
802.11ac vht80	5775	-7.47	-7.77	-5.25	-5.55	-2.39	29.4

Note :

Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test. If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement

The maximum antenna gain is 3.6 dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

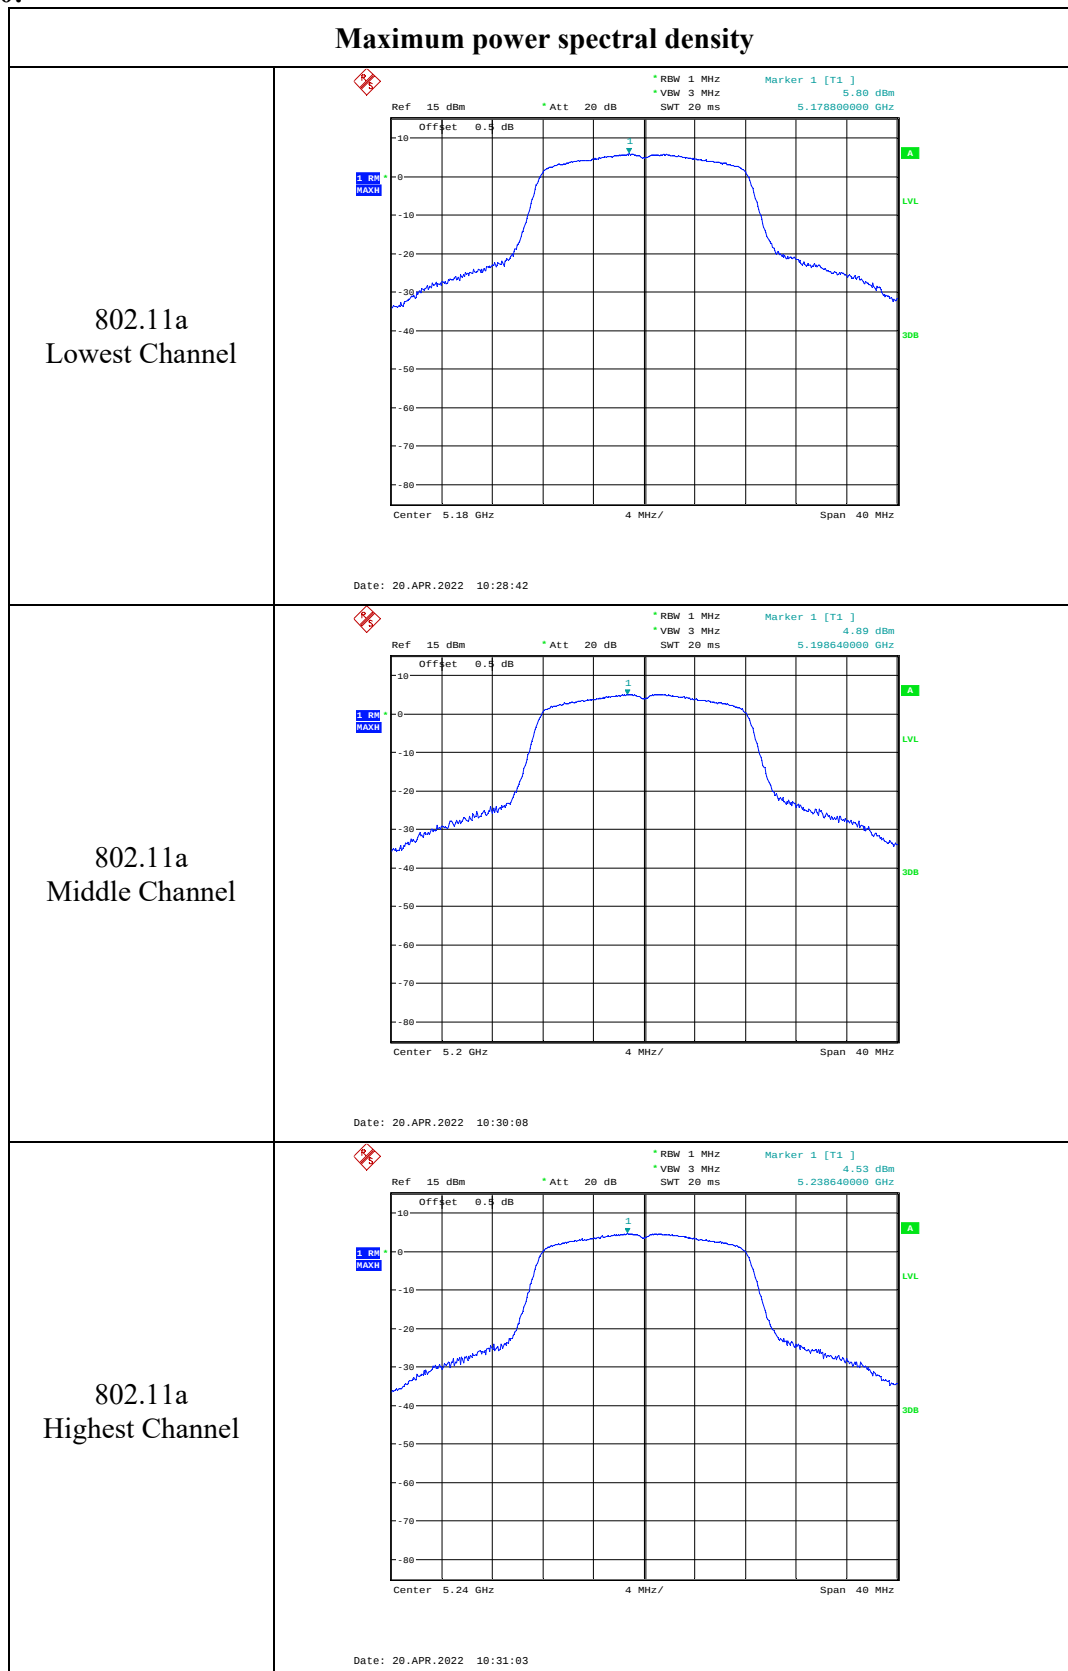
$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$

So:

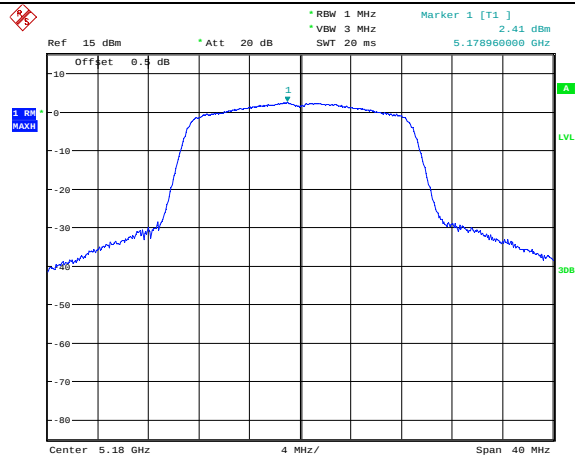
$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 3.6 + 10 \log(2/1) = 6.6 \text{ dBi}$$

5150-5250MHz:

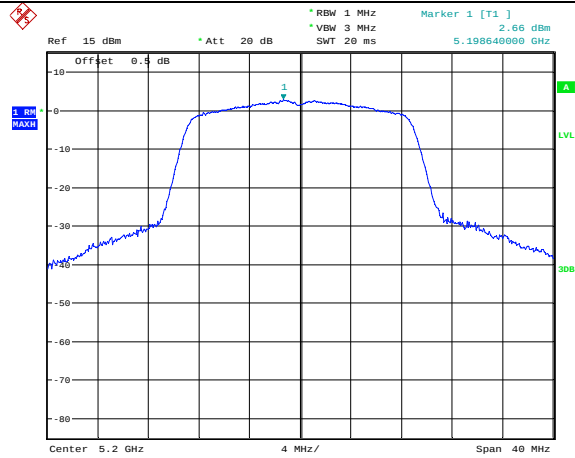
Chain 0:



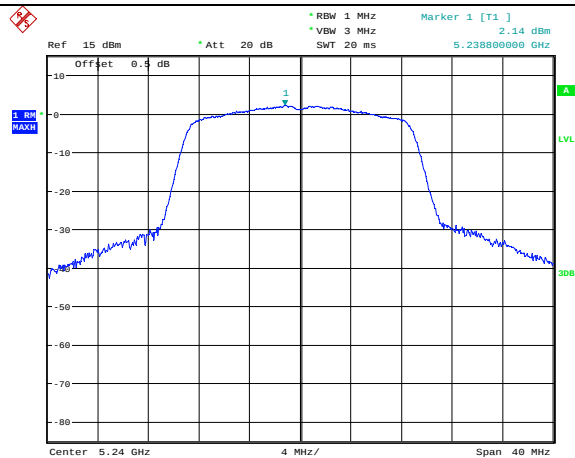
Maximum power spectral density

802.11n ht20
Lowest Channel

Date: 20.APR.2022 10:32:37

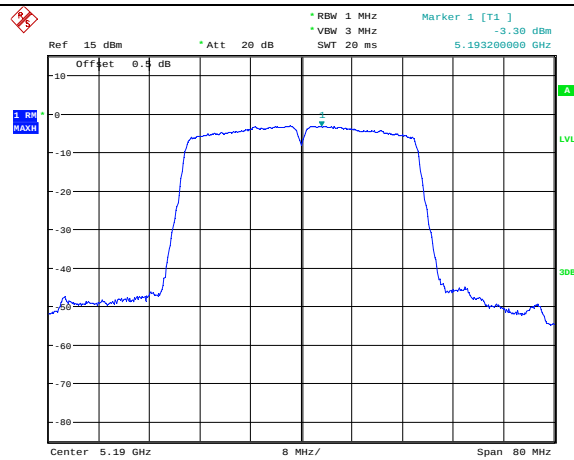
802.11n ht20
Middle Channel

Date: 20.APR.2022 10:33:43

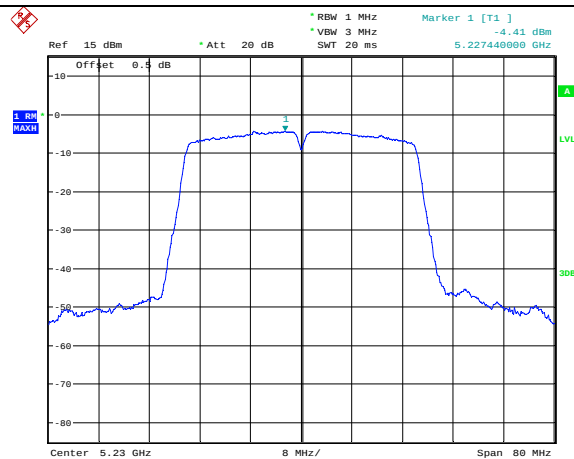
802.11n ht20
Highest Channel

Date: 20.APR.2022 10:34:58

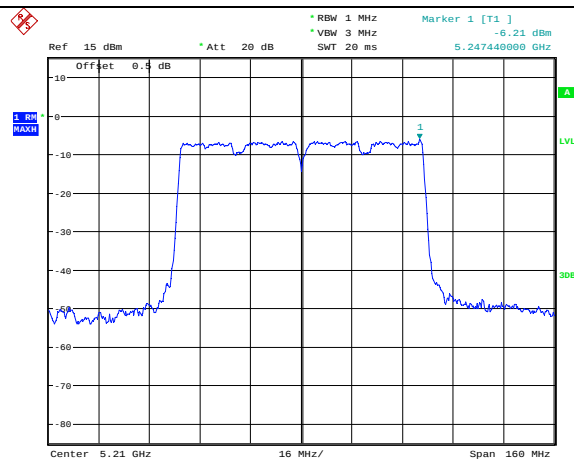
Maximum power spectral density

802.11n ht40
Lowest Channel

Date: 20.APR.2022 10:36:39

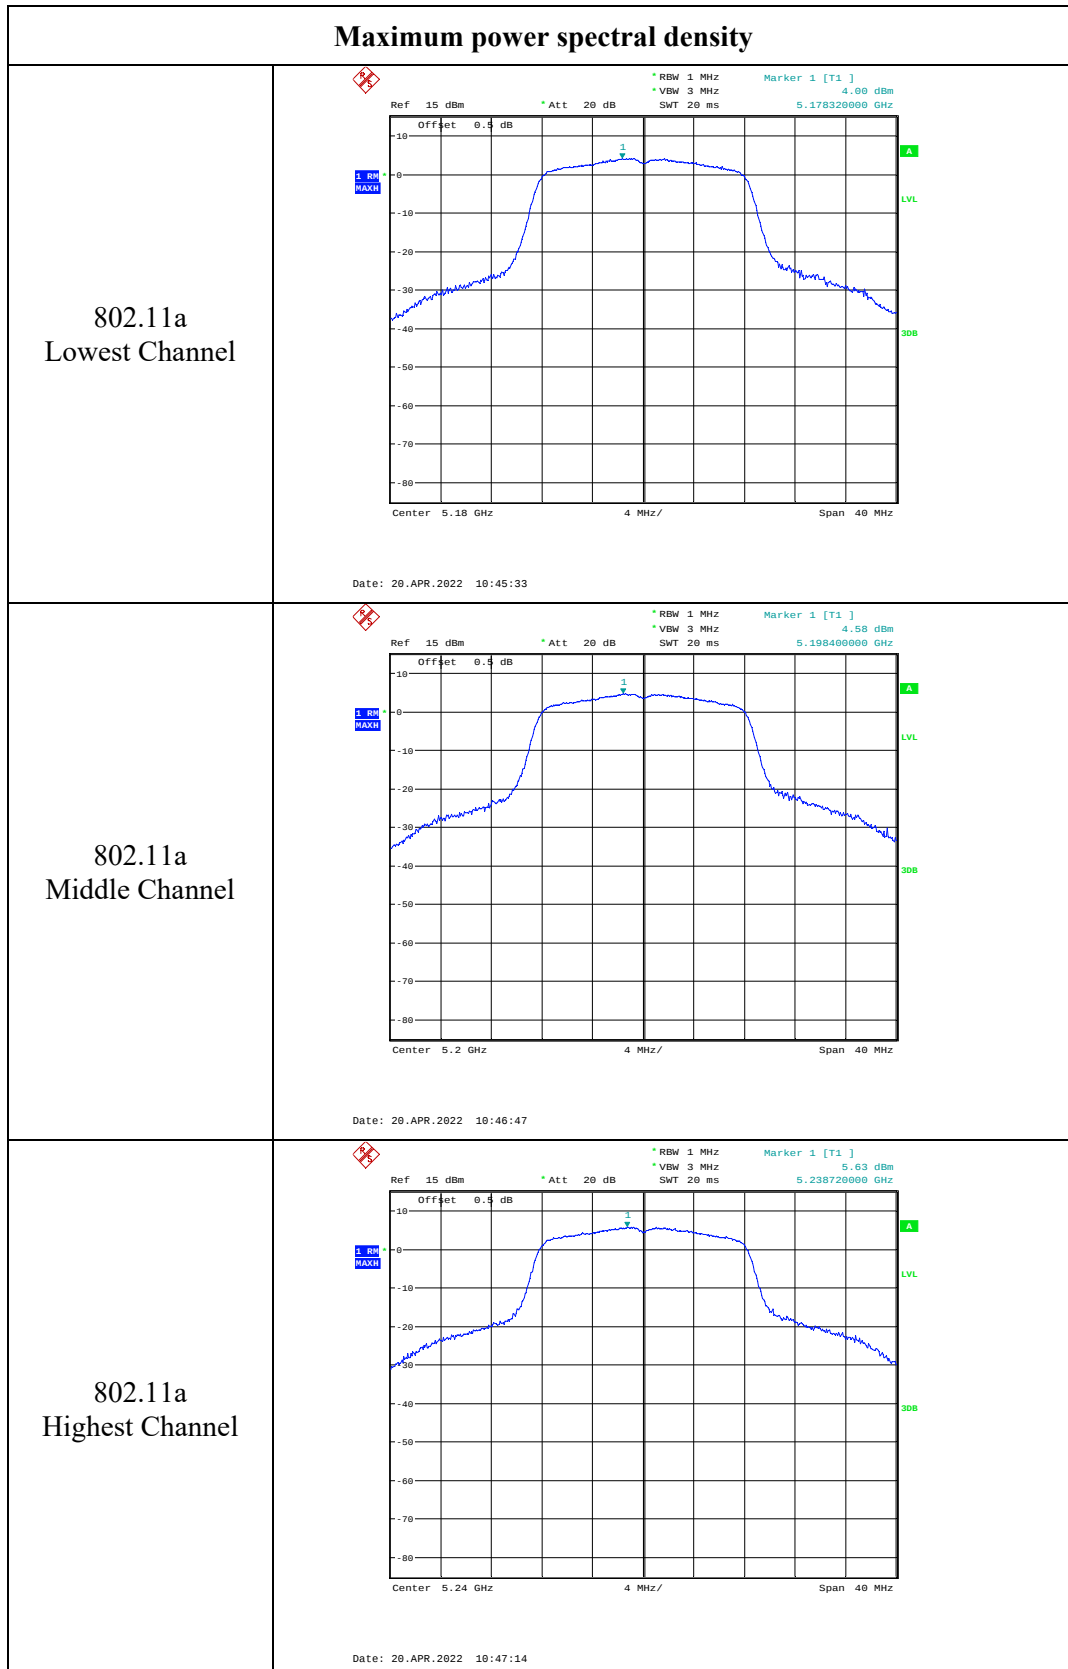
802.11n ht40
Highest Channel

Date: 20.APR.2022 10:37:41

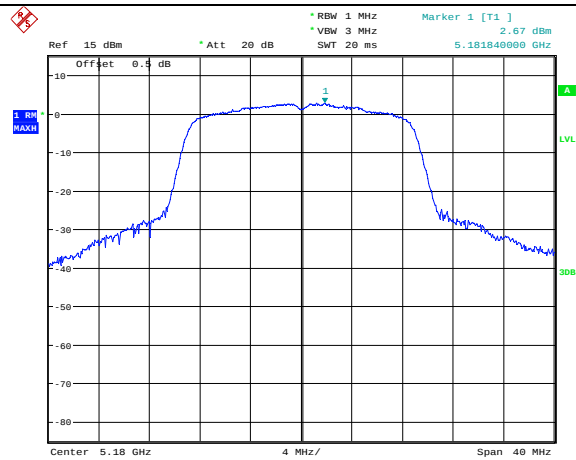
802.11ac vht80
Middle Channel

Date: 20.APR.2022 10:41:30

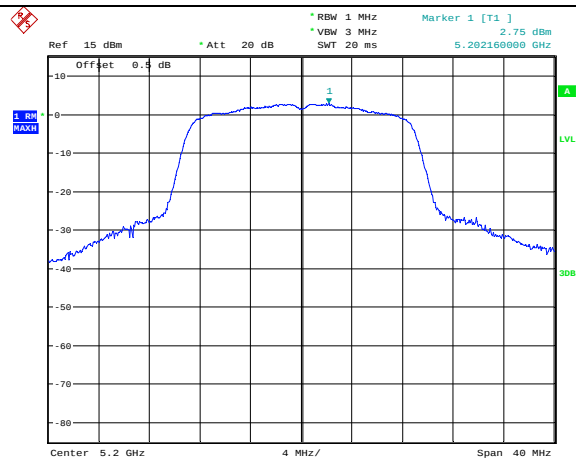
Chain 1:



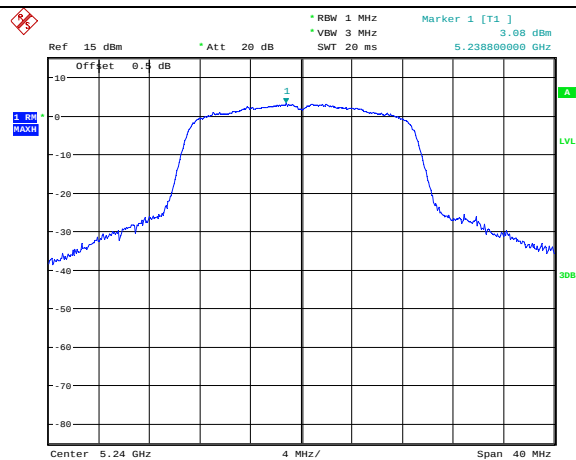
Maximum power spectral density

802.11n ht20
Lowest Channel

Date: 20.APR.2022 10:48:00

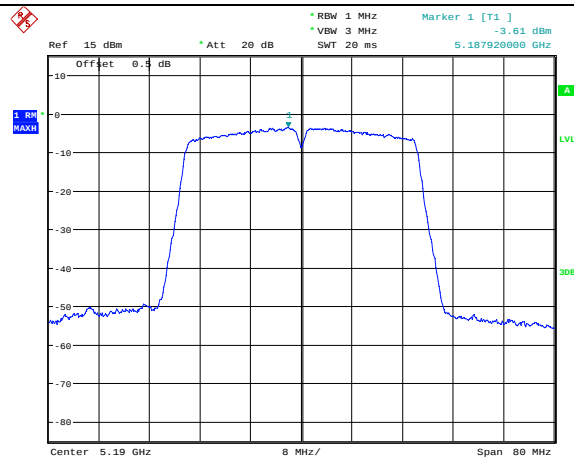
802.11n ht20
Middle Channel

Date: 20.APR.2022 10:48:24

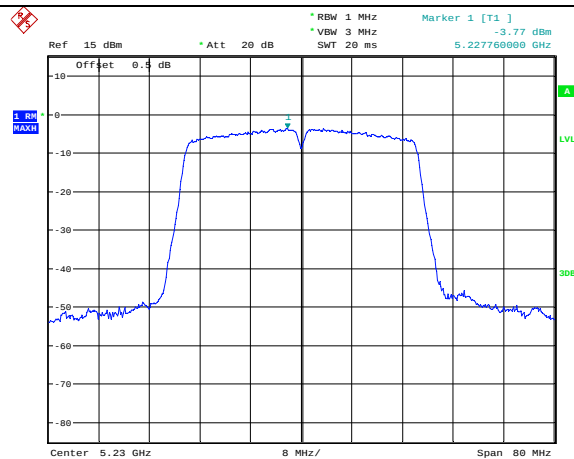
802.11n ht20
Highest Channel

Date: 20.APR.2022 10:48:56

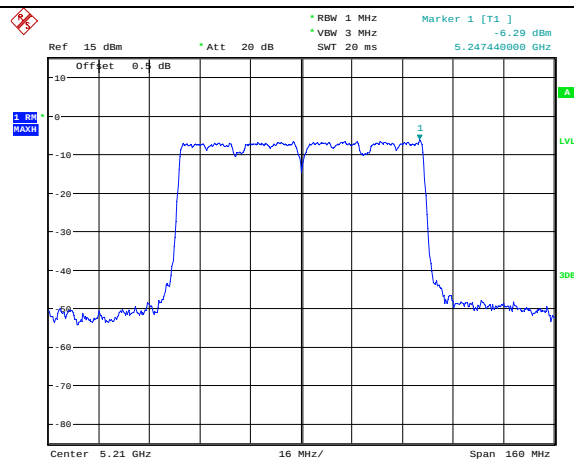
Maximum power spectral density

802.11n ht40
Lowest Channel

Date: 20.APR.2022 10:43:54

802.11n ht40
Highest Channel

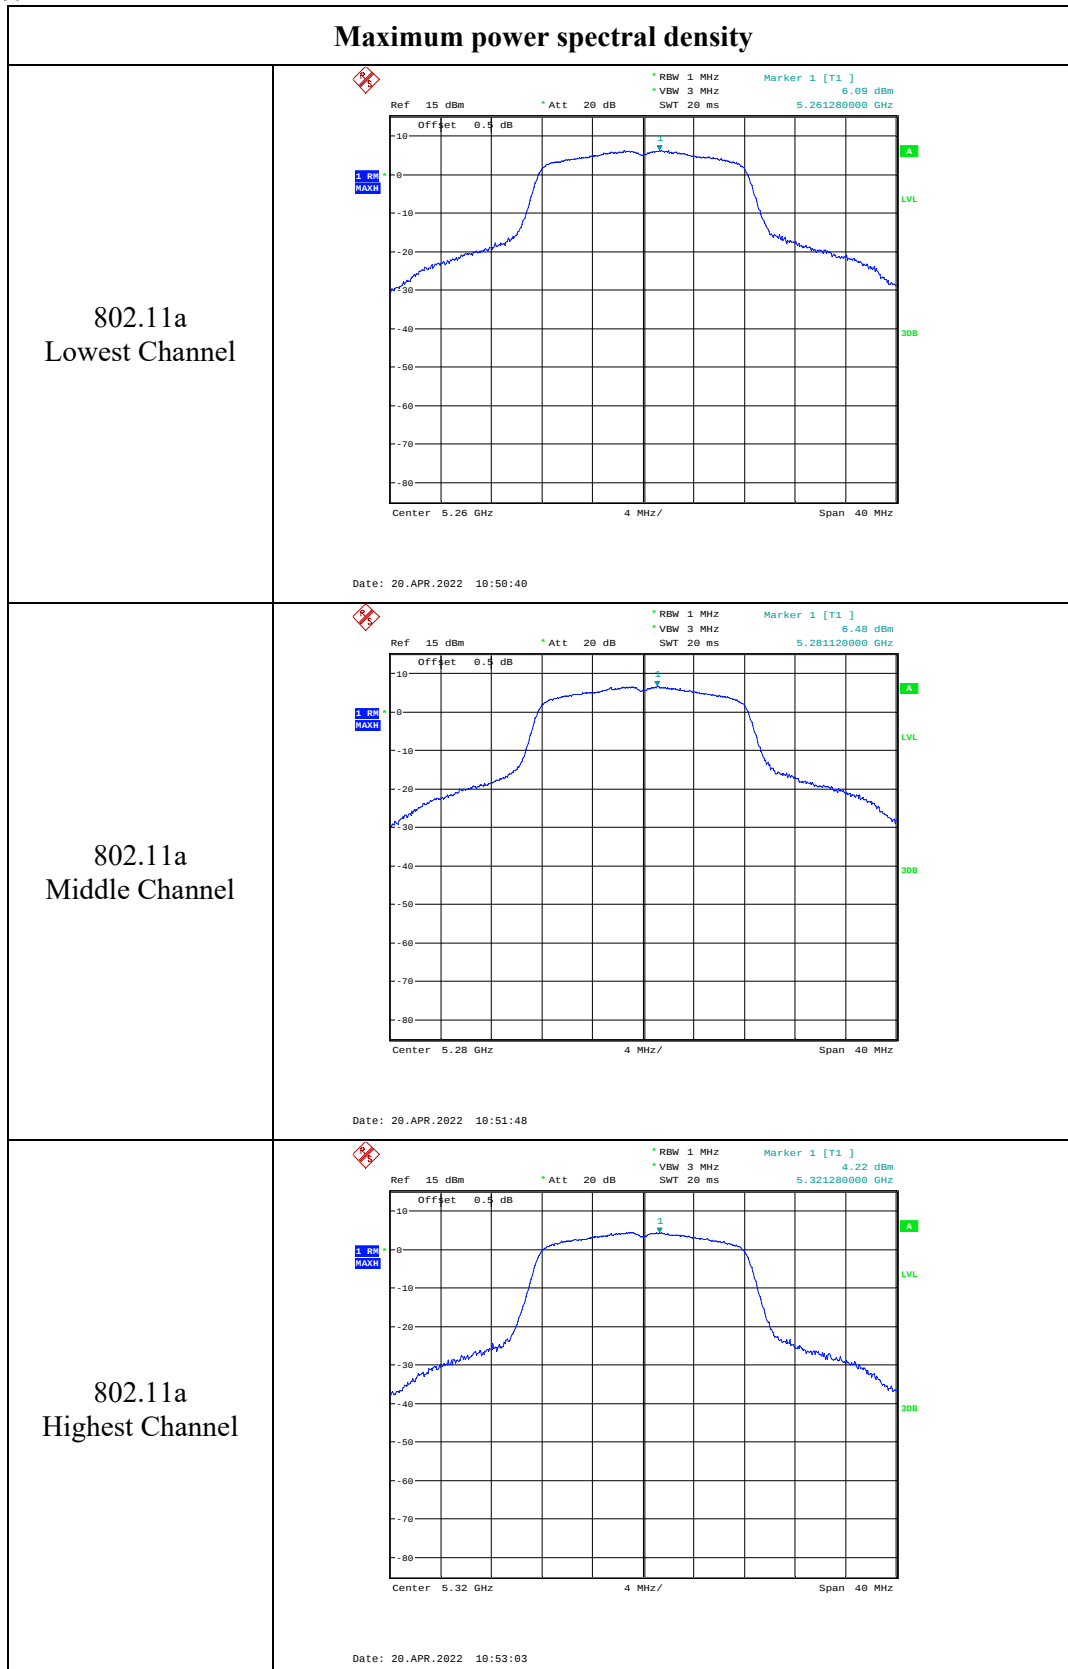
Date: 20.APR.2022 10:44:33

802.11ac vht80
Middle Channel

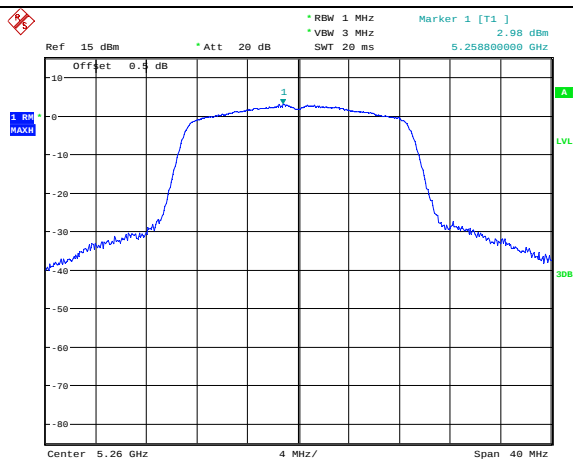
Date: 20.APR.2022 10:41:47

5250-5350MHz:

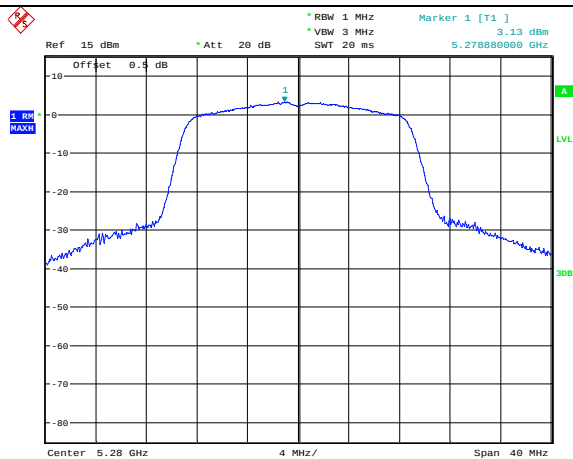
Chain 0:



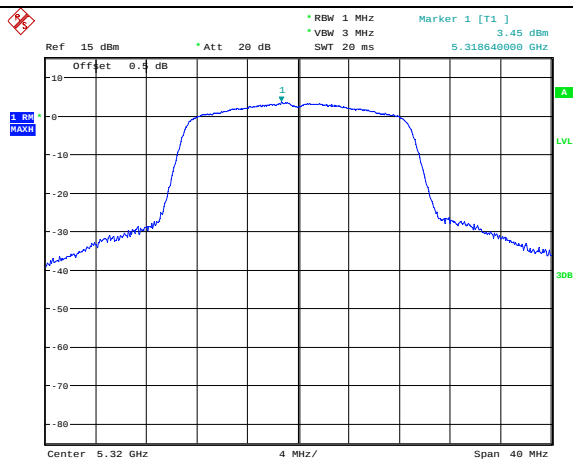
Maximum power spectral density

802.11n ht20
Lowest Channel

Date: 20.APR.2022 10:54:49

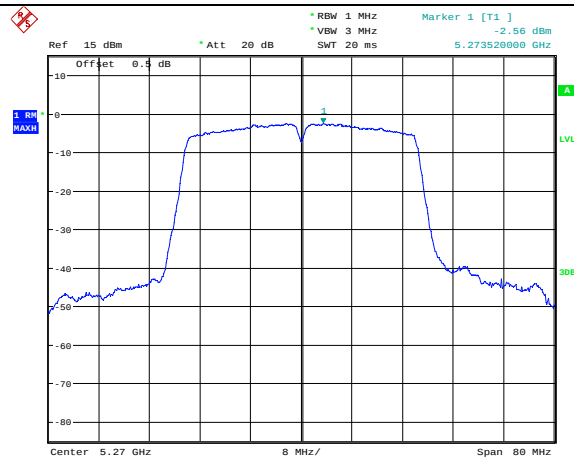
802.11n ht20
Middle Channel

Date: 20.APR.2022 10:55:50

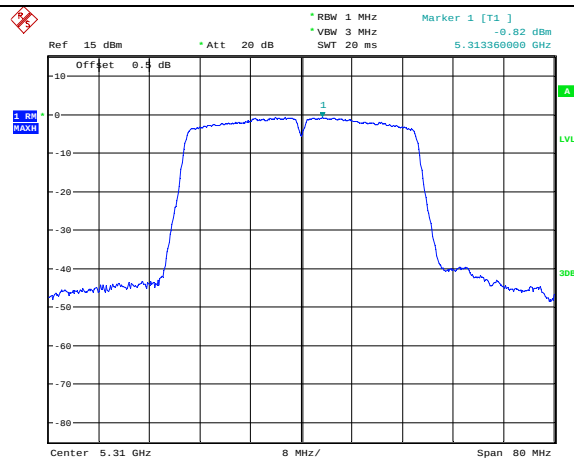
802.11n ht20
Highest Channel

Date: 20.APR.2022 10:56:49

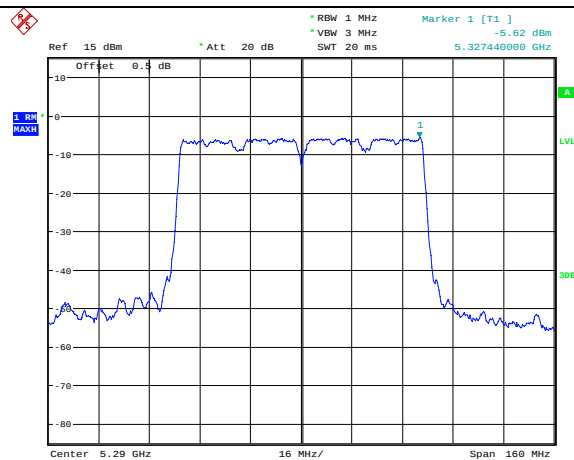
Maximum power spectral density

802.11n ht40
Lowest Channel

Date: 20.APR.2022 10:58:18

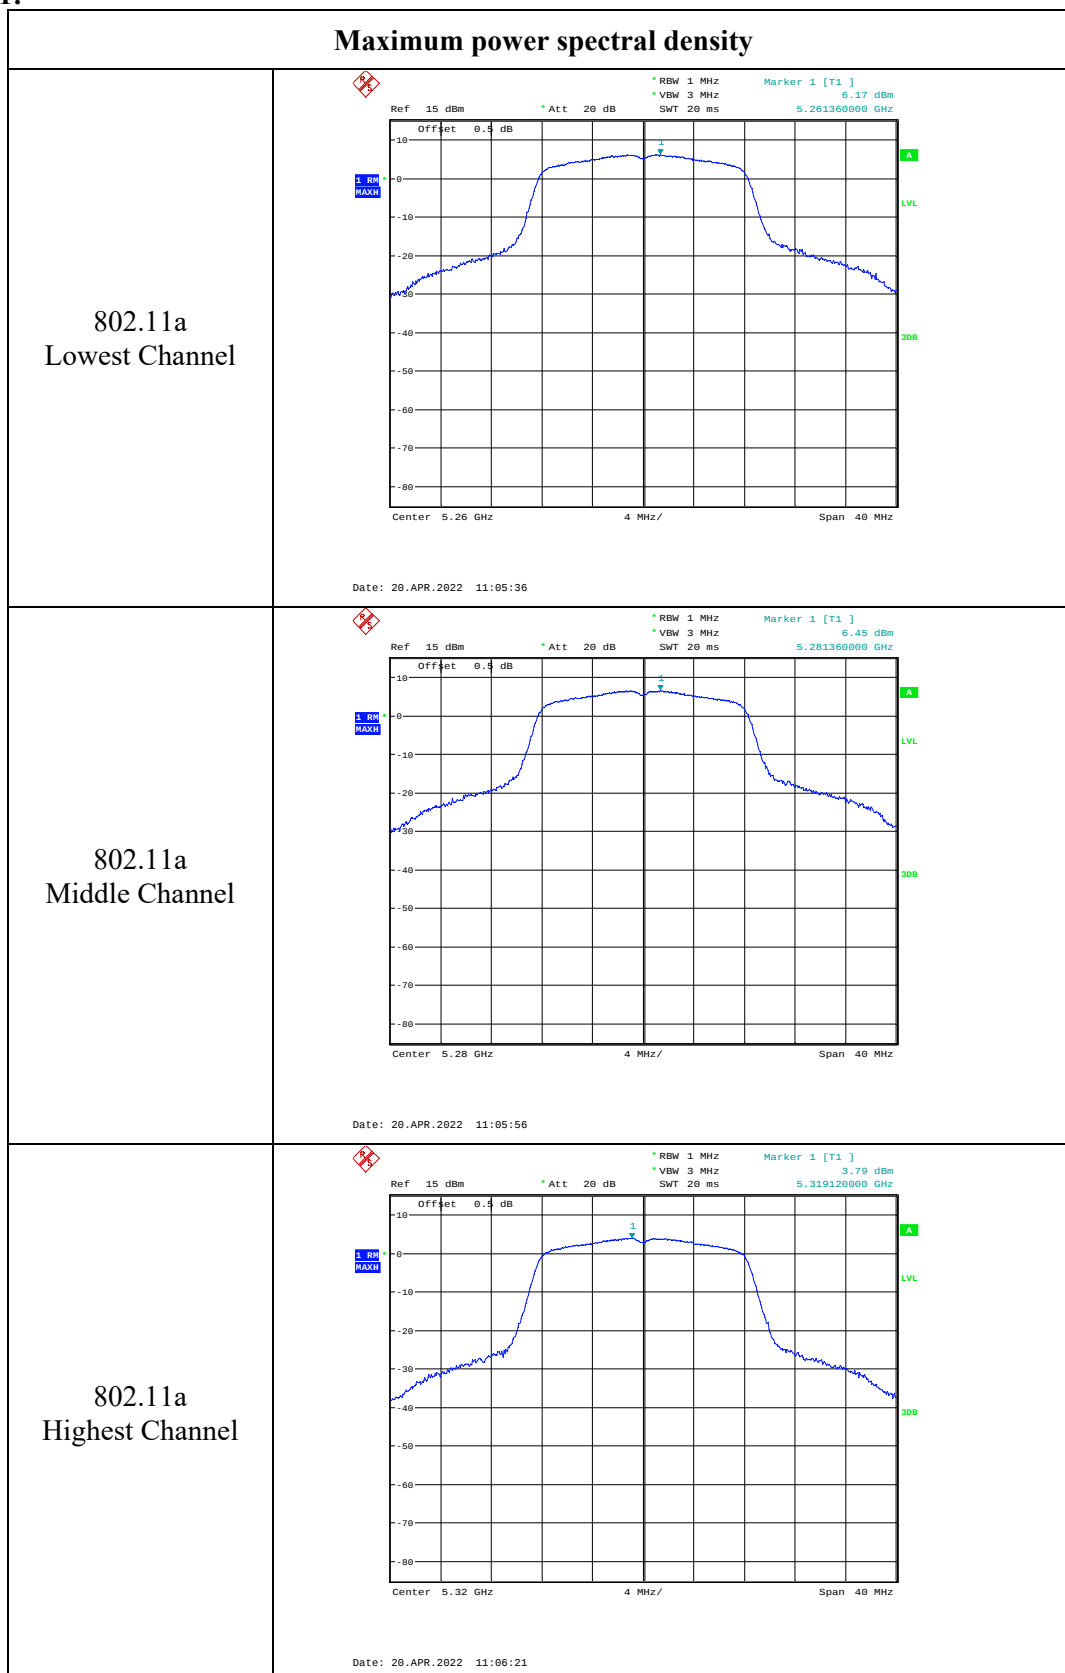
802.11n ht40
Highest Channel

Date: 20.APR.2022 10:59:12

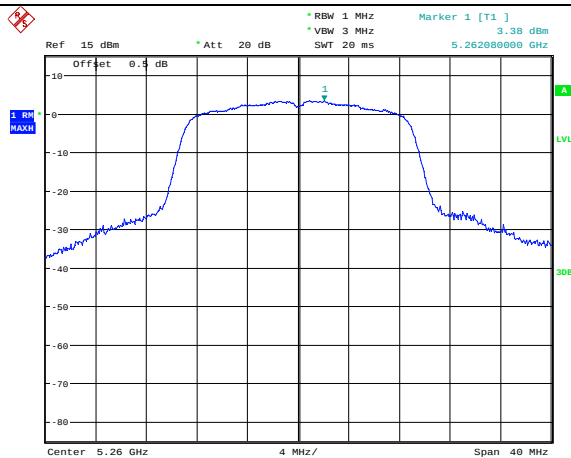
802.11ac vht80
Middle Channel

Date: 20.APR.2022 11:00:39

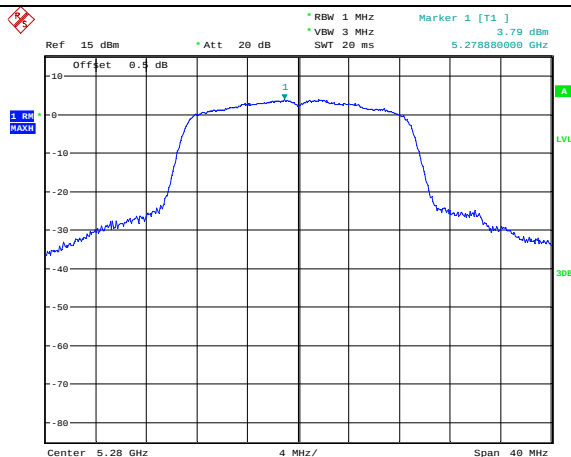
Chain 1:



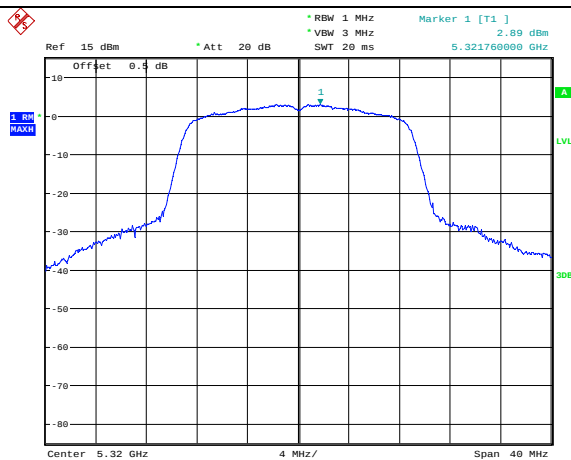
Maximum power spectral density

802.11n ht20
Lowest Channel

Date: 20.APR.2022 11:03:41

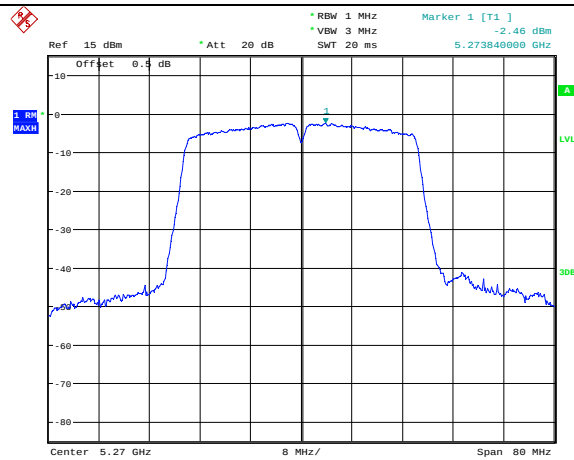
802.11n ht20
Middle Channel

Date: 20.APR.2022 11:04:06

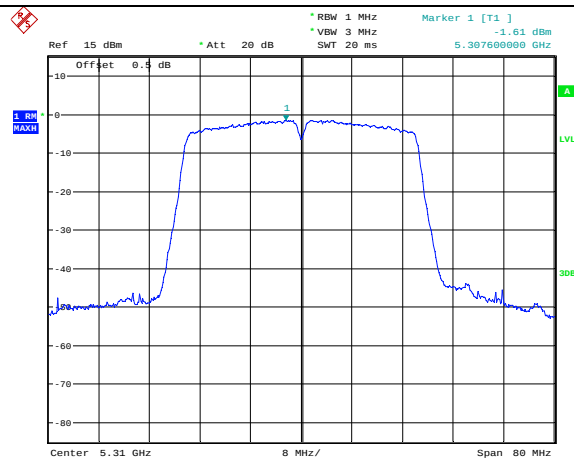
802.11n ht20
Highest Channel

Date: 20.APR.2022 11:04:49

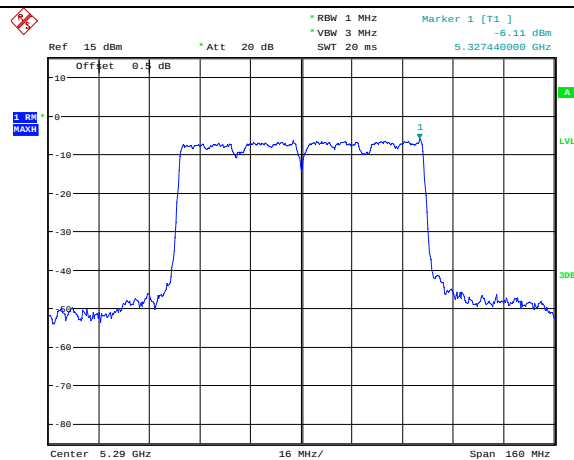
Maximum power spectral density

802.11n ht40
Lowest Channel

Date: 20.APR.2022 11:02:33

802.11n ht40
Highest Channel

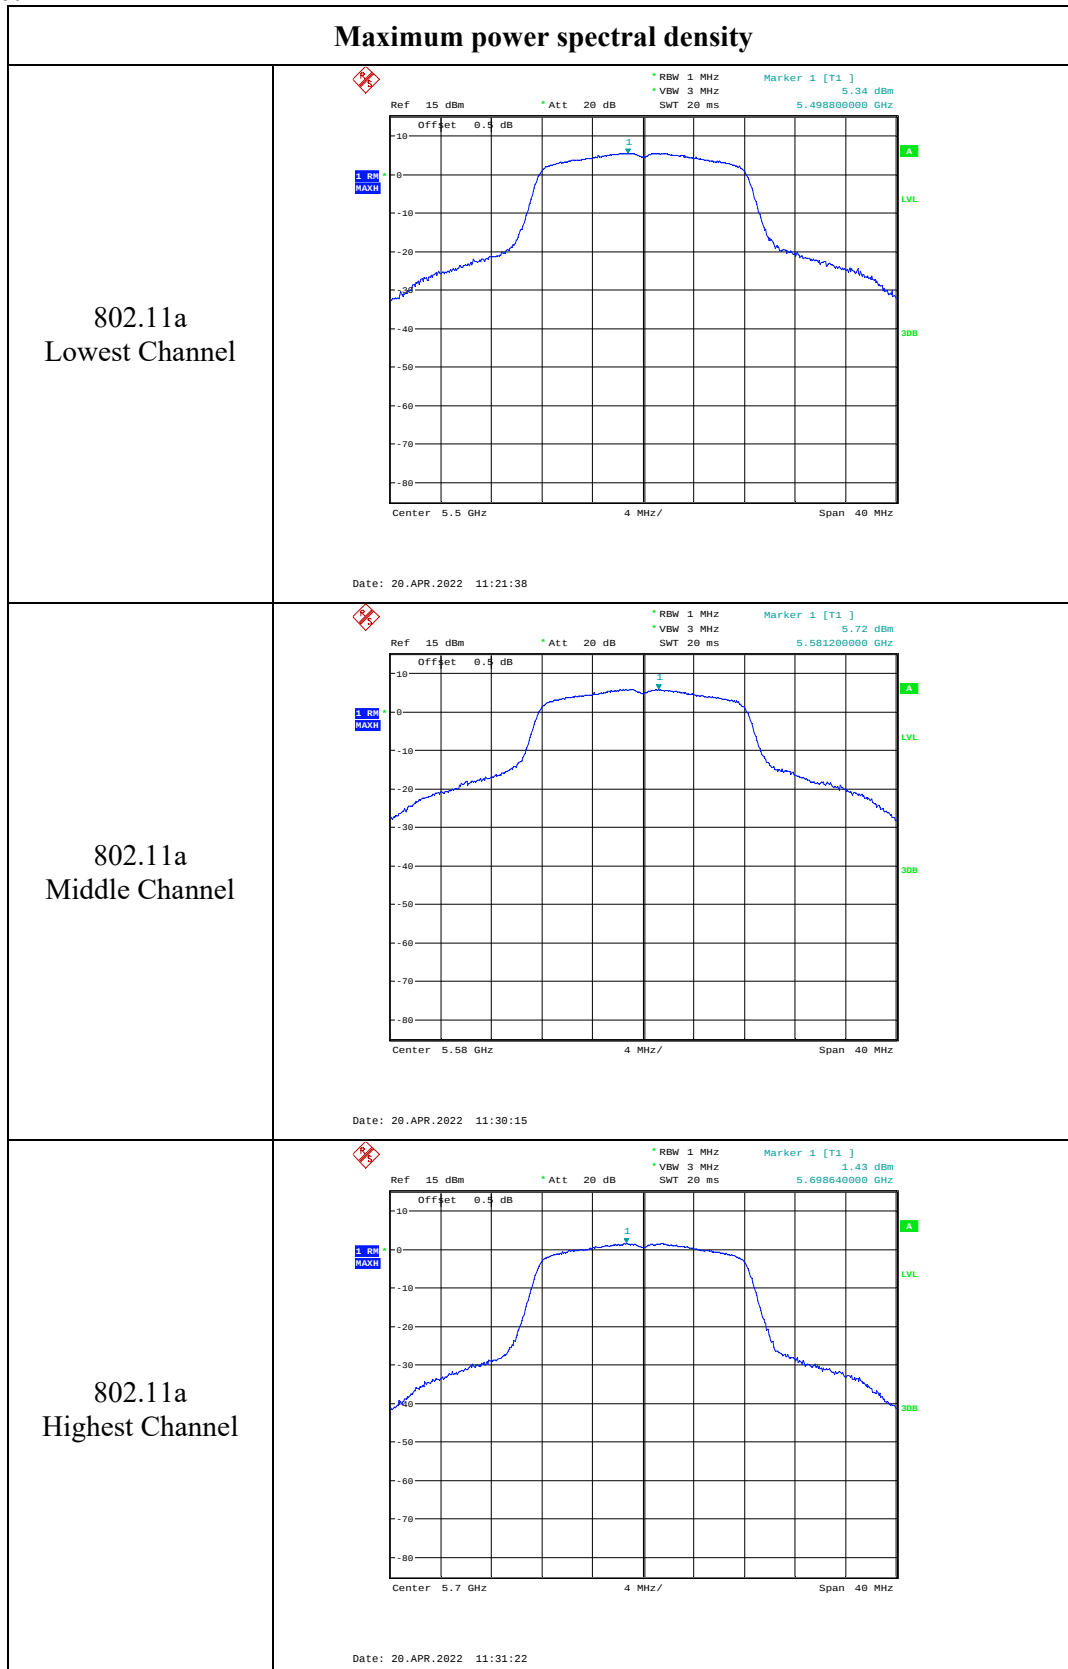
Date: 20.APR.2022 11:02:57

802.11ac vht80
Middle Channel

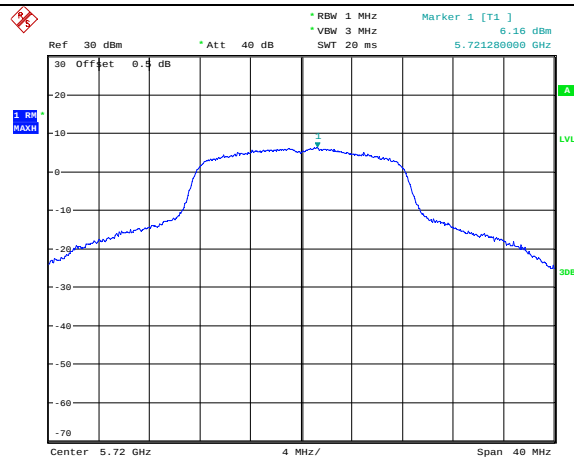
Date: 20.APR.2022 11:01:32

5470-5725MHz:

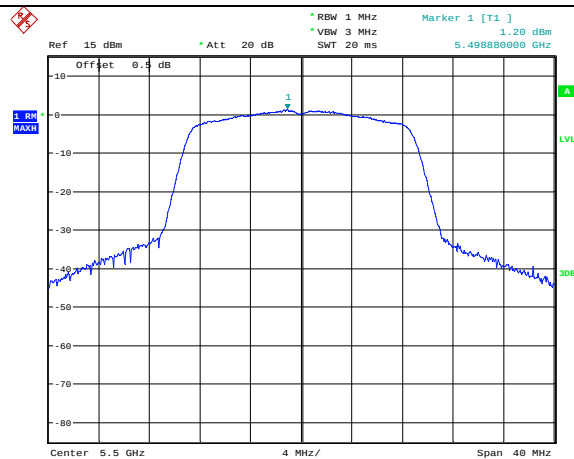
Chain 0:



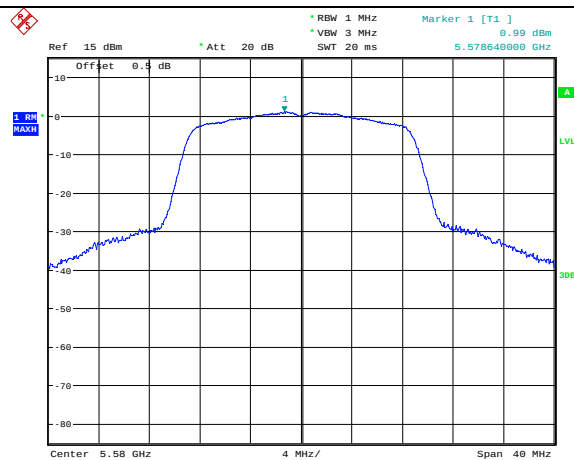
Maximum power spectral density

802.11a
Additional Channel

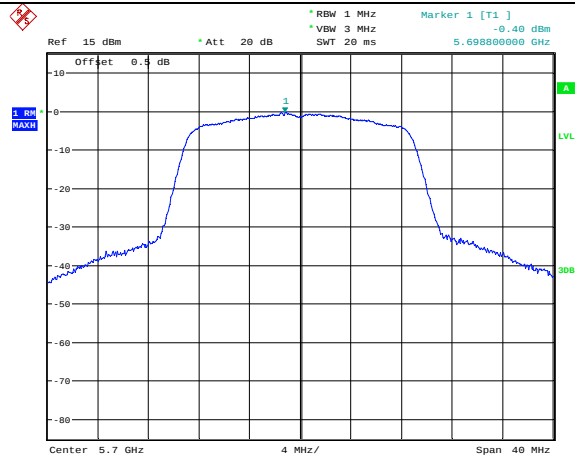
Date: 20.APR.2022 14:19:24

802.11n ht20
Lowest Channel

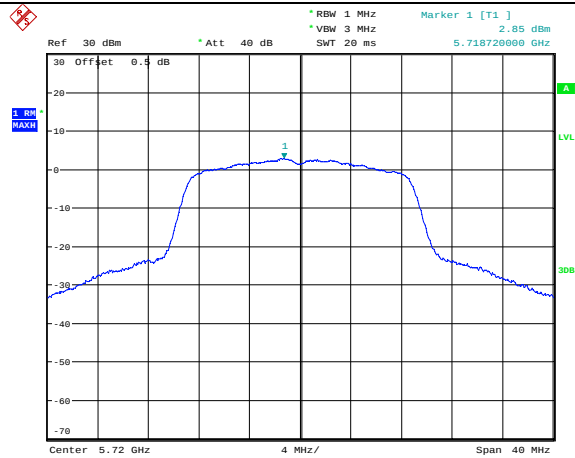
Date: 20.APR.2022 11:33:13

802.11n ht20
Middle Channel

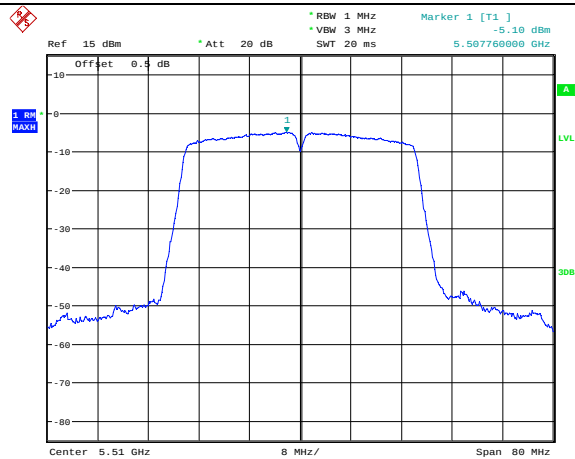
Date: 20.APR.2022 11:34:08

802.11n ht20
Highest Channel

Date: 20.APR.2022 11:35:19

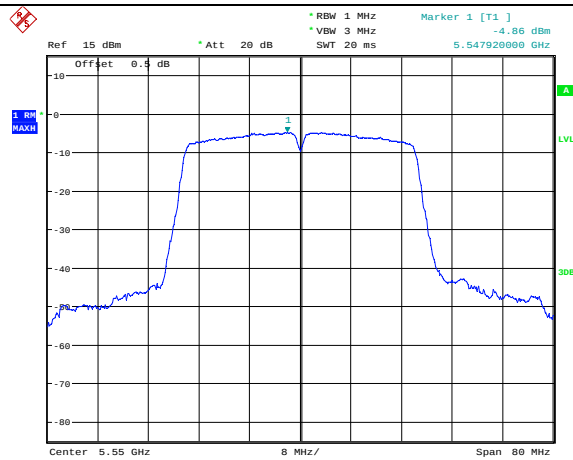
802.11n ht20
Additional Channel

Date: 20.APR.2022 14:21:00

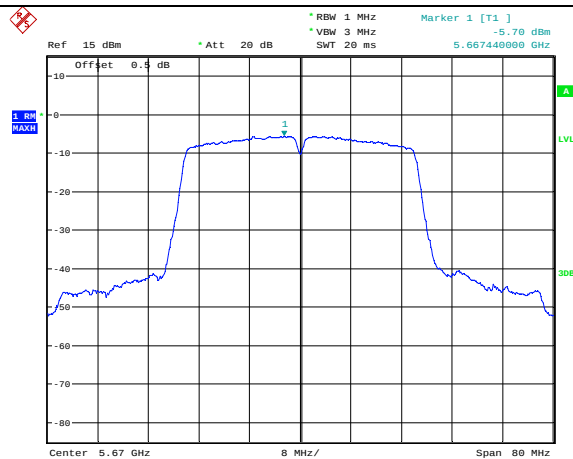
802.11n ht40
Lowest Channel

Date: 20.APR.2022 11:37:00

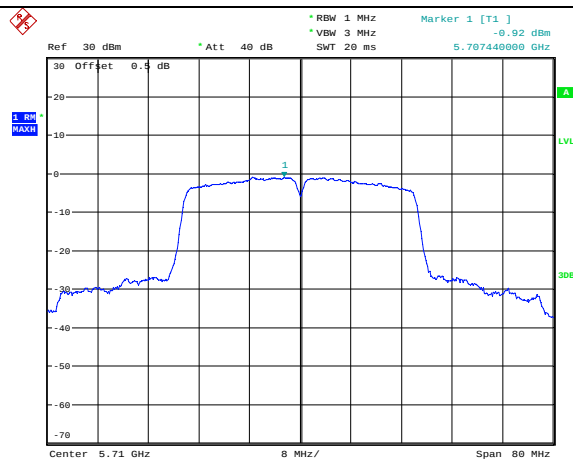
Maximum power spectral density

802.11n ht40
Middle Channel

Date: 20.APR.2022 11:38:28

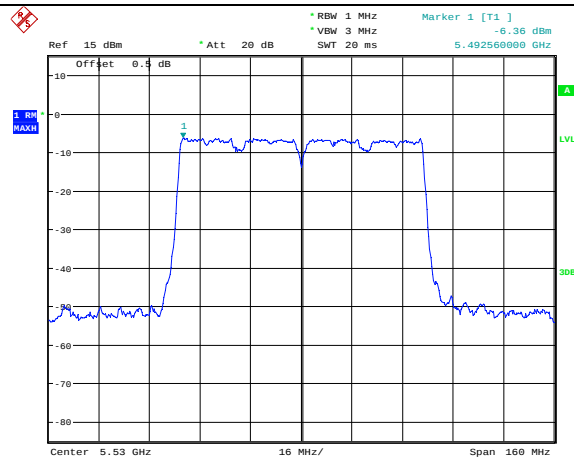
802.11n ht40
Highest Channel

Date: 20.APR.2022 11:39:38

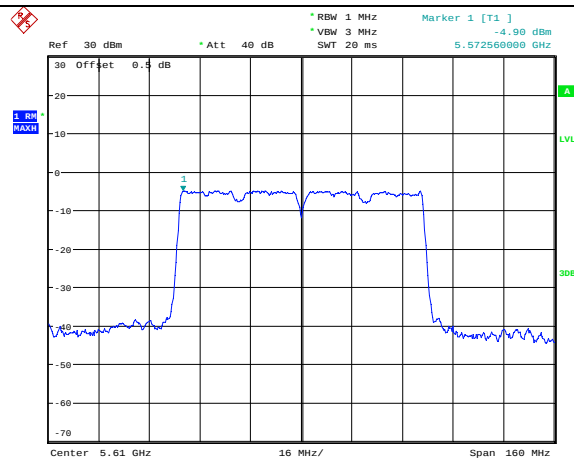
802.11n ht40
Additional Channel

Date: 20.APR.2022 14:24:11

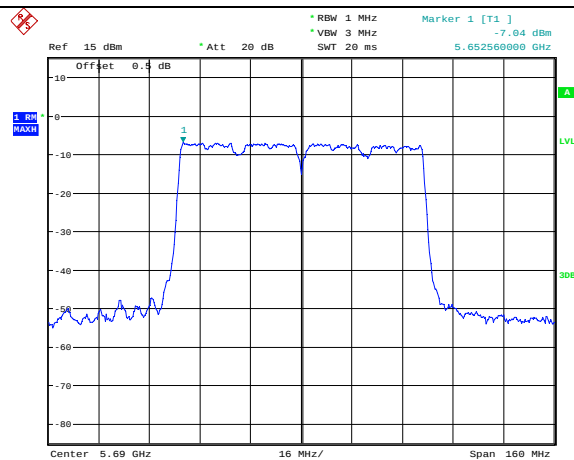
Maximum power spectral density

802.11ac vht80
Lowest Channel

Date: 20.APR.2022 11:41:36

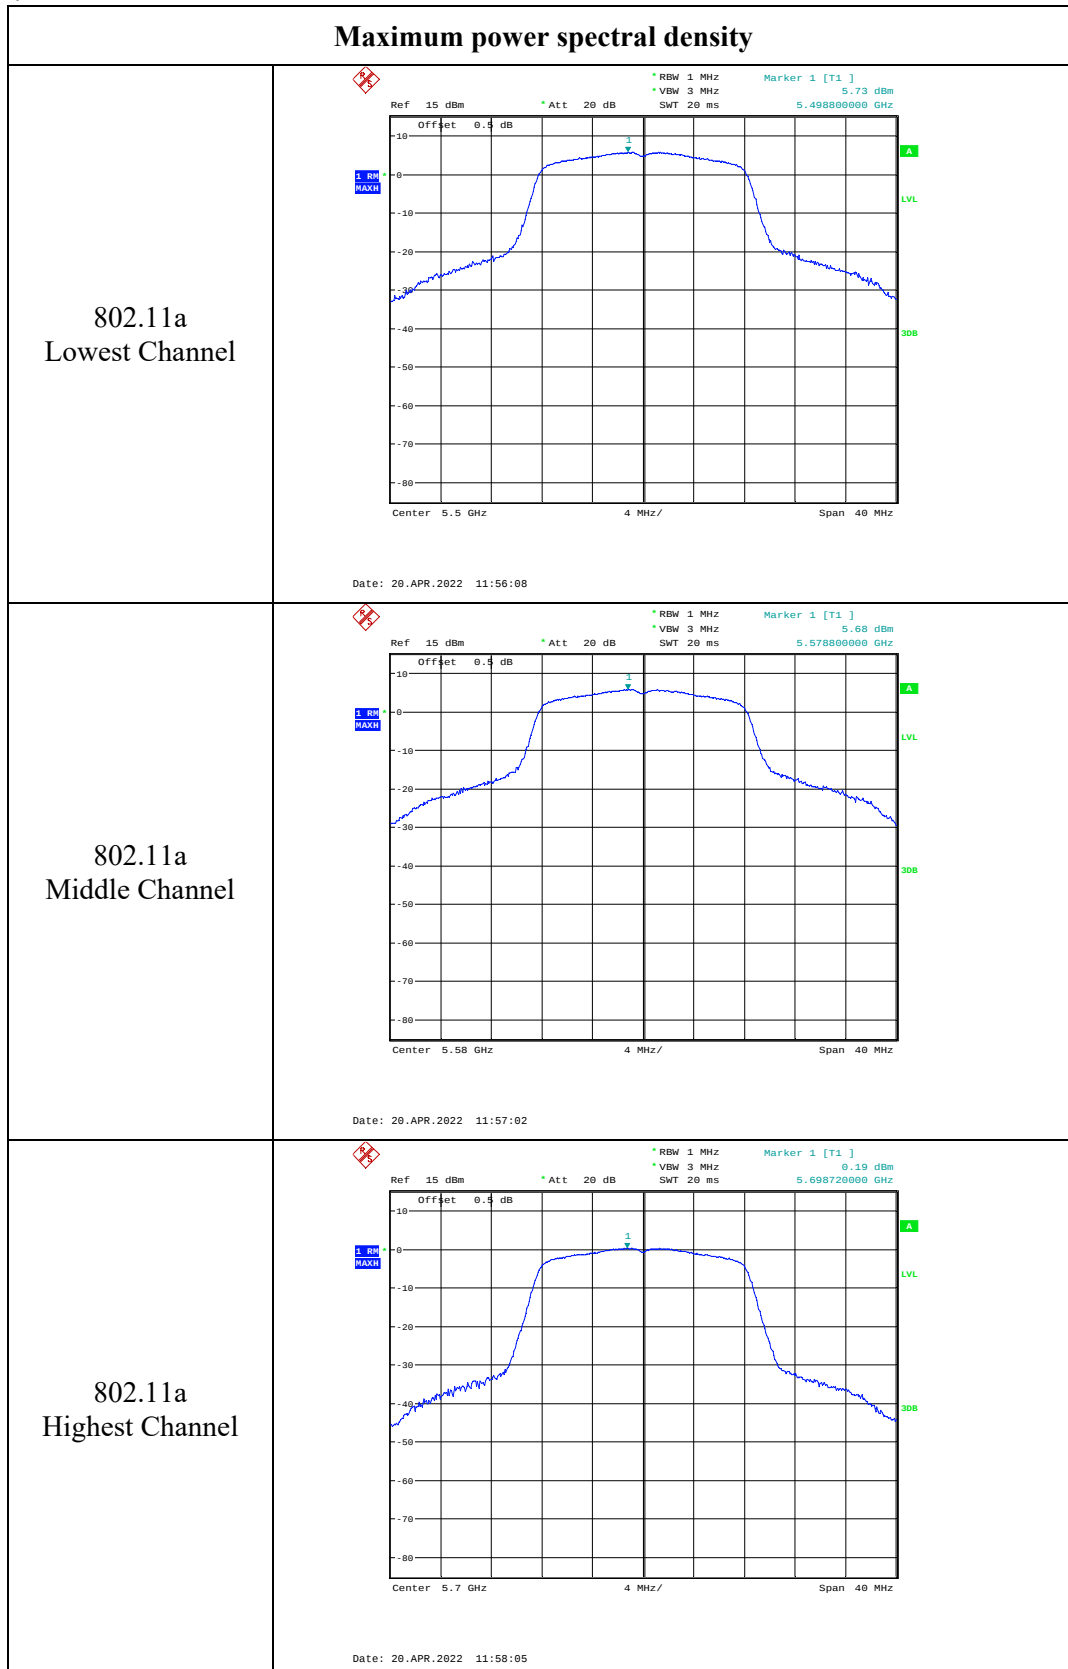
802.11ac vht80
Middle Channel

Date: 20.APR.2022 14:29:57

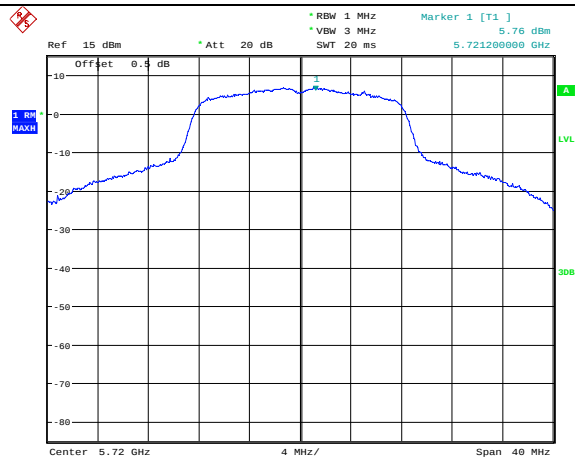
802.11ac vht80
Additional Channel

Date: 20.APR.2022 11:42:58

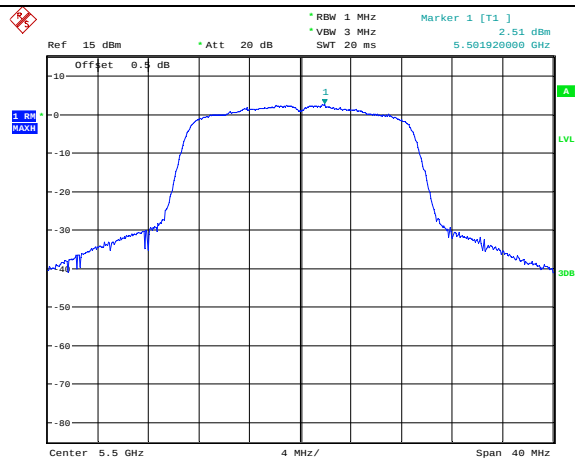
Chain 1:



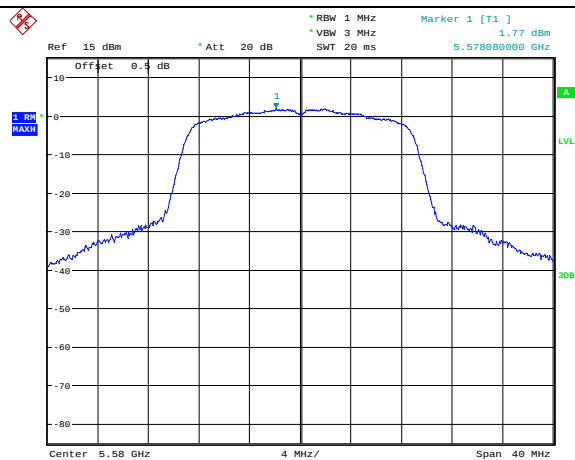
Maximum power spectral density

802.11a
Additional Channel

Date: 20.APR.2022 14:18:11

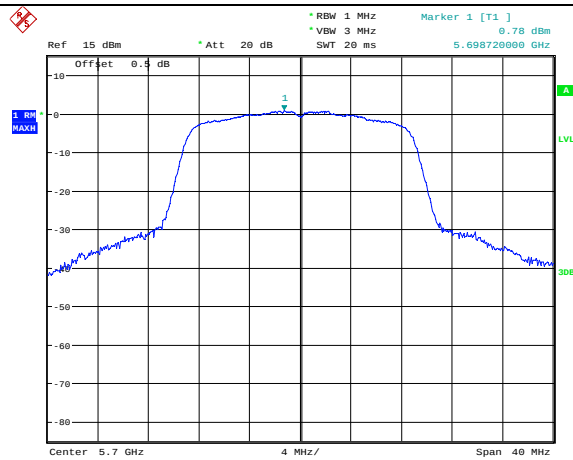
802.11n ht20
Lowest Channel

Date: 20.APR.2022 11:54:11

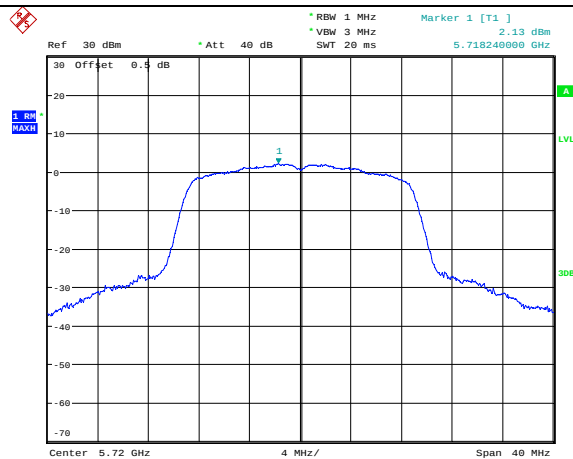
802.11n ht20
Middle Channel

Date: 20.APR.2022 11:54:39

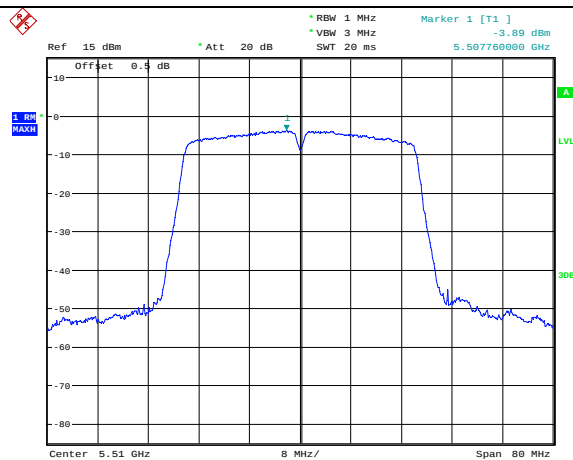
Maximum power spectral density

802.11n ht20
Highest Channel

Date: 20.APR.2022 11:55:01

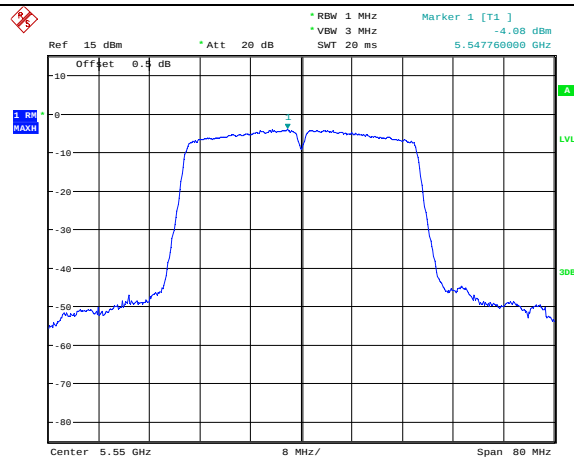
802.11n ht20
Additional Channel

Date: 20.APR.2022 14:21:48

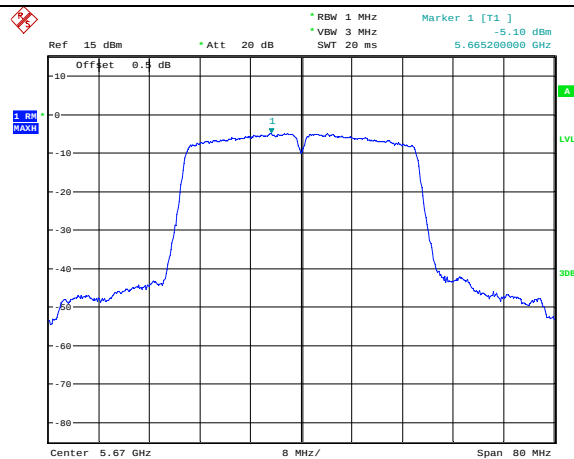
802.11n ht40
Lowest Channel

Date: 20.APR.2022 11:51:42

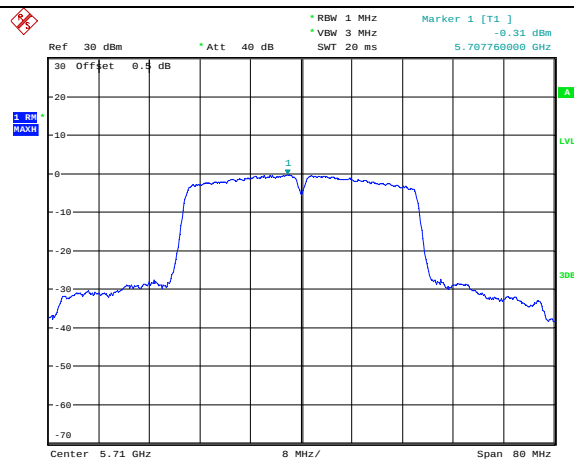
Maximum power spectral density

802.11n ht40
Middle Channel

Date: 20.APR.2022 11:52:38

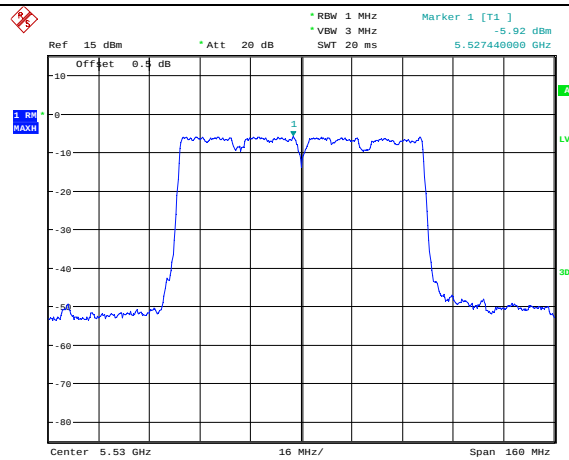
802.11n ht40
Highest Channel

Date: 20.APR.2022 11:53:20

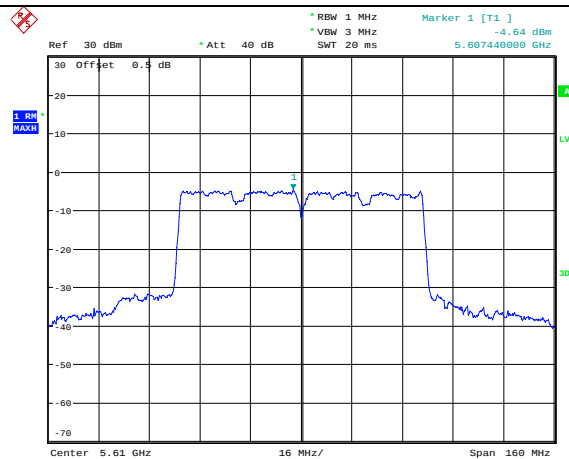
802.11n ht40
Additional Channel

Date: 20.APR.2022 14:23:23

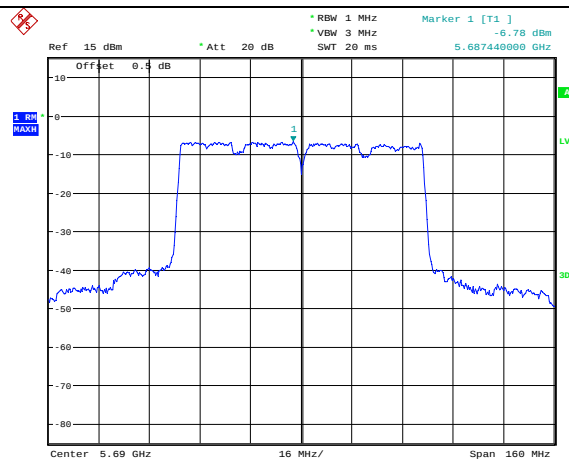
Maximum power spectral density

802.11ac vht80
Lowest Channel

Date: 20.APR.2022 11:45:50

802.11ac vht80
Middle Channel

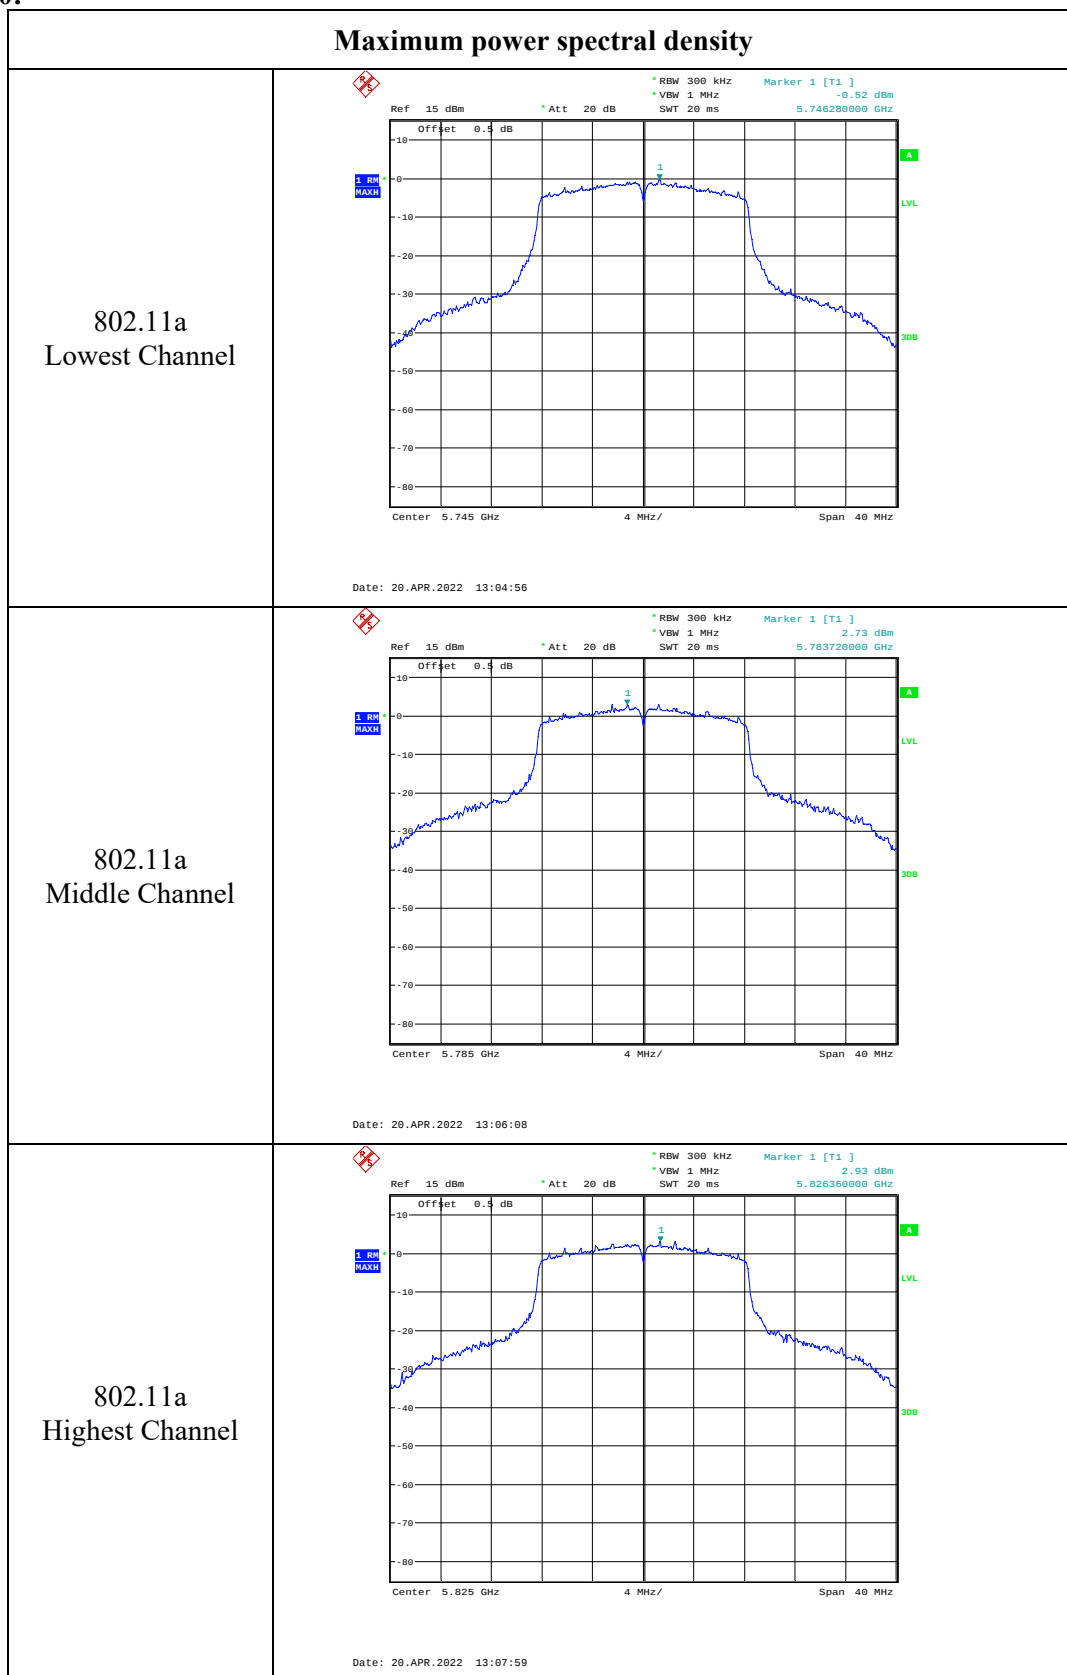
Date: 20.APR.2022 14:30:25

802.11ac vht80
Additional Channel

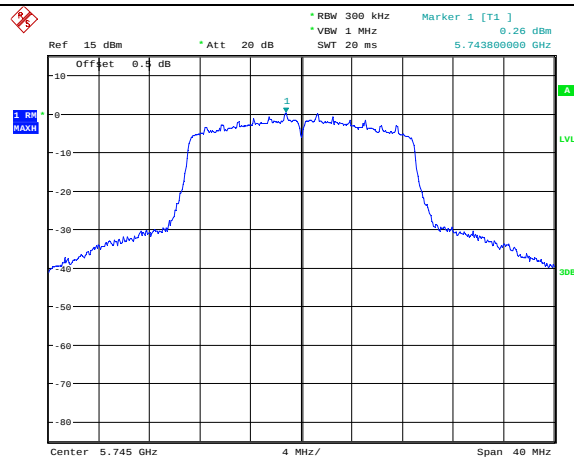
Date: 20.APR.2022 11:43:56

5725-5850MHz:

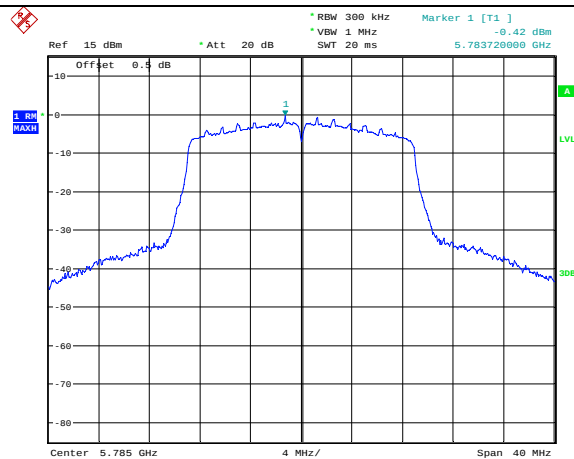
Chain 0:



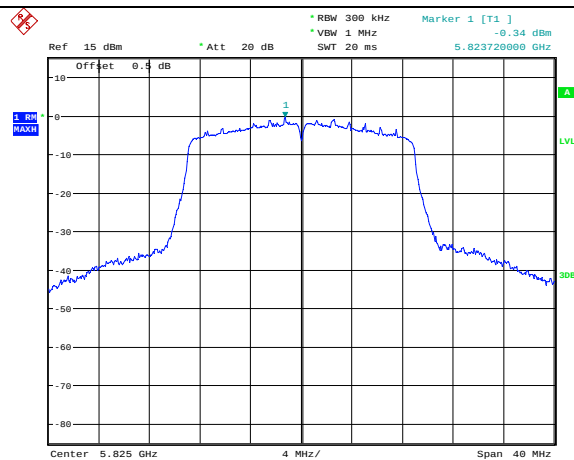
Maximum power spectral density

802.11n ht20
Lowest Channel

Date: 20.APR.2022 13:10:32

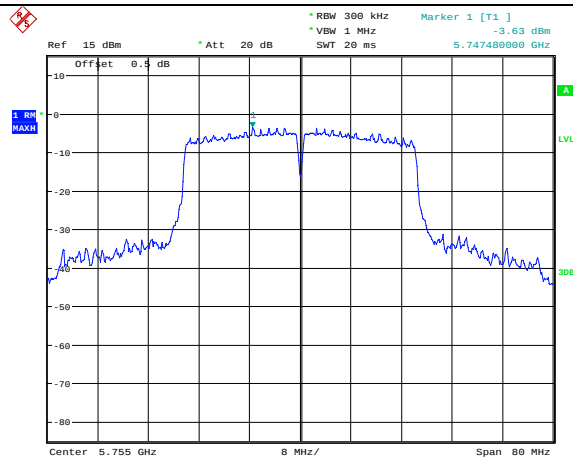
802.11n ht20
Middle Channel

Date: 20.APR.2022 13:12:27

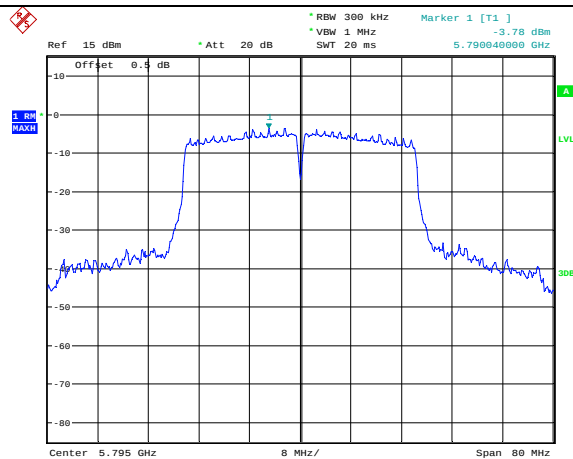
802.11n ht20
Highest Channel

Date: 20.APR.2022 13:13:37

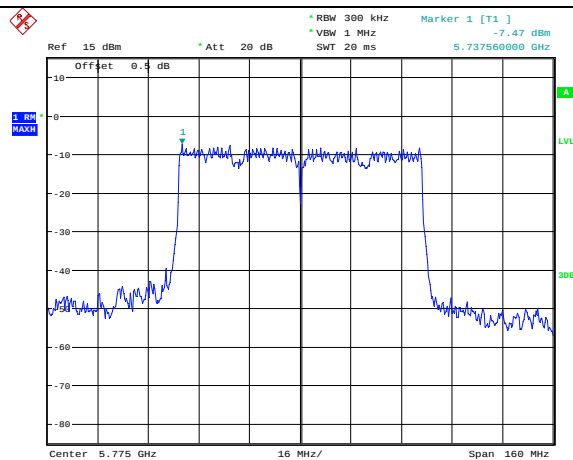
Maximum power spectral density

802.11n ht40
Lowest Channel

Date: 20.APR.2022 13:15:33

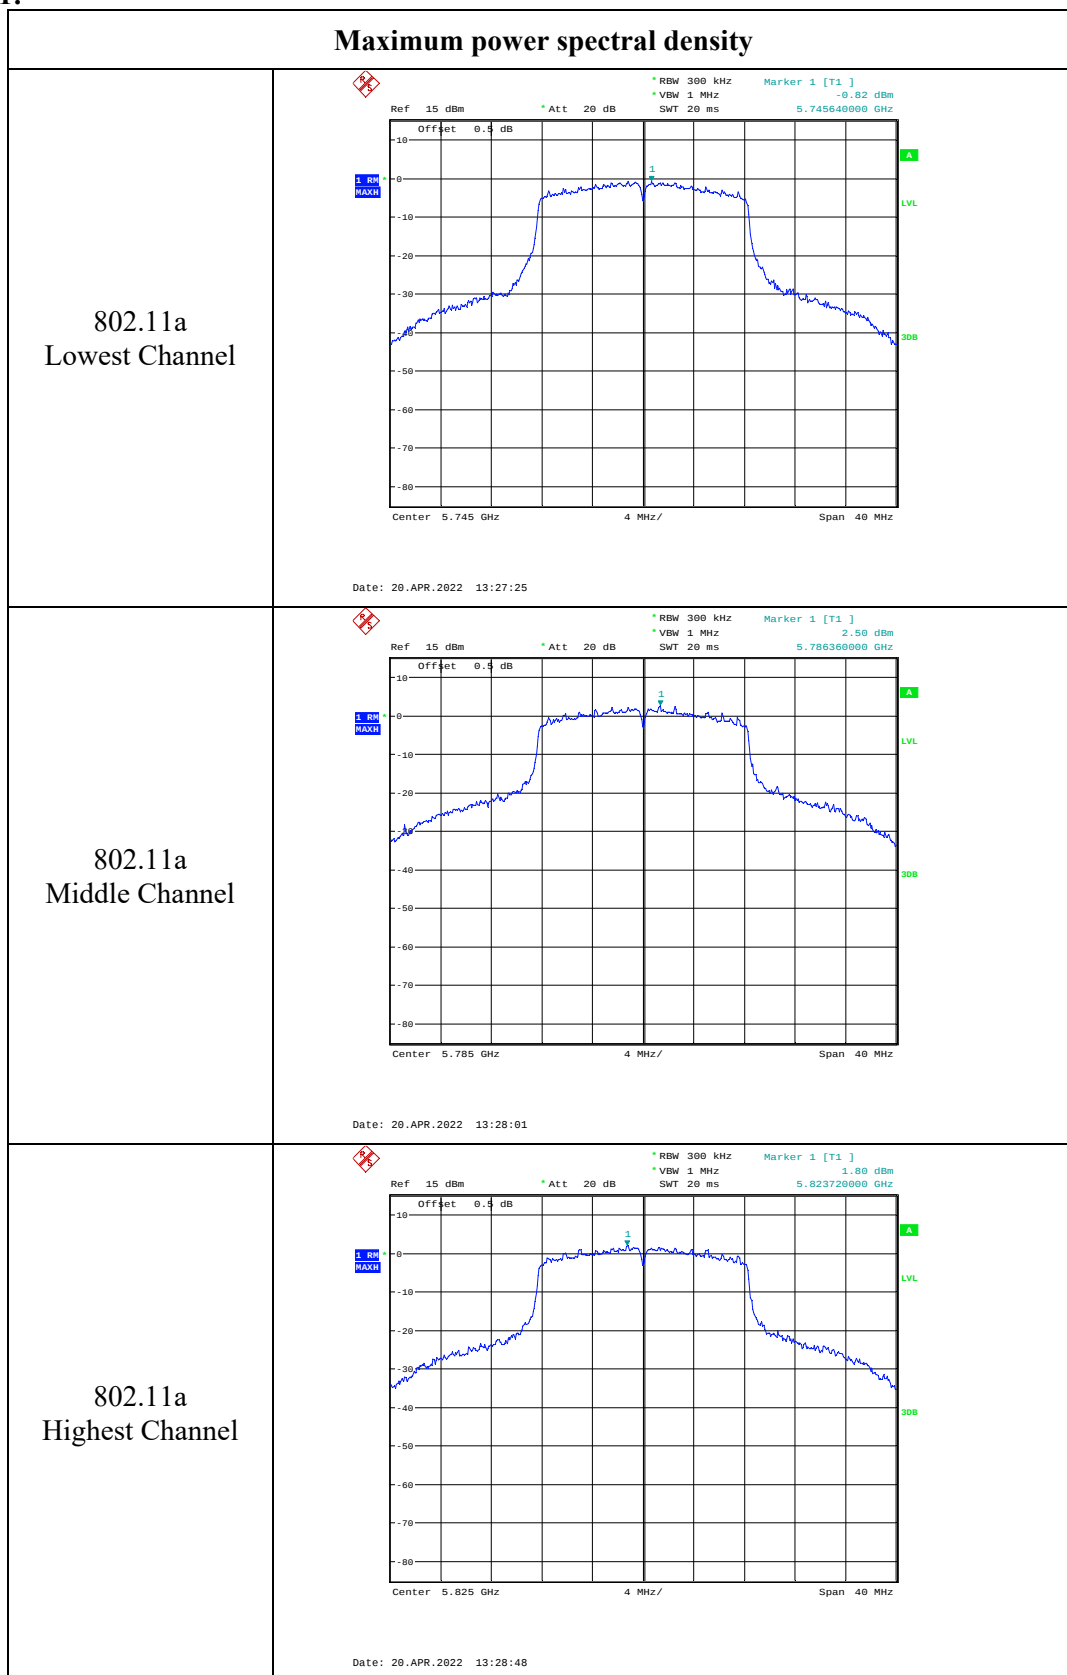
802.11n ht40
Highest Channel

Date: 20.APR.2022 13:16:49

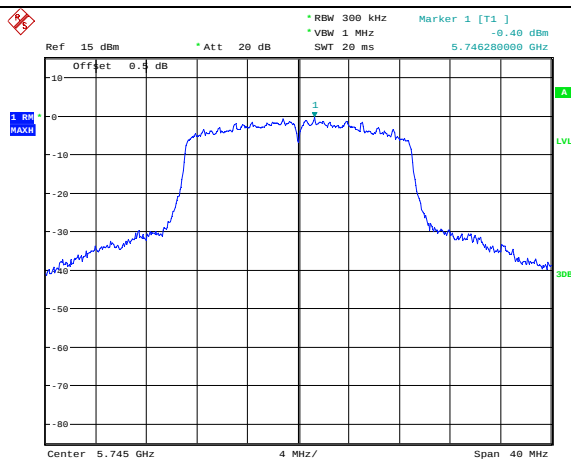
802.11ac vht80
Middle Channel

Date: 20.APR.2022 13:18:44

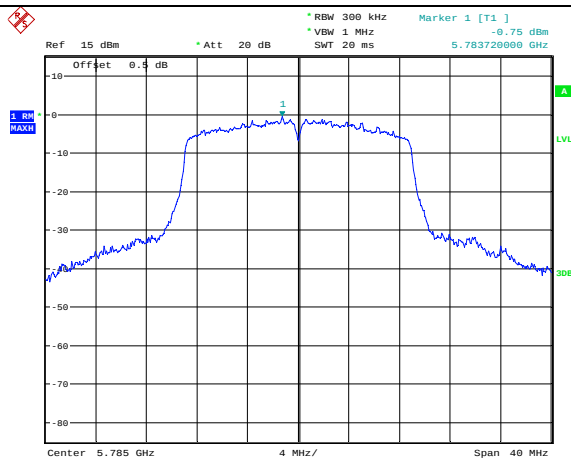
Chain 1:



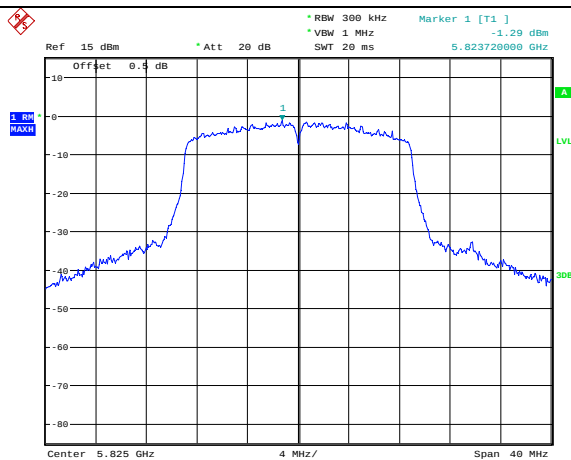
Maximum power spectral density

802.11n ht20
Lowest Channel

Date: 20.APR.2022 13:22:43

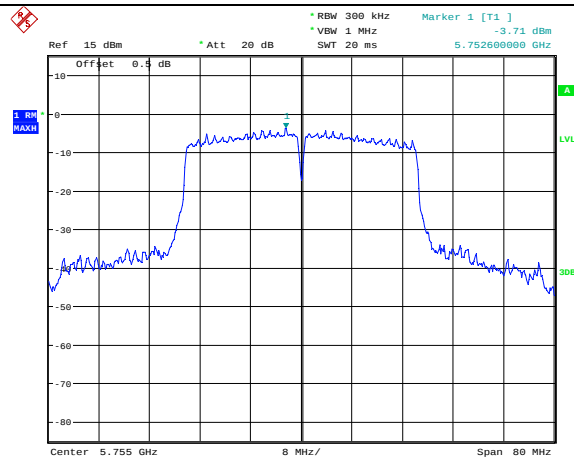
802.11n ht20
Middle Channel

Date: 20.APR.2022 13:23:50

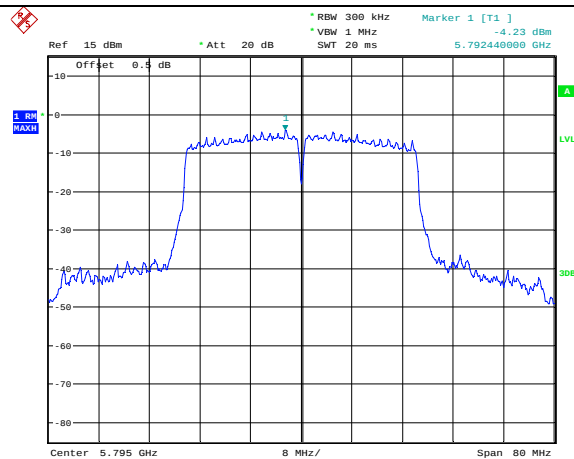
802.11n ht20
Highest Channel

Date: 20.APR.2022 13:25:47

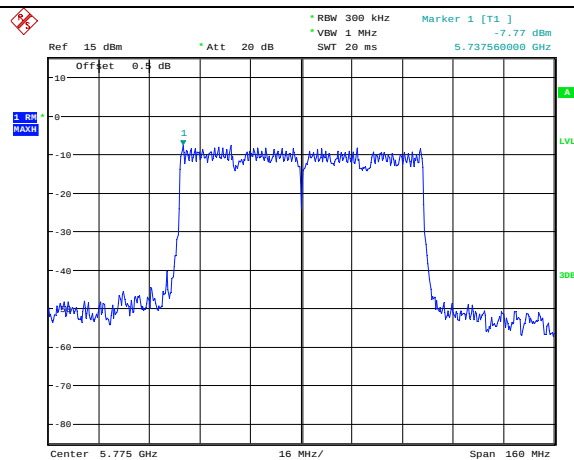
Maximum power spectral density

802.11n ht40
Lowest Channel

Date: 20.APR.2022 13:20:57

802.11n ht40
Highest Channel

Date: 20.APR.2022 13:21:31

802.11ac vht80
Middle Channel

Date: 20.APR.2022 13:19:58

4.6 Duty Cycle:

Serial Number:	CR22020089-RF-S1	Test Date:	2022-04-20
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	25.3	Relative Humidity: (%)	55	ATM Pressure: (kPa)	101.1
----------------------	------	------------------------------	----	------------------------	-------

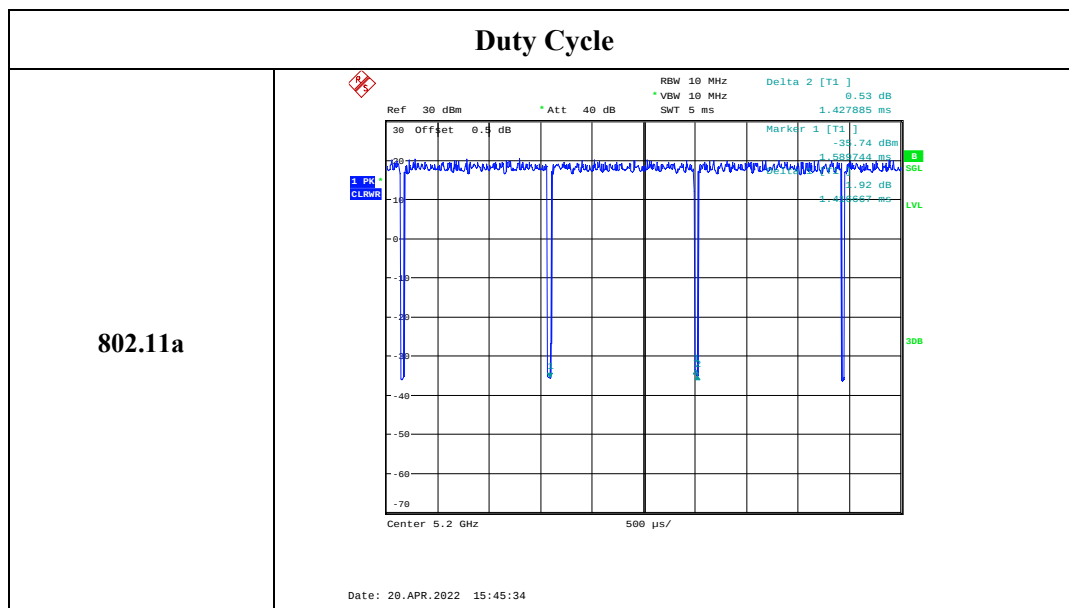
Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2021-07-22	2022-07-21
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

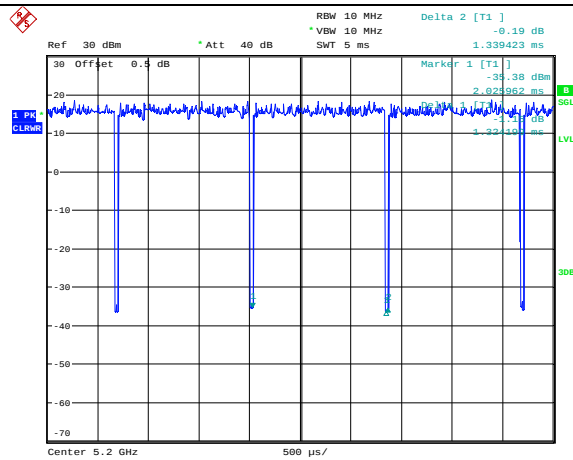
Test Data:

Test Modes	Ton (ms)	Ton+off (ms)	Duty cycle (%)
802.11a	1.417	1.428	99.23
802.11n ht20	1.324	1.339	98.88
802.11n ht40	0.356	0.388	91.75
802.11ac vht80	1.113	1.57	70.89



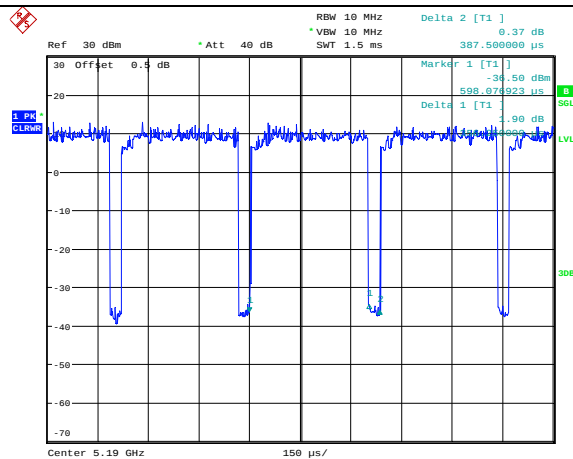
Duty Cycle

802.11n ht20



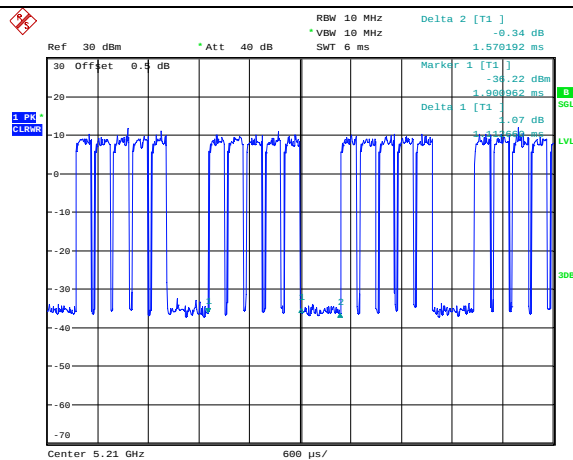
Date: 20.APR.2022 15:52:25

802.11n ht40



Date: 20.APR.2022 15:49:52

802.11ac vht80



Date: 20.APR.2022 15:55:45

5. RF EXPOSURE EVALUATION

5.1 MAXIMUM PERMISSIBLE EXPOSURE (MPE)

5.1.1 Applicable Standard

FCC §15.407 (f) & §1.1310 & §2.1091

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §1.1307(b)(1) of this chapter.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

5.1.2 Procedure

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

5.1.3 Calculated Result

Operation Modes	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
2.4G Wi-Fi	2412-2462	3.6	2.29	25	316.23	20.00	0.14	1.0
5G Wi-Fi	5150-5850	3.6	2.29	16	39.81	20.00	0.02	1.0
Bluetooth	2402-2480	3.3	2.14	4	2.51	20.00	0.001	1.0

Note: the 2.4G Wi-Fi, 5G Wi-Fi or Bluetooth can't transmit simultaneously

Result: The device meet FCC MPE at 20 cm distance

===== END OF REPORT =====