

JQAFileNo. : 400-60134

Issue Date : June 14, 2006

Page 1 of 34

EMI TEST REPORT

JQA File No. : 400-60134

Model No. : TP6793

Type of Equipment : Radio Controlled Toy

(Transmitter)

Regulations Applied : CFR 47 FCC Rules and Regulations Part 15

FCC ID : CVTTP6793

Applicant : NIKKO CO., LTD.

Address : 1-7-14, Mizumoto, Katsushika-ku,

Tokyo 125-0032, Japan

Manufacturer : NIKKO ELECTRONICS BHD.

Address : PLOT 497 PRAI FREE TRADE ZONE, PARI INDUSTRIAL ESTATE,


13600 PRAI, PENANG, MALAYSIA

Received date of EUT : June 1, 2006

Test Result : Passed

Test results in this report are obtained in use of equipment that is traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology(NICT) of Japan.

The test results only respond to the tested sample. This report should not be reproduced except in full, without the written approval of JQA EMC Engineering Dept. Testing Div.



Model No. :TP6793
Standard :CFR 47 FCC Rules Part 15

FCC ID :CVTTP6793 Issue Date :June 14, 2006

Page 2 of 34

TABLE OF CONTENTS

1	Docu	mentation	Page
	1.1	Test Regulation	3
	1.2	General Information	3
	1.3	Test Condition	4 - 8
	1.4	EUT Modifications / Deviation from Standard	9
	1.5	Test results	10
	1.6	Summary	11
	1.7	Test Configuration / Operation of EUT	12
	1.8	EUT Arrangement(Drawing)	13
	1.9	Preliminary Test and Test-setup (Drawings)	14 - 19
	1.10	EUT Arrangement (Photographs)	20 - 21
2	Test	Data	
	2.1	AC Power Line Conducted Emission	N/A
	2.2	Radiated Emission (Electric Field)	22 - 23
	2.3	Frequency Stability	N/A
	2.4	Occupied Bandwidth	24 - 30
3	Appe	ndix	
	Test	instruments List	31 - 34



Standard : CFR 47 FCC Rules Part 15

FCC ID :CVTTP6793

Issue Date :June 14, 2006

Page 3 of 34

1 DOCUMENTATION

1.1 TEST REGULATION

FCC Rules and Regulations Part 15 Subpart A and C Intentional Radiators

Test procedure :

AC power line conducted emission, radiated emission, frequency stability and occupied bandwidth tests were performed according to the procedures in ANSI C63.4-2003.

1.2 GENERAL INFORMATION

1.2.1 Test facility:

- 1) Test Facility located at EMC Engineering Dept. Testing Div. :
 - No.2 and 3 Anechoic Chambers (3 meters Site).
 - Shielded Enclosure.
- 2) EMC Engineering Dept. Testing Div. is recognized under the National Voluntary Laboratory accreditation Program for satisfactory compliance established in title 15, Part 285 Code of Federal Regulations.

NVLAP Lab Code: 200189-0

1.2.2 Description of the Equipment Under Test (EUT) :

1) Type of Equipment : Radio Controlled Toy

(Transmitter)

2) Product Type : Production

3) Category : Low Power Communication Device

Transmitter

4) EUT Authorization : Certification

5) FCC ID : CVTTP6793
6) Trade Name : NIKKO

7) Model No. : TP6793

8) Operating Frequency Range : 27.145 MHz 9) Highest Frequency Used in the EUT : 27.145 MHz


10) Serial No. : None
11) Date of Manufacture : None

12) Power Rating : DC 9.0V(Battery)

13) EUT Grounding : None

1.2.3 Definitions for symbols used in this test report :

- \underline{x} indicates that the listed condition, standard or equipment is applicable for this report.
- indicates that the listed condition, standard or equipment is not applicable for this report.



Standard : CFR 47 FCC Rules Part 15 Page 4 of 34

FCC ID :CVTTP6793 Issue Date :June 14, 2006

1.3 TEST CONDITION

1.3.1 The measurement of the AC Power Line Conducted Emission

- was performed in the following test site.

 \underline{x} - was not applicable.

Test location :

Safety & EMC Center EMC Engineering Dept. Testing Div. 21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

___ - Shielded Enclosure

___ - Anechoic Chamber No. 2 (portable Type)

Туре	Number of test instruments
	(Refer to Appendix)
Test Receiver	N/A
Spectrum Analyzer	N/A
Cable	N/A
AMN(for EUT)	N/A
AMN(for Peripheral)	N/A
Termination	N/A



Model No. :TP6793

Standard : CFR 47 FCC Rules Part 15

FCC ID :CVTTP6793

Issue Date :June 14, 2006

Page 5 of 34

1.3.2 The measurement of the Radiated Emission(9 kHz - 30 MHz)

 $\underline{\mathbf{x}}$ - was performed in the following test site.

___ - was not applicable.

Test location:

Safety & EMC Center EMC Engineering Dept. Testing Div. 21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

x - Anechoic Chamber No. 2 (3 meters)- Anechoic Chamber No. 3 (3 meters)

Validation of Site Attenuation :

1) Last Confirmed Date : N/A
2) Interval : N/A

Type	Number of test instruments
	(Refer to Appendix)
Test Receiver	13
Antenna	21
Cable	43



Model No. :TP6793

Standard : CFR 47 FCC Rules Part 15

FCC ID :CVTTP6793

Issue Date :June 14, 2006

Page 6 of 34

1.3.3 The measurement of the Radiated Emission(30 MHz - 1000 MHz)

 \underline{x} - was performed in the following test site.

___ - was not applicable.

Test location:

Safety & EMC Center EMC Engineering Dept. Testing Div. 21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

x - Anechoic Chamber No. 2 (3 meters)- Anechoic Chamber No. 3 (3 meters)

Validation of Site Attenuation :

1) Last Confirmed Date : March, 2006

2) Interval :1 year

Туре	Number of test instruments
	(Refer to Appendix)
Test Receiver	11
Antenna	26, 28
Cable	38
RF Amplifier	N/A



Standard : CFR 47 FCC Rules Part 15

FCC ID :CVTTP6793

Issue Date :June 14, 2006

Page 7 of 34

1.3.4 The measurement of the Radiated Emission(Above 1000 MHz)

___ - was performed in the following test site.

 \underline{x} - was not applicable.

Test location:

Safety & EMC Center EMC Engineering Dept. Testing Div. 21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

___ - No. 2 site (3 meters)
__ - No. 3 site (3 meters)

Validation of Site Attenuation :

1) Last Confirmed Date : March, 2006

2) Interval :1 year

Туре	Number of test instruments
	(Refer to Appendix)
Test Receiver	N/A
Spectrum Analyzer	N/A
Cable	N/A
Antenna	N/A
RF Amplifier	N/A
Band Reject Filter	N/A
High Pass Filter	N/A



Standard : CFR 47 FCC Rules Part 15 Page 8 of 34

FCC ID :CVTTP6793 Issue Date :June 14, 2006

1.3.5 The measurement of the Frequency Stability

___ - was performed.

 \underline{x} - was not applicable.

Used test instruments:

Type	Number of test instruments
	(Refer to Appendix)
Frequency Counter	N/A
0	3T / 3

Oven N/ADC Power Supply N/A

1.3.6 The measurement of the Occupied Bandwidth

 \underline{x} - was performed.

___ - was not applicable.

Type	Number of test instruments
	(Refer to Appendix)
Test Receiver	13
Spectrum Analyzer	N/A
Cable	47
Antenna	22



Standard : CFR 47 FCC Rules Part 15

FCC ID :CVTTP6793

Issue Date :June 14, 2006


Page 9 of 34

1.4 EUT MODIFICATION / Deviation from Standard

1.4.1 EUT MODIFICATION

 \underline{x} -No modifications were conducted by JQA to achieve compliance to Class B levels.

____ - To achieve compliance to Class B levels, the following changes were made by JQA during the compliance test.

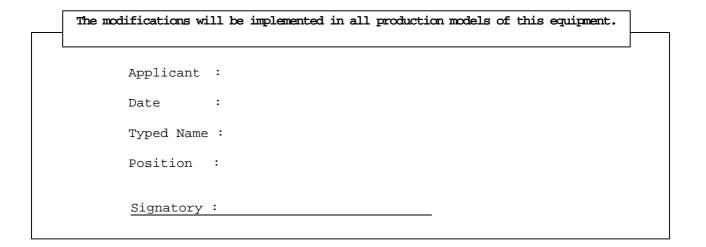

1.4.2 Deviation from Standard:

Х	- No	deviation	s from the	standard	descr	ribed i	n clause	1.1.			
	- The	e following	deviations	were emp	loyed f	from th	ne standard	described	in	clause	1.1:
	_										



Model No. :TP6793 Issue Date :Ju Standard :CFR 47 FCC Rules Part 15 Page 10 of 34

FCC ID :CVTTP6793 Issue Date :June 14, 2006

1.5 TEST RESULTS

Remarks:

AC Power Line Conducted Emission	Applicable	<u>x</u> - NOT Applicable
The requirements are	PASSED	NOT PASSED
Remarks :		
Radiated Emission [§15.227]	<u>x</u> - Applicable	NOT Applicable
The requirements are	x - PASSED	NOT PASSED
Remarks:		
Frequency Stability	Applicable	\underline{x} - NOT Applicable
The requirements are	- PASSED	NOT PASSED
Remarks:		
Occupied Bandwidth [§15.215(c)]	_x Applicable	NOT Applicable
The requirements are	x - PASSED	NOT PASSED



:TP6793

Standard :CFR 47 FCC Rules Part 15 FCC ID :CVTTP6793 Issue Date :June 14, 2006

Page 11 of 34

1.6 SUMMARY

General Remarks:

The EUT was tested according to the requirements of FCC Rules and Regulations Part 15 Subpart A and C under the test configuration, as shown in clause 1.7 to 1.10. The conclusion for the test items which are required by the applied regulation is indicated under the test result.

Test Result :

The "as received" sample;

x - fulfill the test requirements of the regulation mentioned on clause 1.1.

___ - fulfill the test requirements of the regulation mentioned on clause 1.1, but with certain qualifications.

- doesn't fulfill the test regulation mentioned on clause 1.1.

Begin of testing: June 1, 2006

End of testing : June 8, 2006

- JAPAN QUALITY ASSURANCE ORGANIZATION -

Approved by:

Signatories:

Issued by:

Takaharu Hada

Manager

Testing Division

JQA EMC Engineering Dept.

Shigeru Osawa

Assistant Manager

Testing Division

JQA EMC Engineering Dept.



Model No. :TP6793

Standard : CFR 47 FCC Rules Part 15

FCC ID :CVTTP6793

Issue Date :June 14, 2006

Page 12 of 34

1.7 TEST CONFIGURATION / OPERATION OF EUT

1.7.1 Test Configuration

The equipment under test (EUT) consists of :

Item	Manufacturer	Model No.	FCC ID	Serial No.
Radio Controlled Toy	NIKKO ELECTRONICS BHD.	TP6793	CVTTP6793	None
(Transmitter)				

1.7.2 Operating condition

Power supply Voltage: 9.0 VDC(Fresh Battery used)
The tests have been carried out the following mode.

1) TX mode (27.145 MHz)

1.7.3 Generating and Operating frequency of EUT

27.145 MHz



Model No. :TP6793

Standard : CFR 47 FCC Rules Part 15

FCC ID :CVTTP6793 Issue Date :June 14, 2006

Page 13 of 34

1.8 EUT ARRANGEMENT (DRAWINGS)





Standard : CFR 47 FCC Rules Part 15

FCC ID :CVTTP6793

Issue Date :June 14, 2006

Page 14 of 34

1.9 PRELIMINARY TEST AND TEST-SETUP (DRAWINGS)

1.9.1 AC Power Line Conducted Emission (150 kHz - 30 MHz) :

According to description of ANSI C63.4-2003 sec.13.1.3.1, the AC power line preliminary conducted emissions measurements were carried out.


The preliminary conducted measurements were performed using the spectrum analyzer to observe the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for final AC power line conducted emissions measurements.

Shielded Enclosure

- Side View -

Vertical Ground Plane

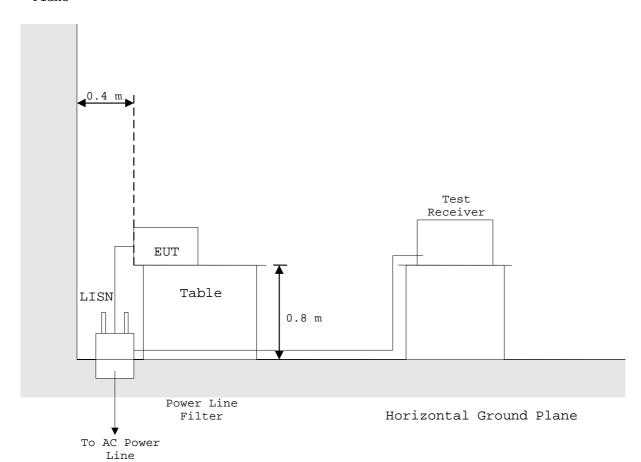



Standard : CFR 47 FCC Rules Part 15

FCC ID :CVTTP6793

Issue Date :June 14, 2006


Page 15 of 34

1.9.2 Radiated Emission (9 kHz - 30 MHz):

According to description of ANSI C63.4-2003 sec.13.1.4.1, the preliminary radiated emissions measurement were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

- Side View -

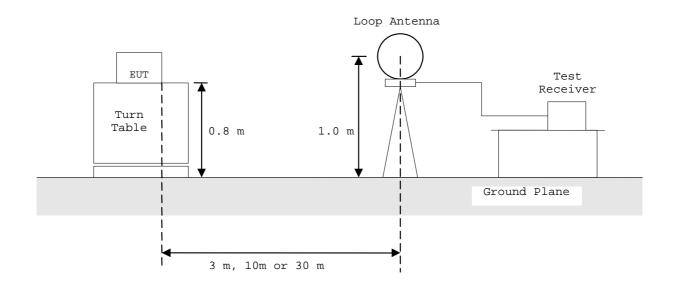



Standard : CFR 47 FCC Rules Part 15

FCC ID :CVTTP6793

Issue Date :June 14, 2006

Page 16 of 34


1.9.3 Radiated Emission (30 MHz - 1000 MHz):

According to description of ANSI C63.4-2003 sec.13.1.4.1, the preliminary radiated emissions measurement were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

Anechoic Chamber

- Side View -

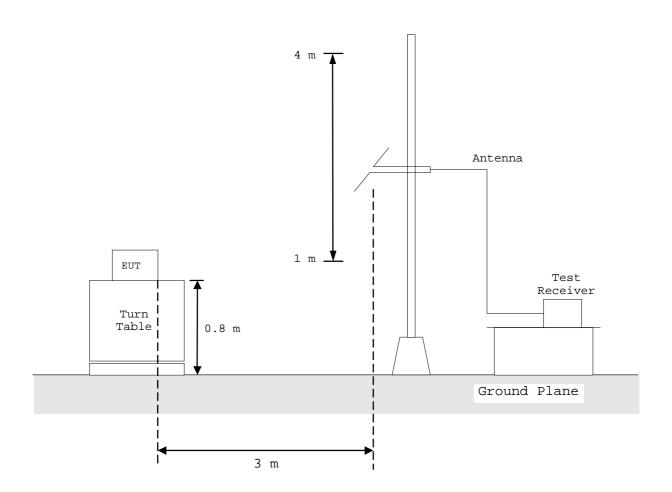



Standard : CFR 47 FCC Rules Part 15

FCC ID :CVTTP6793

Issue Date :June 14, 2006


Page 17 of 34

1.9.4 Radiated Emission (Above 1 GHz):

According to description of ANSI C63.4-2003 sec.13.1.4.1, the preliminary radiated emissions measurements were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

Anechoic Chamber

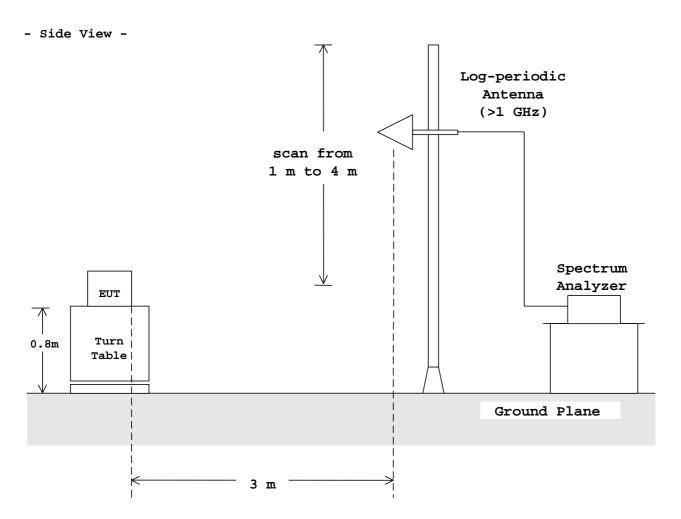



Standard : CFR 47 FCC Rules Part 15

FCC ID :CVTTP6793


Issue Date :June 14, 2006

Page 18 of 34

1.9.5 Frequency Stability:

According to description of ANSI C63.4-2003 sec.13.1.5 and sec.13.1.6, the frequency stability measurements were carried out. By using frequency counter with suitable RF amplifier, the carrier frequency of the transmitter under test was measured with a temperature variation of $-20\,^{\circ}\text{C}$ to $+50\,^{\circ}\text{C}$ at the normal supply voltage, and if required , with a variation in the primary voltage from 85 % to 115 % the rated supply voltage at the temperature of $+20\,^{\circ}\text{C}$.

These measurements were carried out after allow sufficient time (approximately 1 hour) for the temperature of the chamber to stabilize.

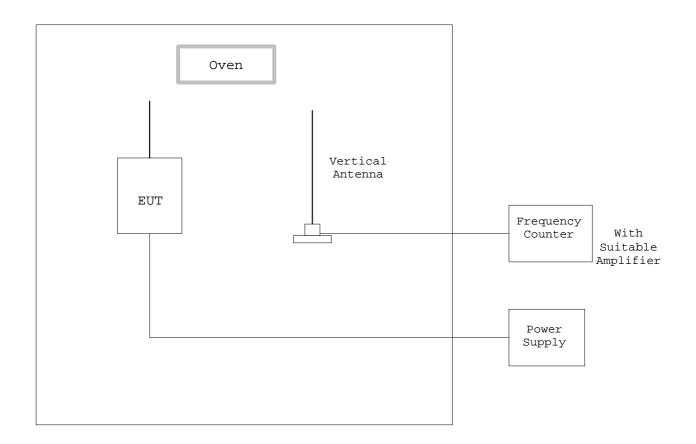



Standard : CFR 47 FCC Rules Part 15

FCC ID :CVTTP6793


Issue Date :June 14, 2006

Page 19 of 34

1.9.6 Occupied Bandwidth:

According to description of ANSI C63.4-2003 sec.13.1.7, the occupied bandwidth measurements were carried out. By using a spectrum analyzer with a vertical antenna for picking up the signal, the measurements of the emission were made under the transmitting modes of the EUT.

The resolution bandwidth of spectrum analyzer was set to the value specified in sec.13.1.7.

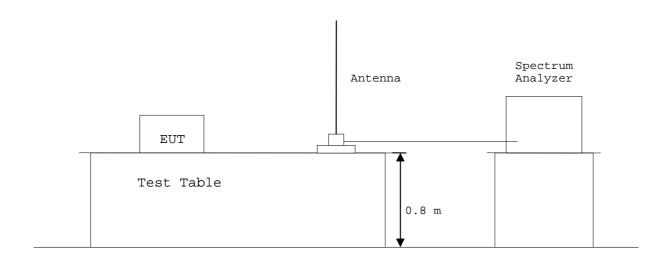



Model No. :TP6793

Standard : CFR 47 FCC Rules Part 15

FCC ID :CVTTP6793


Issue Date :June 14, 2006

Page 20 of 34

1.10 TEST ARRANGEMENT (PHOTOGRAPHS)

PHOTOGRAPHS OF EUT CONFIGURATION FOR RADIATED EMISSIONS MEASUREMENT

Photograph present configuration with maximum emission

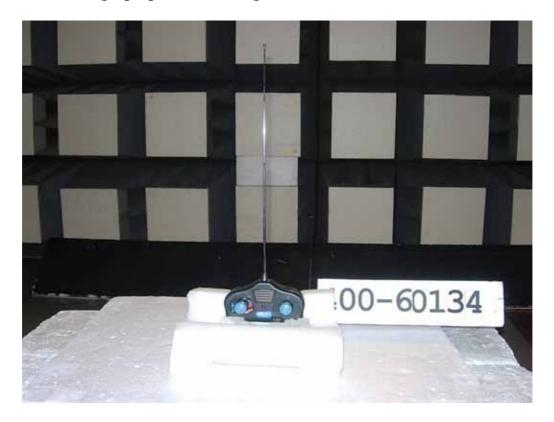





Model No. :TP6793

Standard : CFR 47 FCC Rules Part 15


FCC ID :CVTTP6793

Issue Date :June 14, 2006

Page 21 of 34

PHOTOGRAPHS OF EUT CONFIGURATION FOR RADIATED EMISSIONS MEASUREMENT

Photograph present configuration with maximum emission

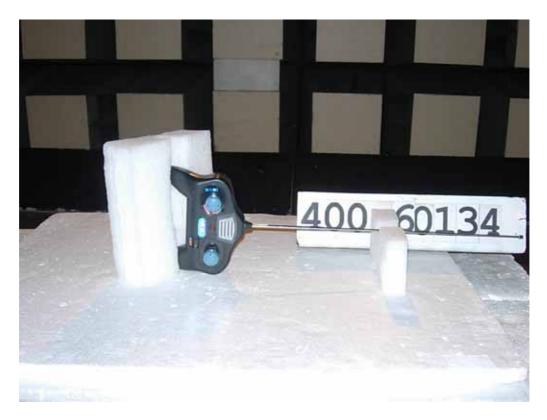





Standard :CFR 47 FCC Rules Part 15 FCC ID :CVTTP6793

Issue Date : June 14, 2006

Page 22 of 34

2 TEST DATA

2.1 AC Power Line Conducted Emissions

Note: This test was not applicable.

2.2 Radiated Emissions Measurement

Operating Frequency : 27.145 MHz Distance of Measurement : 3.0 meters

> Date : June 8, 2006 Temp.: 24 °C Humi.

: 63 %

Frequ- ency	Factor	Antenna				eter Readi (dBuV)	J	(dE	mits BuV/m)		(dBu	n Levels uV/m)	5	(d	gins NB)
(MHz)	(dB)	(dB)			QP	AV	Peak	QP/AV	Peak		QP/AV	Peak		QP/AV	Peak
27.2	0.0	1.5			-	48.9	74.2	80.0	100.0		50.4	75.7		29.6	24.3
54.3	0.0	9.9	V		18.9	-	-	40.0	-		28.8	-		11.2	-
81.5	0.0	7.9	H	<	0.0	-	-	40.0	-	<	7.9	-	>	32.1	-
108.6	0.0	12.3	H	<	0.0	-	-	43.5	-	<	12.3	-	>	31.2	-
135.7	0.0	15.0	H	<	0.0	-	-	43.5	-	<	15.0	-	>	28.5	-
162.9	0.0	16.5	Н	<	0.0	-	-	43.5	-	<	16.5	-	>	27.0	-
190.0	0.0	17.5	H	<	0.0	-	-	43.5	-	<	17.5	-	>	26.0	-
217.2	0.0	18.5	H		1.8	-	-	46.0	-		20.3	-		25.7	-
244.3	0.0	19.4	H	<	0.0	_	_	46.0	_	<	19.4	_	>	26.6	_

Notes:

- 1) The spectrum was checked from 27.145 MHz to 1000 MHz.
- 2) The cable loss is included in the antenna factor.
- 3) The symbol of "<"means "or less".
- 4) The symbol of ">"means "or greater".
- 5) A sample calculation(QP/AV) was made at 27.15 (MHz).

PA + Af + Mr = 0 + 1.5 + 48.9 = 50.4 (dBuV/m)

PA = Peak to Average Factor(P-A Factor)

Af = Antenna Factor

Mr = Meter Reading

6) Measuring Instrument Setting :

Detector function	Resolution Bandwidth	<u>Video Bandwidth</u>
Quasi-peak(QP)	120 kHz	-
Average(AV)	120 kHz	-
Peak	120 kHz	-

Katsunori Miura Testing Engineer



Standard : CFR 47 FCC Rules Part 15

FCC ID :CVTTP6793

Issue Date :June 14, 2006


Page 23 of 34

RADIATED EMISSION MEASUREMENT

Model No.: TP6793

Standard : CFR 47 FCC Rules Part 15 O QP/AV

Operating Frequency(MHz) : 27.145

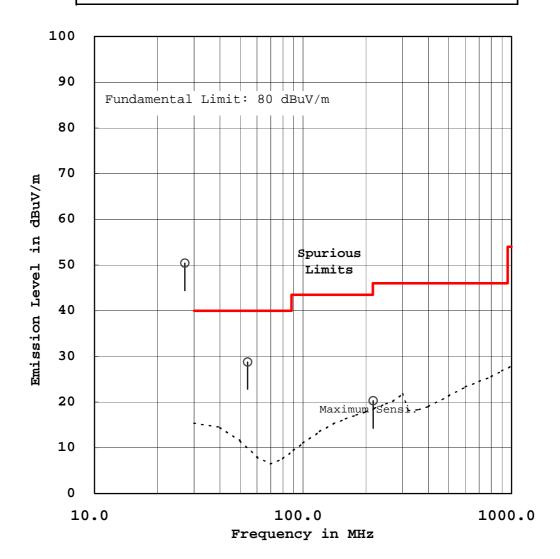



Standard : CFR 47 FCC Rules Part 15

FCC ID :CVTTP6793

Issue Date :June 14, 2006

Page 24 of 34

2.3 Frequency Stability

Note: This test was not applicable.

2.4 Occupied Bandwidth Measurement

Date : ____ June 8, 2006

Temp.: <u>24 °C</u> Humi.: <u>63 %</u>

Measurements Results :

Refer to the attached graphs.

Tested by

Katsunori Miura Testing Engineer



Model No. :TP6793


Standard : CFR 47 FCC Rules Part 15 Page 25 of 34

FCC ID :CVTTP6793 Issue Date :June 14, 2006

Emission Limitation

FCC ID : CVTTP6793 Model: TP6793

Mode of EUT : Forward

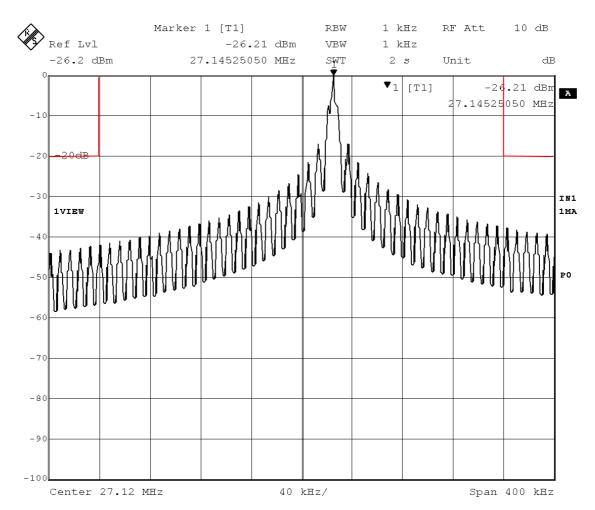




Standard : CFR 47 FCC Rules Part 15 Page 26 of 34

FCC ID :CVTTP6793 Issue Date :June 14, 2006

Emission Limitation

FCC ID : CVTTP6793 Model: TP6793

Mode of EUT : Forward Left

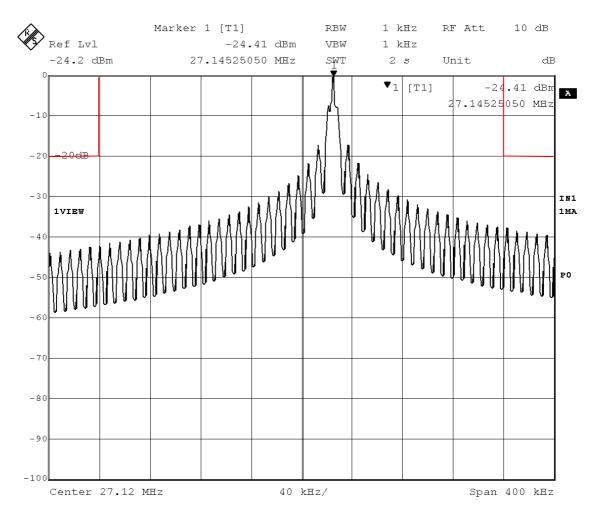



Standard : CFR 47 FCC Rules Part 15

FCC ID :CVTTP6793


Issue Date :June 14, 2006

Page 27 of 34

Emission Limitation

FCC ID : CVTTP6793 Model : TP6793

Mode of EUT : Forward Right

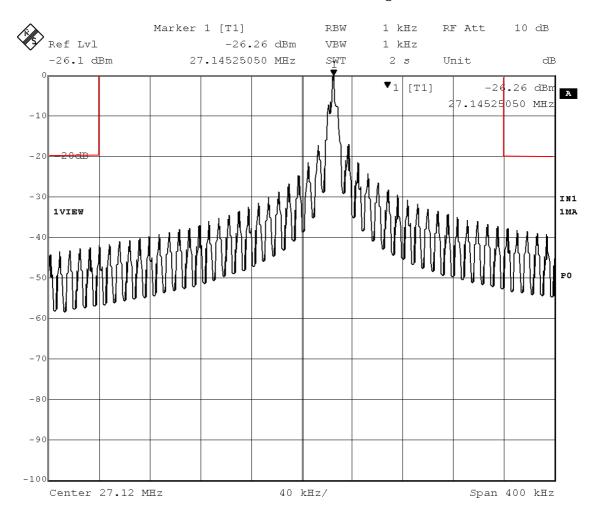



Model No. :TP6793


Standard : CFR 47 FCC Rules Part 15 Page 28 of 34

FCC ID :CVTTP6793 Issue Date :June 14, 2006

Emission Limitation

FCC ID : CVTTP6793 Model: TP6793

Mode of EUT : Reverse

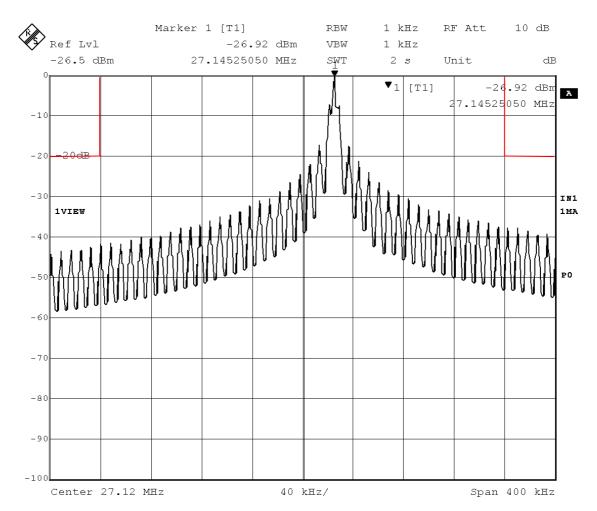




Standard : CFR 47 FCC Rules Part 15 Page 29 of 34

FCC ID :CVTTP6793 Issue Date :June 14, 2006

Emission Limitation

FCC ID : CVTTP6793 Model: TP6793

Mode of EUT : Reverse Left

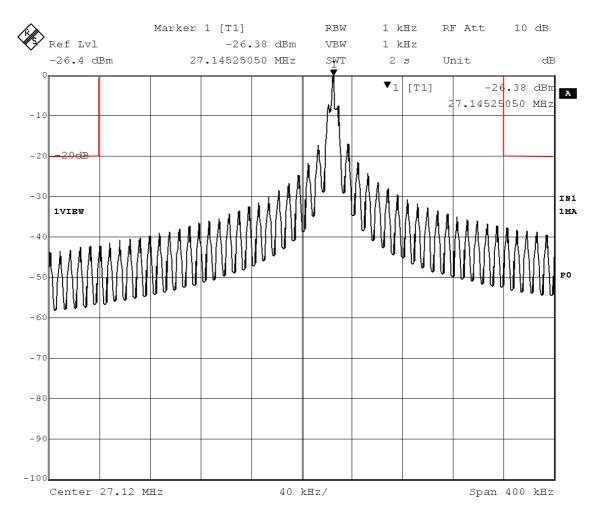




Standard : CFR 47 FCC Rules Part 15 Page 30 of 34


FCC ID :CVTTP6793 Issue Date :June 14, 2006

Emission Limitation

FCC ID : CVTTP6793 Model: TP6793

Mode of EUT : Reverse Right

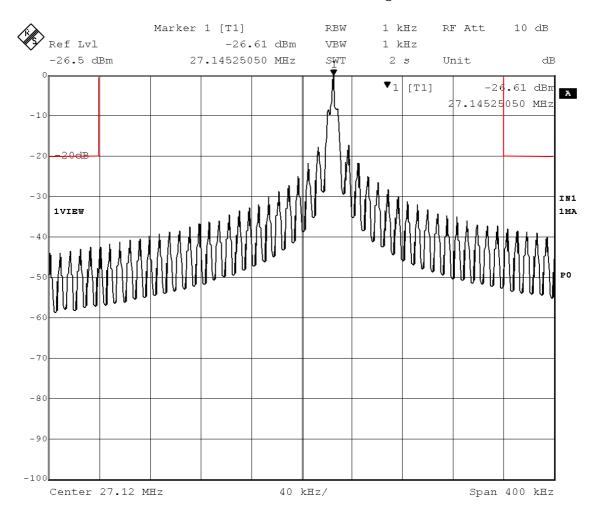



Model No. :TP6793 Issue Date :Ju Standard :CFR 47 FCC Rules Part 15 Page 31 of 34

FCC ID :CVTTP6793 Issue Date :June 14, 2006

Appendix


Test Instruments List



Model No. :TP6793 Issue Date :Ju Standard :CFR 47 FCC Rules Part 15 Page 32 of 34

FCC ID :CVTTP6793 Issue Date :June 14, 2006

No						09-Jun-2006	
Tamechoic Chamber A TDK S00-01-502E0 Mar 2006 1 Year 2 Amechoic Chamber B TDK S00-01-503E0 Mar 2006 1 Year 3 Shield Room A TDK S00-01-501E0 S10-01 S	No Type	Model	Manufacturer	Serial	ID	Last Cal.	Interval
Anechoic Chamber A TDK S00-01-502E0 Mar 2006 1 Year							
Anechoic Chamber B		_	TDK	-	800-01-502E0	Mar 2006	1 Year
Shield Room A		-		_			
Shield Room B		_		_			-
Shield Room C C		_		_			_
Shield Room D		_	-	_			_
New Note		_		_			_
Measuring Instruments:		_		_			_
10 Test Receiver	7 Silicia Room E		IDIX		000 01 00020		
11 Test Receiver	Measuring Instruments:						
12 Test Receiver	10 Test Receiver	ESHS10	Rohde & Schwarz	835871/004	119-01-505E0	Apr 2006	1 Year
13 Test Receiver	11 Test Receiver	ESVS10	Rohde & Schwarz	826148/002	119-03-504E0	Apr 2006	1 Year
14 Spectrum Analyzer	12 Test Receiver	ESVS10	Rohde & Schwarz	832699/001	119-03-506E0	Apr 2006	1 Year
14 Spectrum Analyzer	13 Test Receiver	ESI26	Rohde & Schwarz	100043	119-03-511E0	Aug 2005	1 Year
15 Spectrum Analyzer 8566B	14 Spectrum Analyzer	R3182	Advantest	120600581		•	1 Year
16 RF Pre-selector 85685A Hewlett Packard 2648A00522 122-02-503E0 Oct 2005 1 Year 17 Spectrum Analyzer 8566B Hewlett Packard 2747A05855 122-02-517E0 Apr 2006 1 Year 18 RF Pre-selector 85685A Hewlett Packard 2901A00933 122-02-519E0 Apr 2006 1 Year 19 Spectrum Analyzer R3132 Advantest 150400998 122-02-520E0 Sep 2005 1 Year 65 Power Meter 436A Hewlett Packard 1725A01930 100-02-501E0 Apr 2006 1 Year 66 Power Sensor 8482A Hewlett Packard 1551A01013 100-02-501E0 Apr 2006 1 Year 68 FM Linear Detector MS61A Anritsu M77486 123-02-008E0 Ct 2005 1 Year 70 Measuring Amplifier 2636 B & K 1614851 082-01-502E0 May 2006 1 Year 75 Frequency Counter 53131A Hewlett Packard 3546A11807 102-02-075E0 May 2006 1 Year 84 Fois Meter MN-446 Meguro <td< td=""><td>- v</td><td>8566B</td><td>Hewlett Packard</td><td>2140A01091</td><td>122-02-501E0</td><td>Oct 2005</td><td></td></td<>	- v	8566B	Hewlett Packard	2140A01091	122-02-501E0	Oct 2005	
18 RF Pre-selector 85685A Hewlett Packard 2901A00933 122-02-519E0 Apr 2006 1 Year 19 Spectrum Analyzer R3132 Advantest 120500072 122-02-520E0 Sep 2005 1 Year 20 Spectrum Analyzer R3132 Advantest 150400998 122-02-523E0 Jul 2005 1 Year 65 Power Meter 436A Hewlett Packard 1725A01930 100-02-501E0 Apr 2006 1 Year 66 Power Sensor 8485A Hewlett Packard 1551A01013 100-02-501E0 Apr 2006 1 Year 67 Power Sensor 8485A Hewlett Packard 2942A08969 100-04-021E0 Apr 2006 1 Year 68 FM Linear Detector MS61A Anritsu M77486 123-02-008E0 Oct 2005 1 Year 69 Level Meter ML422C Anritsu M87571 114-02-501E0 Jun 2006 1 Year 75 Frequency Counter 53131A Hewlett Packard 3546A11807 102-02-075E0 May 2006 1 Year 84 Noise Meter MN-446 Meguro 53030478	-	85685A	Hewlett Packard	2648A00522	122-02-503E0	Oct 2005	1 Year
18 RF Pre-selector 85685A Hewlett Packard 2901A00933 122-02-519E0 Apr 2006 1 Year 19 Spectrum Analyzer R3132 Advantest 120500072 122-02-520E0 Sep 2005 1 Year 20 Spectrum Analyzer R3132 Advantest 150400998 122-02-523E0 Jul 2005 1 Year 65 Power Meter 436A Hewlett Packard 1725A01930 100-02-501E0 Apr 2006 1 Year 66 Power Sensor 8485A Hewlett Packard 1551A01013 100-02-501E0 Apr 2006 1 Year 67 Power Sensor 8485A Hewlett Packard 2942A08969 100-04-021E0 Apr 2006 1 Year 68 FM Linear Detector MS61A Anritsu M77486 123-02-008E0 Oct 2005 1 Year 69 Level Meter ML422C Anritsu M87571 114-02-501E0 Jun 2006 1 Year 75 Frequency Counter 53131A Hewlett Packard 3546A11807 102-02-075E0 May 2006 1 Year 84 Noise Meter MN-446 Meguro 53030478	17 Spectrum Analyzer	8566B	Hewlett Packard	2747A05855	122-02-517E0	Apr 2006	1 Year
19 Spectrum Analyzer R3132 Advantest 120500072 122-02-520E0 Sep 2005 1 Year 20 Spectrum Analyzer R3132 Advantest 150400998 122-02-523E0 Jul 2005 1 Year 65 Power Meter 436A Hewlett Packard 1725A01930 100-02-501E0 Apr 2006 1 Year 66 Power Sensor 8482A Hewlett Packard 1551A01031 100-02-501E0 Apr 2006 1 Year 67 Power Sensor 8485A Hewlett Packard 2942A08969 100-04-021E0 Apr 2006 1 Year 68 FM Linear Detector MS61A Amritsu M77486 123-02-008E0 Oct 2005 1 Year 69 Level Meter ML422C Anritsu M87571 114-02-501E0 Jun 2005 1 Year 70 Measuring Amplifier 2636 B & K 1614851 082-01-502E0 May 2006 1 Year 75 Frequency Counter 53131A Hewlett Packard 3246A11807 102-02-075E0 May 2006 1 Year 84 Noise Meter MN-446 Meguro 53030478 082-01-144E0 Apr 2006 1 Year 86 Peak Power Analyzer 8990A/84815A Hewlett Packard 3220A00486/ 100-02-016E0 Apr 2006 1 Year 163 Digital Oscilloscope 54502A Hewlett Packard 2934A05573 121-02-502E0 May 2006 1 Year 165 Multimeter VOAC7413 Iwatsu Electric 0267973 114-02-502E0 May 2006 1 Year 220 Dipole Antenna KBA-511 Kyoritsu 0-170-1 119-05-506E0 Oct 2005 1 Year 22 Dipole Antenna KBA-611 Kyoritsu 0-147-14 119-05-506E0 Oct 2005 1 Year 24 Dipole Antenna KBA-611 Kyoritsu 0-147-14 119-05-505E0 Oct 2005 1 Year 25 Dipole Antenna KBA-611 Kyoritsu 0-147-14 119-05-505E0 Oct 2005 1 Year 26 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-078E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-078E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-078E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-078E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-078E0 Nov 2005	_		Hewlett Packard	2901A00933		-	1 Year
20 Spectrum Analyzer R3132 Advantest 150400998 122-02-523E0 Jul 2005 1 Year 65 Power Meter 436A Hewlett Packard 1725A01930 100-02-501E0 Apr 2006 1 Year 66 Power Sensor 8482A Hewlett Packard 1551A01013 100-02-501E0 Apr 2006 1 Year 67 Power Sensor 8485A Hewlett Packard 2942A08969 100-04-021E0 Apr 2006 1 Year 68 FM Linear Detector MS61A Anritsu M77486 123-02-008E0 Oct 2005 1 Year 70 Measuring Amplifier 2636 B & K 1614851 082-01-502E0 May 2006 1 Year 75 Frequency Counter 53131A Hewlett Packard 3546A11807 102-02-075E0 May 2006 1 Year 83 FFT Analyzer R9211C Advantest 02020253 122-02-506E0 Jun 2005 1 Year 84 Noise Meter MN-446 Meguro 53030478 082-01-144E0 Apr 2006 1 Year 86 Peak Power Analyzer 8990A/84815A Hewlett Packard 3220A00486 100-02-016E0 Apr 2006 1 Year 165 Multimeter VOAC7413 Iwatsu Electric 0267973 121-02-502E0 May 2006 1 Year 220 Dipole Antenna HFH2-Z2 Rohde & Schwarz 881058/62 119-05-033E0 Jun 2006 1 Year 22 Dipole Antenna KBA-511 Kyoritsu 0-170-1 119-05-050E0 Oct 2005 1 Year 24 Dipole Antenna KBA-611 Kyoritsu 0-147-14 119-05-507E0 Oct 2005 1 Year 26 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-111E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-111E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-111E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-078E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-078E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-078E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-078E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 11	19 Spectrum Analyzer	R3132	Advantest	120500072		-	1 Year
65 Power Meter 436A Hewlett Packard 1725A01930 100-02-501E0 Apr 2006 1 Year 66 Power Sensor 8482A Hewlett Packard 1551A01013 100-02-501E0 Apr 2006 1 Year 67 Power Sensor 8485A Hewlett Packard 2942A08969 100-04-021E0 Apr 2006 1 Year 68 FM Linear Detector MS61A Anritsu M77486 123-02-008E0 Oct 2005 1 Year 69 Level Meter ML422C Anritsu M87571 114-02-501E0 Jun 2005 1 Year 70 Measuring Amplifier 2636 B & K 1614851 082-01-502E0 May 2006 1 Year 75 Frequency Counter 53131A Hewlett Packard 3546A11807 102-02-075E0 May 2006 1 Year 83 FFT Analyzer R9211C Advantest 02020253 122-02-506E0 Jun 2005 1 Year 84 Noise Meter MN-446 Meguro 53030478 082-01-144E0 Apr 2006 1 Year 163 Digital Oscilloscope 54502A Hewlett Packard 2934A05573			Advantest	150400998		-	1 Year
66 Power Sensor 8482A Hewlett Packard 1551A01013 100-02-501E0 Apr 2006 1 Year 67 Power Sensor 8485A Hewlett Packard 2942A08969 100-04-021E0 Apr 2006 1 Year 68 FM Linear Detector MS61A Anritsu M77486 123-02-008E0 Oct 2005 1 Year 69 Level Meter ML422C Anritsu M87571 114-02-501E0 Jun 2005 1 Year 70 Measuring Amplifier 2636 B & K 1614851 082-01-502E0 May 2006 1 Year 75 Frequency Counter 53131A Hewlett Packard 3546A11807 102-02-075E0 May 2006 1 Year 84 Noise Meter MN-446 Meguro 53030478 082-01-144E0 Apr 2006 1 Year 86 Peak Power Analyzer 8990A/84815A Hewlett Packard 2293400486/ 100-02-016E0 Apr 2006 1 Year 163 Digital Oscilloscope 54502A Hewlett Packard 2934A05573 12-02-502E0 May 2006 1 Year 165 Multimeter VOAC7413 Iwatsu Electric	1			1725A01930			
67 Power Sensor 8485A Hewlett Packard 2942A08969 100-04-021E0 Apr 2006 1 Year 68 FM Linear Detector MS61A Anritsu M77486 123-02-008E0 Oct 2005 1 Year 69 Level Meter ML422C Anritsu M87571 114-02-501E0 Jun 2005 1 Year 70 Measuring Amplifier 2636 B & K 1614851 082-01-502E0 May 2006 1 Year 75 Frequency Counter 53131A Hewlett Packard 3546A11807 102-02-075E0 May 2006 1 Year 83 FFT Analyzer R9211C Advantest 02020253 122-02-506E0 Jun 2005 1 Year 84 Noise Meter MN-446 Meguro 53030478 082-01-144E0 Apr 2006 1 Year 86 Peak Power Analyzer 8990A/84815A Hewlett Packard 3220A00486/ 100-02-016E0 Apr 2006 1 Year 163 Digital Oscilloscope 54502A Hewlett Packard 2934A05573 121-02-502E0 May 2006 1 Year 165 Multimeter VOAC7413 Iwatsu Electric	66 Power Sensor	8482A	Hewlett Packard			=	1 Year
68 FM Linear Detector MS61A Anritsu M77486 123-02-008E0 Oct 2005 1 Year 69 Level Meter ML422C Anritsu M87571 114-02-501E0 Jun 2005 1 Year 70 Measuring Amplifier 2636 B & K 1614851 082-01-502E0 May 2006 1 Year 75 Frequency Counter 53131A Hewlett Packard 3546A11807 102-02-075E0 May 2006 1 Year 83 FFT Analyzer R9211C Advantest 02020253 122-02-506E0 Jun 2005 1 Year 84 Noise Meter MN-446 Meguro 53030478 082-01-144E0 Apr 2006 1 Year 86 Peak Power Analyzer 8990A/84815A Hewlett Packard 3220A00486/ 100-02-016E0 Apr 2006 1 Year 163 Digital Oscilloscope 54502A Hewlett Packard 2934A05573 121-02-502E0 May 2006 1 Year 165 Multimeter VOAC7413 Iwatsu Electric 0267973 114-02-502E0 May 2006 1 Year 21 Loop Antenna HFH2-Z2 Rohde & Schwarz 881058/62 119-05-033E0 Jun 2006 1 Year 22 Dipole Antenna KBA-511 <td></td> <td></td> <td></td> <td></td> <td></td> <td>-</td> <td></td>						-	
69 Level Meter ML422C Anritsu M87571 114-02-501E0 Jun 2005 1 Year 70 Measuring Amplifier 2636 B & K 1614851 082-01-502E0 May 2006 1 Year 75 Frequency Counter 53131A Hewlett Packard 3546A11807 102-02-075E0 May 2006 1 Year 83 FFT Analyzer R9211C Advantest 02020253 122-02-506E0 Jun 2005 1 Year 84 Noise Meter MN-446 Meguro 53030478 082-01-144E0 Apr 2006 1 Year 86 Peak Power Analyzer 8990A/84815A Hewlett Packard 3220A00486/ 100-02-016E0 Apr 2006 1 Year 163 Digital Oscilloscope 54502A Hewlett Packard 2934A05573 121-02-502E0 May 2006 1 Year 165 Multimeter VOAC7413 Iwatsu Electric 0267973 114-02-502E0 Apr 2006 1 Year 21 Loop Antenna KBA-511 Kyoritsu 0-170-1 119-05-033E0 Jun 2006 1 Year 22 Dipole Antenna KBA-511 Kyoritsu 0-201-13	68 FM Linear Detector					•	
70 Measuring Amplifier 2636 B & K 1614851 082-01-502E0 May 2006 1 Year 75 Frequency Counter 53131A Hewlett Packard 3546A11807 102-02-075E0 May 2006 1 Year 83 FFT Analyzer R9211C Advantest 02020253 122-02-506E0 Jun 2005 1 Year 84 Noise Meter MN-446 Meguro 53030478 082-01-144E0 Apr 2006 1 Year 86 Peak Power Analyzer 8990A/84815A Hewlett Packard 3220A00486/3 100-02-016E0 Apr 2006 1 Year 163 Digital Oscilloscope 54502A Hewlett Packard 2934A05573 121-02-502E0 May 2006 1 Year 165 Multimeter VOAC7413 Iwatsu Electric 0267973 114-02-502E0 Apr 2006 1 Year 21 Loop Antenna HFH2-Z2 Rohde & Schwarz 881058/62 119-05-033E0 Jun 2006 1 Year 22 Dipole Antenna KBA-511 Kyoritsu 0-170-1 119-05-506E0 Oct 2005 1 Year 24 Dipole Antenna KBA-611 Kyoritsu							
75 Frequency Counter 53131A Hewlett Packard 3546A11807 102-02-075E0 May 2006 1 Year 83 FFT Analyzer R9211C Advantest 02020253 122-02-506E0 Jun 2005 1 Year 84 Noise Meter MN-446 Meguro 53030478 082-01-144E0 Apr 2006 1 Year 86 Peak Power Analyzer 8990A/84815A Hewlett Packard 3220A00486/ 100-02-016E0 Apr 2006 1 Year 163 Digital Oscilloscope 54502A Hewlett Packard 2934A05573 121-02-502E0 May 2006 1 Year 165 Multimeter VOAC7413 Iwatsu Electric 0267973 114-02-502E0 Apr 2006 1 Year 21 Loop Antenna HFH2-Z2 Rohde & Schwarz 881058/62 119-05-033E0 Jun 2006 1 Year 22 Dipole Antenna KBA-511 Kyoritsu 0-170-1 119-05-03E0 Oct 2005 1 Year 24 Dipole Antenna KBA-611 Kyoritsu 0-147-14 119-05-507E0 Oct 2005 1 Year 25 Dipole Antenna KBA-611 Kyoritsu							
83 FFT Analyzer R9211C Advantest 02020253 122-02-506E0 Jun 2005 1 Year 84 Noise Meter MN-446 Meguro 53030478 082-01-144E0 Apr 2006 1 Year 86 Peak Power Analyzer 8990A/84815A Hewlett Packard 3220A00486/ 100-02-016E0 Apr 2006 1 Year 163 Digital Oscilloscope 54502A Hewlett Packard 2934A05573 121-02-502E0 May 2006 1 Year 165 Multimeter VOAC7413 Iwatsu Electric 0267973 114-02-502E0 Apr 2006 1 Year 21 Loop Antenna HFH2-Z2 Rohde & Schwarz 881058/62 119-05-033E0 Jun 2006 1 Year 22 Dipole Antenna KBA-511 Kyoritsu 0-170-1 119-05-506E0 Oct 2005 1 Year 24 Dipole Antenna KBA-611 Kyoritsu 0-147-14 119-05-507E0 Oct 2005 1 Year 25 Dipole Antenna KBA-611 Kyoritsu 0-170-1 119-05-505E0 Oct 2005 1 Year 26 Biconical Antenna BBA9106 Schwarzbeck <						•	
84 Noise Meter MN-446 Meguro 53030478 082-01-144E0 Apr 2006 1 Year 86 Peak Power Analyzer 8990A/84815A Hewlett Packard 3220A00486/3227A00118 100-02-016E0 Apr 2006 1 Year 163 Digital Oscilloscope 54502A Hewlett Packard 2934A05573 121-02-502E0 May 2006 1 Year 165 Multimeter VOAC7413 Iwatsu Electric 0267973 114-02-502E0 Apr 2006 1 Year 21 Loop Antenna HFH2-Z2 Rohde & Schwarz 881058/62 119-05-033E0 Jun 2006 1 Year 22 Dipole Antenna KBA-511 Kyoritsu 0-170-1 119-05-506E0 Oct 2005 1 Year 23 Dipole Antenna KBA-511A Kyoritsu 0-201-13 119-05-504E0 Oct 2005 1 Year 24 Dipole Antenna KBA-611 Kyoritsu 0-147-14 119-05-507E0 Oct 2005 1 Year 25 Dipole Antenna KBA-611 Kyoritsu 0-170-1 119-05-505E0 Oct 2005 1 Year 26 Biconical Antenna BBA9106 Schwarzbeck </td <td></td> <td></td> <td></td> <td></td> <td></td> <td>•</td> <td></td>						•	
86 Peak Power Analyzer 8990A/84815A Hewlett Packard 3220A00486/3227A00118 100-02-016E0 Apr 2006 1 Year 163 Digital Oscilloscope 54502A Hewlett Packard 2934A05573 121-02-502E0 May 2006 1 Year 165 Multimeter VOAC7413 Iwatsu Electric 0267973 114-02-502E0 Apr 2006 1 Year Antennas: 21 Loop Antenna HFH2-Z2 Rohde & Schwarz 881058/62 119-05-033E0 Jun 2006 1 Year 22 Dipole Antenna KBA-511 Kyoritsu 0-170-1 119-05-506E0 Oct 2005 1 Year 23 Dipole Antenna KBA-511A Kyoritsu 0-201-13 119-05-504E0 Oct 2005 1 Year 24 Dipole Antenna KBA-611 Kyoritsu 0-147-14 119-05-507E0 Oct 2005 1 Year 25 Dipole Antenna KBA-611 Kyoritsu 0-170-1 119-05-505E0 Oct 2005 1 Year 26 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-111E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck - 119-05-078E0 Nov 2005 <td< td=""><td>· ·</td><td></td><td></td><td></td><td></td><td></td><td></td></td<>	· ·						
3227A00118 3227A00118 3227A00118 3227A00118 3227A00118 3227A00118 3227A00118 3227A00118 3227A00118 3207A00118 3227A00118 322			_			•	
Antennas: VOAC7413 Iwatsu Electric 0267973 114-02-502E0 Apr 2006 1 Year Antennas: 21 Loop Antenna HFH2-Z2 Rohde & Schwarz 881058/62 119-05-033E0 Jun 2006 1 Year 22 Dipole Antenna KBA-511 Kyoritsu 0-170-1 119-05-506E0 Oct 2005 1 Year 23 Dipole Antenna KBA-511A Kyoritsu 0-201-13 119-05-504E0 Oct 2005 1 Year 24 Dipole Antenna KBA-611 Kyoritsu 0-147-14 119-05-507E0 Oct 2005 1 Year 25 Dipole Antenna KBA-611 Kyoritsu 0-170-1 119-05-505E0 Oct 2005 1 Year 26 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-111E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck - 119-05-078E0 Nov 2005 1 Year	oo r can r ower r many zer	0000120101011	TTO WICELT GOTAL G		100 02 01020	. трт 2000	1 1001
Antennas: 21 Loop Antenna HFH2-Z2 Rohde & Schwarz 881058/62 119-05-033E0 Jun 2006 1 Year 22 Dipole Antenna KBA-511 Kyoritsu 0-170-1 119-05-506E0 Oct 2005 1 Year 23 Dipole Antenna KBA-511A Kyoritsu 0-201-13 119-05-504E0 Oct 2005 1 Year 24 Dipole Antenna KBA-611 Kyoritsu 0-147-14 119-05-507E0 Oct 2005 1 Year 25 Dipole Antenna KBA-611 Kyoritsu 0-170-1 119-05-505E0 Oct 2005 1 Year 26 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-111E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck - 119-05-078E0 Nov 2005 1 Year	163 Digital Oscilloscope	54502A	Hewlett Packard	2934A05573	121-02-502E0	May 2006	1 Year
21 Loop Antenna HFH2-Z2 Rohde & Schwarz 881058/62 119-05-033E0 Jun 2006 1 Year 22 Dipole Antenna KBA-511 Kyoritsu 0-170-1 119-05-506E0 Oct 2005 1 Year 23 Dipole Antenna KBA-511A Kyoritsu 0-201-13 119-05-504E0 Oct 2005 1 Year 24 Dipole Antenna KBA-611 Kyoritsu 0-147-14 119-05-507E0 Oct 2005 1 Year 25 Dipole Antenna KBA-611 Kyoritsu 0-170-1 119-05-505E0 Oct 2005 1 Year 26 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-111E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck - 119-05-078E0 Nov 2005 1 Year	165 Multimeter	VOAC7413	Iwatsu Electric	0267973	114-02-502E0	Apr 2006	1 Year
21 Loop Antenna HFH2-Z2 Rohde & Schwarz 881058/62 119-05-033E0 Jun 2006 1 Year 22 Dipole Antenna KBA-511 Kyoritsu 0-170-1 119-05-506E0 Oct 2005 1 Year 23 Dipole Antenna KBA-511A Kyoritsu 0-201-13 119-05-504E0 Oct 2005 1 Year 24 Dipole Antenna KBA-611 Kyoritsu 0-147-14 119-05-507E0 Oct 2005 1 Year 25 Dipole Antenna KBA-611 Kyoritsu 0-170-1 119-05-505E0 Oct 2005 1 Year 26 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-111E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck - 119-05-078E0 Nov 2005 1 Year							
22 Dipole Antenna KBA-511 Kyoritsu 0-170-1 119-05-506E0 Oct 2005 1 Year 23 Dipole Antenna KBA-511A Kyoritsu 0-201-13 119-05-504E0 Oct 2005 1 Year 24 Dipole Antenna KBA-611 Kyoritsu 0-147-14 119-05-507E0 Oct 2005 1 Year 25 Dipole Antenna KBA-611 Kyoritsu 0-170-1 119-05-505E0 Oct 2005 1 Year 26 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-111E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck - 119-05-078E0 Nov 2005 1 Year	· · · · · · · · · · · · · · · · · · ·						
23 Dipole Antenna KBA-511A Kyoritsu 0-201-13 119-05-504E0 Oct 2005 1 Year 24 Dipole Antenna KBA-611 Kyoritsu 0-147-14 119-05-507E0 Oct 2005 1 Year 25 Dipole Antenna KBA-611 Kyoritsu 0-170-1 119-05-505E0 Oct 2005 1 Year 26 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-111E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck - 119-05-078E0 Nov 2005 1 Year		HFH2-Z2	Rohde & Schwarz	881058/62	119-05-033E0	Jun 2006	1 Year
24 Dipole Antenna KBA-611 Kyoritsu 0-147-14 119-05-507E0 Oct 2005 1 Year 25 Dipole Antenna KBA-611 Kyoritsu 0-170-1 119-05-505E0 Oct 2005 1 Year 26 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-111E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck - 119-05-078E0 Nov 2005 1 Year	22 Dipole Antenna	KBA-511	Kyoritsu	0-170-1	119-05-506E0	Oct 2005	1 Year
25 Dipole Antenna KBA-611 Kyoritsu 0-170-1 119-05-505E0 Oct 2005 1 Year 26 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-111E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck - 119-05-078E0 Nov 2005 1 Year	23 Dipole Antenna	KBA-511A	Kyoritsu	0-201-13	119-05-504E0	Oct 2005	1 Year
26 Biconical Antenna BBA9106 Schwarzbeck VHA91031150 119-05-111E0 Nov 2005 1 Year 27 Biconical Antenna BBA9106 Schwarzbeck - 119-05-078E0 Nov 2005 1 Year	24 Dipole Antenna	KBA-611	Kyoritsu	0-147-14	119-05-507E0	Oct 2005	1 Year
27 Biconical Antenna BBA9106 Schwarzbeck - 119-05-078E0 Nov 2005 1 Year	25 Dipole Antenna	KBA-611		0-170-1	119-05-505E0	Oct 2005	1 Year
	26 Biconical Antenna	BBA9106	Schwarzbeck	VHA91031150	119-05-111E0	Nov 2005	1 Year
28 Log-neri Antenna - LIHALP9107 Schwarzbeck - 119-05-079F0 Nov 2005 1 Vear	27 Biconical Antenna	BBA9106	Schwarzbeck	-	119-05-078E0	Nov 2005	1 Year
20 Log per l'Internité Circult vivi Denvin Local III de Viville 1407 Logo II Teat	28 Log-peri. Antenna	UHALP9107	Schwarzbeck	-	119-05-079E0	Nov 2005	1 Year
29 Log-peri. Antenna UHALP9107 Schwarzbeck - 119-05-110E0 Nov 2005 1 Year	29 Log-peri. Antenna	UHALP9107	Schwarzbeck	-	119-05-110E0	Nov 2005	1 Year
30 Log-peri. Antenna HL025 Rohde & Schwarz 340182/015 119-05-100E0 Jan 2006 1 Year	30 Log-peri. Antenna	HL025	Rohde & Schwarz	340182/015	119-05-100E0	Jan 2006	1 Year
31 Horn Antenna 3115 EMC Test Systems 6442 119-05-514E0 Jan 2006 2 Year	31 Horn Antenna	3115	EMC Test Systems	6442	119-05-514E0	Jan 2006	2 Year
32 Horn Antenna 3116 EMC Test Systems 2547 119-05-515E0 May 2005 2 Year	32 Horn Antenna	3116	EMC Test Systems	2547	119-05-515E0	May 2005	2 Year



Model No. :TP6793 Issue Date :Ju Standard :CFR 47 FCC Rules Part 15 Page 33 of 34

FCC ID :CVTTP6793 Issue Date :June 14, 2006

					09-Jun-2006	
No Type	Model	Manufacturer	Serial	ID	Last Cal.	Interval
Cables:						
38 RF Cable	5D-2W	Fujikura	-	155-21-001E0	Feb 2006	1 Year
39 RF Cable	5D-2W	Fujikura	-	155-21-002E0	Feb 2006	1 Year
40 RF Cable	3D-2W	Fujikura	-	155-21-005E0	Apr 2006	1 Year
41 RF Cable	3D-2W	Fujikura	-	155-21-006E0	Apr 2006	1 Year
42 RF Cable	3D-2W	Fujikura	-	155-21-007E0	Apr 2006	1 Year
43 RF Cable	RG213/U	Rohde & Schwarz	-	155-21-010E0	Apr 2006	1 Year
44 RF Cable(10m)	S 04272B	Suhner	-	155-21-011E0	May 2006	1 Year
45 RF Cable(1.5m 18GHz)	S 04272B	Suhner	-	155-21-012E0	May 2006	1 Year
46 RF Cable(1m 18GHz)	SUCOFLEX	Suhner	-	155-21-013E0	May 2006	1 Year
47 RF Cable(1m N)	S 04272B	Suhner	-	155-21-015E0	Jun 2005	1 Year
48 RF Cable(1m 26GHz)	SUCOFLEX 104E	Suhner	14543/4E	155-21-016E0	Dec 2005	1 Year
49 RF Cable(4m 26GHz)	SUCOFLEX	Suhner	190630	155-21-017E0	Dec 2005	1 Year
50 RF Cable(10m)	F130-S1S1-394	MEGA PHASE	10510	155-21-018E0	Dec 2005	1 Year
51 RF Cable(7m)	3D-2W	Fujikura	-	155-21-009E0	Apr 2006	1 Year
52 RF Cable(7m)	RG223/U	Suhner	-	155-21-021E0	May 2006	1 Year
_						
Networks:						
33 LISN	KNW-407	Kyoritsu	8-833-6	149-04-052E0	-	1 Year
34 LISN	KNW-407	Kyoritsu	8-855-2	149-04-055E0	-	1 Year
35 LISN	KNW-407	Kyoritsu	8-1130-6	149-04-062E0	-	1 Year
36 LISN	KNW-242C	Kyoritsu	8-837-13	149-04-054E0	-	1 Year
37 Absorbing Clamp	MDS21	Luthi	03293	119-06-506E0	_	1 Year
164 LISN	KNW-403D	Kyoritsu	8-1474-3	149-04-059E0	Apr 2006	1 Year
Amplifiers:						
53 AF Amplifier	P-500L	Accuphase	BOY806	127-01-501E0	Feb 2006	1 Year
54 RF Amplifier	WJ-6882-814	Watkins-Johnson	0414	127-04-017E0	Jun 2005	1 Year
55 RF Amplifier	WJ-5315-556	Watkins-Johnson	106	127-04-006E0		1 Year
56 RF Amplifier	WJ-5320-307	Watkins-Johnson	645	127-04-005E0		1 Year
57 RF Amplifier	JS4-00102600- 28-5A	MITEQ	669167	127-04-502E0	Apr 2006	1 Year
_						
Generators:	00050	TT 1 TO 1	0047463336	440.00.10.1	T 10000	4 77
58 Function Generator	3325B	Hewlett Packard	2847A03284	118-08-124E0		1 Year
59 Function Generator	VP-7422A	Matsushita Communication	050351E122	118-08-503E0		1 Year
60 Signal Generator	8664A	Hewlett Packard	3035A00140	118-03-014E0		1 Year
61 Signal Generator	8664A	Hewlett Packard	3438A00756	118-04-502E0		1 Year
62 Signal Generator	6061A	Gigatronics	5130593	118-04-024E0	Mar 2006	1 Year



Model No. :TP6793
Standard :CFR 47 FCC Rules Part 15

FCC ID :CVTTP6793 Issue Date :June 14, 2006

Page 34 of 34

						09-Jun-2006	
No	Туре	Model	Manufacturer	Serial	ID	Last Cal.	Interval
<u>Oth</u>	ers:						
63	3 Termination(50)	-	Suhner	-	154-06-501E0	Jan 2006	1 Year
64	Termination(50)	-	Suhner	-	154-06-502E0	Jan 2006	1 Year
71	Microphone	4134	B & K	1253497	147-01-502E0	May 2005	1 Year
72	Preamplifier	2639	B & K	1268763	127-01-504E0	-	-
73	3 Pistonphone	4220	B & K	1165008	147-02-501E0	Mar 2006	1 Year
74	Artificial Mouth	4227	B & K	1274869	-	-	-
76	6 Oven	-	Ohnishi	-	023-02-018E0	-	-
77	DC Power Supply	6628A	Hewlett Packard	3224A00284	072-05-503E0	Jun 2005	1 Year
78	Band RejectFilter	BRM12294	Micro-tronics	003	149-01-501E0	Jan 2006	1 Year
79	High Pass Filter	F-100-4000-5-	RLC Electronics	0149	149-01-502E0	Feb 2006	1 Year
80	Attenuator	43KC-10	Anritsu	-	148-03-506E0	Feb 2006	1 Year
81	Attenuator	43KC-20	Anritsu	-	148-03-507E0	Feb 2006	1 Year
82	Attenuator	355D	Hewlett Packard	219-10782	148-03-065E0	Apr 2006	1 Year
85	RF Detector	75KC-50	Anritsu	305002	100-02-506E0	Jul 2005	1 Year