



SLXD+

Version: PRELIMINARY - NOT FOR RELEASE

System Components

Transmitters

①


SLXD1+ bodypack (BP) transmitter

②

SLXD2+ handheld (HH) transmitter

③

SLXD3+ plug-on (PO) transmitter

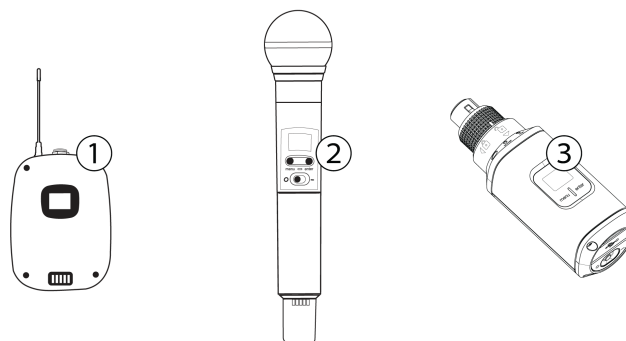

Componentes del sistema

Transmisores

①

Transmisor portátil (BP) SLXD1+

②

Transmisor de mano (HH) SLXD2+

③

Transmisor enchufable (PO) SLXD3+

Componentes do Sistema

Transmissores

①

Transmissor bodypack (BP) SLXD1+

②

Transmissor de mão (HH) SLXD2+

③

Transmissor SLXD3+ plug-on (PO)+

系统组件

发射机

①

SLXD1+ 腰包式 (BP) 发射机

②

SLXD2+ 手持式 (HH) 发射机

③


SLXD3+ 接插式 (PO) 发射机

Microphone Battery Installation

Important: To avoid damaging transmitters, only use Shure SB903 Li-ion rechargeable batteries or 1.5V AA batteries.


Bodypack / Plug-On:

1. Push the tab up and open the battery door to access the battery compartment.
2. Place a Shure SB903 Li-ion rechargeable battery or 2 AA batteries in the compartment.
3. Close the battery door.

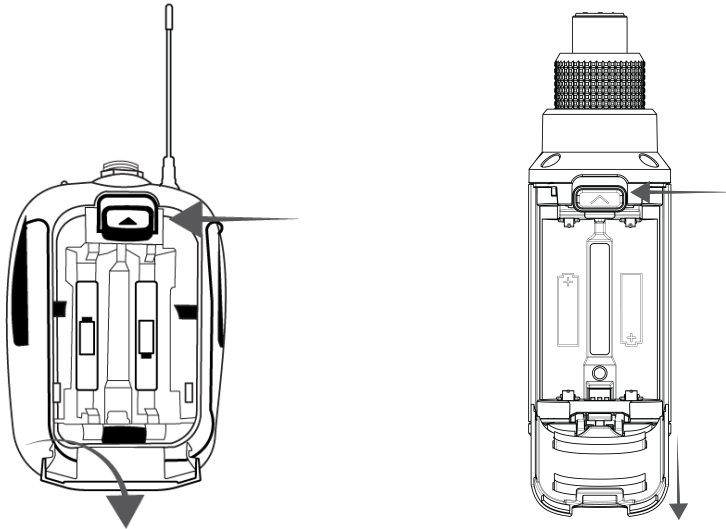

Handheld:

1. Remove the battery cover to access the battery compartment.
2. Lift the battery door to open the battery compartment.
3. Place a Shure SB903 Li-ion rechargeable battery or 2 AA batteries in the compartment.
4. Replace the battery cover.

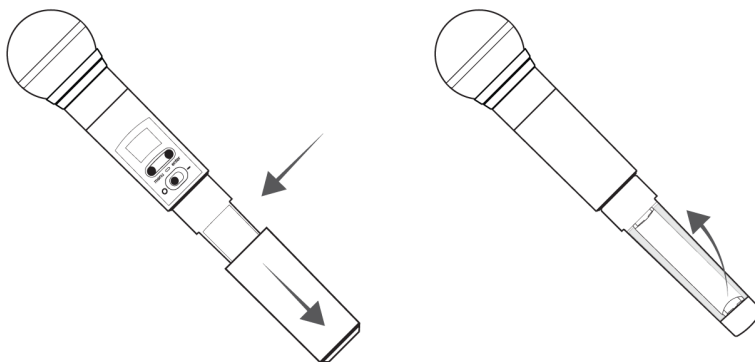


Instalación de la batería del micrófono

Importante: Para evitar dañar los transmisores, solo debe utilizar baterías de iones de litio recargables SB903 de Shure o baterías AA de 1,5 V.


Portátil/enchufable:

1. Empuje la pestaña hacia arriba y abra la tapa de la batería para acceder al compartimento de la batería.
2. Coloque una batería de iones de litio recargable SB903 de Shure o 2 baterías AA en el compartimiento.
3. Cierre la puerta del compartimento de la pila.

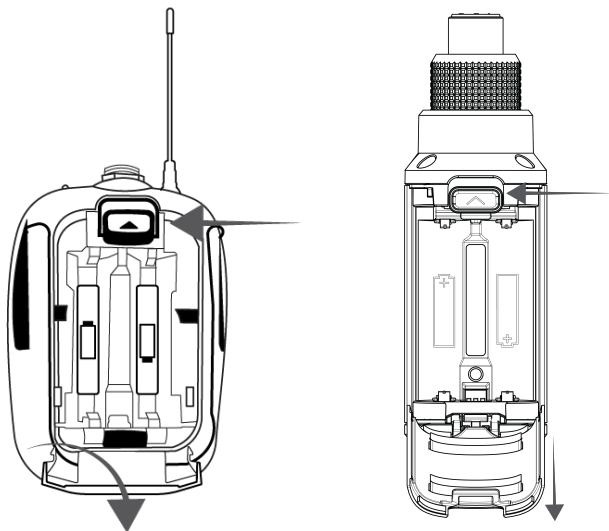

De mano:

1. Retire la tapa de la batería para acceder al compartimento de la batería.
2. Levante la tapa de la batería para abrir el compartimento de la batería.
3. Coloque una batería de iones de litio recargable SB903 de Shure o 2 baterías AA en el compartimiento.
4. Vuelva a colocar la cubierta de pila.

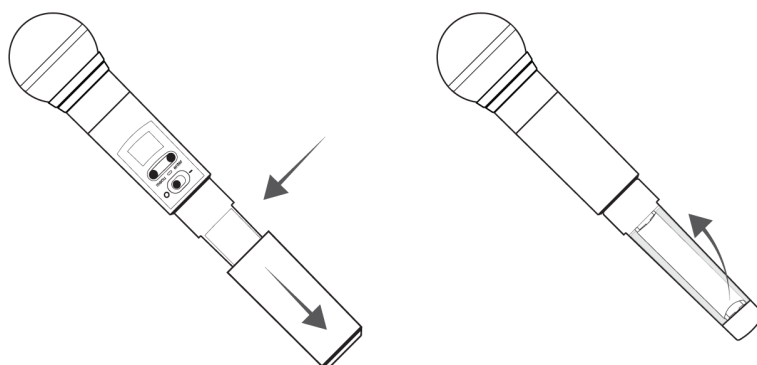


Instalação da bateria do microfone

Importante: para evitar danos aos transmissores, use apenas baterias recarregáveis de íon de lítio Shure SB903 ou pilhas de 1,5 V AA.


Bodypack/plug-on:

1. Pressione a aba superior e abra a porta da bateria para acessar o compartimento da bateria.
2. Coloque uma bateria recarregável de íon de lítio Shure SB903 ou 2 pilhas AA no compartimento.
3. Feche a tampa do compartimento da bateria.

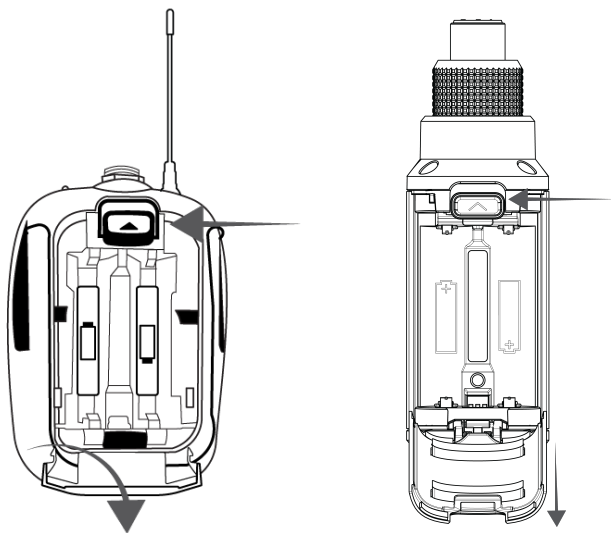

De Mão:

1. Remova a tampa da bateria para acessar o compartimento da bateria.
2. Levante a porta da bateria para abrir o compartimento da bateria.
3. Coloque uma bateria recarregável de íon de lítio Shure SB903 ou 2 pilhas AA no compartimento.
4. Recoloque a tampa da bateria.

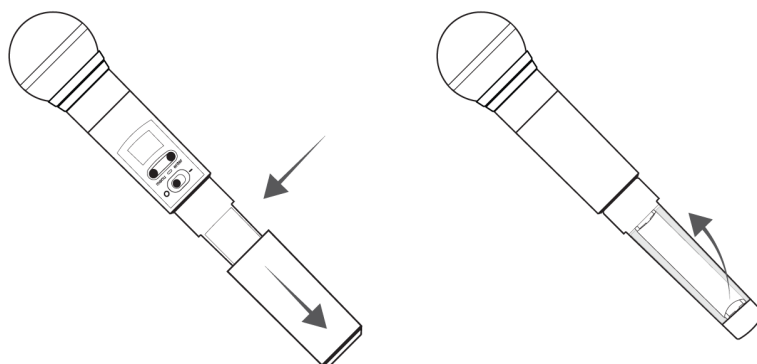


话筒电池安装

重要提示：为避免损坏发射机，请仅使用 Shure SB903 锂离子充电电池或 1.5V 五号电池。


腰包式/接插式：

1. 向上推开卡舌，打开电池盖，打开电池舱。
2. 将 Shure SB903 锂离子充电电池或 2 个五号电池放入电池舱中。
3. 盖上电池盖。

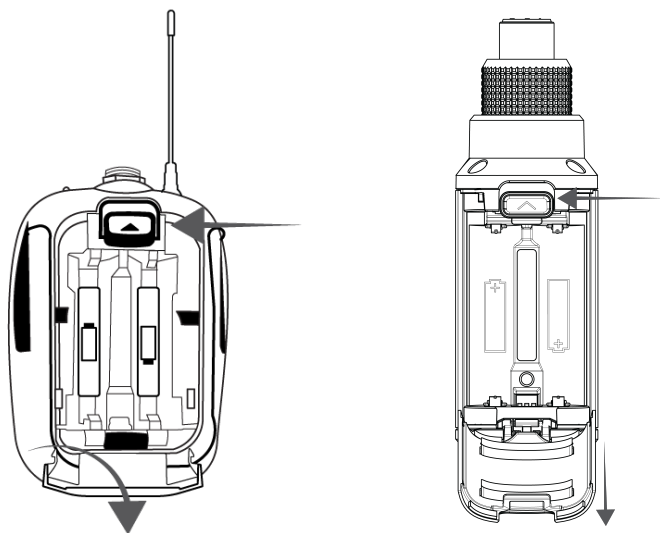

手持式：

1. 拆除电池盖，打开电池舱。
2. 提起电池盖，打开电池舱。
3. 将 Shure SB903 锂离子充电电池或 2 个五号电池放入电池舱中。
4. 装回电池盖。

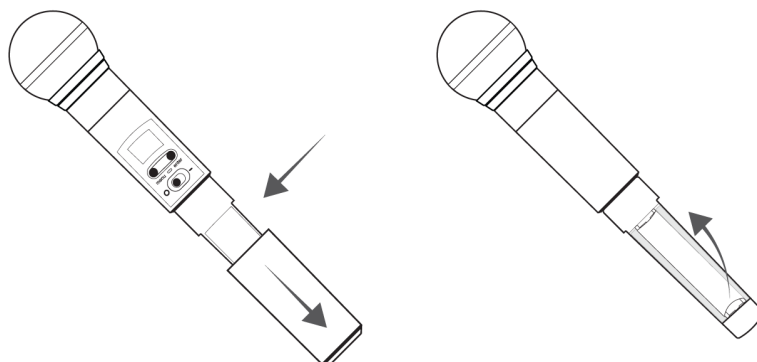

SLXD1+ Bodypack Transmitter

Battery Type

Rechargeable Li-Ion or 1.5 V AA batteries

Dimensions

98 x 68 x 25.5 mm (3.86 x 2.68 x 1 in.), H x W x D

Weight

89 g

Housing

PC/ABS

Audio Input

Connector

4-Pin male mini connector (TA4M)

Configuration

See drawing for details

Impedance

1 M Ω

Maximum Input Level

8.2 dBV (2.57 Vrms, 7.27 Vpp)

Preamplifier Equivalent Input Noise (EIN)

-118 dBV

RF Output

Antenna Type

1/4 wave

Occupied Bandwidth

<200 kHz

Modulation Type

Shure proprietary digital

Power

1 mW or 10 mW

See Frequency Range and Output Power table, varies by region

SLXD2+ Handheld Transmitter

Battery Type

Rechargeable Li-Ion or 1.5 V AA batteries

Dimensions

37.1 x 176 mm (1.46 x 6.93 in.), D x L

Weight

147 g

Housing

Aluminum

Audio Input

Configuration

See drawing for details

Maximum Input Level

8.2 dBV (2.57 Vrms, 7.27 Vpp)

Note: Dependent on microphone type

RF Output

Antenna Type

Integrated Single Band Helical

Occupied Bandwidth

<200 kHz

Modulation Type

Shure proprietary digital

Power

1 mW or 10 mW

See Frequency Range and Output Power table, varies by region

SLXD3+ Plug-On Transmitter

Battery Type

Rechargeable Li-Ion or 1.5 V AA batteries

Dimensions

126 × 41 × 41 mm (4.96 × 1.61 × 1.61 in.), L×W×D

Weight

200 g

Housing

Aluminum, zinc alloy, PC/ABS

Audio Input

Connector Type

XLR

See drawing for details

Maximum Input Level

Pad -12 dB	20.5 dBV
0 dB	8.5 dBV
Boost +12 dB	-3.5 dBV

1 kHz at 1% THD

Note: Dependent on microphone type

Phantom Power

+48 V(7 mA maximum), +12 V(15 mA maximum)

RF Output

Antenna Type

Dipole

Occupied Bandwidth

<200 kHz

Modulation Type

Shure proprietary digital

Power

1 mW / 10 mW / 30 mW

See Frequency Range and Output Power table, varies by region

BLE Specifications

Frequency Range

2402 - 2480 MHz

RF Power

10 dBm EIRP

Modulation Type

GFSK

Transmisor de cuerpo SLXD1+

Tipo de batería

Baterías de iones de litio recargable o AA de 1,5 V

Dimensiones

98 x 68 x 25,5 mm (3,86 x 2,68 x 1 pulg.), Al x An x Pr

Peso

89 g

Caja

Policarbonato/ABS

Entrada de audio

Conector

Conector macho miniatura de 4 clavijas (TA4M)

Configuración

Vea el dibujo para más detalles.

Impedancia

1 M Ω

Nivel máximo de entrada

8,2 dBV (2,57 Vrms; 7,27 Vpp)

Ruido de entrada equivalente (EIN) en preamplificador

-118 dBV

Salida de RF

Tipo de antena

1/4 de onda

Ancho de banda ocupado

< 200 kHz

Tipo de modulación

Shure digital patentado

Alimentación

1 mW o 10 mW

Consulte la tabla de rango de frecuencia y potencia de salida (varía según la región)

Transmisor de mano SLXD2+

Tipo de batería

Baterías de iones de litio recargable o AA de 1,5 V

Dimensiones

37,1 x 176 mm (1,46 x 6,93 pulg.), D x L

Peso

147 g

Caja

Aluminio

Entrada de audio

Configuración

Vea el dibujo para más detalles.

Nivel máximo de entrada

8,2 dBV (2,57 Vrms; 7,27 Vpp)

Nota: Depende del tipo de micrófono

Salida de RF

Tipo de antena

Helicoidal de banda sencilla integrada

Ancho de banda ocupado

< 200 kHz

Tipo de modulación

Shure digital patentado

Alimentación

1 mW o 10 mW

Consulte la tabla de rango de frecuencia y potencia de salida (varía según la región)

Transmisor enchufable SLXD3+

Tipo de batería

Baterías de iones de litio recargable o AA de 1,5 V

Dimensiones

126 × 41 × 41 mm (4,96 × 1,61 × 1,61 pulg.), L × A × P

Peso

200 g

Caja

Aluminio, aleación de zinc, policarbonato/ABS

Entrada de audio

Tipo de conector

XLR

Vea el dibujo para más detalles.

Nivel máximo de entrada

Atenuador de -12 dB	20,5 dBV
0 dB	8,5 dBV
Refuerzo de +12 dB	-3,5 dBV

1 kHz a 1 % THD

Nota: Depende del tipo de micrófono

Alimentación phantom

+48 V (7 mA máximo), +12 V (15 mA máximo)

Salida de RF

Tipo de antena

Dipolo

Ancho de banda ocupado

< 200 kHz

Tipo de modulación

Shure digital patentado

Alimentación

1 mW/10 mW/30 mW

Consulte la tabla de rango de frecuencia y potencia de salida, varía según la región

BLE Especificaciones

Rango de frecuencia

2402 - 2480 MHz

RF power

10 dBm EIRP

Tipo de modulación

GFSK

Transmissor Bodypack SLXD1+

Tipo de Bateria

Pilhas recarregáveis de Íon de Lítio ou 1,5 V AA

Dimensões

98 x 68 x 25,5 mm (3,86 x 2,68 x 1 pol.), A x L x P

Peso

89 g

Caixa

PC/ABS

Entrada de Áudio

Conector

Conector mini macho de 4 pinos (TA4M)

Configuração

Consulte o desenho para obter detalhes

Impedância

1 MΩ

Nível máximo de entrada

8,2 dBV (2,57 Vrms, 7,27 Vpp)

Ruído de entrada equivalente (EIN) do pré-amplificador

-118 dBV

Saída de RF

Antenna Type

1/4 de onda

Largura de Banda Ocupada

<200 kHz

Tipo de Modulação

Proprietário Digital Shure

Alimentação Elétrica

1 mW ou 10 mW

Consulte a tabela de Faixa de Frequências e Potência de Saída, varia por região

Transmissor de mão SLXD2+

Tipo de Bateria

Pilhas recarregáveis de Íon de Lítio ou 1,5 V AA

Dimensões

37,1 x 176 mm (1,46 x 6,93 pol.), P x C

Peso

147 g

Caixa

Alumínio

Entrada de Áudio

Configuração

Consulte o desenho para obter detalhes

Nível máximo de entrada

8,2 dBV (2,57 Vrms, 7,27 Vpp)

Observação: Depende do tipo de microfone

Saída de RF

Antenna Type

Helicoidal de Banda Única Integrada

Largura de Banda Ocupada

<200 kHz

Tipo de Modulação

Proprietário Digital Shure

Alimentação Elétrica

1 mW ou 10 mW

Consulte a tabela de Faixa de Frequências e Potência de Saída, varia por região

Transmissor plug-on SLXD3+

Tipo de Bateria

Pilhas recarregáveis de Íon de Lítio ou 1,5 V AA

Dimensões

126 × 41 × 41 mm (4,96 × 1,61 × 1,61 pol.), A × L × P

Peso

200 g

Estojo

Alumínio, liga de zinco, PC/ABS

Entrada de Áudio

Tipo de conector

XLR

Consulte o desenho para obter detalhes

Nível máximo de entrada

Atenuador -12 dB	20,5 dBV
0 dB	8,5 dBV
Amplificador +12 dB	-3,5 dBV

1 kHz a 1% THD

Observação: Depende do tipo de microfone

Alimentação fantasma

+48 V(7 mA máximo), +12 V (15 mA máximo)

Saída de RF

Tipo de antena

Dipolo

Largura de Banda Ocupada

<200 kHz

Tipo de Modulação

Proprietário Digital Shure

Alimentação Elétrica

1 mW/10 mW/30 mW

Consulte a tabela de Faixa de frequência e potência de saída, varia por região

BLE Especificações

Faixa de frequência

2402 - 2480 MHz

RF power

10 dBm EIRP

Tipo de modulação

GFSK

SLXD1+ 腰包发射机

电池型号

充电锂电池或 1.5 V AA 电池

外观尺寸

98 x 68 x 25.5 毫米 (3.86 x 2.68 x 1 英寸) , 高 x 宽 x 深

重量

89 g

外壳

PC/ABS

音频输入

接头

4 针插头迷你连接器 (TA4M)

配置

有关详细信息, 请参看图纸

阻抗

1 MΩ

最大输入电平

8.2 dBV (2.57 Vrms, 7.27 Vpp)

前置放大器等效输入噪声 (EIN)

-118 dBV

射频输出

天线类型

1/4 波长天线

占用带宽

<200 kHz

调幅类型

Shure 专利数字设备

电源

1 mW 或 10 mW

参见频率范围和输出功率表, 根据地区不同有所差别

SLXD2+ 手持式发射机

电池型号

充电锂电池或 1.5 V AA 电池

外观尺寸

37.1 x 176 毫米 (1.46 x 6.93 英寸) , 直径 x 长度

重量

147 g

外壳

铝

音频输入

配置

有关详细信息, 请参看图纸

最大输入电平

8.2 dBV (2.57 Vrms, 7.27 Vpp)

注意: 取决于话筒类型

射频输出

天线类型

集成式单波段螺旋型

占用带宽

<200 kHz

调幅类型

Shure 专利数字设备

电源

1 mW 或 10 mW

参见频率范围和输出功率表, 根据地区不同有所差别

SLXD3+ 接插式发射机

电池型号

充电锂电池或 1.5 V AA 电池

外观尺寸

126 × 41 × 41 毫米 (4.96 × 1.61 × 1.61 英寸) ， 长×宽×深

重量

200 克

外壳

铝、锌合金、PC/ABS

音频输入

接头类型

XLR

有关详细信息，请参看图纸

最大输入电平

衰减 -12 dB	20.5 dBV
0 dB	8.5 dBV
增强 +12 dB	-3.5 dBV

1% THD 下 1 千赫

注意：取决于话筒类型

幻像电源

+48 V (7 mA 最大值) ， +12 V (15 mA 最大值)

射频输出

天线类型

偶极

占用带宽

<200 kHz

调幅类型

Shure 专利数字设备

电源

1 mW/10 mW/30 mW

参见频率范围和输出功率表， 根据地区不同有所差别

话筒偏移范围

0 至 21 dB (3 dB 步进)

BLE 规格

频率范围

2402-2480 MHz

射频功率

10 dBm EIRP

调幅类型

高斯频移键控 (GFSK)

SLXD+

Frequency Range and Transmitter Output Power

Band	Frequency Range (MHz)	Power (mW RMS)* (Low/High)
G54	479 to 565	1 / 10
G57	470 to 608	1 / 10 / 30**
G60	470 to 510	1 / 10 / 30**
G64	470 to 616	1 / 10 / 30**
G65	470 to 606	1 / 10 / 30**
G66	487 to 606	1 / 10
H58	520 to 608	1 / 10 / 30**
JB	806 to 810	1 / 10
K55	606 to 694	1 / 10 / 30**
K60	614 to 703	1 / 10
L60	630 to 698	1 / 10 / 30**
M55	694 to 703, 748 to 758	1 / 10 / 30**
S50	823 to 832, 863 to 865	1 / 10
X51	925 to 937.5	1 / 10

* Power delivered to the antenna port

** SLXD3+ only

Note: Frequency bands might not be available for sale or authorized for use in all countries or regions.

Frequencies for European Countries



	Frequency Range	Country Code
SLXD-G60	470 - 510 MHz*	A, B, BG, CH, CY, CZ, D, EST, F, GB, GR, H, I, IS, L, LT, NL, P, PL, S, SK, SLO, DK, FIN, M, N, HR, E, IRL, LV, RO, TR
SLXD-G65	470 - 606 MHz*	
SLXD-K55	606–694 MHz*	
SLXD-S50	823–832, 863–865 MHz *	

* This equipment may be capable of operating on some frequencies not authorized in your region.

Safety and Regulatory Information for Wireless Products

Explanation of Symbols

	This symbol indicates that dangerous voltage constituting a risk of electric shock is present within this unit.
	This symbol indicates that there are important operating and maintenance instructions in the literature accompanying this unit.

Important Safety Instructions

1. READ these instructions.
2. KEEP these instructions.
3. HEED all warnings.
4. FOLLOW all instructions.
5. DO NOT use this apparatus near water.
6. CLEAN ONLY with dry cloth.
7. DO NOT block any ventilation openings. Allow sufficient distances for adequate ventilation and install in accordance with the manufacturer's instructions.
8. DO NOT install near any heat sources such as open flames, radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat. Do not place any open flame sources on the product.
9. DO NOT defeat the safety purpose of the polarized or grounding type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wider blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. PROTECT the power cord from being walked on or pinched, particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
11. ONLY USE attachments/accessories specified by the manufacturer.
12. USE only with a cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.



13. UNPLUG this apparatus during lightning storms or when unused for long periods of time.
14. REFER all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
15. DO NOT expose the apparatus to dripping and splashing. DO NOT put objects filled with liquids, such as vases, on the apparatus.
16. The MAINS plug or an appliance coupler shall remain readily operable.
17. The airborne noise of the Apparatus does not exceed 70dB (A).
18. Apparatus with CLASS I construction shall be connected to a MAINS socket outlet with a protective earthing connection.
19. To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.
20. Do not attempt to modify this product. Doing so could result in personal injury and/or product failure.
21. Operate this product within its specified operating temperature range.
22. Follow local regulations and consult qualified personnel if the product installation or relocation requires construction work. Choose mounting hardware and an installation location that can support the weight of the product. Avoid locations subject to constant vibration. Use the required tools to install the product properly. Inspect the product periodically.

WARNING:

- Voltages in this equipment are hazardous to life. No user-serviceable parts inside. Refer all servicing to qualified service personnel. The safety certifications do not apply when the operating voltage is changed from the factory setting.
- If water or other foreign objects enter the inside of the device, fire or electric shock may result.

Safety and Regulatory Information for Battery Chargers

1. This equipment is intended to be used in professional audio applications.
2. Use this battery charger only with the Shure charging modules and battery packs for which it is designed. Use with other than the specified modules and battery packs may increase the risk of fire or explosion.
3. Changes or modifications not expressly approved by Shure Incorporated could void your authority to operate this equipment.

Safety Information for Batteries

1. Battery packs may explode or release toxic materials. Risk of fire or burns. Do not open, crush, modify, disassemble, heat above 140°F (60°C), or incinerate.
2. Follow instructions from manufacturer
3. Only use Shure charger to recharge Shure rechargeable batteries

WARNING:



Danger of explosion if battery incorrectly replaced. Replace only with same or equivalent type.

Do not dispose of the battery along with household waste. Check with local vendor for proper disposal of used battery packs.

4. Never put batteries in mouth. If swallowed, contact your physician or local poison control center
5. In the event of a cell leaking, do not allow the liquid to come in contact with the skin or eyes. If contact has been made, wash the affected area with copious amounts of water and seek medical advice.
6. Do not short circuit; may cause burns or catch fire
7. Do not charge or use battery packs other than Shure rechargeable batteries
8. Batteries (battery pack or batteries installed) shall not be exposed to excessive heat such as sunshine, fire or the like
9. Do not immerse the battery in liquid such as water, beverages, or other fluids.
10. Do not attach or insert battery with polarity reversed.
11. Keep away from small children.
12. Do not use abnormal batteries.
13. Pack the battery securely for transport.

Note: Use only with the included power supply, batteries, or a Shure-approved equivalent.

Storing Batteries

If batteries are to be stored for more than eight days, they should be placed into a temperature controlled storage area. Recommended battery storage temperature is 10 to 25°C (50 to 77°F).

Additional battery storage information is available at [shure.com/battery-storage](https://www.shure.com/battery-storage).



Important Product Regulatory Information

EMC conformance testing is based on the use of supplied and recommended cable types. The use of other cable types may degrade EMC performance.

Regulatory Information for Class B EMC Products

CE Notice

Hereby, Shure Incorporated declares that this product with CE Marking has been determined to be in compliance with European Union requirements.

The full text of the EU declaration of conformity is available at the following site: <https://www.shure.com/en-EU/support/declarations-of-conformity>.

UKCA Notice

Hereby, Shure Incorporated declares that this product with UKCA Marking has been determined to be in compliance with UK-CA requirements.

The full text of the UK declaration of conformity is available at the following site: <https://www.shure.com/en-GB/support/declarations-of-conformity>.

UK Cybersecurity

UK SI 2023 NO. 1007 STATEMENT OF COMPLIANCE

Product Type: Relevant connectable products as defined by The Product Security and Telecommunications Infrastructure (Security Requirements for Relevant Connectable Products) Regulations 2023.

Manufacturer Statement: We, Shure Incorporated, certify and declare as manufacturer under our sole responsibility, that the above mentioned product(s) conform(s) to Schedule 2 of the essential requirements of the listed applicable United Kingdom Statutory Instruments (including their amendments) and the associated norms.

Information on how to report security issues: The latest version of Shure's Disclosure policy can be found at the following link: <https://www.shure.com/en-GB/about-us/security>

Security update periods: Shure provides support regarding hardware and software updates that continue the integral cyber security safety of Shure products up to 24 months after end of life (AEOL). For the full statement regarding Shure's product support policy, and information regarding products end of life status information can be found at the following link: <https://www.shure.com/en-GB/about-us/security>

Manufacturer:

Shure Incorporated 5800 Touhy Avenue
Niles, Illinois, 60714-4608 U.S.A.
Website: www.Shure.com.

Technical documentation is kept at:

Shure Incorporated, Corporate Global Compliance Engineering Division

UK Importer/Representative:

Shure UK Limited
Unit 2, The IO Centre, Lea Road, Waltham Abbey, Essex, EN9 1AS, U.K.
Phone: +44 (0)1992 - 703058
Email: EMEAsupport@shure.de

On behalf of Manufacturer:



Chad Ayers

01 February 2024 Niles, Illinois

Senior Director, Global Compliance

FCC Notice

This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference with radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference with radio or television reception, which can be determined by turning the equipment off and on, you are encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the antenna of the radio/television receiver.
- Increase the separation between this equipment and the radio/television receiver.
- Plug the equipment into a different outlet so that the equipment and the radio/television receiver are on different power mains branch circuits.
- Consult a representative of Shure or an experienced radio/television technician for additional suggestions.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Notice: The FCC regulations provide that changes or modifications not expressly approved by Shure Incorporated could void your authority to operate this equipment.

For information regarding responsible party and other matters relating to FCC compliance, please contact Shure Incorporated, 5800 W. Touhy Avenue, Niles, Illinois 60714-4608 U.S.A. [shure.com/contact](https://www.shure.com/contact)

Canada,ISED Notice

Notice: The Industry Canada regulations provide that changes or modifications not expressly approved by Shure Inc. could void your authority to operate this equipment.

Regulatory Information for Wireless Products

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End user must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The portable device is designed to meet the requirements for exposure to radio waves established by the Federal Communications Commission (USA). These requirements set a SAR limit of 1.6 W/kg averaged over one gram of tissue. The highest SAR value reported under this standard during product certification for use when properly worn on the body/head. This equipment should be installed and operated with minimum distance 0 cm between the radiator and your body/head.

Industry Canada (IC) Notices

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment. End user must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Cet équipement est conforme aux limites d'exposition aux rayonnements ISED établies pour un environnement non contrôlé. L'utilisateur final doit suivre les instructions spécifiques pour satisfaire les normes. Cet émetteur ne doit pas être co-implanté ou fonctionner en conjonction avec toute autre antenne ou transmetteur.

This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment. This equipment could be installed and operated with minimum distance 0 cm between the radiator and your body. End user must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The portable device is designed to meet the requirements for exposure to radio waves established by the ISED. These requirements set a SAR limit of 1.6 W/kg averaged over one gram of tissue. The highest SAR value reported under this standard during product certification for use when properly worn on the body/head.

Cet équipement est conforme aux limites d'exposition aux rayonnements ISED établies pour un environnement non contrôlé. Cet équipement peut-être installé et utilisé avec une distance minimale de 0 cm entre le radiateur et votre corps. L'utilisateur final doit suivre les instructions spécifiques pour satisfaire les normes. Cet émetteur ne doit pas être co-implanté ou fonctionner en conjonction avec toute autre antenne ou transmetteur.

Le dispositif portatif est conçu pour répondre aux exigences d'exposition aux ondes radio établie par le développement énergétique DURABLE. Ces exigences un SAR limite de 1,6 W/kg en moyenne pour un gramme de tissu. La valeur SAR la plus élevée signalée en vertu de cette norme lors de la certification de produit à utiliser lorsqu'il est correctement porté sur les corps/tête.

Additional Canadian information on RF exposure also can be found at the following Web address: <http://www.ic.gc.ca/eic/site/smt-gst.nsf/eng/sf08792.html>

ANATEL Notice

Este equipamento não tem direito à proteção contra interferência prejudicial e não pode causar interferência em sistemas devidamente autorizados. Para maiores informações, consulte o site da ANATEL – <http://www.anatel.gov.br>.

IFETEL Notice

La operación de este equipo está sujeta a las siguientes dos condiciones: (1) es posible que este equipo o dispositivo no cause interferencia perjudicial y (2) este equipo o dispositivo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada.

KCC Notice

해당 무선설비는 전파혼신 가능성이 있으므로 인명안전과 관련된 서비스는 할 수 없음

NBTC Notice

เครื่องโทรคมนาคมและอุปกรณ์นี้มีความสอดคล้องตามมาตรฐานหรือข้อกำหนดทางเทคนิคของ กสทช.

NCC Notice

Connection and use of this communications equipment is permitted by the Nigerian Communications Commission.

NCC Notice

低功率射頻器材技術規範

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前述合法通信，指依電信管理法規定作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

614MHz-703MHz: 使用頻段供其他通訊業務使用時，器材應即停止使用

SRRC Notice

- (一) 本产品符合“微功率短距离无线电发射设备目录和技术要求”的具体条款和使用场景；
- (二) 不得擅自改变使用场景或使用条件、扩大发射频率范围、加大发射功率（包括额外加装射频功率放大器），不得擅自更改发射天线；
- (三) 不得对其他合法的无线电台（站）产生有害干扰，也不得提出免受有害干扰保护；
- (四) 应当承受辐射射频能量的工业、科学及医疗（ISM）应用设备的干扰或其他合法的无线电台（站）干扰；
- (五) 如对其他合法的无线电台（站）产生有害干扰时，应立即停止使用，并采取措施消除干扰后方可继续使用；
- (六) 在航空器内和依据法律法规、国家有关规定、标准划设的射电天文台、气象雷达站、卫星地球站（含测控、测距、接收、导航站）等军民用无线电台（站）、机场等的电磁环境保护区域内使用微功率设备，应当遵守电磁环境保护及相关行业主管部门的规定。

Canada Warning for Wireless

This device operates on a no-protection, no-interference basis. Should the user seek to obtain protection from other radio services operating in the same TV bands, a radio licence is required. For further details, consult Innovation, Science and Economic Development Canada's document Client Procedures Circular CPC-2-1-28, Voluntary Licensing of Licence-Exempt Low-Power Radio Apparatus in the TV Bands.

Ce dispositif fonctionne selon un régime de non-brouillage et de non-protection. Si l'utilisateur devait chercher à obtenir une certaine protection contre d'autres services radio fonctionnant dans les mêmes bandes de télévision, une licence radio serait requise. Pour en savoir plus, veuillez consulter la Circulaire des procédures concernant les clients CPC-2.1.28, Délivrance de licences sur une base volontaire pour les appareils radio de faible puissance exempts de licence et exploités dans les bandes de télévision d'Innovation, Sciences et Développement économique Canada.

ACMA Notice

WARNING: This device operates under an ACMA class license and must comply with all conditions of that license including operating frequencies.


MIC Notice

運用に際しての注意

この機器の使用周波数帯では、電子レンジ等の産業・科学・医療用機器のほか工場の製造ライン等で使用されている移動体識別用の構内無線局（免許を要する無線局）及び特定小電力無線局（免許を要しない無線局）並びにアマチュア無線局（免許を要する無線局）が運用されています。

1. この機器を使用する前に、近くで移動体識別用の構内無線局及び特定小電力無線局並びにアマチュア無線局が運用されていないことを確認して下さい。
2. 万一、この機器から移動体識別用の構内無線局に対して有害な電波干渉の事例が発生した場合には、速やかに使用周波数を変更するか又は電波の発射を停止した上、下記連絡先にご連絡頂き、混信回避のための処置等（例えば、パーティションの設置など）についてご相談して下さい。
3. その他、この機器から移動体識別用の特定小電力無線局あるいはアマチュア無線局に対して有害な電波干渉の事例が発生した場合など何かお困りのことが起きたときは、保証書に記載の販売代理店または購入店へお問い合わせください。代理店および販売店情報は Shure 日本語ウェブサイト <http://www.shure.co.jp> でもご覧いただけます。

現品表示記号について



現品表示記号は、以下のことを表しています。この無線機器は 2.4GHz 帯の電波を使用し、変調方式は「FH-SS」方式、想定干渉距離は 10m です。2,400MHz～2,483.5MHz の全帯域を使用し、移動体識別装置の帯域を回避することはできません。

Environmental Regulatory Information

Waste Electrical and Electronic Equipment (WEEE) Directive



In the European Union and the United Kingdom, this label indicates that this product should not be disposed of with household waste. It should be deposited at an appropriate facility to enable recovery and recycling.

Registration, Evaluation, Authorization of Chemicals (REACH) Directive

REACH (Registration, Evaluation, Authorization of Chemicals) is the European Union (EU) and the United Kingdom (UK) chemical substances regulatory framework. Information on substances of very high concern contained in Shure products in a concentration above 0.1% weight over weight (w/w) is available upon request.

Recycling Information

Please consider the environment, electric products and packaging are part of regional recycling schemes and do not belong to regular household waste.

中国 RoHS

部件名称	有害物质									
	Pb	Cd	Hg	Cr(VI)	PBB	PBDE	DBP	BBP	DIBP	DEHP
电路模块	X	○	○	○	○	○	○	○	○	○
金属模块	X	○	○	○	○	○	○	○	○	○
线缆及其组件	X	○	○	○	○	○	○	○	○	○
电源适配器*	X	○	○	○	○	○	○	○	○	○
锂电池组*	X	○	○	○	○	○	○	○	○	○
注 1: ○: 表示该有害物质在该部件所有均质材料中的含量均不超出电器电子产品有害物质限制使用国家标准要求。 X: 表示该有害物质至少在该部件某一均质材料中的含量超出电器电子产品有害物质限制使用国家标准要求。 注 2: 本产品大部分的部件采用无害的环保材料制造, 含有有害物质的部件皆因全球技术发展水平的限制而无法实现有害物质的替代。 注 3: 以上未列出的部分,表明其有害物质含量均不超出电器电子产品有害物质限制使用国家标准要求 *:表示如果包含部分										

Certifications

Regulatory Model Number/规范型号 (RMN)

For regulatory identification purposes your product has been assigned a regulatory model number (RMN). This regulatory model number should not be confused with product number, as below.

出于法规识别目的, 已为您的产品分配规范型号 (RMN)。不应将此规范型号与以下的产品编号混为一谈。

RMN: SLXD1+

Product Numbers: SLXD1+ G54/SLXD1+ G57/SLXD1+ G60/SLXD1+ G64/SLXD1+ G65/SLXD1+ G66/SLXD1+ H58/SLXD1+ JB/SLXD1+ K55/SLXD1+ K60/SLXD1+ L60/SLXD1+ M55/SLXD1+ S50/ SLXD1+ X51

RMN: SLXD2+

Product Numbers: SLXD2+ G54/SLXD2+ G57/SLXD2+ G60/SLXD2+ G64/SLXD2+ G65/SLXD2+ G66/SLXD2+ H58/SLXD2+ JB/SLXD2+ K55/SLXD2+ K60/SLXD2+ L60/SLXD2+ M55/SLXD2+ S50/ SLXD2+ X51

RMN: SLXD3+

Product Numbers: SLXD3+ G54/SLXD3+ G57/SLXD3+ G60/SLXD3+ G64/SLXD3+ G65/SLXD3+ G66/SLXD3+ H58/SLXD3+ JB/SLXD3+ K55/SLXD3+ K60/SLXD3+ L60/SLXD3+ M55/SLXD3+ S50/ SLXD3+ X51