

RF Test Data for Bluetooth(BDR+EDR) (Conducted Measurements)



General Description of EUT	
Product Name:	Tablet PC
Test Model:	Q2S
Sample ID:	202204_0277-03-03-2
Environmental Conditions	
Temperature:	25℃
Relative Humidity:	55%
Test Voltage:	DC 3.8V
Test Engineer:	Huangjianping
Note: For a more detailed features description, please refer to the report TBR-C-202204-0277-28	



Contents



1. Duty Cycle	3
2. Maximum Conducted Output Power	9
3. -20dB Bandwidth	15
4. Occupied Channel Bandwidth	21
5. Band Edge	27
6. Band Edge(Hopping)	34
7. Conducted RF Spurious Emission	41
8. Restrict Band	51
9. Carrier Frequencies Separation	58
10. Number of Hopping Channel	61



1. Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH1	2402	Ant1	100	0	0
NVNT	1-DH1	2441	Ant1	100	0	0
NVNT	1-DH1	2480	Ant1	100	0	0
NVNT	2-DH1	2402	Ant1	100	0	0
NVNT	2-DH1	2441	Ant1	100	0	0
NVNT	2-DH1	2480	Ant1	100	0	0
NVNT	3-DH1	2402	Ant1	100	0	0
NVNT	3-DH1	2441	Ant1	100	0	0
NVNT	3-DH1	2480	Ant1	100	0	0

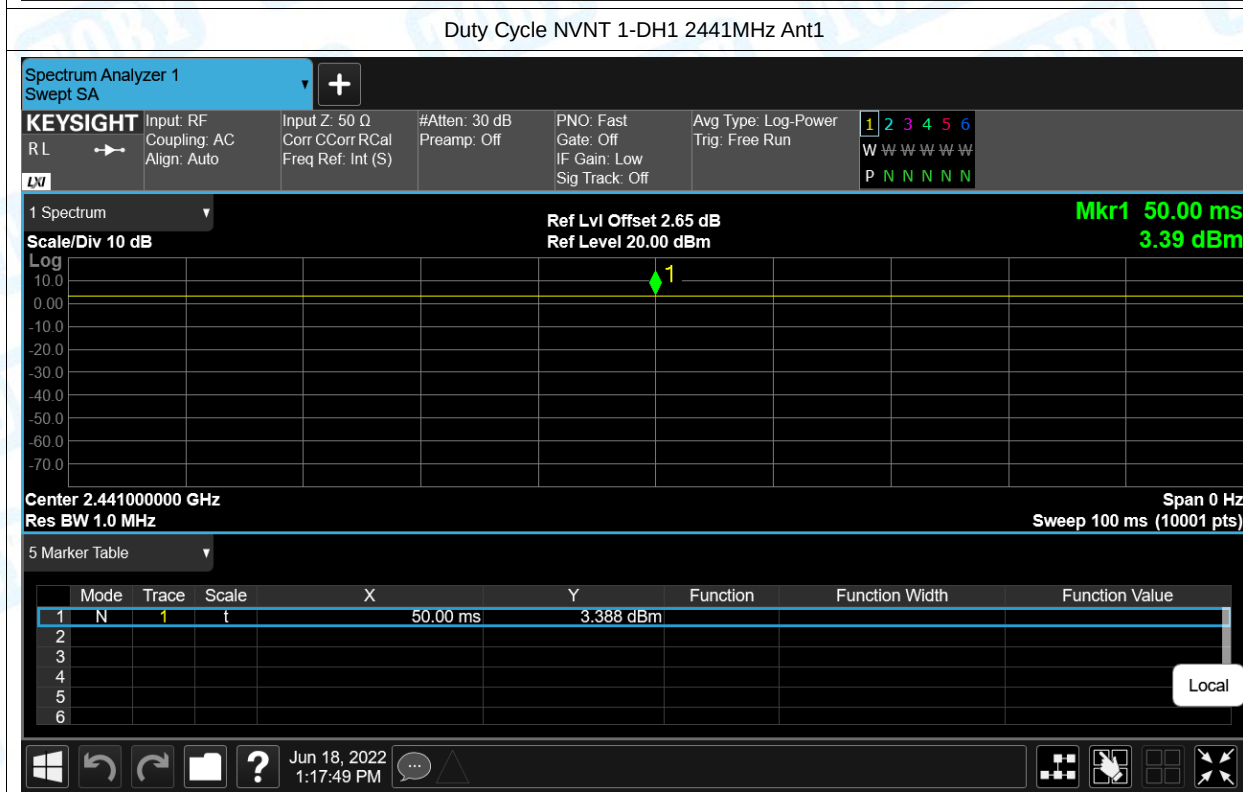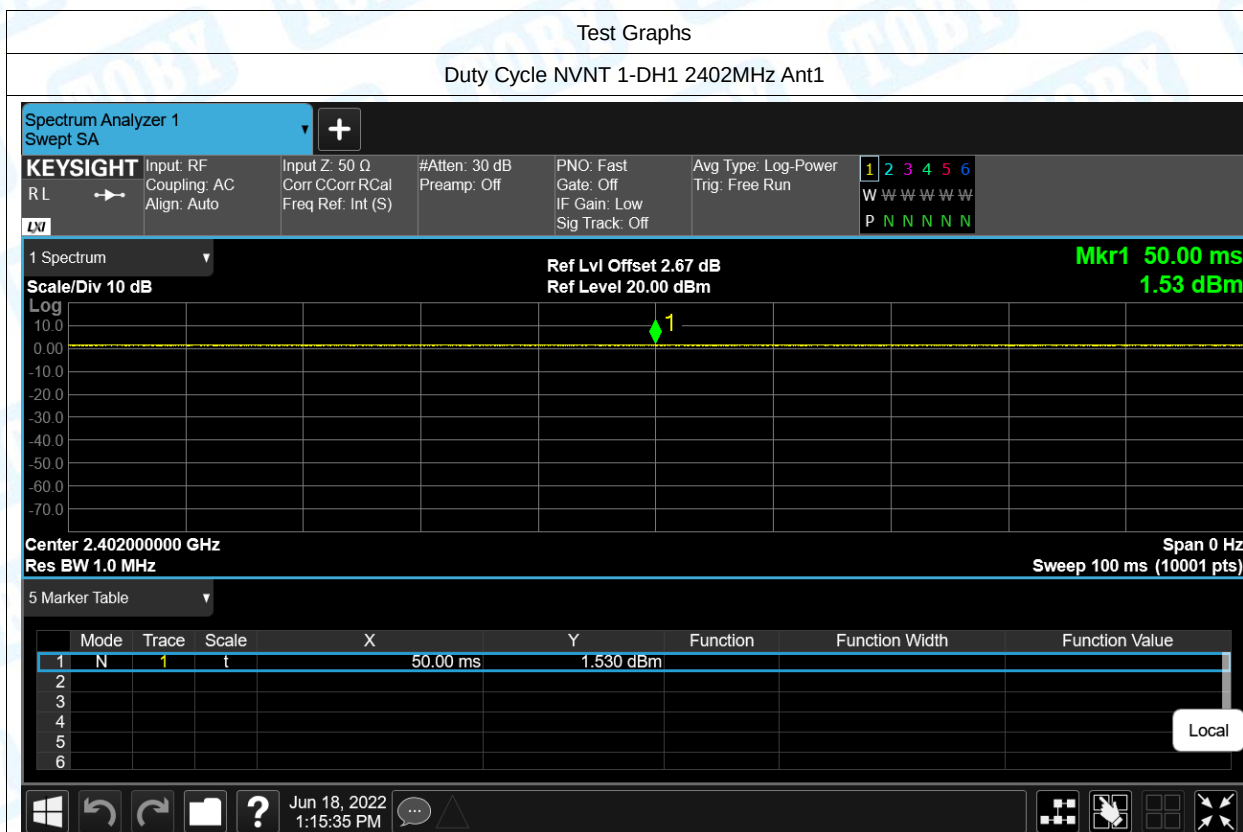

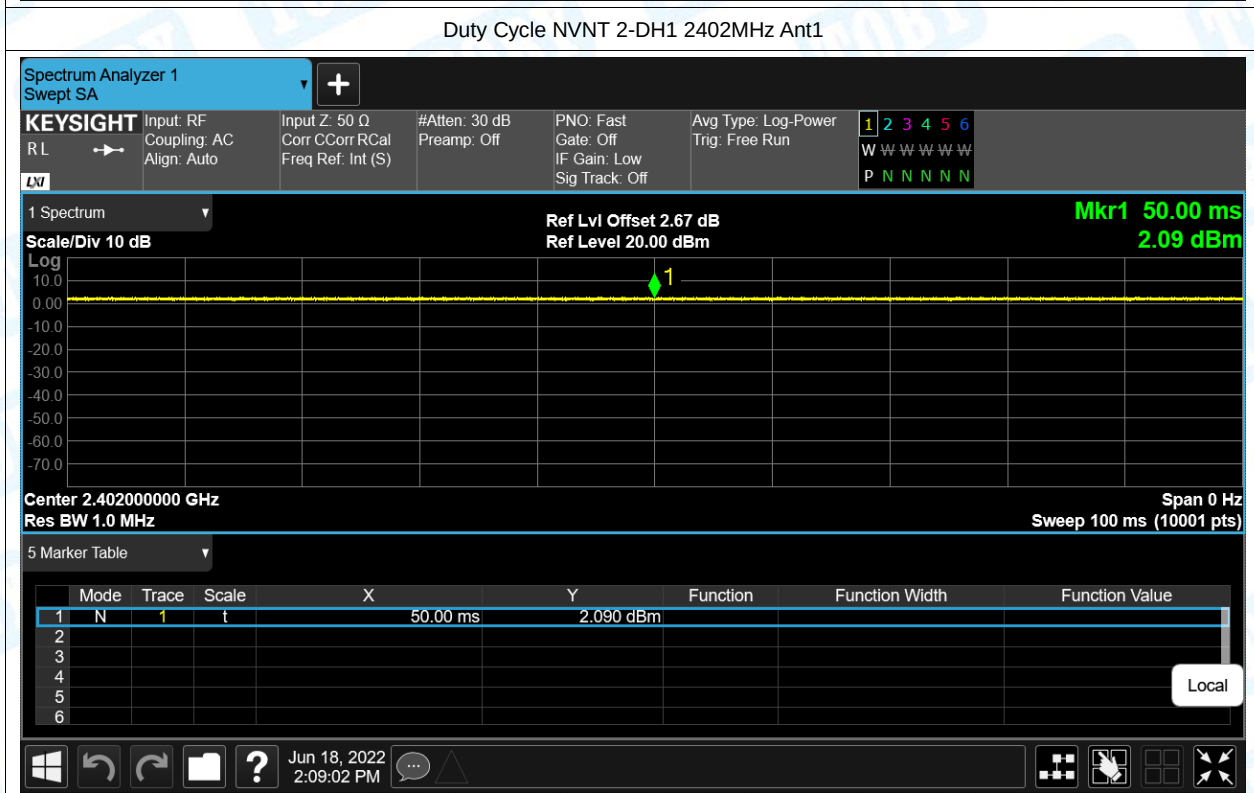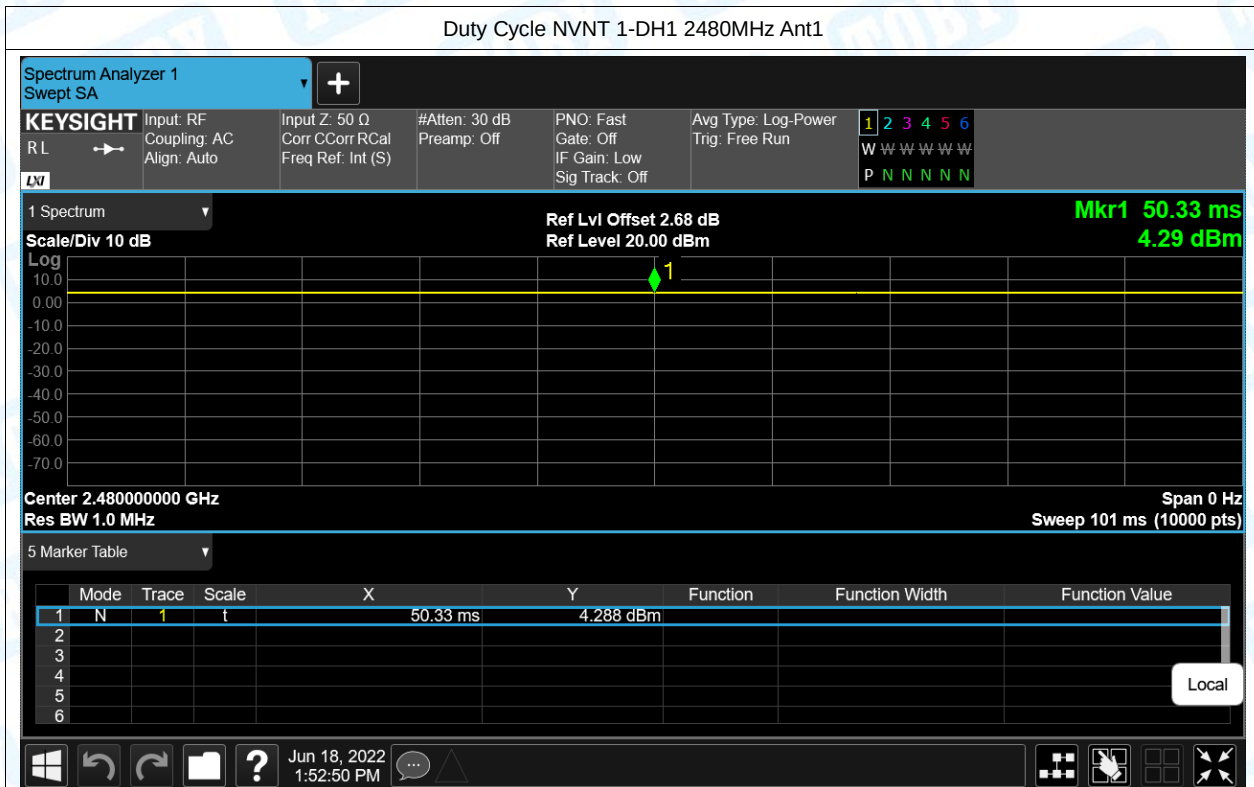

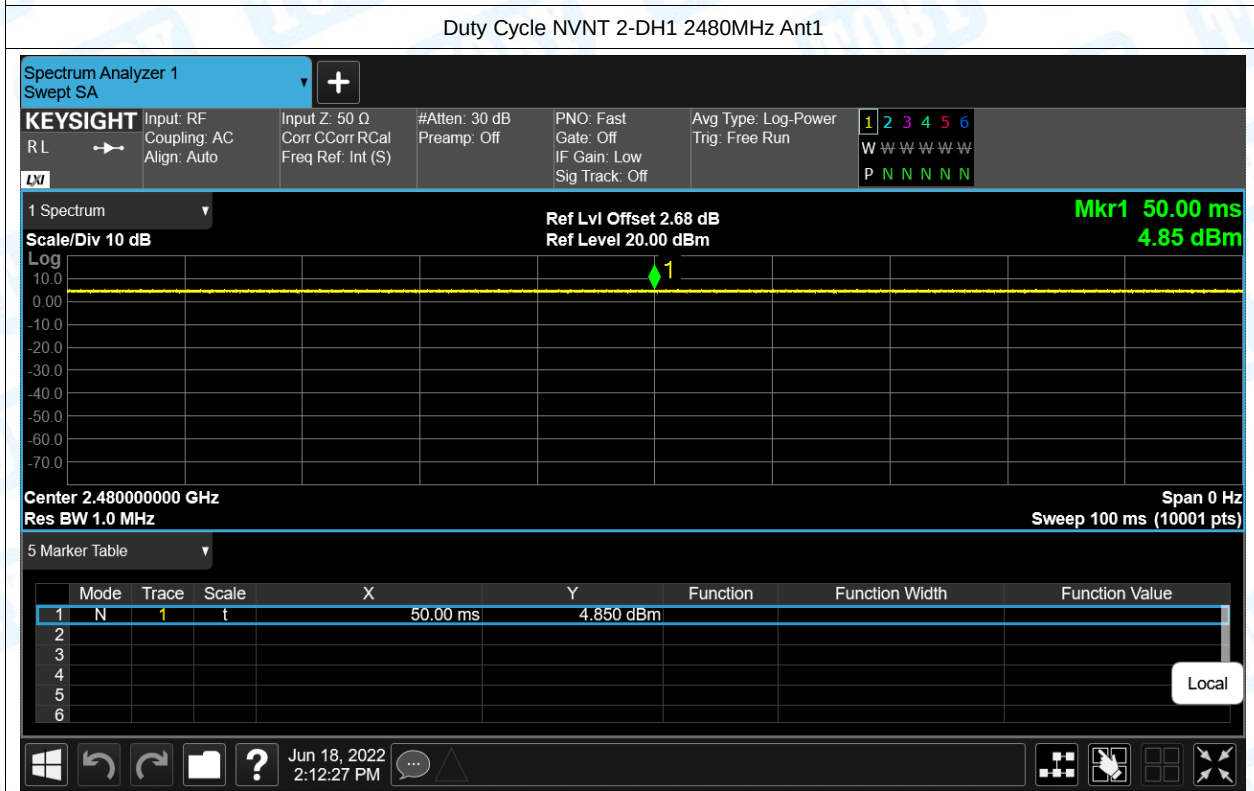
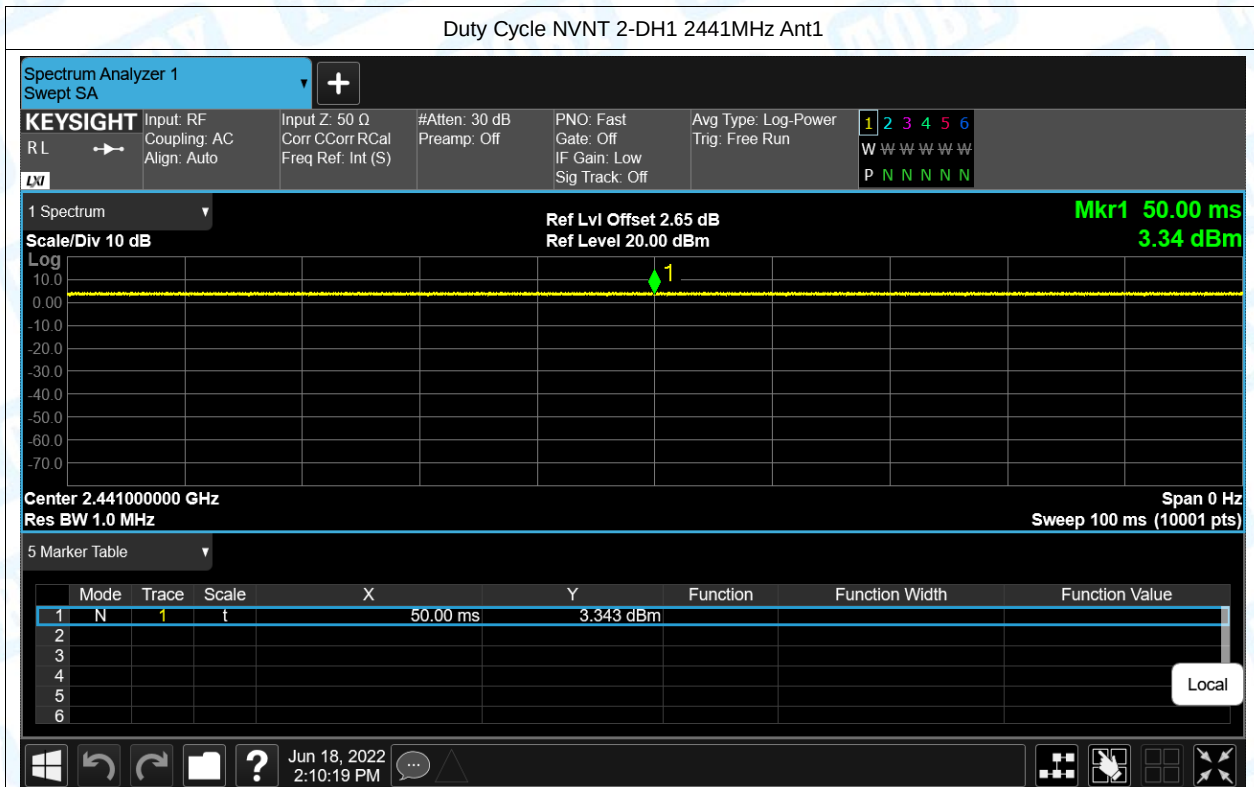


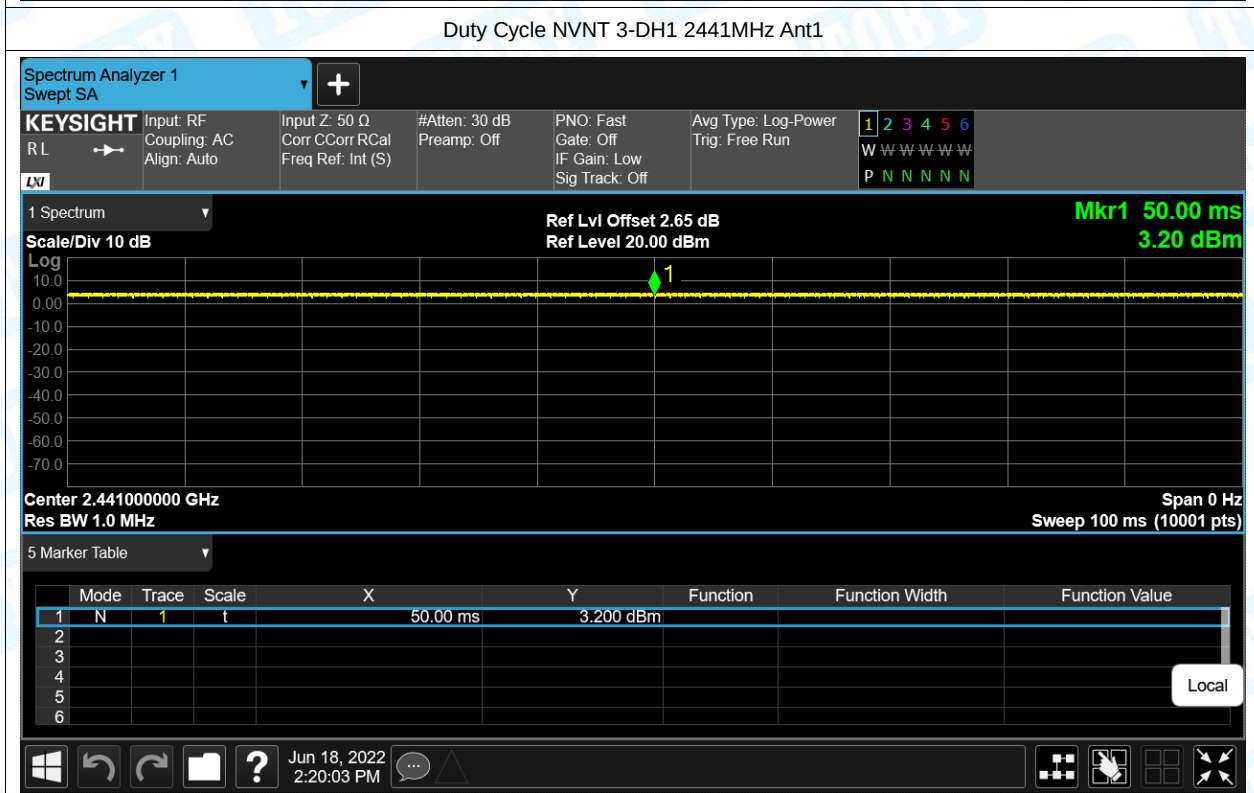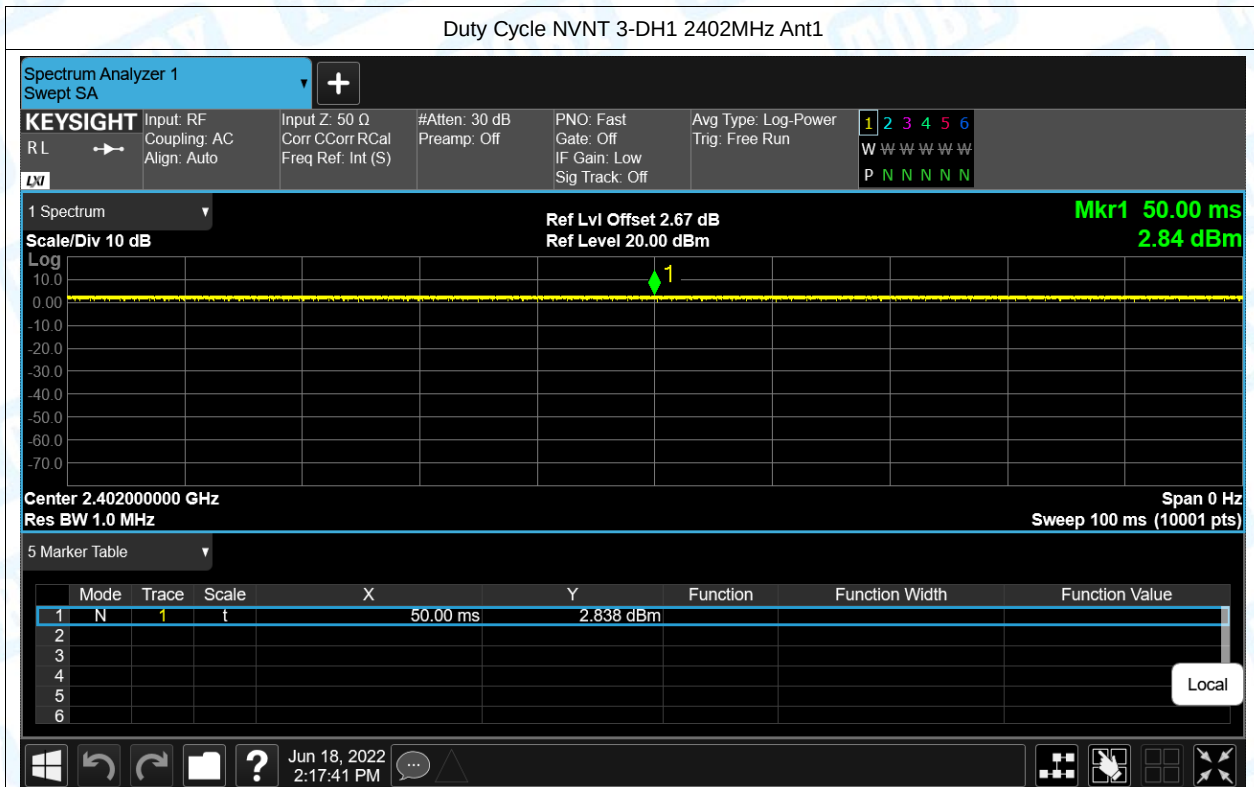



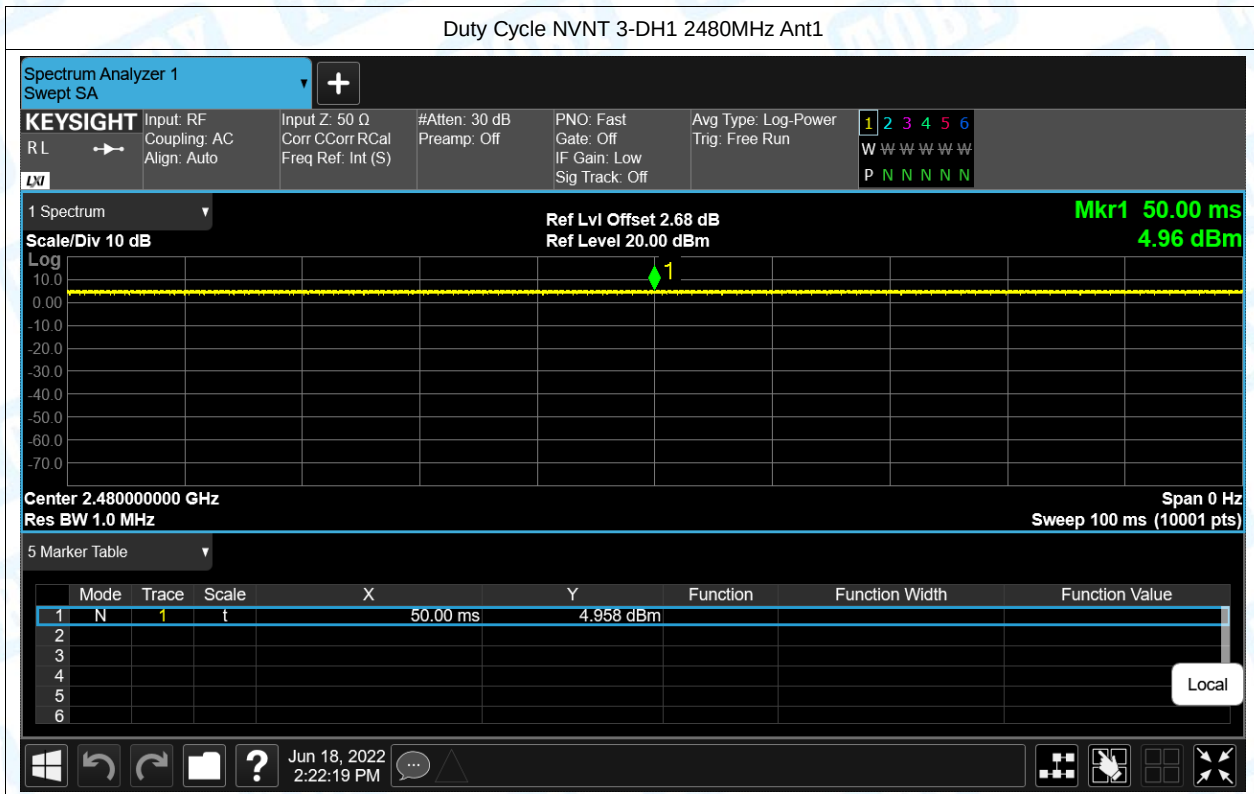



2. Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	1.491	21	Pass
NVNT	1-DH1	2441	Ant1	0.535	21	Pass
NVNT	1-DH1	2480	Ant1	1.254	21	Pass
NVNT	2-DH1	2402	Ant1	0.335	21	Pass
NVNT	2-DH1	2441	Ant1	2.154	21	Pass
NVNT	2-DH1	2480	Ant1	2.843	21	Pass
NVNT	3-DH1	2402	Ant1	0.573	21	Pass
NVNT	3-DH1	2441	Ant1	2.449	21	Pass
NVNT	3-DH1	2480	Ant1	0.115	21	Pass

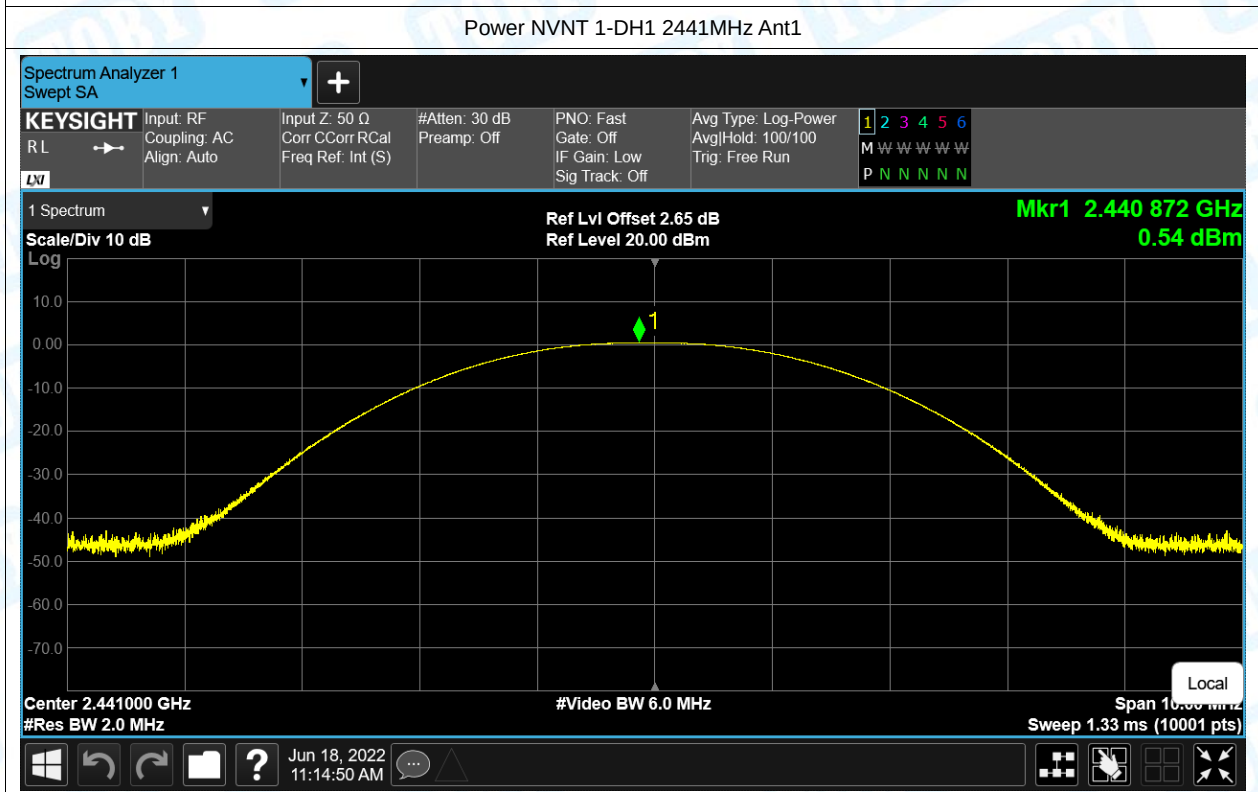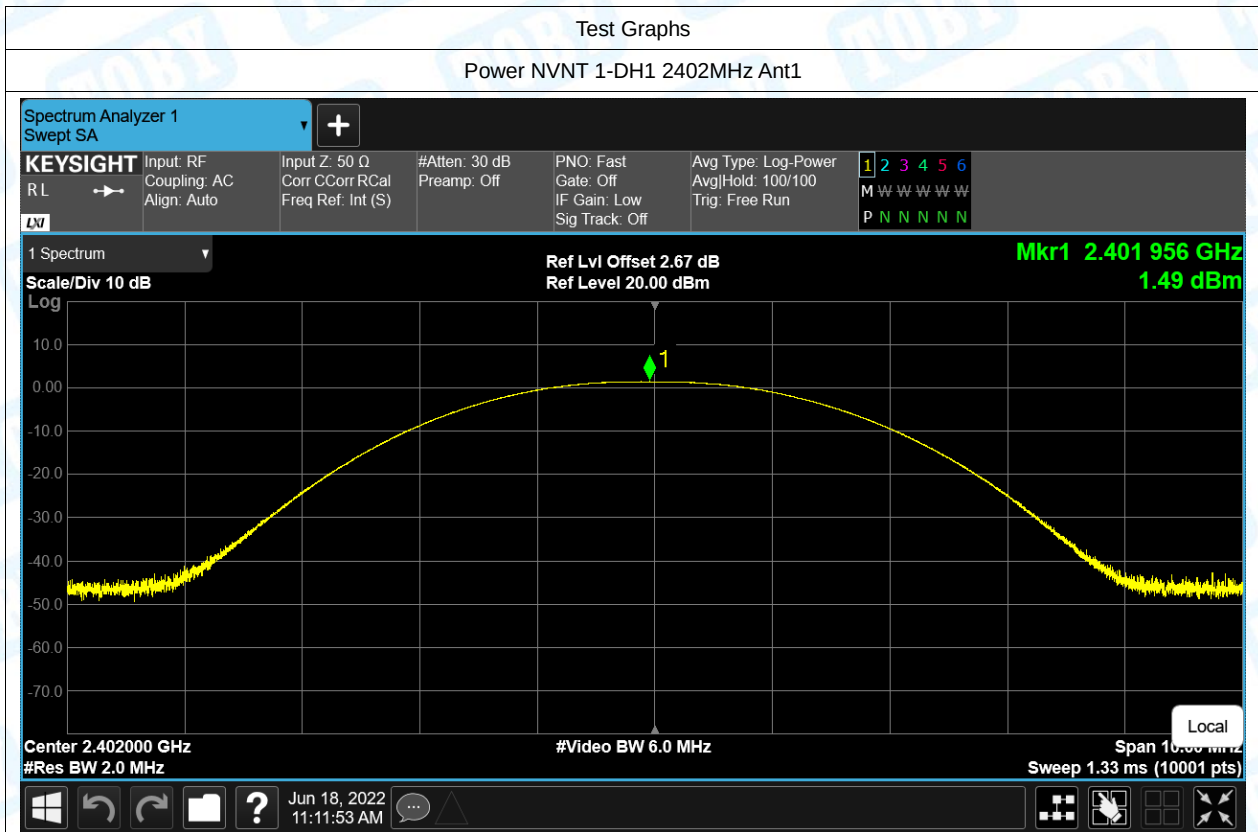

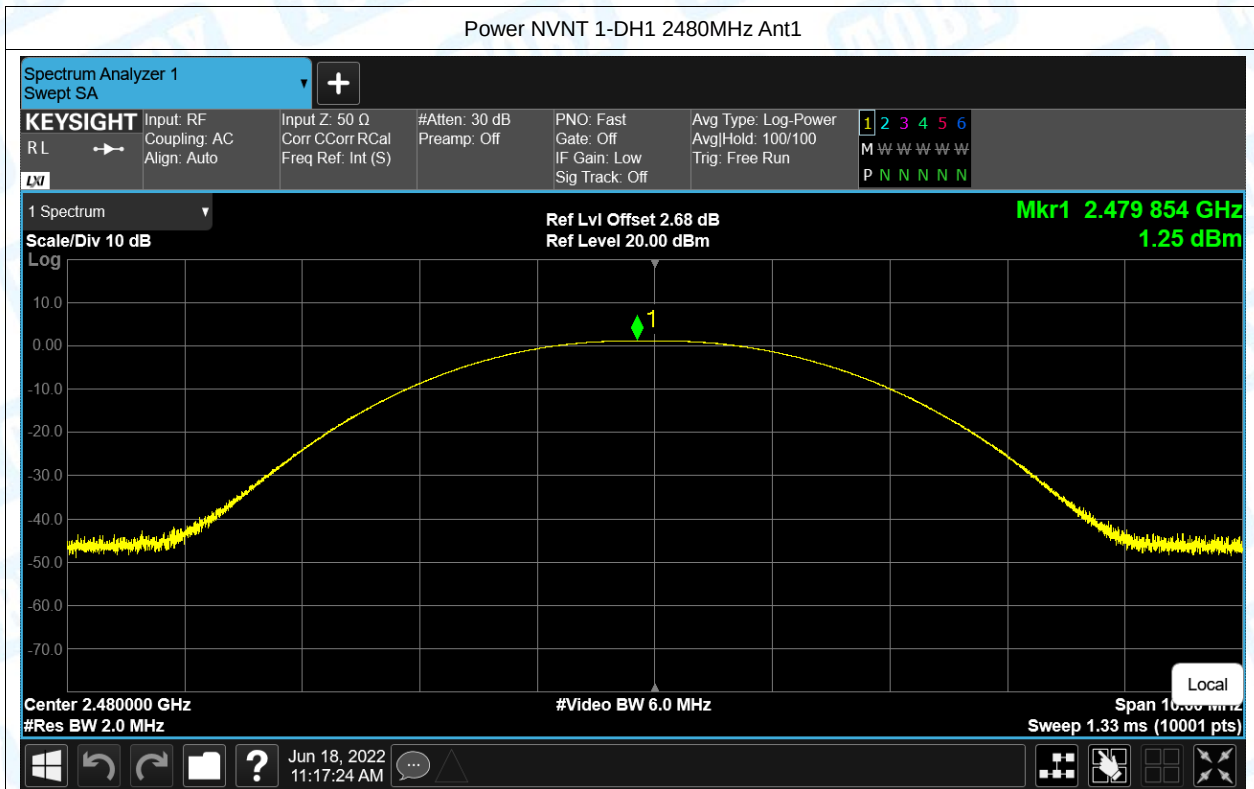

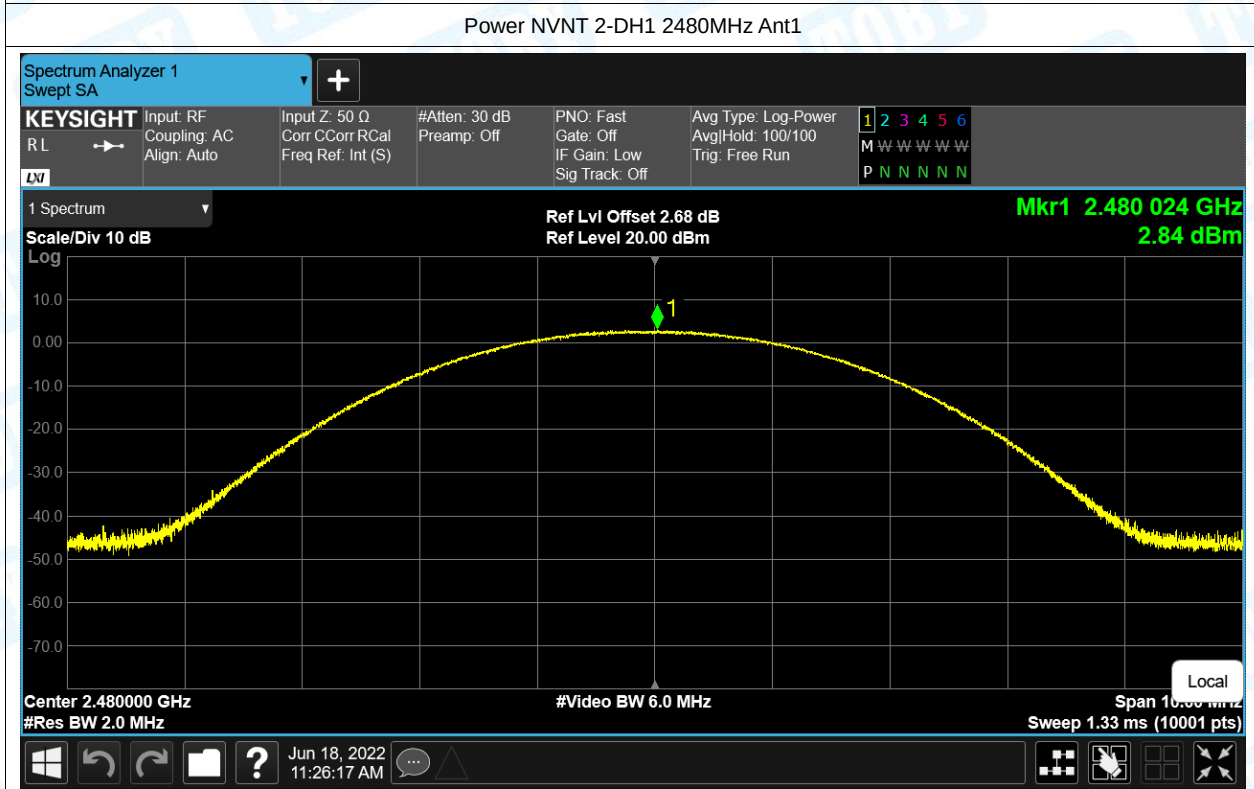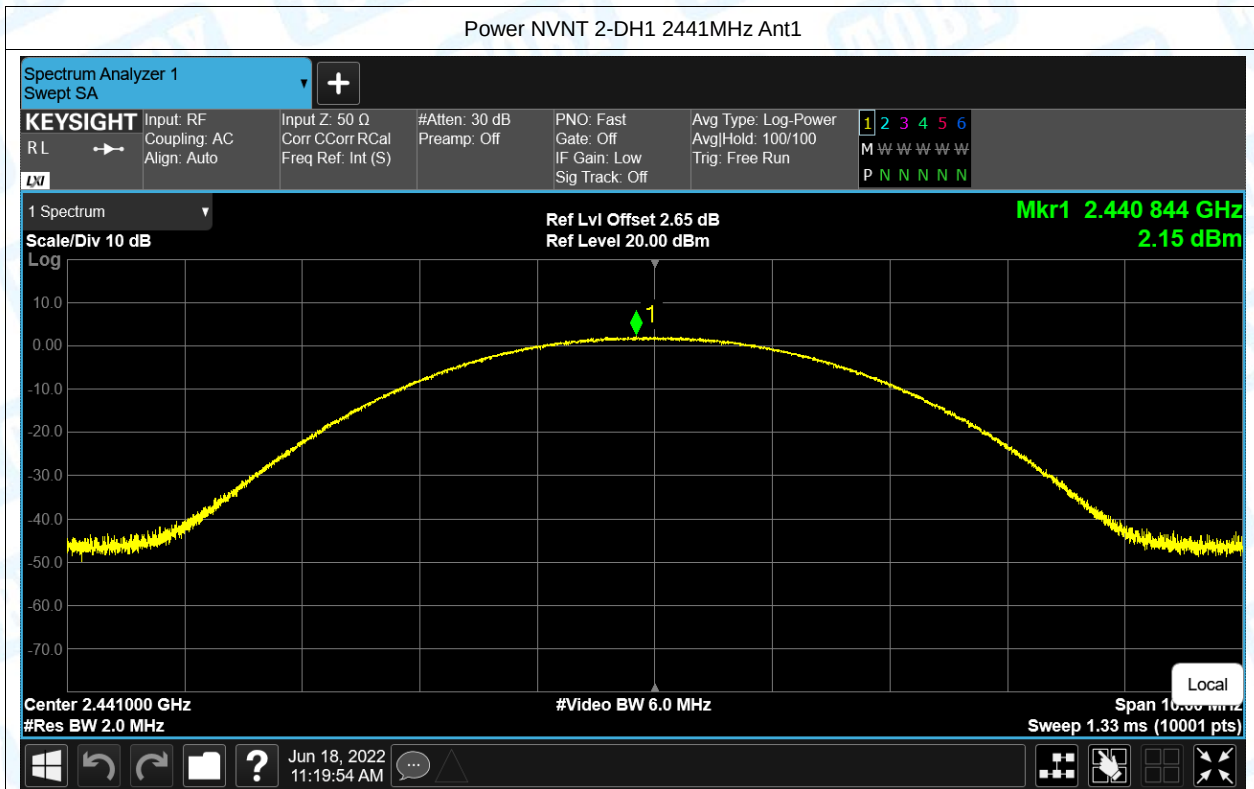

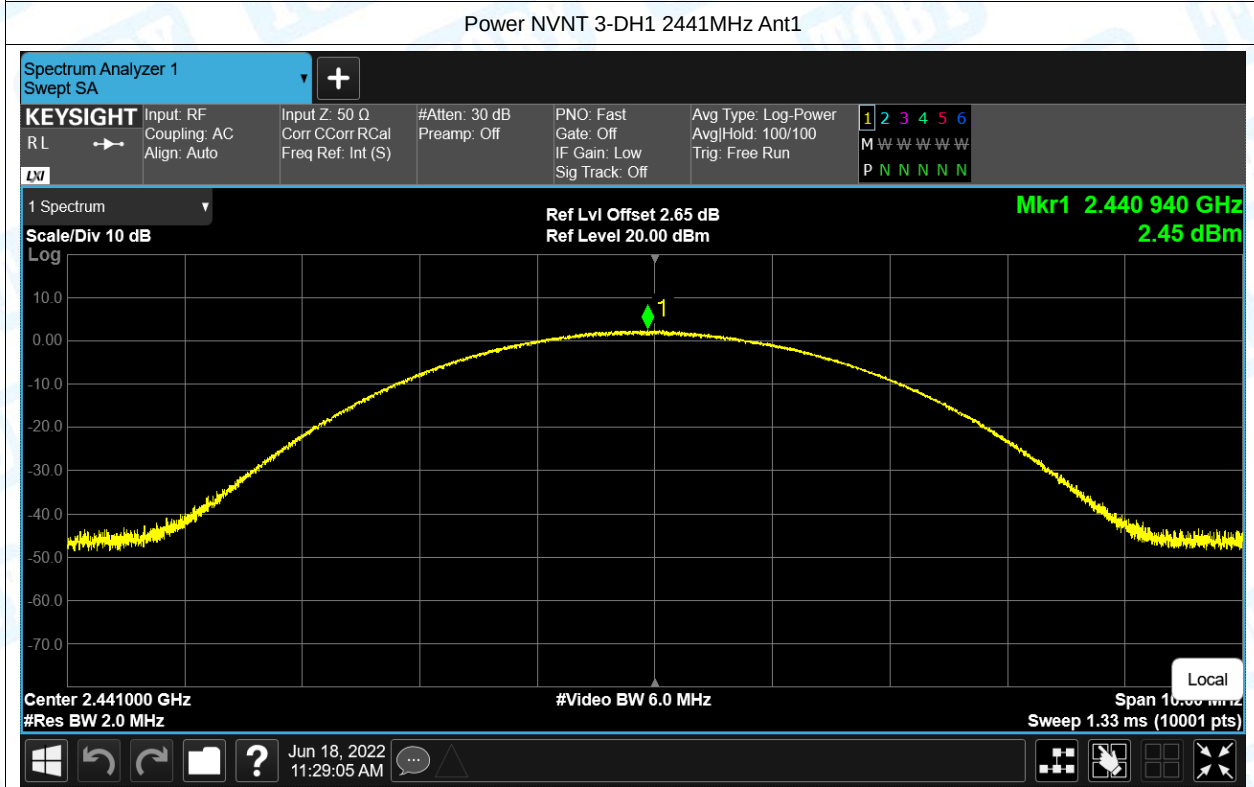



3. -20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	1.03	0	Pass
NVNT	1-DH1	2441	Ant1	1.03	0	Pass
NVNT	1-DH1	2480	Ant1	1.03	0	Pass
NVNT	2-DH1	2402	Ant1	1.34	0	Pass
NVNT	2-DH1	2441	Ant1	1.34	0	Pass
NVNT	2-DH1	2480	Ant1	1.33	0	Pass
NVNT	3-DH1	2402	Ant1	1.29	0	Pass
NVNT	3-DH1	2441	Ant1	1.29	0	Pass
NVNT	3-DH1	2480	Ant1	1.29	0	Pass



Test Graphs

-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1




-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1




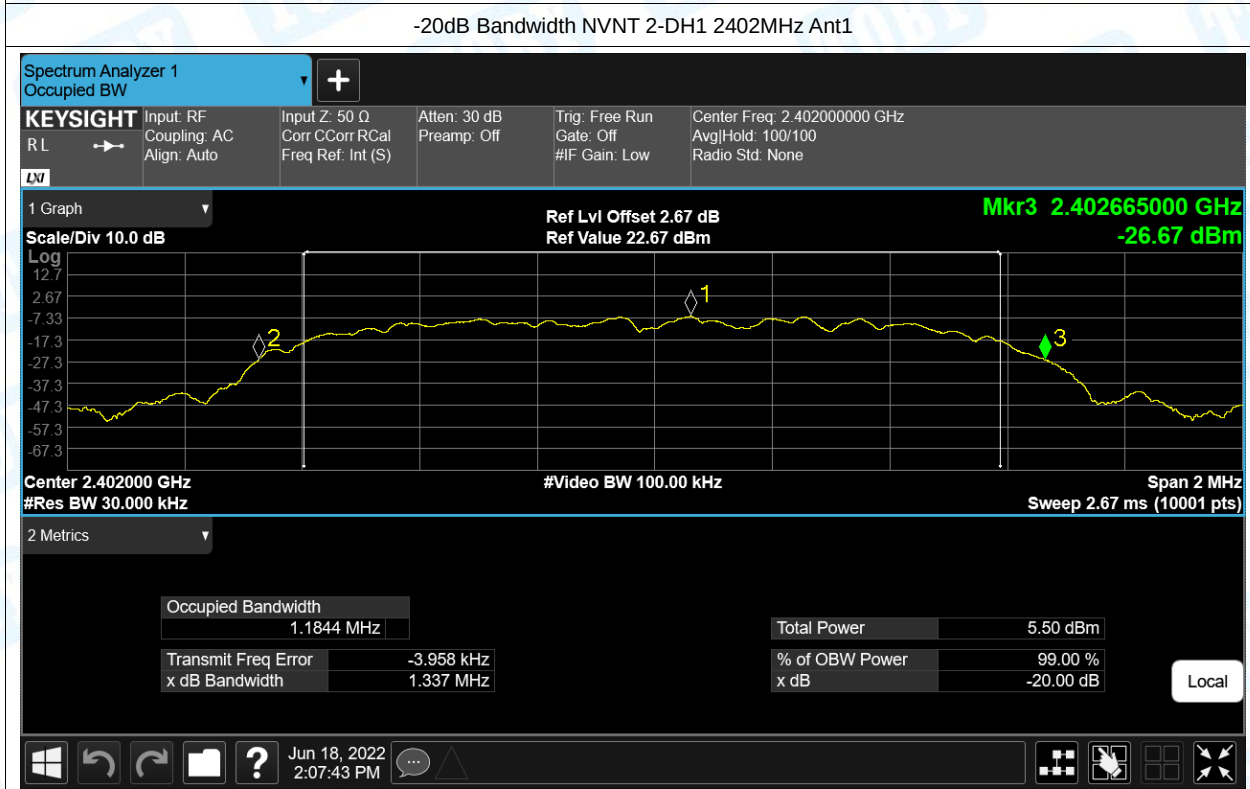
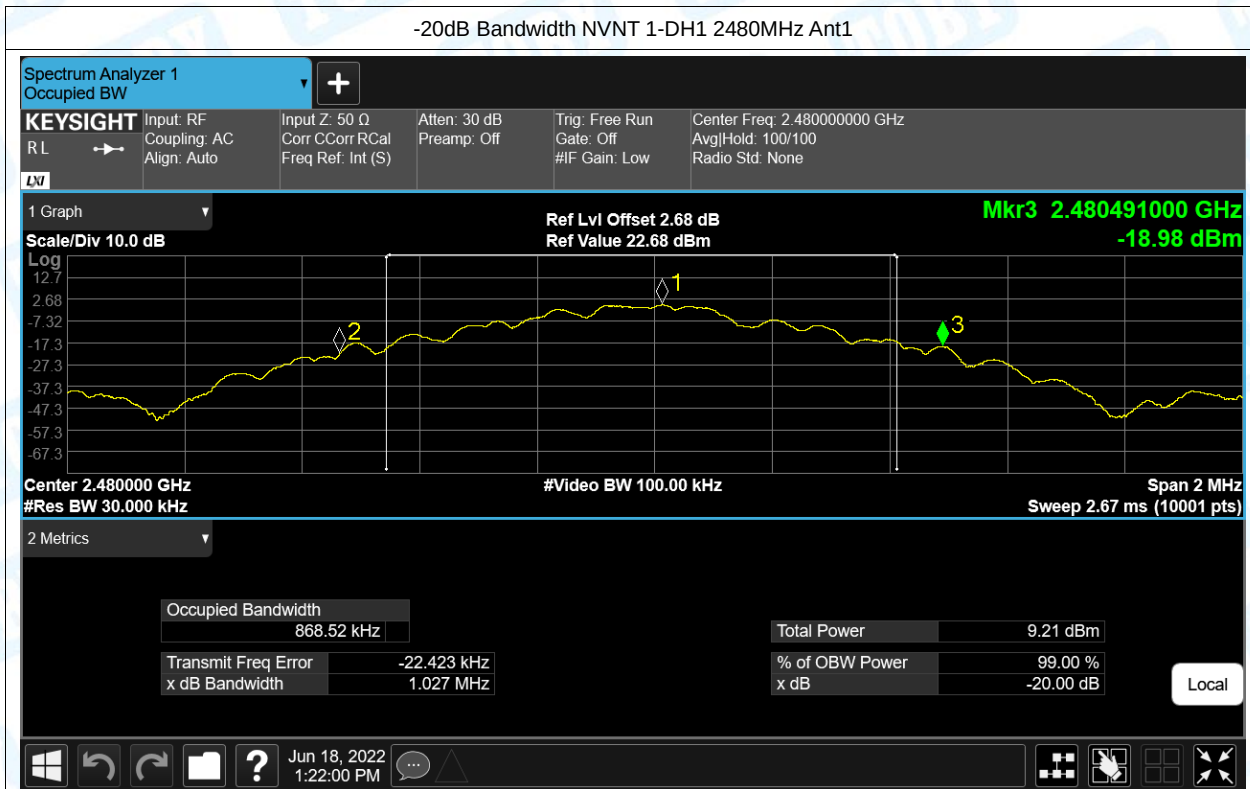



-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

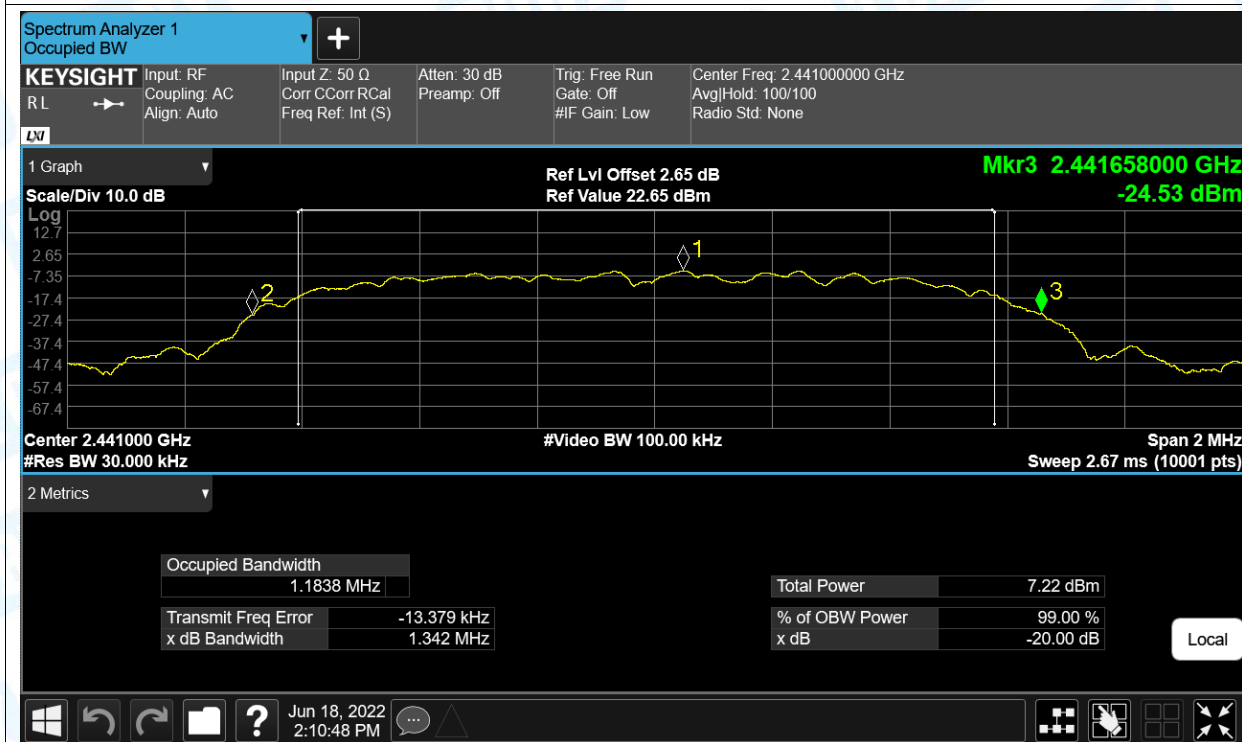

-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

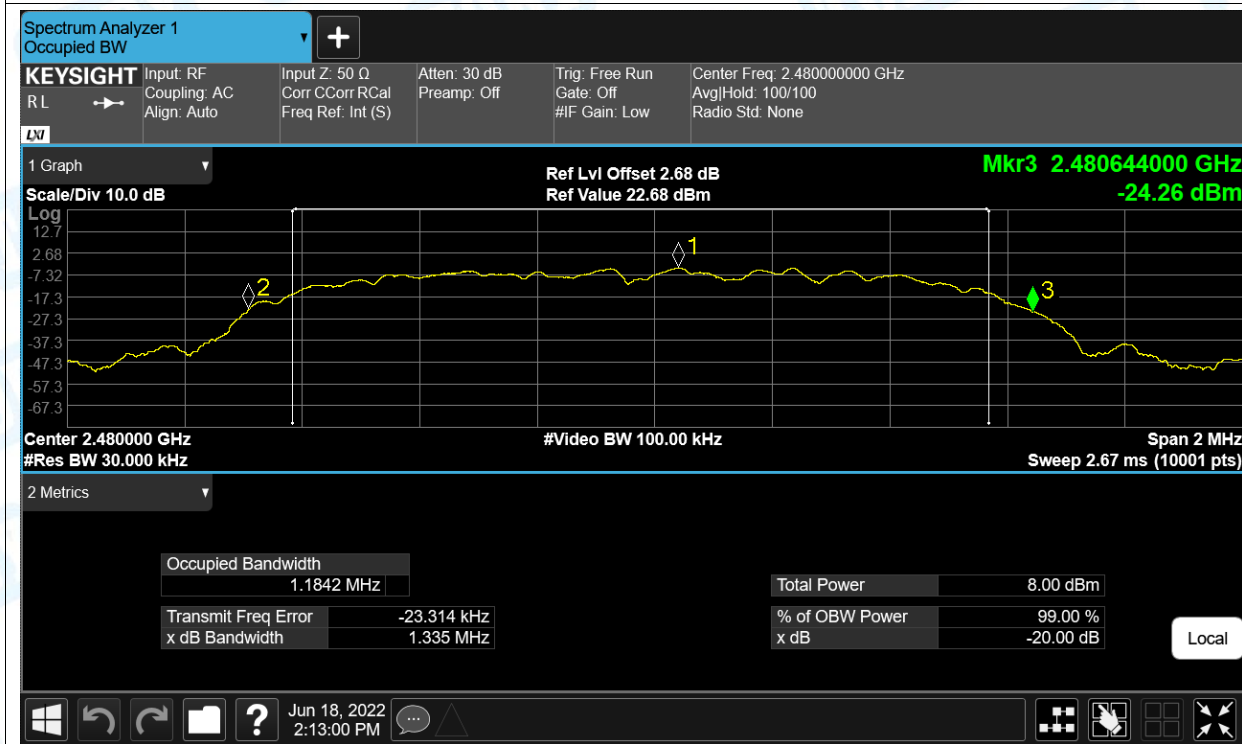

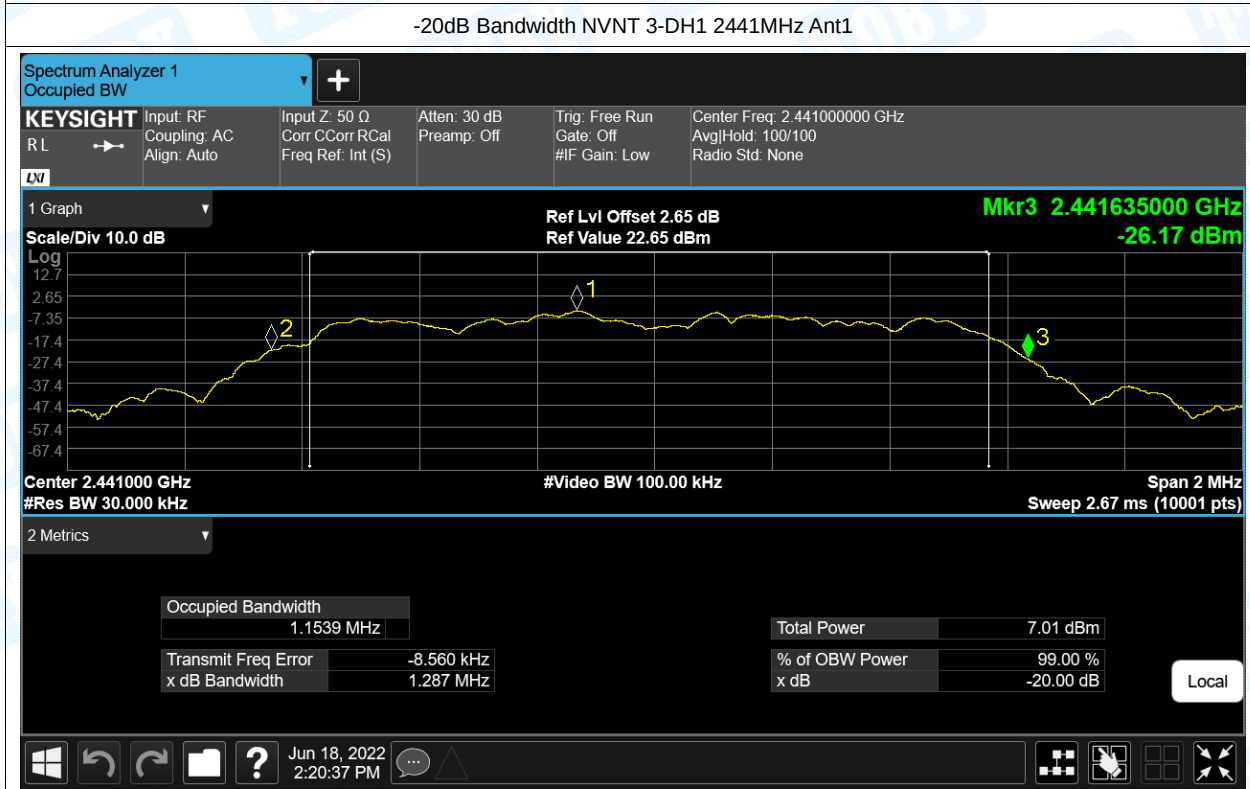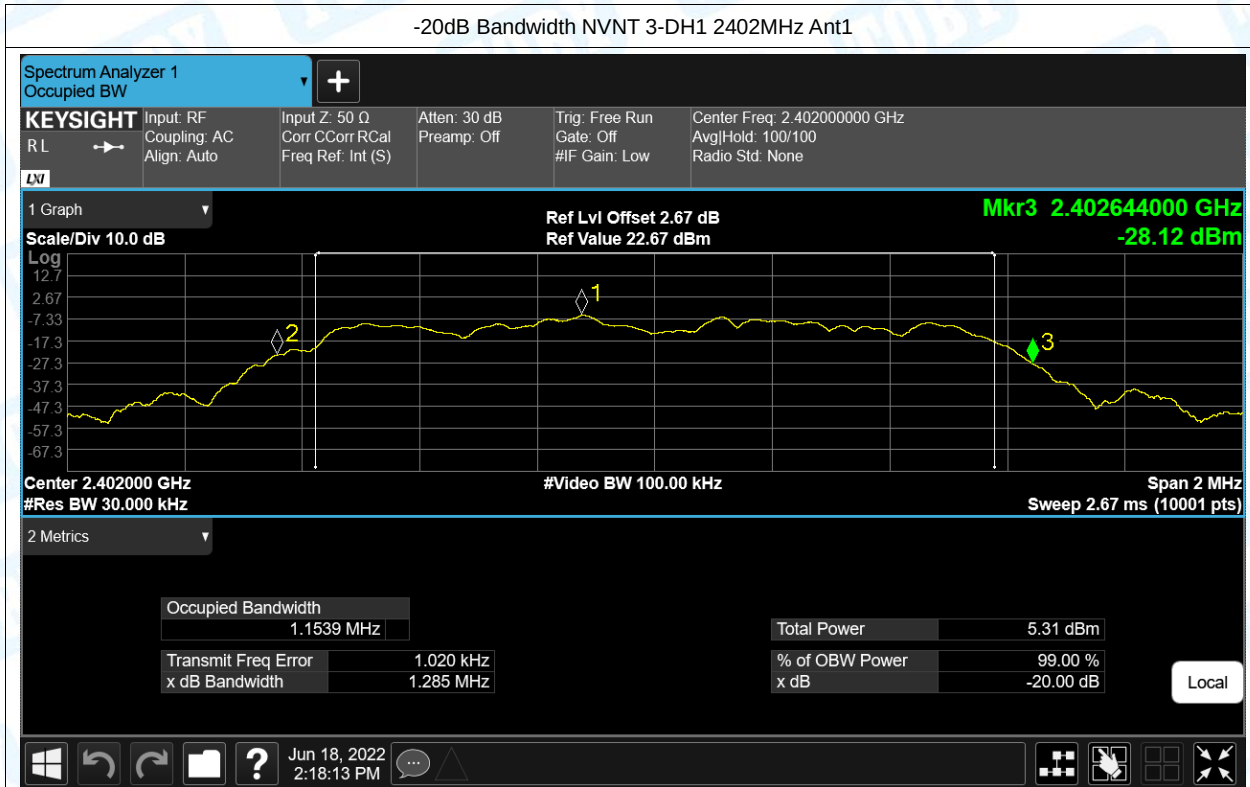

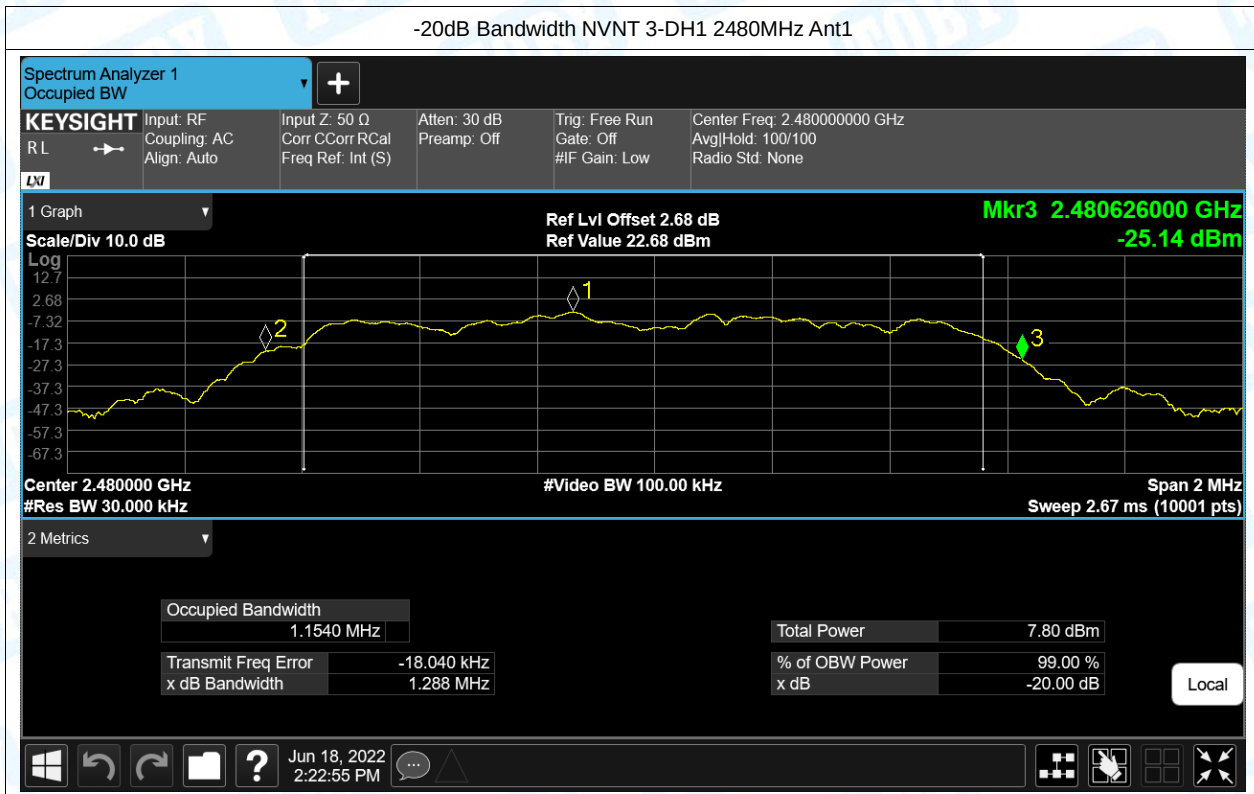

4. Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.867
NVNT	1-DH1	2441	Ant1	0.868
NVNT	1-DH1	2480	Ant1	0.869
NVNT	2-DH1	2402	Ant1	1.184
NVNT	2-DH1	2441	Ant1	1.185
NVNT	2-DH1	2480	Ant1	1.186
NVNT	3-DH1	2402	Ant1	1.153
NVNT	3-DH1	2441	Ant1	1.153
NVNT	3-DH1	2480	Ant1	1.155

Test Graphs

OBW NVNT 1-DH1 2402MHz Ant1



OBW NVNT 1-DH1 2441MHz Ant1





OBW NVNT 1-DH1 2480MHz Ant1



OBW NVNT 2-DH1 2402MHz Ant1




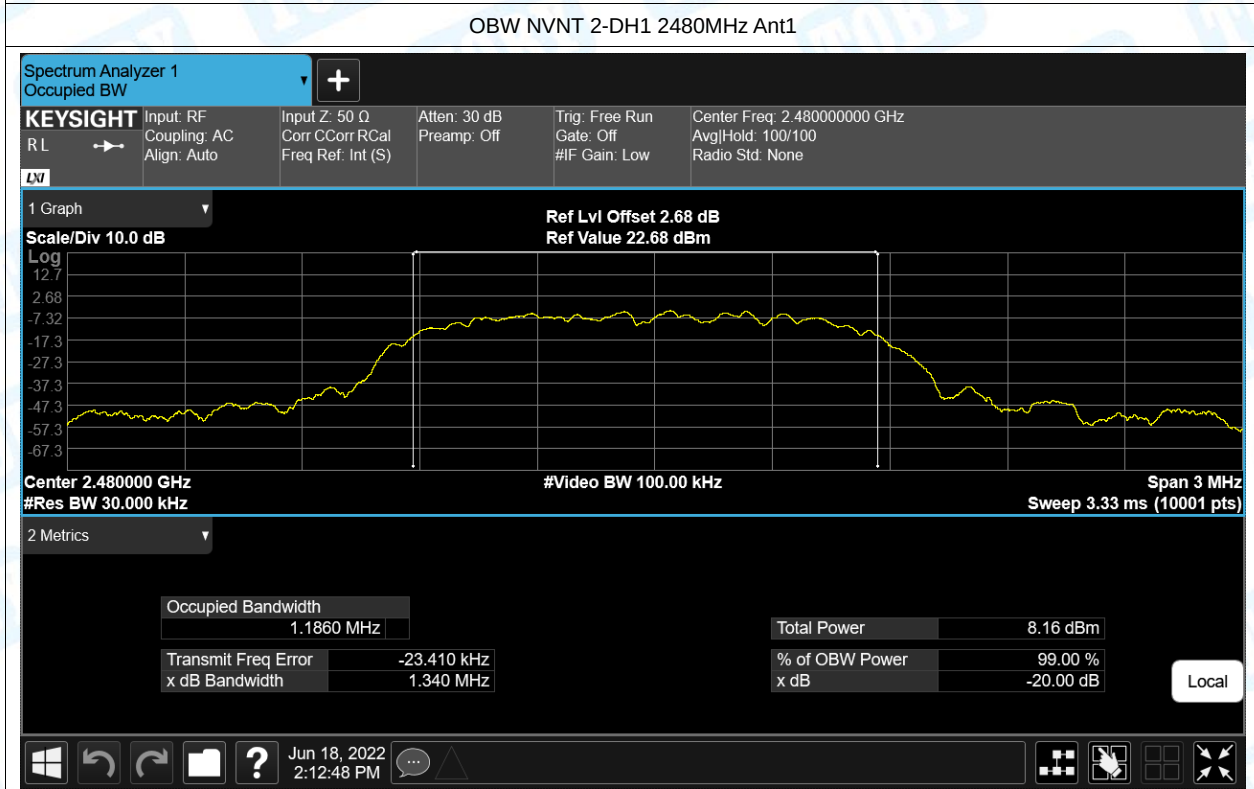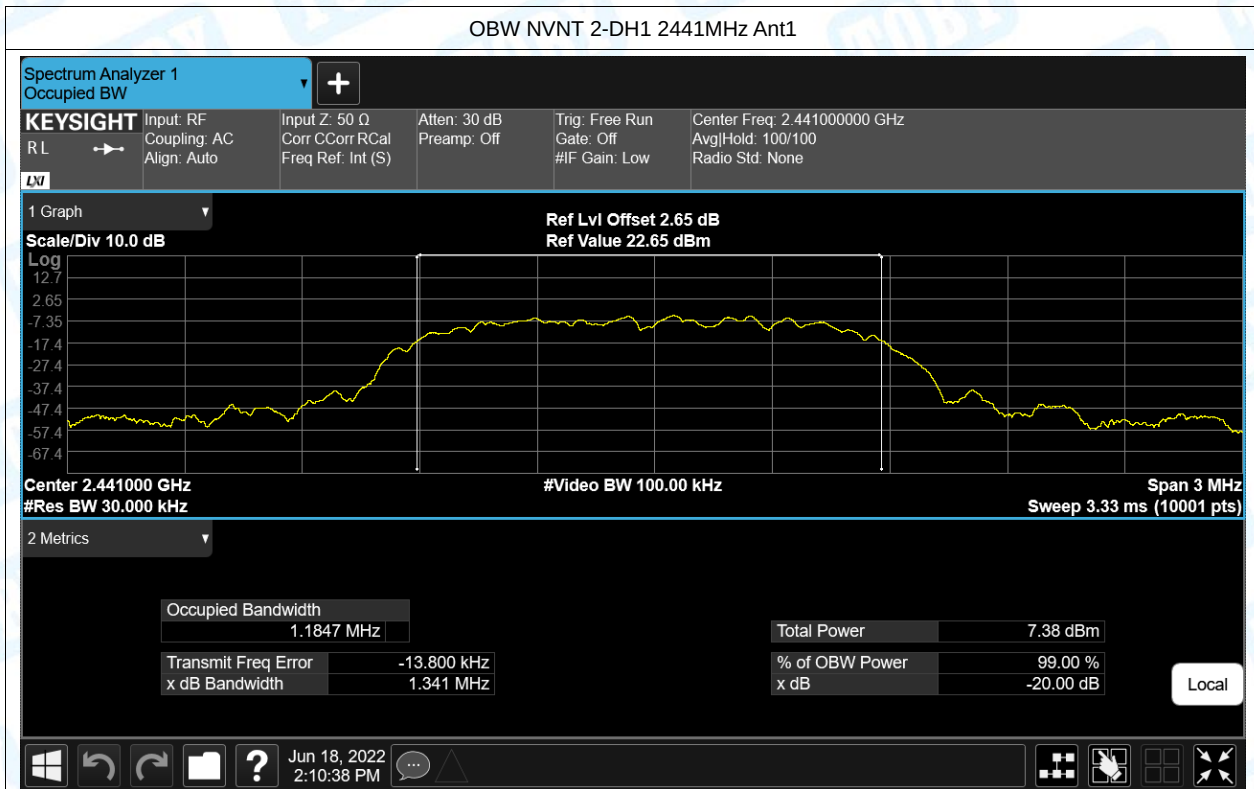


OBW NVNT 3-DH1 2402MHz Ant1




OBW NVNT 3-DH1 2441MHz Ant1


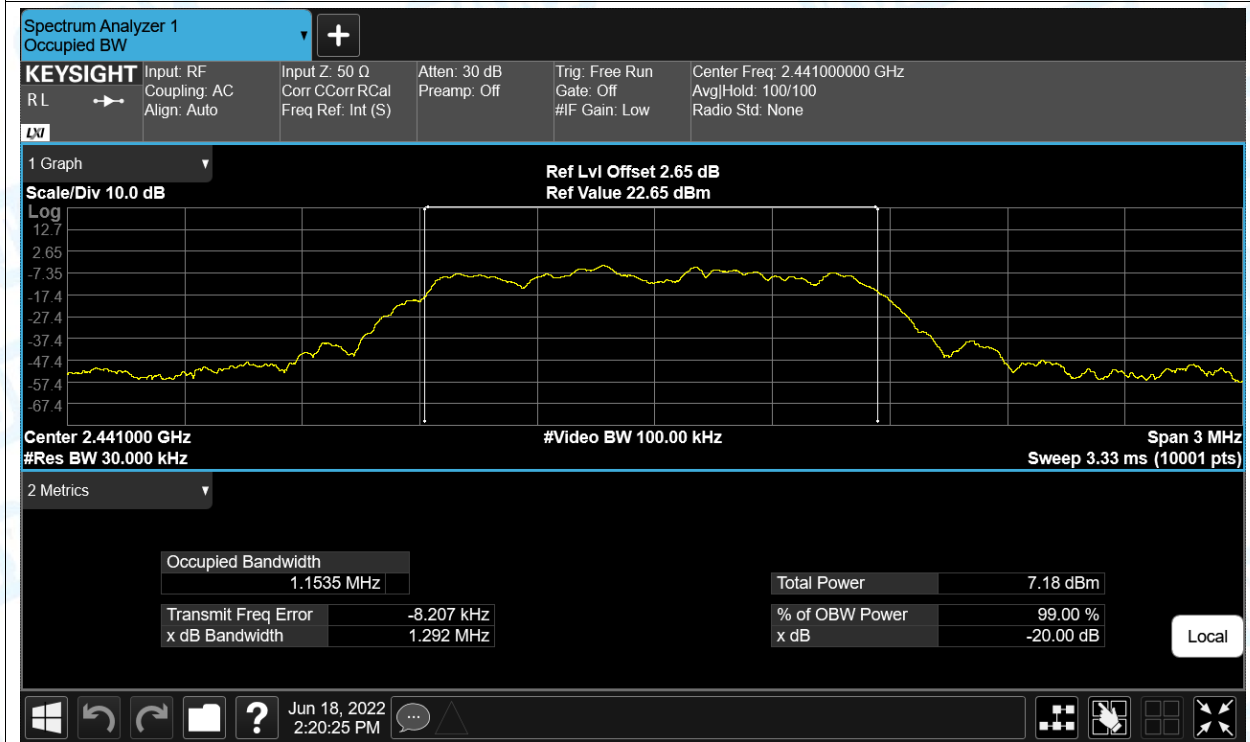



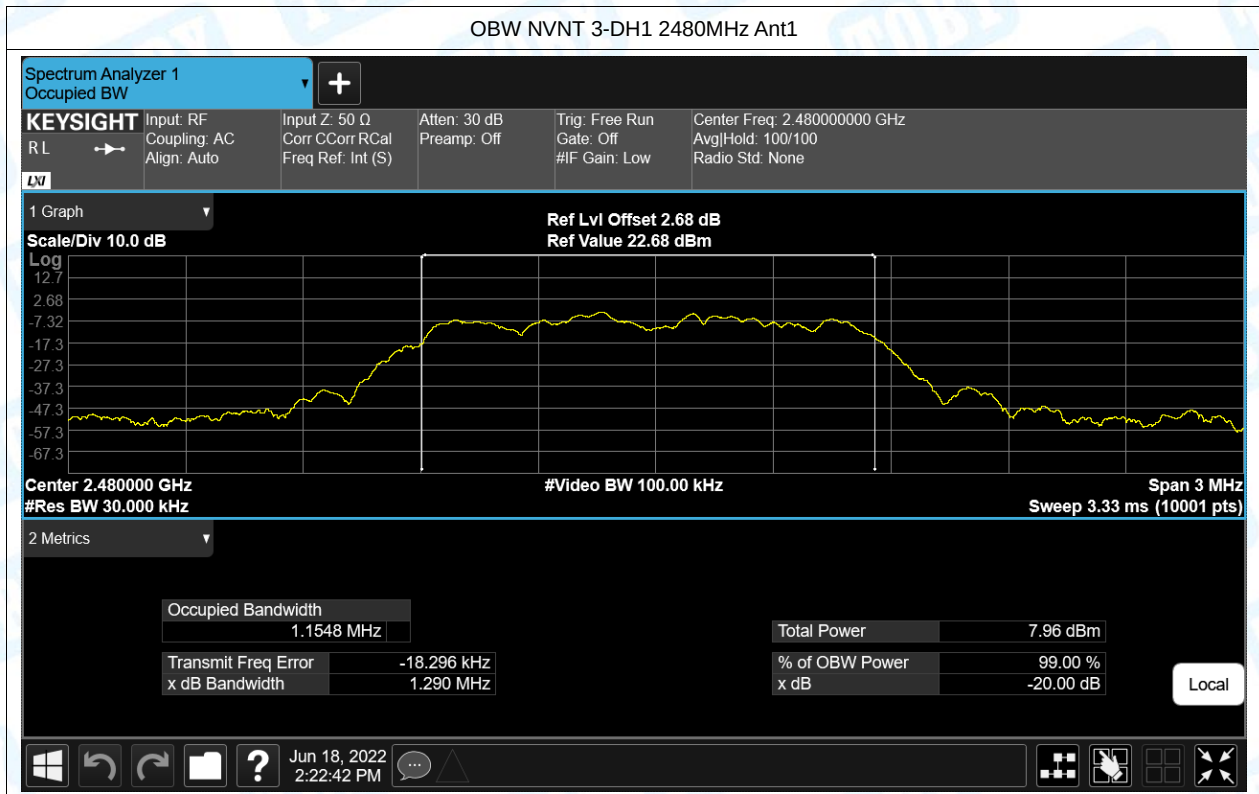




5. Band Edge



Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	No-Hopping	-56.9	-20	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	-58.86	-20	Pass
NVNT	2-DH1	2402	Ant1	No-Hopping	-54.31	-20	Pass
NVNT	2-DH1	2480	Ant1	No-Hopping	-55.98	-20	Pass
NVNT	3-DH1	2402	Ant1	No-Hopping	-54.48	-20	Pass
NVNT	3-DH1	2480	Ant1	No-Hopping	-56.58	-20	Pass


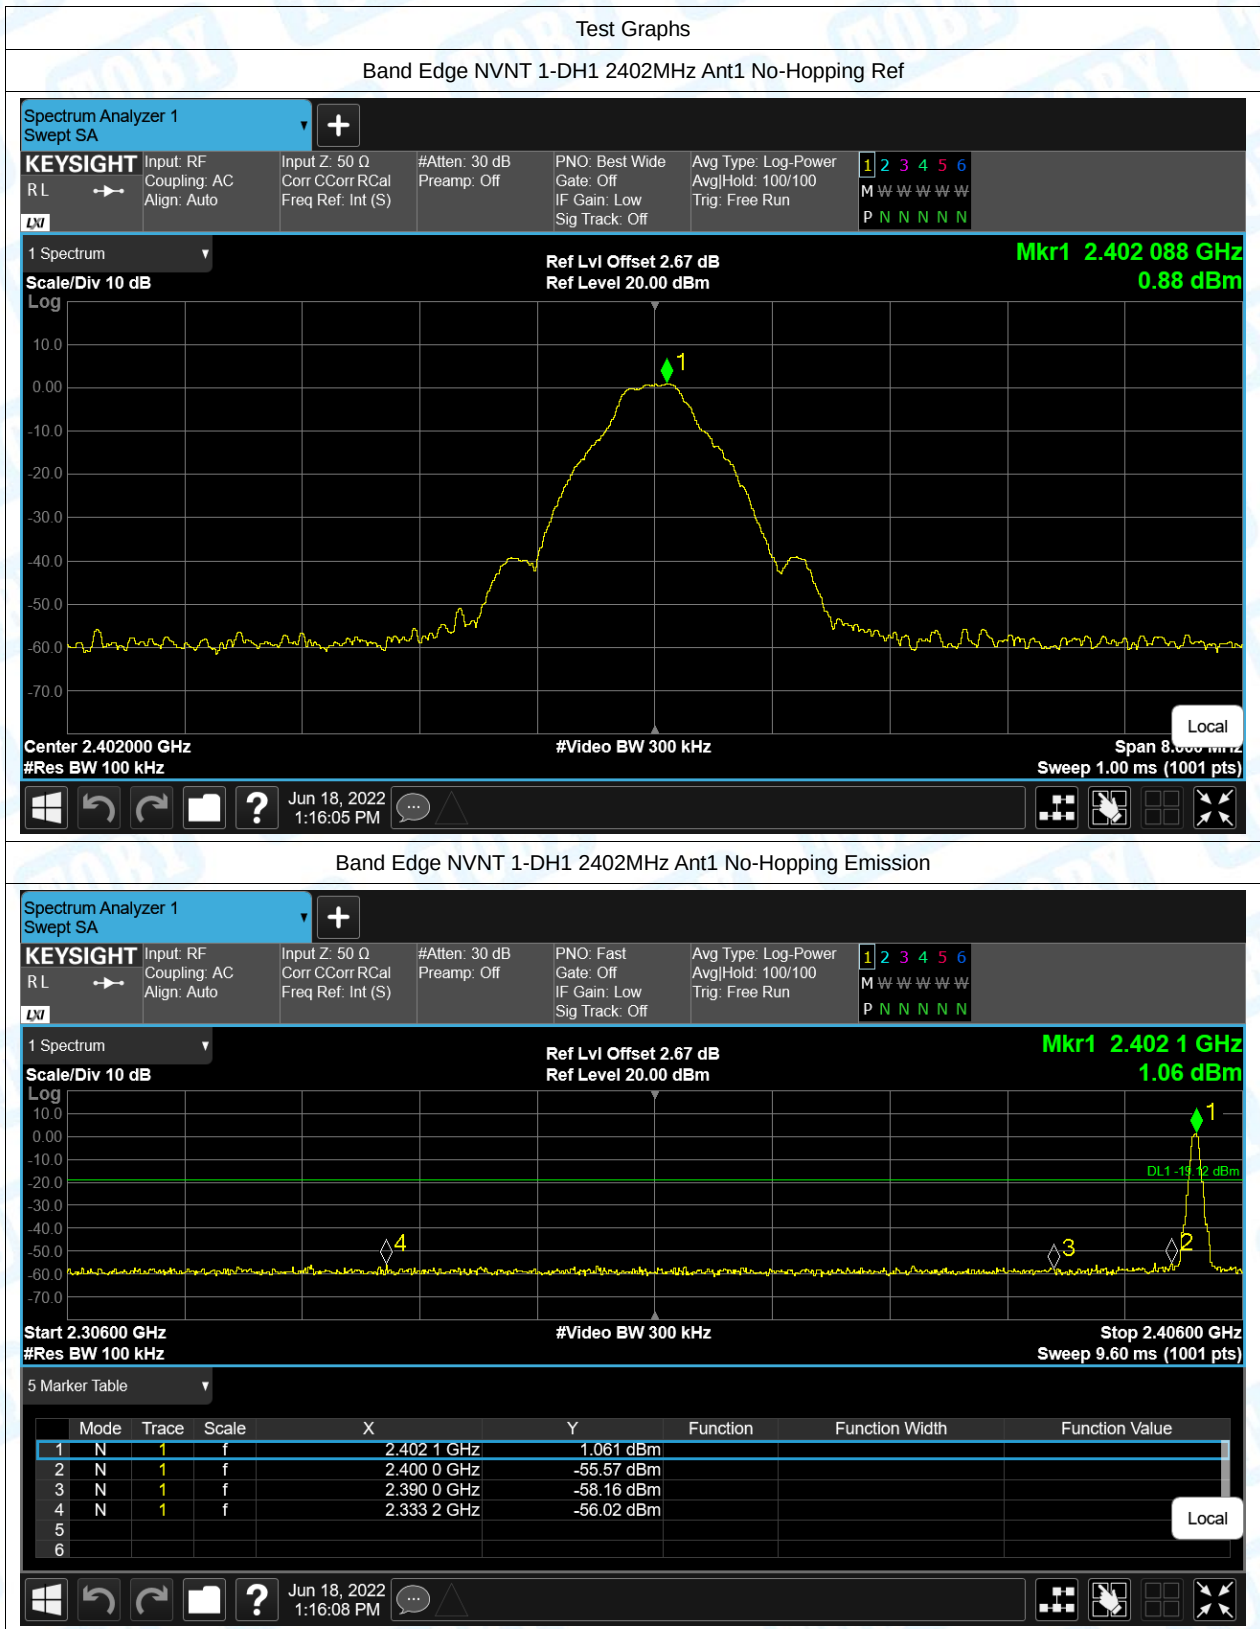


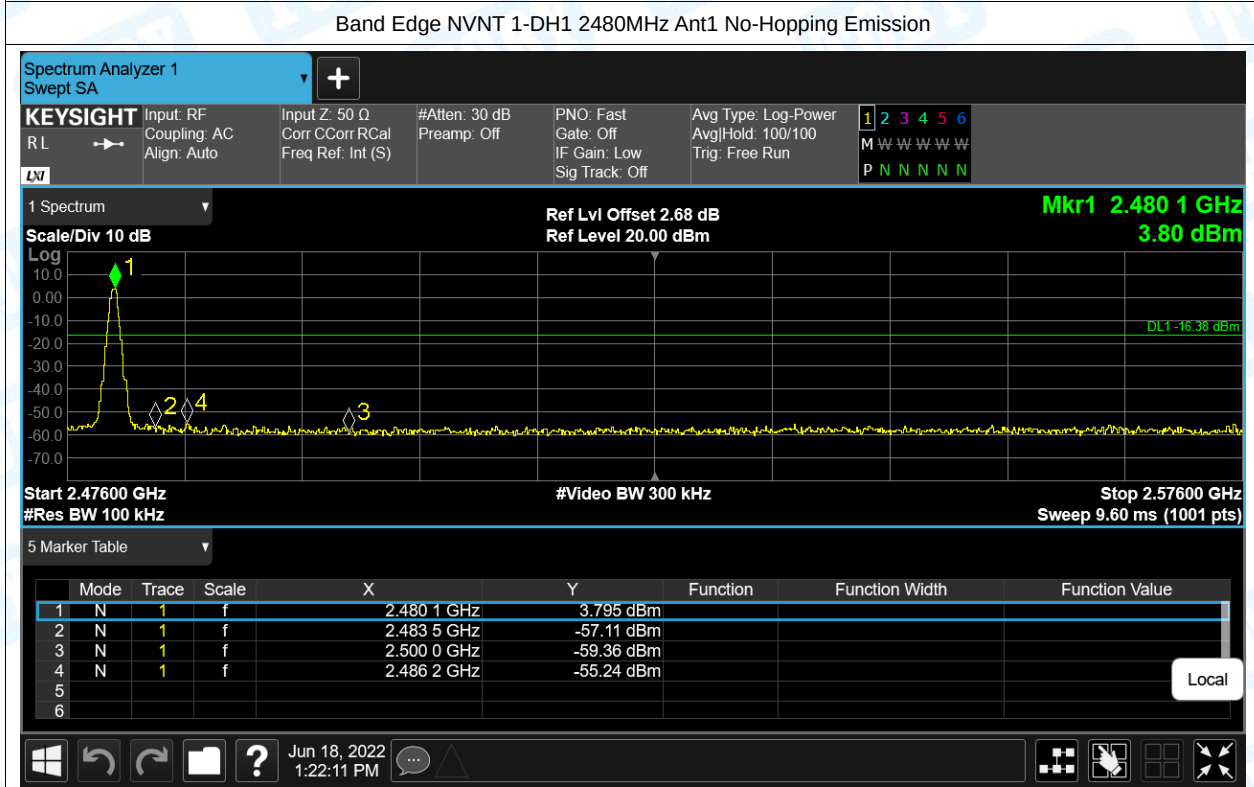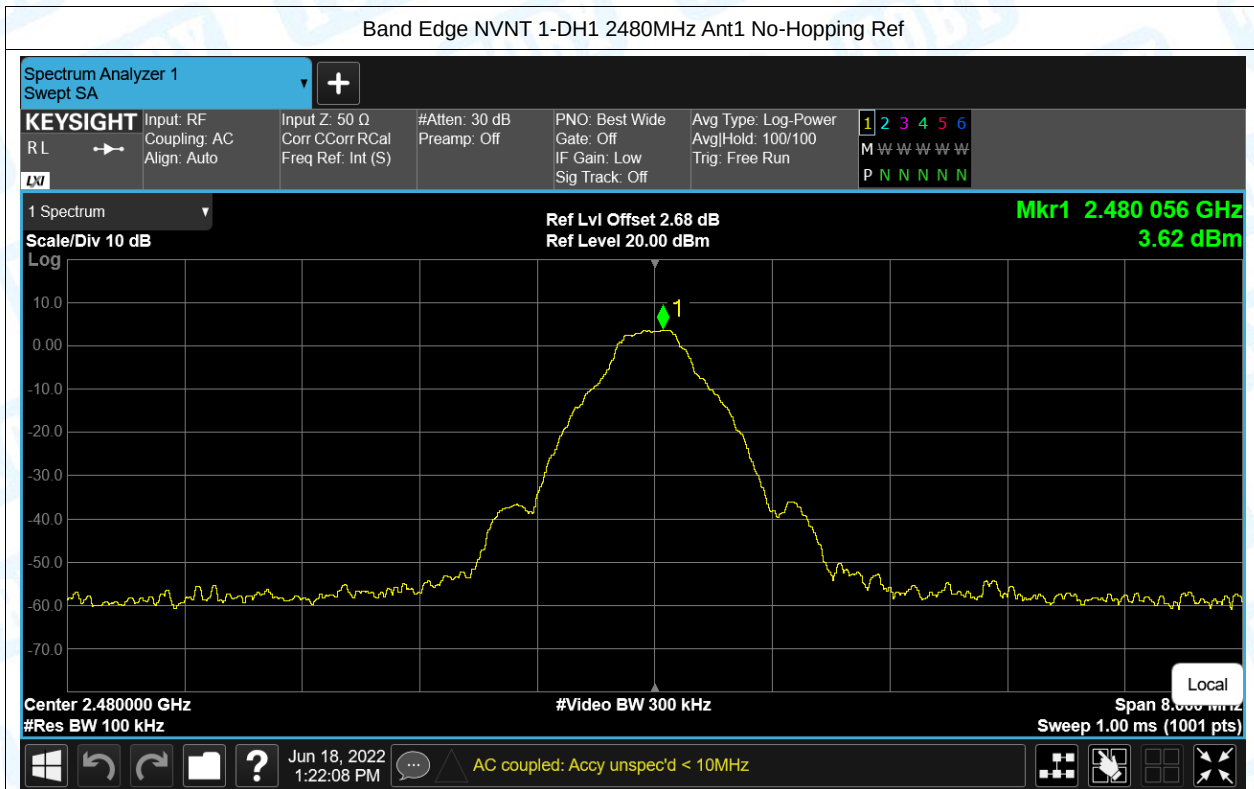

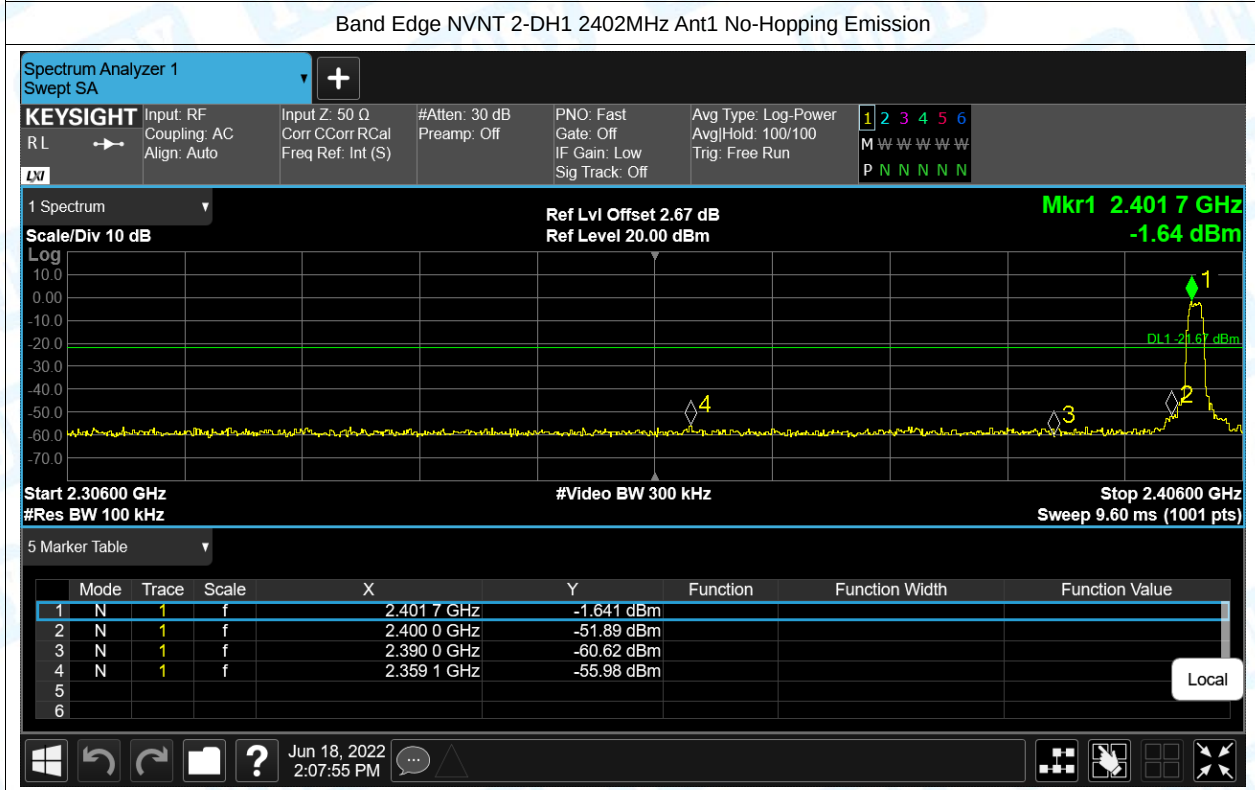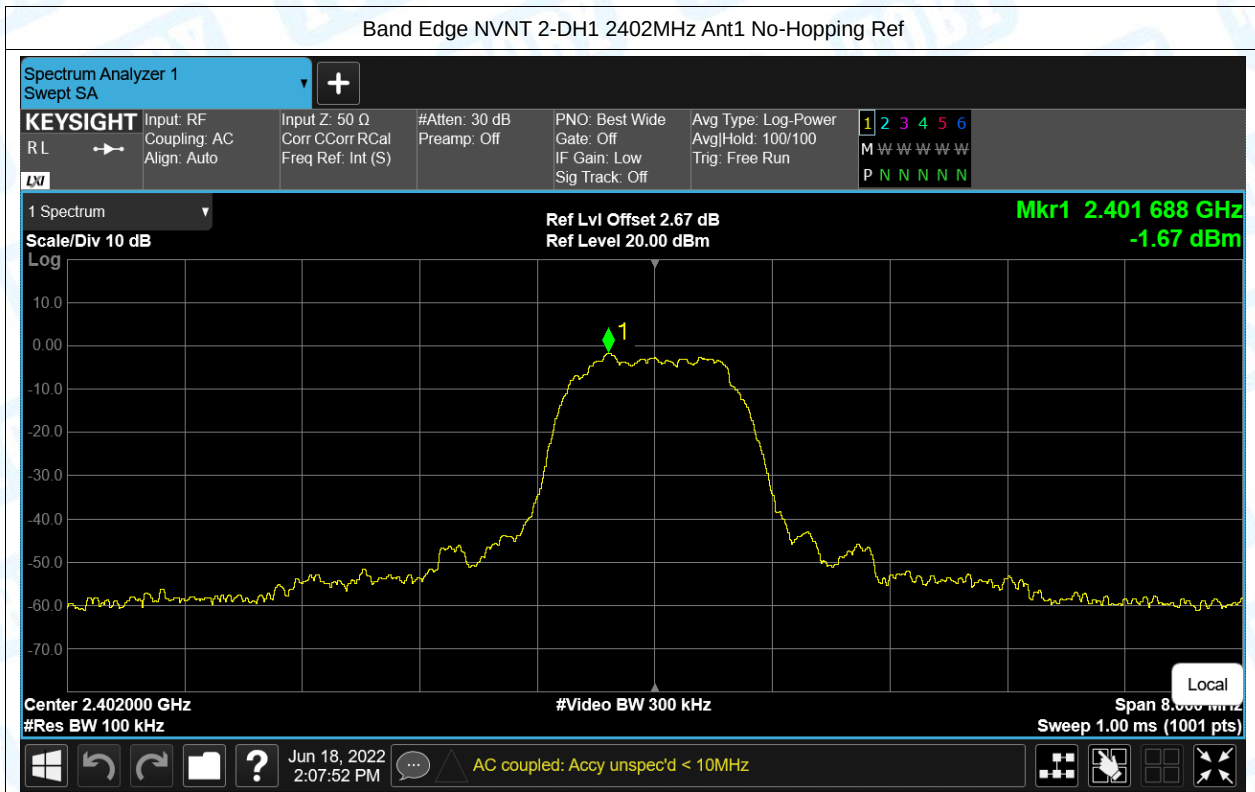

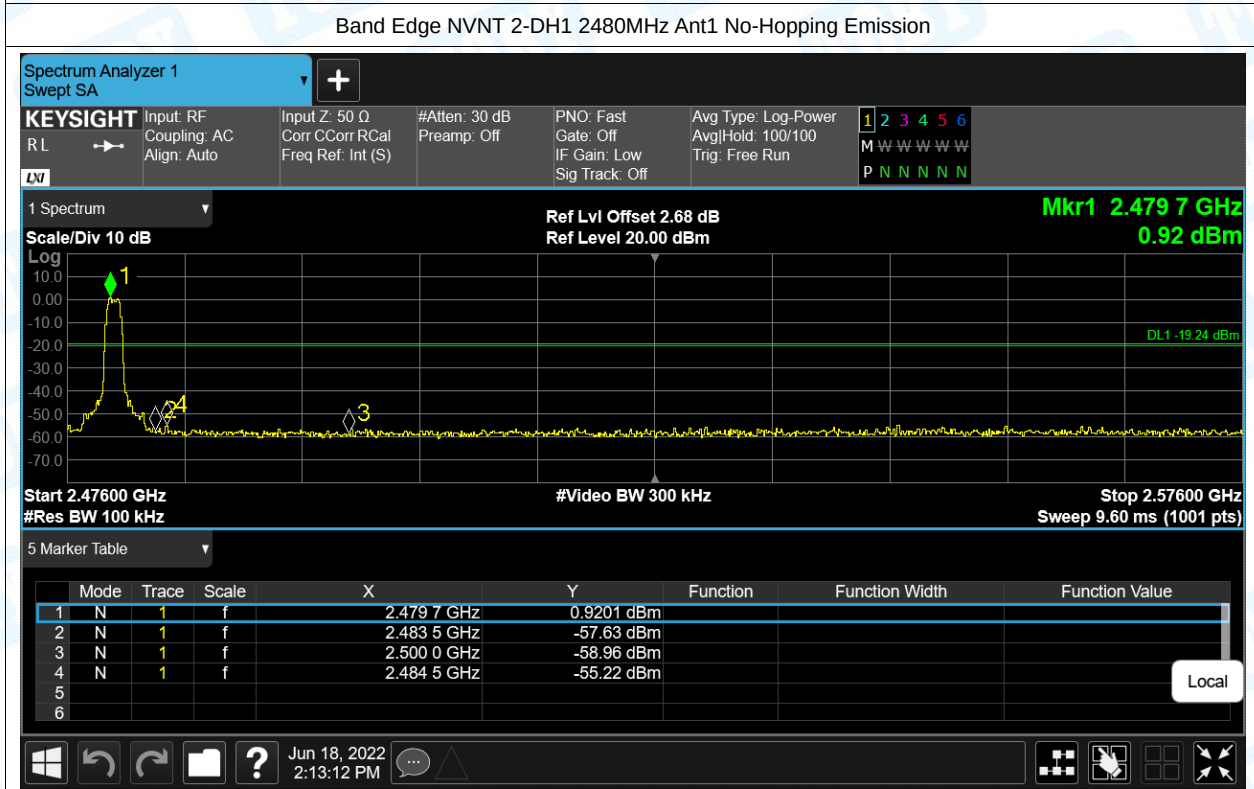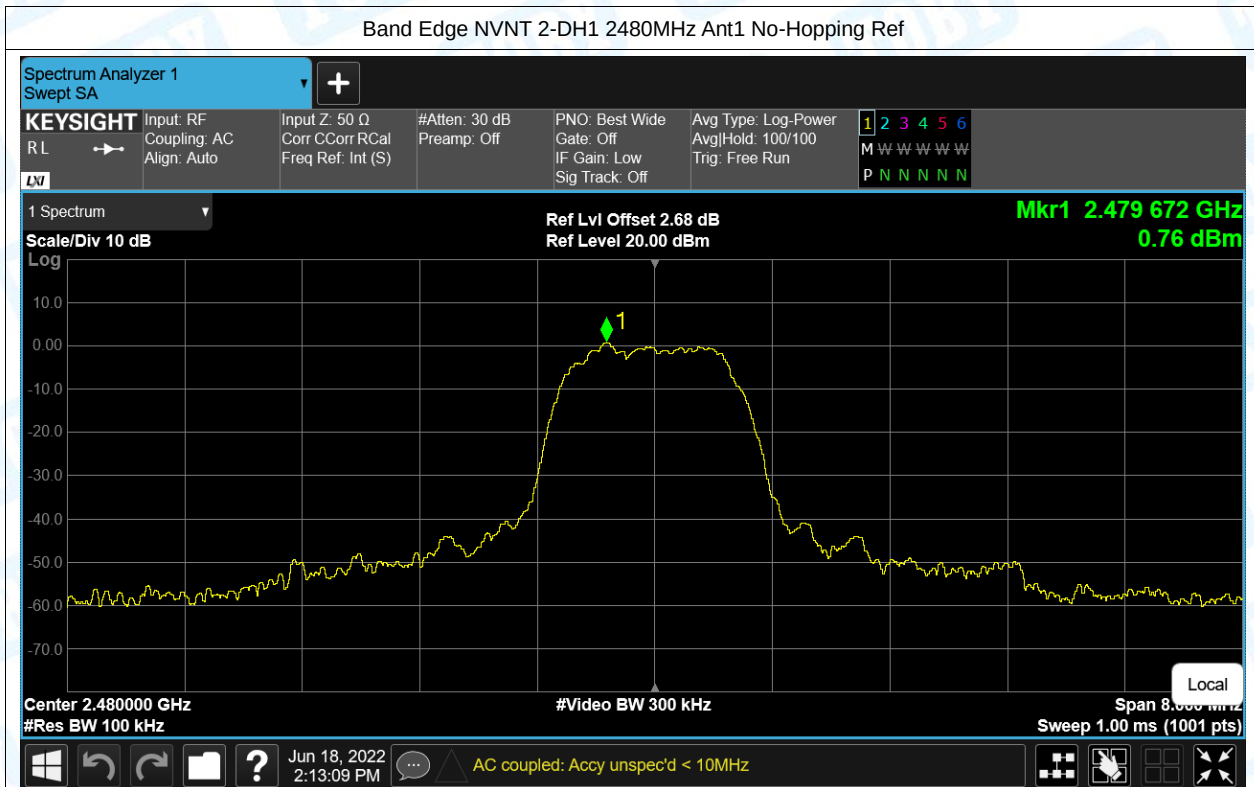

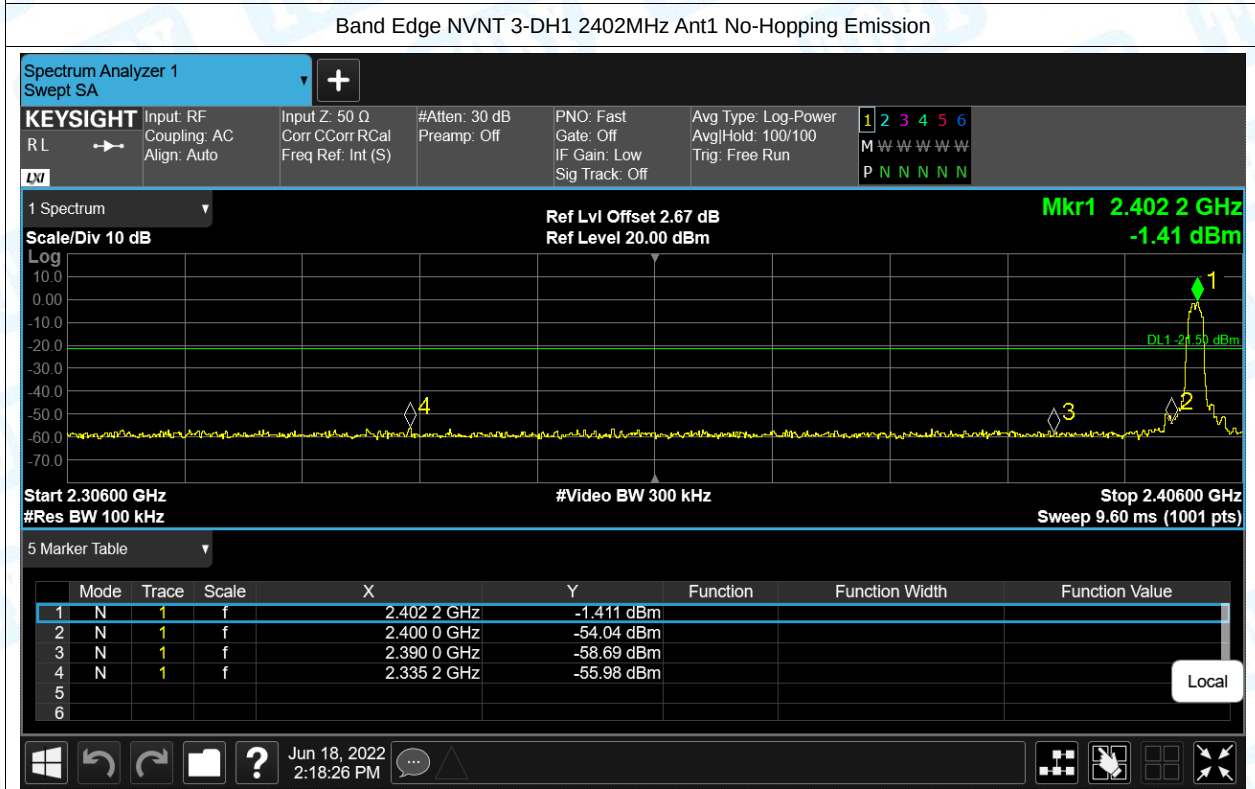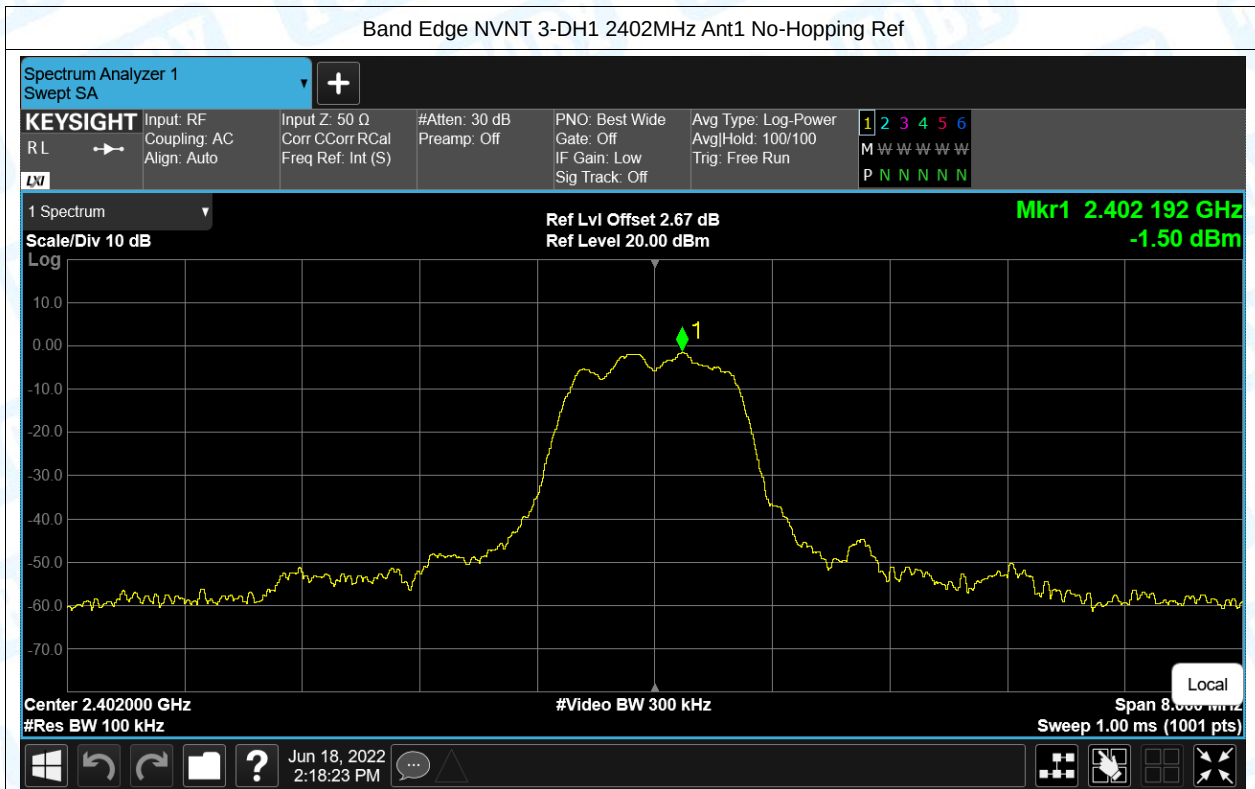

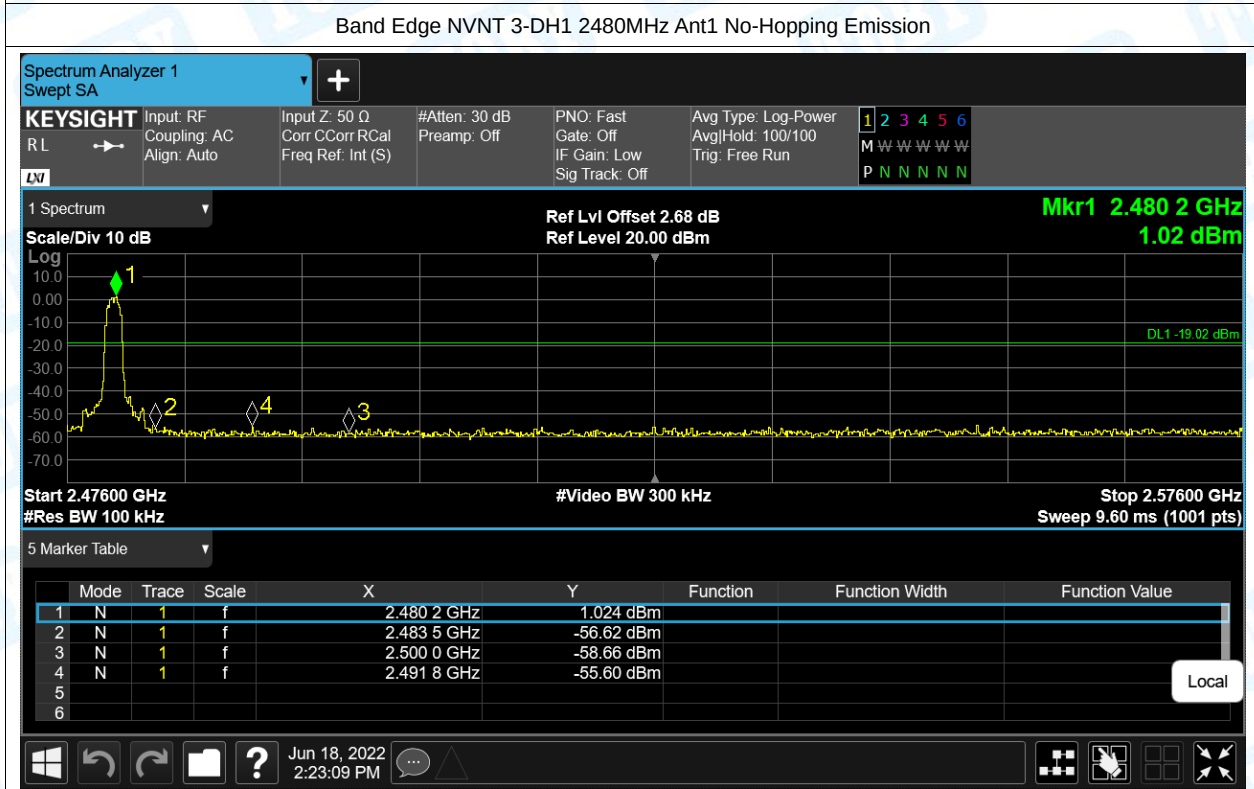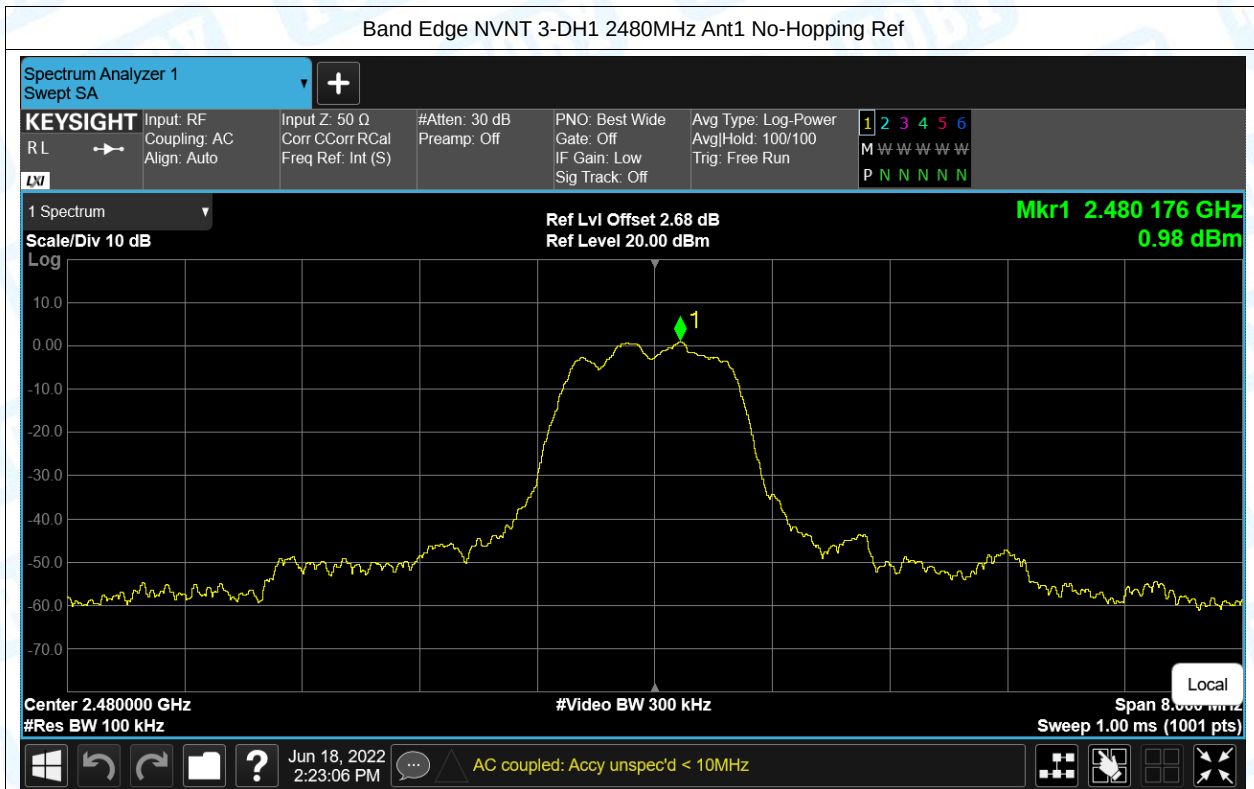

6. Band Edge(Hopping)

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	Hopping	-56.44	-20	Pass
NVNT	1-DH1	2480	Ant1	Hopping	-55.21	-20	Pass
NVNT	2-DH1	2402	Ant1	Hopping	-55.77	-20	Pass
NVNT	2-DH1	2480	Ant1	Hopping	-59.24	-20	Pass
NVNT	3-DH1	2402	Ant1	Hopping	-56.97	-20	Pass
NVNT	3-DH1	2480	Ant1	Hopping	-58.9	-20	Pass

