

ANTENNA INFORMATION

OEM	DELL
ODM	Compal Electronics Inc.
Platform model name	P146F
Intel platform (ex: Yes, No or NA)	No
Platform type (ex: regular NB, convertible PC, AIO...etc)	Regular NB
SAR minimum separation (mm)	FCC (1g) 2.71mm (w/bumper) 0.8mm (w/o bumper)
	ISED (1g) 2.71mm (w/bumper) 0.8mm (w/o bumper)
	ISED (10g) 2.71mm (w/bumper) 0.8mm (w/o bumper)

Antenna manufacturer	Company name	SPEED
	Address	25F., No. 95, Xipu 6th St., Taoyuan Dist., Taoyuan City 33044
location	Company name	Sporton International INC.
	Address	No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333
	Name(Full name)	Shun-Hao HU
Test Personnel	E-mail	shun_hao@speed-hz.com
	Tel/Mobile	+886-3-3253360 ext 243
Testing date		2025.12.9

Antenna Part number	Main	F-0G-FH-6201-001-00 (DC330031Z0L)
	Aux	F-0G-FH-6201-001-00 (DC330031Z0L)
Antenna type (ex: PIFA, Dipole...etc)		Monopole

Antenna Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	1.60	1.80	1.61	2.97	2.96	2.60	3.13	2.46	1.65	1.37
Aux	1.93	1.59	1.17	2.65	2.68	1.60	3.10	1.75	2.70	1.51

Cable Assembly Part Number and Information					
	Cable PN	Cable length(mm)	Cable diameter(mm)	Impedance(ohm)	Connector type
Main	SY113L/50-143	28	1.13	50	I-PEX MHF-4L
Aux	SY113L/50-118	22	1.13	50	I-PEX MHF-4L

* 3D Antenna Peak Gain required being test in system basis.

Cable loss (dB)										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	-0.18	-0.3	-0.3	-0.3	-0.34	-0.34	-0.34	-0.34	-0.39	-0.39
Aux	-0.59	-0.97	-0.97	-0.97	-1.08	-1.08	-1.08	-1.08	-1.24	-1.24

Table of Contents

Cover page..... 1

1. Intel Reference Gain and Type..... 3

2. Document Revision History..... 3

3. Test & System Description

 3.1 Measurement Method and System..... 4

 3.2 Test setup..... 4

 3.3 Equipment list..... 5

4. Radiation characteristics of antenna loaded in Host Platform..... 6

Annex A. Photographs

 A.1 Setup Photo..... 16

 A.2 Test sample..... 17

Annex B. Antenna Location

 B.1 Antenna Host Platform Location Information.....19

 B.2 Antenna dimensional information for SAR evaluation..... 20

1. Intel Reference Gain and Type

Antenna Peak gain w/ cable loss (dBi)											
Band/Frequency		2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Design	EU/UK	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00
PIFA	For WiFi 6E and earlier	3.24	3.64	3.73	4.77	4.97	4.72	4.83	4.30	5.37	5.59
	From WiFi 7	2.95	5.11	4.55	5.15	5.13	4.45	5.02	5.02	4.96	4.96
Dipole	For WiFi 6E and earlier	2.89	2.92	3.19	4.41	4.22	4.22	4.83	4.30	4.49	5.34
	From WiFi 7	2.95	4.03	4.11	5.15	5.13	4.45	5.02	4.71	4.49	4.96
Monopole	From WiFi 7	2.83	4.57	4.44	4.95	4.95	4.43	4.87	4.91	4.91	4.79

3D Peak Antenna gain should be equal or greater than -2 dBi

If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.

2. Document Revision History

Revision #	Revision Details	Issued Date
Rev. 00	First Issue	

3. Test & System Description

3.1 Measurement Method and System

ETS-Lindgren AMS-8500 system is 3D fully anechoic chamber, it is applied to the "Conical Cut test method", the detail description is described as below.

The Conical Cut method requires the ability of the Measurement Antenna to be physically rotated in the theta plane (overhead) of the EUT for implementations using a single Measurement Antenna. Typically, the EUT will remain affixed to a turntable during the entire measurement process. The Measurement Antenna will be positioned at a starting theta angle. The EUT will then be rotated around the full 360 degrees of phi rotation. The Measurement Antenna will then be positioned at the next theta angle, and the process repeated.


3.2 Test setup

<insert test diagram here for test site utilized>

Chamber Coordinate

- Both Theta- and Phi-axis rotate clockwise.
- From center of Quiet Zone
 - To 90-degree Phi $\rightarrow$ X axis
 - To ceiling $\rightarrow$ Y axis
 - To 3164 measurement antenna $\rightarrow$ Z axis

Theta Polarization $\rightarrow$ Horizontal
Phi Polarization $\rightarrow$ Vertical

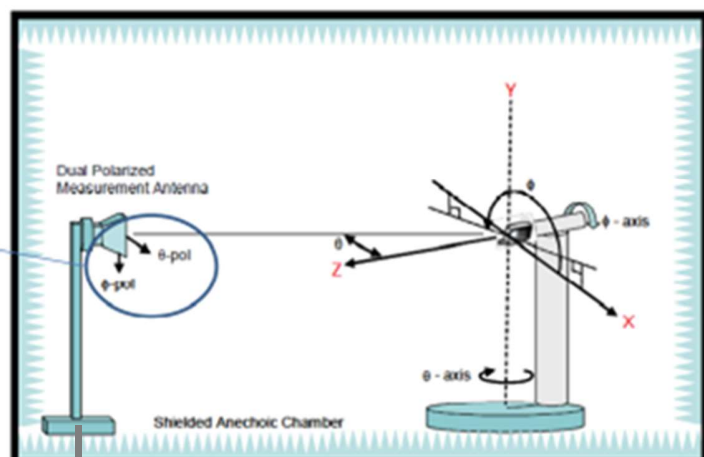

AMS-8500 Basics

3.3 Equipment list

<insert test diagram here for test site utilized>


OTA03-HY					
Name	Manufacturer	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
ENA Series vector network analyzer	Keysight	E5080B	MY59500745	2025/5/20	2026/5/19
RF Switch	ETS	EMCENTER™	N/A	NCR	NCR
Multi-Axis Positioner Controller	ETS-Lindgren	2090	N/A	N/A	N/A
Medium-Duty Positioner	ETS-Lindgren	2015	N/A	N/A	N/A
Measurement Horn Antenna	EMCO	3164-08	00086722	NCR	NCR
Anechoic Chamber	ETS-Lindgren	AMS-8500	N/A	2025/9/19	2026/9/18

4. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	1.60

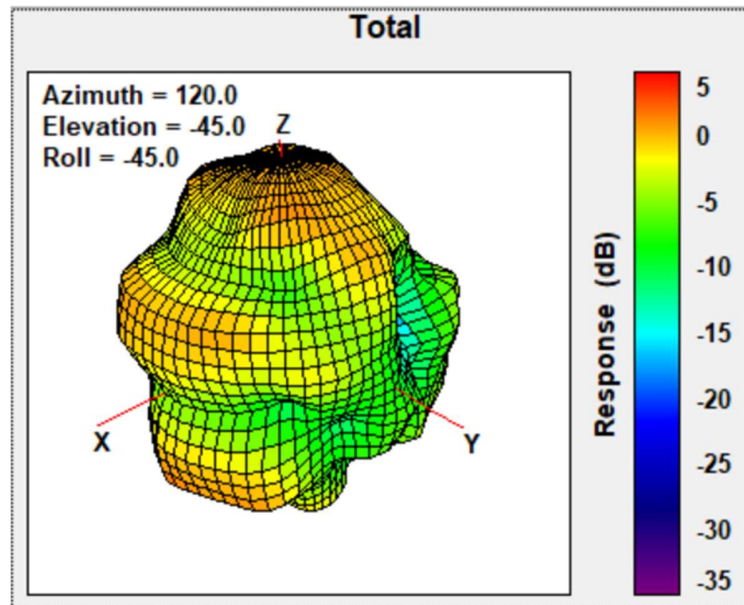


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	1.8

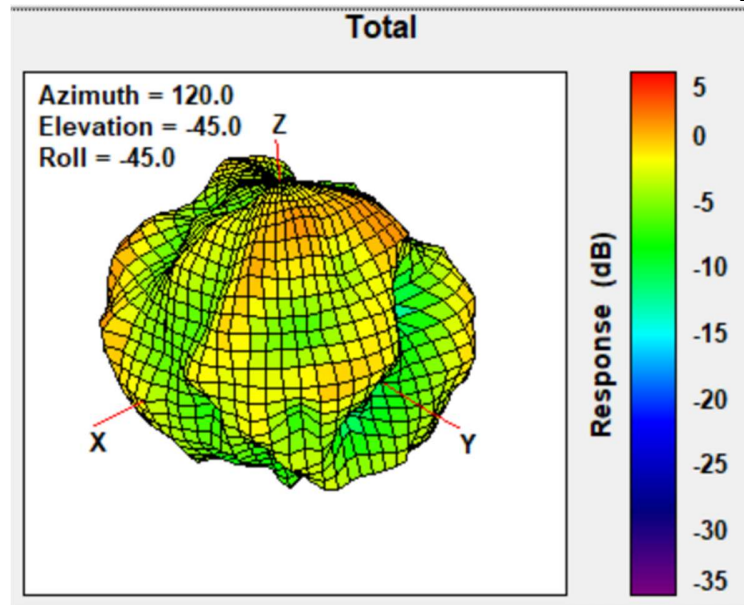


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	1.61

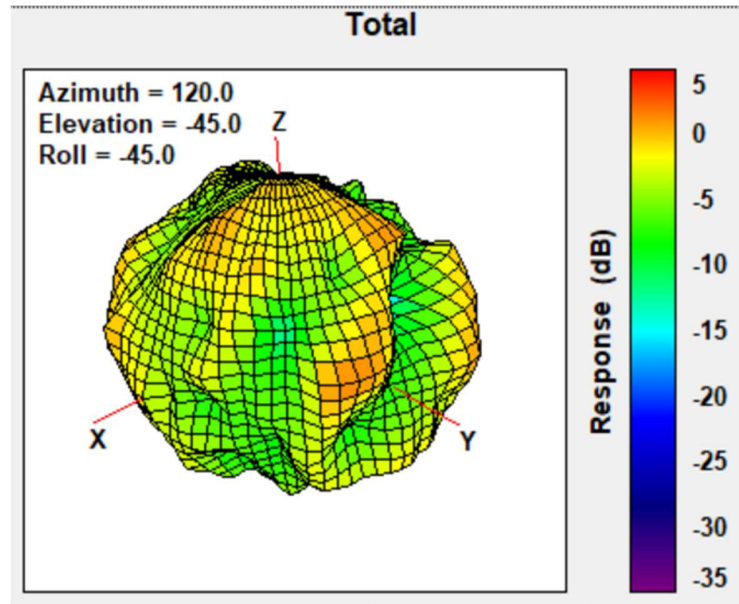


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	2.97

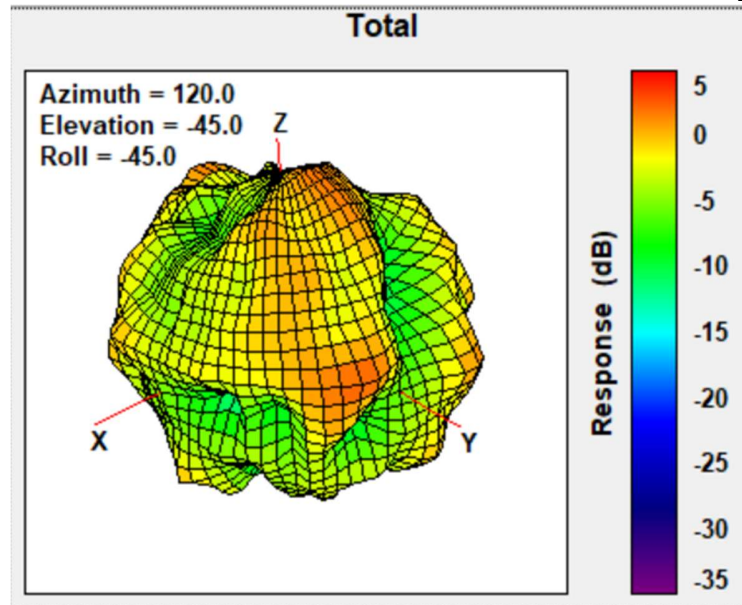


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	2.96

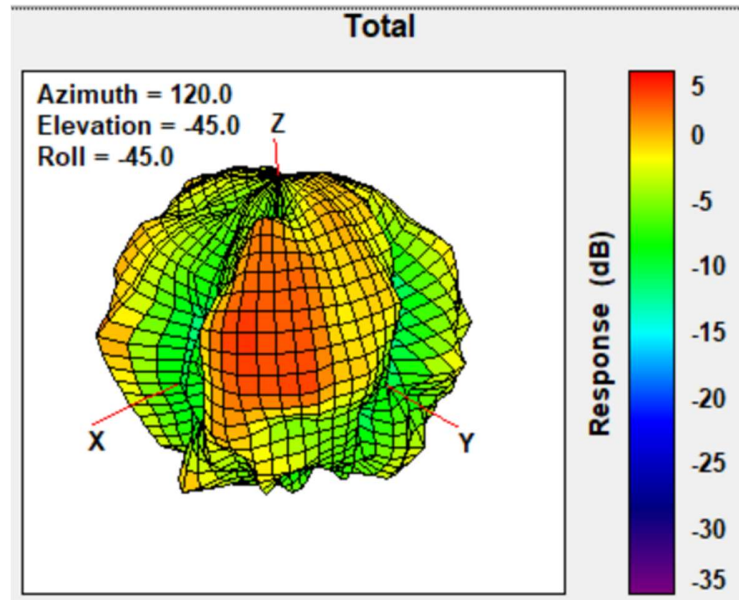


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	2.60

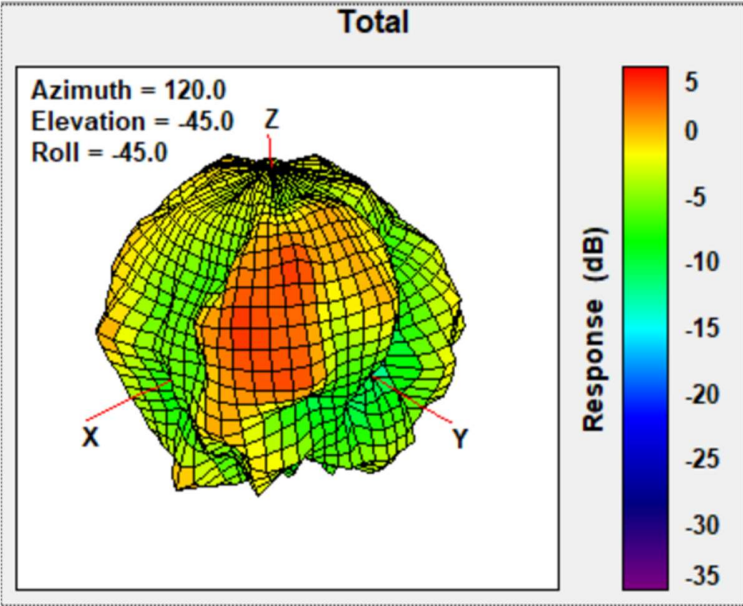


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	3.13

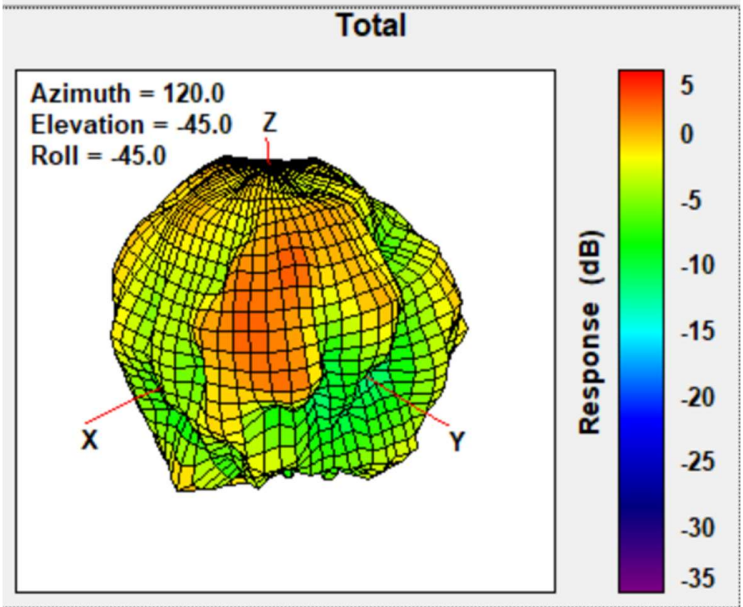


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	2.46

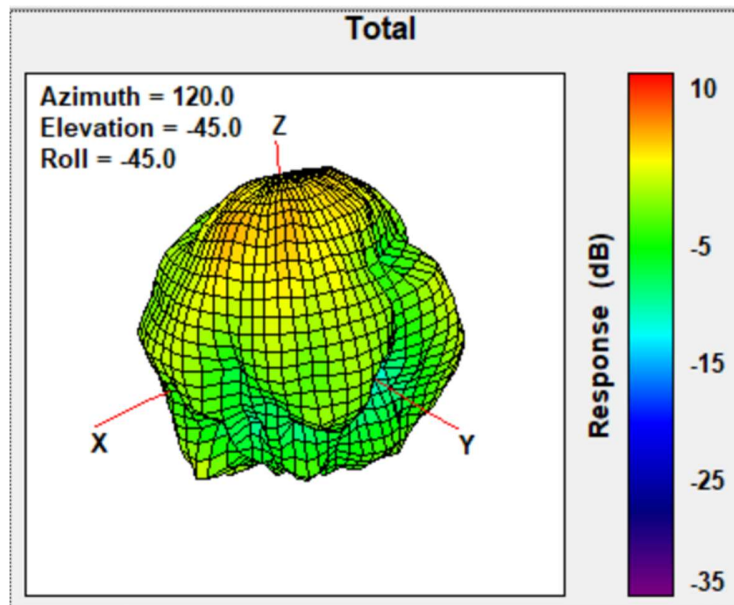


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	1.65

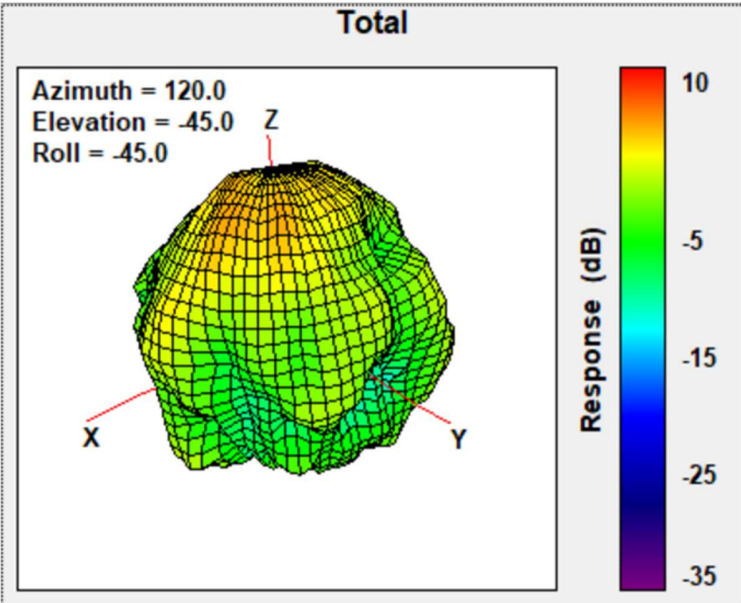

Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	1.37

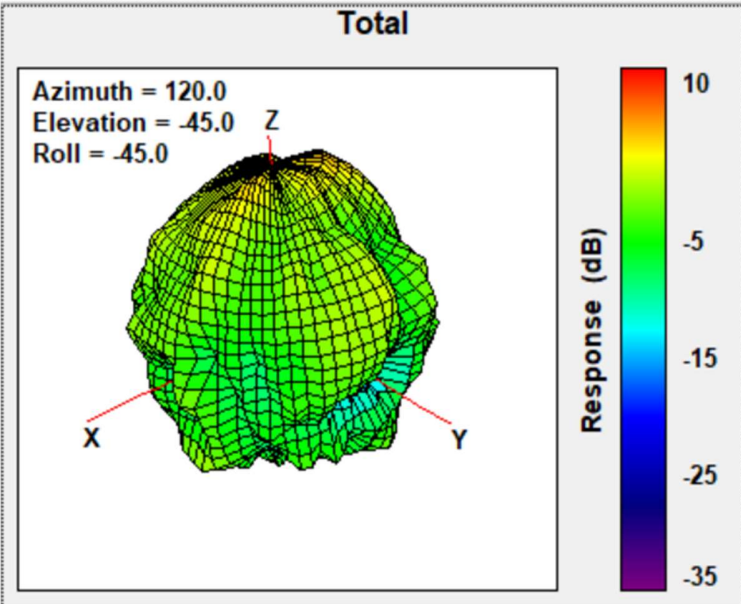

Auxiliary Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	1.93

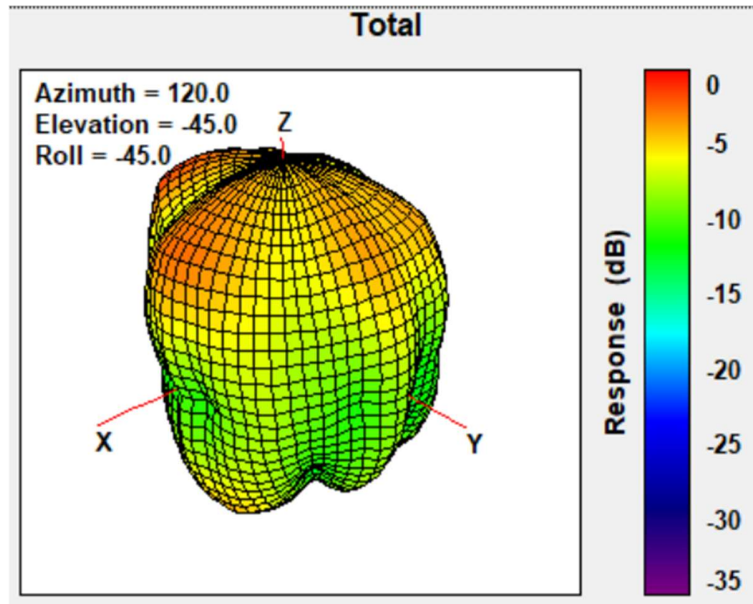


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	1.59

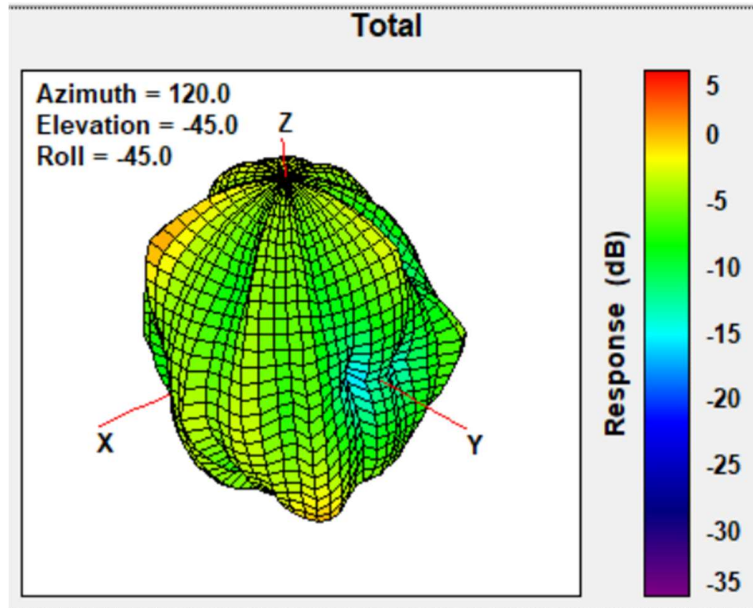


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	1.17

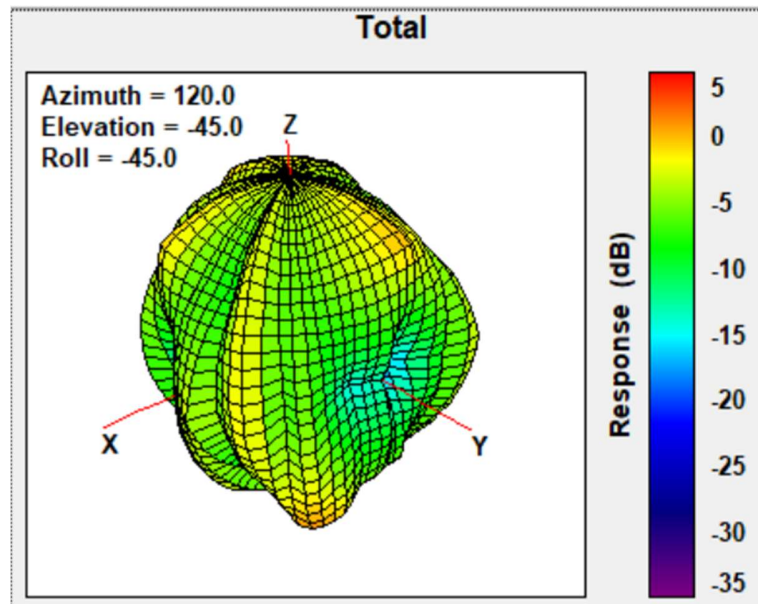


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	2.65

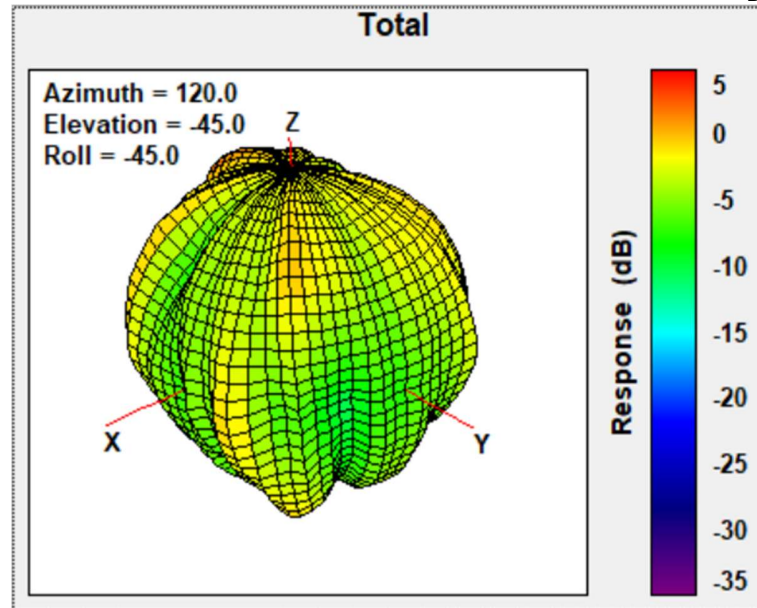


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	2.68

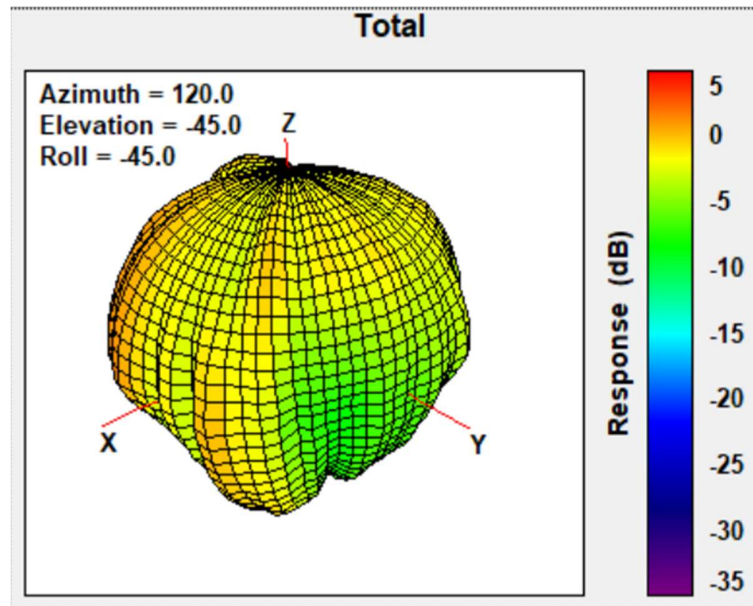


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	1.60

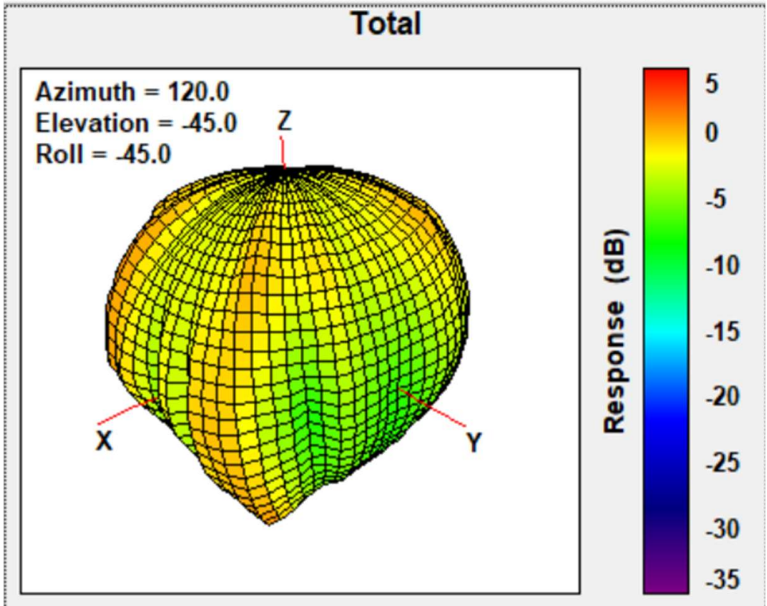


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	3.10

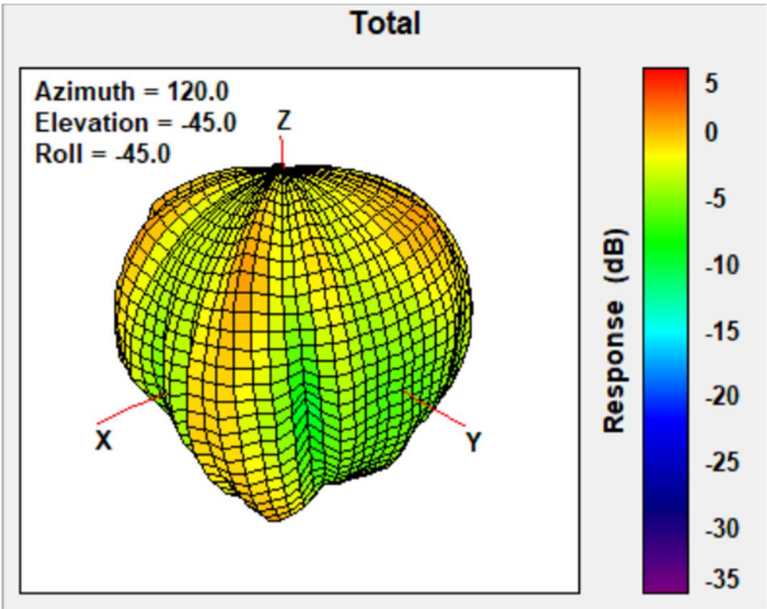


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	1.75

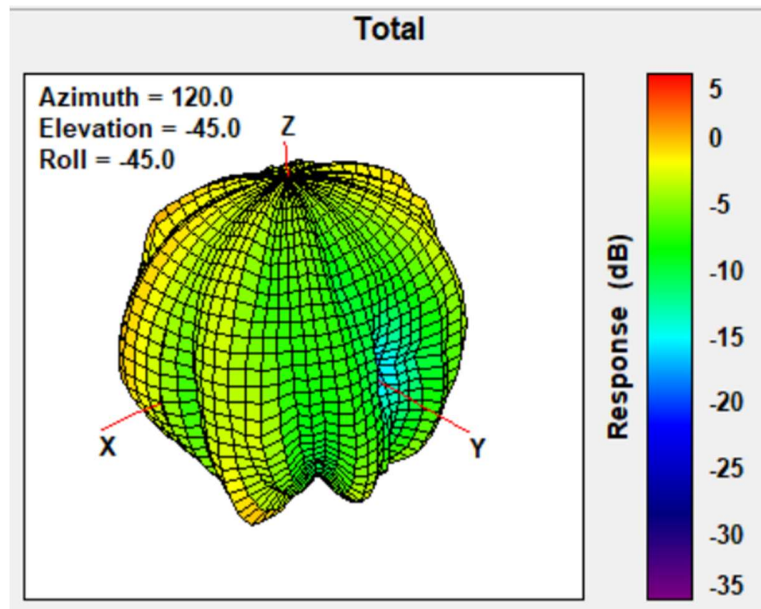


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	2.70

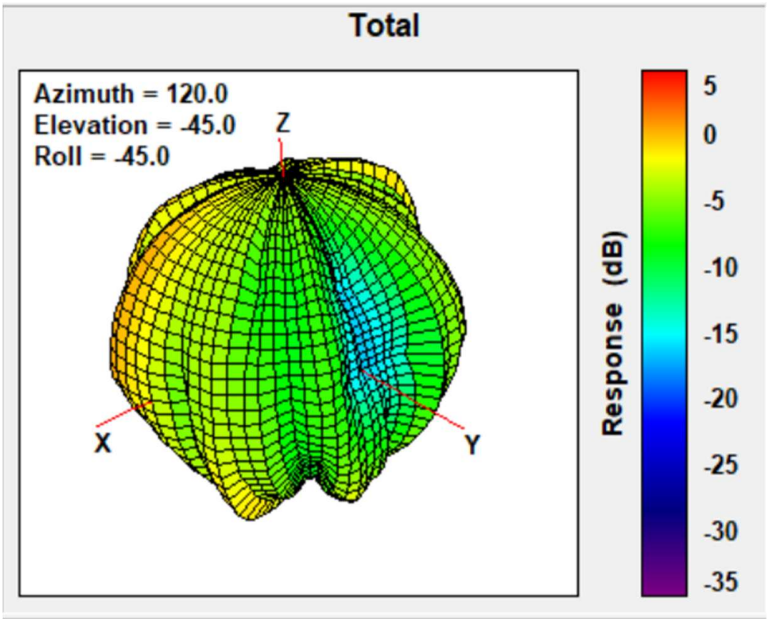

Max Antenna 3D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	1.51

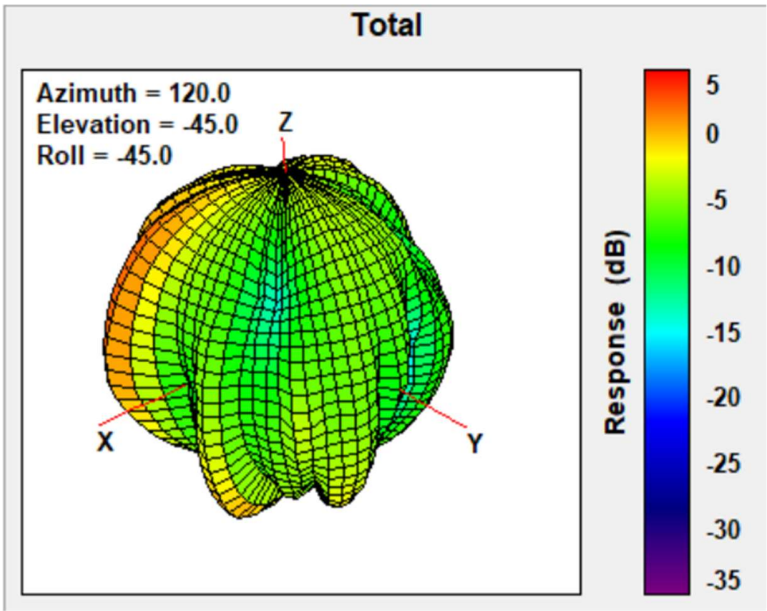


Annex B. Antenna Location

B.1 Antenna Host Platform Location Information

Include a dimensioned photo(s) or dimensioned drawing(s) of Main and Aux antenna placements (measurements are not required for receive-only antenna).

Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

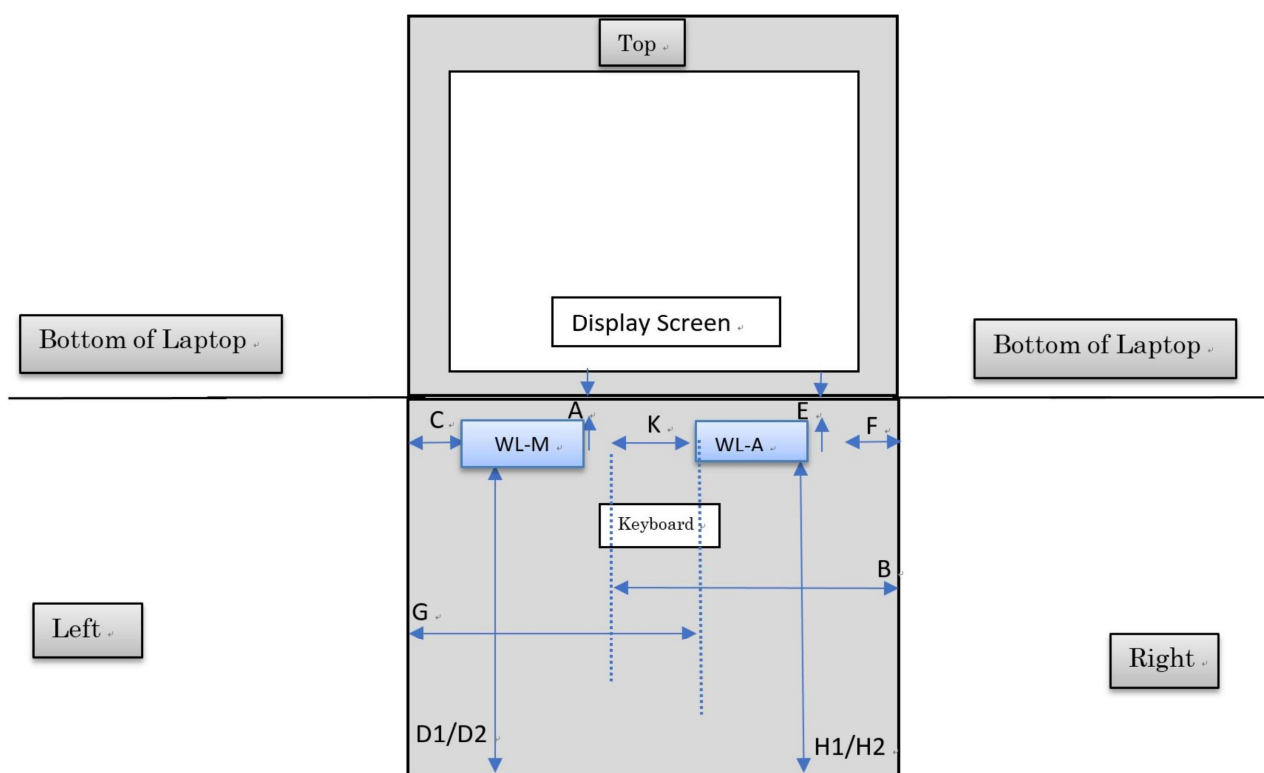

Minimum Separation Distance			
Item	Antenna	Position	Distance (mm)
A	WLAN- Aux	to Top	1.1mm
B	WLAN- Aux	to Right	231.29mm
C	WLAN- Aux	to Left	37.1mm
D-1	WLAN- Aux	to Bottom of Laptop (Include Bumper)	2.71mm
D-2	WLAN- Aux	to Bottom of Laptop (NOT include Bumper)	0.8mm
E	WLAN-Main	to Top	1.1mm
F	WLAN- Main	to Right	37.1mm
G	WLAN- Main	to Left	231.29mm
H-1	WLAN- Main	to Bottom of Laptop (Include Bumper)	2.71mm
H-1	WLAN- Main	to Bottom of Laptop (NOT include Bumper)	0.8mm
K	WLAN Main	to WLAN Aux	110mm

B.2 Antenna dimensional information for SAR evaluation

Include a dimensioned photo(s) or dimensioned drawing(s) showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

Antennas on the panel section

