

RF Test Data for Bluetooth(BDR+EDR) (Conducted Measurements)


General Description of EUT	
Product Name:	Tablet PC
Test Model:	YQ10S
Sample ID:	202204-0277_03-02-2
Environmental Conditions	
Temperature:	25℃
Relative Humidity:	55%
Test Voltage:	DC 3.8V
Test Engineer:	Huangjianping
Note: For a more detailed features description, please refer to the report TBR-C-202204-0277-15.	



Contents



1.	Duty Cycle	3
2.	Maximum Conducted Output Power	9
3.	-20dB Bandwidth	18
4.	Occupied Channel Bandwidth	24
5.	Band Edge	30
6.	Band Edge(Hopping)	37
7.	Conducted RF Spurious Emission	44
8.	Restrict Band	54
9.	Carrier Frequencies Separation	61
10.	Number of Hopping Channel	64
11.	Dwell Time	67


1. Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH1	2402	Ant1	100	0	0
NVNT	1-DH1	2441	Ant1	100	0	0
NVNT	1-DH1	2480	Ant1	100	0	0
NVNT	2-DH1	2402	Ant1	100	0	0
NVNT	2-DH1	2441	Ant1	100	0	0
NVNT	2-DH1	2480	Ant1	100	0	0
NVNT	3-DH1	2402	Ant1	100	0	0
NVNT	3-DH1	2441	Ant1	100	0	0
NVNT	3-DH1	2480	Ant1	100	0	0

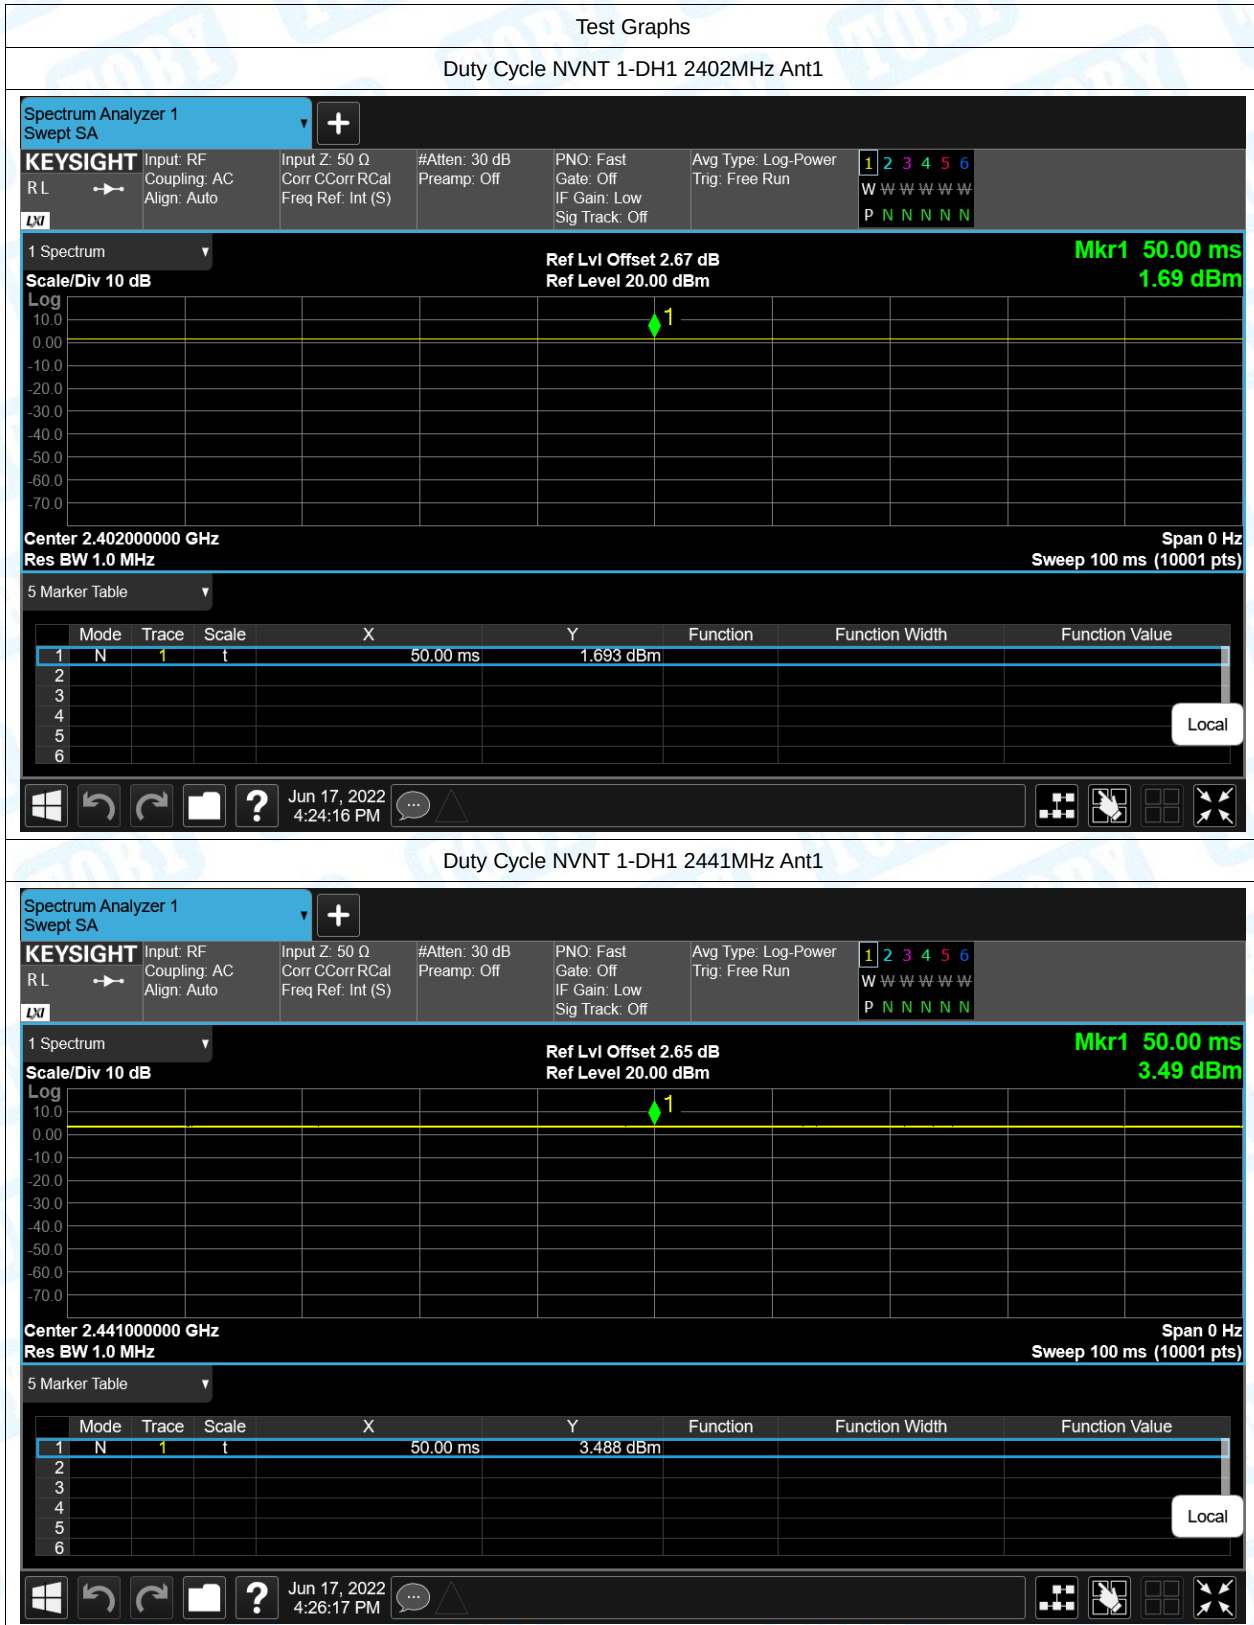

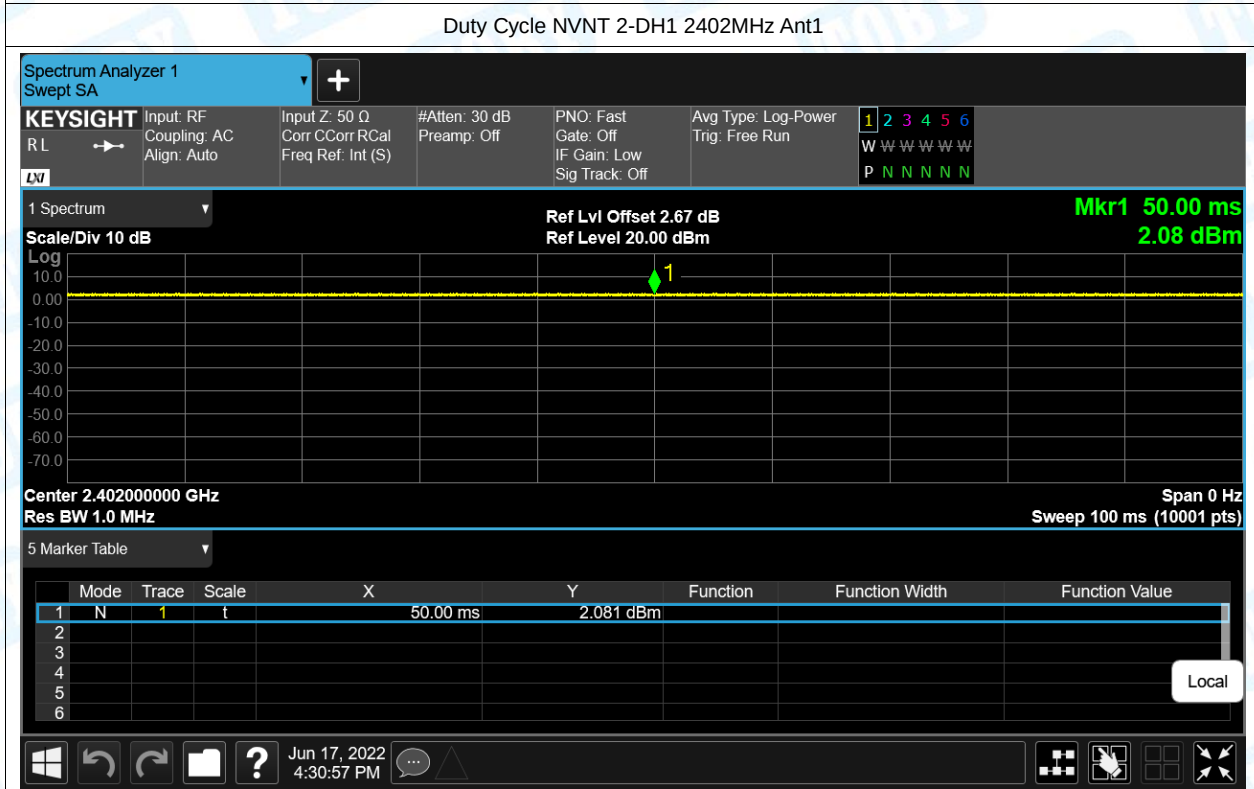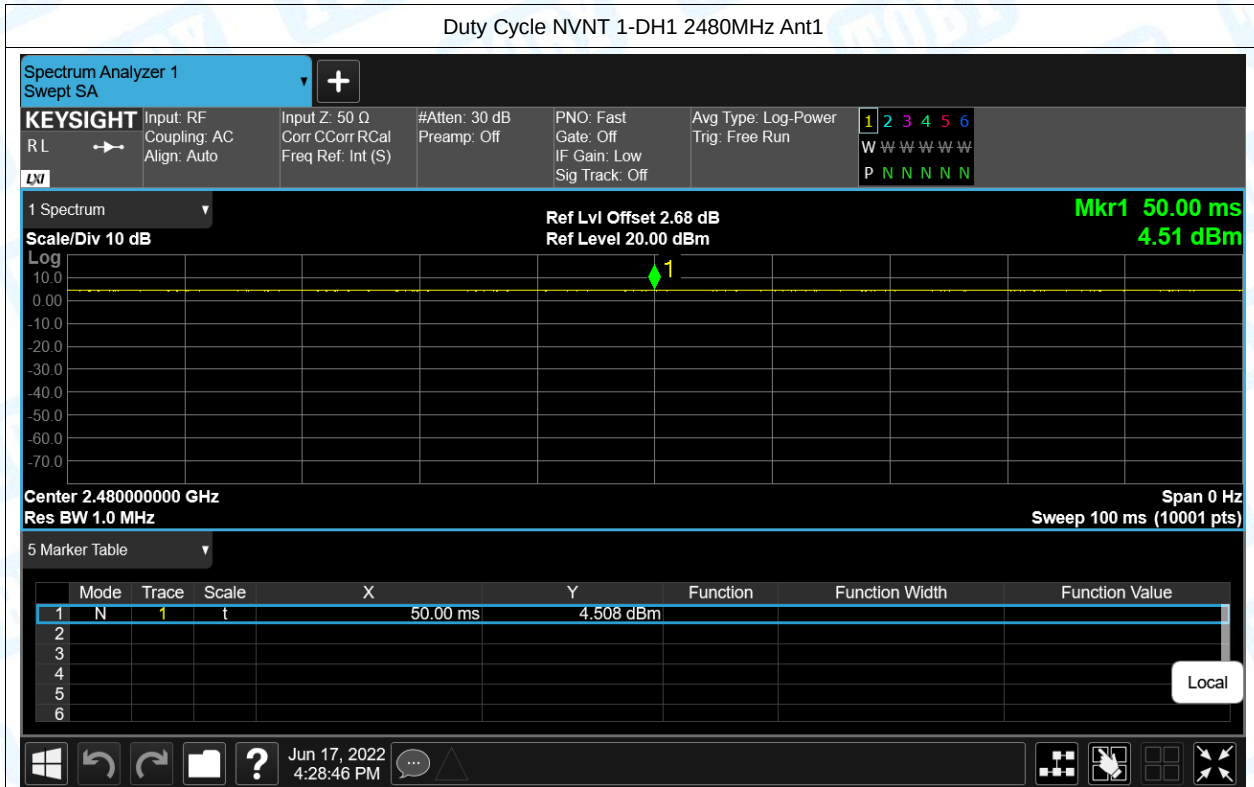

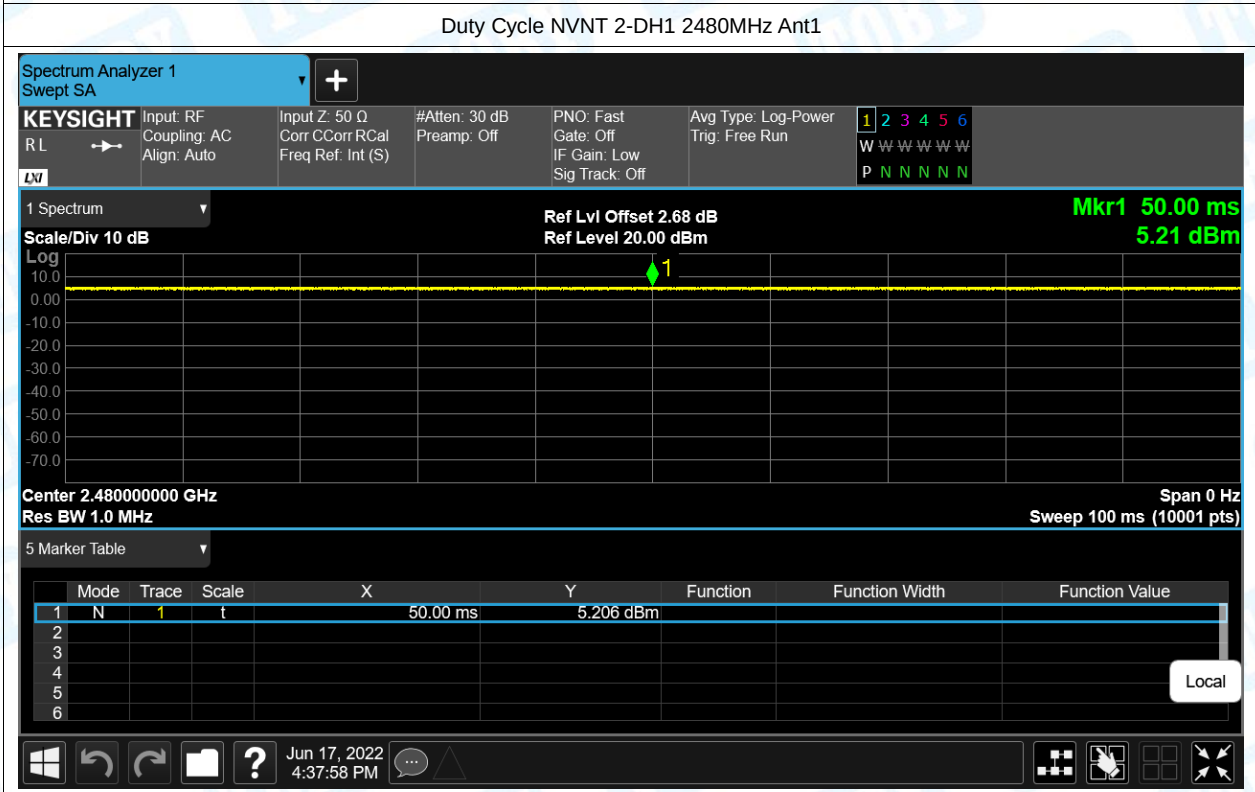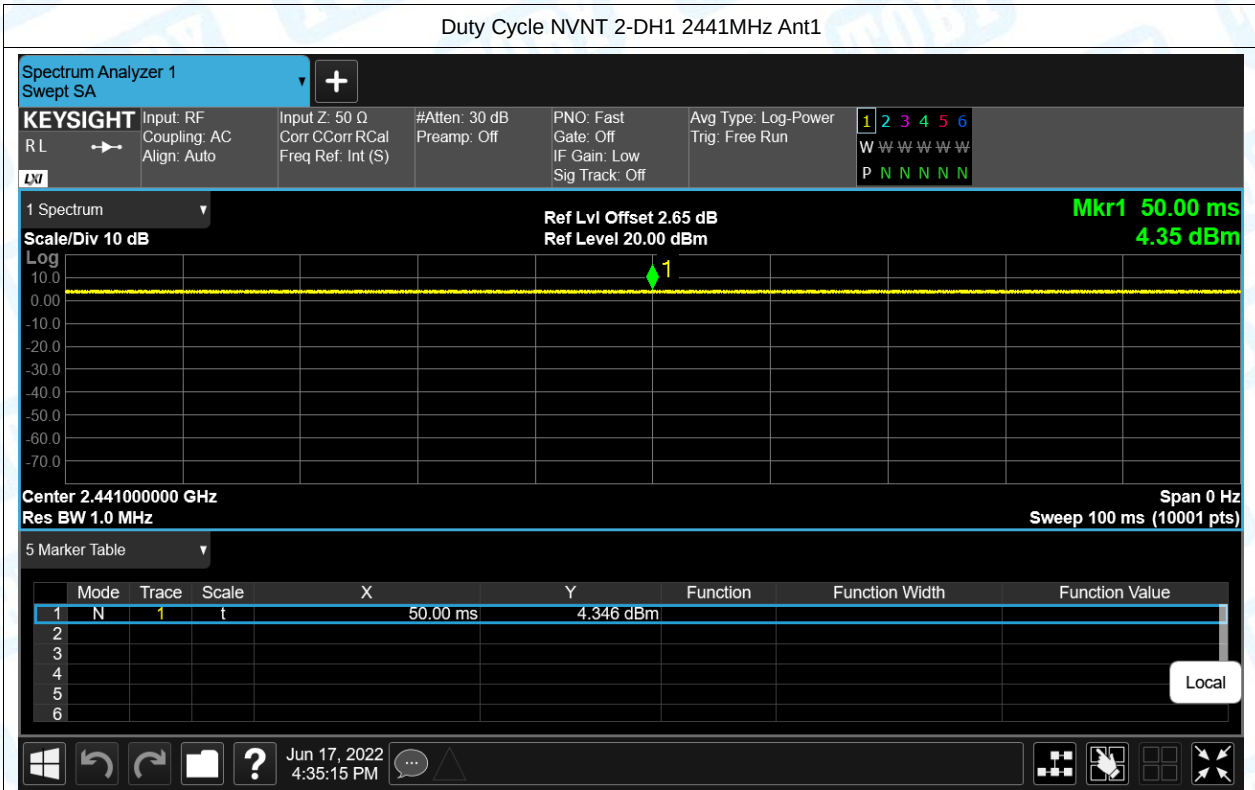


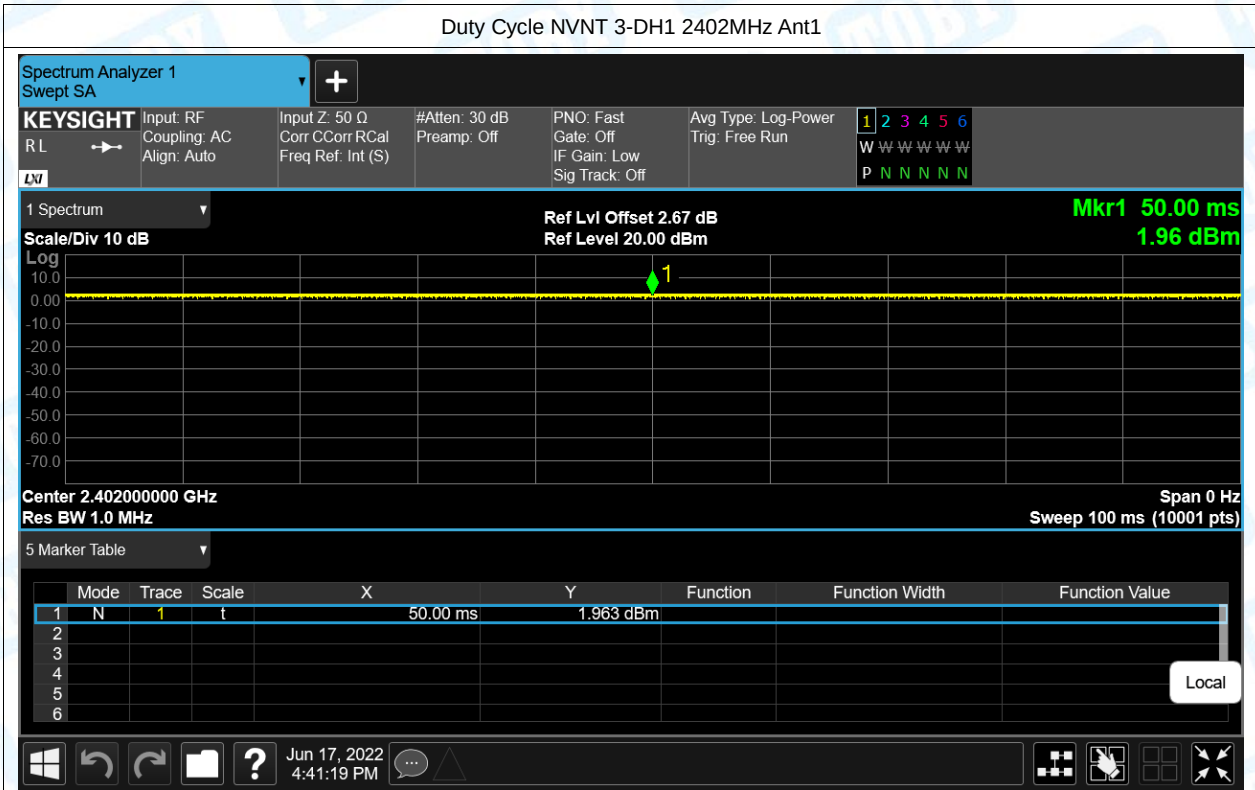

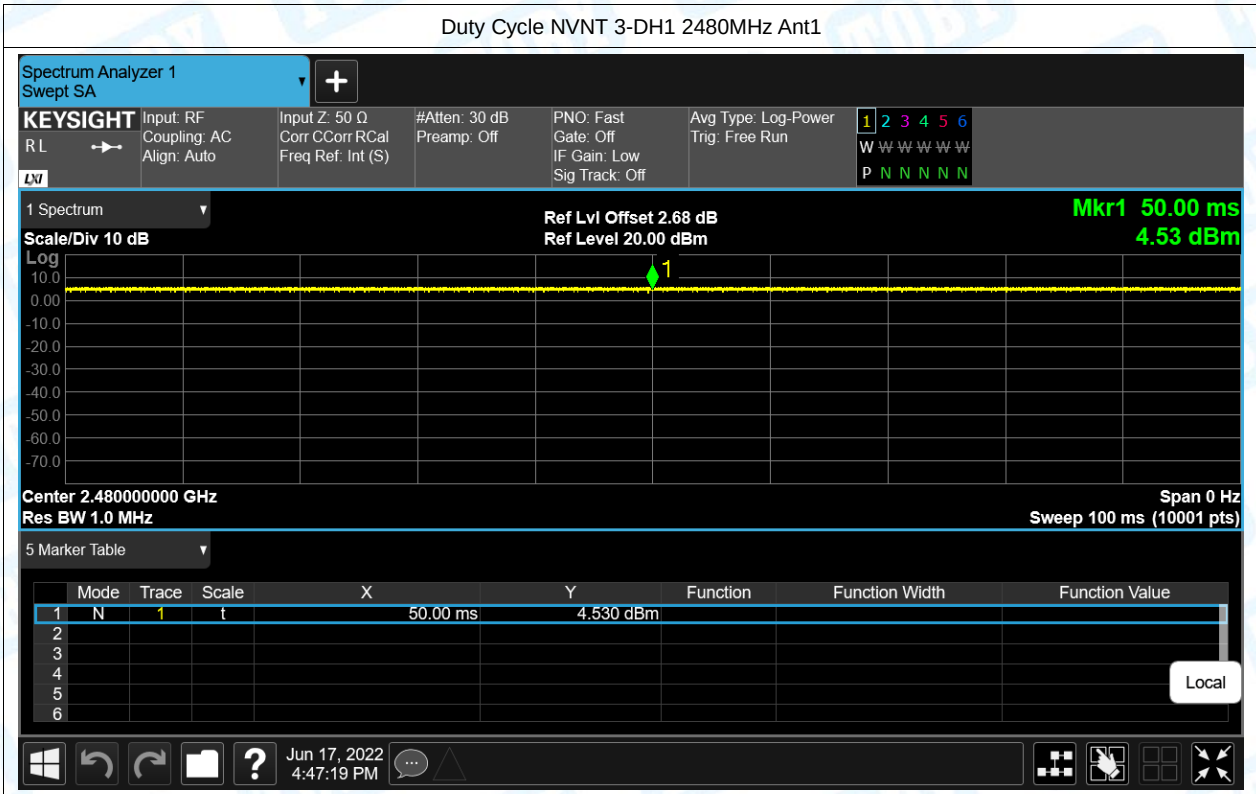

2. Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	-1.538	21	Pass
NVNT	1-DH1	2441	Ant1	0.212	21	Pass
NVNT	1-DH1	2480	Ant1	1.161	21	Pass
NVNT	1-DH3	2441	Ant1	1.814	21	Pass
NVNT	1-DH5	2441	Ant1	1.814	21	Pass
NVNT	2-DH1	2402	Ant1	0.029	21	Pass
NVNT	2-DH1	2441	Ant1	1.753	21	Pass
NVNT	2-DH1	2480	Ant1	2.594	21	Pass
NVNT	2-DH3	2441	Ant1	1.806	21	Pass
NVNT	2-DH5	2441	Ant1	1.791	21	Pass
NVNT	3-DH1	2402	Ant1	0.409	21	Pass
NVNT	3-DH1	2441	Ant1	2.144	21	Pass
NVNT	3-DH1	2480	Ant1	-0.141	21	Pass
NVNT	3-DH3	2441	Ant1	1.797	21	Pass
NVNT	3-DH5	2441	Ant1	1.776	21	Pass

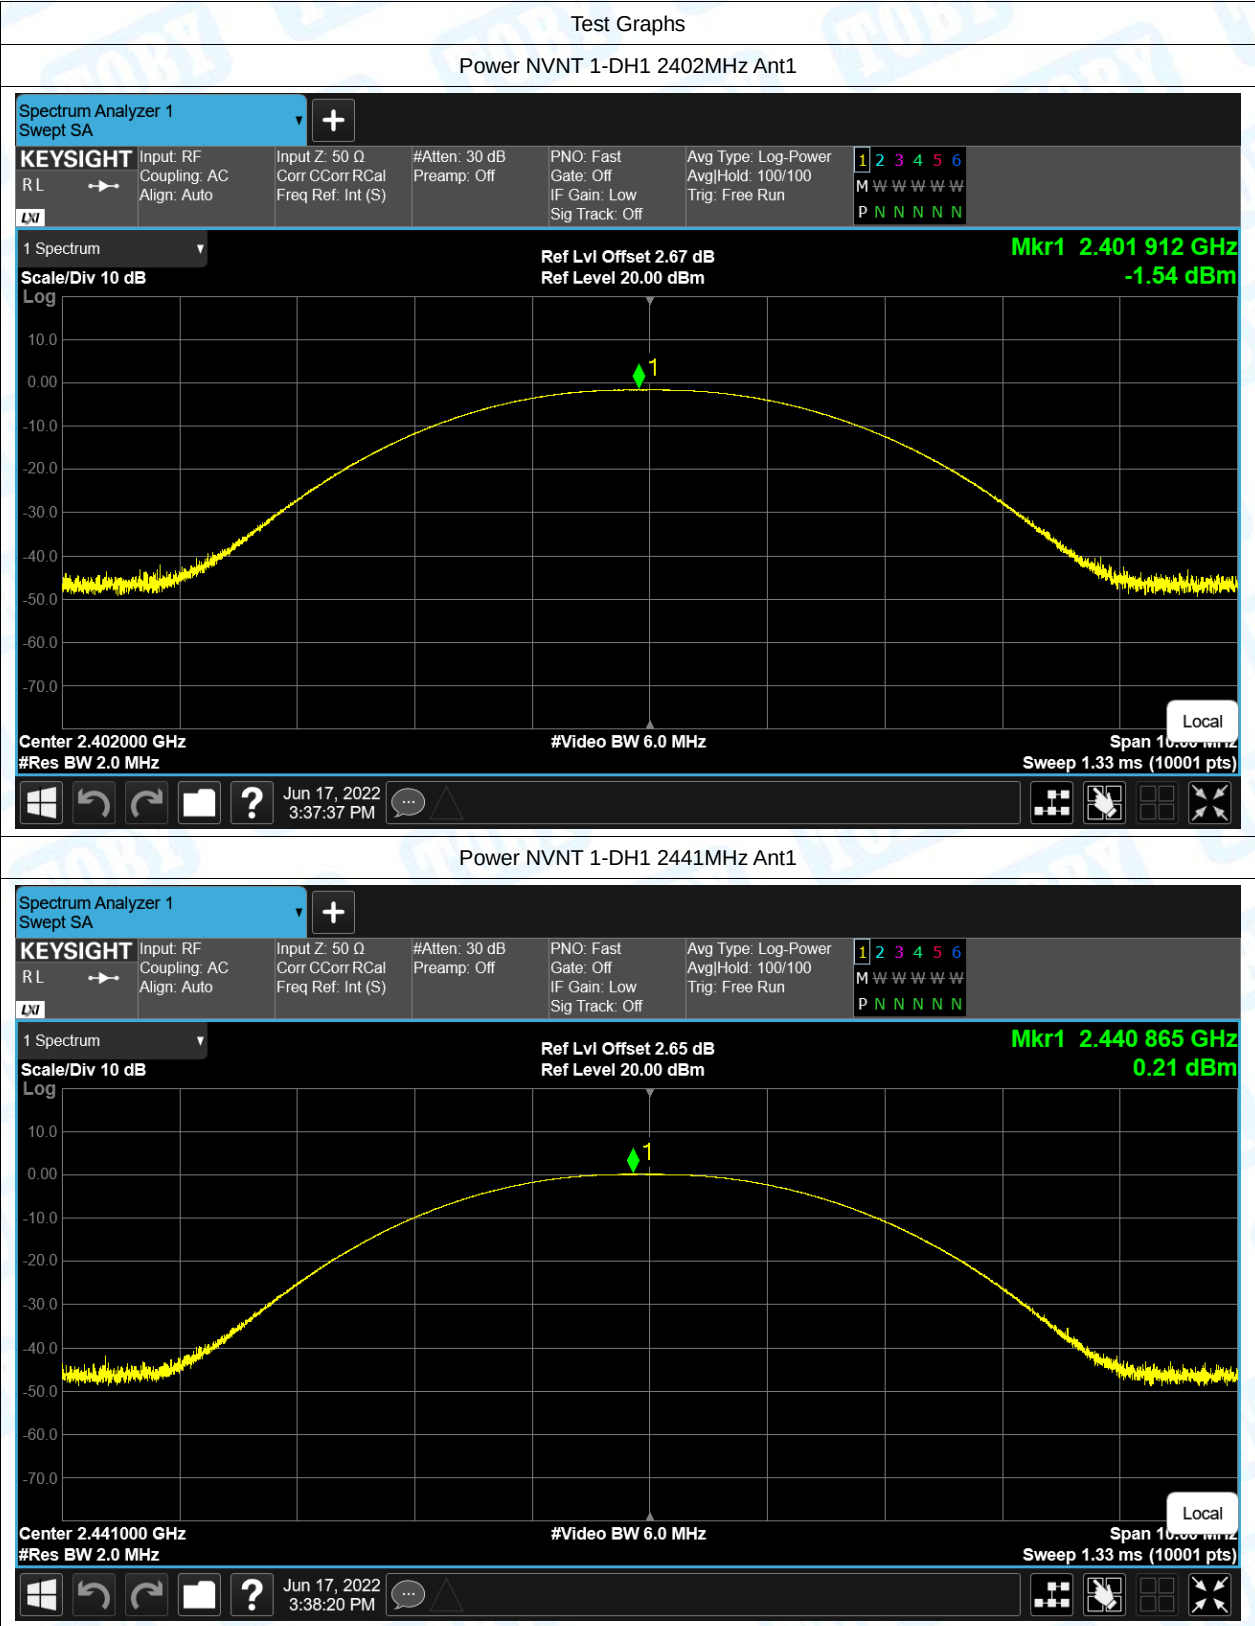

Power NVNT 1-DH1 2441MHz Ant1

Spectrum Analyzer 1
Swept SA

KEYSIGHT

Input: RF
Coupling: AC
Align: Auto

Input Z: 50 Ω
Corr CCorr RCal
Freq Ref: Int (S)

#Atten: 30 dB
Preamp: Off

PNO: Fast
Gate: Off
IF Gain: Low
Sig Track: Off

Avg Type: Log-Power
AvalHold: 100/100
Trig: Free Run

1 2 3 4 5 6
M W W W W W
P N N N N N

1 Spectrum

Scale/Div 10 dB

Log



Ref Lvl Offset 2.65 dB
Ref Level 20.00 dBmMkr1 2.440 865 GHz
0.21 dBmCenter 2.441000 GHz
#Res BW 2.0 MHz



#Video BW 6.0 MHz



Span 10.00 MHz
Sweep 1.33 ms (10001 pts)



Local



Jun 17, 2022 3:38:20 PM

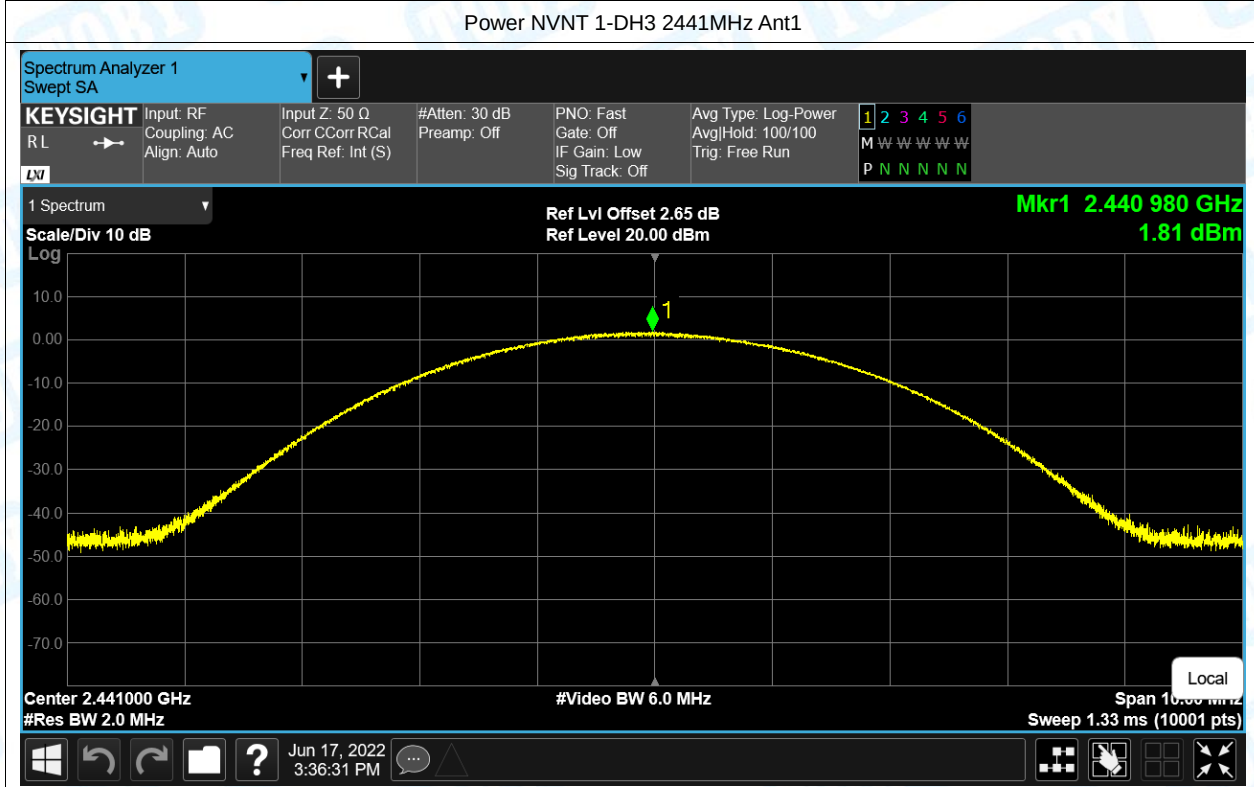
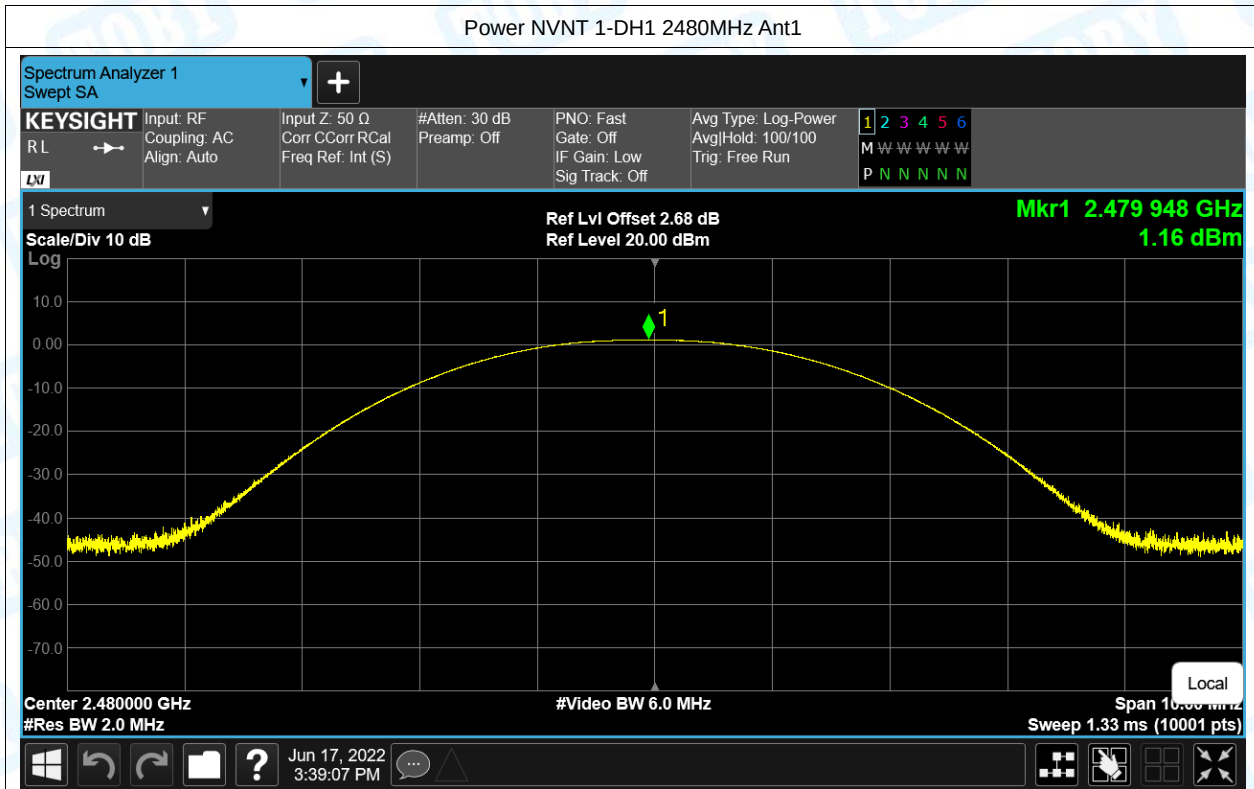


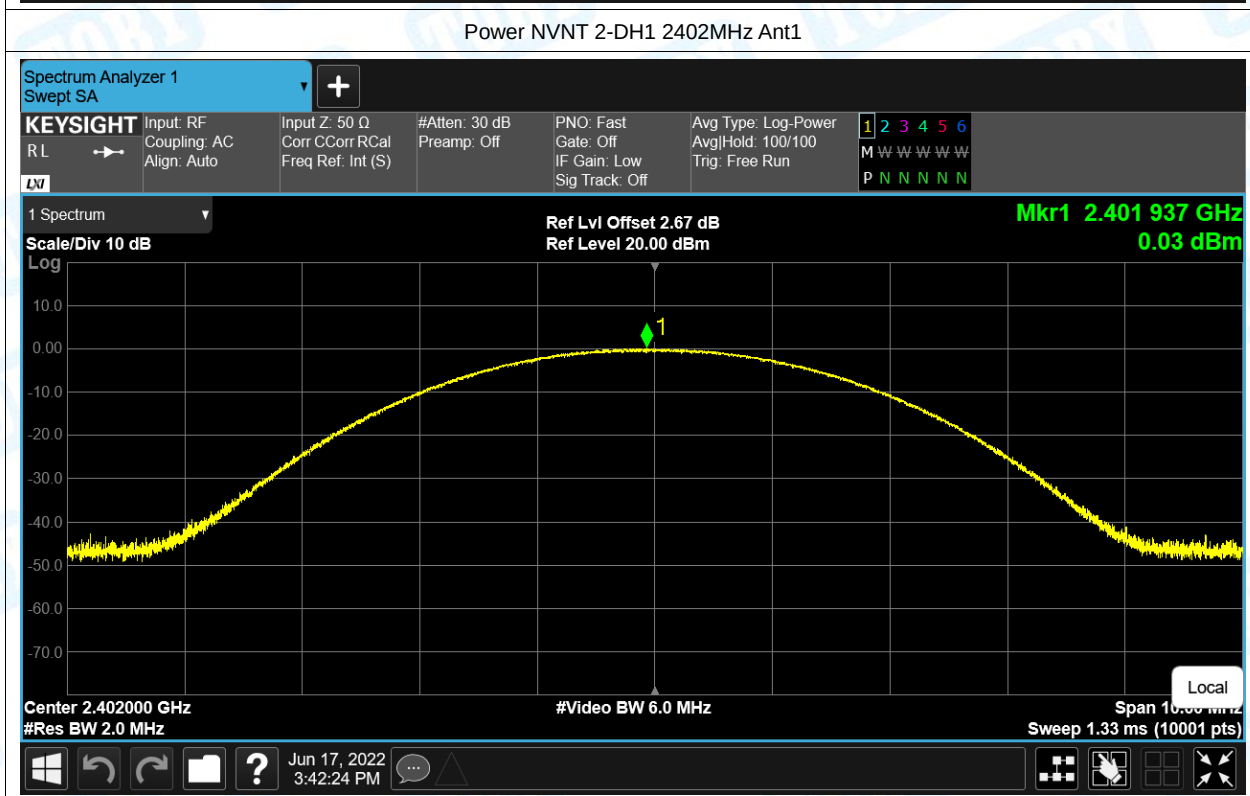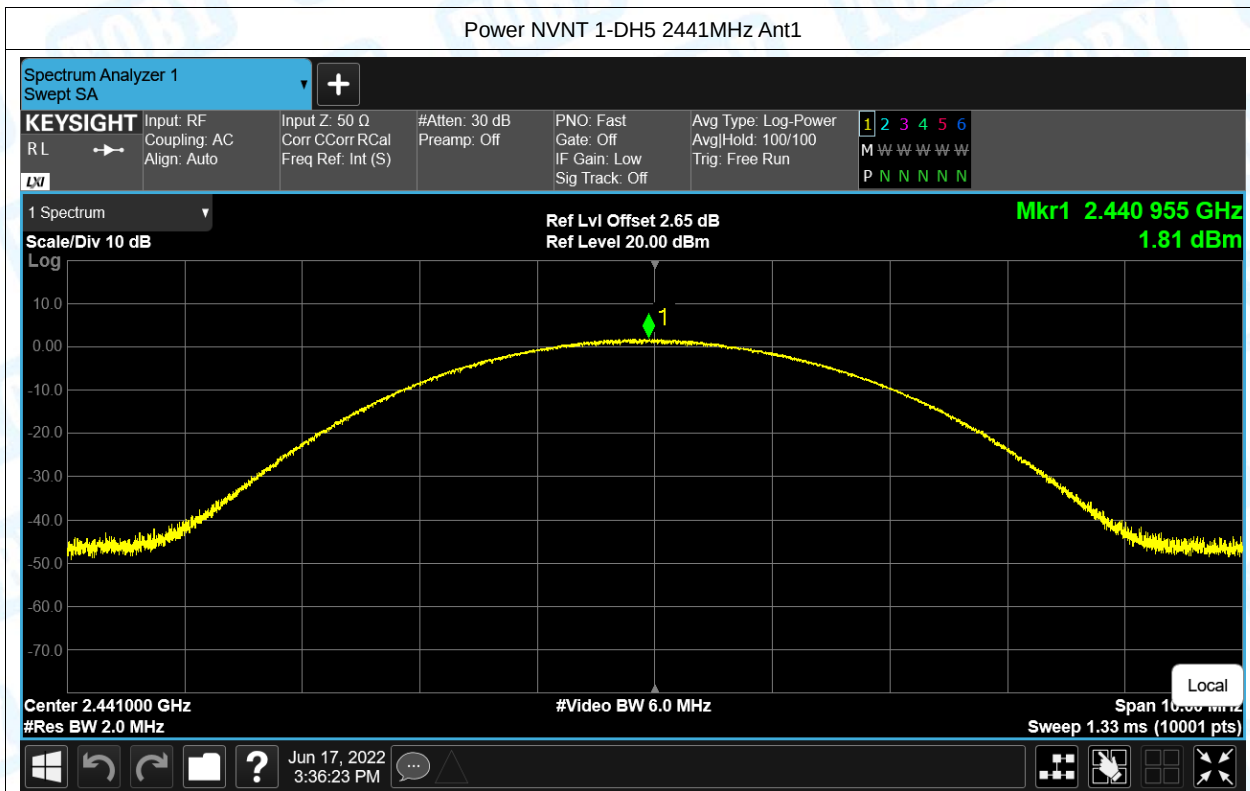


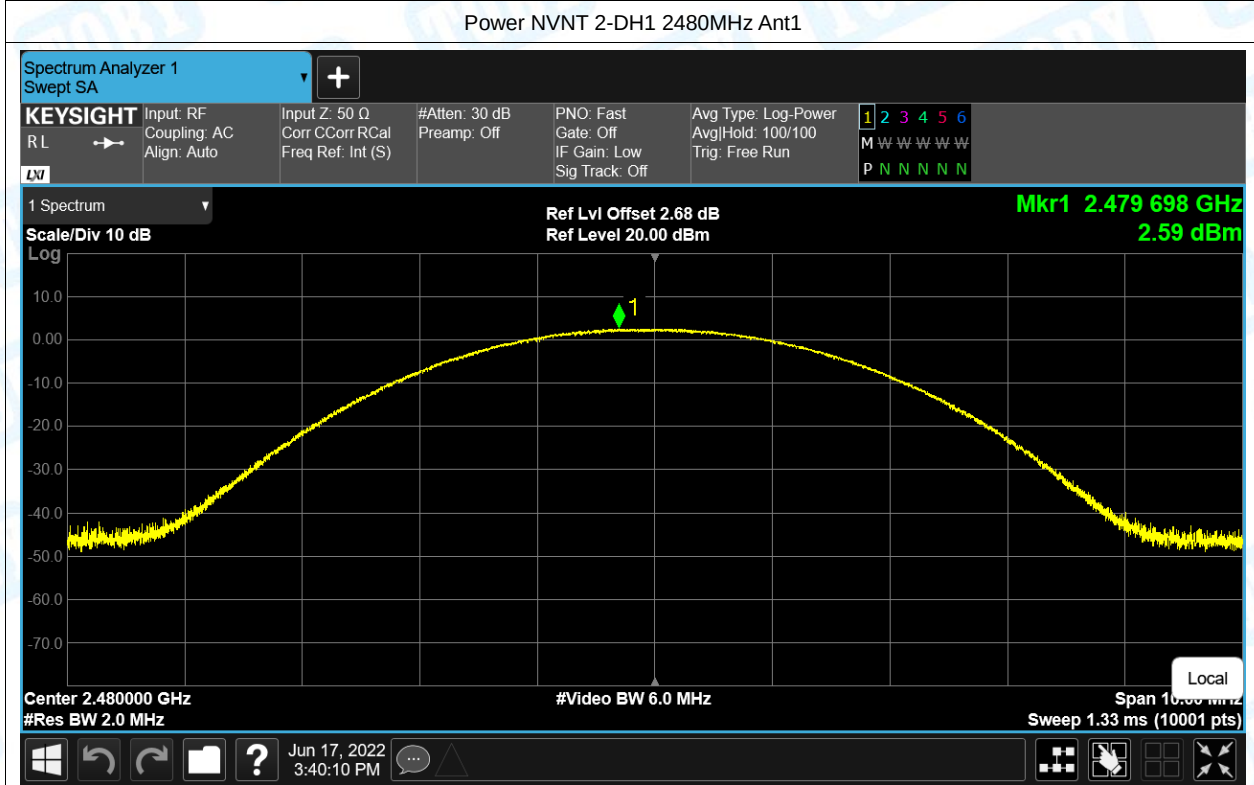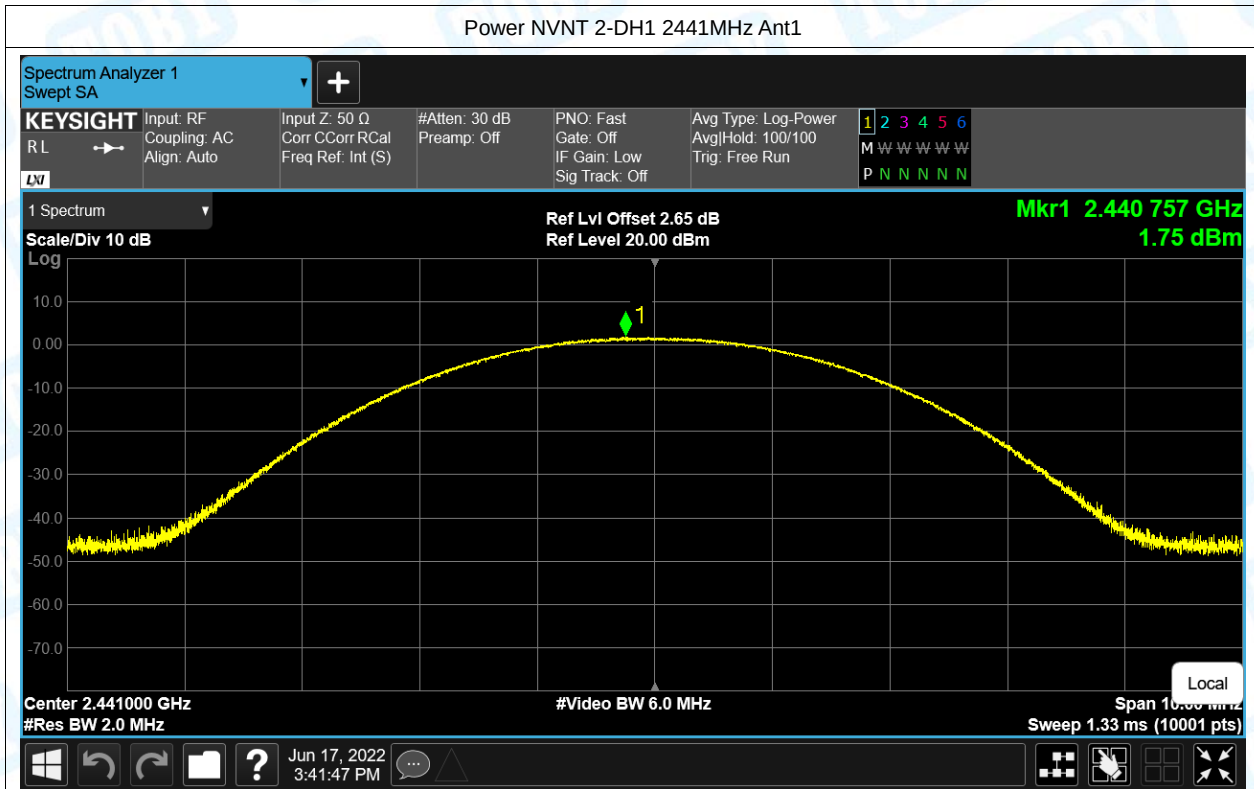

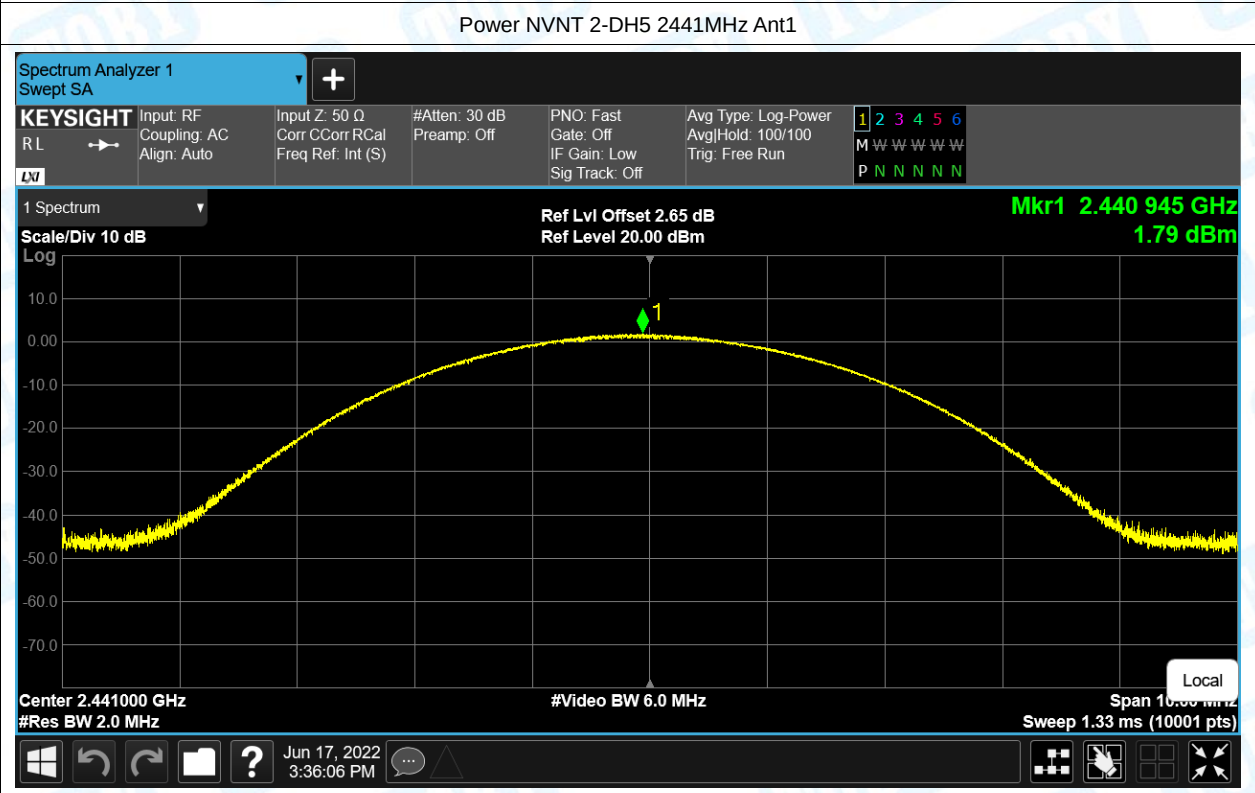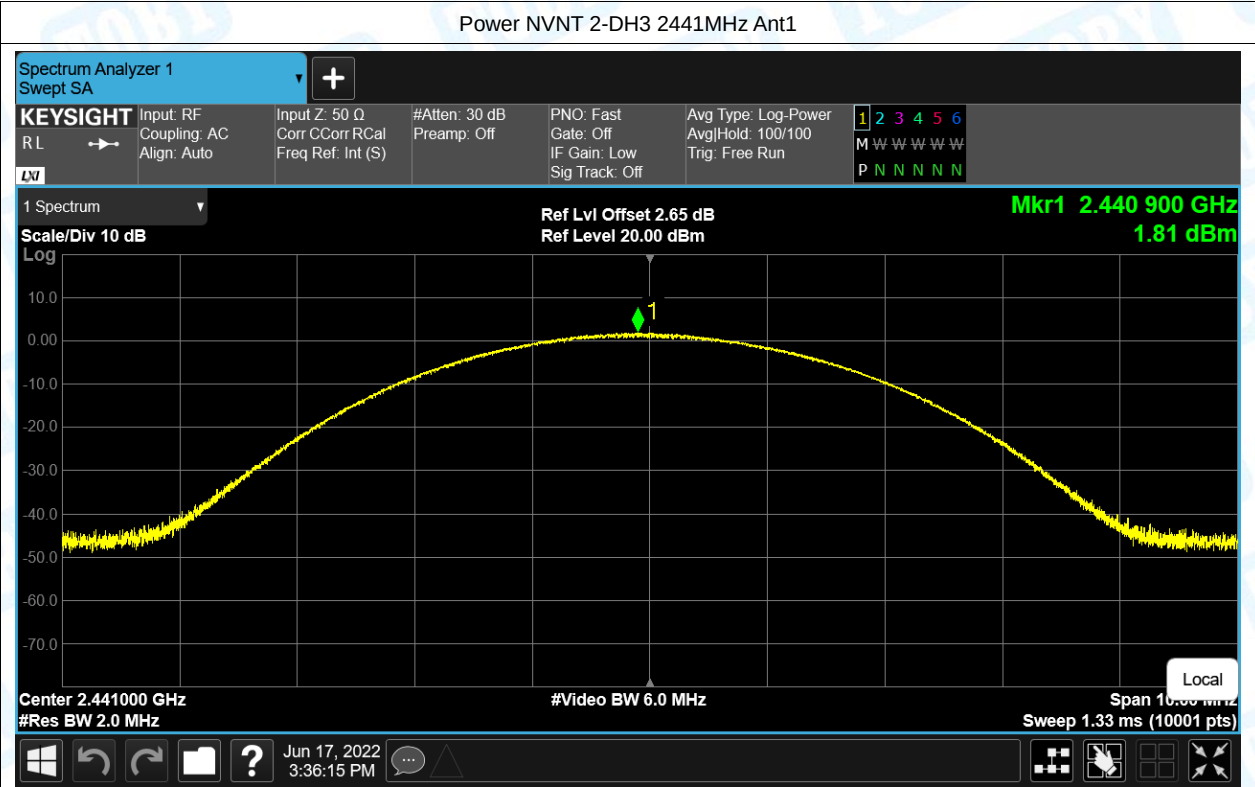

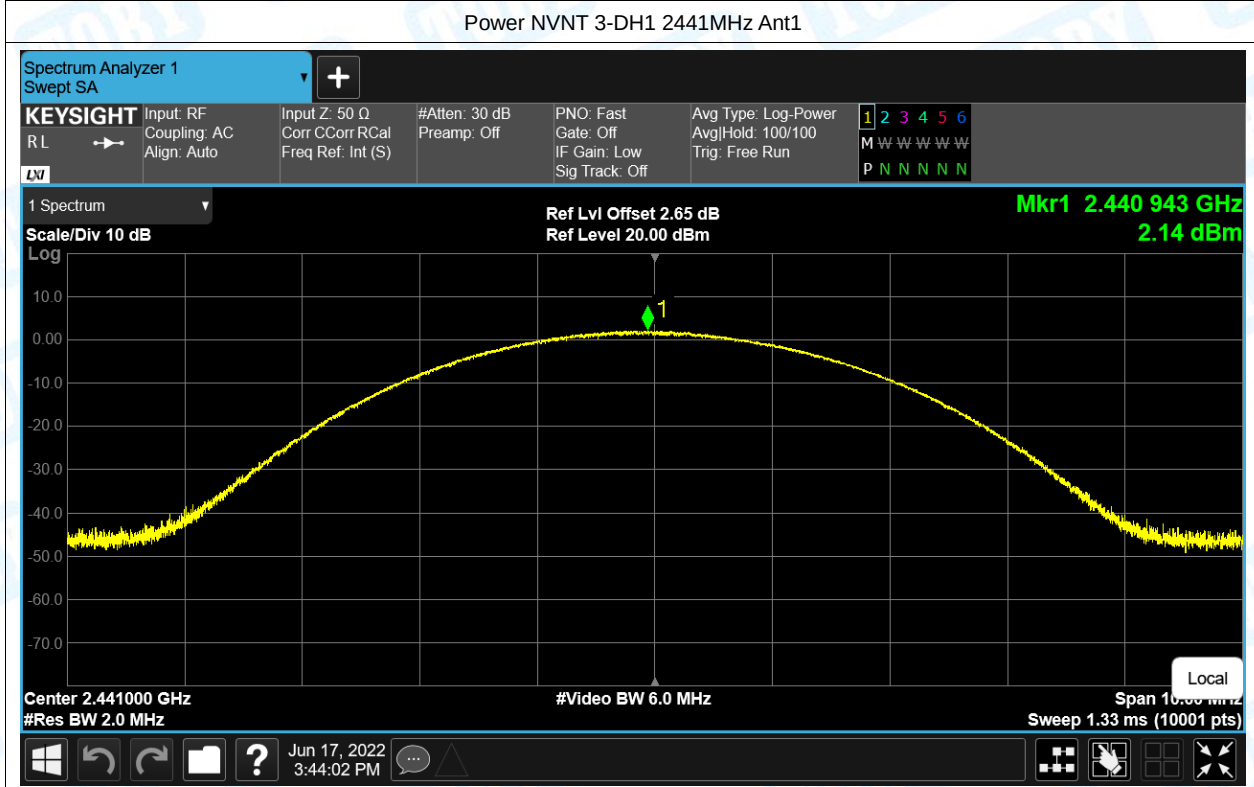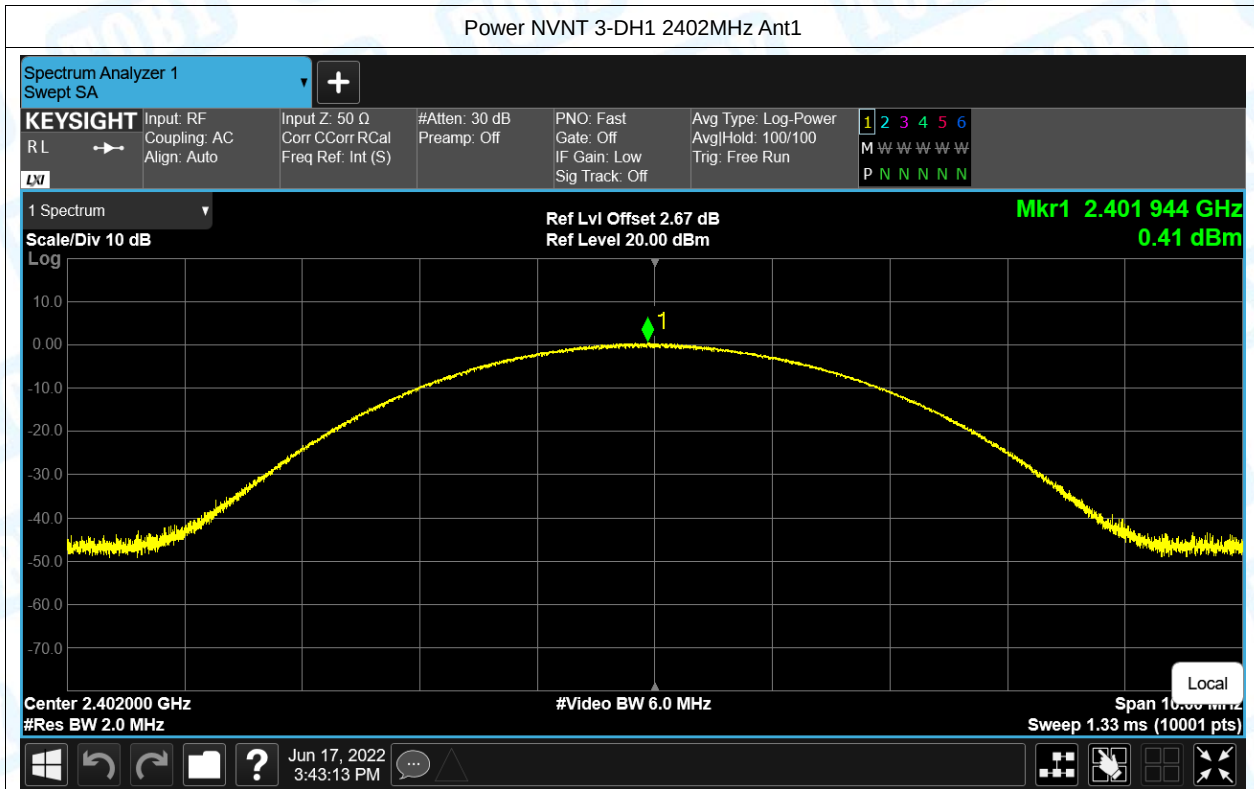

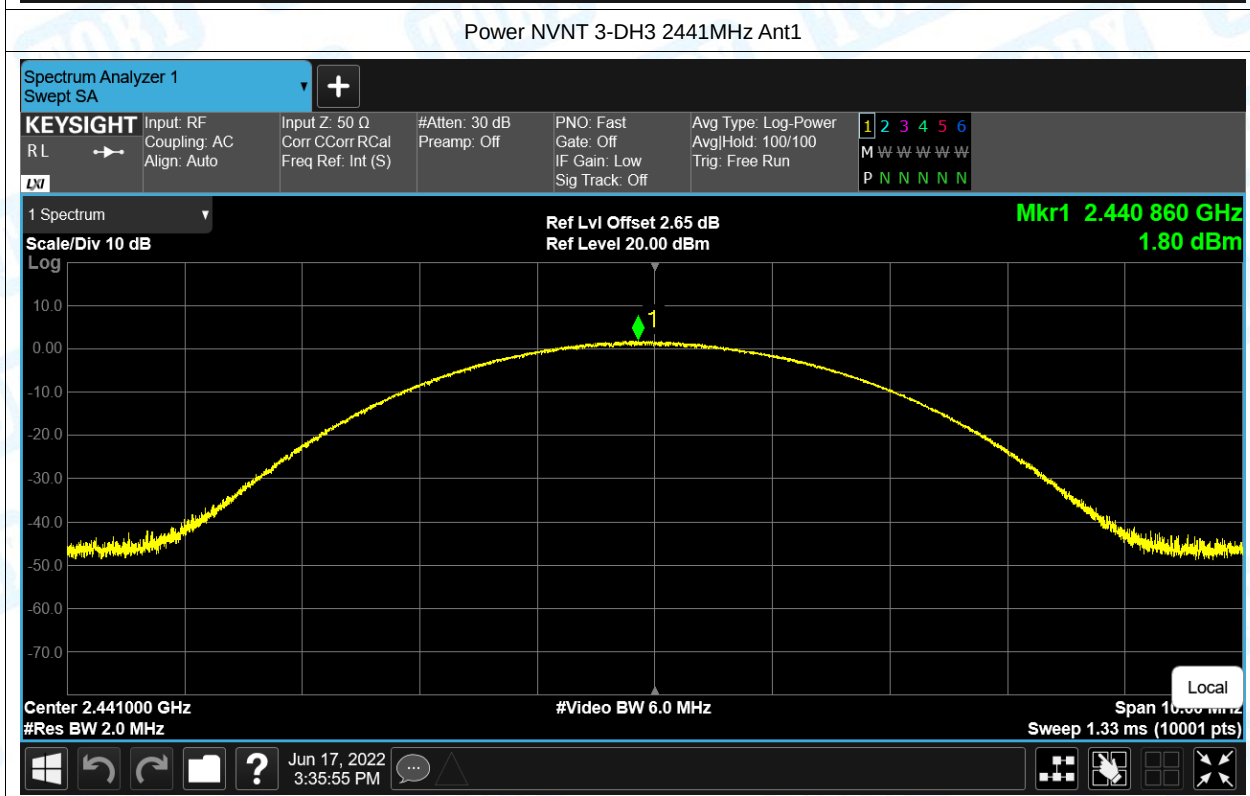
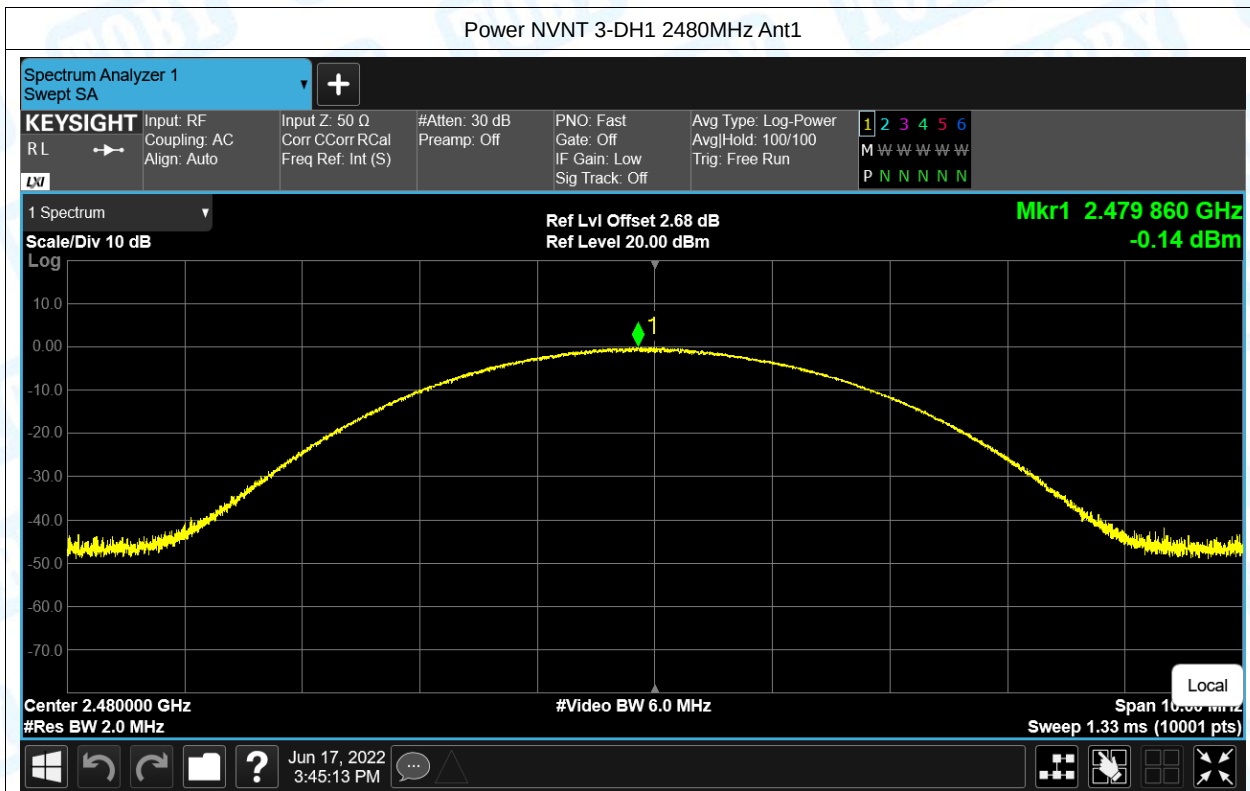



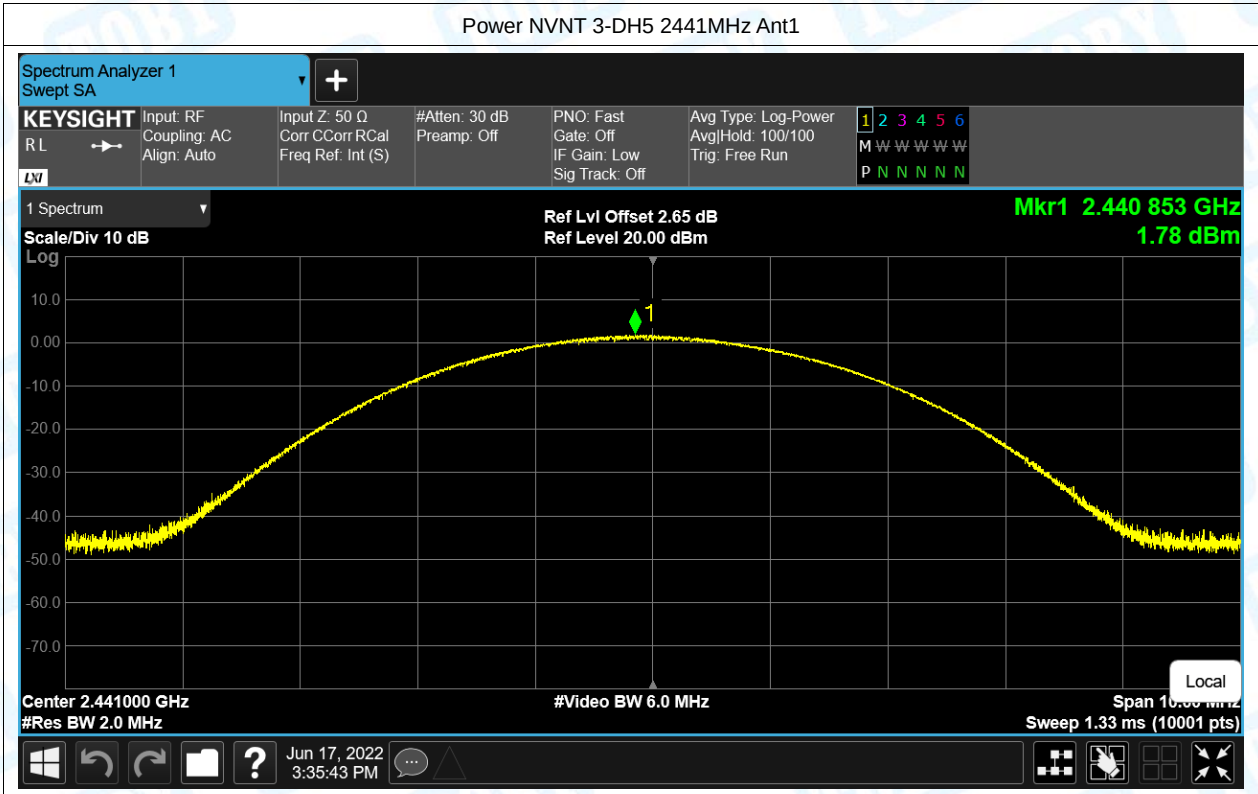




3. -20dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	1.03	0	Pass
NVNT	1-DH1	2441	Ant1	1.03	0	Pass
NVNT	1-DH1	2480	Ant1	1.03	0	Pass
NVNT	2-DH1	2402	Ant1	1.34	0	Pass
NVNT	2-DH1	2441	Ant1	1.34	0	Pass
NVNT	2-DH1	2480	Ant1	1.34	0	Pass
NVNT	3-DH1	2402	Ant1	1.29	0	Pass
NVNT	3-DH1	2441	Ant1	1.29	0	Pass
NVNT	3-DH1	2480	Ant1	1.29	0	Pass



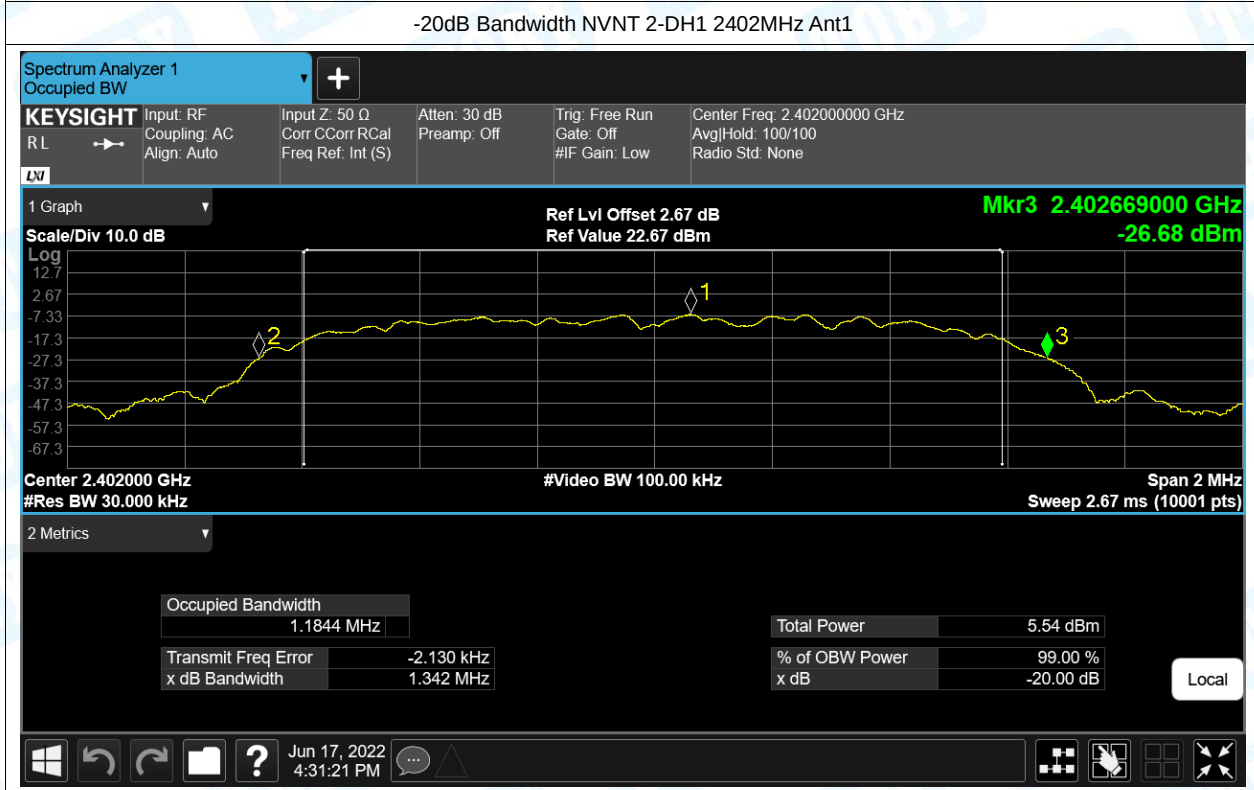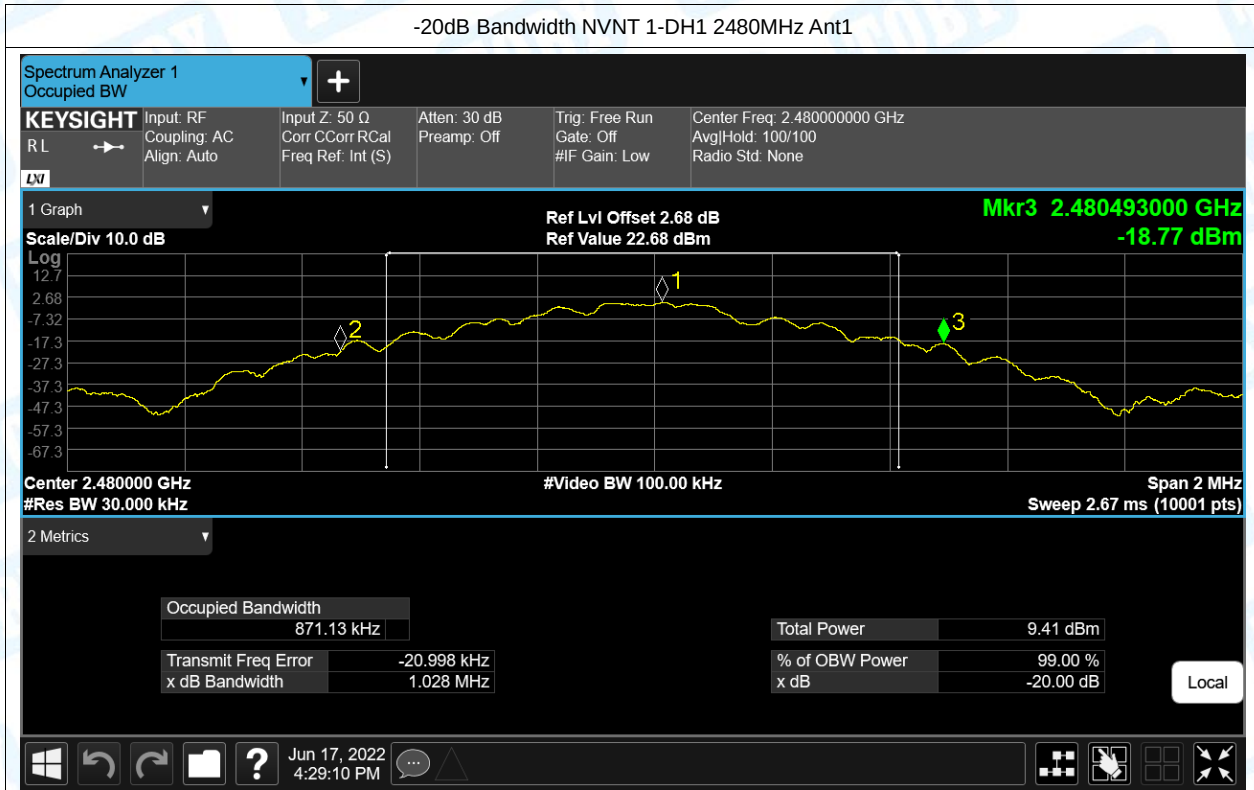

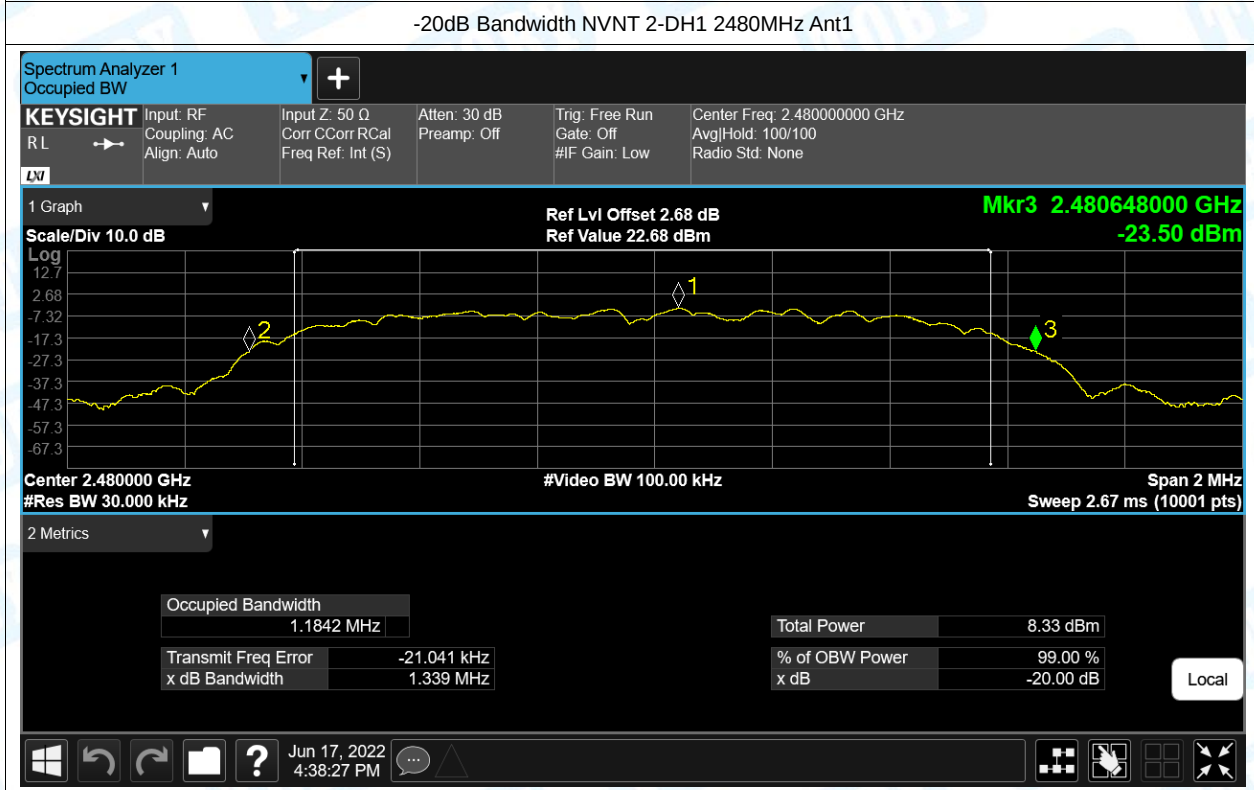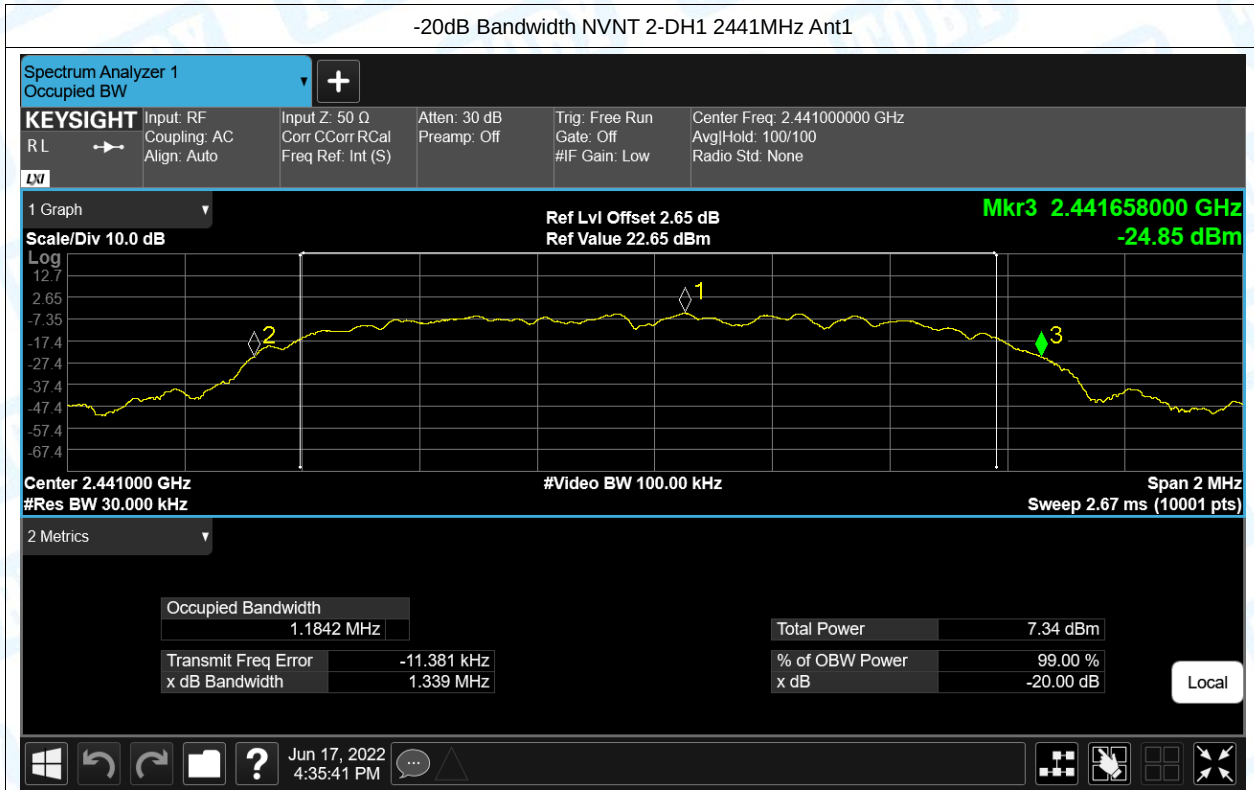

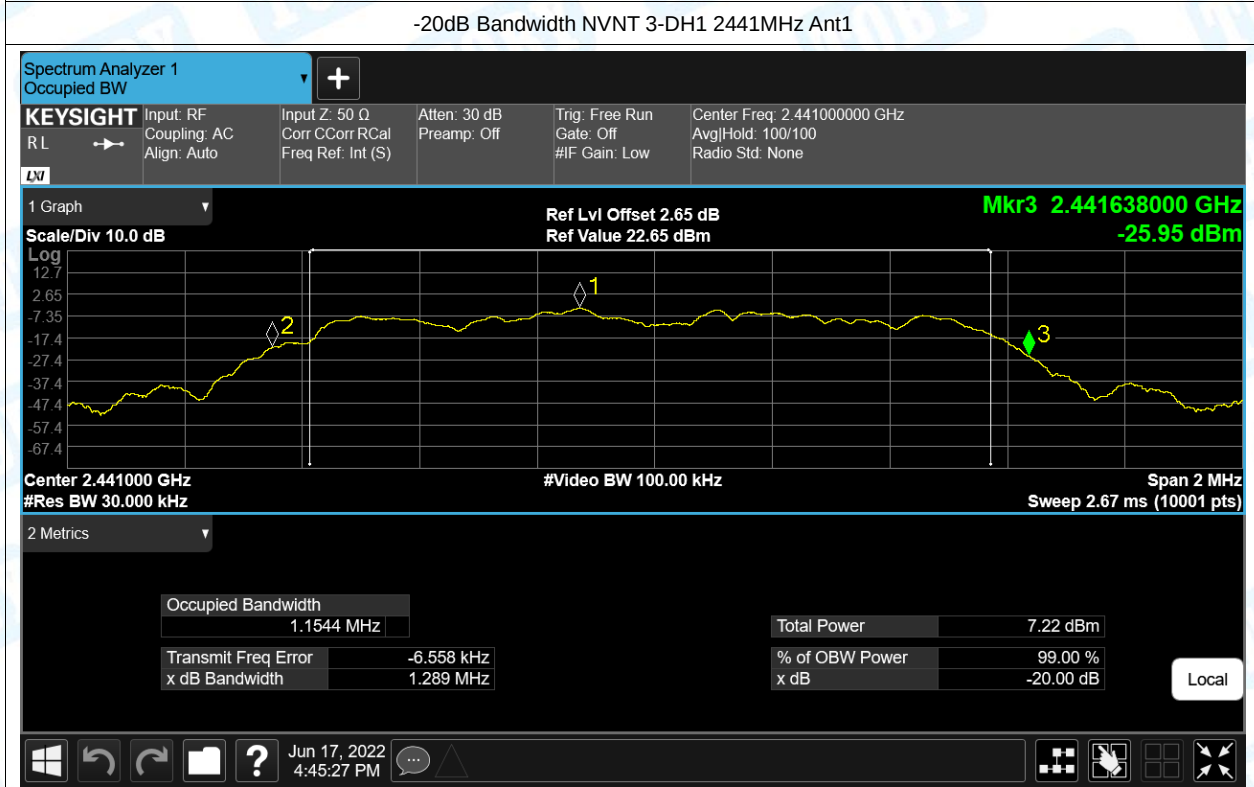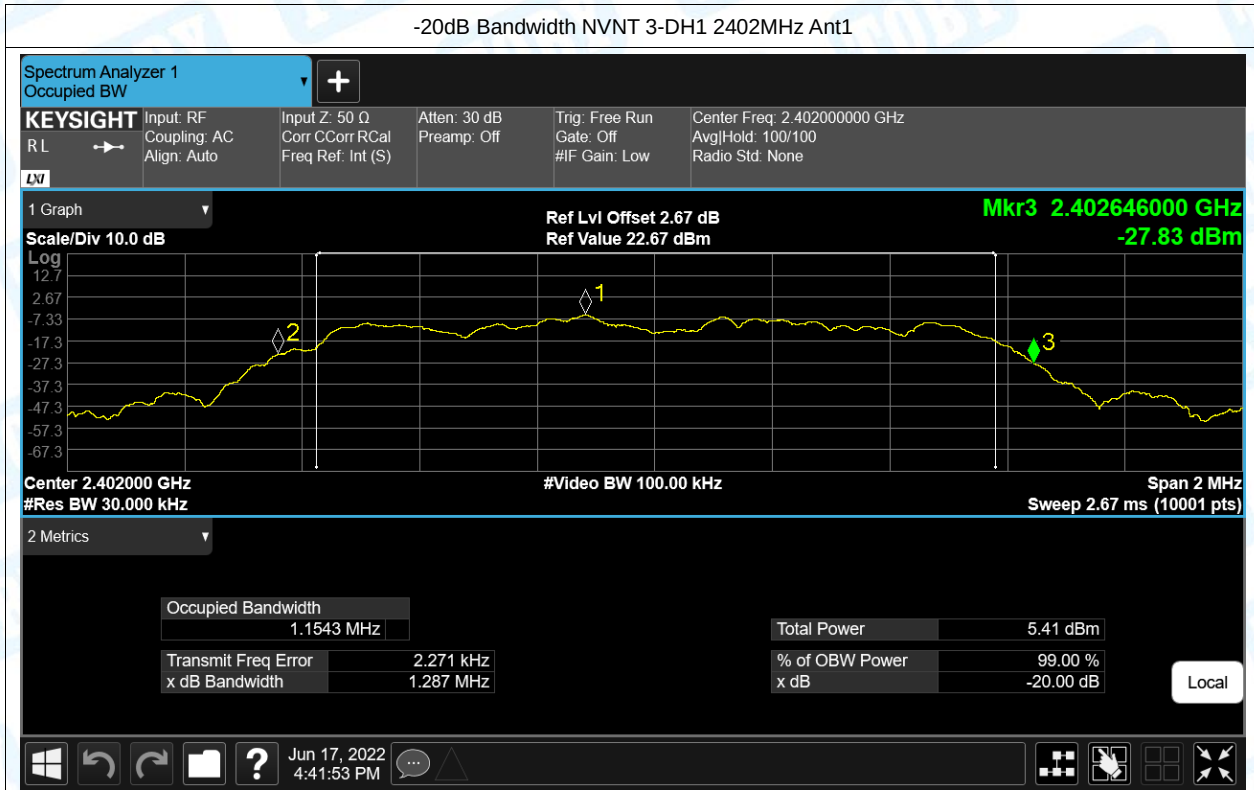



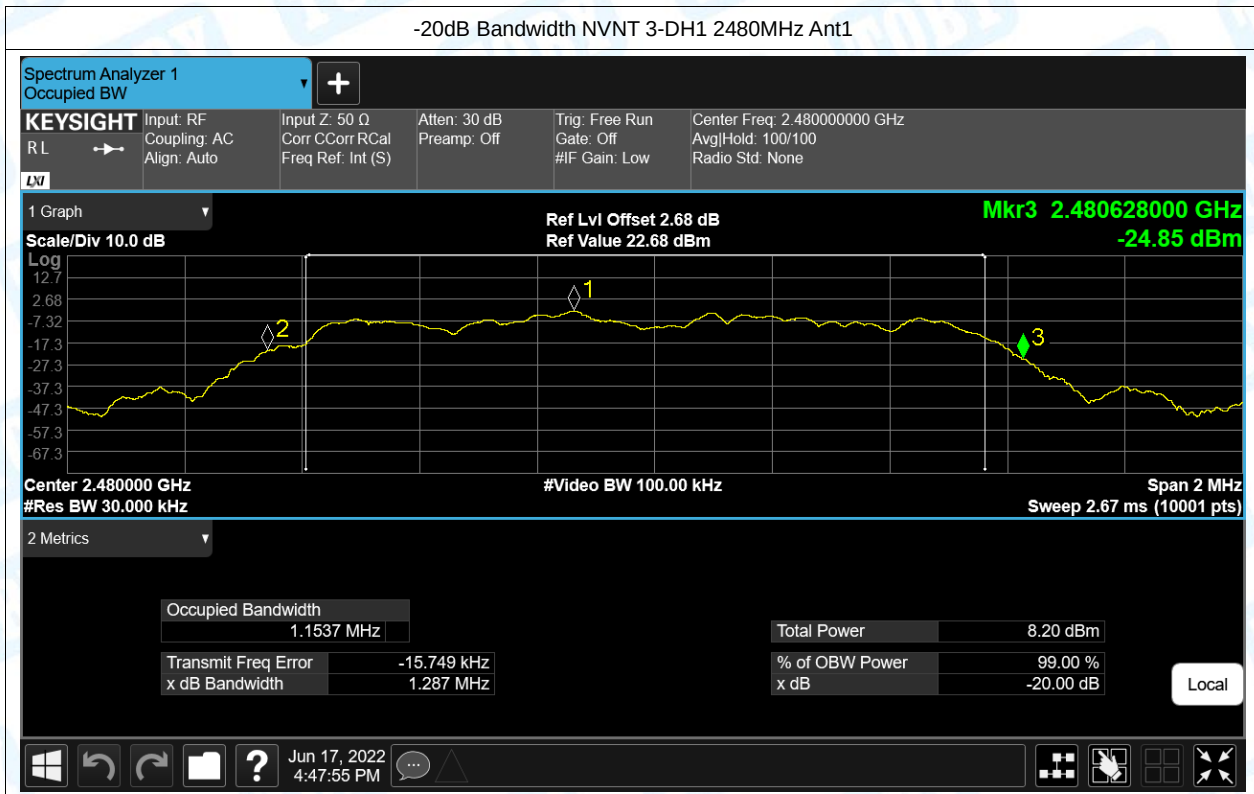


4. Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.869
NVNT	1-DH1	2441	Ant1	0.869
NVNT	1-DH1	2480	Ant1	0.868
NVNT	2-DH1	2402	Ant1	1.185
NVNT	2-DH1	2441	Ant1	1.186
NVNT	2-DH1	2480	Ant1	1.185
NVNT	3-DH1	2402	Ant1	1.154
NVNT	3-DH1	2441	Ant1	1.155
NVNT	3-DH1	2480	Ant1	1.156



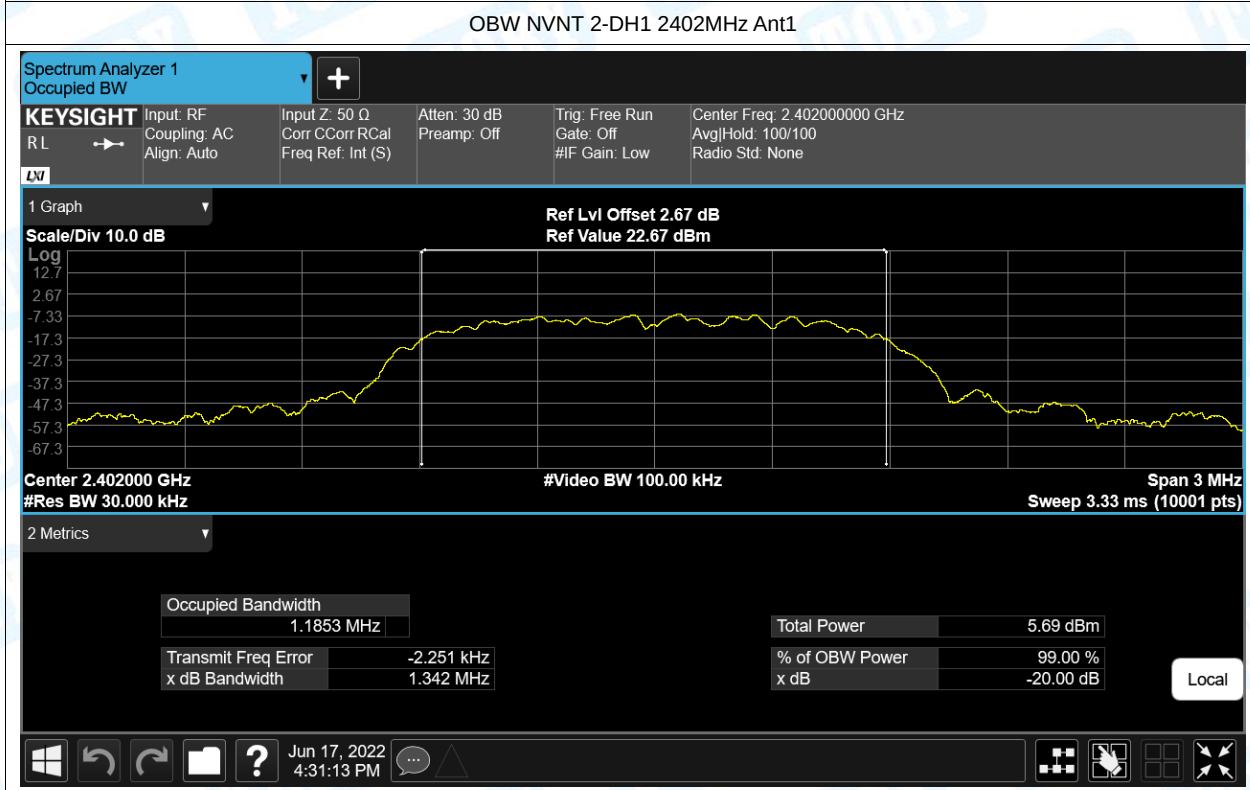


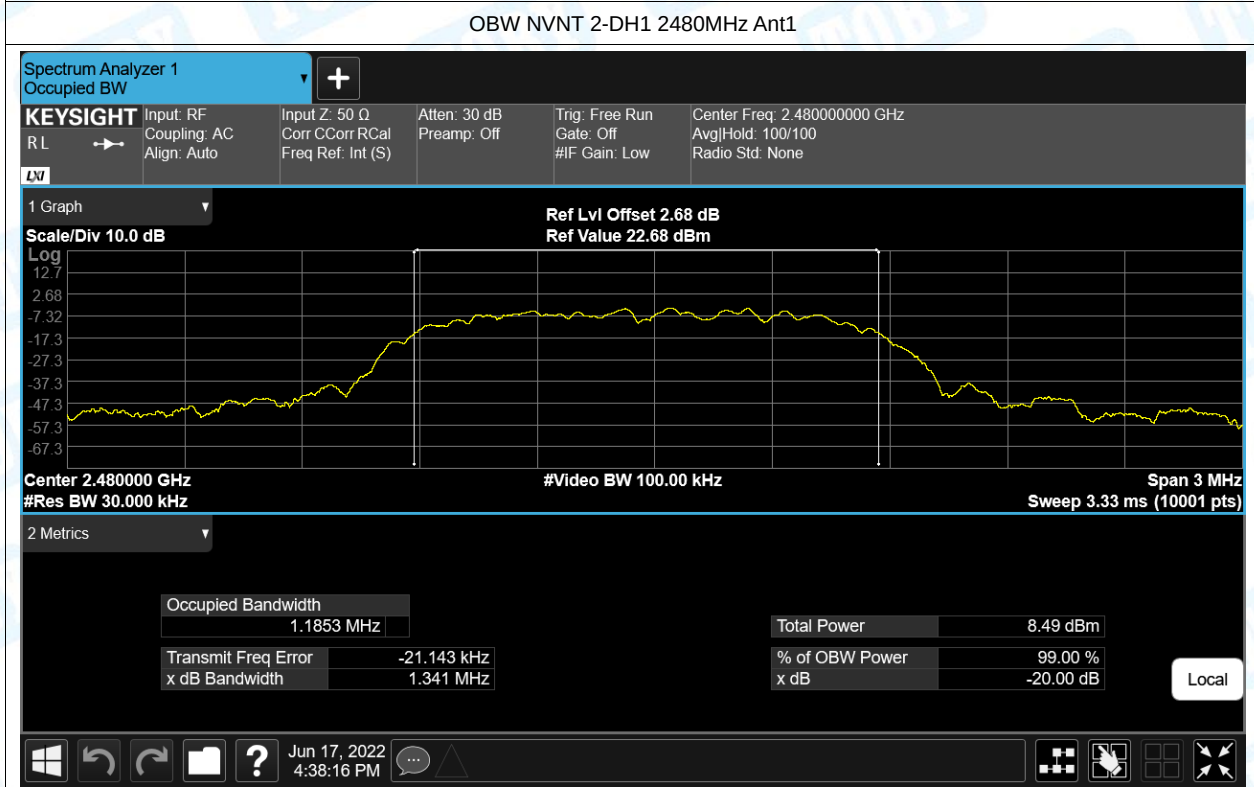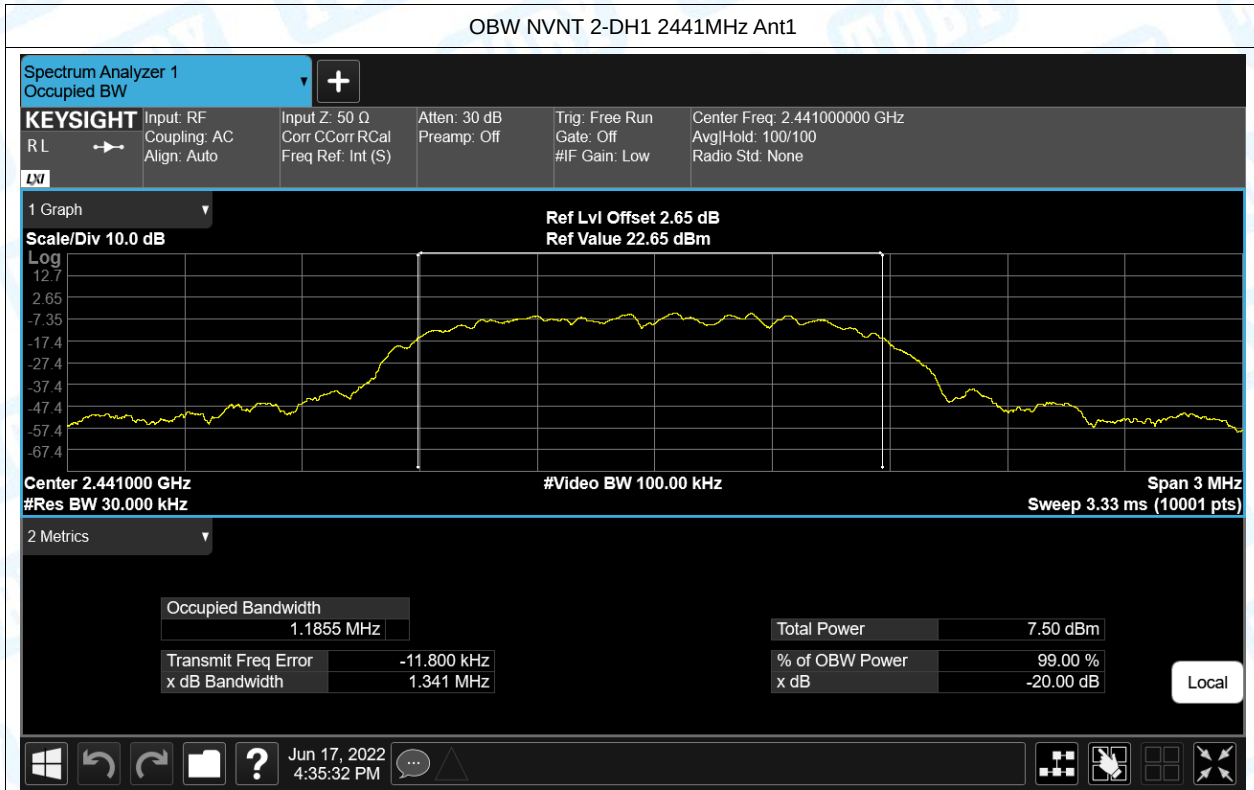


OBW NVNT 3-DH1 2402MHz Ant1

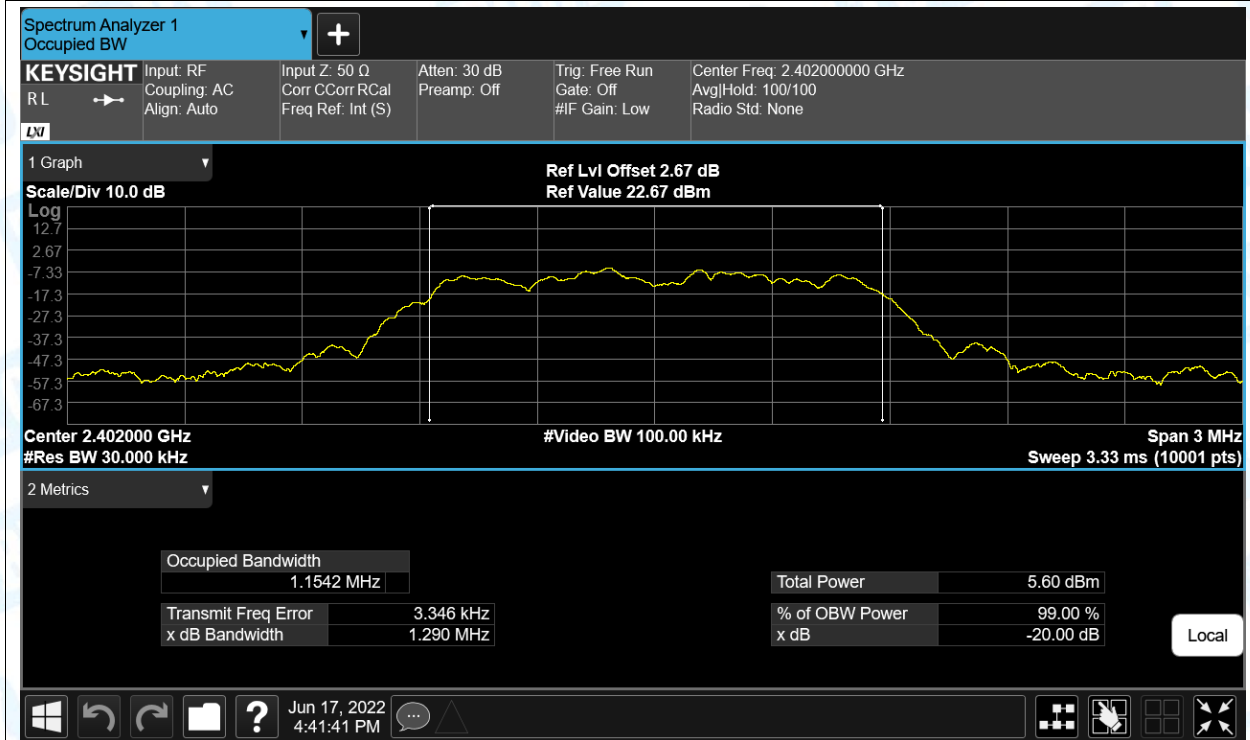


OBW NVNT 3-DH1 2441MHz Ant1


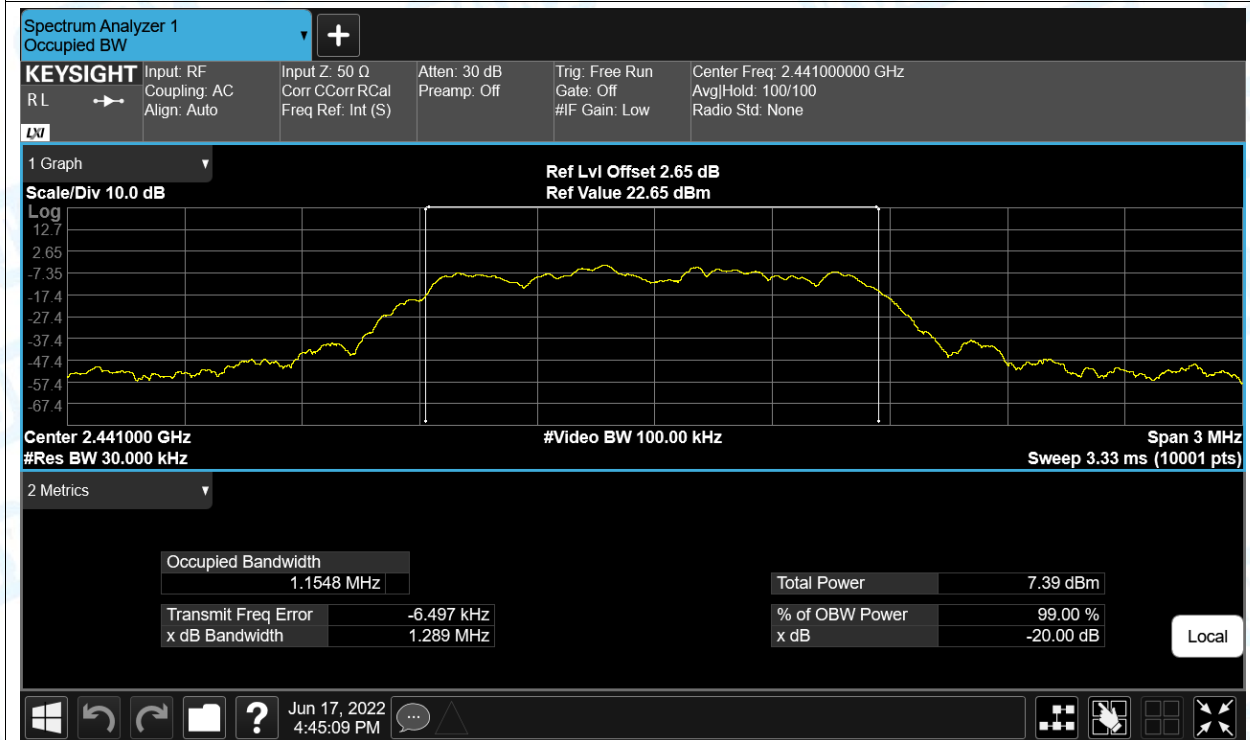



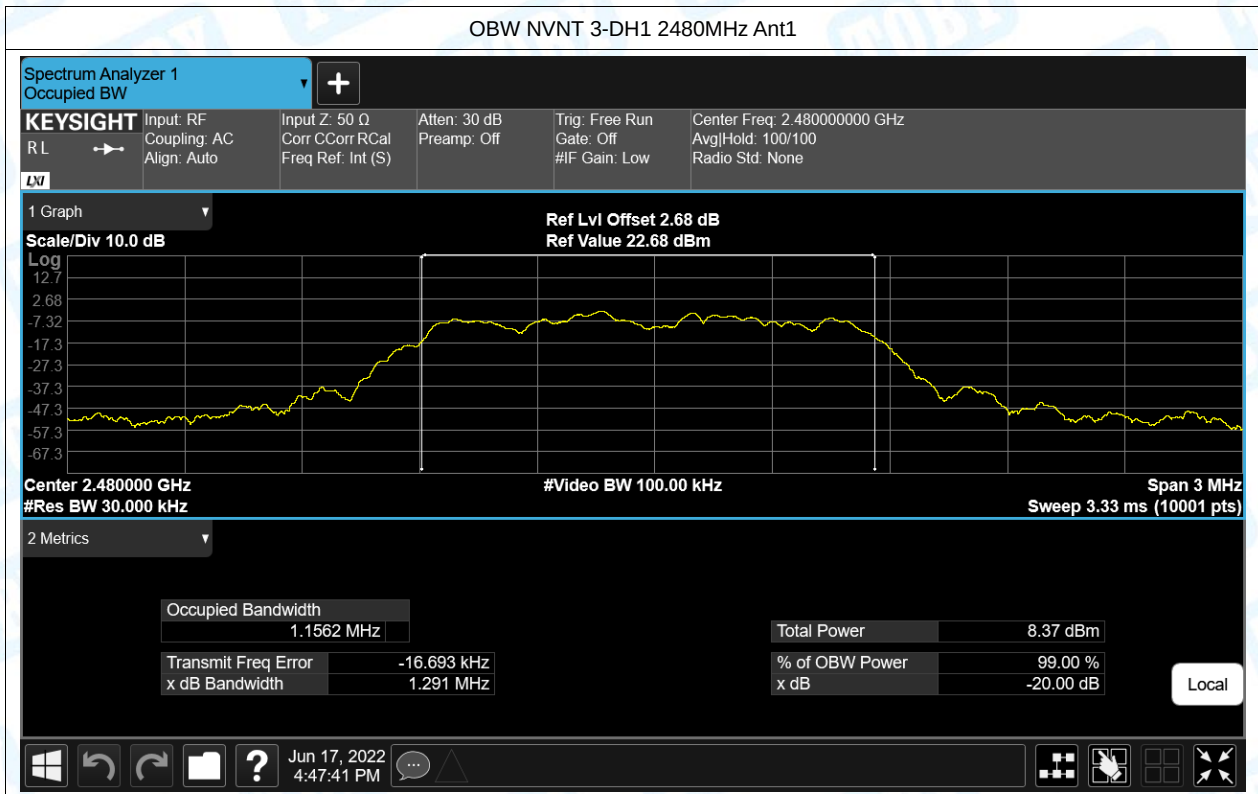




5. Band Edge



Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	No-Hopping	-56.42	-20	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	-57.64	-20	Pass
NVNT	2-DH1	2402	Ant1	No-Hopping	-53.56	-20	Pass
NVNT	2-DH1	2480	Ant1	No-Hopping	-56.72	-20	Pass
NVNT	3-DH1	2402	Ant1	No-Hopping	-54.11	-20	Pass
NVNT	3-DH1	2480	Ant1	No-Hopping	-56.18	-20	Pass


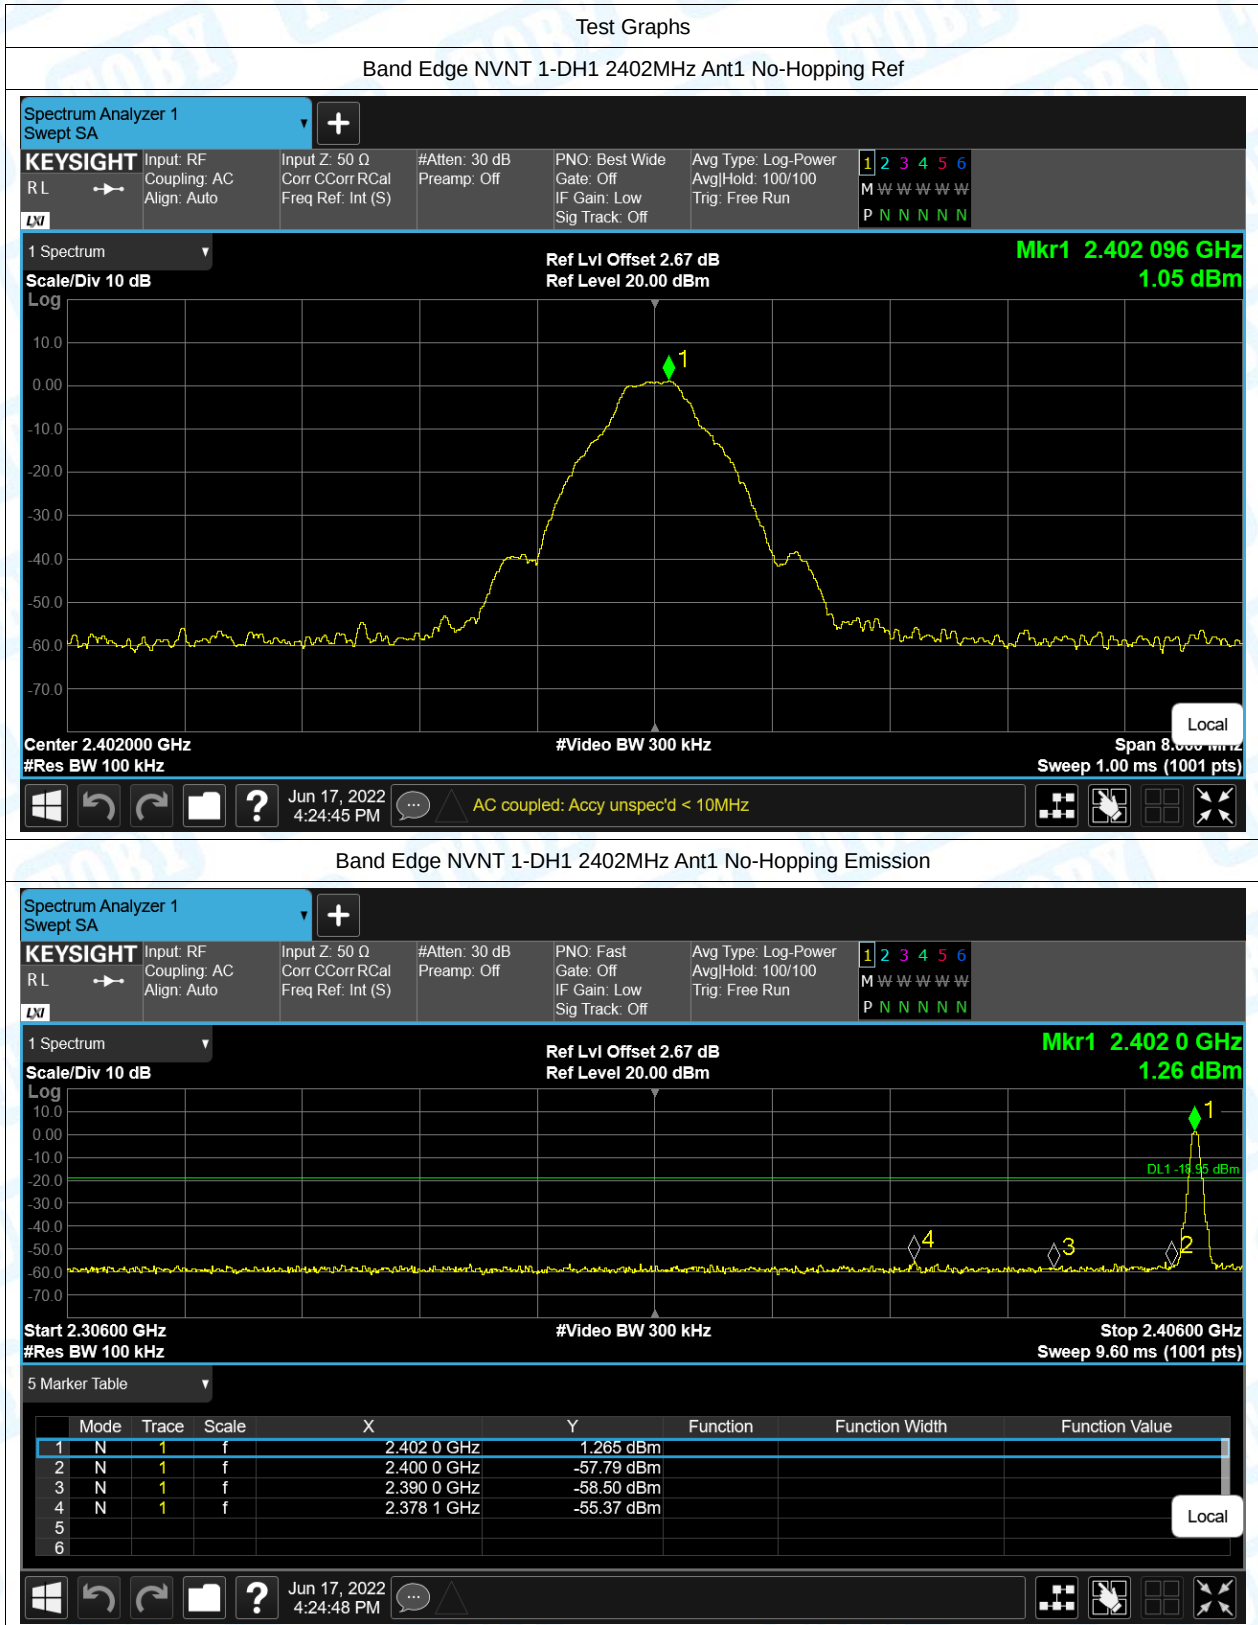


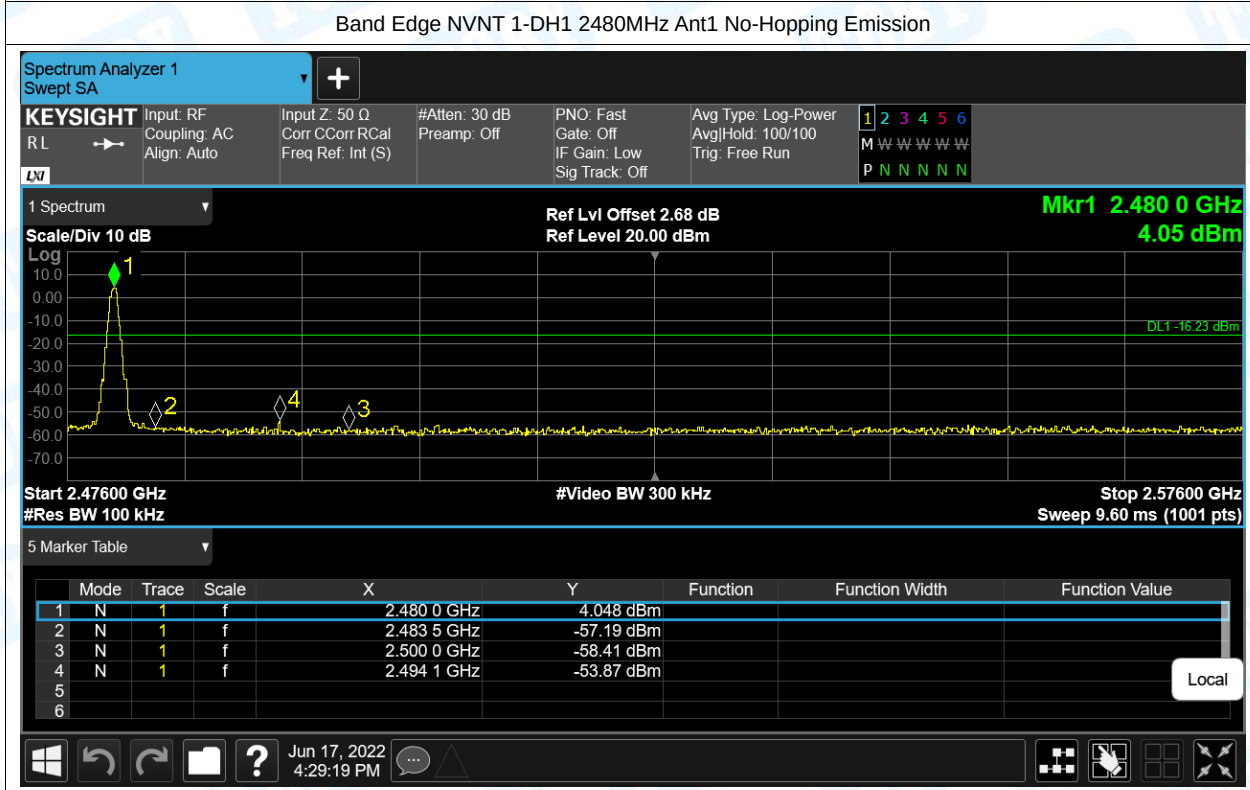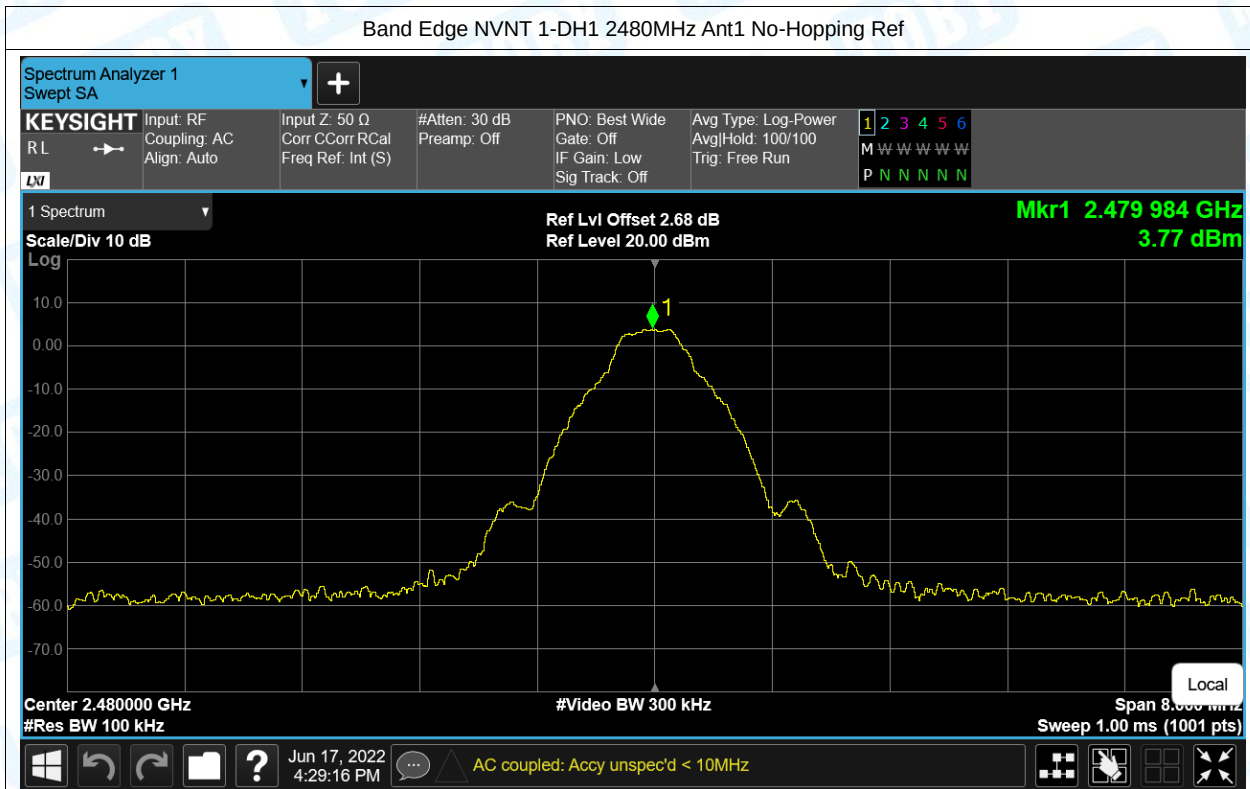

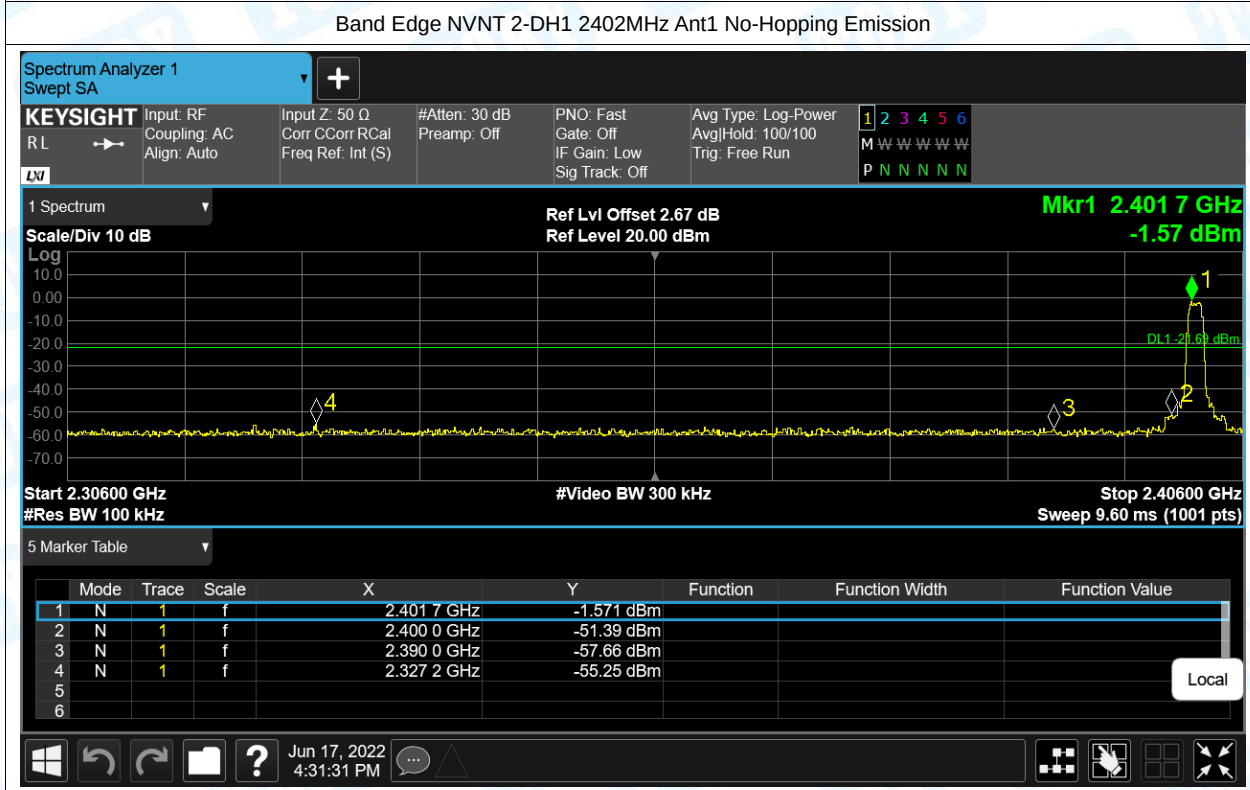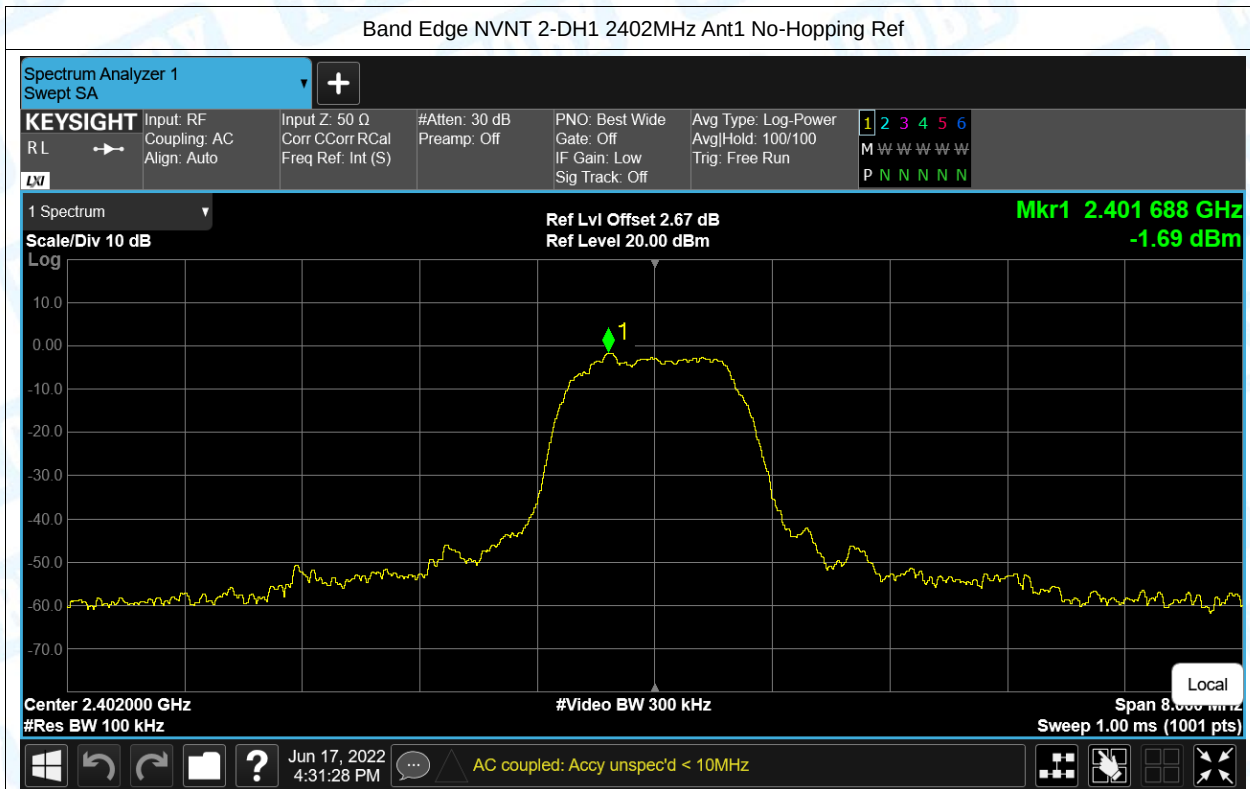

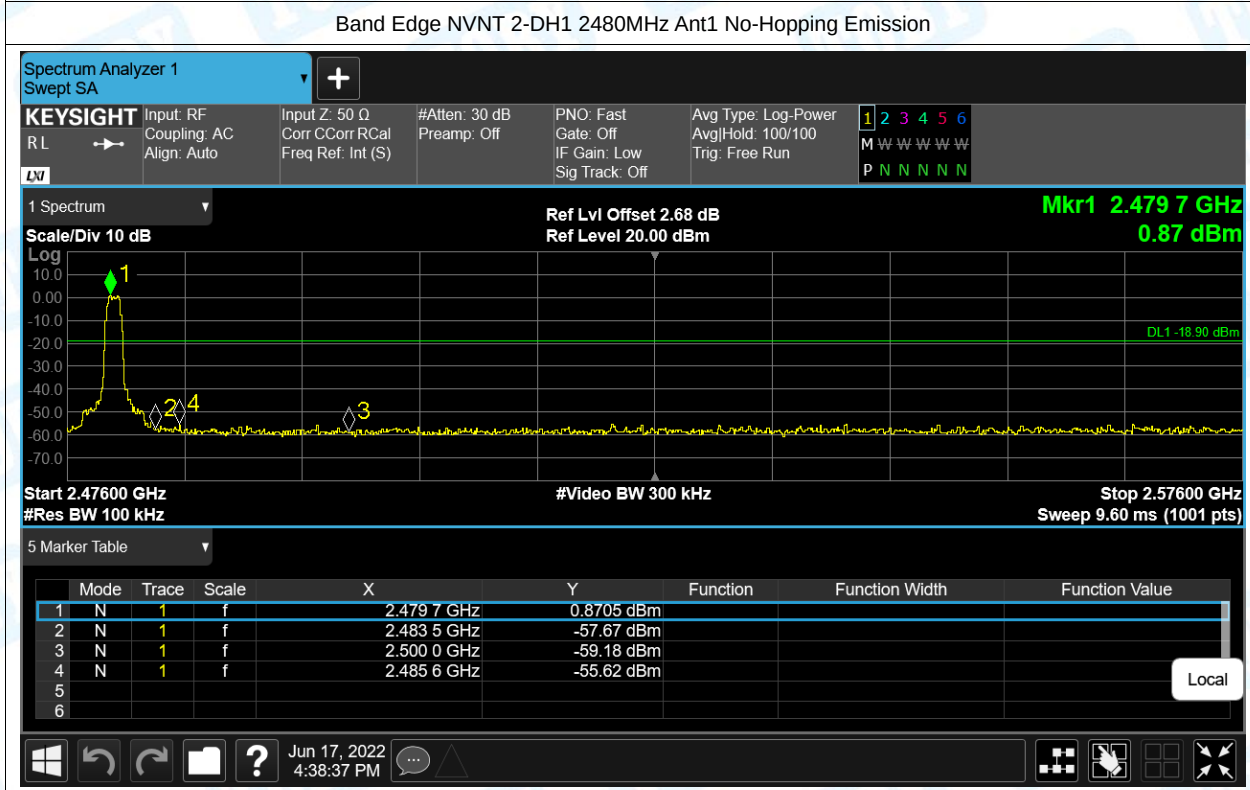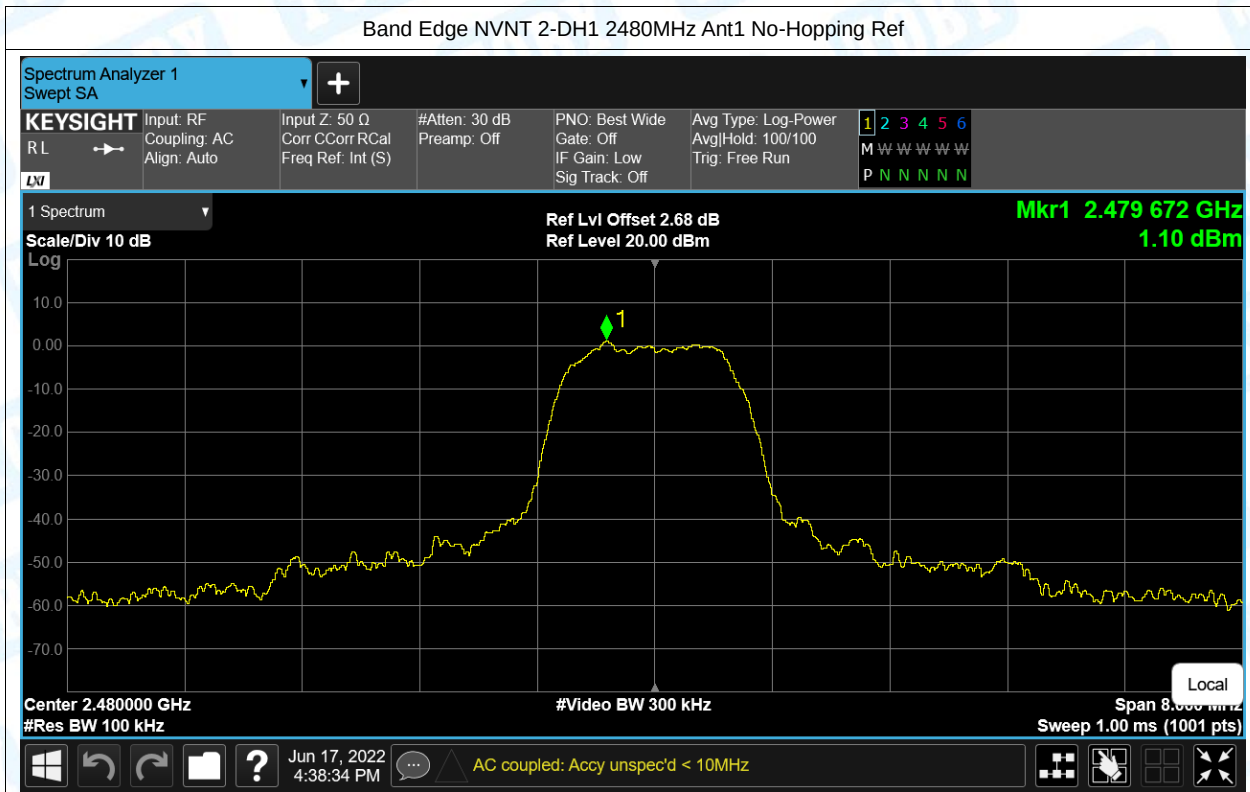


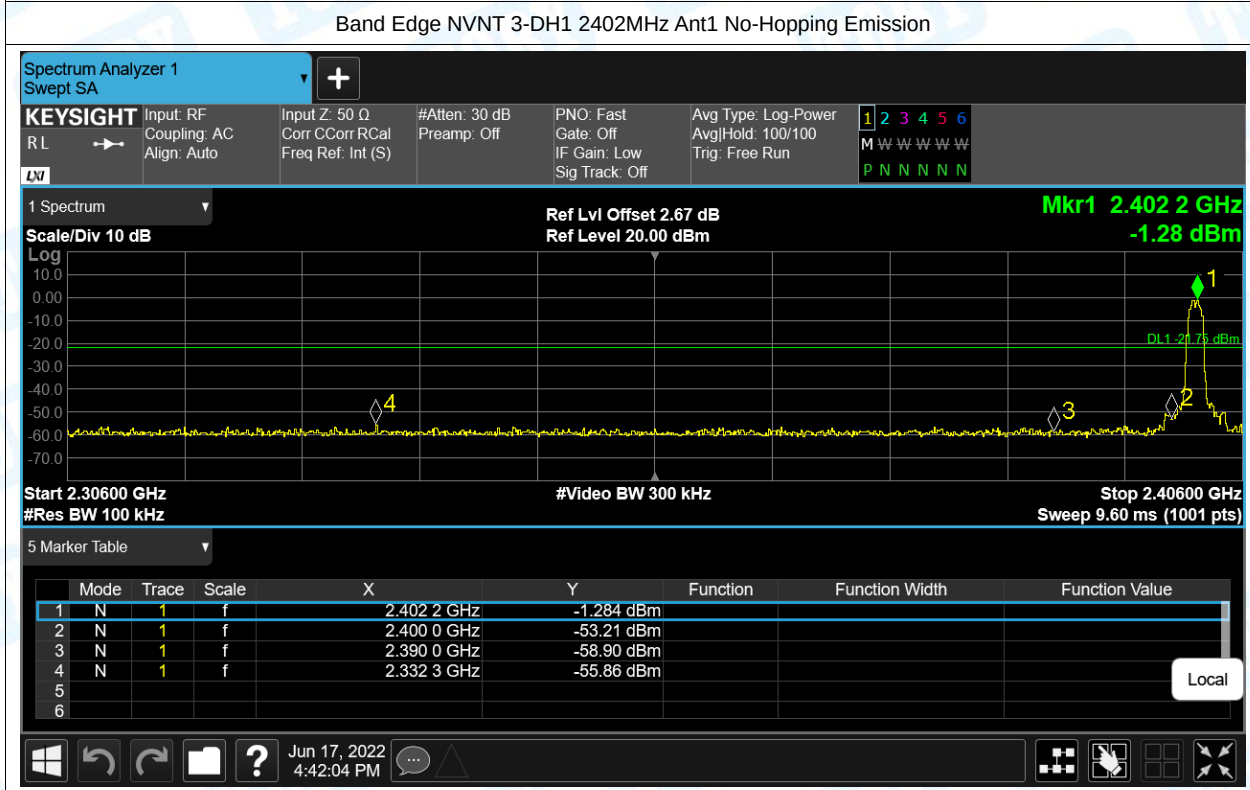
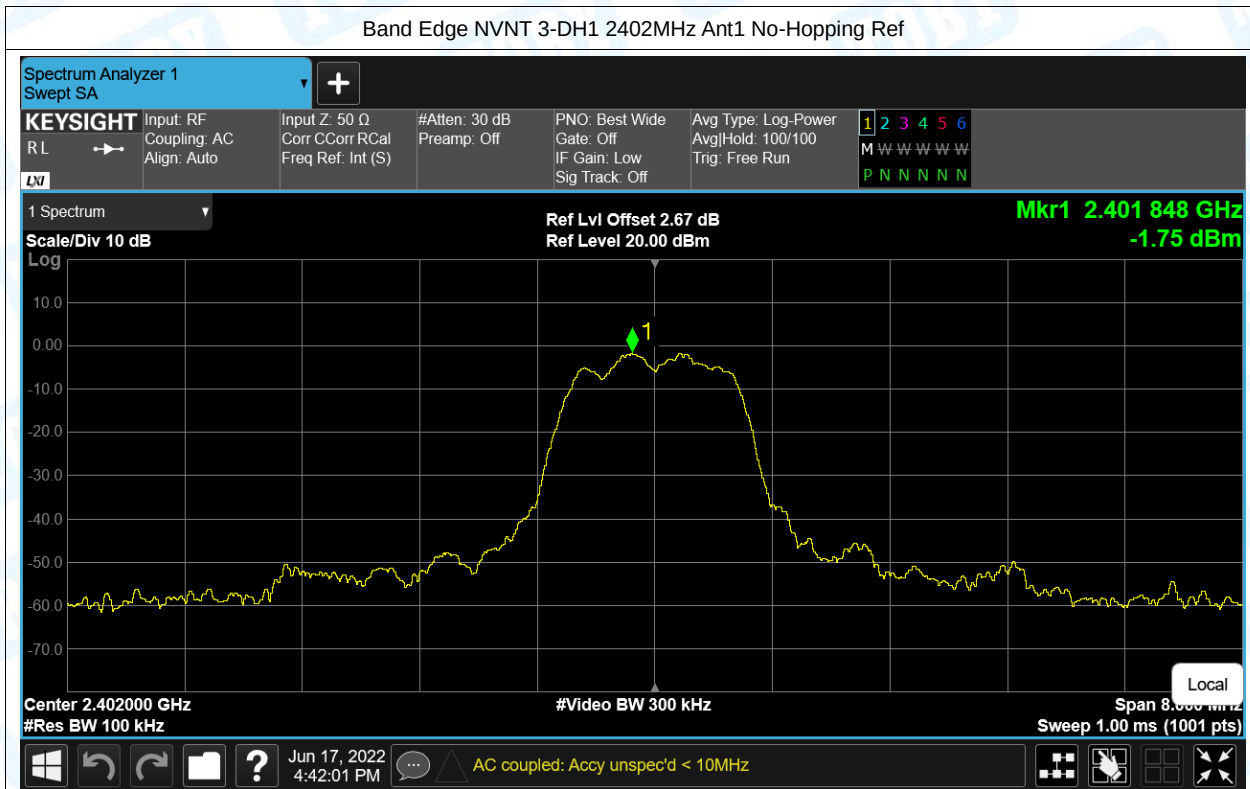


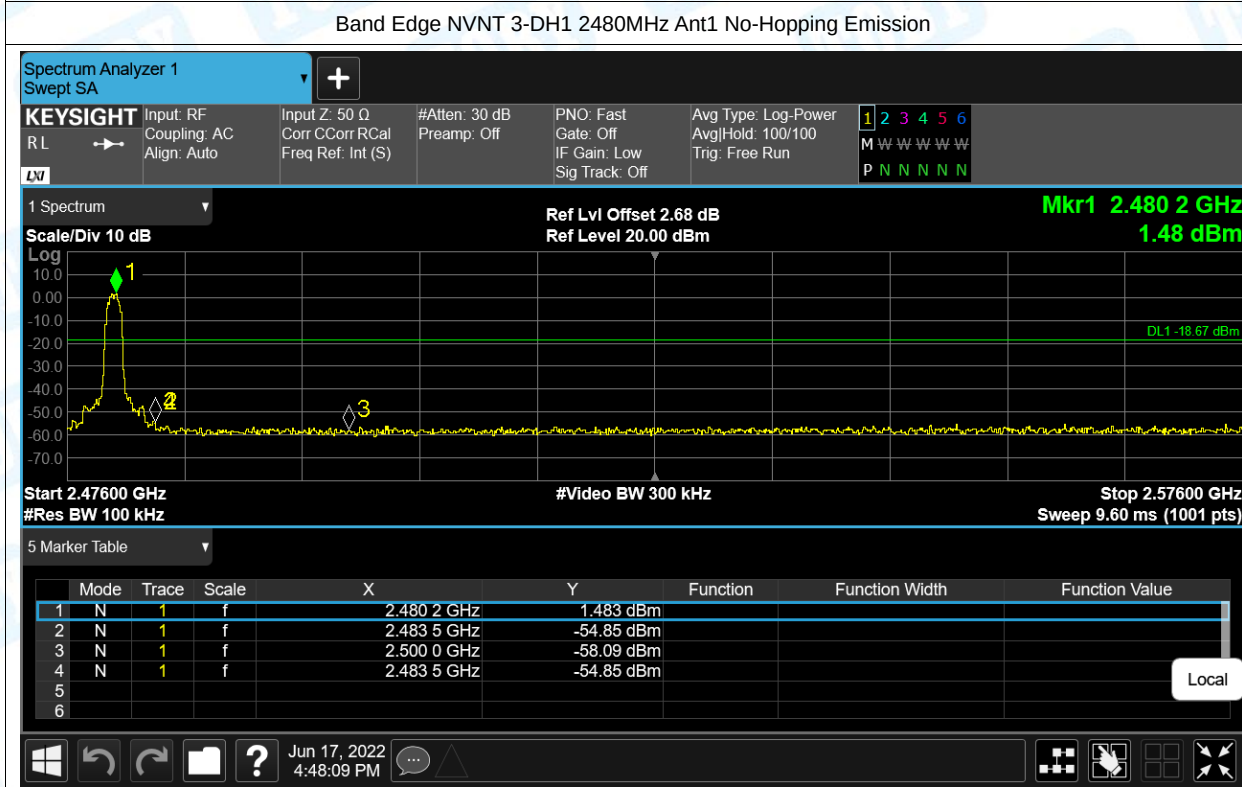
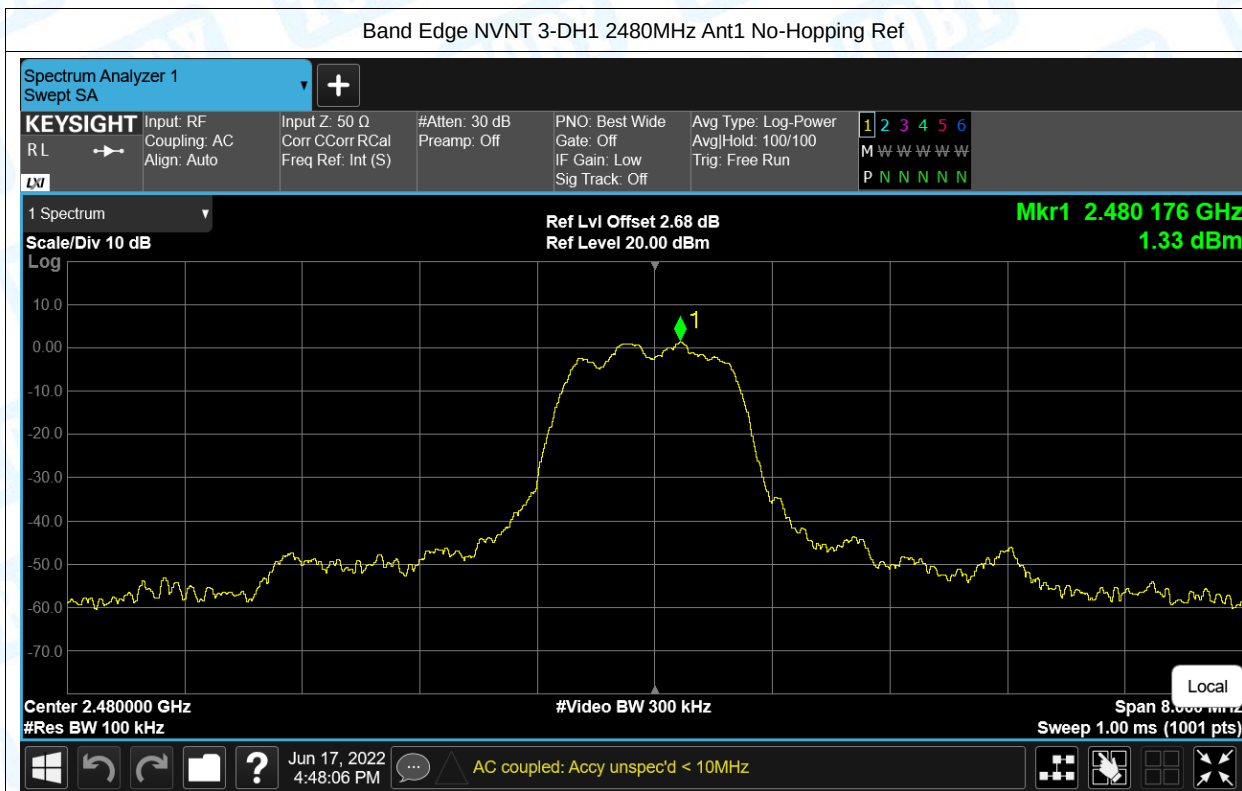




6. Band Edge(Hopping)



Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	Hopping	-56.64	-20	Pass
NVNT	1-DH1	2480	Ant1	Hopping	-59.95	-20	Pass
NVNT	2-DH1	2402	Ant1	Hopping	-55.92	-20	Pass
NVNT	2-DH1	2480	Ant1	Hopping	-59.95	-20	Pass
NVNT	3-DH1	2402	Ant1	Hopping	-56.4	-20	Pass
NVNT	3-DH1	2480	Ant1	Hopping	-59.37	-20	Pass


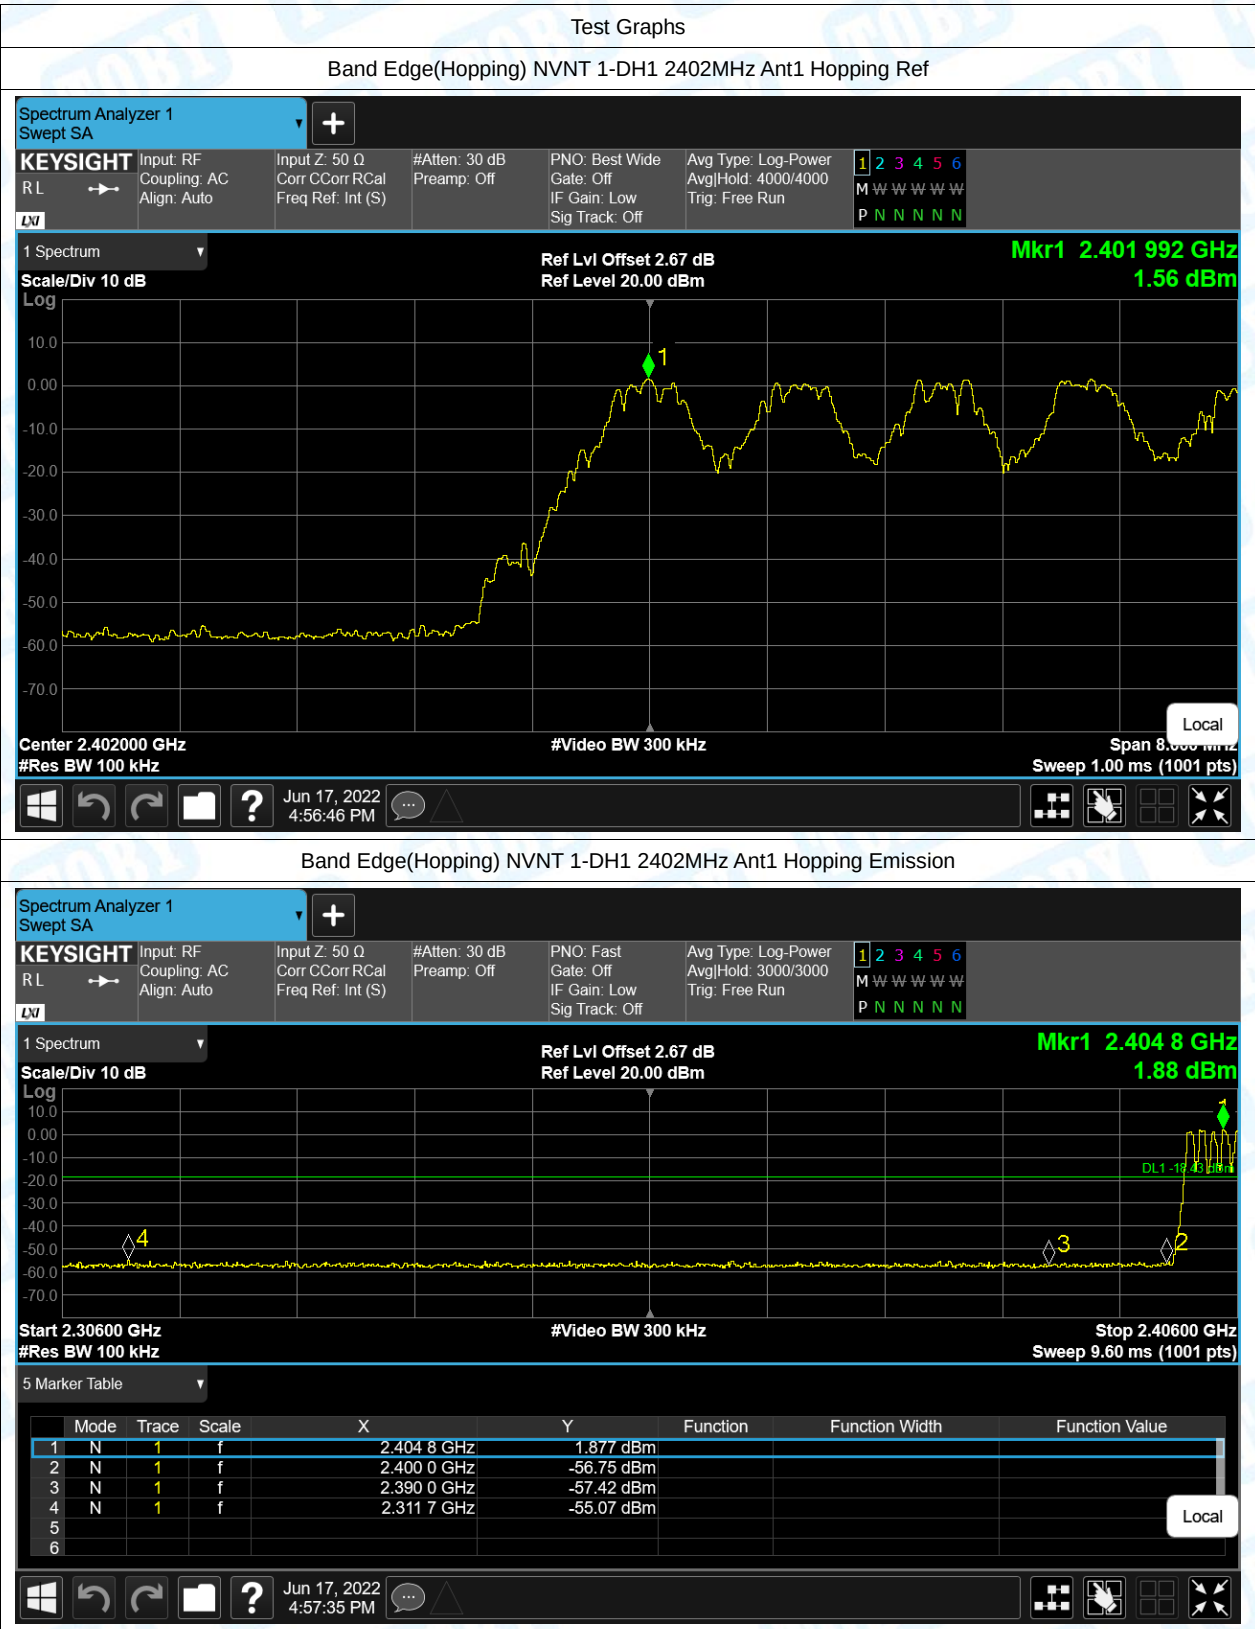


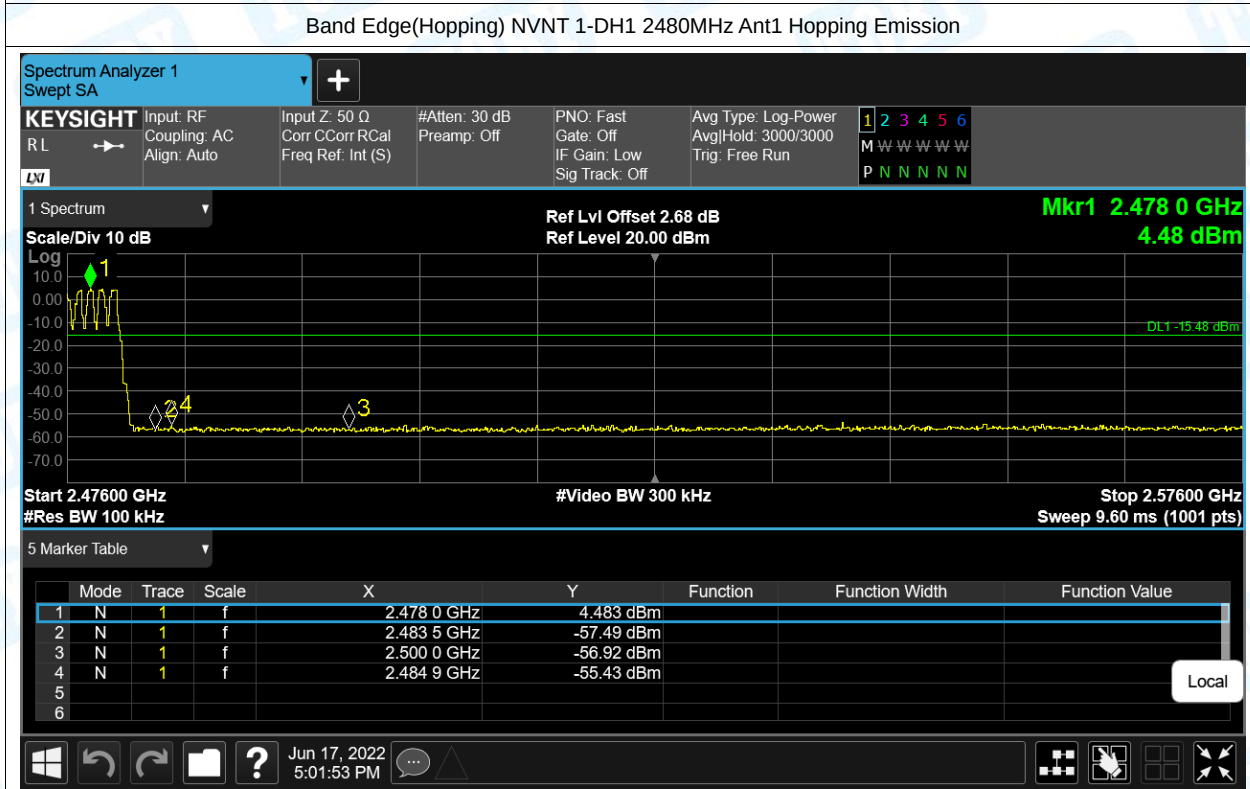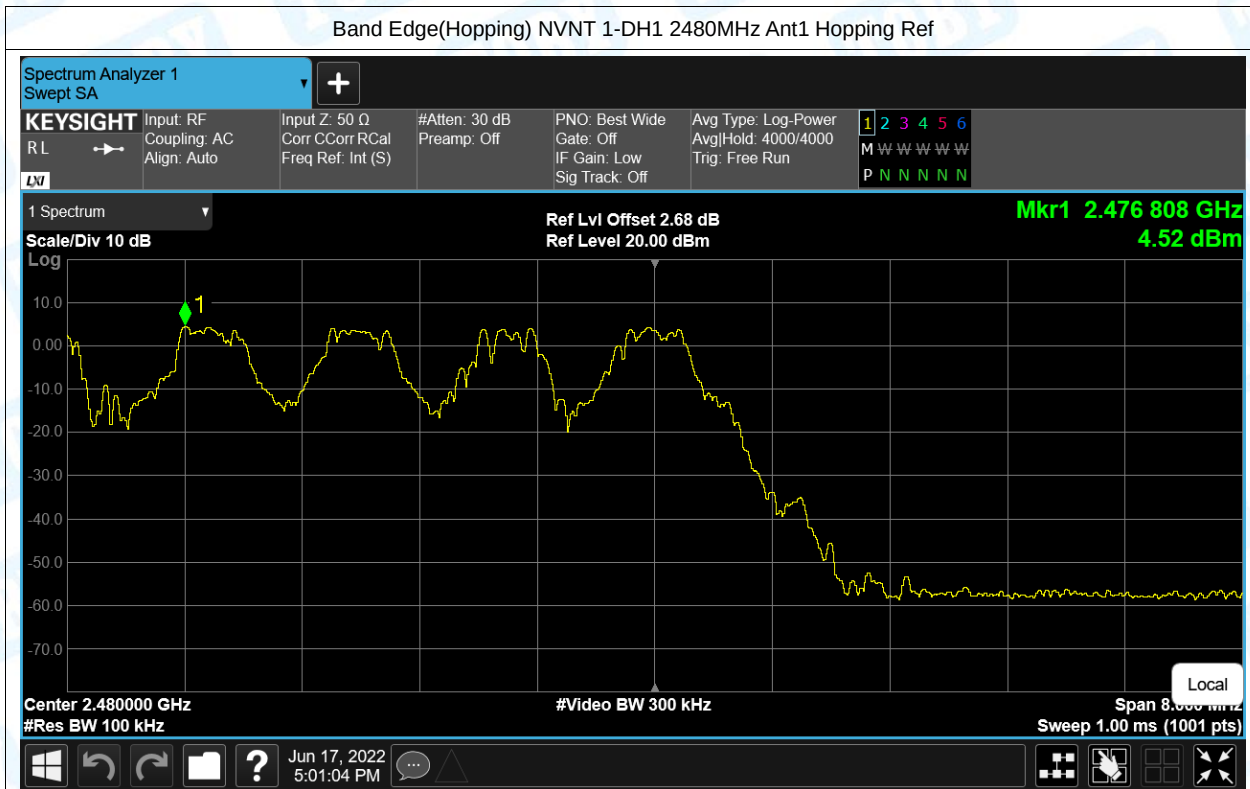

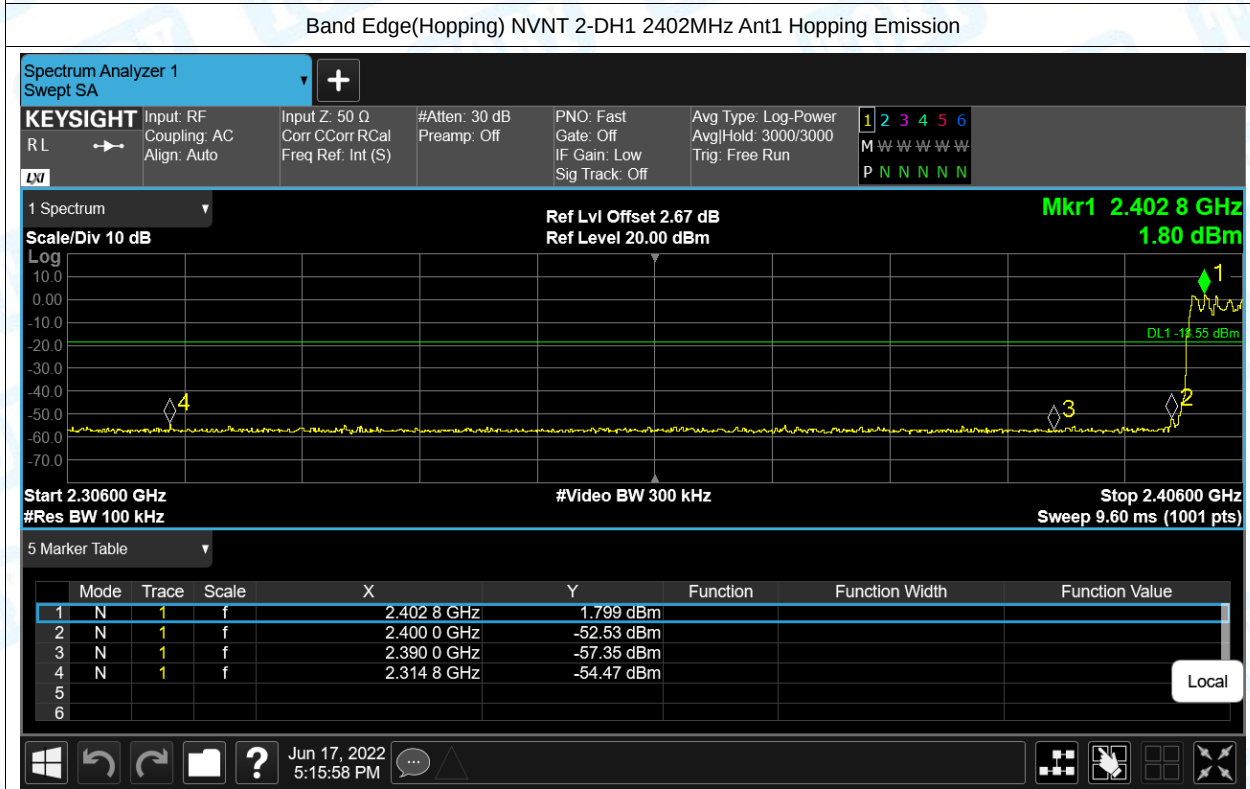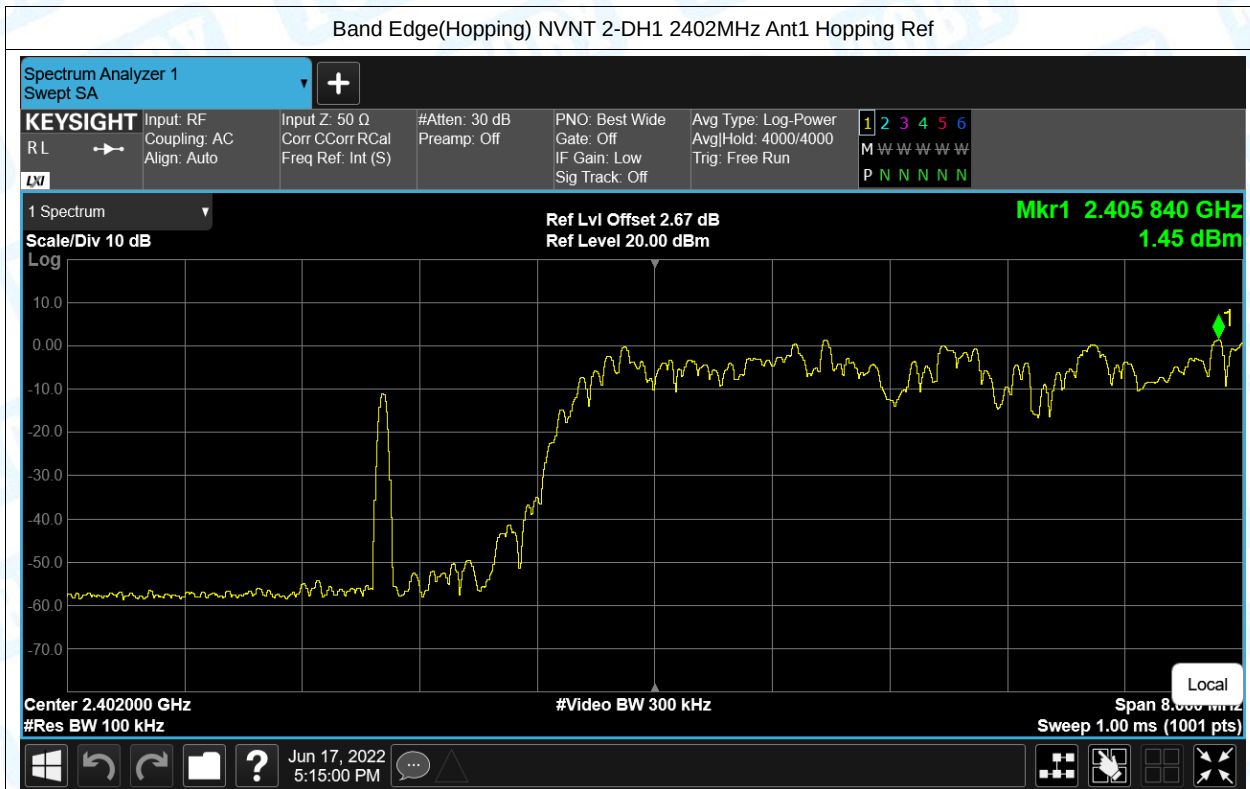

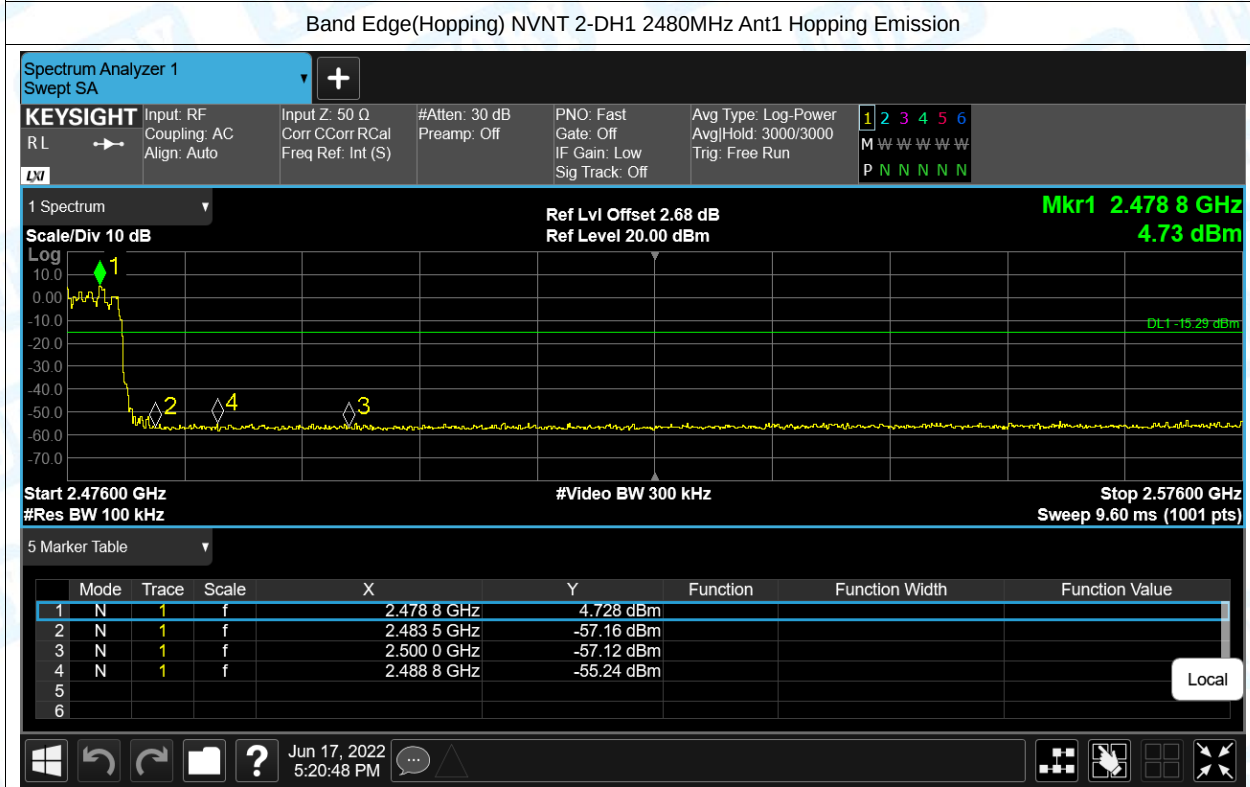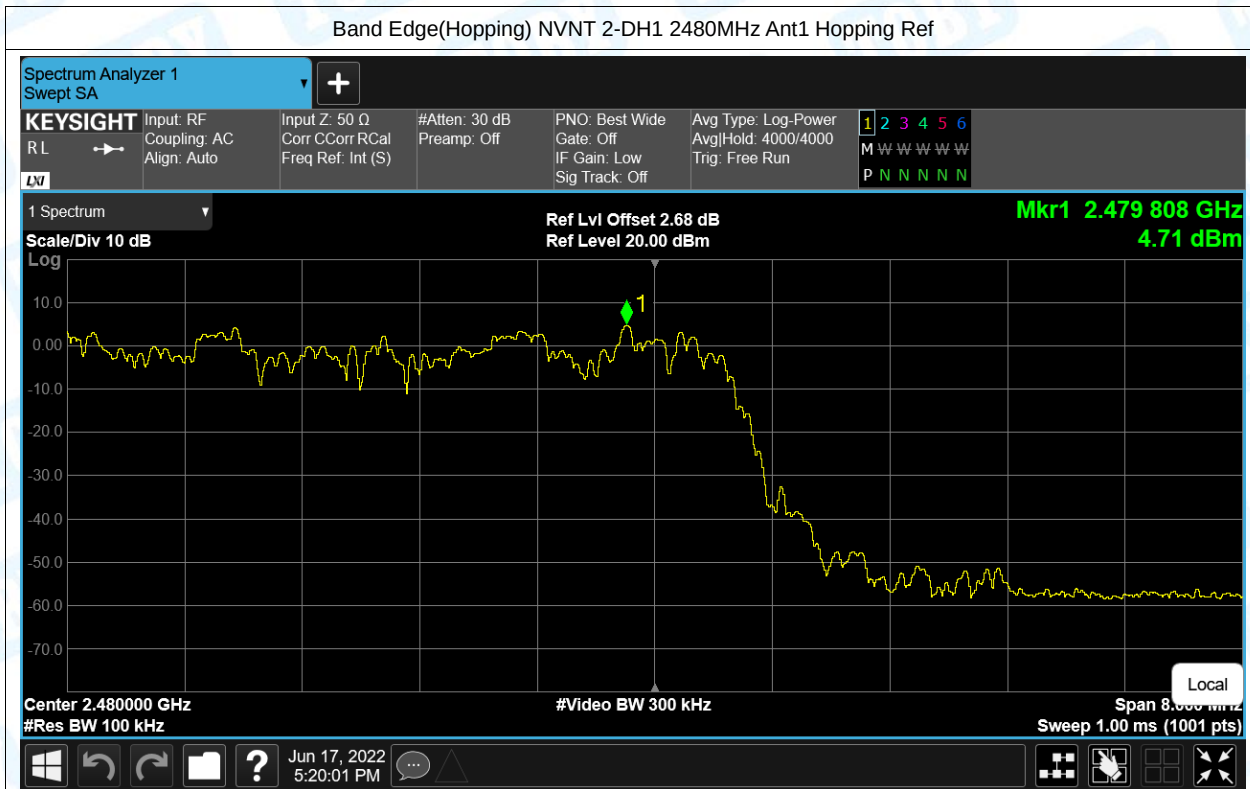

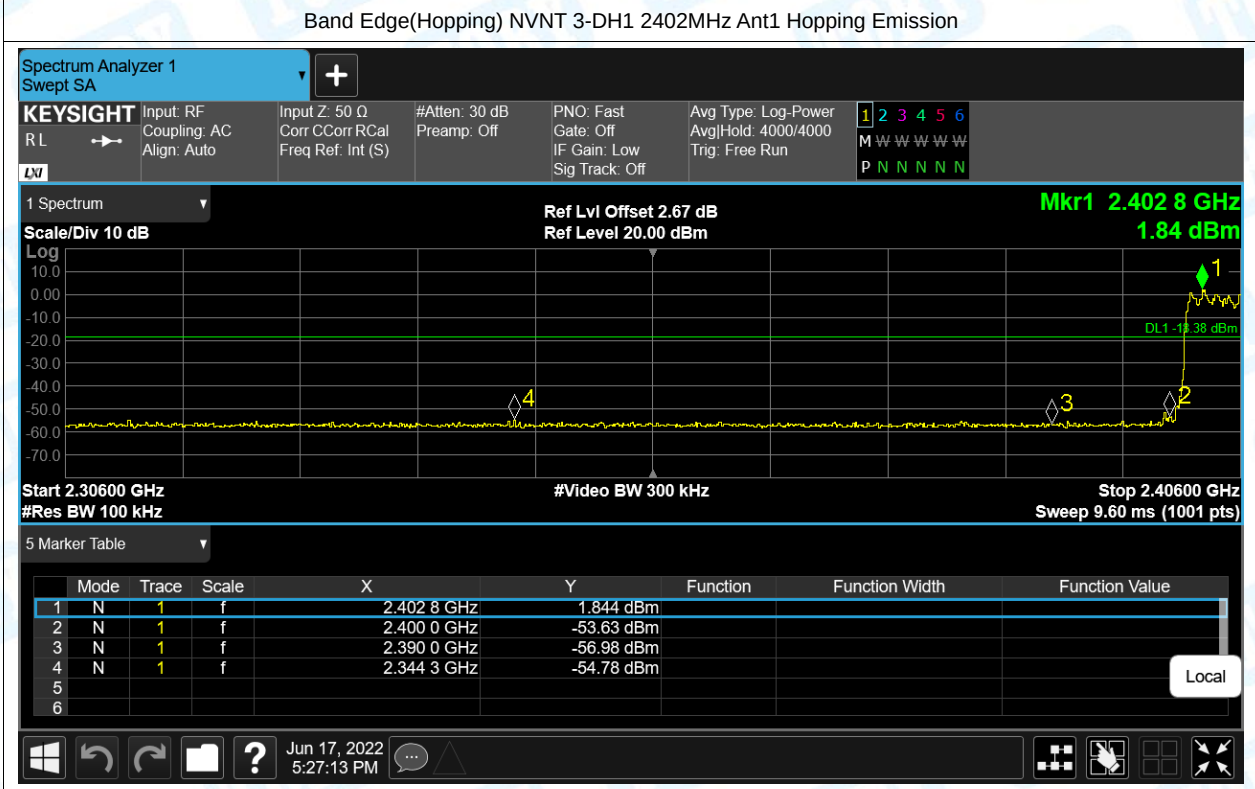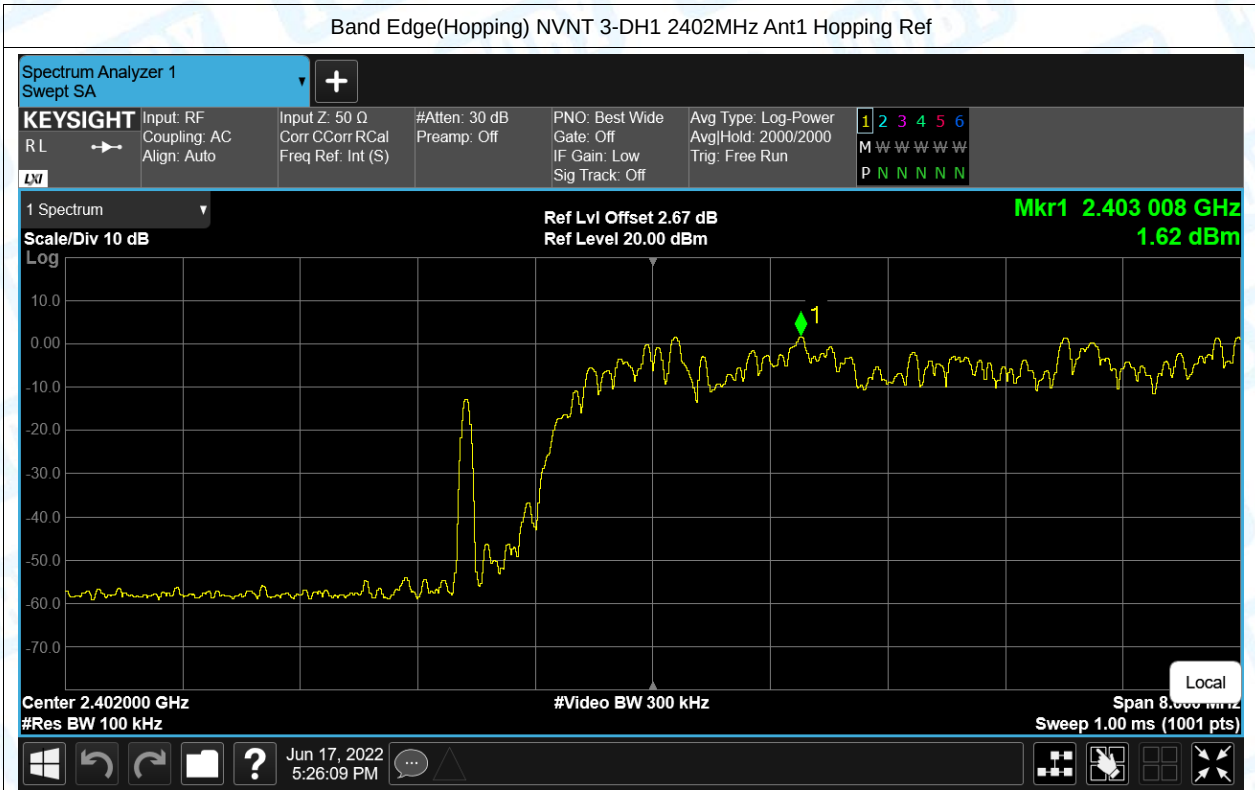

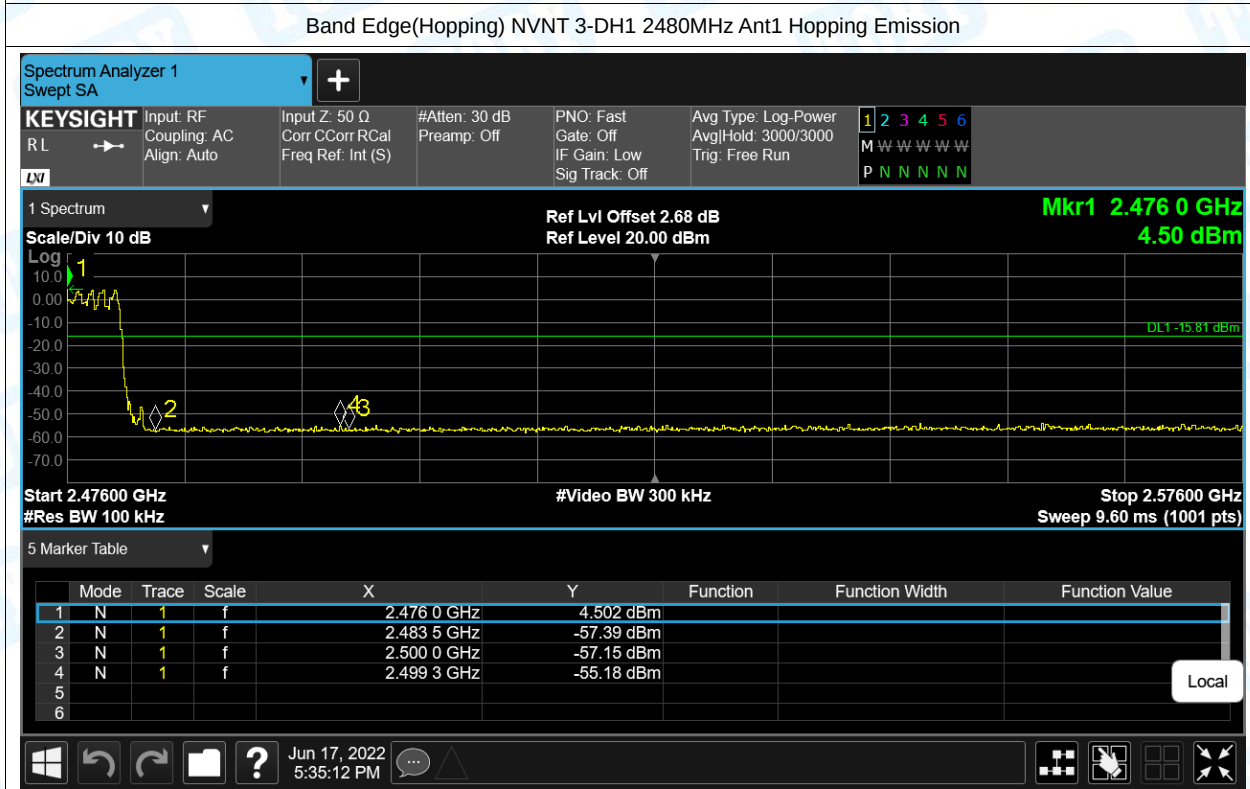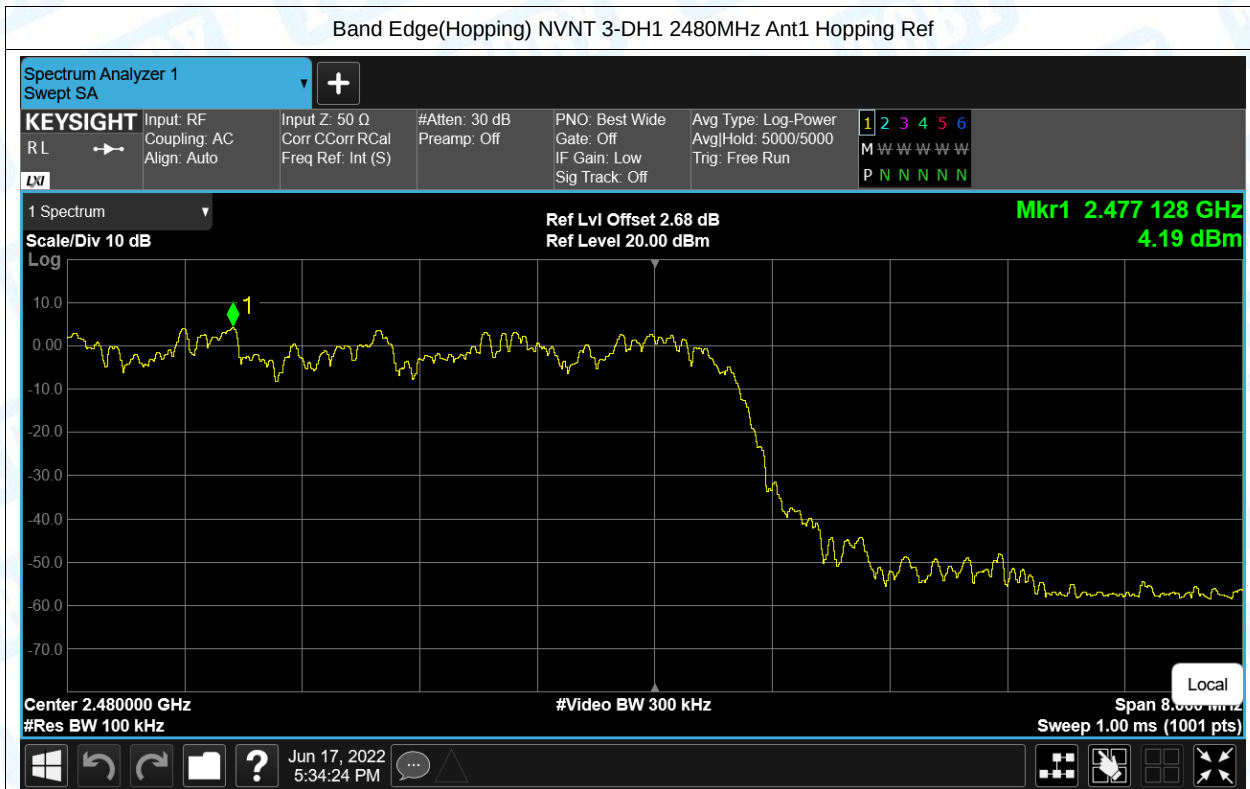

7. Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	-51.91	-20	Pass
NVNT	1-DH1	2441	Ant1	-52.01	-20	Pass
NVNT	1-DH1	2480	Ant1	-53.74	-20	Pass
NVNT	2-DH1	2402	Ant1	-49.88	-20	Pass
NVNT	2-DH1	2441	Ant1	-51.46	-20	Pass
NVNT	2-DH1	2480	Ant1	-52.51	-20	Pass
NVNT	3-DH1	2402	Ant1	-50.02	-20	Pass
NVNT	3-DH1	2441	Ant1	-50.48	-20	Pass
NVNT	3-DH1	2480	Ant1	-53.2	-20	Pass