


TEST REPORT

Job No. : GPEM2511001178EC
Test Report No. : F690501-RF-EMC004524
Applicant : MEDICOSON Co., Ltd.
Product Name : REFLORA
Model Name : PR-RFB20
Standards : FCC Part 15 Subpart B
FCC ID : 2468L-PR-RFB20
Date of Receipt : November 6, 2025
Date of Test : December 8, 2025 ~ December 30, 2025
Date of Issue : January 29, 2026
Test Result : Complied

- 1) This test report does not assure KOLAS accreditation.
2) The results of this test report are effective only to the items tested.
3) The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received.

Affirmation	Tested by (Name, signature) Dojun Lee 	Approved by (Name, signature) Paul Kang 
-------------	---	--

SGS Korea Co., Ltd. Gunpo Laboratory

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807, KOREA

Remarks :

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full.

Contents

1. Test Laboratory.....	4
1.1 General information.....	4
2. General Information of E.U.T.	5
2.1 Applicant Information	5
2.2 General Information of E.U.T.	5
2.3 Configurations of E.U.T	6
3. E.U.T. Operation and Test Configuration	7
3.1 Peripheral Equipments.....	7
3.2 Cable List.....	7
3.3 Operating Modes and Conditions	7
3.4 Test System Layout	7
3.5 Modifications to the test items during testing	8
4. Test Results.....	9
4.1 Summary	9
4.2 Note	9
5. Emission Test.....	10
5.1 Test Method and Limits	10
5.2 Test Limits.....	10
5.3 Conducted Emission	11
5.3.1 Test Equipments.....	11
5.3.2 Environment Conditions.....	11
5.3.3 Test Results.....	12
5.4 Radiated Emission	14
5.4.1 Test Equipments.....	14
5.4.2 Environment Conditions.....	14
5.4.3 Test Result	15
Appendix A: Measurement Uncertainty	19



Revision History

Revision	Report Number	Description
0	F690501-RF-EMC004524	Initial

1. Test Laboratory

1.1 General information

Name	SGS Korea Co., Ltd.	
- Branch Site	4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Republic of Korea Tel. +82 31 428 5700 Fax. +82 31 427 5370	
- Branch Site-3	35, Giheungdanji-ro 121beon-gil, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea Tel. +82 31 548 0710 Fax. +82 31 548 0719	
- Branch Site-4	12, Dongtansandan 10-gil, Hwaseong-si, Gyeonggi-do, 18487, Republic of Korea Tel. +82 31 8007 5302 Fax. +82 31 427 2370	
Website	http://www.sgsgroup.kr/ee	

SGS Korea Co., Ltd. has been accredited by the agencies listed in the following table;

Accreditation	Accreditation bodies	Accreditation No.
KC	MSIT- RRA	KR0150
FCC	FCC (MRA)	
ISED	ISED (MRA)	
Vietnam-MIC	Vietnam-MIC	
Japan EMI	VCCI	C-14102, T-11156, R-13662, G-20037
KOLAS	KATS - KOLAS	Testing No.123
CBTL	IECEE	TL 146
SDPPI	SDPPI	-

2. General Information of E.U.T.

2.1 Applicant Information

Applicant	MEDICOSON Co., Ltd.
Applicant Address	#704, #711, WMIT, 200 Gieopdosi-ro, Jijeong-myeon, Wonju-si, Gangwon-do, Republic of Korea
Manufacturer	MEDICOSON Co., Ltd.
Manufacturer Address	#704, #711, WMIT, 200 Gieopdosi-ro, Jijeong-myeon, Wonju-si, Gangwon-do, Republic of Korea

2.2 General Information of E.U.T.

Classification	Description
Product Name	REFLORA
Model Name	PR-RFB20
Alt. Model Name	-
Model Differences	-
Serial No.	FTC251101
EMI Classification	Class B
Internal Clock Frequency	140 MHz (Wireless: 2 480 MHz)
Rated Power	100 – 240 V~, 50/60 Hz(AC-DC Adapter) 5 Vd.c., 2 A(Battery)
Tested Power	01 Mode : 120 V~, 60 Hz(AC-DC Adapter) 02, 03 Mode : 5 Vd.c., 2 A(Battery)
H/W Version	1.0
S/W Version	1.0
Port	14 Pin connector, DC IN, USB C-Type connector(2 EA)
Components	EUT(Main body), FLOLIFT CHARGING CADLE, Body cartridge, Face cartridge
Function	High frequency based beauty devices with Bluetooth functionality.

2.3 Configurations of E.U.T

Description	Model	Serial No.	Manufacturer	Note
Header pin Board	FLOLIF SUB PCB0 REV3.2	-	MEDICOSON Co., Ltd.	-
Main Board	-	-	MEDICOSON Co., Ltd.	-
AMP Board	-	-	MEDICOSON Co., Ltd.	-
Face tip Board	FLOLIF FACE REV3.2	-	MEDICOSON Co., Ltd.	-
Face socket Board	-	-	MEDICOSON Co., Ltd.	
Body tip Board	-	-	MEDICOSON Co., Ltd.	
Body socket Board	-	-	MEDICOSON Co., Ltd.	
Cradle Board	-	-	MEDICOSON Co., Ltd.	
BLE Module	BoT-Nle521	-	CHIPSEN. Co., Ltd	-

3. E.U.T. Operation and Test Configuration

3.1 Peripheral Equipments

Description	Model	Serial No.	Manufacturer	Note.
AC-DC Adapter	EP-TA21KBK	-	SOLUM VINA COMPANY LIMITED	-
Mobile phone	BE2013	-	-	-


3.2 Cable List


Start		END		Cable Spec.		Used core
Name	I/O Port	Name	I/O Port	Length (m)	Shield	
01 Mode						
EUT (Main body)	14 Pin connector	EUT (Face cart ridge)	14 Pin connector	-	-	-
	DC IN	EUT (FLOFIFT CHARGING CRADLE)	USB C-type connector	-	-	-
AC-DC Adapter	USB A-type connector		USB C-type connector	0.8	Unshielded	-
02 Mode						
EUT (Main body)	14 Pin connector	EUT(Body cartridge)	14 Pin connector	-	-	-
	-	Mobile phone	-		-	-

3.3 Operating Modes and Conditions

Operating mode	Operating condition
01 Charging	The state in which the EUT is charged from AC-DC Adapter.
02 Operating(Bluetooth)	Transferring product information to the phone via bluetooth.

3.4 Test System Layout

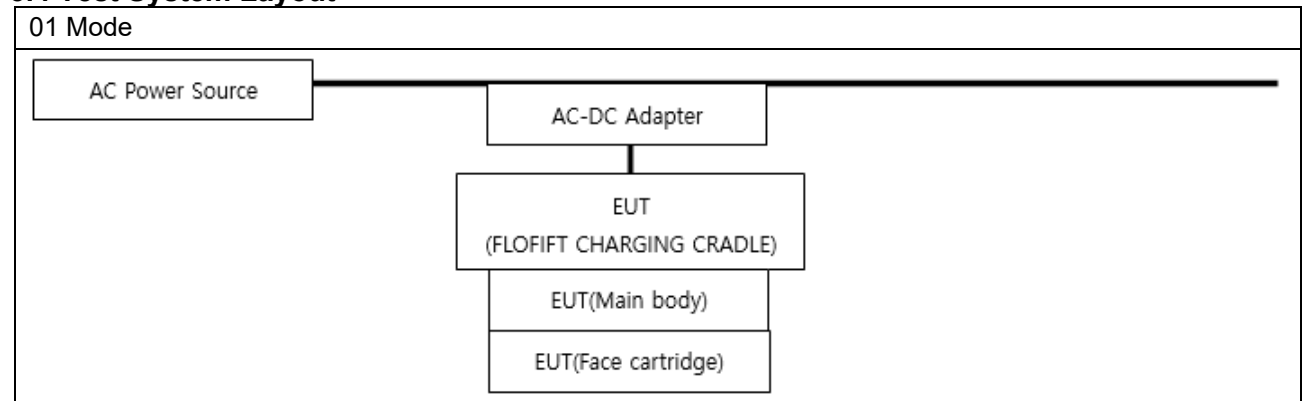

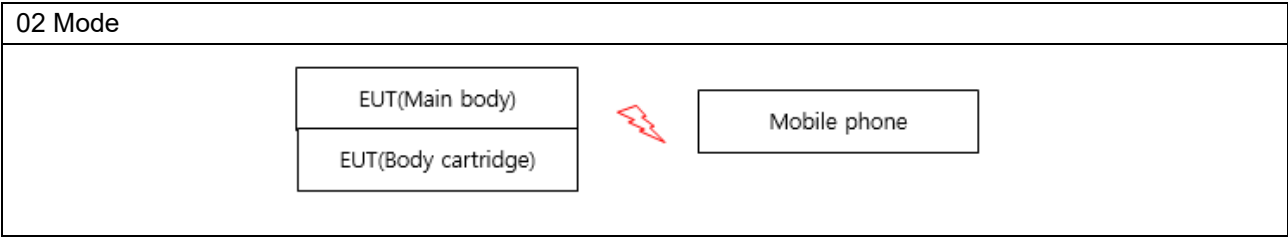

3.5 Modifications to the test items during testing

☒ No modifications done during testing

☐ Modification done during testing (see details below)

No.	Description of modification (if any)
1	
2	

4. Test Results

4.1 Summary

Test Items	Standards	Test Results
Conducted Emission	FCC Part 15 Subpart B Section 15.107 ANSI C63.4a:2017	Complied
Radiated Emission	FCC Part 15 Subpart B Section 15.109 ANSI C63.4a:2017	Complied

4.2 Note

- 1 Test Methods of all test items are performed according to the basic standard in subclause 4.1.
- 2

Emission Test

5.1 Test Method and Limits

Test Items	Measuring Frequency Range	RBW	Measuring Distance
Conducted Emission	0.15 MHz - 30 MHz	9 kHz	-
Radiated Emission	30 MHz - 1 GHz	120 kHz	10 m or 3 m
	Above 1 GHz	1 MHz	3 m

5.2 Test Limits

Frequency Range	Limits(dBμV)		Class
	Quasi-peak	CISPR-Average	
0.15 MHz - 0.5 MHz	79	66	Class A
0.5 MHz - 30 MHz	73	60	
0.15 MHz - 0.5 MHz	66 to 56 ^{Note1}	56 to 46 ^{Note1}	Class B
0.5 MHz - 5 MHz	56	46	
5 MHz - 30 MHz	60	50	

[Table 2.1 Conducted Emission Limits]

Frequency Range	Limits(dBμV/m)	Class
	Quasi-peak	
30 MHz - 88 MHz	39.0	Class A (10 m method)
88 MHz - 216 MHz	43.5	
216 MHz - 960 MHz	46.5	
960 MHz - 1 GHz	49.5	
30 MHz - 88 MHz	40.0	Class B (3 m method)
88 MHz - 216 MHz	43.5	
216 MHz - 960 MHz	46.0	
960 MHz - 1 GHz	54.0	

[Table 2.2 Radiated Emission Limits below 1 GHz]

Frequency Range	Limits(dBμV)		Class
	Peak	CISPR-Average	
Above 1 GHz	79.5	59.5	Class A
	74.0	54.0	Class B

[Table 2.3 Radiated Emission Limits Above 1 GHz ^{Note2}]

Note 1. The lower limit shall apply at the transition frequencies. The limit decreases linearly with the logarithm of that frequency.

Note 2. The limits of class A equipment is extrapolated using an extrapolation factor of 20 dB/decade because it was measured at 3 m distance not 10 m distance.

5.3 Conducted Emission

5.3.1 Test Equipments

Description	Model No.	Manufacturer	Serial No	Cal Due. Date
EMI TEST RECEIVER	ESU8	R&S	100128	2026-05-30
2-LINE V-NETWORK	ENV216	R&S	101180	2026-08-07
PULSE LIMITER	ESH3-Z2	R&S	100283	2026-08-21
RF Cable	EMH-1Lab-CE-01	-	-	-

Note. Measuring software is below


- Branch Site : EMC32(V10.60.20) from R&S
- Branch Site-3 : EMC32(V10.40.10) from R&S
- Branch Site-4 : EMC32(V10.40.00) from R&S

5.3.2 Environment Conditions

Test Site	Shield Room in Branch site-3
Temperature	(Minimum 17.4, Maximum 18.1) °C
Humidity	(Minimum 30.0, Maximum 31.0) % R.H.
Atmospheric Pressure	(Minimum 101.4, Maximum 101.4) kPa
Test Date	2025-12-08

5.3.3 Test Results


Live Line_01 Mode

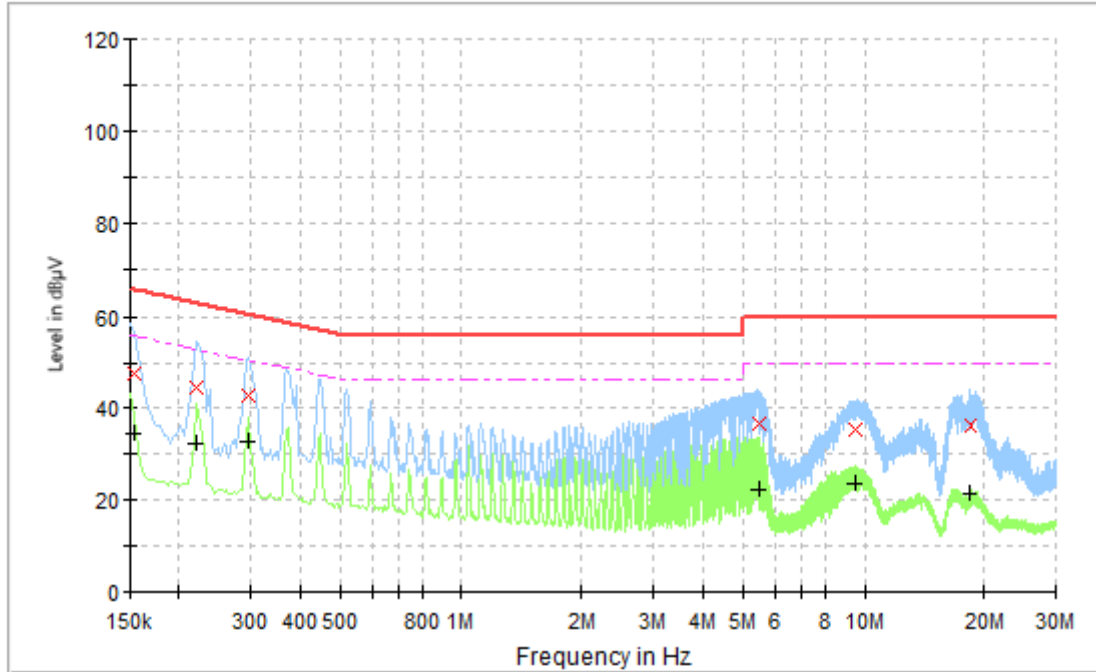

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.154	---	34.42	55.78	21.36	15 000.0	9.000	L1	ON	19.7
0.154	47.42	---	65.78	18.36	15 000.0	9.000	L1	ON	19.7
0.222	---	32.06	52.74	20.68	15 000.0	9.000	L1	ON	19.7
0.222	44.23	---	62.74	18.52	15 000.0	9.000	L1	ON	19.7
0.298	---	32.38	50.30	17.92	15 000.0	9.000	L1	ON	19.7
0.298	42.45	---	60.30	17.85	15 000.0	9.000	L1	ON	19.7
5.510	---	22.17	50.00	27.83	15 000.0	9.000	L1	ON	19.9
5.510	36.49	---	60.00	23.51	15 000.0	9.000	L1	ON	19.9
9.446	---	23.38	50.00	26.62	15 000.0	9.000	L1	ON	20.0
9.446	35.16	---	60.00	24.84	15 000.0	9.000	L1	ON	20.0
18.482	---	21.19	50.00	28.81	15 000.0	9.000	L1	ON	20.4
18.482	36.03	---	60.00	23.97	15 000.0	9.000	L1	ON	20.4

Neutral Line_01 Mode

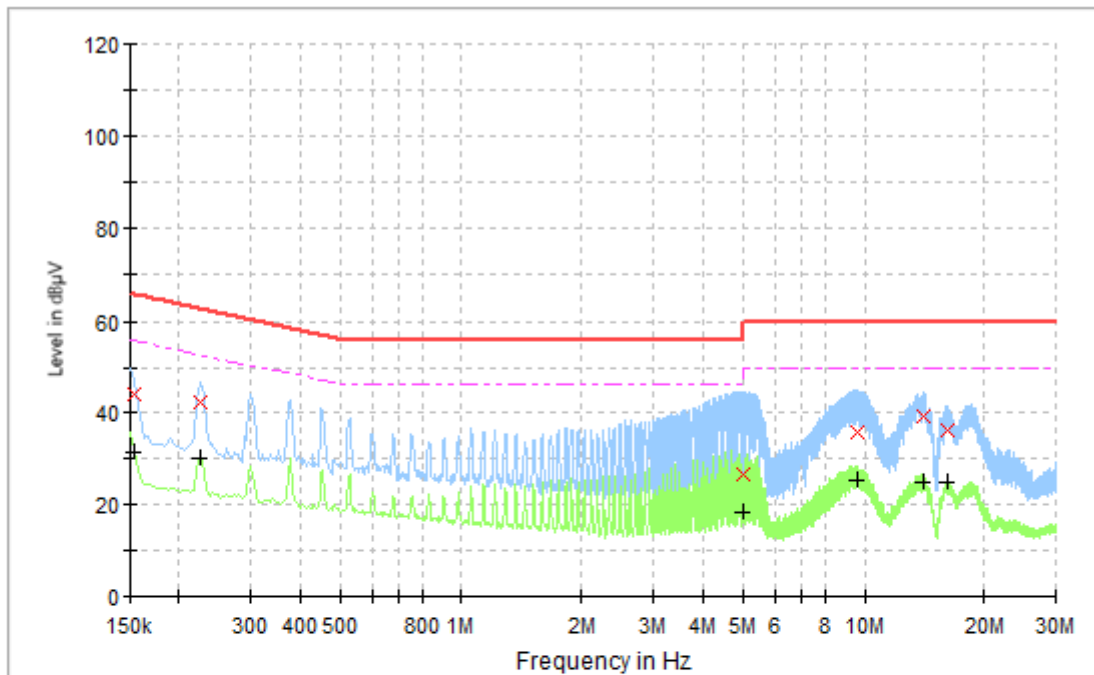

Final Result

Frequency (kHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.154	---	31.18	55.78	24.60	15 000.0	9.000	N	ON	19.7
0.154	43.56	---	65.78	22.22	15 000.0	9.000	N	ON	19.7
0.226	---	29.74	52.60	22.85	15 000.0	9.000	N	ON	19.7
0.226	42.10	---	62.60	20.49	15 000.0	9.000	N	ON	19.7
5.038	---	18.29	50.00	31.71	15 000.0	9.000	N	ON	19.9
5.038	26.33	---	60.00	33.67	15 000.0	9.000	N	ON	19.9
9.554	---	25.26	50.00	24.74	15 000.0	9.000	N	ON	20.1
9.554	35.51	---	60.00	24.49	15 000.0	9.000	N	ON	20.1
13.998	---	24.69	50.00	25.31	15 000.0	9.000	N	ON	20.4
13.998	39.15	---	60.00	20.85	15 000.0	9.000	N	ON	20.4
16.014	---	24.52	50.00	25.48	15 000.0	9.000	N	ON	20.5
16.014	35.97	---	60.00	24.03	15 000.0	9.000	N	ON	20.5

Note. Measurement Uncertainty : See Appendix A

- Line (L1) : Live Line of AC Power
- Margin = Limit – Quasi Peak or CAverage

- Line (N) : Neutral Line of AC Power
- Corr. = LISN Factor + Cable loss + Pulse Limiter factor

Ex) In case

Freq ; 0.5 Mhz, level ; 30 dB(μV), CL ; 0.2 dB, LISN ; 9.5 dB, P/L: 9.8 dB

Result = Level + CL + LISN + P/L

= 30 + 0.2 + 9.5 + 9.8

= 49.5

Margin = Limit – Result

= 79 - 49.5

= 29.5

5.4 Radiated Emission

5.4.1 Test Equipments

Equipment	Model	Manufacturer	Serial No	Cal Due. Date
EMI TEST RECEIVER	ESU8	R&S	100128	2026-05-30
TRILOG BROADBAND ANTENNA	VULB 9163	SCHWARZBECK	9163-437	2026-06-02
Double Ridged Horn Antenna	HF907	R&S	100208	2026-03-06
LOOP ANTENNA	HFH2-Z2	R&S	827525/002	2026-03-12
PRE-AMPLIFIER	AM-1431	MITEQ	1336160	2026-06-09
AMPLIFIER	SCU 18	R&S	10070	2026-08-26
RF Cable	EMH-1Lab-RE-01	-	-	-
RF Cable	EMH-1Lab-RE-02	-	-	-
RF Cable	EMH-1Lab-RE-03	-	-	-
RF Cable	EMH-1Lab-RE-04	-	-	-
RF Cable	EMH-1Lab-RE-05	-	-	-
RF Cable	EMH-1Lab-RE-06	-	-	-

Note. Measuring software is below

- Branch Site : ELECTRA(V5.02.0) from R&S
- Branch Site-3 : EMC32(V10.40.10) from R&S
- Branch Site-4 : EMC32(V10.40.10) from R&S


5.4.2 Environment Conditions

Test Site	10 m SEMI-ANECHOIC CHAMBER in Branch site-3
Temperature	(Minimum 18.1, Maximum 20.5) °C
Humidity	(Minimum 30.0, Maximum 34.0) % R.H.
Atmospheric Pressure	(Minimum 101.8, Maximum 102.1) kPa
Test Date	2025-12-30 (Below 1 GHz) 2025-12-29 (Above 1 GHz)

5.4.3 Test Result

Below 1 GHz


01 Mode (30 MHz ~ 1 000 MHz) _10m method

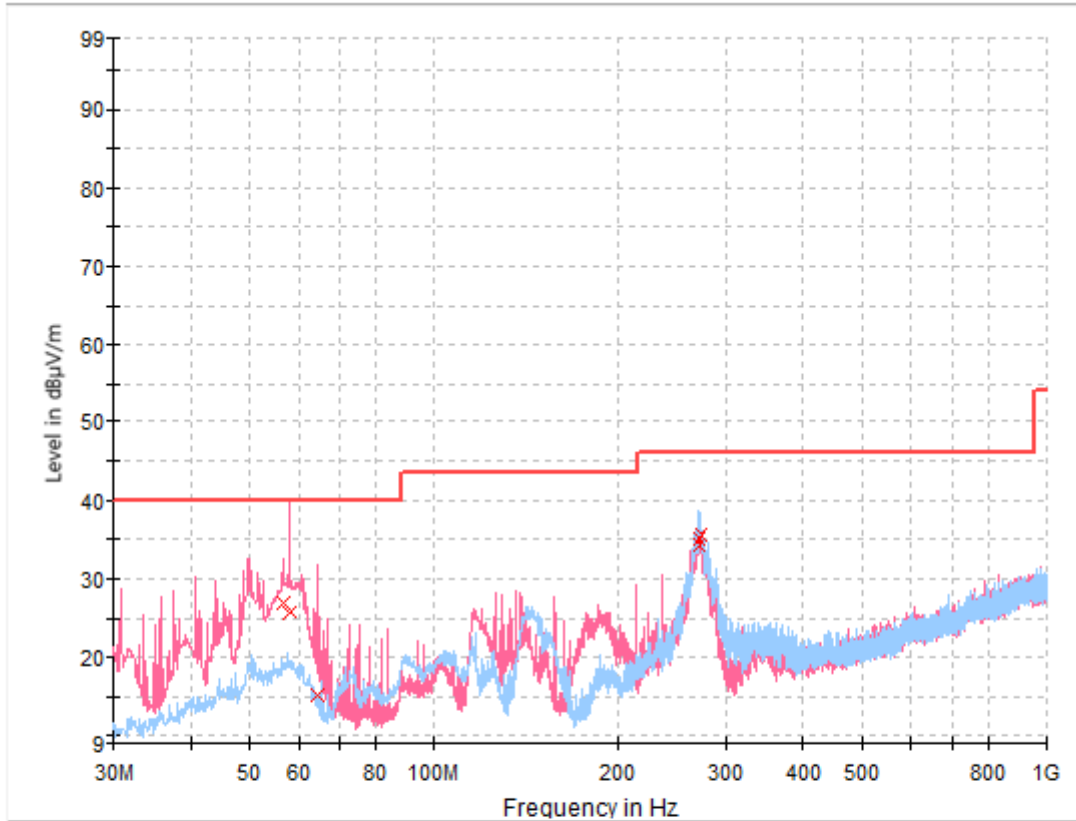

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
56.481	27.08	40.00	12.92	15 000.0	120.000	125.0	V	266.0	-17.4
57.936	25.82	40.00	14.18	15 000.0	120.000	100.0	V	47.0	-17.5
64.435	15.15	40.00	24.85	15 000.0	120.000	110.0	V	256.0	-19.4
270.075	34.36	46.00	11.64	15 000.0	120.000	156.0	H	211.0	-16.5
271.336	34.98	46.00	11.02	15 000.0	120.000	180.0	H	203.0	-16.4
273.470	35.46	46.00	10.54	15 000.0	120.000	200.0	H	220.0	-16.4

02 Mode (30 MHz ~ 1 000 MHz) _10m method

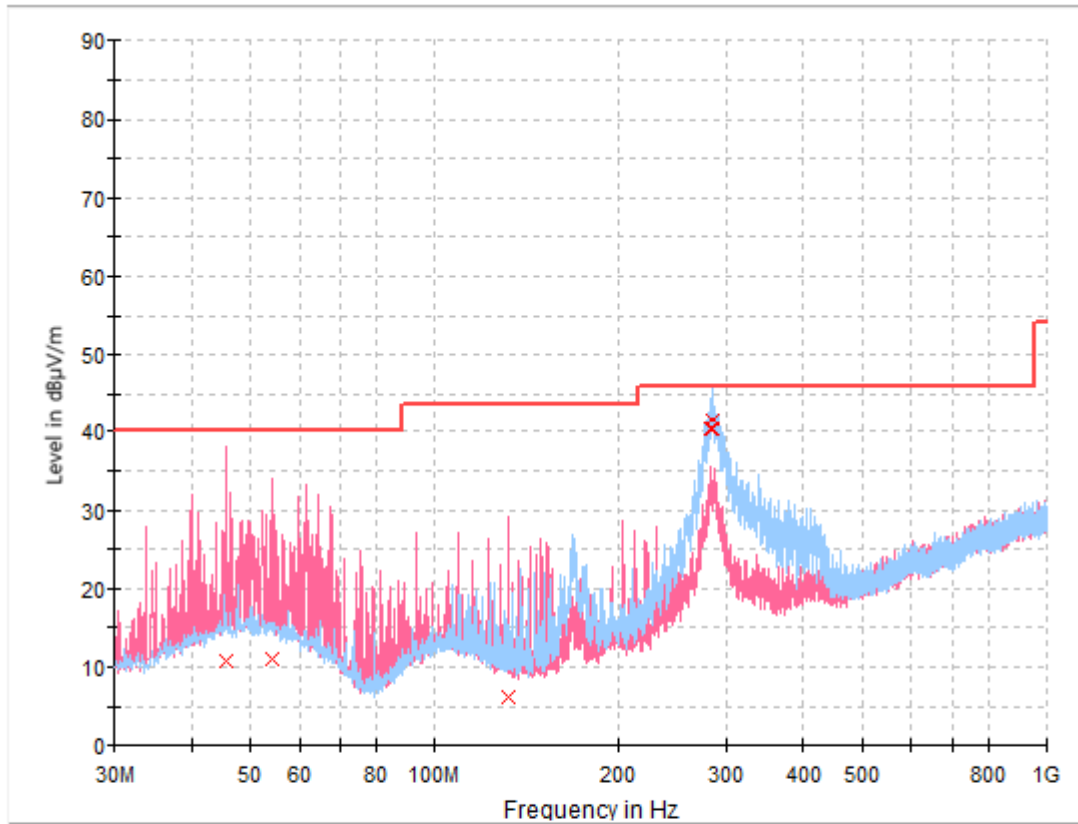

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.714	10.81	40.00	29.19	15 000.0	120.000	100.0	V	252.0	-17.0
54.153	11.13	40.00	28.87	15 000.0	120.000	100.0	V	16.0	-16.9
132.141	6.32	43.50	37.18	15 000.0	120.000	260.0	V	302.0	-21.8
283.461	40.31	46.00	5.69	15 000.0	120.000	145.0	H	79.0	-16.1
285.595	40.35	46.00	5.65	15 000.0	120.000	130.0	H	63.0	-16.0
285.692	41.67	46.00	4.33	15 000.0	120.000	180.0	H	276.0	-16.0

Note. Measurement Uncertainty: See Appendix A

- POL H = Horizontal
- POL V = Vertical
- Margin = Limit – Quasi Peak
- Corr. = Antenna Factor + Cable loss – Amplifier Gain

Above 1 GHz (3 m method)


01 Mode

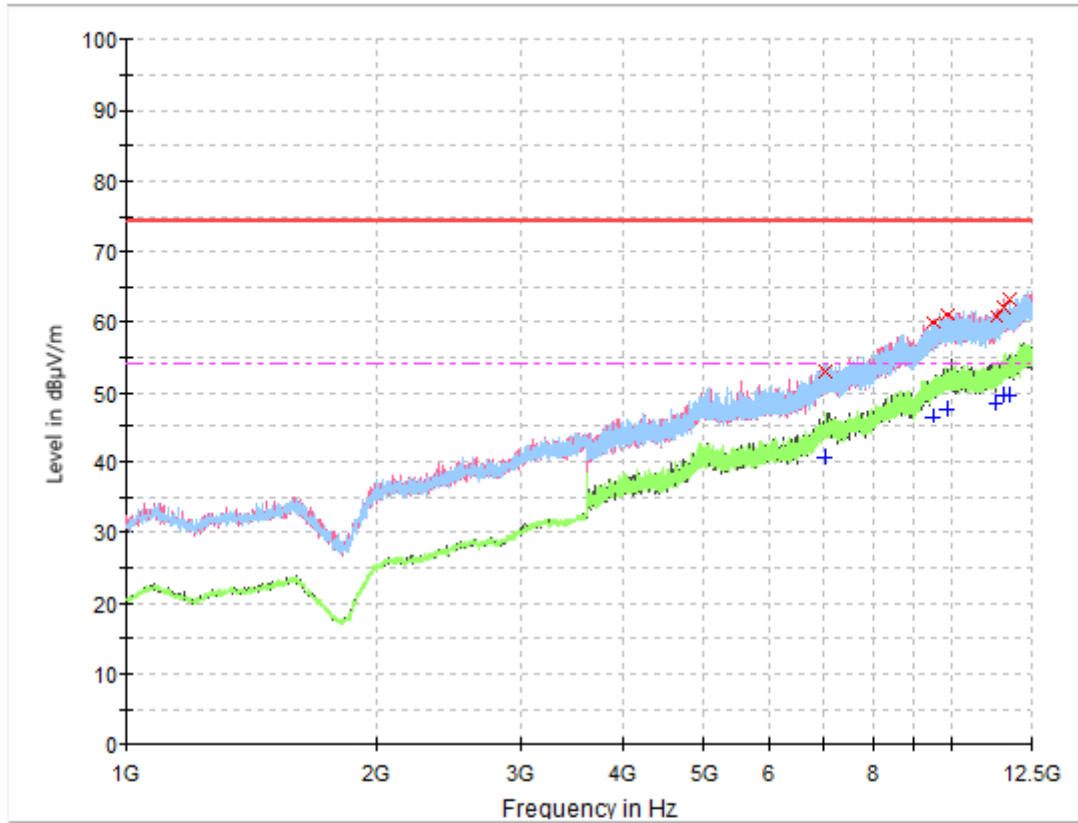

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7 049.200	52.98	---	74.00	21.02	15 000.0	1 000.000	100.0	V	44.0	12.3
7 049.200	---	40.77	54.00	13.23	15 000.0	1 000.000	100.0	V	44.0	12.3
9 503.200	---	46.61	54.00	7.39	15 000.0	1 000.000	100.0	H	143.0	18.6
9 503.200	59.81	---	74.00	14.19	15 000.0	1 000.000	100.0	H	143.0	18.6
9 854.800	60.94	---	74.00	13.06	15 000.0	1 000.000	100.0	V	44.0	19.4
9 854.800	---	47.67	54.00	6.33	15 000.0	1 000.000	100.0	V	44.0	19.4
11 356.000	---	48.42	54.00	5.58	15 000.0	1 000.000	100.0	H	0.0	20.3
11 356.000	60.79	---	74.00	13.21	15 000.0	1 000.000	100.0	H	0.0	20.3
11 585.200	62.19	---	74.00	11.81	15 000.0	1 000.000	100.0	V	0.0	20.9
11 585.200	---	49.62	54.00	4.38	15 000.0	1 000.000	100.0	V	0.0	20.9
11 756.800	63.26	---	74.00	10.74	15 000.0	1 000.000	100.0	H	354.0	21.3
11 756.800	---	49.55	54.00	4.45	15 000.0	1 000.000	100.0	H	354.0	21.3

02 Mode

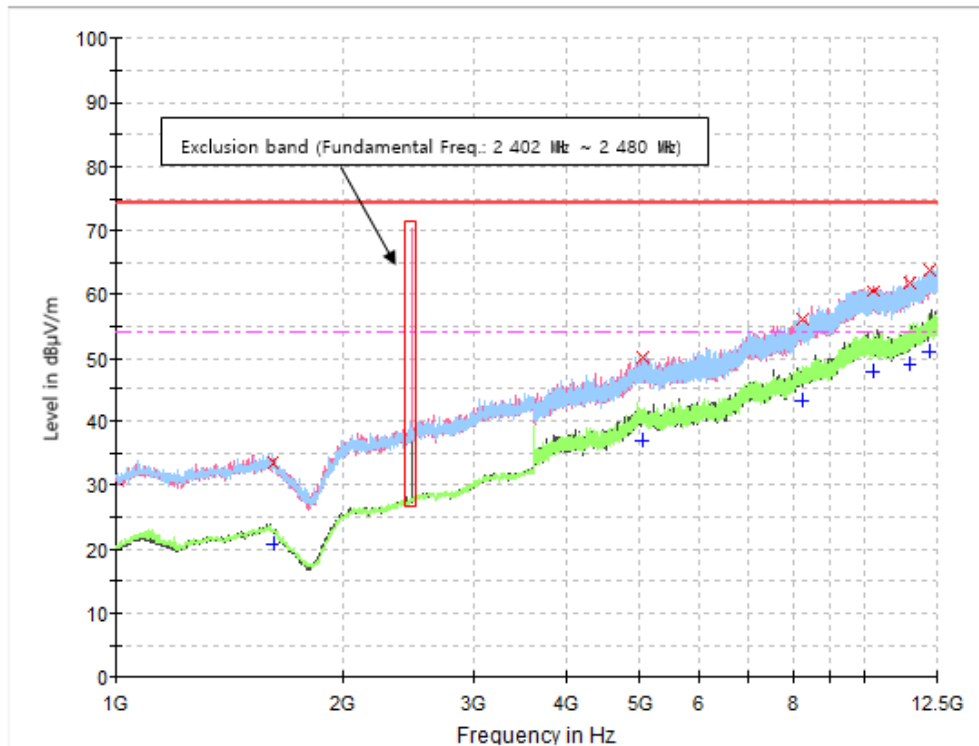

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1 620.400	33.60	---	74.00	40.40	15 000.0	1 000.000	100.0	V	70.0	-9.9
1 620.400	---	20.93	54.00	33.07	15 000.0	1 000.000	100.0	V	70.0	-9.9
5 053.600	50.12	---	74.00	23.88	15 000.0	1 000.000	100.0	H	153.0	8.4
5 053.600	---	36.91	54.00	17.09	15 000.0	1 000.000	100.0	H	153.0	8.4
8 261.200	55.99	---	74.00	18.01	15 000.0	1 000.000	100.0	V	136.0	15.2
8 261.200	---	43.28	54.00	10.72	15 000.0	1 000.000	100.0	V	136.0	15.2
10 273.600	60.49	---	74.00	13.51	15 000.0	1 000.000	100.0	V	0.0	19.7
10 273.600	---	47.84	54.00	6.16	15 000.0	1 000.000	100.0	V	0.0	19.7
11 531.200	---	49.03	54.00	4.97	15 000.0	1 000.000	100.0	V	57.0	20.7
11 531.200	61.80	---	74.00	12.20	15 000.0	1 000.000	100.0	V	57.0	20.7
12 256.000	---	50.96	54.00	3.04	15 000.0	1 000.000	100.0	H	0.0	22.4
12 256.000	63.79	---	74.00	10.21	15 000.0	1 000.000	100.0	H	0.0	22.4

Note. Measurement Uncertainty: See Appendix A

- AF = Antenna Factor
 - POL H = Horizontal
 - H = Height
 - Corr. = AF + CL – AMP
 - CL = Cable Loss
 - POL V = Vertical
 - Margin = Limit – Result
 - AMP = Amplifier Gain
 - A = Angle
- ** The value of 'Level' includes 'Corr.'.

Ex) In case

Freq ; 100 MHz, level ; 30 dB(μV/m), AF ; 10 dB/m, CL ; 4 dB, Amp ; 25 dB

Result = Level + AF + CL – Amp

= 30 + 10 + 4 - 25

= 19

Margin = Limit – Result

= 43.5 – 19

= 24.5

Appendix A: Measurement Uncertainty

Test Method		Measurement Uncertainty
Conducted Emission	ENV216	3.0 dB (The confidence level is 95 %, $k=2$)
	ESH2-Z5	2.8 dB (The confidence level is 95 %, $k=2$)
	ESH3-Z6	3.0 dB (The confidence level is 95 %, $k=2$)
Conducted Emission - Signal	ISN T800	5.3 dB (The confidence level is 95 %, $k=2$)
	ISNT8-Cat6	5.4 dB (The confidence level is 95 %, $k=2$)
	ISN S751	6.8 dB (The confidence level is 95 %, $k=2$)
Disturbance Voltage at Antenna Terminal		2.4 dB (The confidence level is 95 %, $k=2$)
Radiated Emission	9 kHz - 30 MHz	Horizontal 3.4 dB (The confidence level is 95 %, $k=2$)
		Vertical 3.4 dB (The confidence level is 95 %, $k=2$)
	30 MHz - 1 000 MHz	Horizontal 4.6 dB (The confidence level is 95 %, $k=2$)
		Vertical 5.0 dB (The confidence level is 95 %, $k=2$)
	1 GHz - 18 GHz	Horizontal 3.6 dB (The confidence level is 95 %, $k=2$)
		Vertical 3.6 dB (The confidence level is 95 %, $k=2$)

Table A.1 Measurement Uncertainty of Branch Site

Test Method		Measurement Uncertainty	
Conducted Emission		ENV216	3.3 dB (The confidence level is 95 %, $k=2$)
		ESH3-Z6	3.3 dB (The confidence level is 95 %, $k=2$)
		ESH2-Z5	3.2 dB (The confidence level is 95 %, $k=2$)
		NNLK8129	3.2 dB (The confidence level is 95 %, $k=2$)
Conducted Emission - Signal		ISN T800	5.5 dB (The confidence level is 95 %, $k=2$)
		ISN ST08	6.6 dB (The confidence level is 95 %, $k=2$)
Radiated Emission	9 kHz - 30 MHz	Horizontal	3.5 dB (The confidence level is 95 %, $k=2$)
		Vertical	3.5 dB (The confidence level is 95 %, $k=2$)
	30 MHz - 1 000 MHz	Horizontal	4.4 dB (The confidence level is 95 %, $k=2$)
		Vertical	5.0 dB (The confidence level is 95 %, $k=2$)
	1 GHz - 18 GHz	Horizontal	3.8 dB (The confidence level is 95 %, $k=2$)
		Vertical	4.1 dB (The confidence level is 95 %, $k=2$)

Table A.2 Measurement Uncertainty of Branch Site-3

Test Method		Measurement Uncertainty
Conducted Emission	ENV216	3.5 dB (The confidence level is 95 %, $k=2$)
	ESH2-Z6	3.4 dB (The confidence level is 95 %, $k=2$)
	ESH3-Z5	3.4 dB (The confidence level is 95 %, $k=2$)
	NNLK8129	3.4 dB (The confidence level is 95 %, $k=2$)
Conducted Emission - Signal	ISN T800	5.6 dB (The confidence level is 95 %, $k=2$)
	ISN ST08	5.6 dB (The confidence level is 95 %, $k=2$)
Radiated Emission	9 kHz - 30 MHz (Triple Loop Ant.)	2.6 dB (The confidence level is 95 %, $k=2$)
	9 kHz - 30 MHz (Loop Ant.)	Horizontal 4.2 dB (The confidence level is 95 %, $k=2$)
		Vertical 4.2 dB (The confidence level is 95 %, $k=2$)
	30 MHz - 1 000 MHz	Horizontal 5.4 dB (The confidence level is 95 %, $k=2$)
		Vertical 5.7 dB (The confidence level is 95 %, $k=2$)
	1 GHz - 18 GHz	Horizontal 4.6 dB (The confidence level is 95 %, $k=2$)
		Vertical 4.6 dB (The confidence level is 95 %, $k=2$)

Table A.3 Measurement Uncertainty of Branch Site-4

- End of Test Report -