



FCC RF Test Report

APPLICANT : Quectel Wireless Solutions Co., Ltd.
EQUIPMENT : Wi-Fi & Bluetooth Module
BRAND NAME : Quectel
MODEL NAME : FCS866R
FCC ID : XMR2023FCS866R
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jan. 09, 2024 ~ Mar. 08, 2024

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Kunshan).

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	7
1.7 Test Software.....	8
1.8 Applicable Standards.....	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	9
2.1 Carrier Frequency Channel	9
2.2 Test Mode.....	10
2.3 Connection Diagram of Test System.....	11
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	12
3 TEST RESULT	13
3.1 6dB and 99% Bandwidth Measurement	13
3.2 Output Power Measurement.....	26
3.3 Power Spectral Density Measurement	27
3.4 Conducted Band Edges and Spurious Emission Measurement	40
3.5 Radiated Band Edges and Spurious Emission Measurement	57
3.6 AC Conducted Emission Measurement.....	61
3.7 Antenna Requirements.....	63
4 LIST OF MEASURING EQUIPMENT.....	64
5 MEASUREMENT UNCERTAINTY.....	65
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION AND PLOTS	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR3D2611B	Rev. 01	Initial issue of report	Mar. 11, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 30\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 0.71 dB at 675.050 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.05 dB at 0.404 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

1.2 Manufacturer

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wi-Fi & Bluetooth Module
Brand Name	Quectel
Model Name	FCS866R
FCC ID	XMR2023FCS866R
SN Code	Conducted: E1M23KL03000093 Conduction: E1M23KL03000085 Radiation: E1M23KL03000054
HW Version	R1.0
SW Version	NA
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	<Ant. 0> BLE 1Mbps: 6.90 dBm (0.0049 W) BLE 2Mbps: 6.80 dBm (0.0048 W) <Ant. 2> BLE 1Mbps: 7.70 dBm (0.0059 W) BLE 2Mbps: 7.60 dBm (0.0058 W)
99% Occupied Bandwidth	<Ant. 0> BLE 1Mbps: 1.023MHz BLE 2Mbps: 2.042MHz <Ant. 2> BLE 1Mbps:1.025MHz BLE 2Mbps:2.042MHz
Antenna Type / Gain	<Ant. 0/2>:Dipole Antenna type with gain -0.10 dBi
Type of Modulation	Bluetooth LE : GFSK

Note:

1. BLE 2Mbps does not support advertising channel CH00/CH39.
2. The device supports Bluetooth LE SISO mode only.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-SZ	CN1256	421272



1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	CO01-KS	AUDIX	E3	6.2009-8-24
2.	03CH04-SZ	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-



2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps Mode 4: Bluetooth Tx CH01_2404 MHz_BLE 2Mbps Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps Mode 6: Bluetooth Tx CH38_2478 MHz_BLE 2Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps Mode 4: Bluetooth Tx CH01_2404 MHz_BLE 2Mbps Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps Mode 6: Bluetooth Tx CH38_2478 MHz_BLE 2Mbps Mode 7: Bluetooth Tx CH38_2478 MHz_BLE 2Mbps + 802.11n HT20 CH01_2412 MHz
AC Conducted Emission	Mode 1: Bluetooth Link + WLAN Link (2.4G) Link + USB Cable (Charging From EVB Adapter)
Remark: For Radiated Test Cases, the tests were performance with Adapter and test jig.	



2.3 Connection Diagram of Test System

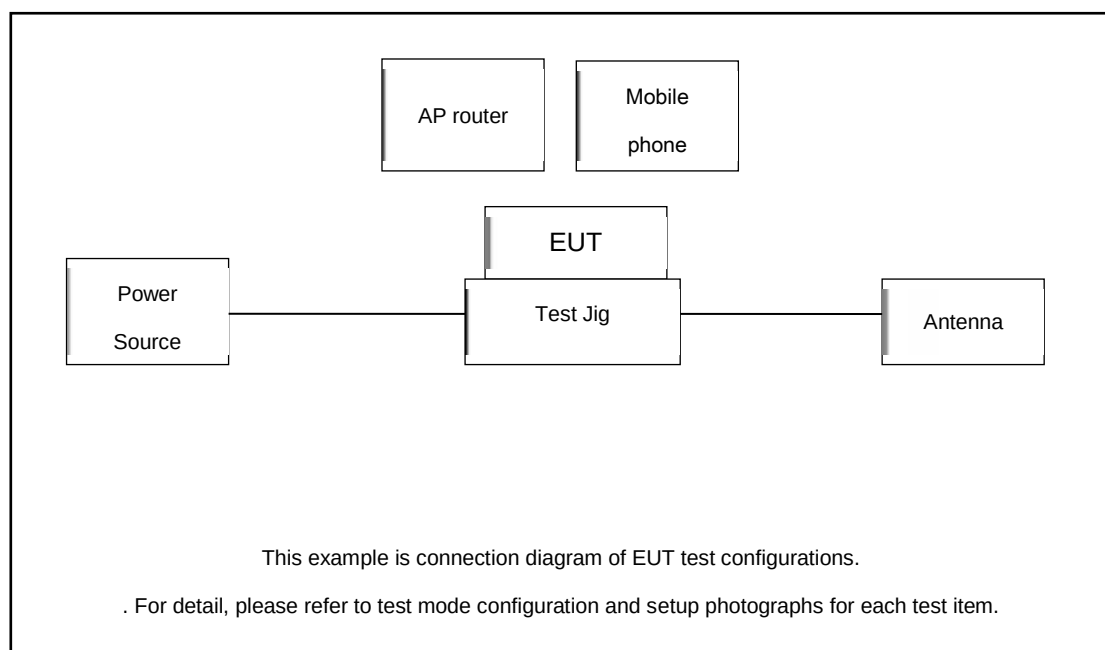

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
2.	Mobile phone	MOTO	XT1952-1	N/A	N/A	N/A
3.	Antenna	N/A	N/A	N/A	N/A	N/A
4.	Test Jig	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 11 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 11 + 10 = 21 \text{ (dB)}\end{aligned}$$



3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

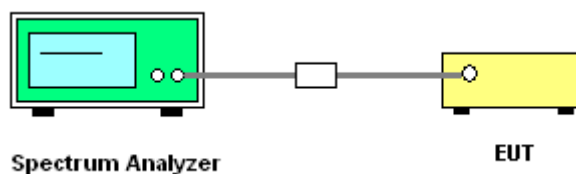




3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.


<Ant.0>

BLE 1Mbps

6 dB Bandwidth Plot on Channel 00

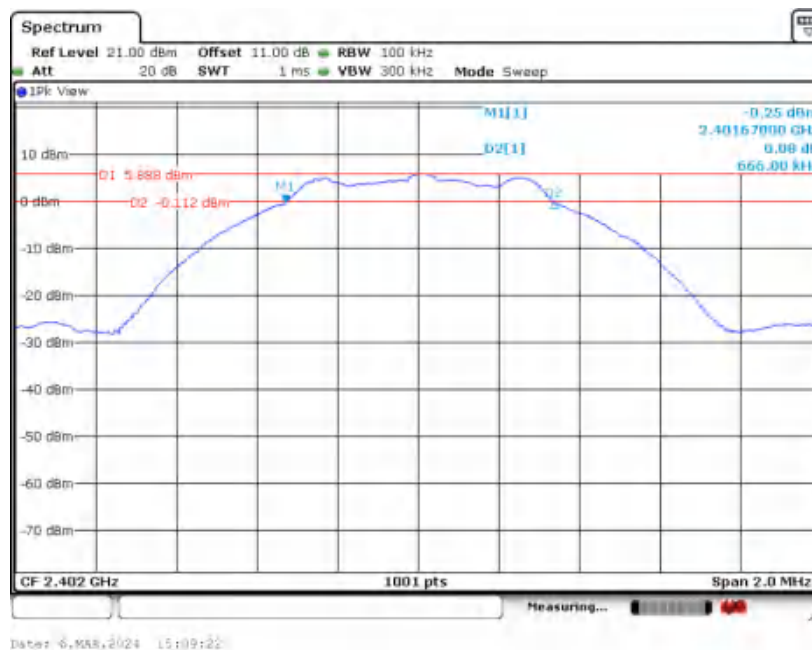


6 dB Bandwidth Plot on Channel 19

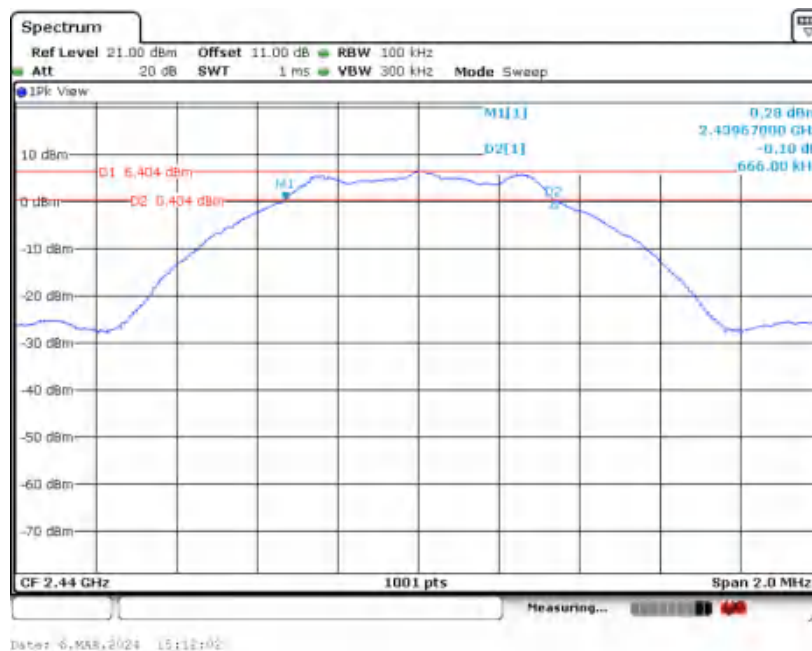




6 dB Bandwidth Plot on Channel 39

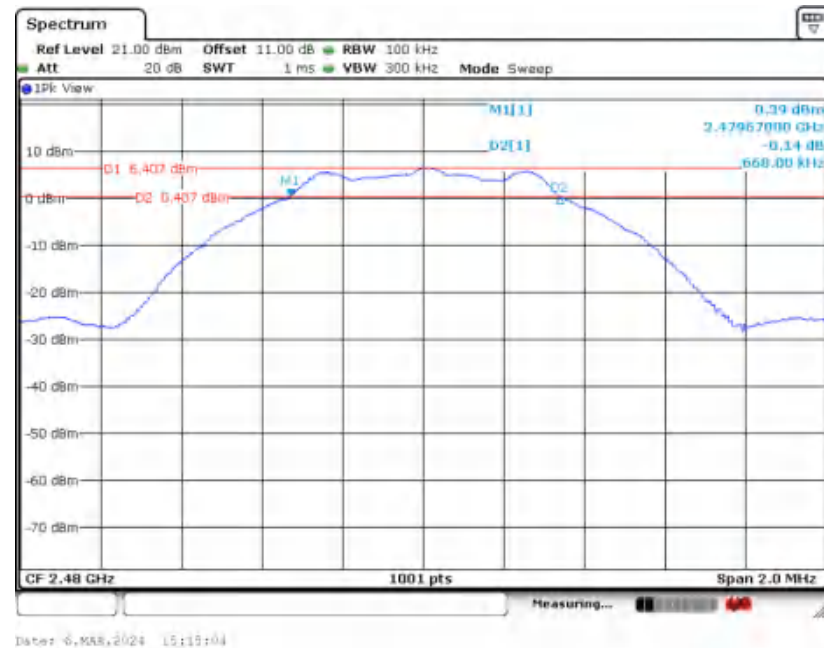


BLE 2Mbps

6 dB Bandwidth Plot on Channel 01

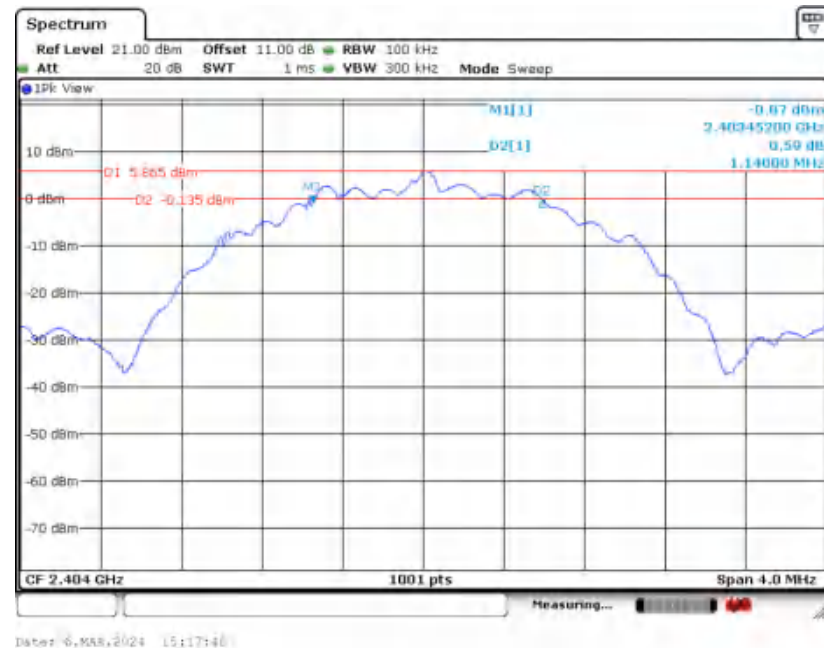




6 dB Bandwidth Plot on Channel 19

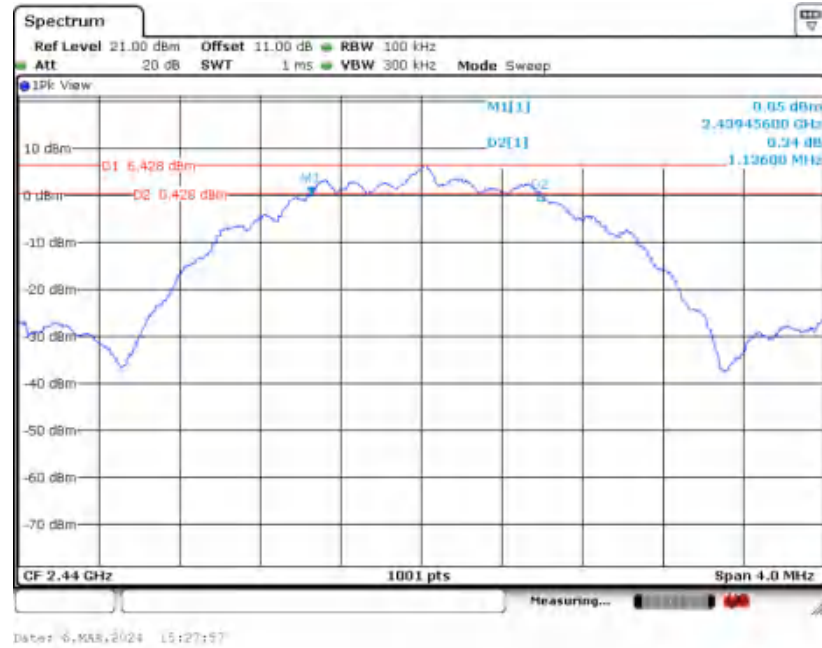

6 dB Bandwidth Plot on Channel 38

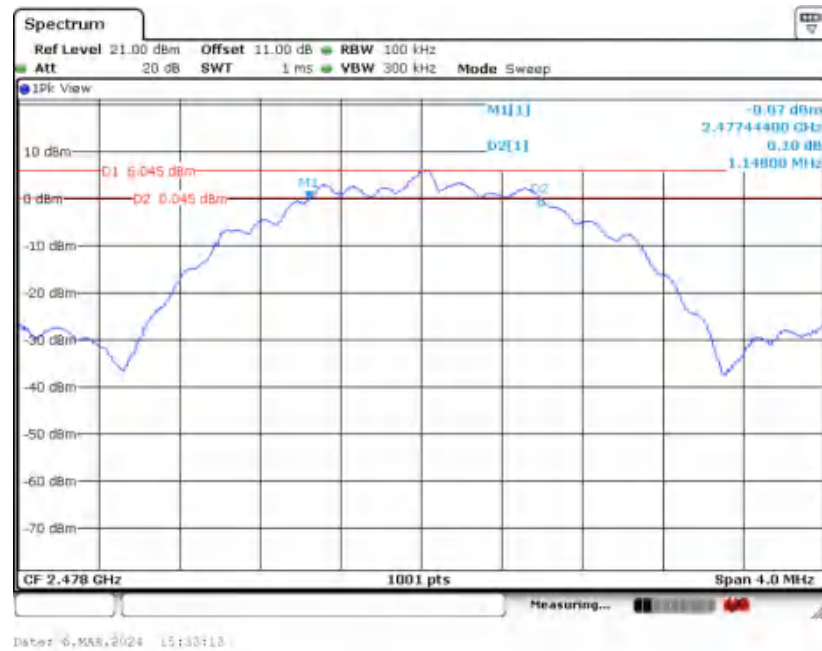





<Ant.2>

BLE 1Mbps

6 dB Bandwidth Plot on Channel 00

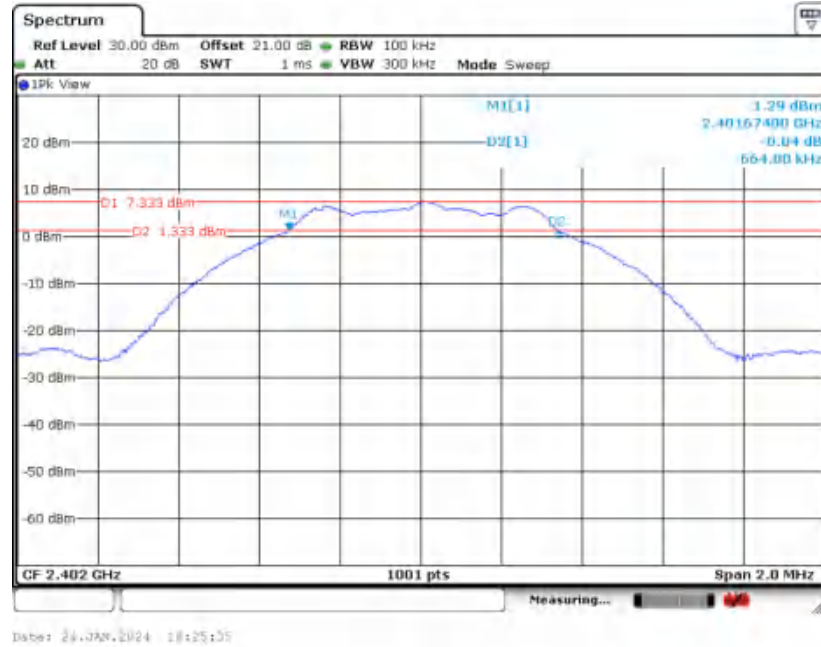


6 dB Bandwidth Plot on Channel 19

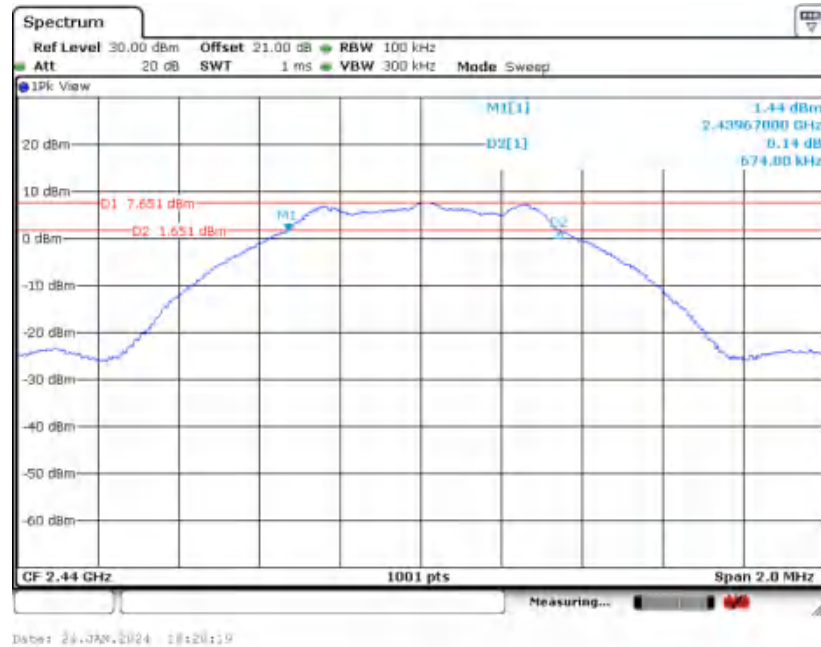




6 dB Bandwidth Plot on Channel 39

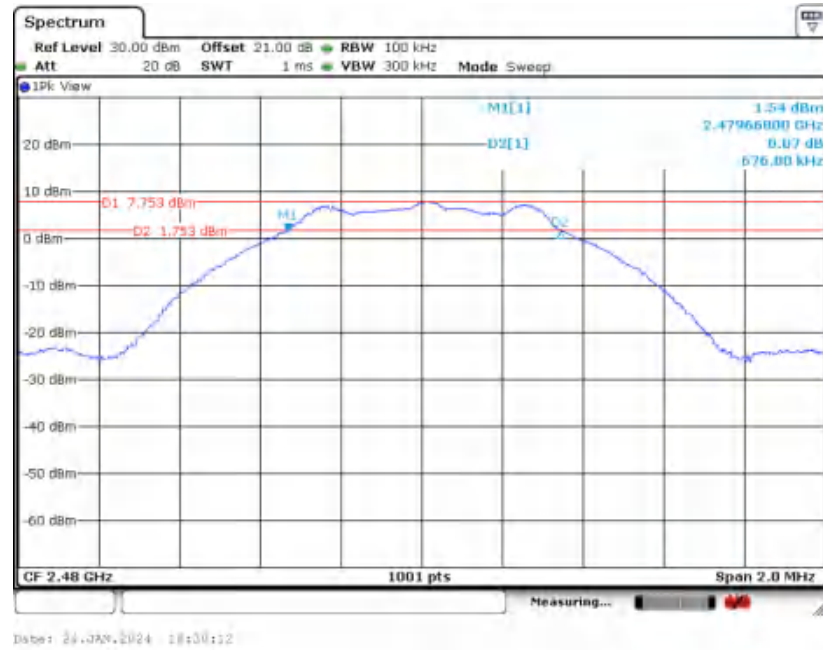


BLE 2Mbps

6 dB Bandwidth Plot on Channel 01

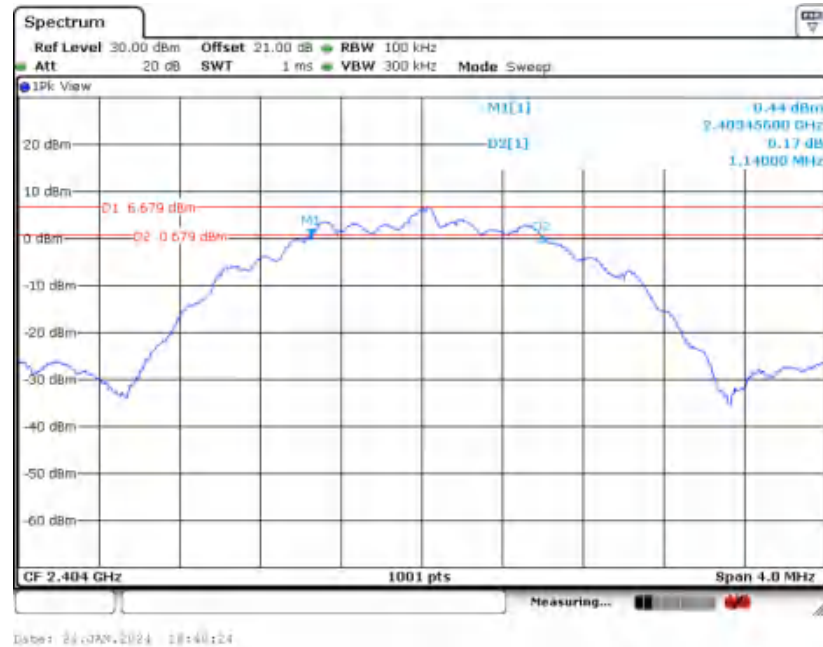




6 dB Bandwidth Plot on Channel 19

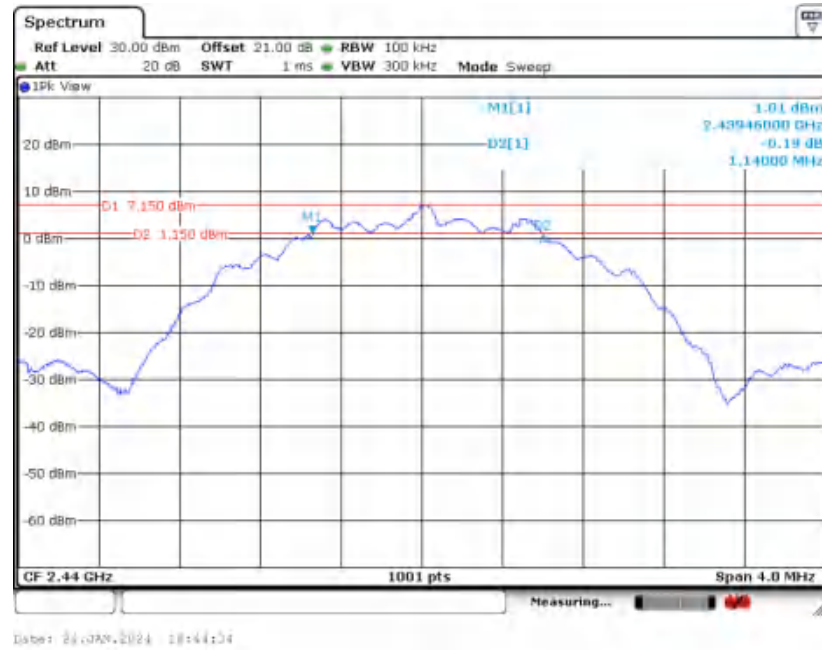

6 dB Bandwidth Plot on Channel 38

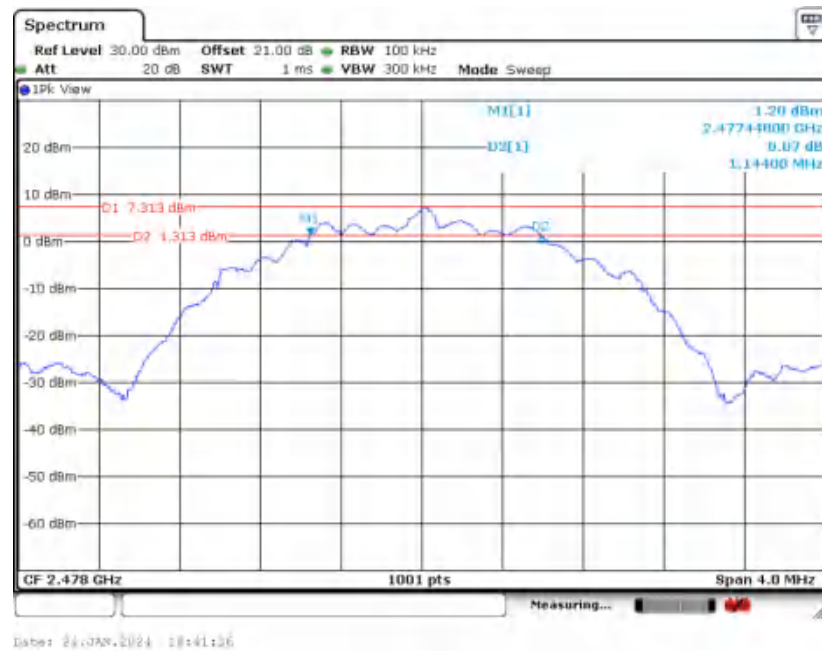




3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


<Ant. 0>

BLE 1Mbps

99% Occupied Bandwidth Plot on Channel 00

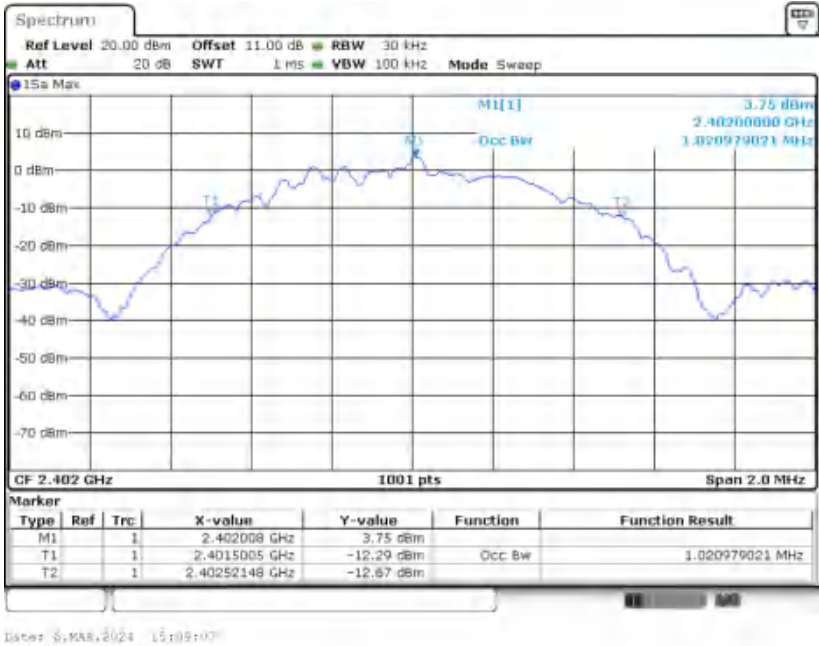


99% Occupied Bandwidth Plot on Channel 19

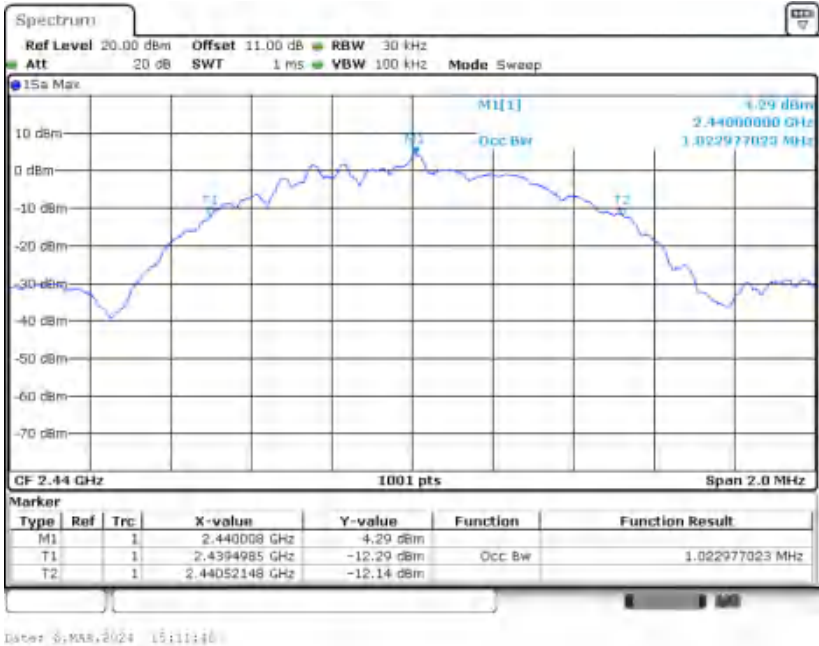




99% Occupied Bandwidth Plot on Channel 39

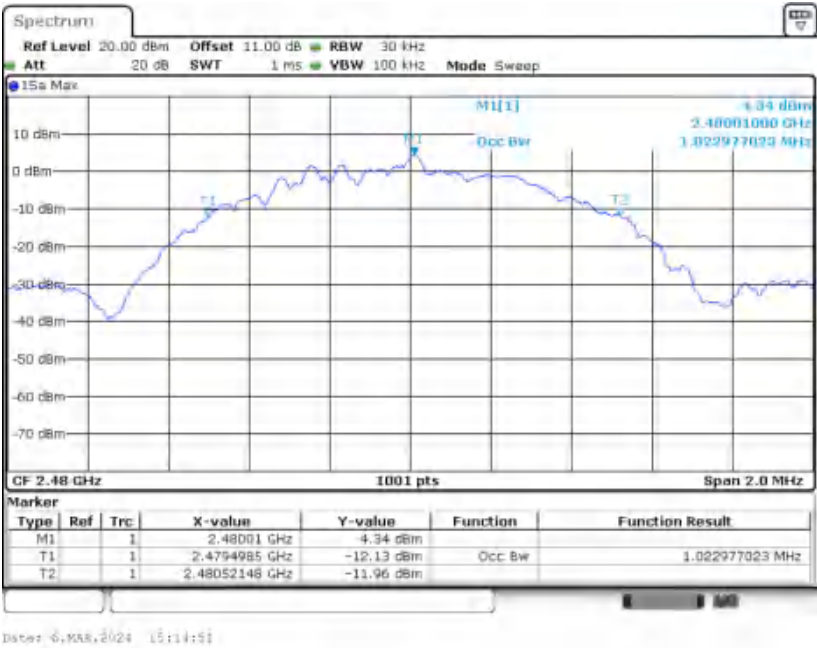

BLE 2Mbps


99% Occupied Bandwidth Plot on Channel 01

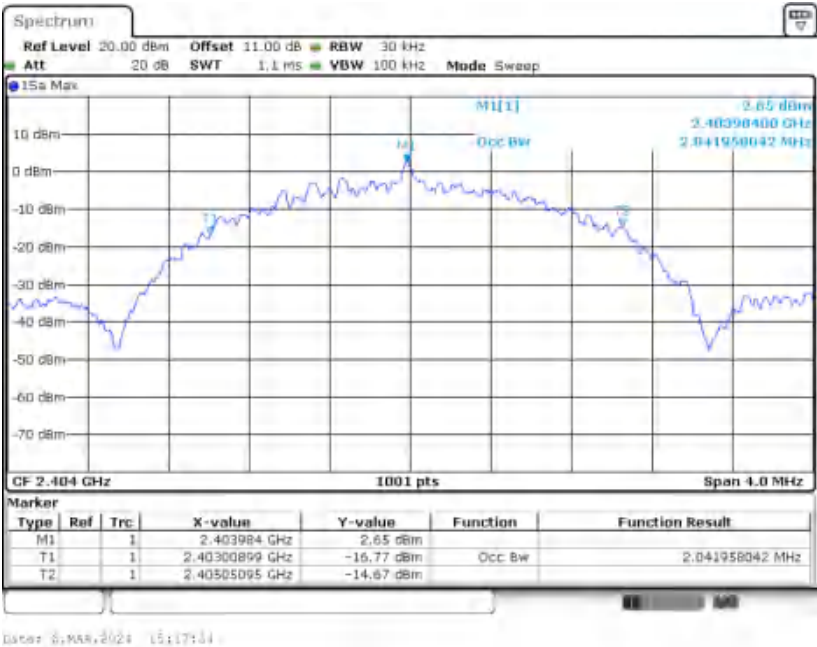




<Ant.2>

BLE 1Mbps
99% Occupied Bandwidth Plot on Channel 00

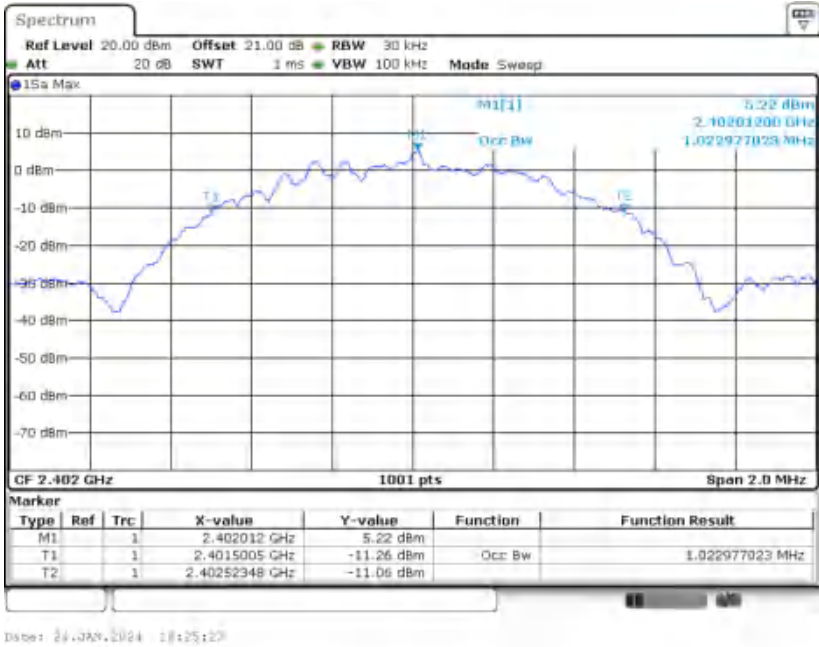


99% Occupied Bandwidth Plot on Channel 19

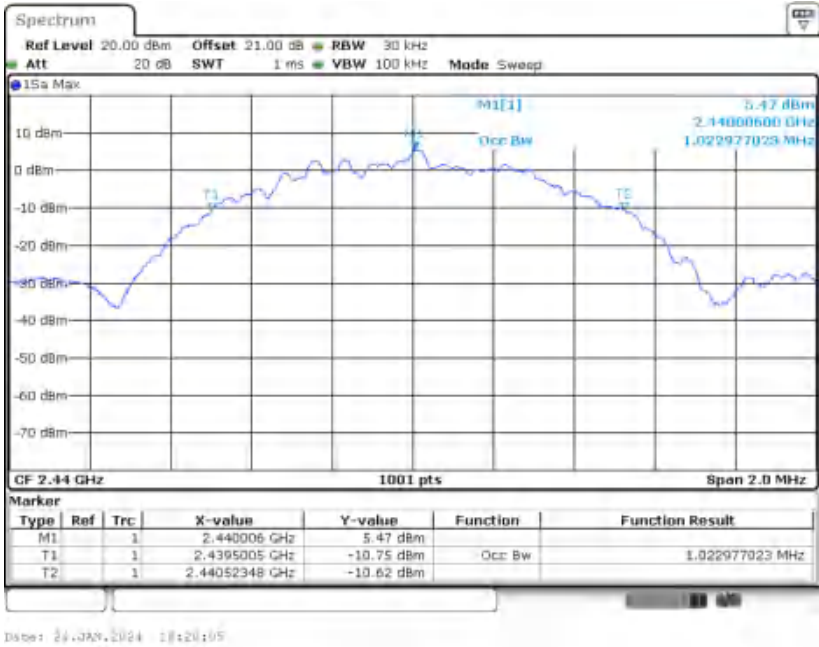




99% Occupied Bandwidth Plot on Channel 39

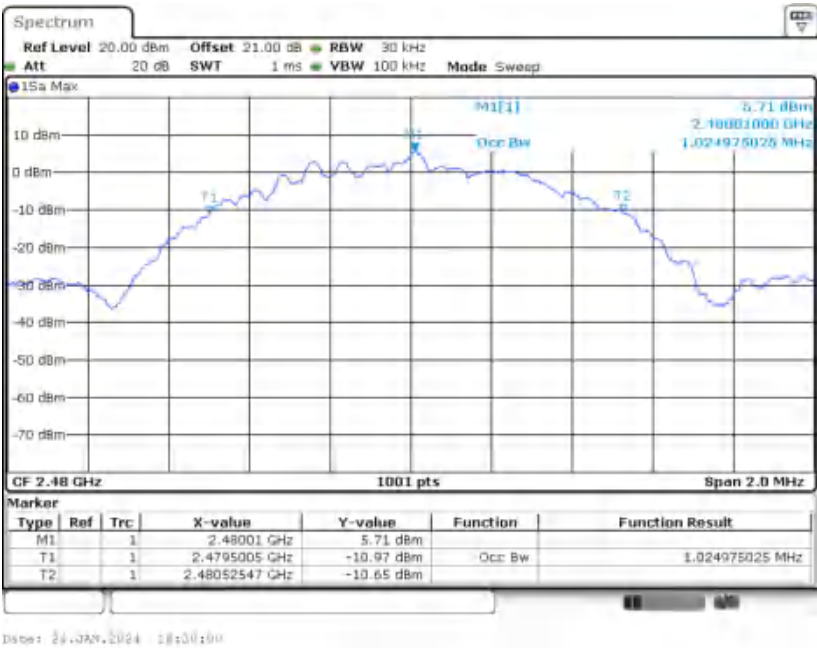


BLE 2Mbps

99% Occupied Bandwidth Plot on Channel 01

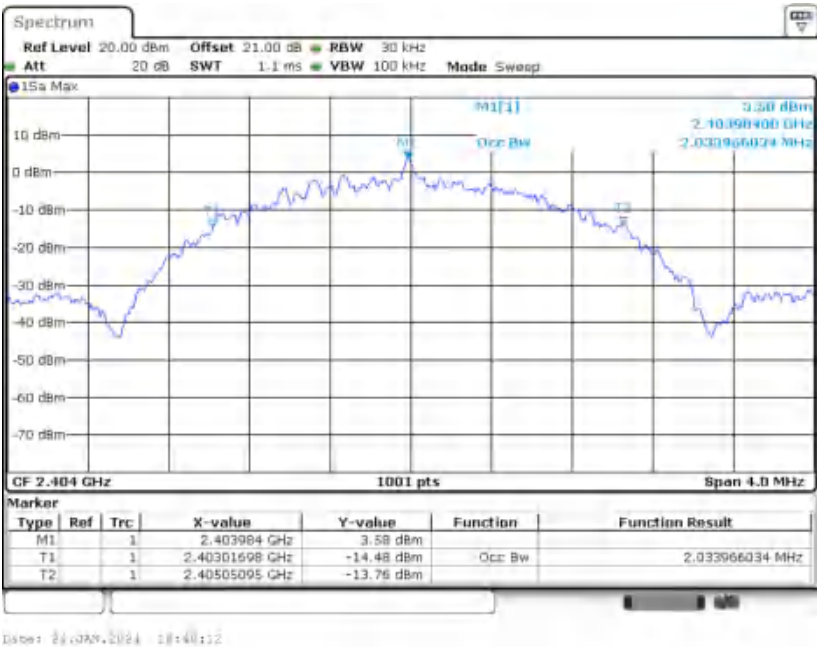




99% Occupied Bandwidth Plot on Channel 19

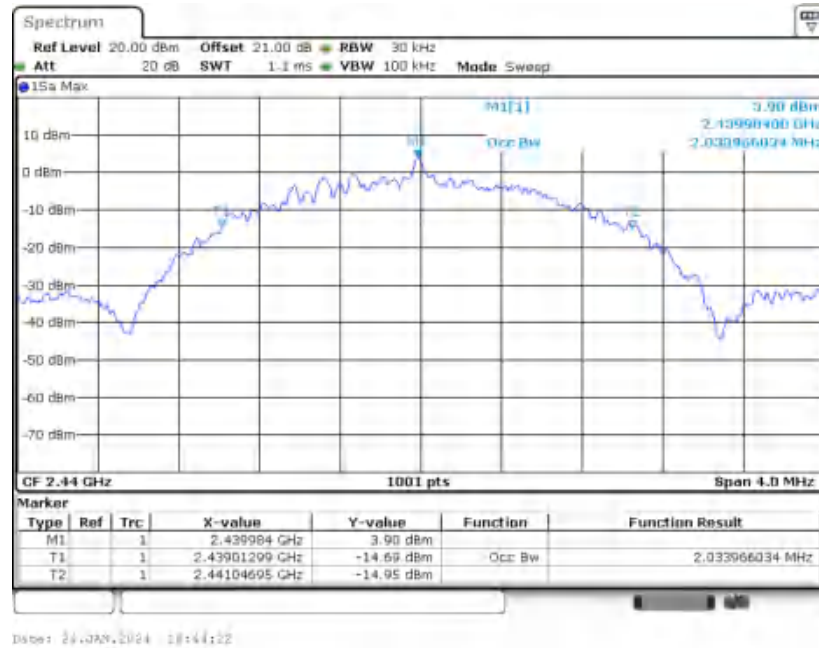

99% Occupied Bandwidth Plot on Channel 38

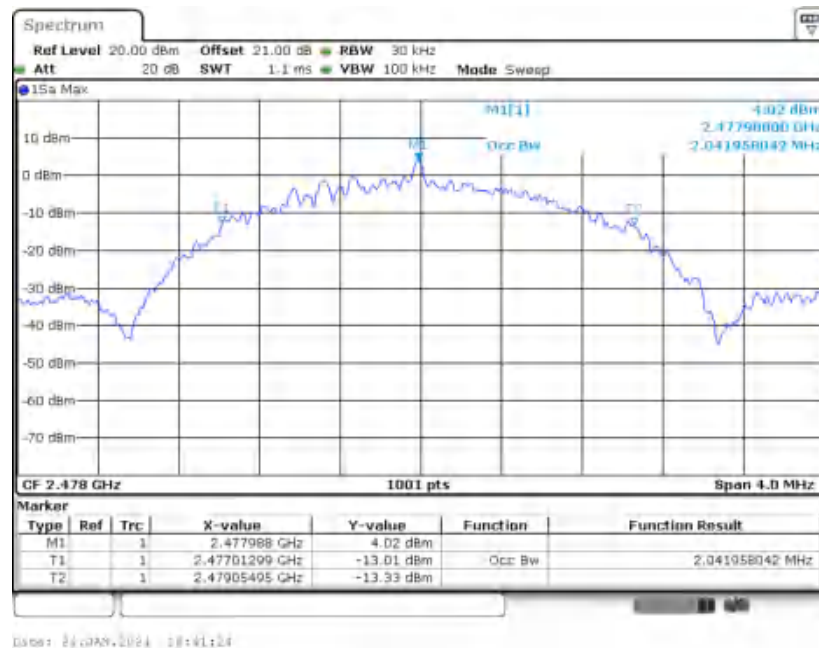

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

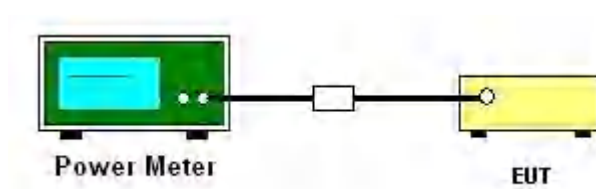

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

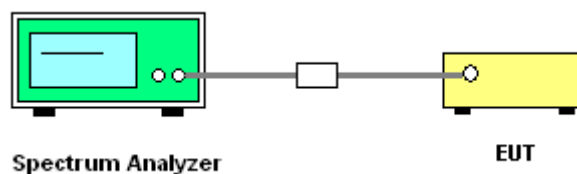

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)


<Ant.0>

BLE 1Mbps


PSD 100kHz Plot on Channel 00

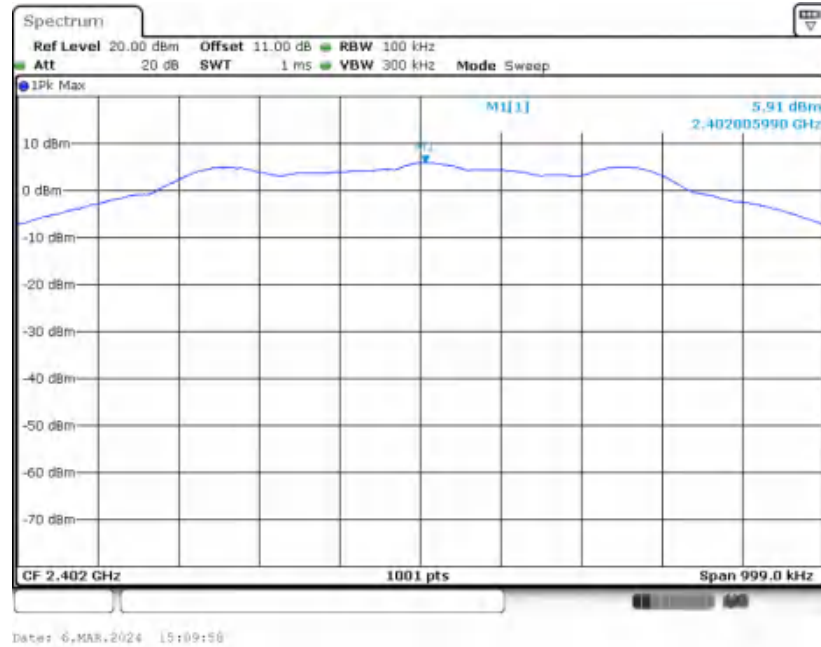

PSD 100kHz Plot on Channel 19

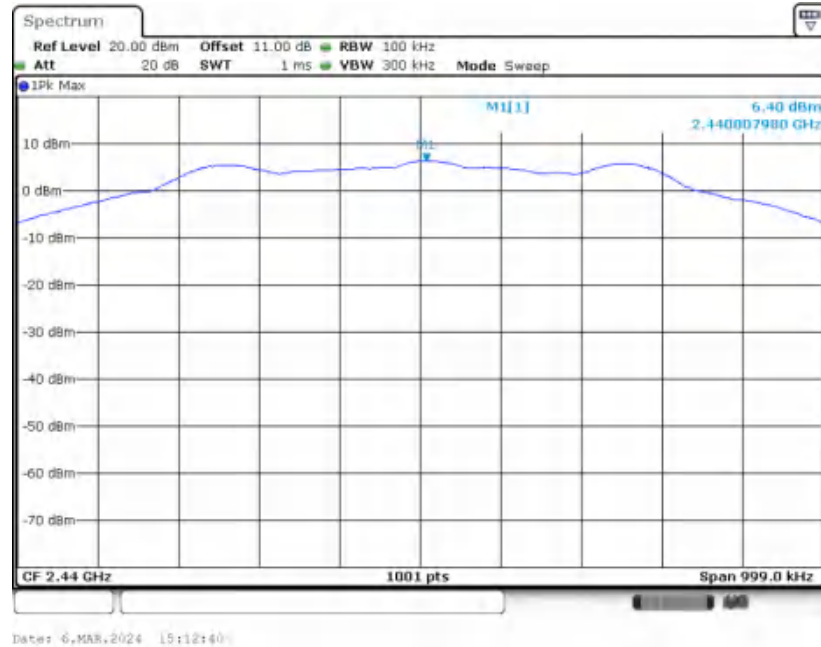


PSD 100kHz Plot on Channel 39

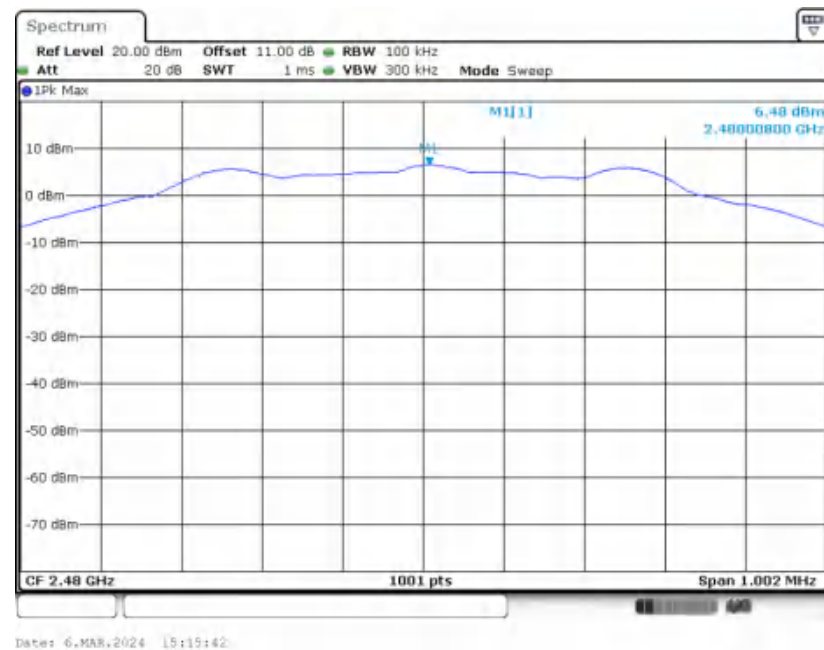


BLE 2Mbps

PSD 100kHz Plot on Channel 01

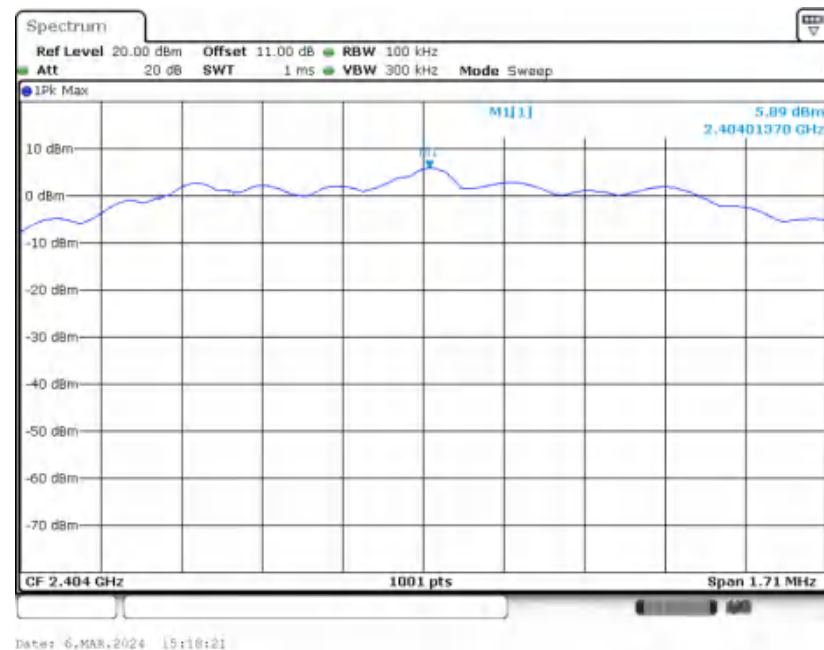




PSD 100kHz Plot on Channel 19

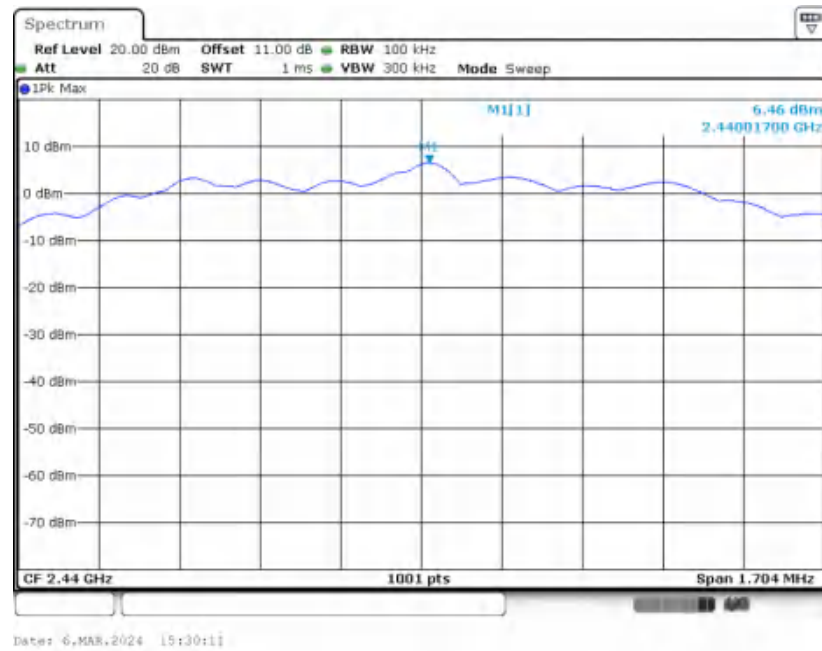


PSD 100kHz Plot on Channel 38

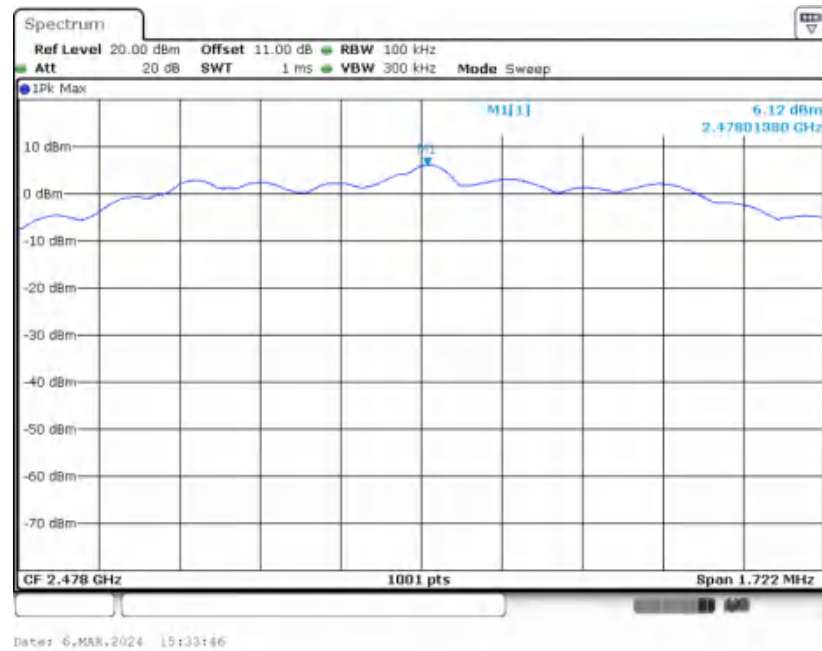


<Ant.2>

BLE 1Mbps

PSD 100kHz Plot on Channel 00

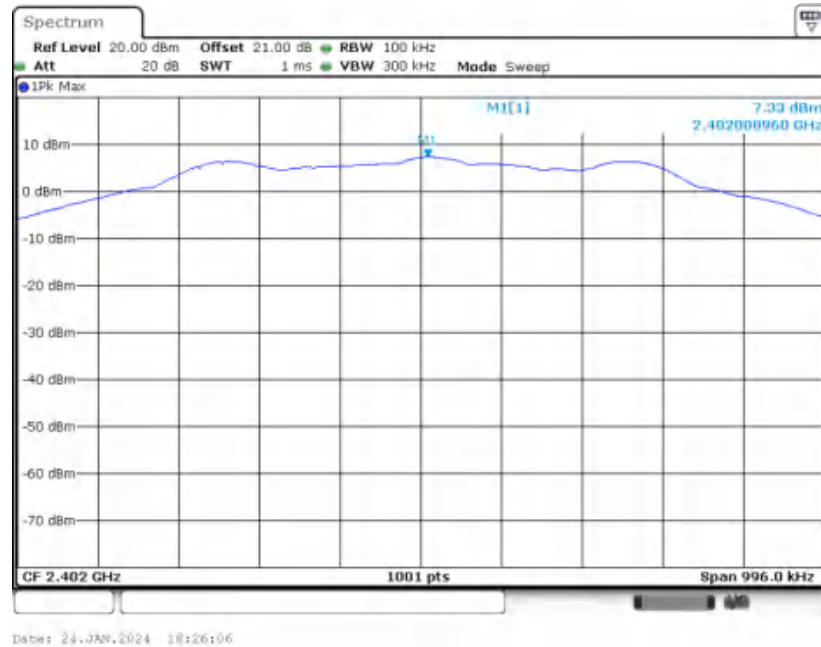

PSD 100kHz Plot on Channel 19

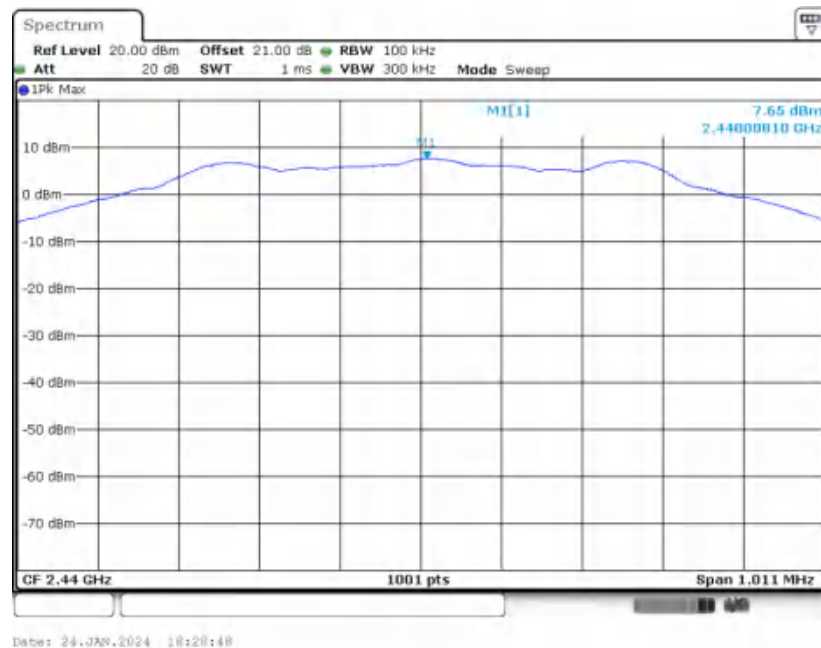


PSD 100kHz Plot on Channel 39




BLE 2Mbps


PSD 100kHz Plot on Channel 01

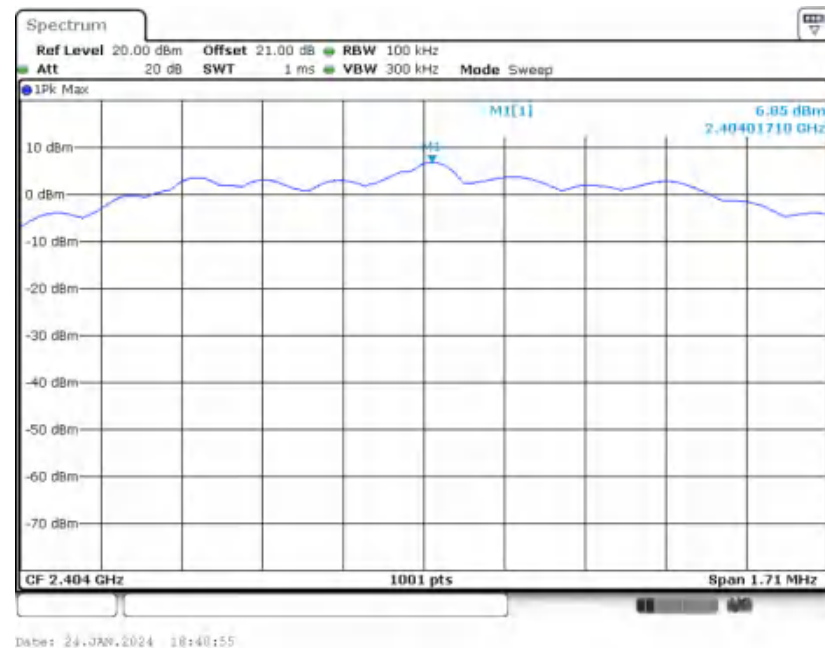

PSD 100kHz Plot on Channel 19

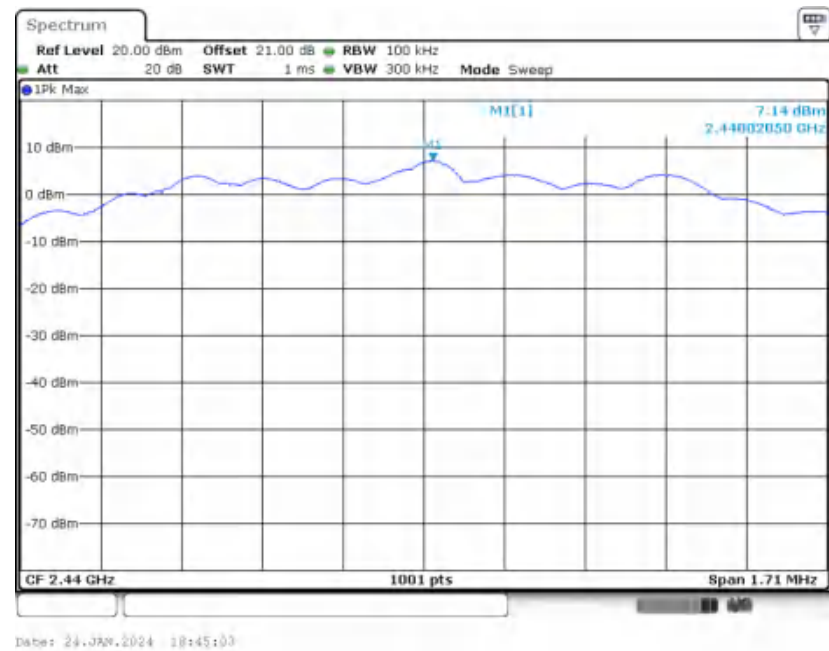

PSD 100kHz Plot on Channel 38

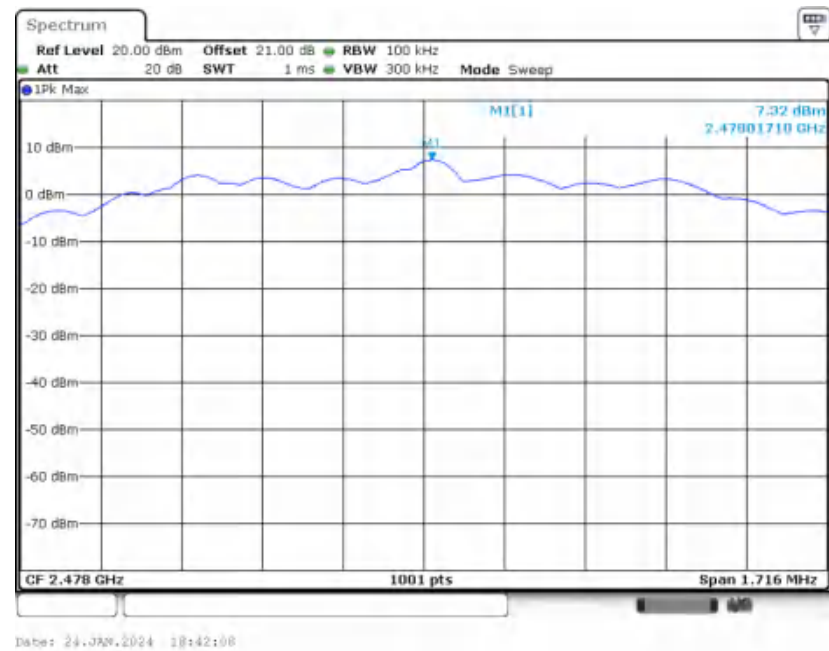




3.3.7 Test Result of Power Spectral Density Plots (3kHz)


<Ant.0>

BLE 1Mbps


PSD 3kHz Plot on Channel 00

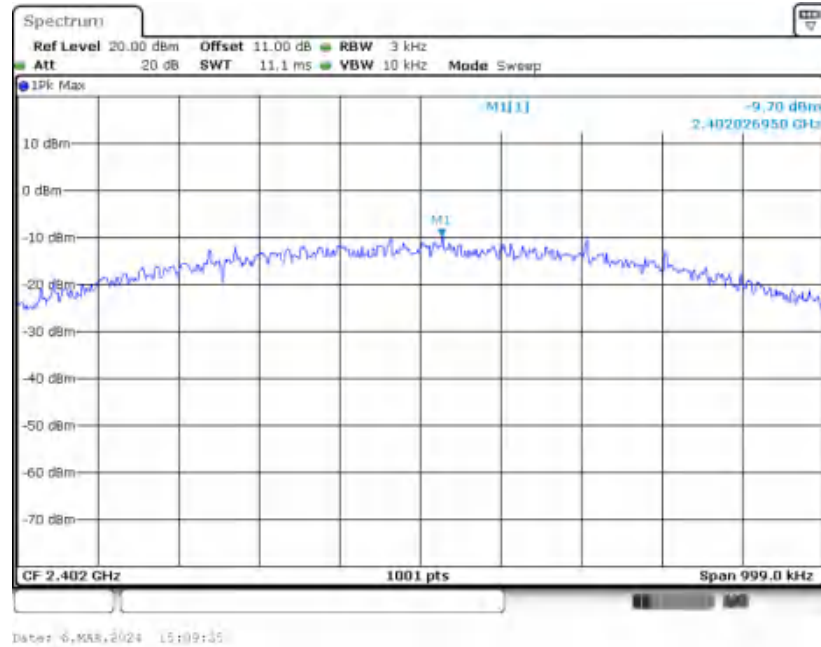

PSD 3kHz Plot on Channel 19

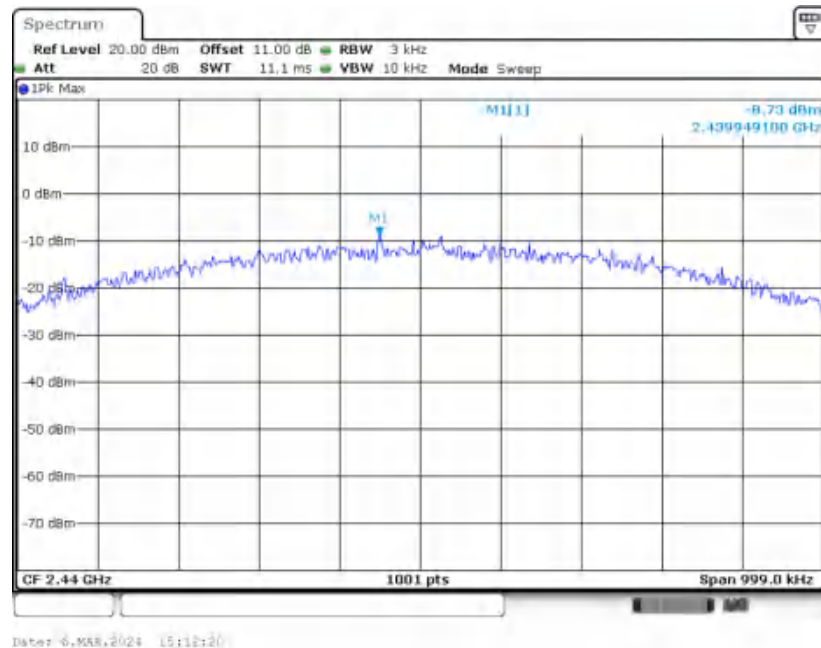


PSD 3kHz Plot on Channel 39

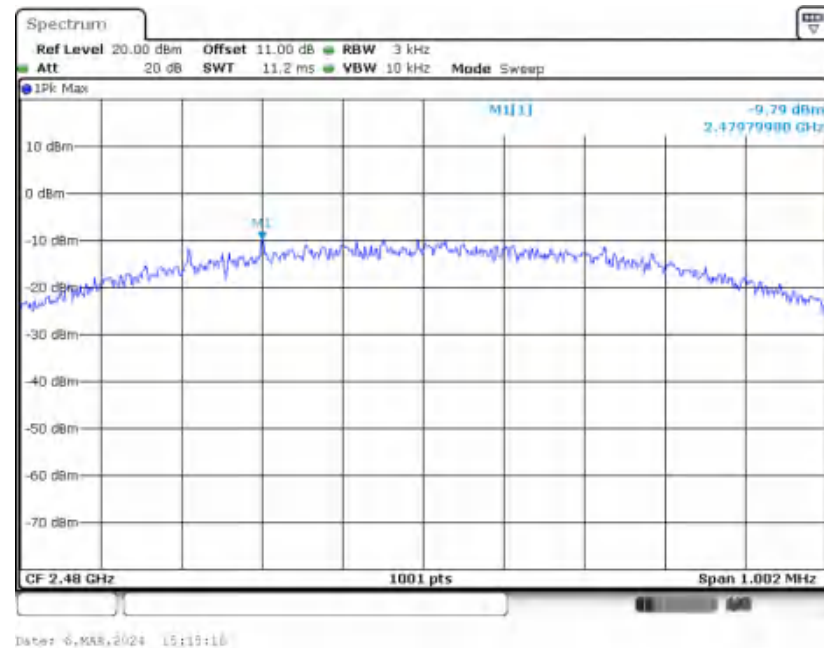


BLE 2Mbps

PSD 3kHz Plot on Channel 01

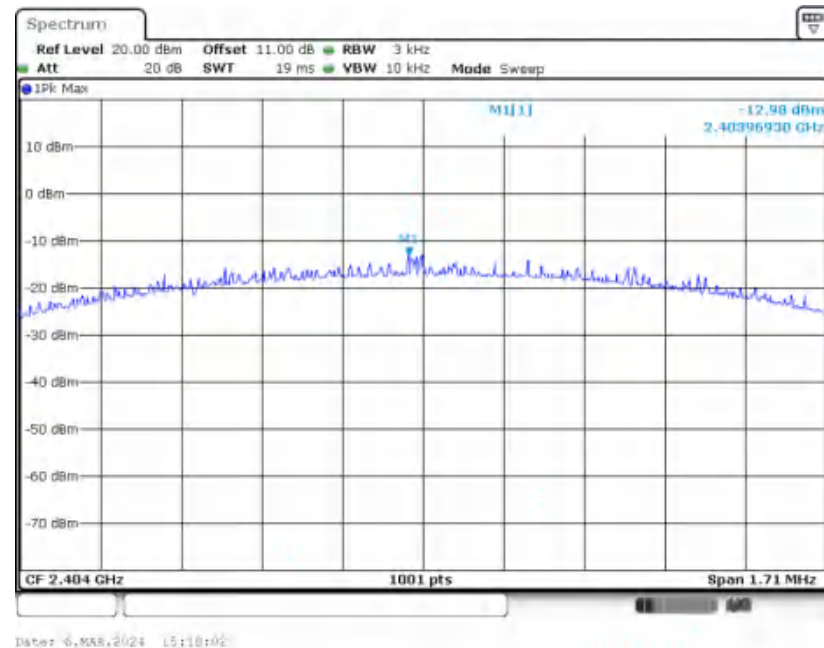




PSD 3kHz Plot on Channel 19

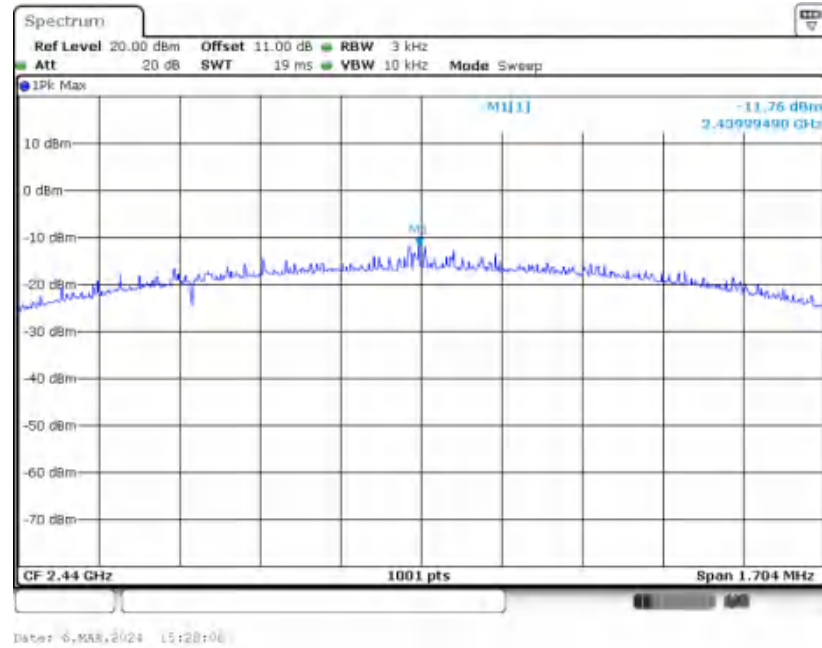

PSD 3kHz Plot on Channel 38

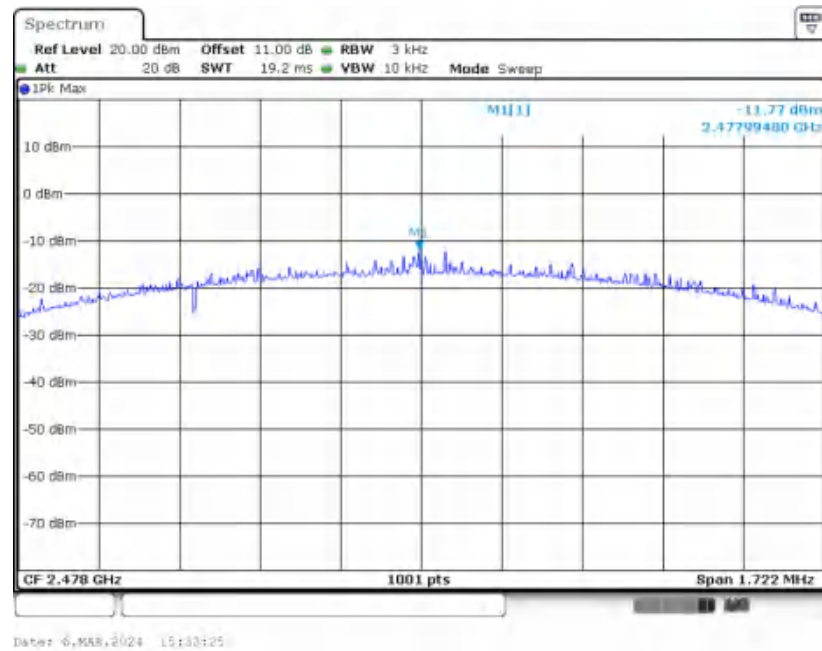





<Ant.2>

BLE 1Mbps

PSD 3kHz Plot on Channel 00

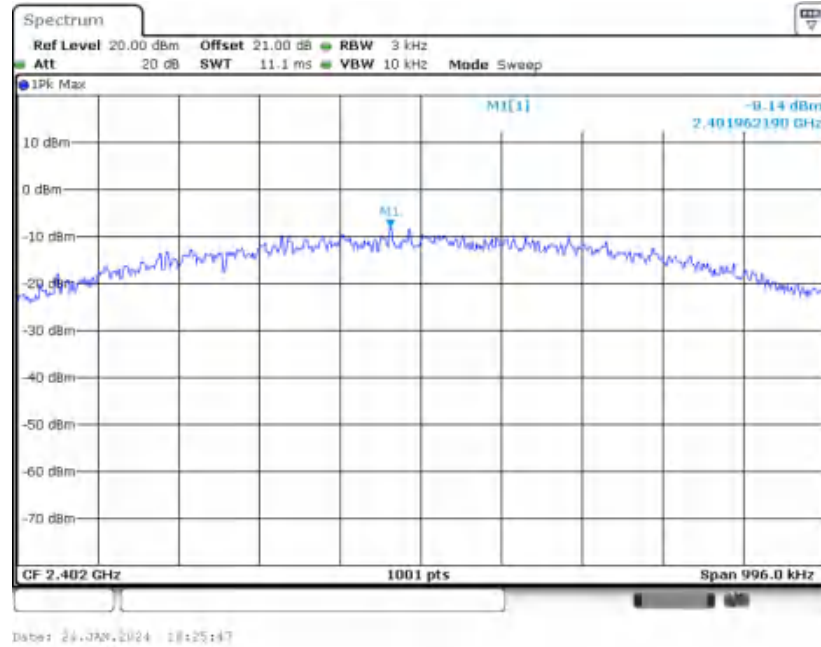


PSD 3kHz Plot on Channel 19

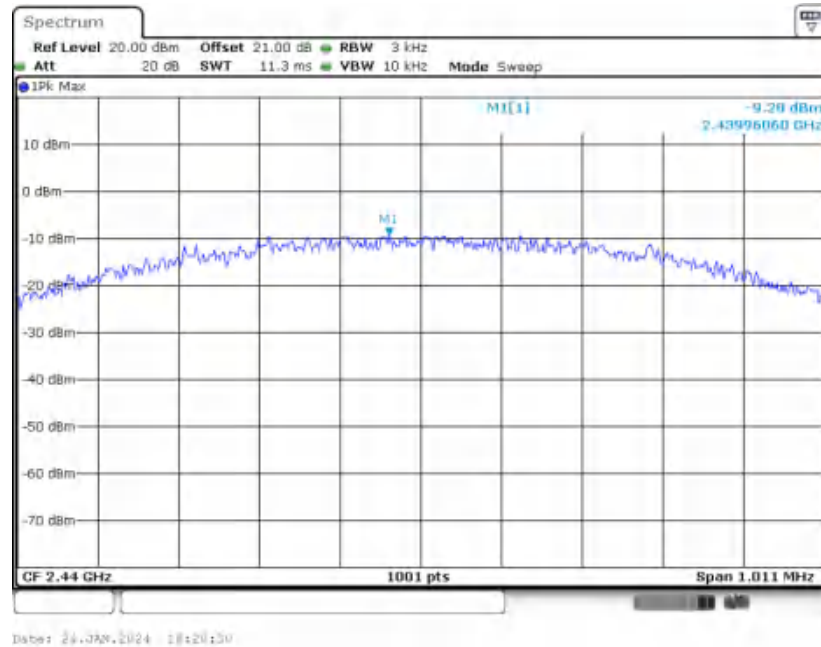




PSD 3kHz Plot on Channel 39

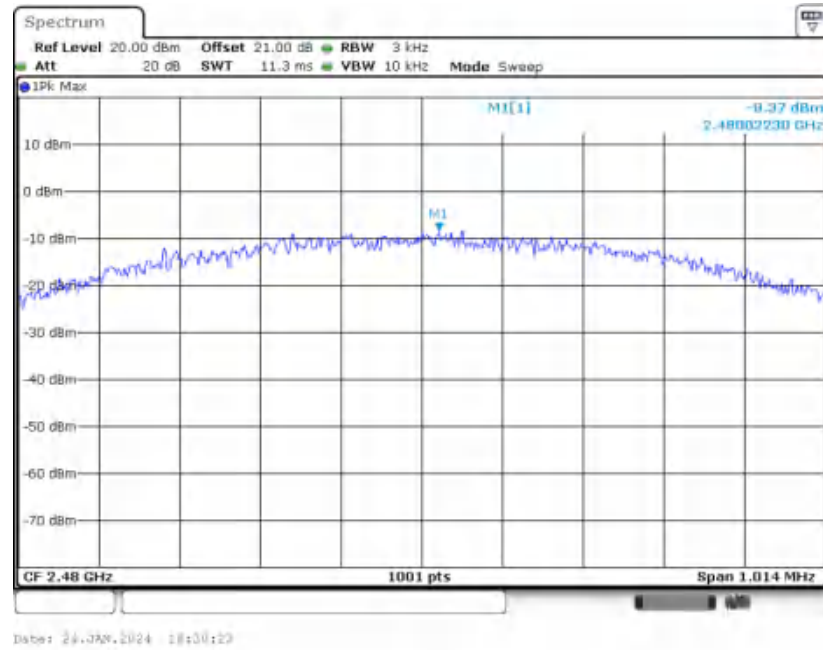


BLE 2Mbps

PSD 3kHz Plot on Channel 01

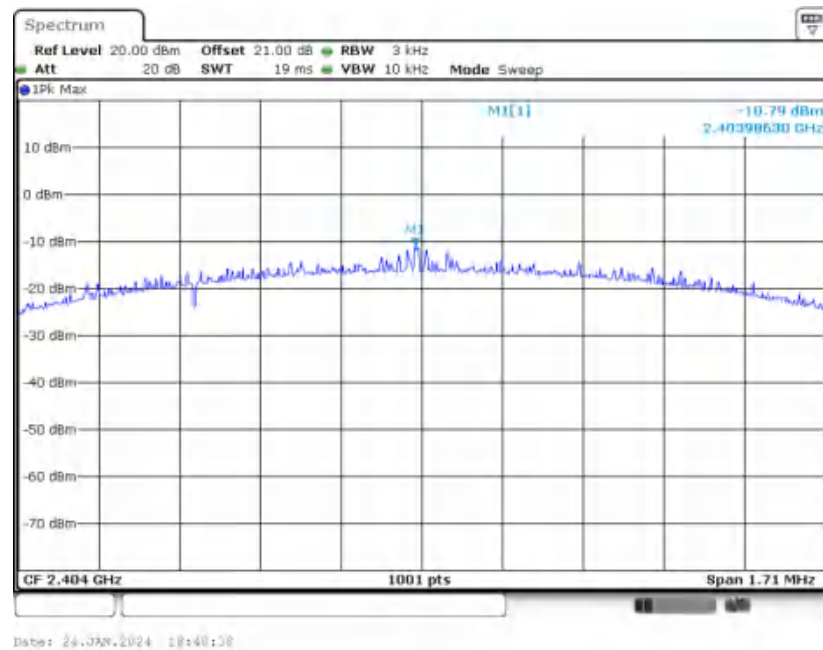




PSD 3kHz Plot on Channel 19

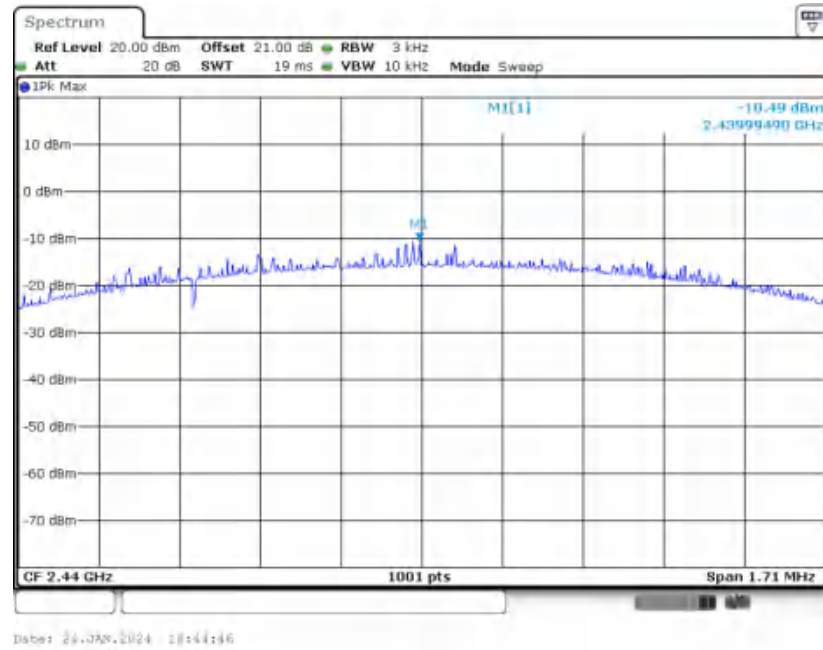

PSD 3kHz Plot on Channel 38

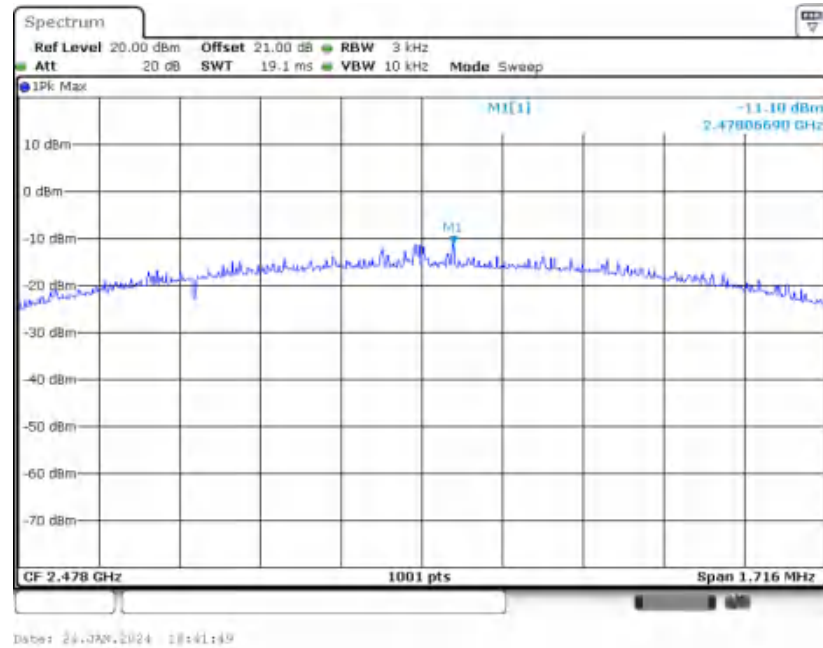



3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

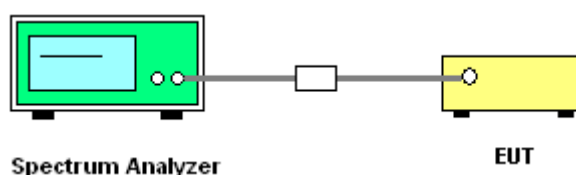




3.4.5 Test Result of Conducted Band Edges Plots


<Ant.0>

BLE 1Mbps

Low Band Edge Plot on Channel 00

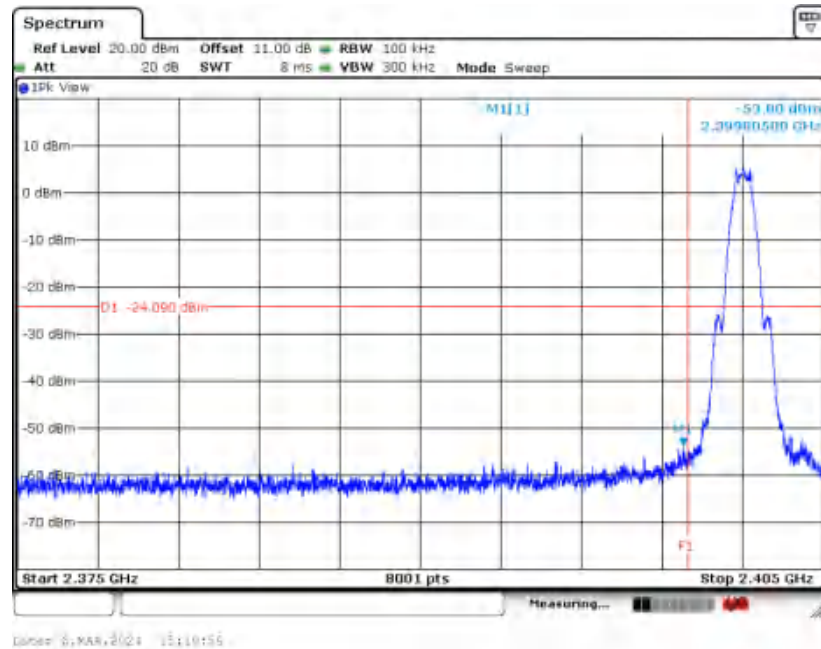


High Band Edge Plot on Channel 39

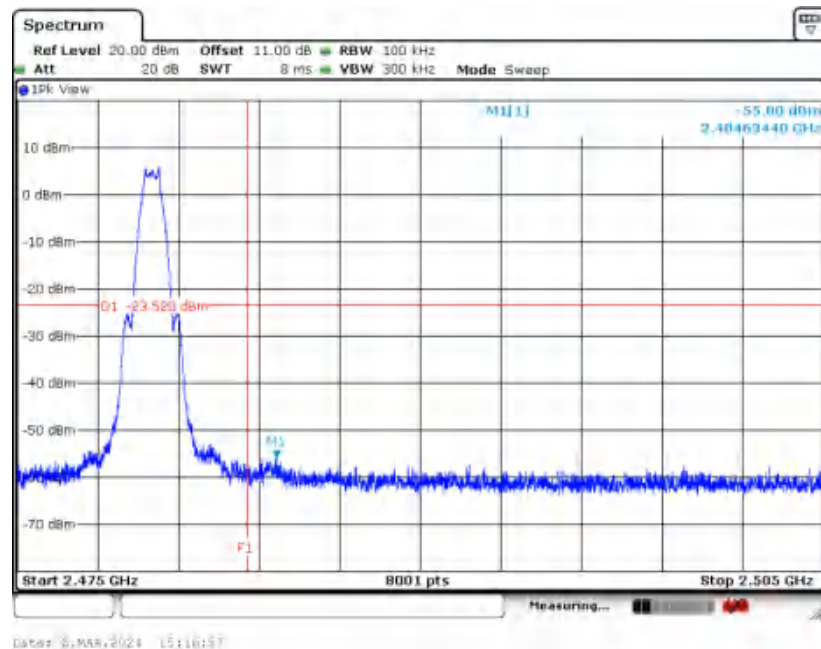




BLE 2Mbps

Low Band Edge Plot on Channel 01

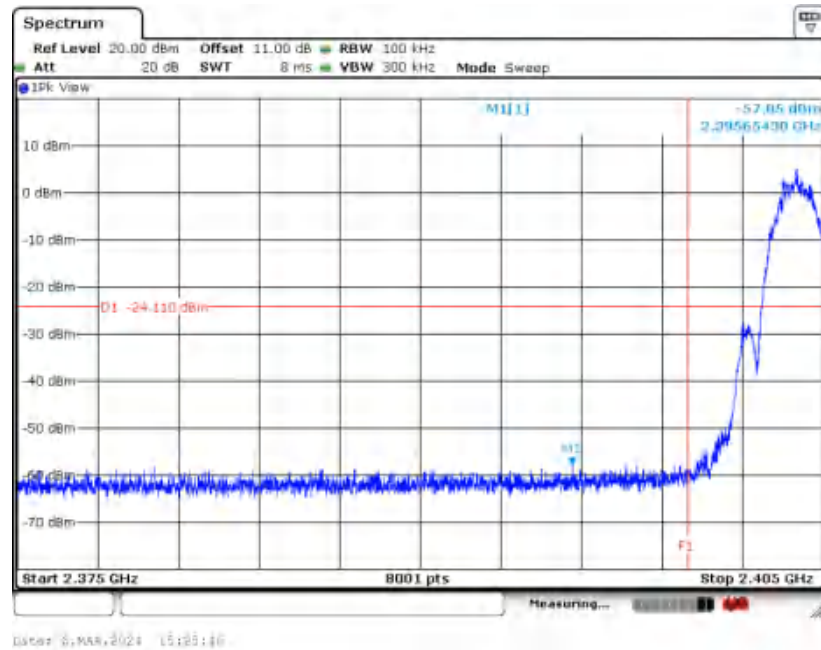

High Band Edge Plot on Channel 38

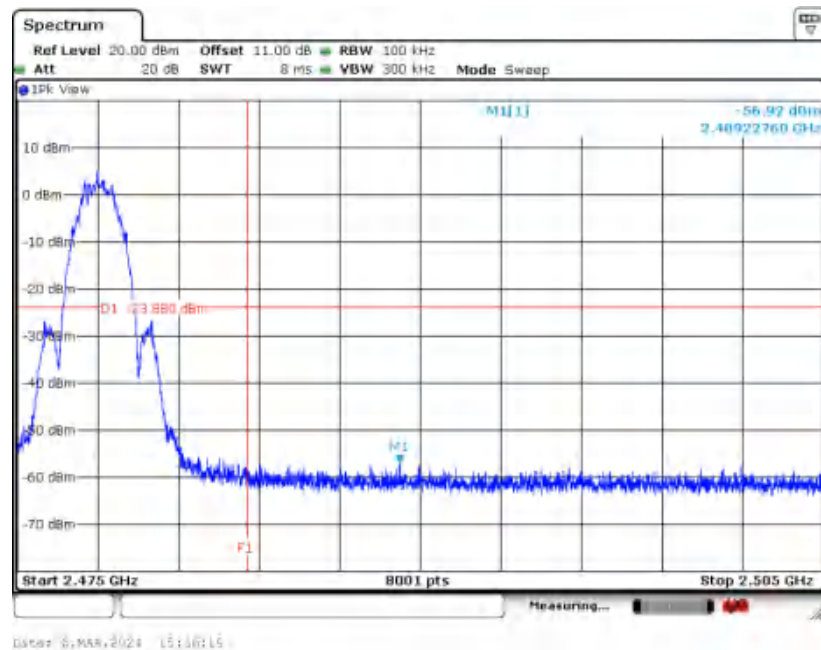





<Ant.2>

BLE 1Mbps

Low Band Edge Plot on Channel 00

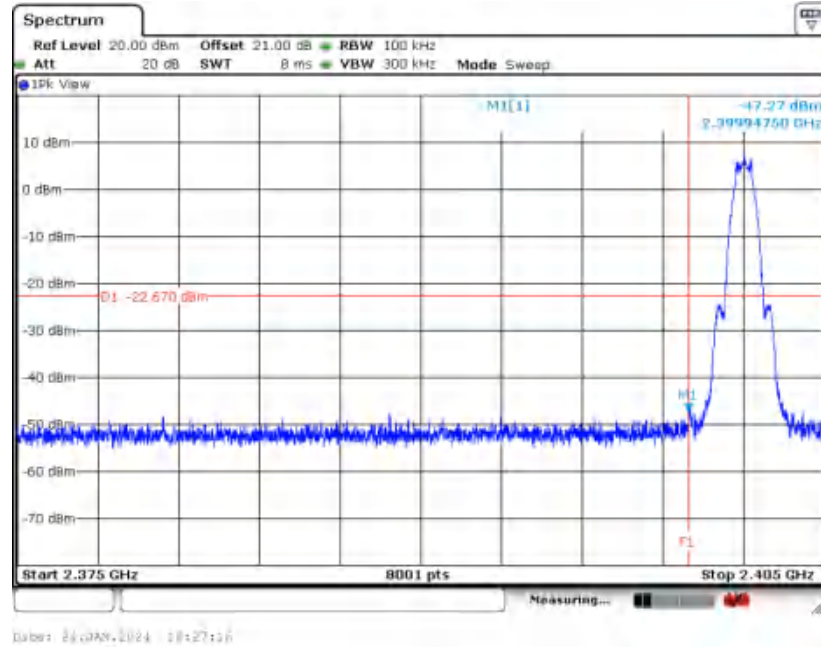


High Band Edge Plot on Channel 39

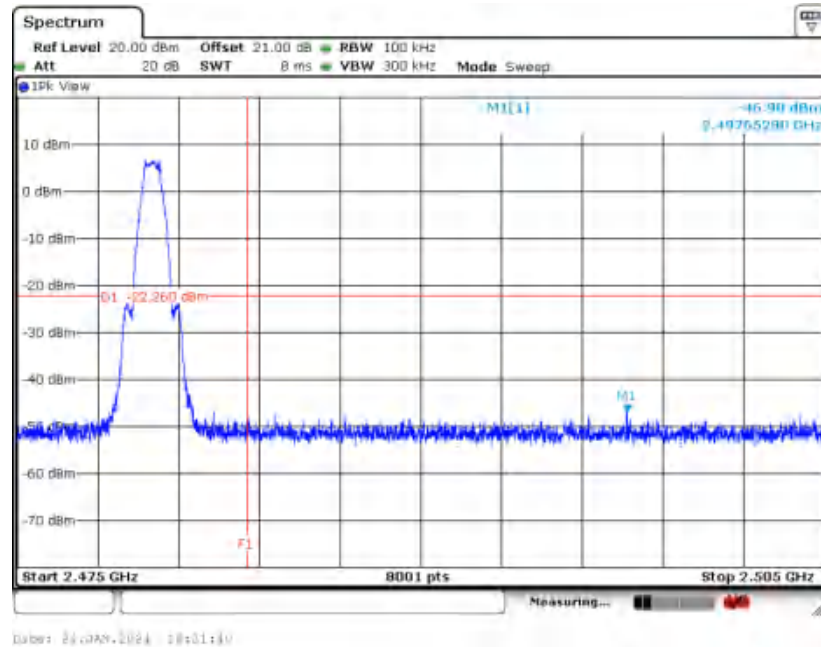




BLE 2Mbps

Low Band Edge Plot on Channel 01

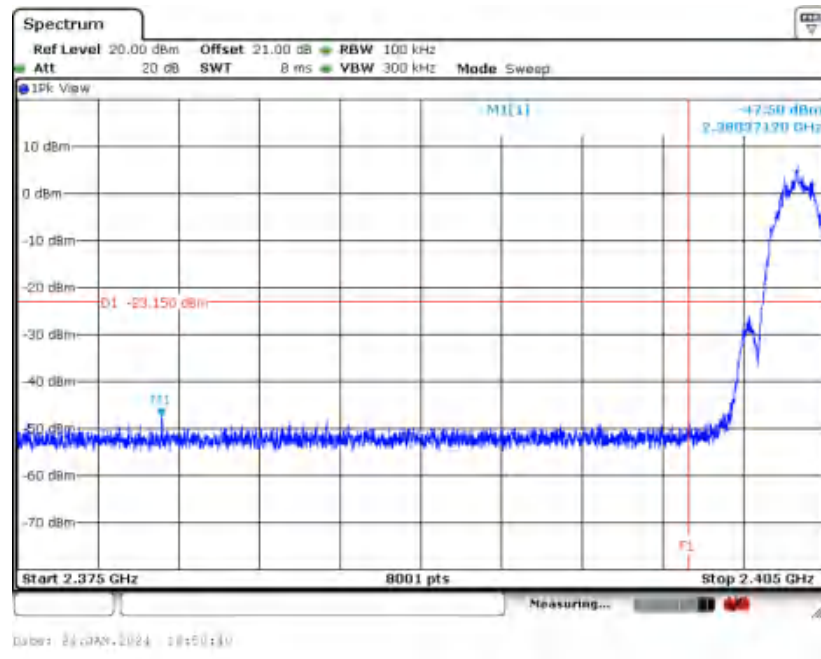

High Band Edge Plot on Channel 38

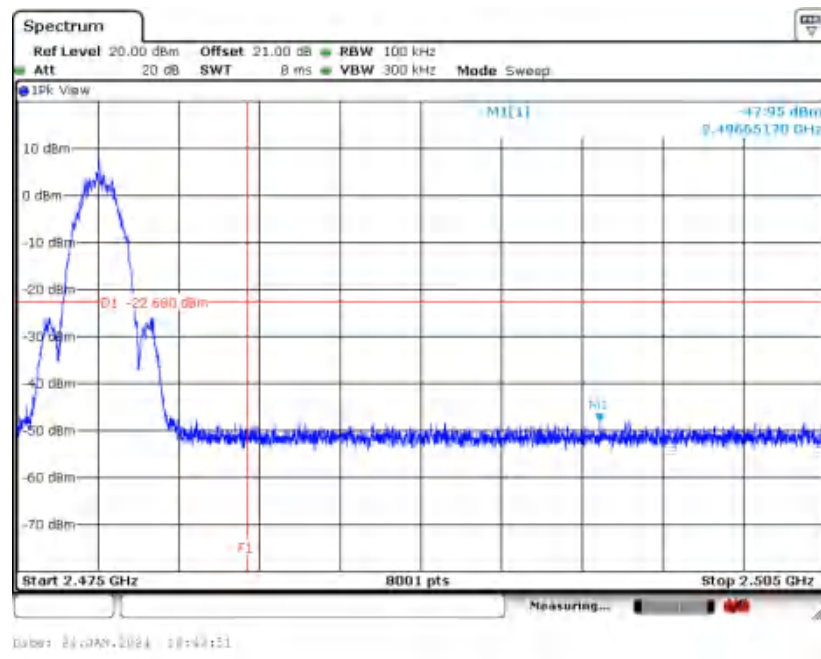





3.4.6 Test Result of Conducted Spurious Emission Plots

<Ant.0>

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

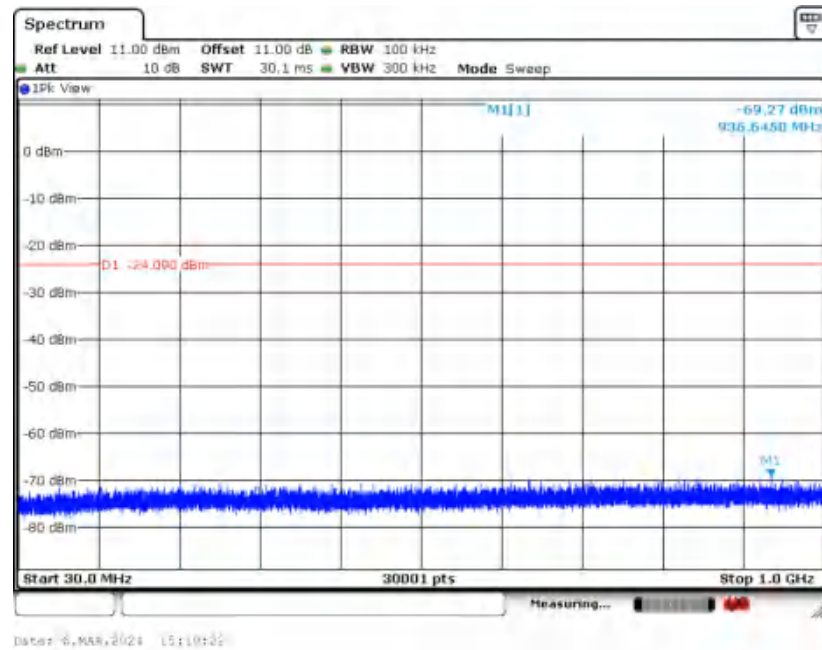


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

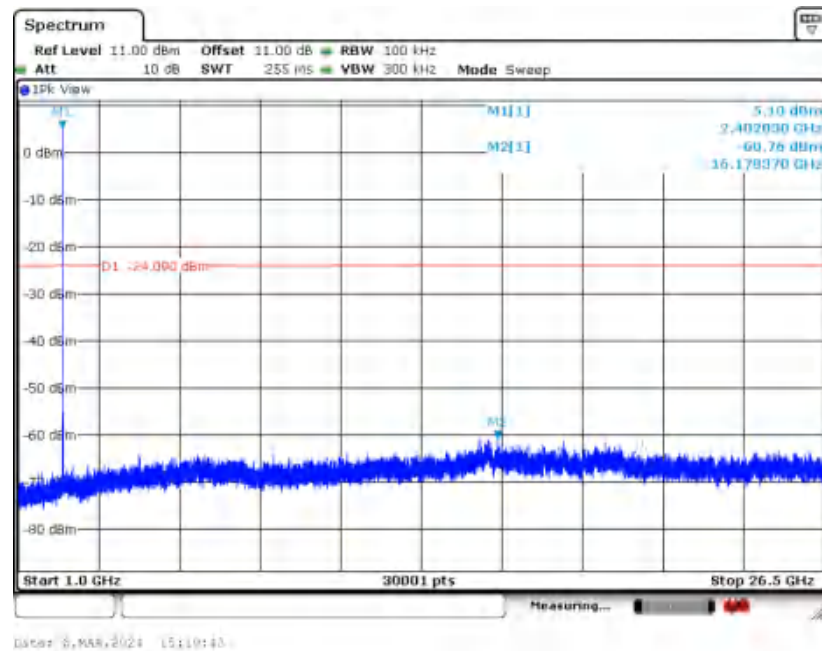




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

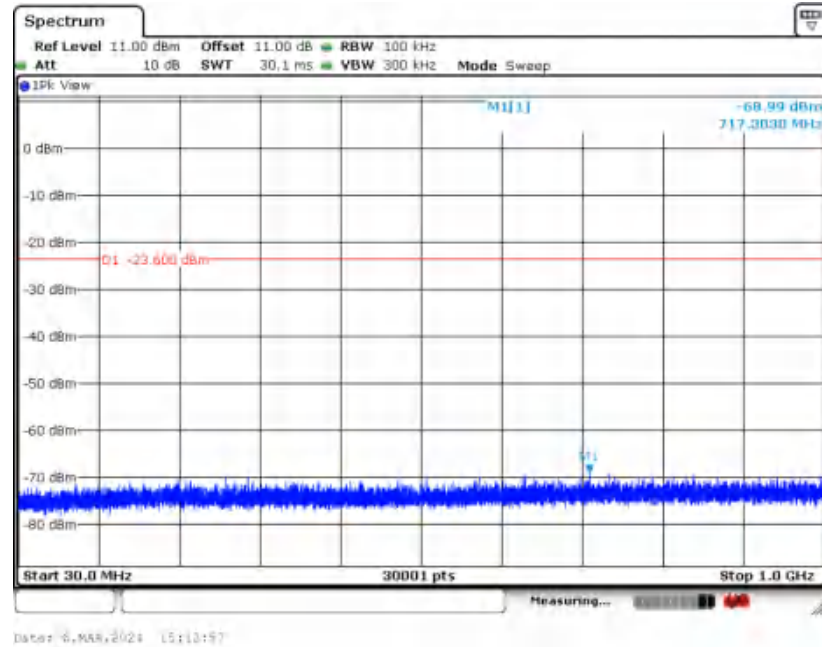


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

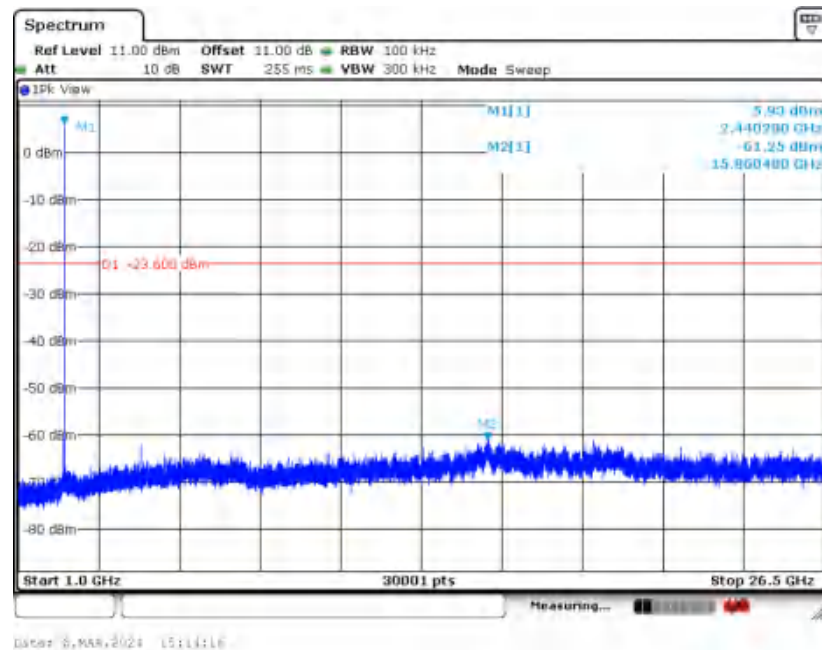




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

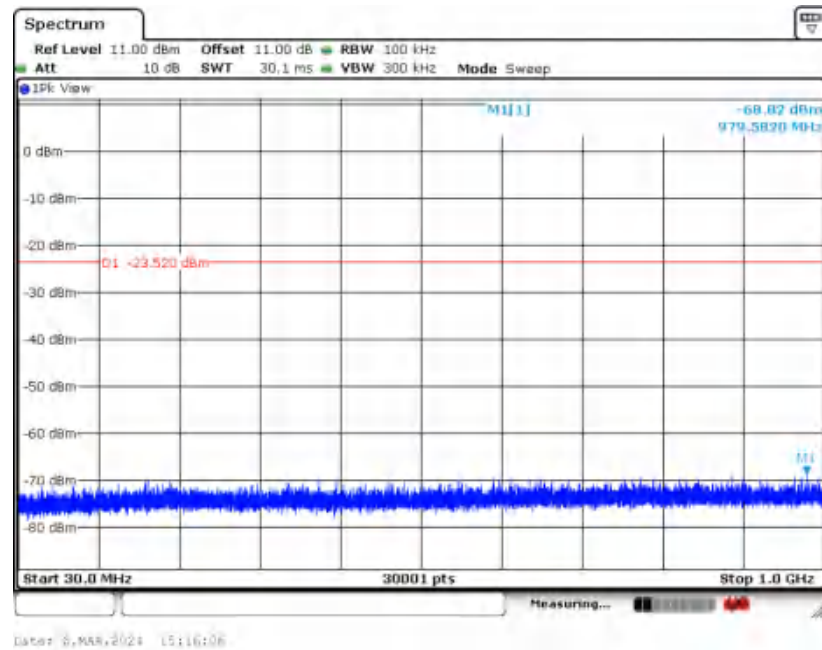


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

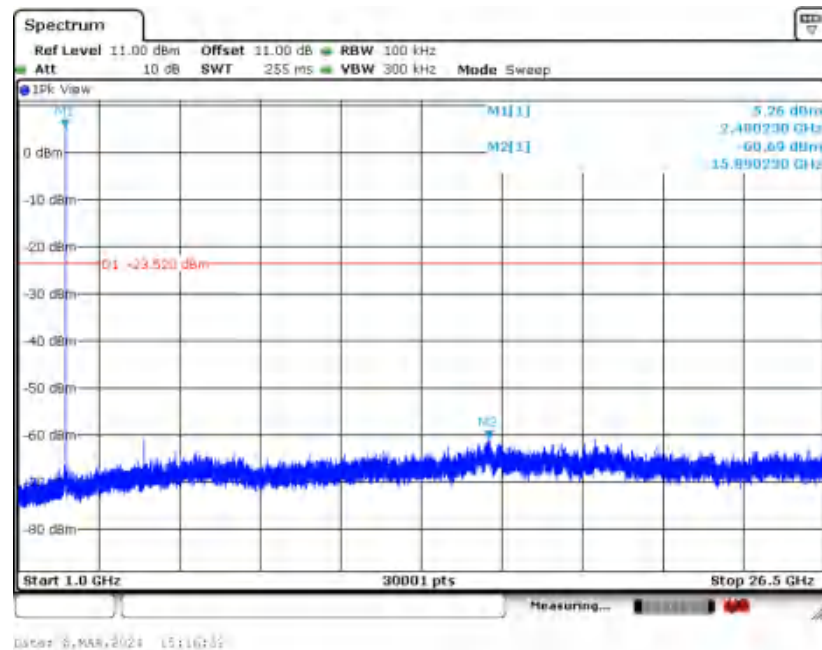




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 01

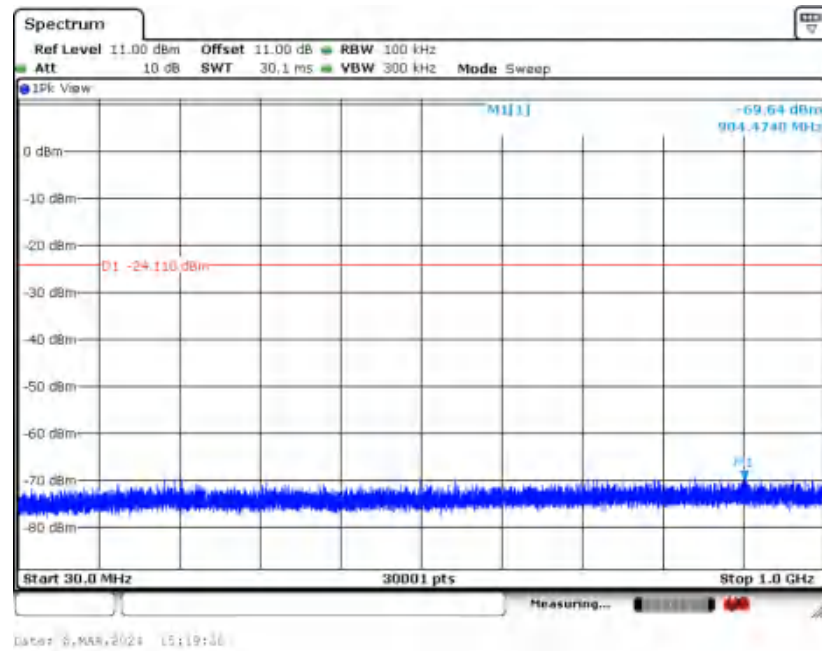


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 01

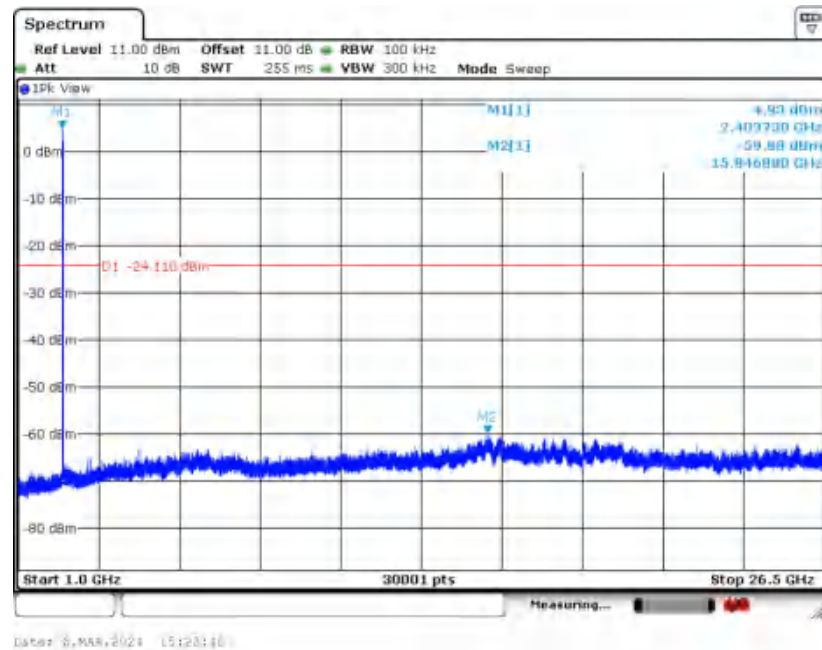




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 19

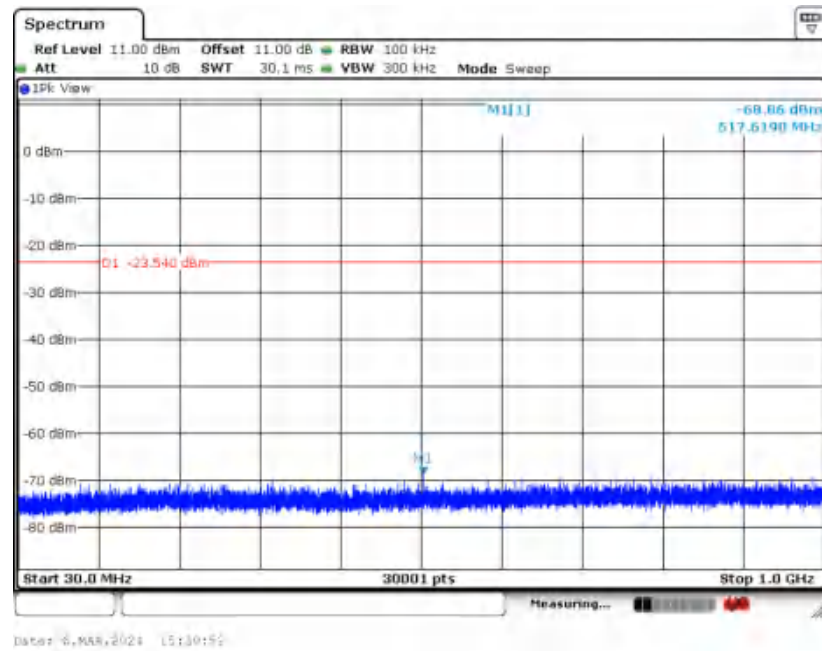


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 19

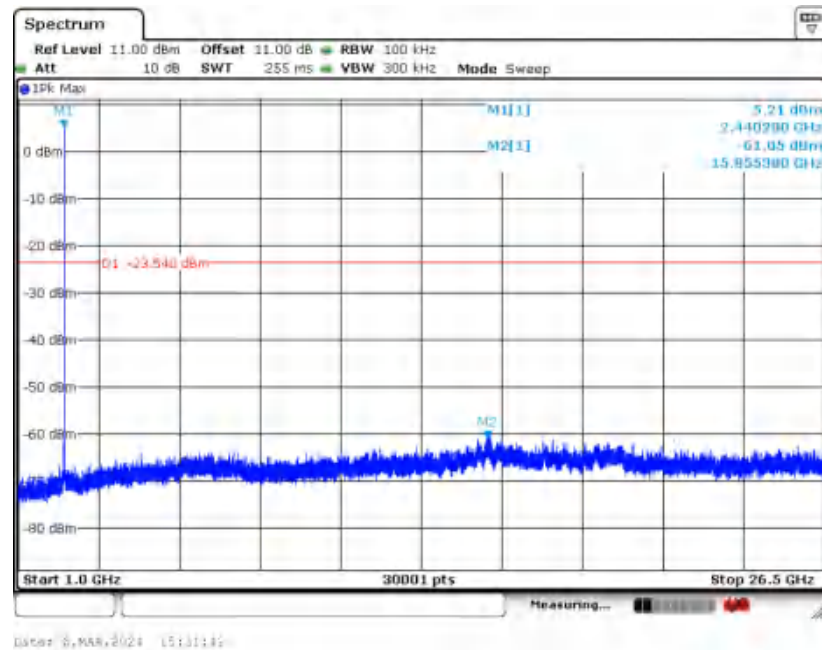




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 38

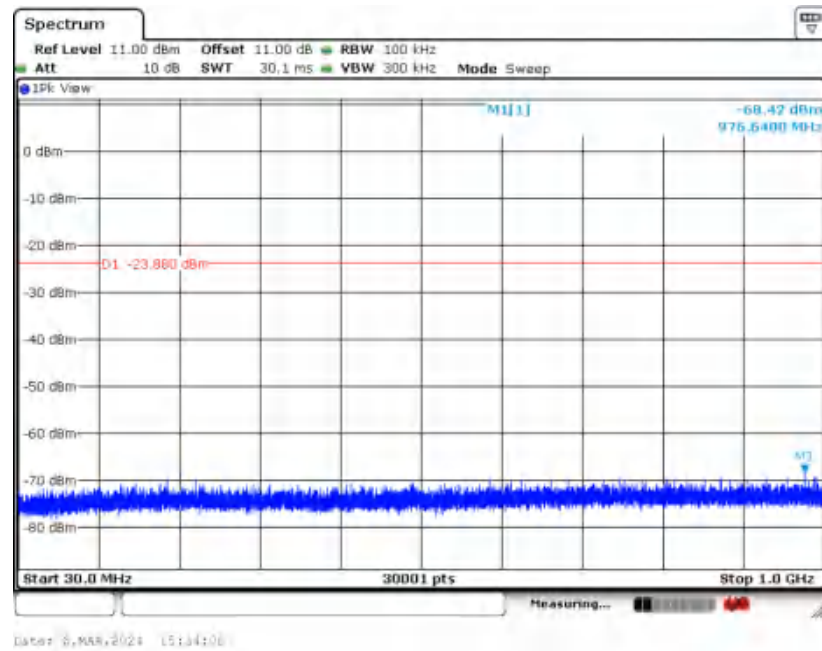


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 38

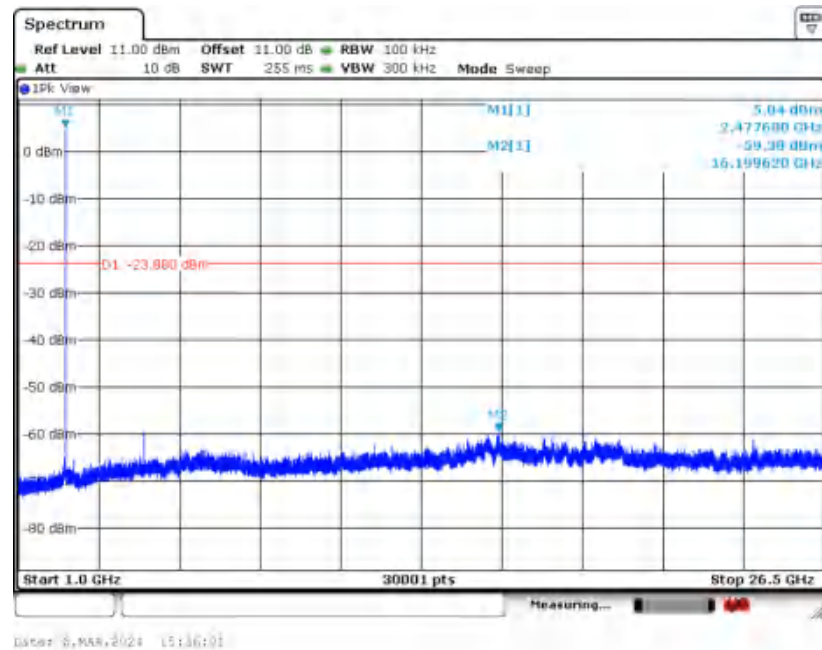




<Ant.2>

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 00

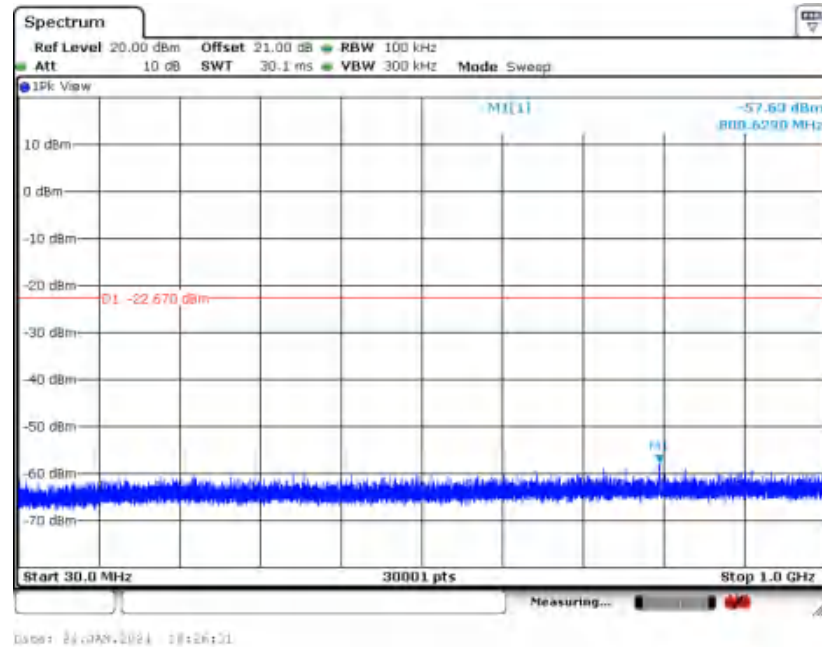


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 00

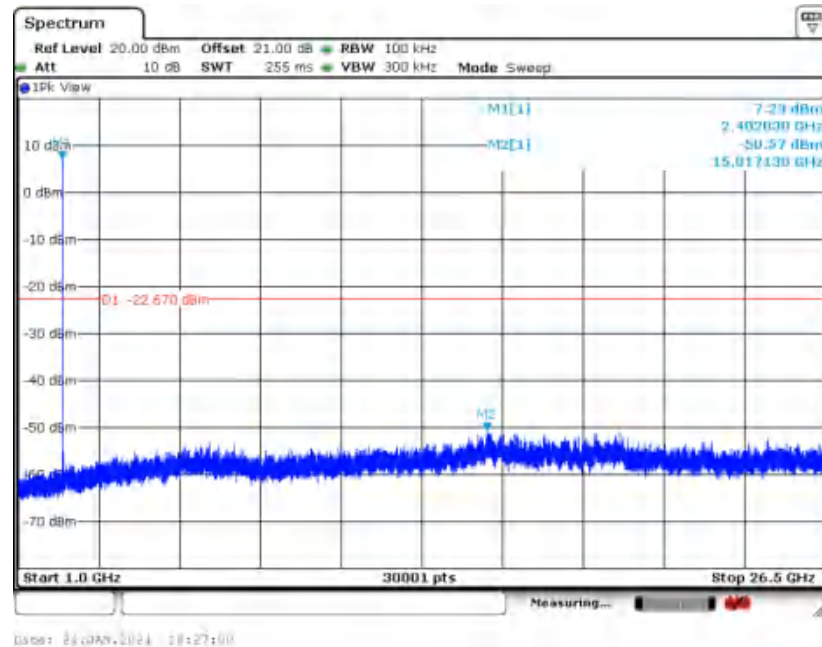




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

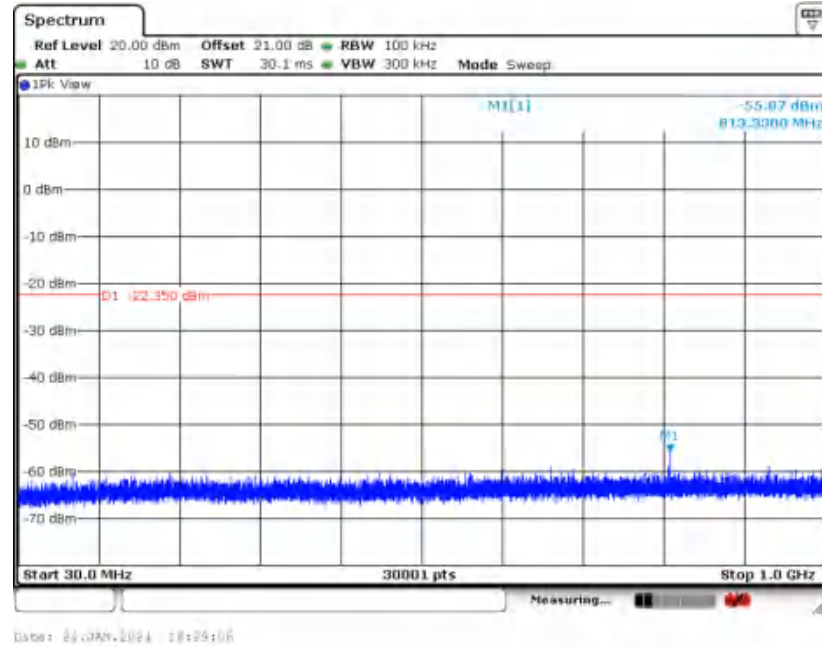


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

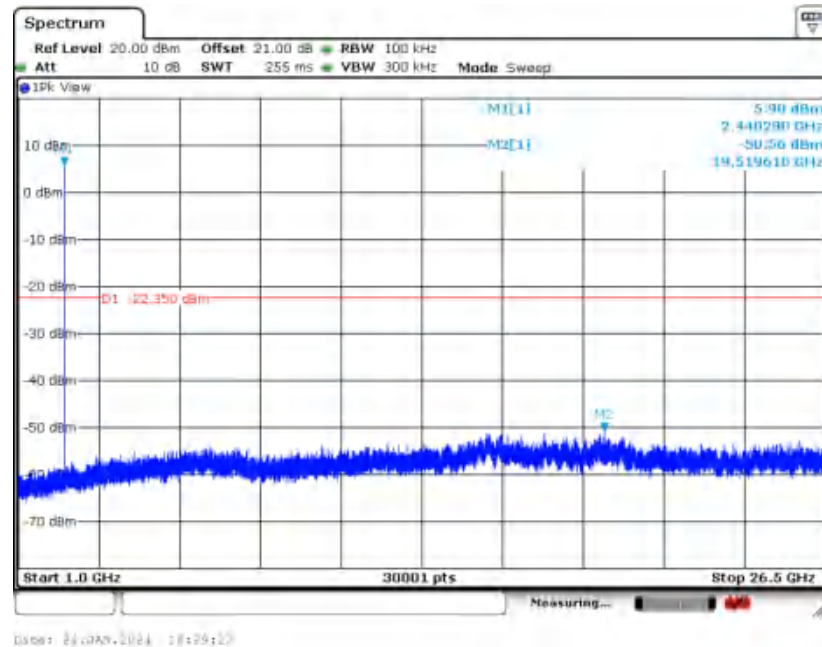




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

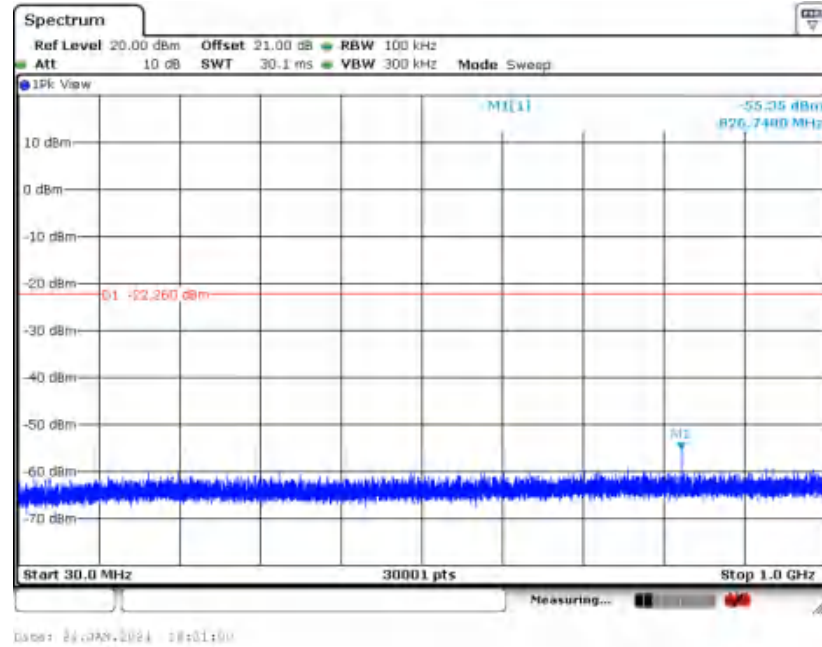


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

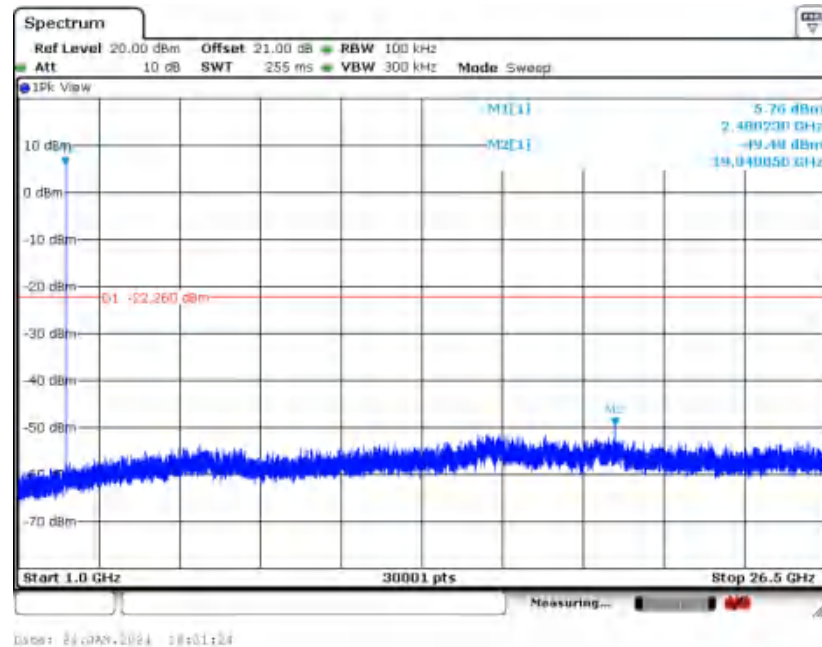




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 01

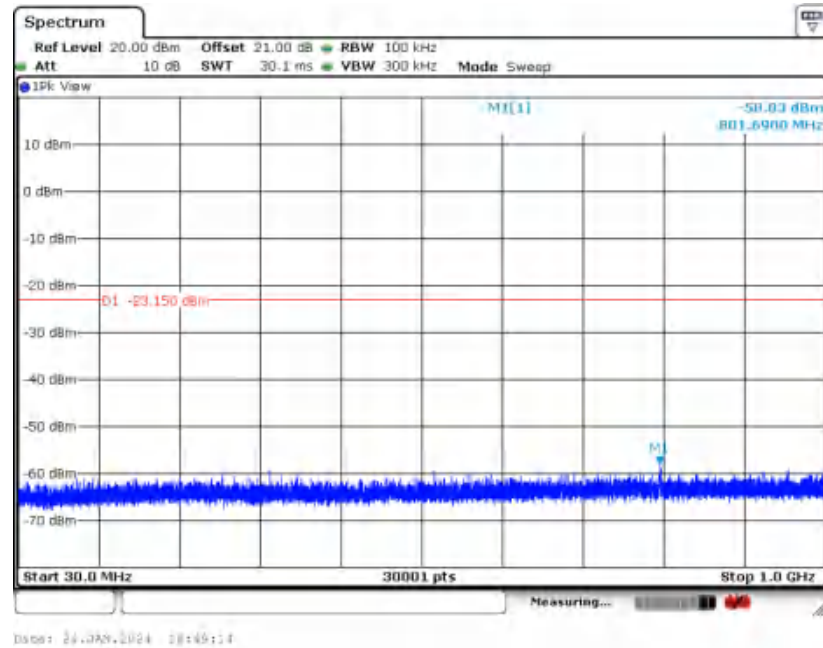


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 01

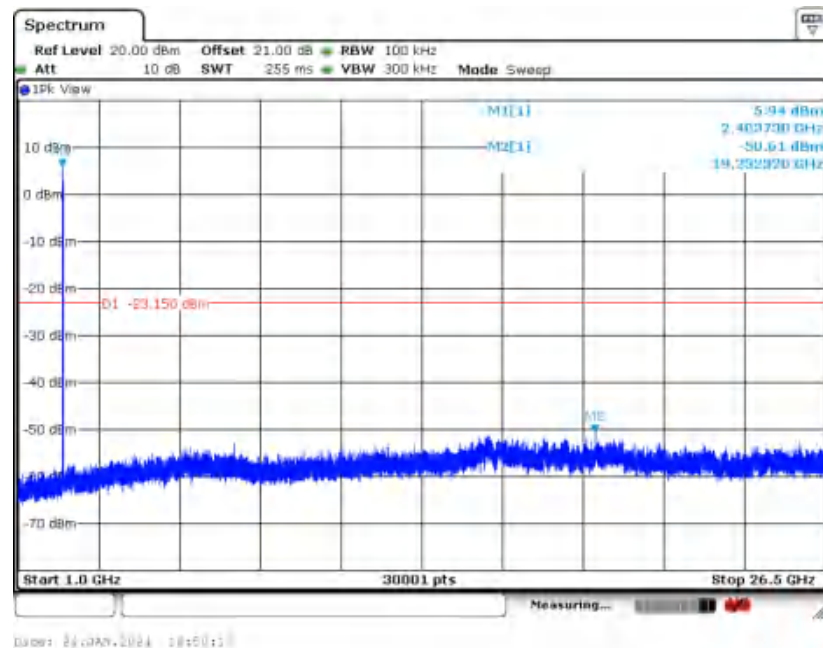




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 19

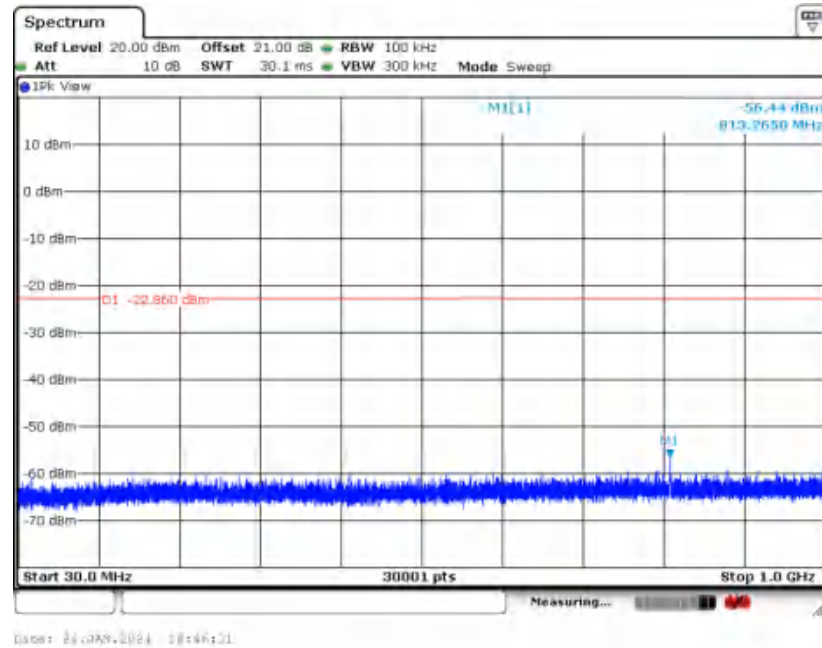


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 19

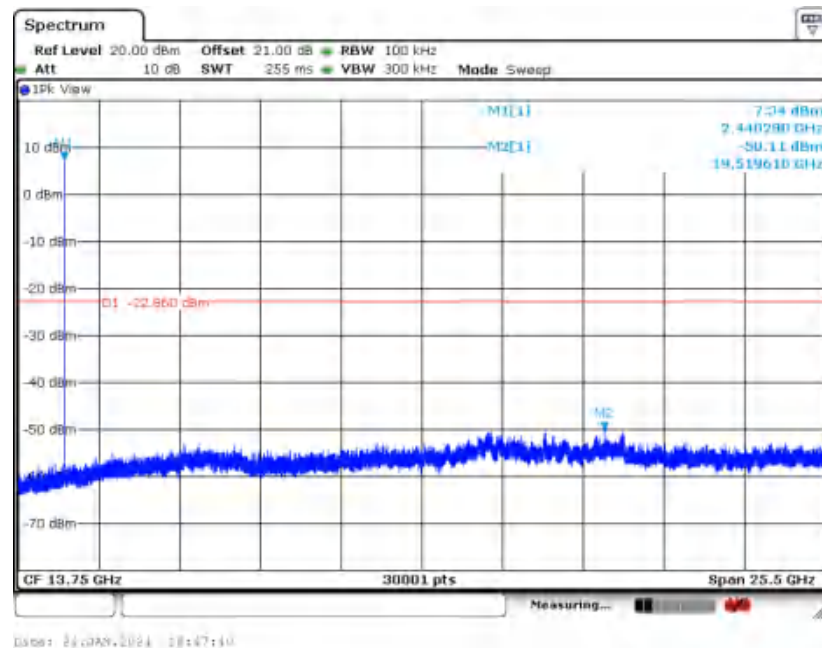




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 38

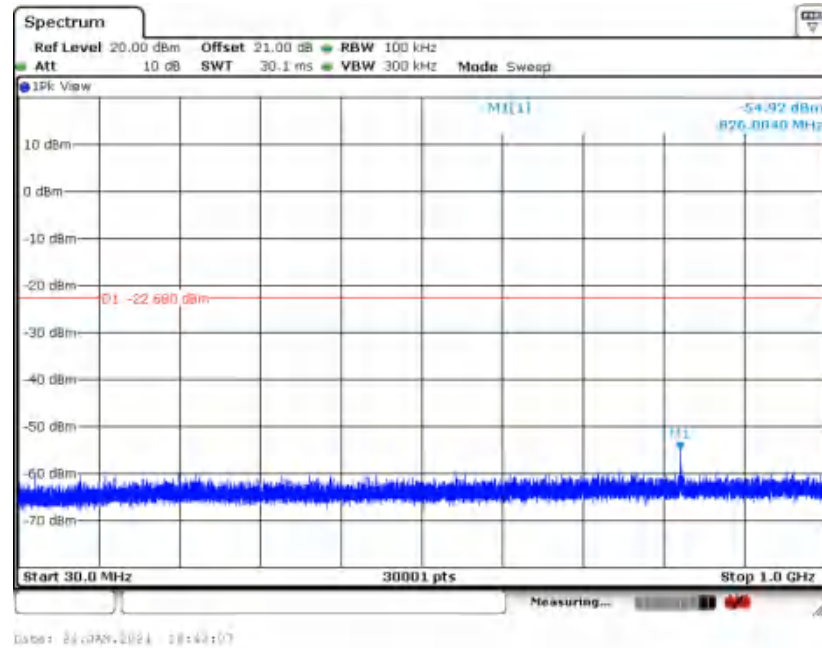

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 38

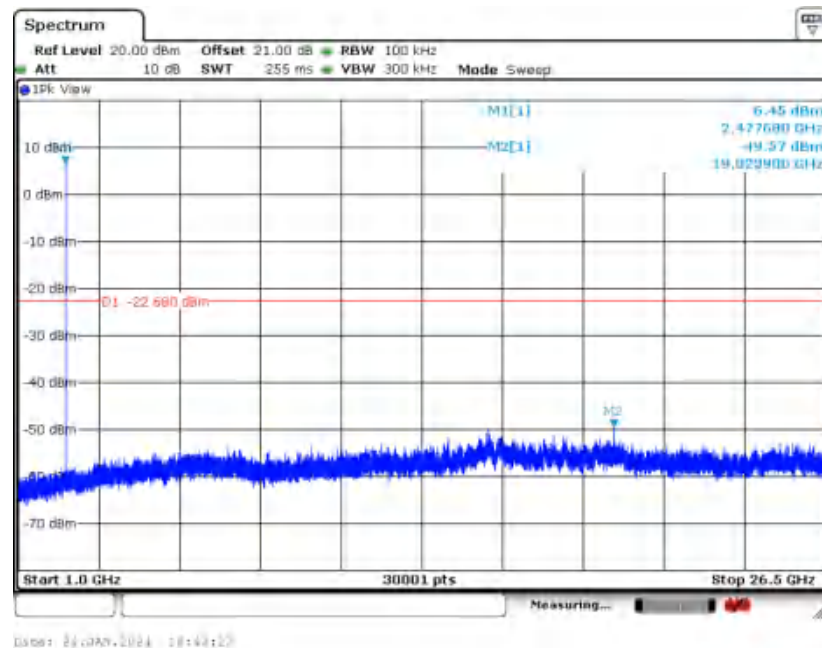



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$; $\text{VBW} \geq \text{RBW}$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1 \text{ GHz}$ for peak measurement.
For average measurement:
 - $\text{VBW} = 10 \text{ Hz}$, when duty cycle is no less than 98 percent.
 - $\text{VBW} \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




3.5.4 Test Setup


For radiated emissions below 30MHz

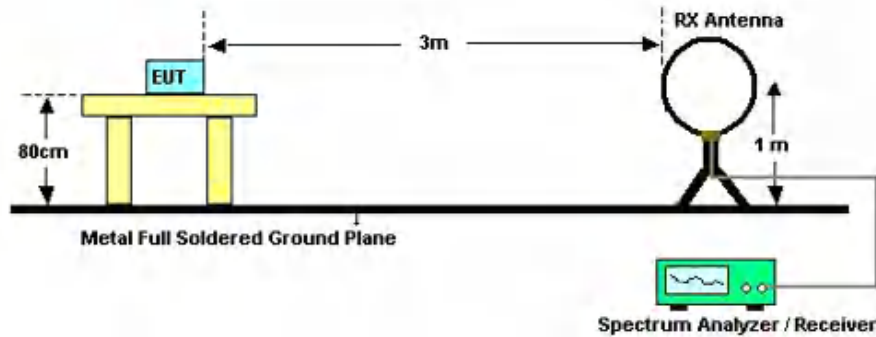

For radiated emissions from 30MHz to 1GHz

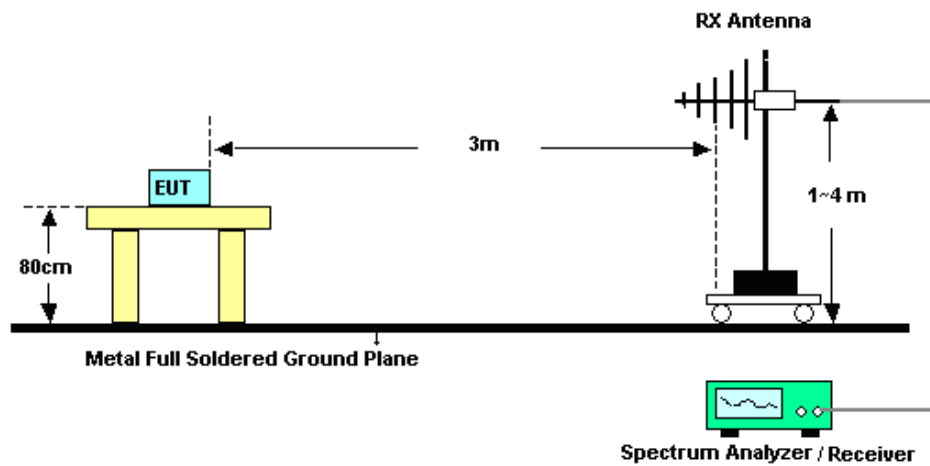

For radiated emissions above 1GHz

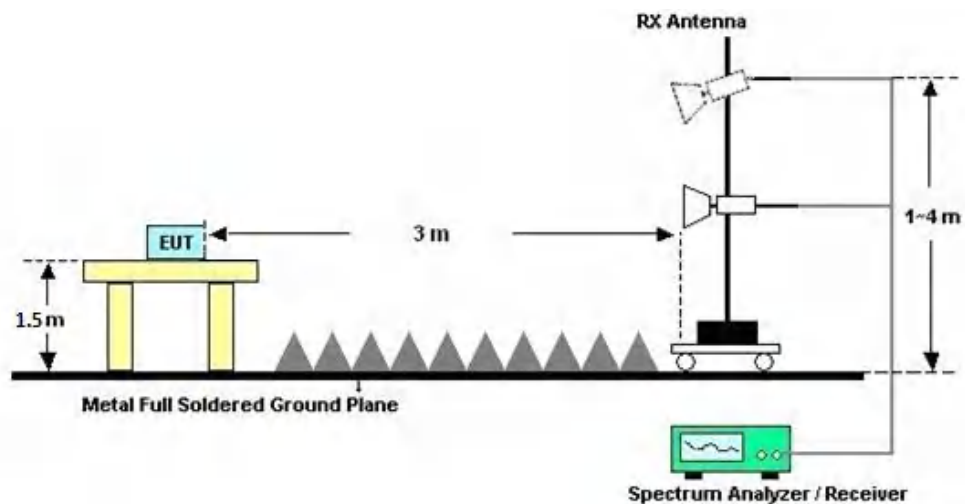

**3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.



3.6.4 Test Setup

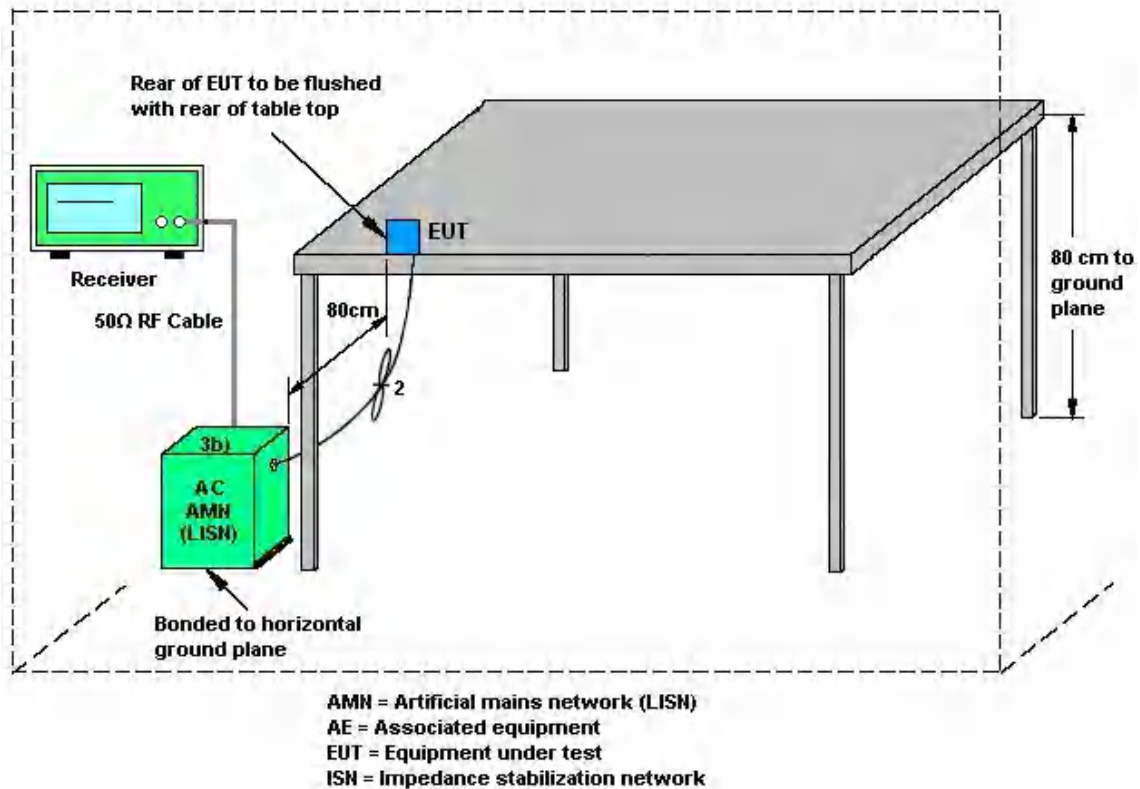

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	Jan. 15, 2024~ Mar. 08, 2024	Apr. 05, 2024	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 29, 2023	Jan. 15, 2024~ Mar. 08, 2024	Dec. 28, 2024	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Aug. 21, 2023	Jan. 15, 2024~ Mar. 08, 2024	Aug. 20, 2024	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 18, 2023	Jan. 29, 2024~ Mar. 08, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2023	Jan. 29, 2024~ Mar. 08, 2024	Jul. 06, 2024	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 28, 2022	Jan. 29, 2024~ Mar. 08, 2024	Jun. 27, 2024	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May. 14, 2023	Jan. 29, 2024~ Mar. 08, 2024	May. 13, 2024	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Jul. 07, 2023	Jan. 29, 2024~ Mar. 08, 2024	Jul. 06, 2024	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 08, 2023	Jan. 29, 2024~ Mar. 08, 2024	Jul. 07, 2024	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 18, 2023	Jan. 29, 2024~ Mar. 08, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Jan. 29, 2024~ Mar. 08, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2023	Jan. 29, 2024~ Mar. 08, 2024	Jul. 06, 2024	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY57280136	500MHz~26.5GHz	Aug. 21, 2023	Jan. 29, 2024~ Mar. 08, 2024	Aug. 20, 2024	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Oct. 18, 2023	Jan. 29, 2024~ Mar. 08, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jan. 29, 2024~ Mar. 08, 2024	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jan. 29, 2024~ Mar. 08, 2024	NCR	Radiation (03CH04-SZ)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 16, 2023	Jan. 09, 2024	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Jan. 09, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Jan. 09, 2024	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Jan. 09, 2024	Oct. 10, 2024	Conduction (CO01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Conducted Power Spectral Density	± 1.32 dB
Frequency	± 1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.50dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.10dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.80dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.10dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

<Ant.0>

Test Engineer:	Chen ZhiQiang	Temperature:	21~25	°C
Test Date:	2024/1/15~2024/3/8	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.021	0.666	0.50	Pass
BLE	1Mbps	1	19	2440	1.023	0.666	0.50	Pass
BLE	1Mbps	1	39	2480	1.023	0.668	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	0.69	6.40	30.00	-0.10	6.30	36.00	Pass
BLE	1Mbps	1	19	2440	0.69	6.90	30.00	-0.10	6.80	36.00	Pass
BLE	1Mbps	1	39	2480	0.69	6.80	30.00	-0.10	6.70	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	5.91	-9.70	-0.10	8.00	Pass
BLE	1Mbps	1	19	2440	6.40	-8.73	-0.10	8.00	Pass
BLE	1Mbps	1	39	2480	6.48	-9.79	-0.10	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

Test Engineer:	Chen ZhiQiang	Temperature:	21~25	°C
Test Date:	2024/1/15~2024/3/8	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	1	2404	2.042	1.140	0.50	Pass
BLE	2Mbps	1	19	2440	2.030	1.136	0.50	Pass
BLE	2Mbps	1	38	2478	2.030	1.148	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	1	2404	2.41	6.30	30.00	-0.10	6.20	36.00	Pass
BLE	2Mbps	1	19	2440	2.41	6.80	30.00	-0.10	6.70	36.00	Pass
BLE	2Mbps	1	38	2478	2.41	6.70	30.00	-0.10	6.60	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	1	2404	5.89	-12.98	-0.10	8.00	Pass
BLE	2Mbps	1	19	2440	6.46	-11.76	-0.10	8.00	Pass
BLE	2Mbps	1	38	2478	6.12	-11.77	-0.10	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

<Ant.2>

Test Engineer:	Chen ZhiQiang	Temperature:	21~25	°C
Test Date:	2024/1/15~2024/3/8	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.023	0.664	0.50	Pass
BLE	1Mbps	1	19	2440	1.023	0.674	0.50	Pass
BLE	1Mbps	1	39	2480	1.025	0.676	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	0.69	7.70	30.00	-0.10	7.60	36.00	Pass
BLE	1Mbps	1	19	2440	0.69	7.70	30.00	-0.10	7.60	36.00	Pass
BLE	1Mbps	1	39	2480	0.69	7.40	30.00	-0.10	7.30	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	7.33	-8.14	-0.10	8.00	Pass
BLE	1Mbps	1	19	2440	7.65	-9.28	-0.10	8.00	Pass
BLE	1Mbps	1	39	2480	7.74	-8.37	-0.10	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

Test Engineer:	Chen ZhiQiang	Temperature:	21~25	°C
Test Date:	2024/1/15~2024/3/8	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	1	2404	2.034	1.140	0.50	Pass
BLE	2Mbps	1	19	2440	2.034	1.140	0.50	Pass
BLE	2Mbps	1	38	2478	2.042	1.144	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	1	2404	2.39	7.60	30.00	-0.10	7.50	36.00	Pass
BLE	2Mbps	1	19	2440	2.39	7.60	30.00	-0.10	7.50	36.00	Pass
BLE	2Mbps	1	38	2478	2.39	7.30	30.00	-0.10	7.20	36.00	Pass

TEST RESULTS DATA
Peak Power Density


Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	1	2404	6.85	-10.79	-0.10	8.00	Pass
BLE	2Mbps	1	19	2440	7.14	-10.49	-0.10	8.00	Pass
BLE	2Mbps	1	38	2478	7.32	-11.10	-0.10	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

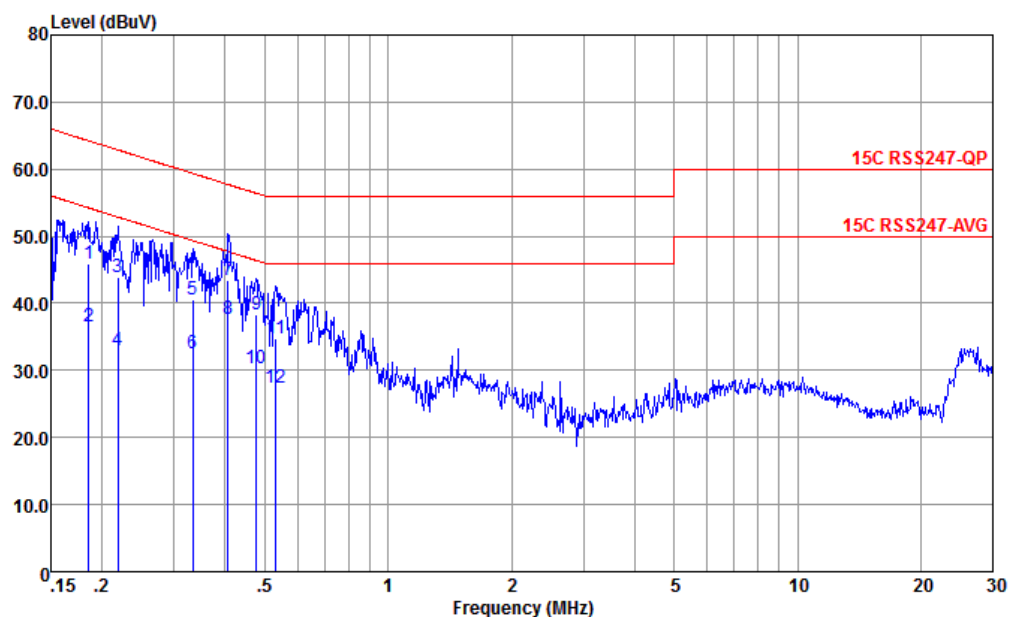


Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-L 2023 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.185	45.95	-18.29	64.24	35.50	0.04	10.41	QP
2	0.185	36.65	-17.59	54.24	26.20	0.04	10.41	Average
3	0.219	43.93	-18.95	62.88	33.51	0.03	10.39	QP
4	0.219	33.03	-19.85	52.88	22.61	0.03	10.39	Average
5	0.334	40.54	-18.81	59.35	30.20	0.03	10.31	QP
6	0.334	32.64	-16.71	49.35	22.30	0.03	10.31	Average
7	0.406	43.47	-14.26	57.73	33.19	0.00	10.28	QP
8 *	0.406	37.57	-10.16	47.73	27.29	0.00	10.28	Average
9	0.476	38.41	-18.00	56.41	28.20	-0.02	10.23	QP
10	0.476	30.41	-16.00	46.41	20.20	-0.02	10.23	Average
11	0.532	34.67	-21.33	56.00	24.50	-0.04	10.21	QP
12	0.532	27.47	-18.53	46.00	17.30	-0.04	10.21	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

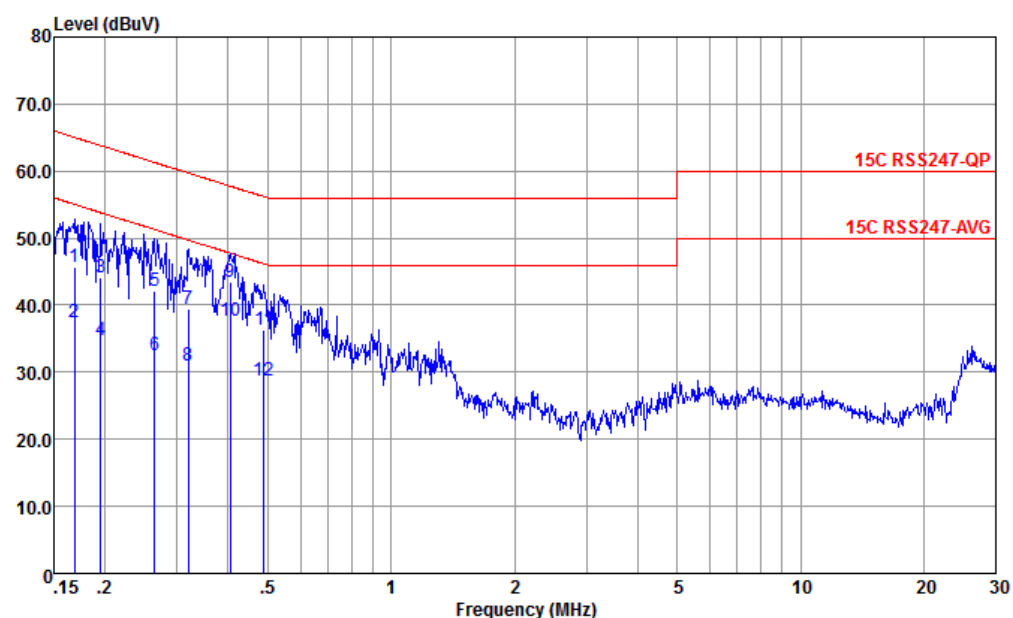

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-N 2023 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.169	45.66	-19.37	65.03	35.20	0.04	10.42	QP
2	0.169	37.36	-17.67	55.03	26.90	0.04	10.42	Average
3	0.195	44.06	-19.74	63.80	33.60	0.05	10.41	QP
4	0.195	34.66	-19.14	53.80	24.20	0.05	10.41	Average
5	0.264	42.14	-19.15	61.29	31.79	-0.01	10.36	QP
6	0.264	32.64	-18.65	51.29	22.29	-0.01	10.36	Average
7	0.320	39.48	-20.23	59.71	29.20	-0.04	10.32	QP
8	0.320	30.88	-18.83	49.71	20.60	-0.04	10.32	Average
9	0.404	43.42	-14.35	57.77	33.20	-0.06	10.28	QP
10 *	0.404	37.72	-10.05	47.77	27.50	-0.06	10.28	Average
11	0.489	36.36	-19.83	56.19	26.20	-0.07	10.23	QP
12	0.489	28.76	-17.43	46.19	18.60	-0.07	10.23	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	ZhangXu	Relative Humidity :	50%
		Temperature :	20-22C°

Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	Remark
Mode 1	2400-2483.5	2	Bluetooth-LE	00	2402	1Mbps	-
Mode 2	2400-2483.5	2	Bluetooth-LE	19	2440	1Mbps	-
Mode 3	2400-2483.5	2	Bluetooth-LE	39	2480	1Mbps	-
Mode 4	2400-2483.5	2	Bluetooth-LE	01	2404	2Mbps	-
Mode 5	2400-2483.5	2	Bluetooth-LE	19	2440	2Mbps	-
Mode 6	2400-2483.5	2	Bluetooth-LE	38	2478	2Mbps	-
Mode 7	2400-2483.5	2	Bluetooth-LE	38	2478	2Mbps	LF
Mode 8	2400-2483.5	0	Bluetooth-LE	00	2402	1Mbps	-
Mode 9	2400-2483.5	0	Bluetooth-LE	19	2440	1Mbps	-
Mode 10	2400-2483.5	0	Bluetooth-LE	39	2480	1Mbps	-
Mode 11	2400-2483.5	0	Bluetooth-LE	01	2404	2Mbps	-
Mode 12	2400-2483.5	0	Bluetooth-LE	19	2440	2Mbps	-
Mode 13	2400-2483.5	0	Bluetooth-LE	38	2478	2Mbps	-
Mode 14	2400-2483.5	0	Bluetooth LE	39	2480	1Mbps	LF



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE	00	1386.00	51.50	54.00	-2.50	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE	00	4804.00	42.88	74.00	-31.12	V	Peak	Pass	Harmonic
2	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE	19	7320.00	45.09	74.00	-28.91	V	Peak	Pass	Harmonic
3	Bluetooth-LE	39	1386.00	51.52	54.00	-2.48	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE	39	7440.00	45.39	74.00	-28.61	V	Peak	Pass	Harmonic
4	Bluetooth-LE	01	1386.00	51.21	54.00	-2.79	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	01	4808.00	42.49	74.00	-31.51	H	Peak	Pass	Harmonic
5	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE	19	7320.00	45.16	74.00	-28.84	V	Peak	Pass	Harmonic
6	Bluetooth-LE	38	1386.00	51.66	54.00	-2.34	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	38	7434.00	44.49	74.00	-29.51	V	Peak	Pass	Harmonic
7	Bluetooth-LE	38	675.05	45.29	46.00	-0.71	V	Peak	Pass	LF
8	Bluetooth-LE	00	2375.96	34.59	54.00	-19.41	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	00	4804.00	42.50	74.00	-31.50	H	Peak	Pass	Harmonic
9	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE	19	7320.00	45.89	74.00	-28.11	H	Peak	Pass	Harmonic
10	Bluetooth-LE	39	2483.96	40.68	54.00	-13.32	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE	39	7440.00	44.85	74.00	-29.15	H	Peak	Pass	Harmonic
11	Bluetooth-LE	01	2375.89	34.64	54.00	-19.36	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	01	4808.00	43.91	74.00	-30.09	H	Peak	Pass	Harmonic
12	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE	19	7320.00	45.79	74.00	-28.21	H	Peak	Pass	Harmonic
13	Bluetooth-LE	38	2483.54	37.32	54.00	-16.68	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE	38	7434.00	45.15	74.00	-28.85	H	Peak	Pass	Harmonic
14	Bluetooth-LE	39	675.05	45.26	46.00	-0.74	V	Peak	Pass	LF

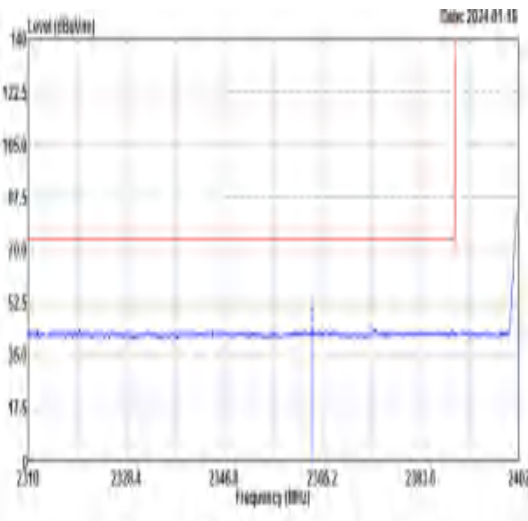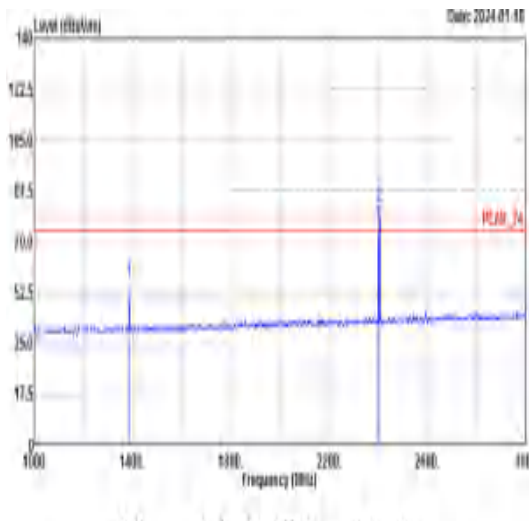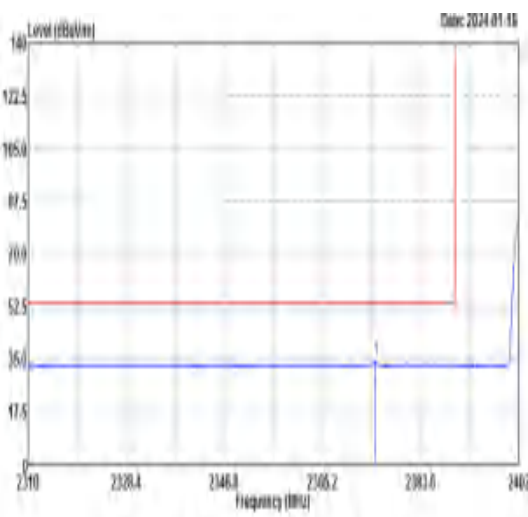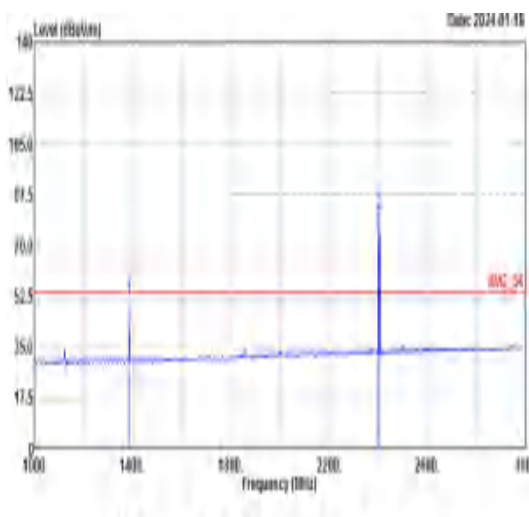

Mode	1																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																									
ANT	2																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	 Level (dBm) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Abs</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><th>mic</th><th>dBm</th><th>m</th><th>dBm</th><th>m</th><th>dB</th><th>dBm</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2363.00</td><td>45.06</td><td>74.00</td><td>-28.94</td><td>42.28</td><td>10.71</td><td>5.34</td><td>13.20</td><td>400</td><td>80</td><td>PIAC</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Abs	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark	mic	dBm	m	dBm	m	dB	dBm	dB	dB	cm	deg	1	2363.00	45.06	74.00	-28.94	42.28	10.71	5.34	13.20	400	80	PIAC	 Level (dBm) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Abs</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><th>mic</th><th>dBm</th><th>m</th><th>dBm</th><th>m</th><th>dB</th><th>dBm</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2366.00</td><td>55.04</td><td>74.00</td><td>-18.96</td><td>56.97</td><td>25.42</td><td>4.13</td><td>14.44</td><td>400</td><td>80</td><td>PIAC</td></tr><tr><td>2</td><td>2402.00</td><td>82.40</td><td>74.00</td><td>-8.40</td><td>79.63</td><td>16.72</td><td>5.37</td><td>13.24</td><td>400</td><td>80</td><td>PIAC</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Abs	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark	mic	dBm	m	dBm	m	dB	dBm	dB	dB	cm	deg	1	2366.00	55.04	74.00	-18.96	56.97	25.42	4.13	14.44	400	80	PIAC	2	2402.00	82.40	74.00	-8.40	79.63	16.72	5.37	13.24	400	80	PIAC
	Limit	Read	Ant	Cable	Preamp	Abs	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																																			
mic	dBm	m	dBm	m	dB	dBm	dB	dB	cm	deg																																																																																
1	2363.00	45.06	74.00	-28.94	42.28	10.71	5.34	13.20	400	80	PIAC																																																																															
Limit	Read	Ant	Cable	Preamp	Abs	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																																			
mic	dBm	m	dBm	m	dB	dBm	dB	dB	cm	deg																																																																																
1	2366.00	55.04	74.00	-18.96	56.97	25.42	4.13	14.44	400	80	PIAC																																																																															
2	2402.00	82.40	74.00	-8.40	79.63	16.72	5.37	13.24	400	80	PIAC																																																																															
Avg	 Level (dBm) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Abs</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><th>mic</th><th>dBm</th><th>m</th><th>dBm</th><th>m</th><th>dB</th><th>dBm</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2375.04</td><td>34.06</td><td>74.00</td><td>-19.94</td><td>32.15</td><td>10.72</td><td>5.35</td><td>13.27</td><td>400</td><td>80</td><td>AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Abs	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark	mic	dBm	m	dBm	m	dB	dBm	dB	dB	cm	deg	1	2375.04	34.06	74.00	-19.94	32.15	10.72	5.35	13.27	400	80	AVERAGE	 Level (dBm) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Abs</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><th>mic</th><th>dBm</th><th>m</th><th>dBm</th><th>m</th><th>dB</th><th>dBm</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2366.00</td><td>51.50</td><td>74.00</td><td>-22.50</td><td>52.48</td><td>25.42</td><td>4.13</td><td>14.44</td><td>400</td><td>80</td><td>AVERAGE</td></tr><tr><td>2</td><td>2402.00</td><td>81.41</td><td>74.00</td><td>-7.41</td><td>78.56</td><td>16.72</td><td>5.37</td><td>13.24</td><td>400</td><td>80</td><td>AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Abs	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark	mic	dBm	m	dBm	m	dB	dBm	dB	dB	cm	deg	1	2366.00	51.50	74.00	-22.50	52.48	25.42	4.13	14.44	400	80	AVERAGE	2	2402.00	81.41	74.00	-7.41	78.56	16.72	5.37	13.24	400	80	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Abs	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																																			
mic	dBm	m	dBm	m	dB	dBm	dB	dB	cm	deg																																																																																
1	2375.04	34.06	74.00	-19.94	32.15	10.72	5.35	13.27	400	80	AVERAGE																																																																															
Limit	Read	Ant	Cable	Preamp	Abs	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																																			
mic	dBm	m	dBm	m	dB	dBm	dB	dB	cm	deg																																																																																
1	2366.00	51.50	74.00	-22.50	52.48	25.42	4.13	14.44	400	80	AVERAGE																																																																															
2	2402.00	81.41	74.00	-7.41	78.56	16.72	5.37	13.24	400	80	AVERAGE																																																																															







Mode	1																																																																																					
	Band Edge																																																																																					
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																					
ANT	2																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Prompt</th><th>Alos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/u</th><th>dB</th><th>deg</th></tr><tr><td>1</td><td>2393.40</td><td>45.16</td><td>74.00</td><td>-28.84</td><td>42.48</td><td>10.74</td><td>5.30</td><td>152.16</td><td>152 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Prompt	Alos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss Factor				dBuV/m	dBuV/m	dB	dBuV/m	dB/u	dB	deg	1	2393.40	45.16	74.00	-28.84	42.48	10.74	5.30	152.16	152 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Prompt</th><th>Alos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/u</th><th>dB</th><th>deg</th></tr><tr><td>1</td><td>2393.40</td><td>45.16</td><td>74.00</td><td>-28.84</td><td>42.48</td><td>10.74</td><td>5.30</td><td>152.16</td><td>152 PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>95.91</td><td>---</td><td>---</td><td>92.46</td><td>10.72</td><td>5.37</td><td>15.24</td><td>146 152 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Prompt	Alos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss Factor				dBuV/m	dBuV/m	dB	dBuV/m	dB/u	dB	deg	1	2393.40	45.16	74.00	-28.84	42.48	10.74	5.30	152.16	152 PEAK	2	2402.00	95.91	---	---	92.46	10.72	5.37	15.24	146 152 PEAK
		Limit	Read	Ant	Cable	Prompt	Alos	TPos	Remark																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																															
		dBuV/m	dBuV/m	dB	dBuV/m	dB/u	dB	deg																																																																														
1	2393.40	45.16	74.00	-28.84	42.48	10.74	5.30	152.16	152 PEAK																																																																													
	Limit	Read	Ant	Cable	Prompt	Alos	TPos	Remark																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																															
		dBuV/m	dBuV/m	dB	dBuV/m	dB/u	dB	deg																																																																														
1	2393.40	45.16	74.00	-28.84	42.48	10.74	5.30	152.16	152 PEAK																																																																													
2	2402.00	95.91	---	---	92.46	10.72	5.37	15.24	146 152 PEAK																																																																													
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Prompt</th><th>Alos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/u</th><th>dB</th><th>deg</th></tr><tr><td>1</td><td>2393.40</td><td>45.16</td><td>74.00</td><td>-28.84</td><td>42.48</td><td>10.74</td><td>5.30</td><td>152.16</td><td>152 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Prompt	Alos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss Factor				dBuV/m	dBuV/m	dB	dBuV/m	dB/u	dB	deg	1	2393.40	45.16	74.00	-28.84	42.48	10.74	5.30	152.16	152 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Prompt</th><th>Alos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/u</th><th>dB</th><th>deg</th></tr><tr><td>1</td><td>2393.40</td><td>45.16</td><td>74.00</td><td>-28.84</td><td>42.48</td><td>10.74</td><td>5.30</td><td>152.16</td><td>152 AVERAGE</td></tr><tr><td>2</td><td>2402.00</td><td>94.25</td><td>---</td><td>---</td><td>91.40</td><td>10.72</td><td>5.37</td><td>15.24</td><td>146 152 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Prompt	Alos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss Factor				dBuV/m	dBuV/m	dB	dBuV/m	dB/u	dB	deg	1	2393.40	45.16	74.00	-28.84	42.48	10.74	5.30	152.16	152 AVERAGE	2	2402.00	94.25	---	---	91.40	10.72	5.37	15.24	146 152 AVERAGE
	Limit	Read	Ant	Cable	Prompt	Alos	TPos	Remark																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																															
		dBuV/m	dBuV/m	dB	dBuV/m	dB/u	dB	deg																																																																														
1	2393.40	45.16	74.00	-28.84	42.48	10.74	5.30	152.16	152 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Prompt	Alos	TPos	Remark																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																															
		dBuV/m	dBuV/m	dB	dBuV/m	dB/u	dB	deg																																																																														
1	2393.40	45.16	74.00	-28.84	42.48	10.74	5.30	152.16	152 AVERAGE																																																																													
2	2402.00	94.25	---	---	91.40	10.72	5.37	15.24	146 152 AVERAGE																																																																													

Mode	1																																																													
	Harmonic																																																													
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																													
ANT	2																																																													
Pol.	Horizontal	Vertical																																																												
Peak Avg	<table><thead><tr><th>Unit</th><th>Band</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Att</th><th>TP</th><th>Ref</th><th>TP</th><th>Ref</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>4000.00</td><td>42.45</td><td>74.00</td><td>-31.55</td><td>82.62</td><td>10.71</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td></tr></tbody></table>	Unit	Band	Ant	Cable	Preamp	Att	TP	Ref	TP	Ref	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	4000.00	42.45	74.00	-31.55	82.62	10.71	8.94	64.84	---	---	<table><thead><tr><th>Unit</th><th>Band</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Att</th><th>TP</th><th>Ref</th><th>TP</th><th>Ref</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>4000.00</td><td>42.40</td><td>74.00</td><td>-31.60</td><td>82.65</td><td>10.71</td><td>8.94</td><td>64.84</td><td>---</td><td>---</td></tr></tbody></table>	Unit	Band	Ant	Cable	Preamp	Att	TP	Ref	TP	Ref	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	4000.00	42.40	74.00	-31.60	82.65	10.71	8.94	64.84	---	---
	Unit	Band	Ant	Cable	Preamp	Att	TP	Ref	TP	Ref																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB																																																					
4000.00	42.45	74.00	-31.55	82.62	10.71	8.94	64.84	---	---																																																					
Unit	Band	Ant	Cable	Preamp	Att	TP	Ref	TP	Ref																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB																																																					
4000.00	42.40	74.00	-31.60	82.65	10.71	8.94	64.84	---	---																																																					











Mode	2																																																																																																					
	Harmonic																																																																																																					
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																					
ANT	2																																																																																																					
Pol.	Horizontal	Vertical																																																																																																				
Peak Avg	Level (dBm/Hz) 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2000 6000 9000 12000 15000 18000 Frequency (MHz) Date: 2024-01-19 <table><tr><th></th><th>Limit</th><th>Band</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Att</th><th>Loss</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBm/Hz</th><th>dBm/Hz</th><th>dB</th><th>dBm</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>6880.00</td><td>43.21</td><td>24.00</td><td>-19.79</td><td>63.50</td><td>15.01</td><td>4.21</td><td>64.87</td><td>---</td></tr><tr><td>2</td><td>7320.00</td><td>44.80</td><td>24.00</td><td>-19.04</td><td>62.77</td><td>16.07</td><td>10.18</td><td>64.86</td><td>---</td></tr></table>		Limit	Band	Ant	Cable	Preamp	Att	Loss	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBm/Hz	dBm/Hz	dB	dBm	dB/m	dB	dB	dB	dB	1	6880.00	43.21	24.00	-19.79	63.50	15.01	4.21	64.87	---	2	7320.00	44.80	24.00	-19.04	62.77	16.07	10.18	64.86	---	Level (dBm/Hz) 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2000 6000 9000 12000 15000 18000 Frequency (MHz) Date: 2024-01-19 <table><tr><th></th><th>Limit</th><th>Band</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Att</th><th>Loss</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBm/Hz</th><th>dBm/Hz</th><th>dB</th><th>dBm</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>6880.00</td><td>43.25</td><td>24.00</td><td>-19.75</td><td>63.50</td><td>15.01</td><td>4.21</td><td>64.87</td><td>---</td></tr><tr><td>2</td><td>7320.00</td><td>45.80</td><td>24.00</td><td>-18.91</td><td>62.90</td><td>16.07</td><td>10.18</td><td>64.86</td><td>---</td></tr></table>		Limit	Band	Ant	Cable	Preamp	Att	Loss	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBm/Hz	dBm/Hz	dB	dBm	dB/m	dB	dB	dB	dB	1	6880.00	43.25	24.00	-19.75	63.50	15.01	4.21	64.87	---	2	7320.00	45.80	24.00	-18.91	62.90	16.07	10.18	64.86	---
	Limit	Band	Ant	Cable	Preamp	Att	Loss	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																															
MHz	dBm/Hz	dBm/Hz	dB	dBm	dB/m	dB	dB	dB	dB																																																																																													
1	6880.00	43.21	24.00	-19.79	63.50	15.01	4.21	64.87	---																																																																																													
2	7320.00	44.80	24.00	-19.04	62.77	16.07	10.18	64.86	---																																																																																													
	Limit	Band	Ant	Cable	Preamp	Att	Loss	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																															
MHz	dBm/Hz	dBm/Hz	dB	dBm	dB/m	dB	dB	dB	dB																																																																																													
1	6880.00	43.25	24.00	-19.75	63.50	15.01	4.21	64.87	---																																																																																													
2	7320.00	45.80	24.00	-18.91	62.90	16.07	10.18	64.86	---																																																																																													

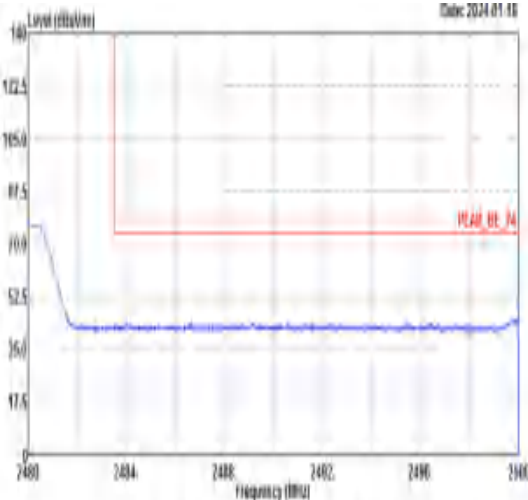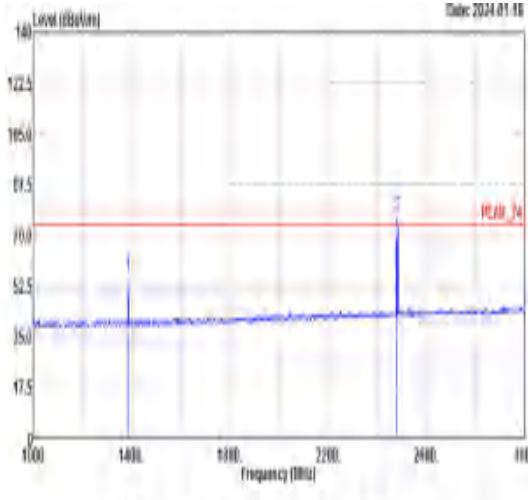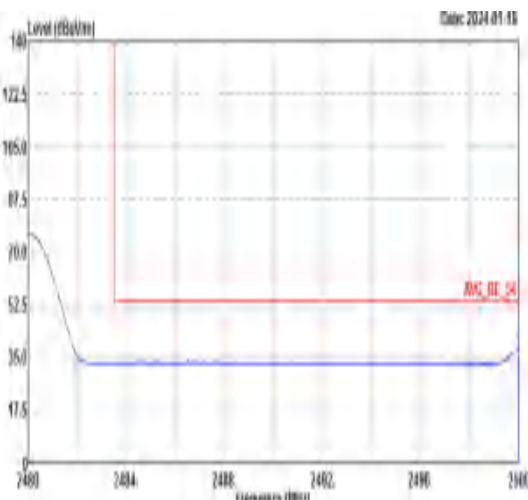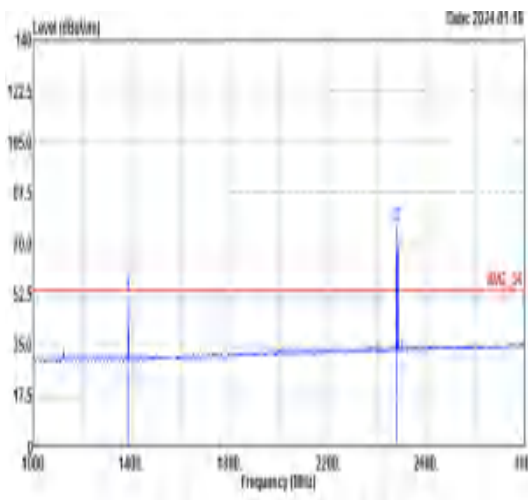





Mode	3																																																																																										
	Band Edge																																																																																										
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																										
ANT	3																																																																																										
Pol.	Horizontal	Fundamental																																																																																									
Peak	 Level (dBuV/m) Frequency (MHz) PLAB 01_24 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pump</th><th>Alos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2400.00</td><td>45.01</td><td>74.00</td><td>-28.99</td><td>41.03</td><td>10.70</td><td>5.48</td><td>13.10</td><td>400</td><td>214 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Pump	Alos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2400.00	45.01	74.00	-28.99	41.03	10.70	5.48	13.10	400	214 PEAK	 Level (dBuV/m) Frequency (MHz) PLAB 01_24 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pump</th><th>Alos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>1366.00</td><td>55.08</td><td>74.00</td><td>-18.93</td><td>54.47</td><td>21.42</td><td>4.13</td><td>16.49</td><td>400</td><td>214 PEAK</td></tr><tr><td>2</td><td>2400.00</td><td>77.22</td><td>74.00</td><td>3.22</td><td>74.29</td><td>10.70</td><td>5.46</td><td>13.13</td><td>400</td><td>214 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Pump	Alos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	1366.00	55.08	74.00	-18.93	54.47	21.42	4.13	16.49	400	214 PEAK	2	2400.00	77.22	74.00	3.22	74.29	10.70	5.46	13.13	400	214 PEAK
		Limit	Read	Ant	Cable	Pump	Alos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2400.00	45.01	74.00	-28.99	41.03	10.70	5.48	13.10	400	214 PEAK																																																																																	
	Limit	Read	Ant	Cable	Pump	Alos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	1366.00	55.08	74.00	-18.93	54.47	21.42	4.13	16.49	400	214 PEAK																																																																																	
2	2400.00	77.22	74.00	3.22	74.29	10.70	5.46	13.13	400	214 PEAK																																																																																	
Avg	 Level (dBuV/m) Frequency (MHz) AVG 01_24 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pump</th><th>Alos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2400.00</td><td>37.52</td><td>54.00</td><td>-16.48</td><td>34.44</td><td>10.70</td><td>5.48</td><td>13.10</td><td>400</td><td>214 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Pump	Alos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2400.00	37.52	54.00	-16.48	34.44	10.70	5.48	13.10	400	214 AVERAGE	 Level (dBuV/m) Frequency (MHz) AVG 01_24 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pump</th><th>Alos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>1366.00</td><td>51.52</td><td>54.00</td><td>-2.48</td><td>52.46</td><td>21.42</td><td>4.13</td><td>16.49</td><td>400</td><td>214 AVERAGE</td></tr><tr><td>2</td><td>2400.00</td><td>76.12</td><td>74.00</td><td>2.12</td><td>71.00</td><td>10.70</td><td>5.46</td><td>13.13</td><td>400</td><td>214 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Pump	Alos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	1366.00	51.52	54.00	-2.48	52.46	21.42	4.13	16.49	400	214 AVERAGE	2	2400.00	76.12	74.00	2.12	71.00	10.70	5.46	13.13	400	214 AVERAGE
	Limit	Read	Ant	Cable	Pump	Alos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2400.00	37.52	54.00	-16.48	34.44	10.70	5.48	13.10	400	214 AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Pump	Alos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	1366.00	51.52	54.00	-2.48	52.46	21.42	4.13	16.49	400	214 AVERAGE																																																																																	
2	2400.00	76.12	74.00	2.12	71.00	10.70	5.46	13.13	400	214 AVERAGE																																																																																	

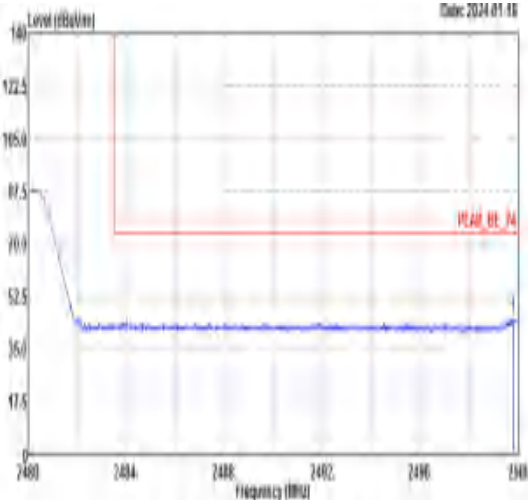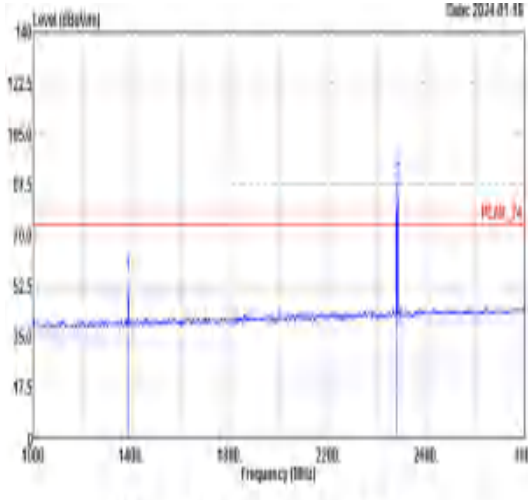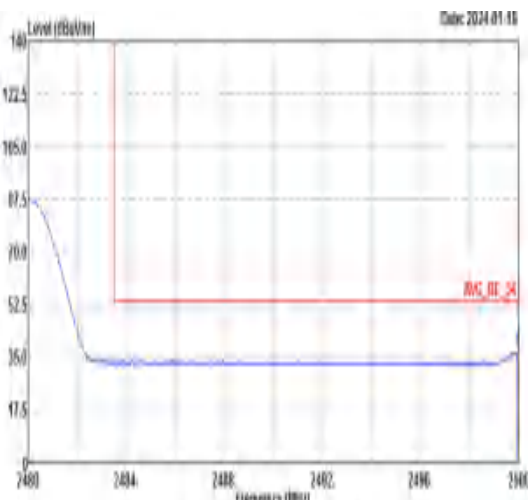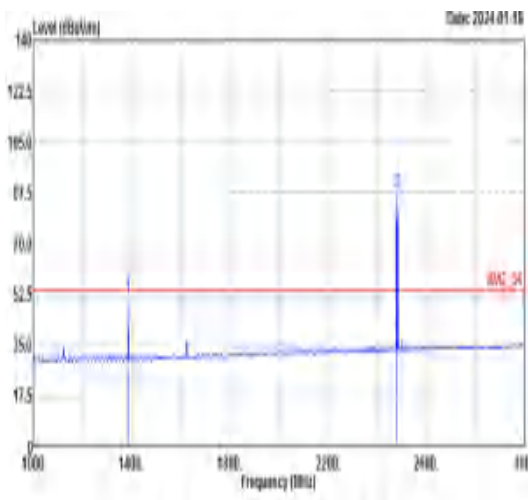

Mode	3																																																																																		
	Band Edge																																																																																		
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																		
ANT	2																																																																																		
Pol.	Vertical	Fundamental																																																																																	
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pump</th><th>Alos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2480.74</td><td>45.23</td><td>74.00</td><td>-28.77</td><td>42.15</td><td>10.70</td><td>5.48</td><td>13.10</td></tr></table>		Limit	Read	Ant	Cable	Pump	Alos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBm	dB	dBm	dB	dB	dB	dB	1	2480.74	45.23	74.00	-28.77	42.15	10.70	5.48	13.10	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pump</th><th>Alos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2480.00</td><td>55.89</td><td>74.00</td><td>-18.11</td><td>46.87</td><td>28.42</td><td>4.17</td><td>16.49</td></tr><tr><td>2</td><td>2480.00</td><td>88.51</td><td>74.00</td><td>14.51</td><td>15.48</td><td>16.70</td><td>5.46</td><td>13.13</td></tr></table>		Limit	Read	Ant	Cable	Pump	Alos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBm	dB	dBm	dB	dB	dB	dB	1	2480.00	55.89	74.00	-18.11	46.87	28.42	4.17	16.49	2	2480.00	88.51	74.00	14.51	15.48	16.70	5.46	13.13
		Limit	Read	Ant	Cable	Pump	Alos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																											
	MHz	dBm	dB	dBm	dB	dB	dB	dB																																																																											
1	2480.74	45.23	74.00	-28.77	42.15	10.70	5.48	13.10																																																																											
	Limit	Read	Ant	Cable	Pump	Alos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																											
	MHz	dBm	dB	dBm	dB	dB	dB	dB																																																																											
1	2480.00	55.89	74.00	-18.11	46.87	28.42	4.17	16.49																																																																											
2	2480.00	88.51	74.00	14.51	15.48	16.70	5.46	13.13																																																																											
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pump</th><th>Alos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2480.00</td><td>37.20</td><td>74.00</td><td>-36.80</td><td>34.12</td><td>10.70</td><td>5.48</td><td>13.10</td></tr></table>		Limit	Read	Ant	Cable	Pump	Alos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBm	dB	dBm	dB	dB	dB	dB	1	2480.00	37.20	74.00	-36.80	34.12	10.70	5.48	13.10	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pump</th><th>Alos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2480.00</td><td>51.40</td><td>74.00</td><td>-22.60</td><td>52.47</td><td>28.42</td><td>4.17</td><td>16.49</td></tr><tr><td>2</td><td>2480.00</td><td>82.40</td><td>74.00</td><td>8.40</td><td>16.40</td><td>16.70</td><td>5.46</td><td>13.13</td></tr></table>		Limit	Read	Ant	Cable	Pump	Alos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBm	dB	dBm	dB	dB	dB	dB	1	2480.00	51.40	74.00	-22.60	52.47	28.42	4.17	16.49	2	2480.00	82.40	74.00	8.40	16.40	16.70	5.46	13.13
		Limit	Read	Ant	Cable	Pump	Alos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																											
	MHz	dBm	dB	dBm	dB	dB	dB	dB																																																																											
1	2480.00	37.20	74.00	-36.80	34.12	10.70	5.48	13.10																																																																											
	Limit	Read	Ant	Cable	Pump	Alos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																											
	MHz	dBm	dB	dBm	dB	dB	dB	dB																																																																											
1	2480.00	51.40	74.00	-22.60	52.47	28.42	4.17	16.49																																																																											
2	2480.00	82.40	74.00	8.40	16.40	16.70	5.46	13.13																																																																											

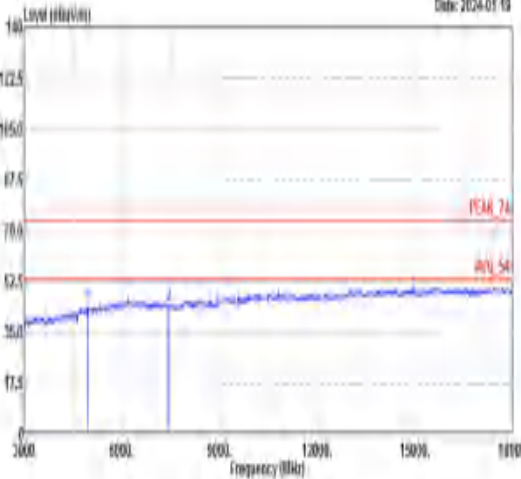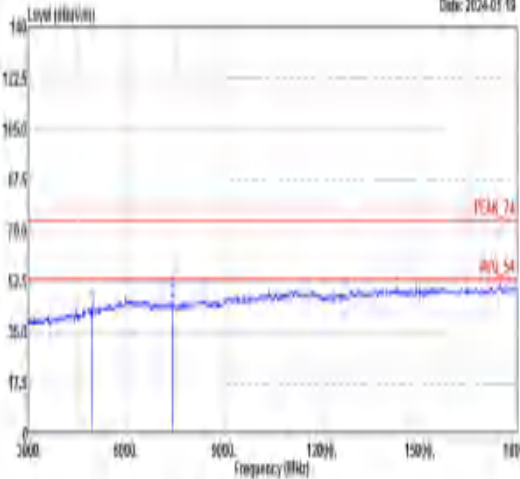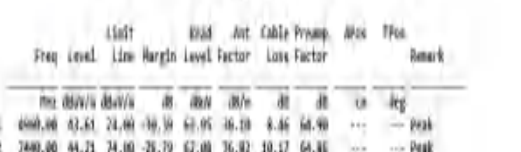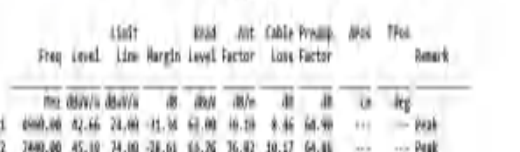Mode	3									
	Harmonic									
	2400-2483.5_Bluetooth-LE_CH39_2480MHz									
ANT	2									
Pol.	Horizontal					Vertical				
Peak										
Avg										

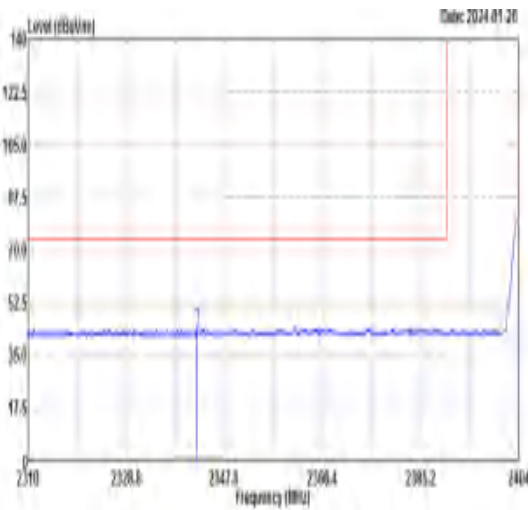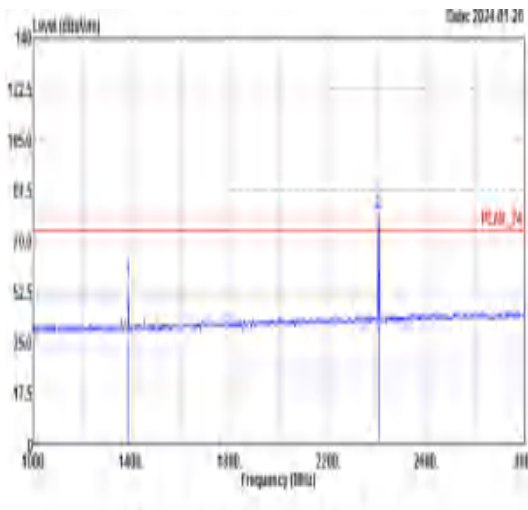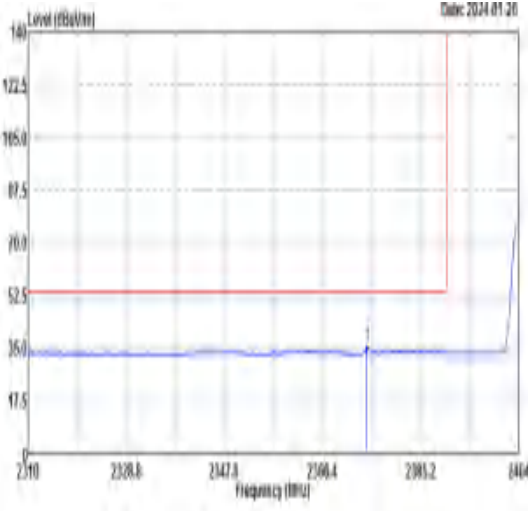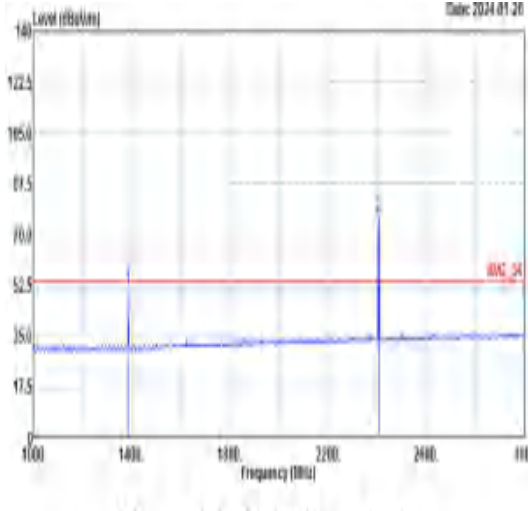

Mode	4																																																																																				
	Band Edge																																																																																				
	2400-2483.5_Bluetooth-LE_CH01_2404MHz																																																																																				
ANT	2																																																																																				
Pol.	Horizontal	Fundamental																																																																																			
Peak	 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pump</th><th>Alos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/u</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2342.54</td><td>45.00</td><td>74.00</td><td>-28.97</td><td>42.35</td><td>10.71</td><td>5.32</td><td>13.32</td><td>400</td><td>271 P1AC</td></tr></tbody></table>	Limit	Read	Ant	Cable	Pump	Alos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/u	dB	dB	cm	deg	1	2342.54	45.00	74.00	-28.97	42.35	10.71	5.32	13.32	400	271 P1AC	 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pump</th><th>Alos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/u</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>1366.00</td><td>56.58</td><td>74.00</td><td>-17.42</td><td>57.52</td><td>25.42</td><td>4.13</td><td>16.49</td><td>400</td><td>271 P1AC</td></tr><tr><td>2</td><td>2404.00</td><td>80.03</td><td>---</td><td>---</td><td>77.17</td><td>16.72</td><td>5.37</td><td>13.23</td><td>400</td><td>271 P1AC</td></tr></tbody></table>	Limit	Read	Ant	Cable	Pump	Alos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/u	dB	dB	cm	deg	1	1366.00	56.58	74.00	-17.42	57.52	25.42	4.13	16.49	400	271 P1AC	2	2404.00	80.03	---	---	77.17	16.72	5.37	13.23	400	271 P1AC
	Limit	Read	Ant	Cable	Pump	Alos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/u	dB	dB	cm	deg																																																																											
1	2342.54	45.00	74.00	-28.97	42.35	10.71	5.32	13.32	400	271 P1AC																																																																											
Limit	Read	Ant	Cable	Pump	Alos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/u	dB	dB	cm	deg																																																																											
1	1366.00	56.58	74.00	-17.42	57.52	25.42	4.13	16.49	400	271 P1AC																																																																											
2	2404.00	80.03	---	---	77.17	16.72	5.37	13.23	400	271 P1AC																																																																											
Avg	 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pump</th><th>Alos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/u</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2374.06</td><td>35.72</td><td>54.00</td><td>-18.28</td><td>32.92</td><td>10.71</td><td>5.35</td><td>13.28</td><td>400</td><td>271 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Pump	Alos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/u	dB	dB	cm	deg	1	2374.06	35.72	54.00	-18.28	32.92	10.71	5.35	13.28	400	271 AVERAGE	 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pump</th><th>Alos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/u</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>1366.00</td><td>51.15</td><td>54.00</td><td>-2.85</td><td>52.06</td><td>25.42</td><td>4.13</td><td>16.49</td><td>400</td><td>271 AVERAGE</td></tr><tr><td>2</td><td>2404.00</td><td>76.43</td><td>---</td><td>---</td><td>71.57</td><td>16.72</td><td>5.37</td><td>13.23</td><td>400</td><td>271 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Pump	Alos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/u	dB	dB	cm	deg	1	1366.00	51.15	54.00	-2.85	52.06	25.42	4.13	16.49	400	271 AVERAGE	2	2404.00	76.43	---	---	71.57	16.72	5.37	13.23	400	271 AVERAGE
Limit	Read	Ant	Cable	Pump	Alos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/u	dB	dB	cm	deg																																																																											
1	2374.06	35.72	54.00	-18.28	32.92	10.71	5.35	13.28	400	271 AVERAGE																																																																											
Limit	Read	Ant	Cable	Pump	Alos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/u	dB	dB	cm	deg																																																																											
1	1366.00	51.15	54.00	-2.85	52.06	25.42	4.13	16.49	400	271 AVERAGE																																																																											
2	2404.00	76.43	---	---	71.57	16.72	5.37	13.23	400	271 AVERAGE																																																																											







Mode	4																																																																	
	Harmonic																																																																	
	2400-2483.5_Bluetooth-LE_CH01_2404MHz																																																																	
ANT	2																																																																	
Pol.	Horizontal	Vertical																																																																
Peak Avg	Level (dBm/Hz) Date: 2024-02-04 Frequency (Hz) <table><tr><th>Unit</th><th>Band</th><th>Ant</th><th>Cable</th><th>Pump</th><th>A/Co</th><th>T/Co</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>Hz</td><td>dBm/Hz</td><td>dBm/Hz</td><td>dB</td><td>dBm/Hz</td><td>dB/Hz</td><td>dB</td><td>dB</td></tr><tr><td>1</td><td>4000.00</td><td>42.40</td><td>74.00</td><td>-14.51</td><td>62.00</td><td>59.74</td><td>8.93 64.85 --- Peak</td></tr></table>	Unit	Band	Ant	Cable	Pump	A/Co	T/Co	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Hz	dBm/Hz	dBm/Hz	dB	dBm/Hz	dB/Hz	dB	dB	1	4000.00	42.40	74.00	-14.51	62.00	59.74	8.93 64.85 --- Peak	Level (dBm/Hz) Date: 2024-02-04 Frequency (Hz) <table><tr><th>Unit</th><th>Band</th><th>Ant</th><th>Cable</th><th>Pump</th><th>A/Co</th><th>T/Co</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>Hz</td><td>dBm/Hz</td><td>dBm/Hz</td><td>dB</td><td>dBm/Hz</td><td>dB/Hz</td><td>dB</td><td>dB</td></tr><tr><td>1</td><td>4000.00</td><td>42.27</td><td>74.00</td><td>-14.73</td><td>62.46</td><td>59.74</td><td>8.93 64.85 --- Peak</td></tr></table>	Unit	Band	Ant	Cable	Pump	A/Co	T/Co	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Hz	dBm/Hz	dBm/Hz	dB	dBm/Hz	dB/Hz	dB	dB	1	4000.00	42.27	74.00	-14.73	62.46	59.74	8.93 64.85 --- Peak
	Unit	Band	Ant	Cable	Pump	A/Co	T/Co	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																											
Hz	dBm/Hz	dBm/Hz	dB	dBm/Hz	dB/Hz	dB	dB																																																											
1	4000.00	42.40	74.00	-14.51	62.00	59.74	8.93 64.85 --- Peak																																																											
Unit	Band	Ant	Cable	Pump	A/Co	T/Co	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																											
Hz	dBm/Hz	dBm/Hz	dB	dBm/Hz	dB/Hz	dB	dB																																																											
1	4000.00	42.27	74.00	-14.73	62.46	59.74	8.93 64.85 --- Peak																																																											







Mode	5	
	Harmonic	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz	
ANT	2	
Pol.	Horizontal	Vertical
Peak Avg	Level (dBm/Hz)	

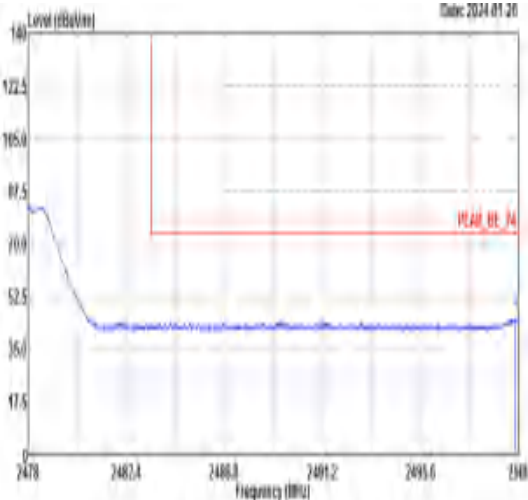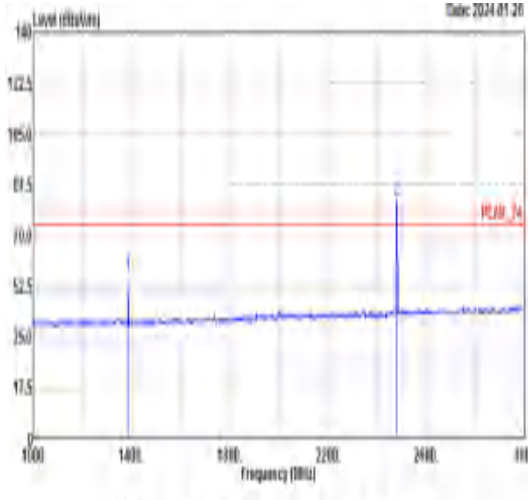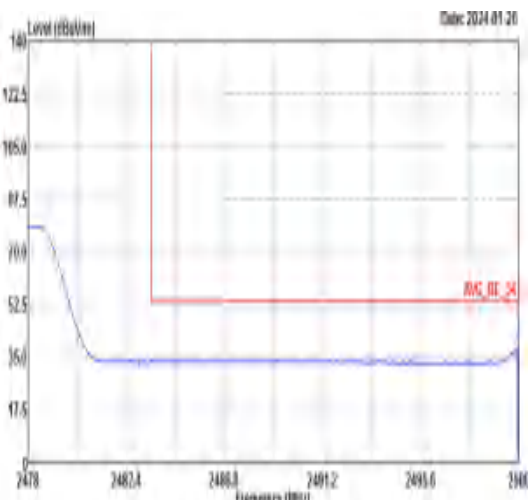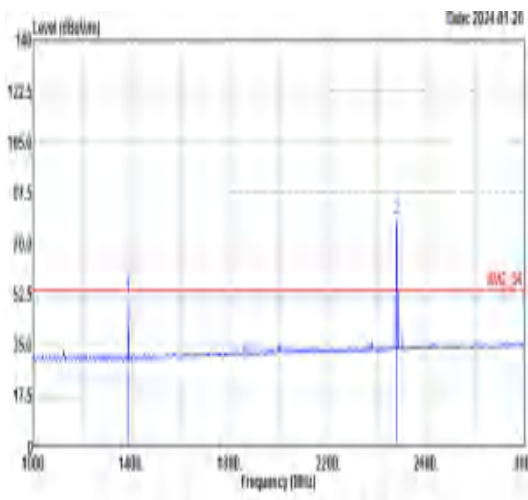

Mode	6																																																																																										
	Band Edge																																																																																										
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																										
ANT	2																																																																																										
Pol.	Horizontal	Fundamental																																																																																									
Peak	 Level (dBuV/m) Frequency (MHz) PLAB 01_24 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Alos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2478.02</td><td>45.47</td><td>74.00</td><td>-28.53</td><td>42.10</td><td>10.70</td><td>5.40</td><td>13.10</td><td>394</td><td>125 P1AC</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Alos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2478.02	45.47	74.00	-28.53	42.10	10.70	5.40	13.10	394	125 P1AC	 Level (dBuV/m) Frequency (MHz) PLAB 01_24 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Alos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>1386.00</td><td>55.94</td><td>74.00</td><td>-18.06</td><td>46.88</td><td>21.42</td><td>4.13</td><td>14.44</td><td>394</td><td>125 P1AC</td></tr><tr><td>2</td><td>2478.00</td><td>82.21</td><td>74.00</td><td>8.21</td><td>79.29</td><td>10.70</td><td>5.45</td><td>13.13</td><td>394</td><td>125 P1AC</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Alos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	1386.00	55.94	74.00	-18.06	46.88	21.42	4.13	14.44	394	125 P1AC	2	2478.00	82.21	74.00	8.21	79.29	10.70	5.45	13.13	394	125 P1AC
		Limit	Read	Ant	Cable	Preamp	Alos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2478.02	45.47	74.00	-28.53	42.10	10.70	5.40	13.10	394	125 P1AC																																																																																	
	Limit	Read	Ant	Cable	Preamp	Alos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	1386.00	55.94	74.00	-18.06	46.88	21.42	4.13	14.44	394	125 P1AC																																																																																	
2	2478.00	82.21	74.00	8.21	79.29	10.70	5.45	13.13	394	125 P1AC																																																																																	
Avg	 Level (dBuV/m) Frequency (MHz) PLAB 01_24 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Alos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2478.03</td><td>37.72</td><td>74.00</td><td>-36.28</td><td>34.64</td><td>10.70</td><td>5.40</td><td>13.10</td><td>394</td><td>125 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Alos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2478.03	37.72	74.00	-36.28	34.64	10.70	5.40	13.10	394	125 AVERAGE	 Level (dBuV/m) Frequency (MHz) PLAB 01_24 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Alos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>1386.00</td><td>51.11</td><td>74.00</td><td>-22.89</td><td>52.85</td><td>21.42</td><td>4.13</td><td>14.44</td><td>394</td><td>125 AVERAGE</td></tr><tr><td>2</td><td>2478.00</td><td>78.04</td><td>74.00</td><td>4.04</td><td>75.42</td><td>10.70</td><td>5.45</td><td>13.13</td><td>394</td><td>125 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Alos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	1386.00	51.11	74.00	-22.89	52.85	21.42	4.13	14.44	394	125 AVERAGE	2	2478.00	78.04	74.00	4.04	75.42	10.70	5.45	13.13	394	125 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Alos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2478.03	37.72	74.00	-36.28	34.64	10.70	5.40	13.10	394	125 AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	Alos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	1386.00	51.11	74.00	-22.89	52.85	21.42	4.13	14.44	394	125 AVERAGE																																																																																	
2	2478.00	78.04	74.00	4.04	75.42	10.70	5.45	13.13	394	125 AVERAGE																																																																																	

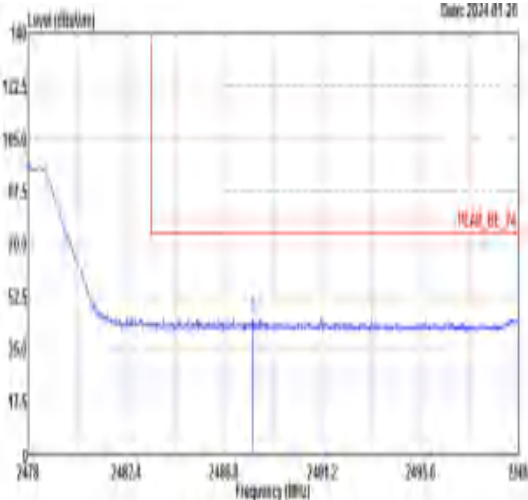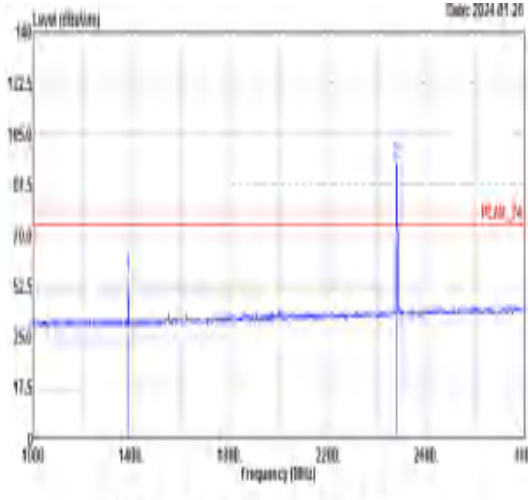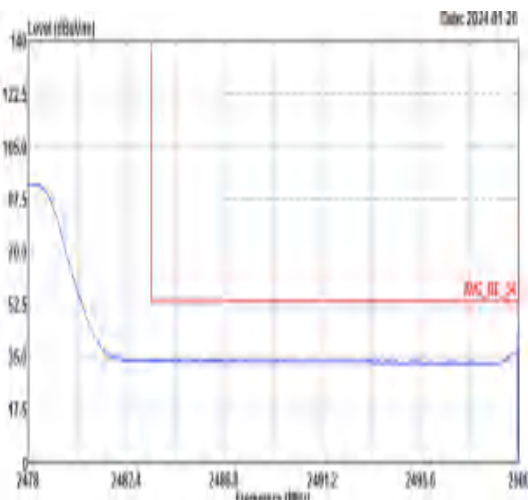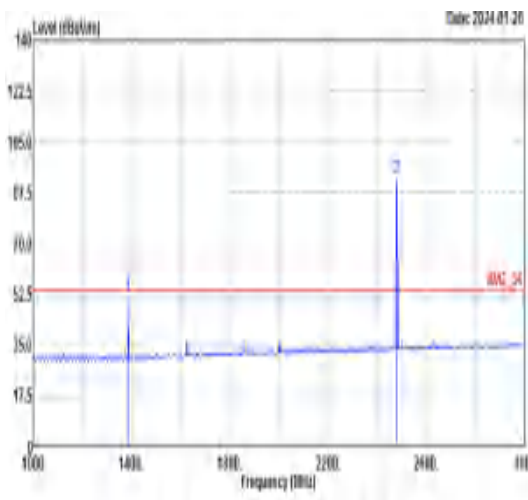

Mode	6																																																																																								
	Band Edge																																																																																								
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																								
ANT	2																																																																																								
Pol.	Vertical	Fundamental																																																																																							
Peak	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pump</th><th>Alos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2478.00</td><td>45.52</td><td>74.00</td><td>-28.48</td><td>42.47</td><td>10.70</td><td>5.46</td><td>03.12</td><td>400</td><td>154 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Pump	Alos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBm	dB	dBm	dB	dB	dB	cm	1	2478.00	45.52	74.00	-28.48	42.47	10.70	5.46	03.12	400	154 PEAK	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pump</th><th>Alos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2478.00</td><td>56.40</td><td>74.00</td><td>-17.60</td><td>57.41</td><td>23.42</td><td>4.51</td><td>16.44</td><td>400</td><td>154 PEAK</td></tr><tr><td>2</td><td>2479.00</td><td>05.83</td><td>74.00</td><td>-68.17</td><td>02.81</td><td>16.70</td><td>5.45</td><td>13.13</td><td>400</td><td>154 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Pump	Alos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBm	dB	dBm	dB	dB	dB	cm	1	2478.00	56.40	74.00	-17.60	57.41	23.42	4.51	16.44	400	154 PEAK	2	2479.00	05.83	74.00	-68.17	02.81	16.70	5.45	13.13	400	154 PEAK
		Limit	Read	Ant	Cable	Pump	Alos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
	MHz	dBm	dB	dBm	dB	dB	dB	cm																																																																																	
1	2478.00	45.52	74.00	-28.48	42.47	10.70	5.46	03.12	400	154 PEAK																																																																															
	Limit	Read	Ant	Cable	Pump	Alos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
	MHz	dBm	dB	dBm	dB	dB	dB	cm																																																																																	
1	2478.00	56.40	74.00	-17.60	57.41	23.42	4.51	16.44	400	154 PEAK																																																																															
2	2479.00	05.83	74.00	-68.17	02.81	16.70	5.45	13.13	400	154 PEAK																																																																															
Avg	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pump</th><th>Alos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2478.03</td><td>37.43</td><td>74.00</td><td>-36.57</td><td>34.15</td><td>10.70</td><td>5.46</td><td>03.10</td><td>400</td><td>154 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Pump	Alos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBm	dB	dBm	dB	dB	dB	cm	1	2478.03	37.43	74.00	-36.57	34.15	10.70	5.46	03.10	400	154 AVERAGE	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Pump</th><th>Alos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBm</th><th>dB</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2478.00</td><td>51.66</td><td>74.00</td><td>-22.34</td><td>52.60</td><td>23.42</td><td>4.51</td><td>16.44</td><td>400</td><td>154 AVERAGE</td></tr><tr><td>2</td><td>2479.00</td><td>02.40</td><td>74.00</td><td>-71.60</td><td>02.44</td><td>16.70</td><td>5.45</td><td>13.13</td><td>400</td><td>154 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Pump	Alos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBm	dB	dBm	dB	dB	dB	cm	1	2478.00	51.66	74.00	-22.34	52.60	23.42	4.51	16.44	400	154 AVERAGE	2	2479.00	02.40	74.00	-71.60	02.44	16.70	5.45	13.13	400	154 AVERAGE
		Limit	Read	Ant	Cable	Pump	Alos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
	MHz	dBm	dB	dBm	dB	dB	dB	cm																																																																																	
1	2478.03	37.43	74.00	-36.57	34.15	10.70	5.46	03.10	400	154 AVERAGE																																																																															
	Limit	Read	Ant	Cable	Pump	Alos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
	MHz	dBm	dB	dBm	dB	dB	dB	cm																																																																																	
1	2478.00	51.66	74.00	-22.34	52.60	23.42	4.51	16.44	400	154 AVERAGE																																																																															
2	2479.00	02.40	74.00	-71.60	02.44	16.70	5.45	13.13	400	154 AVERAGE																																																																															







Mode	6																																																																																																				
	Harmonic																																																																																																				
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																																				
ANT	2																																																																																																				
Pol.	Horizontal	Vertical																																																																																																			
Peak Avg	Level (dBm/Hz) Date: 2024-02-04 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Band</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APox</th><th>TPox</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBm/Hz</th><th>dBm/Hz</th><th>dB</th><th>dBm</th><th>dB/m</th><th>dB</th><th>dB</th><th>ca</th><th>deg</th></tr><tr><td>1</td><td>6956.00</td><td>82.21</td><td>24.00</td><td>-30.79</td><td>63.54</td><td>16.09</td><td>8.44</td><td>64.90</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7434.00</td><td>41.76</td><td>74.00</td><td>-30.24</td><td>61.62</td><td>76.81</td><td>10.17</td><td>64.86</td><td>---</td><td>Peak</td></tr></table> Level (dBm/Hz) Date: 2024-02-04 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Band</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APox</th><th>TPox</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBm/Hz</th><th>dBm/Hz</th><th>dB</th><th>dBm</th><th>dB/m</th><th>dB</th><th>dB</th><th>ca</th><th>deg</th></tr><tr><td>1</td><td>6956.00</td><td>82.46</td><td>24.00</td><td>-31.54</td><td>63.19</td><td>16.09</td><td>8.44</td><td>64.90</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7434.00</td><td>44.40</td><td>74.00</td><td>-29.53</td><td>62.35</td><td>76.81</td><td>10.17</td><td>64.86</td><td>---</td><td>Peak</td></tr></table>		Limit	Band	Ant	Cable	Preamp	APox	TPox		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBm/Hz	dBm/Hz	dB	dBm	dB/m	dB	dB	ca	deg	1	6956.00	82.21	24.00	-30.79	63.54	16.09	8.44	64.90	---	Peak	2	7434.00	41.76	74.00	-30.24	61.62	76.81	10.17	64.86	---	Peak		Limit	Band	Ant	Cable	Preamp	APox	TPox		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBm/Hz	dBm/Hz	dB	dBm	dB/m	dB	dB	ca	deg	1	6956.00	82.46	24.00	-31.54	63.19	16.09	8.44	64.90	---	Peak	2	7434.00	44.40	74.00	-29.53	62.35	76.81	10.17	64.86	---	Peak
	Limit	Band	Ant	Cable	Preamp	APox	TPox																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBm/Hz	dBm/Hz	dB	dBm	dB/m	dB	dB	ca	deg																																																																																												
1	6956.00	82.21	24.00	-30.79	63.54	16.09	8.44	64.90	---	Peak																																																																																											
2	7434.00	41.76	74.00	-30.24	61.62	76.81	10.17	64.86	---	Peak																																																																																											
	Limit	Band	Ant	Cable	Preamp	APox	TPox																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBm/Hz	dBm/Hz	dB	dBm	dB/m	dB	dB	ca	deg																																																																																												
1	6956.00	82.46	24.00	-31.54	63.19	16.09	8.44	64.90	---	Peak																																																																																											
2	7434.00	44.40	74.00	-29.53	62.35	76.81	10.17	64.86	---	Peak																																																																																											



Mode	7	
	LF	
	Bluetooth LE LF_CH38_2478MHz	
ANT	2	
Pol.	Horizontal	Vertical
QPI/ Peak	<	

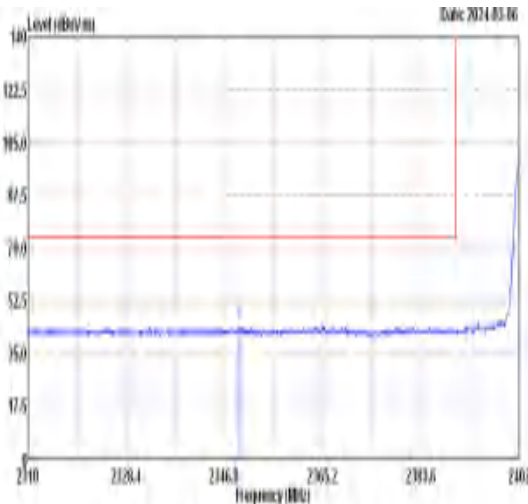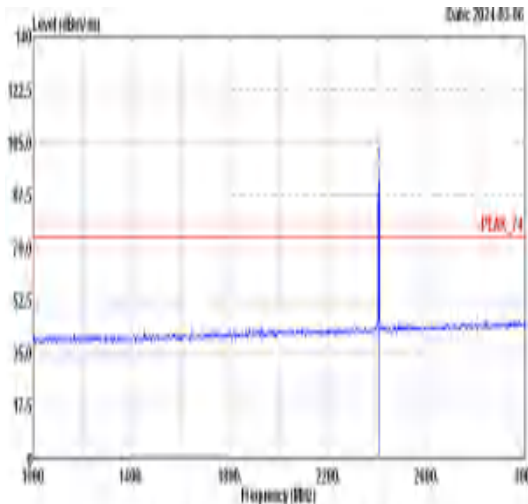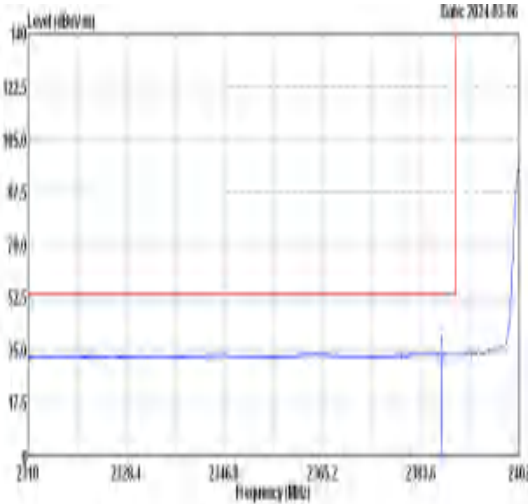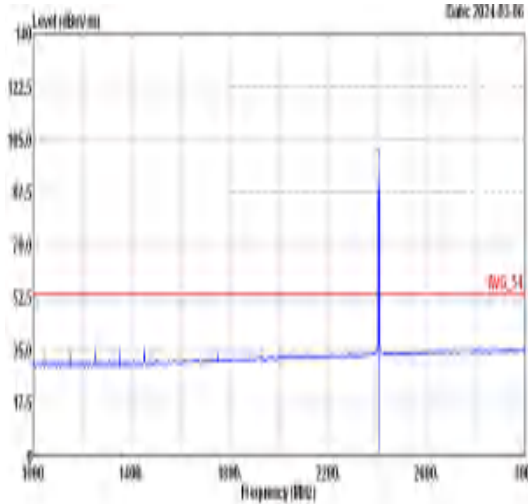

Mode	8																																																																			
	Band Edge																																																																			
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																			
ANT	0																																																																			
Pol.	Horizontal	Fundamental																																																																		
Peak	 Level (dBm/Hz) Frequency (MHz) Date: 2024-03-06 <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>dB</th><th>cs</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>2349.56</td><td>44.34</td><td>74.00</td><td>-20.46</td><td>41.70</td><td>10.73</td><td>5.13</td><td>13.11</td><td>200</td><td>321</td><td>PRD</td><td></td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	dB	cs	deg	Remark	1	2349.56	44.34	74.00	-20.46	41.70	10.73	5.13	13.11	200	321	PRD		 Level (dBm/Hz) Frequency (MHz) Date: 2024-03-06 <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>dB</th><th>cs</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>2402.10</td><td>87.47</td><td>94.62</td><td>10.72</td><td>5.17</td><td>13.14</td><td>200</td><td>321</td><td>PRD</td><td></td><td></td><td>PLAN_24</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	dB	cs	deg	Remark	1	2402.10	87.47	94.62	10.72	5.17	13.14	200	321	PRD			PLAN_24
Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	dB	cs	deg	Remark																																																								
1	2349.56	44.34	74.00	-20.46	41.70	10.73	5.13	13.11	200	321	PRD																																																									
Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	dB	cs	deg	Remark																																																								
1	2402.10	87.47	94.62	10.72	5.17	13.14	200	321	PRD			PLAN_24																																																								
Avg	 Level (dBm/Hz) Frequency (MHz) Date: 2024-03-06 <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>dB</th><th>cs</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>2307.37</td><td>33.00</td><td>54.00</td><td>-20.02</td><td>31.16</td><td>10.72</td><td>5.16</td><td>13.16</td><td>200</td><td>321</td><td>AVERAGE</td><td></td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	dB	cs	deg	Remark	1	2307.37	33.00	54.00	-20.02	31.16	10.72	5.16	13.16	200	321	AVERAGE		 Level (dBm/Hz) Frequency (MHz) Date: 2024-03-06 <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>dB</th><th>cs</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>2402.10</td><td>86.82</td><td>93.50</td><td>10.72</td><td>5.17</td><td>13.14</td><td>200</td><td>321</td><td>AVERAGE</td><td></td><td></td><td></td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	dB	cs	deg	Remark	1	2402.10	86.82	93.50	10.72	5.17	13.14	200	321	AVERAGE			
Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	dB	cs	deg	Remark																																																								
1	2307.37	33.00	54.00	-20.02	31.16	10.72	5.16	13.16	200	321	AVERAGE																																																									
Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	dB	cs	deg	Remark																																																								
1	2402.10	86.82	93.50	10.72	5.17	13.14	200	321	AVERAGE																																																											



Mode	8																																																																															
	Band Edge																																																																															
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																															
ANT	0																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Loss</th><th>Pos</th><th>Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>Hz</th><th>dBm</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2390.66</td><td>44.33</td><td>74.00</td><td>-20.67</td><td>-41.53</td><td>10.72</td><td>5.35</td><td>33.47</td><td>400</td><td>109</td><td>P100</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Loss	Pos	Pos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Hz	dBm	dBm	dB	dB	dB	dB	dB	dB	1	2390.66	44.33	74.00	-20.67	-41.53	10.72	5.35	33.47	400	109	P100	<table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Loss</th><th>Pos</th><th>Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>Hz</th><th>dBm</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2402.00</td><td>44.33</td><td>74.00</td><td>-20.67</td><td>-41.53</td><td>10.72</td><td>5.35</td><td>33.47</td><td>400</td><td>109</td><td>P100</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Loss	Pos	Pos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Hz	dBm	dBm	dB	dB	dB	dB	dB	dB	1	2402.00	44.33	74.00	-20.67	-41.53	10.72	5.35	33.47	400	109	P100
	Limit Margin	Read	Ant	Cable	Preamp	Loss	Pos	Pos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
Hz	dBm	dBm	dB	dB	dB	dB	dB	dB																																																																								
1	2390.66	44.33	74.00	-20.67	-41.53	10.72	5.35	33.47	400	109	P100																																																																					
Limit Margin	Read	Ant	Cable	Preamp	Loss	Pos	Pos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
Hz	dBm	dBm	dB	dB	dB	dB	dB	dB																																																																								
1	2402.00	44.33	74.00	-20.67	-41.53	10.72	5.35	33.47	400	109	P100																																																																					
Avg	<table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Loss</th><th>Pos</th><th>Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>Hz</th><th>dBm</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2390.66</td><td>44.33</td><td>74.00</td><td>-20.67</td><td>-41.53</td><td>10.72</td><td>5.35</td><td>33.47</td><td>400</td><td>109</td><td>AVERAGE</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Loss	Pos	Pos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Hz	dBm	dBm	dB	dB	dB	dB	dB	dB	1	2390.66	44.33	74.00	-20.67	-41.53	10.72	5.35	33.47	400	109	AVERAGE	<table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Loss</th><th>Pos</th><th>Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>Hz</th><th>dBm</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2402.00</td><td>44.33</td><td>74.00</td><td>-20.67</td><td>-41.53</td><td>10.72</td><td>5.35</td><td>33.47</td><td>400</td><td>109</td><td>AVERAGE</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Loss	Pos	Pos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Hz	dBm	dBm	dB	dB	dB	dB	dB	dB	1	2402.00	44.33	74.00	-20.67	-41.53	10.72	5.35	33.47	400	109	AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	Loss	Pos	Pos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
Hz	dBm	dBm	dB	dB	dB	dB	dB	dB																																																																								
1	2390.66	44.33	74.00	-20.67	-41.53	10.72	5.35	33.47	400	109	AVERAGE																																																																					
Limit Margin	Read	Ant	Cable	Preamp	Loss	Pos	Pos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
Hz	dBm	dBm	dB	dB	dB	dB	dB	dB																																																																								
1	2402.00	44.33	74.00	-20.67	-41.53	10.72	5.35	33.47	400	109	AVERAGE																																																																					



Mode	8																																																																													
	Harmonic																																																																													
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																													
ANT	0																																																																													
Pol.	Horizontal	Vertical																																																																												
Peak Avg	Level (dBm/Hz) Date: 2024-03-07 Frequency (MHz) <table><tr><th>Unit</th><th>Read</th><th>Ant. Cable</th><th>Preamp</th><th>AFos</th><th>TFos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><td>Hz</td><td>dBm/Hz</td><td>dBm/Hz</td><td>dB</td><td>dBm</td><td>dB/dB</td><td>dB</td><td>dB</td><td>dB</td><td>deg</td></tr><tr><td>L</td><td>4004.00</td><td>41.00</td><td>74.00</td><td>-31.00</td><td>02.07</td><td>35.73</td><td>0.04</td><td>04.04</td><td>---</td><td>--- Peak</td></tr></table>	Unit	Read	Ant. Cable	Preamp	AFos	TFos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				Hz	dBm/Hz	dBm/Hz	dB	dBm	dB/dB	dB	dB	dB	deg	L	4004.00	41.00	74.00	-31.00	02.07	35.73	0.04	04.04	---	--- Peak	Level (dBm/Hz) Date: 2024-03-07 Frequency (MHz) <table><tr><th>Unit</th><th>Read</th><th>Ant. Cable</th><th>Preamp</th><th>AFos</th><th>TFos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><td>Hz</td><td>dBm/Hz</td><td>dBm/Hz</td><td>dB</td><td>dBm</td><td>dB/dB</td><td>dB</td><td>dB</td><td>dB</td><td>deg</td></tr><tr><td>L</td><td>4004.00</td><td>41.00</td><td>74.00</td><td>-32.00</td><td>02.12</td><td>35.73</td><td>0.04</td><td>04.04</td><td>---</td><td>--- Peak</td></tr></table>	Unit	Read	Ant. Cable	Preamp	AFos	TFos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				Hz	dBm/Hz	dBm/Hz	dB	dBm	dB/dB	dB	dB	dB	deg	L	4004.00	41.00	74.00	-32.00	02.12	35.73	0.04	04.04	---	--- Peak
	Unit	Read	Ant. Cable	Preamp	AFos	TFos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																								
Hz	dBm/Hz	dBm/Hz	dB	dBm	dB/dB	dB	dB	dB	deg																																																																					
L	4004.00	41.00	74.00	-31.00	02.07	35.73	0.04	04.04	---	--- Peak																																																																				
Unit	Read	Ant. Cable	Preamp	AFos	TFos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																								
Hz	dBm/Hz	dBm/Hz	dB	dBm	dB/dB	dB	dB	dB	deg																																																																					
L	4004.00	41.00	74.00	-32.00	02.12	35.73	0.04	04.04	---	--- Peak																																																																				







Mode	9																																																																																																					
	Harmonic																																																																																																					
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																					
ANT	0																																																																																																					
Pol.	Horizontal	Vertical																																																																																																				
Peak Avg	Level (dBm/Hz) Date: 2024-03-07 <table><tr><th></th><th>Unit</th><th>ISM</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APol</th><th>TPol</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Range</th><th>Level</th><th>Factor</th><th>Line</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>me</th><th>dBm/Hz</th><th>dBm/Hz</th><th>dB</th><th>dBm/Hz</th><th>dB</th><th>dB</th><th>Co</th><th>dB</th></tr><tr><td>1</td><td>4089.66</td><td>42.89</td><td>74.00</td><td>-31.11</td><td>63.14</td><td>-8.55</td><td>9.15</td><td>64.87</td><td>---</td><td>High</td></tr><tr><td>2</td><td>7320.10</td><td>45.80</td><td>74.10</td><td>-28.30</td><td>63.80</td><td>-8.67</td><td>10.18</td><td>64.85</td><td>---</td><td>Peak</td></tr></table> Level (dBm/Hz) Date: 2024-03-07 <table><tr><th></th><th>Unit</th><th>ISM</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APol</th><th>TPol</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Range</th><th>Level</th><th>Factor</th><th>Line</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>me</th><th>dBm/Hz</th><th>dBm/Hz</th><th>dB</th><th>dBm/Hz</th><th>dB</th><th>dB</th><th>Co</th><th>dB</th></tr><tr><td>1</td><td>4089.66</td><td>42.89</td><td>74.00</td><td>-31.11</td><td>63.14</td><td>-8.55</td><td>9.15</td><td>64.87</td><td>---</td><td>High</td></tr><tr><td>2</td><td>7320.10</td><td>45.77</td><td>74.10</td><td>-28.33</td><td>63.83</td><td>-8.67</td><td>10.18</td><td>64.85</td><td>---</td><td>Peak</td></tr></table>		Unit	ISM	Ant	Cable	Preamp	APol	TPol		Freq	Level	Line	Range	Level	Factor	Line	Factor	Remark		me	dBm/Hz	dBm/Hz	dB	dBm/Hz	dB	dB	Co	dB	1	4089.66	42.89	74.00	-31.11	63.14	-8.55	9.15	64.87	---	High	2	7320.10	45.80	74.10	-28.30	63.80	-8.67	10.18	64.85	---	Peak		Unit	ISM	Ant	Cable	Preamp	APol	TPol		Freq	Level	Line	Range	Level	Factor	Line	Factor	Remark		me	dBm/Hz	dBm/Hz	dB	dBm/Hz	dB	dB	Co	dB	1	4089.66	42.89	74.00	-31.11	63.14	-8.55	9.15	64.87	---	High	2	7320.10	45.77	74.10	-28.33	63.83	-8.67	10.18	64.85	---	Peak	
	Unit	ISM	Ant	Cable	Preamp	APol	TPol																																																																																															
Freq	Level	Line	Range	Level	Factor	Line	Factor	Remark																																																																																														
	me	dBm/Hz	dBm/Hz	dB	dBm/Hz	dB	dB	Co	dB																																																																																													
1	4089.66	42.89	74.00	-31.11	63.14	-8.55	9.15	64.87	---	High																																																																																												
2	7320.10	45.80	74.10	-28.30	63.80	-8.67	10.18	64.85	---	Peak																																																																																												
	Unit	ISM	Ant	Cable	Preamp	APol	TPol																																																																																															
Freq	Level	Line	Range	Level	Factor	Line	Factor	Remark																																																																																														
	me	dBm/Hz	dBm/Hz	dB	dBm/Hz	dB	dB	Co	dB																																																																																													
1	4089.66	42.89	74.00	-31.11	63.14	-8.55	9.15	64.87	---	High																																																																																												
2	7320.10	45.77	74.10	-28.33	63.83	-8.67	10.18	64.85	---	Peak																																																																																												



Mode	10																																																							
	Band Edge																																																							
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																							
ANT	0																																																							
Pol.	Horizontal	Fundamental																																																						
Peak	Level (dBm/Hz) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a sharp peak at 2400 MHz and a red horizontal line at 74.00 dBm/Hz labeled 'PLR, 74'. The x-axis ranges from 2400 to 2500 MHz, and the y-axis ranges from 140 to 180 dBm/Hz. <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attenu</th><th>Power</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Factor</th><th>Loss Factor</th><th>dB</th><th>dB</th><th>cs</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>2400.00</td><td>74.00</td><td>0.00</td><td>0.00</td><td>0.00</td><td>0.00</td><td>0.00</td><td>0.00</td><td>PLR, 74</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attenu	Power	Freq	Level	Line	Factor	Loss Factor	dB	dB	cs	deg	Remark	1	2400.00	74.00	0.00	0.00	0.00	0.00	0.00	0.00	PLR, 74	Level (dBm/Hz) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a sharp peak at 2480 MHz and a red horizontal line at 74.00 dBm/Hz labeled 'PLR, 74'. The x-axis ranges from 2400 to 2500 MHz, and the y-axis ranges from 140 to 180 dBm/Hz. <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attenu</th><th>Power</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Factor</th><th>Loss Factor</th><th>dB</th><th>dB</th><th>cs</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>2480.00</td><td>74.00</td><td>0.00</td><td>0.00</td><td>0.00</td><td>0.00</td><td>0.00</td><td>0.00</td><td>PLR, 74</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attenu	Power	Freq	Level	Line	Factor	Loss Factor	dB	dB	cs	deg	Remark	1	2480.00	74.00	0.00	0.00	0.00	0.00	0.00	0.00	PLR, 74
	Limit Margin	Read	Ant	Cable	Preamp	Attenu	Power																																																	
Freq	Level	Line	Factor	Loss Factor	dB	dB	cs	deg	Remark																																															
1	2400.00	74.00	0.00	0.00	0.00	0.00	0.00	0.00	PLR, 74																																															
Limit Margin	Read	Ant	Cable	Preamp	Attenu	Power																																																		
Freq	Level	Line	Factor	Loss Factor	dB	dB	cs	deg	Remark																																															
1	2480.00	74.00	0.00	0.00	0.00	0.00	0.00	0.00	PLR, 74																																															
Avg	Level (dBm/Hz) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a sharp peak at 2400 MHz and a red horizontal line at 74.00 dBm/Hz labeled 'AVG, 74'. The x-axis ranges from 2400 to 2500 MHz, and the y-axis ranges from 140 to 180 dBm/Hz. <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attenu</th><th>Power</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Factor</th><th>Loss Factor</th><th>dB</th><th>dB</th><th>cs</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>2400.00</td><td>74.00</td><td>0.00</td><td>0.00</td><td>0.00</td><td>0.00</td><td>0.00</td><td>0.00</td><td>AVG, 74</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attenu	Power	Freq	Level	Line	Factor	Loss Factor	dB	dB	cs	deg	Remark	1	2400.00	74.00	0.00	0.00	0.00	0.00	0.00	0.00	AVG, 74	Level (dBm/Hz) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a sharp peak at 2480 MHz and a red horizontal line at 74.00 dBm/Hz labeled 'AVG, 74'. The x-axis ranges from 2400 to 2500 MHz, and the y-axis ranges from 140 to 180 dBm/Hz. <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attenu</th><th>Power</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Factor</th><th>Loss Factor</th><th>dB</th><th>dB</th><th>cs</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>2480.00</td><td>74.00</td><td>0.00</td><td>0.00</td><td>0.00</td><td>0.00</td><td>0.00</td><td>0.00</td><td>AVG, 74</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attenu	Power	Freq	Level	Line	Factor	Loss Factor	dB	dB	cs	deg	Remark	1	2480.00	74.00	0.00	0.00	0.00	0.00	0.00	0.00	AVG, 74
	Limit Margin	Read	Ant	Cable	Preamp	Attenu	Power																																																	
Freq	Level	Line	Factor	Loss Factor	dB	dB	cs	deg	Remark																																															
1	2400.00	74.00	0.00	0.00	0.00	0.00	0.00	0.00	AVG, 74																																															
Limit Margin	Read	Ant	Cable	Preamp	Attenu	Power																																																		
Freq	Level	Line	Factor	Loss Factor	dB	dB	cs	deg	Remark																																															
1	2480.00	74.00	0.00	0.00	0.00	0.00	0.00	0.00	AVG, 74																																															

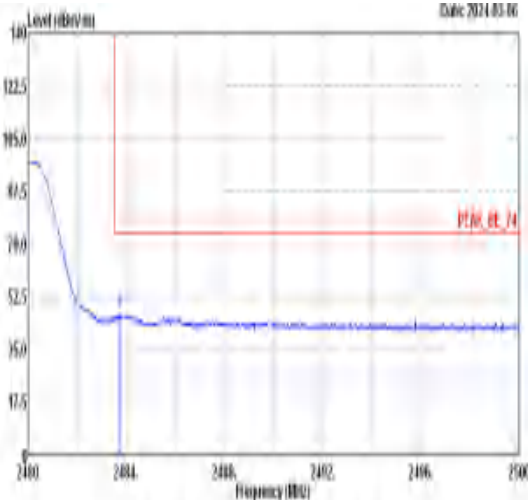
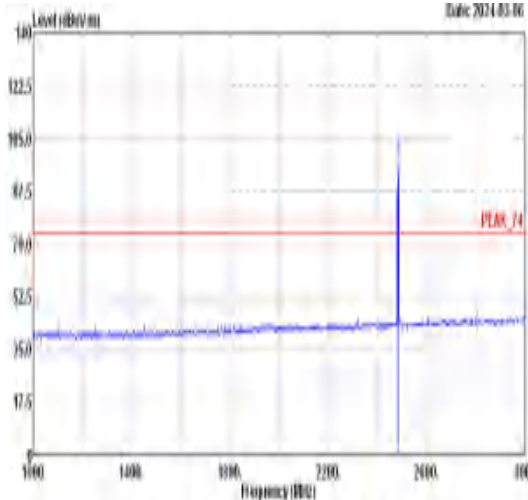
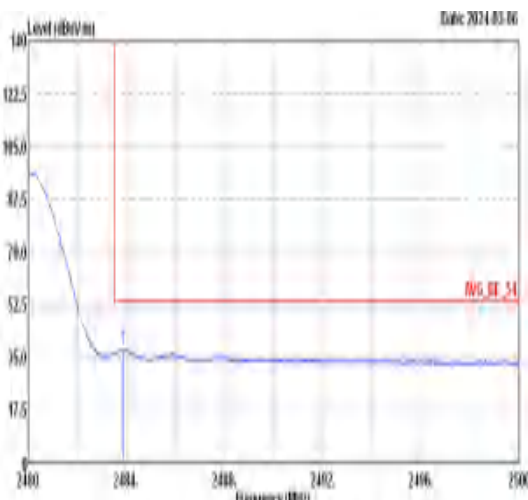
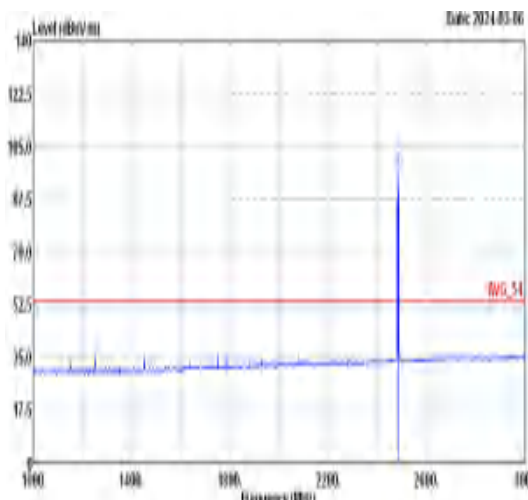



Mode	10																																																									
	Band Edge																																																									
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																									
ANT	0																																																									
Pol.	Vertical	Fundamental																																																								
Peak	 <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><td>1</td><td>2403.76</td><td>46.85</td><td>74.00</td><td>-27.14</td><td>41.82</td><td>10.70</td></tr><tr><td></td><td></td><td></td><td>5.46</td><td>53.12</td><td>344</td><td>0 FREQ</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos	Freq	Level	Line	(dB)	Level Factor	Loss Factor	Remark	1	2403.76	46.85	74.00	-27.14	41.82	10.70				5.46	53.12	344	0 FREQ	 <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><td>1</td><td>2400.10</td><td>57.92</td><td>94.52</td><td>10.70</td><td>5.46</td><td>53.12</td></tr><tr><td></td><td></td><td></td><td>344</td><td>0</td><td>FREQ</td><td></td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos	Freq	Level	Line	(dB)	Level Factor	Loss Factor	Remark	1	2400.10	57.92	94.52	10.70	5.46	53.12				344	0	FREQ	
	Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos																																																			
Freq	Level	Line	(dB)	Level Factor	Loss Factor	Remark																																																				
1	2403.76	46.85	74.00	-27.14	41.82	10.70																																																				
			5.46	53.12	344	0 FREQ																																																				
Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos																																																				
Freq	Level	Line	(dB)	Level Factor	Loss Factor	Remark																																																				
1	2400.10	57.92	94.52	10.70	5.46	53.12																																																				
			344	0	FREQ																																																					
Avg	 <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><td>1</td><td>2403.86</td><td>37.95</td><td>54.00</td><td>-16.45</td><td>34.53</td><td>10.70</td></tr><tr><td></td><td></td><td></td><td>5.46</td><td>53.12</td><td>344</td><td>0 AVERAGE</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos	Freq	Level	Line	(dB)	Level Factor	Loss Factor	Remark	1	2403.86	37.95	54.00	-16.45	34.53	10.70				5.46	53.12	344	0 AVERAGE	 <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><td>1</td><td>2400.10</td><td>56.47</td><td>93.44</td><td>10.70</td><td>5.46</td><td>53.12</td></tr><tr><td></td><td></td><td></td><td>344</td><td>0</td><td>AVERAGE</td><td></td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos	Freq	Level	Line	(dB)	Level Factor	Loss Factor	Remark	1	2400.10	56.47	93.44	10.70	5.46	53.12				344	0	AVERAGE	
	Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos																																																			
Freq	Level	Line	(dB)	Level Factor	Loss Factor	Remark																																																				
1	2403.86	37.95	54.00	-16.45	34.53	10.70																																																				
			5.46	53.12	344	0 AVERAGE																																																				
Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos																																																				
Freq	Level	Line	(dB)	Level Factor	Loss Factor	Remark																																																				
1	2400.10	56.47	93.44	10.70	5.46	53.12																																																				
			344	0	AVERAGE																																																					




Mode	10																																																																																	
	Harmonic																																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																	
ANT	0																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	Level (dBm/Hz) Date: 2024-03-08 PEAK: 74 AVG: 54 <table><tr><th>Line</th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Level Factor</th><th>Loss Factor</th><th>AFos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBm/Hz</th><th>dBm/Hz</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>2400.00</td><td>42.00</td><td>74.00</td><td>-32.00</td><td>62.04</td><td>46.10</td><td>6.96</td><td>64.90</td><td>---</td></tr><tr><td>2</td><td>2440.00</td><td>44.00</td><td>74.00</td><td>-30.00</td><td>62.71</td><td>46.82</td><td>5.89</td><td>64.86</td><td>---</td></tr></table>	Line	Freq	Level	Limit	Margin	Level Factor	Loss Factor	AFos	TPos	Remark		MHz	dBm/Hz	dBm/Hz	dB	dBm	dBm	dB	dB		1	2400.00	42.00	74.00	-32.00	62.04	46.10	6.96	64.90	---	2	2440.00	44.00	74.00	-30.00	62.71	46.82	5.89	64.86	---	Level (dBm/Hz) Date: 2024-03-08 PEAK: 74 AVG: 54 <table><tr><th>Line</th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Level Factor</th><th>Loss Factor</th><th>AFos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBm/Hz</th><th>dBm/Hz</th><th>dB</th><th>dBm</th><th>dBm</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>2400.00</td><td>43.33</td><td>74.00</td><td>-30.67</td><td>63.88</td><td>46.10</td><td>6.86</td><td>64.90</td><td>---</td></tr><tr><td>2</td><td>2440.00</td><td>44.01</td><td>74.00</td><td>-29.99</td><td>62.68</td><td>46.82</td><td>5.86</td><td>64.86</td><td>---</td></tr></table>	Line	Freq	Level	Limit	Margin	Level Factor	Loss Factor	AFos	TPos	Remark		MHz	dBm/Hz	dBm/Hz	dB	dBm	dBm	dB	dB		1	2400.00	43.33	74.00	-30.67	63.88	46.10	6.86	64.90	---	2	2440.00	44.01	74.00	-29.99	62.68	46.82	5.86	64.86	---
	Line	Freq	Level	Limit	Margin	Level Factor	Loss Factor	AFos	TPos	Remark																																																																								
	MHz	dBm/Hz	dBm/Hz	dB	dBm	dBm	dB	dB																																																																										
1	2400.00	42.00	74.00	-32.00	62.04	46.10	6.96	64.90	---																																																																									
2	2440.00	44.00	74.00	-30.00	62.71	46.82	5.89	64.86	---																																																																									
Line	Freq	Level	Limit	Margin	Level Factor	Loss Factor	AFos	TPos	Remark																																																																									
	MHz	dBm/Hz	dBm/Hz	dB	dBm	dBm	dB	dB																																																																										
1	2400.00	43.33	74.00	-30.67	63.88	46.10	6.86	64.90	---																																																																									
2	2440.00	44.01	74.00	-29.99	62.68	46.82	5.86	64.86	---																																																																									

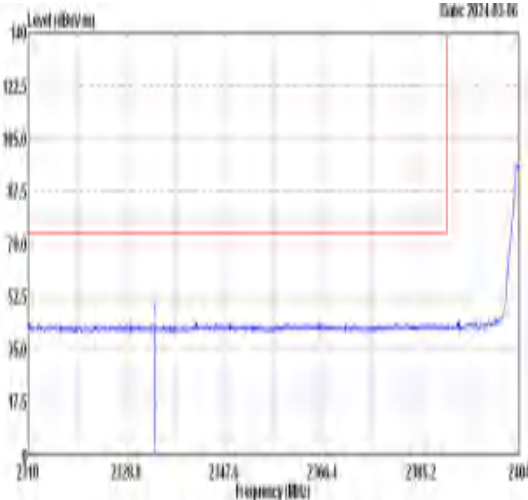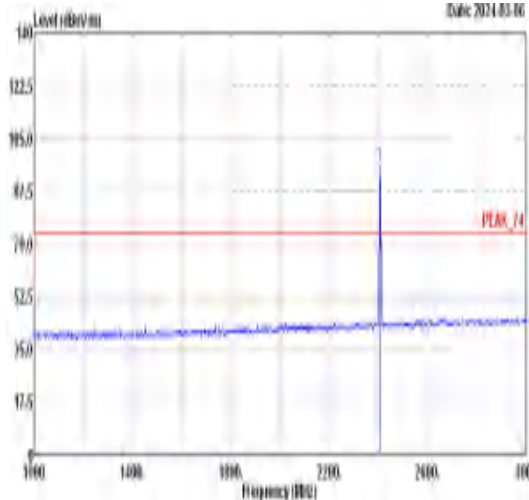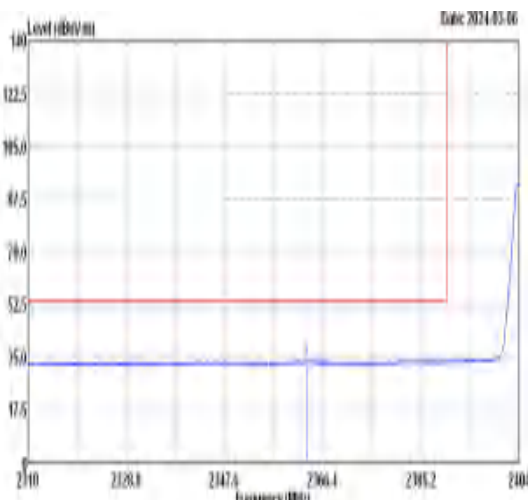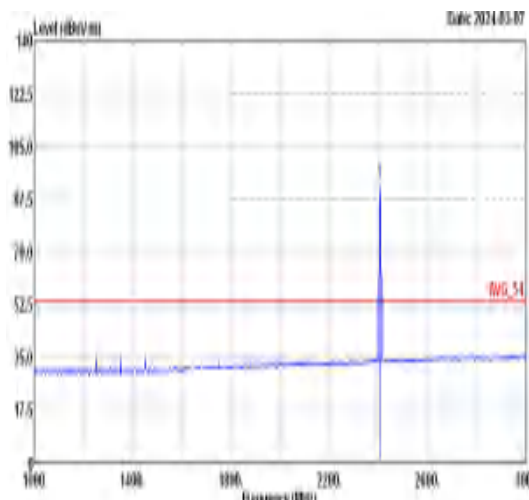

Mode	11																																																																														
	Band Edge																																																																														
	2400-2483.5_Bluetooth-LE_CH01_2404MHz																																																																														
ANT	0																																																																														
Pol.	Horizontal	Fundamental																																																																													
Peak	 Level (dBm/Hz) Frequency (MHz) Date: 2024-03-06 <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><td>1</td><td>2334.35</td><td>-44.44</td><td>74.00</td><td>-20.36</td><td>-41.73</td><td>10.73</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>5.31</td><td>31.13</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>200</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>336 PWR</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos	Freq	Level	Line	(dB)	Level Factor	Loss Factor	Remark	1	2334.35	-44.44	74.00	-20.36	-41.73	10.73						5.31	31.13							200							336 PWR	 Level (dBm/Hz) Frequency (MHz) Date: 2024-03-06 <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><td>1</td><td>2404.00</td><td>16.20</td><td>91.34</td><td>10.73</td><td>5.37</td><td>31.13</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>200</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>336 PWR</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos	Freq	Level	Line	(dB)	Level Factor	Loss Factor	Remark	1	2404.00	16.20	91.34	10.73	5.37	31.13							200							336 PWR
Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos																																																																									
Freq	Level	Line	(dB)	Level Factor	Loss Factor	Remark																																																																									
1	2334.35	-44.44	74.00	-20.36	-41.73	10.73																																																																									
					5.31	31.13																																																																									
						200																																																																									
						336 PWR																																																																									
Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos																																																																									
Freq	Level	Line	(dB)	Level Factor	Loss Factor	Remark																																																																									
1	2404.00	16.20	91.34	10.73	5.37	31.13																																																																									
						200																																																																									
						336 PWR																																																																									
Avg	 Level (dBm/Hz) Frequency (MHz) Date: 2024-03-06 <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><td>1</td><td>2361.11</td><td>34.00</td><td>54.00</td><td>-20.00</td><td>31.22</td><td>10.73</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>5.34</td><td>31.10</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>200</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>336 AVERAGE</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos	Freq	Level	Line	(dB)	Level Factor	Loss Factor	Remark	1	2361.11	34.00	54.00	-20.00	31.22	10.73						5.34	31.10							200							336 AVERAGE	 Level (dBm/Hz) Frequency (MHz) Date: 2024-03-07 <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><td>1</td><td>2404.00</td><td>12.75</td><td>91.10</td><td>10.73</td><td>5.37</td><td>31.13</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>200</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>336 AVERAGE</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos	Freq	Level	Line	(dB)	Level Factor	Loss Factor	Remark	1	2404.00	12.75	91.10	10.73	5.37	31.13							200							336 AVERAGE
Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos																																																																									
Freq	Level	Line	(dB)	Level Factor	Loss Factor	Remark																																																																									
1	2361.11	34.00	54.00	-20.00	31.22	10.73																																																																									
					5.34	31.10																																																																									
						200																																																																									
						336 AVERAGE																																																																									
Limit Margin	Read	Ant	Cable	Preamp	Attos	TPos																																																																									
Freq	Level	Line	(dB)	Level Factor	Loss Factor	Remark																																																																									
1	2404.00	12.75	91.10	10.73	5.37	31.13																																																																									
						200																																																																									
						336 AVERAGE																																																																									




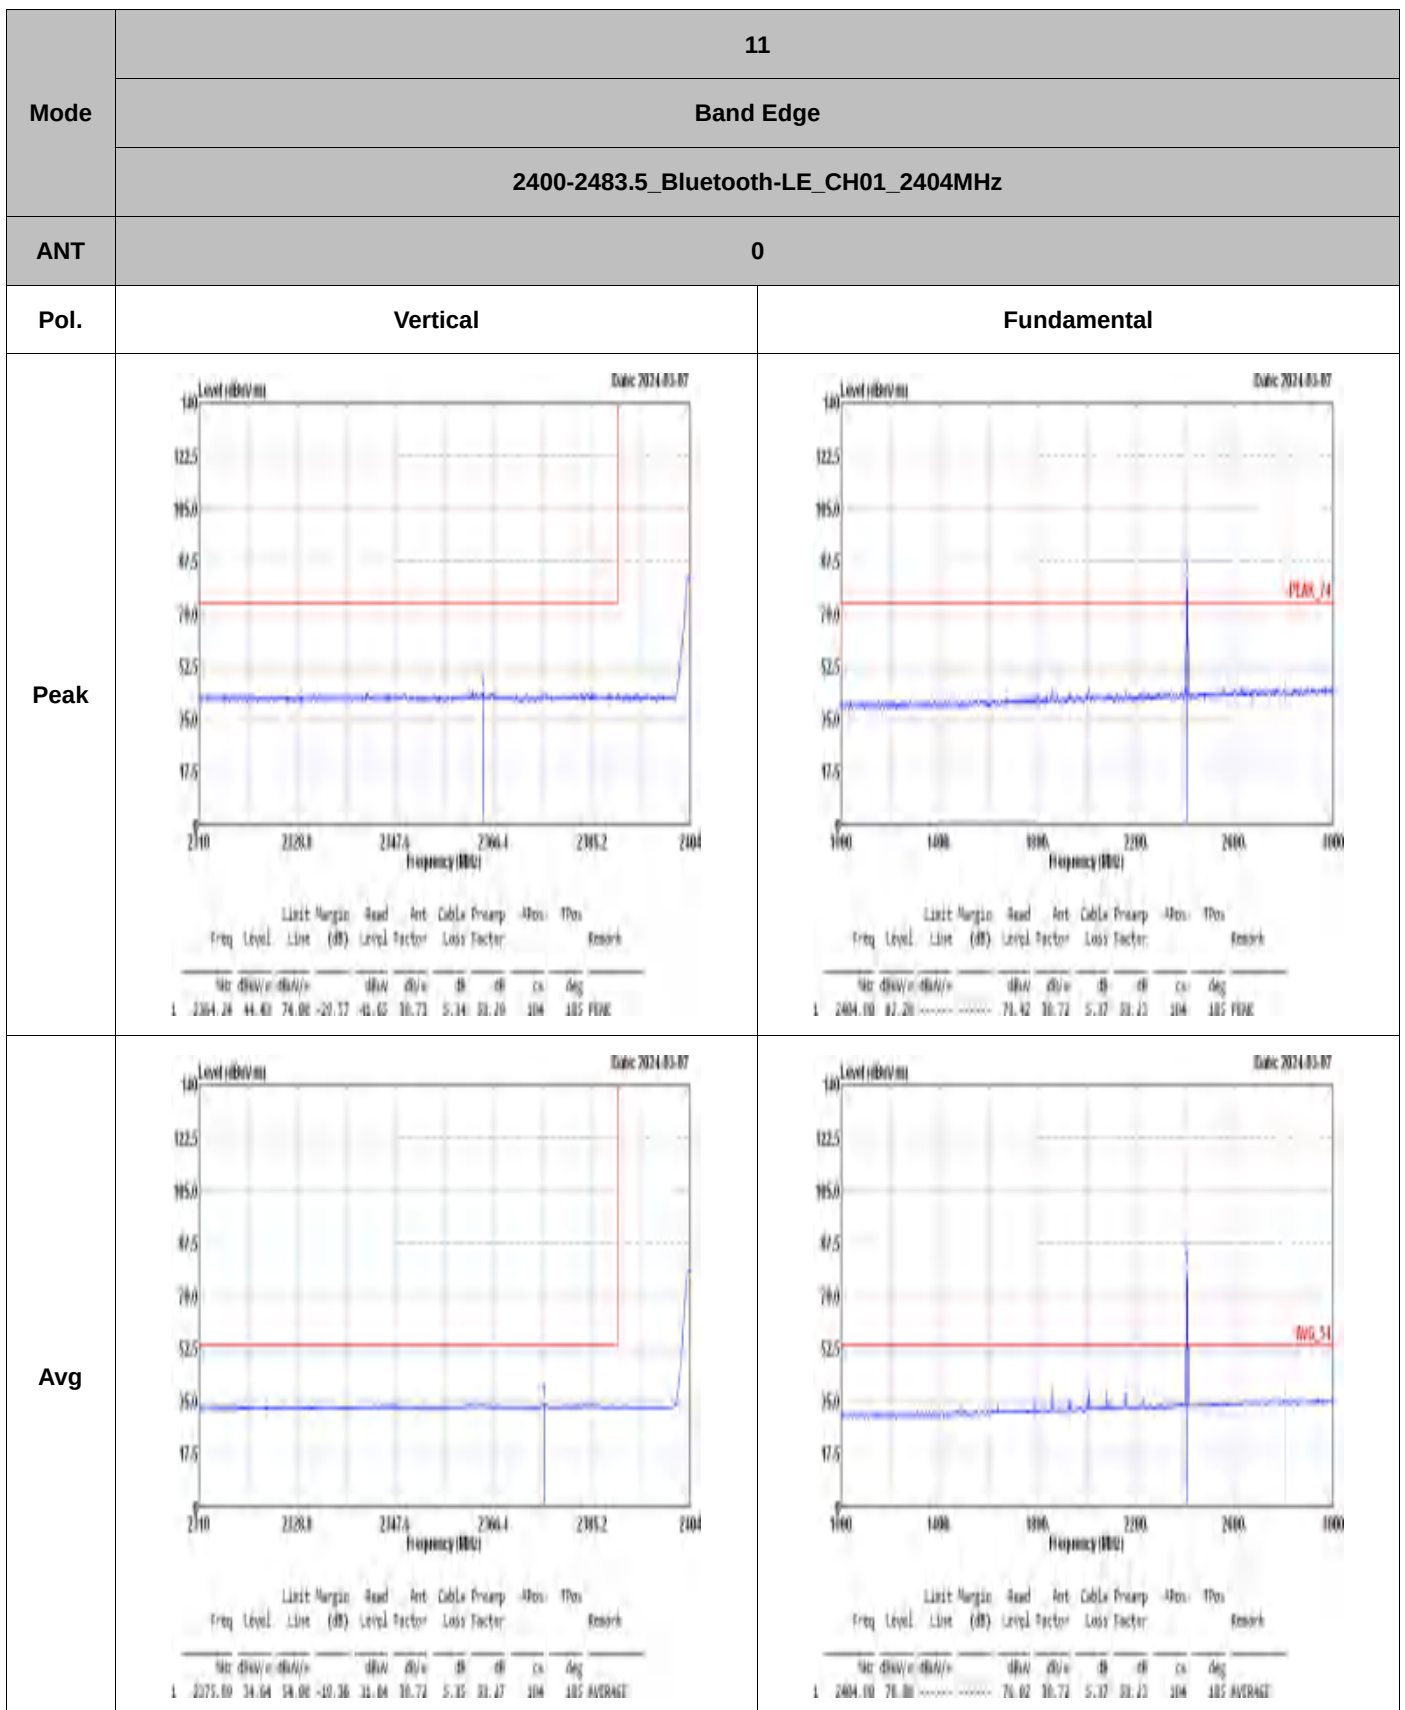


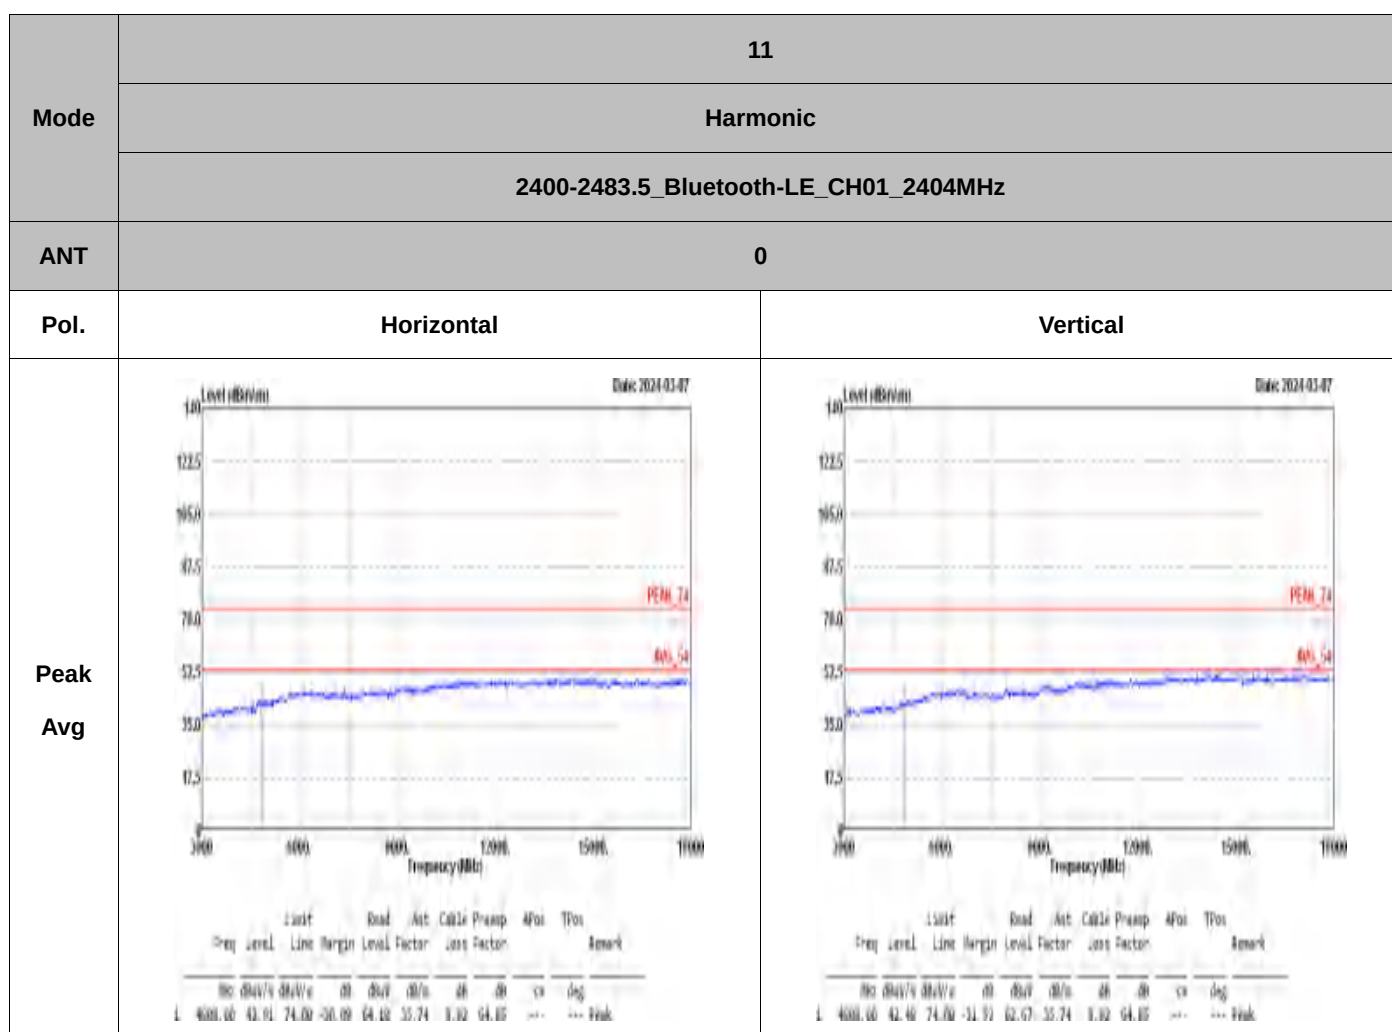







Mode	12																																																																																																	
	Harmonic																																																																																																	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																	
ANT	0																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	Level (dBm/Hz) 100 97.5 95.0 92.5 90.0 87.5 85.0 82.5 80.0 77.5 75.0 72.5 70.0 67.5 65.0 62.5 60.0 57.5 55.0 52.5 50.0 47.5 45.0 42.5 40.0 37.5 35.0 32.5 30.0 27.5 25.0 22.5 20.0 17.5 15.0 12.5 10.0 7.5 5.0 2.5 0.0 -2.5 -5.0 -7.5 -10.0 -12.5 -15.0 -17.5 -20.0 -22.5 -25.0 -27.5 -30.0 -32.5 -35.0 -37.5 -40.0 -42.5 -45.0 -47.5 -50.0 -52.5 -55.0 -57.5 -60.0 -62.5 -65.0 -67.5 -70.0 -72.5 -75.0 -77.5 -80.0 -82.5 -85.0 -87.5 -90.0 -92.5 -95.0 -97.5 -100.0 Frequency (MHz) 2400 2440 2480 Date: 2024-03-07 <table><tr><th>Line</th><th>Freq</th><th>Level</th><th>Line</th><th>Range</th><th>Level</th><th>Factor</th><th>Line</th><th>Factor</th><th>APol</th><th>TPol</th><th>Remark</th></tr><tr><th>me</th><th>dBm/Hz</th><th>dBm/Hz</th><th>dB</th><th>dBm/Hz</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>Co</th><th>Reg</th><th></th></tr><tr><td>1</td><td>4089.66</td><td>43.85</td><td>74.00</td><td>-30.65</td><td>63.06</td><td>-8.55</td><td>9.35</td><td>64.87</td><td>---</td><td>High</td><td></td></tr><tr><td>2</td><td>7320.00</td><td>45.70</td><td>74.00</td><td>-26.21</td><td>60.06</td><td>36.87</td><td>10.18</td><td>64.85</td><td>---</td><td>Peak</td><td></td></tr></table>	Line	Freq	Level	Line	Range	Level	Factor	Line	Factor	APol	TPol	Remark	me	dBm/Hz	dBm/Hz	dB	dBm/Hz	dB	dB	dB	dB	Co	Reg		1	4089.66	43.85	74.00	-30.65	63.06	-8.55	9.35	64.87	---	High		2	7320.00	45.70	74.00	-26.21	60.06	36.87	10.18	64.85	---	Peak		Level (dBm/Hz) 100 97.5 95.0 92.5 90.0 87.5 85.0 82.5 80.0 77.5 75.0 72.5 70.0 67.5 65.0 62.5 60.0 57.5 55.0 52.5 50.0 47.5 45.0 42.5 40.0 37.5 35.0 32.5 30.0 27.5 25.0 22.5 20.0 17.5 15.0 12.5 10.0 7.5 5.0 2.5 0.0 -2.5 -5.0 -7.5 -10.0 -12.5 -15.0 -17.5 -20.0 -22.5 -25.0 -27.5 -30.0 -32.5 -35.0 -37.5 -40.0 -42.5 -45.0 -47.5 -50.0 -52.5 -55.0 -57.5 -60.0 -62.5 -65.0 -67.5 -70.0 -72.5 -75.0 -77.5 -80.0 -82.5 -85.0 -87.5 -90.0 -92.5 -95.0 -97.5 -100.0 Frequency (MHz) 2400 2440 2480 Date: 2024-03-07 <table><tr><th>Line</th><th>Freq</th><th>Level</th><th>Line</th><th>Range</th><th>Level</th><th>Factor</th><th>Line</th><th>Factor</th><th>APol</th><th>TPol</th><th>Remark</th></tr><tr><th>me</th><th>dBm/Hz</th><th>dBm/Hz</th><th>dB</th><th>dBm/Hz</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>Co</th><th>Reg</th><th></th></tr><tr><td>1</td><td>4089.66</td><td>43.87</td><td>74.00</td><td>-30.94</td><td>63.32</td><td>-8.55</td><td>9.35</td><td>64.87</td><td>---</td><td>High</td><td></td></tr><tr><td>2</td><td>7320.00</td><td>45.70</td><td>74.00</td><td>-26.27</td><td>60.54</td><td>36.87</td><td>10.18</td><td>64.85</td><td>---</td><td>Peak</td><td></td></tr></table>	Line	Freq	Level	Line	Range	Level	Factor	Line	Factor	APol	TPol	Remark	me	dBm/Hz	dBm/Hz	dB	dBm/Hz	dB	dB	dB	dB	Co	Reg		1	4089.66	43.87	74.00	-30.94	63.32	-8.55	9.35	64.87	---	High		2	7320.00	45.70	74.00	-26.27	60.54	36.87	10.18	64.85	---	Peak	
Line	Freq	Level	Line	Range	Level	Factor	Line	Factor	APol	TPol	Remark																																																																																							
me	dBm/Hz	dBm/Hz	dB	dBm/Hz	dB	dB	dB	dB	Co	Reg																																																																																								
1	4089.66	43.85	74.00	-30.65	63.06	-8.55	9.35	64.87	---	High																																																																																								
2	7320.00	45.70	74.00	-26.21	60.06	36.87	10.18	64.85	---	Peak																																																																																								
Line	Freq	Level	Line	Range	Level	Factor	Line	Factor	APol	TPol	Remark																																																																																							
me	dBm/Hz	dBm/Hz	dB	dBm/Hz	dB	dB	dB	dB	Co	Reg																																																																																								
1	4089.66	43.87	74.00	-30.94	63.32	-8.55	9.35	64.87	---	High																																																																																								
2	7320.00	45.70	74.00	-26.27	60.54	36.87	10.18	64.85	---	Peak																																																																																								

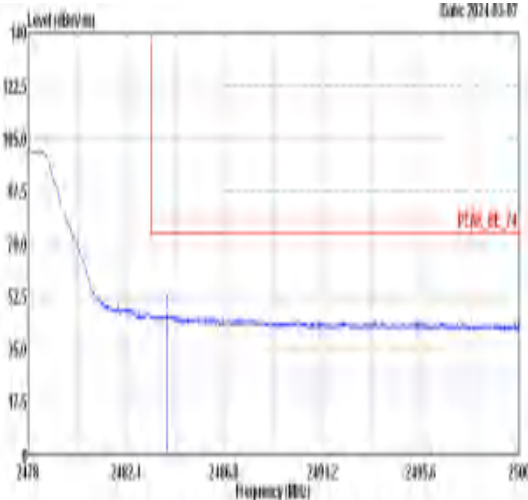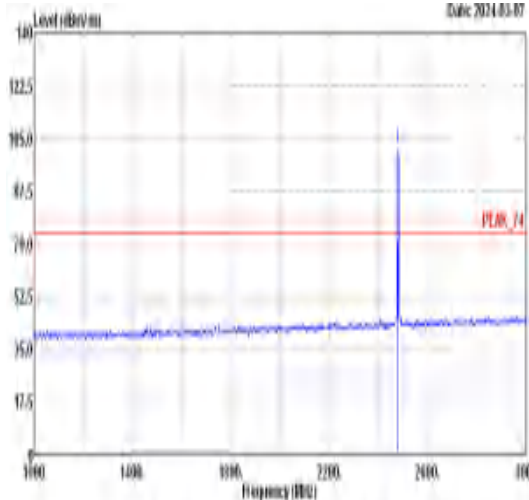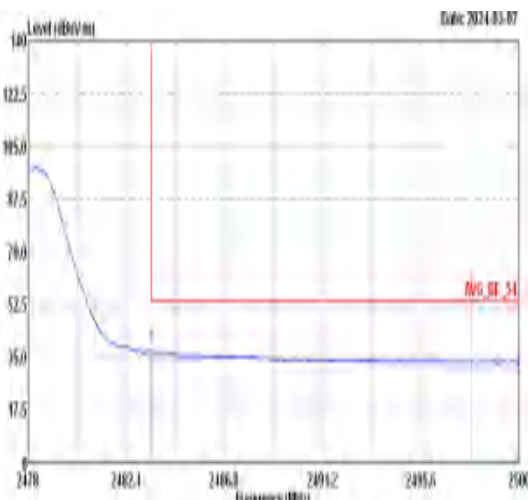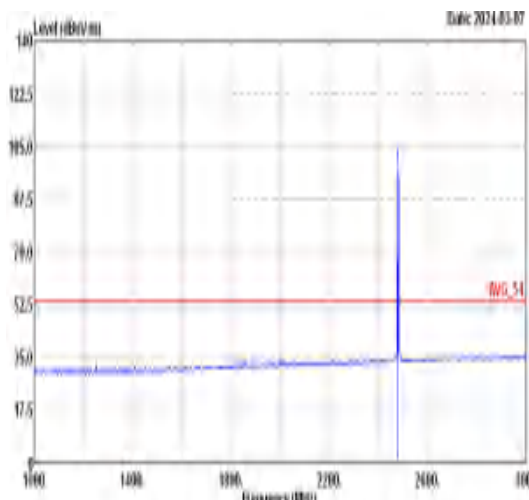

Mode	13																																																										
	Band Edge																																																										
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																										
ANT	0																																																										
Pol.	Horizontal	Fundamental																																																									
Peak	 Level (dBm/Hz) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a sharp peak at 2478 MHz. A red line indicates the peak level at 101.42 dBm/Hz. The x-axis ranges from 2470 to 2500 MHz, and the y-axis ranges from 47.5 to 140 dBm/Hz. <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attenu</th><th>Loss</th><th>Pos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><td>1</td><td>2478.20</td><td>47.00</td><td>74.00</td><td>-27.00</td><td>41.00</td><td>10.70</td><td>5.46</td><td>33.12</td><td>305</td><td>270</td><td>PEAK</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attenu	Loss	Pos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	1	2478.20	47.00	74.00	-27.00	41.00	10.70	5.46	33.12	305	270	PEAK	 Peak Fundamental Spectrum Plot. The plot shows a sharp peak at 2478 MHz. A red line indicates the peak level at 101.42 dBm/Hz. The x-axis ranges from 2470 to 2500 MHz, and the y-axis ranges from 47.5 to 140 dBm/Hz. <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attenu</th><th>Loss</th><th>Pos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><td>1</td><td>2478.10</td><td>101.42</td><td>-----</td><td>96.40</td><td>10.70</td><td>5.46</td><td>33.12</td><td>305</td><td>270</td><td>PEAK</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attenu	Loss	Pos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	1	2478.10	101.42	-----	96.40	10.70	5.46	33.12	305	270	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	Attenu	Loss	Pos																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																			
1	2478.20	47.00	74.00	-27.00	41.00	10.70	5.46	33.12	305	270	PEAK																																																
Limit Margin	Read	Ant	Cable	Preamp	Attenu	Loss	Pos																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																			
1	2478.10	101.42	-----	96.40	10.70	5.46	33.12	305	270	PEAK																																																	
Avg	 Avg Horizontal Spectrum Plot. The plot shows the average level across the frequency range. A red line indicates the average level at 54.00 dBm/Hz. The x-axis ranges from 2470 to 2500 MHz, and the y-axis ranges from 47.5 to 140 dBm/Hz. <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attenu</th><th>Loss</th><th>Pos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><td>1</td><td>2478.34</td><td>37.52</td><td>54.00</td><td>-16.48</td><td>34.28</td><td>10.70</td><td>5.46</td><td>33.12</td><td>305</td><td>270</td><td>AVERAGE</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attenu	Loss	Pos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	1	2478.34	37.52	54.00	-16.48	34.28	10.70	5.46	33.12	305	270	AVERAGE	 Avg Fundamental Spectrum Plot. The plot shows the average level across the frequency range. A red line indicates the average level at 54.00 dBm/Hz. The x-axis ranges from 2470 to 2500 MHz, and the y-axis ranges from 47.5 to 140 dBm/Hz. <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attenu</th><th>Loss</th><th>Pos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><td>1</td><td>2478.10</td><td>54.00</td><td>-----</td><td>51.02</td><td>10.70</td><td>5.46</td><td>33.12</td><td>305</td><td>270</td><td>AVERAGE</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attenu	Loss	Pos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	1	2478.10	54.00	-----	51.02	10.70	5.46	33.12	305	270	AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	Attenu	Loss	Pos																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																			
1	2478.34	37.52	54.00	-16.48	34.28	10.70	5.46	33.12	305	270	AVERAGE																																																
Limit Margin	Read	Ant	Cable	Preamp	Attenu	Loss	Pos																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																			
1	2478.10	54.00	-----	51.02	10.70	5.46	33.12	305	270	AVERAGE																																																	

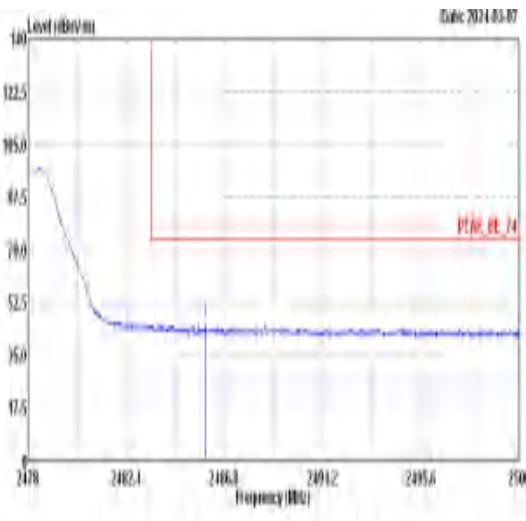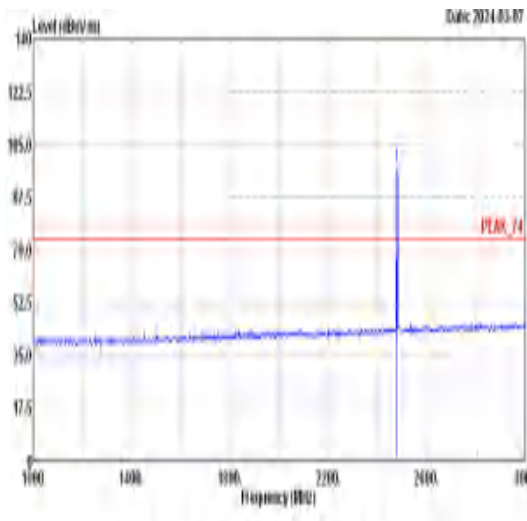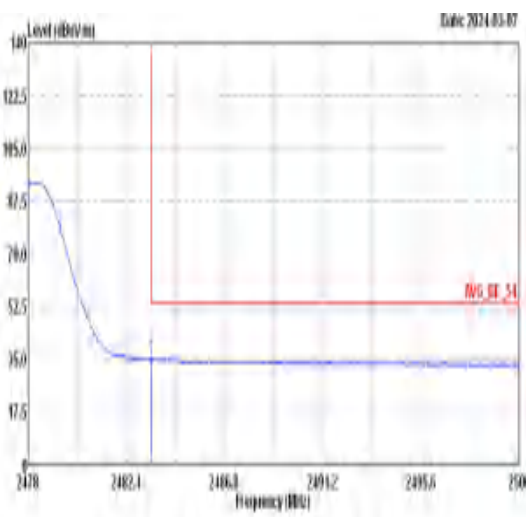
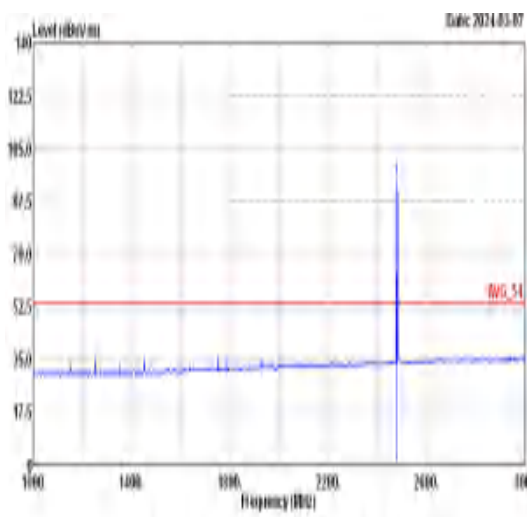


Mode	13																																																																	
	Band Edge																																																																	
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																	
ANT	0																																																																	
Pol.	Vertical	Fundamental																																																																
Peak	 <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attenu</th><th>Thru</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>dBm</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2478.02</td><td>45.00</td><td>74.00</td><td>-20.40</td><td>42.56</td><td>10.70</td><td>5.46 53.12 343 0 PWR</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attenu	Thru	Remark	Freq	Level	Line	(dB)	Level Factor	Loss Factor				dBm	dBm	dB	dB	dB	dB	dB	1	2478.02	45.00	74.00	-20.40	42.56	10.70	5.46 53.12 343 0 PWR	 <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attenu</th><th>Thru</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>dBm</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2478.02</td><td>45.00</td><td>74.00</td><td>-20.40</td><td>42.56</td><td>10.70</td><td>5.46 53.12 343 0 PWR</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attenu	Thru	Remark	Freq	Level	Line	(dB)	Level Factor	Loss Factor				dBm	dBm	dB	dB	dB	dB	dB	1	2478.02	45.00	74.00	-20.40	42.56	10.70	5.46 53.12 343 0 PWR
	Limit Margin	Read	Ant	Cable	Preamp	Attenu	Thru	Remark																																																										
Freq	Level	Line	(dB)	Level Factor	Loss Factor																																																													
	dBm	dBm	dB	dB	dB	dB	dB																																																											
1	2478.02	45.00	74.00	-20.40	42.56	10.70	5.46 53.12 343 0 PWR																																																											
Limit Margin	Read	Ant	Cable	Preamp	Attenu	Thru	Remark																																																											
Freq	Level	Line	(dB)	Level Factor	Loss Factor																																																													
	dBm	dBm	dB	dB	dB	dB	dB																																																											
1	2478.02	45.00	74.00	-20.40	42.56	10.70	5.46 53.12 343 0 PWR																																																											
Avg	 <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attenu</th><th>Thru</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>dBm</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2478.02</td><td>35.54</td><td>54.00</td><td>-18.40</td><td>32.47</td><td>10.70</td><td>5.46 53.12 343 0 AVERAGE</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attenu	Thru	Remark	Freq	Level	Line	(dB)	Level Factor	Loss Factor				dBm	dBm	dB	dB	dB	dB	dB	1	2478.02	35.54	54.00	-18.40	32.47	10.70	5.46 53.12 343 0 AVERAGE	 <table><tr><th>Limit Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Attenu</th><th>Thru</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>dBm</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2478.02</td><td>35.54</td><td>54.00</td><td>-18.40</td><td>32.47</td><td>10.70</td><td>5.46 53.12 343 0 AVERAGE</td></tr></table>	Limit Margin	Read	Ant	Cable	Preamp	Attenu	Thru	Remark	Freq	Level	Line	(dB)	Level Factor	Loss Factor				dBm	dBm	dB	dB	dB	dB	dB	1	2478.02	35.54	54.00	-18.40	32.47	10.70	5.46 53.12 343 0 AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	Attenu	Thru	Remark																																																										
Freq	Level	Line	(dB)	Level Factor	Loss Factor																																																													
	dBm	dBm	dB	dB	dB	dB	dB																																																											
1	2478.02	35.54	54.00	-18.40	32.47	10.70	5.46 53.12 343 0 AVERAGE																																																											
Limit Margin	Read	Ant	Cable	Preamp	Attenu	Thru	Remark																																																											
Freq	Level	Line	(dB)	Level Factor	Loss Factor																																																													
	dBm	dBm	dB	dB	dB	dB	dB																																																											
1	2478.02	35.54	54.00	-18.40	32.47	10.70	5.46 53.12 343 0 AVERAGE																																																											



Mode	13																																																																																																	
	Harmonic																																																																																																	
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																																	
ANT	0																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	Level (dBm/Hz) 100 97.5 95.0 92.5 90.0 87.5 85.0 82.5 80.0 77.5 75.0 72.5 70.0 67.5 65.0 62.5 60.0 57.5 55.0 52.5 50.0 47.5 45.0 42.5 40.0 37.5 35.0 32.5 30.0 27.5 25.0 22.5 20.0 17.5 15.0 12.5 10.0 7.5 5.0 2.5 0.0 -2.5 -5.0 -7.5 -10.0 -12.5 -15.0 -17.5 -20.0 -22.5 -25.0 -27.5 -30.0 -32.5 -35.0 -37.5 -40.0 -42.5 -45.0 -47.5 -50.0 -52.5 -55.0 -57.5 -60.0 -62.5 -65.0 -67.5 -70.0 -72.5 -75.0 -77.5 -80.0 -82.5 -85.0 -87.5 -90.0 -92.5 -95.0 -97.5 -100.0 Frequency (MHz) 2400 2440 2480 2520 2560 2600 DATE: 2024-03-07 <table><tr><th>Line</th><th>Freq</th><th>Level</th><th>Line</th><th>Range</th><th>Level</th><th>Factor</th><th>Line</th><th>Factor</th><th>APOL</th><th>TPOL</th><th>Remark</th></tr><tr><th>me</th><th>dBm/Hz</th><th>dBm/Hz</th><th>dB</th><th>dBm/Hz</th><th>dBm/Hz</th><th>dB</th><th>dB</th><th>Co</th><th>Reg</th><th></th><th></th></tr><tr><td>1</td><td>40.00</td><td>40.00</td><td>74.00</td><td>-30.00</td><td>63.77</td><td>36.00</td><td>9.48</td><td>64.00</td><td>---</td><td>High</td><td></td></tr><tr><td>2</td><td>74.00</td><td>45.15</td><td>74.00</td><td>-20.00</td><td>60.00</td><td>36.00</td><td>10.17</td><td>64.00</td><td>---</td><td>Peak</td><td></td></tr></table>	Line	Freq	Level	Line	Range	Level	Factor	Line	Factor	APOL	TPOL	Remark	me	dBm/Hz	dBm/Hz	dB	dBm/Hz	dBm/Hz	dB	dB	Co	Reg			1	40.00	40.00	74.00	-30.00	63.77	36.00	9.48	64.00	---	High		2	74.00	45.15	74.00	-20.00	60.00	36.00	10.17	64.00	---	Peak		Level (dBm/Hz) 100 97.5 95.0 92.5 90.0 87.5 85.0 82.5 80.0 77.5 75.0 72.5 70.0 67.5 65.0 62.5 60.0 57.5 55.0 52.5 50.0 47.5 45.0 42.5 40.0 37.5 35.0 32.5 30.0 27.5 25.0 22.5 20.0 17.5 15.0 12.5 10.0 7.5 5.0 2.5 0.0 -2.5 -5.0 -7.5 -10.0 -12.5 -15.0 -17.5 -20.0 -22.5 -25.0 -27.5 -30.0 -32.5 -35.0 -37.5 -40.0 -42.5 -45.0 -47.5 -50.0 -52.5 -55.0 -57.5 -60.0 -62.5 -65.0 -67.5 -70.0 -72.5 -75.0 -77.5 -80.0 -82.5 -85.0 -87.5 -90.0 -92.5 -95.0 -97.5 -100.0 Frequency (MHz) 2400 2440 2480 2520 2560 2600 DATE: 2024-03-07 <table><tr><th>Line</th><th>Freq</th><th>Level</th><th>Line</th><th>Range</th><th>Level</th><th>Factor</th><th>Line</th><th>Factor</th><th>APOL</th><th>TPOL</th><th>Remark</th></tr><tr><th>me</th><th>dBm/Hz</th><th>dBm/Hz</th><th>dB</th><th>dBm/Hz</th><th>dBm/Hz</th><th>dB</th><th>dB</th><th>Co</th><th>Reg</th><th></th><th></th></tr><tr><td>1</td><td>40.00</td><td>40.00</td><td>74.00</td><td>-30.00</td><td>63.77</td><td>36.00</td><td>9.48</td><td>64.00</td><td>---</td><td>High</td><td></td></tr><tr><td>2</td><td>74.00</td><td>44.07</td><td>74.00</td><td>-20.00</td><td>62.03</td><td>36.00</td><td>10.17</td><td>64.00</td><td>---</td><td>Peak</td><td></td></tr></table>	Line	Freq	Level	Line	Range	Level	Factor	Line	Factor	APOL	TPOL	Remark	me	dBm/Hz	dBm/Hz	dB	dBm/Hz	dBm/Hz	dB	dB	Co	Reg			1	40.00	40.00	74.00	-30.00	63.77	36.00	9.48	64.00	---	High		2	74.00	44.07	74.00	-20.00	62.03	36.00	10.17	64.00	---	Peak	
Line	Freq	Level	Line	Range	Level	Factor	Line	Factor	APOL	TPOL	Remark																																																																																							
me	dBm/Hz	dBm/Hz	dB	dBm/Hz	dBm/Hz	dB	dB	Co	Reg																																																																																									
1	40.00	40.00	74.00	-30.00	63.77	36.00	9.48	64.00	---	High																																																																																								
2	74.00	45.15	74.00	-20.00	60.00	36.00	10.17	64.00	---	Peak																																																																																								
Line	Freq	Level	Line	Range	Level	Factor	Line	Factor	APOL	TPOL	Remark																																																																																							
me	dBm/Hz	dBm/Hz	dB	dBm/Hz	dBm/Hz	dB	dB	Co	Reg																																																																																									
1	40.00	40.00	74.00	-30.00	63.77	36.00	9.48	64.00	---	High																																																																																								
2	74.00	44.07	74.00	-20.00	62.03	36.00	10.17	64.00	---	Peak																																																																																								

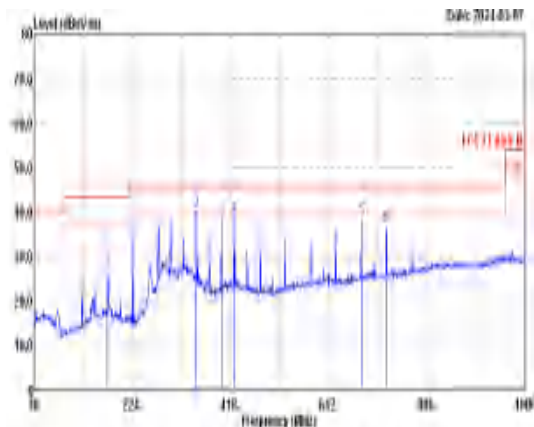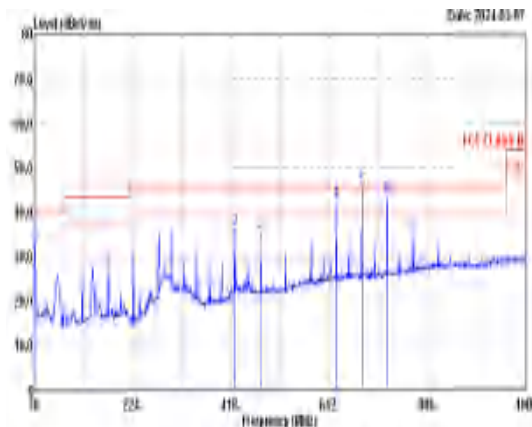


Mode	14																																																																																																																																																																																																	
	LF																																																																																																																																																																																																	
	Bluetooth LE LF_CH39_2480MHz																																																																																																																																																																																																	
ANT	0																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																
QPI/ Peak	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Thrup</th><th>Att</th><th>Thru</th><th>Remark</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>174.03</td><td>32.38</td><td>40.50</td><td>-10.12</td><td>47.58</td><td>15.30</td><td>1.47</td><td>51.10</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>206.00</td><td>40.50</td><td>40.00</td><td>-3.54</td><td>49.29</td><td>10.30</td><td>1.90</td><td>51.40</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>206.07</td><td>34.52</td><td>40.00</td><td>-5.48</td><td>45.93</td><td>12.00</td><td>2.47</td><td>51.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>424.79</td><td>38.98</td><td>40.00</td><td>-1.02</td><td>45.40</td><td>12.00</td><td>1.15</td><td>51.10</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>675.05</td><td>38.50</td><td>40.00</td><td>-1.50</td><td>40.49</td><td>9.50</td><td>2.35</td><td>51.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>724.52</td><td>36.92</td><td>40.00</td><td>-3.08</td><td>33.80</td><td>17.50</td><td>2.09</td><td>51.10</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>		Freq	Level	Limit	Margin	Read	Ant	Cable	Thrup	Att	Thru	Remark						Level	Factor	Loss	Factor				1	174.03	32.38	40.50	-10.12	47.58	15.30	1.47	51.10	---	---	Peak	2	206.00	40.50	40.00	-3.54	49.29	10.30	1.90	51.40	---	---	Peak	3	206.07	34.52	40.00	-5.48	45.93	12.00	2.47	51.00	---	---	Peak	4	424.79	38.98	40.00	-1.02	45.40	12.00	1.15	51.10	---	---	Peak	5	675.05	38.50	40.00	-1.50	40.49	9.50	2.35	51.00	---	---	Peak	6	724.52	36.92	40.00	-3.08	33.80	17.50	2.09	51.10	---	---	Peak	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Thrup</th><th>Att</th><th>Thru</th><th>Remark</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>50.00</td><td>33.89</td><td>40.00</td><td>-6.11</td><td>47.40</td><td>15.30</td><td>1.47</td><td>51.10</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>424.79</td><td>34.25</td><td>40.00</td><td>-5.75</td><td>42.00</td><td>12.00</td><td>2.15</td><td>51.10</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>475.29</td><td>35.98</td><td>40.00</td><td>-4.02</td><td>40.00</td><td>13.00</td><td>2.37</td><td>51.40</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>624.61</td><td>42.17</td><td>40.00</td><td>2.17</td><td>45.00</td><td>12.00</td><td>1.40</td><td>51.10</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>675.05</td><td>46.26</td><td>40.00</td><td>6.26</td><td>47.50</td><td>9.50</td><td>2.35</td><td>51.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>724.52</td><td>40.00</td><td>40.00</td><td>0.00</td><td>44.50</td><td>17.50</td><td>2.09</td><td>51.10</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>		Freq	Level	Limit	Margin	Read	Ant	Cable	Thrup	Att	Thru	Remark						Level	Factor	Loss	Factor				1	50.00	33.89	40.00	-6.11	47.40	15.30	1.47	51.10	---	---	Peak	2	424.79	34.25	40.00	-5.75	42.00	12.00	2.15	51.10	---	---	Peak	3	475.29	35.98	40.00	-4.02	40.00	13.00	2.37	51.40	---	---	Peak	4	624.61	42.17	40.00	2.17	45.00	12.00	1.40	51.10	---	---	Peak	5	675.05	46.26	40.00	6.26	47.50	9.50	2.35	51.00	---	---	Peak	6	724.52	40.00	40.00	0.00	44.50	17.50	2.09	51.10	---	---	Peak
	Freq	Level	Limit	Margin	Read	Ant	Cable	Thrup	Att	Thru	Remark																																																																																																																																																																																							
					Level	Factor	Loss	Factor																																																																																																																																																																																										
1	174.03	32.38	40.50	-10.12	47.58	15.30	1.47	51.10	---	---	Peak																																																																																																																																																																																							
2	206.00	40.50	40.00	-3.54	49.29	10.30	1.90	51.40	---	---	Peak																																																																																																																																																																																							
3	206.07	34.52	40.00	-5.48	45.93	12.00	2.47	51.00	---	---	Peak																																																																																																																																																																																							
4	424.79	38.98	40.00	-1.02	45.40	12.00	1.15	51.10	---	---	Peak																																																																																																																																																																																							
5	675.05	38.50	40.00	-1.50	40.49	9.50	2.35	51.00	---	---	Peak																																																																																																																																																																																							
6	724.52	36.92	40.00	-3.08	33.80	17.50	2.09	51.10	---	---	Peak																																																																																																																																																																																							
	Freq	Level	Limit	Margin	Read	Ant	Cable	Thrup	Att	Thru	Remark																																																																																																																																																																																							
					Level	Factor	Loss	Factor																																																																																																																																																																																										
1	50.00	33.89	40.00	-6.11	47.40	15.30	1.47	51.10	---	---	Peak																																																																																																																																																																																							
2	424.79	34.25	40.00	-5.75	42.00	12.00	2.15	51.10	---	---	Peak																																																																																																																																																																																							
3	475.29	35.98	40.00	-4.02	40.00	13.00	2.37	51.40	---	---	Peak																																																																																																																																																																																							
4	624.61	42.17	40.00	2.17	45.00	12.00	1.40	51.10	---	---	Peak																																																																																																																																																																																							
5	675.05	46.26	40.00	6.26	47.50	9.50	2.35	51.00	---	---	Peak																																																																																																																																																																																							
6	724.52	40.00	40.00	0.00	44.50	17.50	2.09	51.10	---	---	Peak																																																																																																																																																																																							



Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	85.40	2.136	0.468	1KHz
Bluetooth LE 2Mbps	57.74	1.081	0.925	1KHz

Bluetooth LE 1Mbps

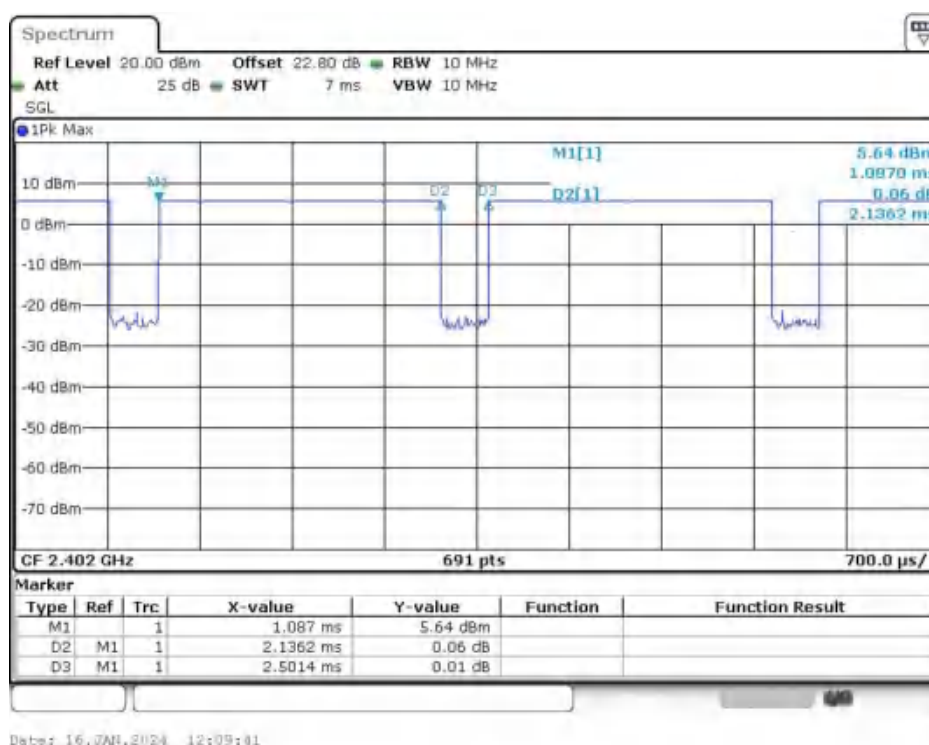



Bluetooth LE 2Mbps

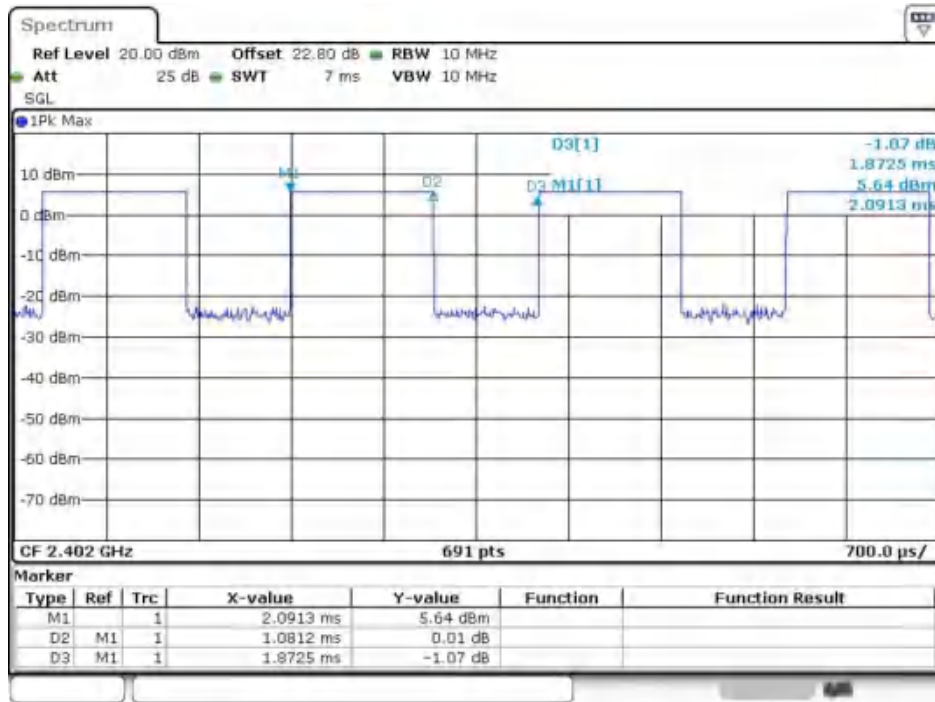

Date: 16.JAN.2024 12:11:19



Appendix E. Setup Photographs

<Conducted Emission>

Remote View




Rear View





<Radiated Emission>

LF

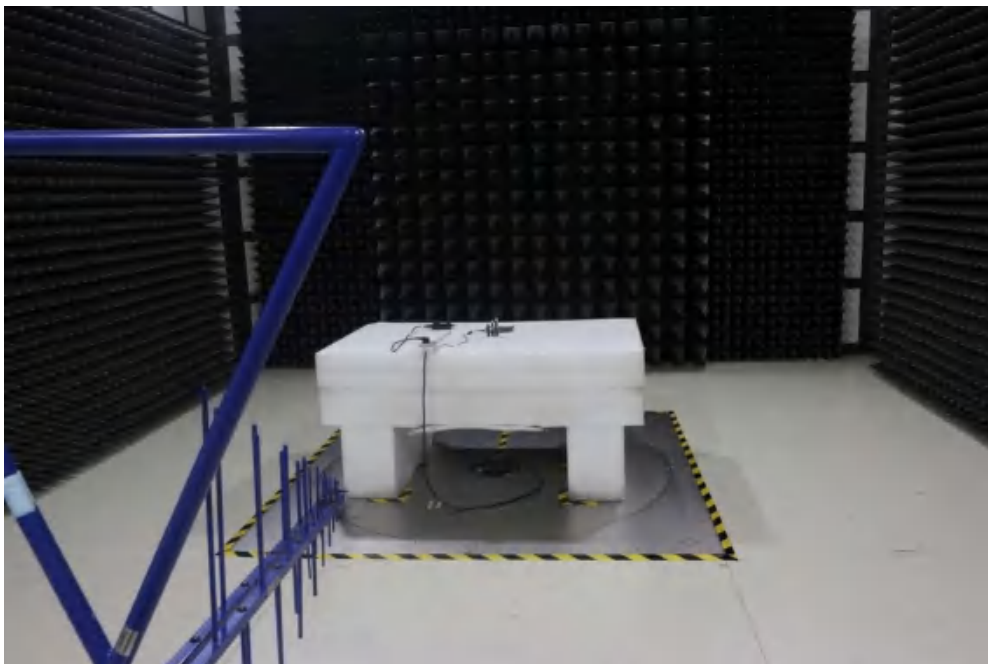

HF

