

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED



DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

产品规格书

PRODUCT SPECIFICATION

客 户:	Jicheng Wireless (Shenzhen) Co., Ltd.
CUSTOMER:	
客户料号:	01.03.010034
CUST P/N:	
金赞料号:	01.03.010034
K C P/N:	
产品名称:	MP-A2, 10uH, 50mm, with holes and slots, the length from the magnetic plate to the outlet: 55 ± 2
D E S E :	
产品型号:	19*19*45*46*0.08*105P*12TS*55mm
D E S E :	
日 期:	2022.4.8
D A T E :	
版 本:	A.0
VERSION :	

(客户承认受领印) ACCEPTANCE STAMP

拟制 PREPARED BY	跟单员 MERCHANDISER	工程审核 ENGINEER CHECKED BY	制程审核 PRODUCTION CHECKDEDED BY	批准 APPROVED BY
He Liang				

Address: No. 2, Xisha Road, Shijie Town, Dongguan City

Tel: 86-076986018114

Fax: 86-076986015646

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

规格内容
Specification


客户料号:
CUST P/N

01.03.010034

金赞型号:
KC DESE

19*19*45*46*0.08*105P*12TS*55mm

1. 产品外形尺寸 (OVERALL DIMENSIONS OF PRODUCTS):

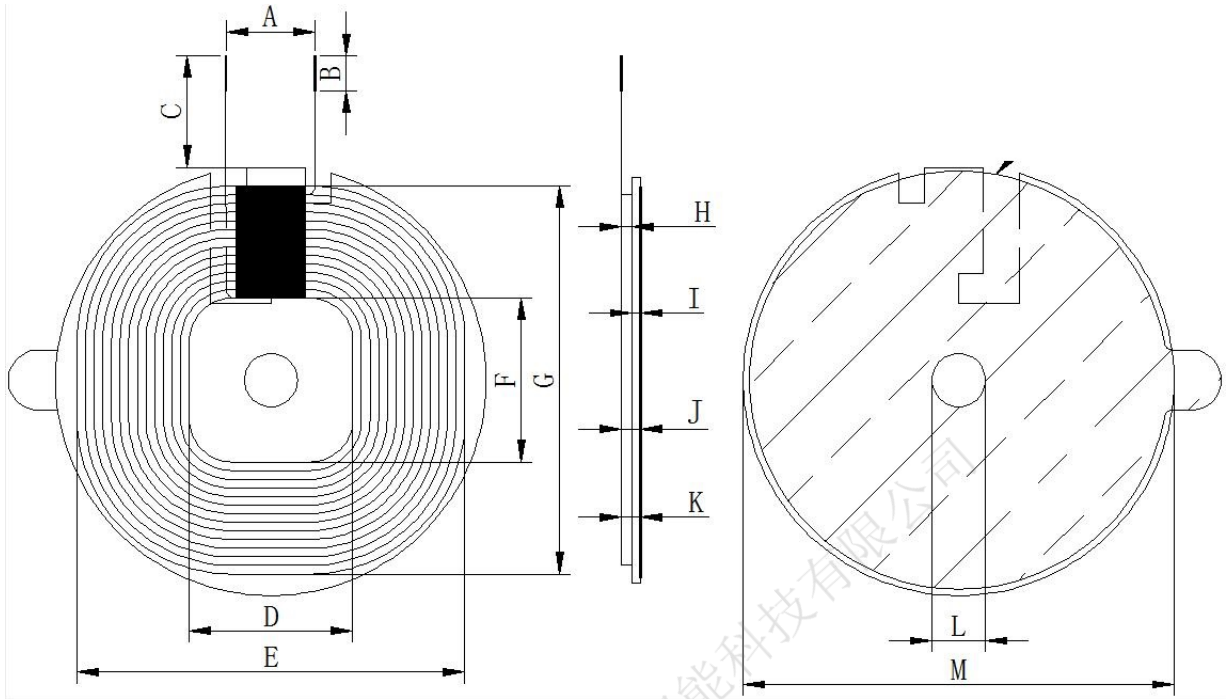

单位(Unit):毫米(mm)

A	B	C	D	E	F	G
10±2	3.5±1.5	55±2	19±1	45±1	19±1	46±1
H	I	J	K	L	M	
1.25MAX	1±0.15	2.8MAX	3.1MAX	5.3±0.5	50±1	

PS: 1. H does not include the inlet; 2. J does not include double-sided adhesive; 3. K includes double-sided adhesive; 4. L is the inner diameter of the magnetic plate; 5. M is the outer diameter of the magnetic plate.

圈数 Turns	线径 Wire Dia.	绕线方式 疏/密 Wdg. Type Spred/Close	绕线方向 Wdg. Direction	相交 是/否 Intersect Yes/Not	线圈 正/反贴 Coil Positive/Anti Paste
12TS	0.08*105P 丝包线 (小线径) (Silk Covered Wire)	密绕 (Close)	顺时针 (Clockwise)	是 (Yes)	反贴 (Anti-Paste)

拟制 PREPARED BY	工程审核 ENGINEER CHECKED BY	制程审核 PRODUCTION CHECKED BY
He liang		

东莞市金赞智能科技有限公司					
DONGGUAN KIMCHEN INDUSTRY INTL LIMITED					
规格内容 Specification			客户料号: CUST P/N	01.03.010034	
			金赞型号: KC DESE	19*19*45*46*0.08*105P*12TS*55mm	
2. 电气特性 (ELECTRICAL CHARACTERISTICS): 温度 TEMPERATURE:25±10℃,湿度 RELATIVE HUMIDITY:65±10%					
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND	S-F	Coil: 5.8 UH ± 10%	100kHz/V	LCZ METER 1062
2	IND	S-F	Coil with magnetic sheet: 10.0 UH ± 10%	100kHz/V	LCZ METER 1062
3	Q 值	S-F	Q value: 75MIN	100kHz/V	LCZ METER 1062
4	DCR	S-F	Resistance: 60mΩ (Maximum)	1kHz/V	LCZ METER 1062
3. 材料清单 (BILL OF MATERIAIS):					
序号 number	材料名称 Material name	品名描述 Description		物料代码 Material Code	
1	wire rod	0.08 * 10 ⁵ P stranded wire (small wire diameter)		SBX-2U-F-0011	
2	Hard magnetic sheet	G50*5.3*1.0H		GCP-T-0050	
3	gum	48.5*5.3*0.08H		SMJ-000018	
4	adhesive plaster	8MM			
5	tin bar	SnCu		LZD-Snun-011	
6	glue	JS-E103			
拟制 PREPARED BY		工程审核 ENGINEER CHECKED BY		制程审核 PRODUCTION CHECKED BY	
He liang					