

惠州启泰电子科技有限公司

Huizhou Qitai Electronic Technology Co., LTD



SPECIFICATIONS SHEET

规格图面

CUSTOMER :	Zhongli Guandar
客户	
DESCRIPTION :	
品名描述	ZLGD-A1-0577
CUSTOMER P/N :	
客户品名	
PART NUMBER :	
制造商料号	
DATE OF APPLICATION :	2026-1-15
提出日期	

CLASSIFICATION OF SPEC. PRESENTATION. (Tick the relevant box "√")

- ☐ New application
- 新规格
- ☒ New part is added to accepted specification
- 新产品规格追加记录
- ☐ Revision of accepted specification
- 既存规格图面变更

ACCEPTANCE STAMP (客户受领印)

APPROVAL BY	CHECK BY	PREPARE BY
承认	审查	制作
Zhao ziqi		Feng xin

ADDRESS : 3rd Floor, No. 181, Mingyue 2nd Road, Shiwan Town, Boluo County, Huizhou city

TELEPHONE : 0752-6668681

E-MAIL : 839689578@qq.com

惠州启泰电子科技有限公司					
Huizhou Qitai Electronic Technology Co., LTD					
History For Revised Specification 规格修订记录		CUSTOMER P/N : 客 户 品 名		Zhongli Guandar	
		PART NUMBER : 制 造 商 料 号		ZLGD-A1-0577	
Item 项次	DESCRIPTION (Content Or Reason For Changed) 变 更 内 容	Rev. 版本	Cust Rev. 客户版本	Date 日期	Revisor 修订者
1	Initial Release (初版发行)	A0		2026-1-15	Feng xin
APPROVED BY 承 认		CHECKED BY 审 查	PREPARED BY 制 作	DATE 日 期	PAGE 页 码
Zhao ziqi			Feng xin	2026-1-15	1 of 3


Specification

规格内容

CUSTOMER P/N : 客 户 品 名	Zhongli Guandar
PART NUMBER : 制 造 商 料 号	ZLGD-A1-0577

1. DIMENSIONS (外形尺寸) : (Unit: mm)

单位 (Unit) : 毫米 (mm)

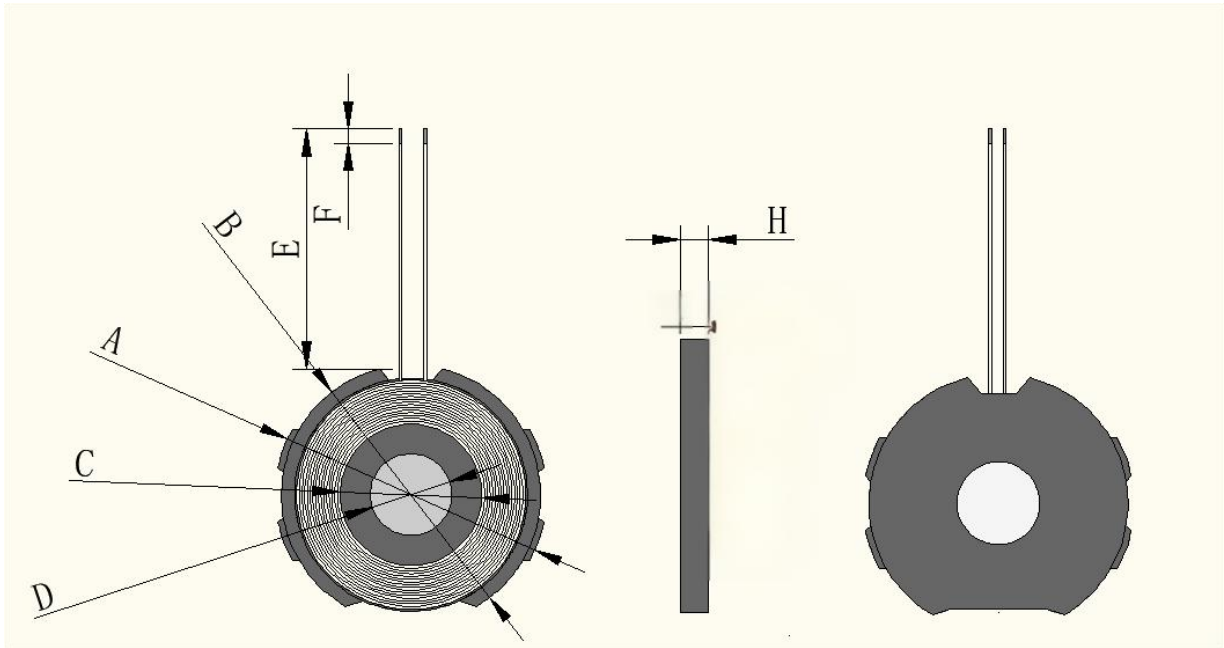

A	B	C	D	E	F	H	
24.5±0.5	23.5.5±0.5	14.2±0.2	10±0.2	10±1	2±1	2.6Ref	

1. This product does not have back adhesive.

2. Magnet specifications: spherical magnet, magnetic field (4200GS ± 150GS).

3. Comes with a 10*5mm circular plastic sleeve.

4. A slot is made at the S142 soft magnetic outlet.

5. S142 soft magnetic specifications: G24.5*14.2*2.6.

APPROVED BY 承 认	CHECKED BY 审 查	PREPARED BY 制 作	DATE 日期	PAGE 页 码
Zhao ziqi		Feng xin	2026-1-15	2 of 3

Huizhou Qitai Electronic Technology Co., LTD

Zhongli Guandar

ZLGD-A1-0577

圈数 Turns	线径 Wire Dia	绕线方式疏/密 Wdg. Type Spred/Close	绕线方向 Wdg.Direction	相交 是/否 Intersect Yes/Not
13TS	0.08*24P热风绞线 (Hot Air stranded Wire)	密绕 (Close)	Counter-clockwise rotation	是 (Yes)

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
Coil 1					
1.	IND	S-F	7.5uh-8.1uh	100kHz/V	UC2906A
2.	Q	S-F	20Min	100kHz/V	UC2906A
3.	DCR	S-F	145Max	100kHz/V	UC2906A

PAGE
页 码

3 of 3