



5" High Definition Pan & Tilt Monitor

LF925HD
LF925-2HD



Parent Guide

This guide contains important information. Please keep it for future reference.

Need help?

Visit leapfrog.com/support

Or go to www.leapfrog.com/zendesk.com



Scan the QR code to enter our Online Help page:



Visit our website leapfrog.com for more information about products, downloads, resources and more. Read our complete warranty policy online at leapfrog.com/warranty.

Key Features

Color and B&W

Automatic Night Vision

Thanks to the latest starlight sensor and noise suppression technology, you can check in on your baby 24/7 with the finest clarity. Night vision is no longer just black-and-white, you can choose to see your baby in color at night! For more details, see **Night Vision (B&W and Color)**.

Night Light

Need some additional lighting near your baby for those bedtime stories? The built-in night light on the baby monitor can help with that. You can control the night light directly on the Baby Unit, or remotely from the Parent Viewer. For more details, see **Parent Viewer Icons - Night Light**.

Technical Specifications

Frequency	2412-2462 MHz
Channels	1-11
LCD	5" Color LCD (IPS 1280x720 pixels)
Nominal effective range	Maximum power allowed by FCC and IC. Actual operating range may vary according to environmental conditions at the time of use.
Power requirements	Parent Viewer: 3.7V 5000mAh Lithium-ion battery Baby Unit power adapter: Output: 5V DC @ 1.5A Parent Viewer power adapter: Output: 5V DC @ 2A

Credits:
The Background Noise sound file was created by Caroline Ford, and is used under the Creative Commons license.
The Stream Noise sound file was created by Caroline Ford, and is used under the Creative Commons license.
The Crickets At Night sound file was created by Mike Koenig, and is used under the Creative Commons license.
The Heart Beat sound file was created by Zarabadeu, and is used under the Creative Commons license.



Important Safety Instructions

The applied nameplate is located at the bottom of the Baby Unit's base. When using your equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including the following:

- Follow all warnings and instructions marked on the product.
- Adult setup is required.
- CAUTION:** Do not install the Baby Unit at a height above 2 meters.
- This product is not a substitute for adult supervision of the infant. Supervising the infant is the parent's or caregiver's responsibility. This product could cease operating, and therefore you should not assume it will continue working properly for any given period of time. Further, this is not a medical device and should not be used as such. This product is intended to assist you in supervising your baby.
- Do not use this product near water. For example, do not use it next to a bath tub, wash bowl, kitchen sink, laundry tub or swimming pool, or in a wet basement or shower.
- CAUTION:** Use only the battery provided. There may be a risk of explosion if a wrong type of battery is used for the Parent Viewer. The battery cannot be subjected to high or low extreme temperature and low air pressure at high altitude during use, storage or transportation. Disposal of battery into fire or a hot oven, or mechanically crushing or cutting or the battery can result in an explosion. Leaving the battery in an extremely high temperature surrounding environment can result in an explosion or the leakage of flammable liquid or gas. Battery subjected to extremely low air pressure may result in an explosion or the leakage of flammable liquid or gas. Dispose of used battery according to the information in **The RRBC seal**.
- Use only the adapters included with this product. Incorrect adapter polarity or voltage can seriously damage the product.



Power adapter information:

Baby Unit output: Output: 5V DC 1.5A; V-Tech Telecommunications Ltd.; Model: VT07EUS05150

Parent Viewer output: Output: 5V DC 2A; V-Tech Telecommunications Ltd.; Model: VT07EUS05200



Built-in rechargeable battery information:


Zhuhai Great Power Energy Co., Ltd.; Lithium battery, 3.7V 5000mAh; Model: GSP806090-5Ah-3.7V-151P

Connect, charge and power on the baby monitor

1. Connect the Baby Monitor

Notes:

- The rechargeable battery in the Parent Viewer is built-in.
- Use only the power adapters supplied with this product.
- Make sure the Parent Viewer and the Baby Unit are not connected to switch controlled electric outlets.
- Connect the power adapters in a vertical or floor mount position only. The adapters' prongs are not designed to hold the weight of the Parent Viewer and the Baby Unit, so do not connect them to any ceiling, under-the-table, or cabinet outlets. Otherwise, the adapters may not properly connect to the outlets.
- Make sure the Parent Viewer, the Baby Unit and the power adapter cords are out of reach of children.
- To maintain compliance with the FCC's RF exposure guidelines, place the Baby Unit at least 20cm from nearby persons.

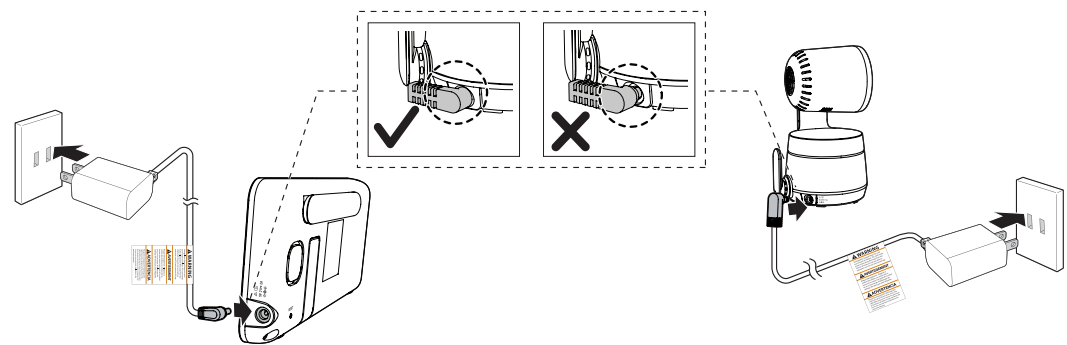

- The power adapters are intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling, under-the-table or cabinet outlet.
- For pluggable equipment, the socket-outlet shall be installed near the equipment and shall be easily accessible.
- Unplug this product from the wall outlet before cleaning.
- Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning. Do not cut off the power adapters to replace them with other plugs, as this causes a hazardous situation.
- Do not allow anything to rest on the power cords. Do not install this product where the cords may be walked on or crimped.
- This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supply in your home, consult your dealer or local power company.
- Do not overload wall outlets or use an extension cord.
- Do not place this product on an unstable table, shelf, stand or other unstable surfaces.
- This product should not be placed in any area where proper ventilation is not provided. Slots and openings in the back or bottom of this product are provided for ventilation. To protect them from overheating, these openings must not be blocked by placing the product on a soft surface such as a bed, sofa or rug. This product should never be placed near or over a radiator or heat register.
- Never push objects of any kind into this product through the slots because they may touch dangerous voltage points or create a short circuit. Never spill liquid of any kind on the product.
- To reduce the risk of electric shock, do not disassemble this product, but take it to an authorized service facility. Opening or removing parts of the product other than specified access doors may expose you to dangerous voltages or other risks. Incorrect reassembly can cause electric shock when the product is subsequently used.
- You should test the sound reception every time you turn on the units or move one of the components.
- Periodically examine all components for damage.
- There is a very low risk of privacy loss when using certain electronic devices, such as baby monitors, cordless telephones, etc. To protect your privacy, make sure the product has never been used before purchase, reset the baby monitor periodically by powering off and then powering on the units, and power off the baby monitor if you will not use it for some time.
- Children should be supervised to ensure that they do not play with the product.
- The product is not intended for use by persons (including children) with reduced physical, sensory or mental

2. Charge the Parent Viewer battery before use

When you connect and turn on the Parent Viewer, the battery charges automatically.

Notes:

- Before using the baby monitor for the first time, charge the Parent Viewer battery for 12 hours. When the Parent Viewer battery is fully charged, the battery icon becomes solid .
- The standby time varies depending on your actual usage time and the age of the battery.

The battery icon on the screen indicates the battery status (see the following table).

Battery Indicators	Battery Status	Action
The screen displays . The light flashes.	The battery is low in power and may only be used for a short time.	Charge without interruption (about 30 minutes).
The battery icon becomes solid .	The battery is fully charged.	To keep the battery charged, connect it to AC power when not in use.

capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

SAVE THESE INSTRUCTIONS

Cautions

- Use and store the product at a temperature between 32°F and 104°F.
- Do not expose the product to extreme cold, heat or direct sunlight. Do not put the product close to a heating source. Batteries should not be exposed to excessive heat such as bright sunshine or fire.
- Warning—Strangulation Hazard—Children have STRANGLED in cords. Keep this cord out of the reach of children (more than 3 ft (0.9m) away). Do not remove this tag.
- Never place the Baby Unit(s) inside the baby's crib or playpen. Never cover the Baby Unit(s) or Parent Viewer with anything such as a towel or a blanket.
- Other electronic products may cause interference with your baby monitor. Try installing your baby monitor as far away from these electronic devices as possible: wireless routers, radios, cellular telephones, intercoms, room monitors, televisions, personal computers, kitchen appliances and cordless telephones.

Precautions for users of implanted cardiac pacemakers

Cardiac pacemakers (applies only to digital cordless devices):

Wireless Technology Research, LLC (WTR), an independent research entity, led a multidisciplinary evaluation of the interference between portable wireless devices and implanted cardiac pacemakers. Supported by the U.S. Food and Drug Administration, WTR recommends to physicians that:

Pacemaker patients

- Should keep wireless devices at least six inches from the pacemaker.
- Should NOT place wireless devices directly over the pacemaker, such as in a breast pocket, when it is turned ON. WTR's evaluation did not identify any risk to bystanders with pacemakers from other persons using wireless devices.

Electromagnetic fields (EMF)

This LeapFrog product complies with all standards regarding electromagnetic fields (EMF). If handled properly and according to the instructions in this user's manual, the product is safe to be used based on scientific evidence available today.

3. Power On or Off the Baby Monitor


- Slide the On/Off switch to **ON** to power on your Baby Unit.
- After the Parent Viewer is fully charged, press and hold until the welcome screen appears.



3. Status Check

Once your Baby Unit and Parent Viewer are powered on and connected, your Parent Viewer displays video from the Baby Unit, and the LINK LED light turns on. The Baby Unit's POWER LED light also turns on.

What's Included

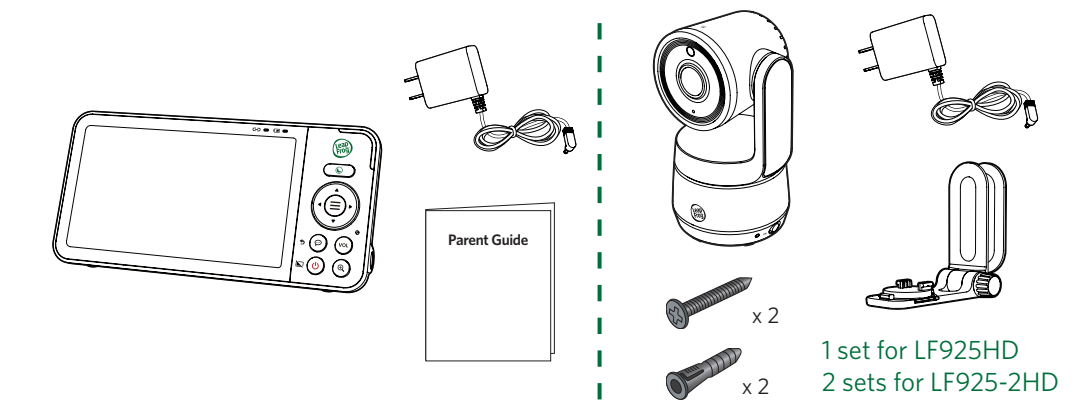

Requirements

For mobile access:

LeapFrog Baby Monitor mobile app

Network	Wi-Fi
Wi-Fi router	2.4GHz 802.11 b/g/n
Internet connection	1.5 Mbps @ 720p or 2.5 Mbps @1080p upload bandwidth per Baby Unit

4. Positioning the Baby Monitor

-
-
-
-

Note:

- To avoid interference from other electronic devices, place your baby monitor at least 3 feet (1 meter) away from devices such as wireless routers, microwaves, cell phones and computers.


Caution:

- The default volume of your Parent Viewer is level 3, and the maximum volume is level 5. If you experience a high-pitched screaming noise from your baby monitor while positioning:
 - Make sure your Baby Unit and Parent Viewer are more than 3 feet (1 meter) apart, OR
 - Lower the volume of your Parent Viewer.

How the system works?

Direct mode

The Parent Viewer and the Baby Unit of your video monitor connect to each other in **Direct mode** by default, which allows you to stream live video right out of the box. **Direct mode** connection lets you stream live video from the Parent Viewer only.

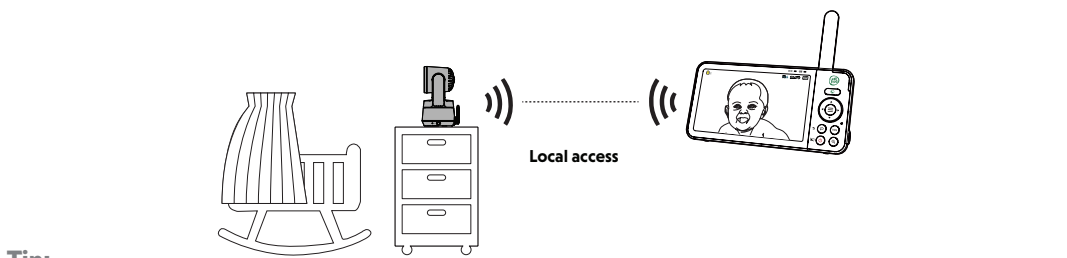

Tip:

- You may experience reduced signal strength if your Parent Viewer and Baby Unit are far apart, or there are obstructing factors, such as internal walls, between them. Move the Parent Viewer closer to the Baby Unit to improve the signal strength. You can also set up **Router mode** to connect the units via your home Wi-Fi network to improve the connection between your Parent Viewer and Baby Unit.

Wi-Fi Router mode

You can continue using your video monitor with **Direct mode** connection, or you can set up your monitor in **Router mode** connection.

Router mode uses your home Wi-Fi network to connect your video monitor. It supports live video streaming through the Parent Viewer and smartphone app.

We recommend that you set up your monitor in **Router mode** to enjoy live video streaming via your Parent Viewer with an enhanced connection.

If you want to stream live video remotely with your mobile device, download and install the LeapFrog baby monitor mobile app. With the app, your Wi-Fi router (not included) provides Internet connectivity to your baby monitor system. It serves as a communicating channel between your Baby Unit and mobile device, allowing you to monitor and/or control your Baby Unit wherever you are. For more details, see **Download app for mobile access** section in this Parent Guide.

Notes:

- Your Parent Viewer detects the connection signal strength. If you have connected your video monitor with your home Wi-Fi network, your Parent Viewer automatically switches to direct or router mode - whichever has a stronger signal strength.
- When both Parent Viewer and app are viewing the camera simultaneously, the video quality will be optimised to deliver the best possible viewing result.

Parent Viewer Icons

Tip: Do your icons look a little different? Your baby monitor probably got a recent software update. Go to our online manual for an overview of the latest icons (See **Online Help**).

Main Menu Icons	
Monitoring mode (For LF925-2HD only)	
	 1 Baby Unit 1 in Single mode
	 2 Baby Unit 2 in Single mode
	 1 2 Split mode Viewer displays video feeds from all paired Baby Units at the same time in split view.
	 1 Patrol mode Viewer displays a single Baby Unit's video feed that transitions to a different Baby Unit every 10 seconds.
Night light	
	  Turn On/Off night light.
	 Select a night light Color. Choose from 7 preset colors and 3 light patterns.
	 - Select Auto Brightness mode - OR - - Adjust the fixed night light brightness level.
	 Set a Timer to turn the night light off after 15, 30, or 60 minutes.

Lullaby		Stop melody playing.
		Play all melodies.
		Play and view all Songs. Choose from 5 melodies and 5 soothing sounds.
		Set a Timer to stop playing melodies after 15, 30, or 60 minutes, or let them play non-stop.

Detection		Sound - Select sound Sensitivity level. - Turn on/off Sound Detection Alert. Parent Viewer beeps when the Baby Unit detects sounds above the chosen sound sensitivity level. - Turn on/off Auto Wake Up function. Once the Baby Unit detects sounds that are louder than the chosen sound sensitivity level, the Parent Viewer screen and speaker turn on automatically.
		Motion - Turn on/off Motion Alert. Parent Viewer beeps when the Baby Unit detects movements larger than the chosen motion sensitivity level. - Select motion Sensitivity level.
Temperature		- Turn on/off Temperature Alert. Parent Viewer beeps if the room temperature detected falls outside the set temperature range. - Select the Minimum temperature of the temperature alert range. - Select Maximum temperature of the temperature alert range. - Select temperature Format. Change the temperature display format to Fahrenheit (°F) or Celsius (°C).

Parent Viewer settings		- Adjust Parent Viewer screen Brightness. - Adjust Low Battery Alert Tone Volume. - Adjust No Link Alert Tone Volume. - Turn on/off Dim Mode. Parent Viewer dims to conserve energy after 5 minutes of inactivity. - Change the Language on your Parent Viewer.
------------------------	--	--

Baby Unit settings		- Activate/Deactivate Parking Mode. - Turn on/off Status LED indicator. When on, the POWER LED light on the Baby Unit turns on/off or flashes to indicate the camera's conditions. - Adjust the Baby Unit's speaker Volume.
General settings		Configure Wi-Fi. Change your Wi-Fi network, select a Connection Mode, and check the Baby Unit and Parent Viewer's Connection Status. Connect Mobile Phone. Add Baby Unit. Remove Baby Unit. Reset Settings to default. Software Update. Check if your Parent Viewer software is up to date, or install a new update when available.
Status Bar Icons		Current view status - The Baby Unit number that is being viewed when in: - Single Baby Unit mode. - Patrol mode (* For LF925-2HD or pairing with LF915-0HD) - Split mode (* For LF925-2HD or pairing with LF915-0HD) Split mode (* For LF925-2HD or pairing with LF915-0HD) Patrol mode (* For LF925-2HD or pairing with LF915-0HD) Black and white night vision is activated. Color night vision is activated. Motion detection and alert is turned on. Sound detection and alert is turned on. Melodies or soothing sounds are playing. Night light is turned on and the automatic brightness setting is turned off.

Parent Viewer Icons (continued)

Status Bar Icons (continued)		Alert Icons
	Night light is turned on and the automatic brightness setting is turned on.	Displays when the Parent Viewer's battery is low and needs charging.
	Parent Viewer speaker is muted.	Displays when motion is detected by a Baby Unit.
	Temperature alert is turned on.	Displays when sound is detected by a Baby Unit.
	Humidity is lower than 30%.	Displays when the temperature detected by the Baby Unit exceeds the set maximum.
	Humidity is within 30-60%.	Displays when the temperature detected by the Baby Unit is lower than the set minimum.
	Humidity is higher than 60%.	
	Temperature is lower than 68°F.	
	Temperature is between 68-75°F.	
	Temperature is higher than 75°F.	
	Battery level indicator	

Night Vision (B&W and Color)

When the Baby Unit being viewed detects low light levels, the infrared LEDs switch on automatically with the activation of the B&W Night Vision mode. Baby Unit has infrared LEDs that allow you to see your baby clearly at night or in a dark room. When Black and White Night Vision mode is activated, appears on the screen. When Color Night Vision mode is activated, appears on the screen.

- Notes:**
- It is normal to see a short white glare on your Parent Viewer screen as the Baby Unit is adapting to the dark environment.
 - If you adjust the night vision mode while night vision is not activated, the new settings will be saved and applied the next time it activates.

- Tip:**
- The video quality may vary depending on the surrounding environment and interfering factors like lightings, objects, colors and backgrounds. Adjust the Baby Unit's angle or place the Baby Unit at a higher elevation to prevent glare and blurry displays.

Mount the Baby Unit on a dry wall (optional)


- Notes:**
- Check for reception strength and the Baby Unit's viewing angle before drilling the holes.
 - The types of screws and anchors you need depend on the composition of the wall. You may need to purchase the screws and anchors separately to mount your Baby Units.

- Place the wall mount bracket on a wall and then use a pencil to mark the top and the bottom holes as shown. Remove the wall mount bracket and drill two holes in the wall (7/32 inch drill bit).
- If you drill the holes into a stud, go to step 3.
 - If you drill the holes into an object other than a stud, insert the wall anchors into the holes. Tap gently on the ends with a hammer until the wall anchors are flush with the wall.
- Align the wall mount bracket and screws with the holes in the wall as shown. Tighten the screw in the middle hole first, so that the wall mount bracket position is fixed. You can tighten the other screw in the top hole.
- Place the Baby Unit on the wall mount bracket. Tighten the screw into the threaded socket at the bottom to secure the Baby Unit.
- You can maximize your Baby Unit's viewing angles by tilting the wall mount bracket.
 - Hold the Baby Unit, and then rotate the knob in an anti-clockwise direction. This will loosen the joint of the wall mount bracket.
 - Tilt your Baby Unit up or down to adjust to your preferred angle. Then, rotate the knob in a clockwise direction to tighten the joint and secure the angle.

Basic Operation - Parent Viewer


Adjust Parent Viewer's speaker volume

- Press **VOL** to open the volume adjustment bar.
- Press to increase the speaker volume and to decrease the speaker volume.

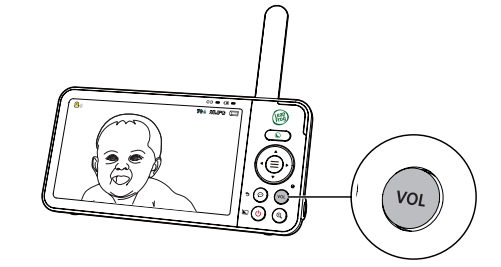


Talk to your baby via the Baby Unit

- Press and hold the key.
- When the icon displays on the screen, speak to your Parent Viewer. Your voice is transmitted to the Baby Unit.
- When finished talking, release the key and hear your baby again.

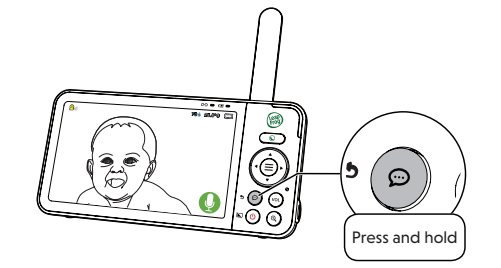


Zoom
Press to zoom in or out. The zoom sequence is , , , then .

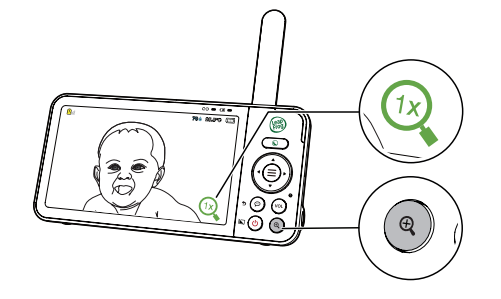

Turn on/off the Parent Viewer screen

You can turn on or off the Parent Viewer screen without powering off the Parent Viewer. You will still hear sounds from the Baby Unit.


- Press on the Parent Viewer to turn the screen off.
- Press any key on the Parent Viewer to turn the screen on again.

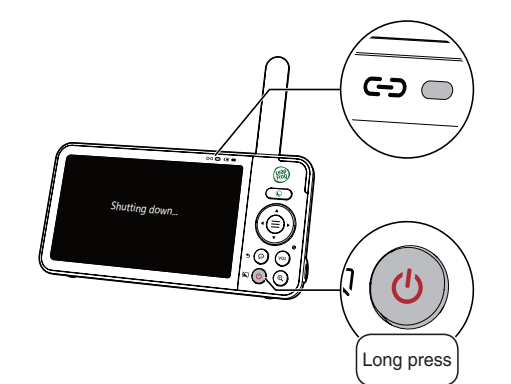

Use the menu

Press to enter the menu, choose a menu item, or save a setting. You can use the Parent Viewer for advanced settings or operations, such as to play or stop the Baby Unit's lullaby, or to adjust the Baby Unit sound sensitivity.

- While in the menu:
- Press , , , or to scroll among the menu options.
 - Press to select an item, or to save a setting.
 - Press to return to the live video.
 - Press to go to the **Help & Info** page.

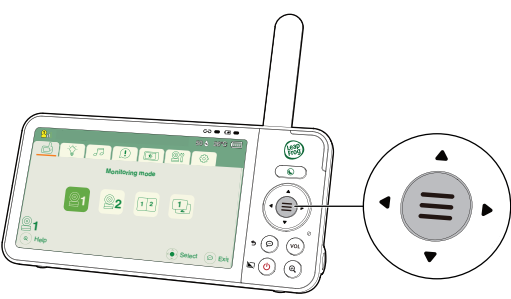

Night Light

Want a softer hue from the Baby Unit's night light to relax your little one? You can control the brightness of its glow remotely from your Parent Viewer, or directly on the Baby Unit.

Adjust the night light on the Parent Viewer

- Press the **Night Mode quick set key** to view the Night Mode menu.
 - Press to brighten the night light (or turn on the night light when it is switched off). Press to dim the night light (or turn off the night light when it is at the lowest brightness level).
- OR -

- Press to enter the main menu.
- Press again to select **Night Light**.
- Press and to select , press .
- Press and to choose the desired brightness level, then press to confirm your selection.

Note:

- If Auto Brightness has been pre-selected, any adjustments in night light brightness (either on the Baby Unit or the Parent Viewer) will automatically turn Auto Brightness mode off and switch to the fixed brightness level.

Test the location for the Baby Unit

If you plan to install your Baby Unit to a designated location, and will use your home Wi-Fi network to connect your video monitor, you need to test which of your selected monitoring areas within the house have good Wi-Fi signal strength.

After you have powered on your Parent Viewer, you can check the Parent Viewer's Wi-Fi signal strength by going to:

- > **Configure Wifi** > **Connection Status**.

Adjust the distance between your Baby Unit and the Wi-Fi router if needed. Once you have identified a suitable location with good connection, you can install your Baby Unit.

- Tip:**
- Depending on surroundings and obstructing factors that affect signal strength, such as distance and internal walls, you may experience reduced Wi-Fi signals. To improve the Wi-Fi signal strength, adjust the distance or direction of your Parent Viewer. Check with your Parent Viewer again.

Disclaimer and Limitation of Liability

LeapFrog and its suppliers assume no responsibility for any damage or loss resulting from the use of this handbook. LeapFrog and its suppliers assume no responsibility for any loss or claims by third parties that may arise through the use of this software. LeapFrog and its suppliers assume no responsibility for any damage or loss caused by deletion of data as a result of malfunction, dead battery, or repairs. Be sure to make backup copies of important data on other media to protect against data loss.

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION. **CAN ICES-3(B)/NMB-3(B)**

CAUTION: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Warranty: Please visit our website at leapfrog.com for full details of the warranty provided in your country.

The RBRC seal

The RBRC seal on the Li-ion battery indicates that VTech Communications, Inc. is voluntarily participating in an industry program to collect and recycle these batteries at the end of their useful lives, when taken out of service within the United States and Canada. The program provides a convenient alternative to placing used Li-ion batteries into the trash or municipal waste, which may be illegal in your area. VTech's participation makes it easy for you to drop off the spent battery at local retailers participating in the program or at authorized VTech product service centers. Please call 1 (800) 8 BATTERY for information on Li-ion battery recycling and disposal bans/restrictions in your area. VTech's involvement in this program is part of its commitment to protecting our environment and conserving natural resources. The RBRC Seal and 1 (800) 8 BATTERY® are registered trademarks of Cal2recycle, Inc.

FCC and IC regulations

- FCC Part 15
- This equipment has been tested and found to comply with the requirements for a Class B digital device under Part 15 of the Federal Communications Commission (FCC) rules. These requirements are intended to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.
- RF radiation exposure statement
- The product complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. The Baby Unit should be installed and operated with a minimum distance of 8 in (20 cm) between the Baby Unit and all persons' body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines. This equipment complies also with Industry Canada RSS-102 with respect to Canada's Health Code 6 for Exposure of Humans to RF Fields.
- Do not spill liquid of any kind on this product or immerse the product in water as it may render it inoperative.
- Keep food and beverages away from this product.
- Never try to dismantle the unit.
- Avoid dropping the product or treating it roughly.

Parking Mode

Designed to give you an additional peace of mind, turn on Parking Mode for a moment of privacy.

When turned on, the Baby Unit will fold into the parking position and disable its camera's audio transmission and video monitoring.

In Parking Mode, motion recording, motion detection, and sound detection will also be temporarily unavailable.

Activate Parking Mode:

- Press to enter the main menu.
- Go to **Baby Unit Settings**.
- Press to **Parking Mode**, press to toggle the switch on.

For LF925-2HD and Pairing with LF915-OHD Only

Monitoring mode

- Single CAM mode
- Select Baby Unit 1 or Baby Unit 2 to view the video feed from the selected Baby Unit.

Patrol mode

Select Patrol mode as your monitoring mode to alternately view the video feed from Baby Units and every 10 seconds.

Split mode

Select Split mode as your monitoring mode to view the video feeds from both Baby Units at once.

- Note:**
- While in Split mode, you can press or to highlight the view of the Baby Unit or Baby Unit 2 , and hear the sounds transmitted from the highlighted Baby Unit.

For cETL compliance only

- Mesures de sécurité importantes
- L'appareil en le plaçant sur un lit, divan, tapis ou toute autre surface similaire. Ne mettez pas le positionner pas à proximité ni au-dessus d'une source de chaleur ou d'un calorifère. De plus, ne placez pas l'appareil dans un endroit avant de vous assurer qu'il y ait une bonne circulation d'air.
- Ne renversez jamais de liquide dans ce produit.
17. N'enfoncez jamais d'objets à travers les ouvertures de cet appareil, car ils pourraient entrer en contact avec des points de tension dangereux ou causer des courts-circuits qui peuvent dégrader en incendies ou en risques d'électrocution. Ne renversez jamais de liquide dans ce produit.
18. Afin de réduire les risques d'électrocution, ne démontez pas cet appareil, mais apportez-le dans un centre de service autorisé. L'ouverture du boîtier ou le retrait de toutes pièces qui contiennent cet appareil, à l'exception de l'accès autorisé à certaines portes ou ouvertures, risque de vous exposer à des points de tension dangereux ou d'autres dangers. Un remaniement incorrect peut par la suite présenter des risques d'électrocution.
19. Vous devriez tester la réception chaque fois que vous mettez l'appareil en fonction.
20. Examinez les composantes afin de vérifier si celles-ci ne sont pas endommagées.
21. Il existe un très faible risque de perte de confidentialité avec certains appareils électroniques (autres écoute-bébés, téléphones sans fil, etc.). Pour l'éviter, s'assurer que le produit n'a jamais été utilisé avant l'achat, réinitialiser l'unité de façon périodique, éteindre l'écoute-bébé quand il n'est pas en cours d'utilisation.
22. Les enfants devraient être supervisés afin de vous assurer qu'ils ne jouent pas avec l'appareil.
23. Le produit n'est pas conçu pour être utilisé par des personnes (incluant des enfants) aux capacités physiques, sensorielles ou mentales réduites ou qui manquent d'expérience et de connaissances, à moins qu'on leur ait donné suffisamment de supervision ou d'instructions relativement à l'utilisation de l'appareil par une personne responsable de leur sécurité.
- CONSERVEZ CES INSTRUCTIONS
- Mises en garde
1. Utilisez et entreposez le produit à une température entre 0° C (32° F) et 40° C (104° F).
2. N'exposez pas cet appareil à des froids ou des chaleurs extrêmes, ainsi qu'à la lumière directe du soleil. Ne l'installez pas près d'une source de chauffage.
3. Le bloc-piles ne doit pas être exposé à la chaleur excessive telle que la lumière du soleil ou au feu.
4. Informations sur les adaptateurs électriques : Adaptateur de l'unité du parent : Sortie : 5V DC 2A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
5. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
6. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
7. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
8. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
9. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
10. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
11. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
12. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
13. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
14. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
15. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
16. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
17. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
18. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
19. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
20. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
21. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
22. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
23. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
24. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
25. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
26. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
27. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
28. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
29. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
30. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
31. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
32. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
33. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
34. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
35. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
36. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
37. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
38. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
39. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
40. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
41. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
42. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
43. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
44. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
45. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
46. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
47. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
48. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
49. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
50. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
51. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
52. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
53. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
54. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
55. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
56. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
57. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
58. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
59. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
60. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
61. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
62. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
63. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
64. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
65. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
66. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
67. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
68. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
69. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
70. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
71. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
72. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
73. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
74. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
75. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
76. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
77. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
78. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
79. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
80. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
81. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
82. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
83. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
84. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
85. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
86. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
87. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
88. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC 1.5A Vtech Telecommunications Ltd. Modèle : VT07EUS05150
89. Informations sur les piles rechargeables : Zhihui Great Power, Inc. 3.7V 5000mAh; Adaptateur de l'unité du bébé : Sortie : 5V DC