

SPECIFICATION

Shenzhen Guandetong Electronic Limited

Shenzhen Guandetong Electronic Limited

2.4G steel antenna patch

Product Specification

connection		frequency range	2400-2500MHZ
Frequency band wire name		edition	A1
Customer part number		Guandetong part number	
Guandetong No			
R F design	Amasa	RF Manager	Owen
Structural design	Car Huang	Structure Manager	
Technical Director	Addi	Date	2025-06-20

Customer confirmation:

Does the assembly meet your company's requirements: ☐OK ☐NG

catalogue

Cover1

catalogue..... 2

一、 Product pictures 3

二、 Product parameters 3

三、 S11(VSWR、 Return、 Smith)4

四、 Structural drawings.....4

五、 Antenna gain and efficiency.....5

六、 2D&3D Figure.....5-6

七、 Environmental performance test.....6

Address: 3/F, Tower D, Huanguan Nanmaoyuan Industrial Park, Guanhu Street, Longhua District, Shenzhen. Tel: 0755-88298396 fax: 0755-89733896

<http://www.szgdtrf.com>

Confidentiality requirements of Shenzhen Guande tong Electronic Co. , Ltd. . The company has proprietary technology to provide the information, which should be strictly confidential, it shall not be disclosed to any person or company without the prior written consent of Shenzhen Guande tong Electronic Co. , Ltd. .

一、 Product pictures



二、 Product parameters


Product testing parameters			
Product name	2.4G steel antenna patch	(Model Type)	
(Electrical Specifications)			
(Frequency Range)	2400-2500MHZ	(Polarization)	perpendicular
(Impedance)	50Ω	Radiation	QXCOMM
(VSWR)	≤2.0	(Power)	50W
(Gain)	2.38dBi	(Bandwidth)	100M
(Mechanical Specifications)			
(Copper tube dimensions)	9.30*3.30*4.95 ± 0.2mm	(Chassis Color)	Silver
(Connector)	Welding (patch)	(Chassis Material)	Stainless steel
(Working Temperature)	-40℃~+85℃	(Limit Temperature)	-40℃~+85℃

Address: 3/F, Tower D, Huanguan Nanmaoyuan Industrial Park, Guanhu Street, Longhua District, Shenzhen. Tel: 0755-88298396 fax: 0755-89733896


<http://www.szgdtrf.com>

Confidentiality requirements of Shenzhen Guande tong Electronic Co. , Ltd. . The company has proprietary technology to provide the information, which should be strictly confidential, it shall not be disclosed to any person or company without the prior written consent of Shenzhen Guande tong Electronic Co. , Ltd. .

三、S11(VSWR、Return、Smith)

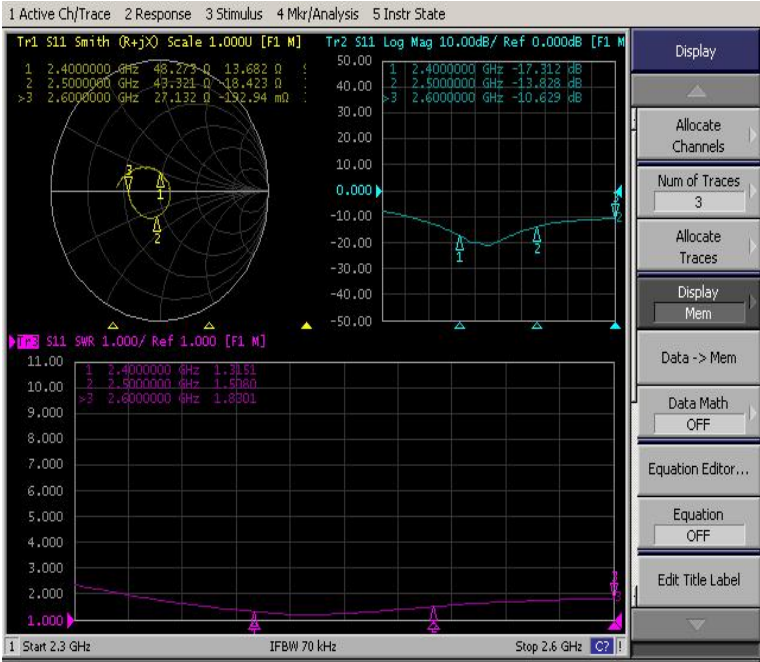

四、Structural drawings

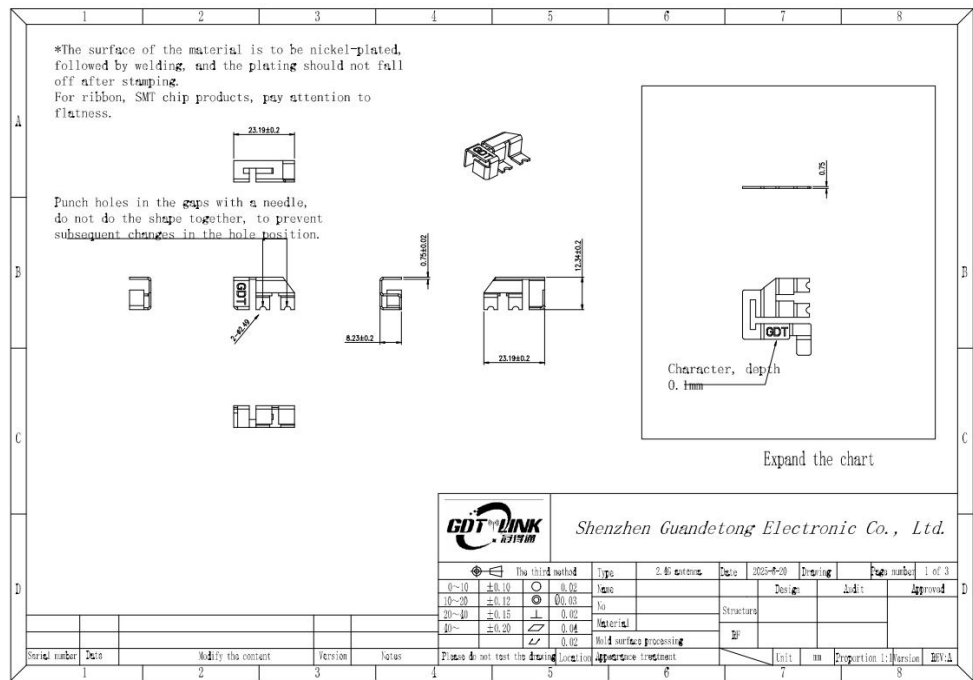

Address: 3/F, Tower D, Huanguan Nanmaoyuan Industrial Park, Guanhu Street, Longhua District, Shenzhen. Tel: 0755-88298396 fax: 0755-89733896


<http://www.szgdt.com>

Confidentiality requirements of Shenzhen Guande tong Electronic Co. , Ltd. . The company has proprietary technology to provide the information, which should be strictly confidential, it shall not be disclosed to any person or company without the prior written consent of Shenzhen Guande tong Electronic Co. , Ltd. .

五、Antenna gain and efficiency

Test Point ID	Freq. (MHz)	TRP (dBm)	Gain (dBi)	Directivity (dBi)	Efficiency (%)	Efficiency (dB)	Max (dBm)	Theta of Max	Phi of Max	Min (dBm)	Theta of Min	Phi of Min	AVG (dBm)	Max/Min (dB)	Max/AVG (dB)	Min/AVG (dB)
1	2400.0	2400.00	1.05	5.20	38.5%	-4.15	1.05	90	60	-95.99	0	0	-4.31	97.04	5.35	-91.68
2	2410.0	2410.00	1.26	5.39	38.6%	-4.14	1.26	90	60	-95.99	0	0	-4.11	97.25	5.36	-91.88
3	2420.0	2420.00	1.60	5.58	40.0%	-3.98	1.60	90	60	-95.99	0	0	-3.73	97.59	5.32	-92.26
4	2430.0	2430.00	2.12	5.66	44.2%	-3.54	2.12	90	60	-95.99	0	0	-3.17	98.11	5.29	-92.82
5	2440.0	2440.00	1.86	5.59	42.3%	-3.73	1.86	90	60	-95.99	0	0	-3.46	97.85	5.32	-92.53
6	2450.0	2450.00	2.03	5.68	43.1%	-3.66	2.03	105	60	-95.99	0	0	-3.42	98.02	5.45	-92.57
7	2460.0	2460.00	2.33	5.84	44.6%	-3.51	2.33	105	60	-95.99	0	0	-3.32	98.32	5.65	-92.67
8	2470.0	2470.00	2.38	5.74	46.1%	-3.36	2.38	105	60	-95.99	0	0	-3.41	98.37	5.79	-92.58
9	2480.0	2480.00	2.08	5.36	46.9%	-3.29	2.08	105	60	-95.99	0	0	-3.74	98.07	5.81	-92.25
10	2490.0	2490.00	1.77	5.23	45.1%	-3.46	1.77	105	60	-95.99	0	0	-4.01	97.76	5.78	-91.98
11	2500.0	2500.00	1.75	5.14	45.8%	-3.39	1.75	105	60	-95.99	0	0	-4.00	97.74	5.75	-91.99


六、2D&3D Figure

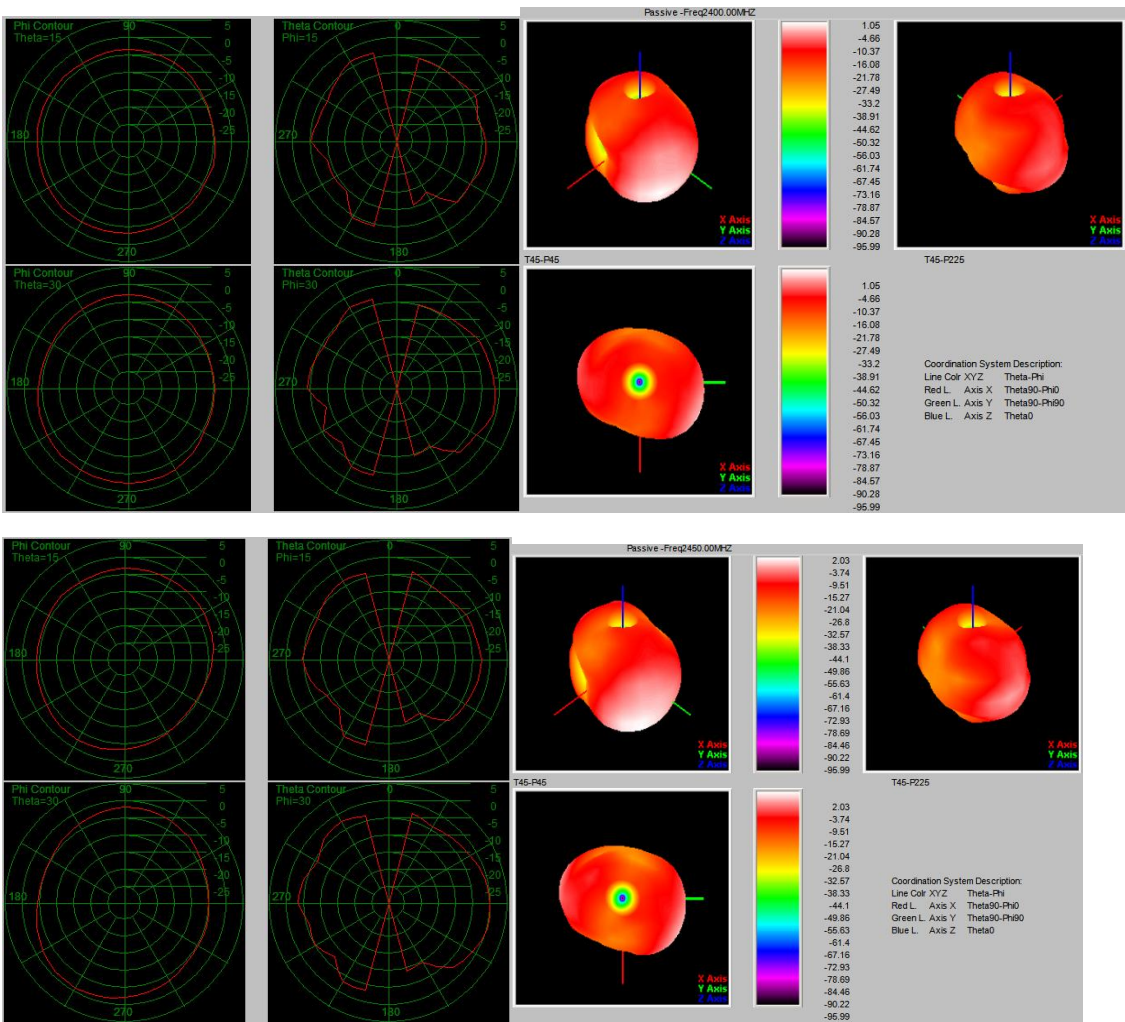

Address: 3/F, Tower D, Huanguan Nanmaoyuan Industrial Park, Guanhu Street, Longhua District, Shenzhen. Tel: 0755-88298396 fax: 0755-89733896

<http://www.szgdtrf.com>

Confidentiality requirements of Shenzhen Guande tong Electronic Co. , Ltd. . The company has proprietary technology to provide the information, which should be strictly confidential, it shall not be disclosed to any person or company without the prior written consent of Shenzhen Guande tong Electronic Co. , Ltd. .

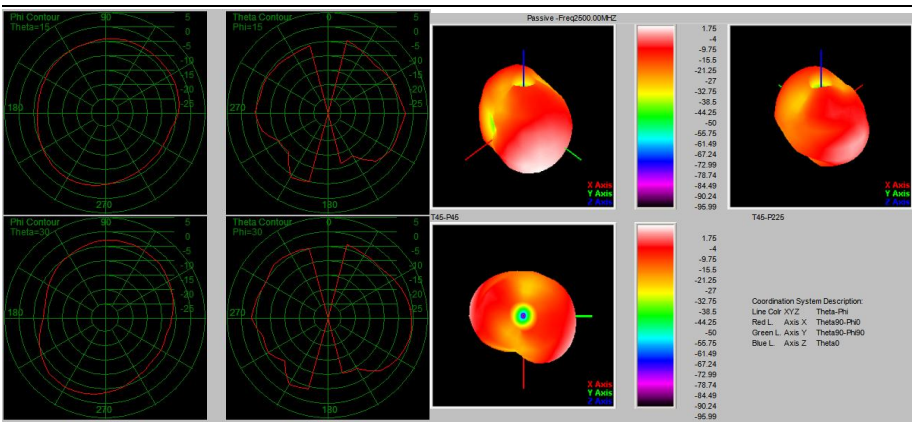

七、Environmental performance test

project	Project test conditions	Specifications
Storage environment	The test temperature, humidity and air pressure are as follows when there is no specific condition: 1. The temperature is - 30 ℃~+80 ℃ 2. Relative humidity: 45% - 85% 3. The air pressure is 86kpa-106kpa	Normal electrical and mechanical performance
High and low temperature test	5 cycles between 70 ° C and 40 ° C, then under normal conditions1-2H, check the appearance quality.	The size shall meet the requirements and Mechanical and electrical performance
Constant damp heat resistance test	Relative humidity: 95 ± 3%, test temperature: 40 ℃. After lasting for 2h, The electrical performance shall be measured within 5 minutes after the test object is taken out, and the test object shall be within the normal range Part 1-2H, check the appearance quality	The size shall meet the requirements and Mechanical and electrical performance
vibration test	Vibration frequency range: 10-55HZ, displacement amplitude: 0.35MM, acceleration amplitude: 50.0M/s, frequency sweep cycles: 30 times	Normal electrical and mechanical performance
Drop test	Free fall for 3 times in the direction of mutually perpendicular axes at a height of 1M	Normal electrical and mechanical performance

Address: 3/F, Tower D, Huanguan Nanmaoyuan Industrial Park, Guanhu Street, Longhua District, Shenzhen. Tel: 0755-88298396 fax: 0755-89733896

<http://www.szgdtrf.com>