






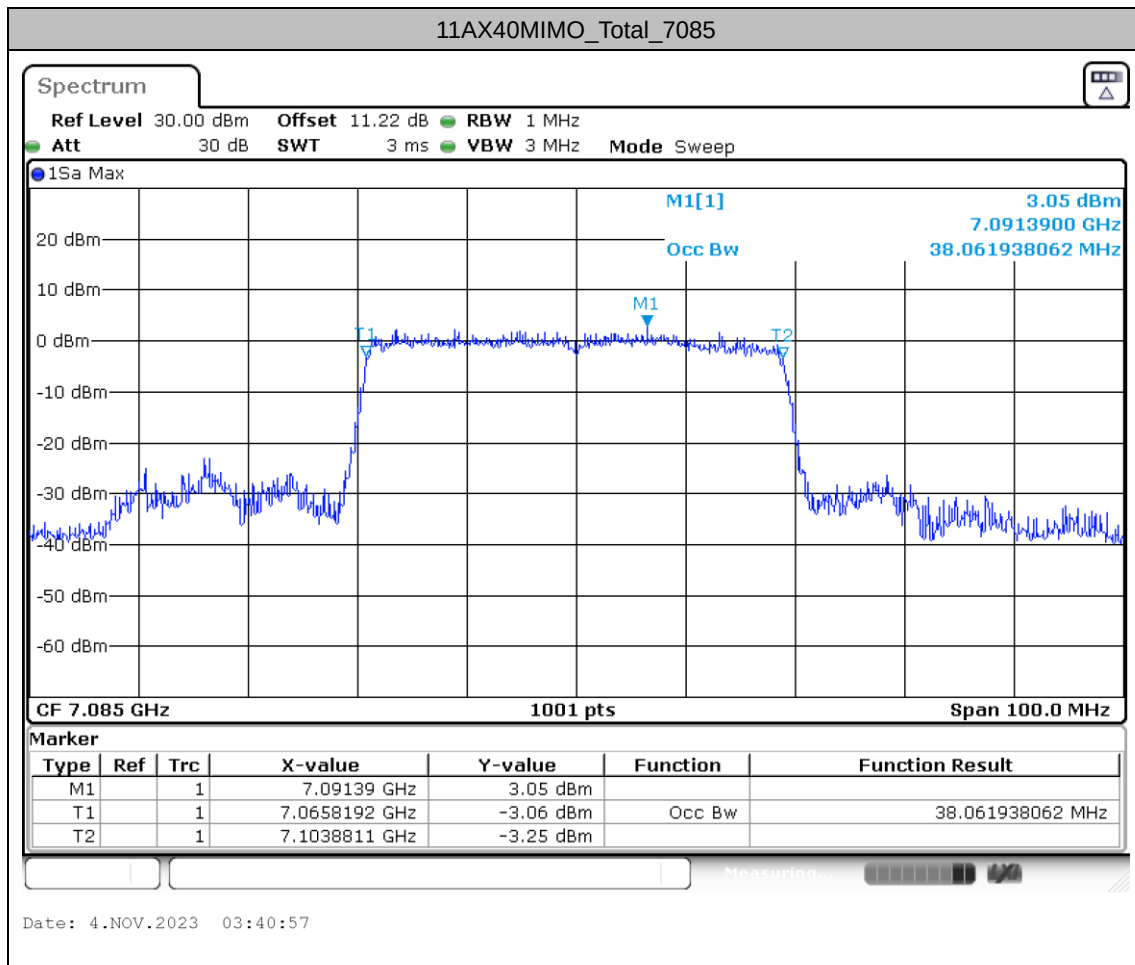


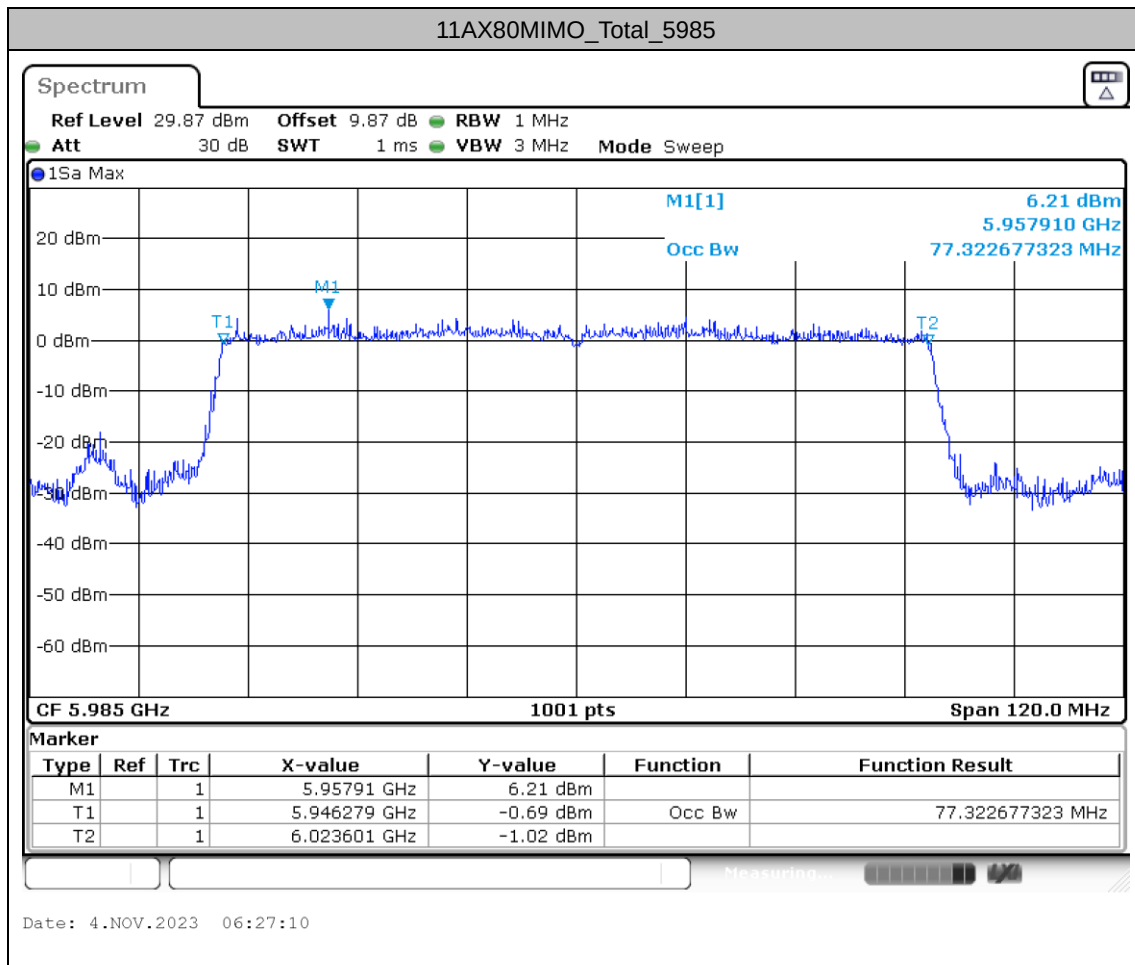


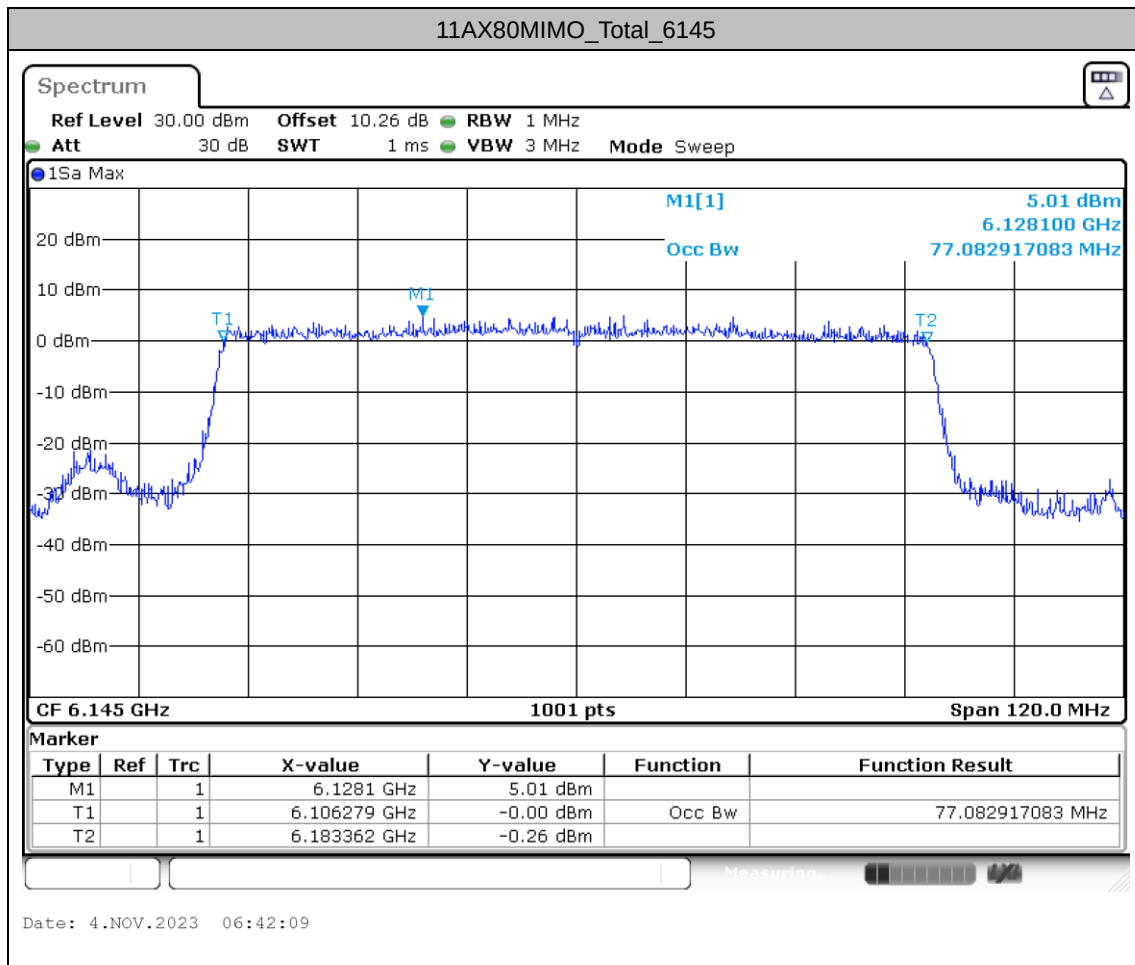


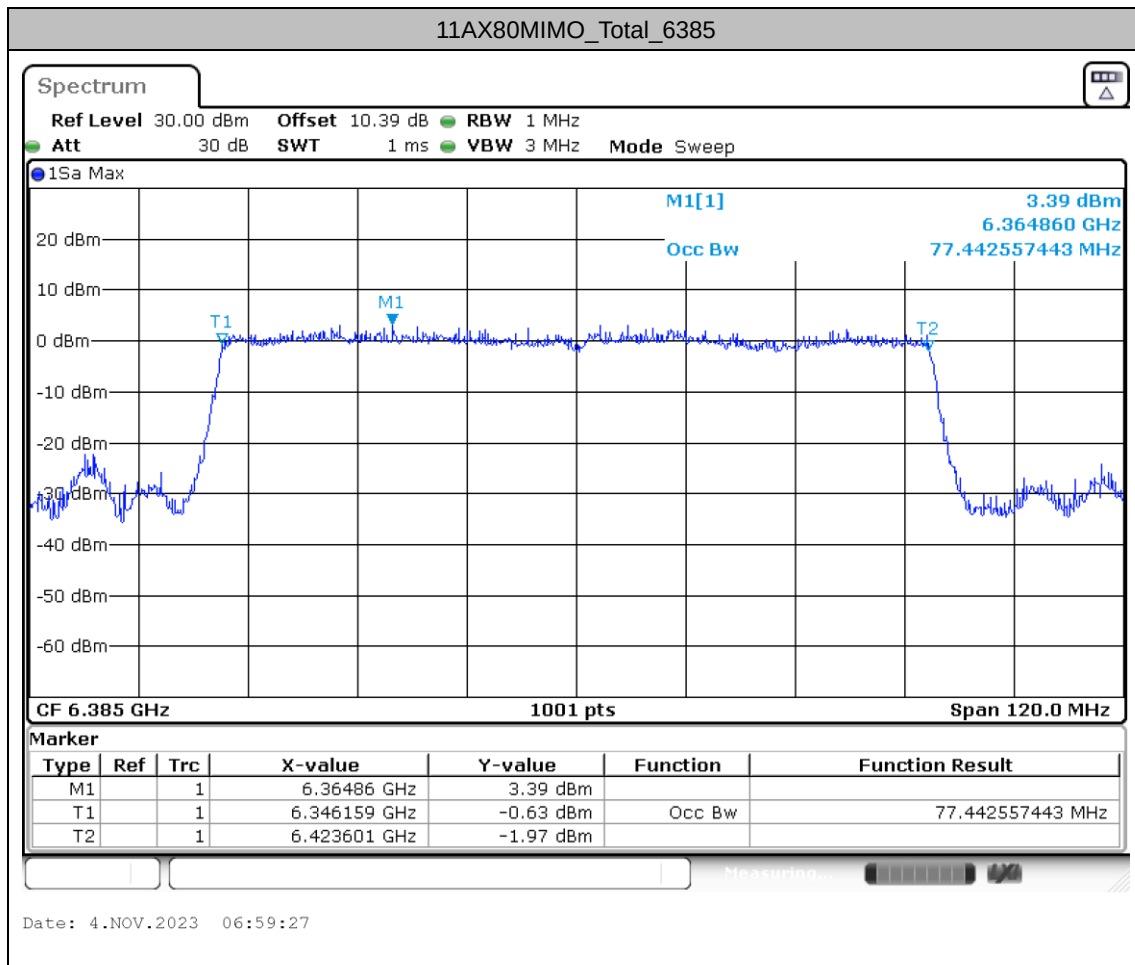


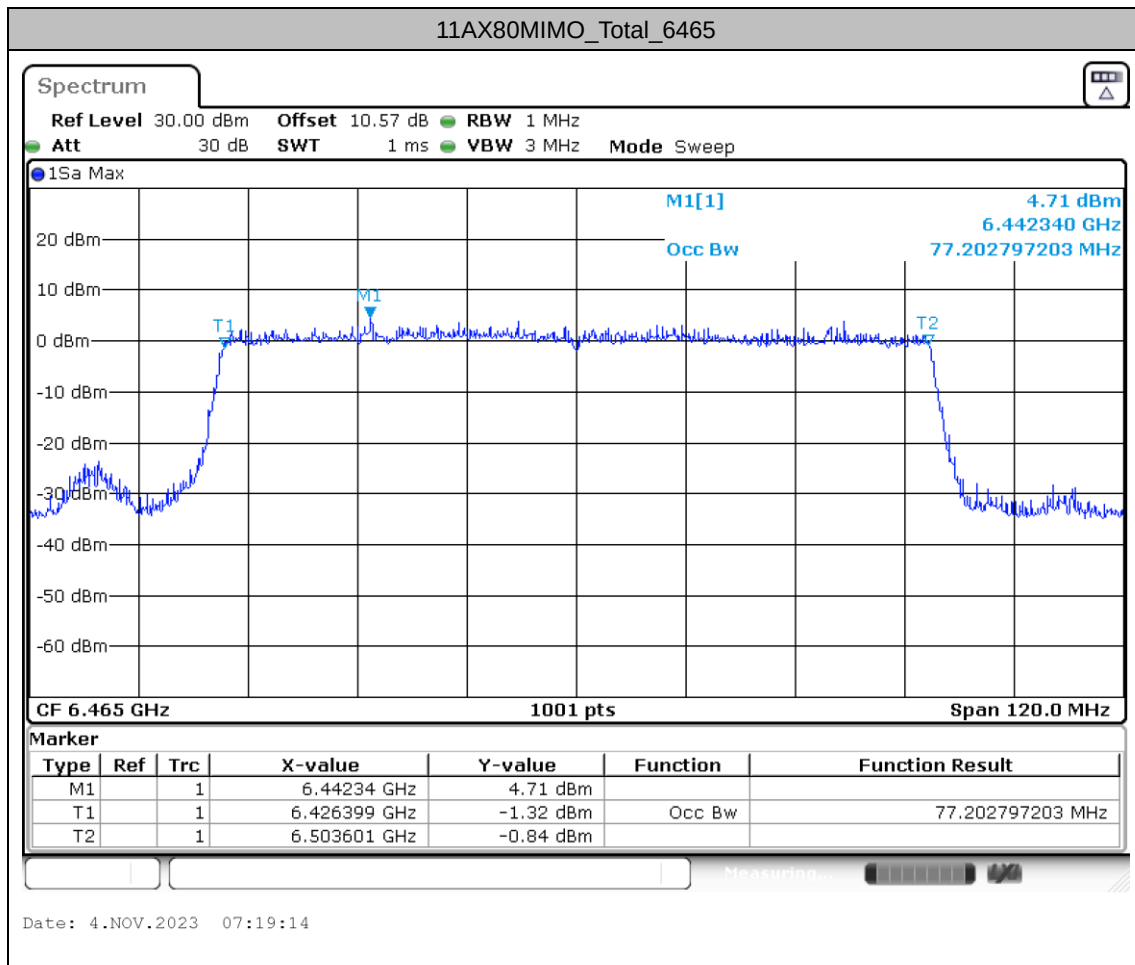


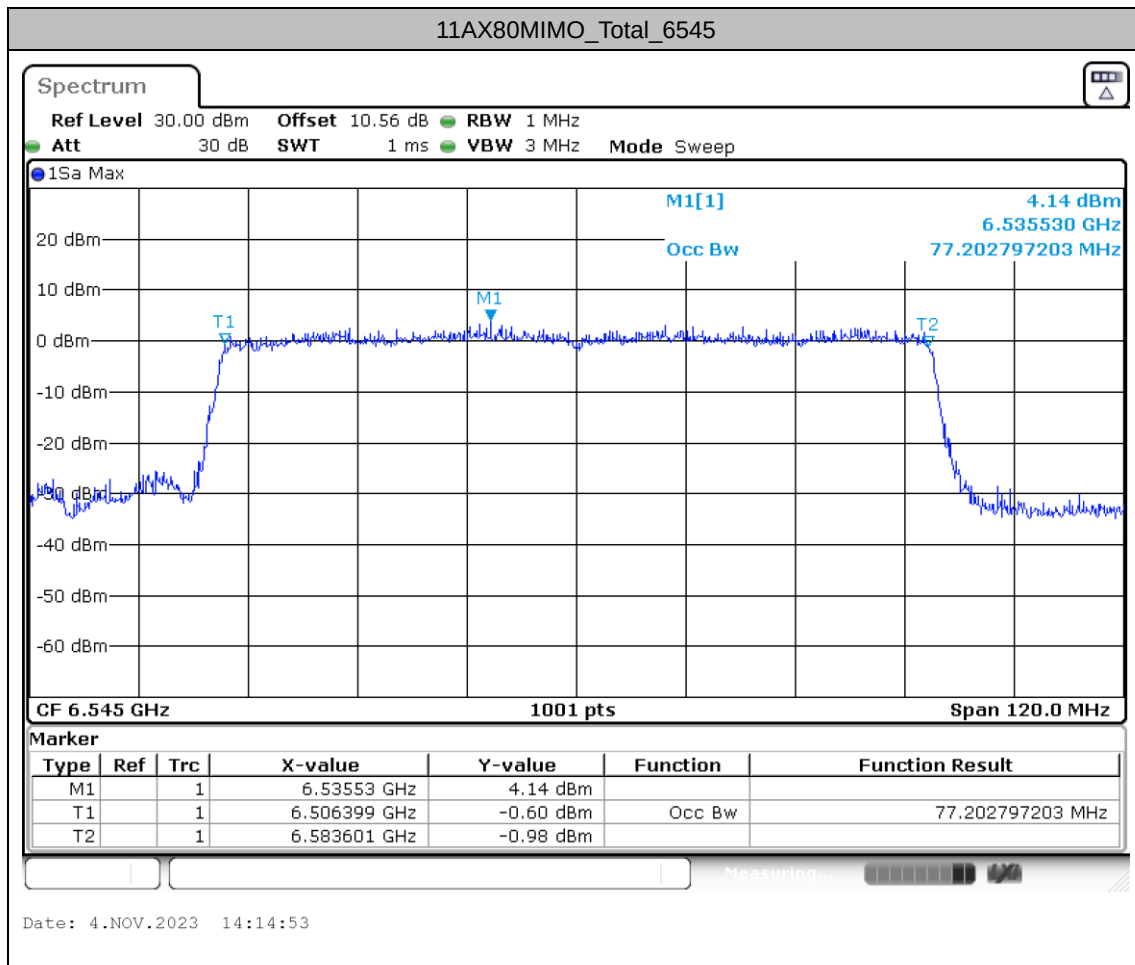


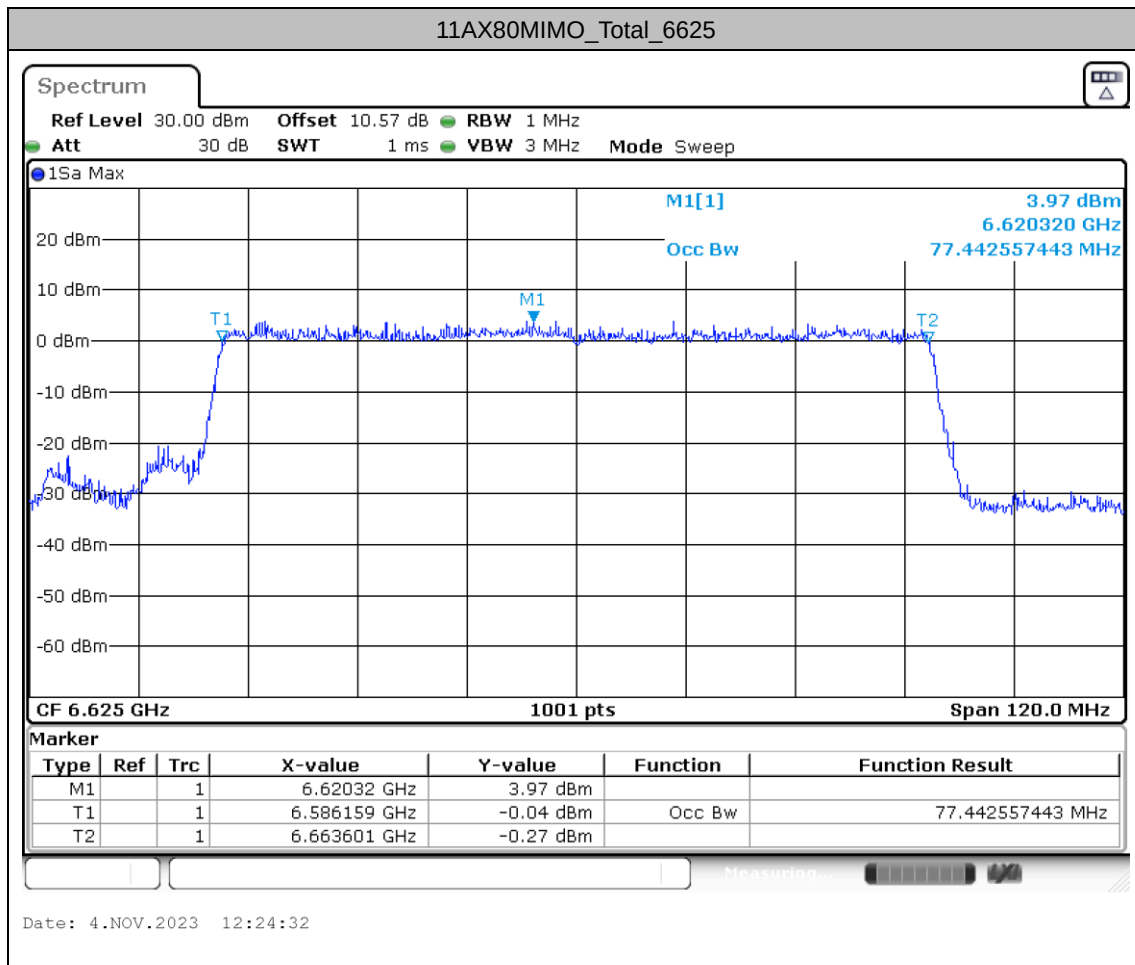


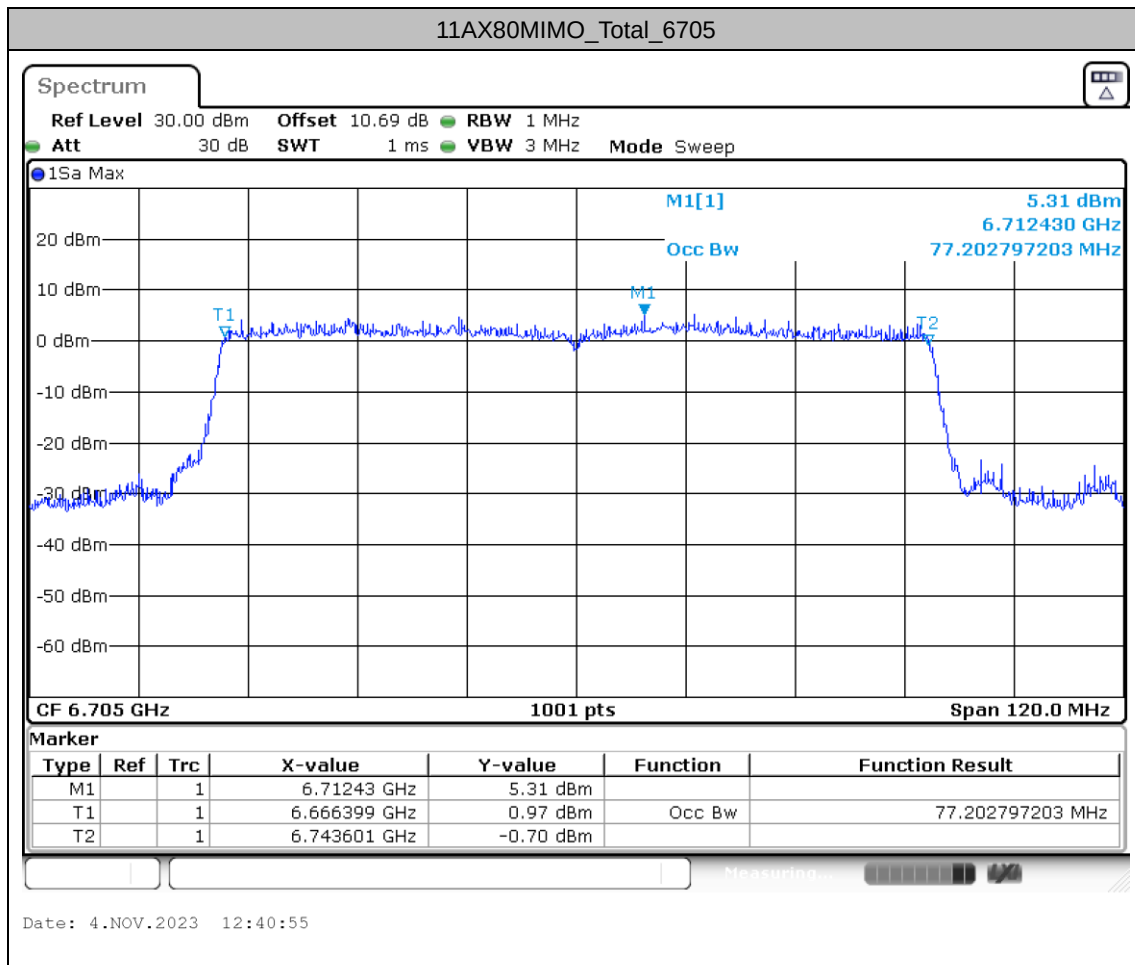


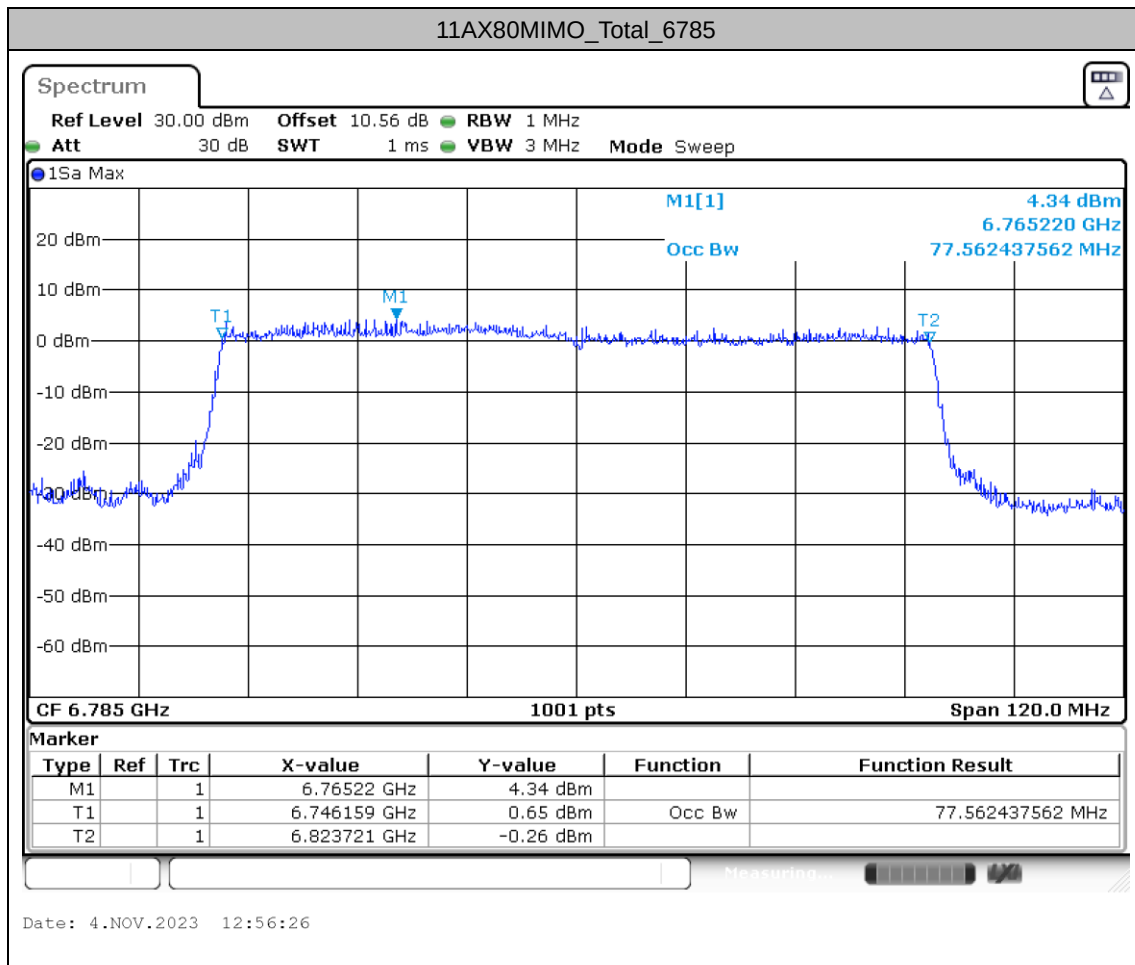


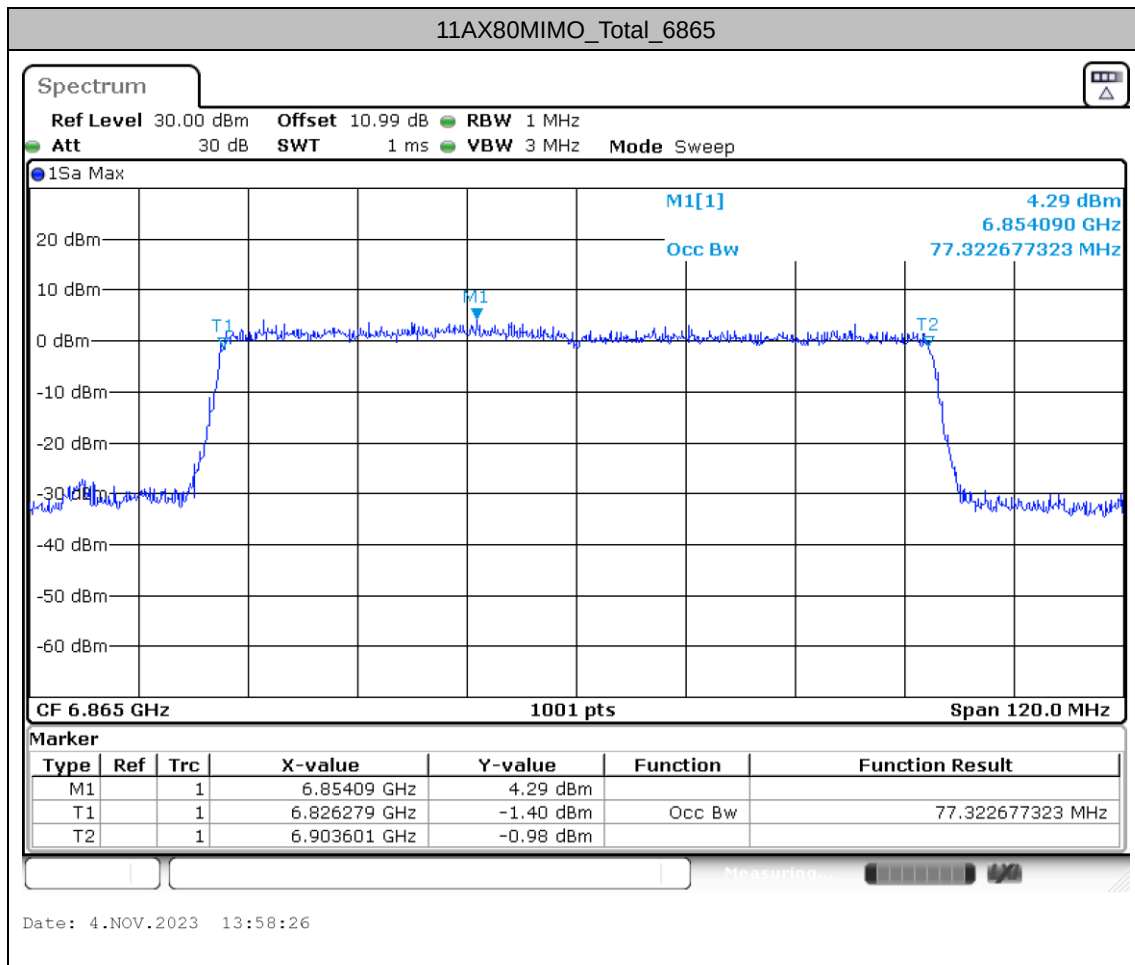


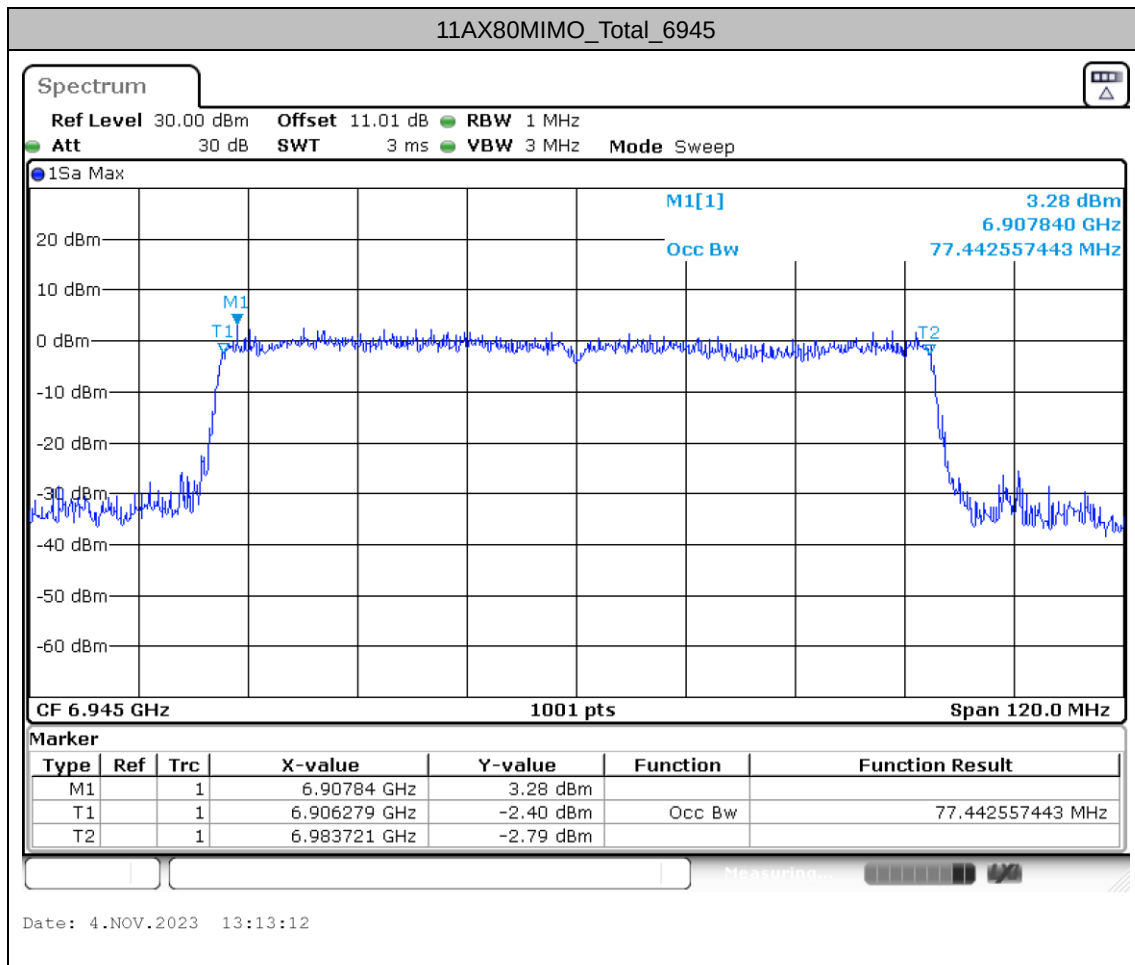


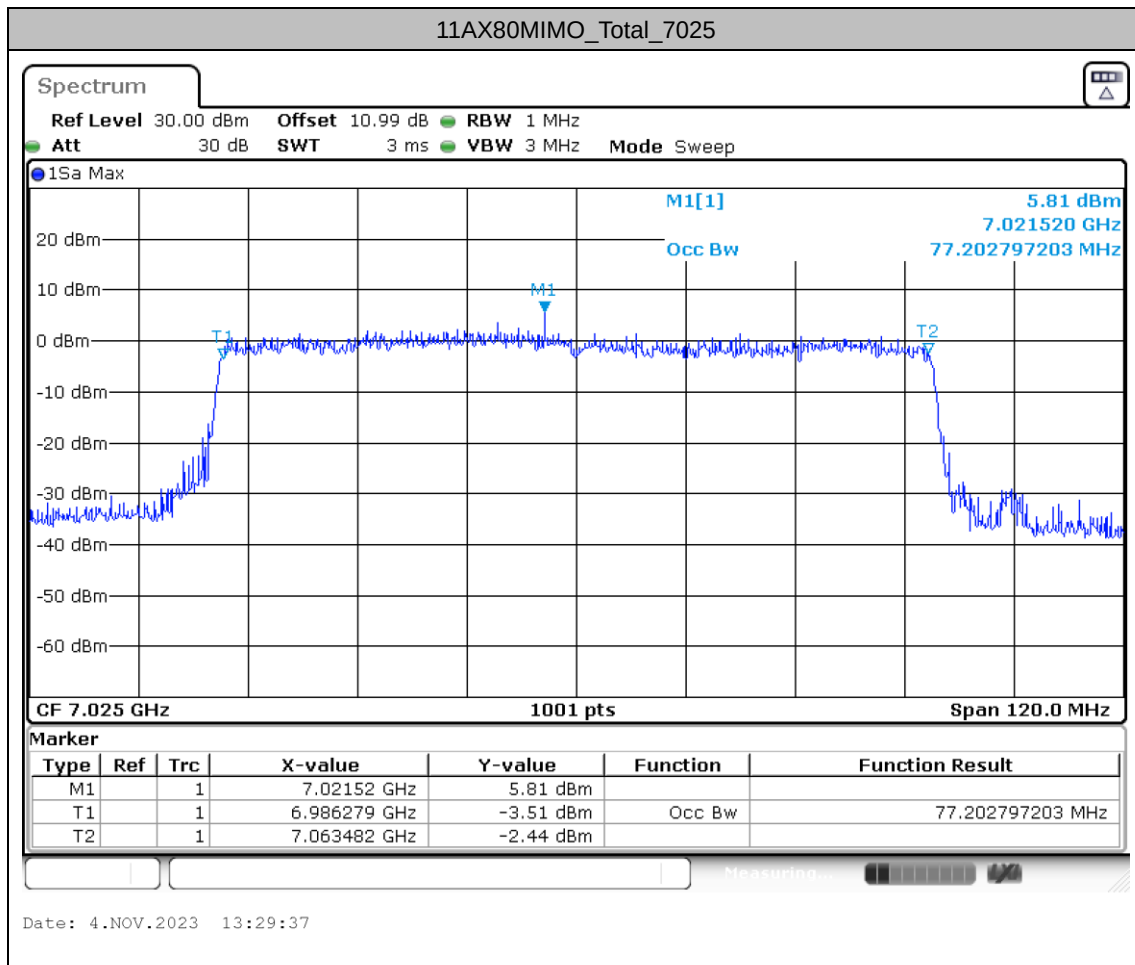


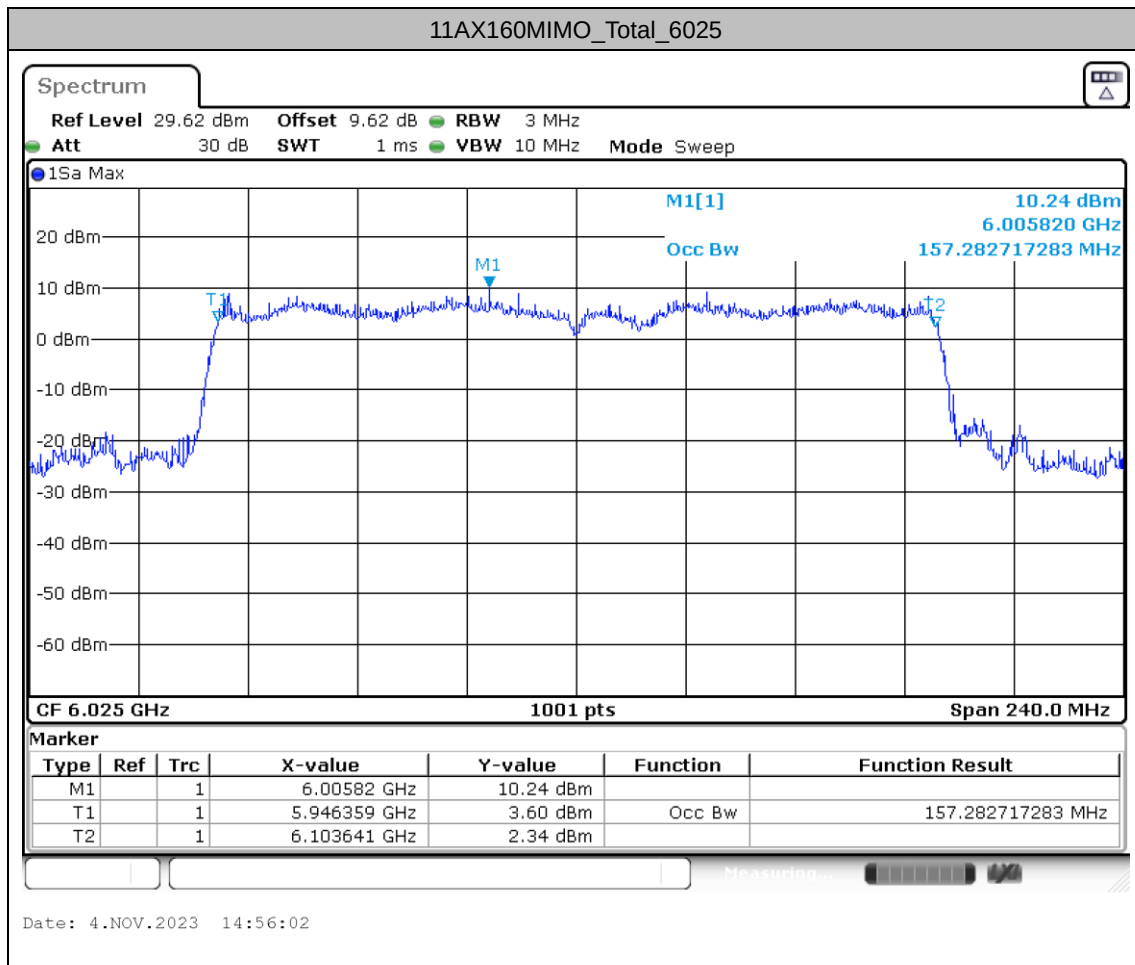


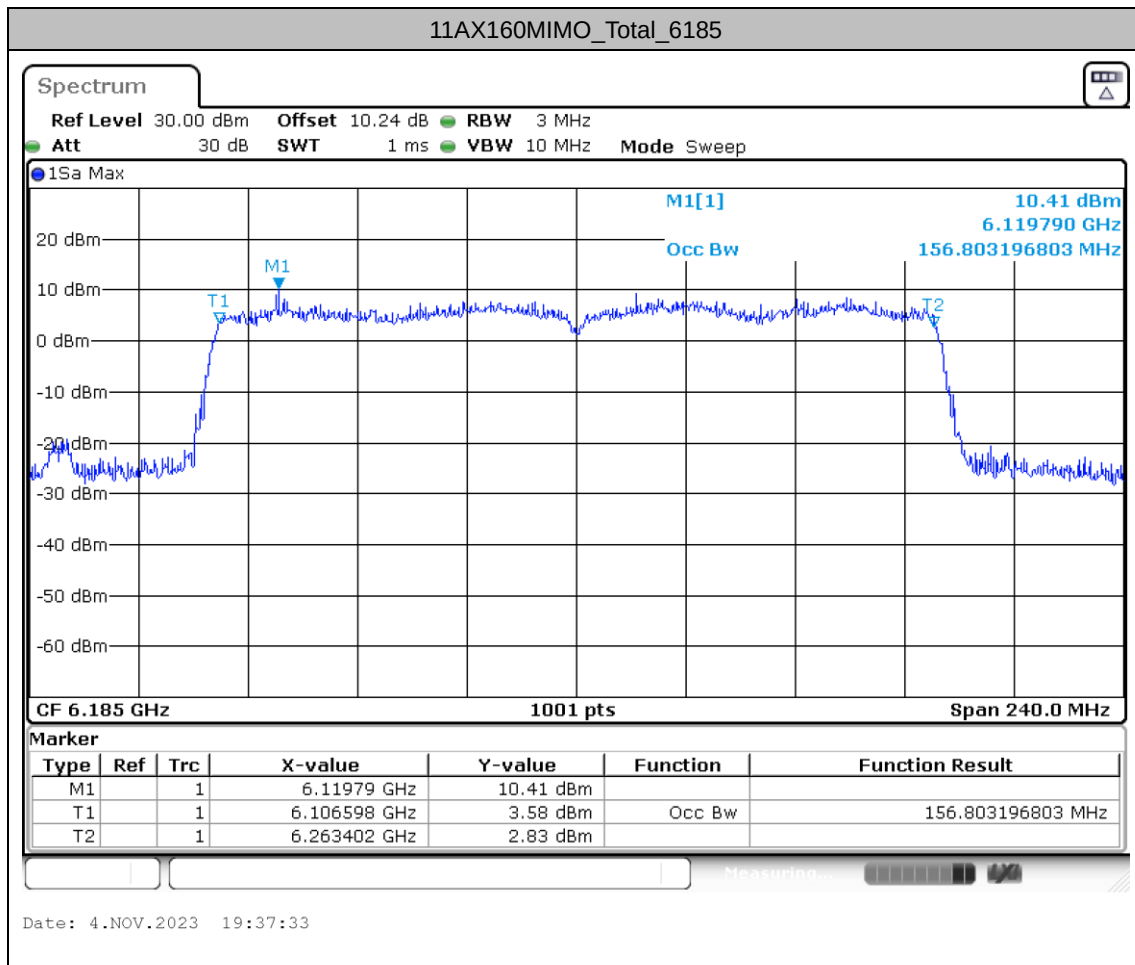


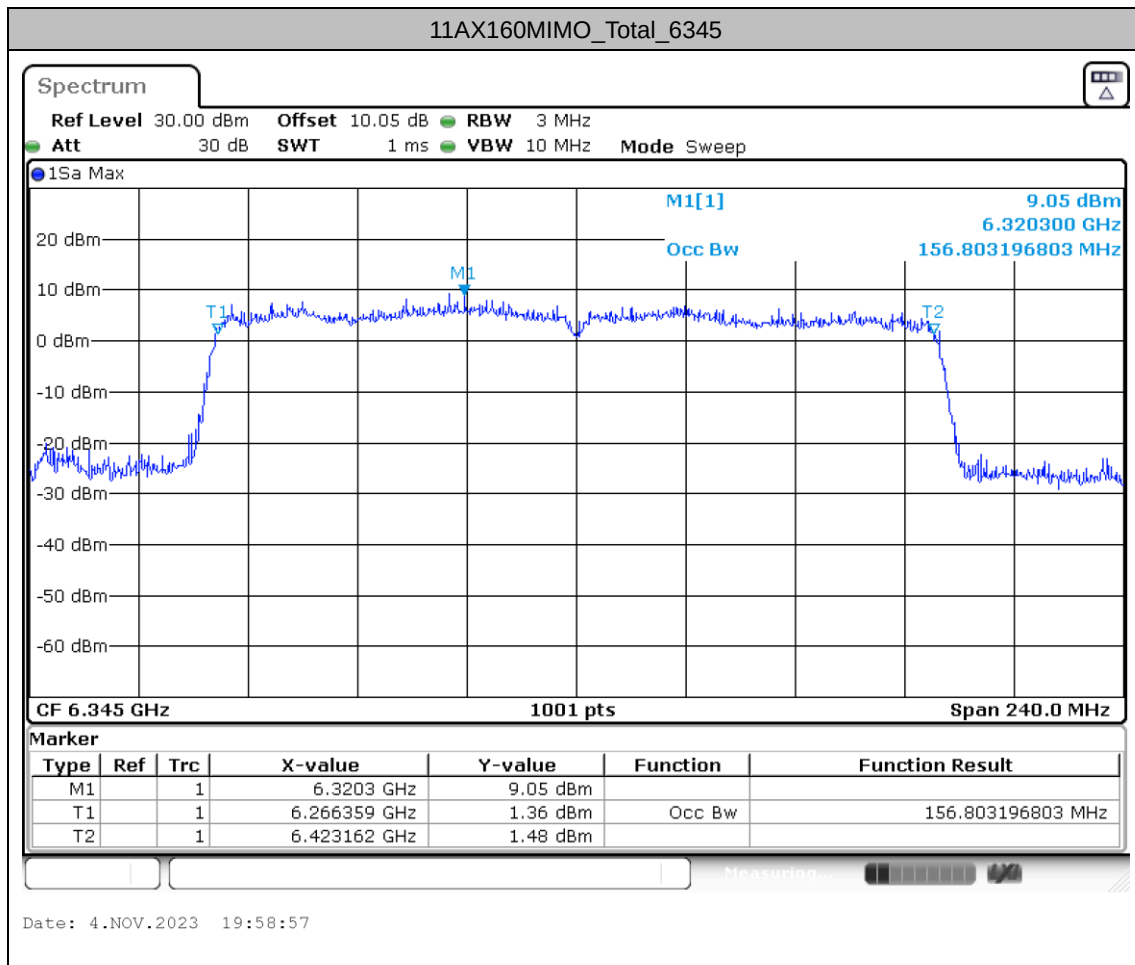

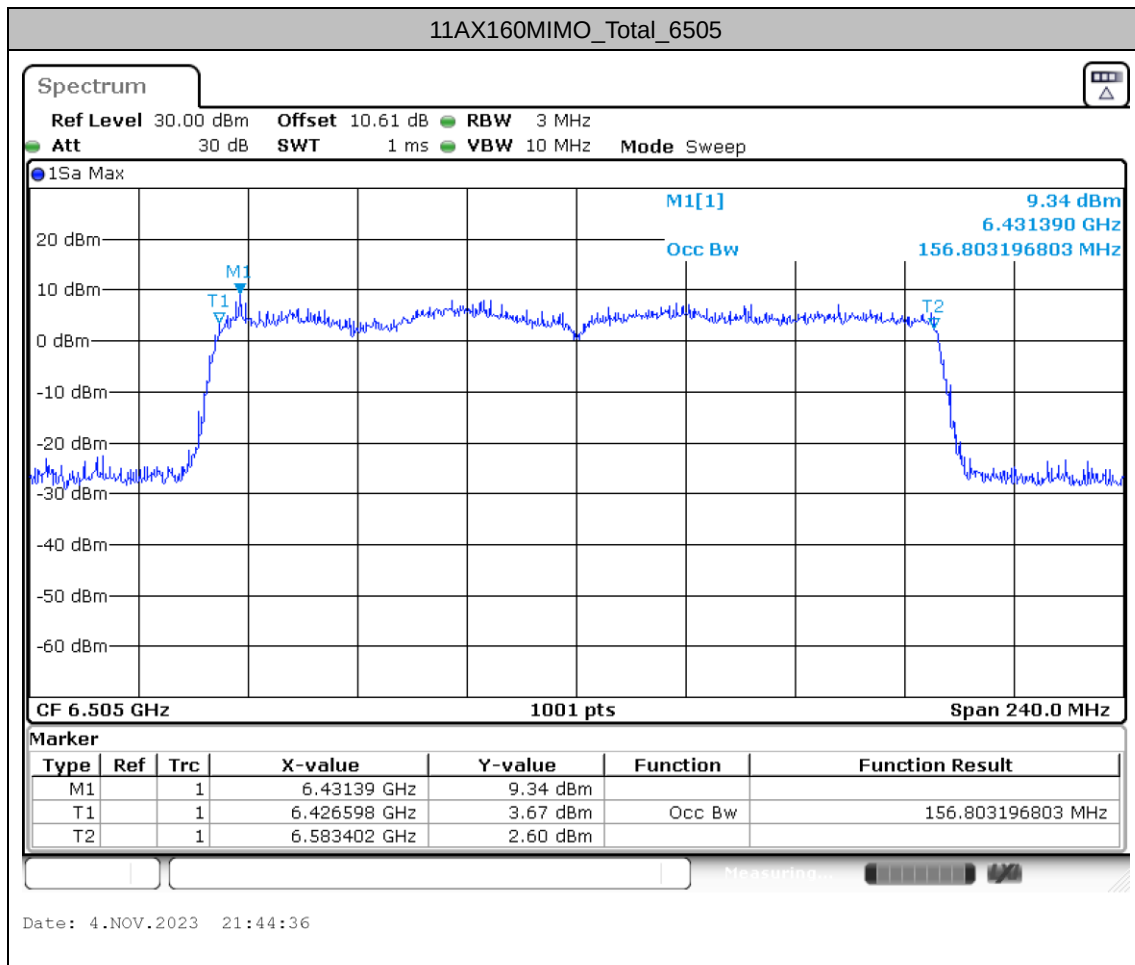

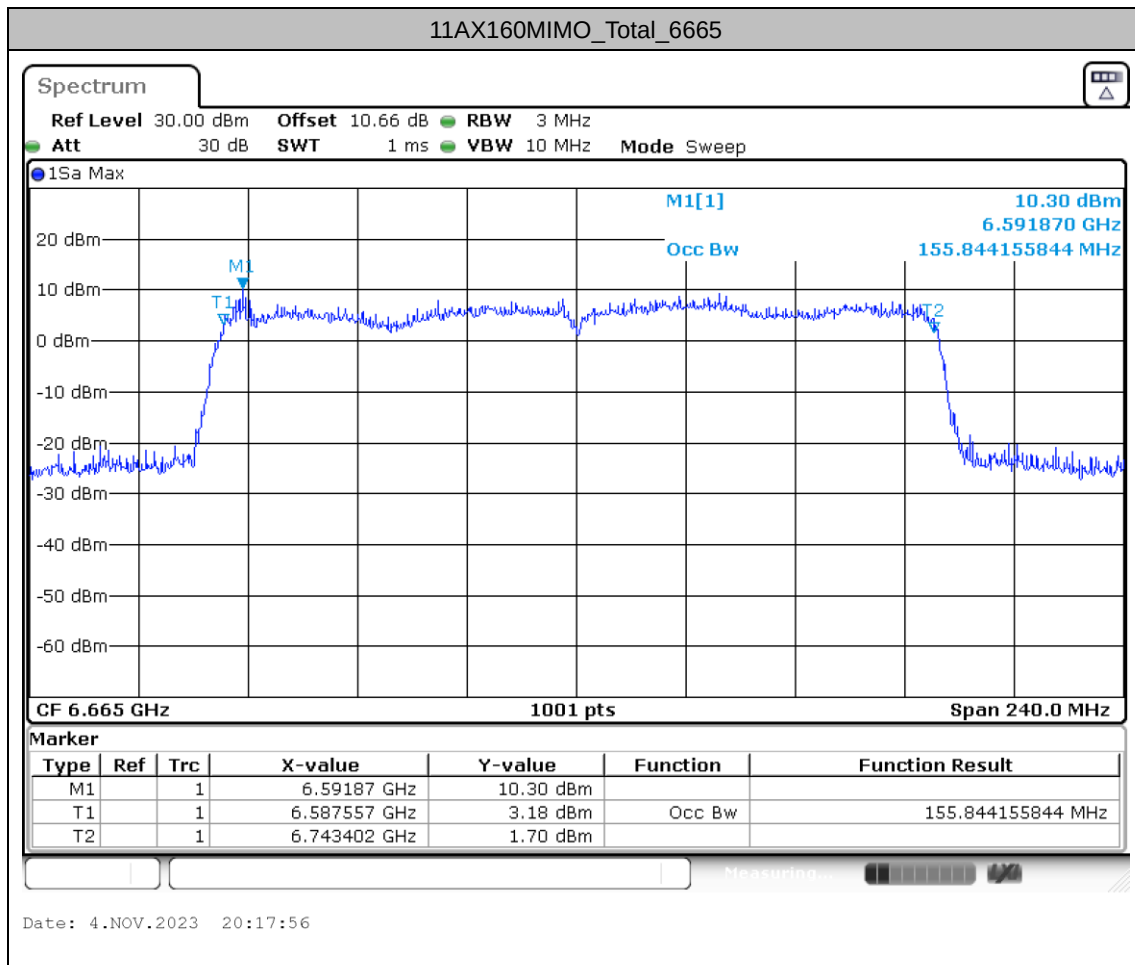

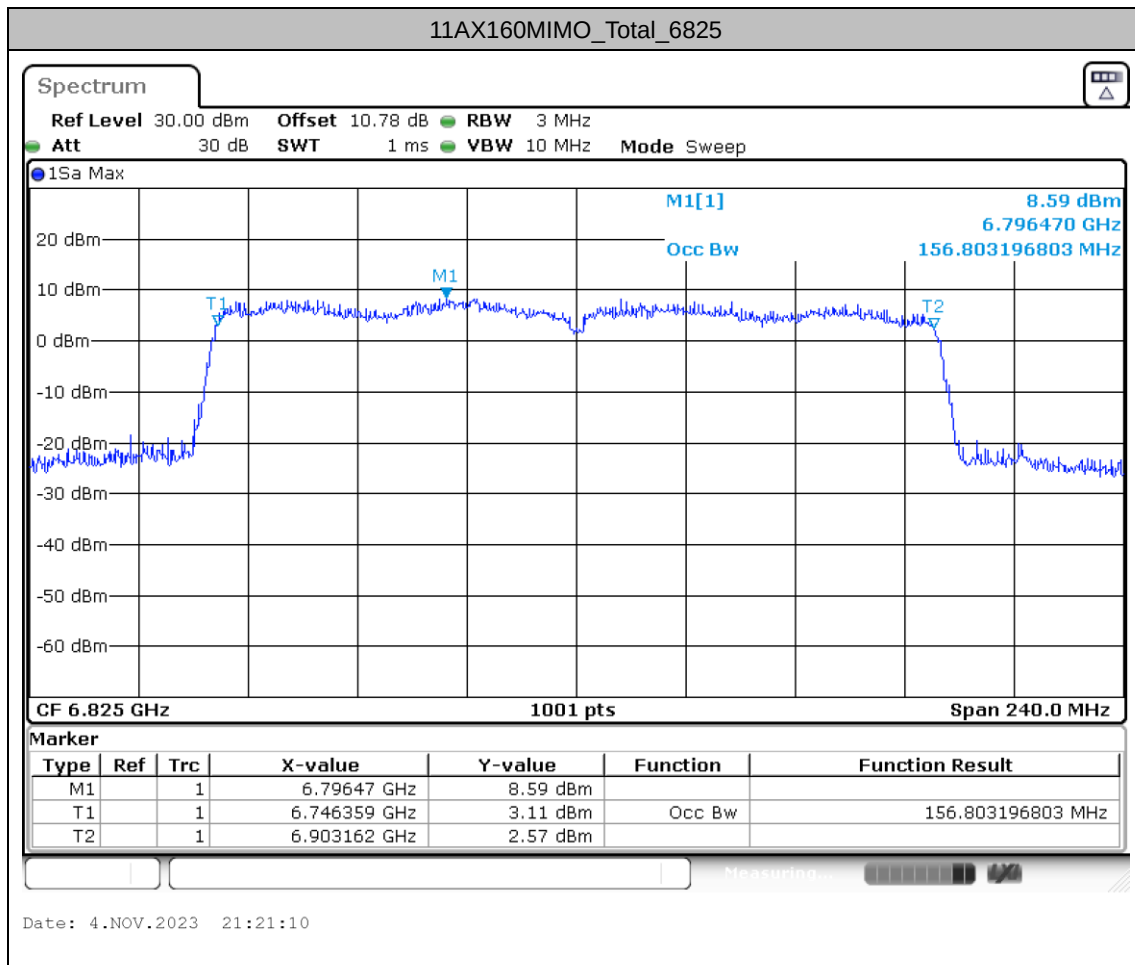

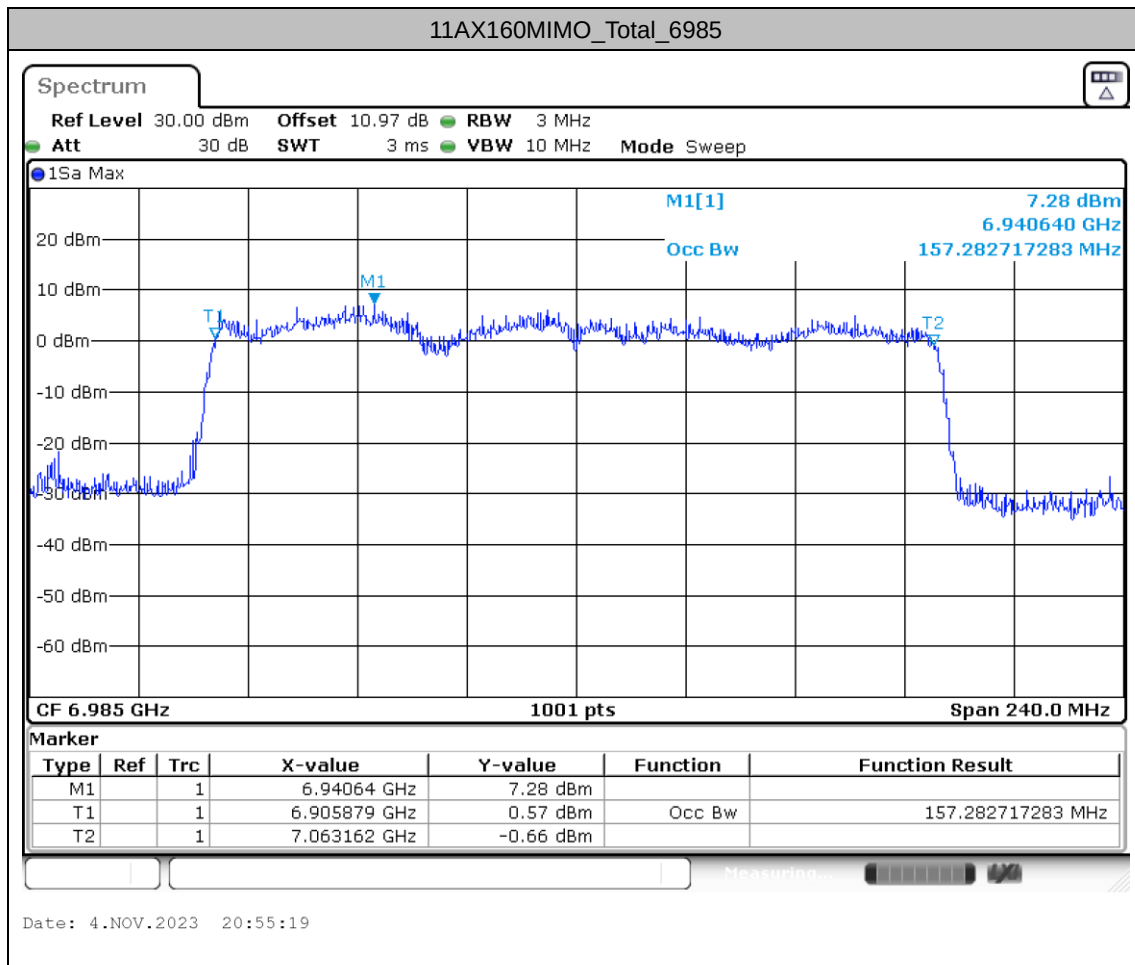



Maximum power spectral density

Test Result

TestMode	Antenna	Freq(MHz)	Read Level (dBμV/m)	DT Factor	Path Loss	Final Level (dBμV/m)	EIRP PSD [dBm/MHz]	Limit [dBm/MHz]	Verdict
11AX20MIMO	total	5955	89.6	0.13	9.93	99.66	4.46	≤5.00	PASS
	total	6175	89.5	0.13	10.31	99.94	4.74	≤5.00	PASS
	total	6415	89.43	0.13	10.47	100.03	4.83	≤5.00	PASS
	total	6435	88.81	0.13	10.51	99.45	4.25	≤5.00	PASS
	total	6475	89.12	0.13	10.6	99.85	4.65	≤5.00	PASS
	total	6515	89.08	0.13	10.59	99.8	4.6	≤5.00	PASS
	total	6535	88.63	0.13	10.55	99.31	4.11	≤5.00	PASS
	total	6695	88.55	0.13	10.67	99.35	4.15	≤5.00	PASS
	total	6855	88.59	0.13	11.01	99.73	4.53	≤5.00	PASS
	total	6875	88.66	0.13	11.01	99.8	4.6	≤5.00	PASS
	total	6895	88.63	0.13	11.03	99.79	4.59	≤5.00	PASS
	total	6995	88.89	0.13	10.94	99.96	4.76	≤5.00	PASS
	total	7095	88.22	0.13	11.22	99.57	4.37	≤5.00	PASS
	total	7115	88.2	0.13	11.31	99.64	4.44	≤5.00	PASS
11AX40MIMO	total	5965	89.58	0.14	9.93	99.65	4.45	≤5.00	PASS
	total	6165	89.25	0.14	10.3	99.69	4.49	≤5.00	PASS
	total	6405	89.26	0.14	10.43	99.83	4.63	≤5.00	PASS
	total	6445	88.89	0.14	10.59	99.62	4.42	≤5.00	PASS
	total	6485	88.91	0.14	10.62	99.67	4.47	≤5.00	PASS
	total	6525	89.06	0.14	10.56	99.76	4.56	≤5.00	PASS
	total	6565	89.23	0.14	10.53	99.9	4.7	≤5.00	PASS
	total	6685	88.87	0.14	10.66	99.67	4.47	≤5.00	PASS
	total	6845	88.88	0.14	10.97	99.99	4.79	≤5.00	PASS
	total	6885	88.4	0.14	11.02	99.56	4.36	≤5.00	PASS
	total	6925	88.67	0.14	10.99	99.8	4.6	≤5.00	PASS
	total	7005	88.84	0.14	10.97	99.95	4.75	≤5.00	PASS
	total	7085	88.47	0.14	11.22	99.83	4.63	≤5.00	PASS
11AX80MIMO	total	5985	89.95	0.12	9.87	99.94	4.74	≤5.00	PASS
	total	6145	89	0.12	10.26	99.38	4.18	≤5.00	PASS
	total	6385	88.92	0.12	10.39	99.43	4.23	≤5.00	PASS
	total	6465	89.39	0.12	10.57	100.08	4.88	≤5.00	PASS
	total	6545	88.75	0.12	10.56	99.43	4.23	≤5.00	PASS

TestMode	Antenna	Freq(MHz)	Read Level (dBμV/m)	DT Factor	Path Loss	Final Level (dBμV/m)	EIRP PSD [dBm/MHz]	Limit [dBm/MHz]	Verdict
11AX80MIMO	total	6625	88.81	0.12	10.57	99.5	4.3	≤5.00	PASS
	total	6705	88.97	0.12	10.69	99.78	4.58	≤5.00	PASS
	total	6785	88.92	0.12	10.56	99.6	4.6	≤5.00	PASS
	total	6865	88.91	0.12	10.99	100.02	4.82	≤5.00	PASS
	total	6945	88.59	0.12	11.01	99.72	4.52	≤5.00	PASS
	total	7025	88.76	0.12	10.99	99.87	4.67	≤5.00	PASS
11AX160MIMO	total	6025	89.96	0.04	9.62	99.62	4.72	≤5.00	PASS
	total	6185	89.12	0.04	10.24	99.4	4.2	≤5.00	PASS
	total	6345	89.51	0.04	10.05	99.6	4.4	≤5.00	PASS
	total	6505	89.19	0.04	10.61	99.84	4.64	≤5.00	PASS
	total	6665	89.08	0.04	10.66	99.78	4.58	≤5.00	PASS
	total	6825	88.78	0.04	10.78	99.6	4.4	≤5.00	PASS
	total	6985	89.19	0.04	10.97	100.2	4.11	≤5.00	PASS

Note:


EIRP PSD(dBm/MHz) = Final Level(dBμV/m) - 95.2

Final Level(dBμV/m) = Read Level(dBμV/m) + Path Loss(dB) + DT Factor


Path Loss(dB) = Antenna Factor(dBμV/m) + Cable Loss(dB) - Preamp Factor(dB)



Test Graphs

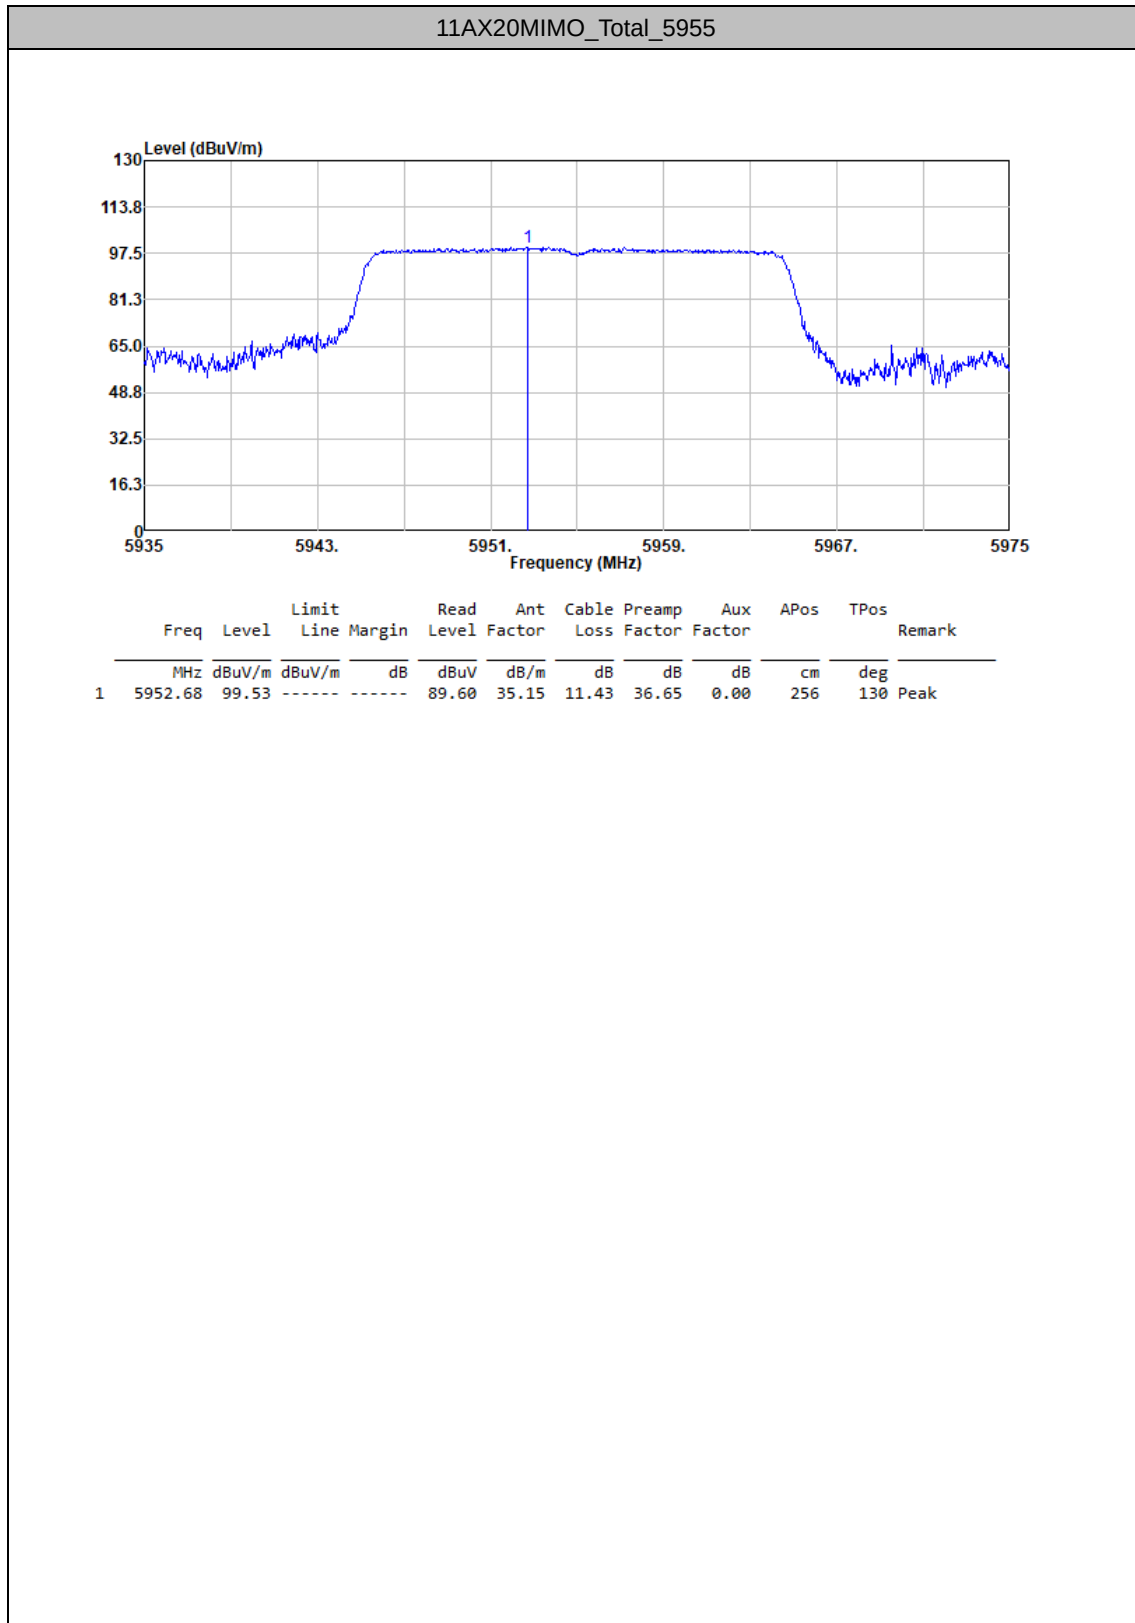


11AX20MIMO_Total_6175

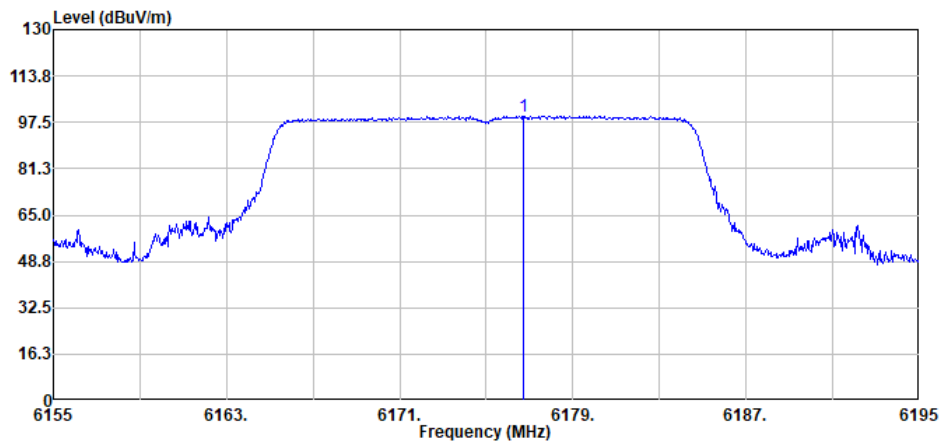

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6176.72	99.81	-----	-----		89.50	35.48	11.59	36.76	0.00	300	92	Peak




11AX20MIMO_Total_6415

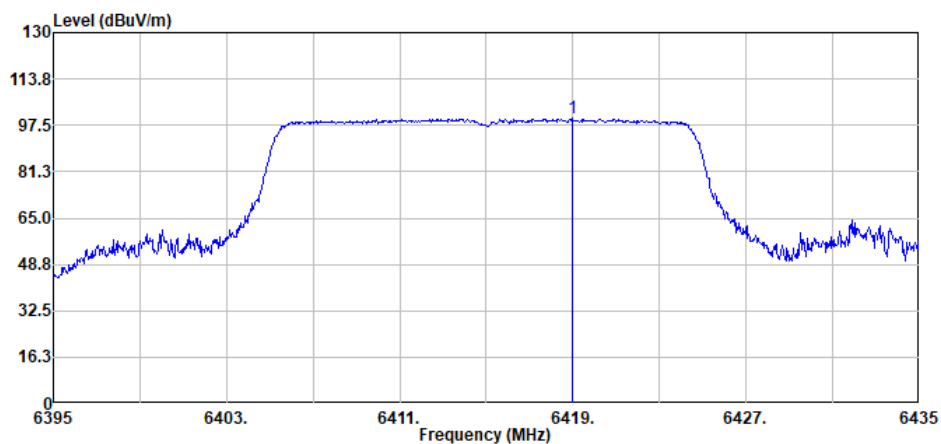

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6418.96	99.90	-----	-----		89.43	35.58	11.92	37.03	0.00	170	113	Peak




11AX20MIMO_Total_6435

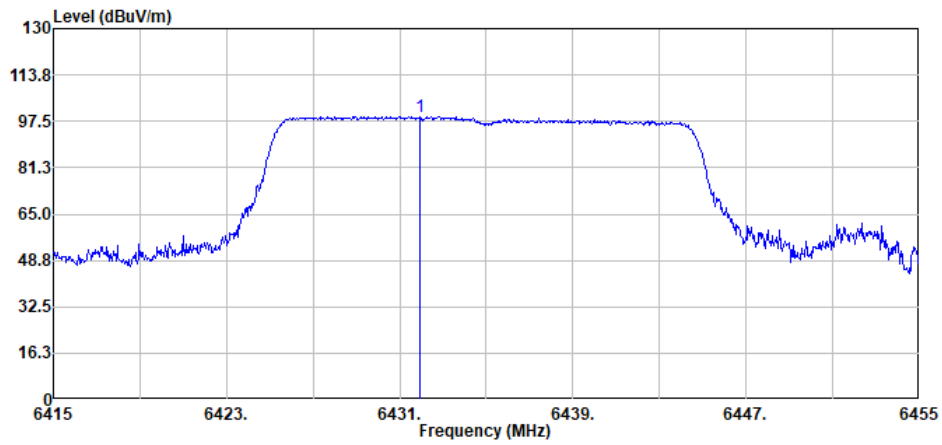

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6431.96	99.32	-----	-----		88.81	35.57	11.93	36.99	0.00	237	108	Peak




11AX20MIMO_Total_6475

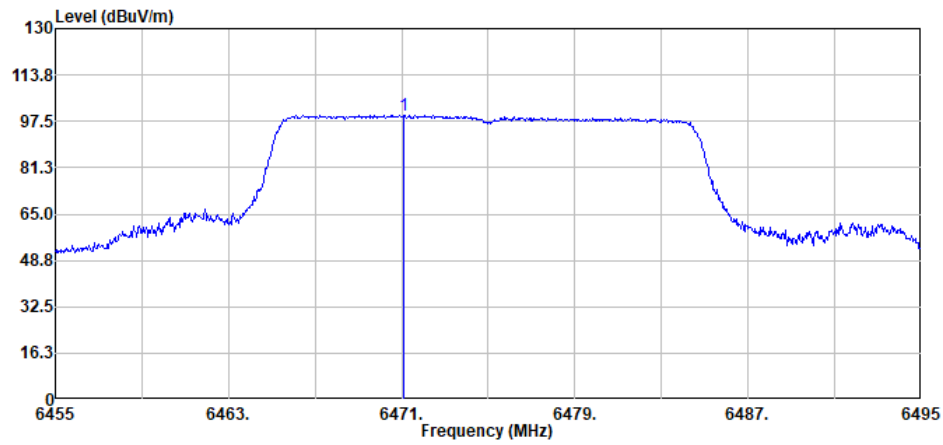

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6471.12	99.72	-----	-----		89.12	35.53	11.97	36.90	0.00	221	112	Peak




11AX20MIMO_Total_6515

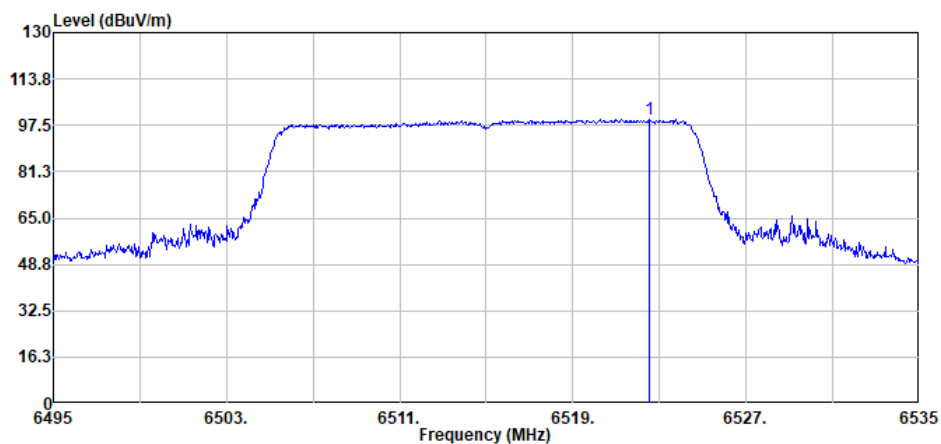

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6522.56	99.67	-----	-----		89.08	35.50	12.02	36.93	0.00	274	114	Peak




11AX20MIMO_Total_6535

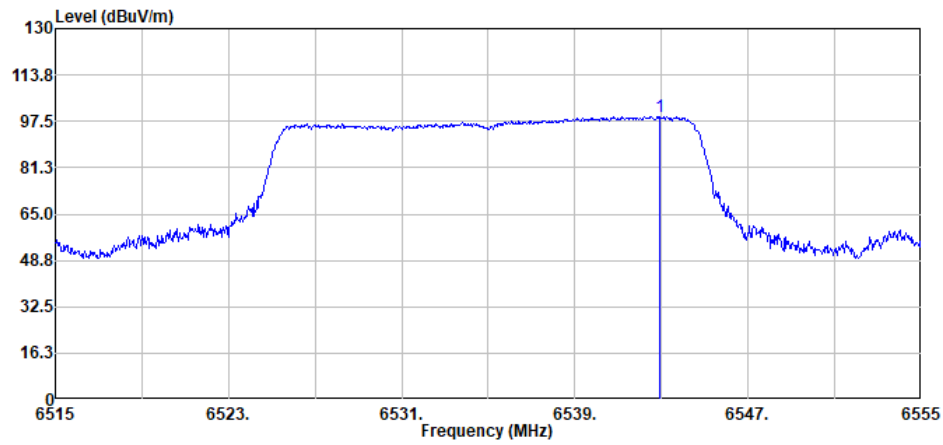

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6542.92	99.18	-----	-----		88.63	35.50	12.04	36.99	0.00	300	138	Peak




11AX20MIMO_Total_6695

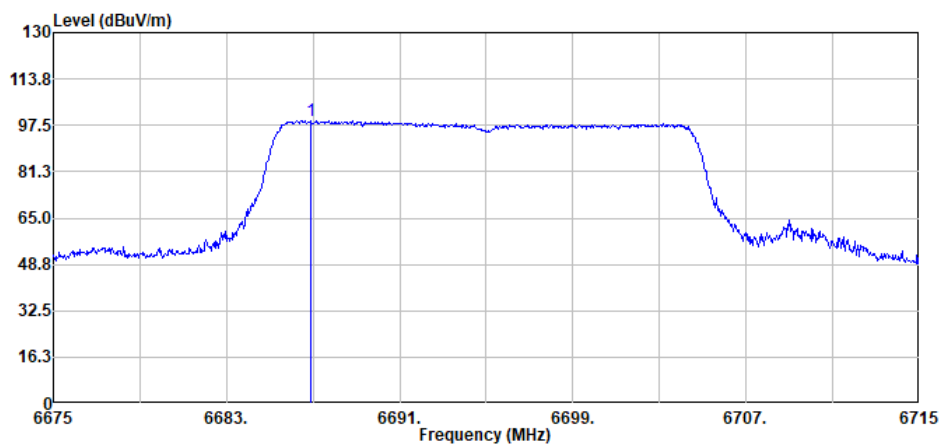

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6686.88	99.22	-----		-----	88.55	35.59	12.16	37.08	0.00	299	112	Peak




11AX20MIMO_Total_6855

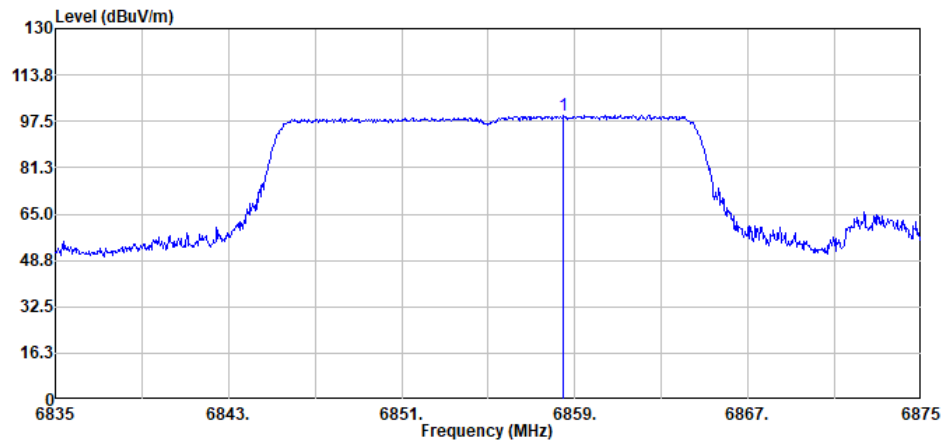

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6858.48	99.60	-----	-----		88.59	35.56	12.31	36.86	0.00	301	112	Peak




11AX20MIMO_Total_6875

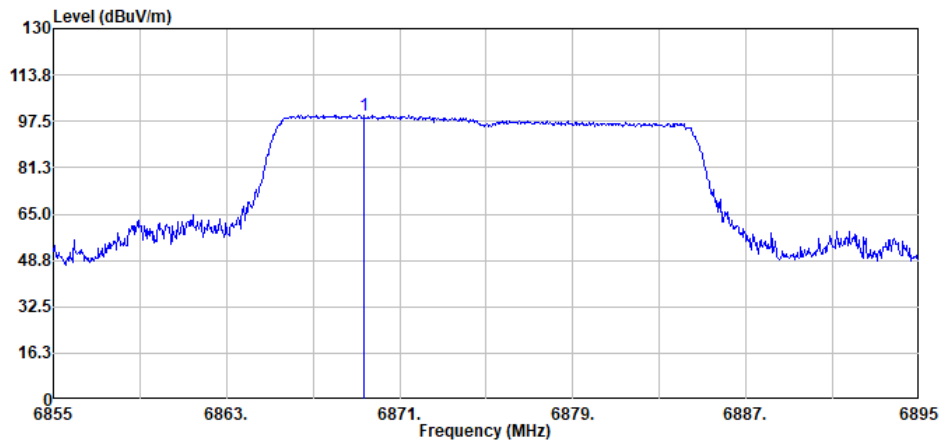

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6869.36	99.67	-----	-----		88.66	35.57	12.32	36.88	0.00	299	105	Peak




11AX20MIMO_Total_6895

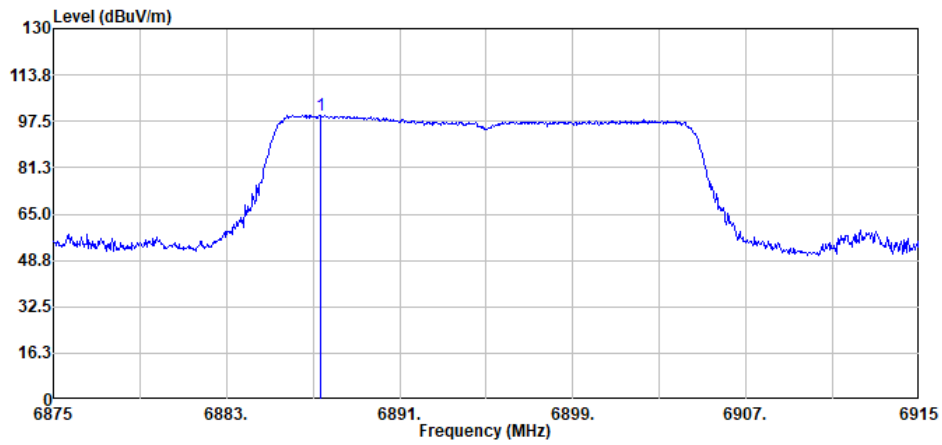

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6887.32	99.66	-----	-----		88.63	35.59	12.34	36.90	0.00	323	115	Peak




11AX20MIMO_Total_6995

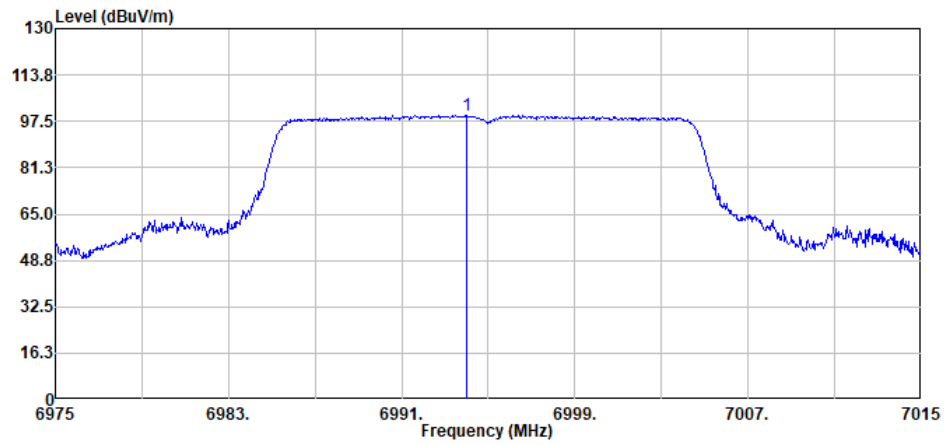

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6994.00	99.83	-----	-----		88.89	35.60	12.45	37.11	0.00	144	93	Peak




11AX20MIMO_Total_7095

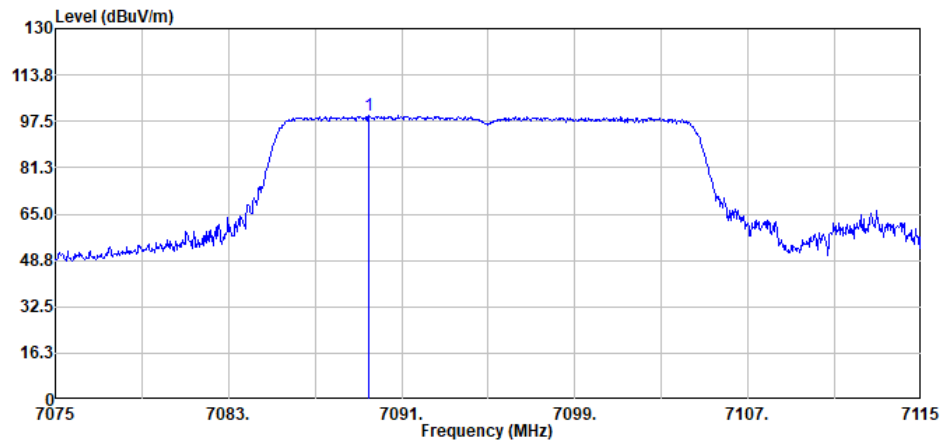

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	7089.48	99.44	-----	-----		88.22	35.69	12.57	37.04	0.00	222	91	Peak




11AX40MIMO_Total_5965

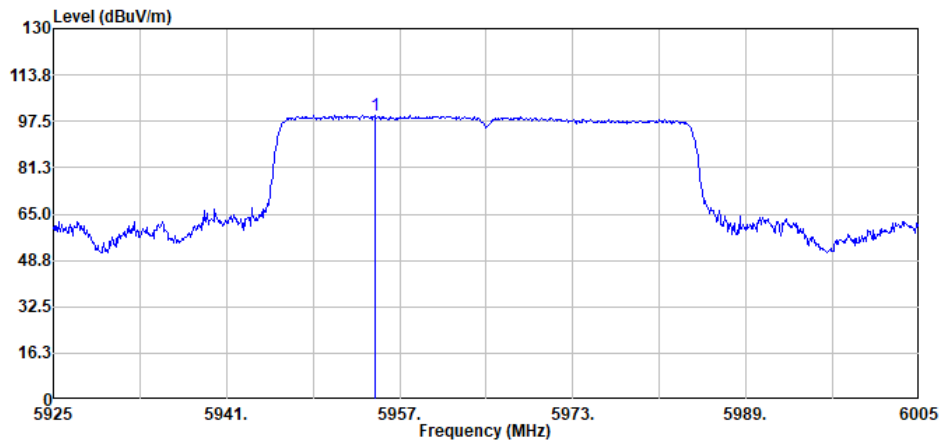

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5954.76	99.51	-----	-----		89.58	35.15	11.43	36.65	0.00	256	95	Peak




11AX40MIMO_Total_6165

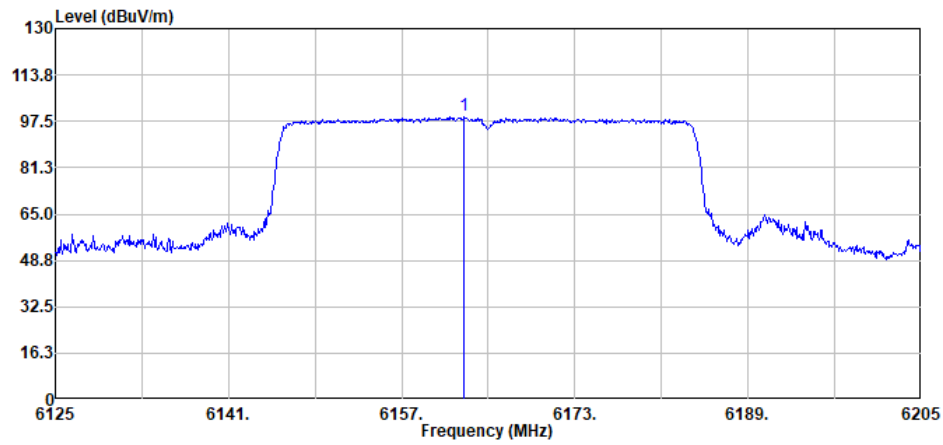

	Freq	Level	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6162.76	99.55	-----	-----	89.25	35.46	11.58	36.74	0.00	222	104	Peak




11AX40MIMO_Total_6405

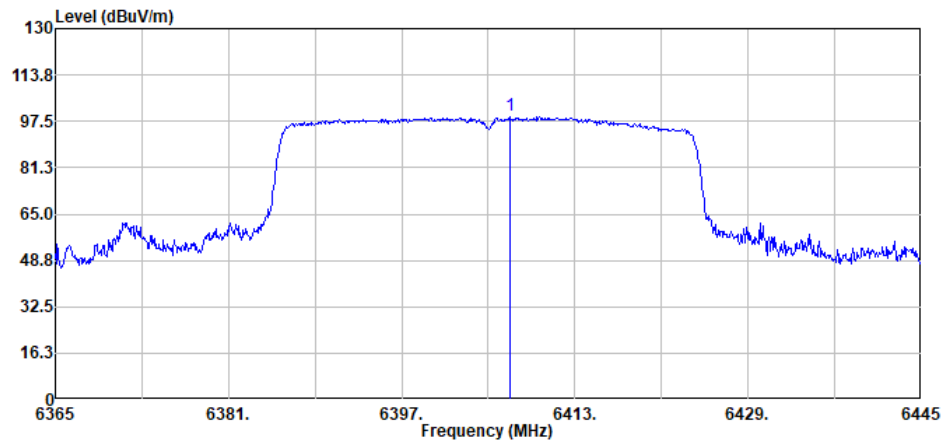

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6407.00	99.69	-----	-----	89.26	35.59	11.91	37.07	0.00	317	136	Peak




11AX40MIMO_Total_6445

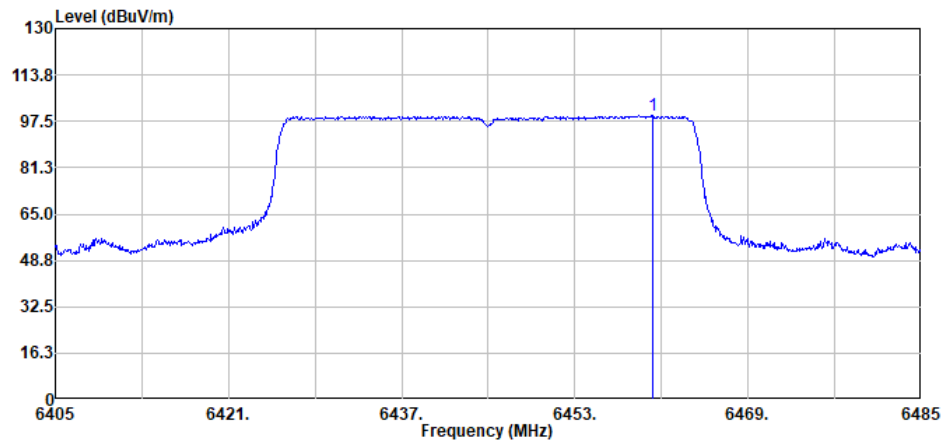

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6460.20	99.48	-----	-----		88.89	35.54	11.96	36.91	0.00	284	111	Peak




11AX40MIMO_Total_6485

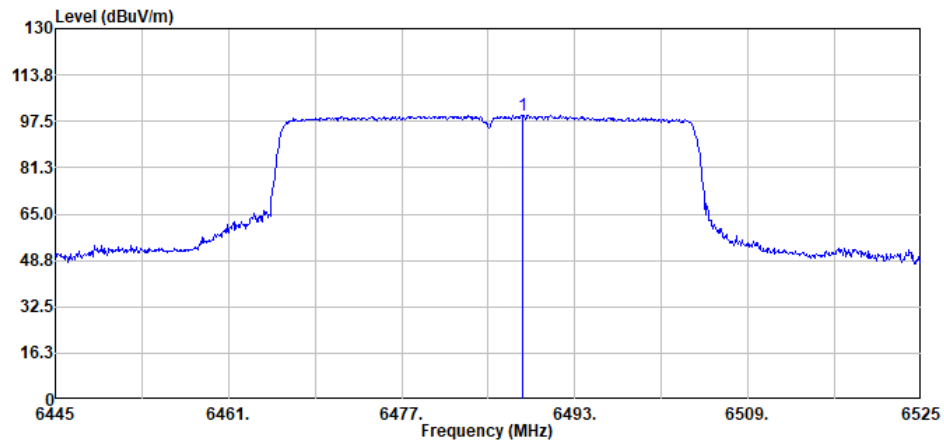

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6488.12	99.53	-----	-----		88.91	35.51	11.99	36.88	0.00	295	107	Peak




11AX40MIMO_Total_6525

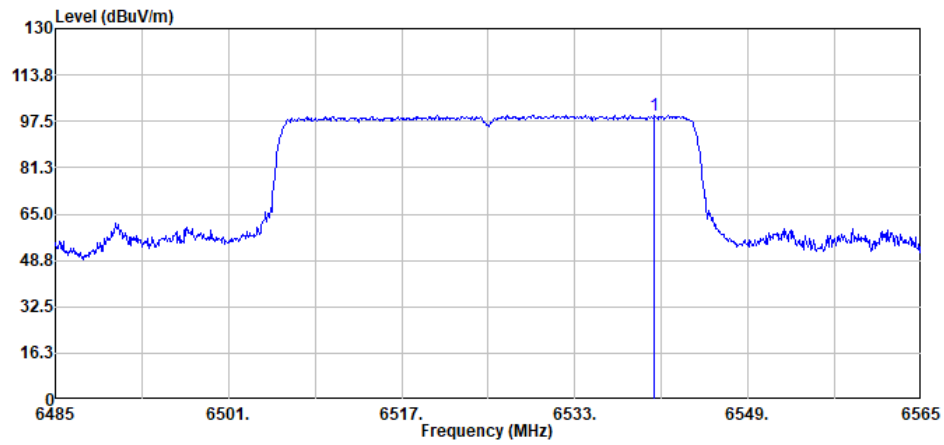

	Freq	Level	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6540.36	99.62	-----	-----	89.06	35.50	12.04	36.98	0.00	300	107	Peak




11AX40MIMO_Total_6565

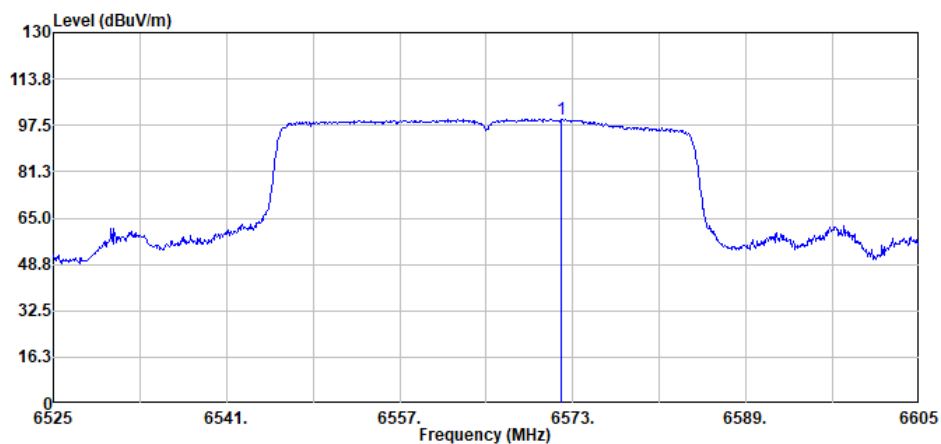

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6571.88	99.76	-----	-----		89.23	35.50	12.07	37.04	0.00	300	116	Peak




11AX40MIMO_Total_6685

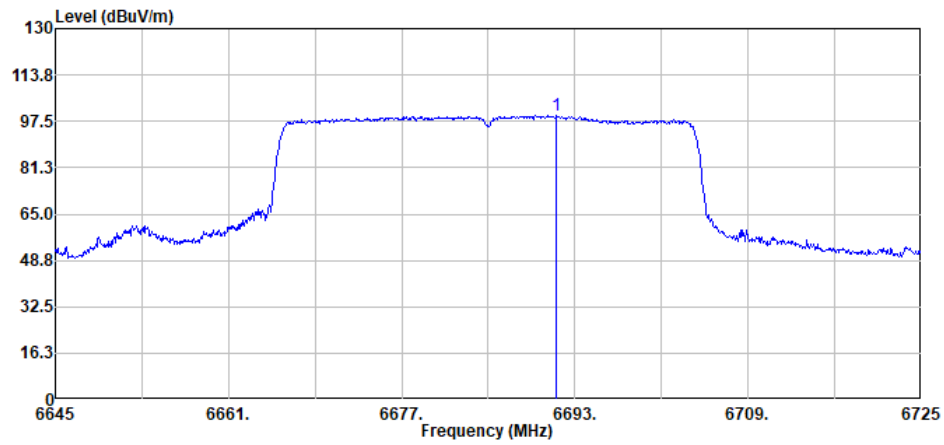

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6691.32	99.53	-----	-----		88.87	35.59	12.16	37.09	0.00	300	117	Peak




11AX40MIMO_Total_6845

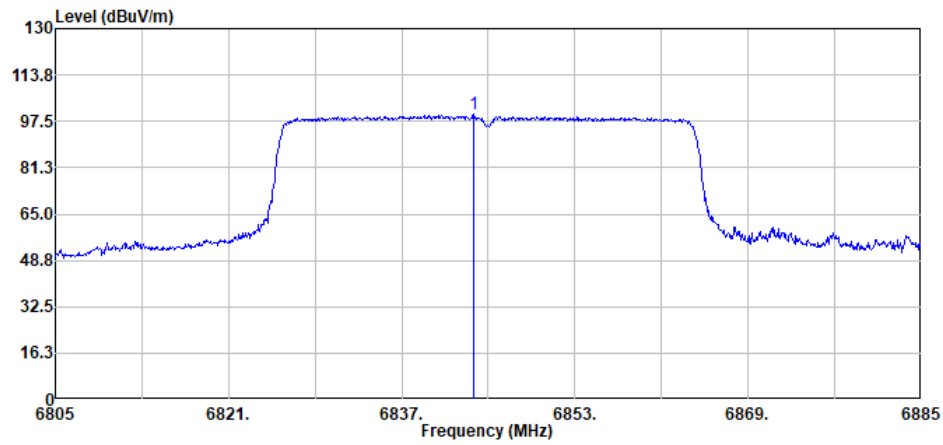

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6843.64	99.85	-----	-----		88.88	35.54	12.29	36.86	0.00	300	74	Peak




11AX40MIMO_Total_6885

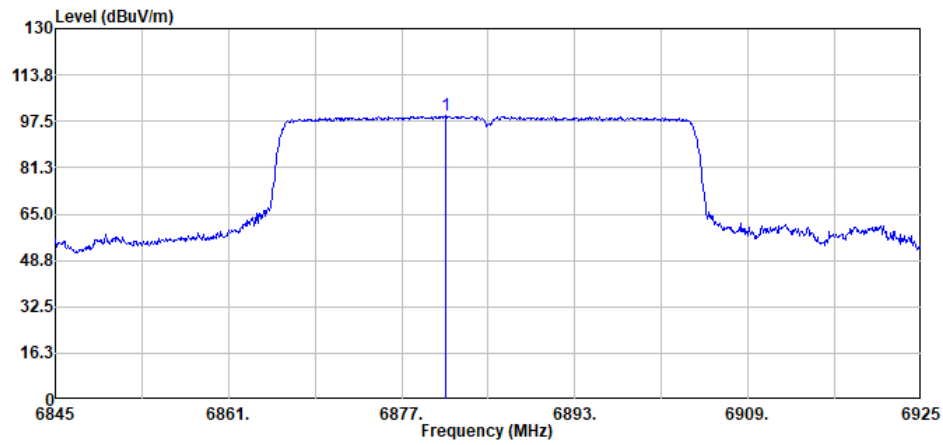

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6881.00	99.42	-----	-----		88.40	35.58	12.33	36.89	0.00	205	86	Peak




11AX40MIMO_Total_6925

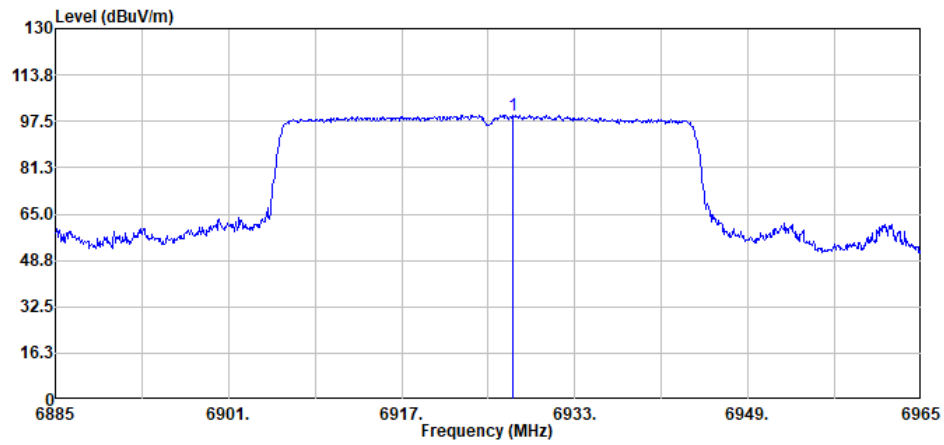

	Freq	Level	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6927.24	99.66	-----	-----	88.67	35.60	12.38	36.99	0.00	322	111	Peak




11AX40MIMO_Total_7005

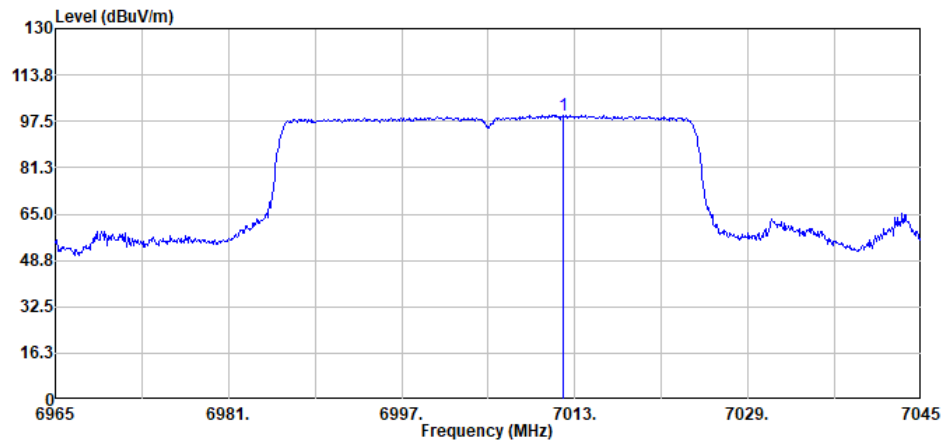

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	7011.88	99.81	-----	-----		88.84	35.61	12.47	37.11	0.00	200	101	Peak




11AX40MIMO_Total_7085

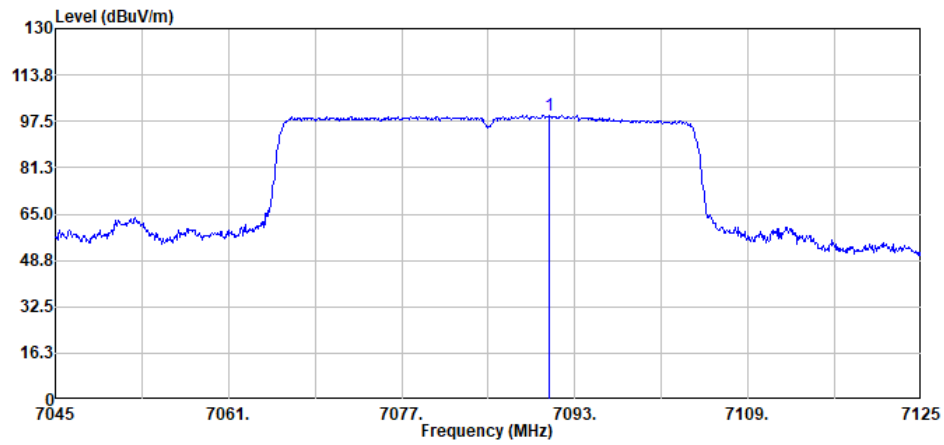

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	7090.68	99.69	-----	-----		88.47	35.69	12.57	37.04	0.00	320	87	Peak




11AX80MIMO_Total_5985

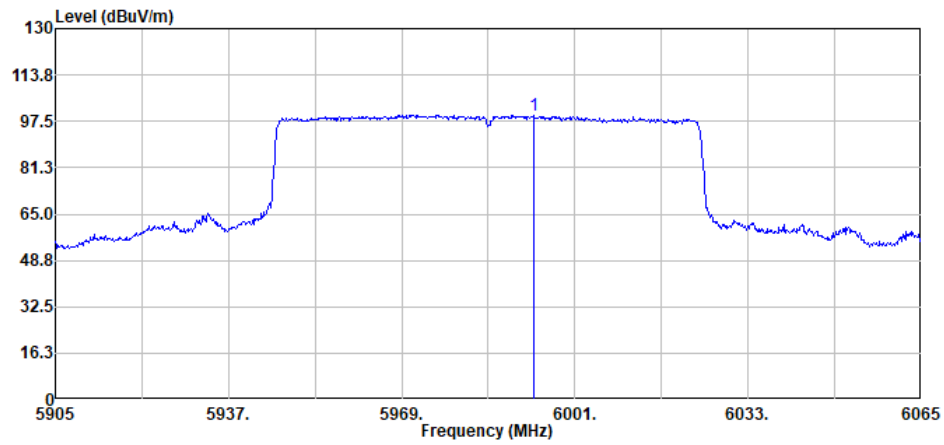

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5993.32	99.82	-----	-----		89.95	35.19	11.47	36.79	0.00	259	87	Peak




11AX80MIMO_Total_6145

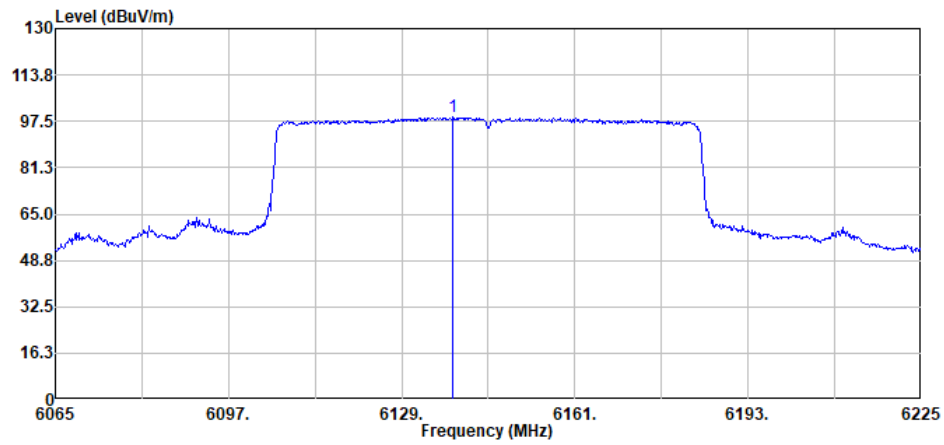

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6138.44	99.26	-----	-----		89.00	35.44	11.56	36.74	0.00	300	83	Peak




11AX80MIMO_Total_6385

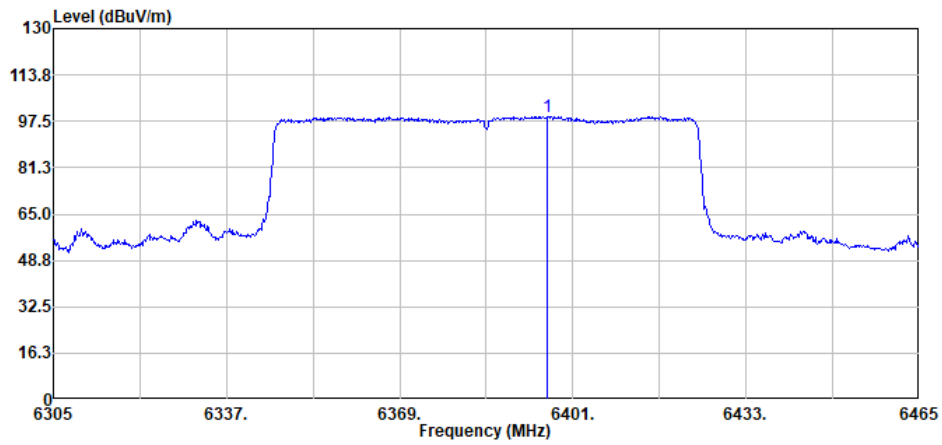

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6396.20	99.31	-----	-----	88.92	35.60	11.90	37.11	0.00	106	98	Peak




11AX80MIMO_Total_6465

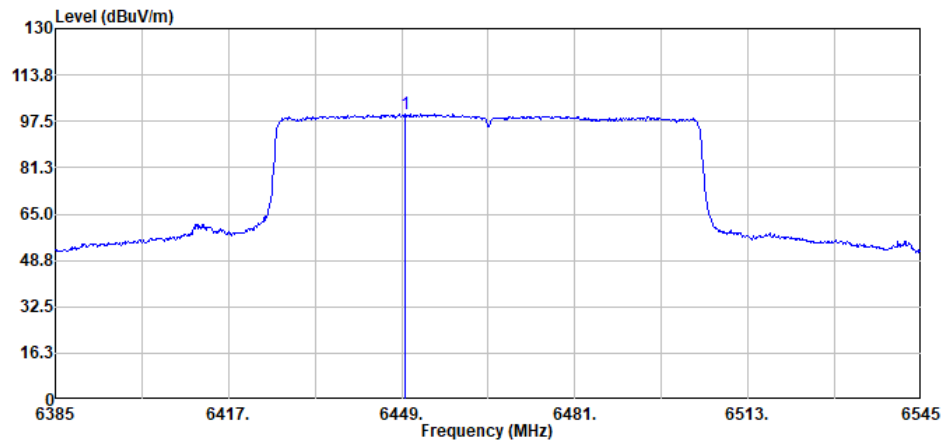

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6449.64	99.96	-----	-----	89.39	35.55	11.95	36.93	0.00	262	109	Peak




11AX80MIMO_Total_6545

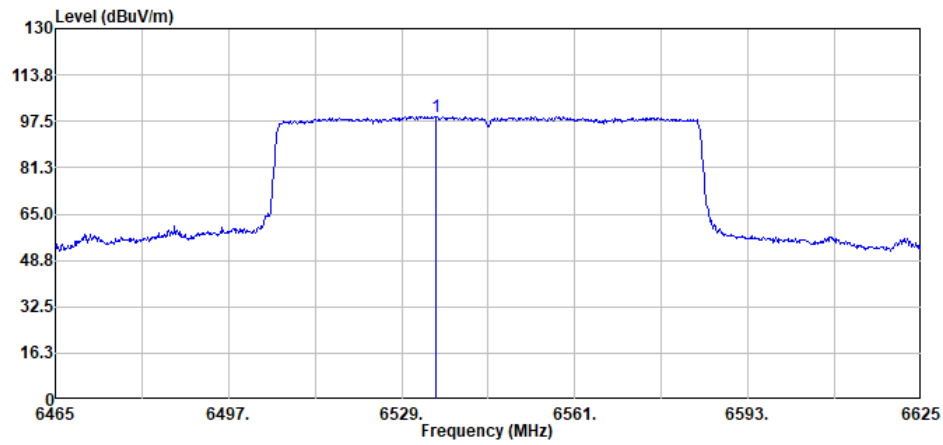

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6535.40	99.31	-----	-----		88.75	35.50	12.03	36.97	0.00	214	121	Peak




11AX80MIMO_Total_6625

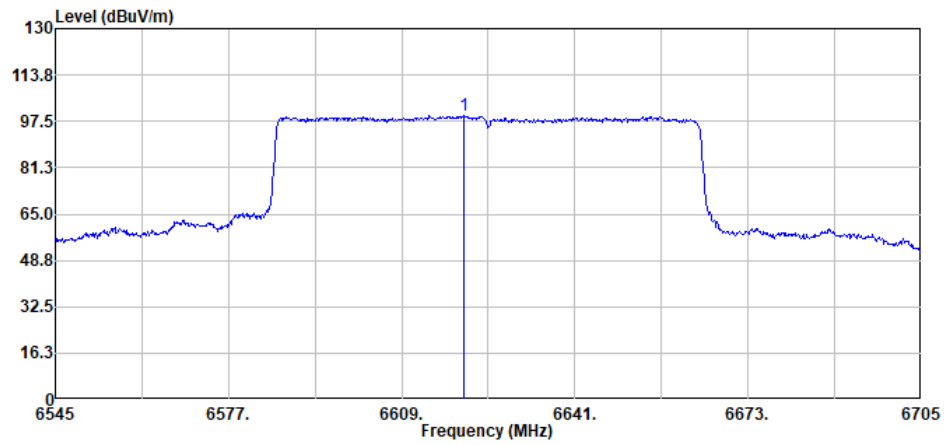

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6620.36	99.38	-----	-----		88.81	35.52	12.11	37.06	0.00	0	0	Peak




11AX80MIMO_Total_6705

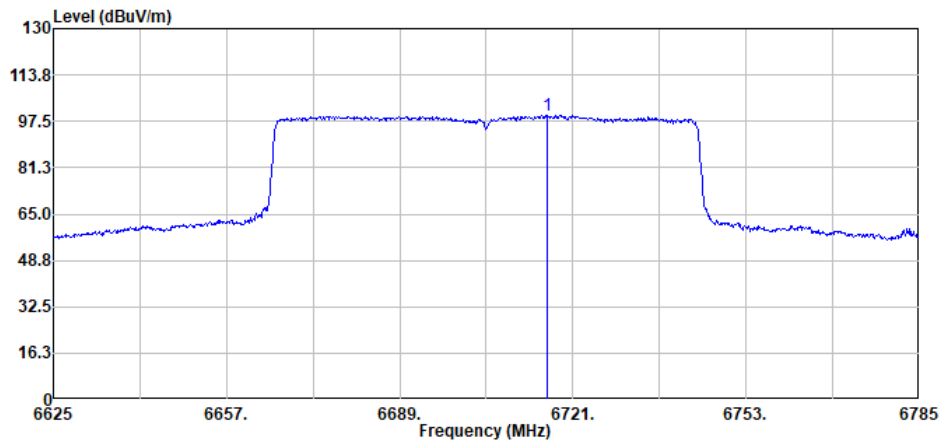

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6716.36	99.66	-----	-----		88.97	35.58	12.18	37.07	0.00	190	119	Peak




11AX80MIMO_Total_6785

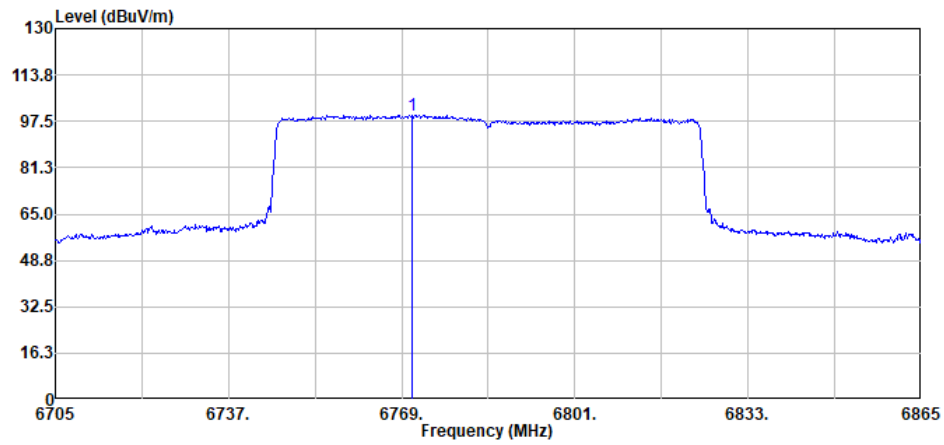

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6770.92	99.68	-----	-----		88.92	35.53	12.22	36.99	0.00	251	89	Peak




11AX80MIMO_Total_6865

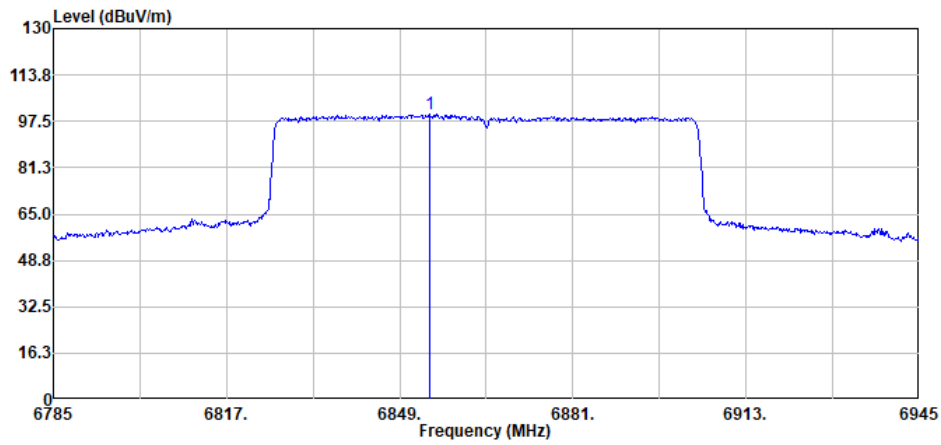

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6854.44	99.90	-----	-----		88.91	35.55	12.30	36.86	0.00	165	88	Peak




11AX80MIMO_Total_6945

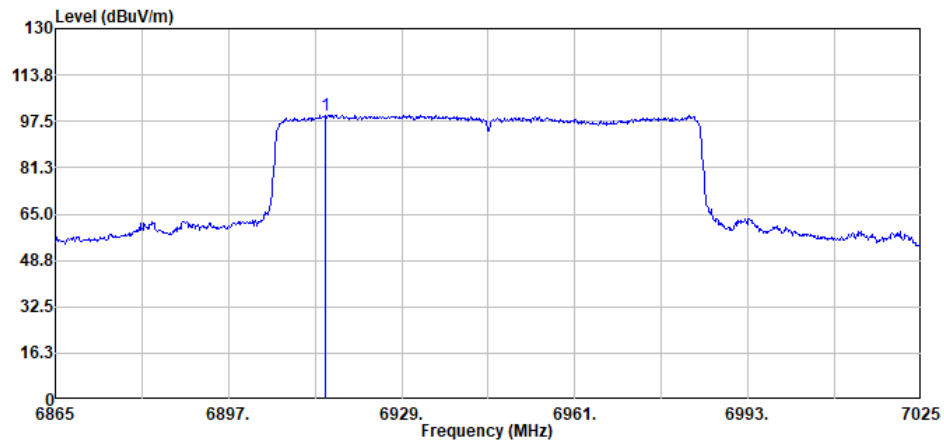


	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6914.92	99.60	-----	-----		88.59	35.60	12.37	36.96	0.00	128	96	Peak



11AX80MIMO_Total_7025

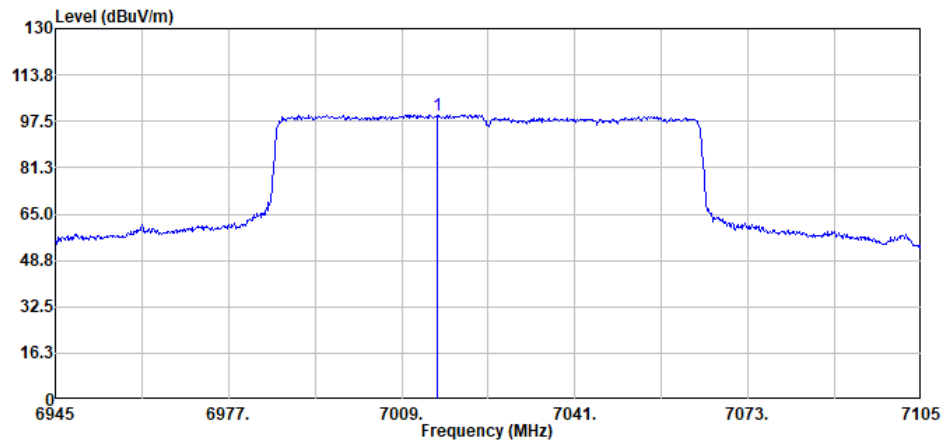


	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	7015.56	99.75	-----	-----		88.76	35.62	12.48	37.11	0.00	144	89	Peak

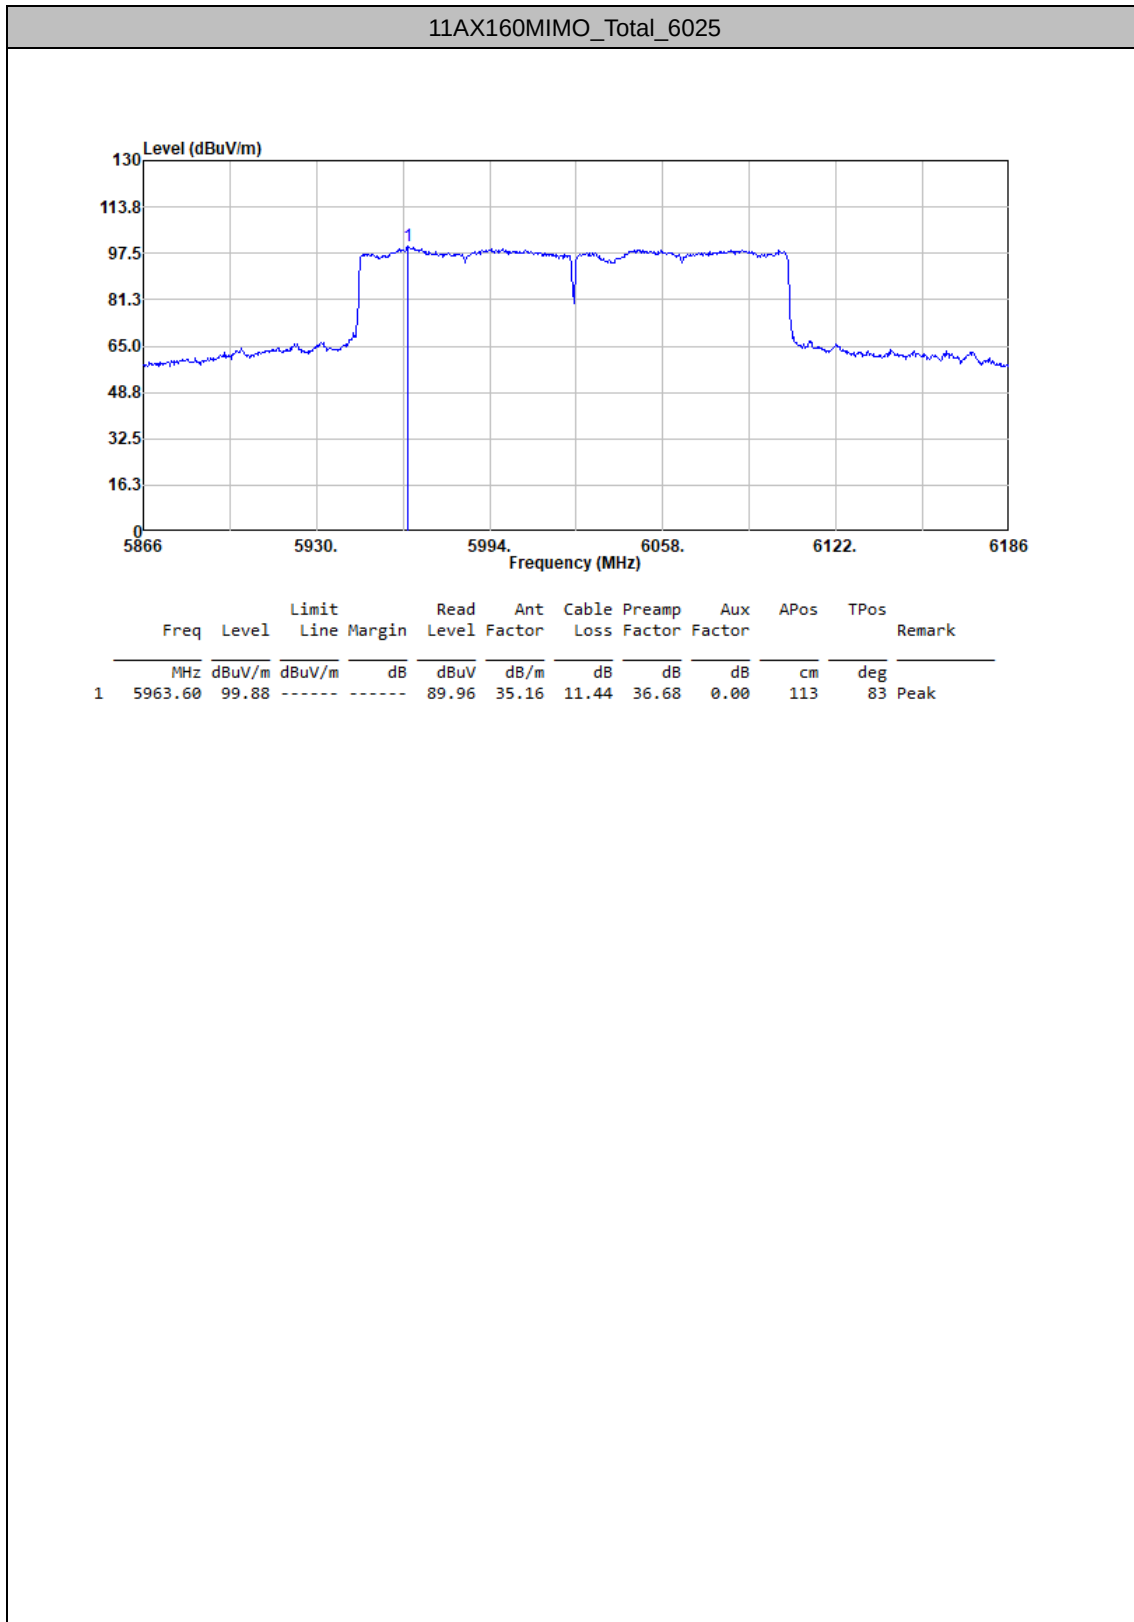






11AX160MIMO_Total_6185

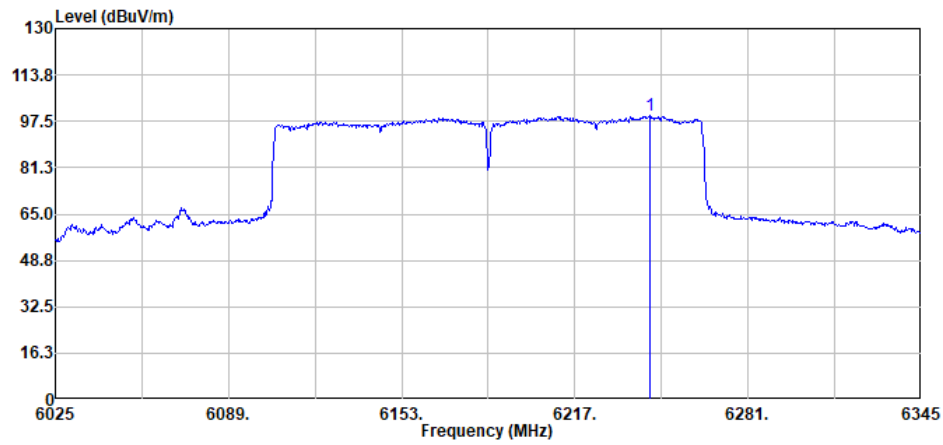



	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6244.84	99.36	-----	-----		89.12	35.50	11.67	36.93	0.00	182	124	Peak

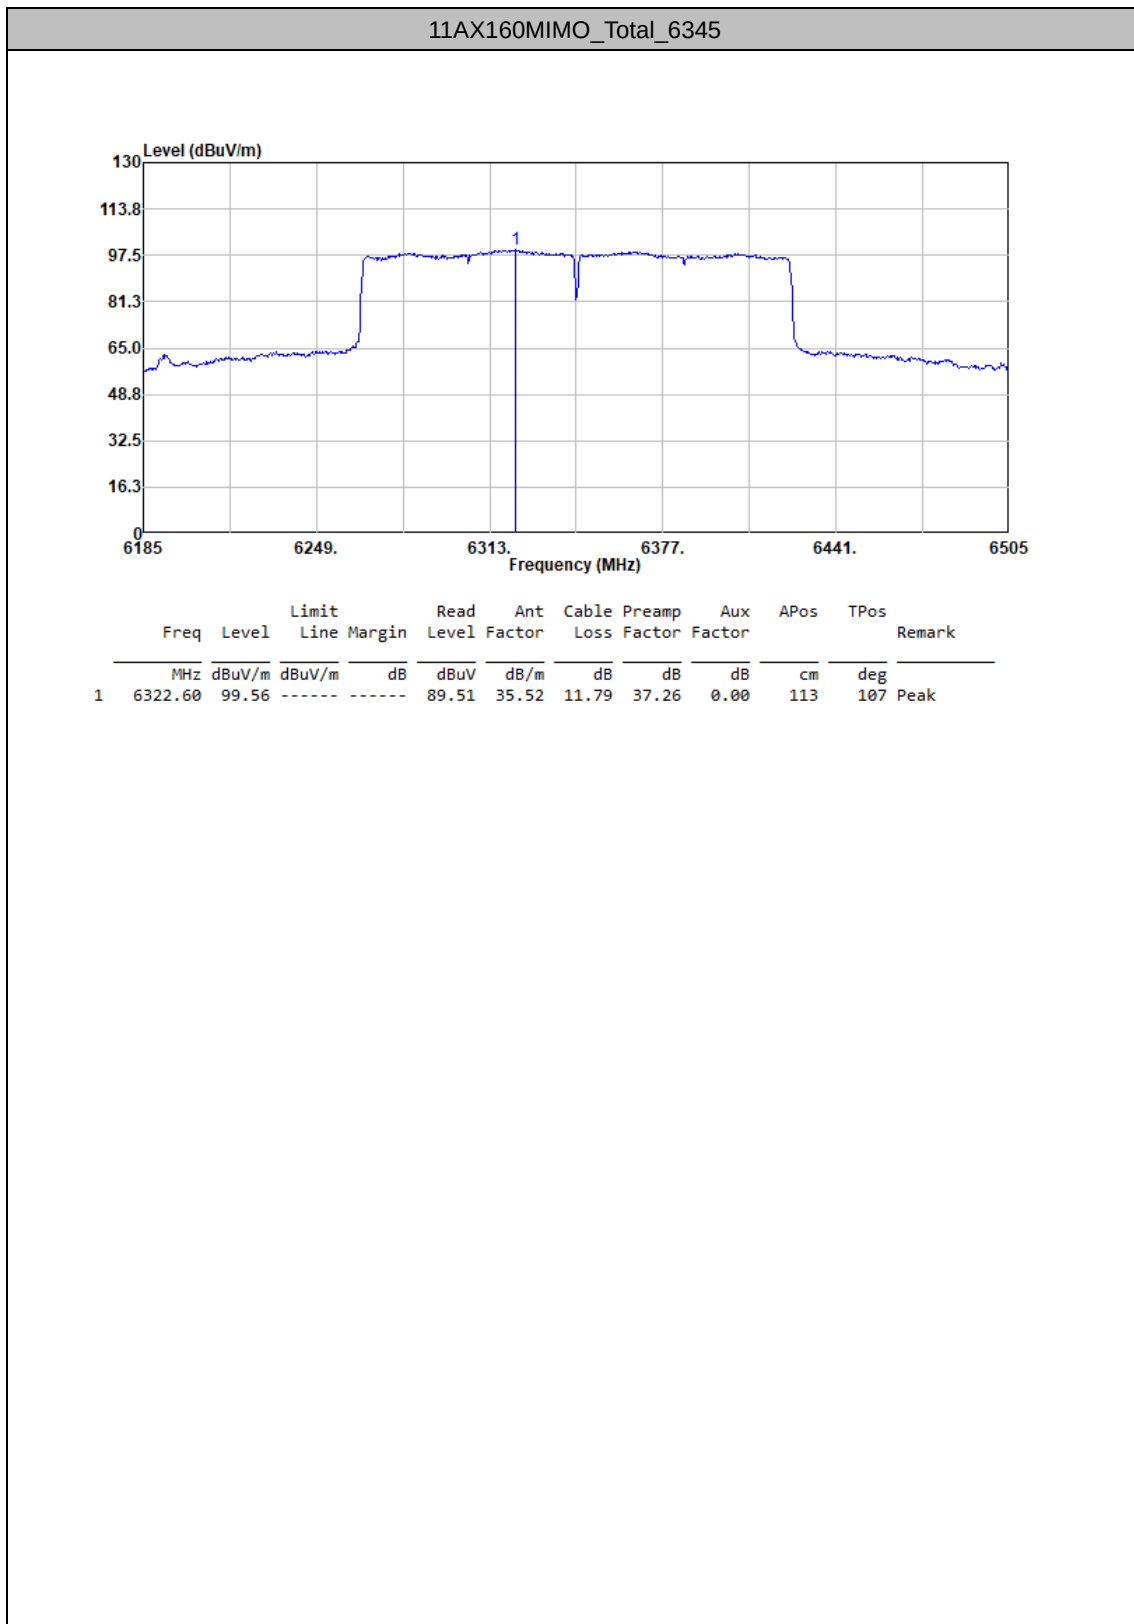

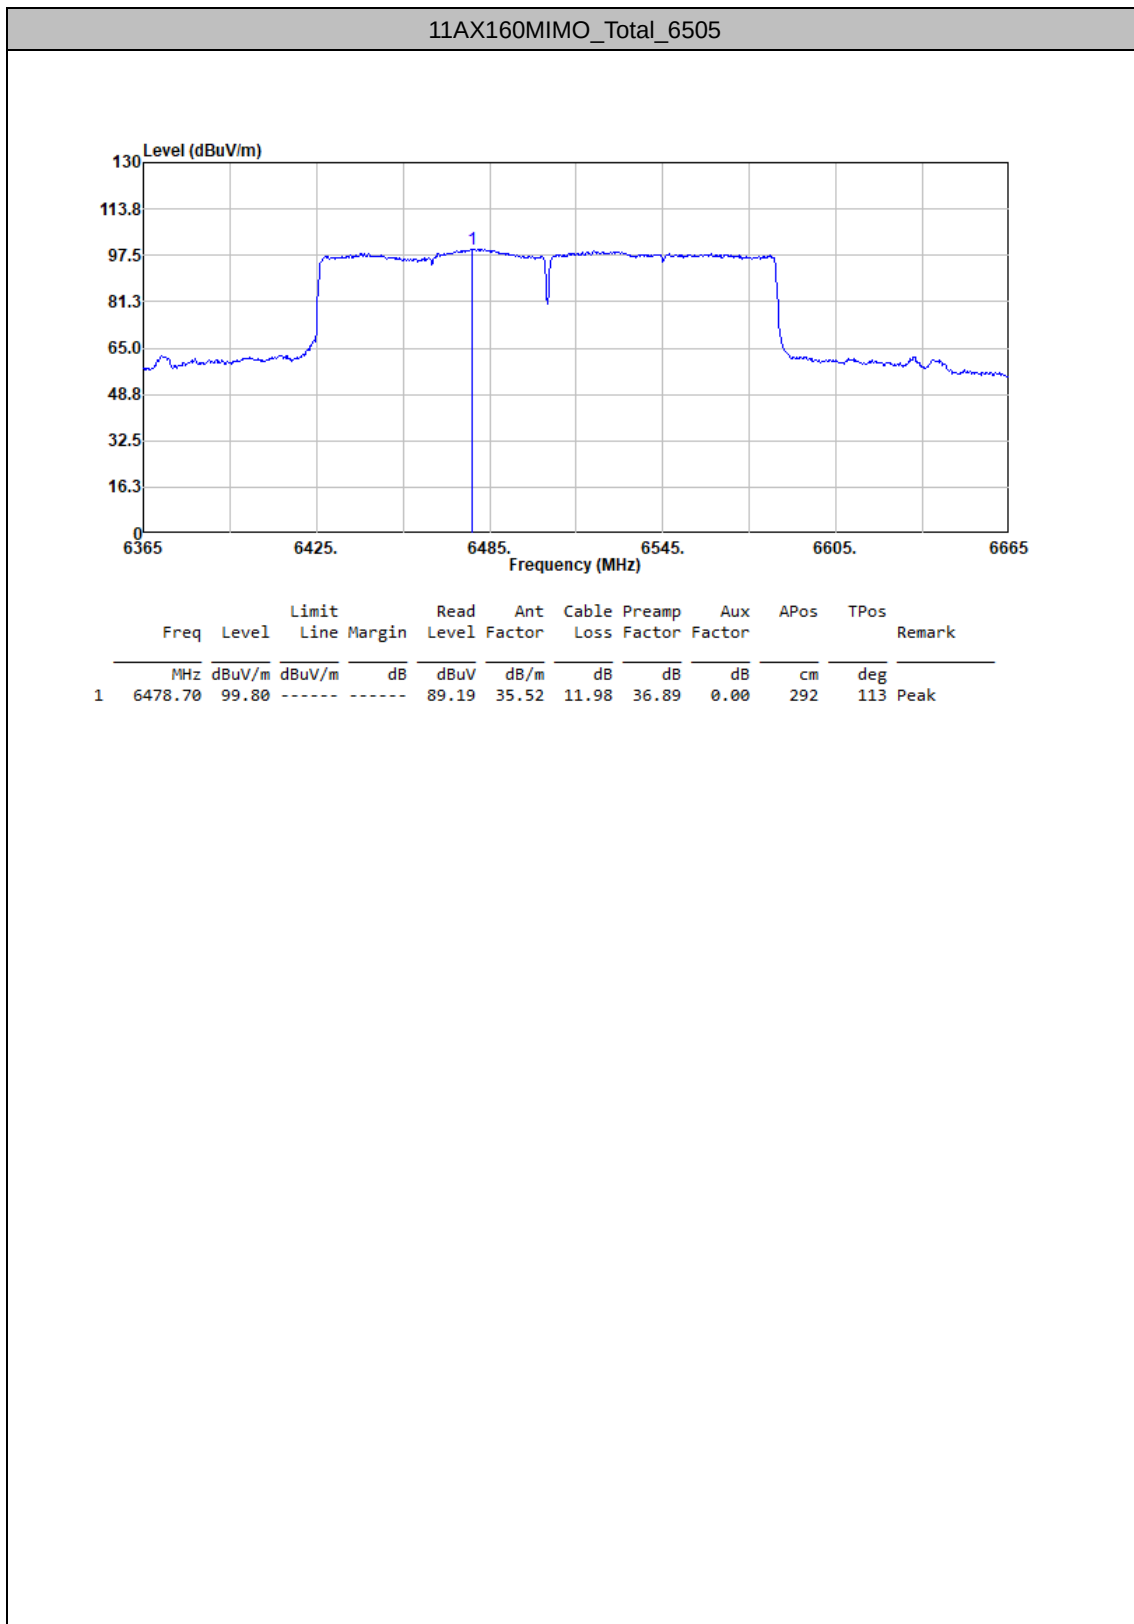

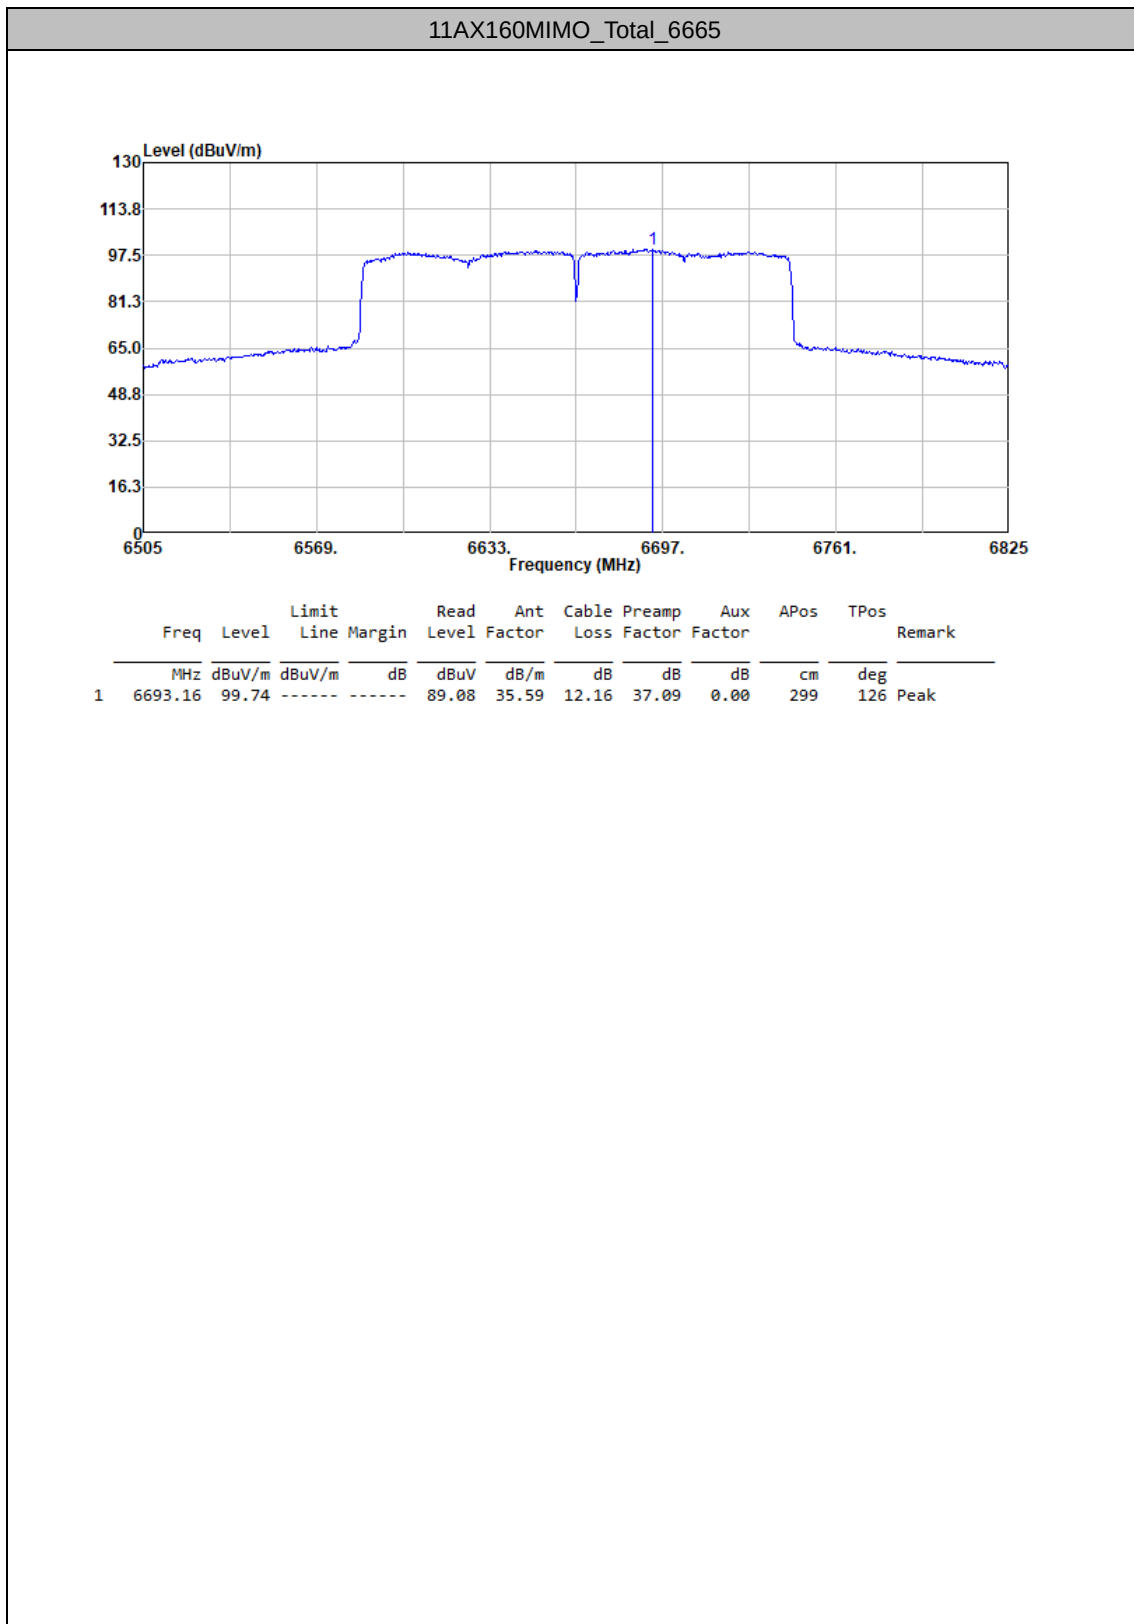

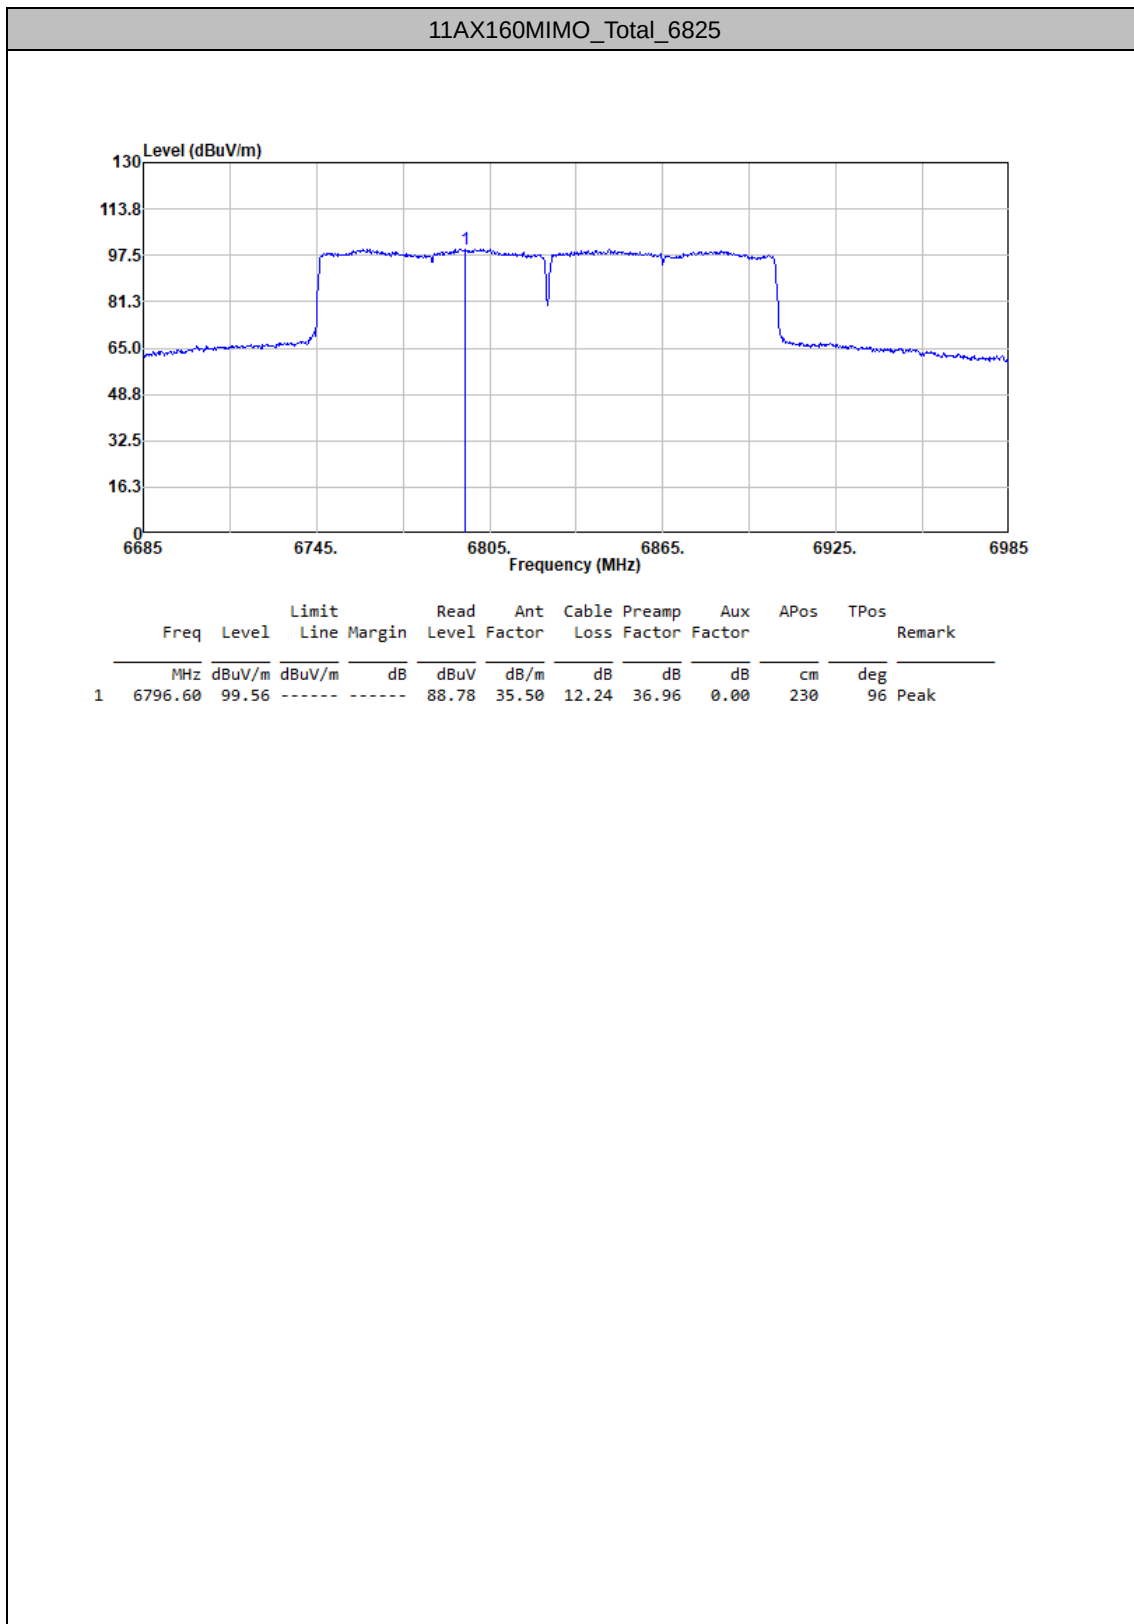

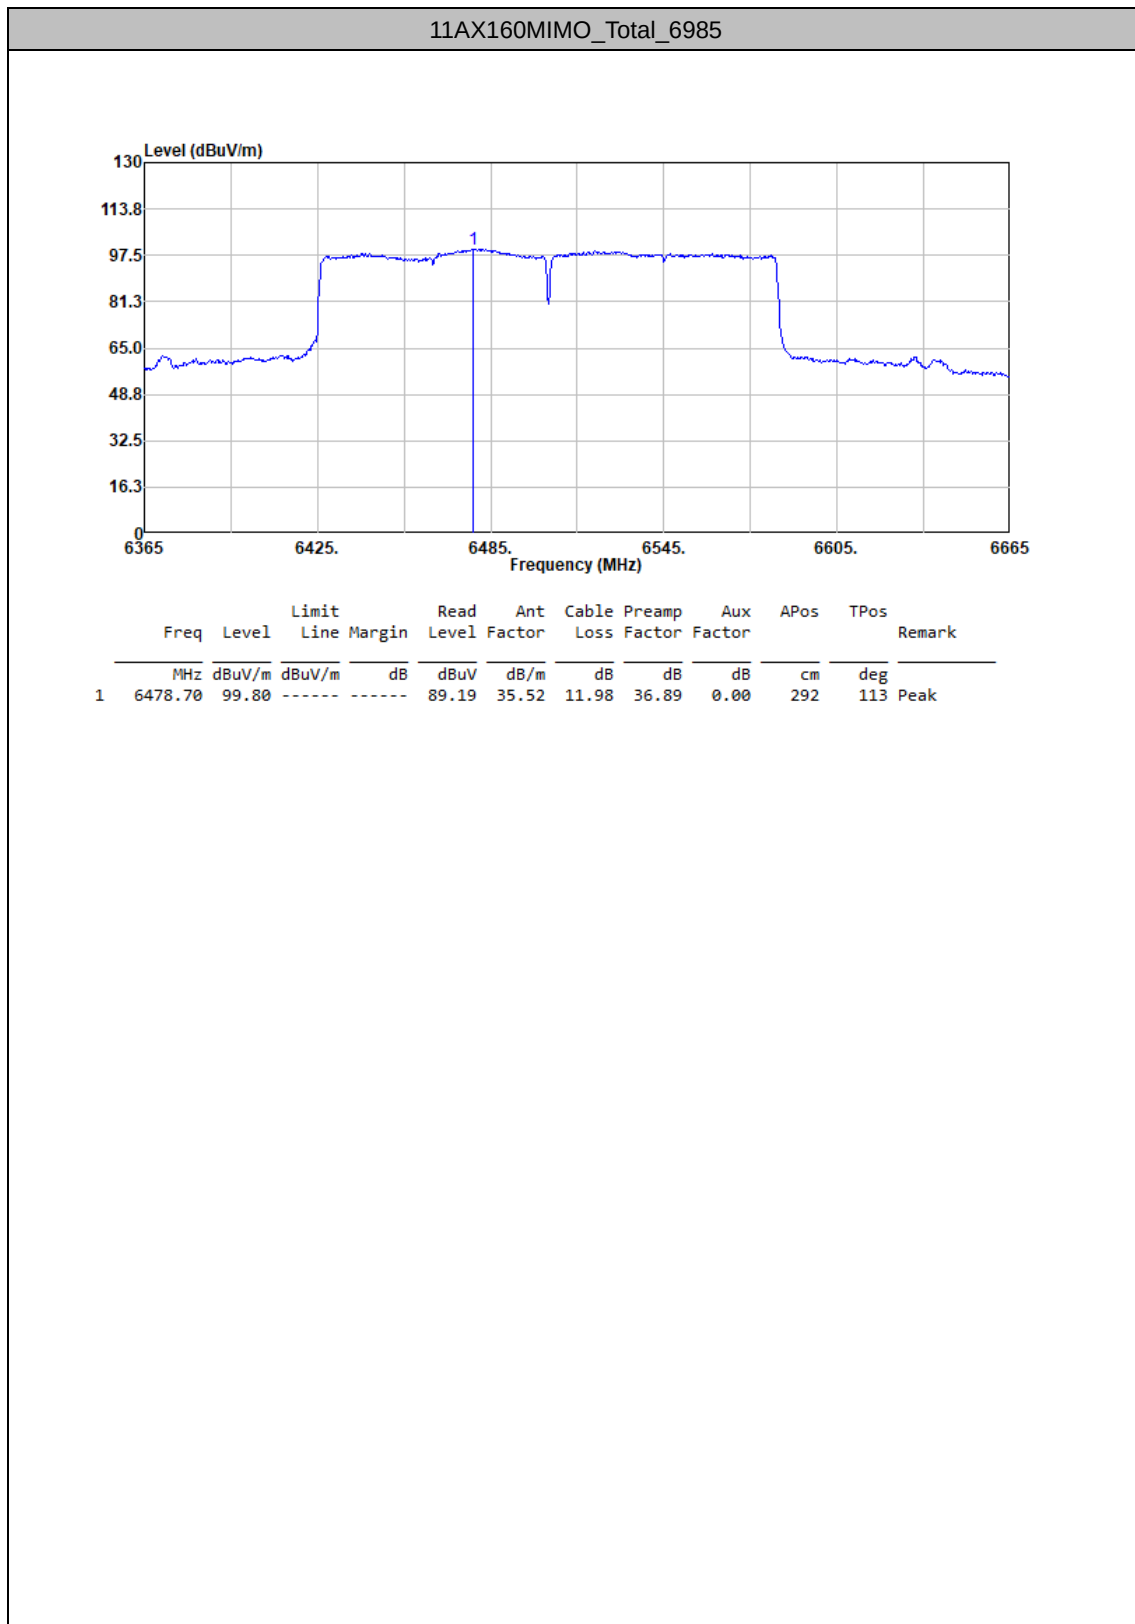

In-Band Emissions

Test Result

TestMode	Antenna	Freq(MHz)	Result	Limit	Verdict
11AX20MIMO	Total	5955	See test graph	See test graph	PASS
	Total	6175	See test graph	See test graph	PASS
	Total	6415	See test graph	See test graph	PASS
	Total	6435	See test graph	See test graph	PASS
	Total	6475	See test graph	See test graph	PASS
	Total	6515	See test graph	See test graph	PASS
	Total	6535	See test graph	See test graph	PASS
	Total	6695	See test graph	See test graph	PASS
	Total	6855	See test graph	See test graph	PASS
	Total	6875	See test graph	See test graph	PASS
	Total	6895	See test graph	See test graph	PASS
	Total	6995	See test graph	See test graph	PASS
11AX40MIMO	Total	7095	See test graph	See test graph	PASS
	Total	5965	See test graph	See test graph	PASS
	Total	6165	See test graph	See test graph	PASS
	Total	6405	See test graph	See test graph	PASS
	Total	6445	See test graph	See test graph	PASS
	Total	6485	See test graph	See test graph	PASS
	Total	6525	See test graph	See test graph	PASS
	Total	6565	See test graph	See test graph	PASS
	Total	6685	See test graph	See test graph	PASS
	Total	6845	See test graph	See test graph	PASS
	Total	6885	See test graph	See test graph	PASS
	Total	6925	See test graph	See test graph	PASS
11AX80MIMO	Total	7005	See test graph	See test graph	PASS
	Total	7085	See test graph	See test graph	PASS
	Total	5985	See test graph	See test graph	PASS
	Total	6145	See test graph	See test graph	PASS
	Total	6385	See test graph	See test graph	PASS
	Total	6465	See test graph	See test graph	PASS
	Total	6545	See test graph	See test graph	PASS
	Total	6625	See test graph	See test graph	PASS
	Total	6705	See test graph	See test graph	PASS
	Total	6785	See test graph	See test graph	PASS
	Total	6865	See test graph	See test graph	PASS
	Total	6945	See test graph	See test graph	PASS
11AX160MIMO	Total	7025	See test graph	See test graph	PASS
	Total	6025	See test graph	See test graph	PASS
	Total	6185	See test graph	See test graph	PASS
	Total	6345	See test graph	See test graph	PASS
	Total	6505	See test graph	See test graph	PASS
	Total	6665	See test graph	See test graph	PASS
	Total	6825	See test graph	See test graph	PASS
	Total	6985	See test graph	See test graph	PASS



Test Graphs

