



Appendix B

Detailed Test Results

1. GSM
GSM850 for Body
GSM1900 for Body
2. WCDMA
WCDMA Band II for Body
WCDMA Band IV for Body
WCDMA Band V for Body
3. LTE
LTE Band 7 for Body
LTE Band 12 for Body
LTE Band 13 for Body
LTE Band 25 for Body
LTE Band 26 for Body
LTE Band 41 for Body
LTE Band 66 for Body
LTE Band 71 for Body
4. WIFI
WIFI 2.4GHz for Body
WIFI 5.2GHz for Body
WIFI 5.3GHz for Body
WIFI 5.8GHz for Body
5. Bluetooth
BT for Body

Date: 2026/8/31

Test Laboratory: LCS-SAR Lab

GSM 850 GPRS 3TX 128CH Left side 0mm Ant 1**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**

Communication System: UID 0, GSM (0); Frequency: 824.2 MHz; Duty Cycle: 1: 2.77
Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.926$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.775 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.396 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.974 W/kg

SAR(1 g) = 0.437 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.716 W/kg

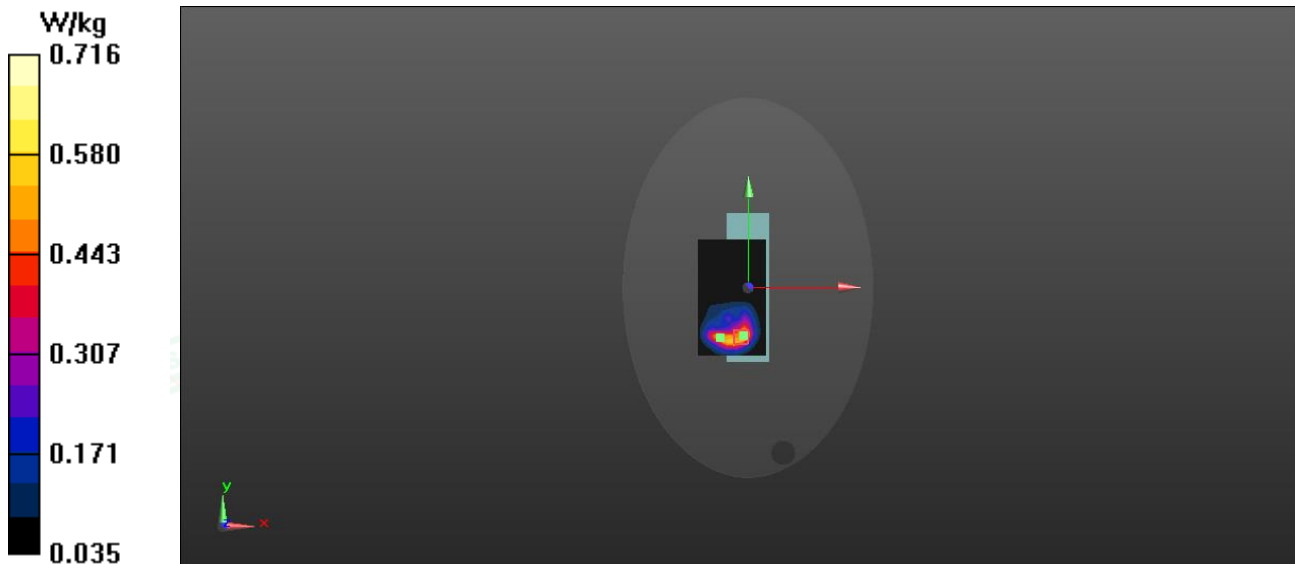



Date: 2026/8/31

Test Laboratory: LCS-SAR Lab

GSM 850 GPRS 3TX 128CH Right side 0mm Ant 2**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**

Communication System: UID 0, GSM (0); Frequency: 824.2 MHz; Duty Cycle: 1: 2.77
Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.926$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.798 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.627 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.503 W/kg; SAR(10 g) = 0.256 W/kg

Maximum value of SAR (measured) = 0.846 W/kg

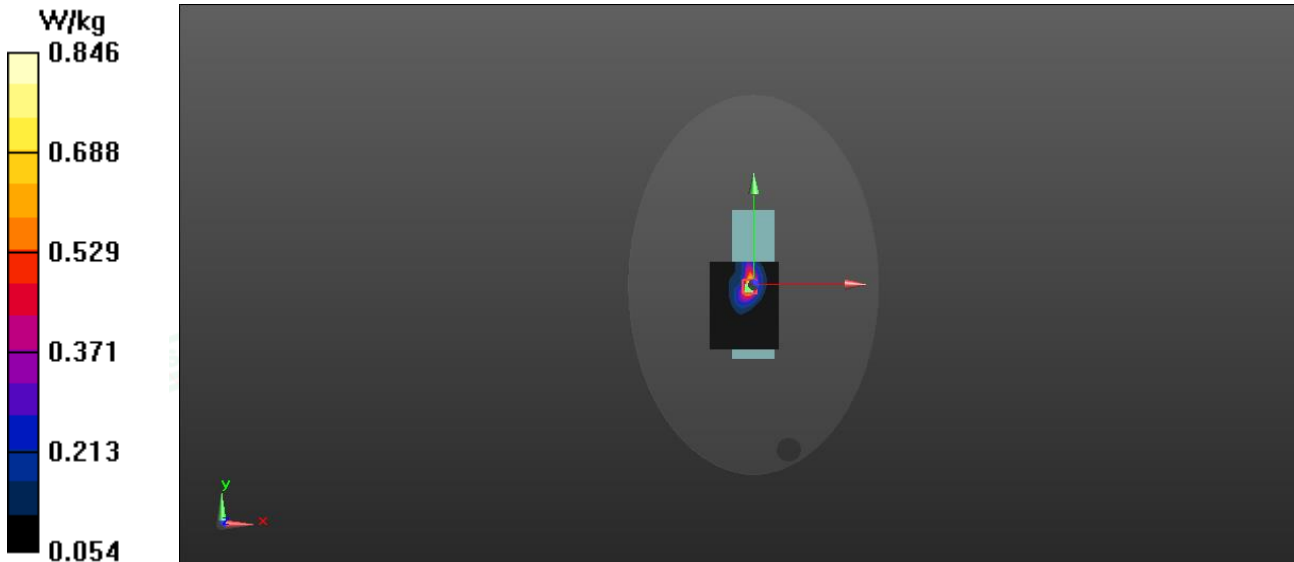



Date: 2026/9/5

Test Laboratory: LCS-SAR Lab

GSM 1900 GPRS 3TX 810CH Left side 0mm Ant 1**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**

Communication System: UID 0, GSM (0); Frequency: 1909.8 MHz; Duty Cycle: 1: 2.77
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.425$ S/m; $\epsilon_r = 39.374$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.763 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.948 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.963 W/kg

SAR(1 g) = 0.455 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 0.704 W/kg

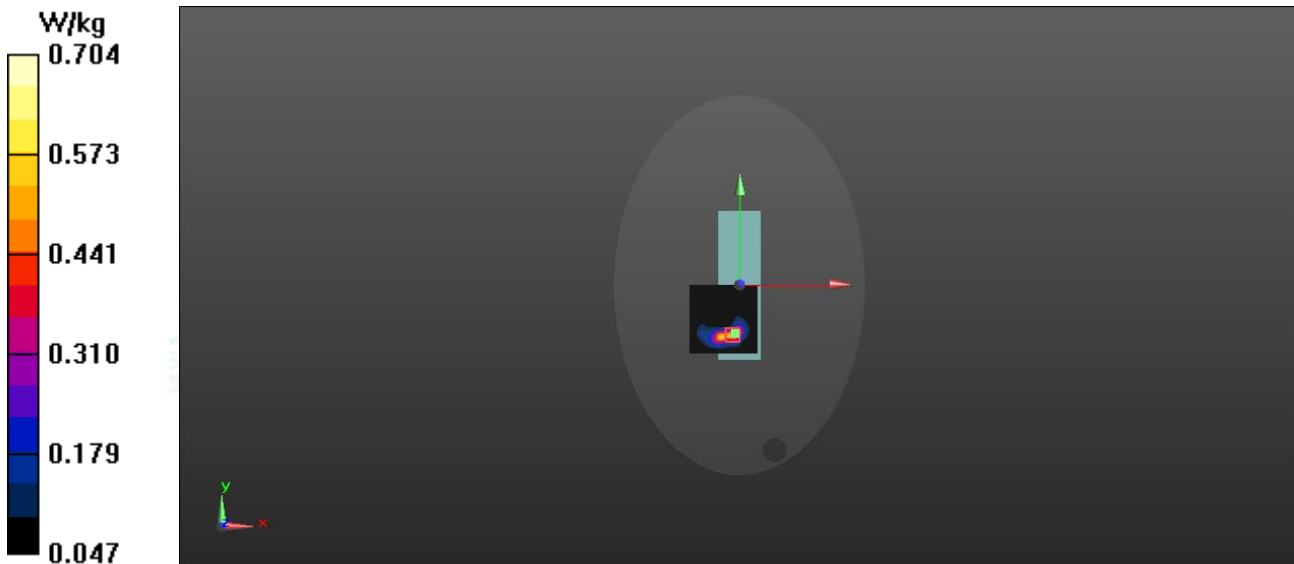

Date: 2026/9/5

Test Laboratory: LCS-SAR Lab

GSM 1900 GPRS 3TX 810CH Right side 0mm Ant 2**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**

Communication System: UID 0, GSM (0); Frequency: 1909.8 MHz; Duty Cycle: 1: 2.77
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.425$ S/m; $\epsilon_r = 39.374$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.852 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.346 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.516 W/kg; SAR(10 g) = 0.262 W/kg

Maximum value of SAR (measured) = 0.794 W/kg

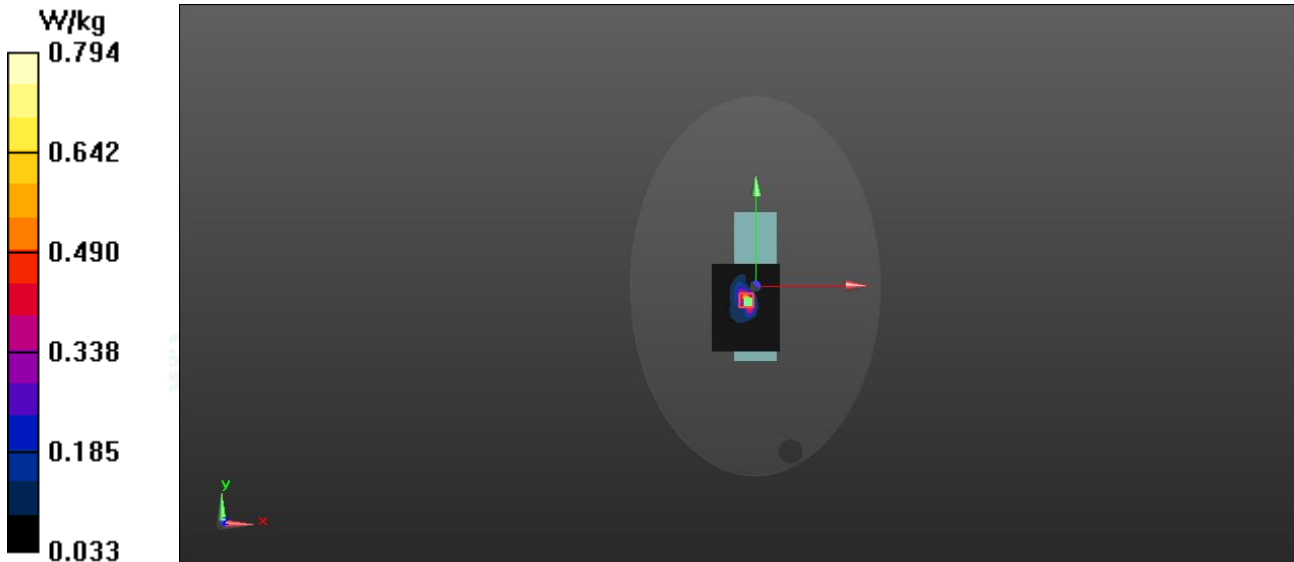

Date: 2026/9/5

Test Laboratory: LCS-SAR Lab

WCDMA II RMC 9400CH Left side 0mm Ant 1**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**

Communication System: UID 0, WCDMA (0); Frequency: 1880.0 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.394$ S/m; $\epsilon_r = 39.014$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.894 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.349 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.522 W/kg; SAR(10 g) = 0.271 W/kg

Maximum value of SAR (measured) = 0.863 W/kg

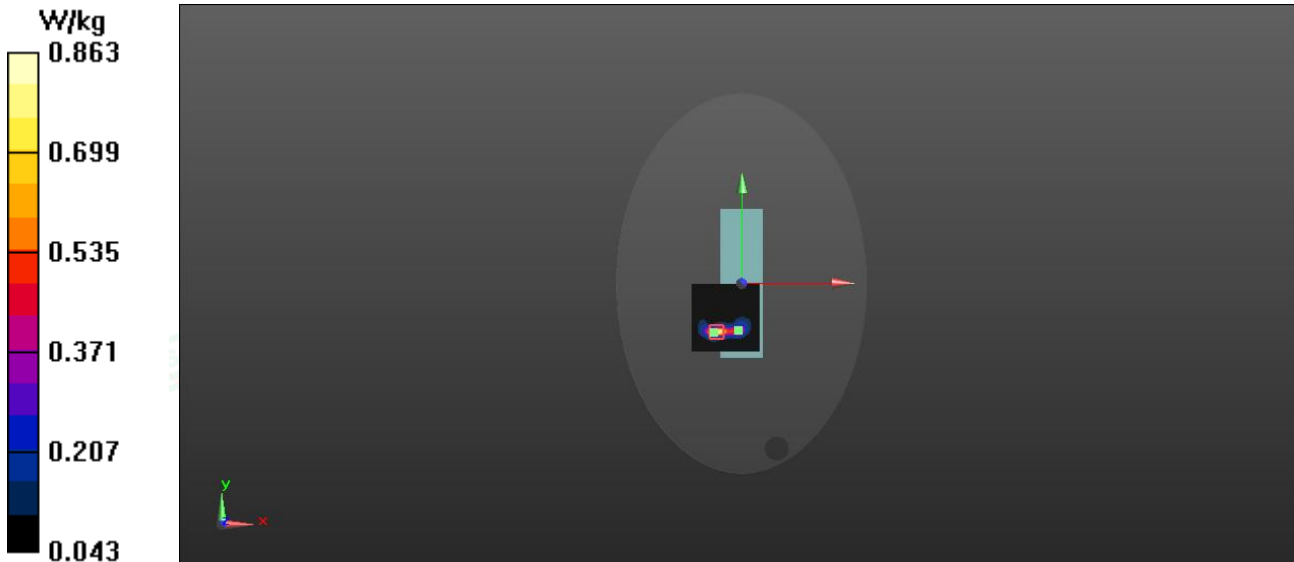

Date: 2026/9/5

Test Laboratory: LCS-SAR Lab

WCDMA II RMC 9400CH Right side 0mm Ant 2**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**

Communication System: UID 0, WCDMA (0); Frequency: 1880.0 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.394$ S/m; $\epsilon_r = 39.014$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.15 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.74 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.684 W/kg; SAR(10 g) = 0.349 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

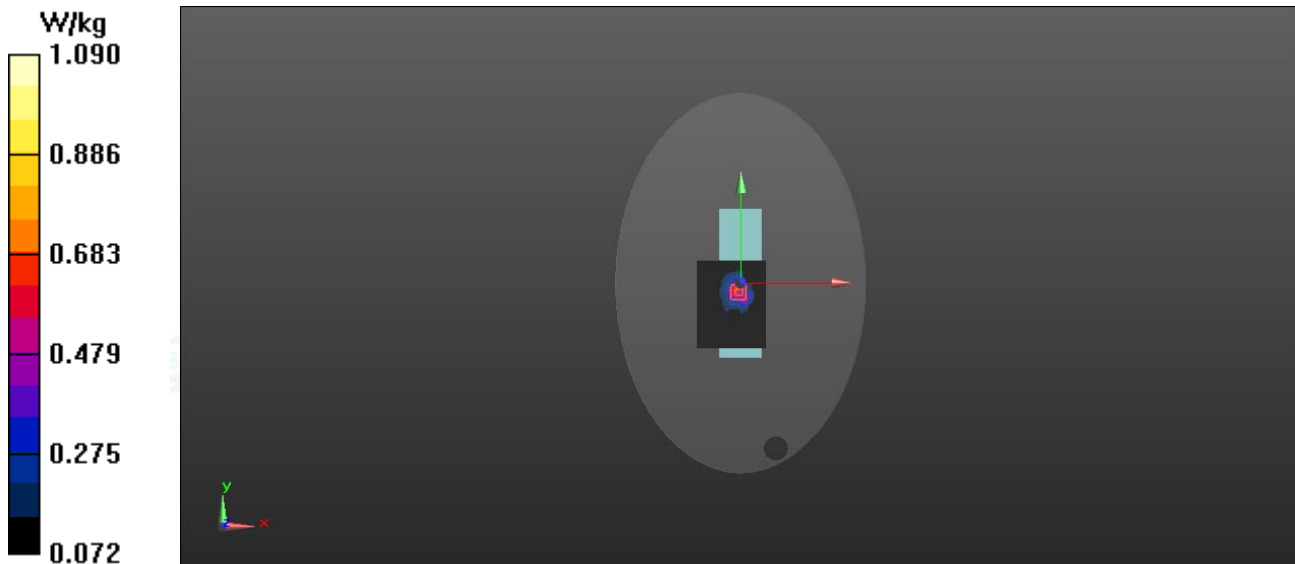

Date: 2026/9/2

Test Laboratory: LCS-SAR Lab

WCDMA IV RMC 1413CH Left side 0mm Ant 1**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used : $f = 1732.6 \text{ MHz}$; $\sigma = 1.367 \text{ S/m}$; $\epsilon_r = 40.346$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.625 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.735 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.836 W/kg

SAR(1 g) = 0.384 W/kg; SAR(10 g) = 0.201 W/kg

Maximum value of SAR (measured) = 0.579 W/kg

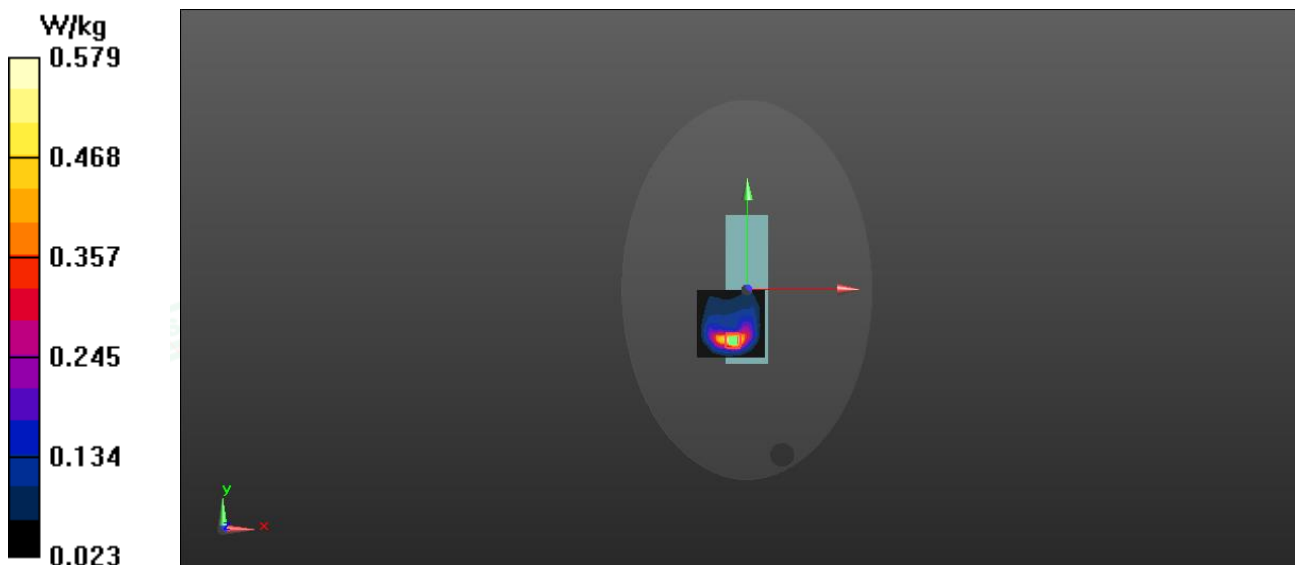

Date: 2026/9/2

Test Laboratory: LCS-SAR Lab

WCDMA IV RMC 1413CH Right side 0mm Ant 2**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium parameters used : $f = 1732.6 \text{ MHz}$; $\sigma = 1.367 \text{ S/m}$; $\epsilon_r = 40.346$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.826 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.16 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.497 W/kg; SAR(10 g) = 0.256 W/kg

Maximum value of SAR (measured) = 0.873 W/kg

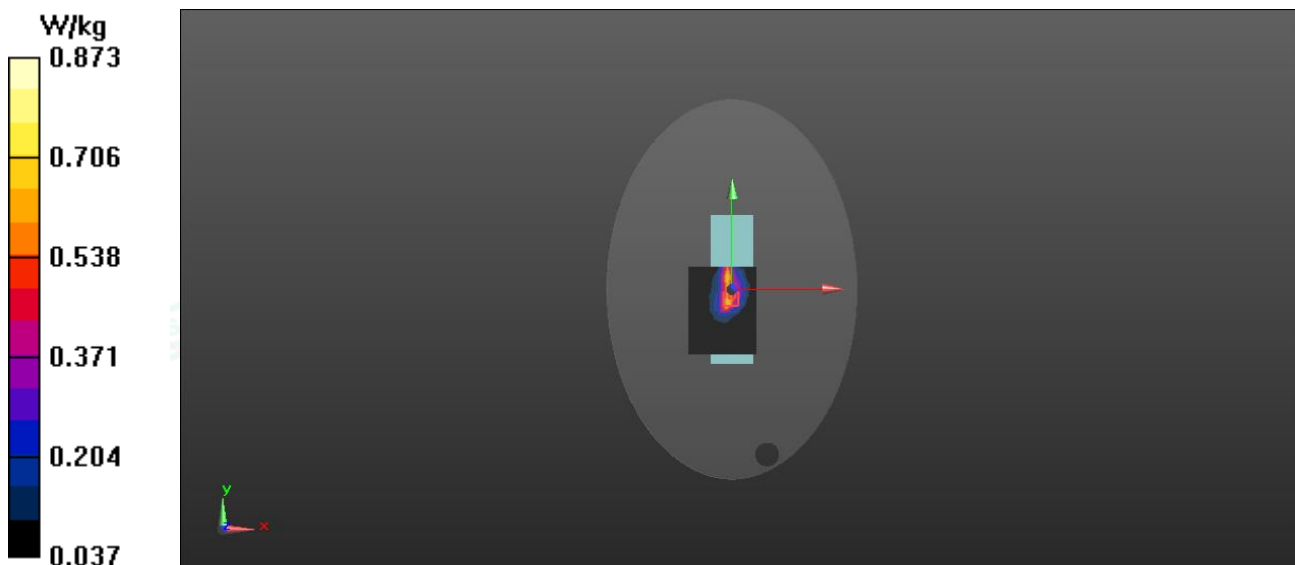

Date: 2026/8/31

Test Laboratory: LCS-SAR Lab

WCDMA V RMC 4182CH Left side 0mm Ant 1**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 836.4 \text{ MHz}$; $\sigma = 0.916 \text{ S/m}$; $\epsilon_r = 42.086$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.584 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.473 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.738 W/kg

SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.182 W/kg

Maximum value of SAR (measured) = 0.526 W/kg

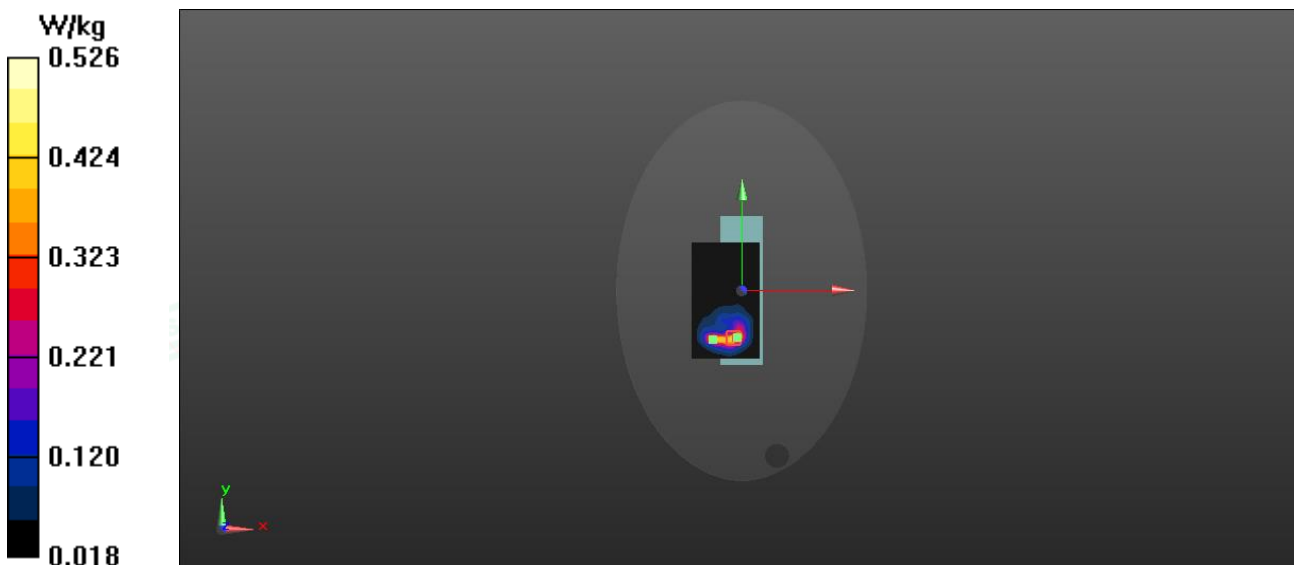



Date: 2026/8/31

Test Laboratory: LCS-SAR Lab

WCDMA V RMC 4182CH Left side 0mm Ant 1**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 836.4 \text{ MHz}$; $\sigma = 0.916 \text{ S/m}$; $\epsilon_r = 42.086$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.736 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.617 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.883 W/kg

SAR(1 g) = 0.428 W/kg; SAR(10 g) = 0.222 W/kg

Maximum value of SAR (measured) = 0.705 W/kg

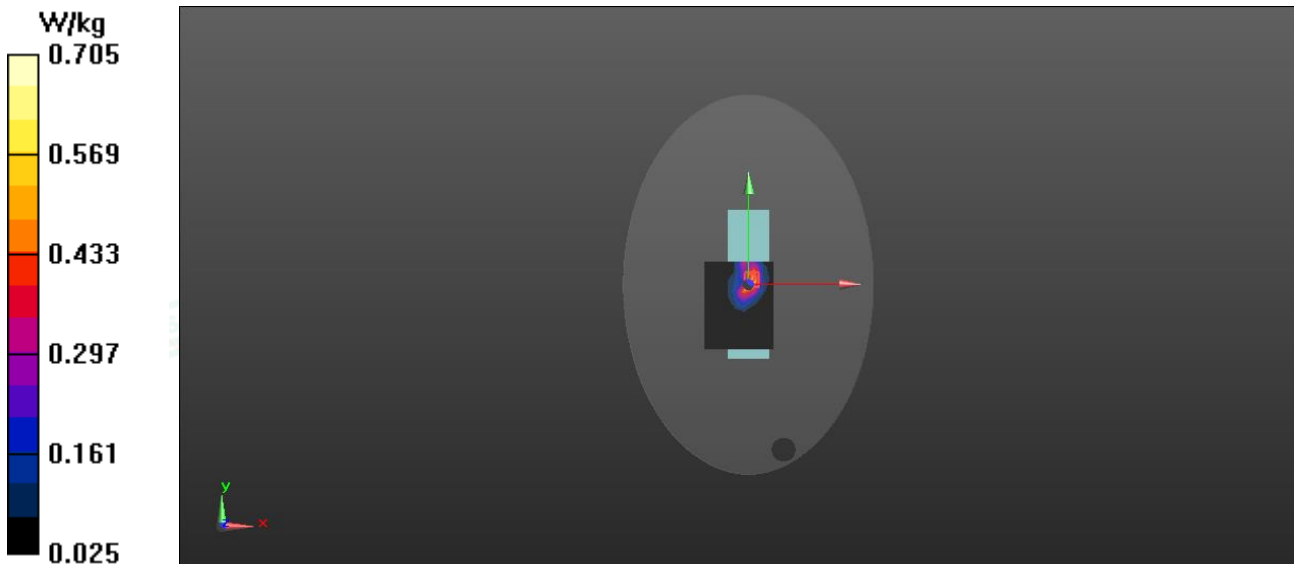



Date: 2026/9/7

Test Laboratory: LCS-SAR Lab

LTE B7 20M QPSK 20850CH 1RB0 Left side 0mm Ant 1

DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1

Communication System: UID 0, LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.903$ S/m; $\epsilon_r = 38.624$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.20, 7.20, 7.20); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.476 W/kg


Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value =4.863 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.614 W/kg

SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.437 W/kg

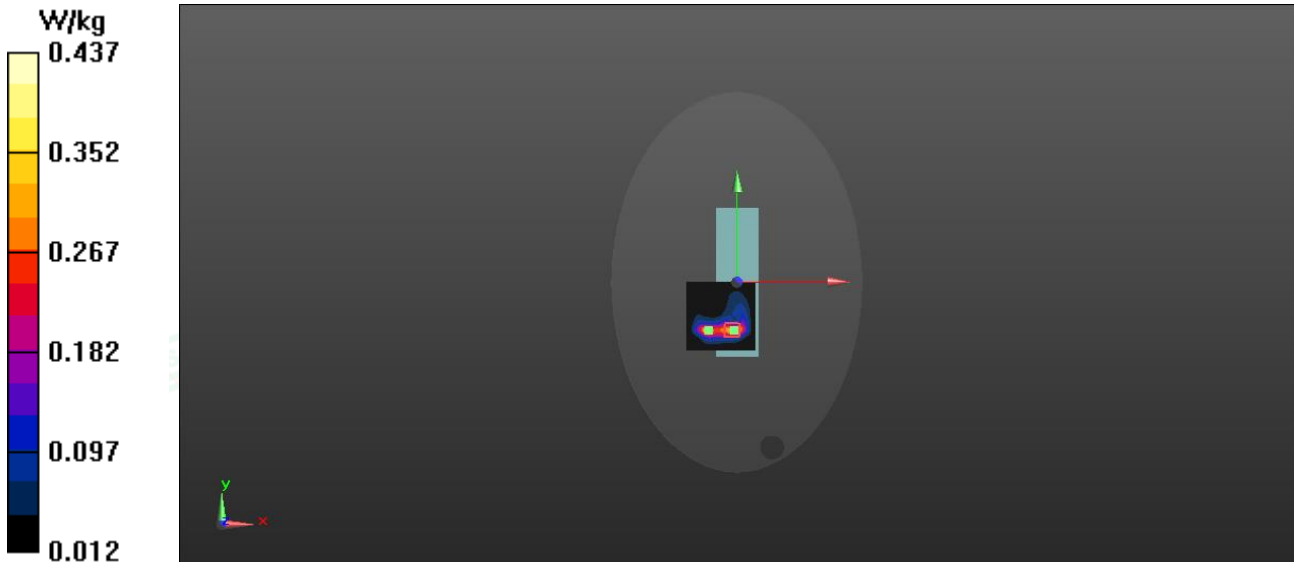

Date: 2026/9/7

Test Laboratory: LCS-SAR Lab

LTE B7 20M QPSK 20850CH 1RB0 Right side 0mm Ant 2**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**


Communication System: UID 0, LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510 \text{ MHz}$; $\sigma = 1.903 \text{ S/m}$; $\epsilon_r = 38.624$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.20, 7.20, 7.20); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

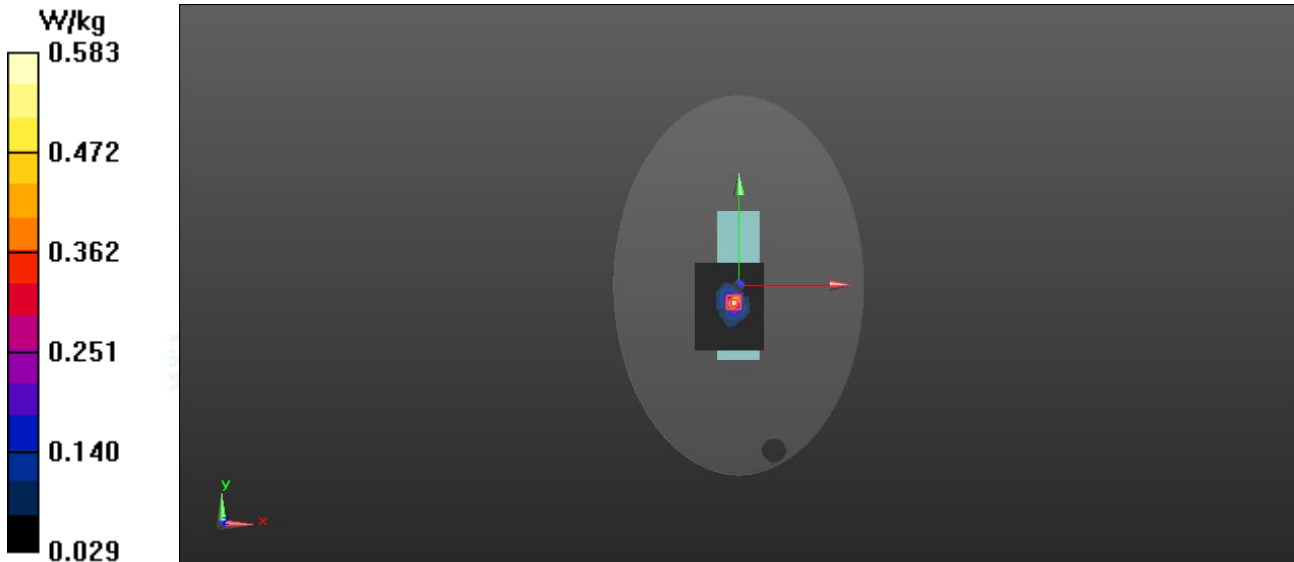Configuration/ Body /Area Scan (9x12x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 0.627 W/kg **Configuration/ Body /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.863 V/m ; Power Drift = 0.18 dB Peak SAR (extrapolated) = 0.837 W/kg **SAR(1 g) = 0.393 W/kg ; SAR(10 g) = 0.209 W/kg** Maximum value of SAR (measured) = 0.583 W/kg 

Date: 2026/8/28

Test Laboratory: LCS-SAR Lab

LTE B12 10M QPSK 23060CH 1RB24 Left side 0mm Ant 1**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**


Communication System: UID 0, LTE (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.869 \text{ S/m}$; $\epsilon_r = 41.583$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.51, 9.51, 9.51); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

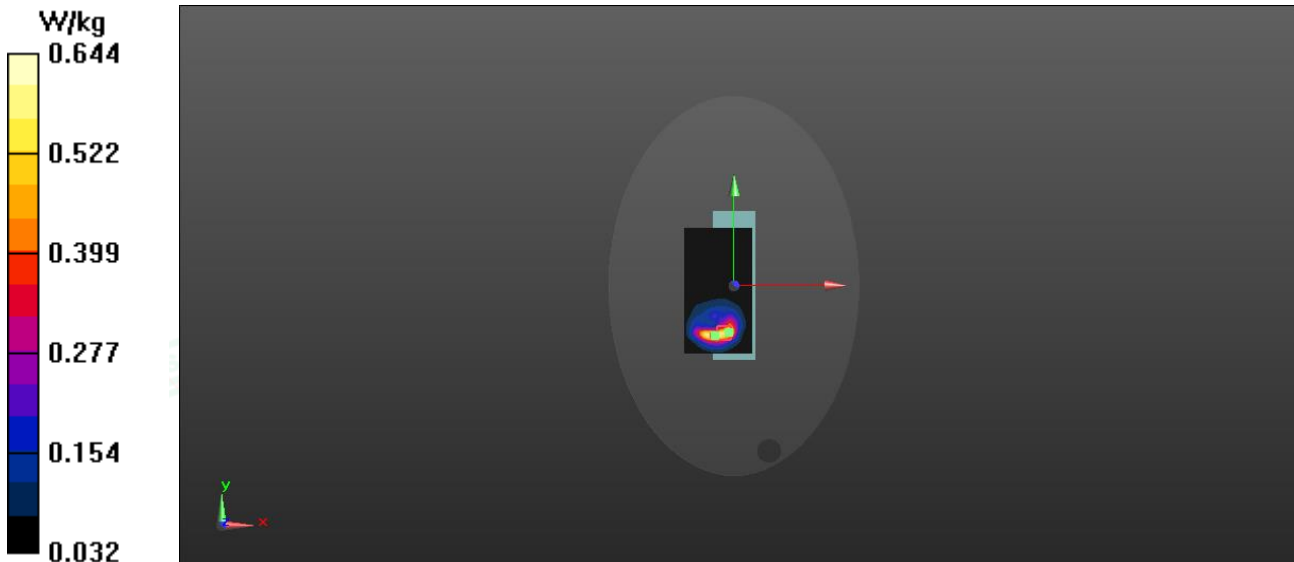Configuration/ Body /Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.687 W/kg **Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 7.248 V/m ; Power Drift = -0.07 dB Peak SAR (extrapolated) = 0.813 W/kg **SAR(1 g) = 0.377 W/kg ; SAR(10 g) = 0.241 W/kg** Maximum value of SAR (measured) = 0.644 W/kg 

Date: 2026/8/28

Test Laboratory: LCS-SAR Lab

LTE B12 10M QPSK 23060CH 1RB24 Right side 0mm Ant 2

DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1


Communication System: UID 0, LTE (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.869 \text{ S/m}$; $\epsilon_r = 41.583$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.51, 9.51, 9.51); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

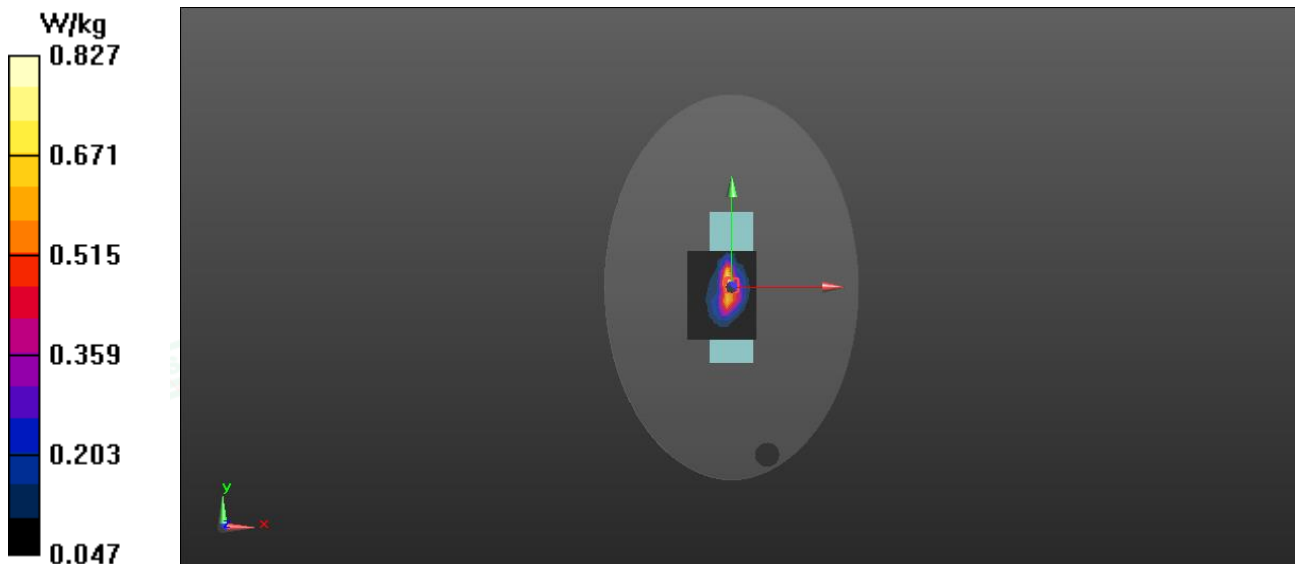Configuration/ Body /Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.895 W/kg **Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 11.37 V/m ; Power Drift = 0.10 dB Peak SAR (extrapolated) = 1.17 W/kg **SAR(1 g) = 0.547 W/kg ; SAR(10 g) = 0.286 W/kg** Maximum value of SAR (measured) = 0.827 W/kg 

Date: 2026/8/28

Test Laboratory: LCS-SAR Lab

LTE B13 10M QPSK 23230CH 1RB24 Left side 0mm Ant 1**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**


Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 42.467$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.51, 9.51, 9.51); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

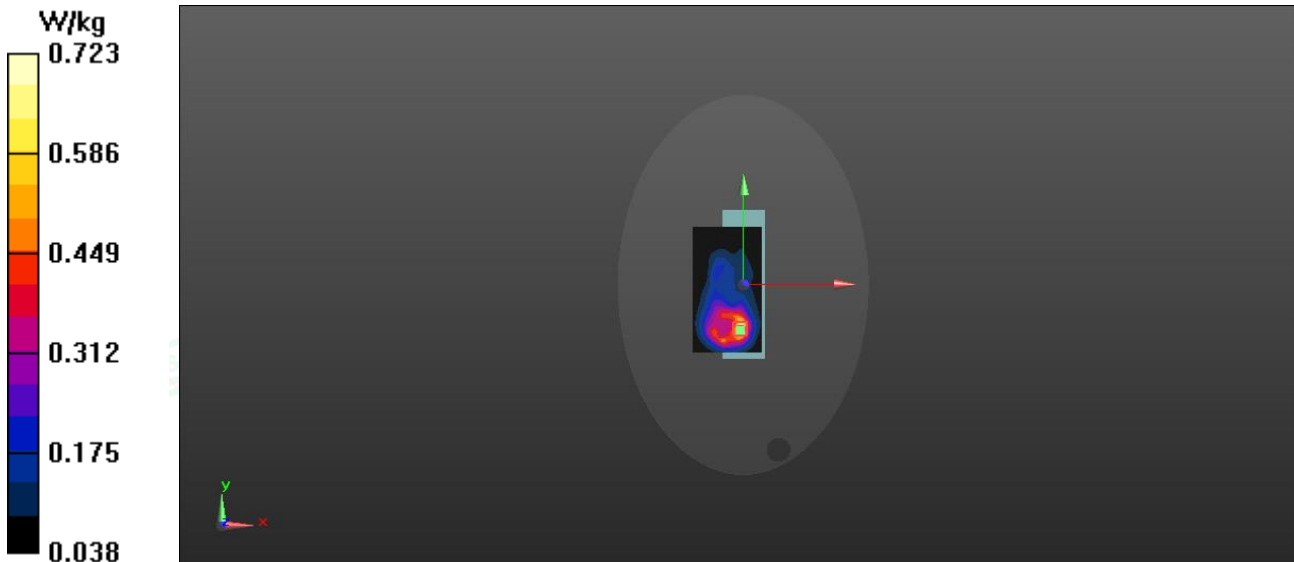Configuration/ Body /Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.679 W/kg **Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.384 V/m ; Power Drift = -0.10 dB Peak SAR (extrapolated) = 0.834 W/kg **SAR(1 g) = 0.411 W/kg ; SAR(10 g) = 0.231 W/kg** Maximum value of SAR (measured) = 0.723 W/kg 

Date: 2026/8/28

Test Laboratory: LCS-SAR Lab

LTE B13 10M QPSK 23230CH 1RB24 Right side 0mm Ant 2**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**


Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 42.467$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.51, 9.51, 9.51); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

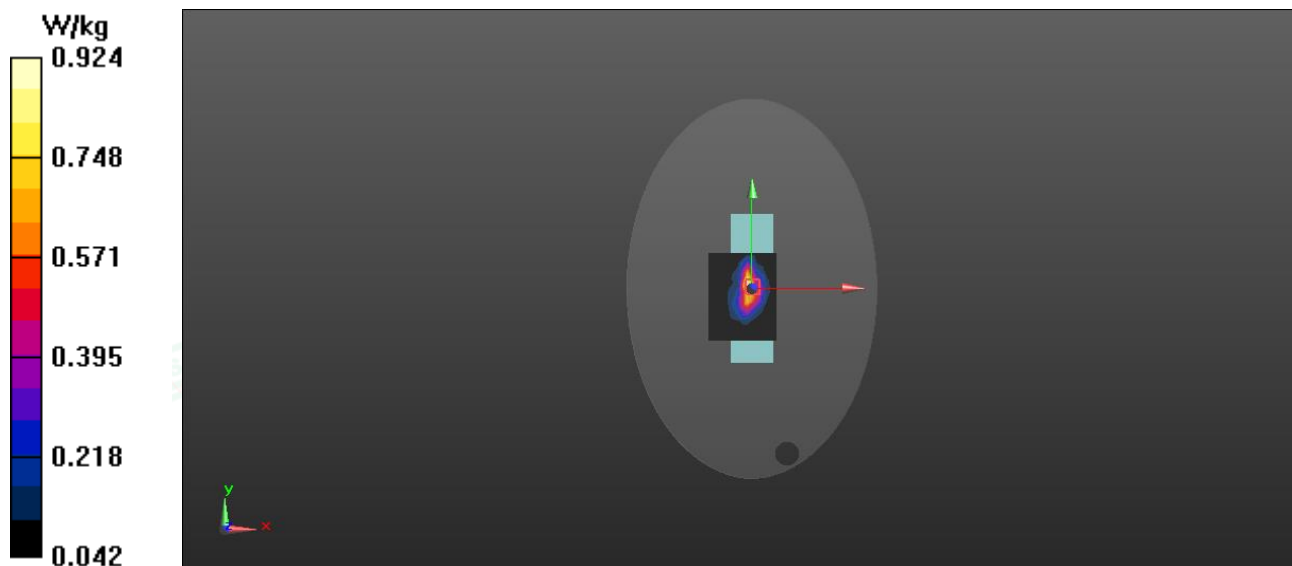Configuration/ Body /Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.968 W/kg **Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 11.63 V/m ; Power Drift = 0.01 dB Peak SAR (extrapolated) = 1.29 W/kg **SAR(1 g) = 0.584 W/kg ; SAR(10 g) = 0.303 W/kg** Maximum value of SAR (measured) = 0.924 W/kg 

Date: 2026/9/5

Test Laboratory: LCS-SAR Lab

LTE B25 20M QPSK 26365CH 1RB49 Left side 0mm Ant 1**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**

Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.037$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.768 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.34 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.946 W/kg

SAR(1 g) = 0.458 W/kg; SAR(10 g) = 0.239 W/kg

Maximum value of SAR (measured) = 0.727 W/kg

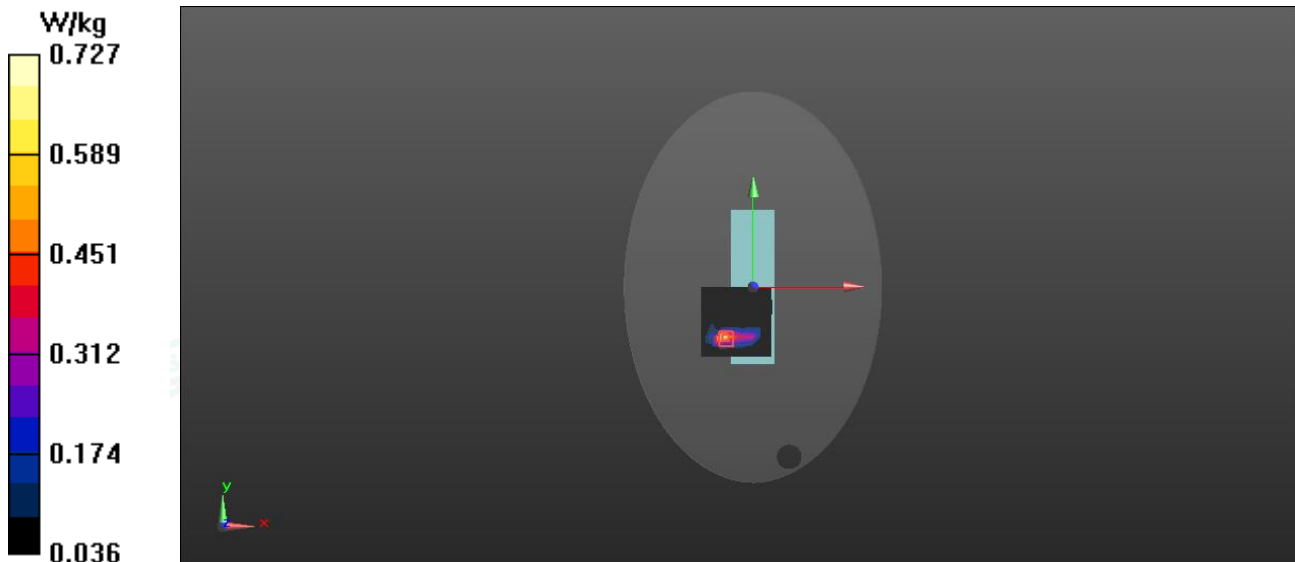

Date: 2026/9/5

Test Laboratory: LCS-SAR Lab

LTE B25 20M QPSK 26365CH 1RB49 Right side 0mm Ant 2**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**


Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1882.5 \text{ MHz}$; $\sigma = 1.397 \text{ S/m}$; $\epsilon_r = 39.037$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

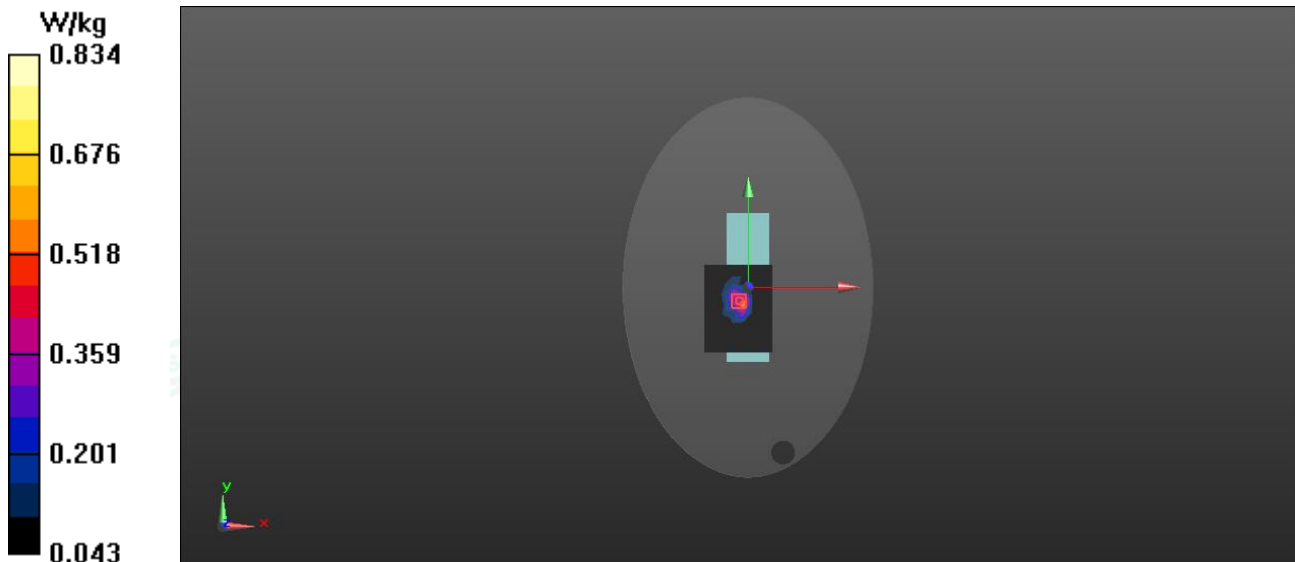Configuration/ Body /Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.875 W/kg **Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 11.76 V/m ; Power Drift = 0.18 dB Peak SAR (extrapolated) = 1.07 W/kg **SAR(1 g) = 0.547 W/kg ; SAR(10 g) = 0.282 W/kg** Maximum value of SAR (measured) = 0.834 W/kg 

Date: 2026/8/31

Test Laboratory: LCS-SAR Lab

LTE B26 10M QPSK 26915CH 1RB38 Left side 0mm Ant 1**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**

Communication System: UID 0, LTE (0); Frequency: 8136.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 42.086$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.793 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.284 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.885 W/kg

SAR(1 g) = 0.403 W/kg; SAR(10 g) = 0.213 W/kg

Maximum value of SAR (measured) = 0.746 W/kg

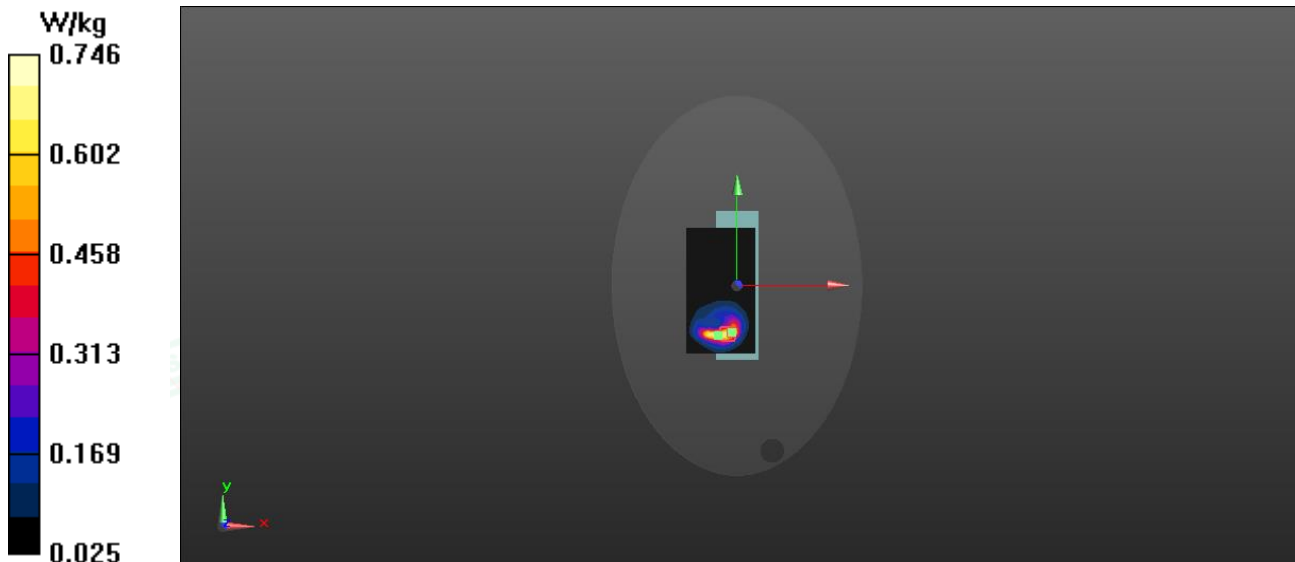



Date: 2026/8/31

Test Laboratory: LCS-SAR Lab

LTE B26 15M QPSK 26915CH 1RB38 Right side 0mm Ant 2**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 42.086$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.856 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.564 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.967 W/kg

SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.252 W/kg

Maximum value of SAR (measured) = 0.802 W/kg

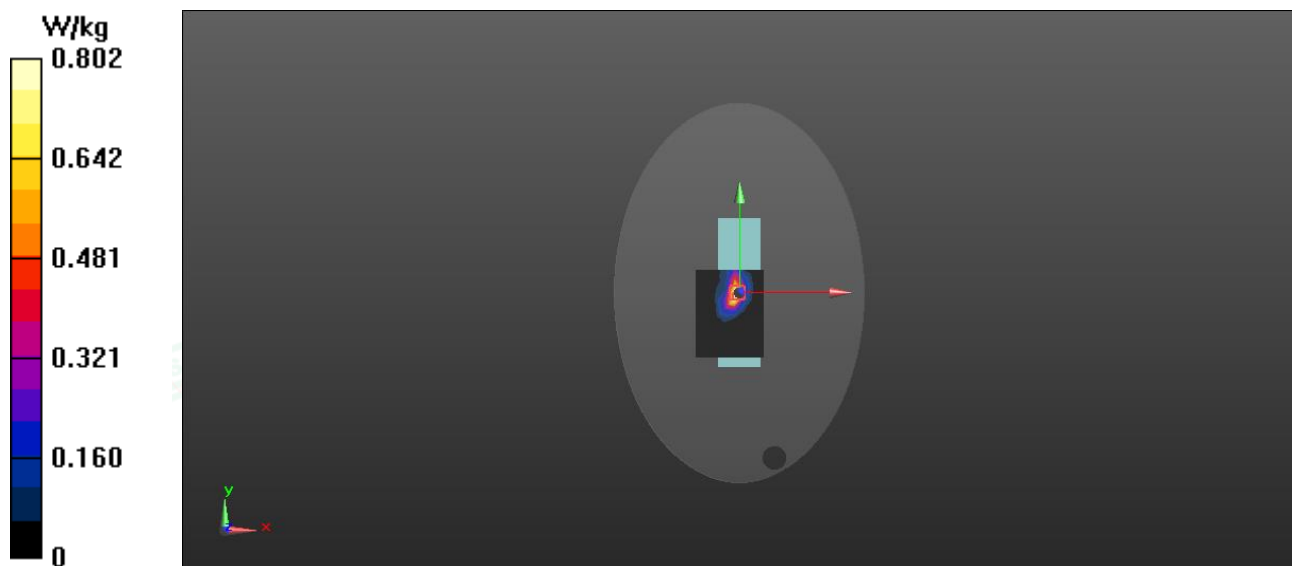

Date: 2026/9/7

Test Laboratory: LCS-SAR Lab

LTE B41 20M QPSK 20620CH 1RB49 Left side 0mm Ant 1**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**

Communication System: UID 0, LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.925$ S/m; $\epsilon_r = 38.848$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.20, 7.20, 7.20); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.963 W/kg


Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.42 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.57 W/kg; SAR(10 g) = 0.246 W/kg

Maximum value of SAR (measured) = 0.895 W/kg

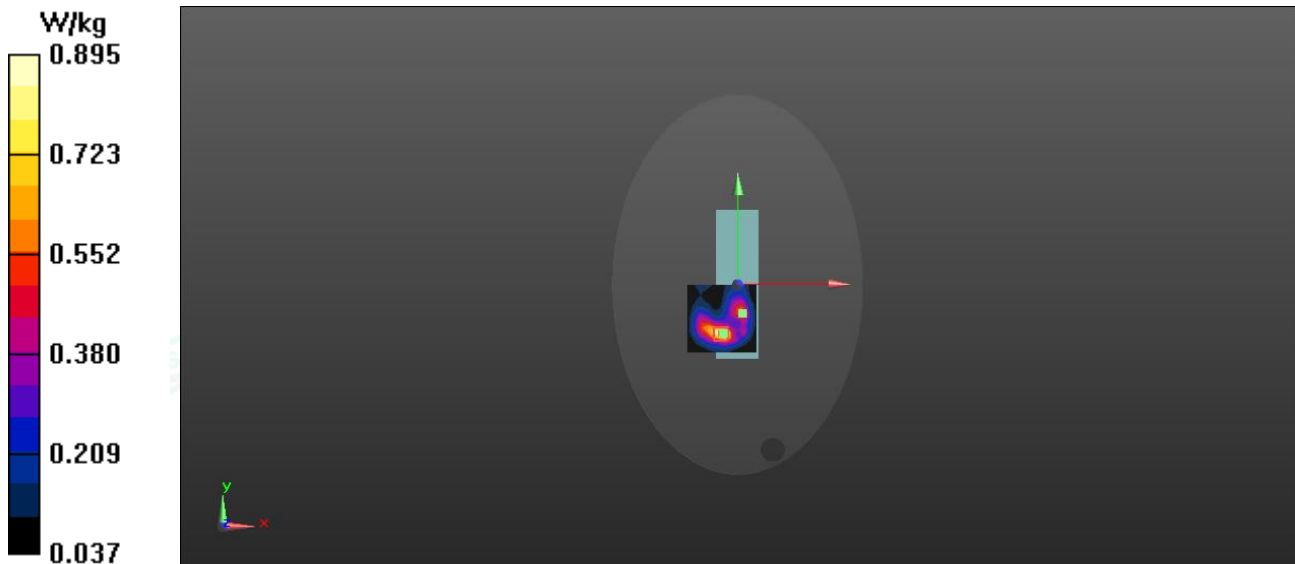



Date: 2026/9/7

Test Laboratory: LCS-SAR Lab

LTE B41 20M QPSK 20620CH 1RB49 Right side 0mm Ant 2**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**


Communication System: UID 0, LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2593 \text{ MHz}$; $\sigma = 1.925 \text{ S/m}$; $\epsilon_r = 38.848$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.20, 7.20, 7.20); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

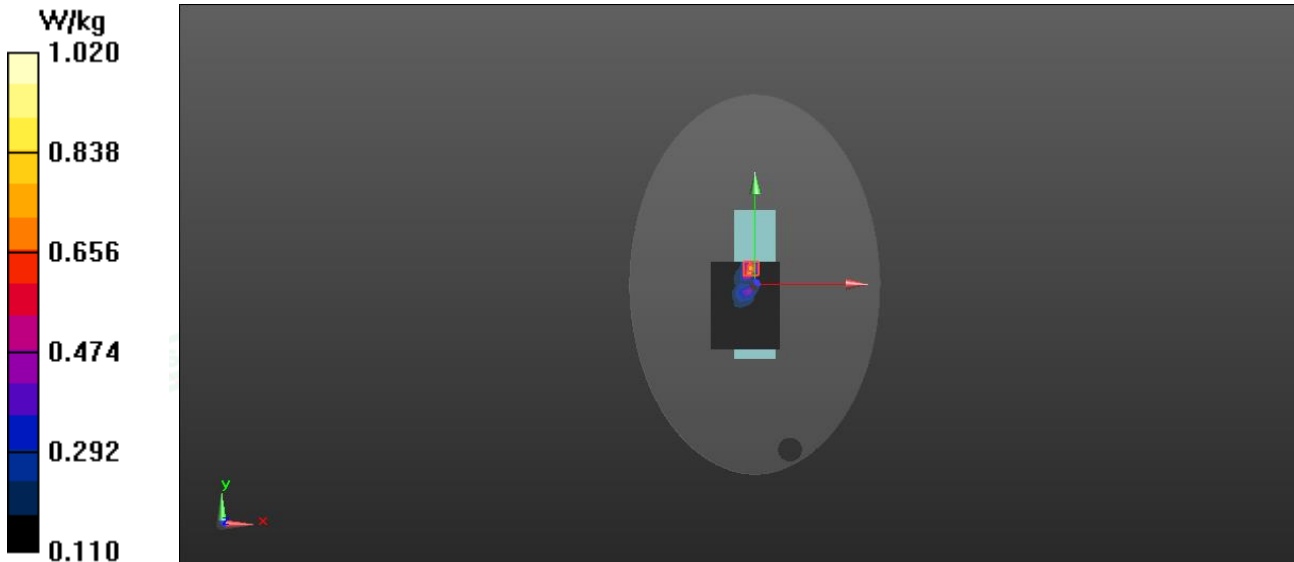Configuration/ Body /Area Scan (9x12x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 1.08 W/kg **Configuration/ Body /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 12.36 V/m ; Power Drift = -0.11 dB Peak SAR (extrapolated) = 1.28 W/kg **SAR(1 g) = 0.643 W/kg ; SAR(10 g) = 0.334 W/kg** Maximum value of SAR (measured) = 1.02 W/kg 

Date: 2026/9/2

Test Laboratory: LCS-SAR Lab

LTE B66 20M QPSK 132322CH 1RB49 Left side 0mm Ant 1

DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 40.437$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.916 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.348 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.246 W/kg

Maximum value of SAR (measured) = 0.869 W/kg

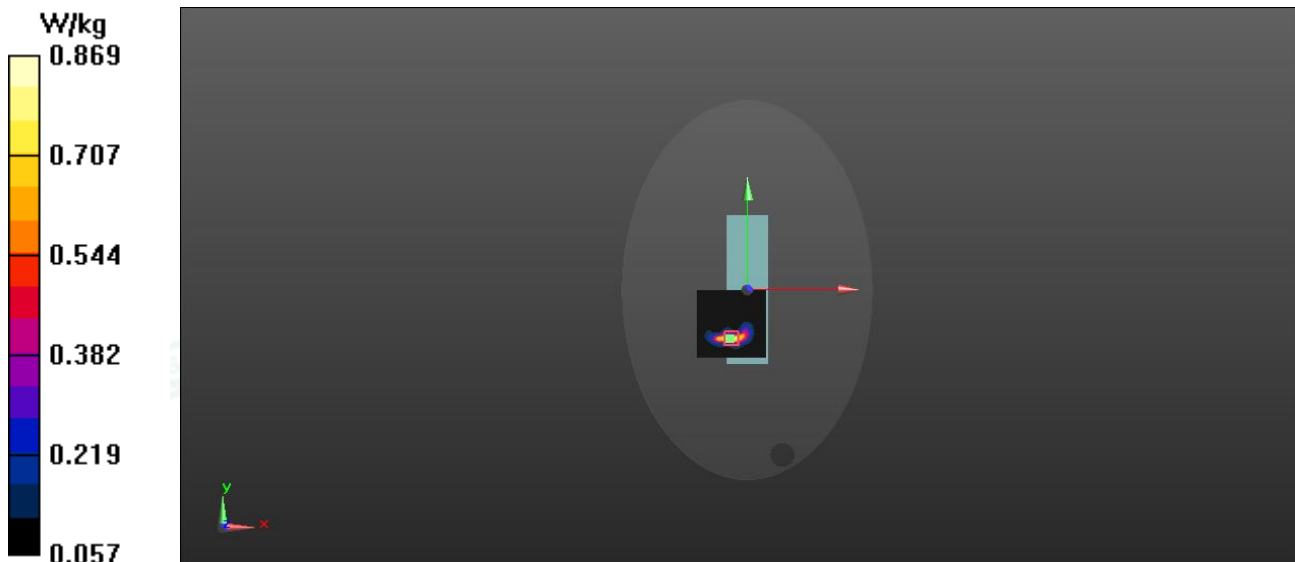

Date: 2026/9/2

Test Laboratory: LCS-SAR Lab

LTE B66 20M QPSK 132322CH 1RB49 Right side 0mm Ant 2

DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1


Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.374 \text{ S/m}$; $\epsilon_r = 40.437$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

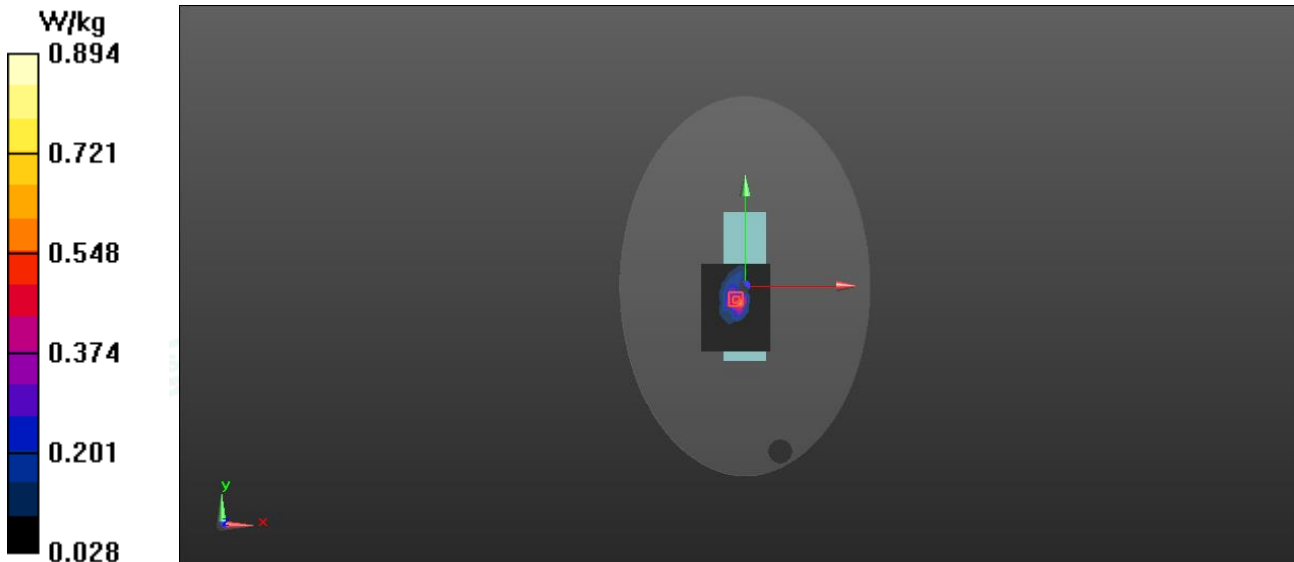Configuration/ Body /Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.983 W/kg **Configuration/ Body /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 10.63 V/m ; Power Drift = -0.07 dB Peak SAR (extrapolated) = 1.09 W/kg **SAR(1 g) = 0.531 W/kg ; SAR(10 g) = 0.281 W/kg** Maximum value of SAR (measured) = 0.894 W/kg 

Date: 2026/8/28

Test Laboratory: LCS-SAR Lab

LTE B71 20M QPSK 133372CH 1RB49 Left side 0mm Ant 1

DUT: Fixed wireless phone; Type: F151; Serial: A260810052-1

Communication System: UID 0, LTE (0); Frequency: 688 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 688$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 41.476$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.51, 9.51, 9.51); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.626 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.372 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.773 W/kg

SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.573 W/kg

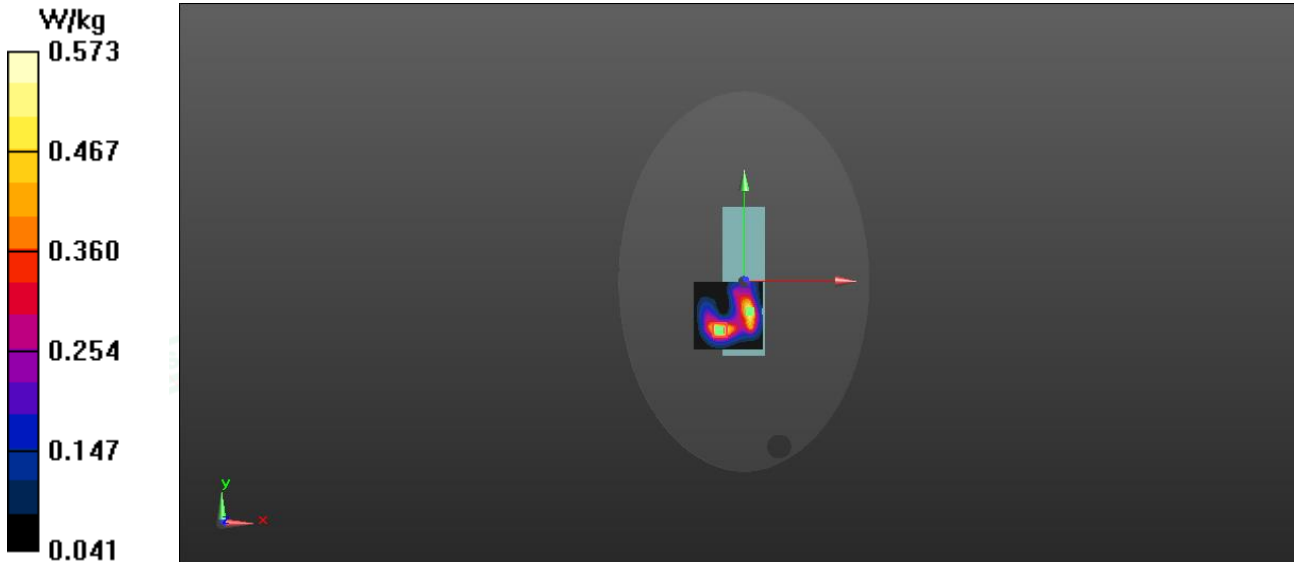

Date: 2026/8/28

Test Laboratory: LCS-SAR Lab

LTE B71 20M QPSK 133372CH 1RB49 Left side 0mm Ant 1

DUT: Fixed wireless phone; Type: F151; Serial: A260810052-1

Communication System: UID 0, LTE (0); Frequency: 688 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 688$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 41.476$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.51, 9.51, 9.51); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.643 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.354 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.869 W/kg

SAR(1 g) = 0.433 W/kg; SAR(10 g) = 0.224 W/kg

Maximum value of SAR (measured) = 0.718 W/kg

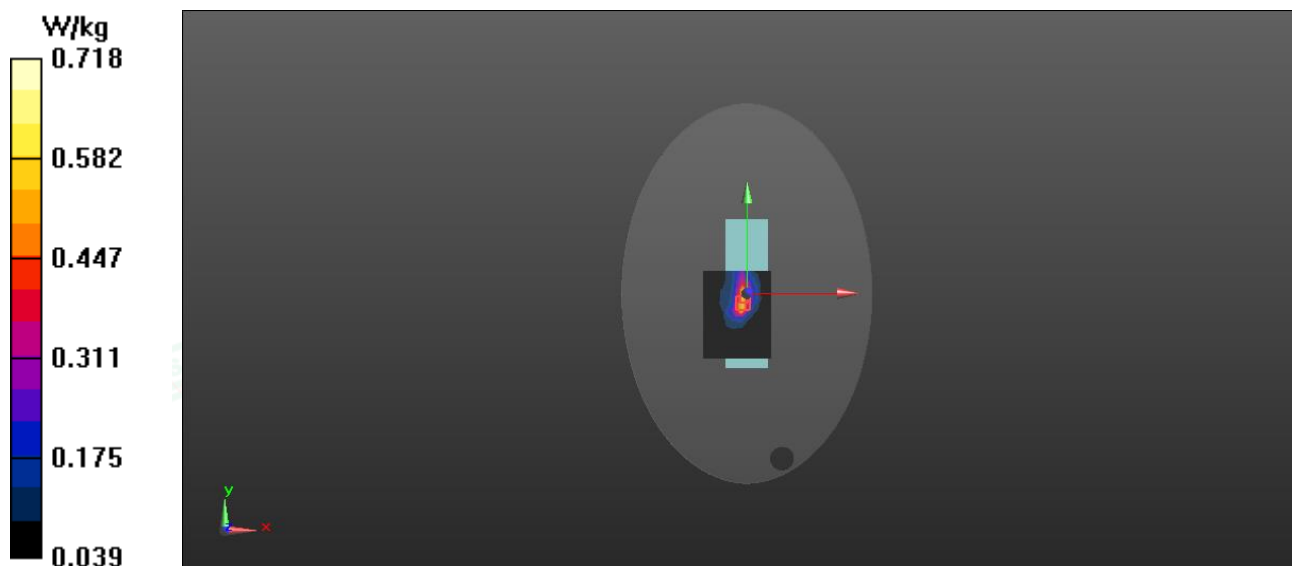

Date: 2026/9/7

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 1CH Front side 0mm**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.779 \text{ S/m}$; $\epsilon_r = 38.473$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.38, 7.38, 7.38); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.823 W/kg


Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.94 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.534 W/kg; SAR(10 g) = 0.302 W/kg

Maximum value of SAR (measured) = 0.874 W/kg

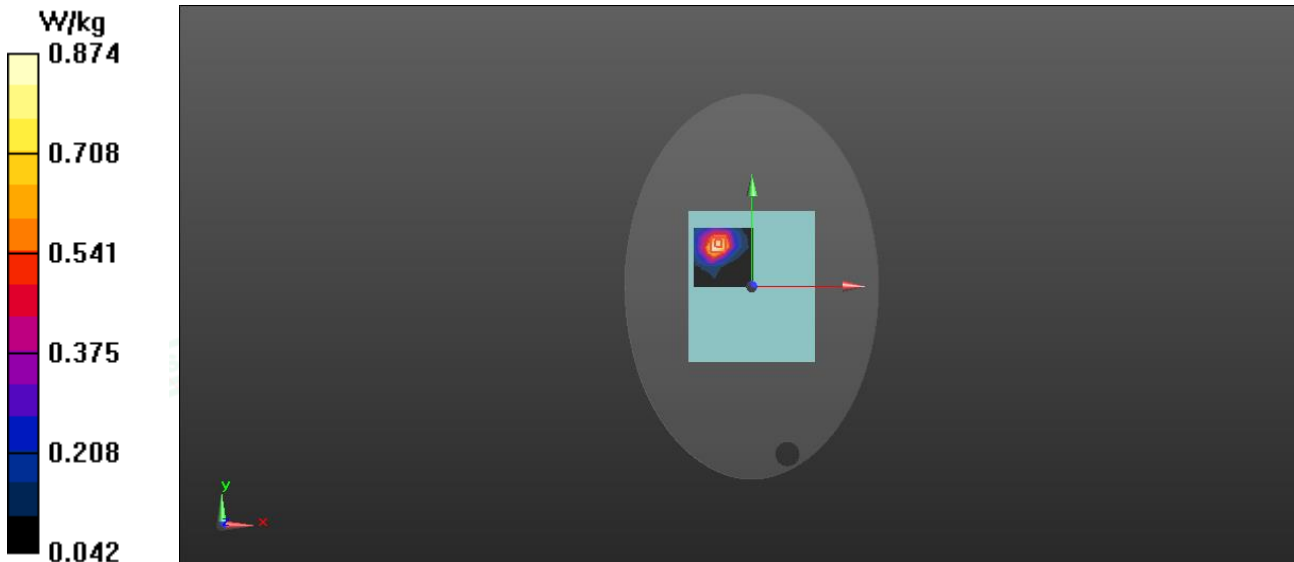

Date: 2026/9/11

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 48CH Front side 0mm**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.578 \text{ S/m}$; $\epsilon_r = 35.975$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.35, 5.35, 5.35); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (10x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.675 W/kg


Configuration/ Body /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.483 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.826 W/kg

SAR(1 g) = 0.379 W/kg; SAR(10 g) = 0.208 W/kg

Maximum value of SAR (measured) = 0.608 W/kg

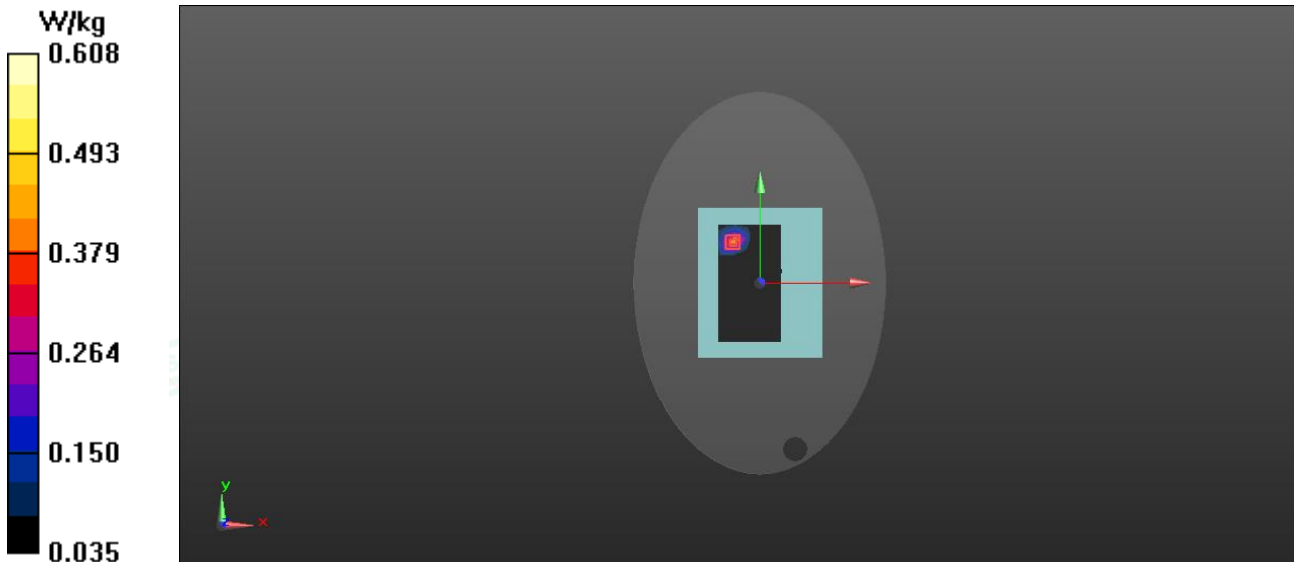

Date: 2026/9/11


Test Laboratory: LCS-SAR Lab

WIFI 5.3G 802.11a 52CH Front side 0mm**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5260 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.724 \text{ S/m}$; $\epsilon_r = 36.233$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.35, 5.35, 5.35); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

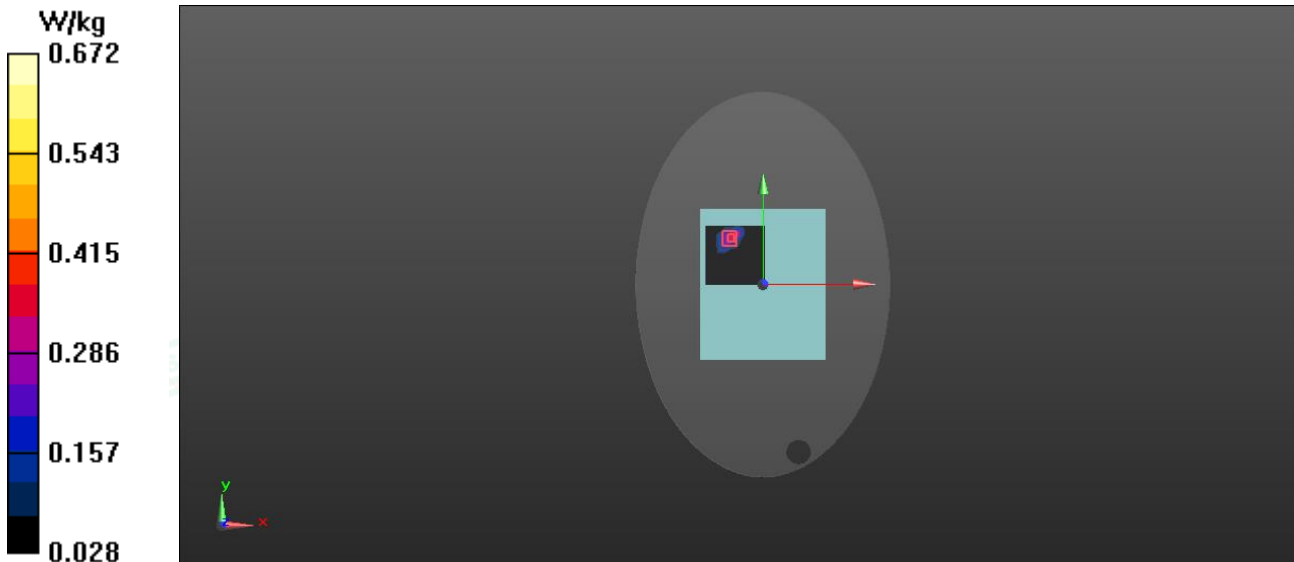Configuration/ Body /Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.724 W/kg **Configuration/ Body /Zoom Scan (7x7x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 4.139 V/m ; Power Drift = 0.18 dB Peak SAR (extrapolated) = 0.861 W/kg **SAR(1 g) = 0.417 W/kg ; SAR(10 g) = 0.231 W/kg** Maximum value of SAR (measured) = 0.672 W/kg 



Date: 2026/9/11

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11n20 165CH Front side 0mm**DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1**


Communication System: UID 0, WIFI 5GHz (0); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.413 \text{ S/m}$; $\epsilon_r = 35.836$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.87, 4.87, 4.87); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

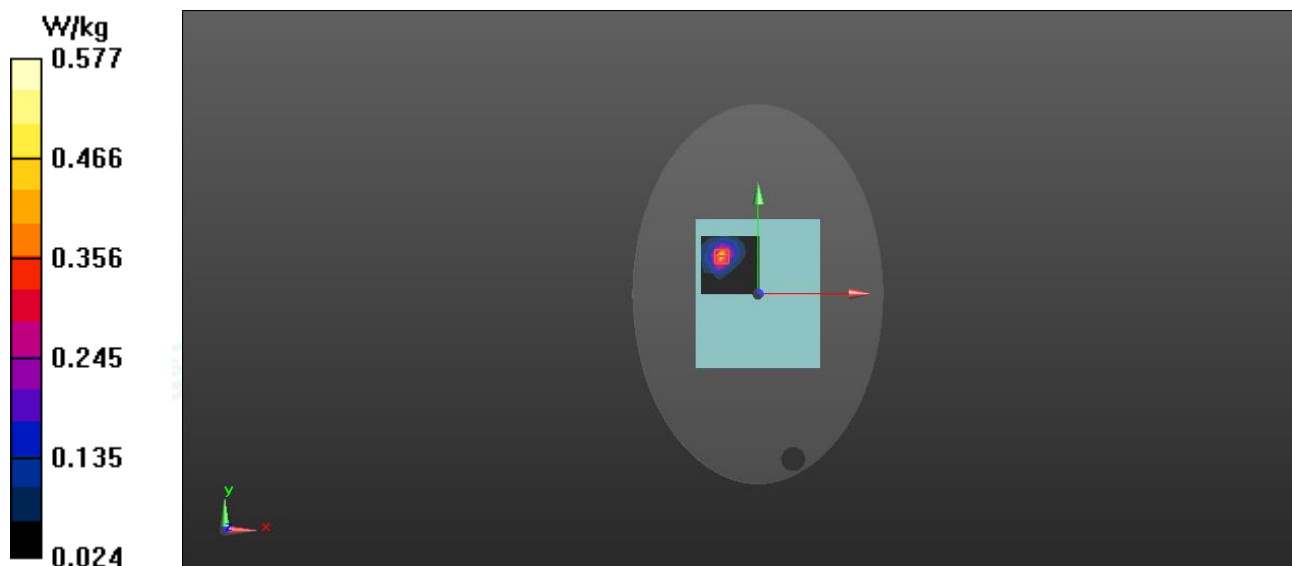Configuration/ Body /Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.632 W/kg **Configuration/Body/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 5.094 V/m ; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.764 W/kg **SAR(1 g) = 0.355 W/kg ; SAR(10 g) = 0.189 W/kg** Maximum value of SAR (measured) = 0.577 W/kg 

Date: 2026/9/7

Test Laboratory: LCS-SAR Lab
BT 3-DH5 39CH Front side 0mm

DUT: Fixed wireless phone ; Type: F151 ; Serial: A260810052-1

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2441$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.723$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.38, 7.38, 7.38); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x16x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.474 W/kg

Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.446 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.592 W/kg
SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.152 W/kg
Maximum value of SAR (measured) = 0.418 W/kg

