



Appendix B

Detailed Test Results

1. GSM
GSM850 for Head& Body
GSM1900 for Head& Body
2. WCDMA
WCDMA Band II for Head& Body
WCDMA Band IV for Head& Body
WCDMA Band V for Head& Body
3. LTE
LTE Band 2 for Head& Body
LTE Band 5 for Head& Body
LTE Band 7 for Head& Body
LTE Band 12 for Head& Body
LTE Band 13 for Head& Body
LTE Band 66 for Head& Body
LTE Band 71 for Head& Body
4. WIFI&BT
WIFI 2.4GHz for Head& Body
WIFI 5.2GHz for Head& Body
WIFI 5.3GHz for Head& Body
WIFI 5.8GHz for Head& Body



Date: 2026/8/24

Test Laboratory: LCS-SAR Lab

GSM 850 190CH Left Cheek

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1: 1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 42.131$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.476 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.364 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.548 W/kg

SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.447 W/kg

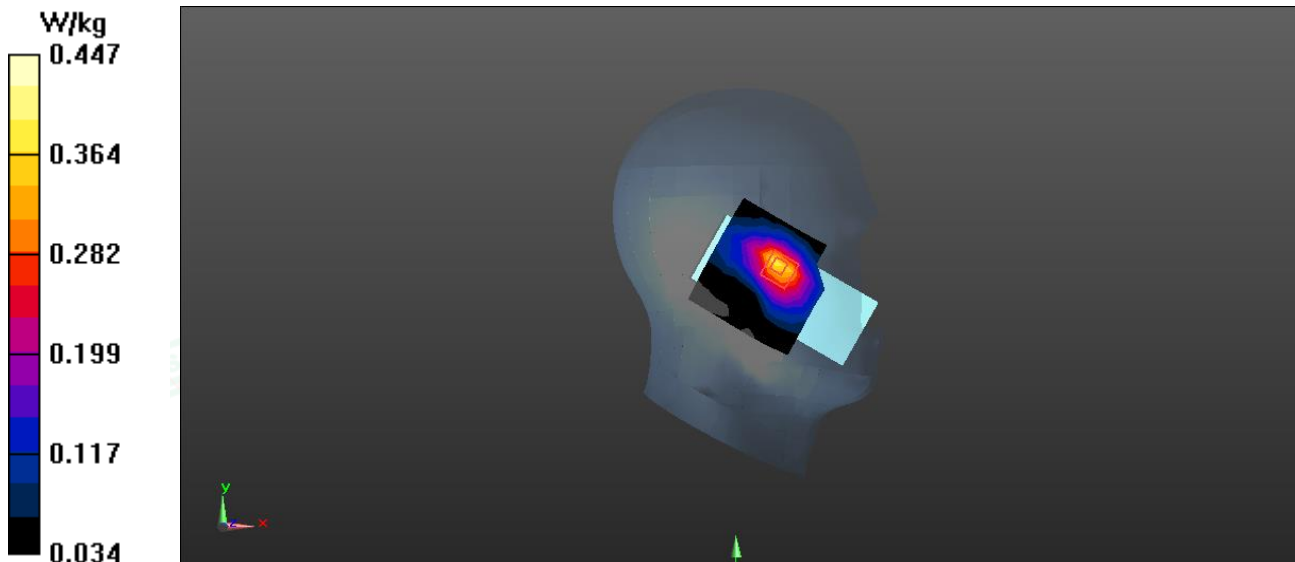

Date: 2026/8/24

Test Laboratory: LCS-SAR Lab

GSM 850 GPRS 3TX 128CH Rear side 10mm

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, GSM (0); Frequency: 824.2 MHz; Duty Cycle: 1: 2.77

Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 41.964$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.817 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.496 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.933 W/kg

SAR(1 g) = 0.454 W/kg; SAR(10 g) = 0.236 W/kg

Maximum value of SAR (measured) = 0.782 W/kg

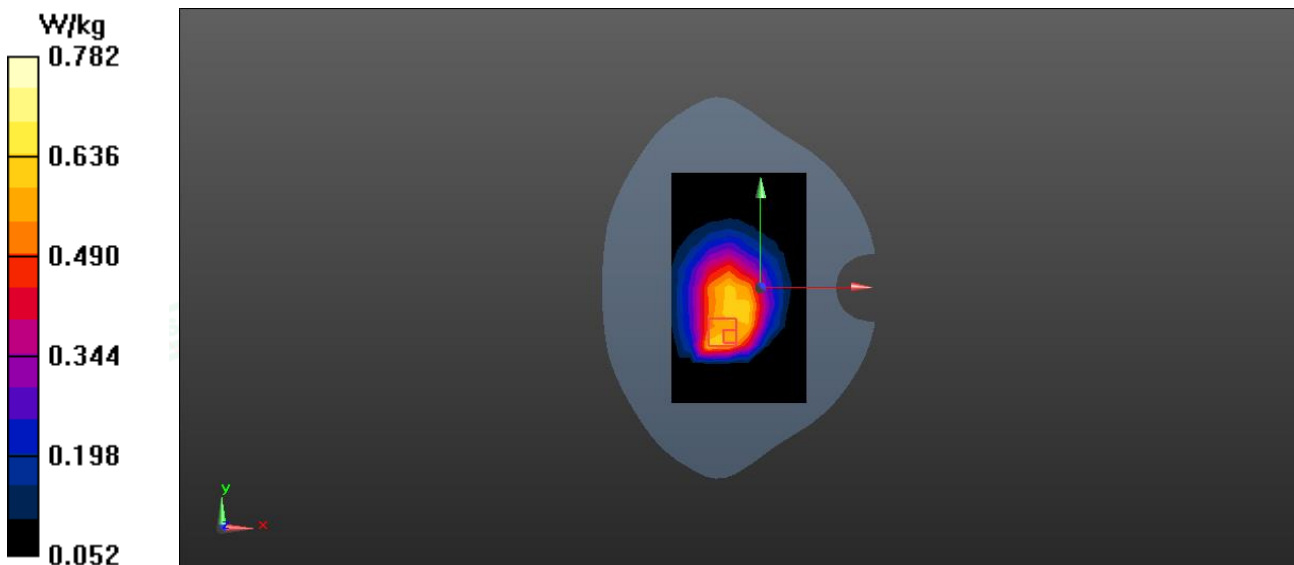



Date: 2026/8/26

Test Laboratory: LCS-SAR Lab

GSM 1900 512CH Left Cheek

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1: 1

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.867$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.537 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.774 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.586 W/kg

SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.496 W/kg

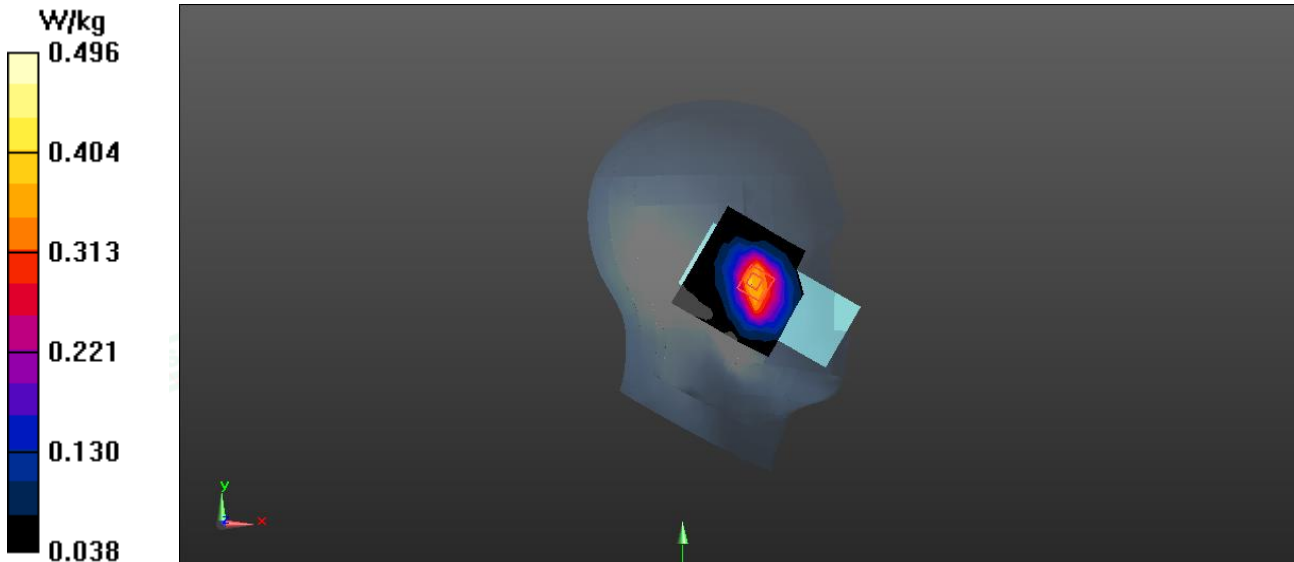

Date: 2026/8/26

Test Laboratory: LCS-SAR Lab

GSM 1900 GPRS 3TX 512CH Rear side 10mm

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1: 2.77

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.867$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.924 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.84 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.608 W/kg; SAR(10 g) = 0.328 W/kg

Maximum value of SAR (measured) = 0.987 W/kg

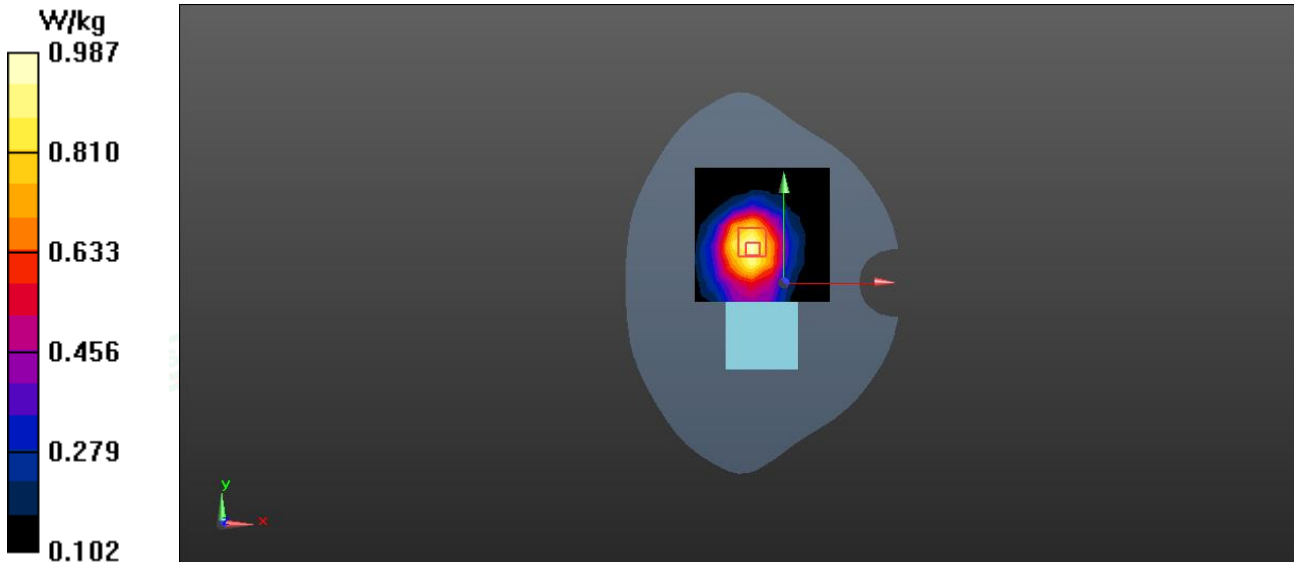

Date: 2026/8/26

Test Laboratory: LCS-SAR Lab

WCDMA II RMC 9400CH Left Cheek

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, WCDMA (0); Frequency: 1880.0 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.415$ S/m; $\epsilon_r = 40.017$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.687 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.384 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.706 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.168 W/kg

Maximum value of SAR (measured) = 0.645 W/kg

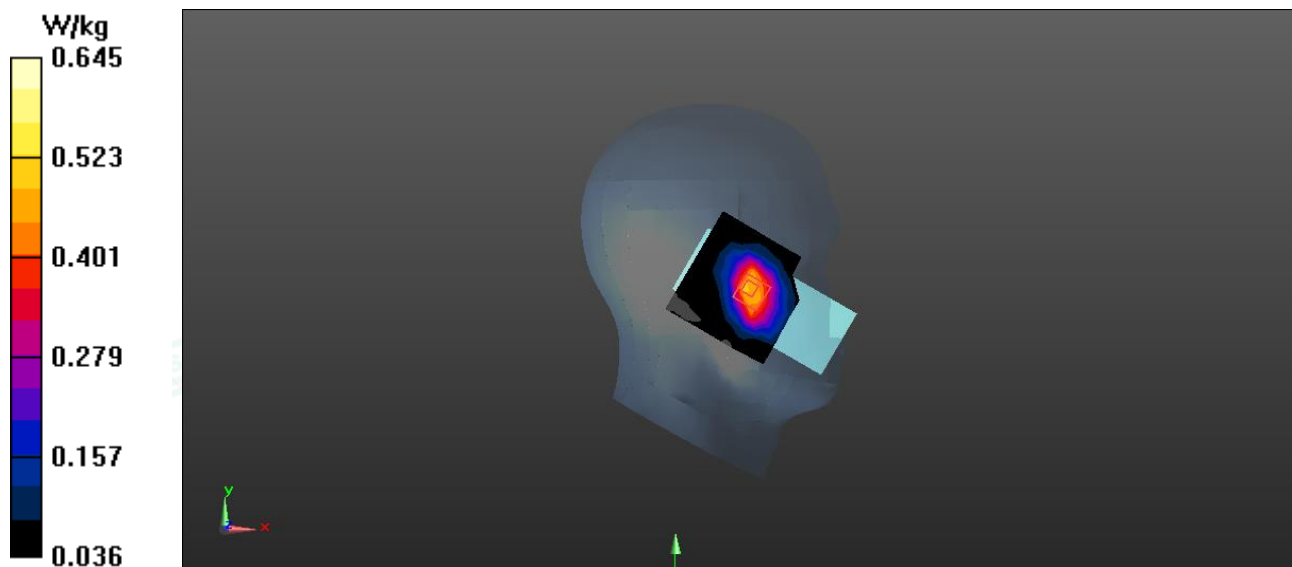

Date: 2026/8/26

Test Laboratory: LCS-SAR Lab

WCDMA II RMC 9400CH Rear side 10mm

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, WCDMA (0); Frequency: 1880.0 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.415$ S/m; $\epsilon_r = 40.017$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.24 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.25 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.677 W/kg; SAR(10 g) = 0.354 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

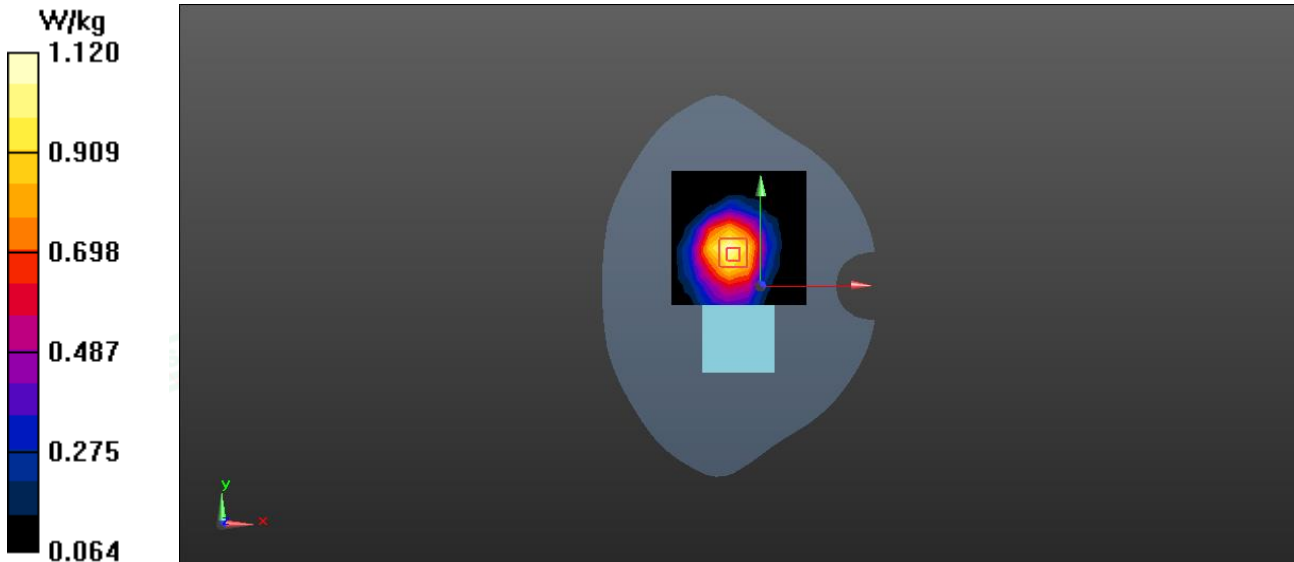



Date: 2026/8/13

Test Laboratory: LCS-SAR Lab

WCDMA IV RMC 1513CH Left Cheek

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.341$ S/m; $\epsilon_r = 39.983$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.347 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.418 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.386 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.313 W/kg

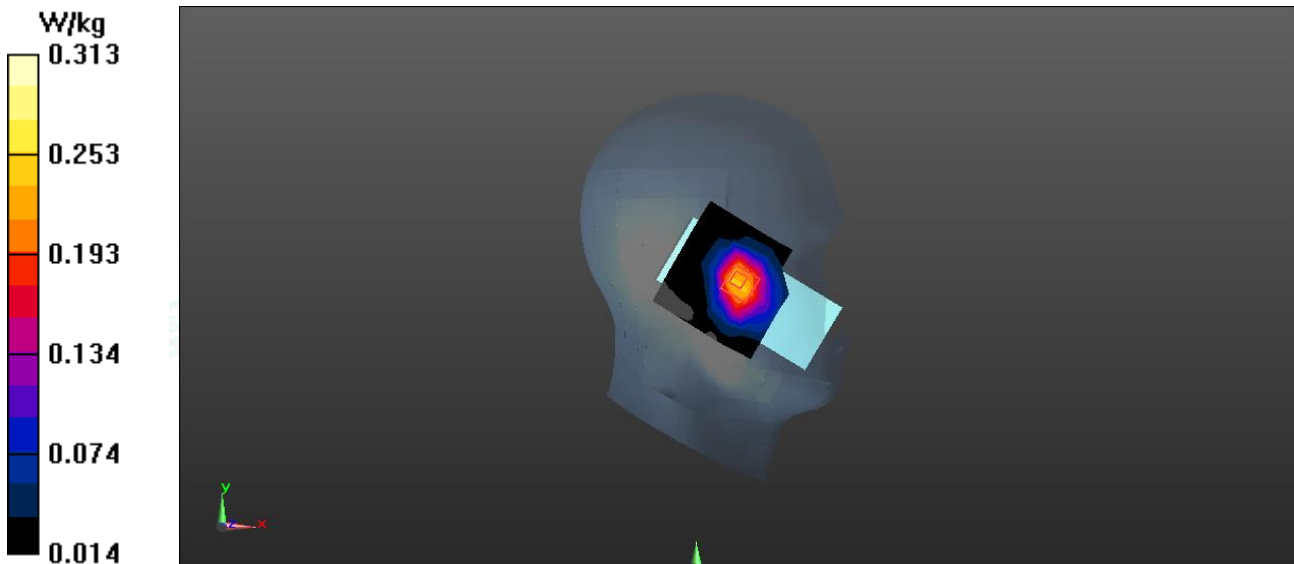



Date: 2026/8/13

Test Laboratory: LCS-SAR Lab

WCDMA IV RMC 1513CH Rear side 10mm

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 1752.6 \text{ MHz}$; $\sigma = 1.341 \text{ S/m}$; $\epsilon_r = 39.983$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.975 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.46 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.578 W/kg; SAR(10 g) = 0.296 W/kg

Maximum value of SAR (measured) = 0.936 W/kg

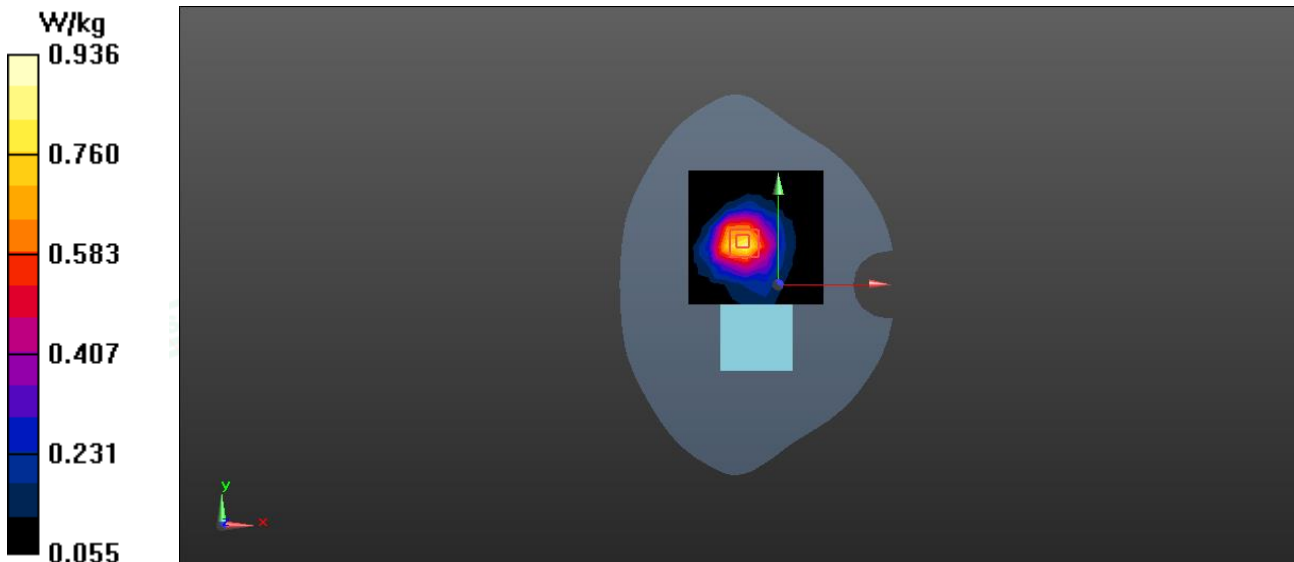

Date: 2026/8/24

Test Laboratory: LCS-SAR Lab

WCDMA V RMC 4233CH Left Cheek

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 42.327$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.358 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.473 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.477 W/kg

SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.396 W/kg

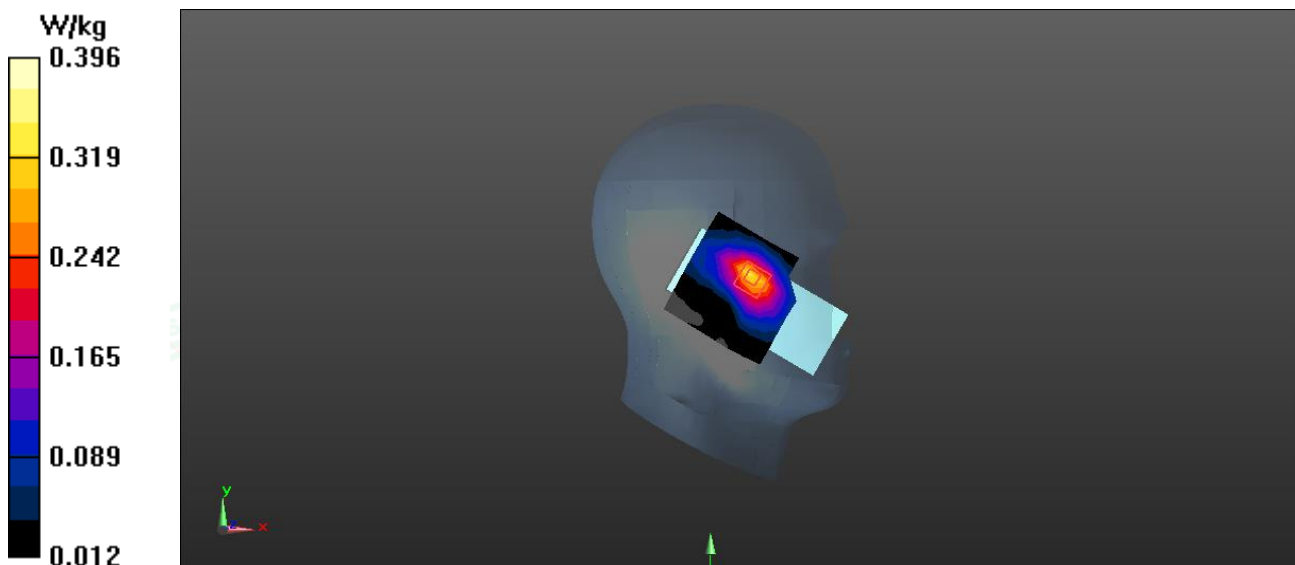

Date: 2026/8/24

Test Laboratory: LCS-SAR Lab

WCDMA V RMC 4233CH Rear side 10mm

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 846.6 \text{ MHz}$; $\sigma = 0.938 \text{ S/m}$; $\epsilon_r = 42.327$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.467 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.457 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.574 W/kg

SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.418 W/kg

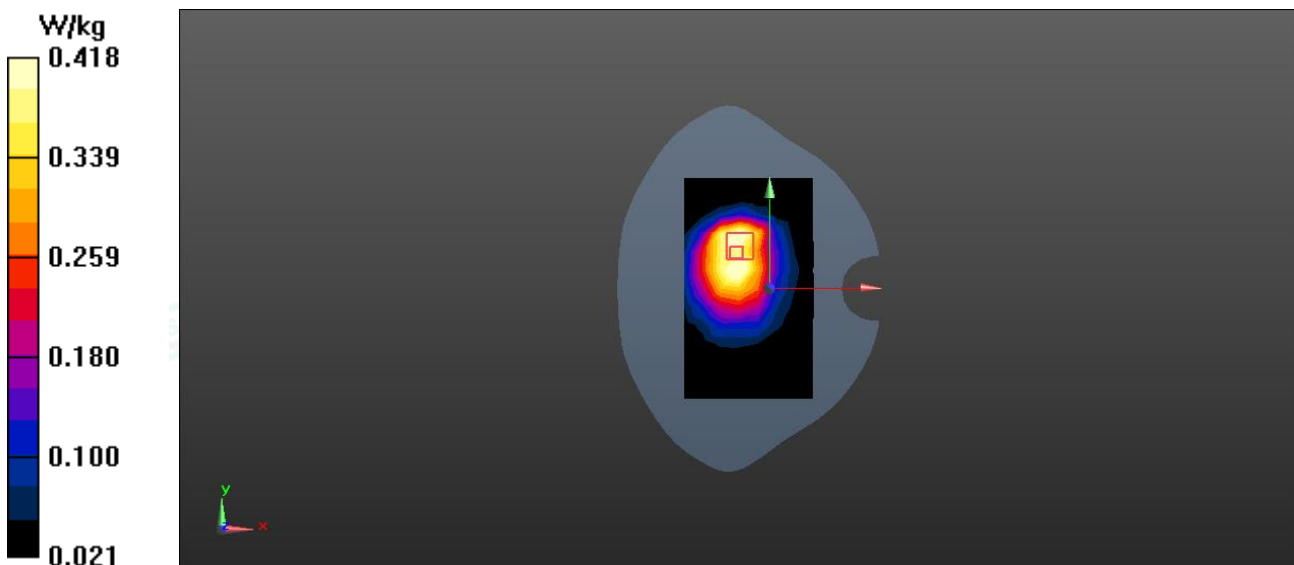



Date: 2026/8/26

Test Laboratory: LCS-SAR Lab

LTE B2 20M QPSK 18700CH 1RB0 Left Cheek

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 39.834$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.406 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.748 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.522 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.118 W/kg

Maximum value of SAR (measured) = 0.374 W/kg

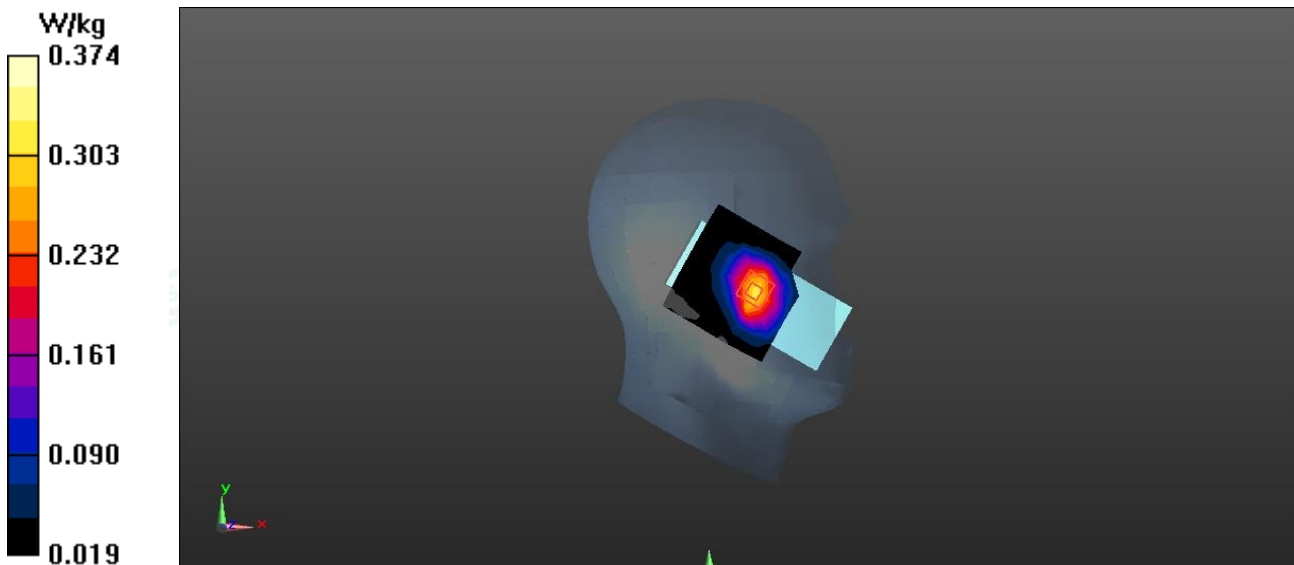



Date: 2026/8/26

Test Laboratory: LCS-SAR Lab

LTE B2 20M QPSK 18700CH 1RB0 Rear side 10mm

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 39.834$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.75, 7.75, 7.75); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.26 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.62 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.69 W/kg; SAR(10 g) = 0.368 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

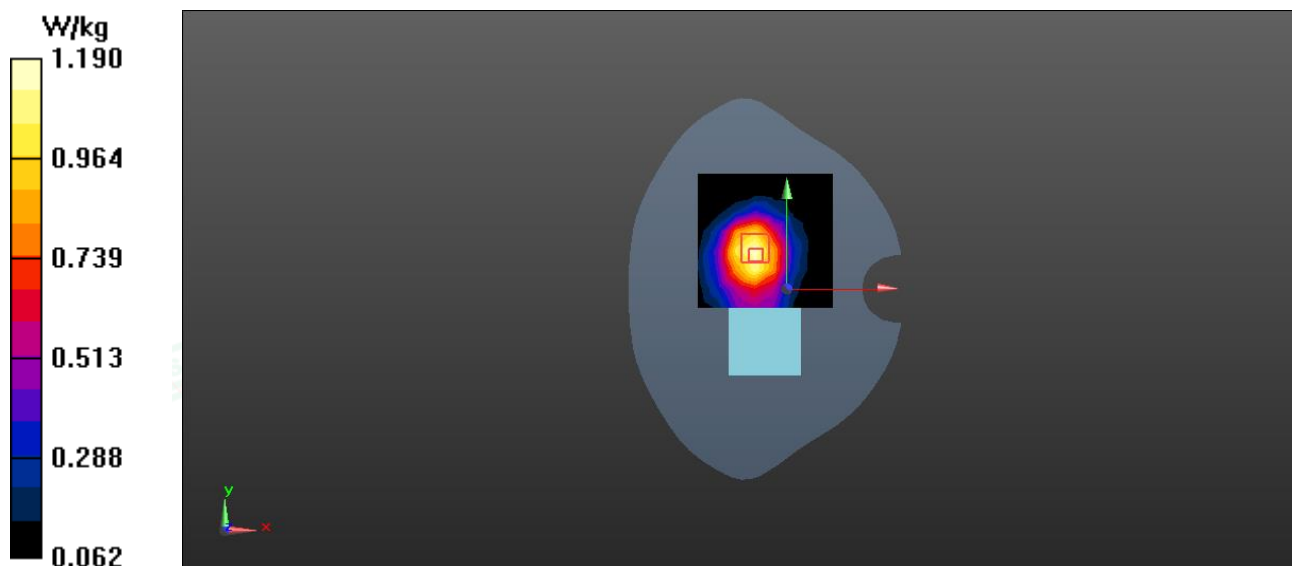

Date: 2026/8/24

Test Laboratory: LCS-SAR Lab

LTE B5 10M QPSK 20450CH 1RB24 Left Cheek**DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1**


Communication System: UID 0, LTE-TDD (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829 \text{ MHz}$; $\sigma = 0.927 \text{ S/m}$; $\epsilon_r = 42.046$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

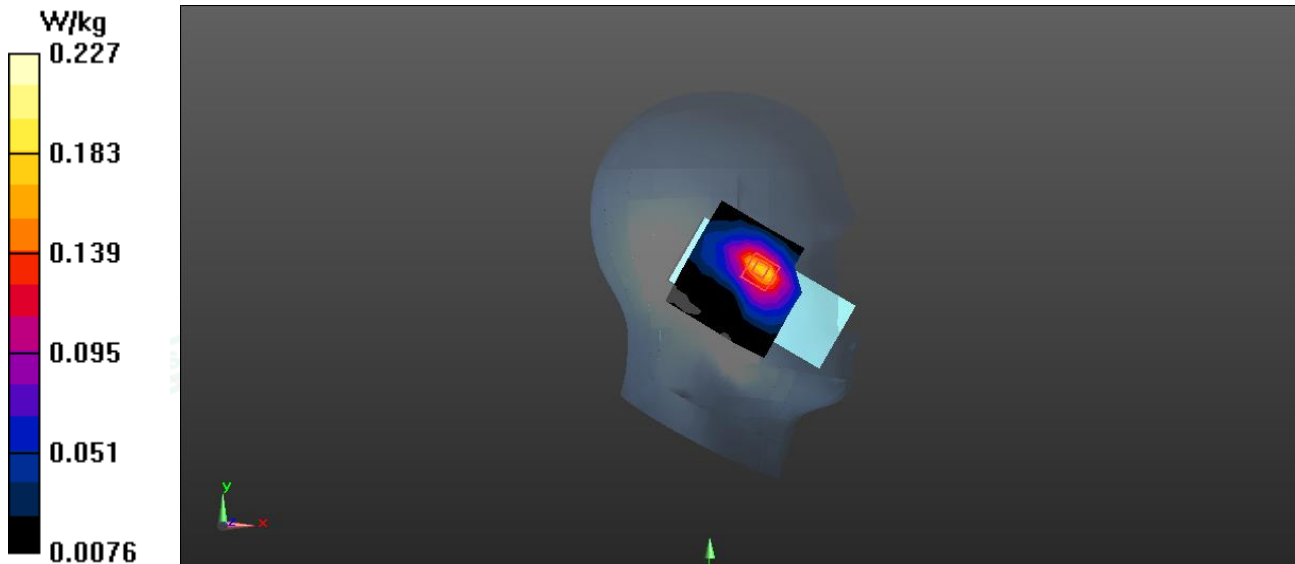Configuration/Head /Area Scan (7x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.253 W/kg **Configuration/Head /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.429 V/m ; Power Drift = 0.16 dB Peak SAR (extrapolated) = 0.286 W/kg **SAR(1 g) = 0.112 W/kg ; SAR(10 g) = 0.071 W/kg** Maximum value of SAR (measured) = 0.227 W/kg 

Date: 2026/8/24

Test Laboratory: LCS-SAR Lab

LTE B5 10M QPSK 20450CH 1RB24 Rear side 10mm

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, LTE-TDD (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829 \text{ MHz}$; $\sigma = 0.927 \text{ S/m}$; $\epsilon_r = 42.046$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.334 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.183 V/m ; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.215 W/kg ; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 0.376 W/kg

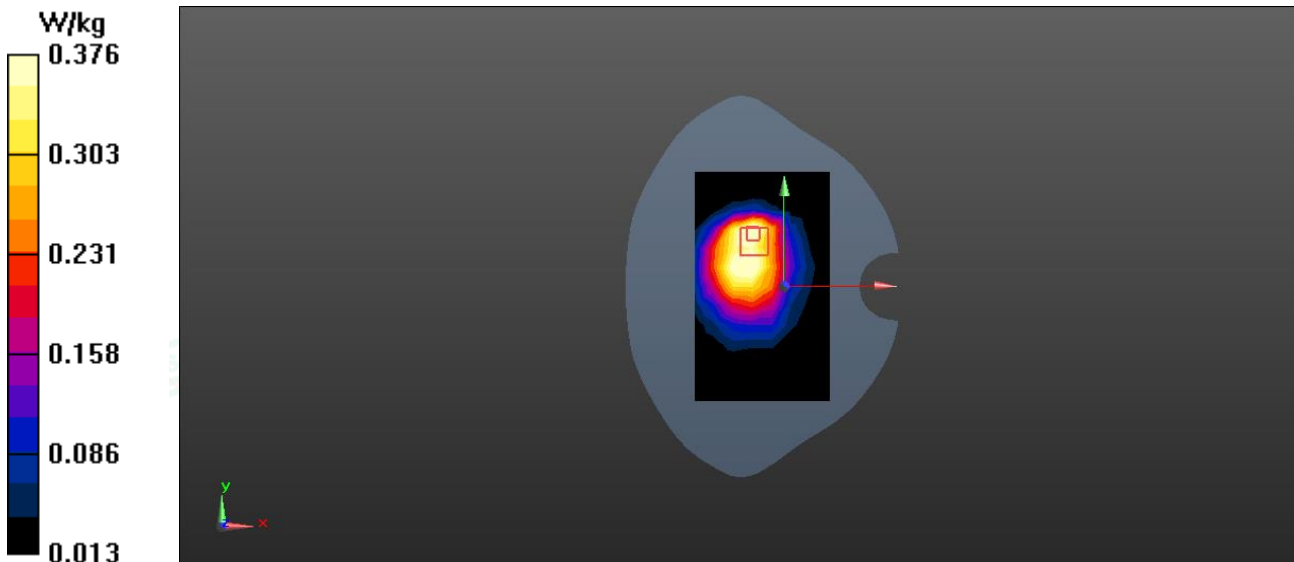

Date: 2026/8/17

Test Laboratory: LCS-SAR Lab

LTE B7 20M QPSK 21350CH 1RB49 Left Cheek

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, LTE-FDD (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.242$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.20, 7.20, 7.20); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.589 W/kg


Configuration/Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.682 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.734 W/kg

SAR(1 g) = 0.346 W/kg; SAR(10 g) = 0.188 W/kg

Maximum value of SAR (measured) = 0.623 W/kg

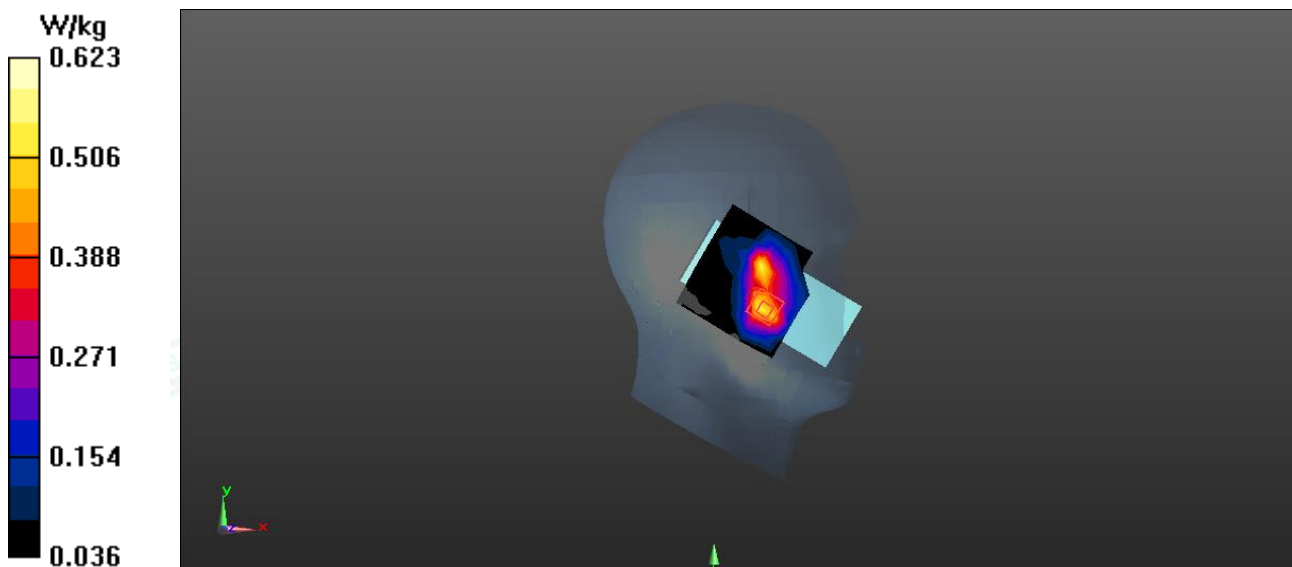

Date: 2026/8/17

Test Laboratory: LCS-SAR Lab

LTE B7 20M QPSK 21350CH 1RB49 Rear side 10mm

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, LTE-FDD (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.242$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.20, 7.20, 7.20); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (9x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.914 W/kg


Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.685 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.653 W/kg; SAR(10 g) = 0.331 W/kg

Maximum value of SAR (measured) = 0.976 W/kg

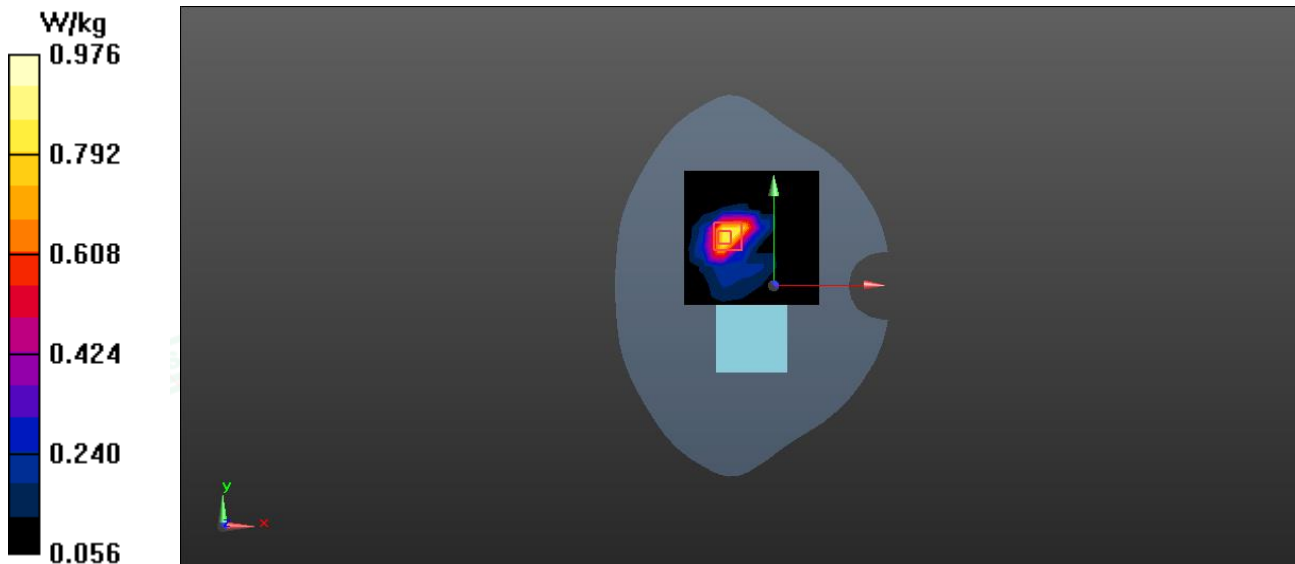

Date: 2026/8/10

Test Laboratory: LCS-SAR Lab

LTE B12 10M QPSK 23095CH 1RB24 Left Cheek

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, LTE-FDD (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5 \text{ MHz}$; $\sigma = 0.863 \text{ S/m}$; $\epsilon_r = 41.234$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.51, 9.51, 9.51); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)0

Configuration/Head /Area Scan (7x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.134 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.425 V/m ; Power Drift = 0.02 dB

Peak S AR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.096 W/kg ; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.177 W/kg

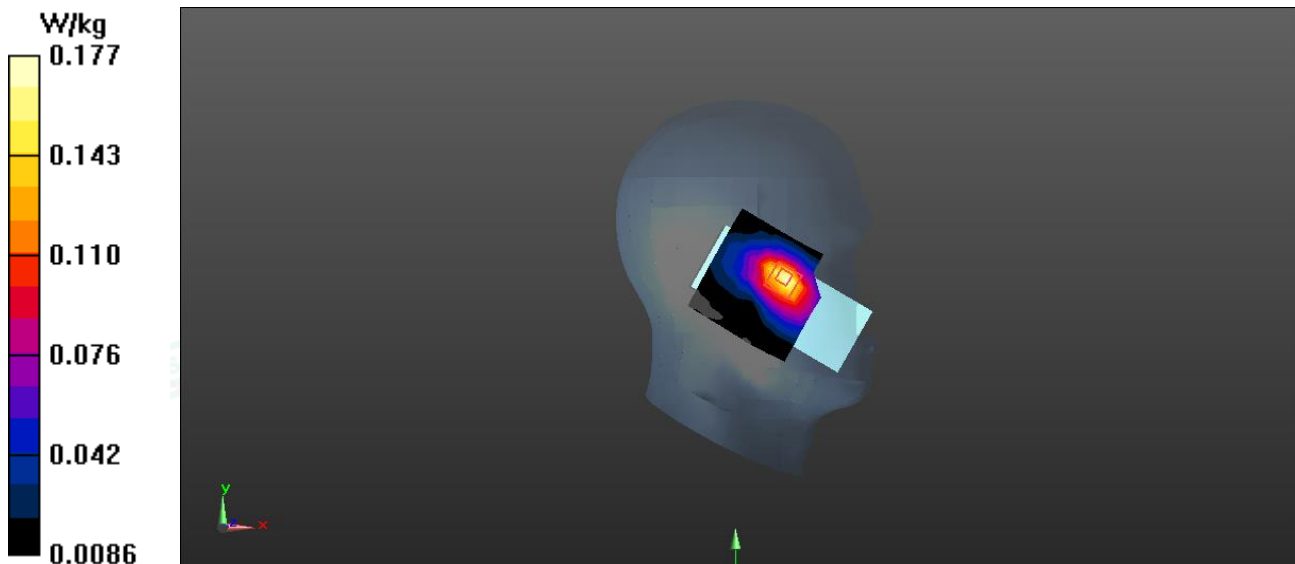

Date: 2026/8/10

Test Laboratory: LCS-SAR Lab

LTE B12 10M QPSK 23095CH 1RB24 Rear side 10mm

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, LTE-FDD (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 41.234$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.51, 9.51, 9.51); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.343 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.594 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.396 W/kg

SAR(1 g) = 0.18 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.302 W/kg

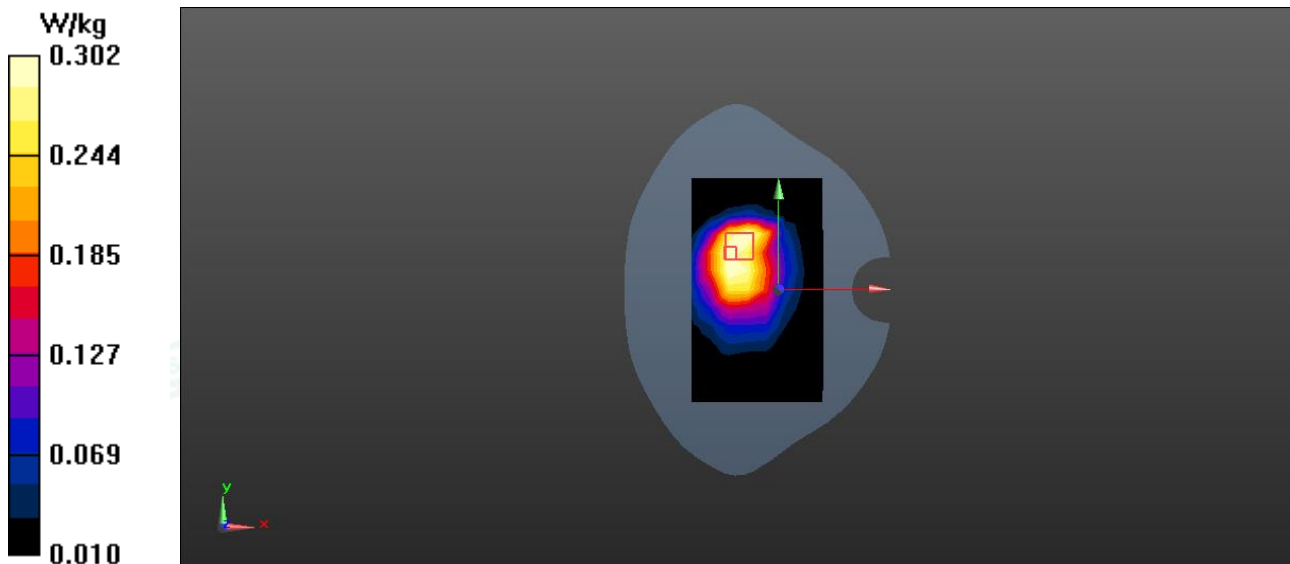

Date: 2026/8/10

Test Laboratory: LCS-SAR Lab

LTE B13 10M QPSK 23230CH 1RB49 Left Cheek

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, LTE-FDD (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 42.036$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.51, 9.51, 9.51); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.476 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.749 V/m ; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.567 W/kg

SAR(1 g) = 0.255 W/kg ; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.428 W/kg

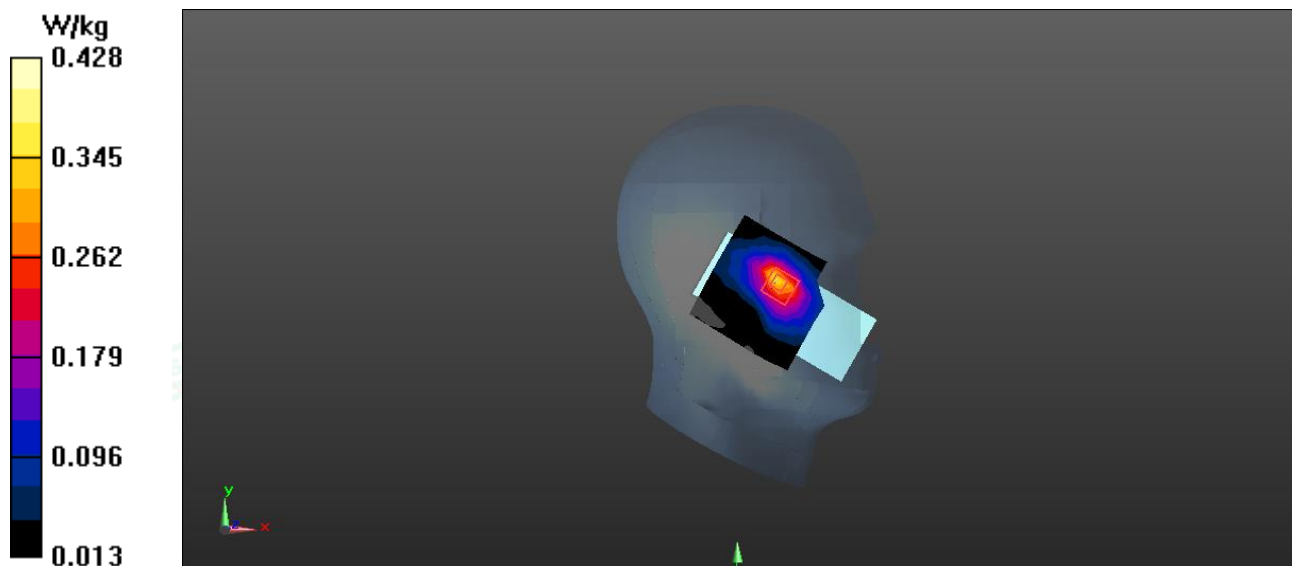



Date: 2026/8/10

Test Laboratory: LCS-SAR Lab

LTE B13 10M QPSK 23230CH 1RB49 Rear side 10mm

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, LTE-FDD (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 42.036$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.51, 9.51, 9.51); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.784 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.252 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.479 W/kg ; SAR(10 g) = 0.258 W/kg

Maximum value of SAR (measured) = 0.734 W/kg

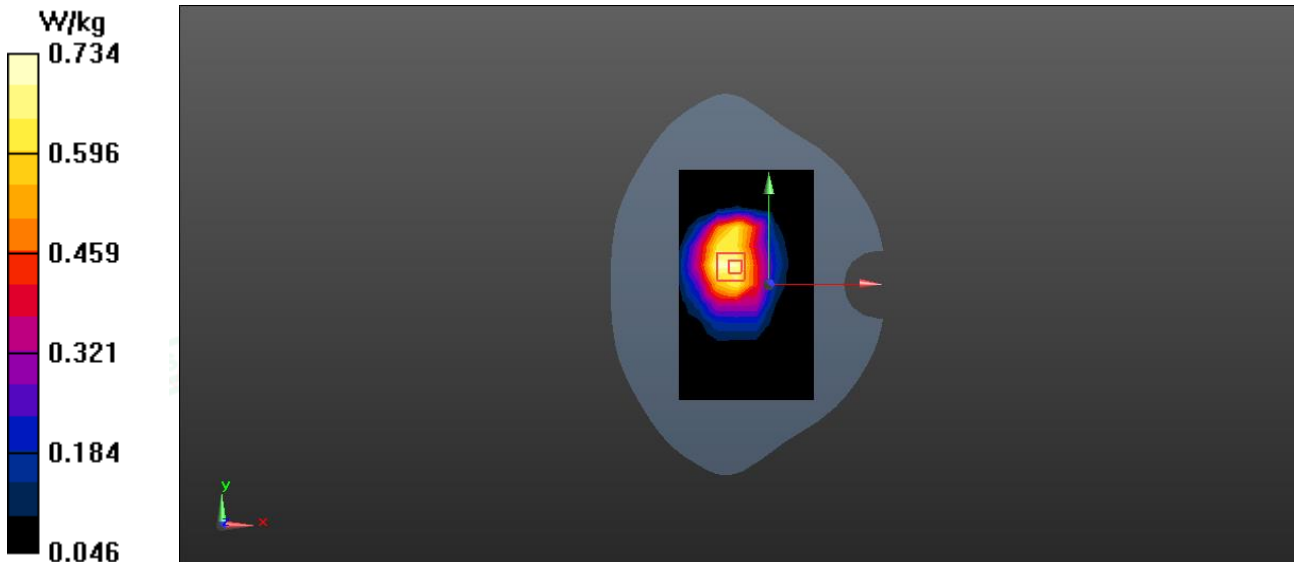



Date: 2026/8/13

Test Laboratory: LCS-SAR Lab

LTE B66 20M QPSK 132322CH 1RB49 Left Cheek**DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.331$ S/m; $\epsilon_r = 39.896$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2026/3/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.412 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.459 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.513 W/kg

SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.124 W/kg

Maximum value of SAR (measured) = 0.467 W/kg

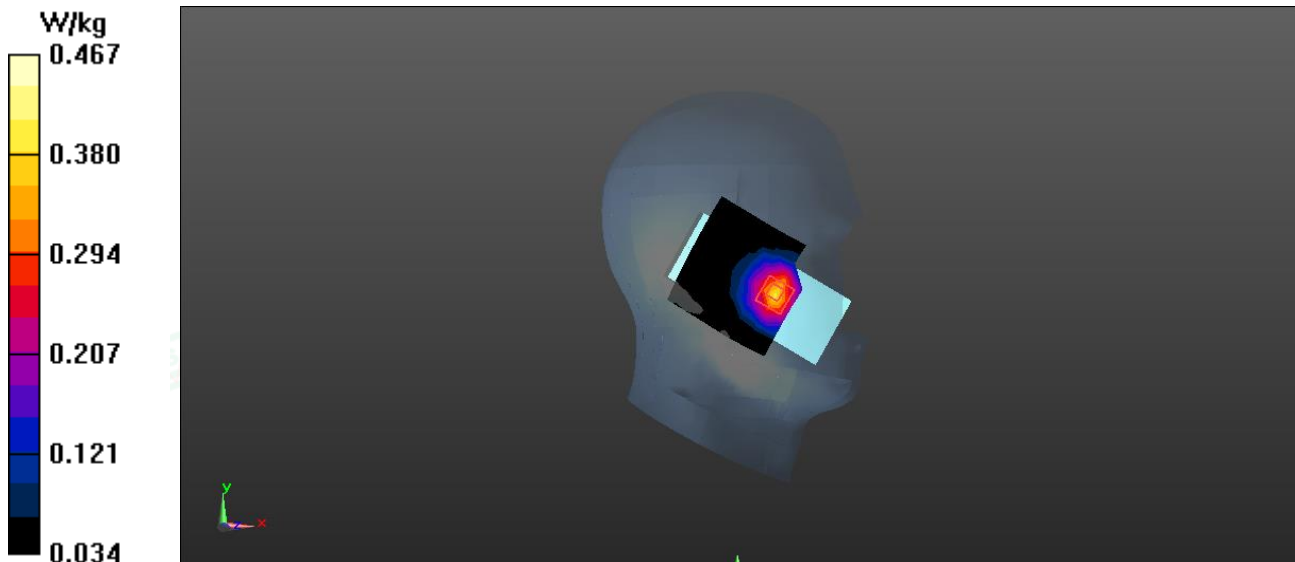



Date: 2026/8/13

Test Laboratory: LCS-SAR Lab

LTE B66 20M QPSK 132322CH 1RB49 Rear Side 10mm

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.331$ S/m; $\epsilon_r = 39.896$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.05, 8.05, 8.05); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.913 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.376 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.573 W/kg; SAR(10 g) = 0.296 W/kg

Maximum value of SAR (measured) = 0.968 W/kg

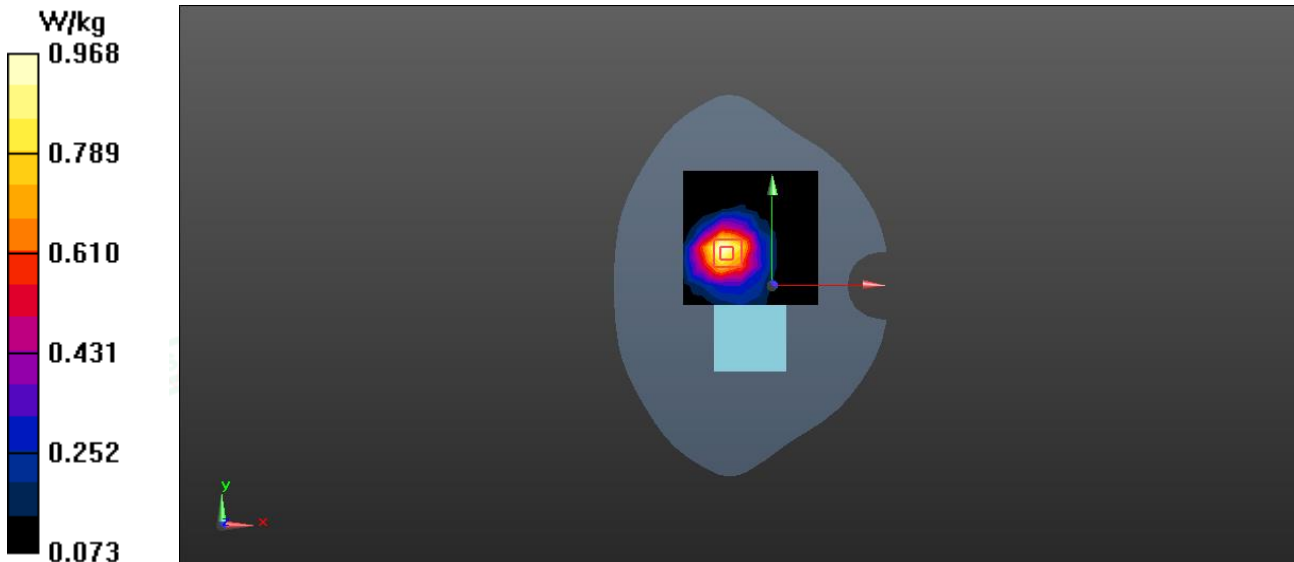



Date: 2026/8/10

Test Laboratory: LCS-SAR Lab

LTE B71 20M QPSK 133222CH 1RB49 Left Cheek

DUT: Mobile Phone; Type: F161; Serial: A260720091-1

Communication System: UID 0, LTE-FDD (0); Frequency: 673 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 673 \text{ MHz}$; $\sigma = 0.868 \text{ S/m}$; $\epsilon_r = 41.186$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.51, 9.51, 9.51); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (7x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.273 W/kg


Configuration/Head /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.561 V/m ; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.386 W/kg

SAR(1 g) = 0.119 W/kg ; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.256 W/kg

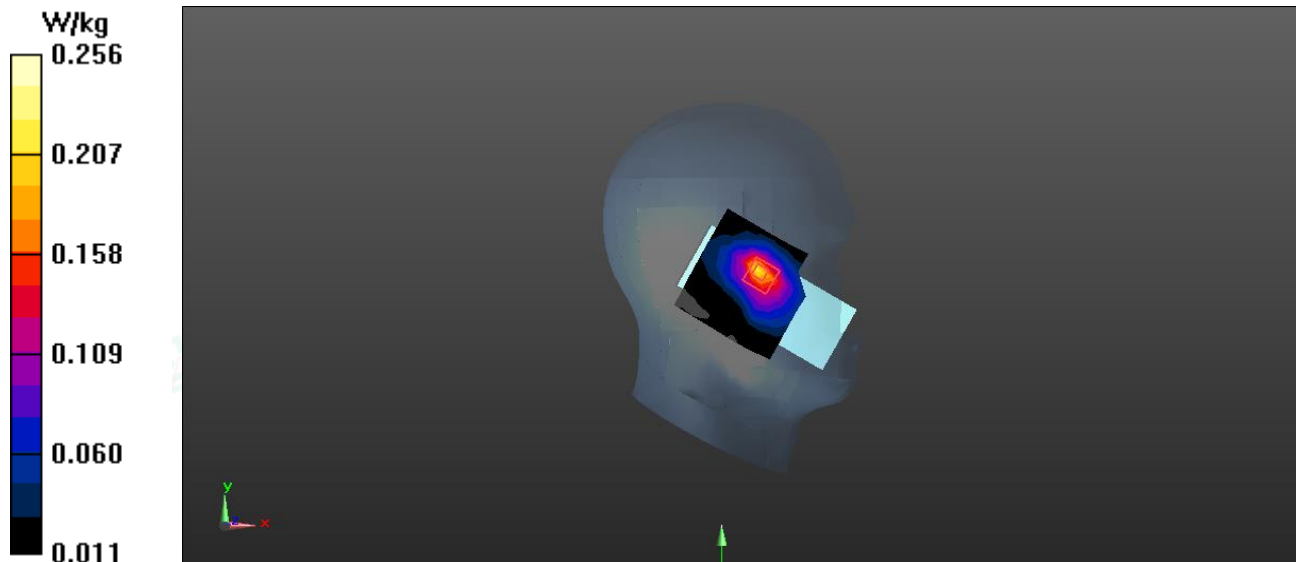



Date: 2026/8/10

Test Laboratory: LCS-SAR Lab

LTE B71 10M QPSK 133222CH 1RB49 Rear side 10mm

DUT: Mobile Phone; Type: F161; Serial: A260720091-1

Communication System: UID 0, LTE-FDD (0); Frequency: 678 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 673 \text{ MHz}$; $\sigma = 0.868 \text{ S/m}$; $\epsilon_r = 41.186$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.51, 9.51, 9.51); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (8x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.407 W/kg


Configuration/ Body /Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.539 V/m ; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.512 W/kg

SAR(1 g) = 0.223 W/kg ; SAR(10 g) = 0.124 W/kg

Maximum value of SAR (measured) = 0.442 W/kg

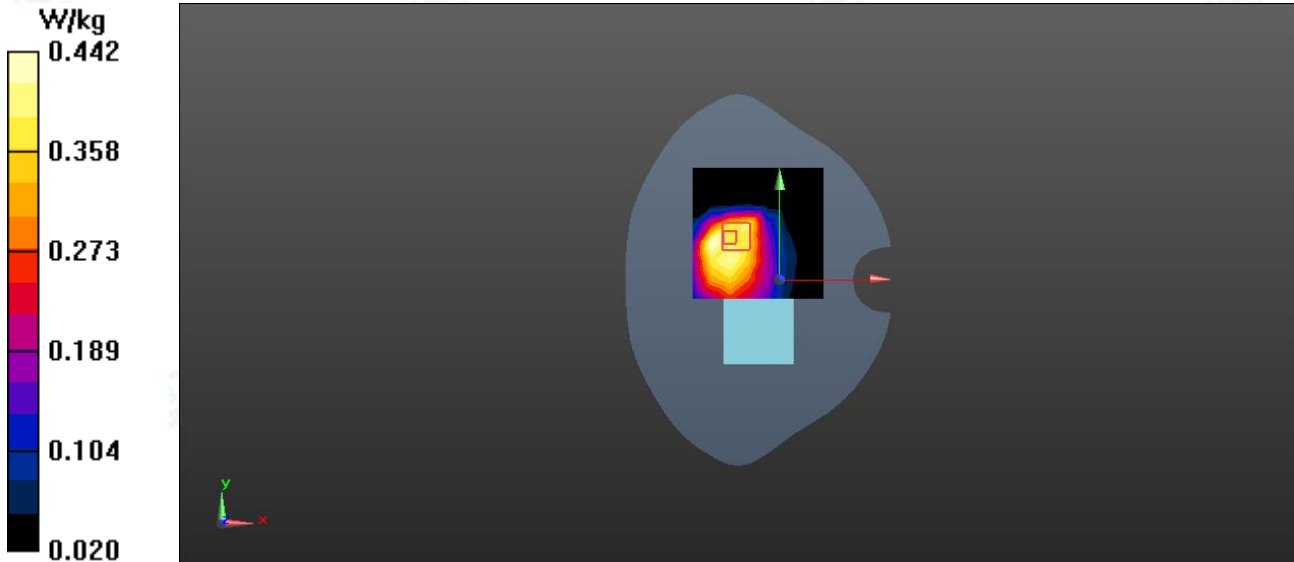



Date: 2026/8/28

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 1CH Left Cheek

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.806 \text{ S/m}$; $\epsilon_r = 38.437$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.38, 7.38, 7.38); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (8x8x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.788 W/kg


Configuration/Head /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.943 V/m ; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.964 W/kg

SAR(1 g) = 0.407 W/kg ; SAR(10 g) = 0.219 W/kg

Maximum value of SAR (measured) = 0.736 W/kg

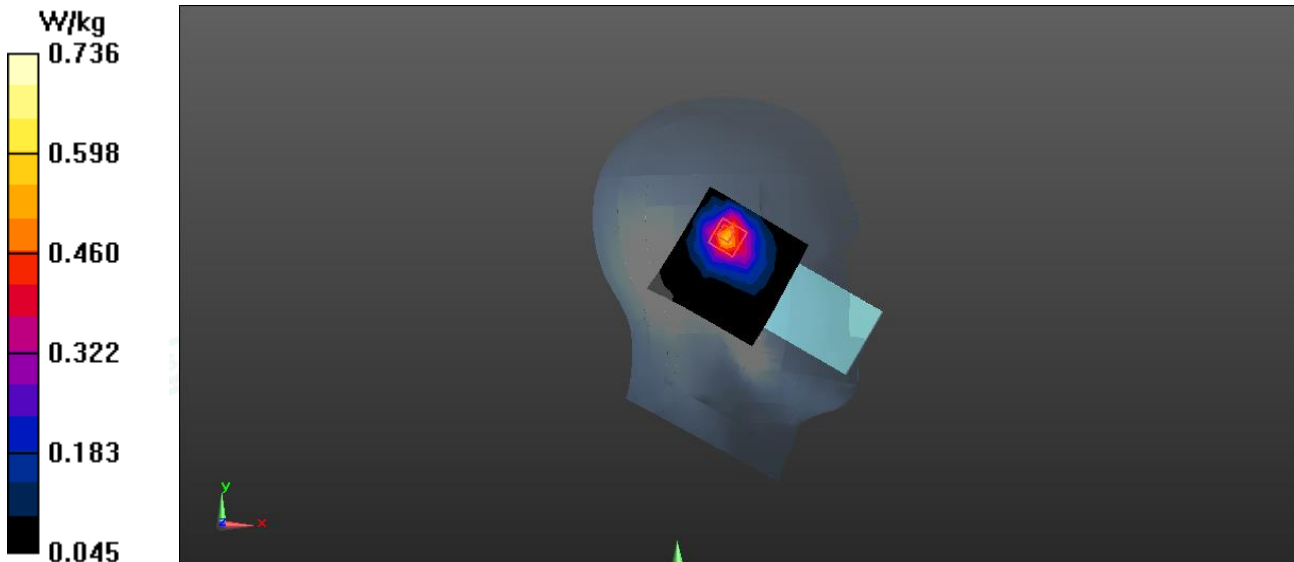



Date: 2026/8/28

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 1CH Rear side 10mm

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.806 \text{ S/m}$; $\epsilon_r = 38.437$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.38, 7.38, 7.38); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (9x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.825 W/kg


Configuration/ Body /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.43 V/m ; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.536 W/kg ; SAR(10 g) = 0.357 W/kg

Maximum value of SAR (measured) = 0.878 W/kg

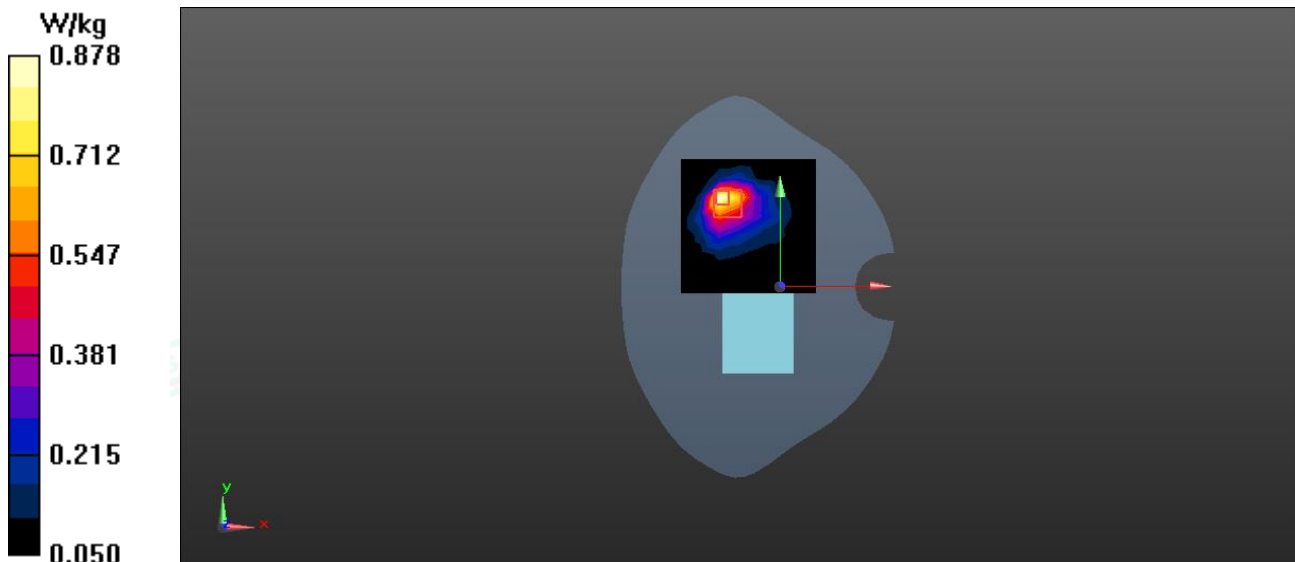



Date: 2026/8/31

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 48CH Left Cheek

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.588 \text{ S/m}$; $\epsilon_r = 35.416$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.35, 5.35, 5.35); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.546 W/kg


Configuration/Head /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.478 V/m ; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.835 W/kg

SAR(1 g) = 0.354 W/kg ; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 0.592 W/kg

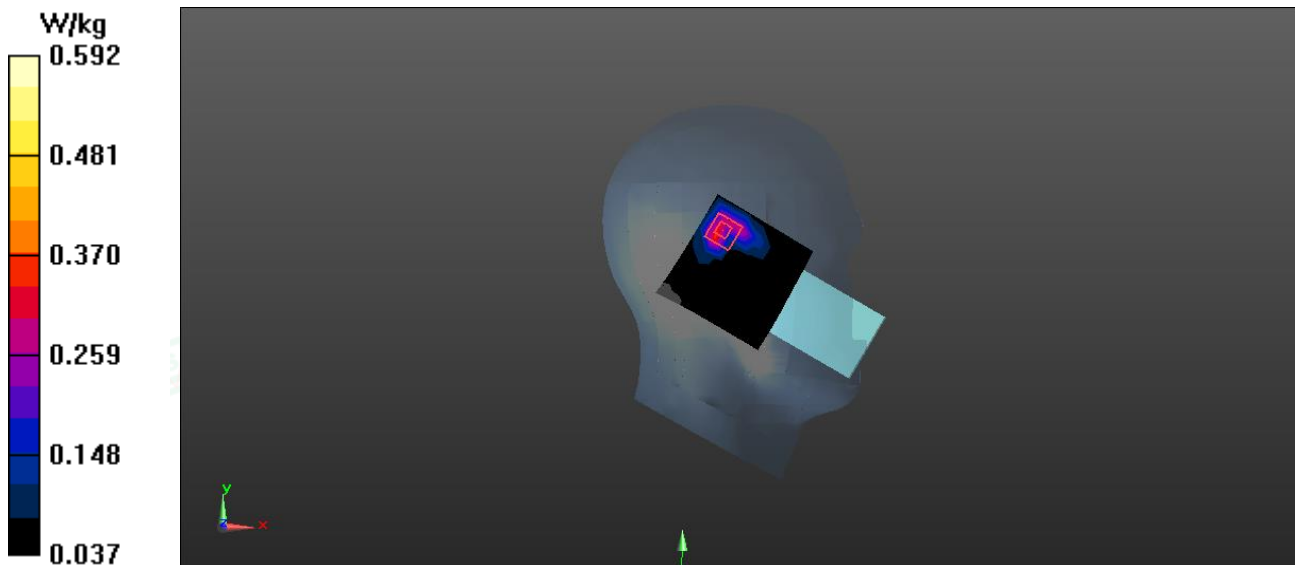



Date: 2026/8/31

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 48CH Rear side 10mm

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.588 \text{ S/m}$; $\epsilon_r = 35.416$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.35, 5.35, 5.35); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.713 W/kg


Configuration/ Body /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.456 V/m ; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.975 W/kg

SAR(1 g) = 0.461 W/kg ; SAR(10 g) = 0.294 W/kg

Maximum value of SAR (measured) = 0.767 W/kg

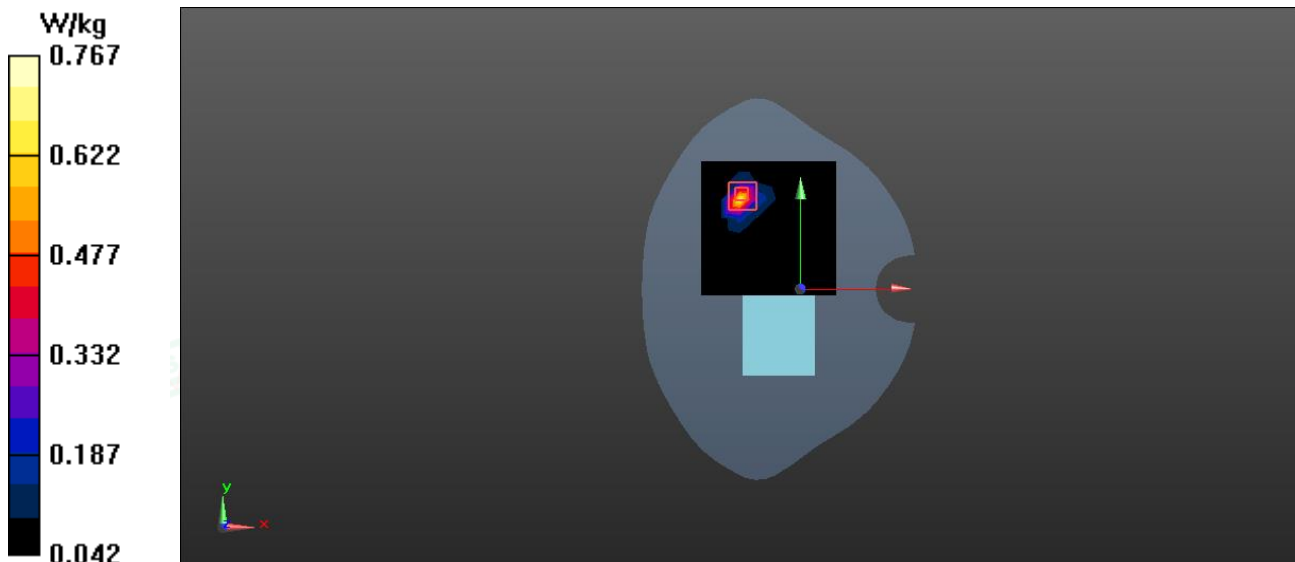



Date: 2026/8/31

Test Laboratory: LCS-SAR Lab

WIFI 5.3G 802.11a 52CH Left Cheek

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5260 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.611 \text{ S/m}$; $\epsilon_r = 35.504$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.35, 5.35, 5.35); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head /Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.567 W/kg


Configuration/Head /Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.746 V/m ; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.642 W/kg

SAR(1 g) = 0.298 W/kg ; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 0.515 W/kg

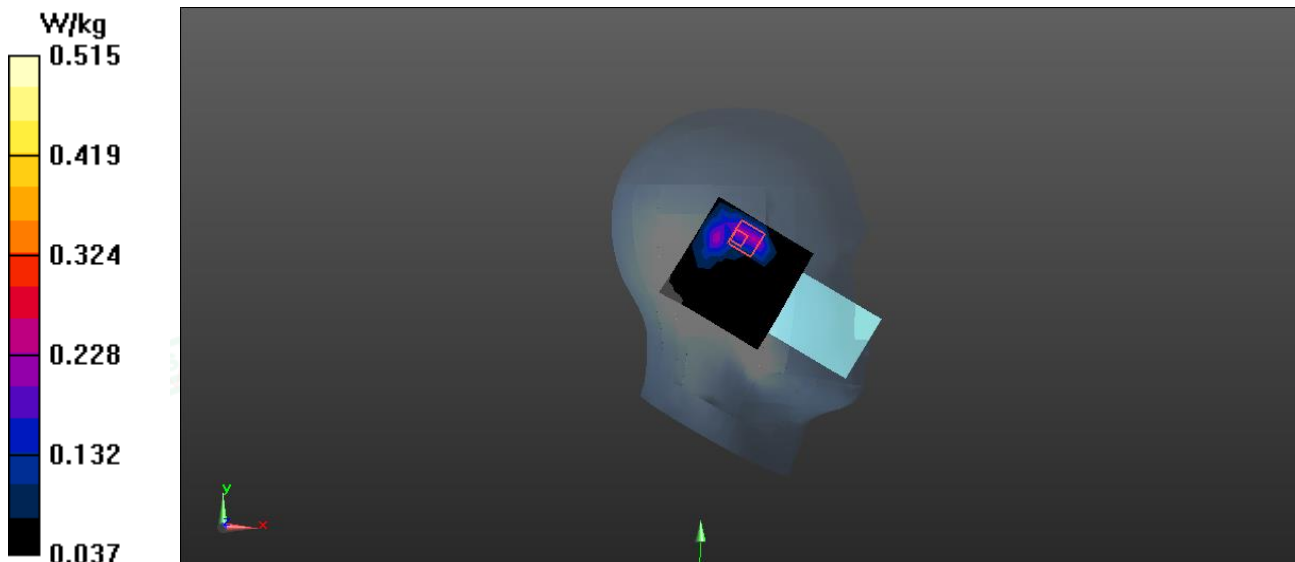



Date: 2026/8/31

Test Laboratory: LCS-SAR Lab

WIFI 5.3G 802.11a 52CH Rear side 10mm

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.611$ S/m; $\epsilon_r = 35.504$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.35, 5.35, 5.35); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.624 W/kg


Configuration/ Body /Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.994 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.842 W/kg

SAR(1 g) = 0.371 W/kg; SAR(10 g) = 0.247 W/kg

Maximum value of SAR (measured) = 0.698 W/kg

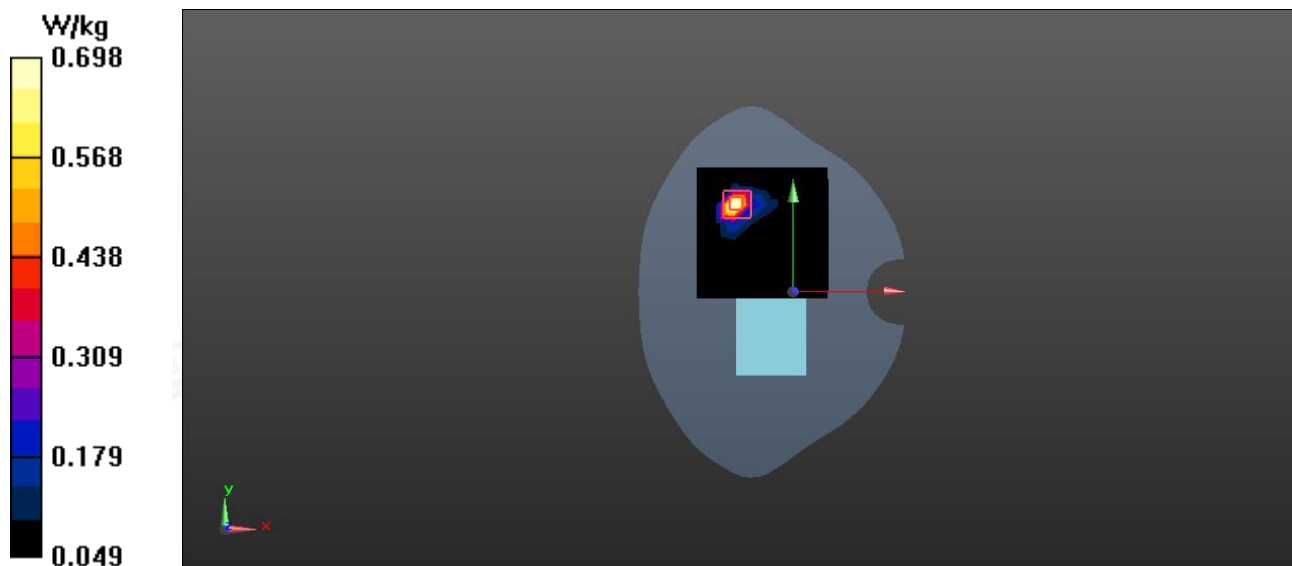



Date: 2026/8/31

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11a 157CH Left Cheek**DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5785 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.359 \text{ S/m}$; $\epsilon_r = 35.653$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.87, 4.87, 4.87); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Head /Area Scan (10x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.465 W/kg


Configuration/Head/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.716 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.588 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.416 W/kg

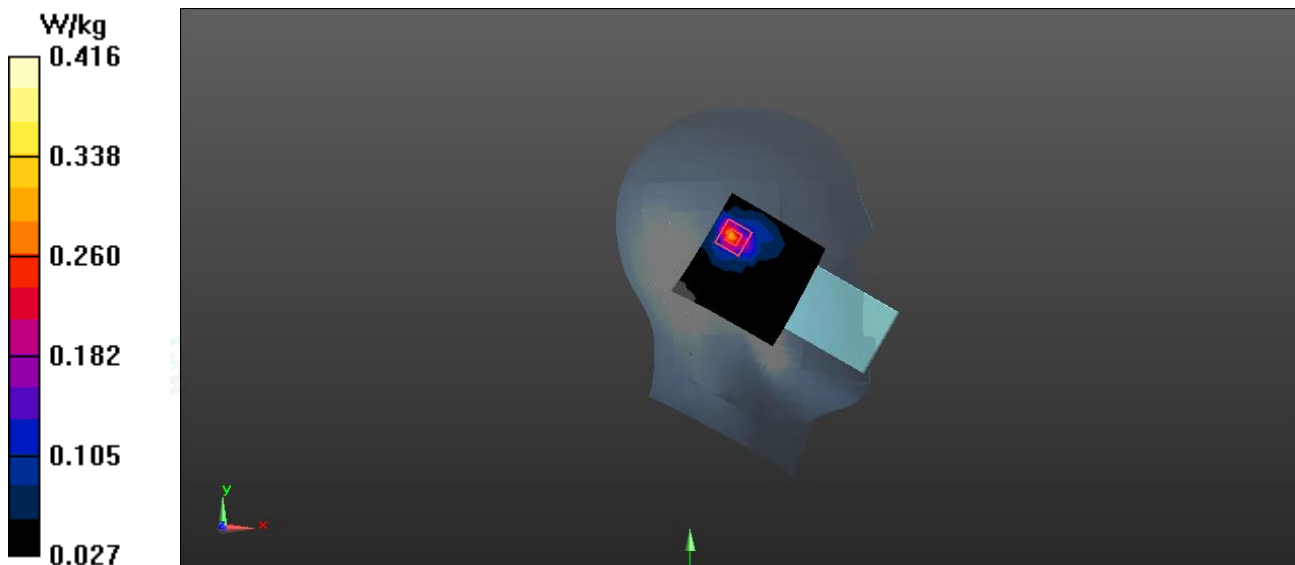



Date: 2026/8/31

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11a 157CH Rear side 10mm

DUT: Mobile Phone ; Type: F161 ; Serial: A260720091-1

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5785 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.359 \text{ S/m}$; $\epsilon_r = 35.653$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.87, 4.87, 4.87); Calibrated: 2026/3/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2026/3/2
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/ Body /Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.574 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.849 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.689 W/kg

SAR(1 g) = 0.32 W/kg; SAR(10 g) = 0.204 W/kg

Maximum value of SAR (measured) = 0.602 W/kg

