

TABLE OF CONTENTS LIST

APPLICANT: TEKK INC.

FCC ID: GOXNT8

PAGE 1.....731 FORM

PAGE 2.....POWER OF ATTORNEY LETTER

TEST REPORT:

PAGE 3.....COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCR.

PAGE 3A.....LIST OF ACTIVE DEVICES

PAGE 4.....TECHNICAL DESCRIP. CONTINUED. AND RF POWER OUTPUT

PAGE 5.....MODULATION CHARACTERISTICS

PAGE 6.....AUDIO FREQUENCY RESPONSE GRAPH

PAGE 7-7A....AUDIO INPUT VS MODULATIONS GRAPHS

PAGE 8.....AUDIO LOW PASS FILTER GRAPH

PAGE 9.....OCCUPIED BANDWIDTH

PAGE 10-13...OCCUPIED BANDWIDTH PLOTS

PAGE 14.....SPURIOUS EMISSIONS AT ANTENNA TERMINALS

PAGE 15-16...FIELD STRENGTH OF SPURIOUS EMISSIONS

PAGE 17.....FREQUENCY STABILITY

PAGE 18-23...TRANSIENT FREQUENCY STABILITY

PAGE 24.....CERTIFICATION OF TECHNICAL DATA

PAGE 25.....LIST OF TEST EQUIPMENT

PAGE 26-27.....SCHEMATICS

PAGE 28.....BLOCK DIAGRAM

PAGE 29-35.....PHOTOGRAPHS

PAGE 36.....FCC ID LABEL SAMPLE AND SKETCH OF LOCATION

LAST ITEM.....OWNER'S MANUAL

INCLUDING THEORY OF OPERATION PAGES 10-14

F:\CUS\T\TEKK\TEK67U8.RPT

GENERAL INFORMATION REQUIRED
FOR TYPE ACCEPTANCE

2.983 (a,b,c) TEKK Inc. will sell the MODEL NO. GOXNT8 VHF transmitter in quantity, for use under FCC RULES PART 22 & 90.

2.983 (d) TECHNICAL DESCRIPTION

(1) Type of Emission: 13K6F3E For 25KHz
9K8F3E For 12.5KHz

For 25KHz

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 4.0\text{KHz (Peak Deviation)}$$

$$K = 1$$

$$B_n = 2(3.0K) + 2(3.8K)(1) = 6.0K + 7.6K = 13.6K$$

ALLOWED AUTHORIZED BANDWIDTH = 20.00KHz.

For 12.5KHz

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 2.2\text{KHz (Peak Deviation)}$$

$$K = 1$$

$$B_n = 2(3.0K) + 2(1.9K)(1) = 6.0K + 3.8K = 9.8K$$

ALLOWED AUTHORIZED BANDWIDTH = 11.25KHz.

90.209(b)(5)

(2) Frequency Range: 146-174 MHz

(3) Power Range and Controls: There are NO user Power controls.

(4) Maximum Output Power Rating:
5.0Watts & 1.0 Watts into a ohm resistive load.

(5) DC Voltages and Current into Final Amplifier:
POWER INPUT

High FINAL AMPLIFIER ONLY

$$V_{ce} = 7.2 \text{ Volts}$$

$$I_{ce} = 1.90 \text{ A.}$$

$$P_{in} = 13.68 \text{ Watts}$$

Low FINAL AMPLIFIER ONLY

$$V_{ce} = 7.2 \text{ Volts}$$

$$I_{ce} = 0.65 \text{ A.}$$

$$P_{in} = 4.68 \text{ Watts}$$

(6) Function of each electron tube or semiconductor device or other active circuit device:

APPLICANT: TEKK Inc.

FCC ID: GOXNT8

REPORT NO.: F:\CUS\T\TEKK\TEK67U8.RPT

PAGE NO.: 3

- 2.983(d) (7) Complete Circuit Diagrams: The circuit diagram is included as PAGE 26-27. The block diagram is included as PAGE 28.
- (8) Instruction book. The instruction manual is included as PAGES Last Item.
- (9) Tune-up procedure. The tune-up procedure is given in PAGE P/O Service Manual.
- (10) Description of all circuitry and devices provided for determining and stabilizing frequency is included in the circuit description in the instruction manual.

- 2.983 (11) Description of any circuits or devices employed for suppression of spurious radiation, for limiting modulation, and for limiting power. In addition to the interstage filtering the multi-section low pass filter made up of L104, L103, C104, L102, C103, C102 L100, & C100.

Limiting Modulation:

The transmitter audio limiting circuitry is contained in the loop filter U100.

Limiting Power: There is no provision for limiting power.


- (12) Digital modulation. This unit does NOT use digital modulation.

2.983(e) The data required by 2.985 through 2.997 is submitted below.

2.985(a) RF power output.

RF power is measured by connecting a 50 ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage of 7.2V, and the transmitter properly adjusted the RF output measures:

High Power	INPUT POWER: (7.2V)(1.90A) = 13.68 Watts
	OUTPUT POWER: 5.0 Watts Efficiency: 36%
Low Power	INPUT POWER: (7.2V)(0.65A) = 4.68 Watts
	OUTPUT POWER: 1.0 Watts Efficiency: 21%

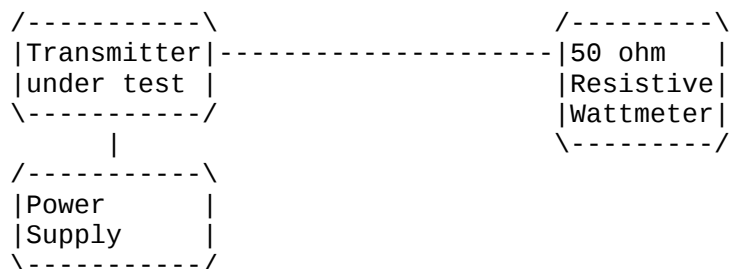

2.987(a) VOICE MODULATION CHARACTERISTICS:

AUDIO FREQUENCY RESPONSE

(a) See the following page.

2.987(a) AUDIO LOW PASS FILTER

The audio low pass filter is included and the plot on the following page. Rules 90.210(b,d, & e) for mobile stations with a low pass filter.

2.987(b) AUDIO INPU VERSUS MODULATION

A plot of the audio input versus deviation is shown on following page.

2.989(c) OCCUPIED BANDWIDTH:
90.210(b,)

Data in the plots shows that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth: At least $43 + \log(P)$ dB.


90.210(d) 12.5KHz channel bandwidth equipment. For transmitters designed to operate with a 12.5KHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows;
(1) On any frequency from the center of the authorized bandwidth f_0 to 5.625kHz removed from f_{P0} : Zero dB.
(2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency($f_d - 2.88$ kHz) dB.
(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency(f_d in kHz $\log(P)$ or 70dB, whichever is the lesser attenuation.

Radiotelephone transmitter with modulation limiter.

Test procedure: TIA/EIA-603 para 2.2.11 , with the exception that various tones were used.

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

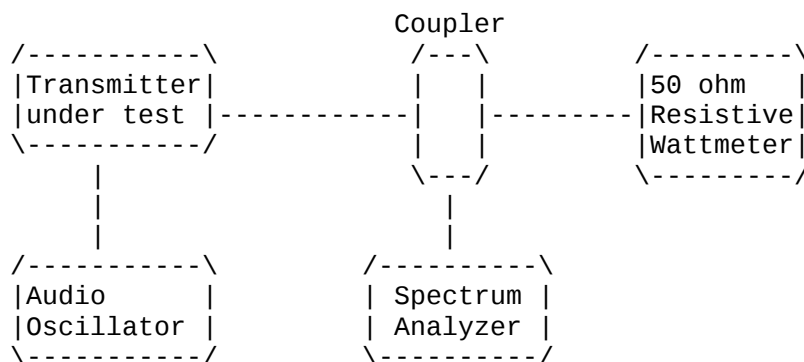


2.991

SPURIOUS EMISSIONS AT ANTENNA TERMINALS(CONDUCTED):

Data on the following page shows the level of conducted spurious responses. The carrier was modulated 100% using 2500Hz tone. The spectrum was scanned from 0.4MHz to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.

Method of Measuring Conducted Spurious Emissions

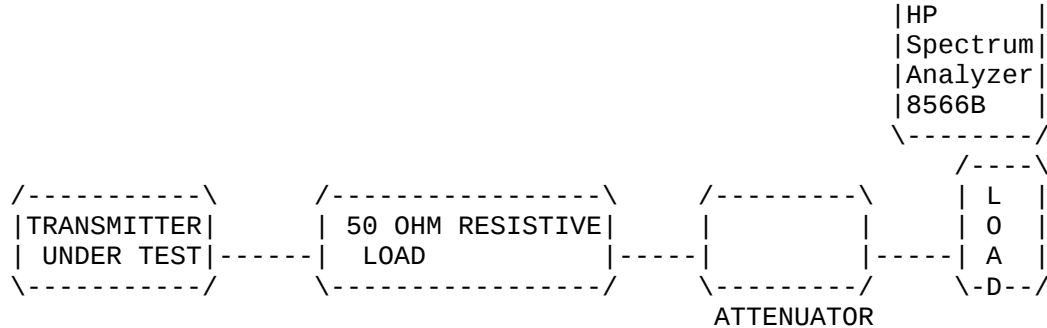

2.991 Continued
REQUIREMENTS:

SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS:

Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter.

For 25KHz

$$43 + 10\log(5.0) = 43 + 6.99 = 49.99 \text{ dB}$$

For 12.5KHz

$$50 + 10\log(1.0) = 50 + 0.0 = 50.00 \text{ dB}$$

	EMISSION FREQUENCY MHz	dB BELOW CARRIER
High	158.025	00.0
	316.05	-65.9
	474.08	-76.8
	632.10	-80.7
	790.13	-90.2
	1106.18	-91.4
	1422.23	-90.5
Low	158.025	00.0
	316.05	-62.8
	474.08	-74.6
	632.10	-79.1
	790.13	-90.9
	1106.18	-92.4
	1422.23	-91.5

METHOD OF MEASUREMENT: The procedure used was TIA/EIA-603 STANDARD without any exceptions. An audio generator was connected to the UUT through a dummy microphone circuit and the output of the transmitter connected to a standard load and from the standard load to the spectrum analyzer. The spectrum was scanned from 400KHz to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer. The measurements were made using the shielded room located at TIMCO ENGINEERING INC. 25355 WEST NEWBERRY Rd, NEWBERRY, FL 32669.

APPLICANT: TEKK Inc. FCC ID: GOXNT8

REPORT NO.: F:\CUS\T\TEKK\TEK67U8.RPT

PAGE NO.: 14

2.993(a)(b) FIELD STRENGTH OF SPURIOUS EMISSIONS:

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter.

$$43 + 10\log(5.0) = 49.9 \text{ dB}$$

$$\text{MARGIN} = \text{ATT} - 49.9$$

EMISSION FREQUENCY MHz	METER READING @ 3 METERS dBuV	COAX LOSS dB	ANTENNA CORRECTION FACTOR dB	FIELD STRENGTH dBuV/m	ATT. Db	MARGIN dB	
High Power							
158.02	111.30	0.90	16.66	128.86	0.00	0.00	V
316.05	33.10	1.40	15.12	49.62	79.24	29.24	V
474.08	30.40	1.60	18.70	50.70	78.16	28.16	H
632.10	28.60	1.60	20.81	51.01	77.85	27.85	H
790.13	25.90	2.00	22.04	49.94	78.92	28.92	H
1106.18	27.60	1.00	24.42	53.02	75.83	25.83	H
Low Power							
158.02	107.80	0.90	16.66	125.36	0.00	0.00	V
316.05	45.60	1.40	15.12	62.12	63.24	20.24	V
474.08	42.80	1.60	18.70	63.10	62.26	19.26	H
632.10	38.30	1.60	20.81	60.71	64.65	21.65	H
790.13	28.20	2.00	22.04	52.24	73.12	30.12	H
948.15	30.10	2.90	24.29	57.29	68.07	25.07	H
1106.18	30.10	1.00	24.42	55.52	69.83	26.83	H
1264.20	29.90	1.00	25.06	55.96	69.40	26.40	H
1422.23	29.90	1.00	25.69	56.59	68.77	25.77	H
1580.25	26.30	1.00	26.32	53.62	71.74	28.74	H


METHOD OF MEASUREMENT: The tabulated Data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental. This test was conducted per ANSI STANDARD C63.4-1992 with the exception of briefly connecting the transmitter to a half wave dipole for the purpose of establishing a reference. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 6051 N.W. 19th Lane Gainesville, FL 32605.

APPLICANT: TEKK Inc.
 FCC ID: GOXNT8
 REPORT NO.: F:\CUS\T\TEKK\TEK67U8.RPT
 PAGE NO.: 15

2.993(a)(b)

2.993(a)(b) Continued FIELD STRENGTH OF SPURIOUS EMISSIONS:

Method of Measuring Radiated Spurious Emissions

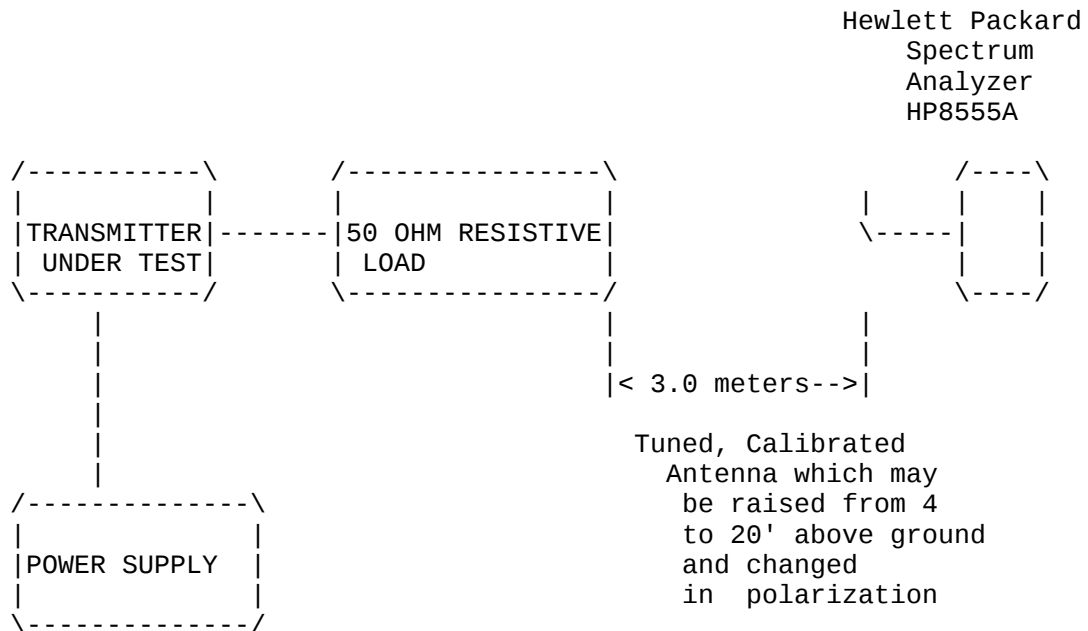

Equipment placed 4' above ground
on a rotatable platform.

APPLICANT: TEKK Inc.
FCC ID: GOXNT8
REPORT NO.: F:\CUS\T\TEKK\TEK67U8.RPT
PAGE NO.: 16

2.995(a)(b)(d) FREQUENCY STABILITY:
90.213(a)

Temperature and voltage tests were performed to verify that the frequency remains within the .0005%, 5.0 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at minus 25% of the battery voltage of 7.2VDC, which we estimate to be the battery endpoint.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 158.025 000MHz

TEMPERATURE C	FREQUENCY MHz	PPM
REFERENCE_____	158.025 000	00.0
-30_____	158.024 840	-1.01
-20_____	158.024 860	-0.88
-10_____	158.024 790	-1.32
0_____	158.024 760	-1.52
+10_____	158.024 770	-1.45
+30_____	158.024 920	-0.51
+40_____	158.025 070	+0.44
+50_____	158.025 120	+0.75

20oC Battery End-Point 5.4VDC	+1.06
-------------------------------	-------

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was -1.52 to +0.75 ppm. The maximum frequency variation over the voltage range was +1.06 ppm.

APPLICANT: TEKK Inc.
FCC ID: GOXNT8
REPORT NO.: F:\CUS\T\TEKK\TEK67U8.RPT
PAGE NO.: 17

2.995(a)(b)(d) FREQUENCY STABILITY:
90.214 Transient Frequency Behavior

REQUIREMENTS: In the 150-174MHz frequency band, transient frequencies must be within the maximum frequency difference limits during the time interval indicated below for 12.5kHz Channels:


Time Interval	Maximum Frequency	Portable Radios 150-174Mhz
t1	+12.5kHz	5.0ms
t2	+6.25kHz	20.0ms
t3, t4	+12.5kHz	5.0ms

TEST PROCEEDURE: TIA/EIA TS603 PARA 2.2.19, the levels were set as follows;

1. Using the variable attenuator the transmitter level was set to 40dB below the test receivers maximum input level, then the transmitter was turned off.
2. With the Transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30dB.
4. With the levels set as above the transient frequency behavior was observed & recorded.

APPLICANT: TEKK Inc.
FCC ID: GOXNT8
REPORT NO.: F:\CUS\T\TEKK\TEK67U8.RPT
PAGE NO.: 18

2.995(a)(b)(d) FREQUENCY STABILITY:
 90.214 Transient Frequency Behavior
 (Continued)

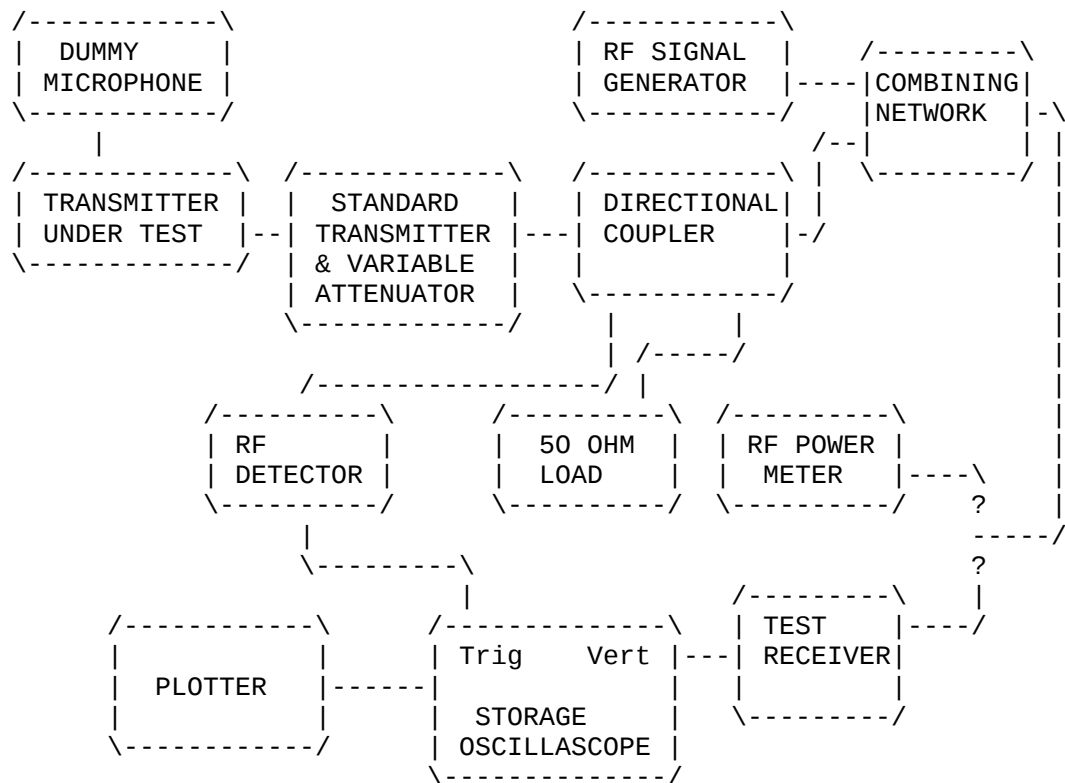

2.983(f) Photo or Drawing of Label:
See Page 36.

2.983(g) Photos of Equipment:
See Pages 29-35.

2.999 Measurement Procedures for Type Acceptance:

Measurement techniques have been in accordance
with EIA specifications and the FCC requirements.

2.909 Certification of Technical Data by Engineers

We, the undersigned, certify that the enclosed
measurements and enclosed data are true and
correct.

S.S. Sanders
Engineer

LIST OF TEST EQUIPMENT

1. Frequency Counter - Hewlett Packard Model 5383A
S/N 2338A06071
2. SPECTRUM ANALYZER - HP Model 8566B
3. RF PRE-SELECTOR - HP Model 85685A
4. QUASI-PEAK ADAPTER - HP 85650A
5. RF Power Meter - Bird Model 43 Serial 81398
6. RF Attenuators - Narda MOD 766-20
7. Audio Oscillator - Hewlett Packard Model 201C
Serial 351-06107
8. Modulation meter - IFR MODEL AM/FM 500A.
9. Voltmeter - Hewlett Packard Model 427A
Serial Number 731-0751
10. HP Distortion Analyzer Model No. 334A
Serial Number 822-01817
11. Tenney Temperature Chamber
12. Eaton Biconical antenna Model 94455-1 antenna kit 20-
200 MHz
13. Electro-Metric Dipole Kit 20-1000MHz, Model TDA 25
14. Electro-Metrics RGA-180 antenna kit 1- 18 GHz
15. Avaatek AFT-2032 broadband preamplifier, serial no.
8606SN01, 1 - 2 GHz.

APPLICANT: TEKK Inc.
FCC ID: GOXNT8
REPORT NO.: F:\CUS\T\TEKK\TEK67U8.RPT
PAGE NO.: 25