



Appendix E

RF Test Data for 5.3GWIFI (Conducted Measurement)

Product Name: Mobile phone

Test Model: F175


Environmental Conditions

Temperature:	25.2°C
Relative Humidity:	54.8%
ATM Pressure:	100.0 kPa
Test Engineer:	Jerry Chu
Supervised by:	Can Kun




E.1 -26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)
NVNT	a	5260	Ant1	34.16
NVNT	a	5280	Ant1	31.33
NVNT	a	5320	Ant1	30.95
NVNT	n20	5260	Ant1	31.48
NVNT	n20	5280	Ant1	33.19
NVNT	n20	5320	Ant1	30.97
NVNT	n40	5270	Ant1	51.96
NVNT	n40	5310	Ant1	51.65
NVNT	ac20	5260	Ant1	33.25
NVNT	ac20	5280	Ant1	30.68
NVNT	ac20	5320	Ant1	31.61
NVNT	ac40	5270	Ant1	48.89
NVNT	ac40	5310	Ant1	46.11
NVNT	ac80	5290	Ant1	90.93

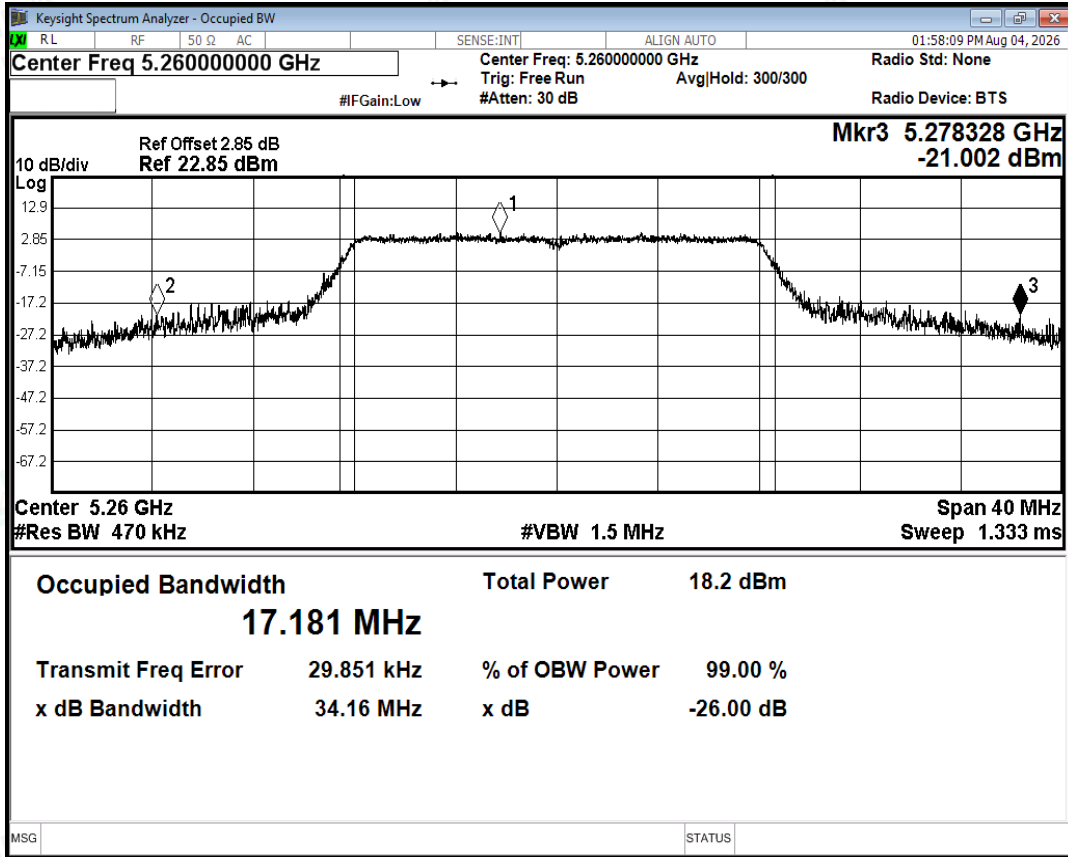


-26dB Bandwidth NVNT a 5260MHz Ant1

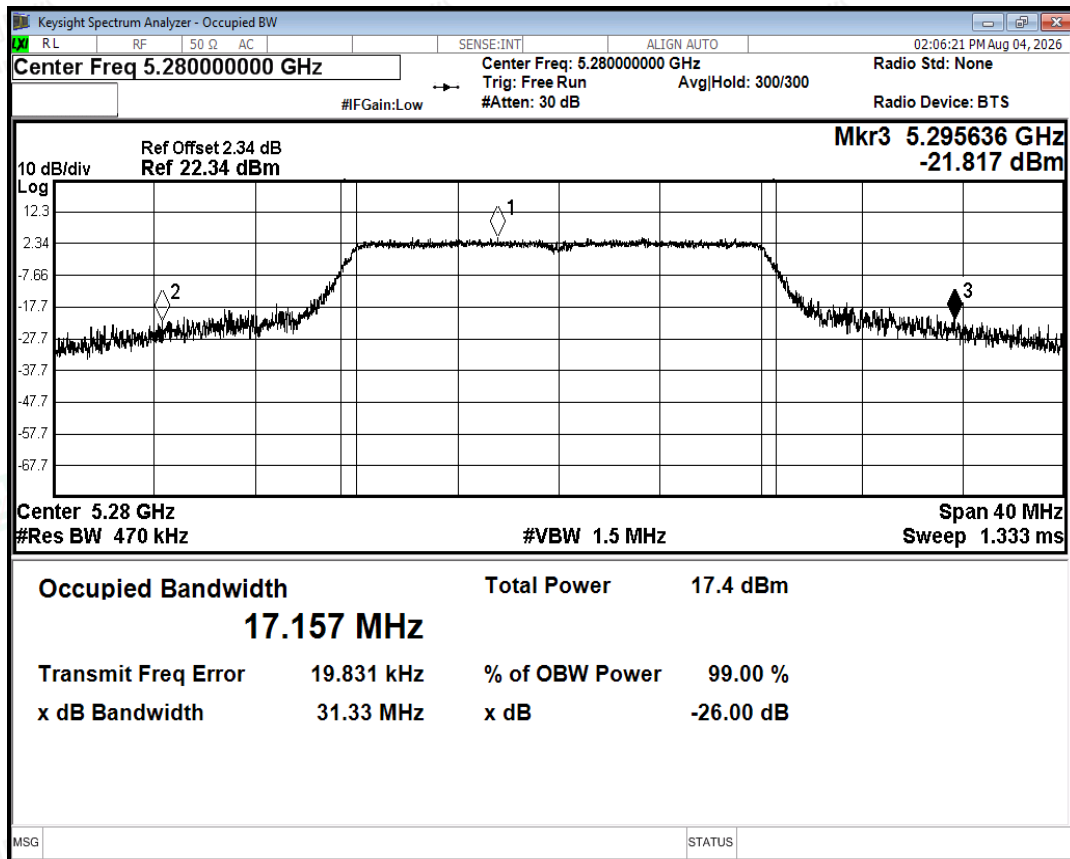


-26dB Bandwidth NVNT a 5280MHz Ant1

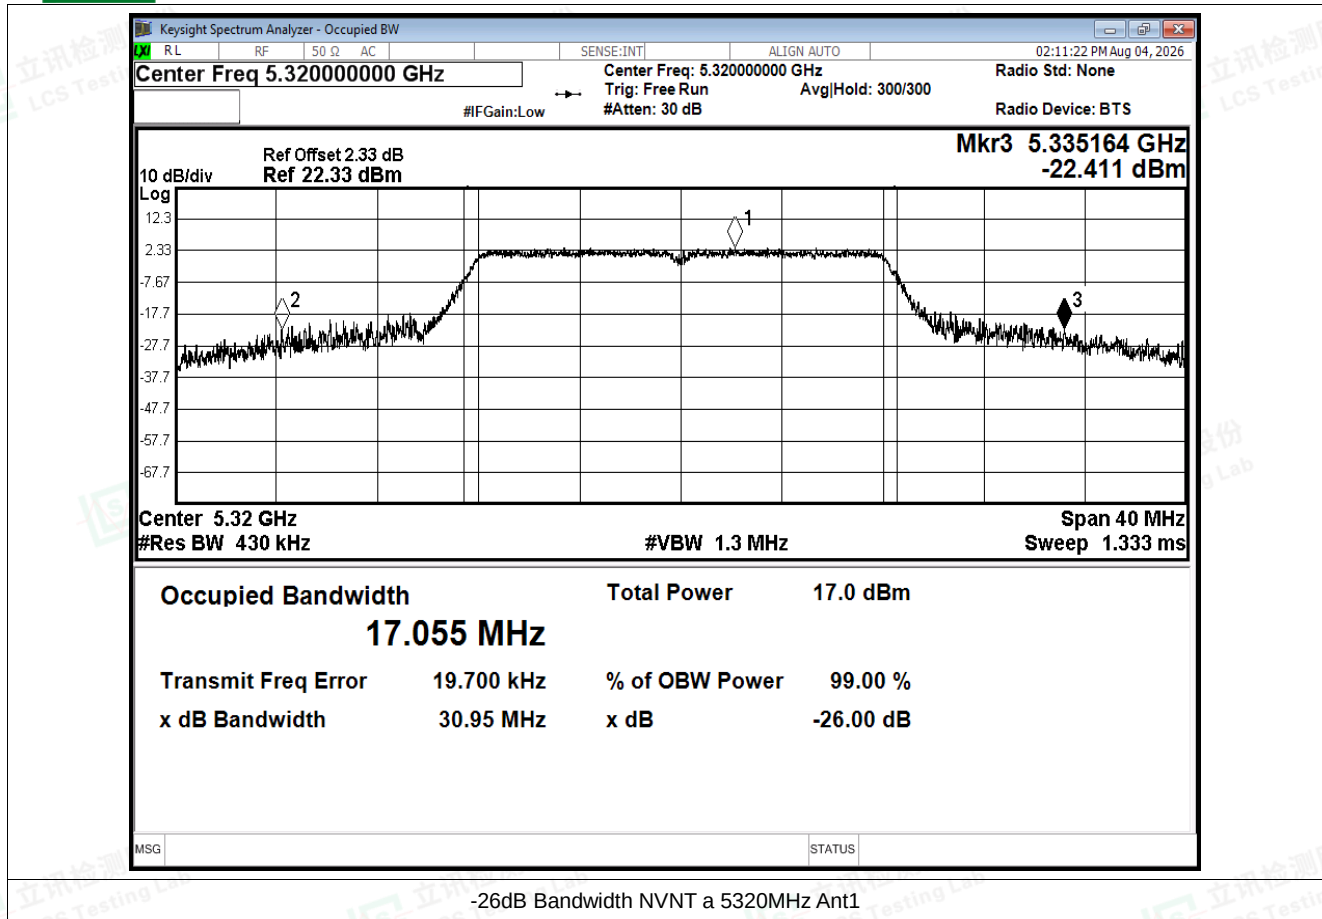


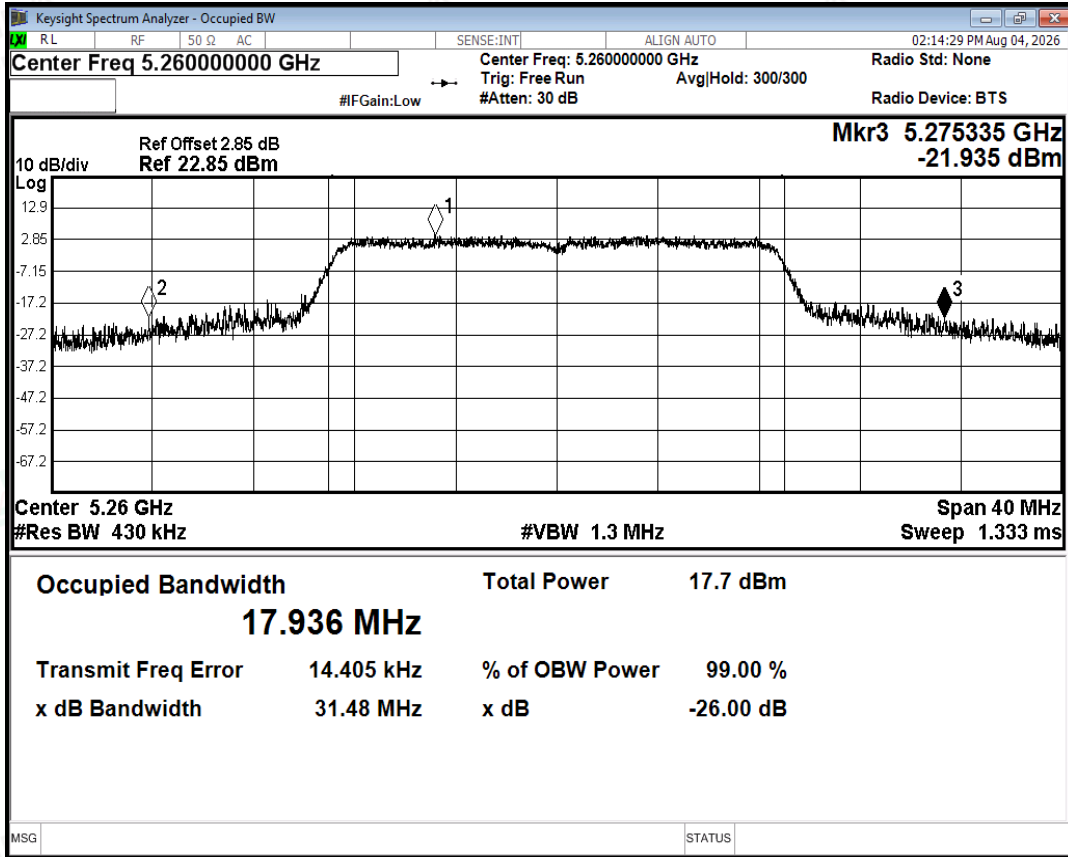


-26dB Bandwidth NVNT n20 5260MHz Ant1

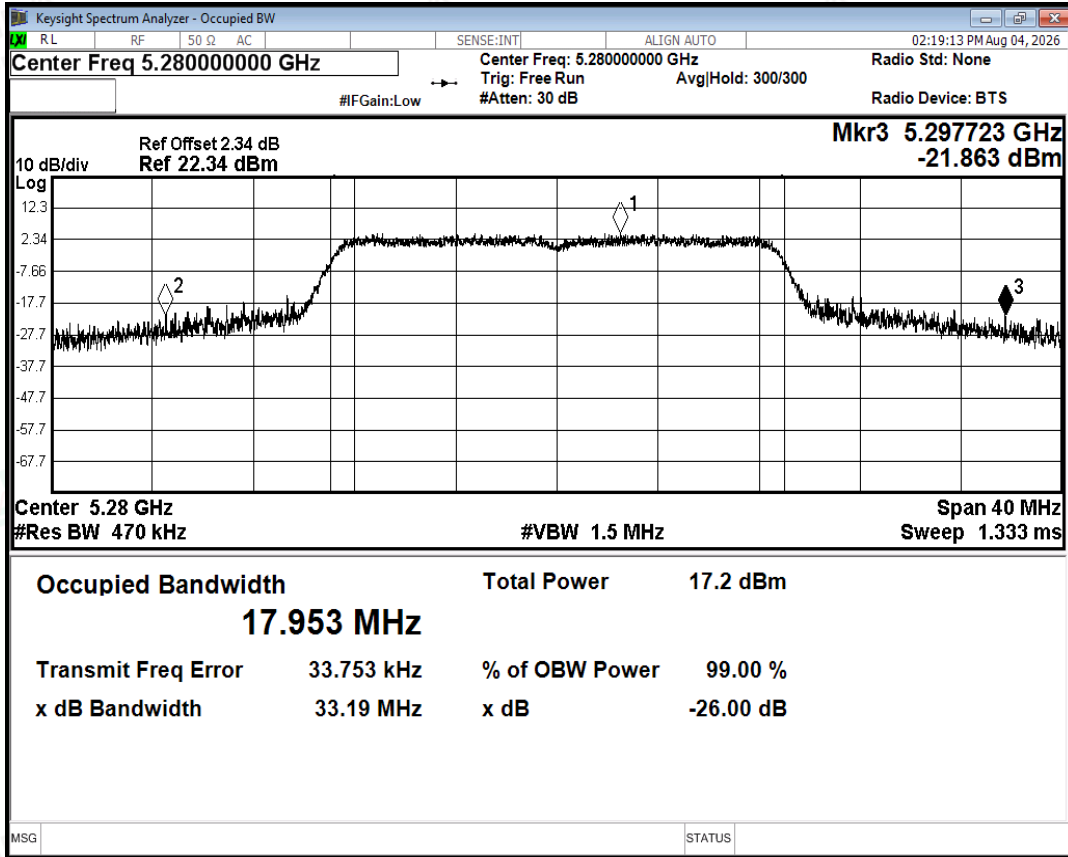



-26dB Bandwidth NVNT n20 5280MHz Ant1

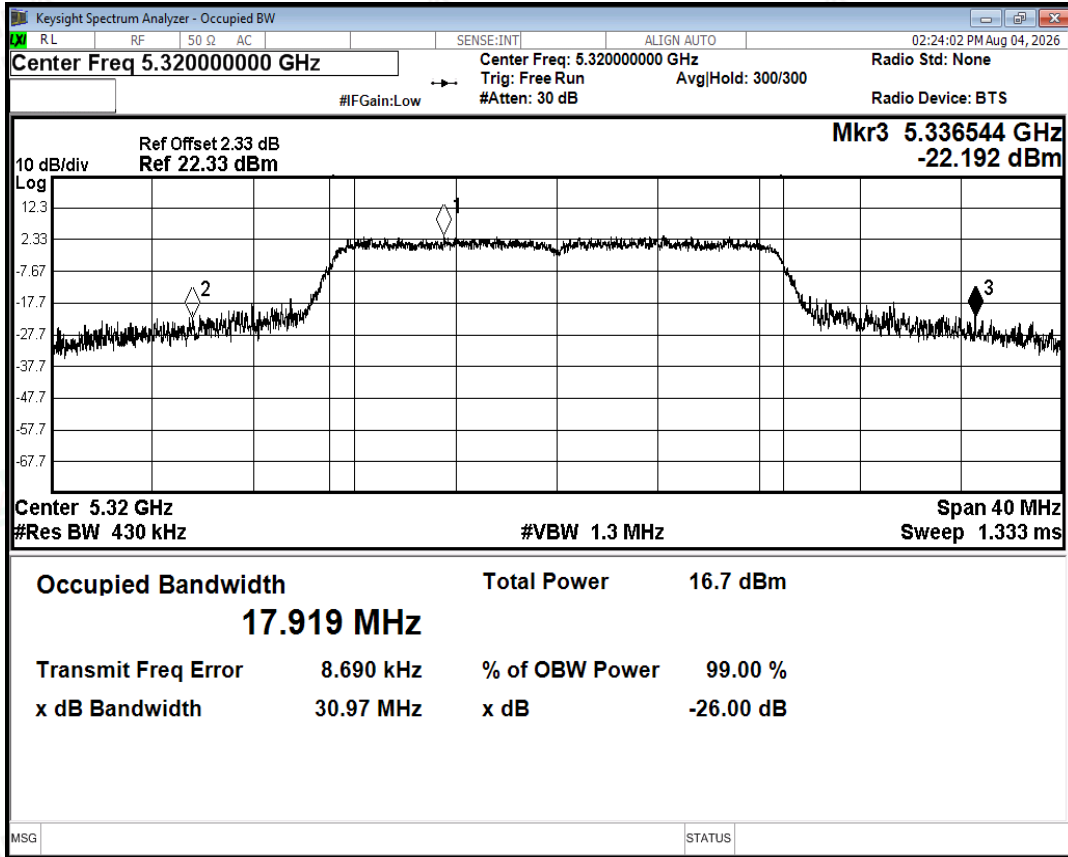



-26dB Bandwidth NVNT n20 5320MHz Ant1

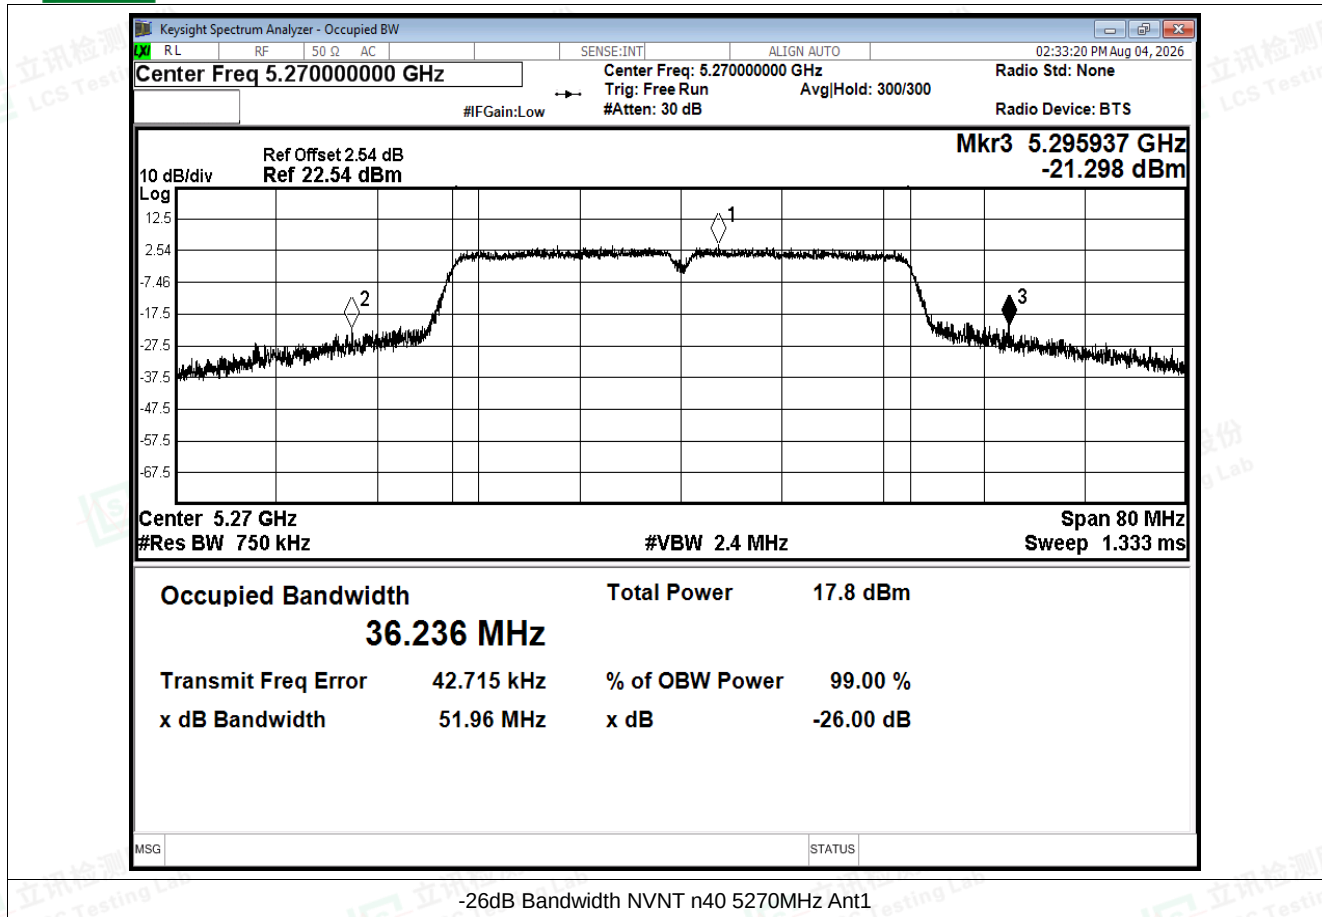

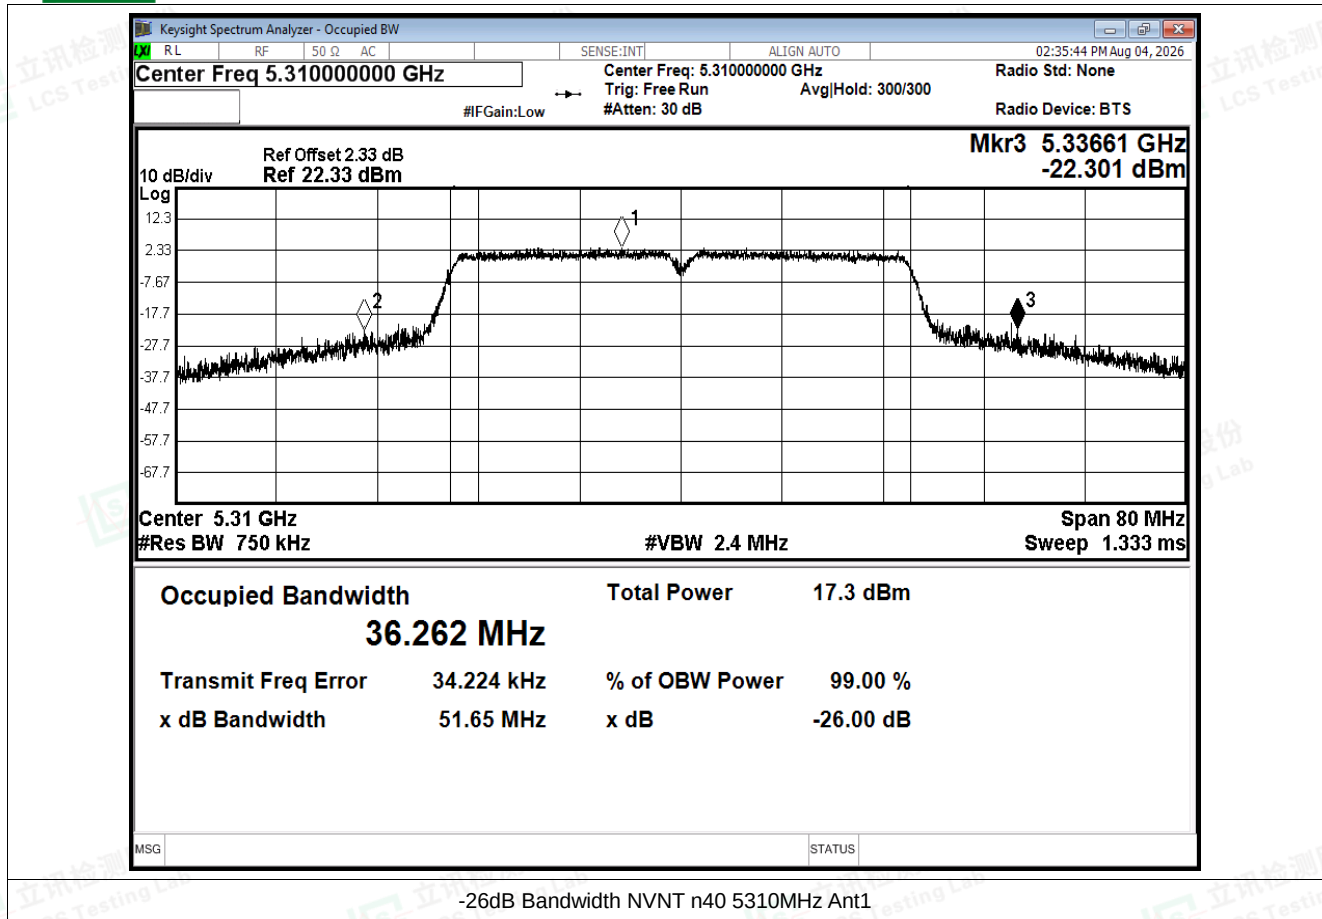


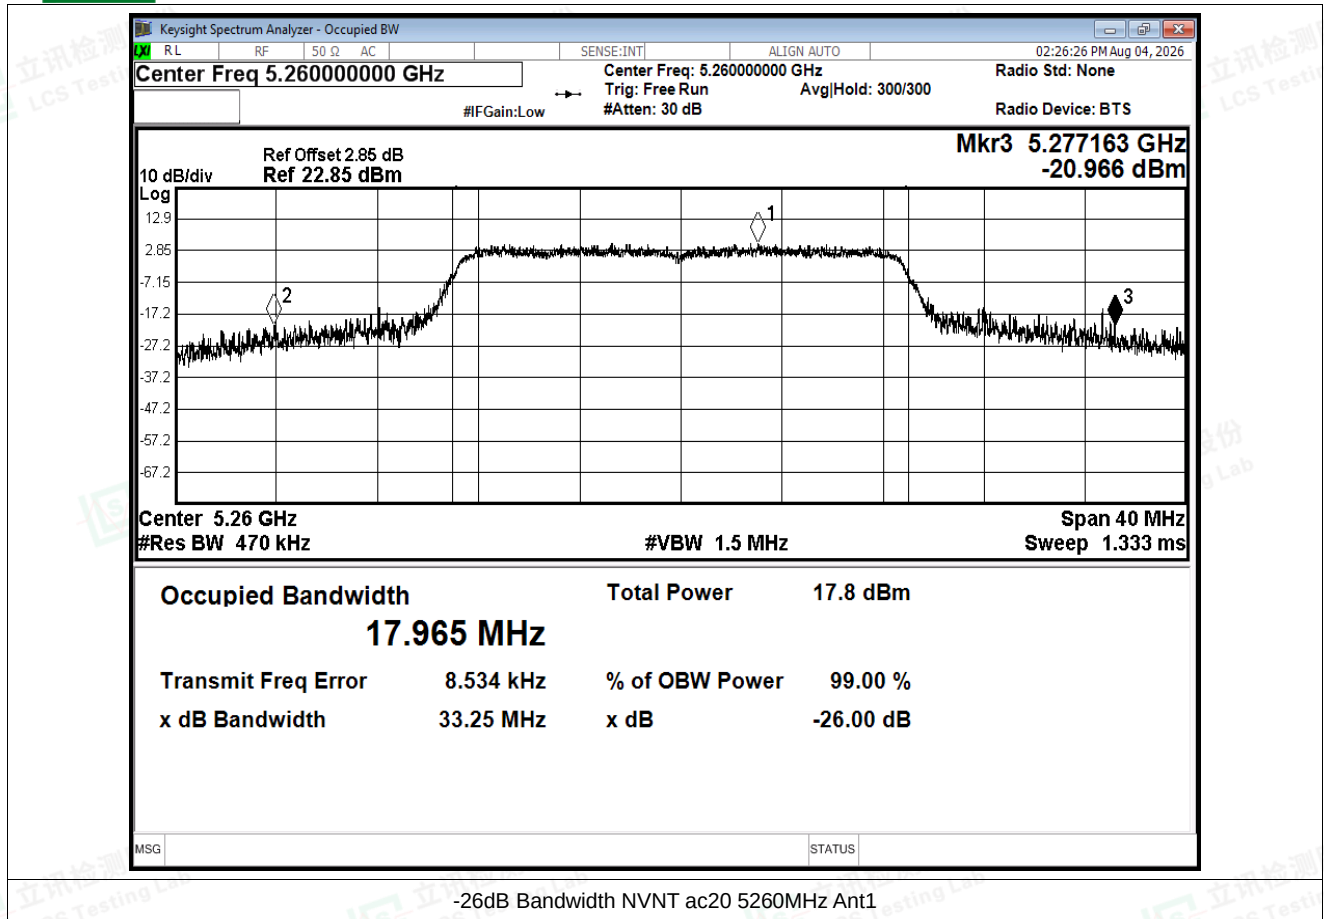

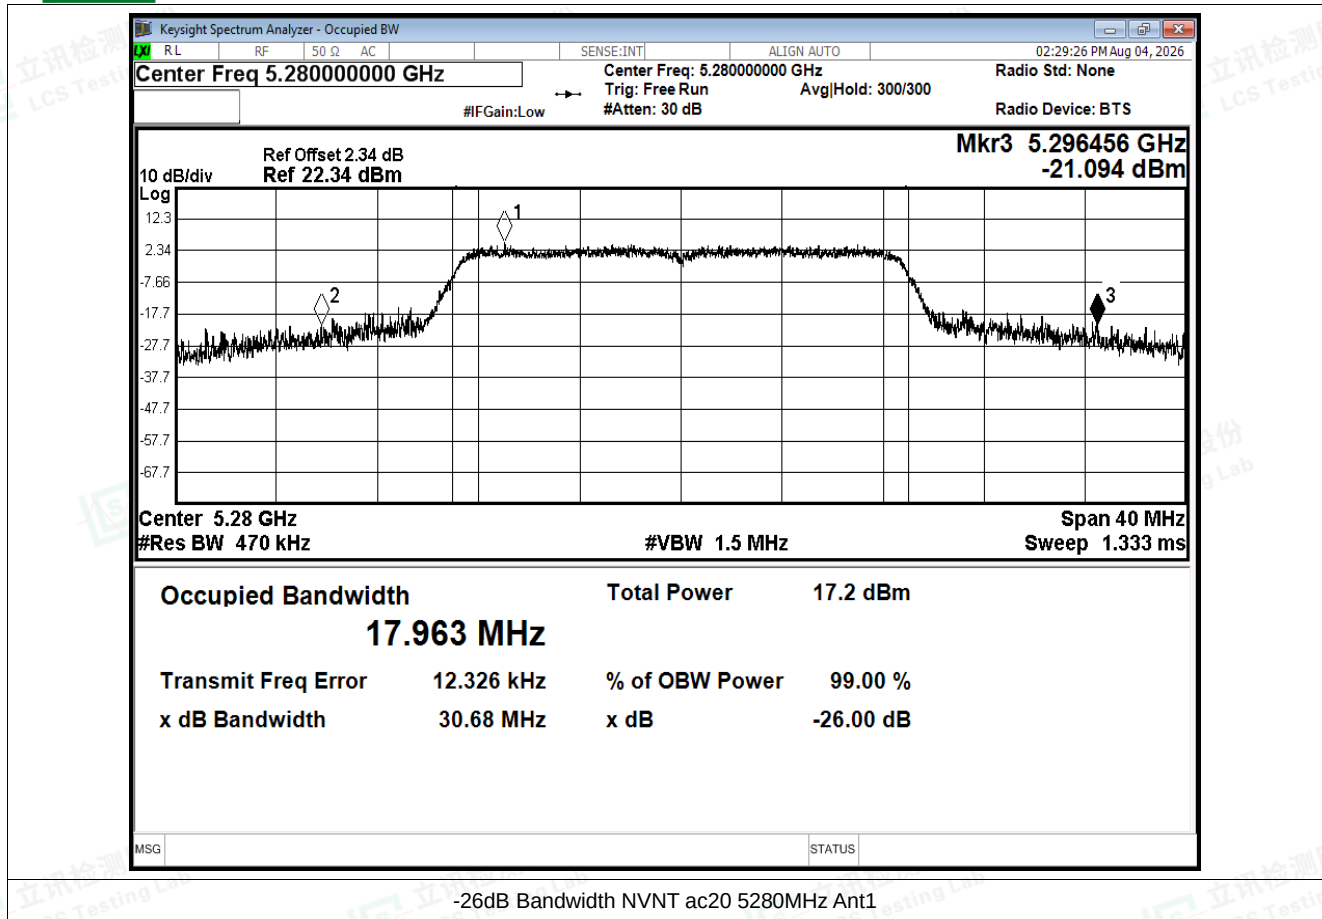


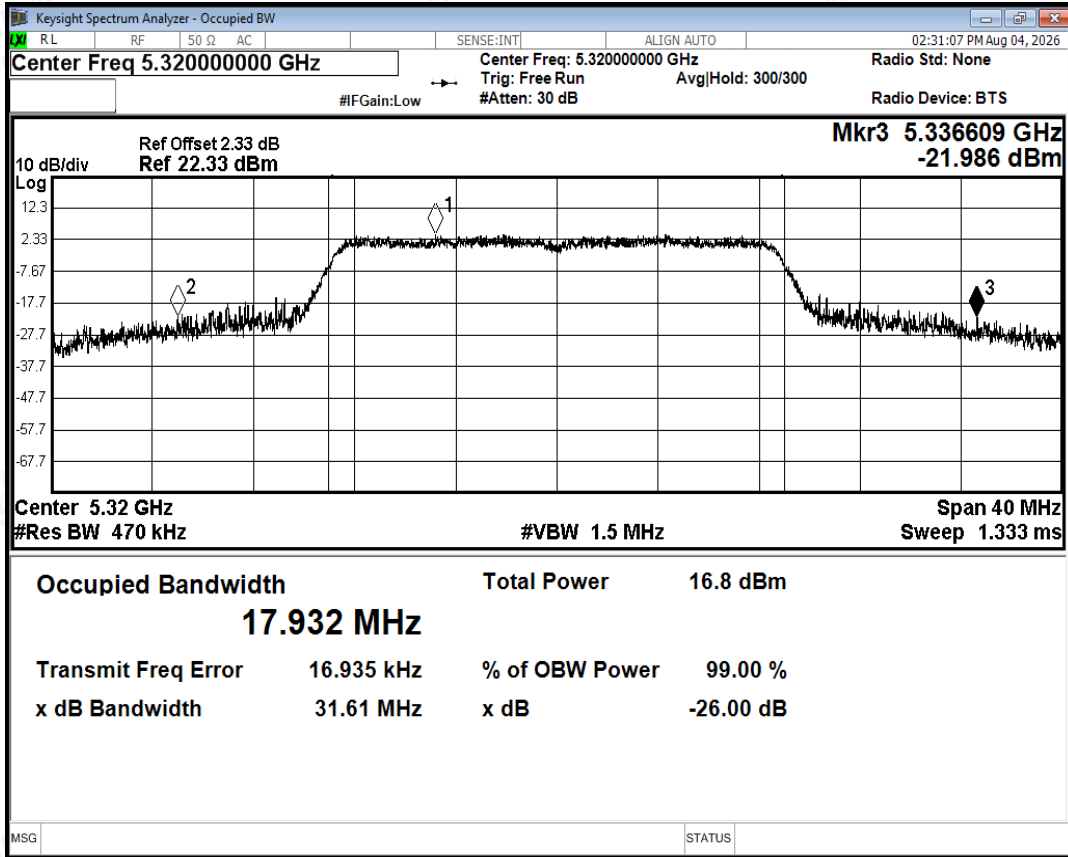


-26dB Bandwidth NVNT ac20 5320MHz Ant1

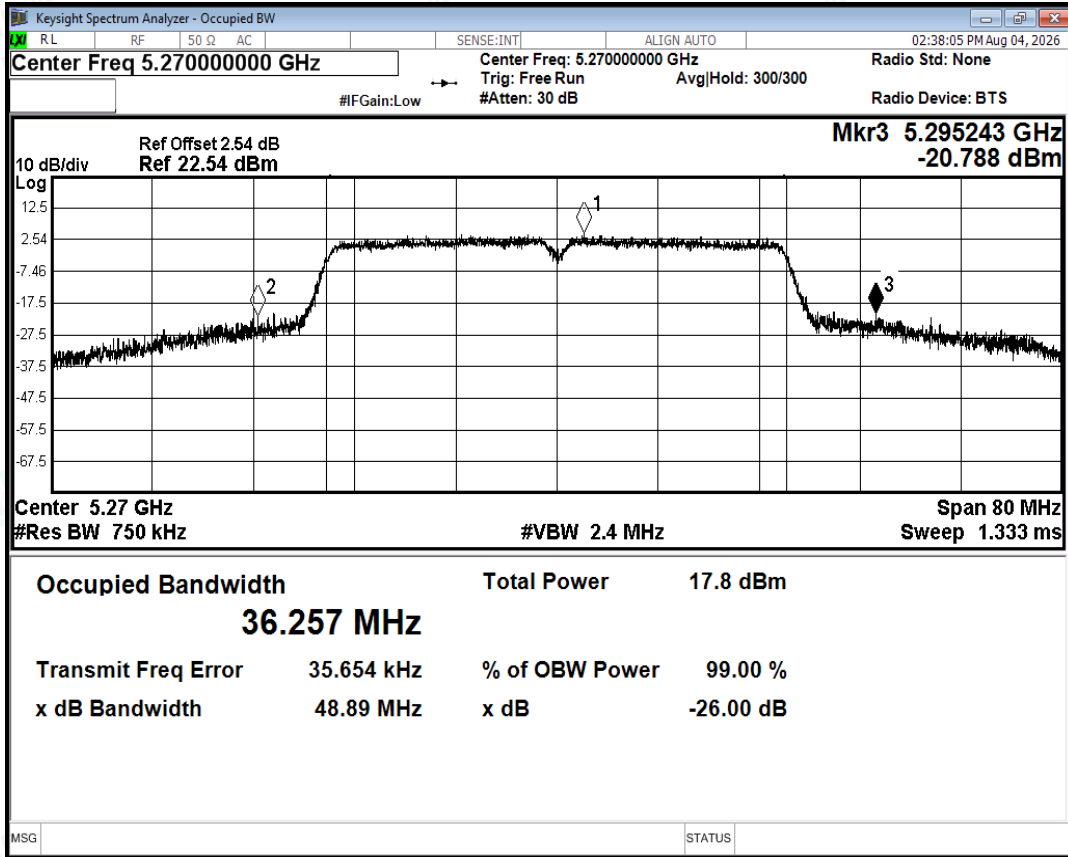

-26dB Bandwidth NVNT ac40 5270MHz Ant1

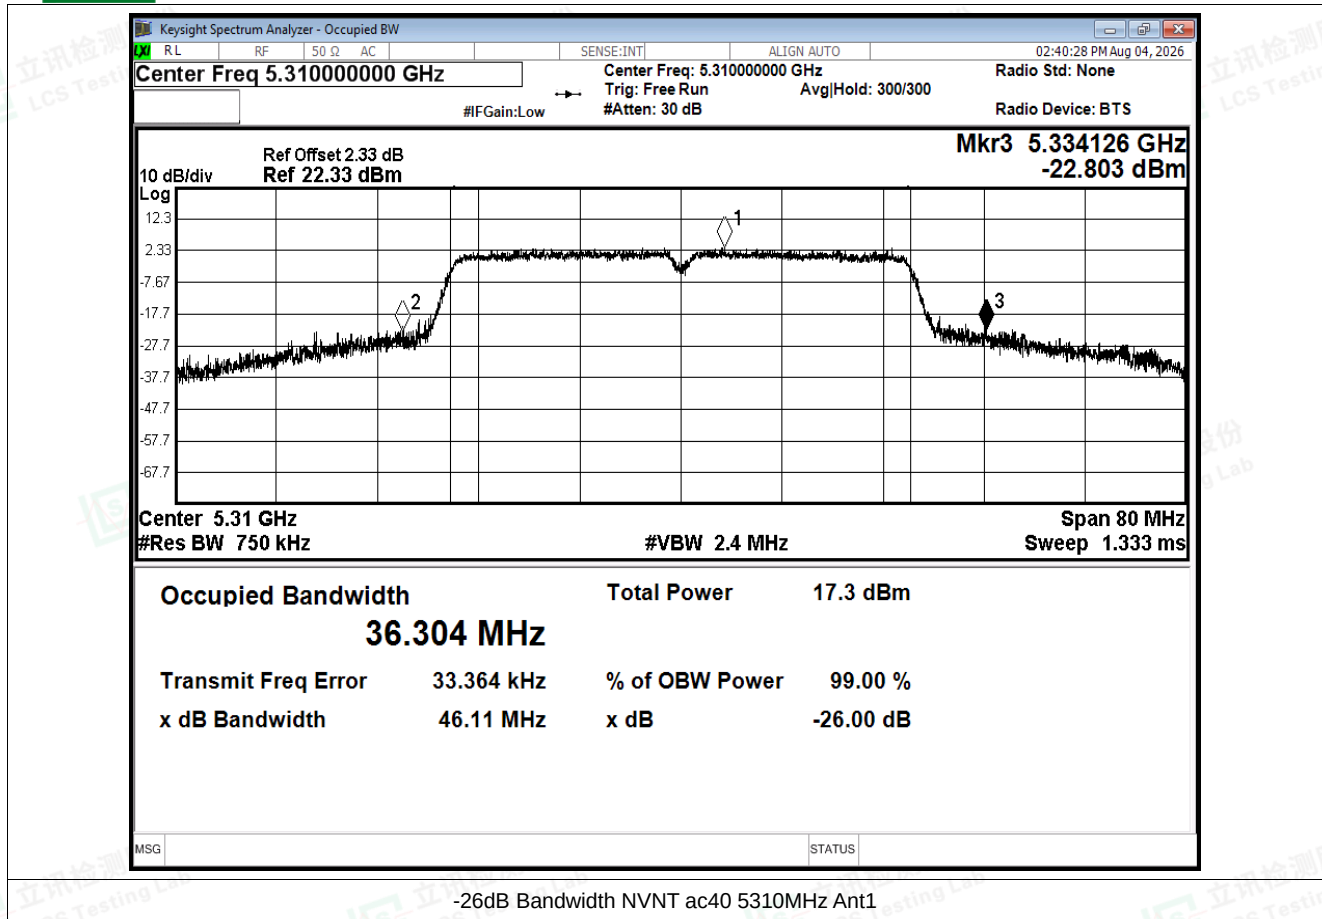

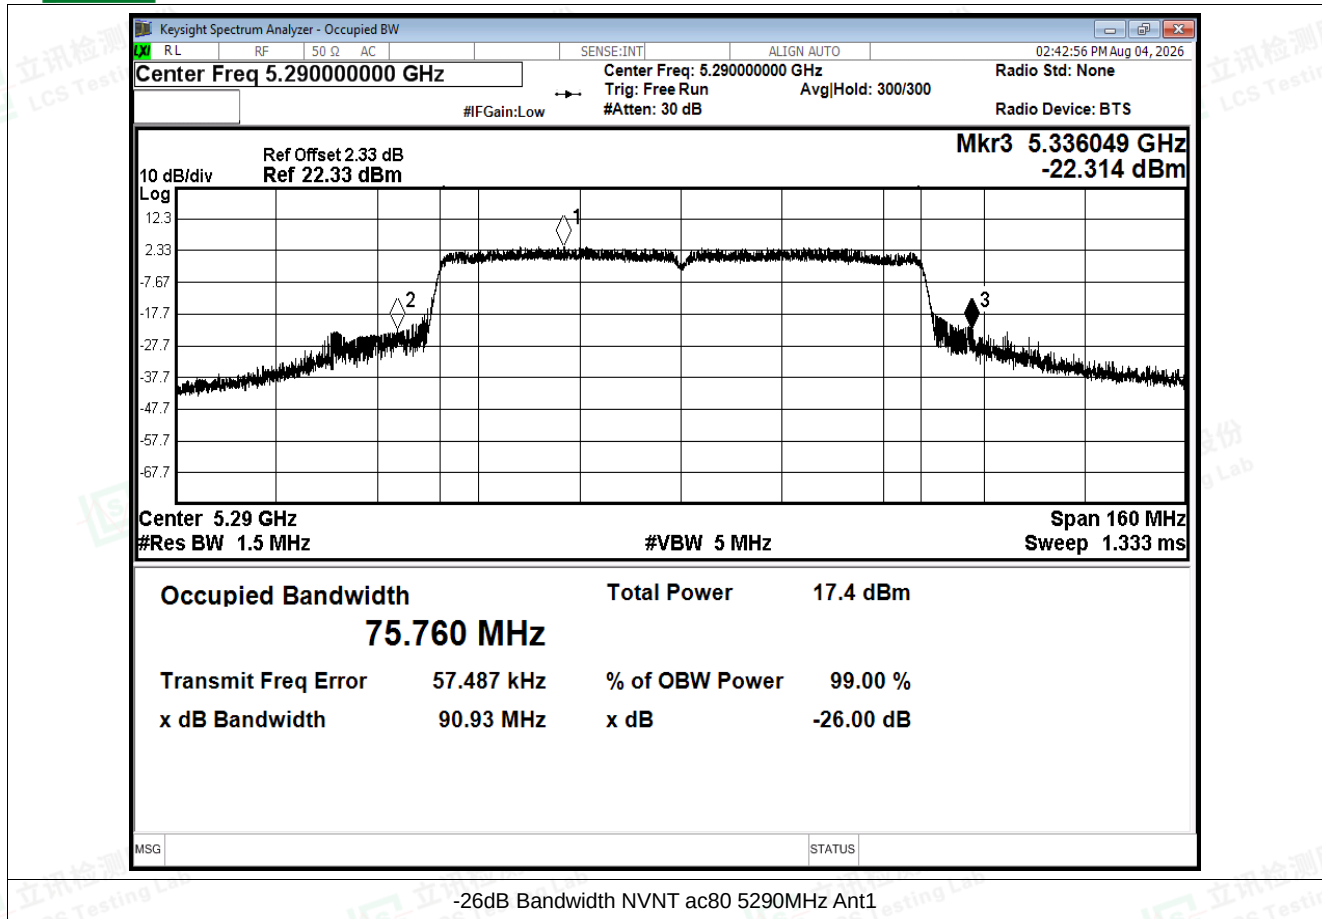




E.2 Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted(dBm)	Verdict
NVNT	a	5260	Ant1	11.8	0.18	11.98	24	Pass
NVNT	a	5280	Ant1	11.03	0.18	11.21	24	Pass
NVNT	a	5320	Ant1	10.65	0.21	10.86	24	Pass
NVNT	n20	5260	Ant1	11	0.22	11.22	24	Pass
NVNT	n20	5280	Ant1	10.33	0.22	10.55	24	Pass
NVNT	n20	5320	Ant1	10.07	0.22	10.29	24	Pass
NVNT	n40	5270	Ant1	10.46	0.49	10.95	24	Pass
NVNT	n40	5310	Ant1	9.9	0.42	10.32	24	Pass
NVNT	ac20	5260	Ant1	11.04	0.25	11.29	24	Pass
NVNT	ac20	5280	Ant1	10.36	0.25	10.61	24	Pass
NVNT	ac20	5320	Ant1	10.01	0.21	10.22	24	Pass
NVNT	ac40	5270	Ant1	10.44	0.42	10.86	24	Pass
NVNT	ac40	5310	Ant1	9.94	0.41	10.35	24	Pass
NVNT	ac80	5290	Ant1	9.12	0.79	9.91	24	Pass





E.3 Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total Conducted PSD (dBm/MHz)	Limit Conducted(dBm/MHz)	Verdict
NVNT	a	5260	Ant1	0.5	0.18	0.68	11	Pass
NVNT	a	5280	Ant1	-0.27	0.18	-0.09	11	Pass
NVNT	a	5320	Ant1	-0.44	0.21	-0.23	11	Pass
NVNT	n20	5260	Ant1	-0.56	0.22	-0.34	11	Pass
NVNT	n20	5280	Ant1	-0.96	0.22	-0.74	11	Pass
NVNT	n20	5320	Ant1	-1.39	0.22	-1.17	11	Pass
NVNT	n40	5270	Ant1	-4.06	0.49	-3.57	11	Pass
NVNT	n40	5310	Ant1	-4.49	0.42	-4.07	11	Pass
NVNT	ac20	5260	Ant1	-0.47	0.25	-0.22	11	Pass
NVNT	ac20	5280	Ant1	-0.92	0.25	-0.67	11	Pass
NVNT	ac20	5320	Ant1	-1.32	0.21	-1.11	11	Pass
NVNT	ac40	5270	Ant1	-3.99	0.42	-3.57	11	Pass
NVNT	ac40	5310	Ant1	-4.46	0.41	-4.05	11	Pass
NVNT	ac80	5290	Ant1	-8.56	0.79	-7.77	11	Pass

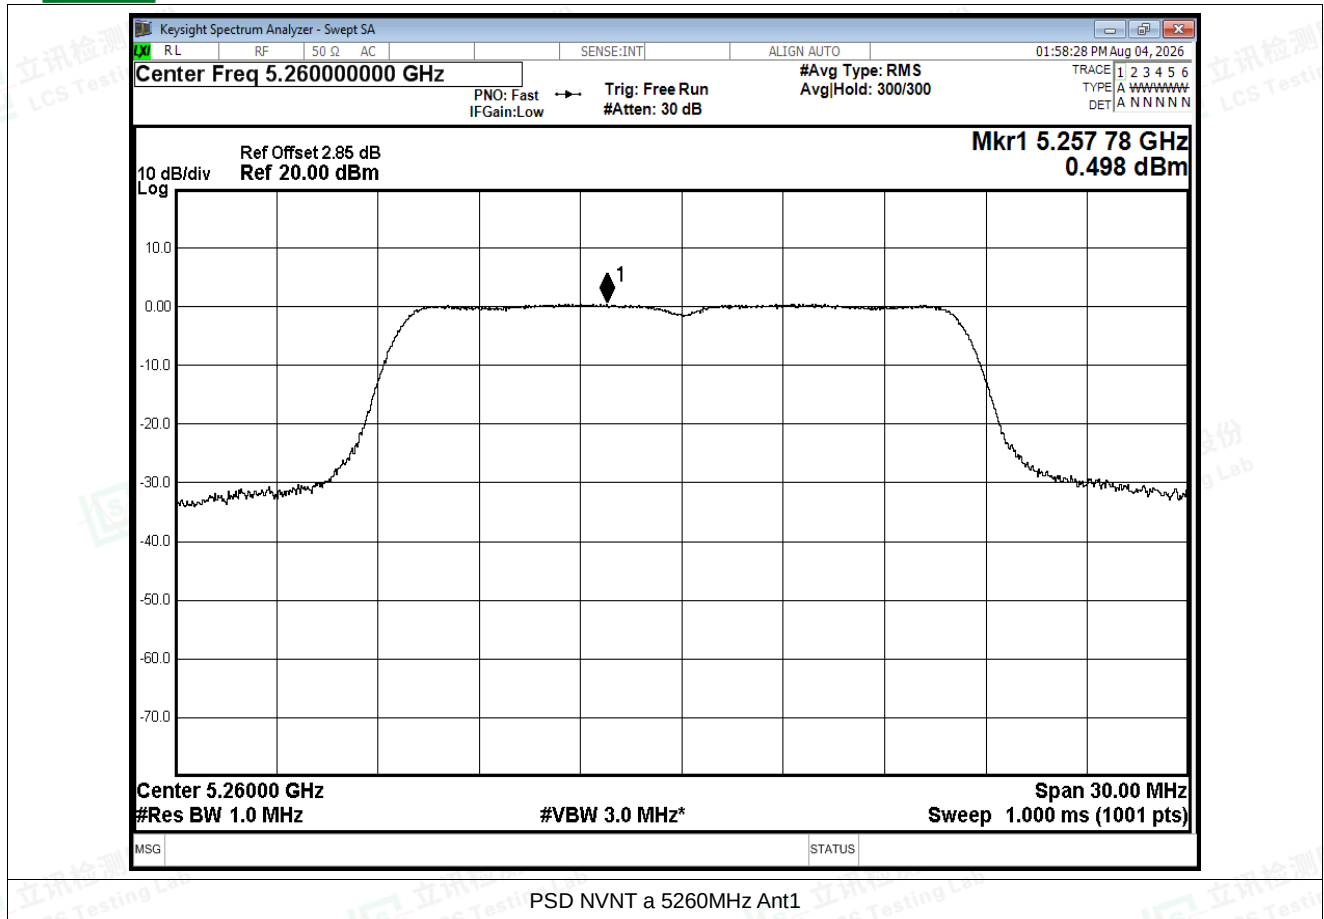


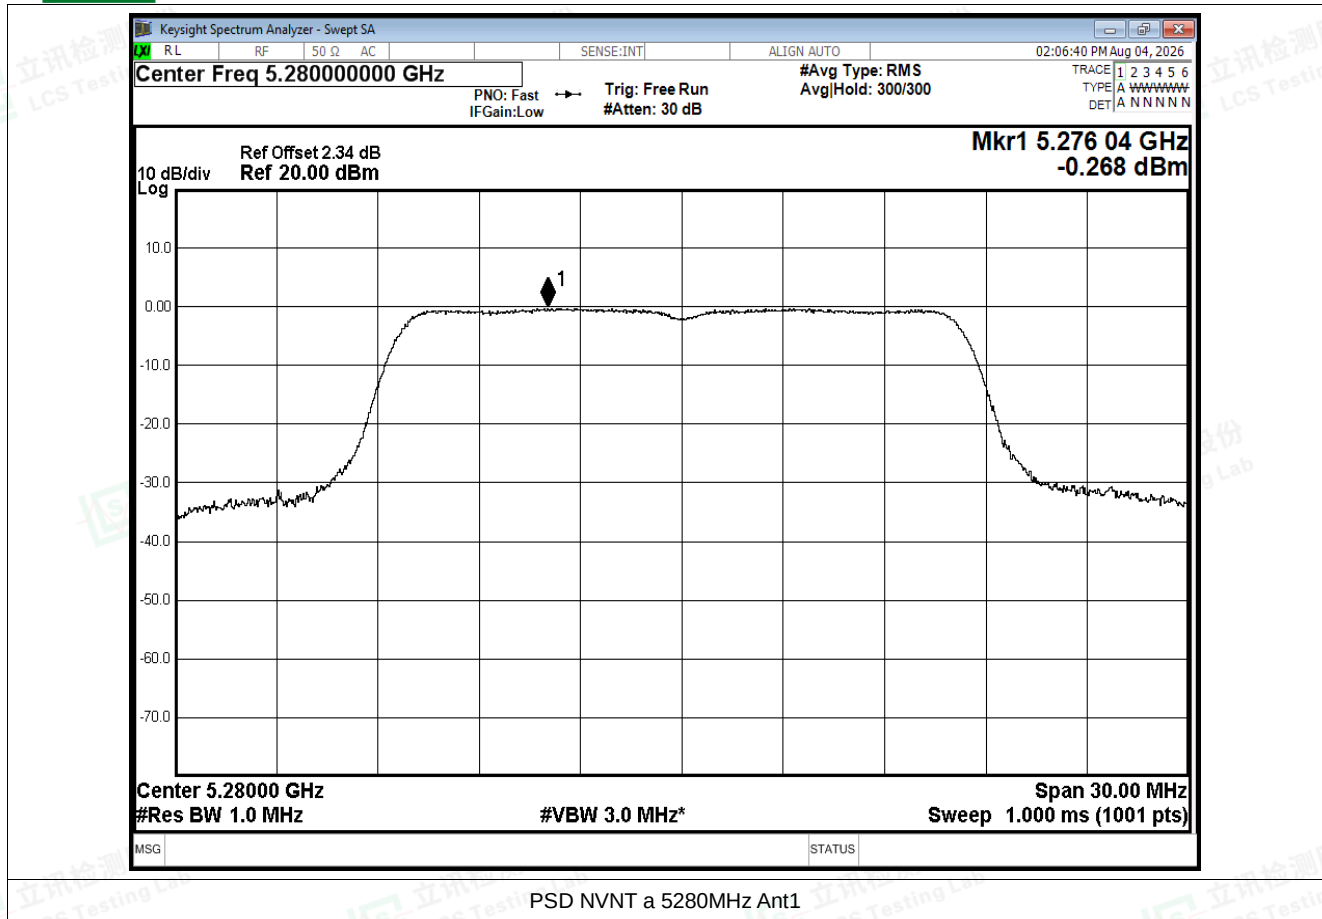


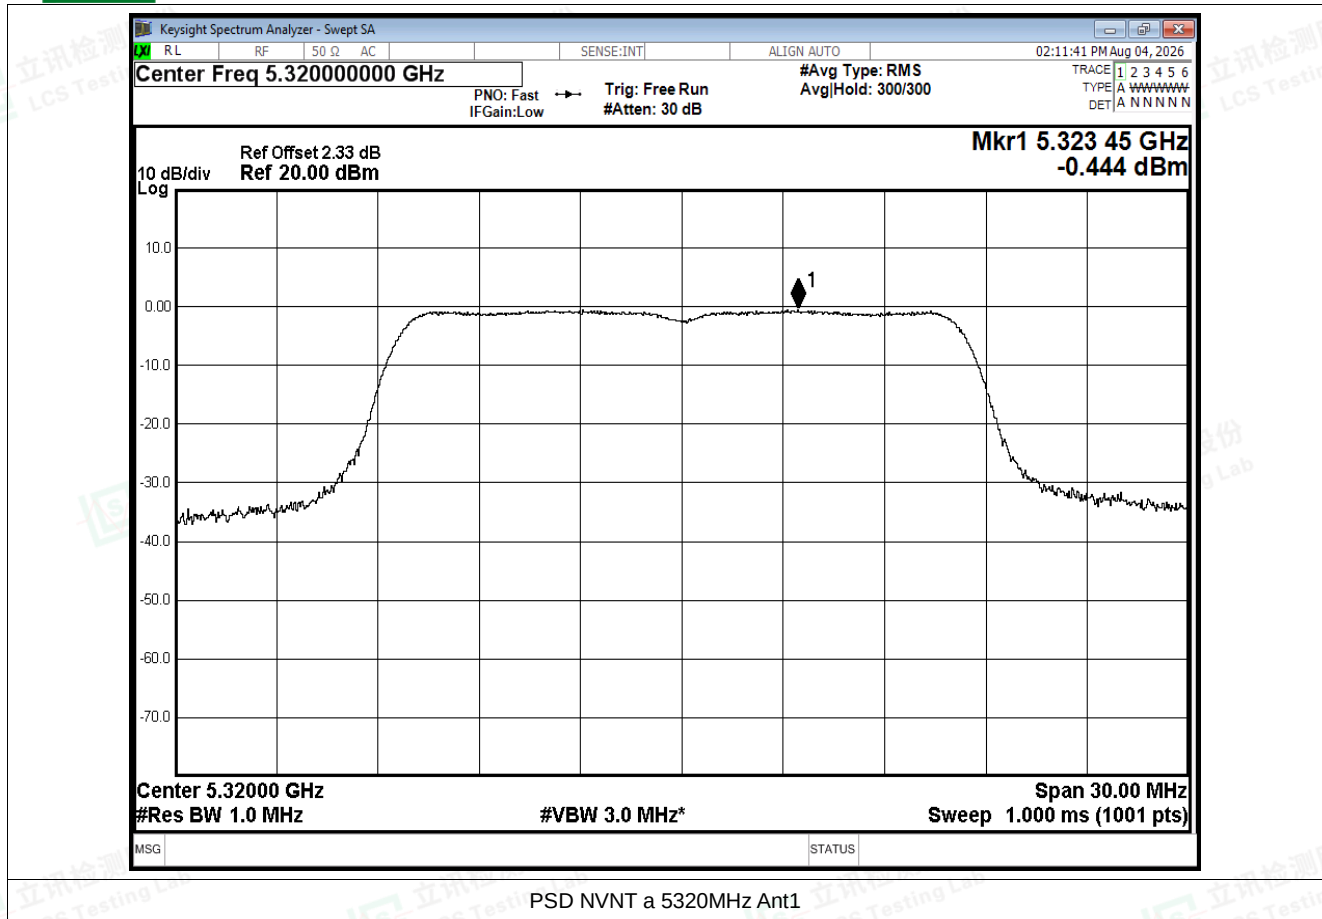


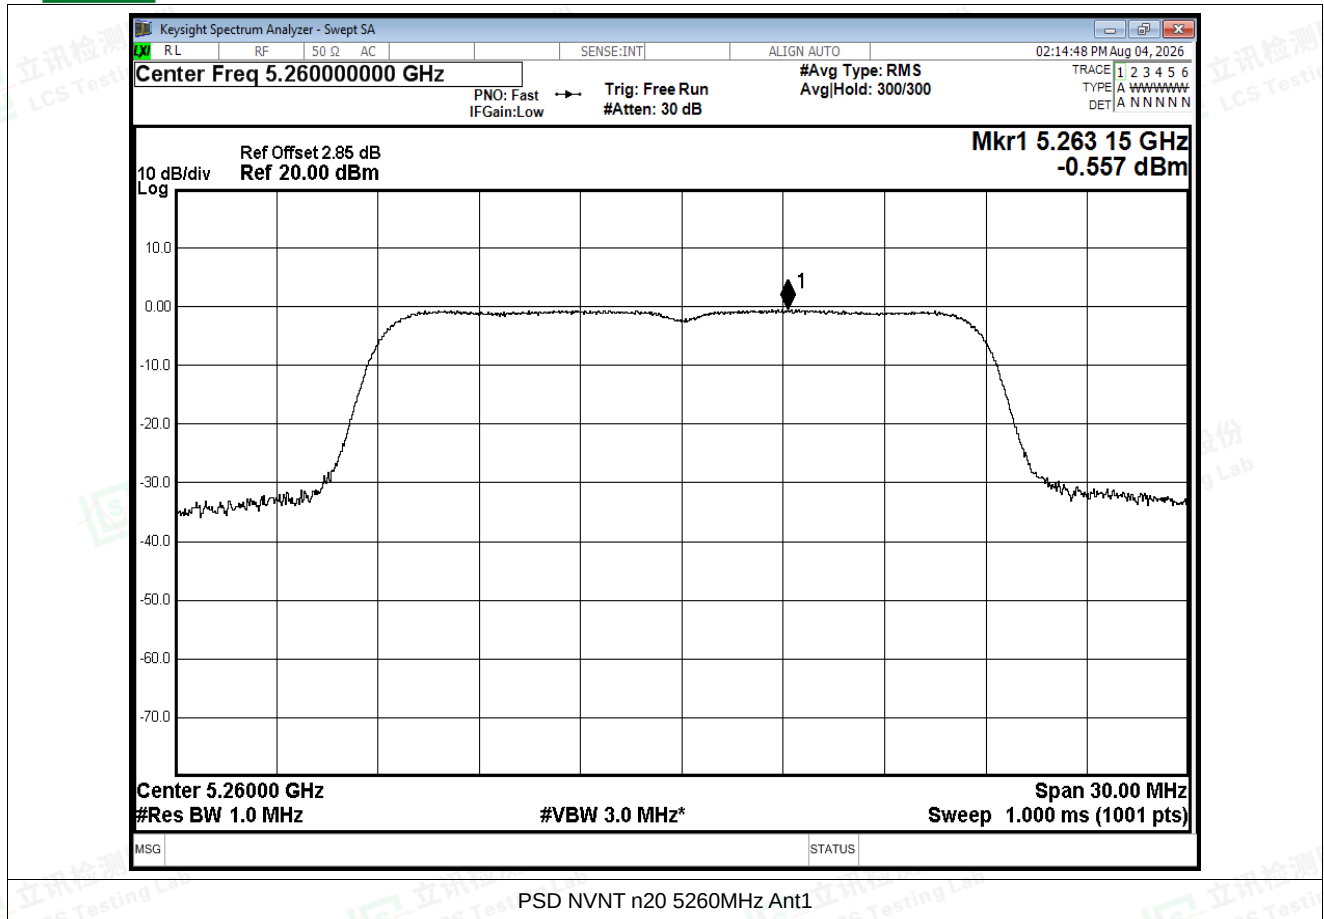


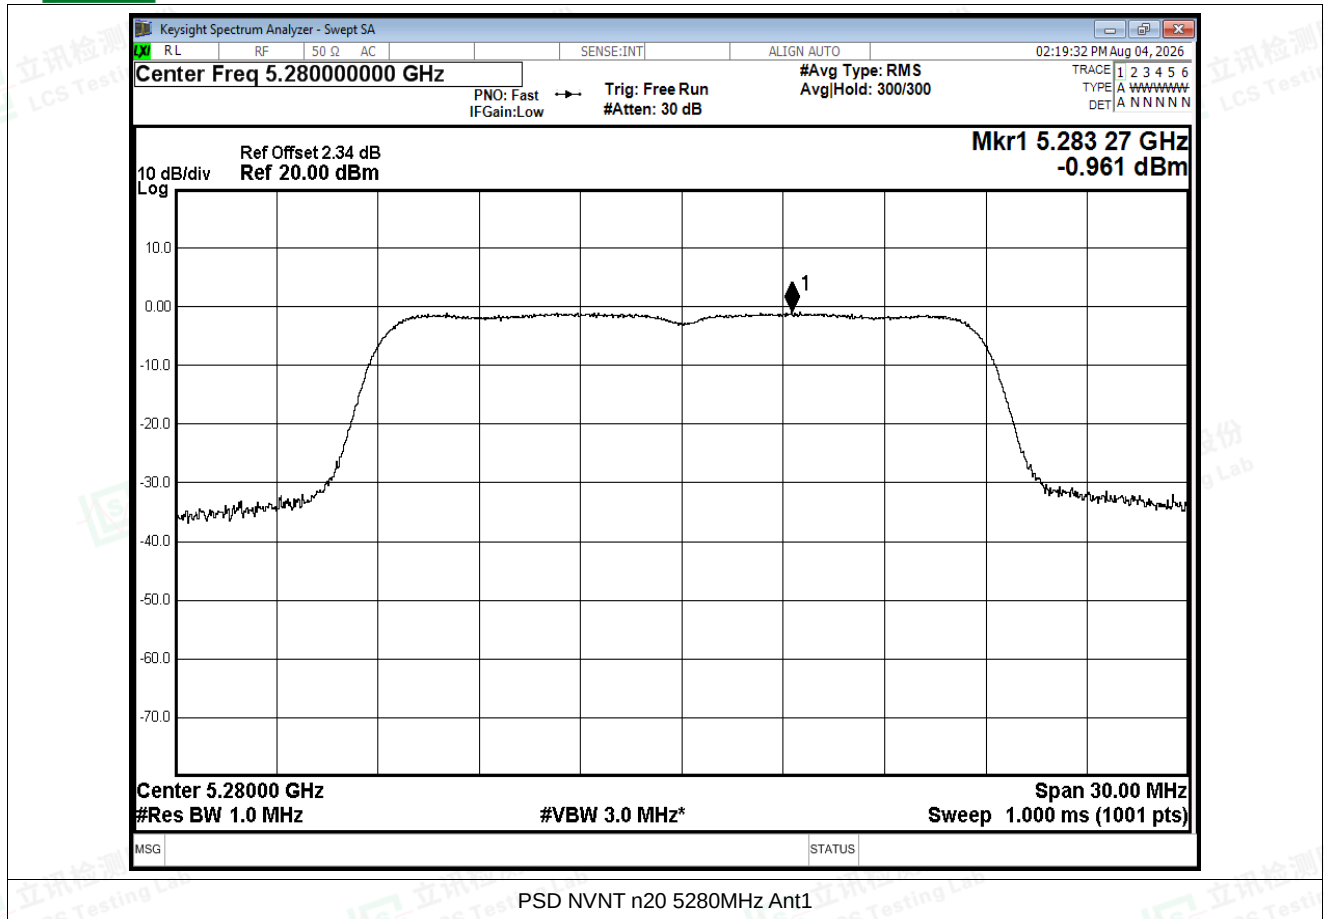


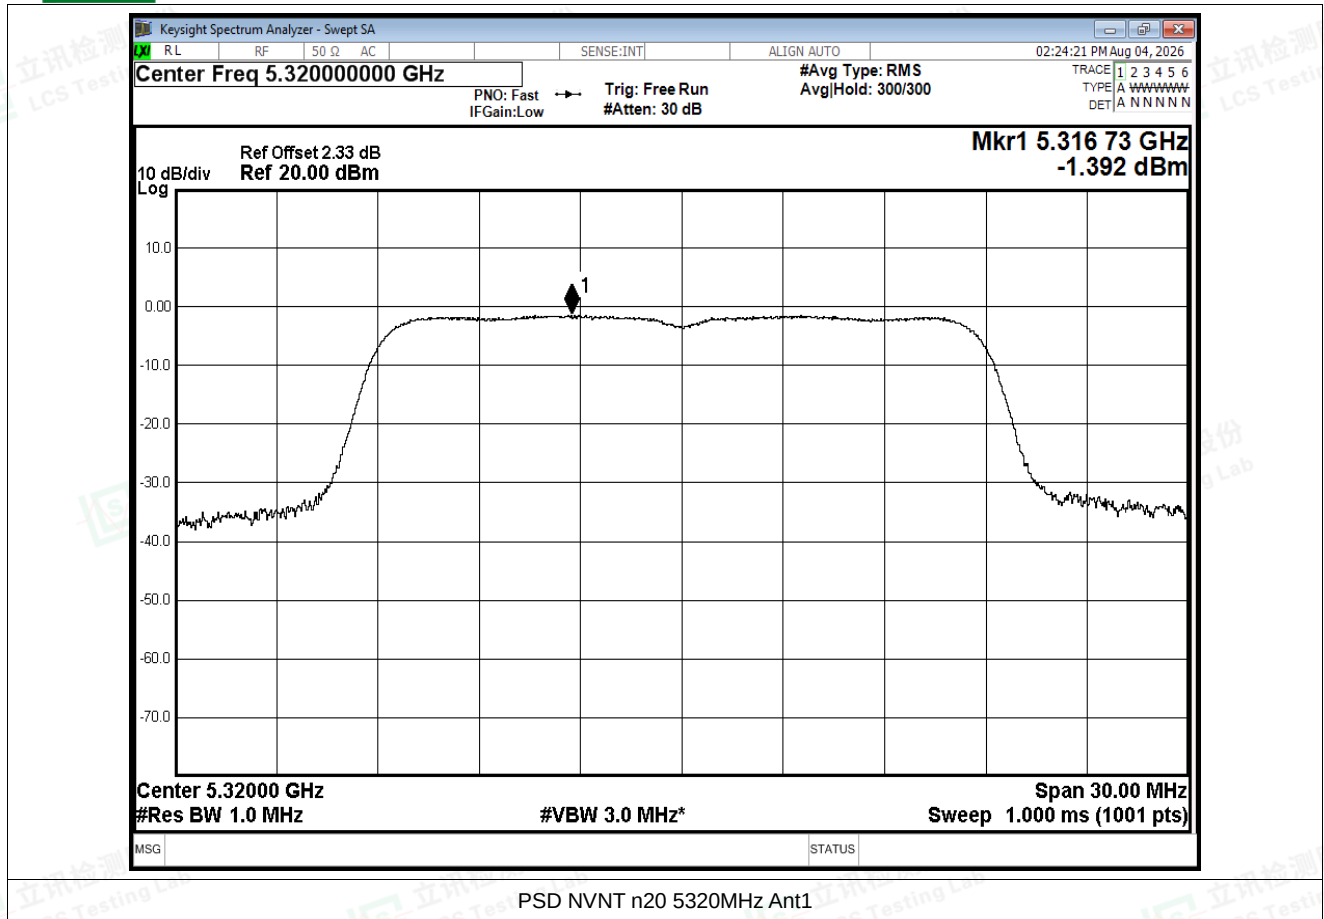


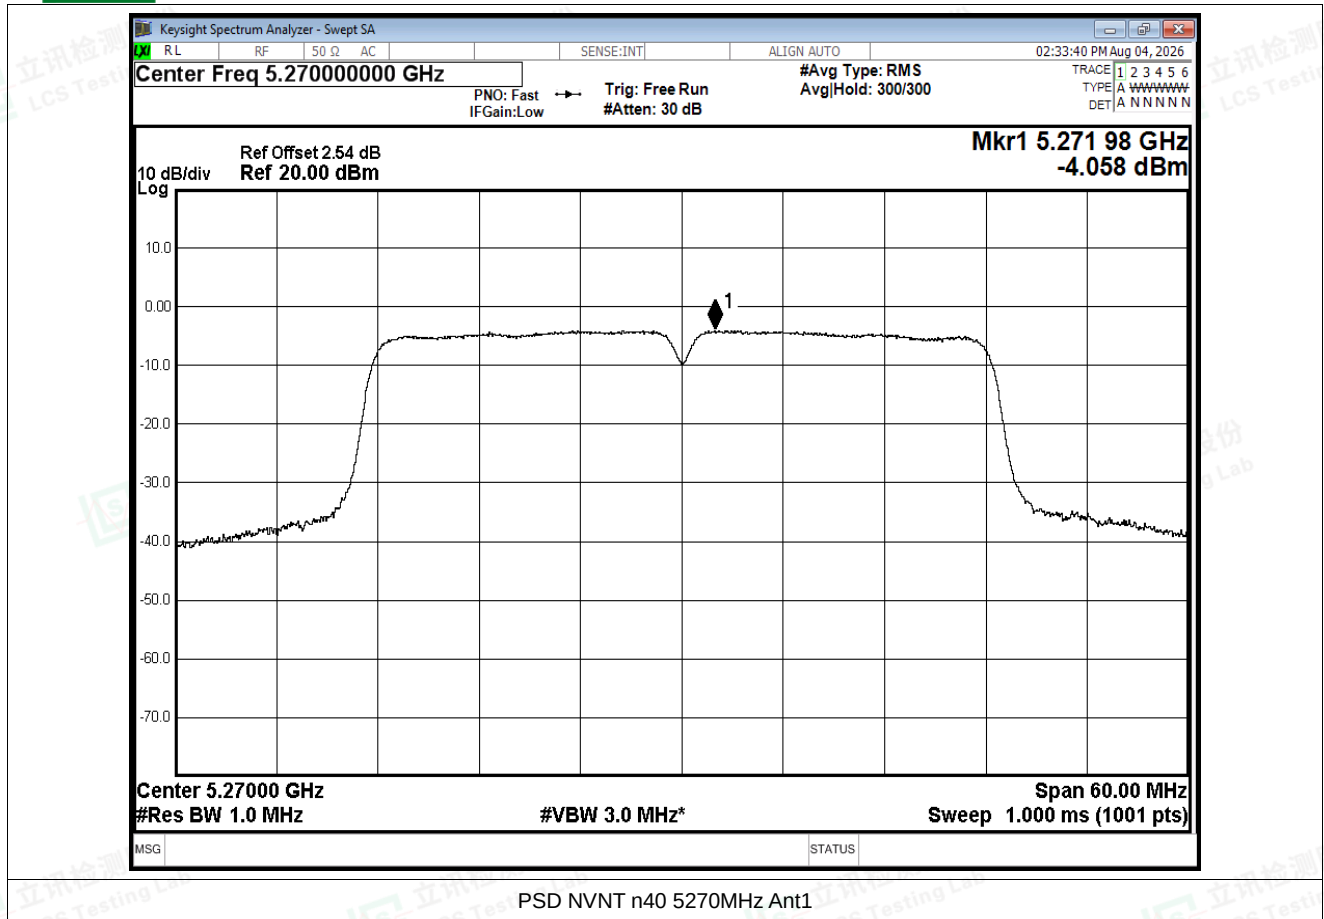


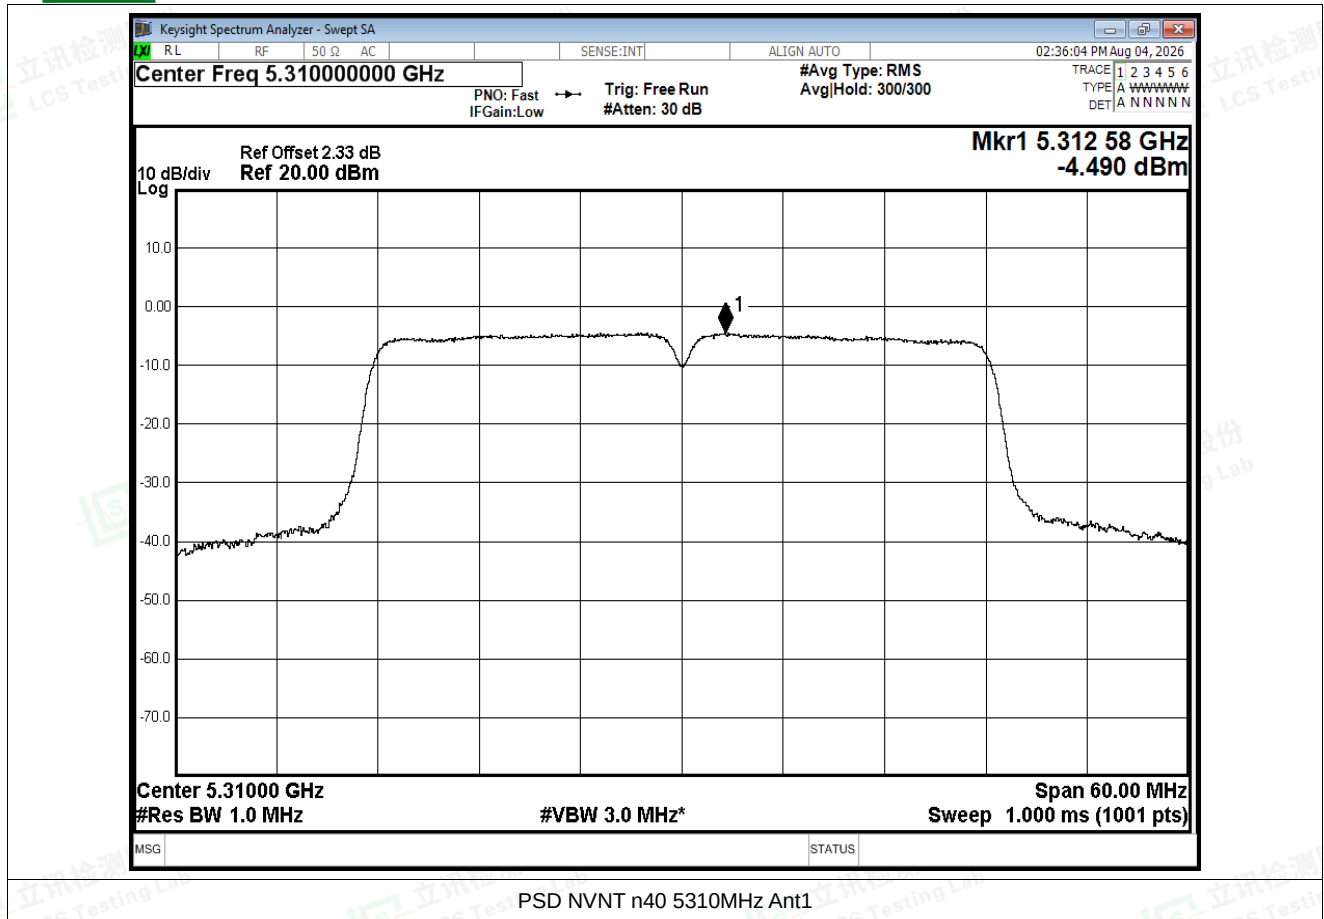


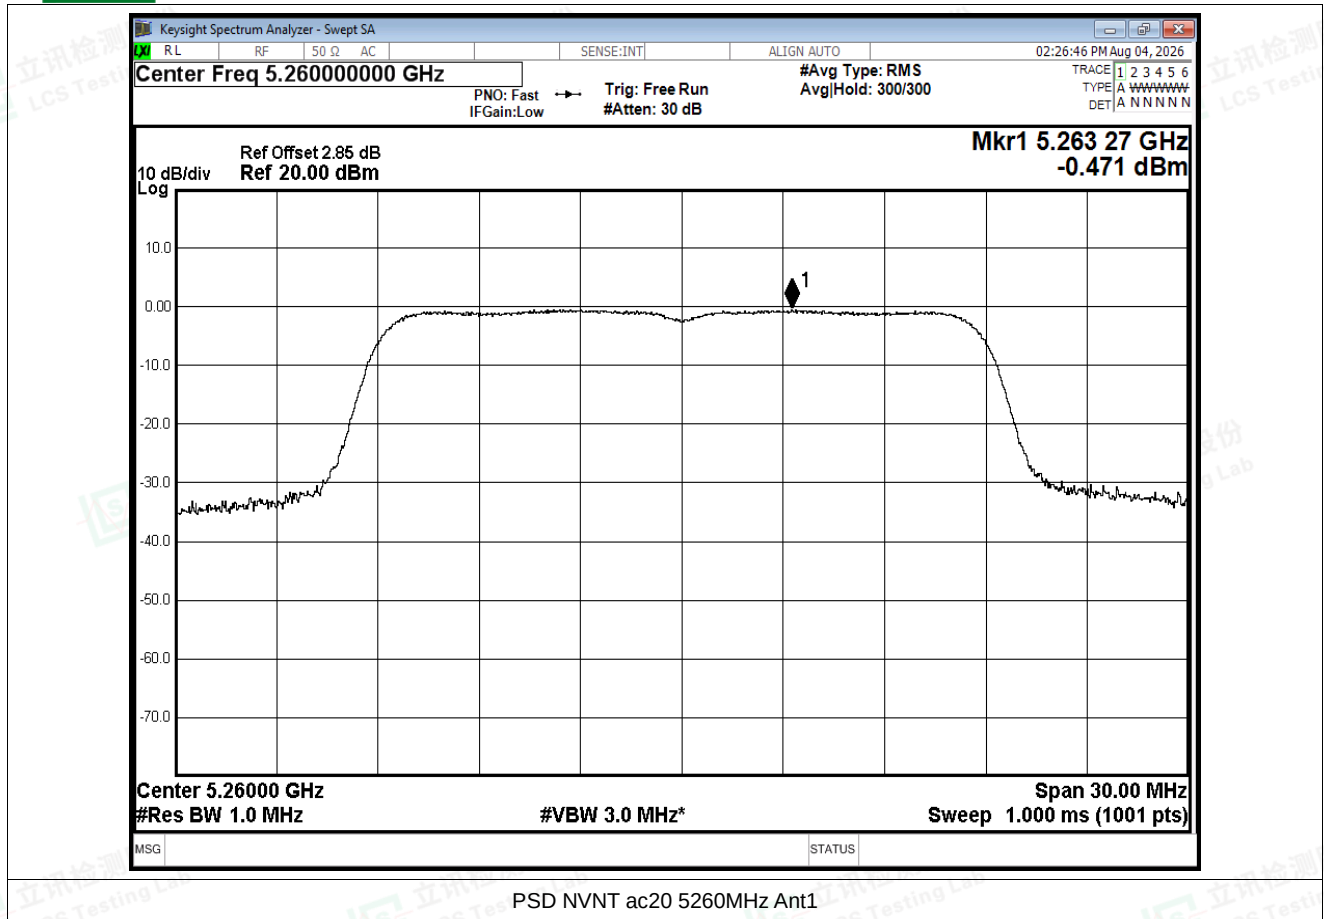


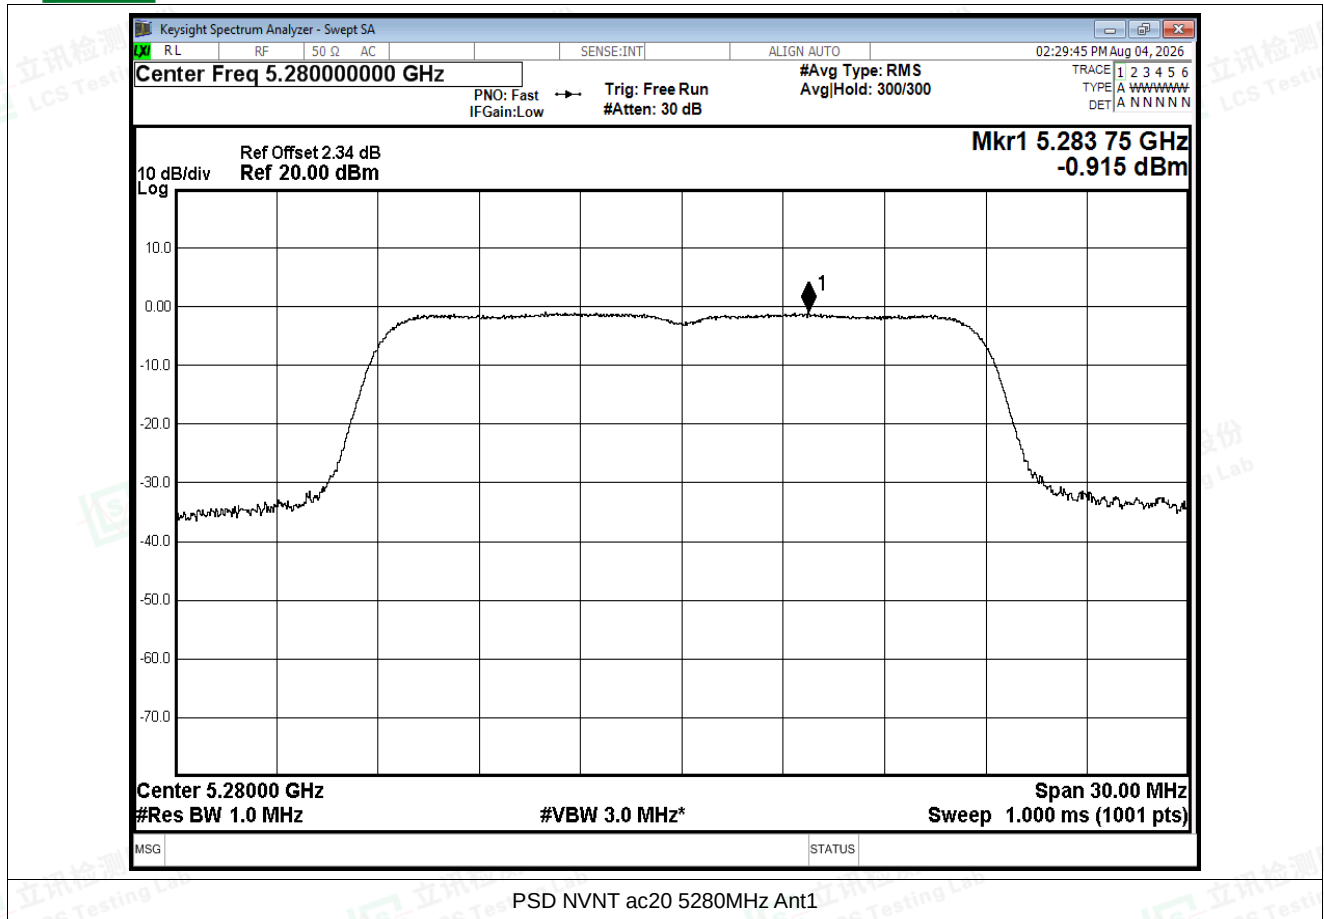

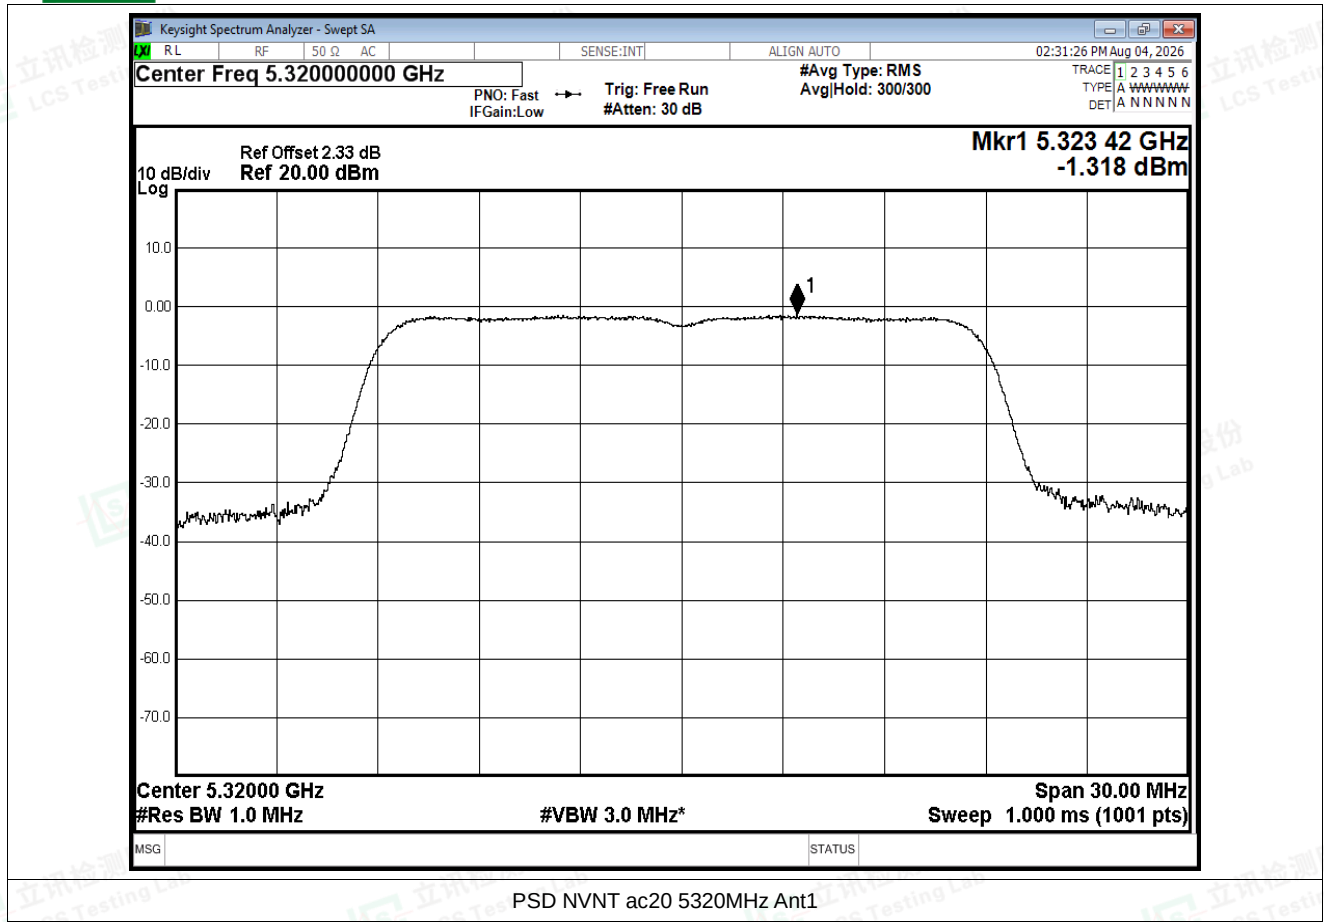

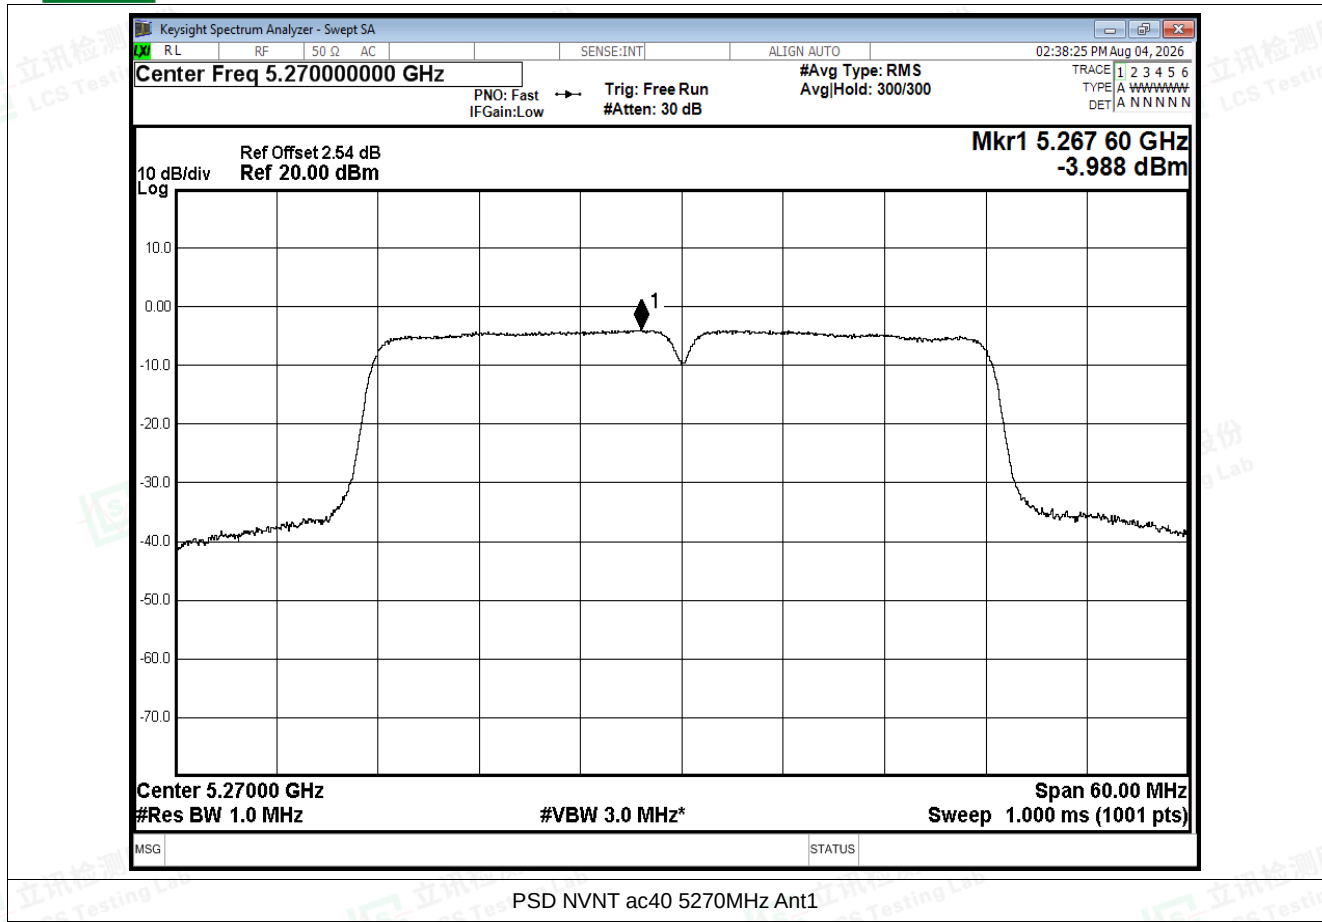

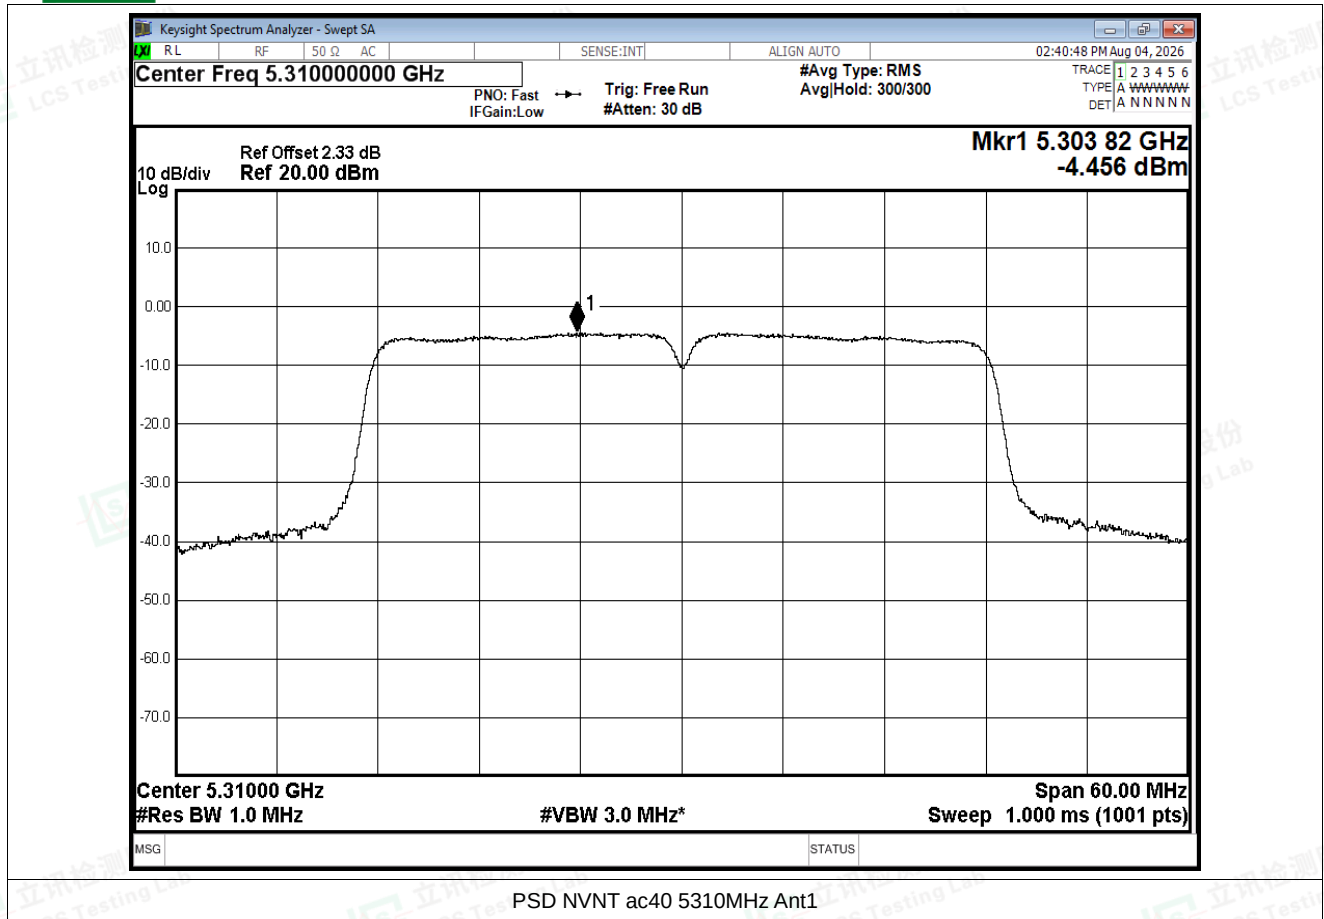

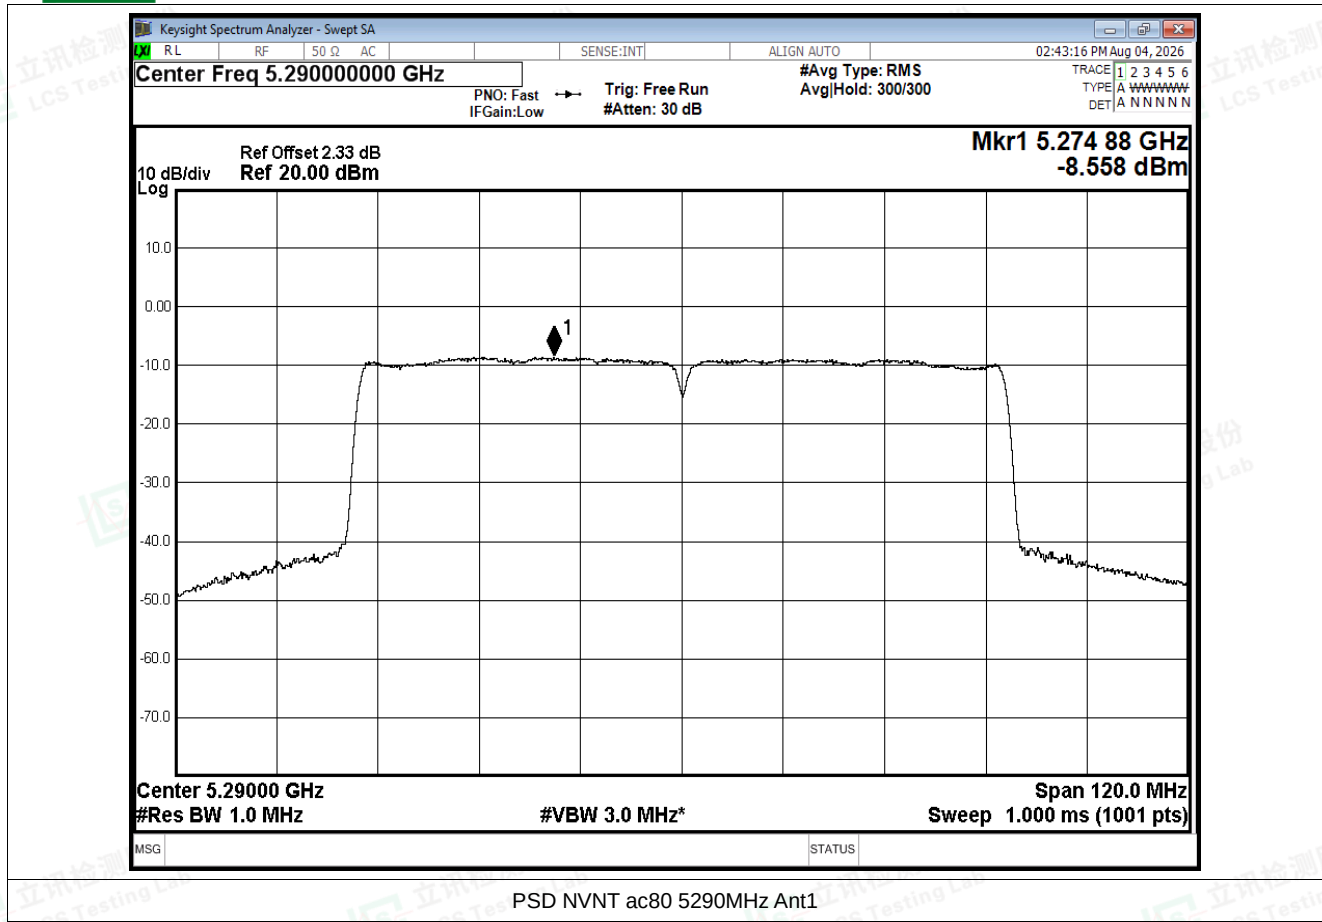



E.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5260	Ant1	4500	-52.29	2	44.94	Peak	68.2	Pass
NVNT	a	5260	Ant1	4500	-58.99	2	38.24	Average	54	Pass
NVNT	a	5260	Ant1	4992.96	-46.86	2	50.37	Peak	68.2	Pass
NVNT	a	5260	Ant1	4787.04	-54.38	2	42.85	Average	54	Pass
NVNT	a	5260	Ant1	5150	-50.26	2	46.97	Peak	68.2	Pass
NVNT	a	5260	Ant1	5150	-56.36	2	40.87	Average	54	Pass
NVNT	a	5320	Ant1	5350	-38.63	2	58.6	Peak	68.2	Pass
NVNT	a	5320	Ant1	5350	-48.69	2	48.54	Average	54	Pass
NVNT	a	5320	Ant1	5350.8	-34.29	2	62.94	Peak	68.2	Pass
NVNT	a	5320	Ant1	5350.4	-48.52	2	48.71	Average	54	Pass
NVNT	a	5320	Ant1	5460	-50.53	2	46.7	Peak	68.2	Pass
NVNT	a	5320	Ant1	5460	-57.76	2	39.47	Average	54	Pass
NVNT	n20	5260	Ant1	4500	-51.85	2	45.38	Peak	68.2	Pass
NVNT	n20	5260	Ant1	4500	-58.93	2	38.3	Average	54	Pass
NVNT	n20	5260	Ant1	5145.06	-46.27	2	50.96	Peak	68.2	Pass
NVNT	n20	5260	Ant1	4787.82	-54.64	2	42.59	Average	54	Pass
NVNT	n20	5260	Ant1	5150	-50.46	2	46.77	Peak	68.2	Pass
NVNT	n20	5260	Ant1	5150	-56.41	2	40.82	Average	54	Pass
NVNT	n20	5320	Ant1	5350	-36.09	2	61.14	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5350	-48.43	2	48.8	Average	54	Pass
NVNT	n20	5320	Ant1	5352	-35.82	2	61.41	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5350.2	-48.03	2	49.2	Average	54	Pass
NVNT	n20	5320	Ant1	5460	-52.01	2	45.22	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5460	-57.79	2	39.44	Average	54	Pass
NVNT	n40	5270	Ant1	4500	-51.94	2	45.29	Peak	68.2	Pass
NVNT	n40	5270	Ant1	4500	-58.8	2	38.43	Average	54	Pass
NVNT	n40	5270	Ant1	4807.8	-45.91	2	51.32	Peak	68.2	Pass
NVNT	n40	5270	Ant1	4806.99	-51.79	2	45.44	Average	54	Pass
NVNT	n40	5270	Ant1	5150	-51.71	2	45.52	Peak	68.2	Pass
NVNT	n40	5270	Ant1	5150	-56.76	2	40.47	Average	54	Pass
NVNT	n40	5310	Ant1	5350	-43.95	2	53.28	Peak	68.2	Pass
NVNT	n40	5310	Ant1	5350	-52.71	2	44.52	Average	54	Pass
NVNT	n40	5310	Ant1	5351	-41.03	2	56.2	Peak	68.2	Pass
NVNT	n40	5310	Ant1	5350.2	-52.54	2	44.69	Average	54	Pass
NVNT	n40	5310	Ant1	5460	-50.67	2	46.56	Peak	68.2	Pass
NVNT	n40	5310	Ant1	5460	-57.58	2	39.65	Average	54	Pass
NVNT	ac20	5260	Ant1	4500	-52.54	2	44.69	Peak	68.2	Pass
NVNT	ac20	5260	Ant1	4500	-58.98	2	38.25	Average	54	Pass


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com




NVNT	ac20	5260	Ant1	5028.06	-46.44	2	50.79	Peak	68.2	Pass
NVNT	ac20	5260	Ant1	4787.82	-54.66	2	42.57	Average	54	Pass
NVNT	ac20	5260	Ant1	5150	-49.51	2	47.72	Peak	68.2	Pass
NVNT	ac20	5260	Ant1	5150	-56.42	2	40.81	Average	54	Pass
NVNT	ac20	5320	Ant1	5350	-35.8	2	61.43	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5350	-48.53	2	48.7	Average	54	Pass
NVNT	ac20	5320	Ant1	5350.6	-35.12	2	62.11	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5350	-48.53	2	48.7	Average	54	Pass
NVNT	ac20	5320	Ant1	5460	-49.49	2	47.74	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5460	-57.71	2	39.52	Average	54	Pass
NVNT	ac40	5270	Ant1	4500	-50.56	2	46.67	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	4500	-59.16	2	38.07	Average	54	Pass
NVNT	ac40	5270	Ant1	4807.8	-46.09	2	51.14	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	4806.99	-51.64	2	45.59	Average	54	Pass
NVNT	ac40	5270	Ant1	5150	-49.79	2	47.44	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	5150	-56.68	2	40.55	Average	54	Pass
NVNT	ac40	5310	Ant1	5350	-42.7	2	54.53	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5350	-52.57	2	44.66	Average	54	Pass
NVNT	ac40	5310	Ant1	5350.2	-40.75	2	56.48	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5350	-52.57	2	44.66	Average	54	Pass
NVNT	ac40	5310	Ant1	5460	-51.41	2	45.82	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5460	-57.07	2	40.16	Average	54	Pass
NVNT	ac80	5290	Ant1	5350	-35.44	2	61.79	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5350	-44.21	2	53.02	Average	54	Pass
NVNT	ac80	5290	Ant1	5350	-35.44	2	61.79	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5350	-44.21	2	53.02	Average	54	Pass
NVNT	ac80	5290	Ant1	5460	-49.57	2	47.66	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5460	-56.71	2	40.52	Average	54	Pass
NVNT	ac80	5290	Ant1	4500	-51.66	2	45.57	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	4500	-58.86	2	38.37	Average	54	Pass
NVNT	ac80	5290	Ant1	5091.6	-47.23	2	50	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5148.15	-55.35	2	41.88	Average	54	Pass
NVNT	ac80	5290	Ant1	5150	-51.06	2	46.17	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5150	-55.42	2	41.81	Average	54	Pass

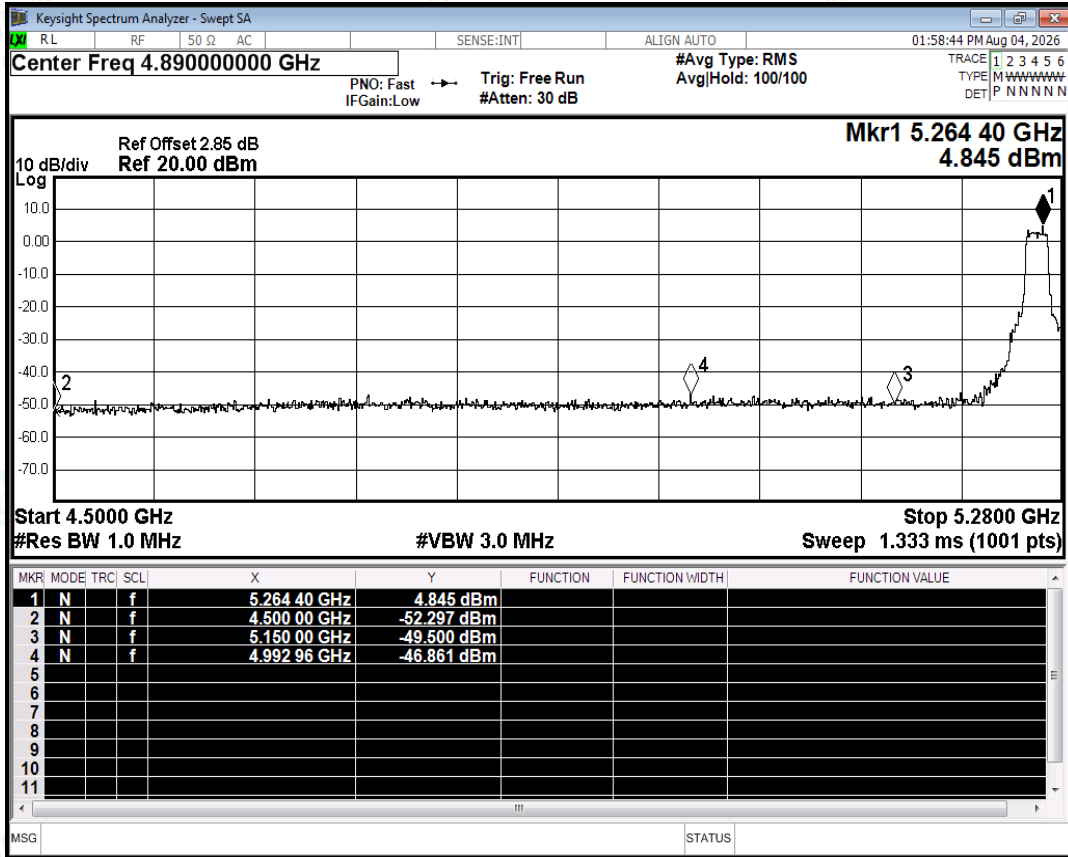


Restrict Band NVNT a 5260MHz Ant1 Peak

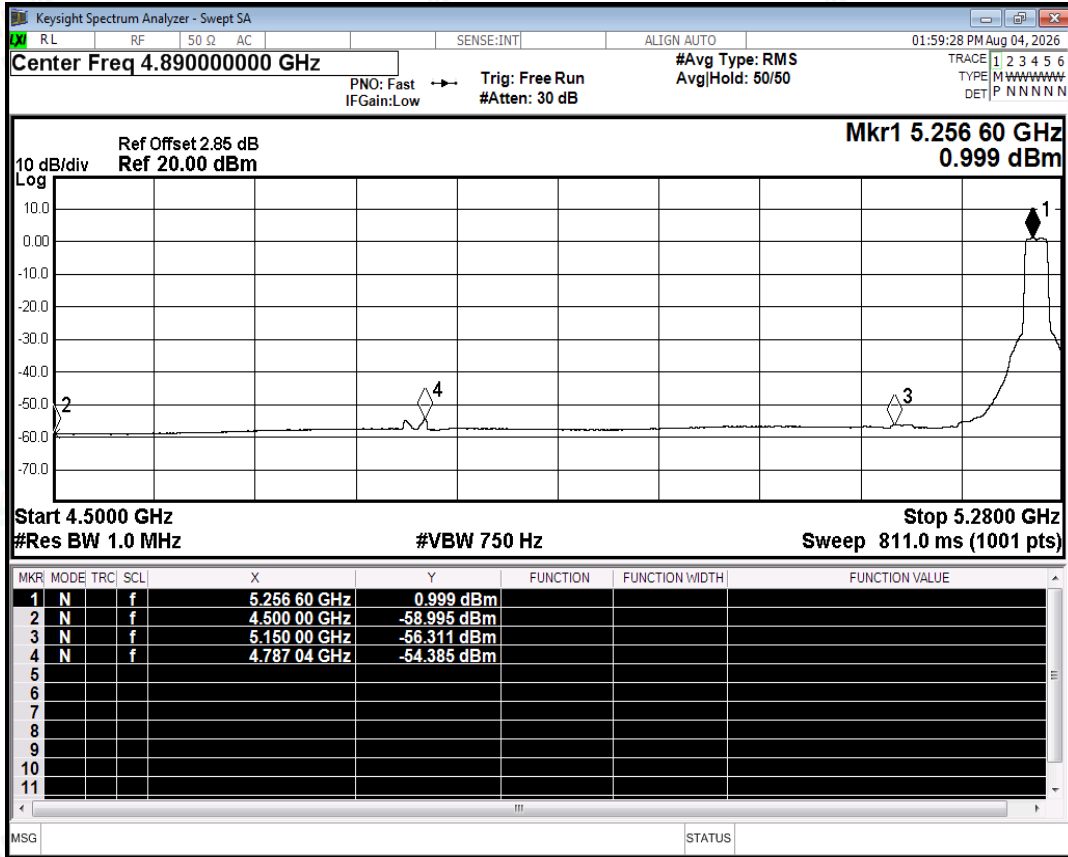


Restrict Band NVNT a 5260MHz Ant1 Average

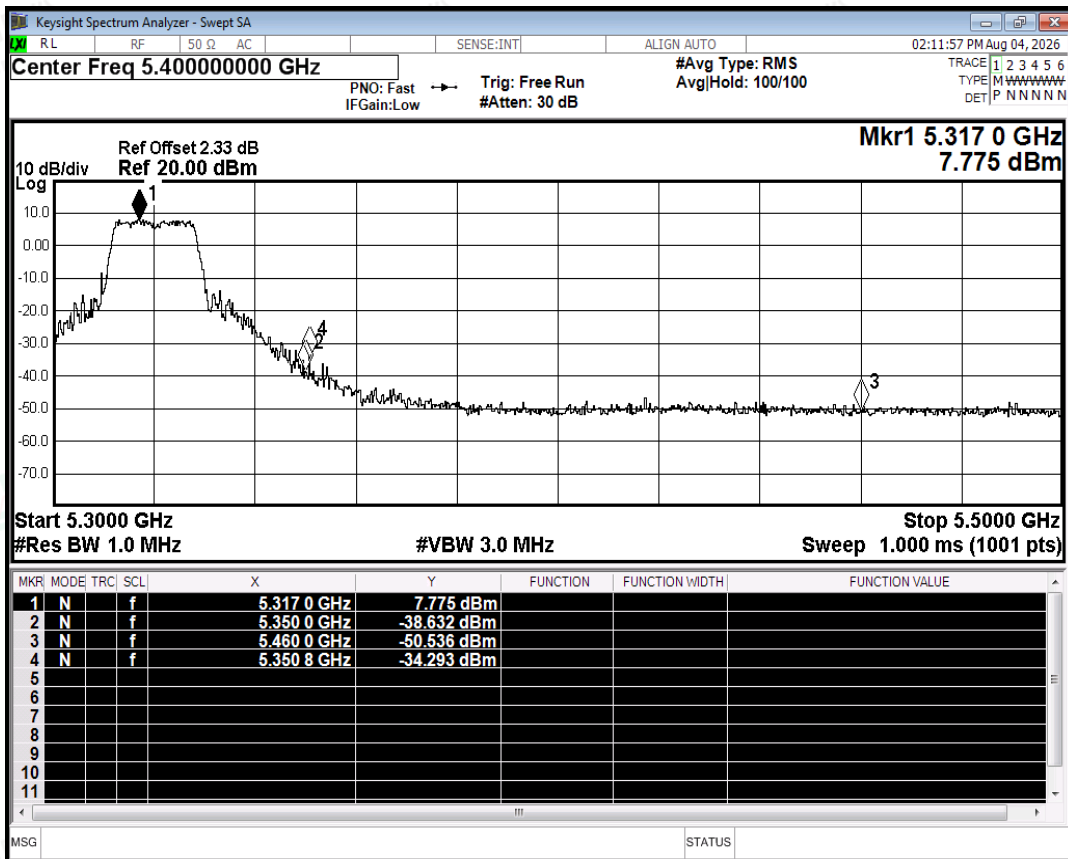


Restrict Band NVNT a 5320MHz Ant1 Peak

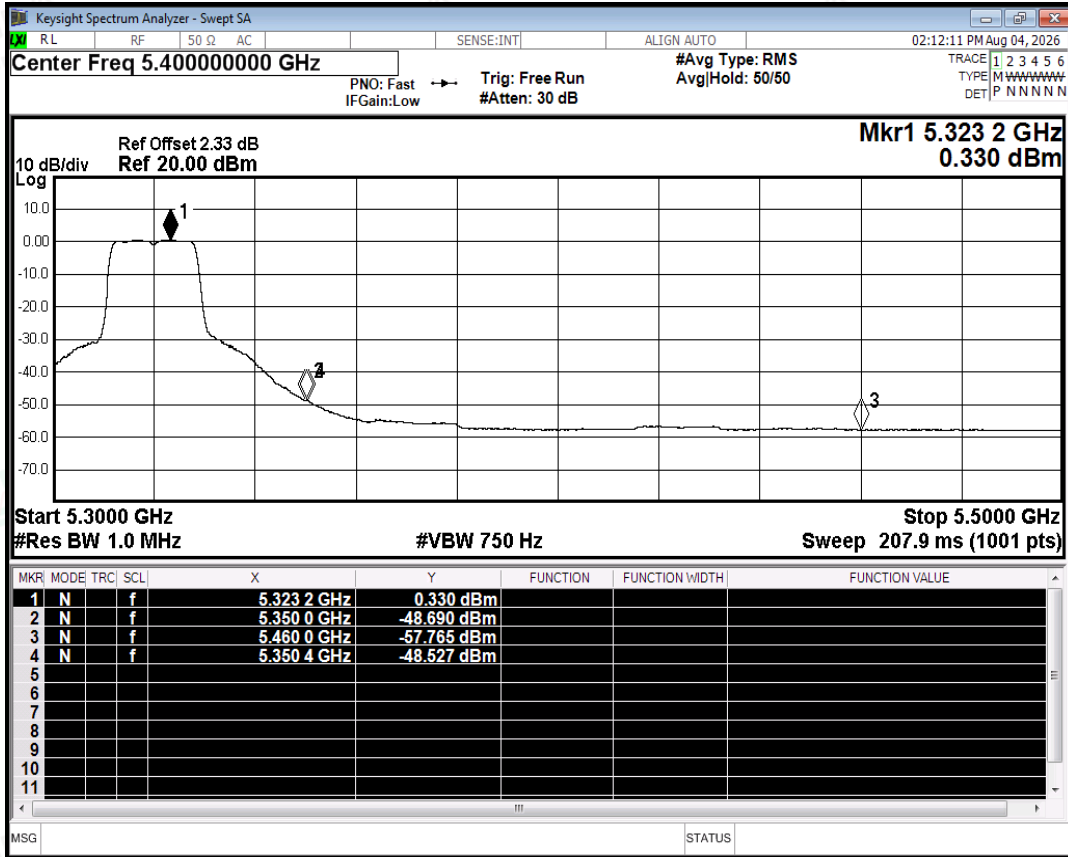


Restrict Band NVNT a 5320MHz Ant1 Average

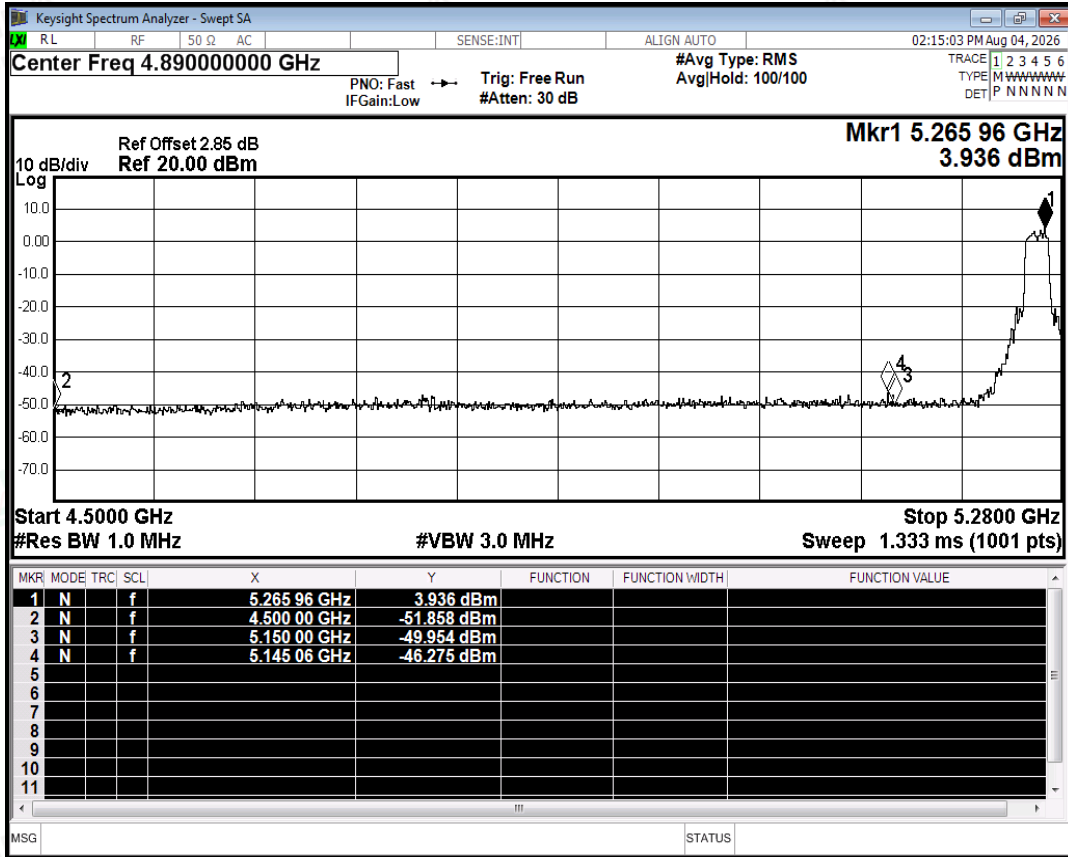


Restrict Band NVNT n20 5260MHz Ant1 Peak

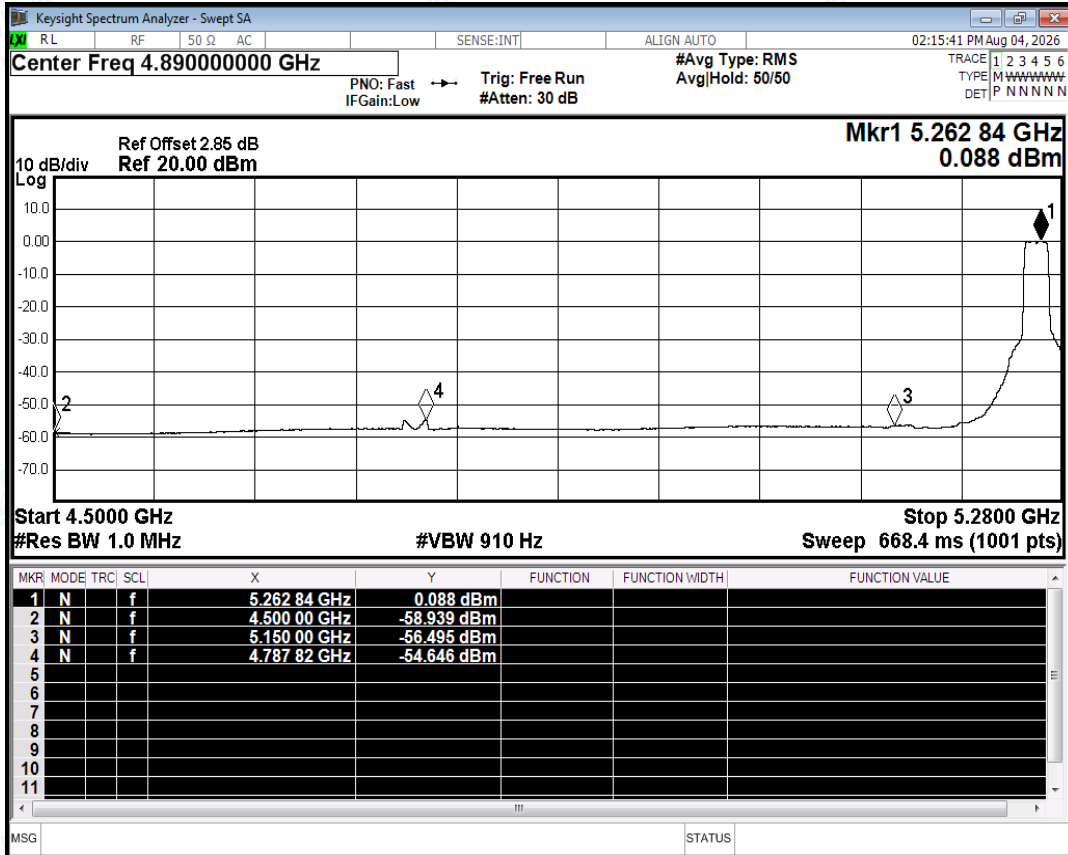


Restrict Band NVNT n20 5260MHz Ant1 Average

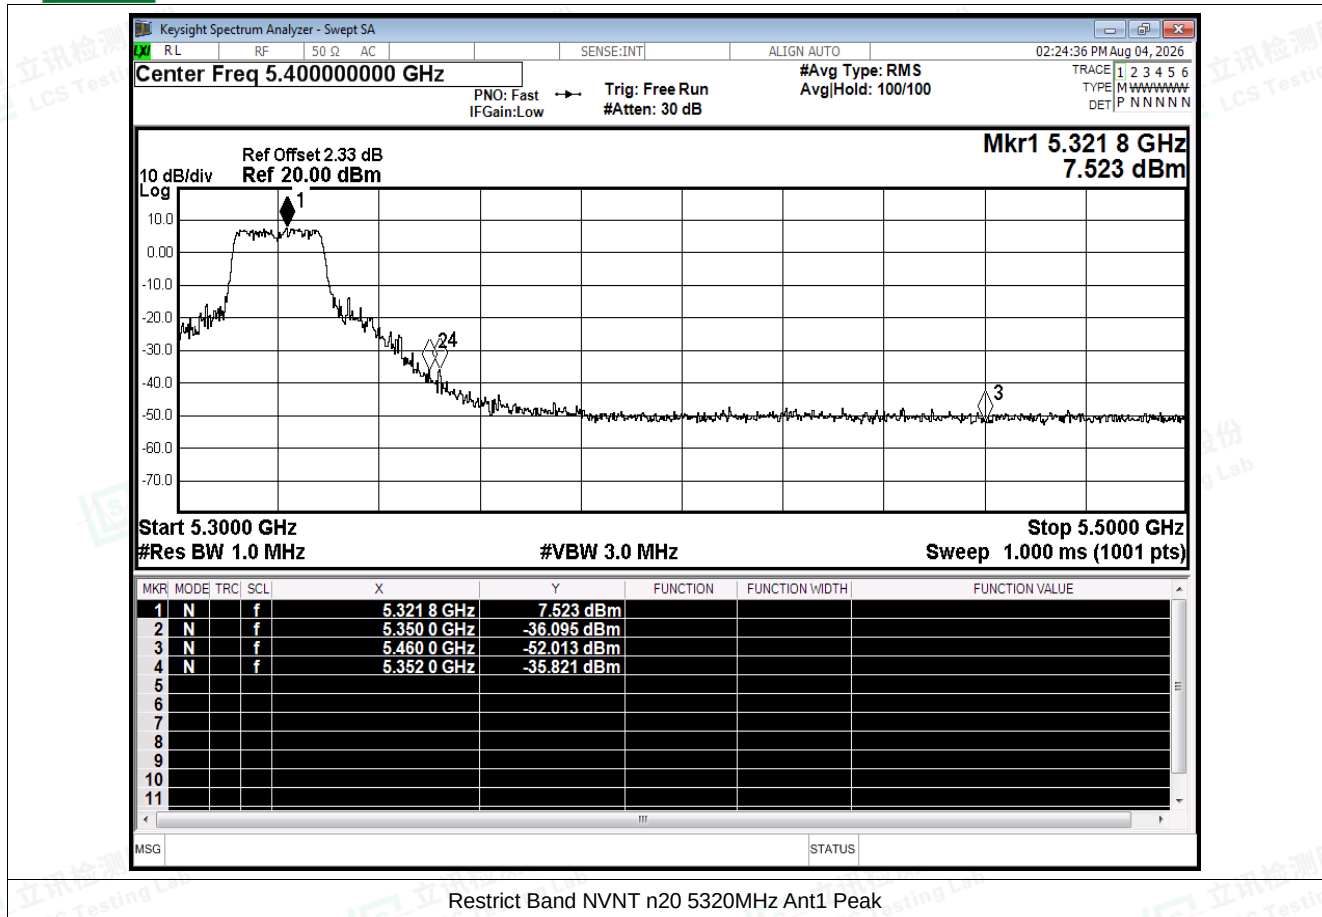


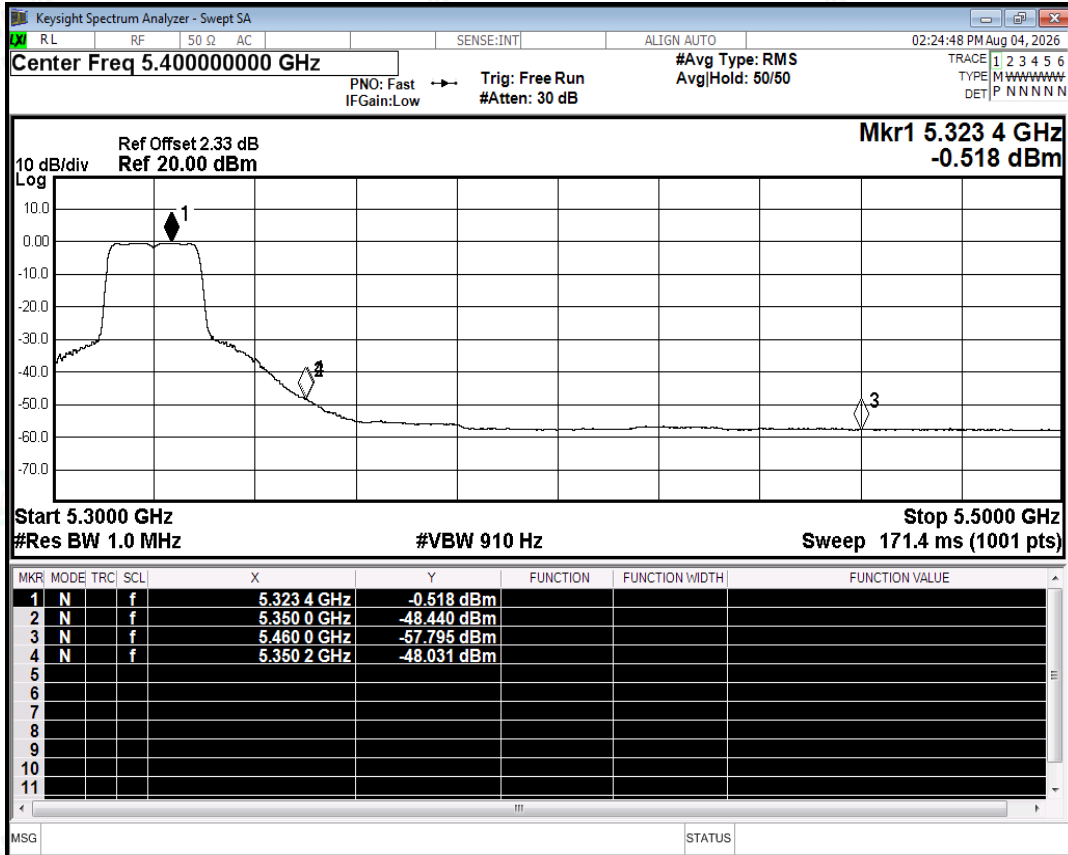


Restrict Band NVNT n20 5320MHz Ant1 Average

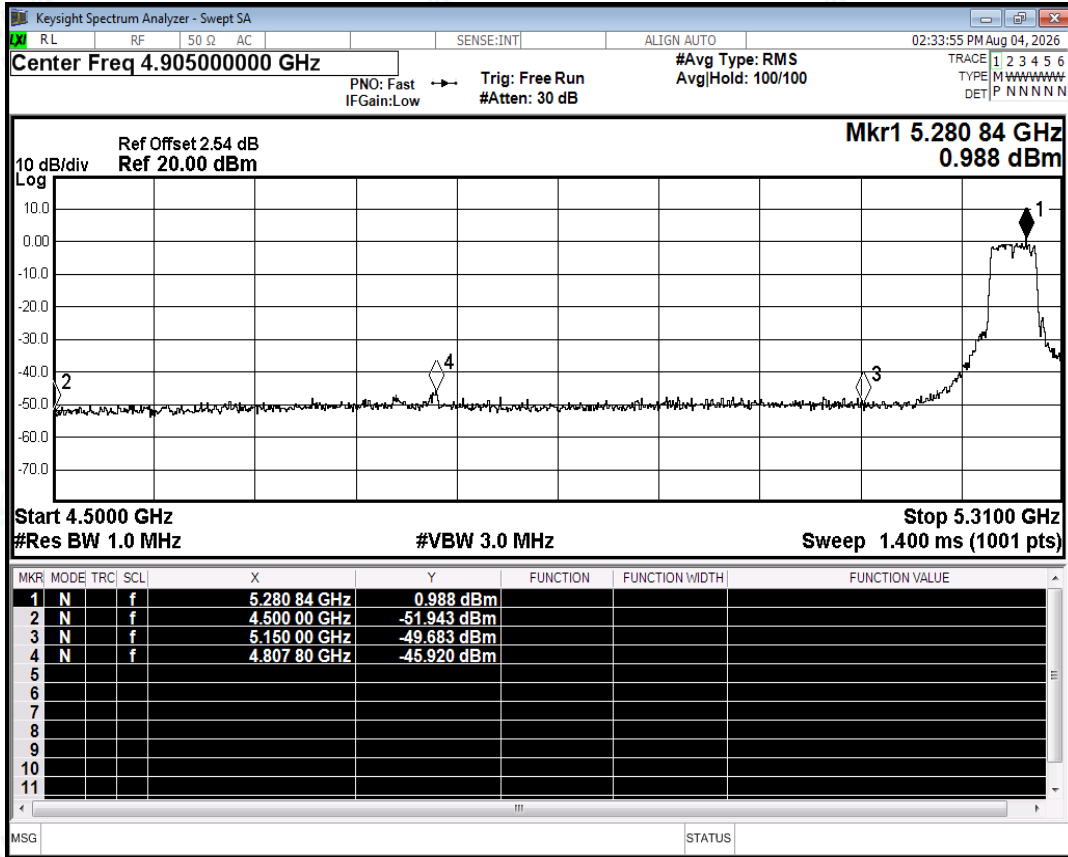


Restrict Band NVNT n40 5270MHz Ant1 Peak

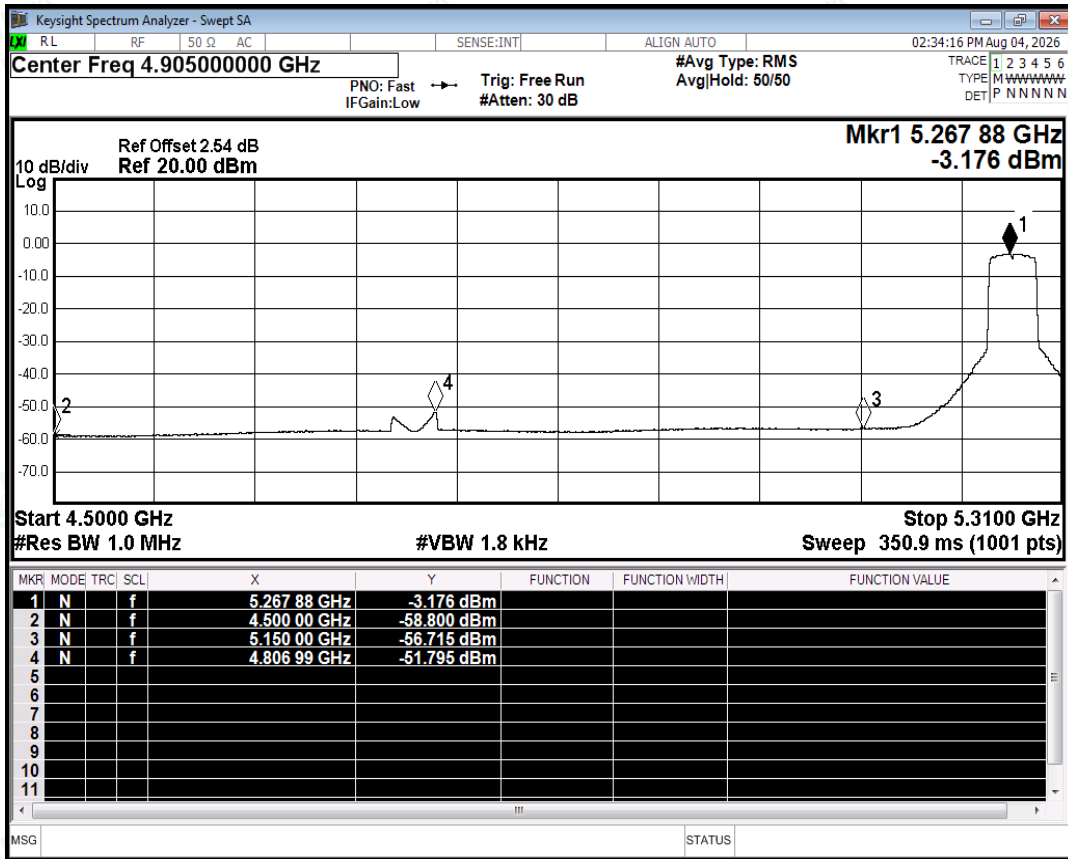


Restrict Band NVNT n40 5270MHz Ant1 Average

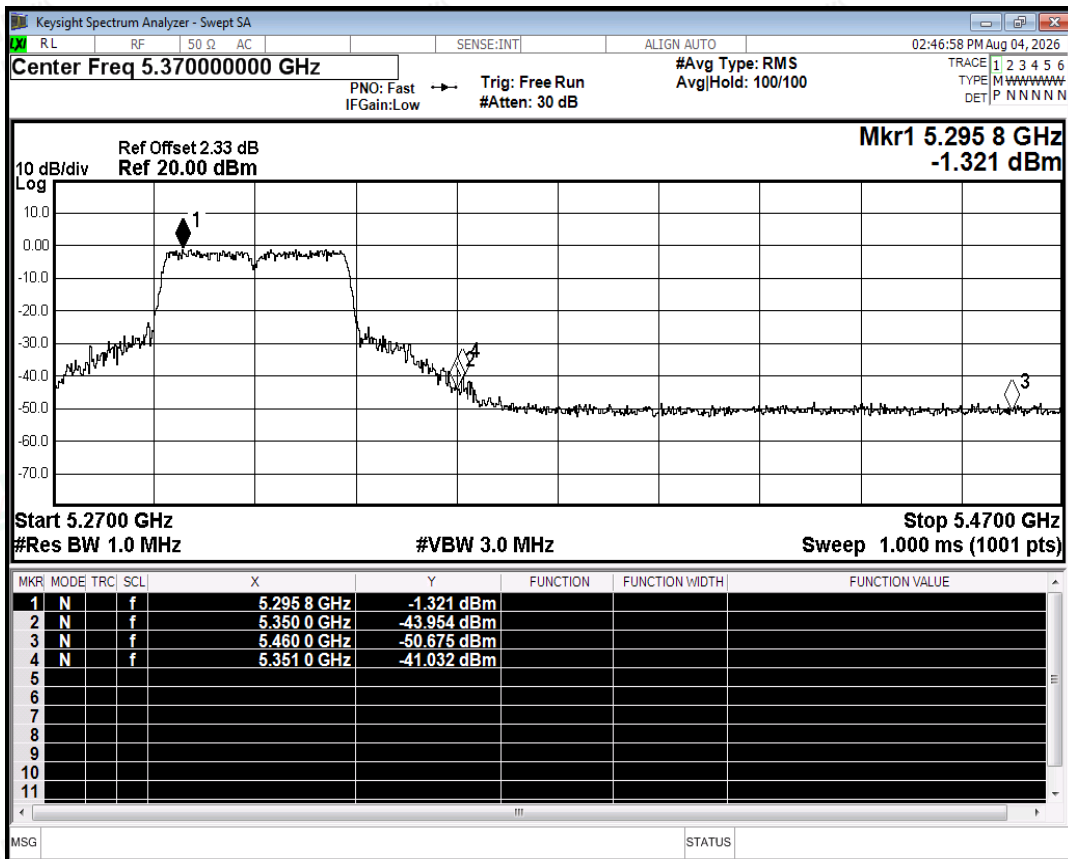


Restrict Band NVNT n40 5310MHz Ant1 Peak

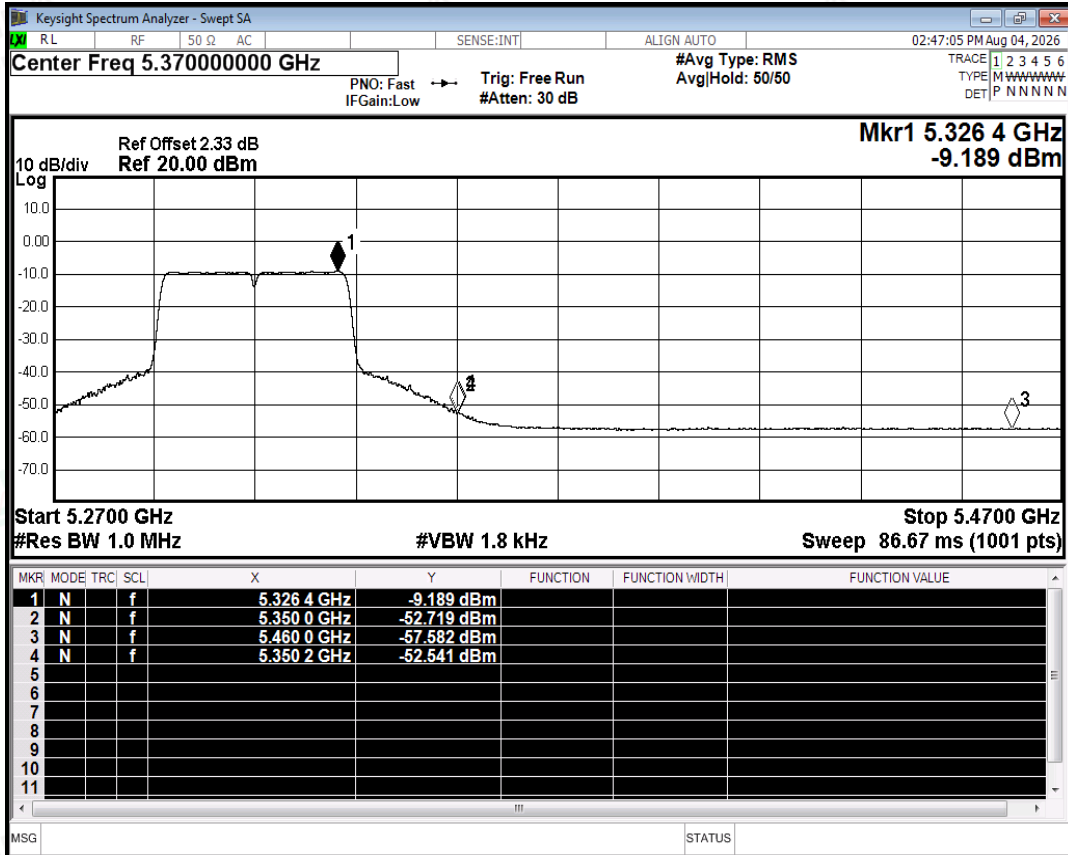


Restrict Band NVNT n40 5310MHz Ant1 Average

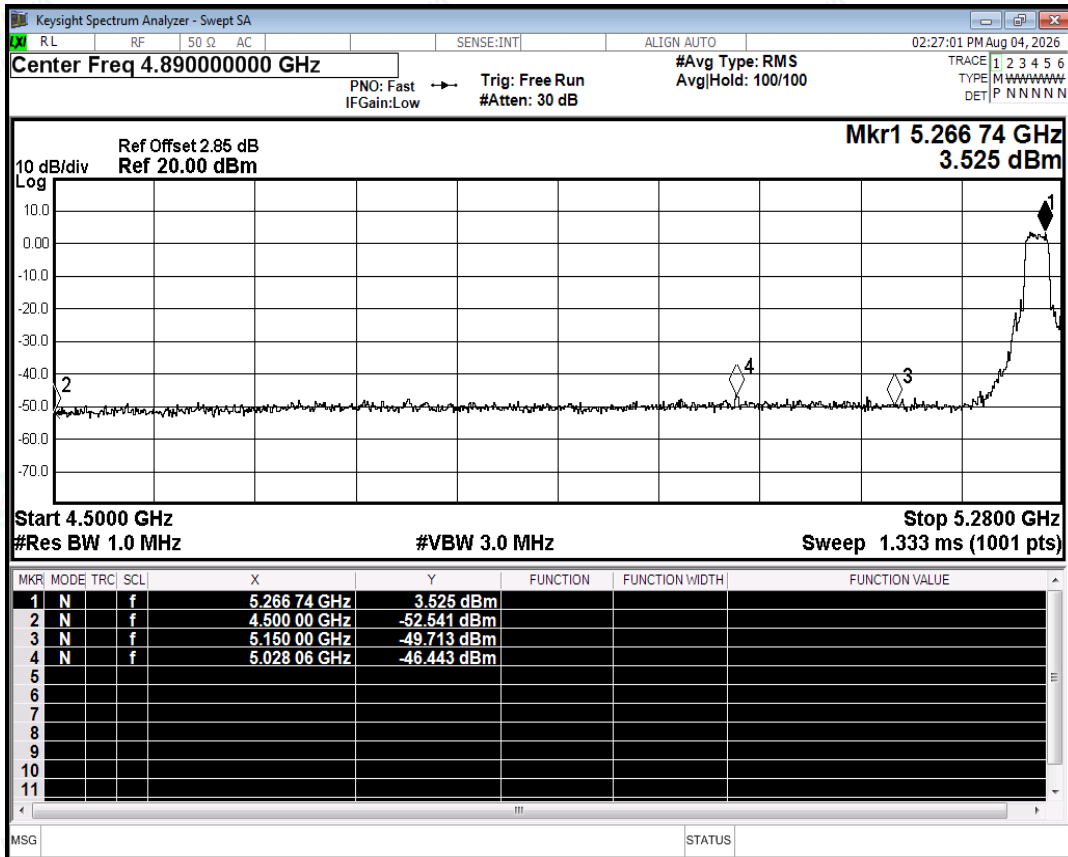


Restrict Band NVNT ac20 5260MHz Ant1 Peak

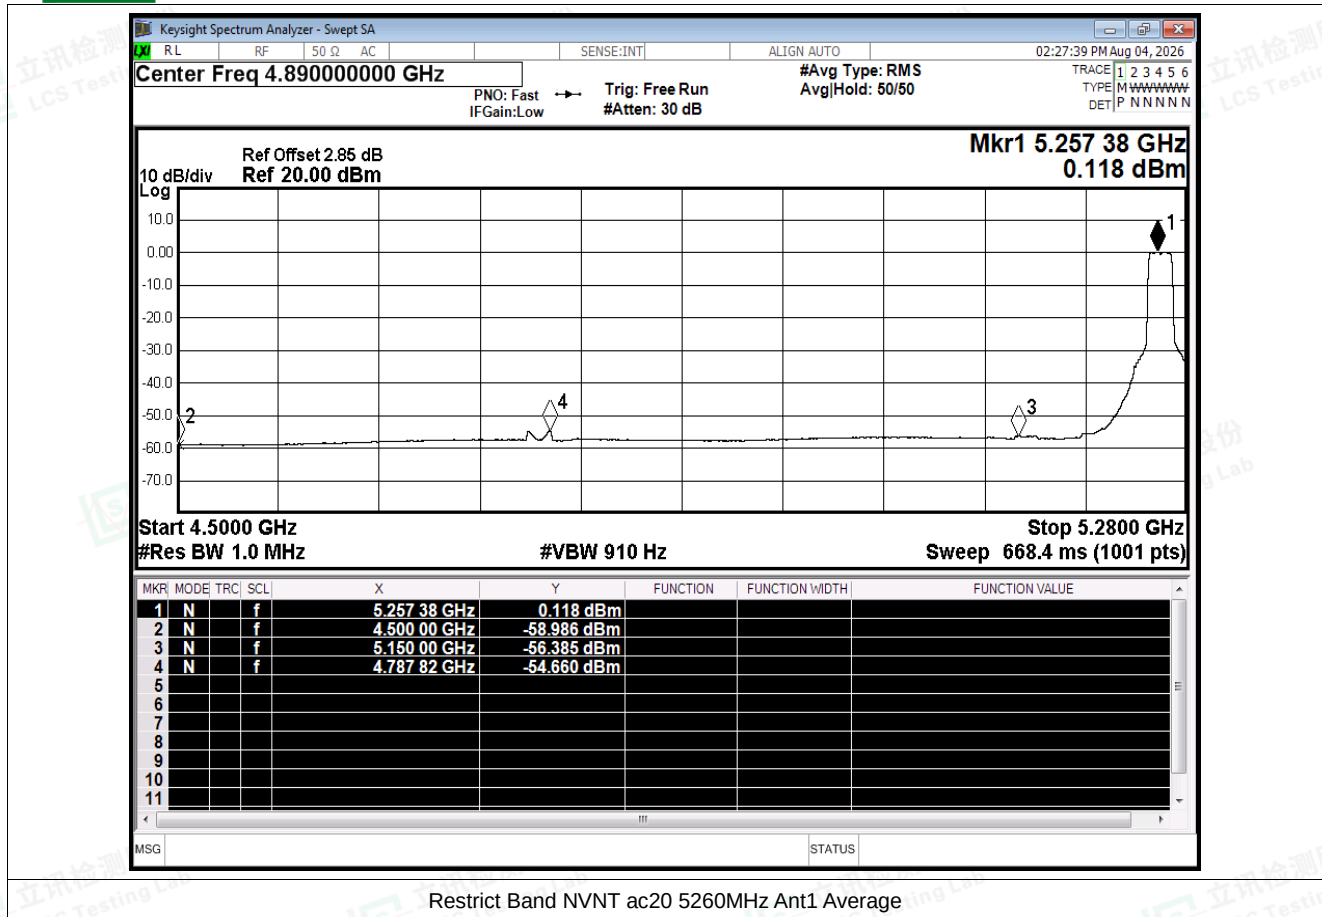


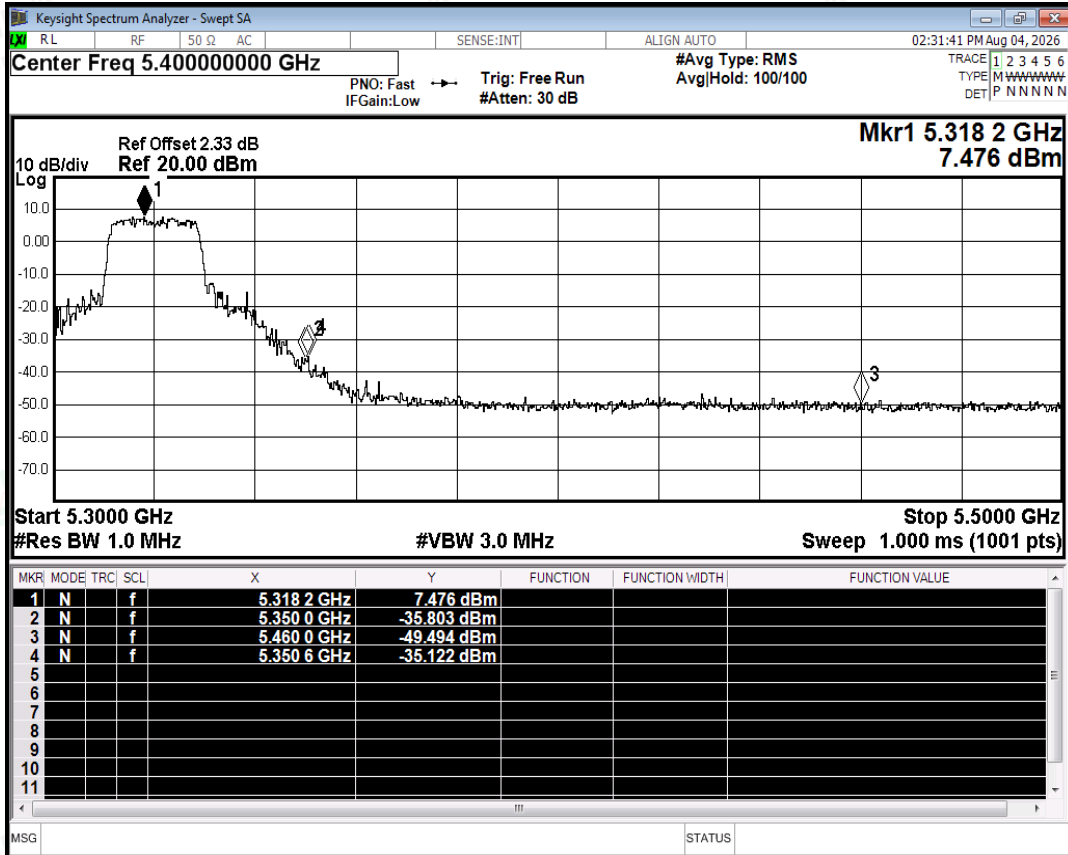


Restrict Band NVNT ac20 5320MHz Ant1 Peak

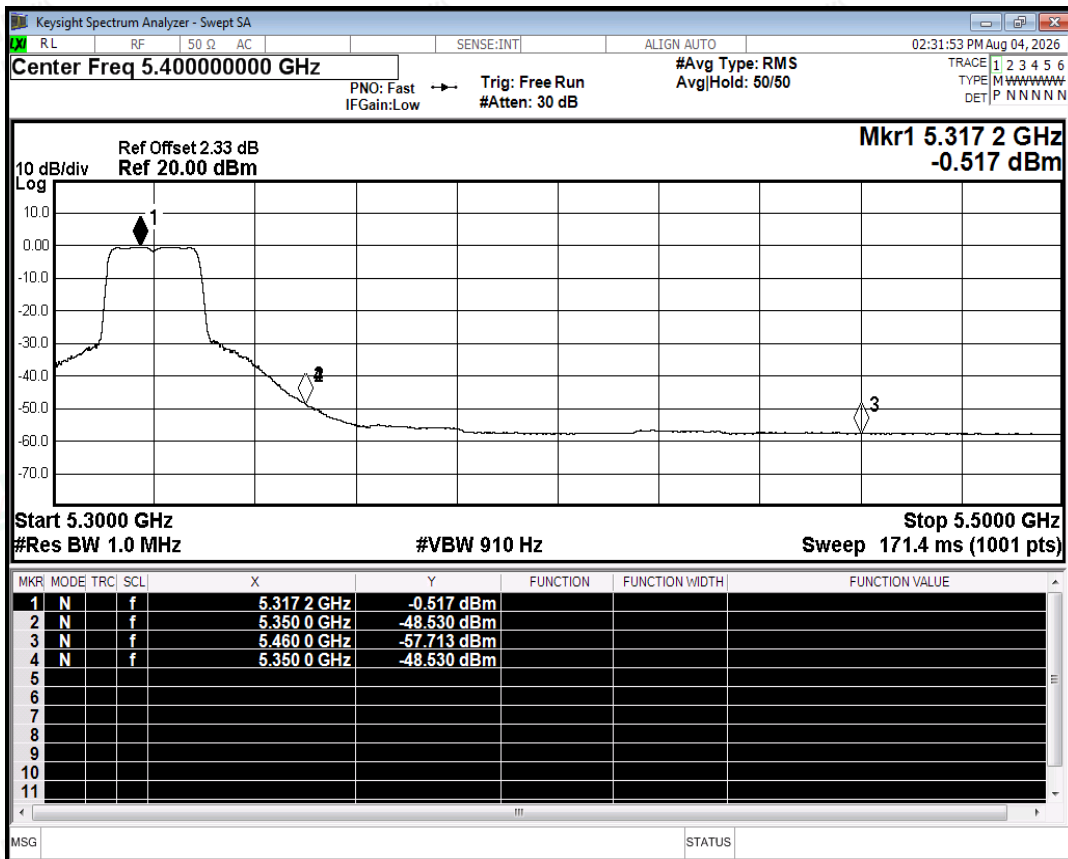


Restrict Band NVNT ac20 5320MHz Ant1 Average

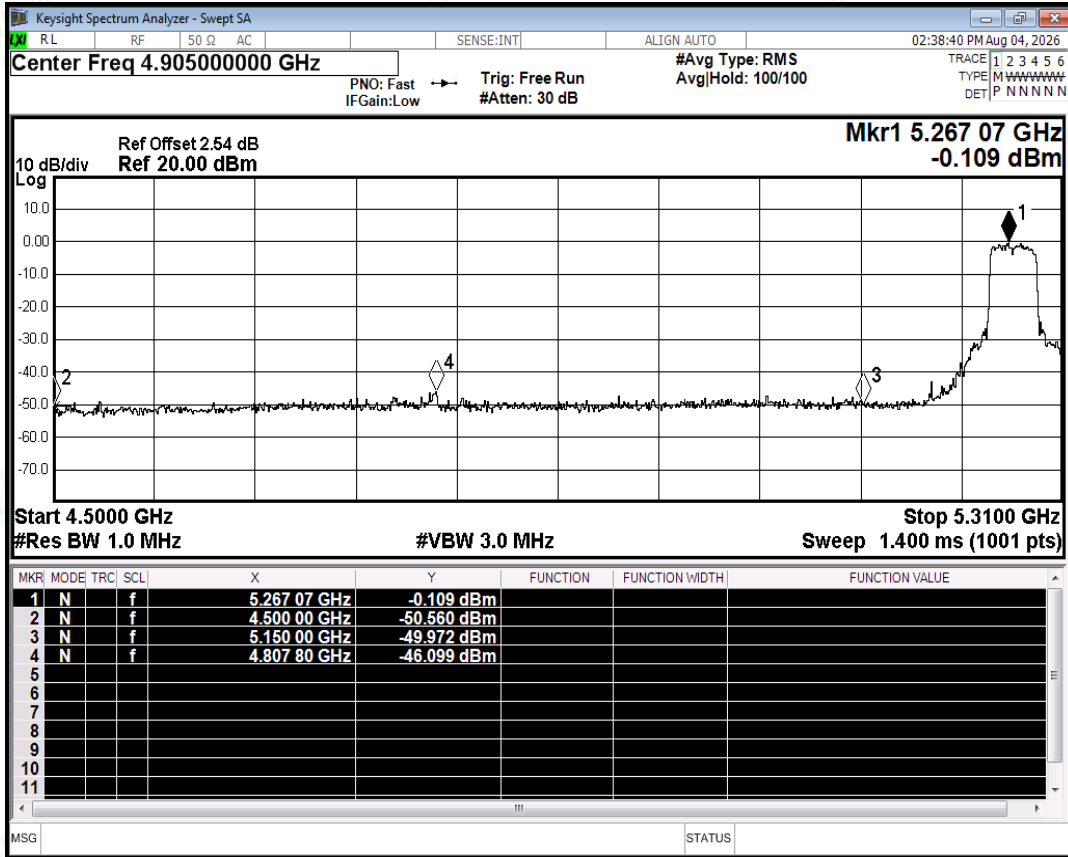


Restrict Band NVNT ac40 5270MHz Ant1 Peak

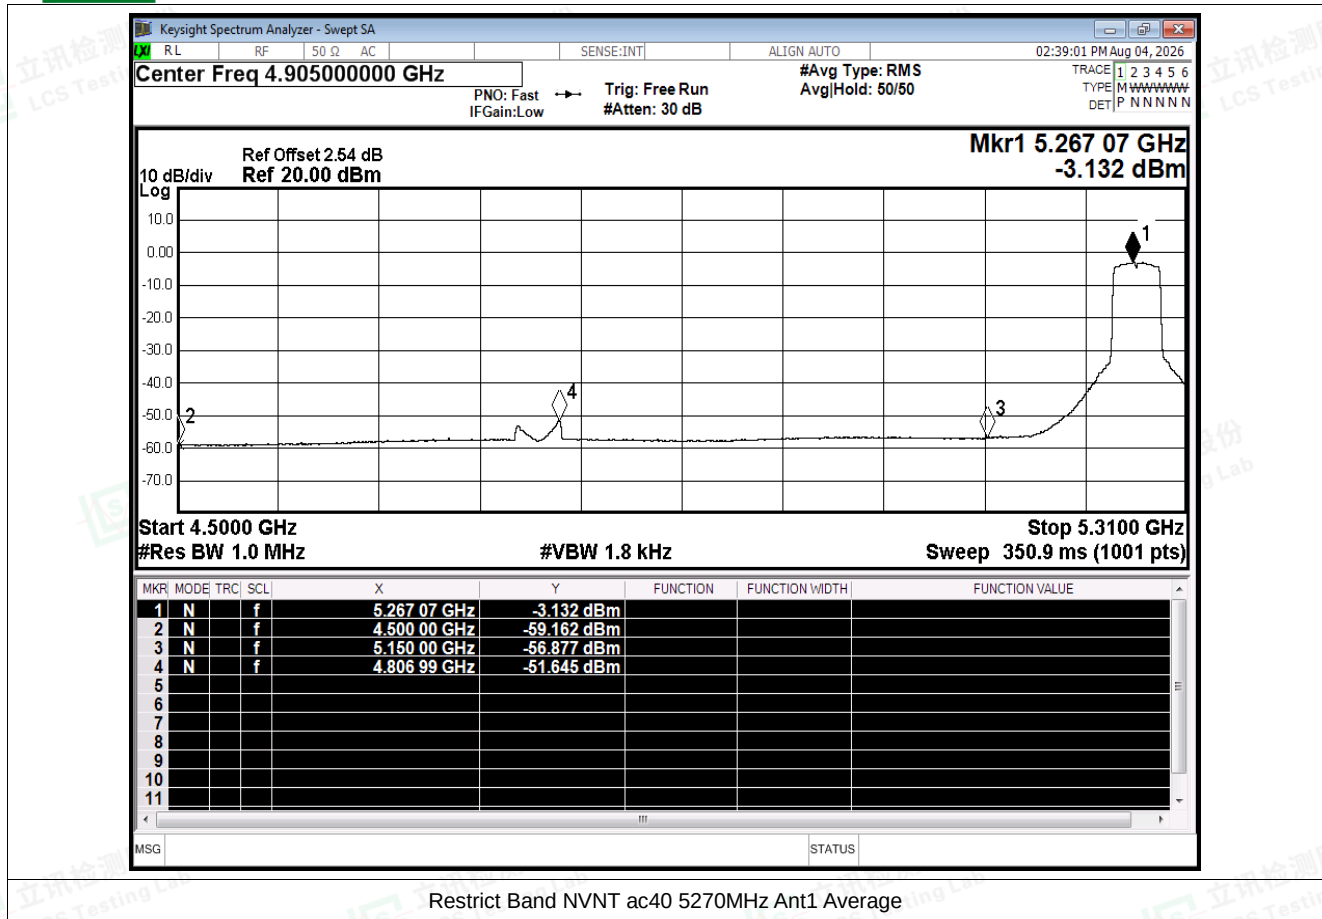


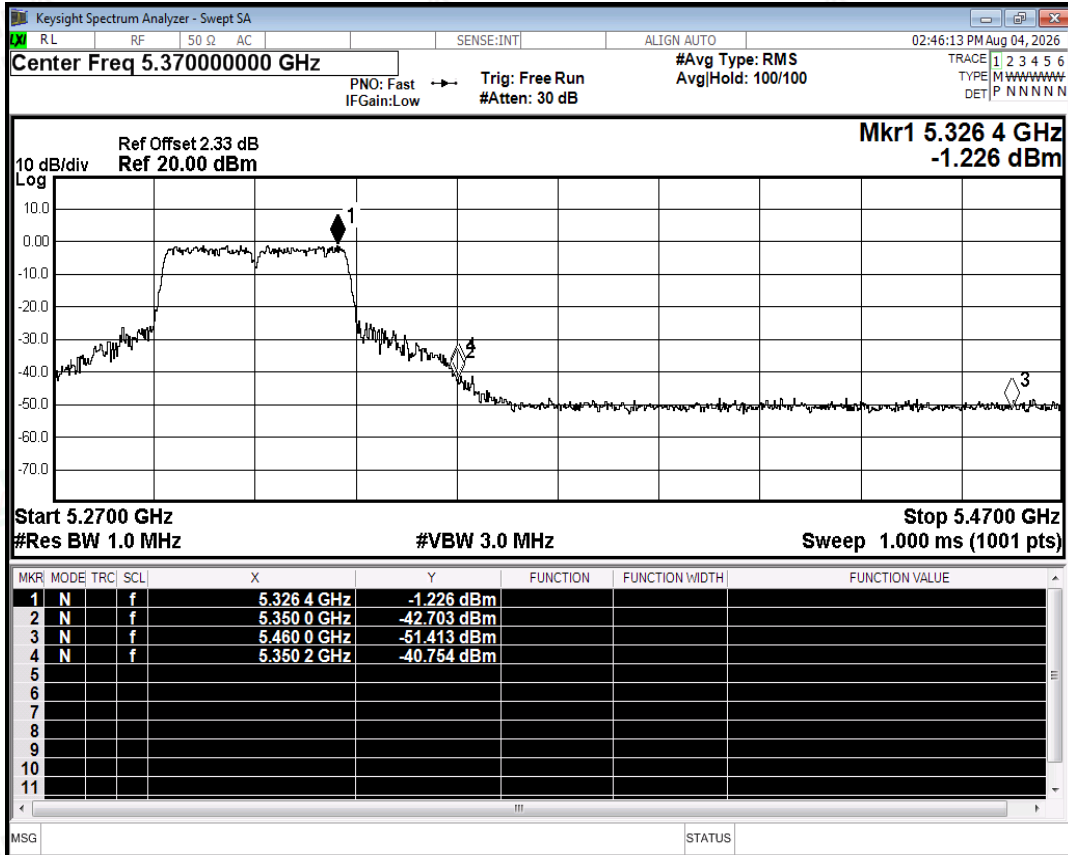


Restrict Band NVNT ac40 5310MHz Ant1 Peak

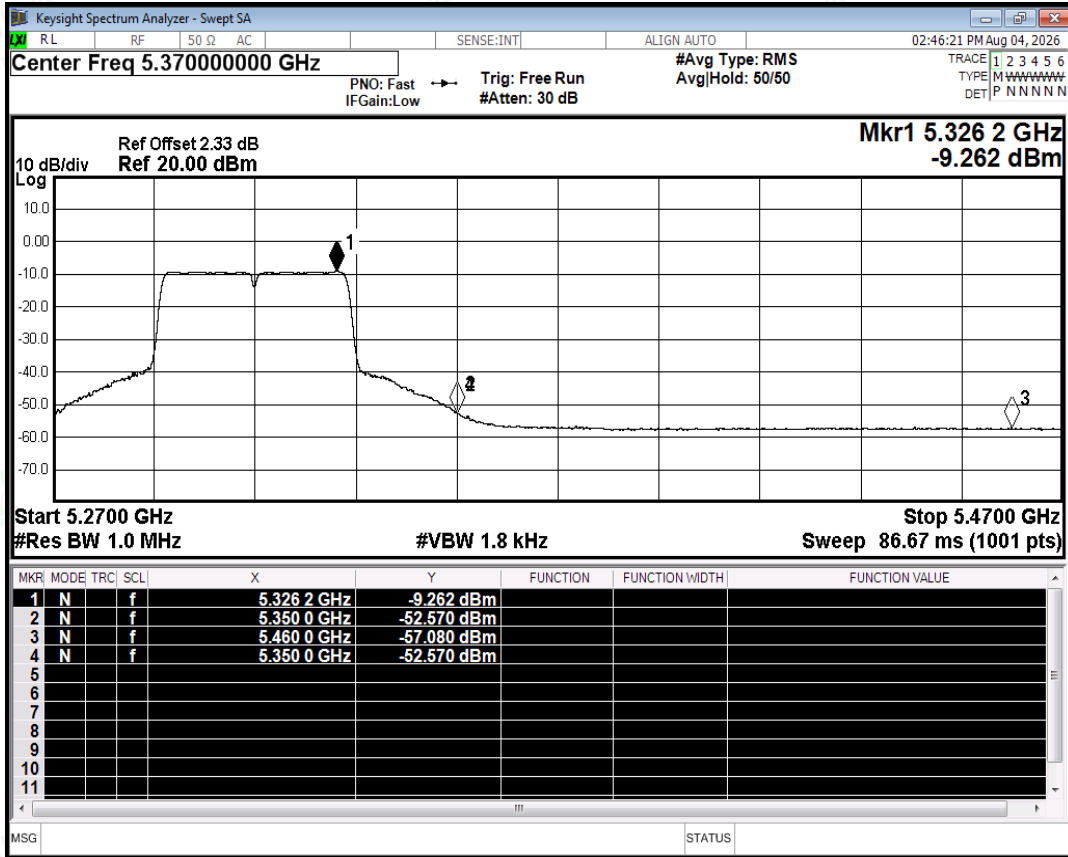


Restrict Band NVNT ac40 5310MHz Ant1 Average

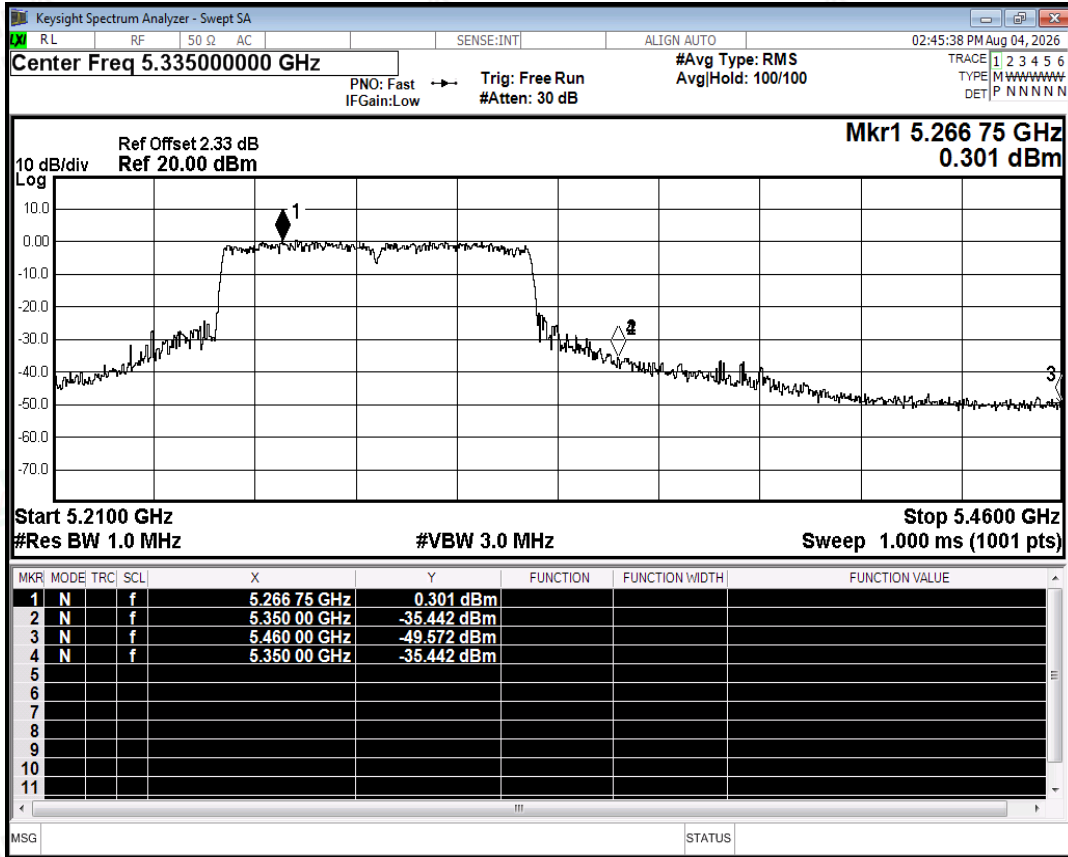


Restrict Band NVNT ac80 5290MHz Ant1 Peak

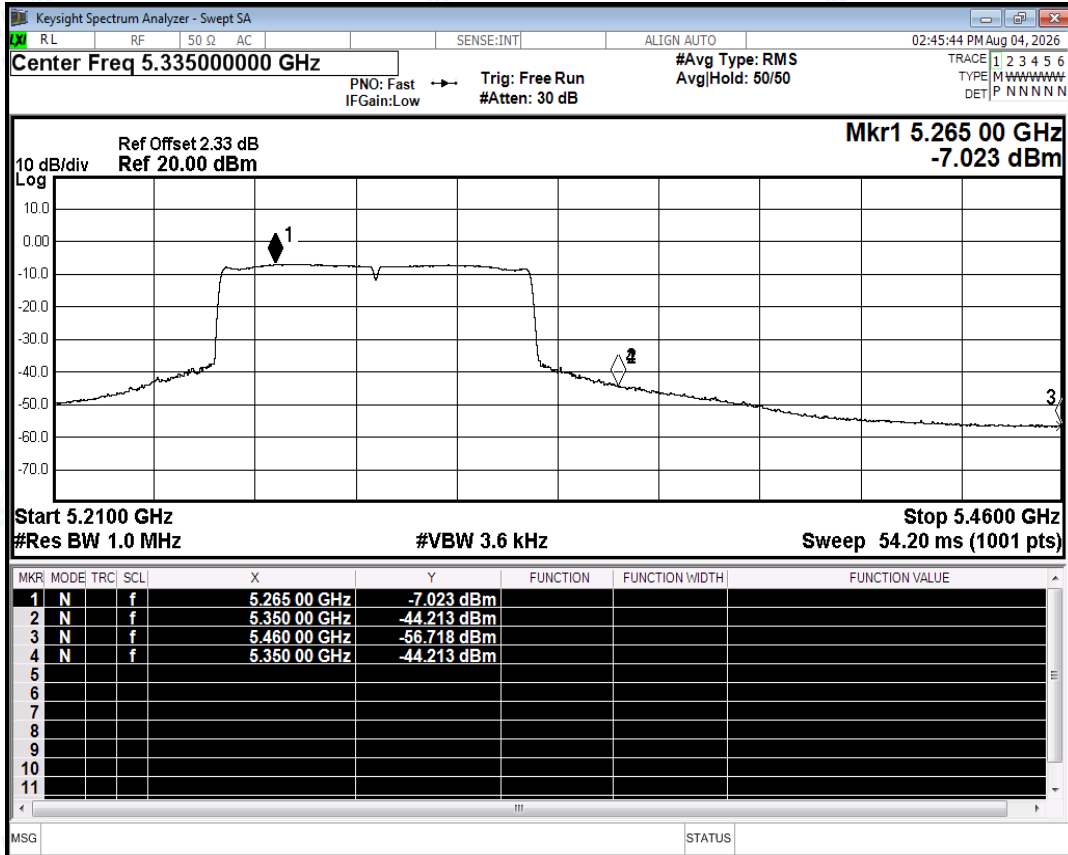

Restrict Band NVNT ac80 5290MHz Ant1 Average

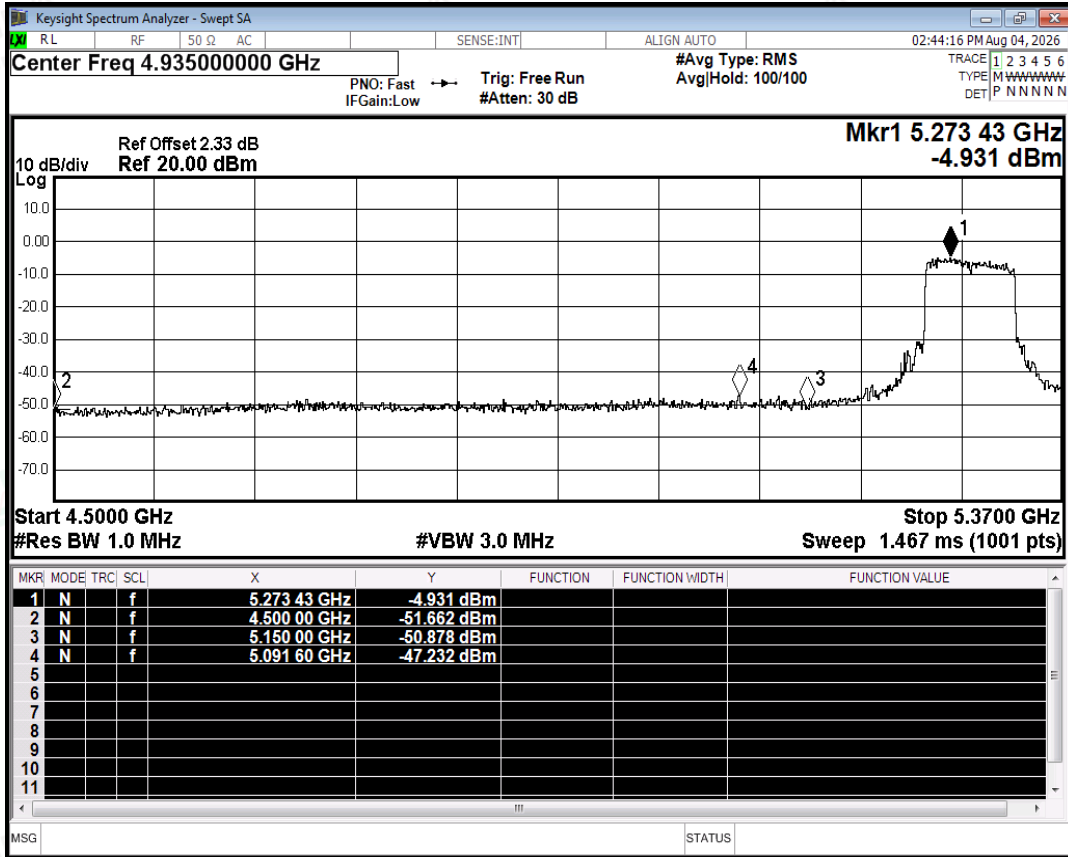

Restrict Band NVNT ac80 5290MHz Ant1 Peak

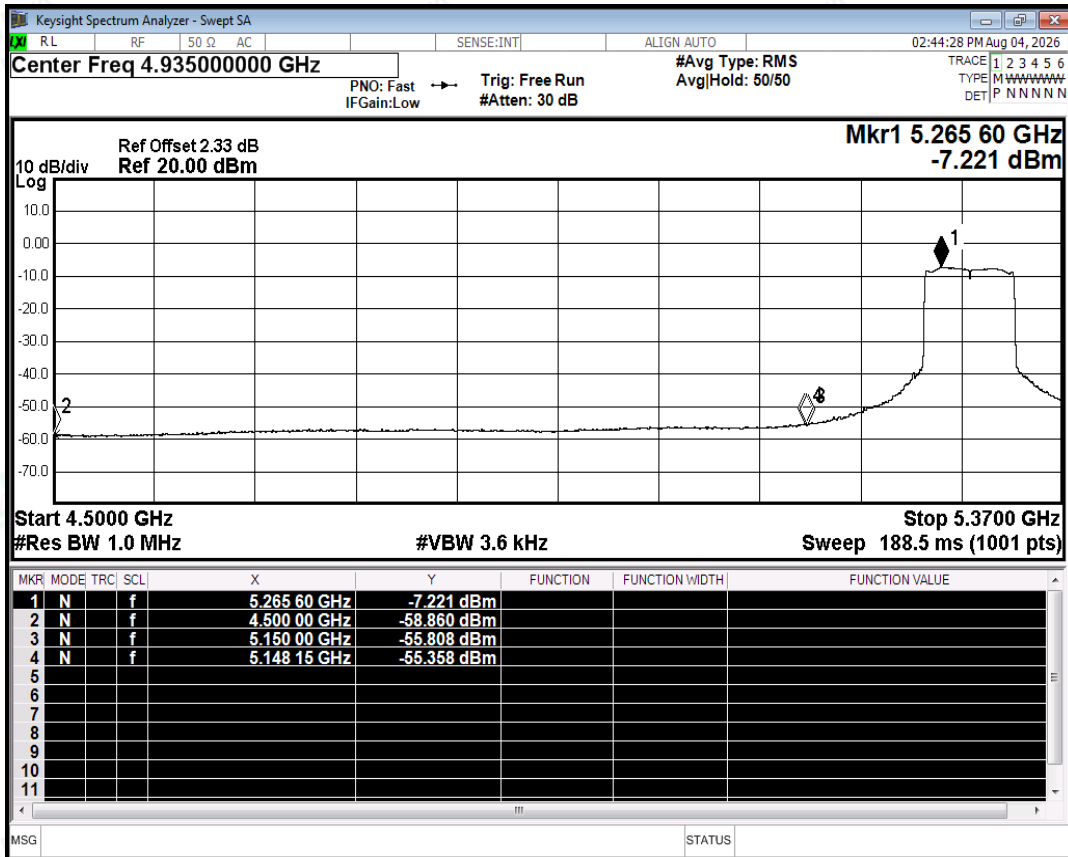



Restrict Band NVNT ac80 5290MHz Ant1 Average




E.5 Frequency Stability


Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	a	5260	Ant1	5259.96	-40000	-7.6	25	Pass
NVNT	a	5280	Ant1	5280	0	0	25	Pass
NVNT	a	5320	Ant1	5319.96	-40000	-7.52	25	Pass
NVNT	n20	5260	Ant1	5259.96	-40000	-7.6	25	Pass
NVNT	n20	5280	Ant1	5279.96	-40000	-7.58	25	Pass
NVNT	n20	5320	Ant1	5319.98	-20000	-3.76	25	Pass
NVNT	n40	5270	Ant1	5270	0	0	25	Pass
NVNT	n40	5310	Ant1	5309.96	-40000	-7.53	25	Pass
NVNT	ac20	5260	Ant1	5259.96	-40000	-7.6	25	Pass
NVNT	ac20	5280	Ant1	5279.98	-20000	-3.79	25	Pass
NVNT	ac20	5320	Ant1	5319.98	-20000	-3.76	25	Pass
NVNT	ac40	5270	Ant1	5269.96	-40000	-7.59	25	Pass
NVNT	ac40	5310	Ant1	5309.96	-40000	-7.53	25	Pass
NVNT	ac80	5290	Ant1	5290	0	0	25	Pass

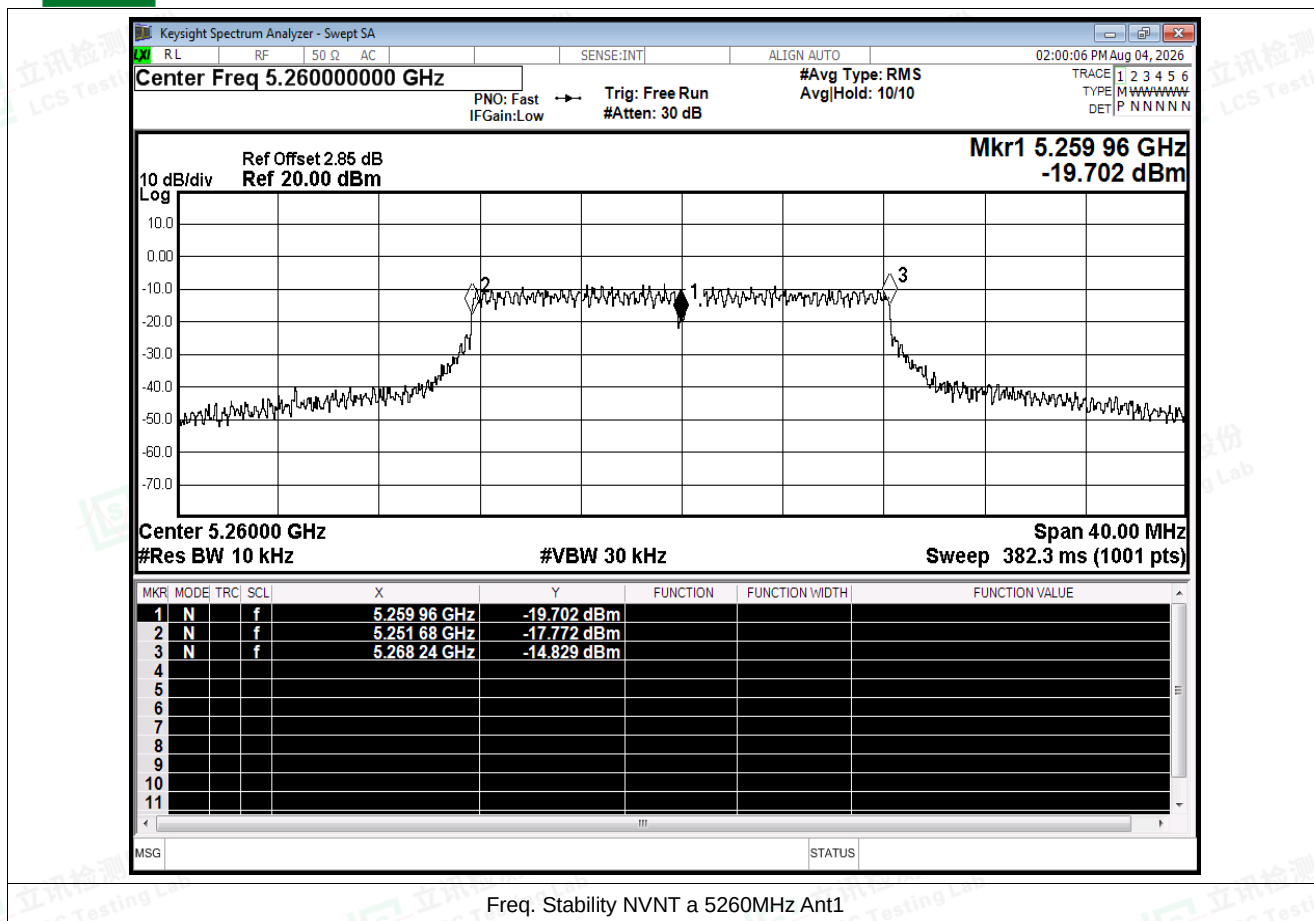


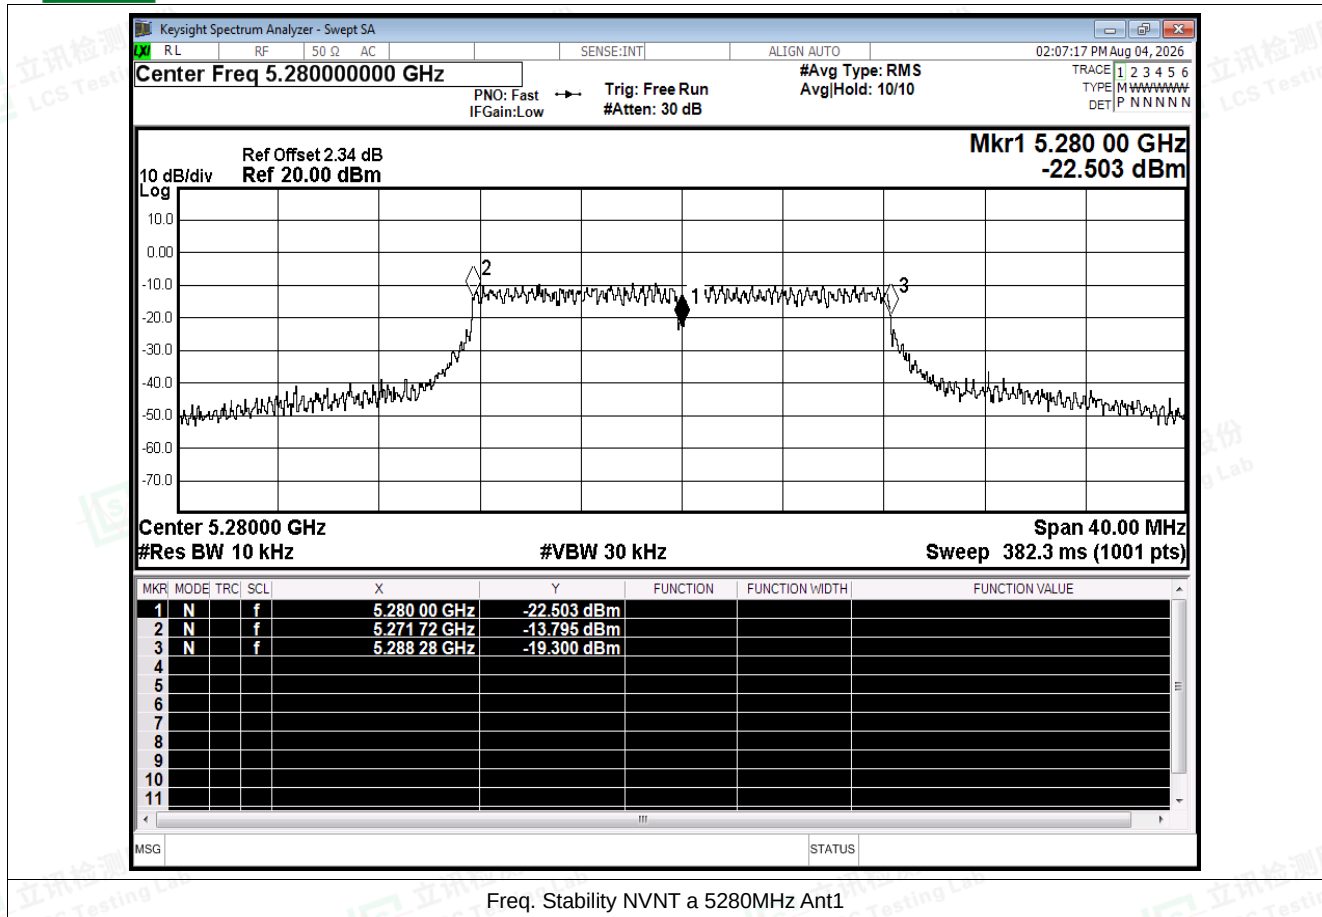


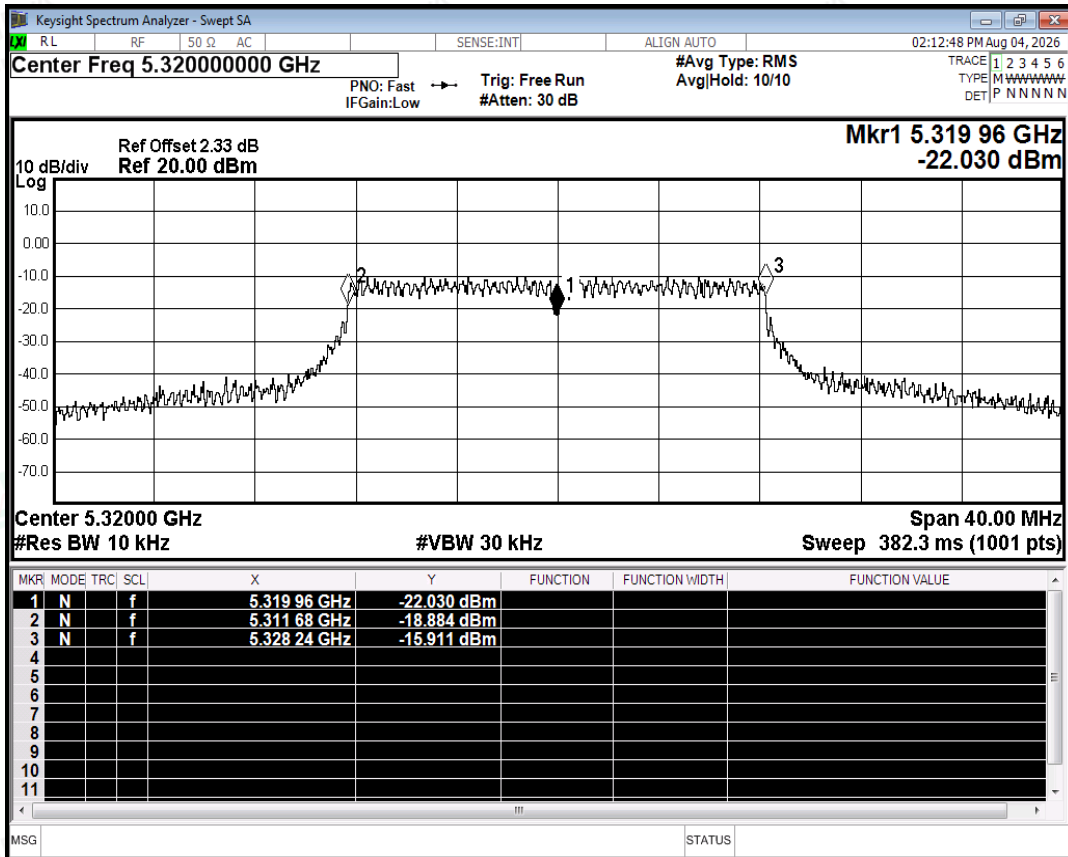



Freq. Stability NVNT a 5320MHz Ant1

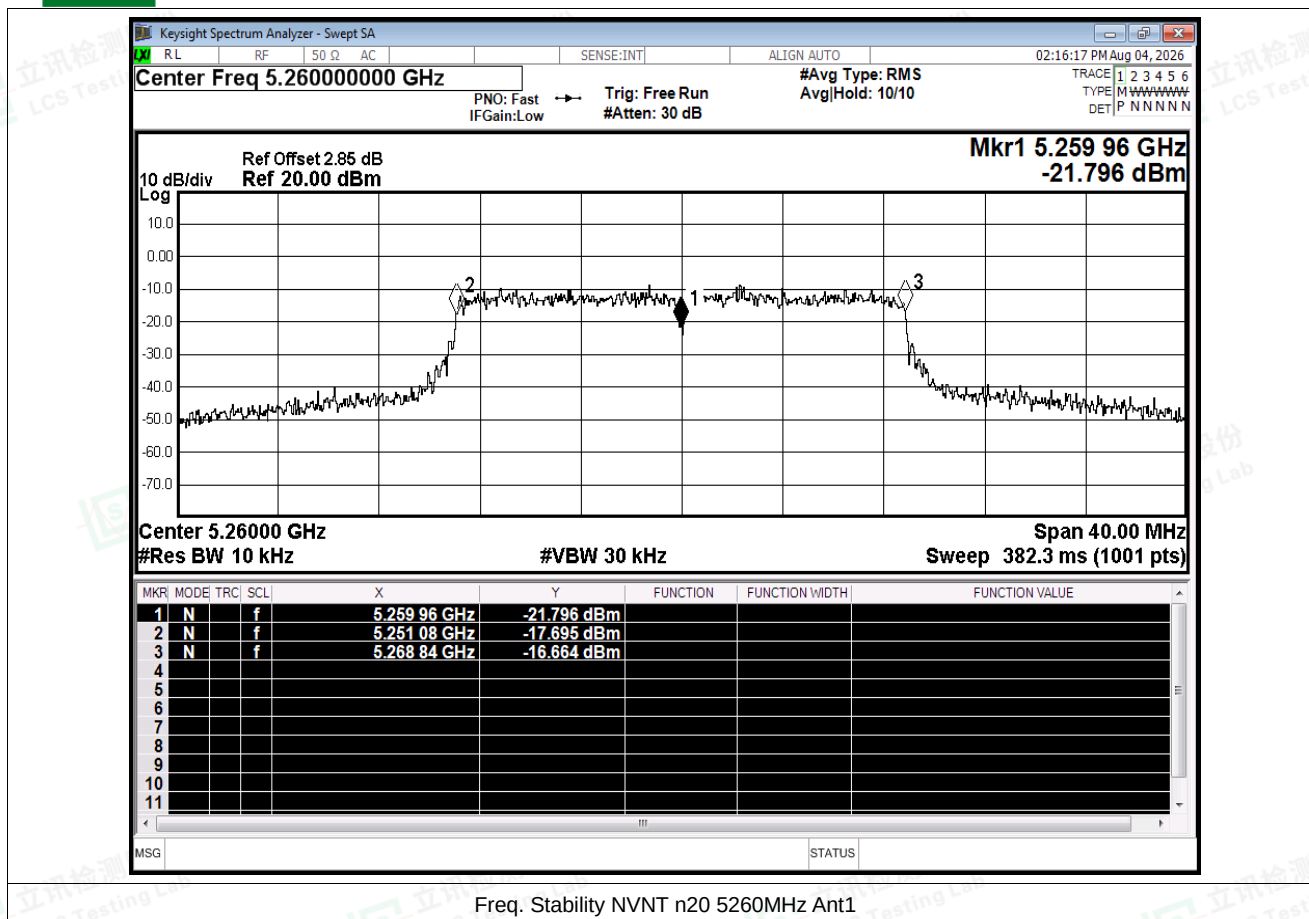


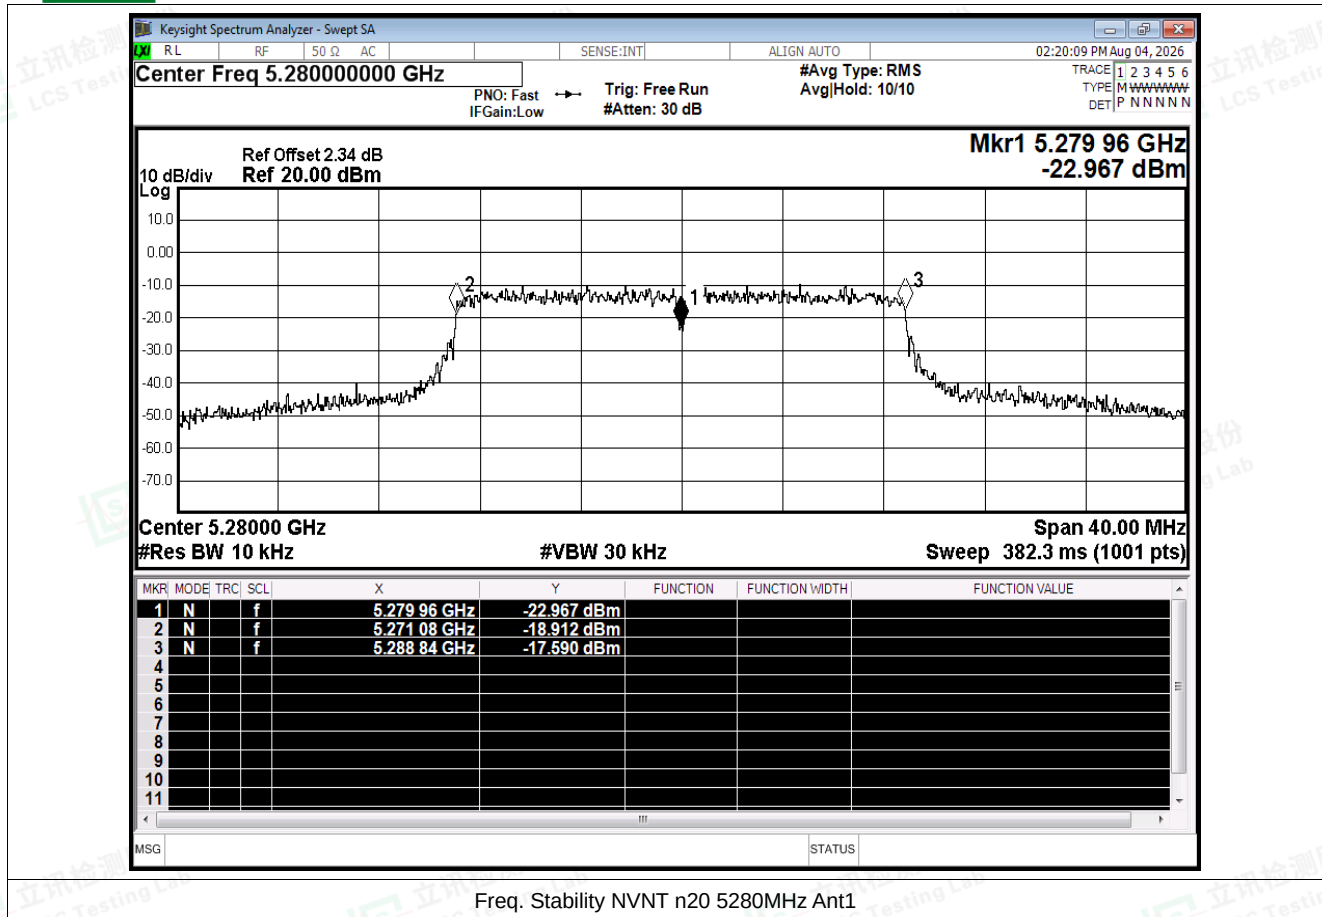


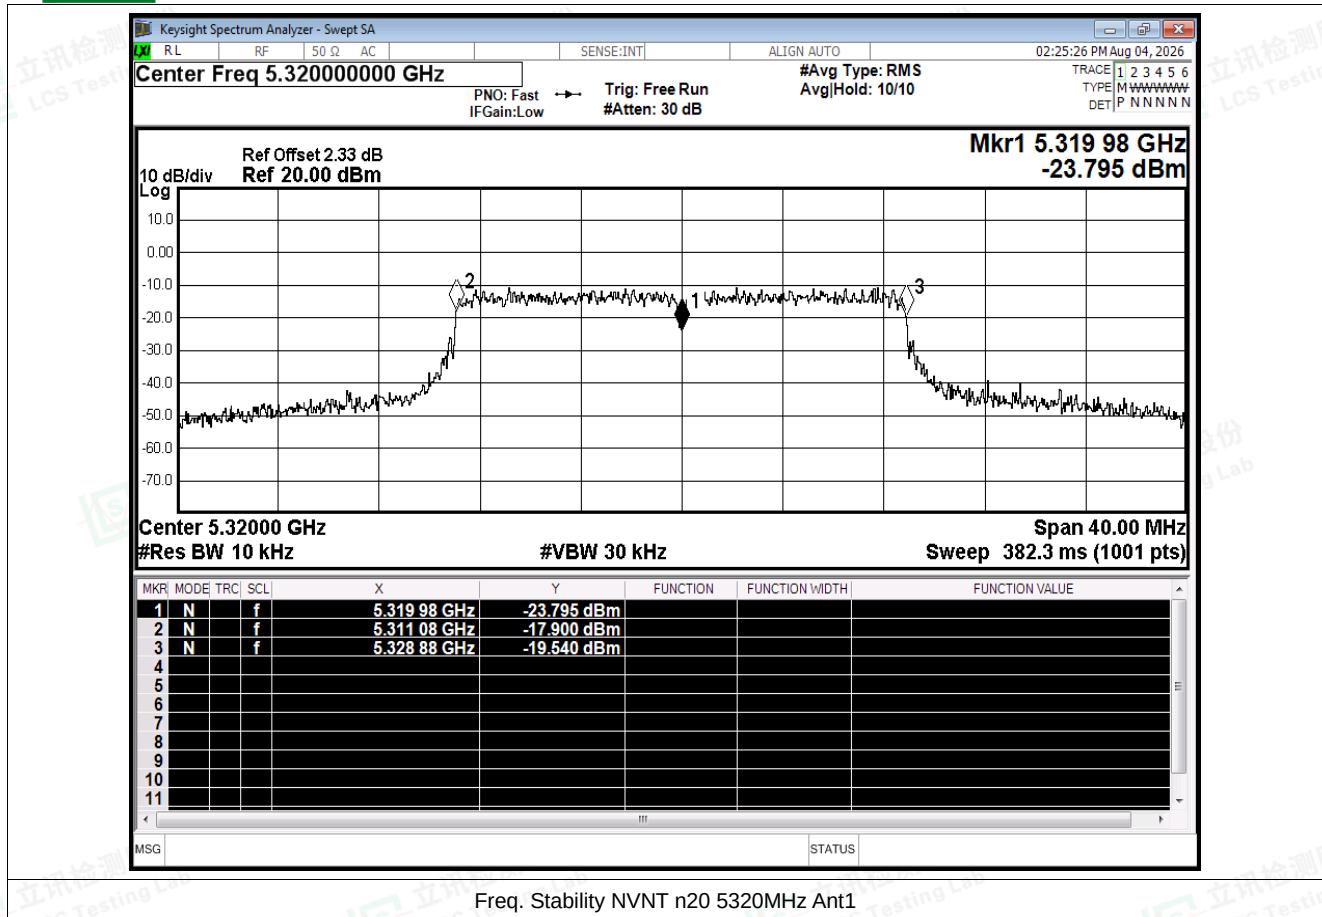

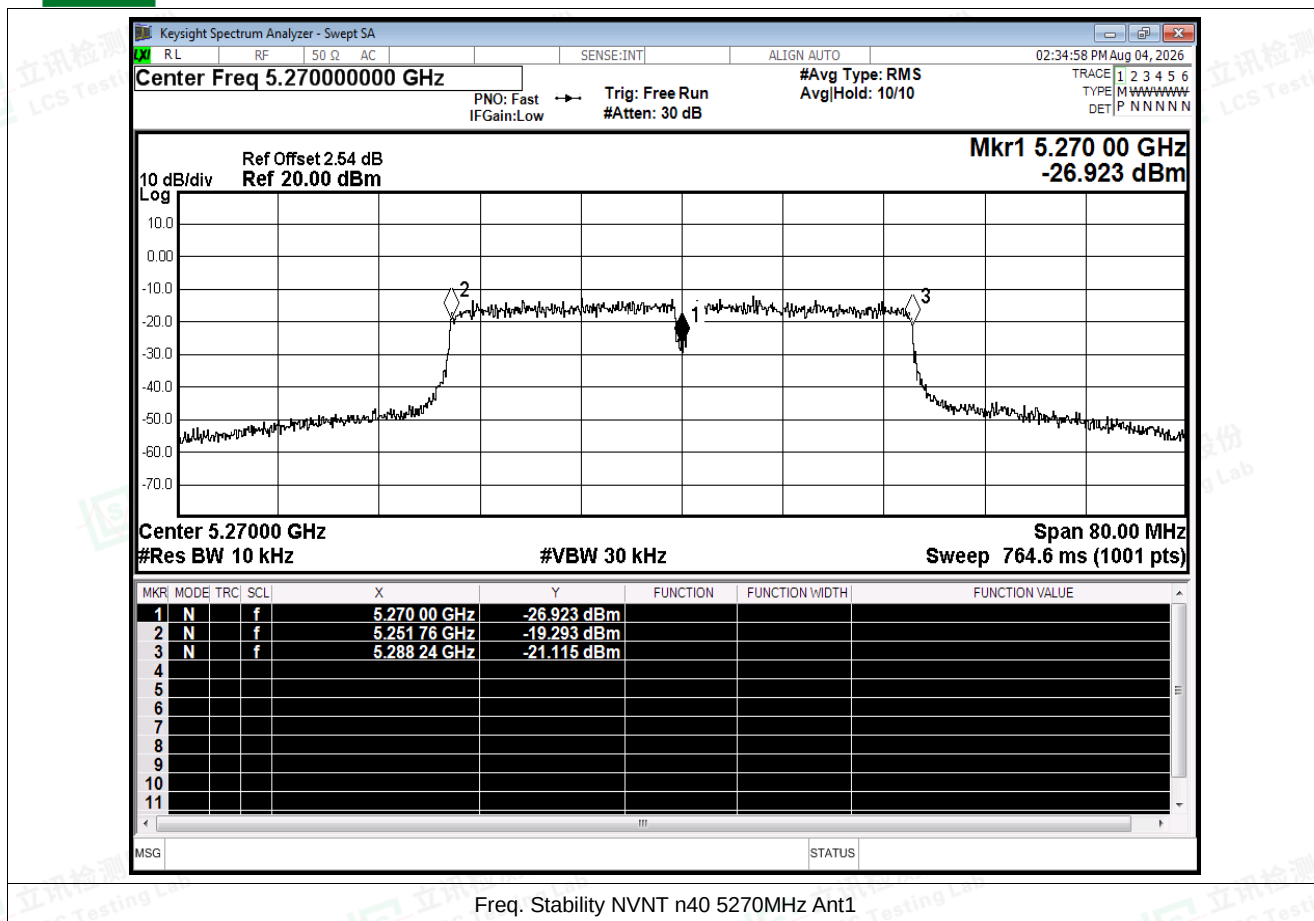


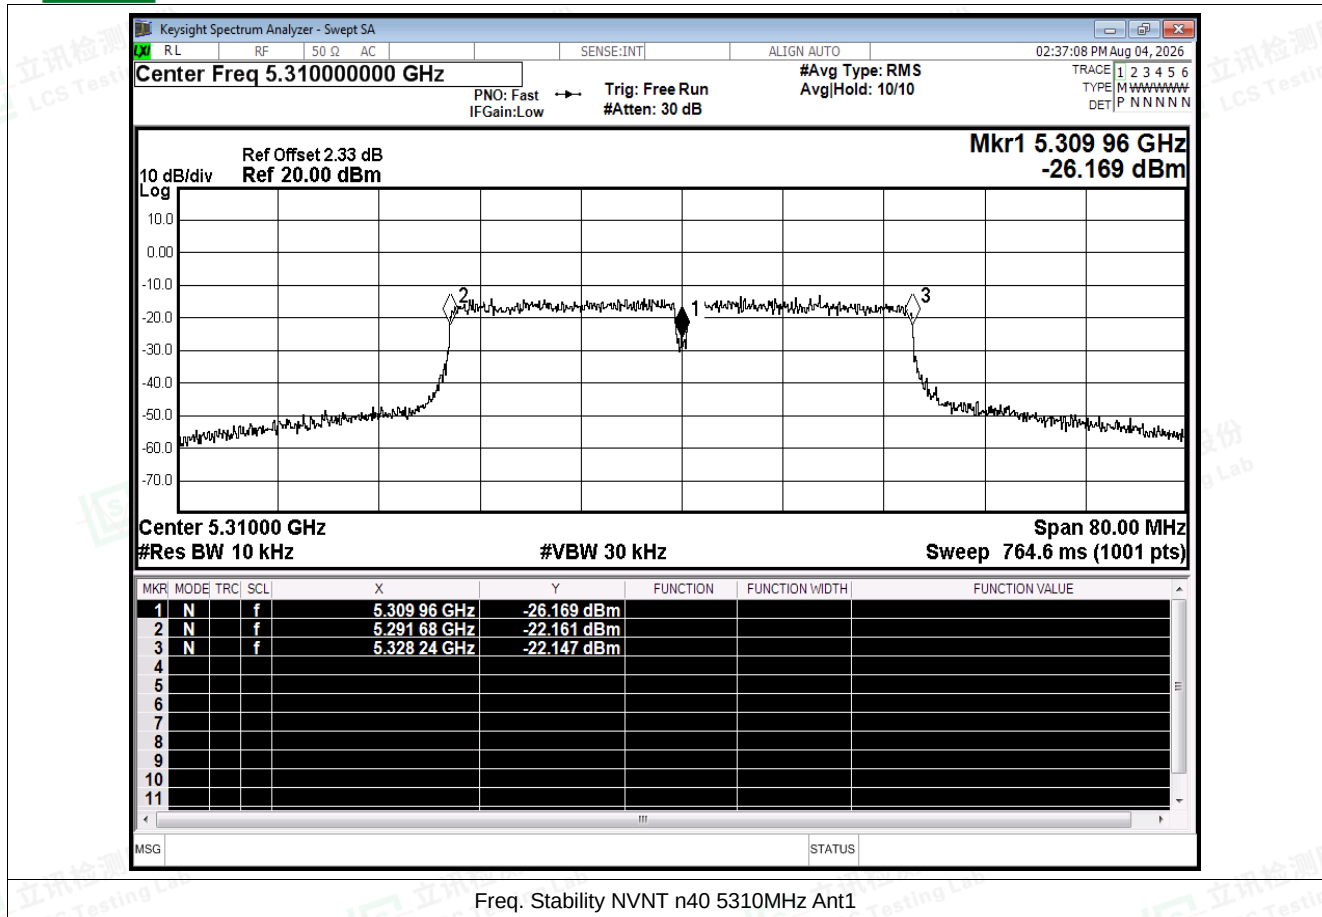

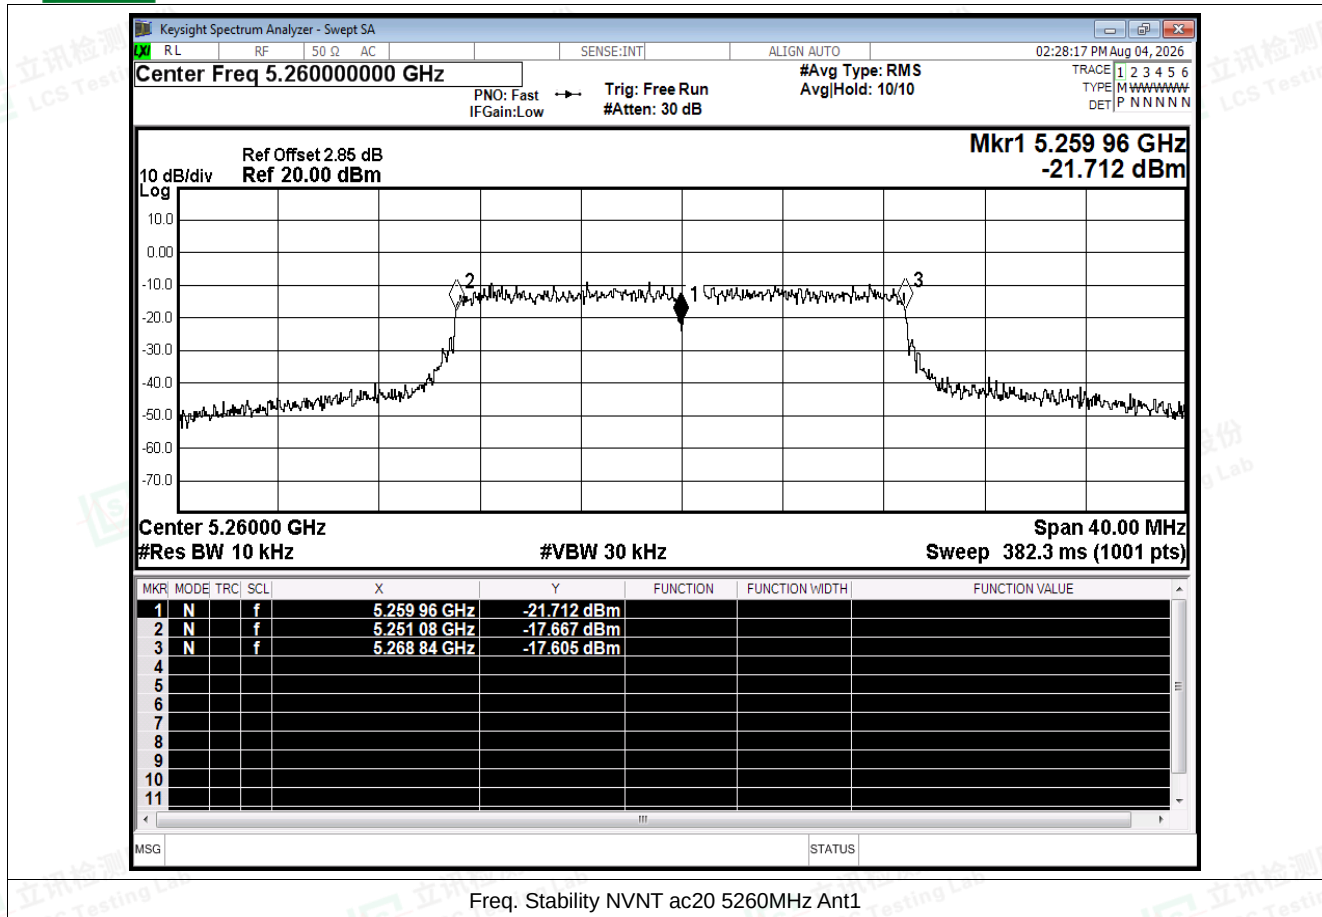


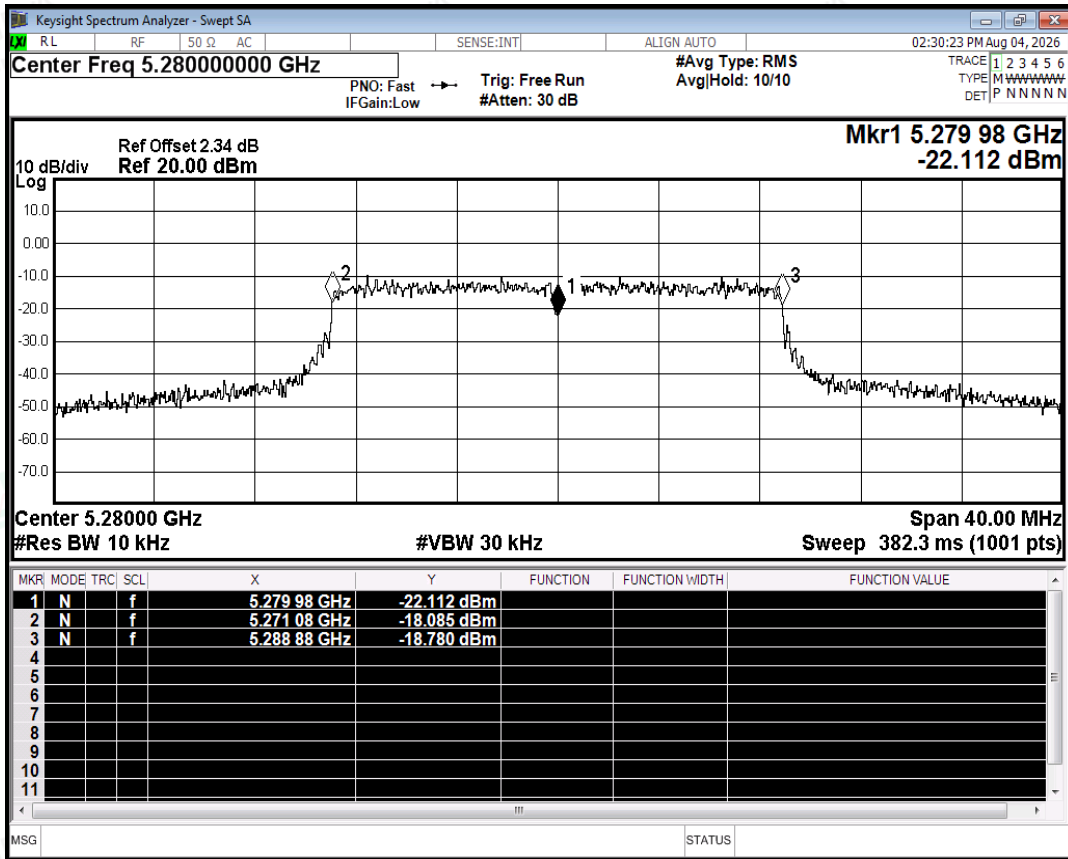



Freq. Stability NVNT ac20 5280MHz Ant1

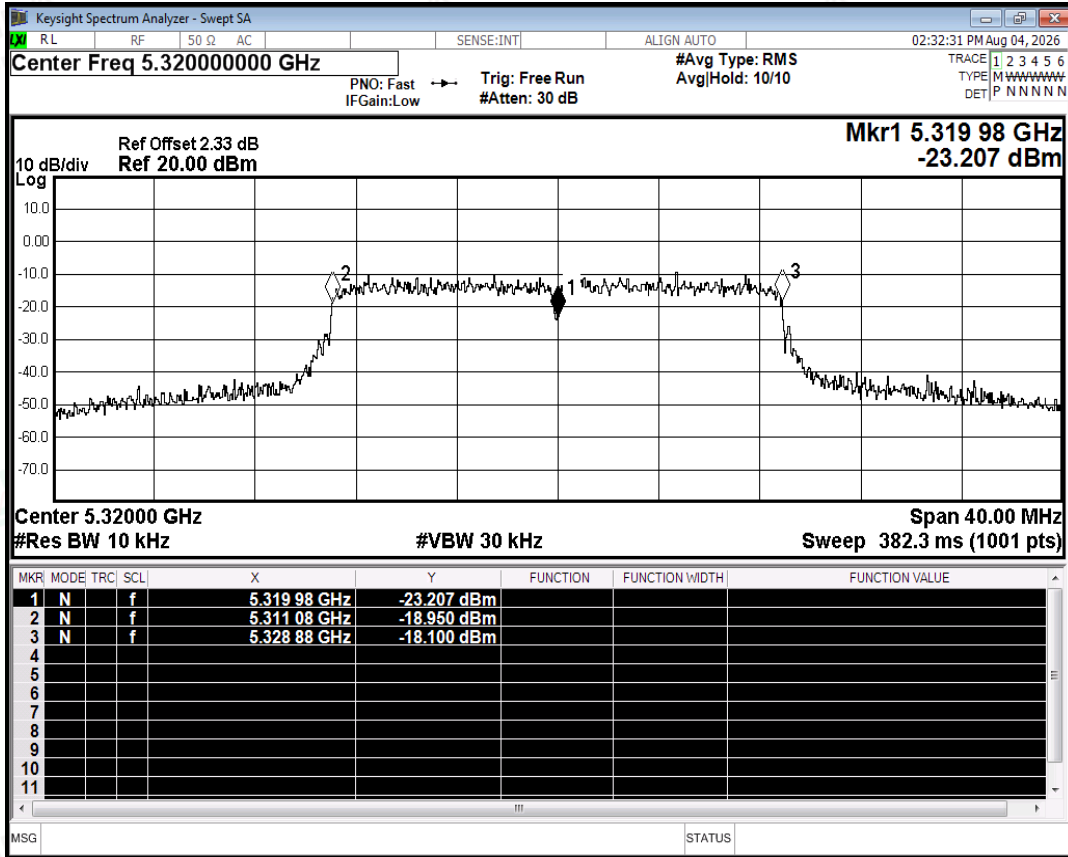

Freq. Stability NVNT ac20 5320MHz Ant1

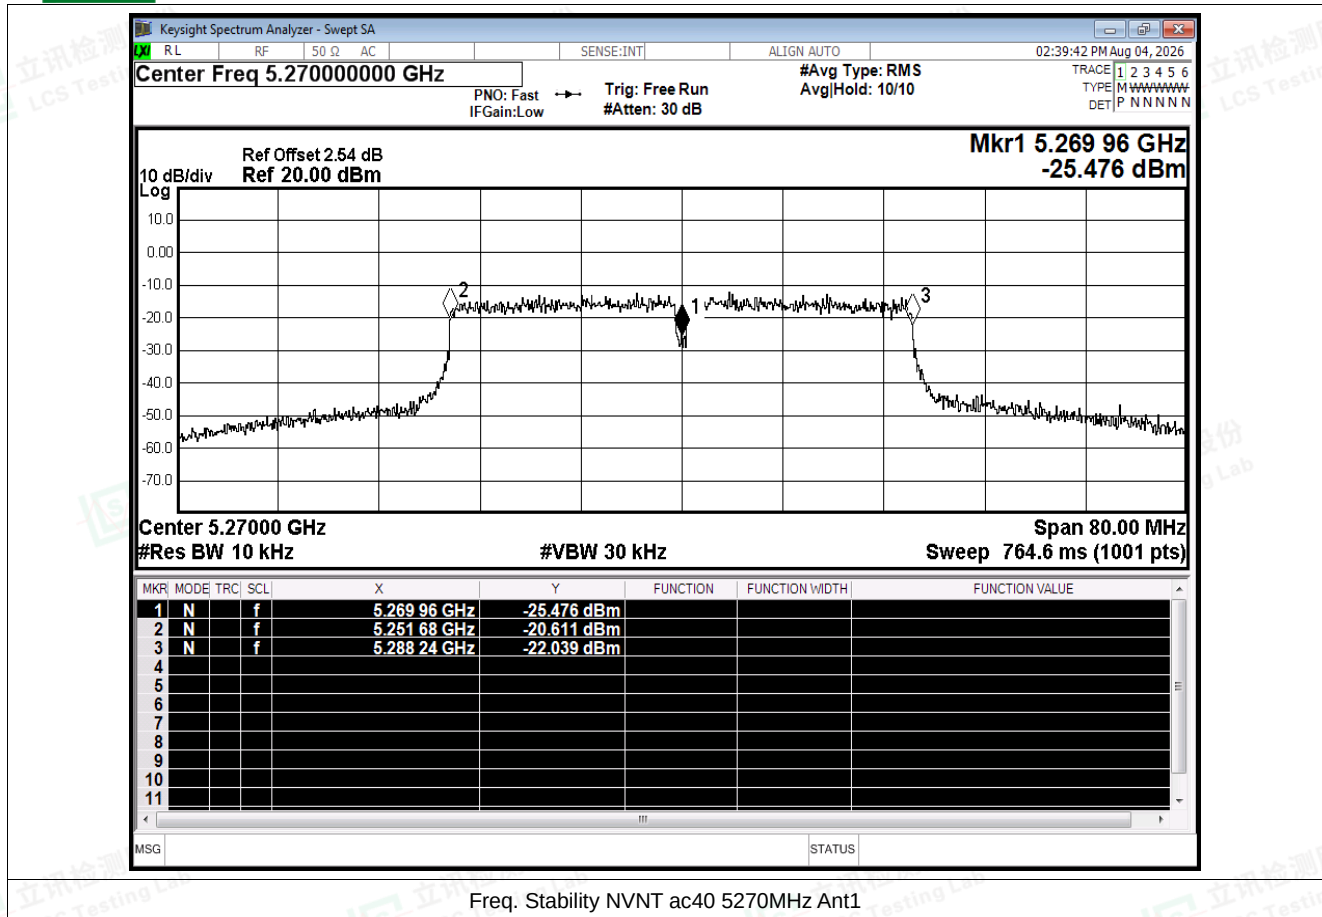

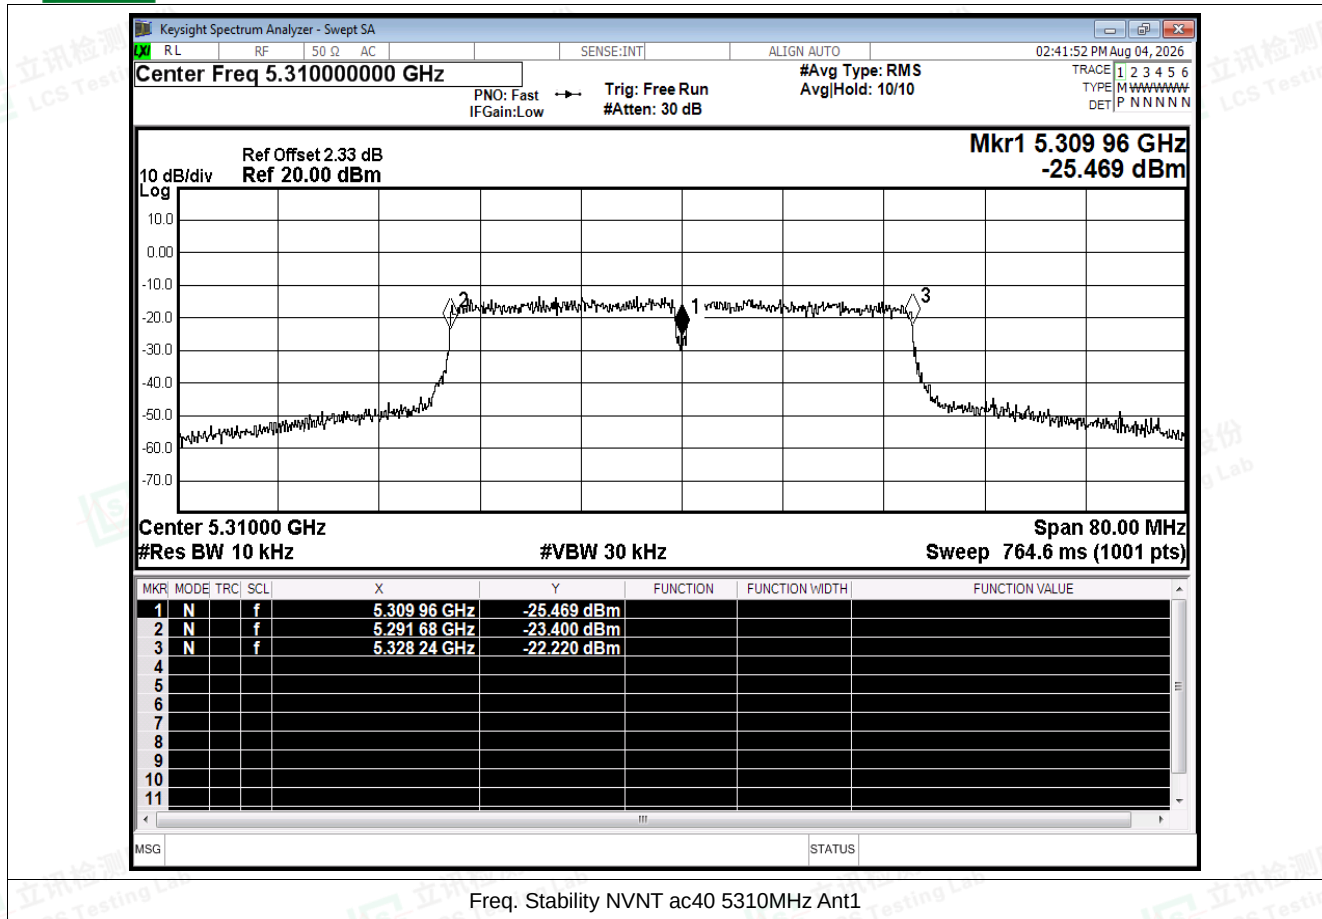


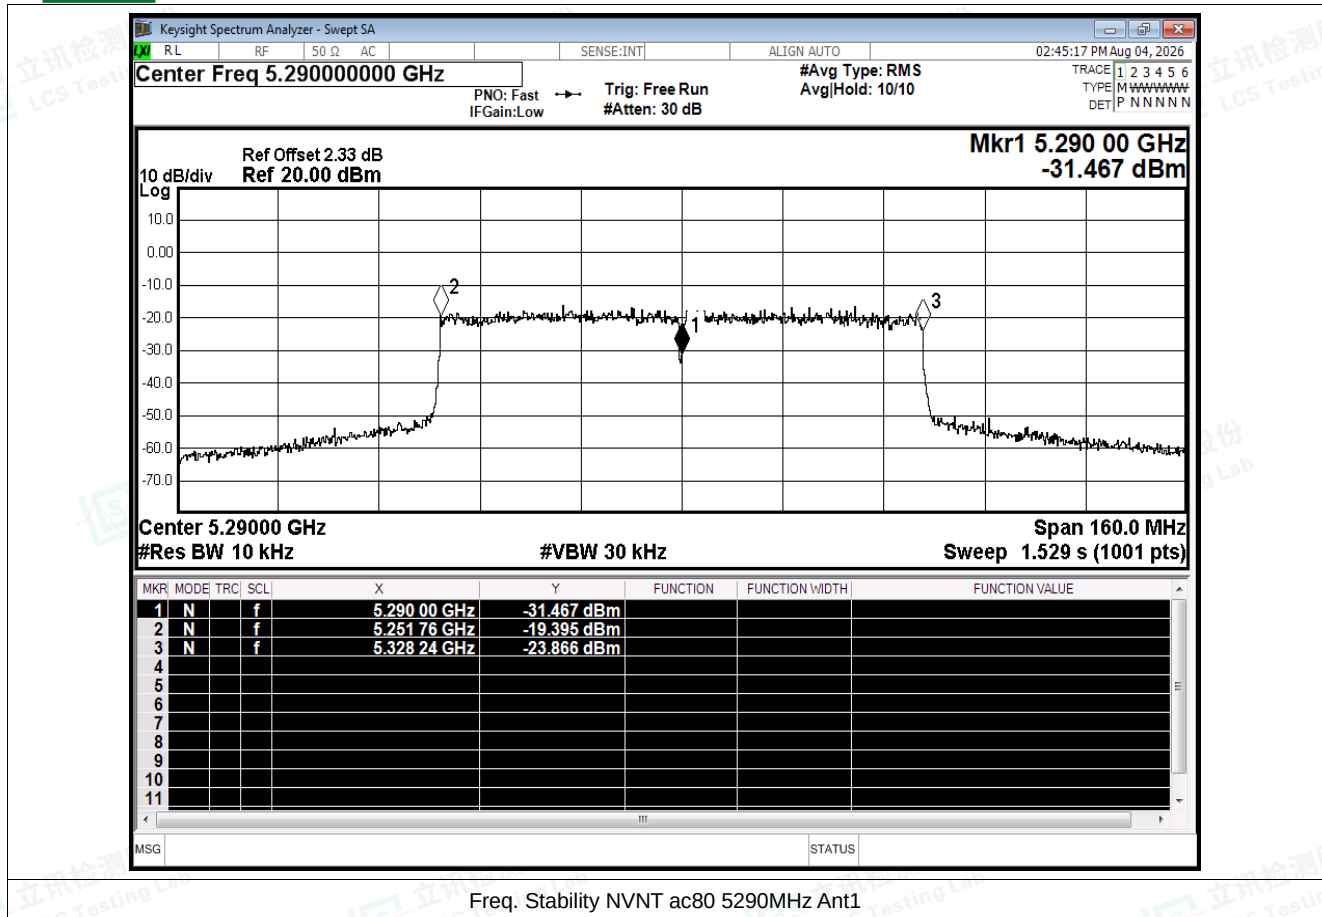






E.6 Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5260	Ant1	95.89	0.18	0.71
NVNT	a	5280	Ant1	95.89	0.18	0.71
NVNT	a	5320	Ant1	95.21	0.21	0.72
NVNT	n20	5260	Ant1	95.16	0.22	0.85
NVNT	n20	5280	Ant1	95.16	0.22	0.85
NVNT	n20	5320	Ant1	95.16	0.22	0.85
NVNT	n40	5270	Ant1	89.23	0.49	1.72
NVNT	n40	5310	Ant1	90.77	0.42	1.69
NVNT	ac20	5260	Ant1	94.44	0.25	0.84
NVNT	ac20	5280	Ant1	94.4	0.25	0.85
NVNT	ac20	5320	Ant1	95.2	0.21	0.84
NVNT	ac40	5270	Ant1	90.77	0.42	1.69
NVNT	ac40	5310	Ant1	90.91	0.41	1.67
NVNT	ac80	5290	Ant1	83.33	0.79	3.33

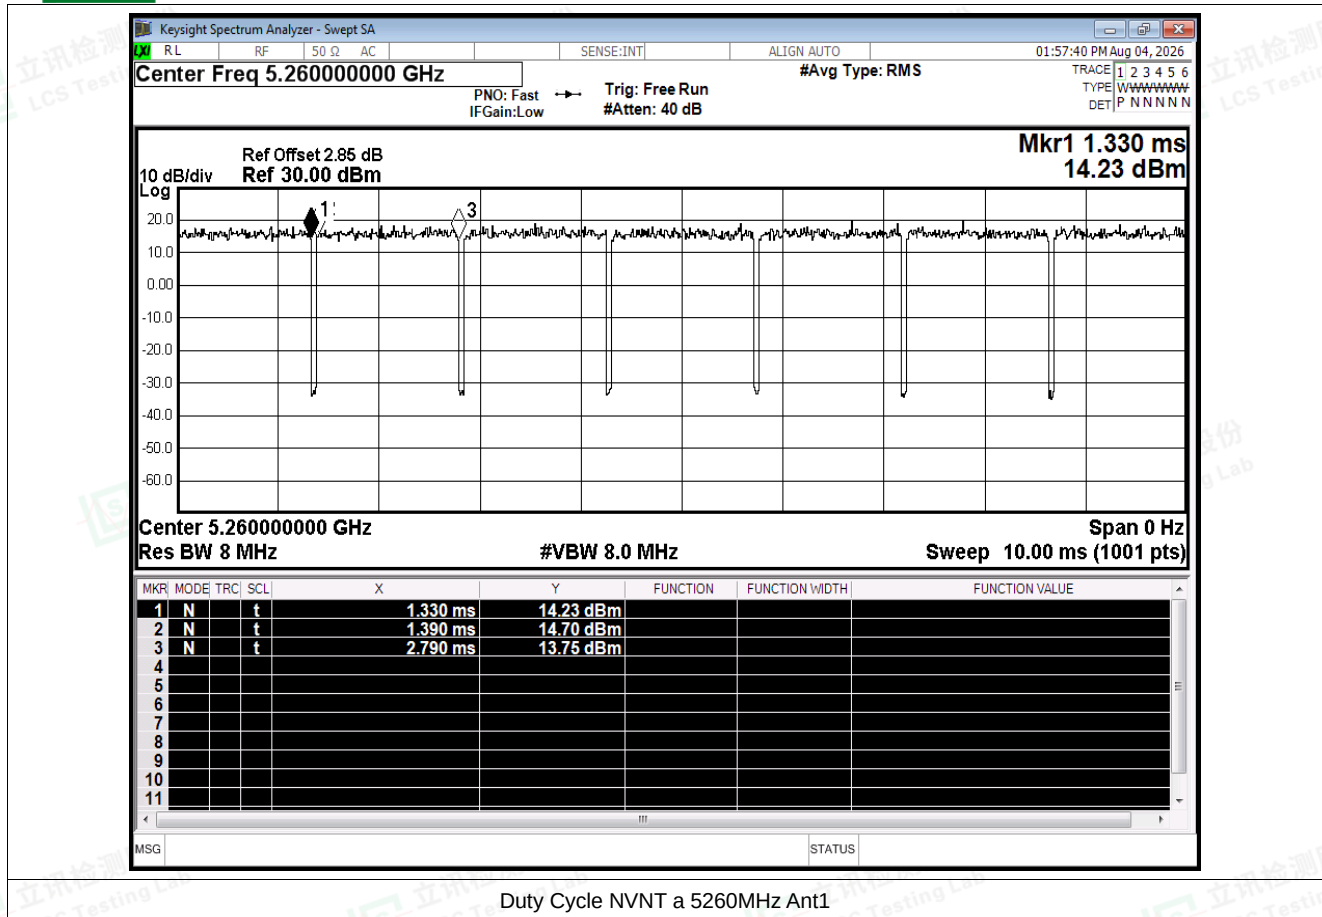


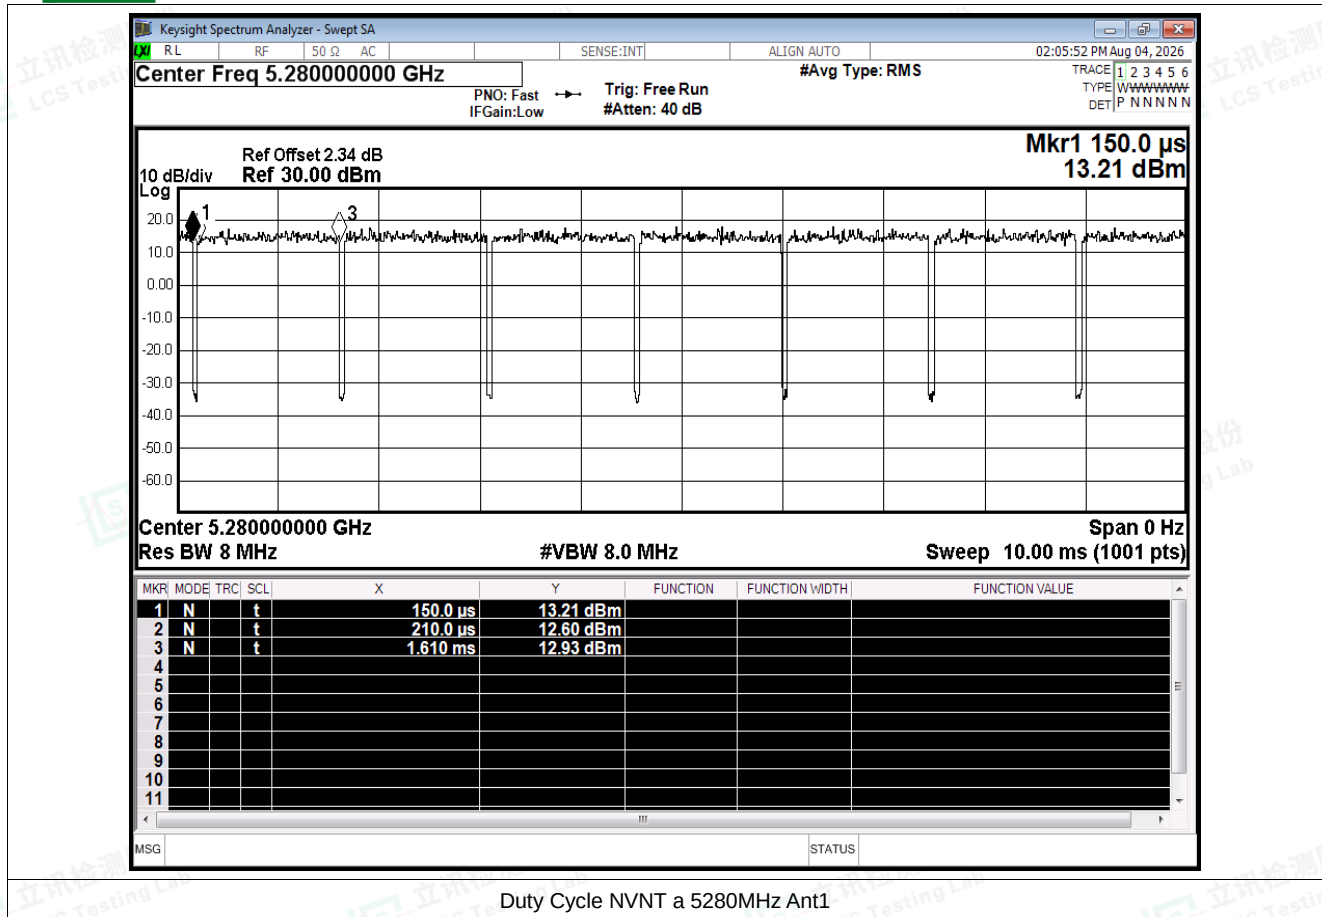


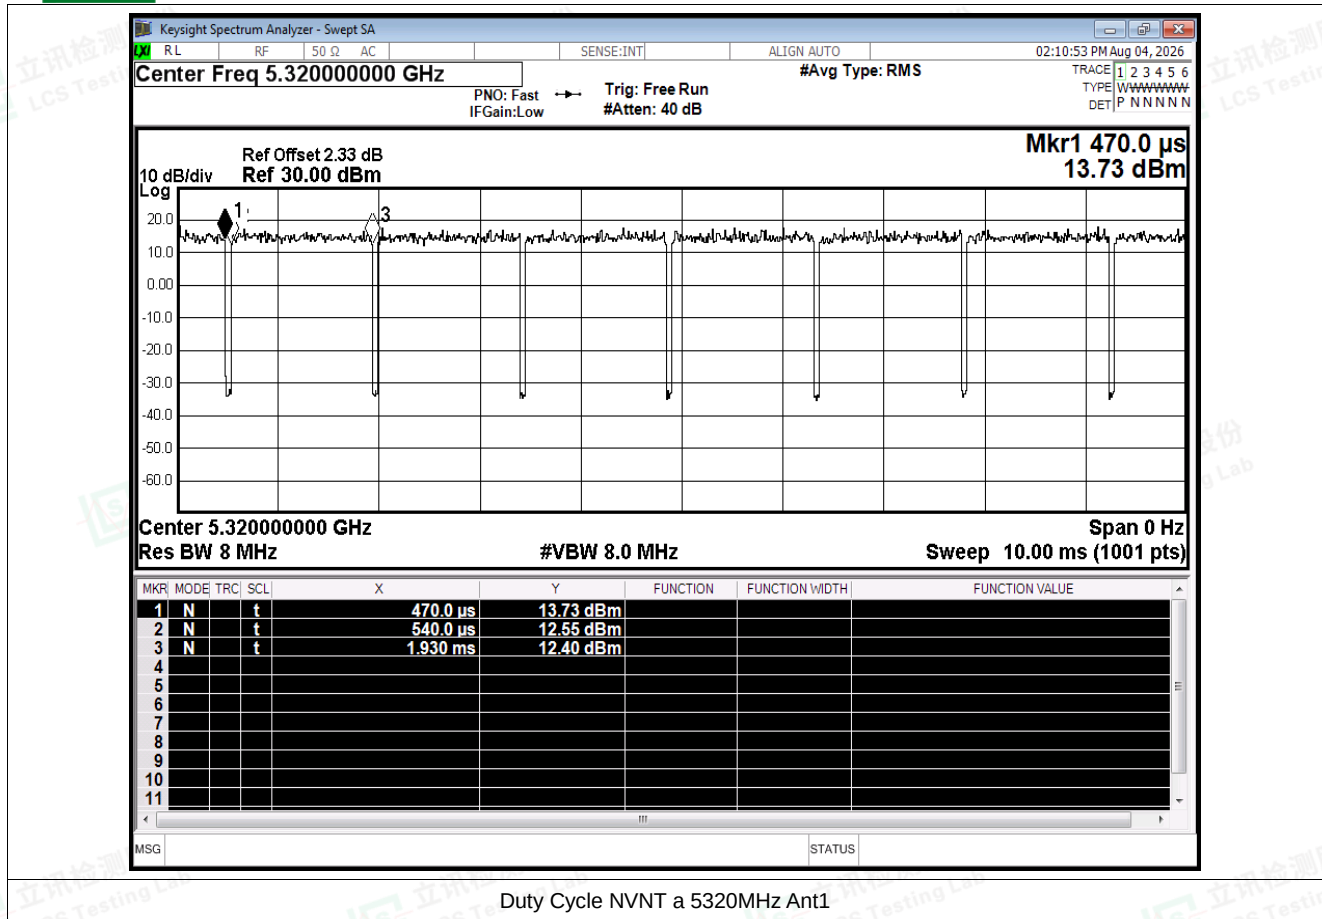

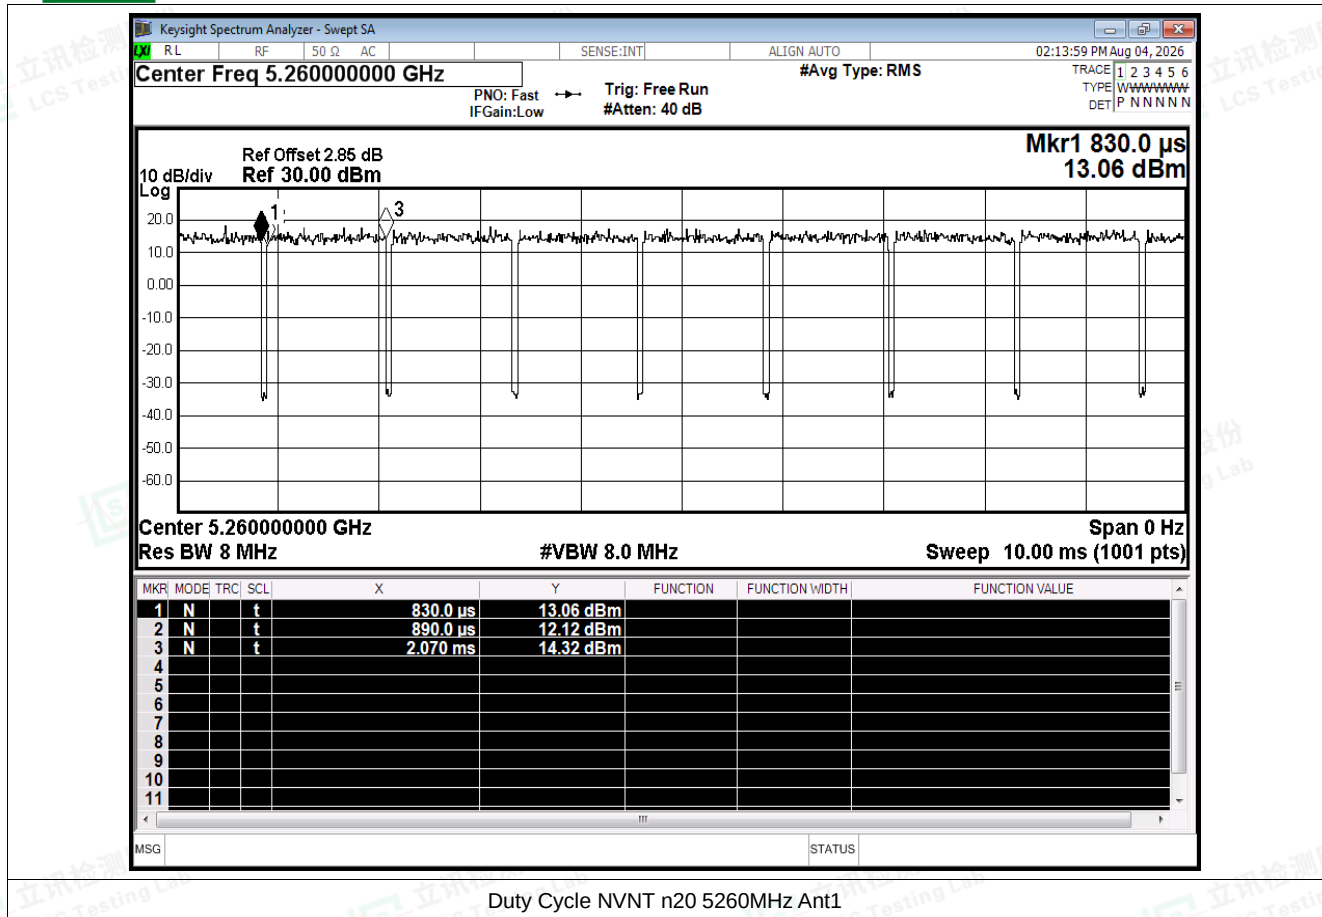


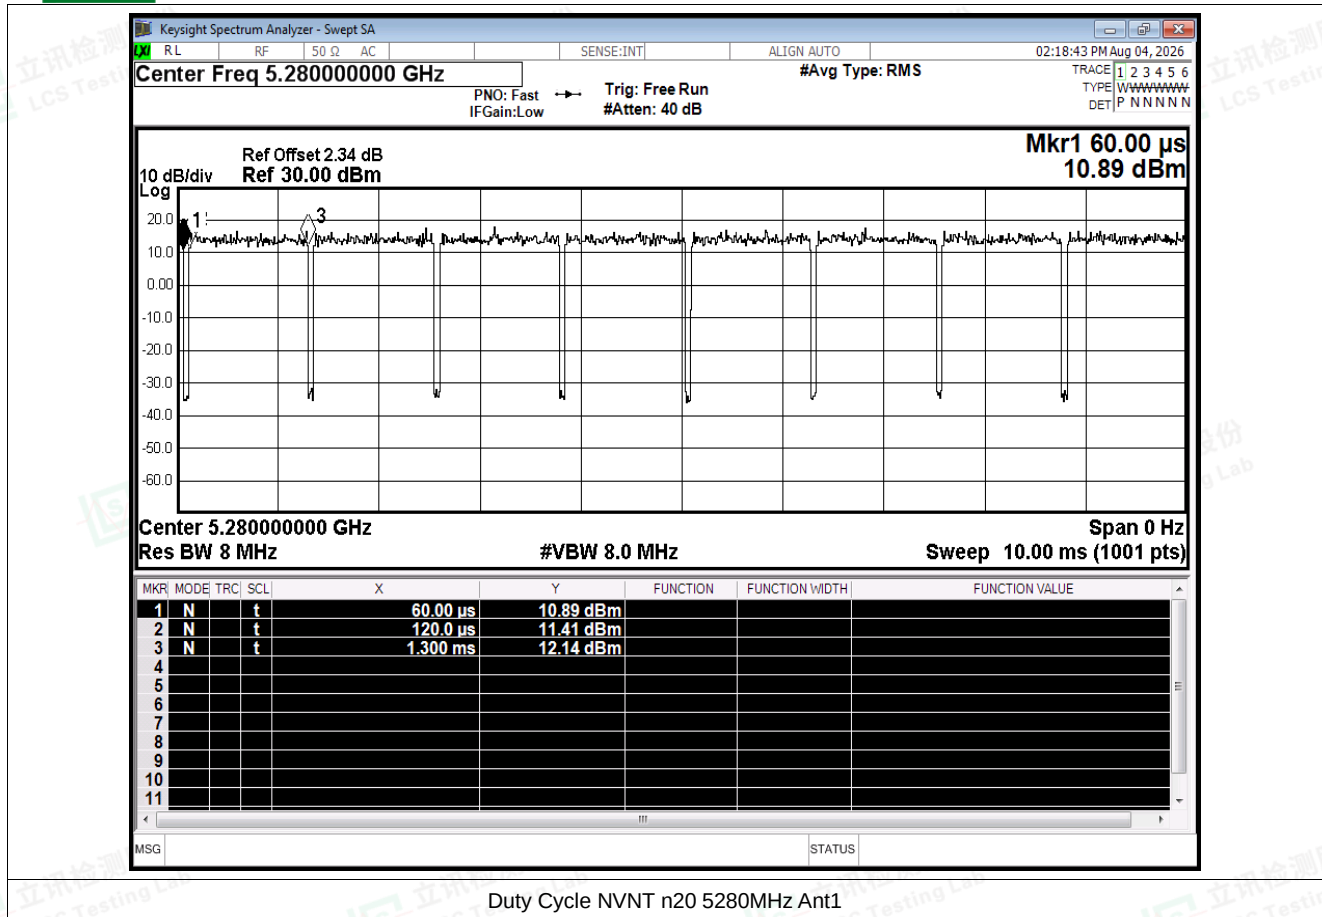

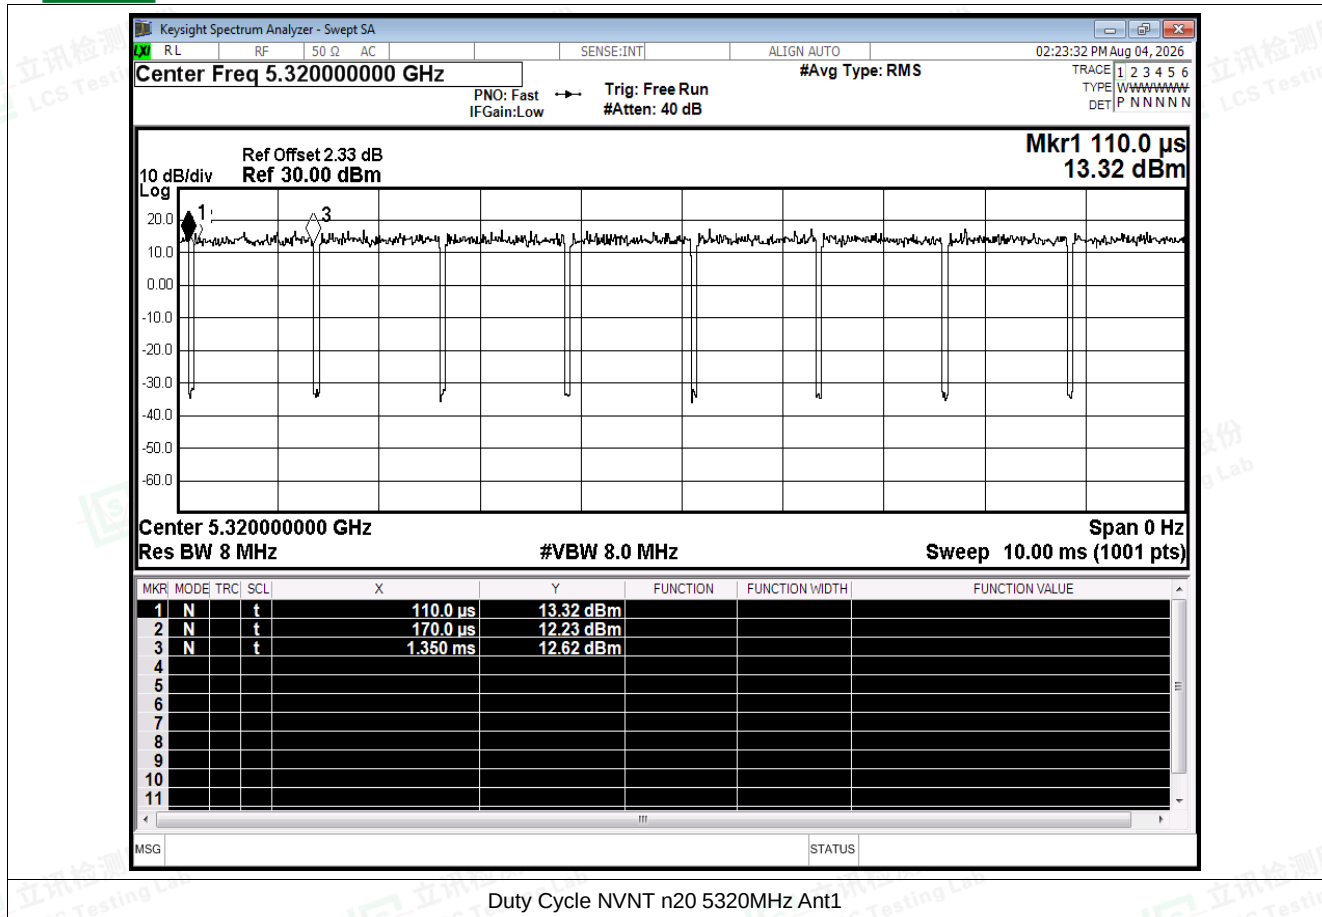


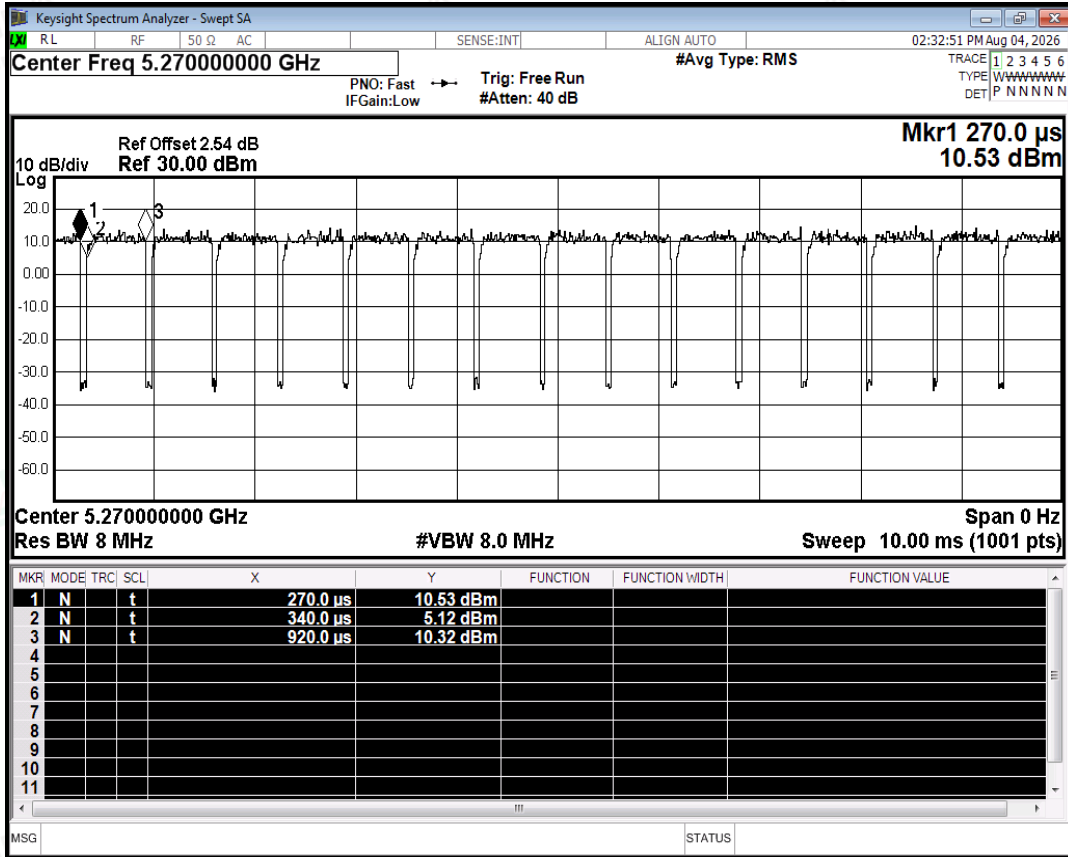


Duty Cycle NVNT n40 5270MHz Ant1

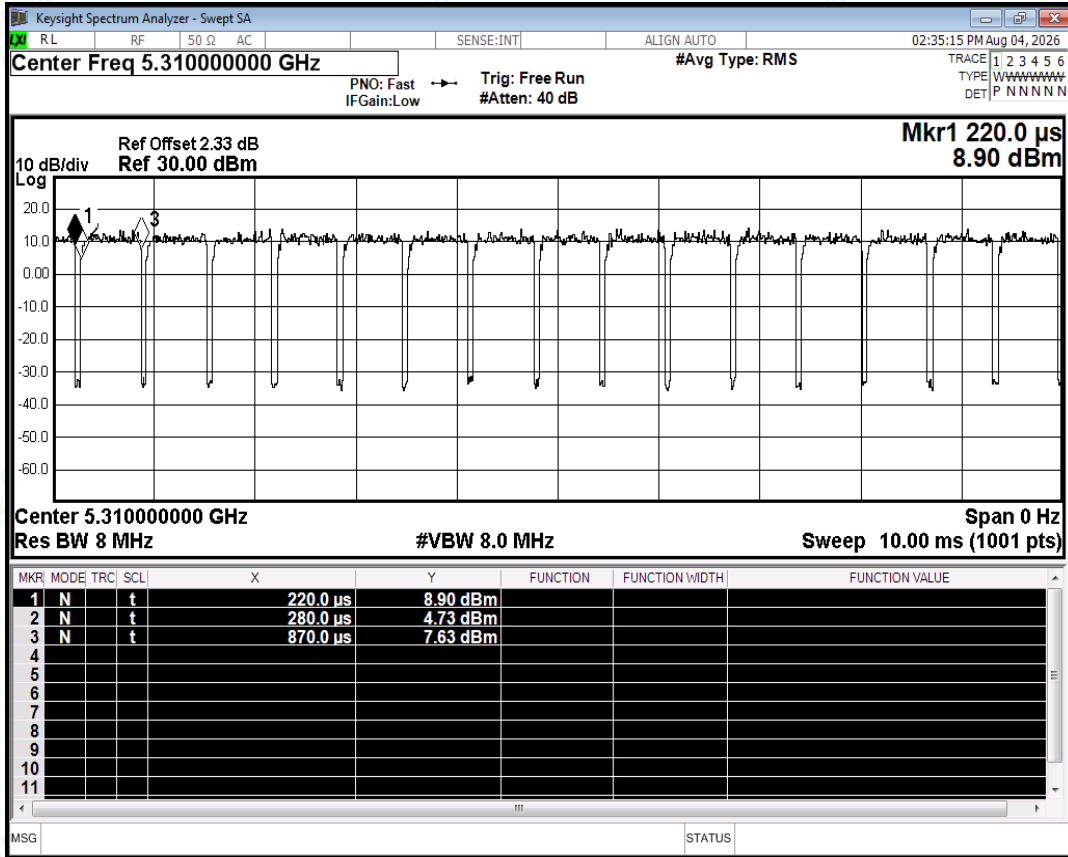



Duty Cycle NVNT n40 5310MHz Ant1

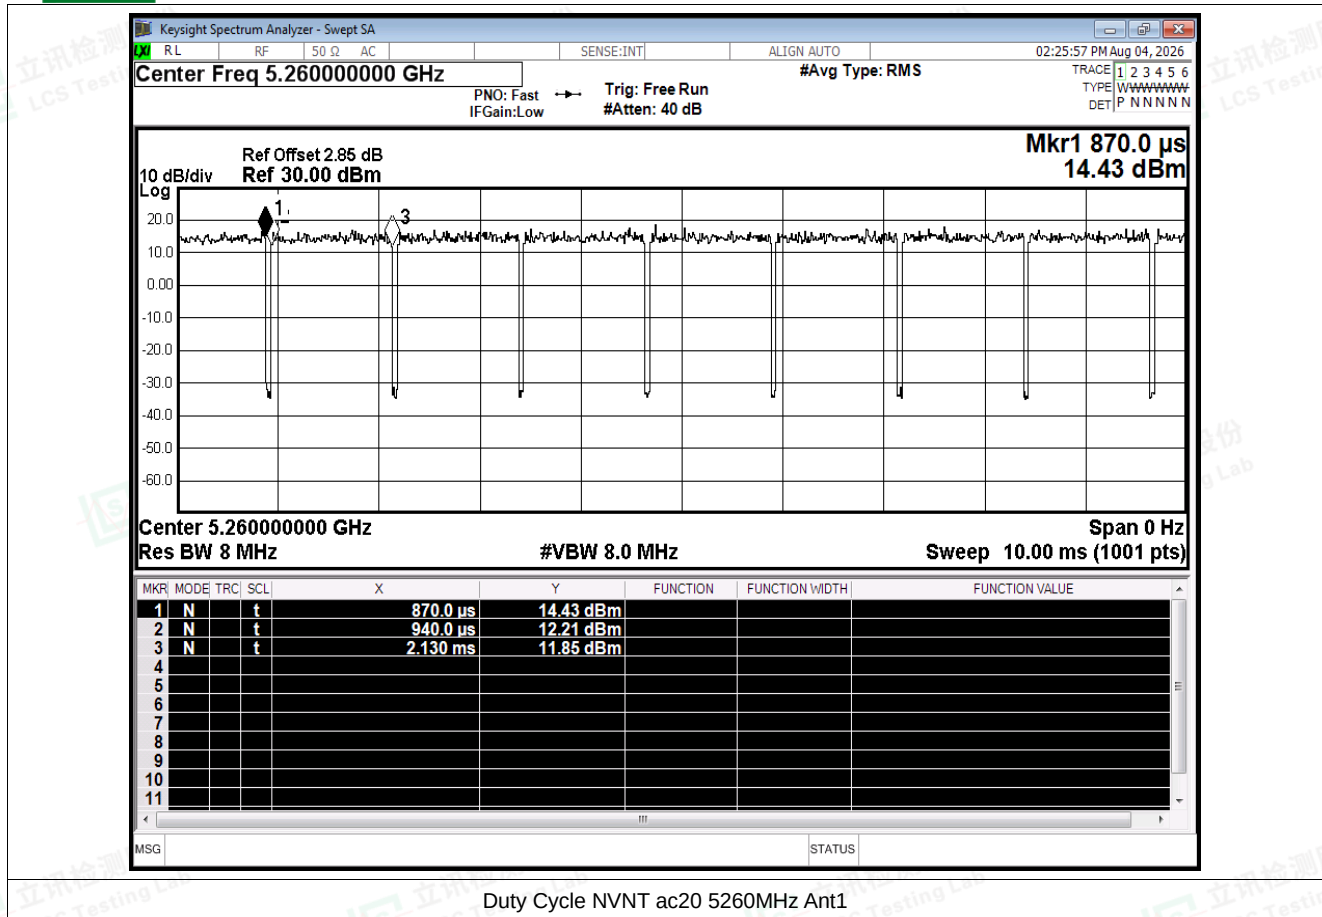

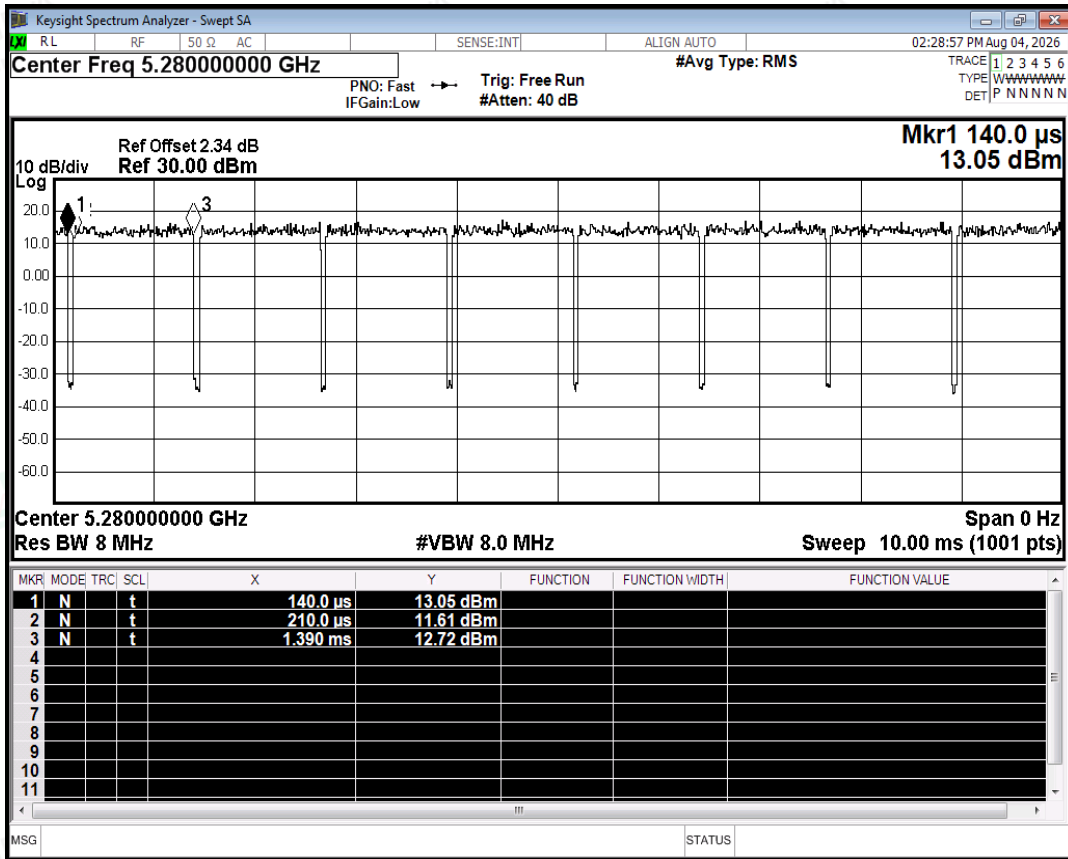


Duty Cycle NVNT ac20 5280MHz Ant1

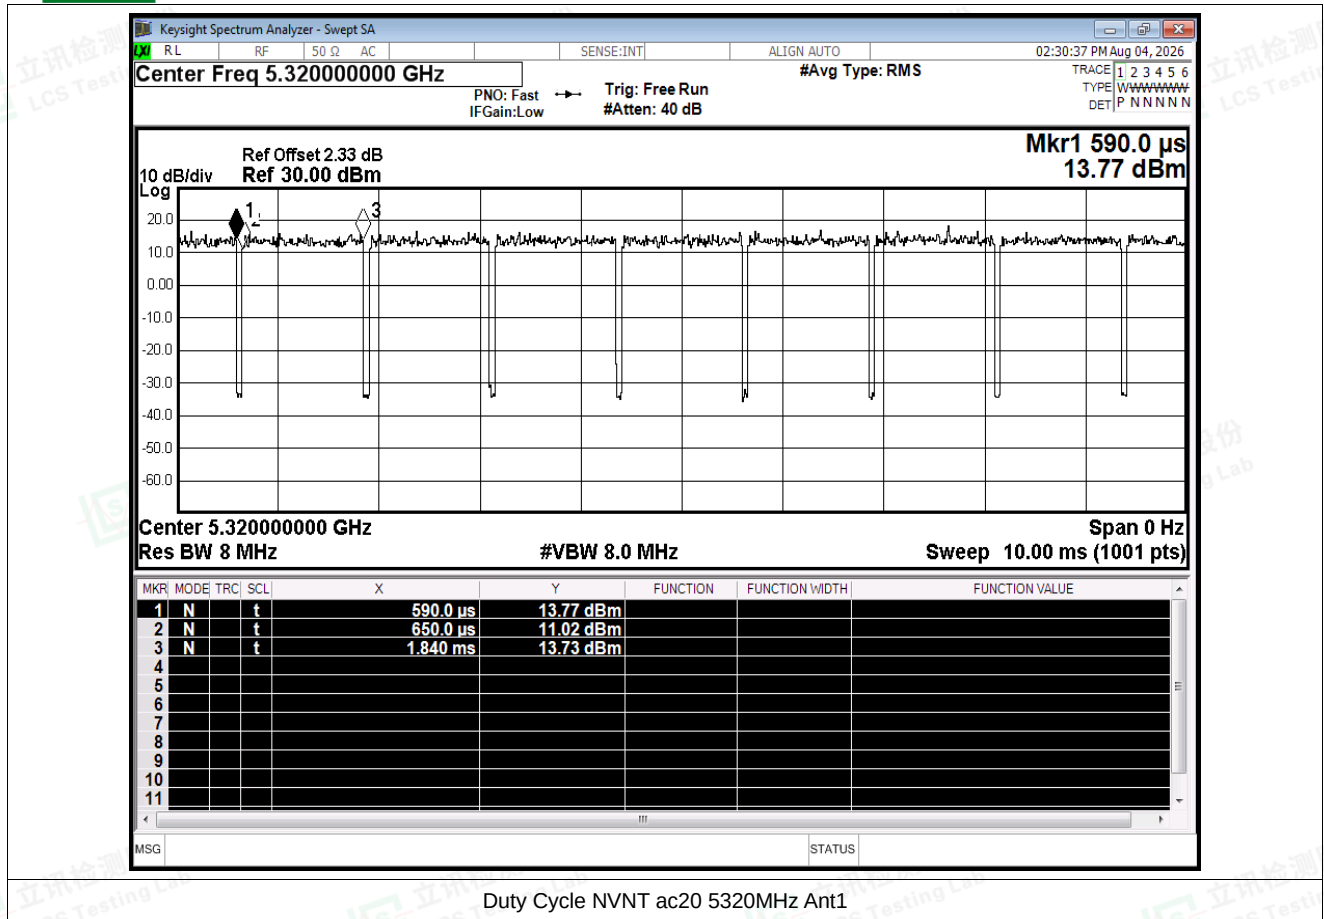


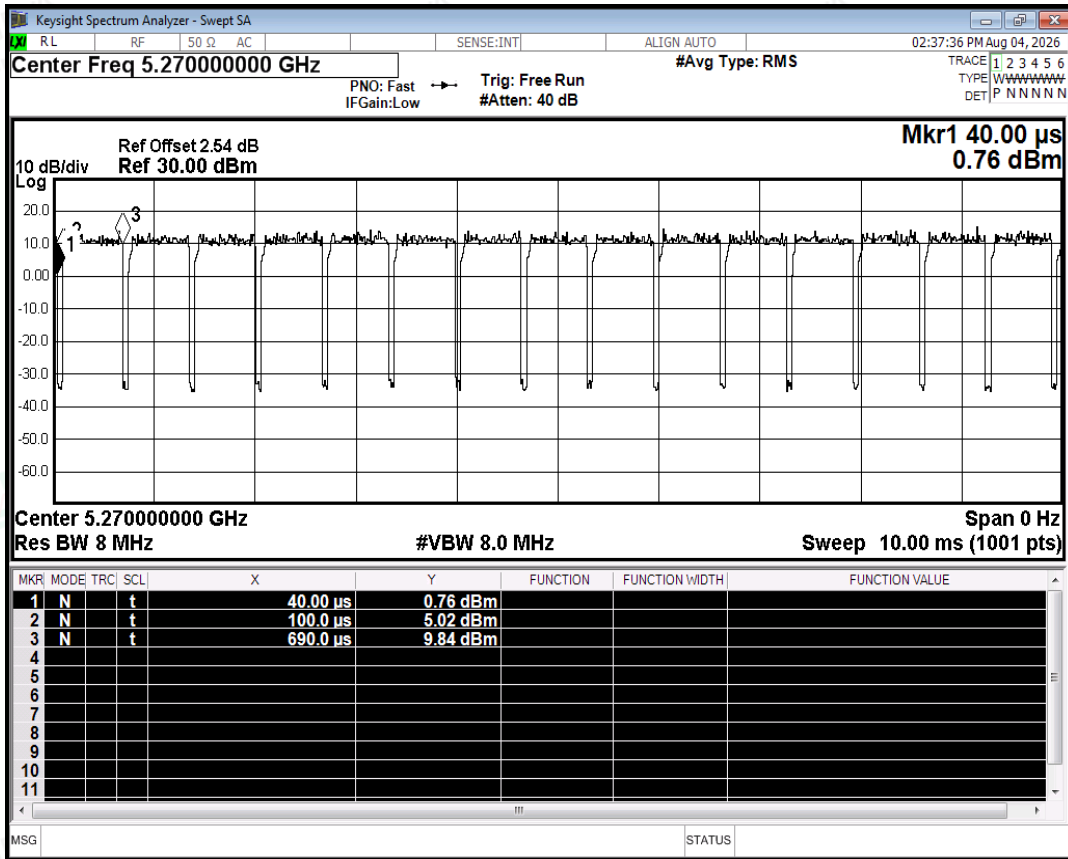

Duty Cycle NVNT ac40 5270MHz Ant1

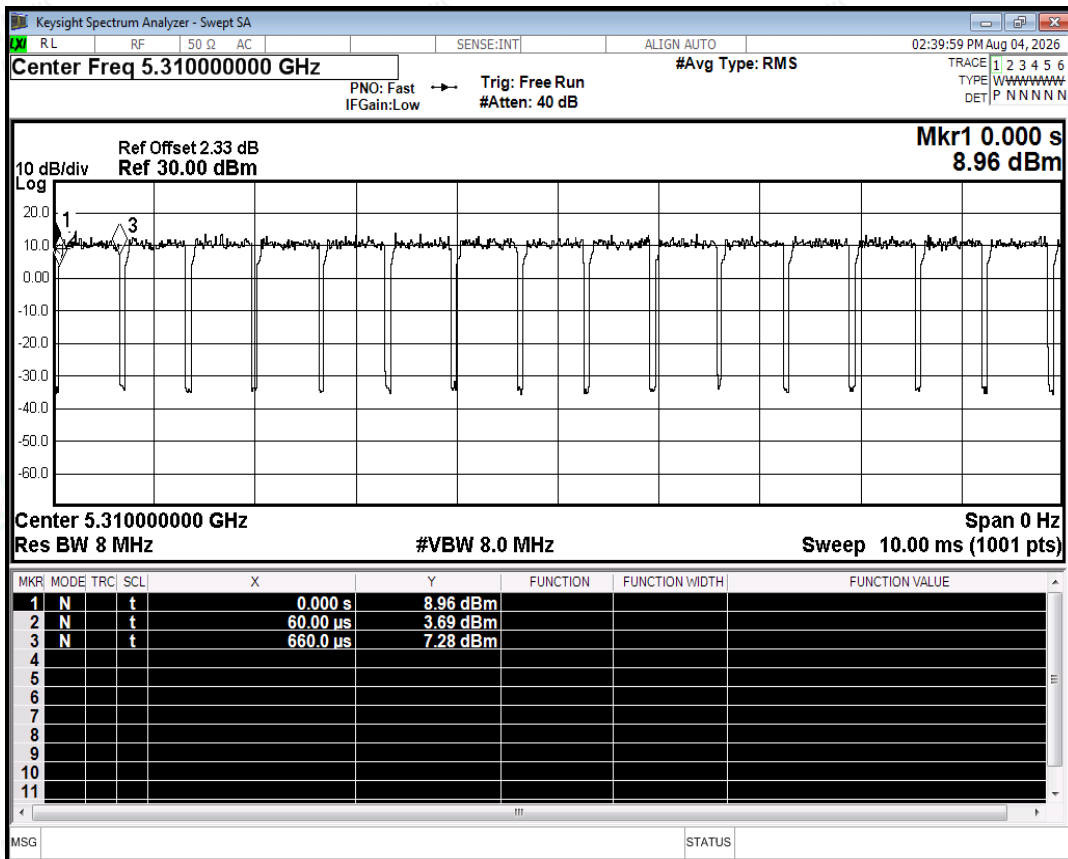

Duty Cycle NVNT ac40 5310MHz Ant1

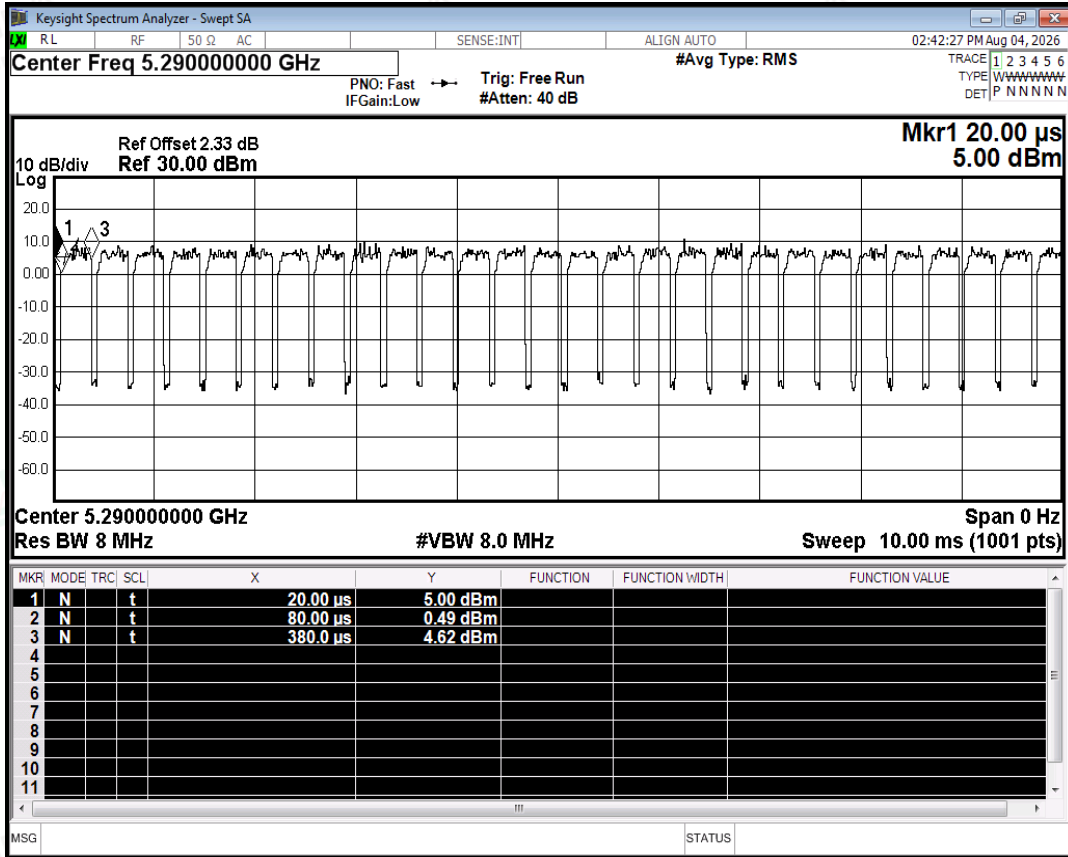

Duty Cycle NVNT ac80 5290MHz Ant1



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com