






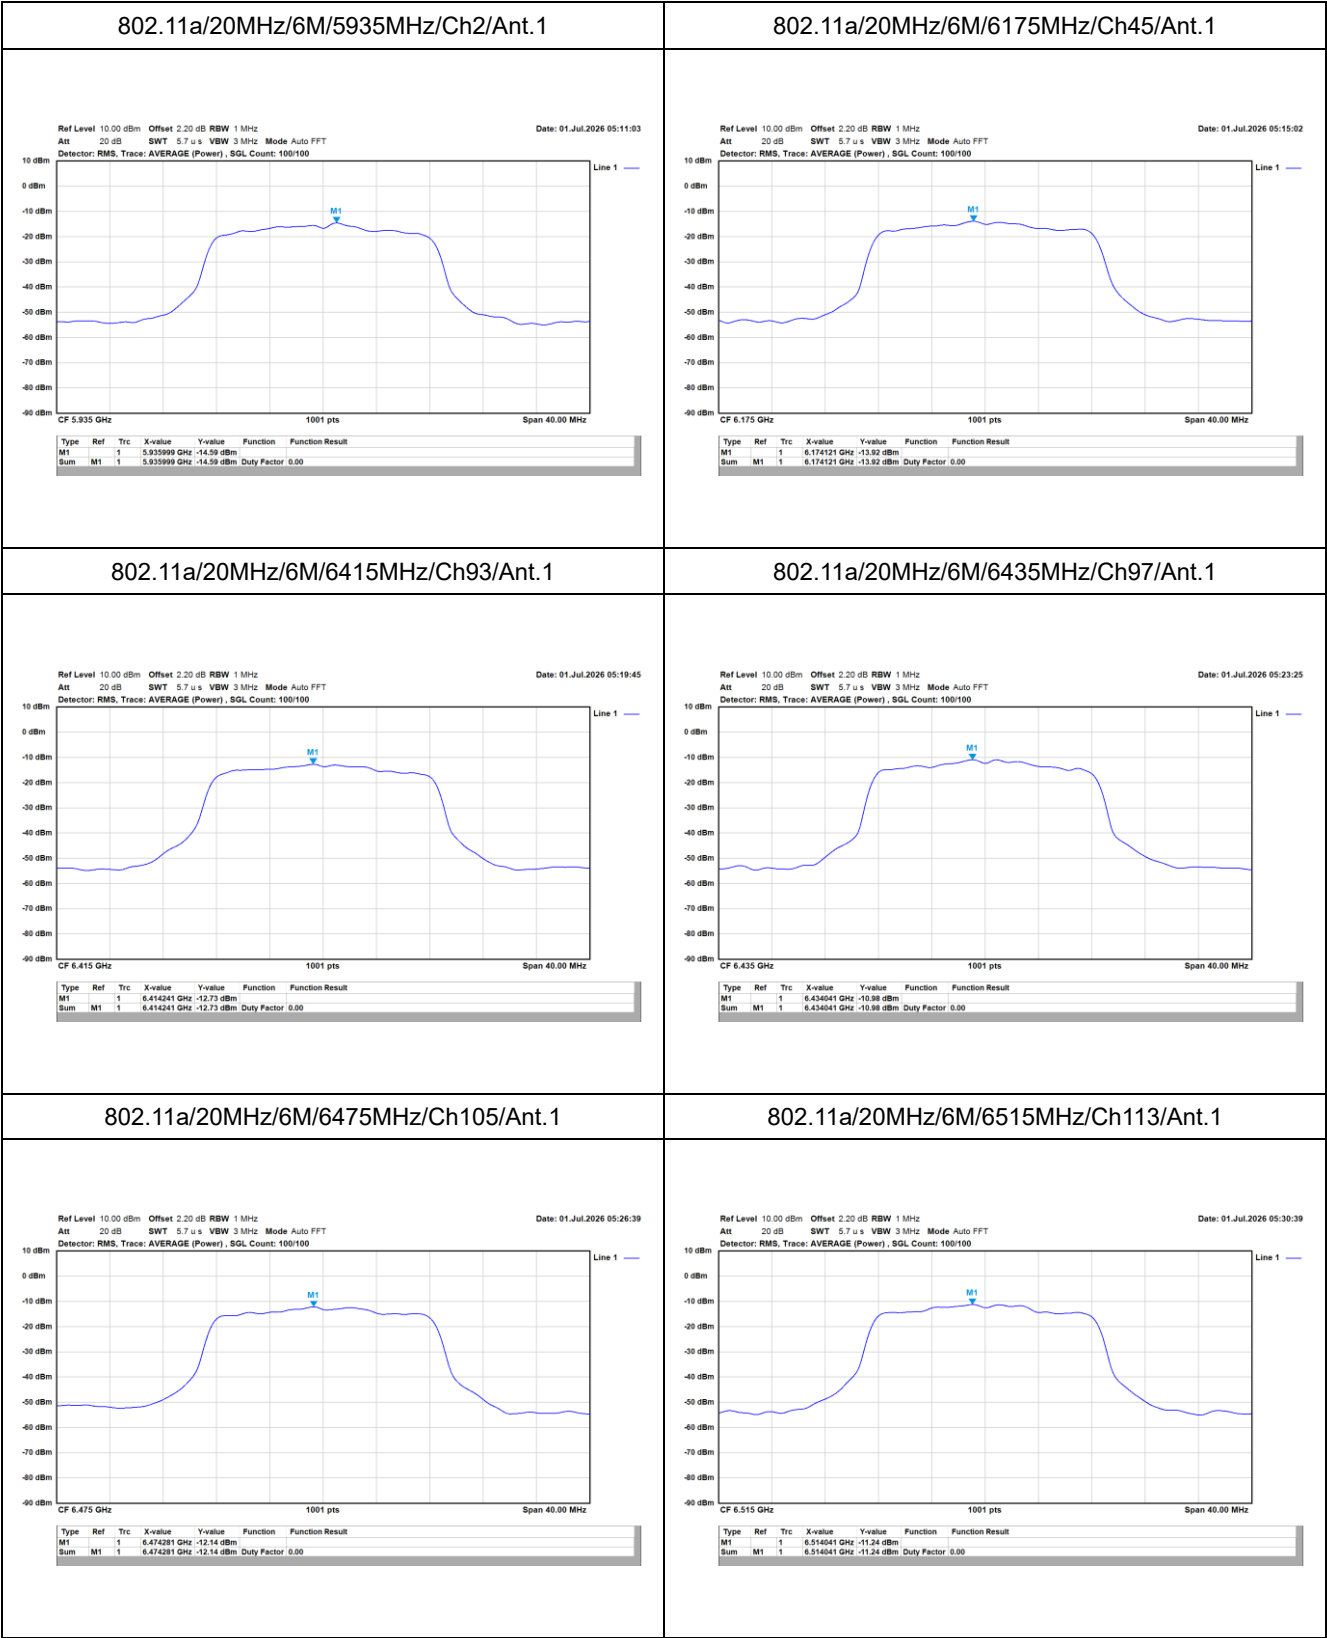


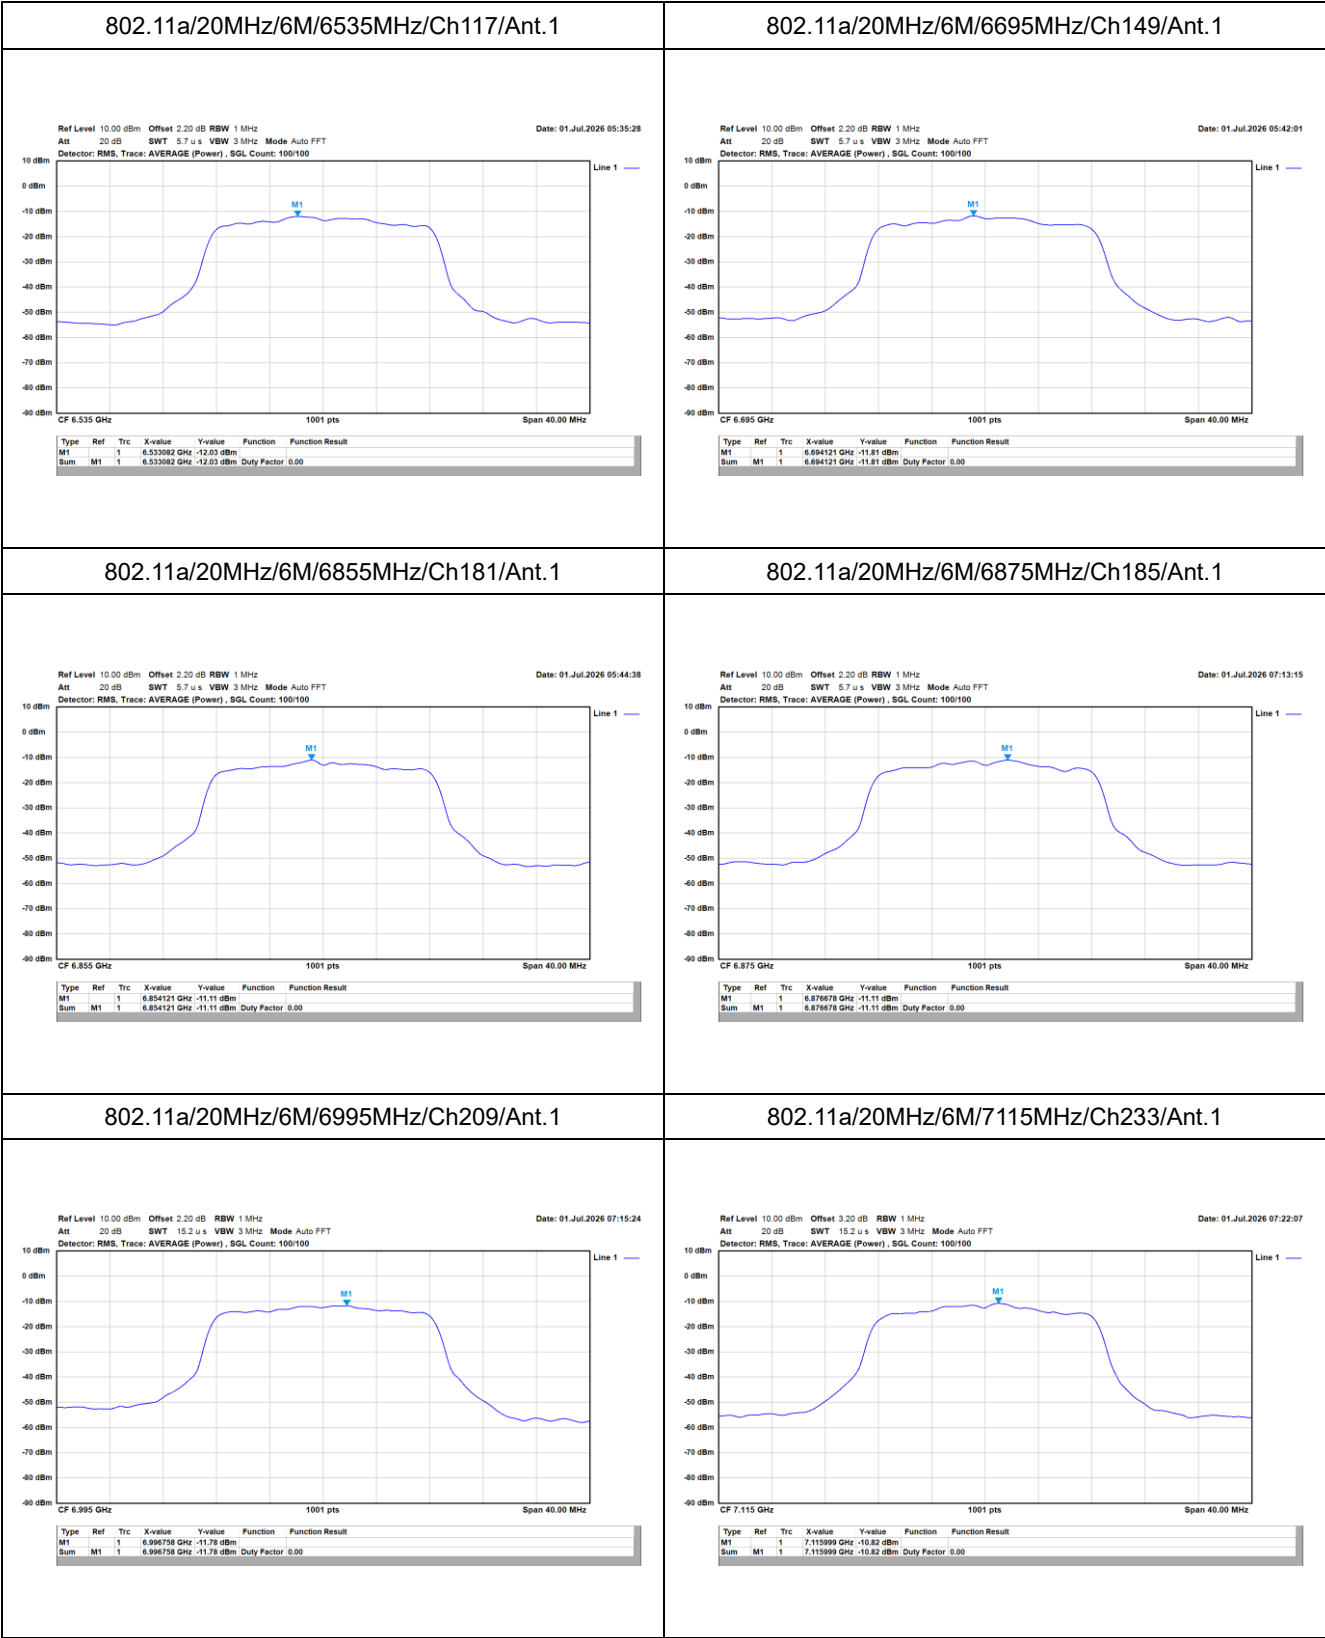


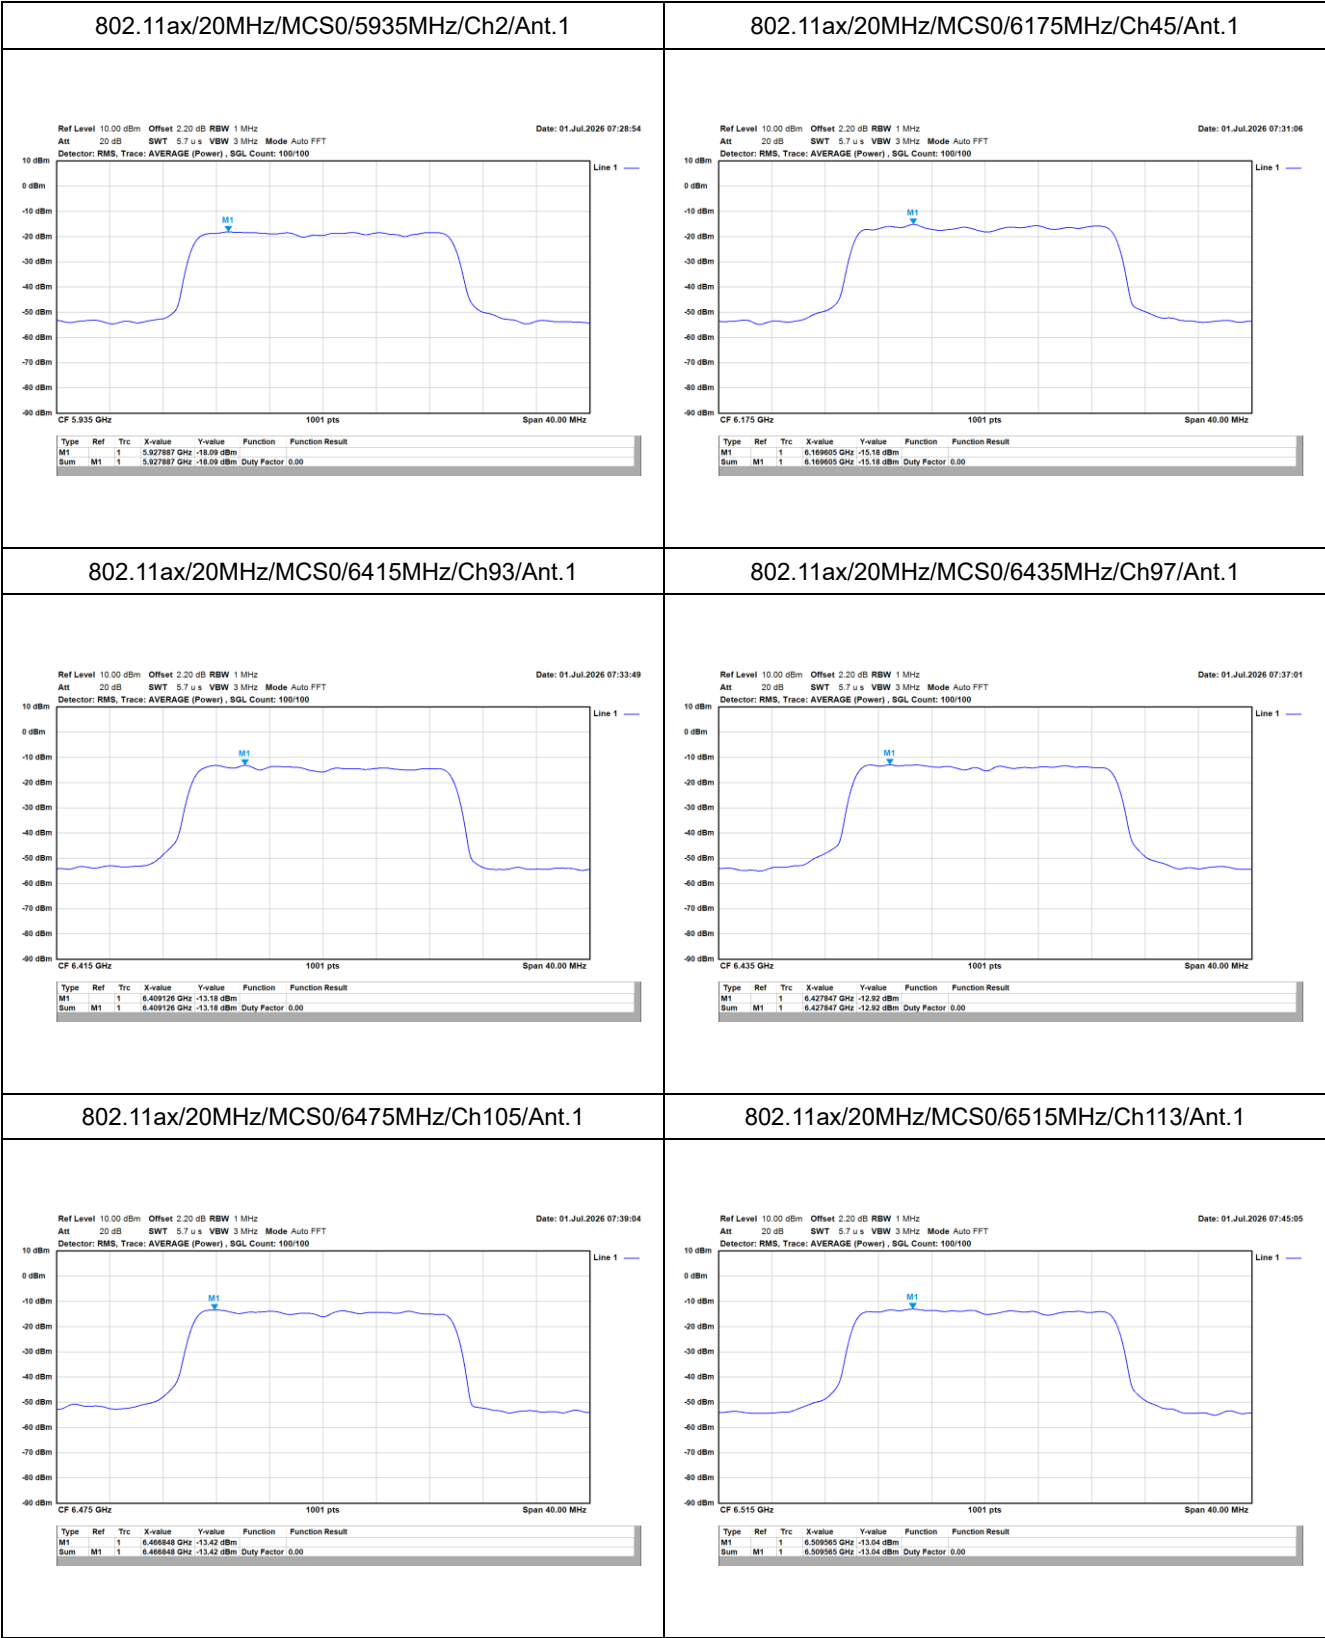


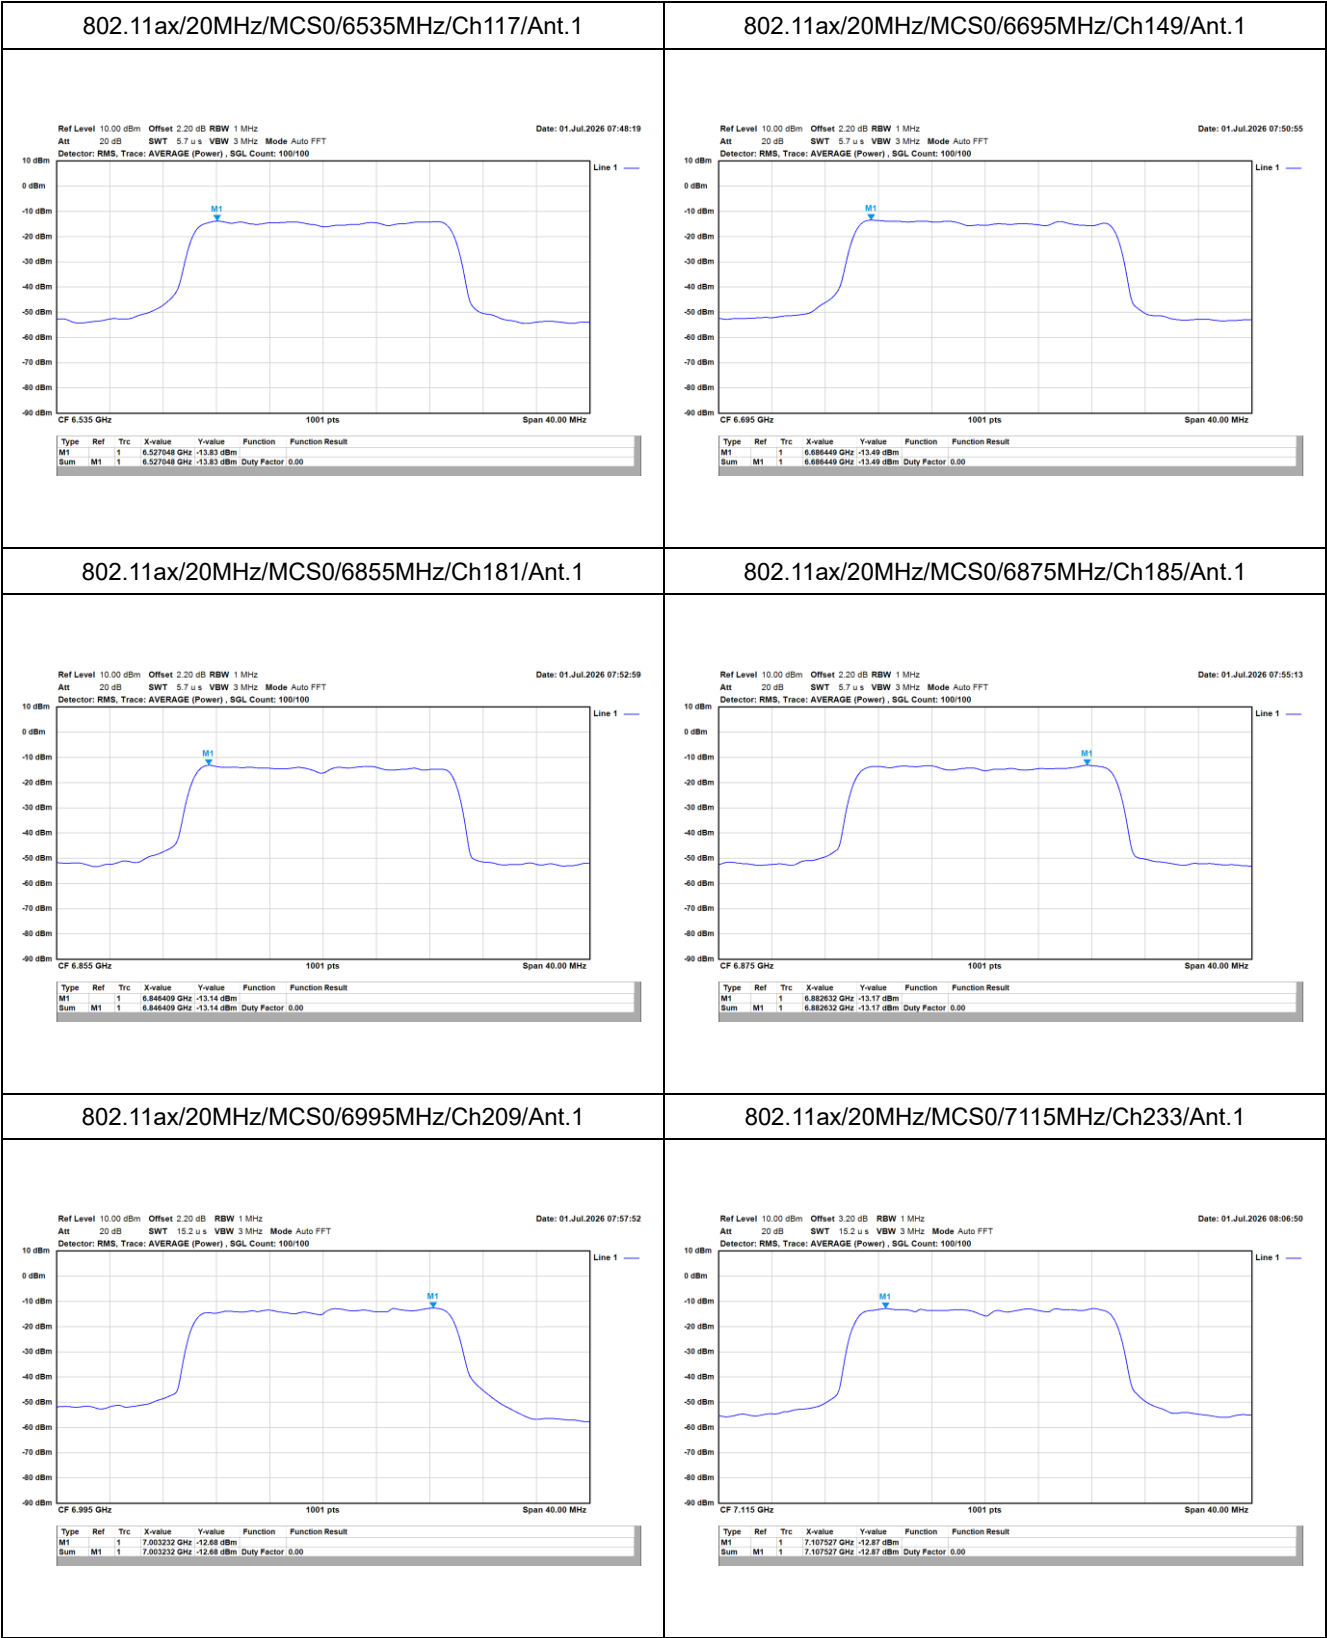


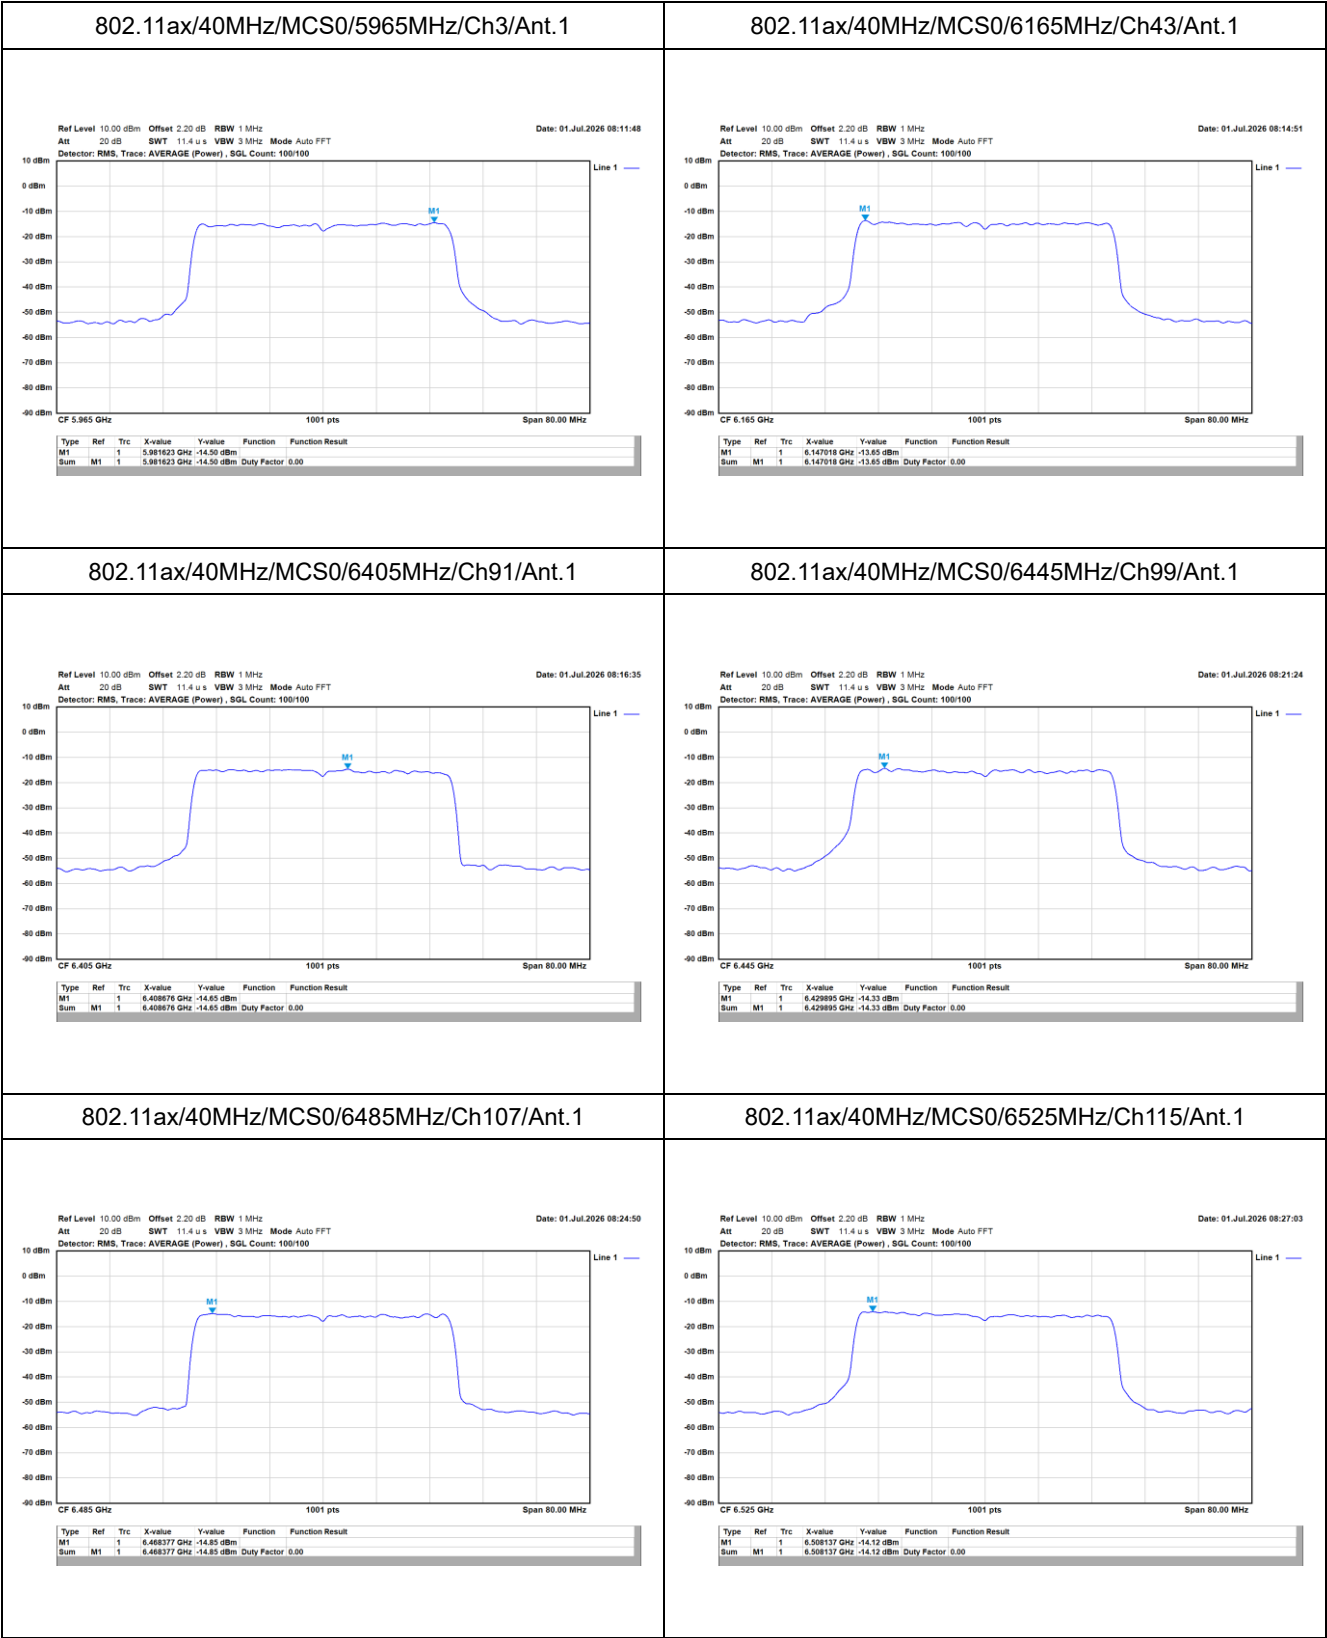

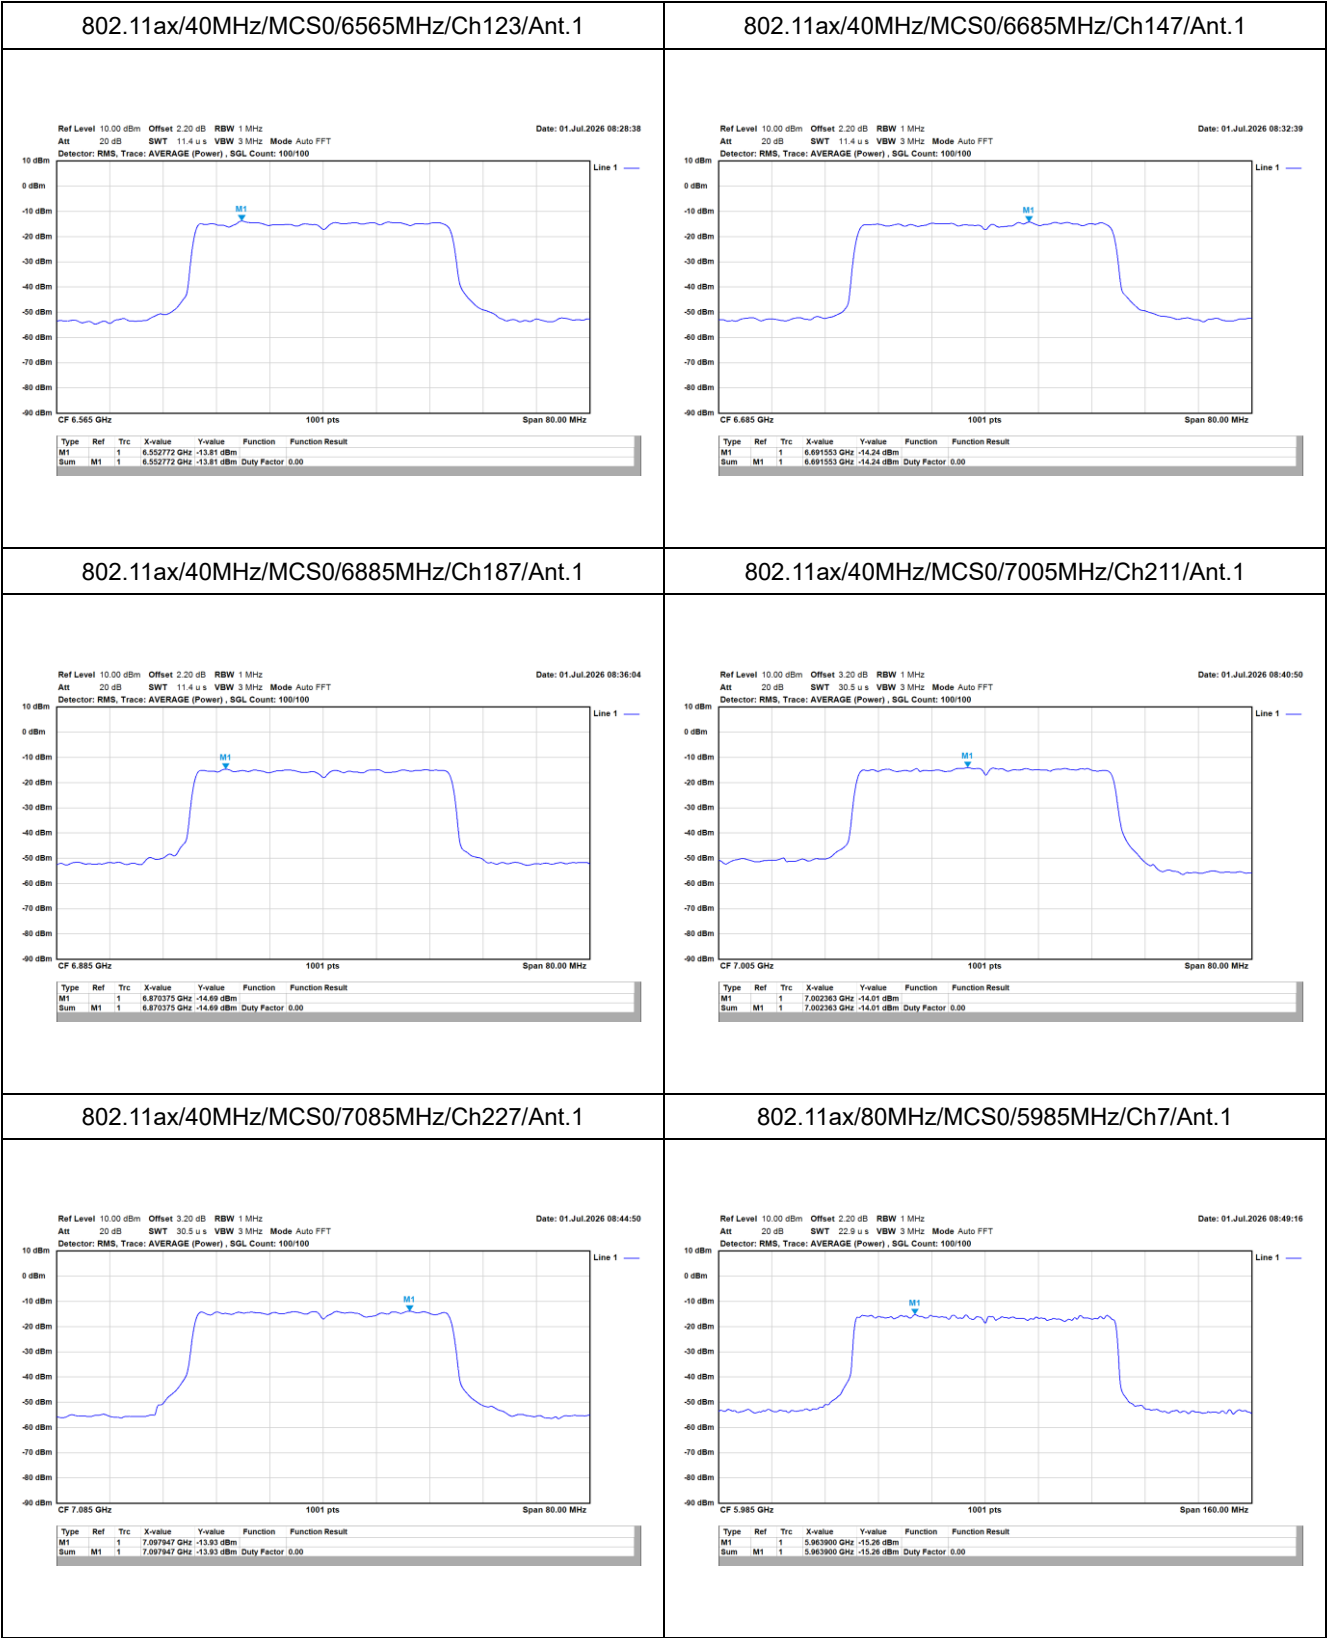

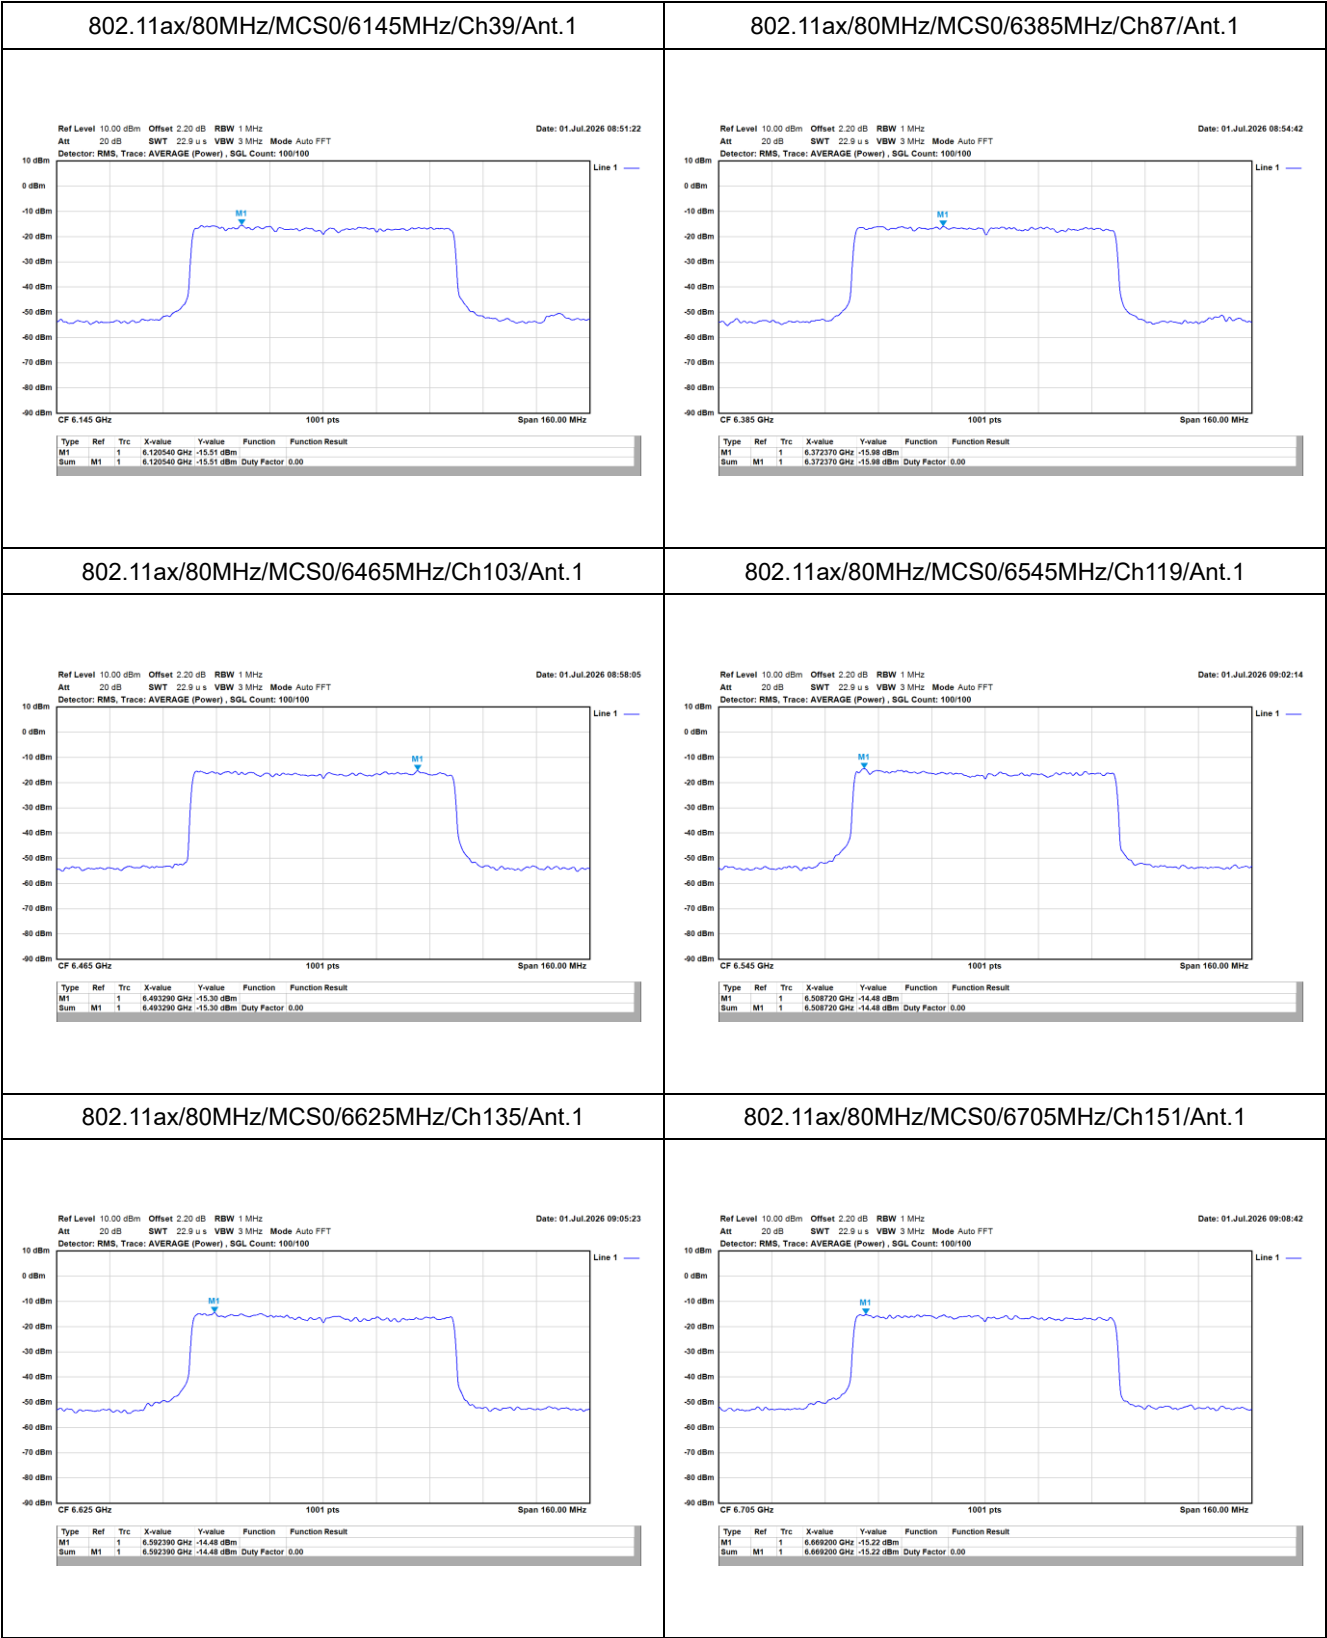

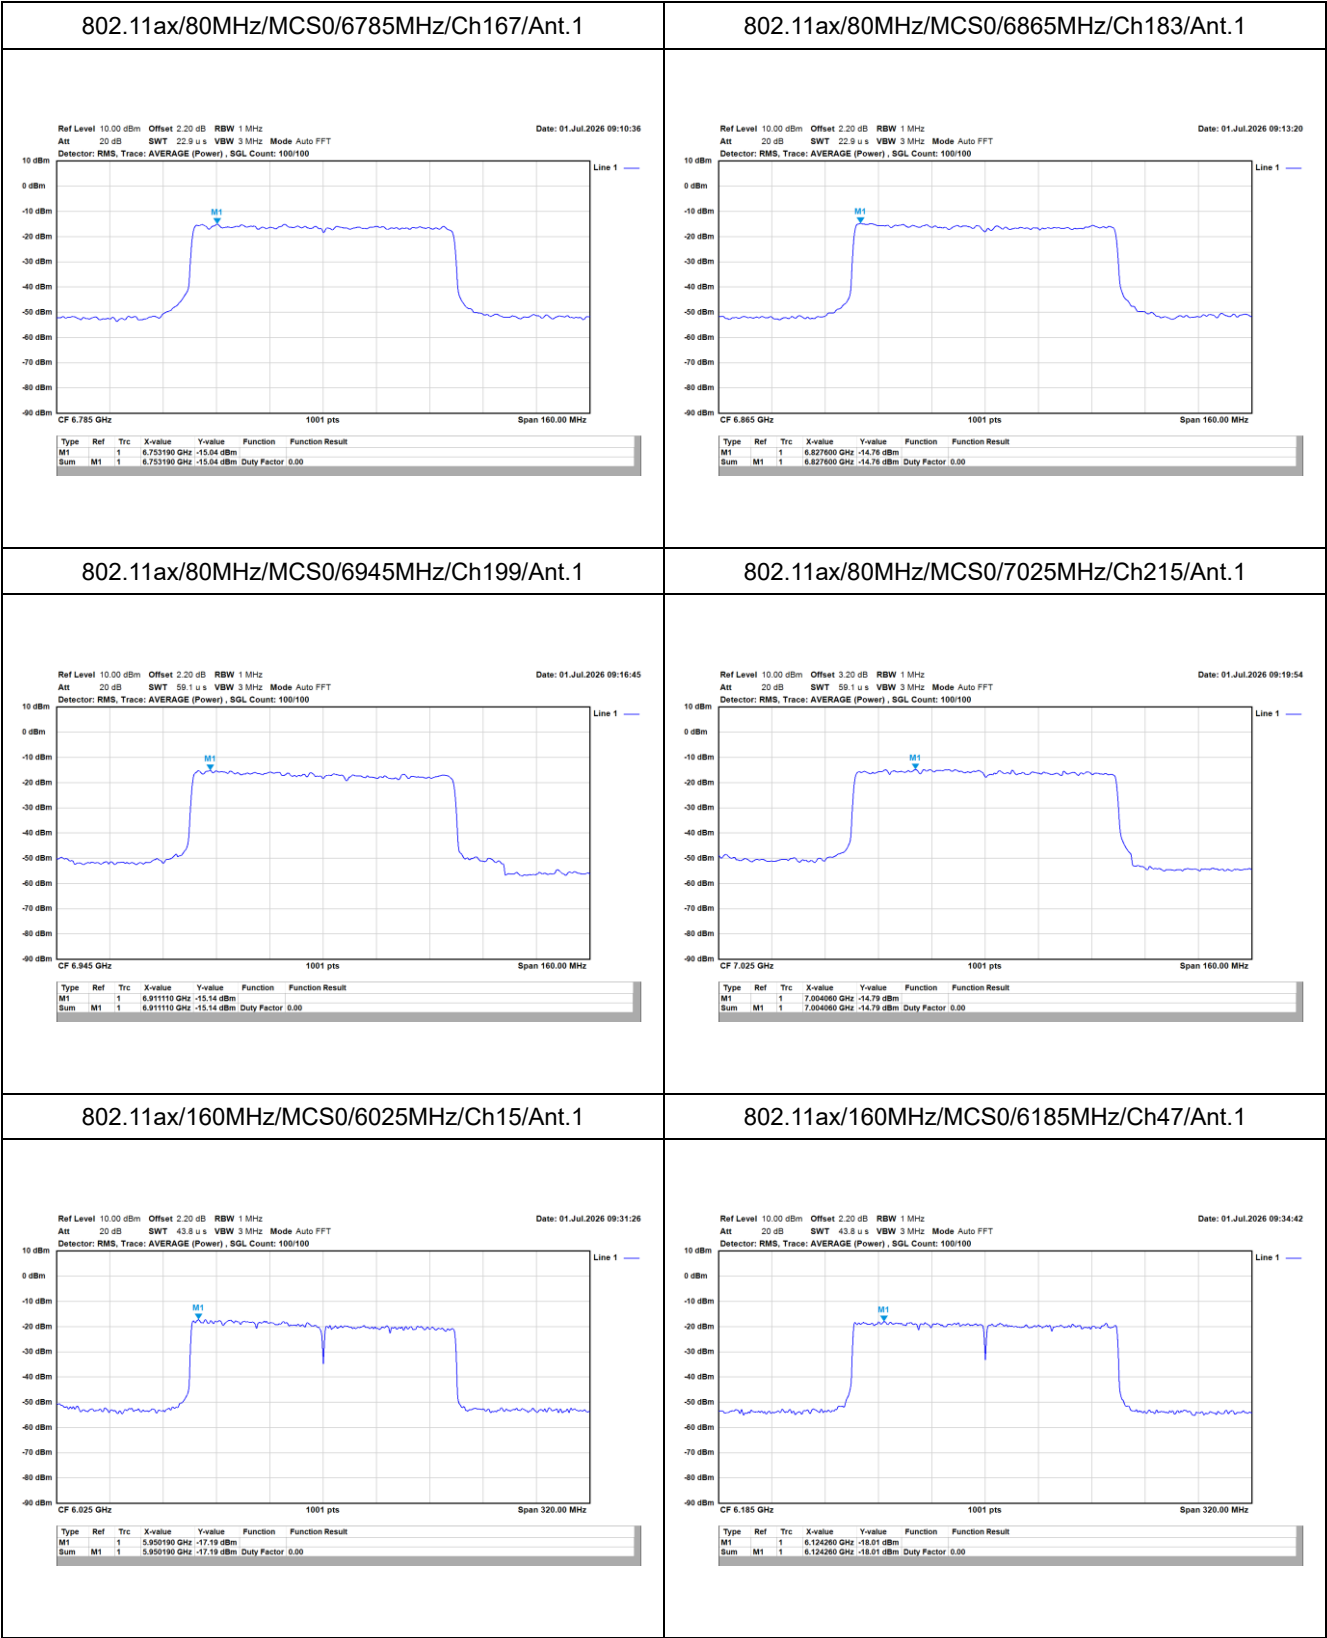

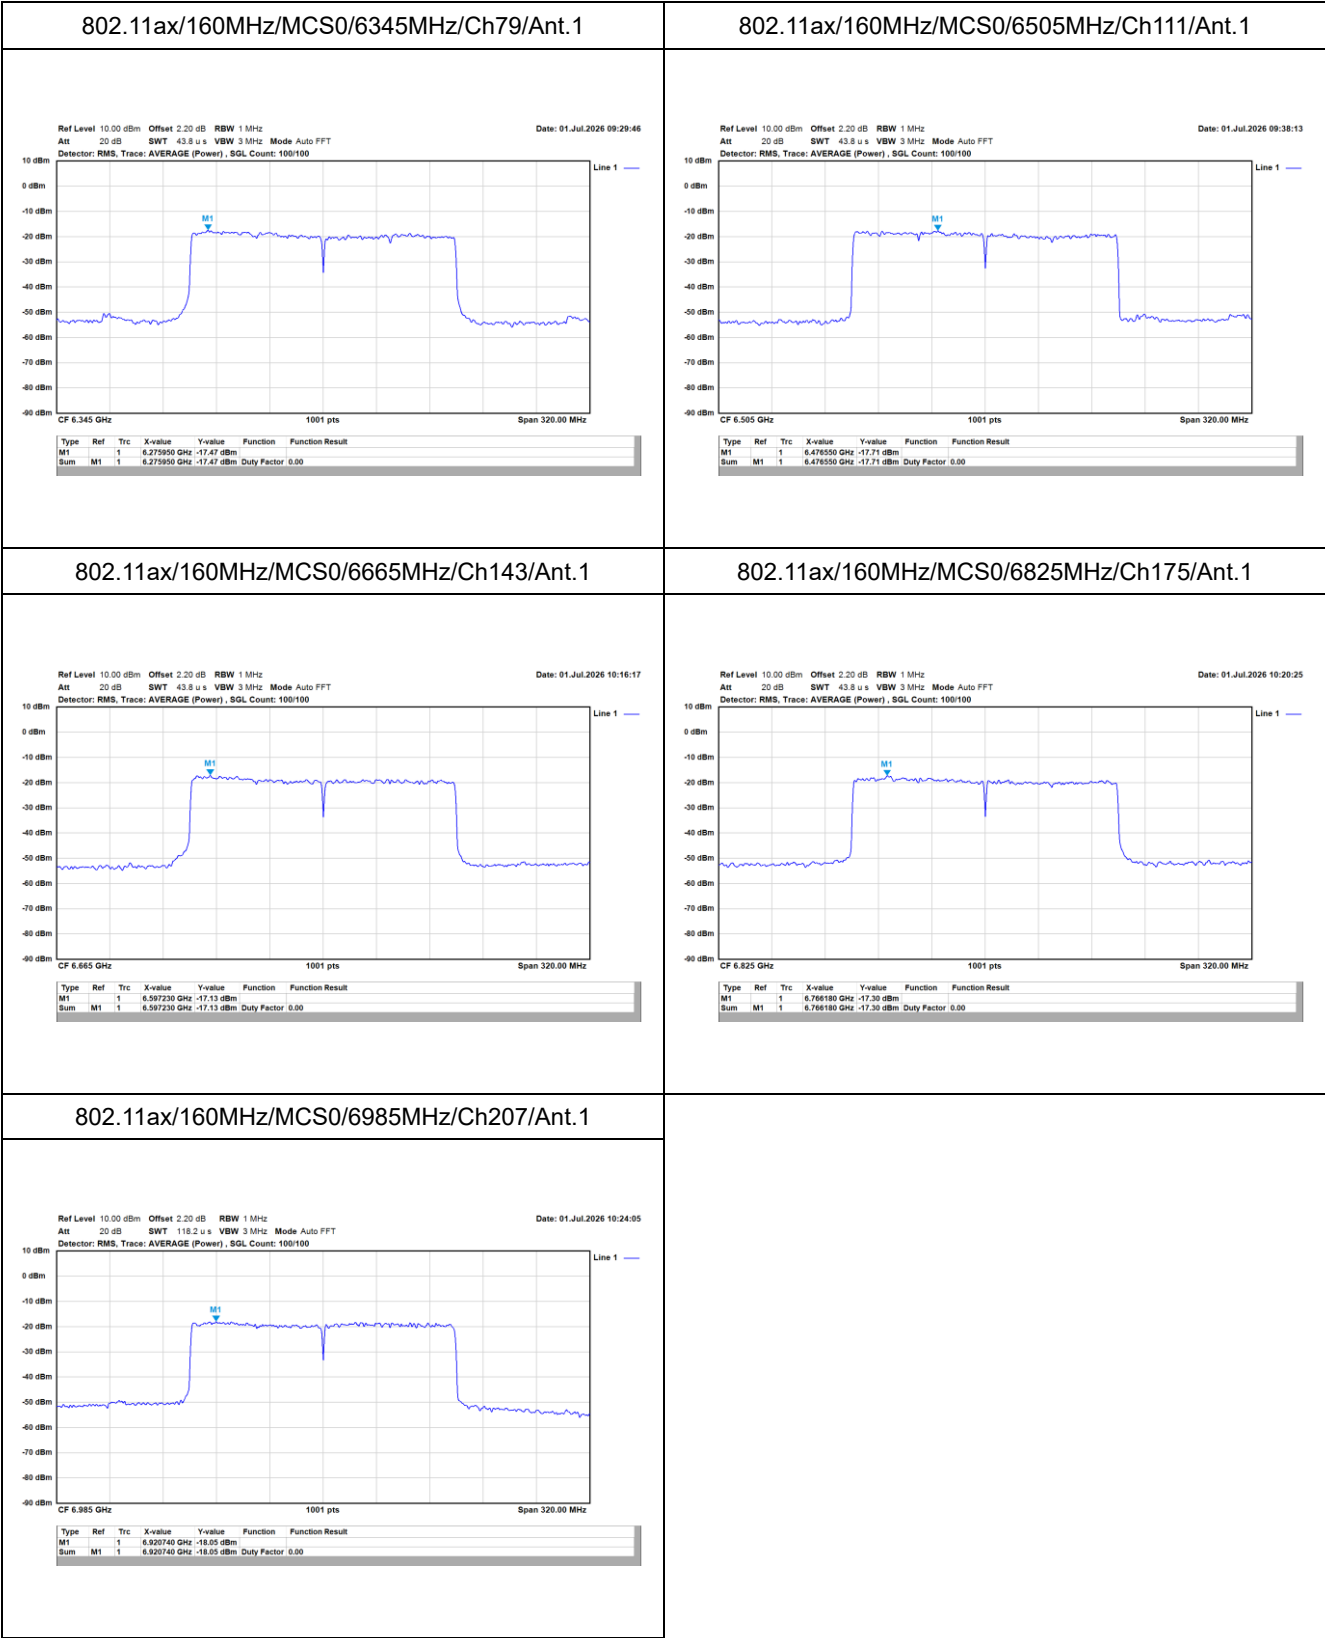


26-tone RU (0)

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)	EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
802.11ax (20MHz)	5935	-11.30	-9.06	-5.00	Pass
	7115	-10.18	-8.53	-5.00	Pass

For TPC

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)	EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
802.11ax (20MHz)	5935	-18.05	-15.81	-11.00	Pass
	7115	-16.97	-15.32	-11.00	Pass

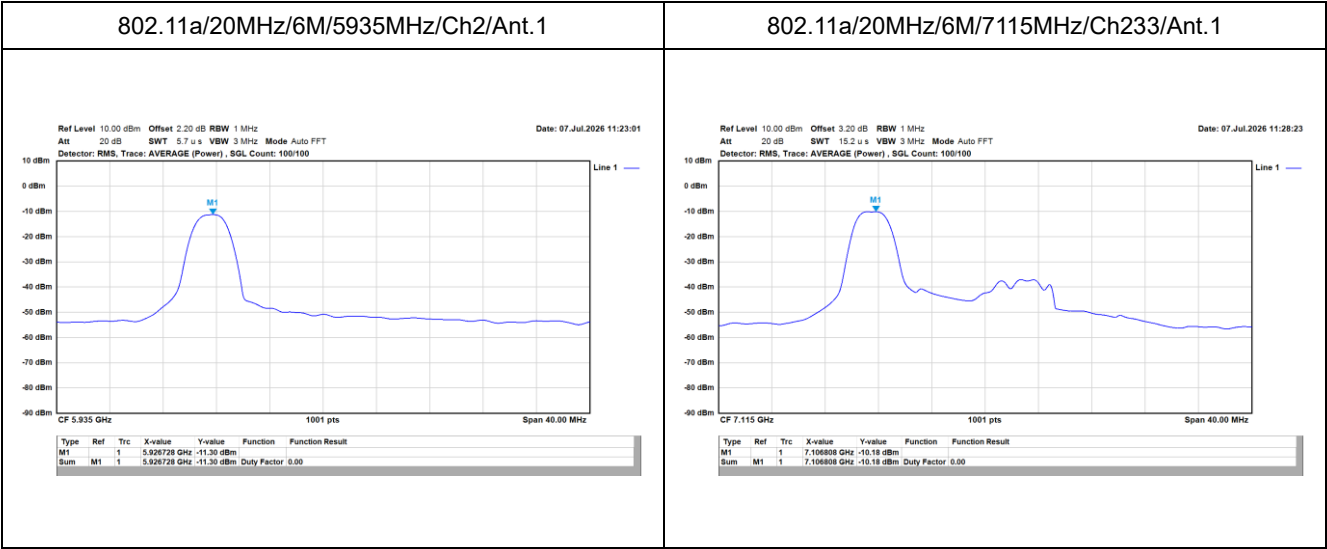


26-tone RU (8)

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)	EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
802.11ax (20MHz)	5935	-11.07	-8.83	-5.00	Pass
	7115	-9.89	-8.24	-5.00	Pass

For TPC

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)	EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
802.11ax (20MHz)	5935	-17.40	-15.16	-5.00	Pass
	7115	-16.54	-14.89	-5.00	Pass

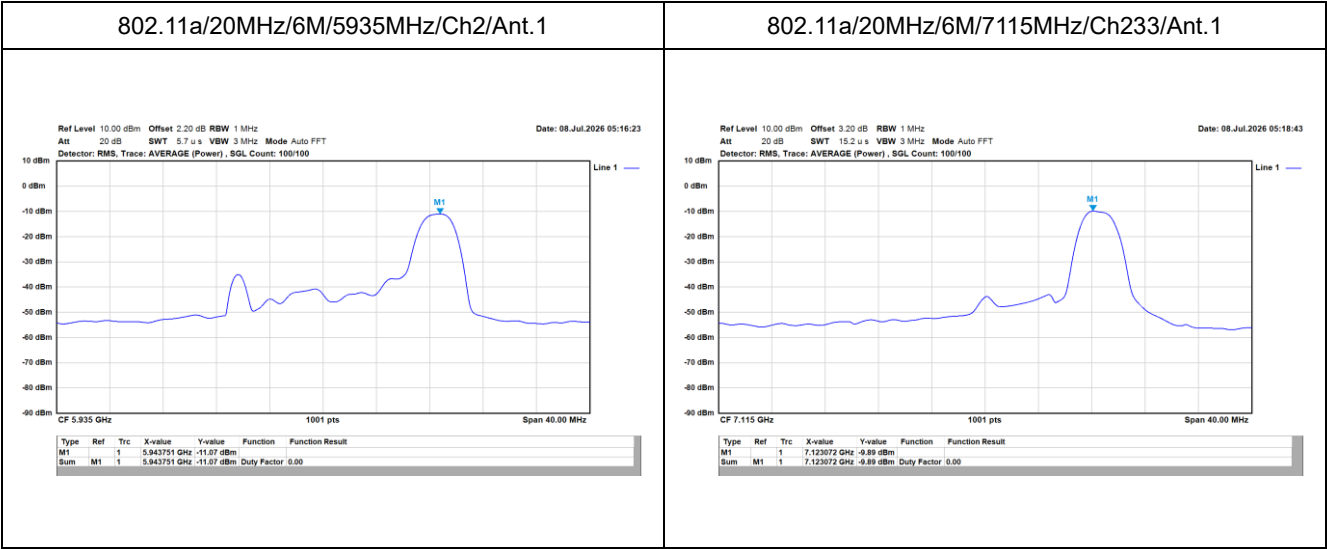


52-tone RU (37)

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)	EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
802.11ax (20MHz)	5935	-10.44	-8.20	-5.00	Pass
	7115	-10.87	-9.22	-5.00	Pass

For TPC

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)	EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
802.11ax (20MHz)	5935	-16.80	-14.56	-11.00	Pass
	7115	-17.70	-16.05	-11.00	Pass

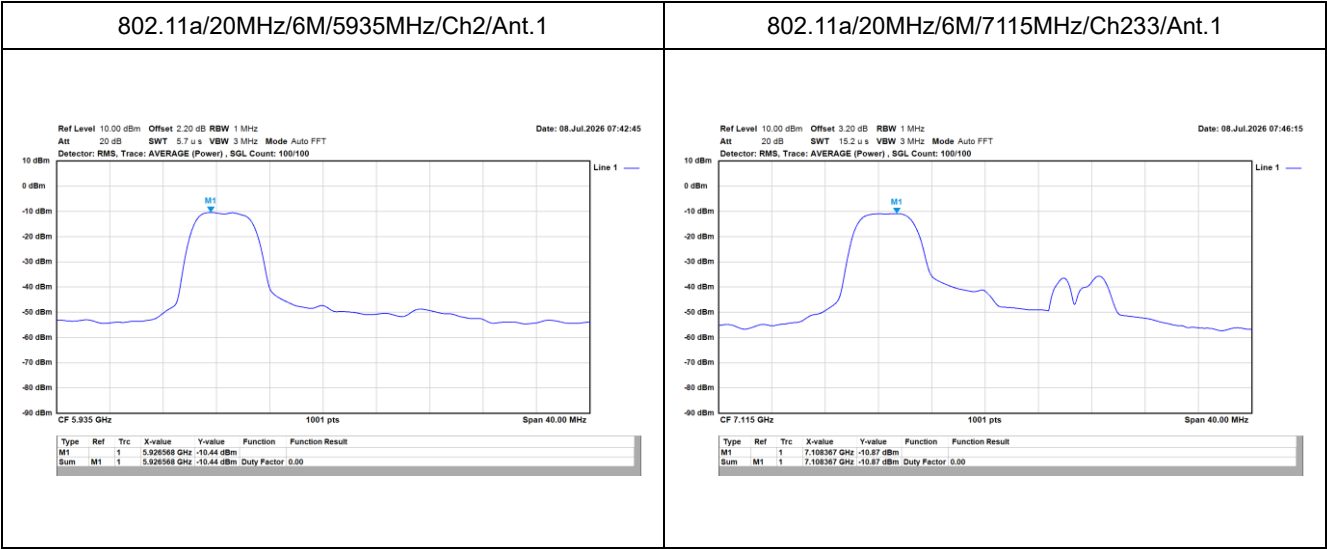


52-tone RU (40)

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)	EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
802.11ax (20MHz)	5935	-9.56	-7.32	-5.00	Pass
	7115	-10.60	-8.95	-5.00	Pass

For TPC

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)	EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
802.11ax (20MHz)	5935	-16.28	-14.04	-11.00	Pass
	7115	-17.37	-15.72	-11.00	Pass

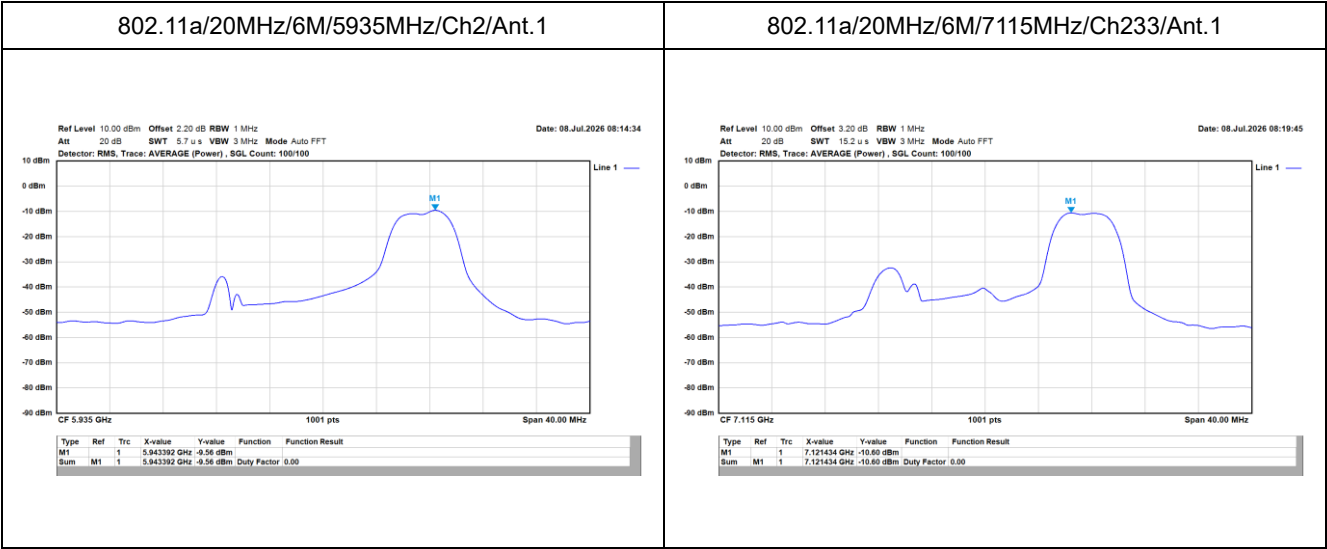


106-tone RU (53)

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)	EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
802.11ax (20MHz)	5935	-12.11	-9.87	-5.00	Pass
	7115	-11.12	-9.47	-5.00	Pass

For TPC

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)	EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
802.11ax (20MHz)	5935	-18.88	-16.64	-11.00	Pass
	7115	-17.30	-15.65	-11.00	Pass

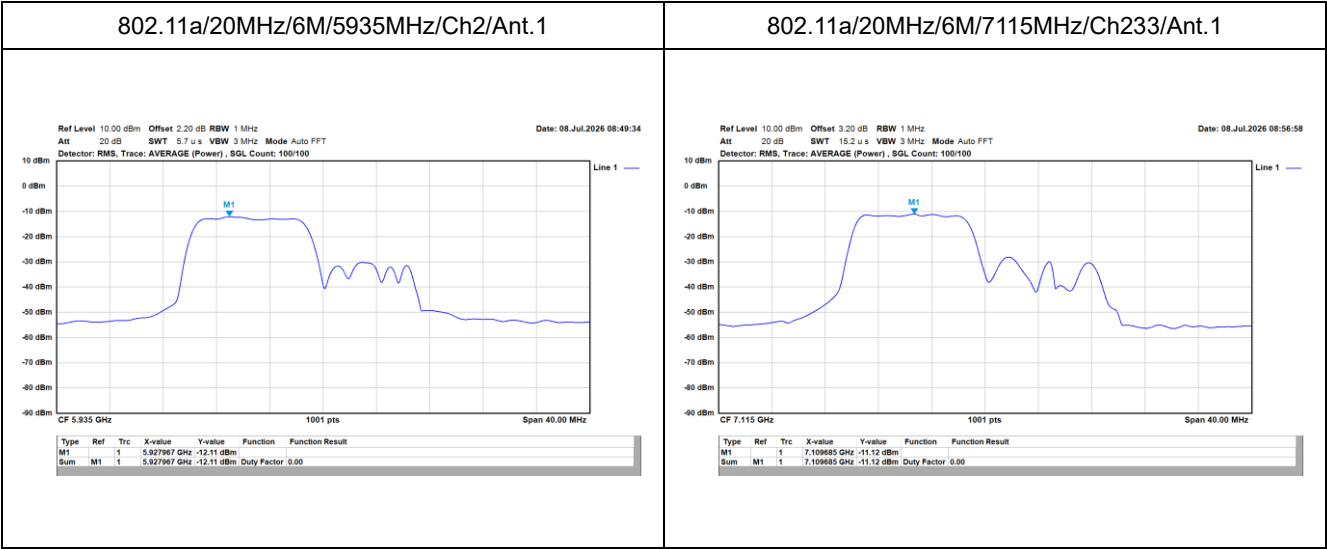


106-tone RU (54)

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)	EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
802.11ax (20MHz)	5935	-11.62	-9.38	-5.00	Pass
	7115	-10.94	-9.29	-5.00	Pass

For TPC


Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)	EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
802.11ax (20MHz)	5935	-18.33	-16.09	-11.00	Pass
	7115	-17.89	-16.24	-11.00	Pass

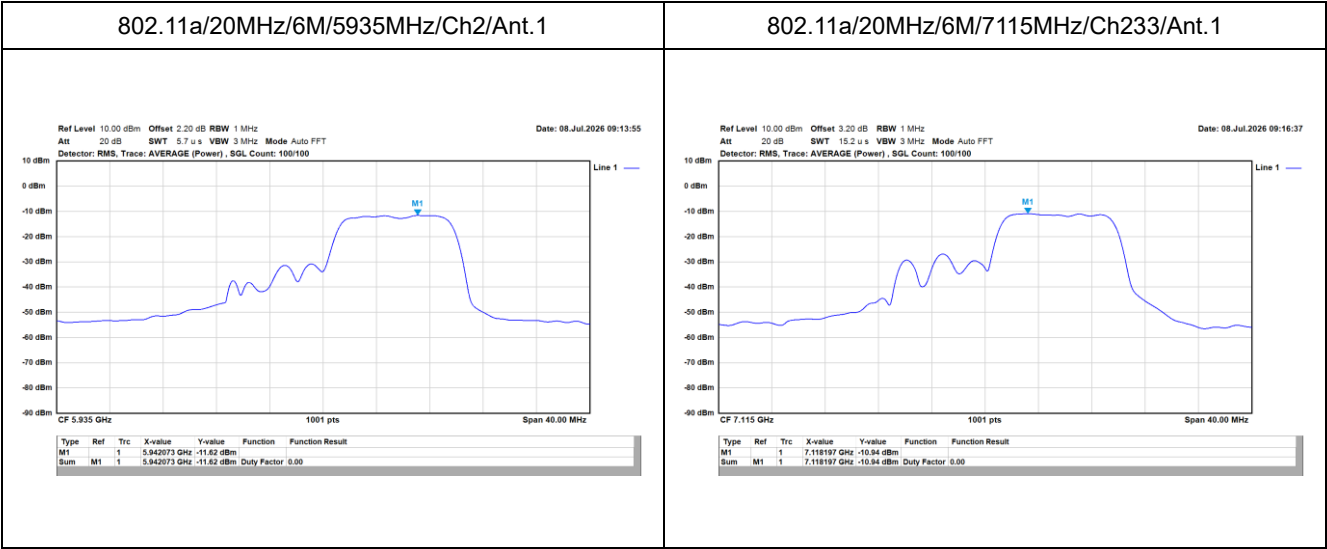

Appendix E. Test Result of Radiated Emission

TX_a_5935MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5935MHz
Test BY :Ashton

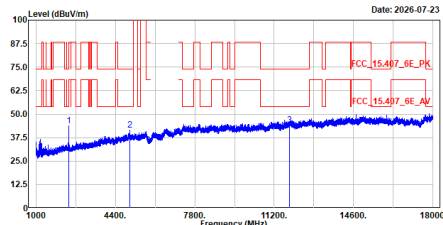


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2394.850	43.90	88.22	-44.32	67.77	-23.87	Peak
2	5900.950	41.68	74.00	-32.32	56.06	-14.38	Peak
3	11870.000	44.21	74.00	-29.79	46.28	-2.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5935MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5935MHz
Test BY :Ashton

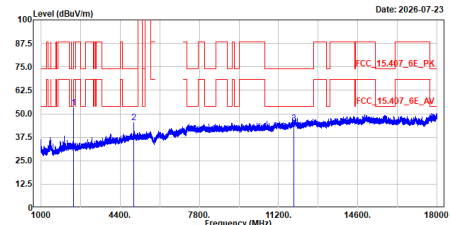


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2393.150	53.26	88.22	-34.96	77.13	-23.87	Peak
2	4995.000	45.23	74.00	-28.77	59.64	-14.41	Peak
3	11870.000	44.76	74.00	-29.24	46.83	-2.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6175MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_6175MHz
Test BY :Ashton

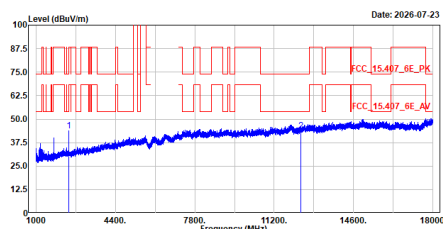


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2394.850	43.92	88.22	-44.30	67.79	-23.87	Peak
2	12350.000	43.96	74.00	-30.04	45.50	-1.54	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6175MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_6175MHz
Test BY :Ashton

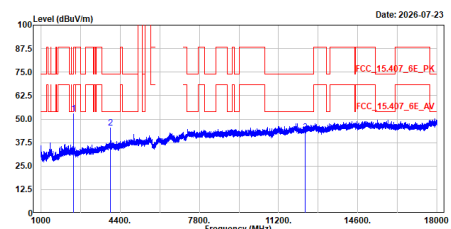


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2394.000	52.70	88.22	-35.52	76.57	-23.87	Peak
2	3980.050	45.33	74.00	-28.67	64.10	-18.77	Peak
3	12350.000	42.98	74.00	-31.02	44.52	-1.54	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6415MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_6415MHz
Test BY :Ashton

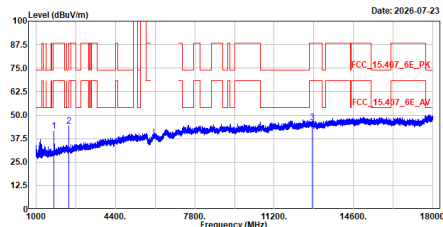


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1705.850	41.50	88.22	-46.72	66.91	-25.41	Peak
2	2397.400	44.12	88.22	-44.10	67.99	-23.87	Peak
3	12830.000	45.96	88.22	-42.26	46.35	-0.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6415MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_6415MHz
Test BY :Ashton

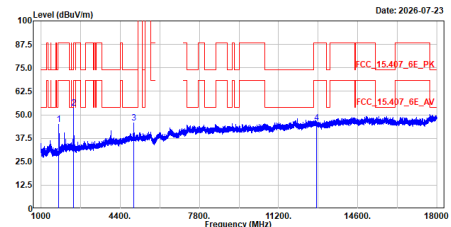


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1705.250	44.82	88.22	-43.40	70.26	-25.44	Peak
2	2392.300	53.60	88.22	-34.62	77.46	-23.86	Peak
3	4978.000	45.47	74.00	-28.53	59.95	-14.48	Peak
4	12830.000	45.53	88.22	-42.69	45.92	-0.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6435MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_6435MHz
Test BY :Ashton

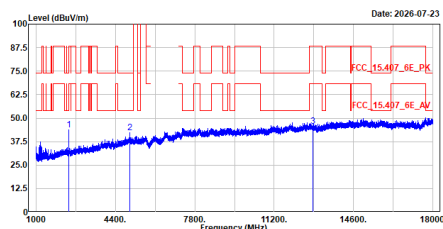


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2394.000	43.73	88.22	-44.49	67.60	-23.87	Peak
2	5000.100	42.25	74.00	-31.75	56.63	-14.38	Peak
3	12870.000	45.72	88.22	-42.50	46.00	-0.28	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6435MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_6435MHz
Test BY :Ashton

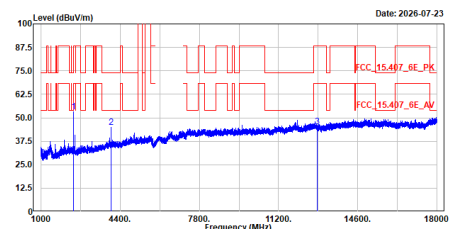


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2394.000	53.37	88.22	-34.85	77.24	-23.87	Peak
2	3990.000	45.07	74.00	-28.93	63.04	-18.77	Peak
3	12870.000	45.18	88.22	-43.04	45.46	-0.28	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6475MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_6475MHz
Test BY :Ashton

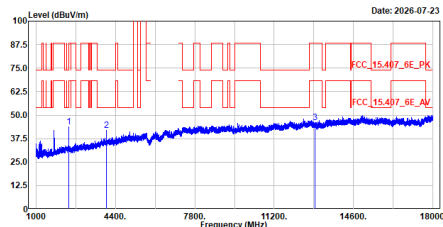


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.850	43.64	88.22	-44.58	67.51	-23.87	Peak
2	3990.000	42.06	74.00	-31.94	60.83	-18.77	Peak
3	12950.000	45.87	88.22	-42.35	46.10	-0.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6475MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_6475MHz
Test BY :Ashton

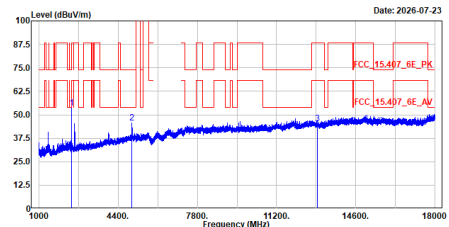


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	53.45	88.22	-34.77	77.31	-23.86	Peak
2	4981.400	45.73	74.00	-28.27	60.20	-14.47	Peak
3	12950.000	45.10	88.22	-43.12	45.33	-0.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6515MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_6515MHz
Test BY :Ashton

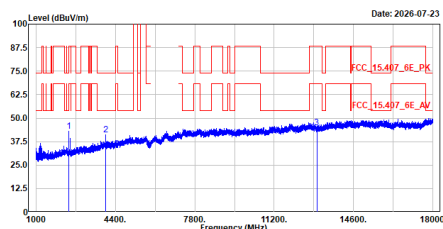


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	42.96	88.22	-45.26	66.83	-23.87	Peak
2	3983.500	41.11	74.00	-32.89	59.89	-18.78	Peak
3	13030.000	44.85	88.22	-43.37	45.08	-0.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6515MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_6515MHz
Test BY :Ashton

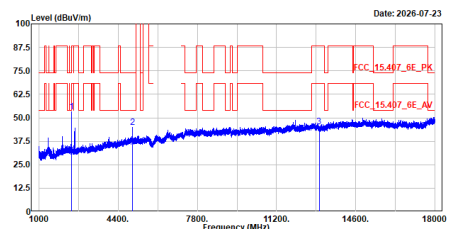


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2393.150	53.07	88.22	-35.15	76.94	-23.87	Peak
2	4995.250	44.92	74.00	-29.08	59.30	-14.38	Peak
3	13030.000	45.45	88.22	-42.77	45.68	-0.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6535MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_6535MHz
Test BY :Ashton

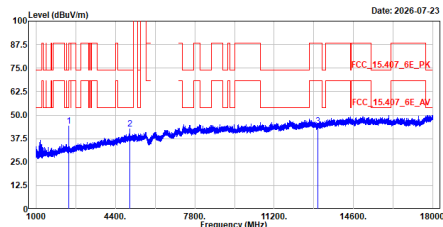


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2393.150	44.19	88.22	-44.03	68.06	-23.87	Peak
2	4999.250	42.45	74.00	-31.55	56.83	-14.30	Peak
3	13070.000	44.05	88.22	-44.17	44.27	-0.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6535MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_6535MHz
Test BY :Ashton

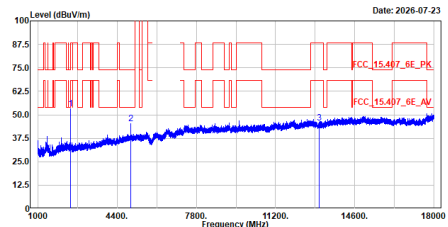


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	53.25	88.22	-34.97	77.12	-23.87	Peak
2	4978.850	43.13	74.00	-28.87	59.61	-14.48	Peak
3	13070.000	45.74	88.22	-42.48	45.96	-0.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6695MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_6695MHz
Test BY :Ashton

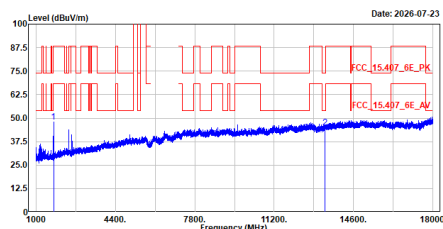


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1741.200	48.10	88.22	-40.12	73.62	-25.52	Peak
2	13390.000	44.85	74.00	-29.15	44.90	-0.05	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6695MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_6695MHz
Test BY :Ashton

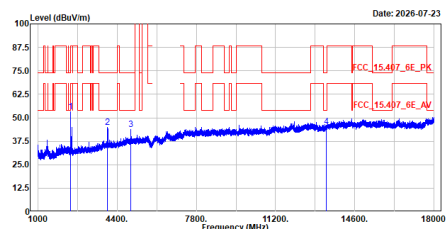


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.900	53.36	74.00	-20.64	77.22	-23.86	Peak
2	3991.150	44.75	74.00	-29.25	63.52	-18.77	Peak
3	4987.350	43.73	74.00	-30.27	58.18	-14.45	Peak
4	13390.000	45.37	74.00	-28.63	45.42	-0.05	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6855MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_6855MHz
Test BY :Ashton

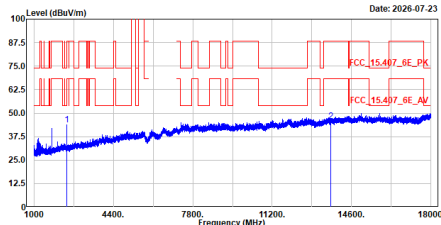


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2393.150	43.78	88.22	-44.44	67.65	-23.87	Peak
2	13710.000	45.69	88.22	-42.53	46.86	-0.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6855MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_6855MHz
Test BY :Ashton

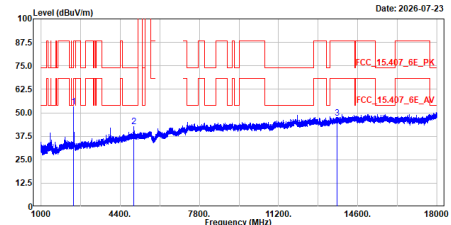


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.600	53.33	88.22	-34.89	77.20	-23.87	Peak
2	4989.900	42.74	74.00	-31.26	57.17	-14.43	Peak
3	13710.000	47.09	88.22	-41.13	47.46	-0.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6875MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_6875MHz
Test BY :Ashton

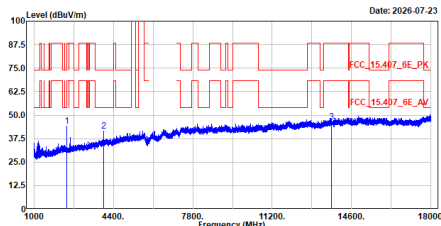


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.750	44.13	74.00	-29.87	68.00	-23.87	Peak
2	3982.650	41.56	74.00	-32.44	60.34	-18.78	Peak
3	13750.000	46.26	88.22	-41.96	46.60	-0.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6875MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_6875MHz
Test BY :Ashton

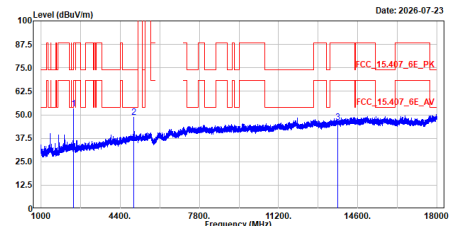


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.600	53.04	88.22	-35.18	76.91	-23.87	Peak
2	4990.750	48.73	74.00	-25.27	63.16	-14.43	Peak
3	13750.000	46.20	88.22	-42.02	46.54	-0.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6995MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_6995MHz
Test BY :Ashton

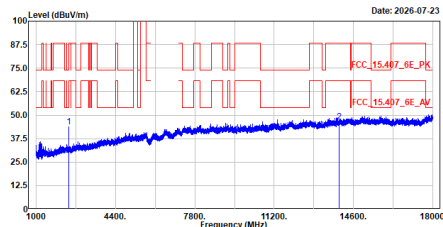


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2396.550	43.66	88.22	-44.56	67.53	-23.87	Peak
2	13990.000	46.49	88.22	-41.73	46.28	0.21	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6995MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_6995MHz
Test BY :Ashton

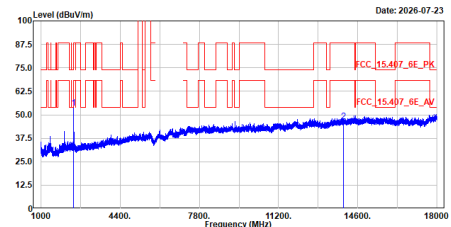


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2396.600	53.41	88.22	-34.81	77.28	-23.87	Peak
2	13990.000	46.35	88.22	-41.87	46.14	0.21	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_7115MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_7115MHz
Test BY :Ashton

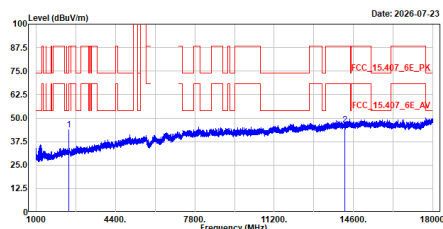


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2394.000	43.66	88.22	-44.56	67.53	-23.87	Peak
2	14230.000	46.35	88.22	-41.87	46.30	0.05	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_7115MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_7115MHz
Test BY :Ashton

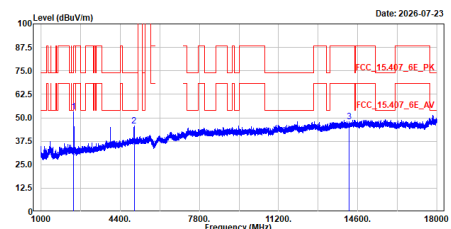


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2394.000	53.20	88.22	-35.02	77.07	-23.87	Peak
2	4996.700	45.80	74.00	-28.20	60.21	-14.41	Peak
3	14230.000	47.96	88.22	-40.26	47.91	0.05	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5935MHz
Test BY :Rock

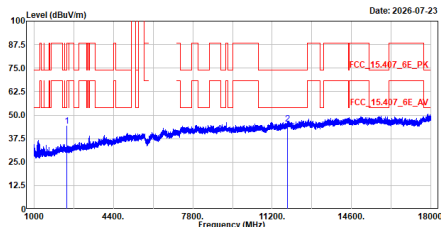


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2391.450	44.14	88.22	-44.08	68.01	-23.87	Peak
2	11870.000	45.45	74.00	-28.55	47.52	-2.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5935MHz
Test BY :Rock

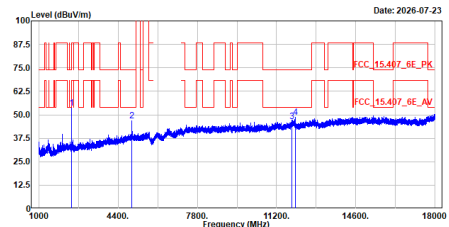


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.750	53.74	74.00	-20.26	77.61	-23.87	Peak
2	4987.350	46.93	74.00	-27.07	61.38	-14.45	Peak
3	11870.000	46.42	74.00	-27.58	48.49	-2.07	Peak
4	11999.850	48.71	74.00	-25.29	50.83	-2.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6175MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_6175MHz
Test BY :Rock

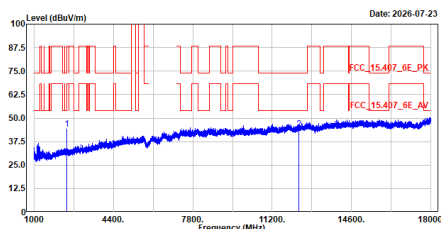


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.600	44.05	88.22	-44.17	67.92	-23.87	Peak
2	12350.000	44.32	74.00	-29.68	45.86	-1.54	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6175MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_6175MHz
Test BY :Rock

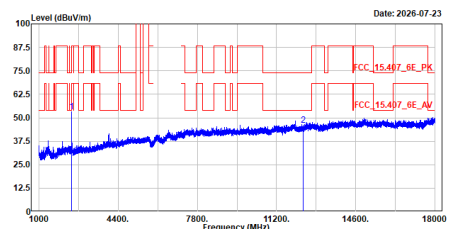


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2393.150	53.32	88.22	-34.90	77.19	-23.87	Peak
2	12350.000	45.87	74.00	-28.13	47.41	-1.54	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6415MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_6415MHz
Test BY :Rock

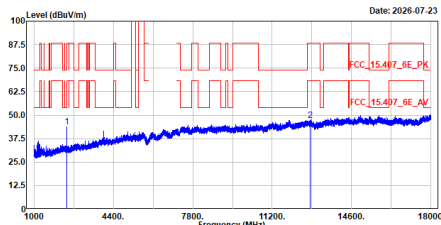


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2393.150	43.65	88.22	-44.57	67.52	-23.87	Peak
2	12830.000	47.14	88.22	-41.08	47.53	-0.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6415MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_6415MHz
Test BY :Rock

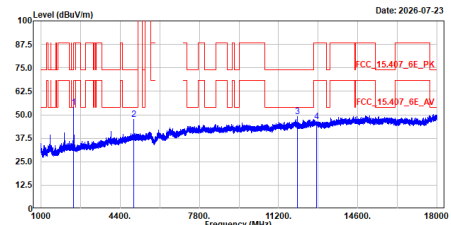


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.600	53.96	88.22	-34.26	77.83	-23.87	Peak
2	4988.200	47.49	74.00	-26.51	61.92	-14.43	Peak
3	11999.850	49.08	74.00	-24.92	51.20	-2.12	Peak
4	12830.000	46.27	88.22	-41.95	46.66	-0.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6435MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_6435MHz
Test BY :Rock

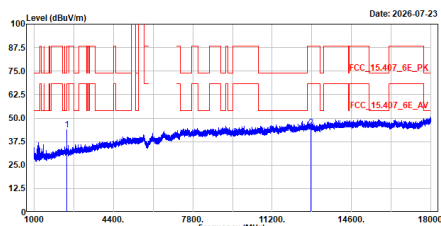


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2393.150	43.66	88.22	-44.56	67.53	-23.87	Peak
2	12870.000	44.97	88.22	-43.25	45.25	-0.28	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6435MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_6435MHz
Test BY :Rock

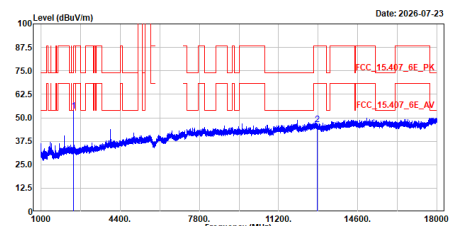


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2391.450	53.42	88.22	-34.80	77.29	-23.87	Peak
2	12870.000	46.29	88.22	-41.93	46.57	-0.28	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6475MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_6475MHz
Test BY :Rock

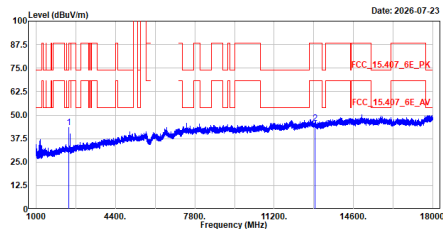


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2389.750	43.37	74.00	-30.63	67.24	-23.87	Peak
2	12950.000	45.67	88.22	-42.55	45.90	-0.23	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6475MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_6475MHz
Test BY :Rock

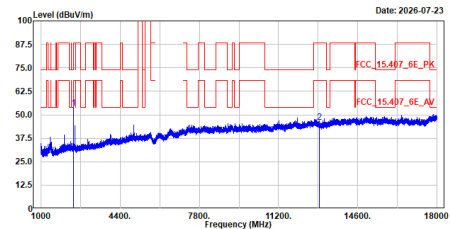


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2392.300	53.67	88.22	-34.55	77.53	-23.86	Peak
2	12950.000	46.09	88.22	-42.13	46.32	-0.23	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6515MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_6515MHz
Test BY :Rock

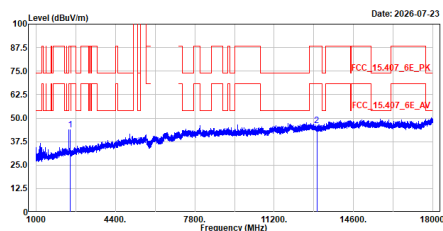


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2457.750	43.77	88.22	-44.45	67.72	-23.95	Peak
2	13030.000	46.17	88.22	-42.05	46.40	-0.23	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6515MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_6515MHz
Test BY :Rock

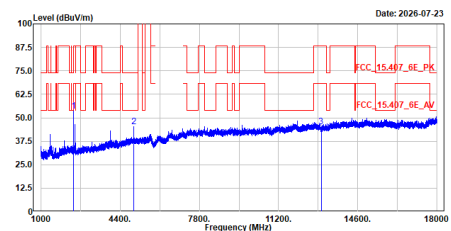


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2393.150	53.70	88.22	-34.52	77.57	-23.87	Peak
2	4983.950	45.32	74.00	-28.68	59.78	-14.46	Peak
3	13030.000	45.18	88.22	-43.04	45.41	-0.23	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6535MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_6535MHz
Test BY :Rock

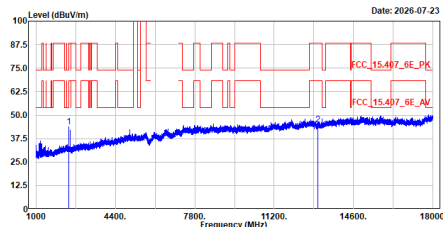


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2390.600	43.95	88.22	-44.27	67.82	-23.87	Peak
2	13070.000	45.06	88.22	-43.16	45.28	-0.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6535MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_6535MHz
Test BY :Rock

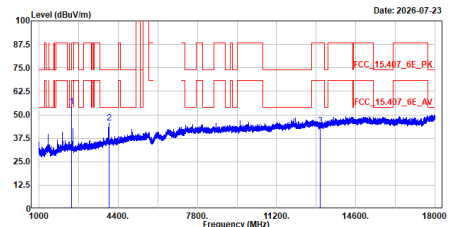


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2390.850	54.32	88.22	-33.90	78.19	-23.87	Peak
2	3999.650	45.60	74.00	-28.40	64.37	-18.77	Peak
3	13070.000	44.00	88.22	-44.22	44.22	-0.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6695MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_6695MHz
Test BY :Rock

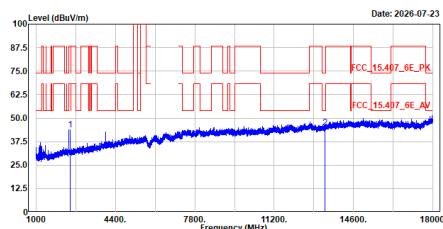


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2456.900	43.76	88.22	-44.46	67.72	-23.96	Peak
2	13390.000	44.97	74.00	-29.03	45.02	-0.05	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6695MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_6695MHz
Test BY :Rock

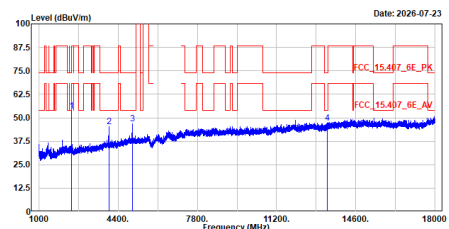


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2393.150	53.77	88.22	-34.45	77.64	-23.87	Peak
2	3995.400	45.26	74.00	-28.74	64.04	-18.78	Peak
3	4998.400	46.89	74.00	-27.11	61.27	-14.38	Peak
4	13390.000	47.23	74.00	-26.77	47.28	-0.05	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6855MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_6855MHz
Test BY :Rock

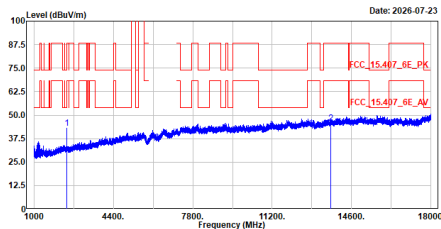


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2392.300	43.06	88.22	-45.16	66.92	-23.86	Peak
2	13710.000	45.70	88.22	-42.52	46.87	-0.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6855MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_6855MHz
Test BY :Rock

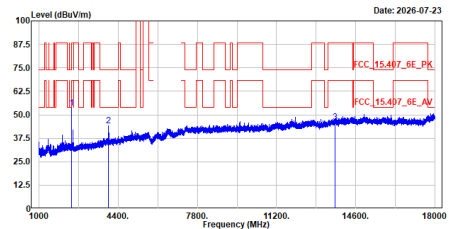


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2391.450	53.42	88.22	-34.80	77.29	-23.87	Peak
2	3986.900	44.34	74.00	-29.66	63.11	-18.77	Peak
3	13710.000	45.89	88.22	-42.33	46.26	-0.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6875MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_6875MHz
Test BY :Rock

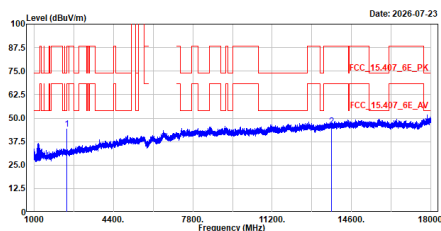


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2394.000	44.02	88.22	-44.20	67.89	-23.87	Peak
2	13750.000	45.57	88.22	-42.65	45.91	-0.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6875MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_6875MHz
Test BY :Rock

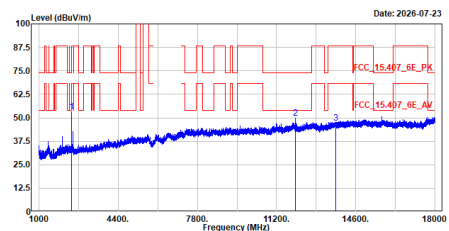


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2392.300	53.36	88.22	-34.86	77.22	-23.86	Peak
2	11995.850	49.95	74.00	-24.05	52.07	-2.12	Peak
3	13750.000	47.24	88.22	-40.98	47.58	-0.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6995MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_6995MHz
Test BY :Rock

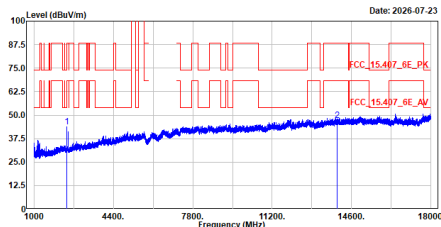


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2390.600	43.61	88.22	-44.61	67.48	-23.87	Peak
2	13990.000	47.01	88.22	-41.21	46.80	0.21	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6995MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_6995MHz
Test BY :Rock

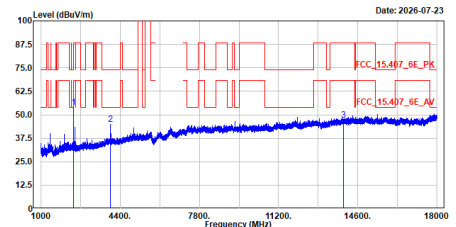


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2392.300	54.82	88.22	-34.20	77.88	-23.86	Peak
2	3992.000	45.89	74.00	-28.91	63.86	-18.77	Peak
3	13990.000	47.05	88.22	-41.17	46.84	0.21	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_7115MHz
Test BY :Rock

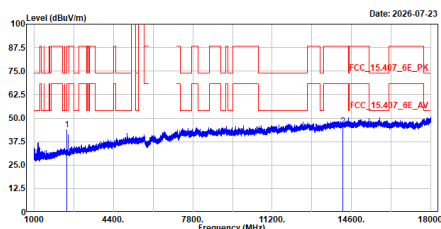


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2393.150	43.80	88.22	-44.42	67.67	-23.87	Peak
2	14230.000	45.82	88.22	-42.40	45.77	0.05	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_7115MHz
Test BY :Rock

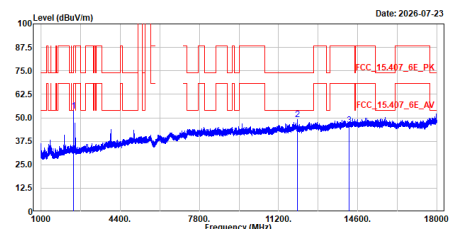


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2391.450	53.69	88.22	-34.53	77.56	-23.87	Peak
2	11995.850	48.93	74.00	-25.07	51.05	-2.12	Peak
3	14230.000	46.03	88.22	-42.19	45.98	0.05	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5965MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_5965MHz
Test BY :Rock

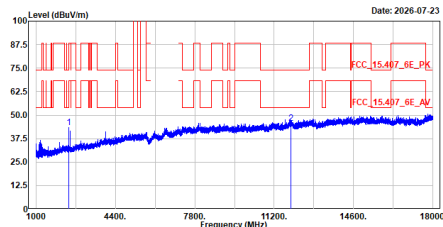


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.600	43.40	88.22	-44.82	67.27	-23.87	Peak
2	11930.000	45.73	74.00	-28.27	47.81	-2.08	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5965MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_5965MHz
Test BY :Rock

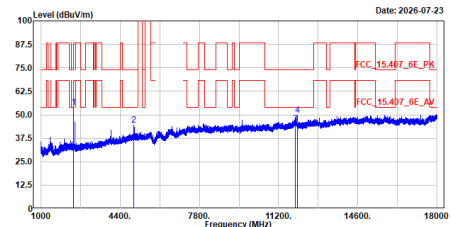


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	54.00	88.22	-34.22	77.86	-23.86	Peak
2	4980.500	44.69	74.00	-29.31	59.14	-14.45	Peak
3	11930.000	45.37	74.00	-28.63	47.45	-2.08	Peak
4	11999.850	49.85	74.00	-24.15	51.97	-2.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6165MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_6165MHz
Test BY :Rock

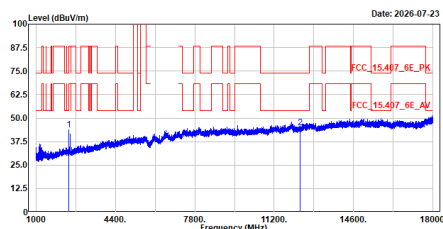


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2399.100	43.65	88.22	-44.57	67.52	-23.87	Peak
2	12330.000	44.73	74.00	-29.27	46.30	-1.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6165MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_6165MHz
Test BY :Rock

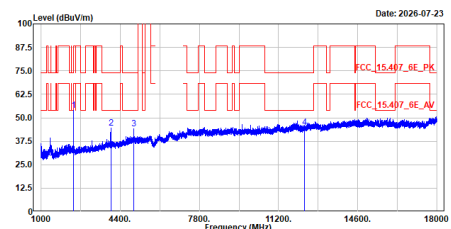


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2391.450	53.92	88.22	-34.30	77.79	-23.87	Peak
2	3993.700	44.71	74.00	-29.29	63.49	-18.78	Peak
3	4978.000	44.12	74.00	-29.88	58.60	-14.48	Peak
4	12330.000	45.05	74.00	-28.95	46.62	-1.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6405MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_6405MHz
Test BY :Rock

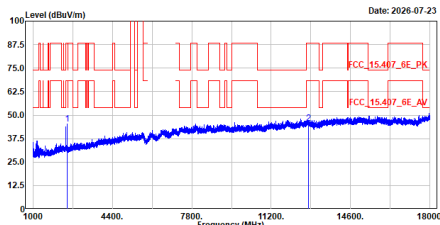


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2456.900	45.23	88.22	-42.99	69.19	-23.96	Peak
2	12810.000	45.80	88.22	-42.42	46.23	-0.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6405MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_6405MHz
Test BY :Rock

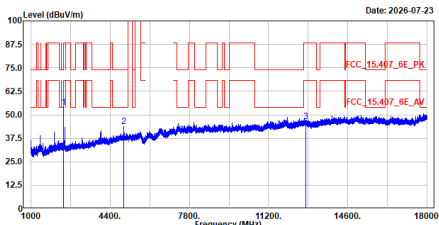


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2380.900	53.80	74.00	-20.20	77.66	-23.86	Peak
2	4984.800	43.90	74.00	-30.10	58.36	-14.46	Peak
3	12810.000	46.60	88.22	-41.62	47.03	-0.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6445MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_6445MHz
Test BY :Rock

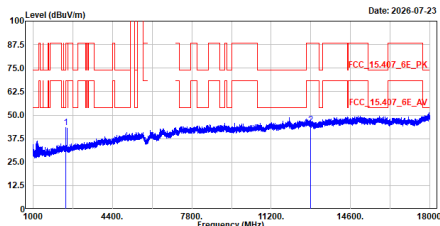


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.850	43.33	88.22	-44.89	67.20	-23.87	Peak
2	12890.000	45.03	88.22	-43.19	45.28	-0.25	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6445MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_6445MHz
Test BY :Rock

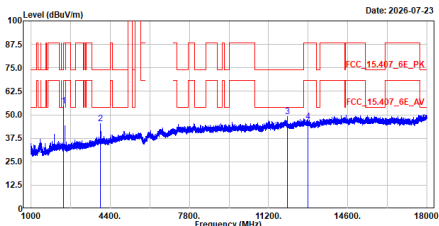


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.600	54.77	88.22	-33.45	78.64	-23.87	Peak
2	3983.500	45.42	74.00	-28.58	64.20	-18.78	Peak
3	12000.700	49.15	74.00	-24.85	51.27	-2.12	Peak
4	12890.000	46.29	88.22	-41.93	46.54	-0.25	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6485MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_6485MHz
Test BY :Rock

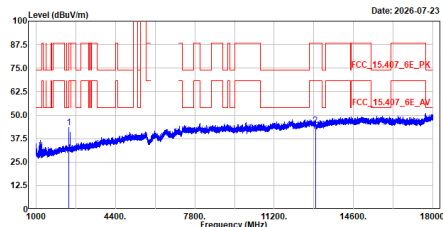


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2390.600	43.30	88.22	-44.92	67.17	-23.87	Peak
2	12970.000	44.56	88.22	-43.66	44.78	-0.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6485MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_6485MHz
Test BY :Rock

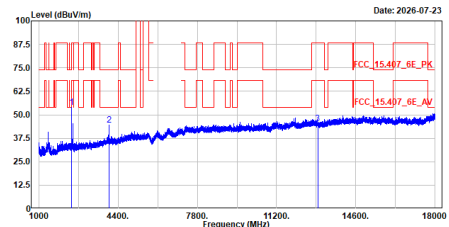


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2392.300	53.93	88.22	-34.29	77.79	-23.86	Peak
2	3997.100	44.42	74.00	-29.58	63.18	-18.76	Peak
3	12970.000	45.42	88.22	-42.80	45.64	-0.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6525MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_6525MHz
Test BY :Rock

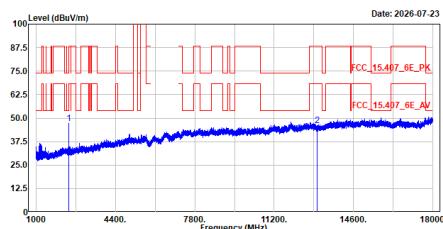


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2390.600	47.18	88.22	-41.04	71.05	-23.87	Peak
2	13050.000	45.97	88.22	-42.25	46.21	-0.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6525MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_6525MHz
Test BY :Rock

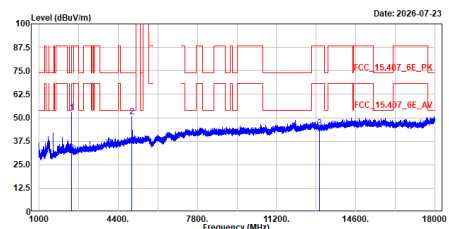


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2392.300	52.87	88.22	-35.35	76.73	-23.86	Peak
2	4995.050	50.62	74.00	-23.38	65.03	-14.41	Peak
3	13050.000	44.41	88.22	-43.81	44.65	-0.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6565MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_6565MHz
Test BY :Rock

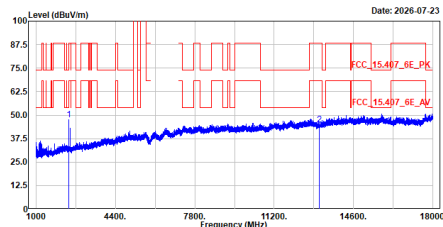


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	47.67	88.22	-40.55	71.53	-23.86	Peak
2	13130.000	44.84	88.22	-43.38	44.96	-0.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6565MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_6565MHz
Test BY :Rock

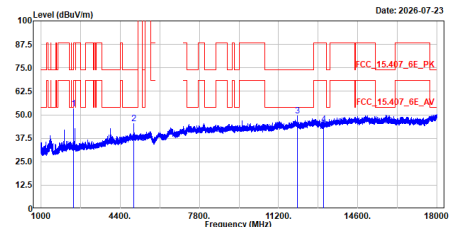


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	53.10	88.22	-35.12	76.97	-23.87	Peak
2	4981.400	45.45	74.00	-28.55	59.92	-14.47	Peak
3	11999.850	49.51	74.00	-24.49	51.63	-2.12	Peak
4	13130.000	44.88	88.22	-43.34	45.00	-0.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6685MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_6685MHz
Test BY :Rock

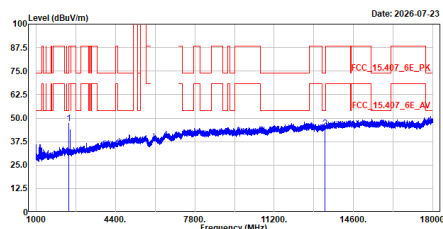


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.900	47.04	74.00	-26.96	70.90	-23.86	Peak
2	13370.000	44.50	74.00	-29.50	44.61	-0.11	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6685MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_6685MHz
Test BY :Rock

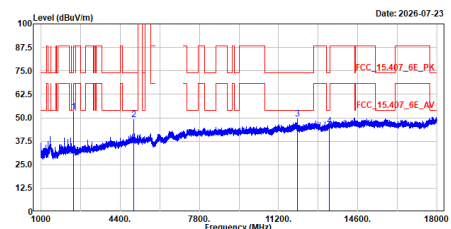


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2391.450	53.14	88.22	-35.08	77.01	-23.87	Peak
2	4981.400	49.19	74.00	-24.81	63.06	-14.47	Peak
3	12000.700	49.56	74.00	-24.44	51.68	-2.12	Peak
4	13370.000	45.60	74.00	-28.40	45.71	-0.11	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6885MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_6885MHz
Test BY :Rock

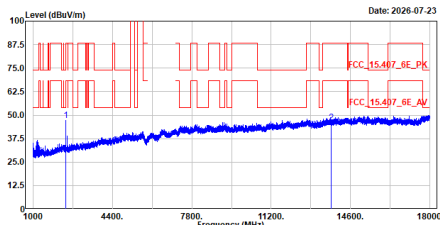


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2391.450	47.18	88.22	-41.04	71.05	-23.87	Peak
2	13770.000	46.11	88.22	-42.11	46.44	-0.33	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6885MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_6885MHz
Test BY :Rock

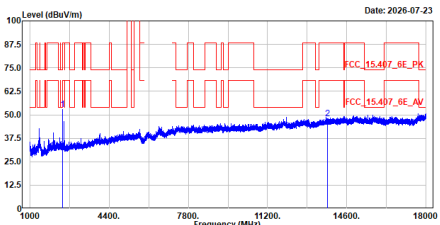


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.600	52.86	88.22	-35.36	76.73	-23.87	Peak
2	13770.000	47.83	88.22	-40.39	48.16	-0.33	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_7005MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_7005MHz
Test BY :Rock

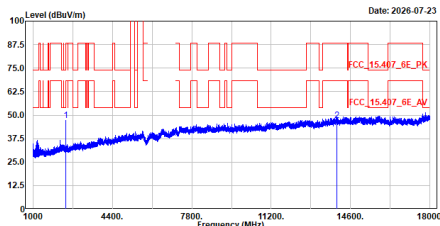


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.850	47.18	88.22	-41.04	71.05	-23.87	Peak
2	14010.000	47.04	88.22	-41.18	46.79	0.25	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_7005MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_7005MHz
Test BY :Rock

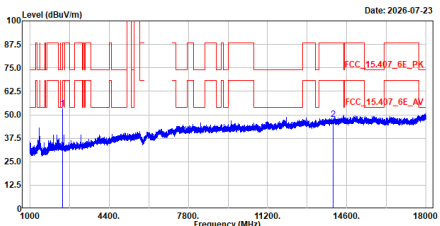


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2393.150	53.26	88.22	-34.96	77.13	-23.87	Peak
2	14010.000	47.72	88.22	-40.50	47.47	0.25	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_7085MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_7085MHz
Test BY :Rock

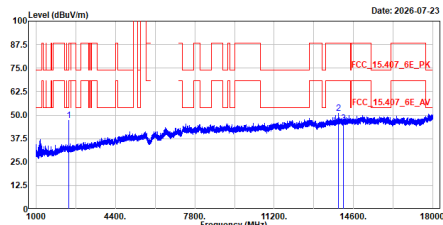


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	47.21	88.22	-41.01	71.87	-23.86	Peak
2	13950.250	51.12	88.22	-37.10	51.63	0.09	Peak
3	14170.000	45.72	88.22	-42.50	45.75	-0.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_7085MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_7085MHz
Test BY :Rock

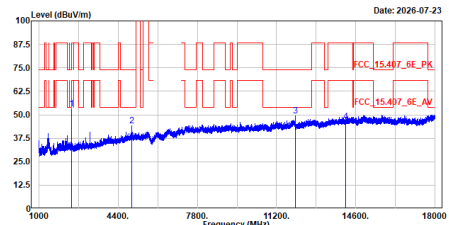


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.750	53.18	74.00	-20.82	77.05	-23.87	Peak
2	4989.050	44.13	74.00	-29.87	58.56	-14.43	Peak
3	11999.850	49.61	74.00	-24.39	51.73	-2.12	Peak
4	14170.000	46.45	88.22	-41.77	46.48	-0.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5985MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_5985MHz
Test BY :Rock

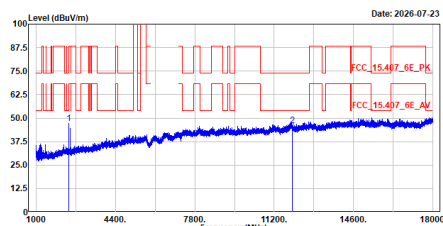


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2393.150	47.00	88.22	-41.22	70.87	-23.87	Peak
2	11970.000	45.98	74.00	-28.02	48.13	-2.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5985MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_5985MHz
Test BY :Rock

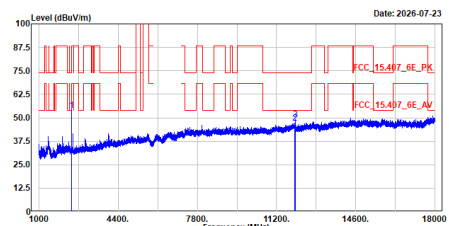


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.900	53.95	74.00	-20.05	77.81	-23.86	Peak
2	11970.000	47.16	74.00	-26.84	49.31	-2.15	Peak
3	11999.850	49.02	74.00	-24.98	51.14	-2.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6145MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_6145MHz
Test BY :Rock

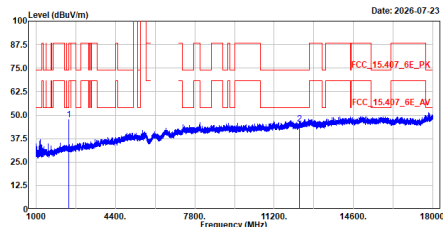


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2392.300	47.38	88.22	-40.84	71.24	-23.86	Peak
2	12290.000	45.37	74.00	-28.63	46.99	-1.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6145MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_6145MHz
Test BY :Rock

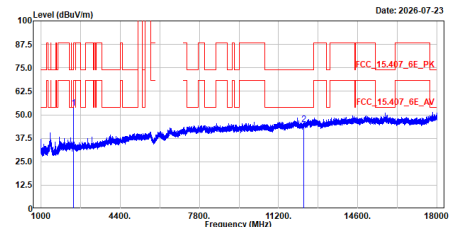


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2394.000	53.71	88.22	-34.51	77.58	-23.87	Peak
2	12290.000	45.04	74.00	-28.96	46.66	-1.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6385MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_6385MHz
Test BY :Rock

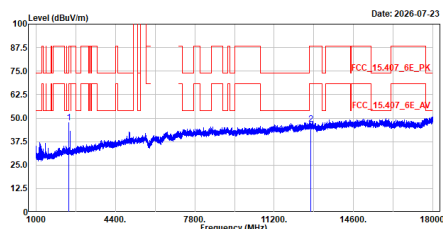


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2391.450	47.53	88.22	-40.69	71.40	-23.87	Peak
2	12770.000	46.90	88.22	-41.32	47.26	-0.36	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6385MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_6385MHz
Test BY :Rock

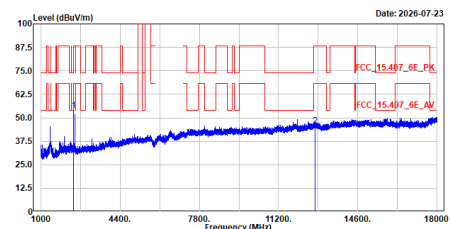

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2390.600	53.80	88.22	-34.42	77.67	-23.87	Peak
2	12770.000	45.50	88.22	-42.72	45.86	-0.36	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.