

Appendix A. Test Result of AC Power Line Conducted Emission

As the EUT is battery-powered, this test item was not performed.

Appendix B. Test Result of Occupied Bandwidth & DTS Bandwidth


Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	Limit (MHz)	
				99% Occupied Bandwidth	DTS Bandwidth
GFSK (1Mbps)	2402	1.01	0.66	-	≥ 0.5
	2440	1.01	0.66	-	≥ 0.5
	2480	1.01	0.66	-	≥ 0.5
GFSK (2Mbps)	2402	1.99	1.15	-	≥ 0.5
	2440	1.98	1.15	-	≥ 0.5
	2480	1.98	1.16	-	≥ 0.5

For 99% Occupied Bandwidth:

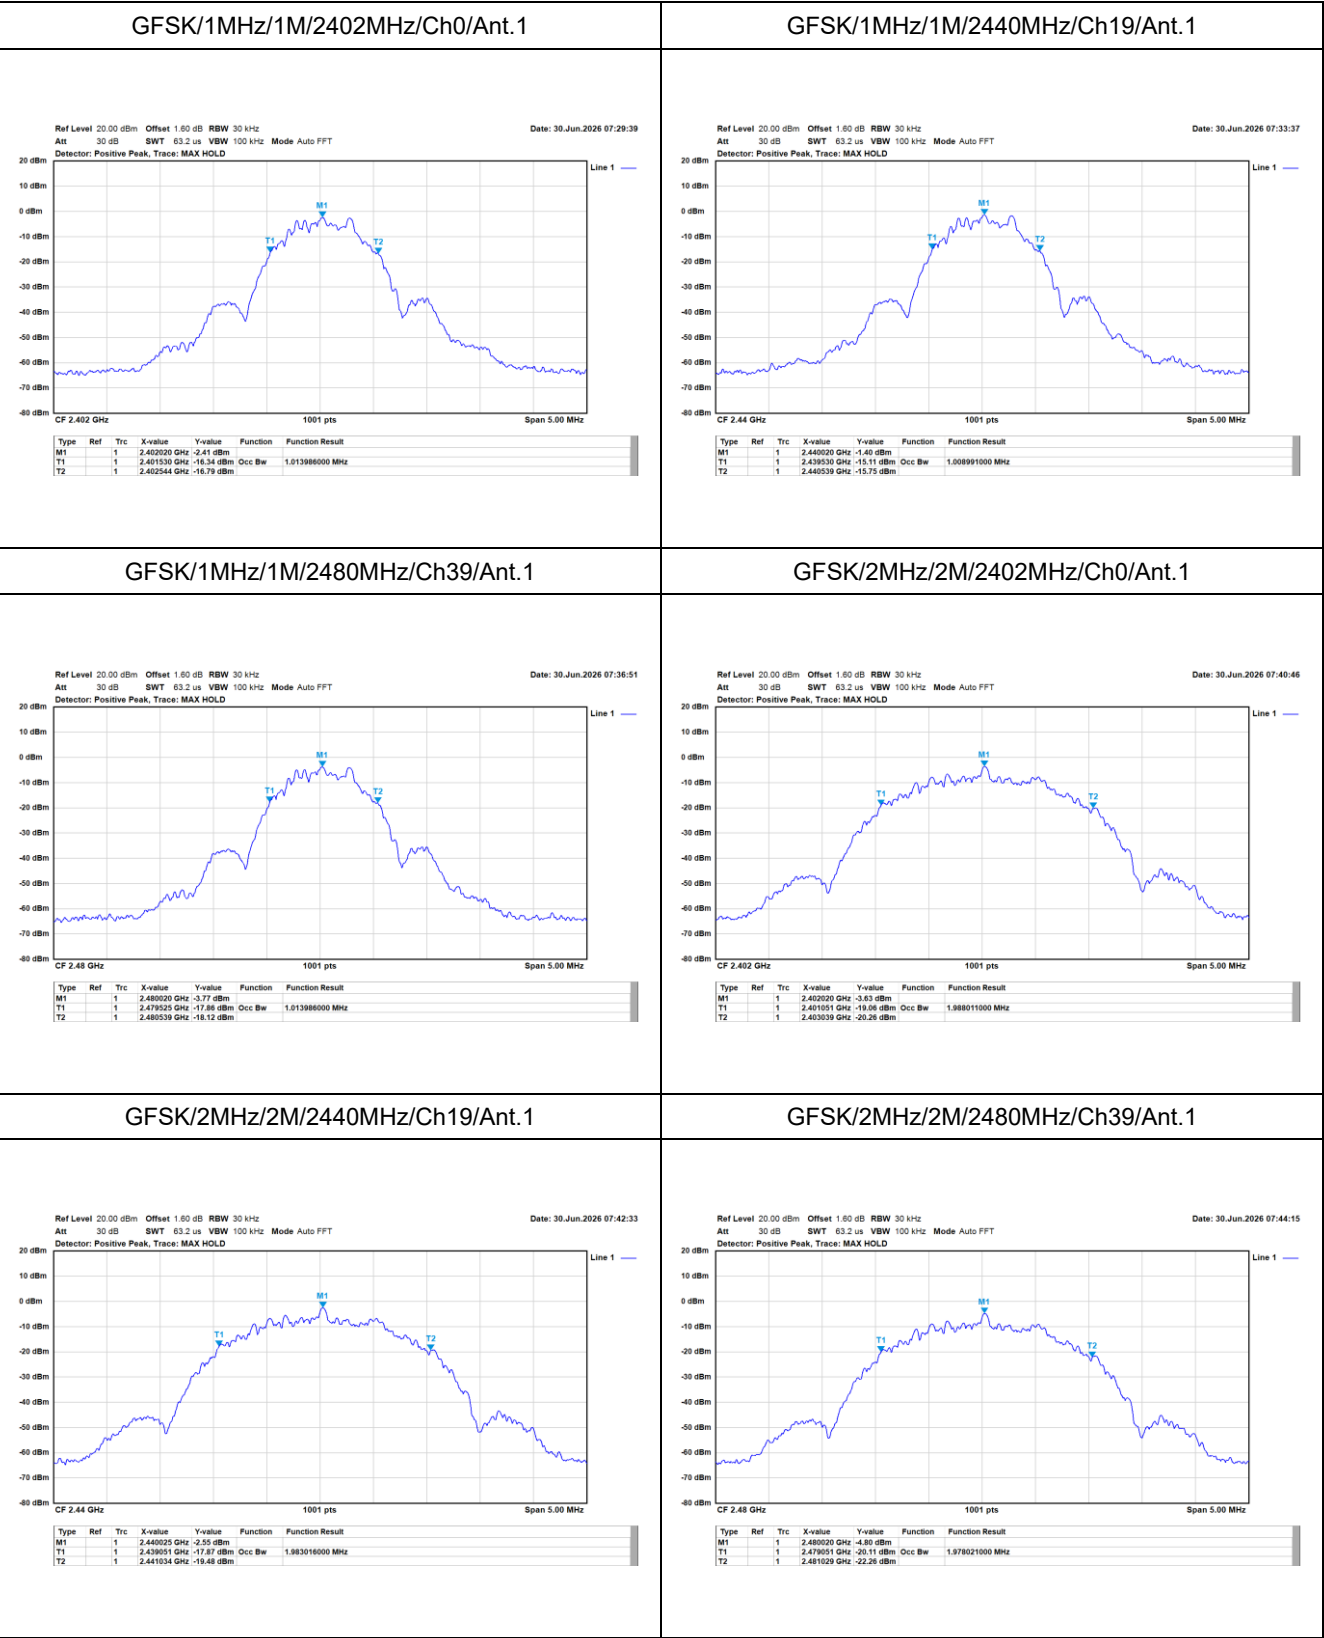


For DTS Bandwidth:


GFSK/1MHz/1M/2402MHz/Ch0/Ant.1

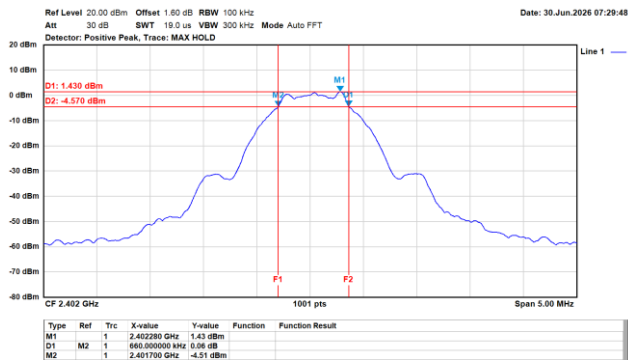


GFSK/1MHz/1M/2440MHz/Ch19/Ant.1

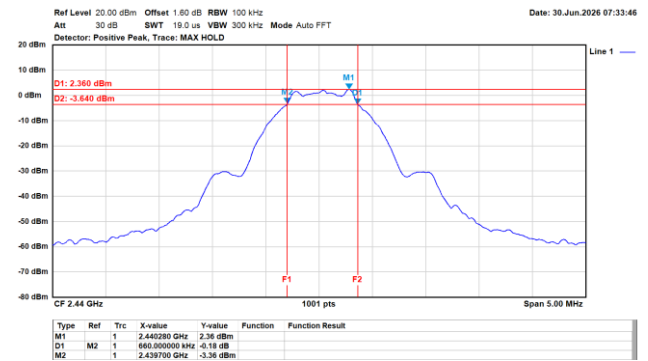


GFSK/1MHz/1M/2480MHz/Ch39/Ant.1

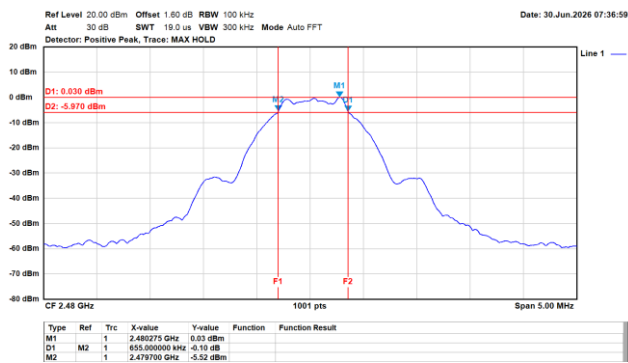


GFSK/2MHz/2M/2402MHz/Ch0/Ant.1

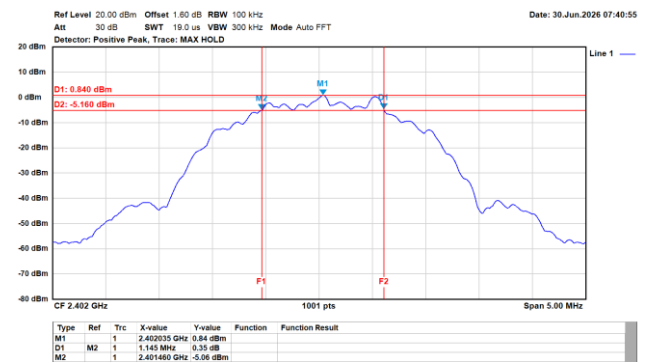

GFSK/2MHz/2M/2440MHz/Ch19/Ant.1

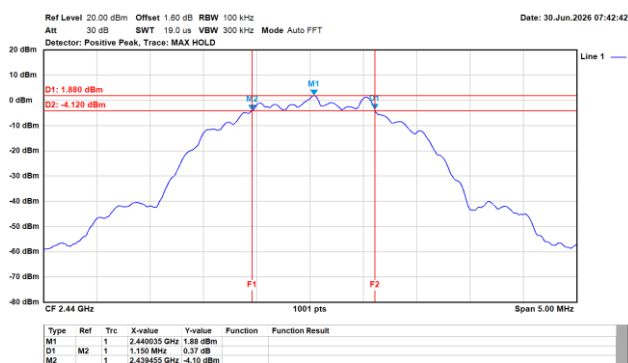

GFSK/2MHz/2M/2480MHz/Ch39/Ant.1

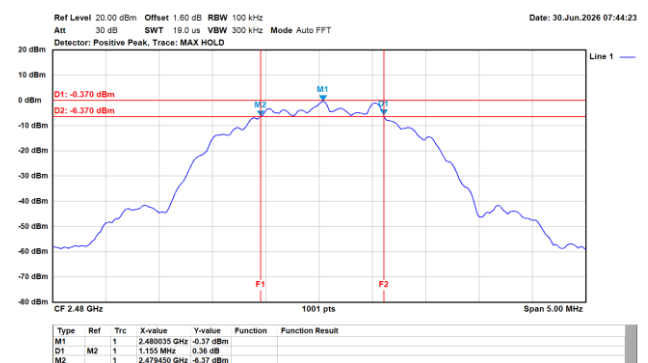


Appendix C. Test Result of Maximum Peak Conducted Output Power


Modulation	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)	Result
GFSK (125kbps)	2402	1.55	28.66	Pass
	2440	2.56	28.66	Pass
	2480	0.31	28.66	Pass
GFSK (500kbps)	2402	1.57	28.66	Pass
	2440	2.52	28.66	Pass
	2480	0.31	28.66	Pass
GFSK (1Mbps)	2402	1.58	28.66	Pass
	2440	2.57	28.66	Pass
	2480	0.32	28.66	Pass
GFSK (2Mbps)	2402	1.82	28.66	Pass
	2440	2.83	28.66	Pass
	2480	0.58	28.66	Pass


Appendix D. Test Result of Maximum Power Spectral Density

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK (1Mbps)	2402	-15.09	6.66	Pass
	2440	-14.14	6.66	Pass
	2480	-16.47	6.66	Pass
GFSK (2Mbps)	2402	-17.94	6.66	Pass
	2440	-16.90	6.66	Pass
	2480	-19.12	6.66	Pass

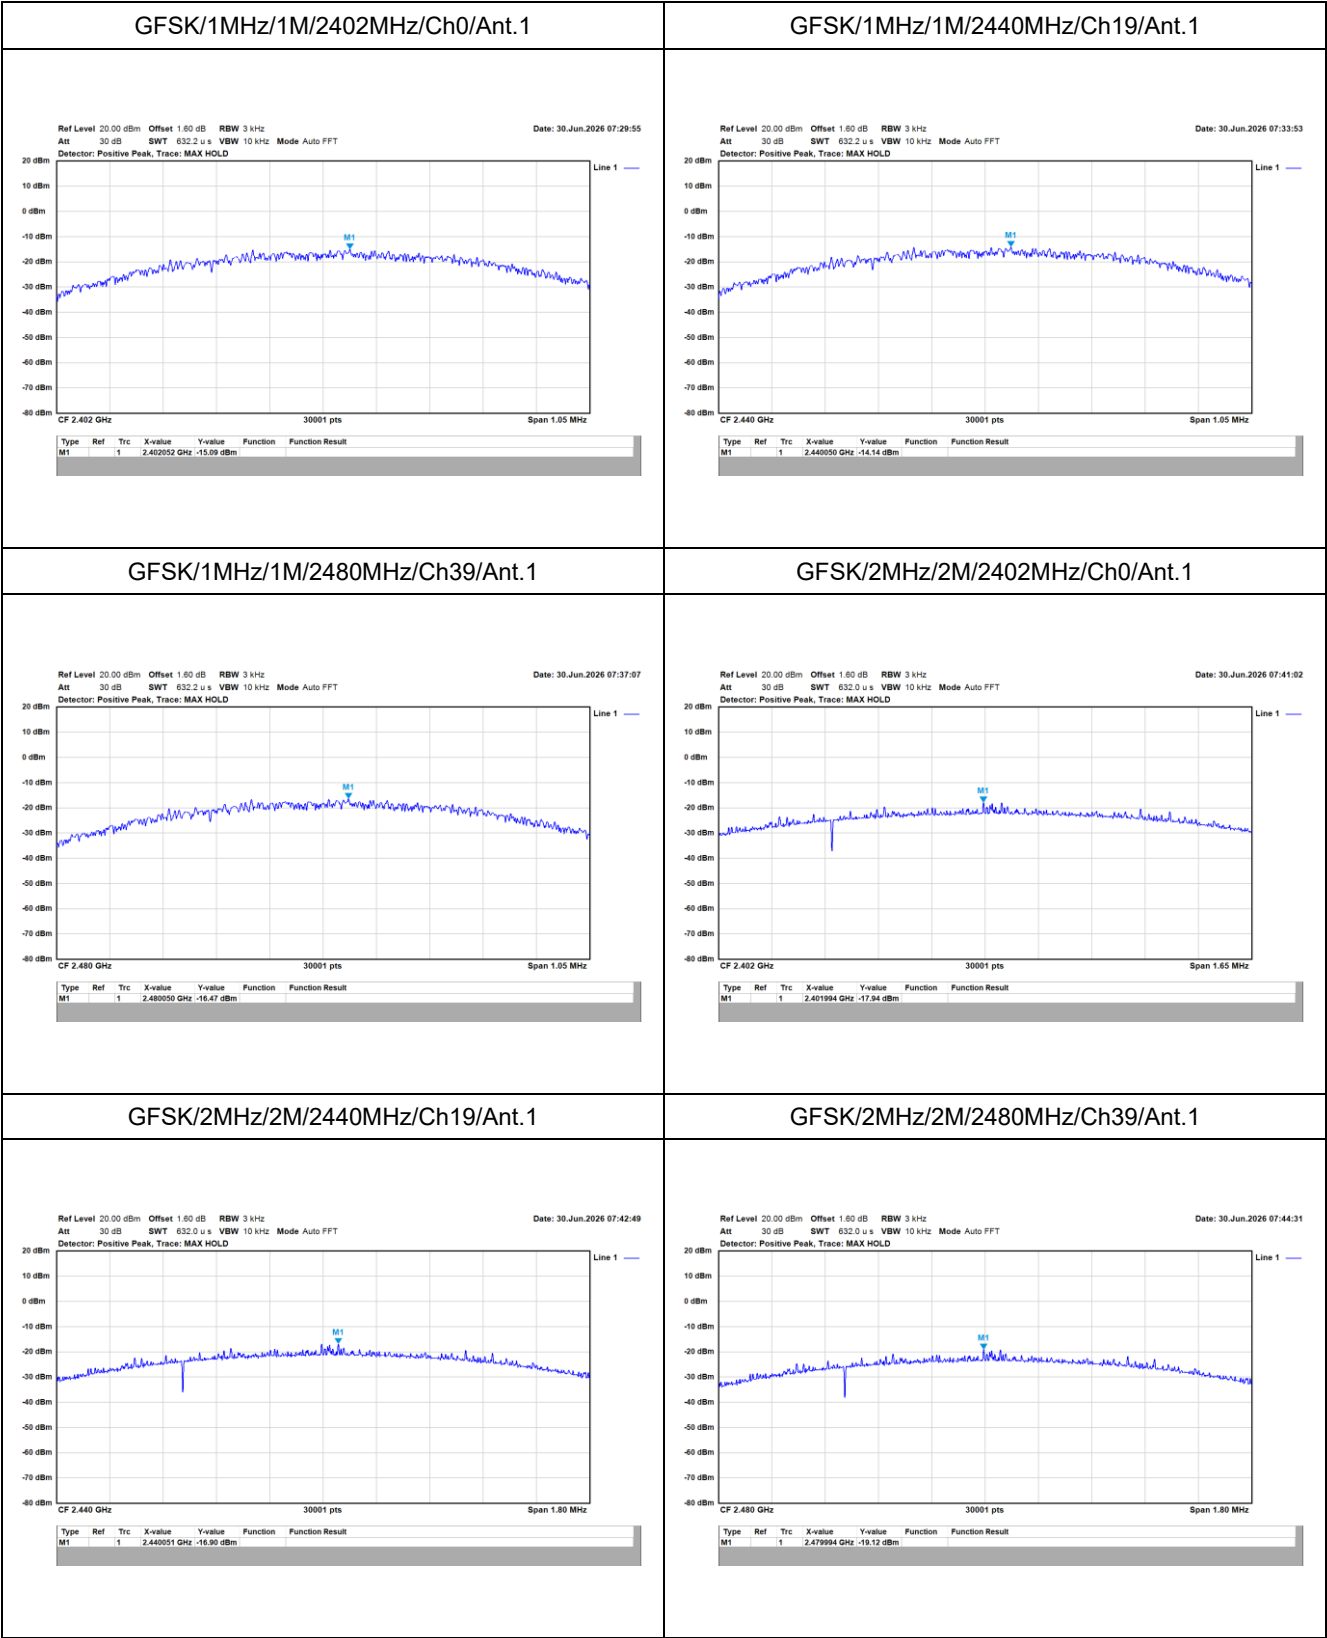

Appendix E. Test Result of Antenna Port Conducted Emission

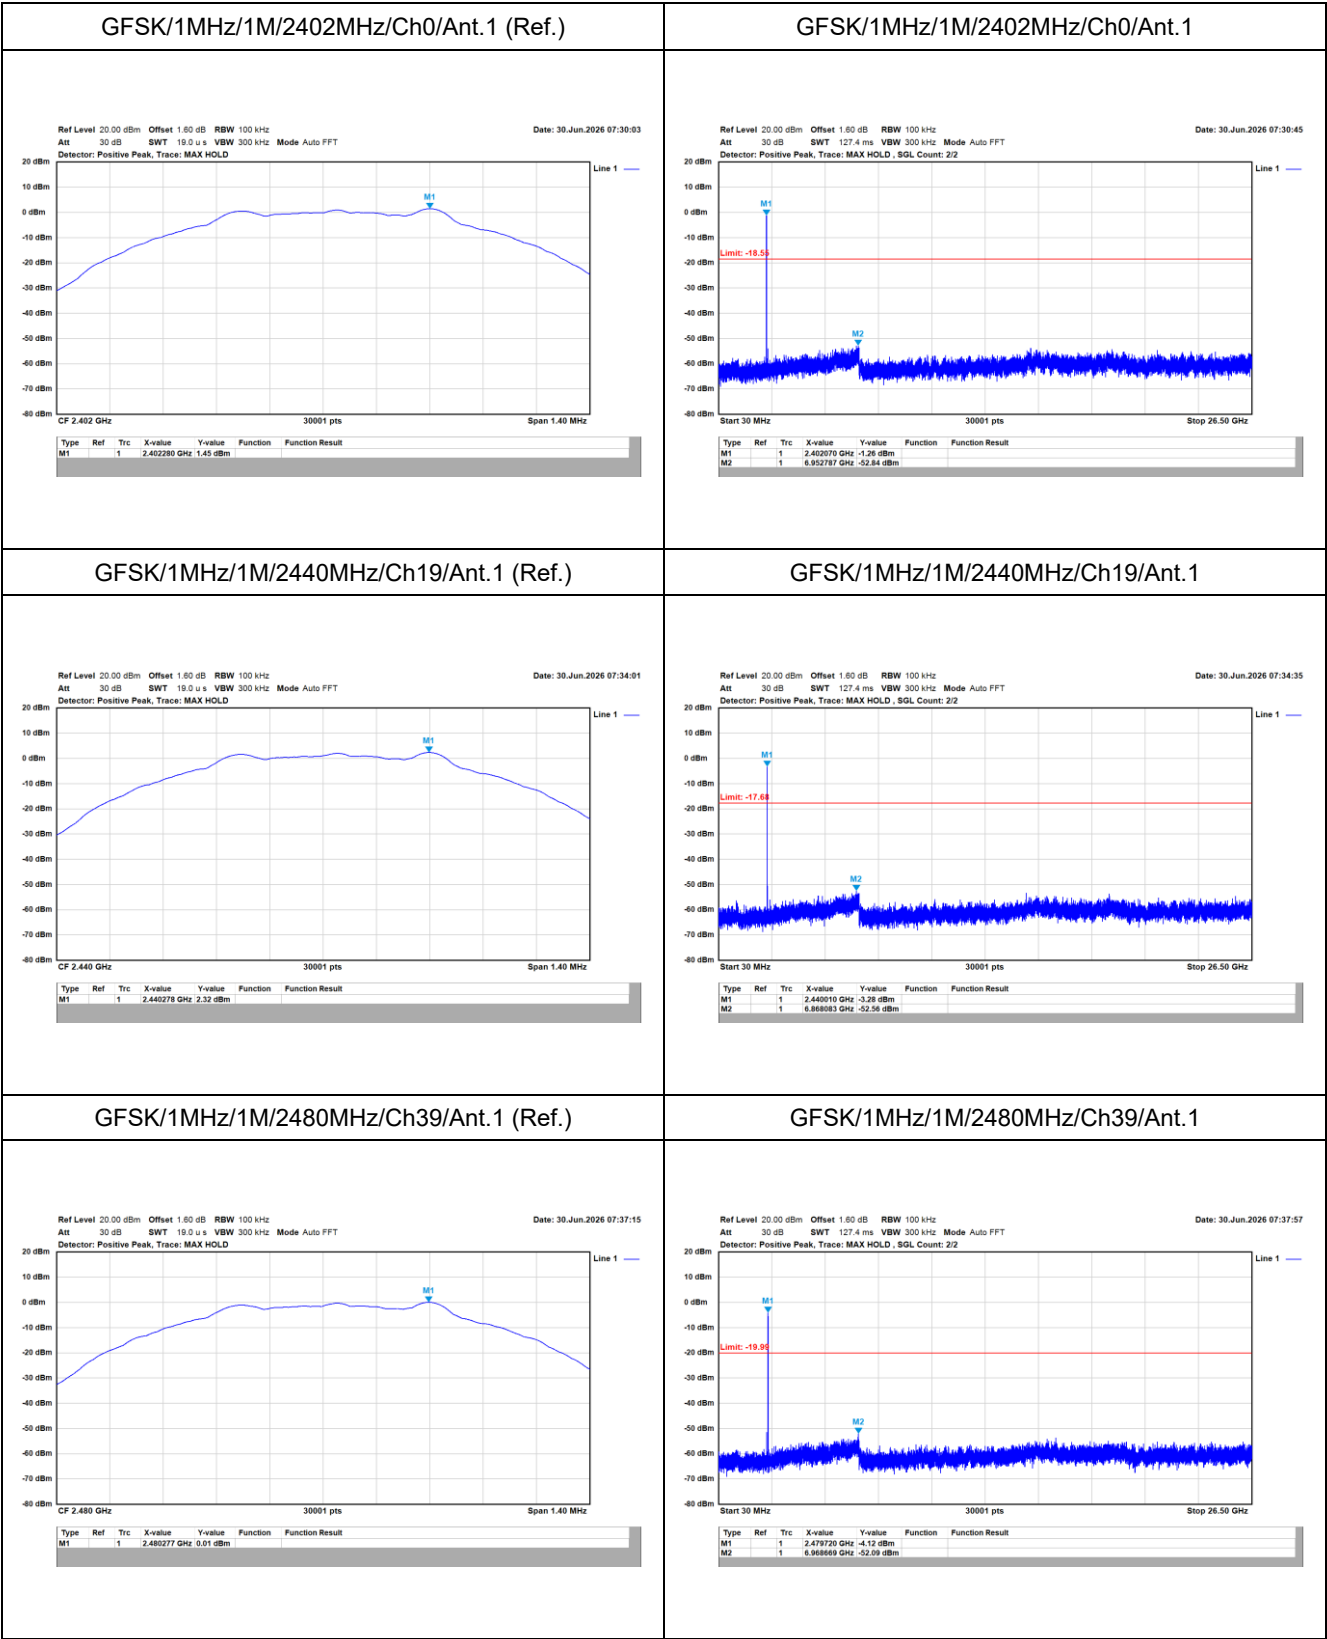

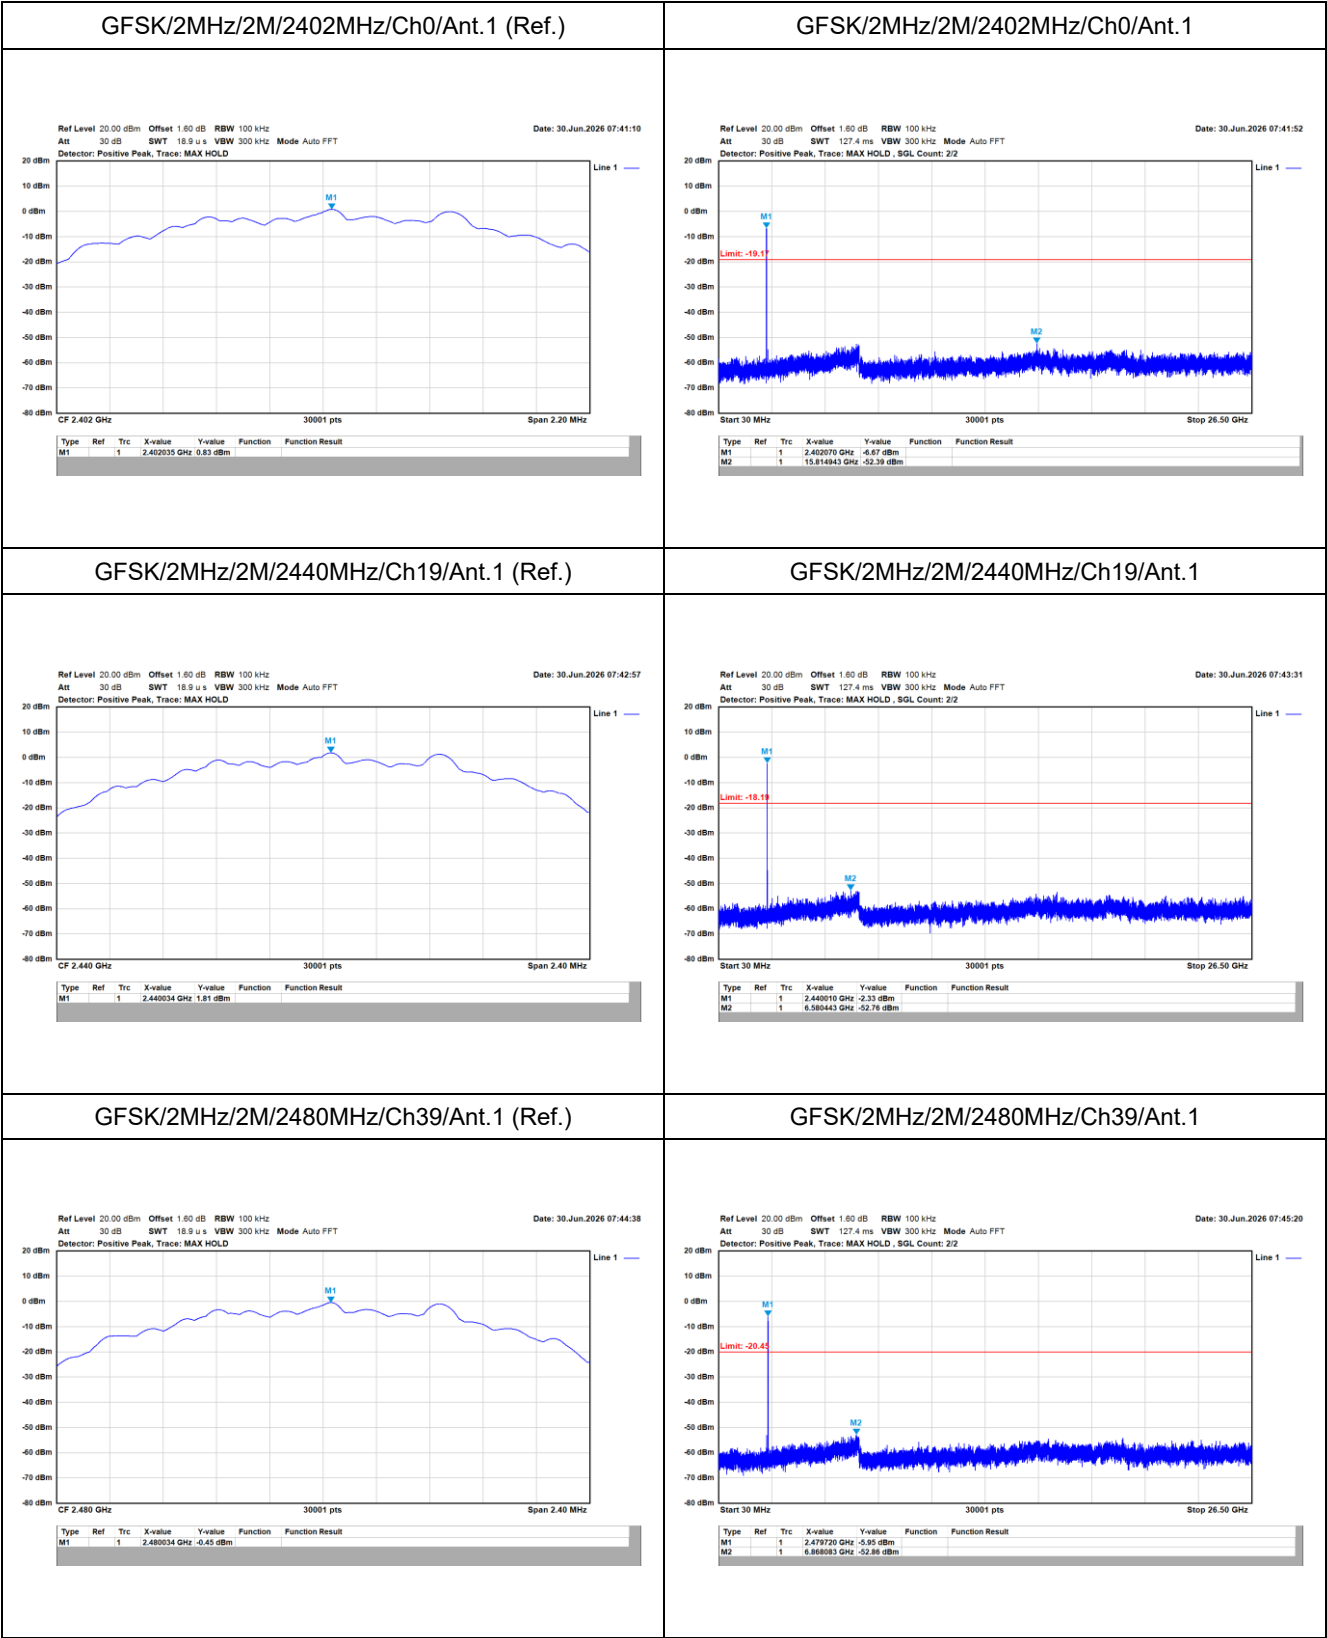




Appendix F. Test Result of Radiated Emission

TX_BLE1M_2402MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Rock

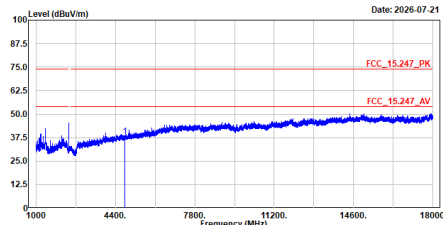

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	


1 4884.000 38.16 74.00 -35.84 53.35 -15.19 Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Rock

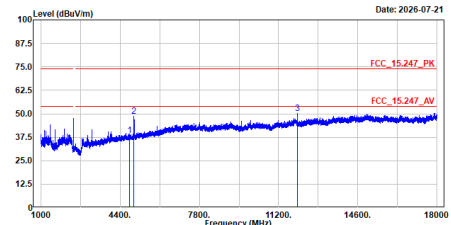

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	

1 4884.000 38.33 74.00 -35.67 53.52 -15.19 Peak

2 4991.600 48.61 74.00 -25.39 63.04 -14.43 Peak


3 12010.000 50.06 74.00 -23.94 52.17 -2.11 Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2440MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2440MHz
Test BY :Rock

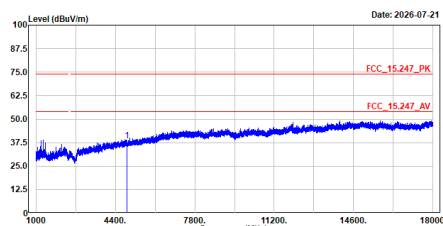

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	


1 4880.000 38.63 74.00 -35.37 53.50 -14.87 Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2440MHz
Test BY :Rock

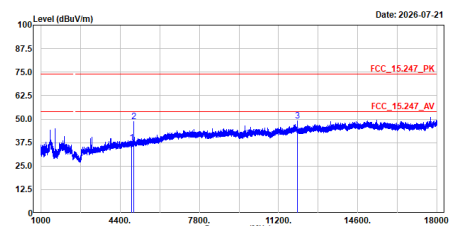

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	

1 4880.000 37.44 74.00 -36.56 52.31 -14.87 Peak

2 4994.150 48.85 74.00 -25.15 63.26 -14.41 Peak


3 12000.700 49.18 74.00 -24.82 51.30 -2.12 Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Rock

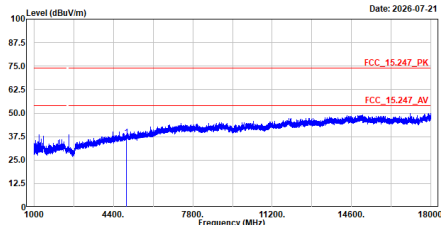


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4968.000	36.94	74.00	-37.06	51.50	-14.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Rock

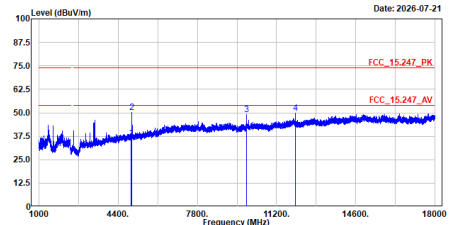


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4968.000	36.66	74.00	-37.34	51.22	-14.56	Peak
2	4999.850	50.18	74.00	-23.82	64.59	-14.41	Peak
3	9920.000	48.97	74.00	-25.03	55.05	-6.08	Peak
4	11999.850	49.96	74.00	-24.04	52.08	-2.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2402MHz
Test BY :Rock

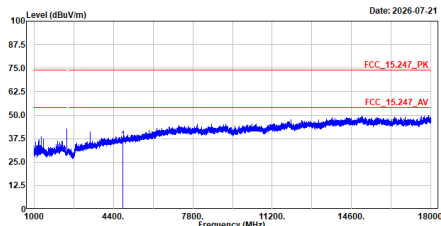


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4884.000	37.13	74.00	-36.87	52.32	-15.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2402MHz
Test BY :Rock

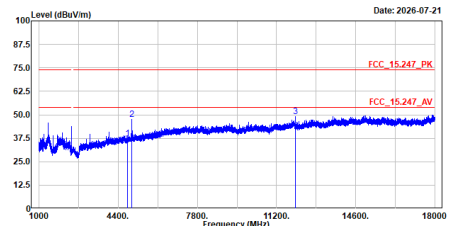


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4884.000	37.51	74.00	-36.49	52.70	-15.19	Peak
2	4989.900	47.60	74.00	-26.40	62.03	-14.43	Peak
3	11999.850	48.88	74.00	-25.12	51.00	-2.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2440MHz
Test BY :Rock

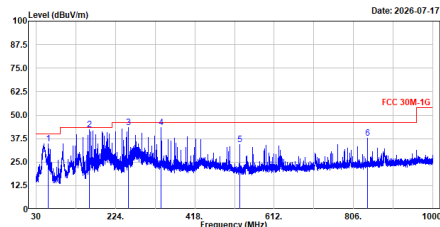


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	59.973	34.89	40.00	-5.11	59.02	-24.13	QP
2	159.900	42.39	43.50	-1.11	66.33	-23.94	QP
3	256.010	43.44	46.00	-2.56	68.28	-24.84	QP
4	336.035	43.25	46.00	-2.75	65.32	-22.07	QP
5	528.095	34.49	46.00	-11.51	52.17	-17.68	QP
6	840.144	37.77	46.00	-8.23	50.11	-12.34	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE2M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2440MHz
Test BY :Rock

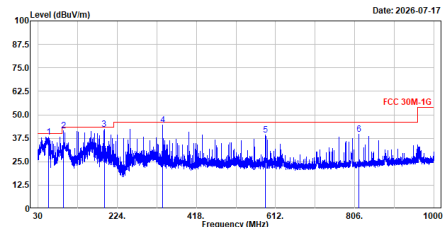


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	56.287	38.20	40.00	-1.80	61.96	-23.76	QP
2	91.983	41.39	43.50	-2.11	71.02	-29.63	QP
3	192.087	42.40	43.50	-1.10	68.98	-26.58	QP
4	336.035	44.46	46.00	-1.54	66.53	-22.07	QP
5	587.847	39.17	46.00	-6.83	55.38	-16.21	QP
6	816.088	39.73	46.00	-6.27	52.27	-12.54	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE1M_2402MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Rock

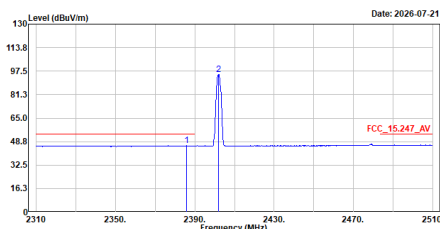


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2385.800	46.03	54.00	-7.97	15.72	30.31	Average
2	2402.000	95.41	-----	-----	65.15	30.26	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Rock

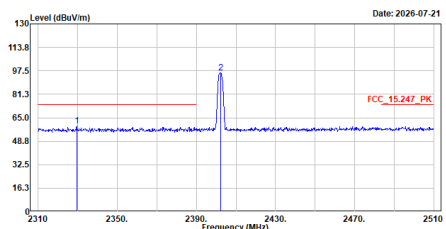


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2329.600	59.26	74.00	-14.74	28.83	30.43	Peak
2	2402.400	96.07	-----	-----	65.81	30.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Rock

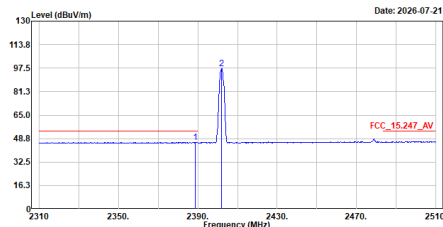


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.000	46.15	54.00	-7.85	15.87	30.28	Average
2	2402.000	96.99	54.00	66.73	66.73	30.26	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Rock

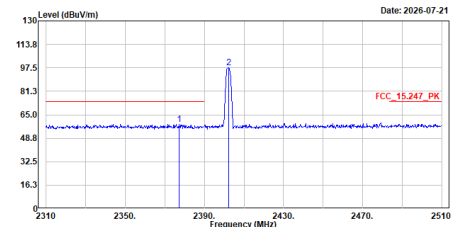


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2377.200	58.59	74.00	-15.41	28.22	30.37	Peak
2	2402.000	97.62	54.00	67.36	67.36	30.26	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Rock

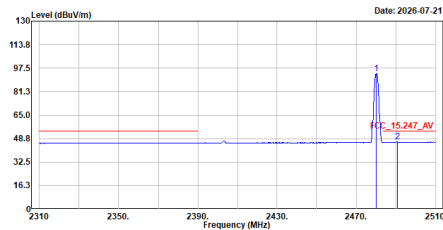


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	93.65	54.00	63.33	63.33	30.32	Average
2	2490.600	46.46	54.00	-7.54	16.13	30.33	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Rock

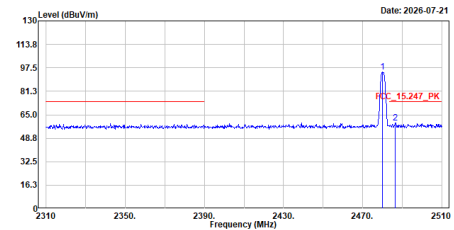


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	94.48	54.00	64.16	64.16	30.32	Peak
2	2486.600	59.33	74.00	-14.67	29.61	30.32	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Rock

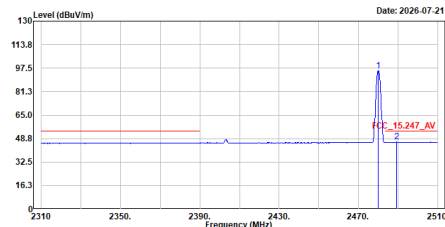


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	95.51	-----	-----	65.19	30.32	Average
2	2489.000	46.39	54.00	-7.61	16.86	30.33	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Rock

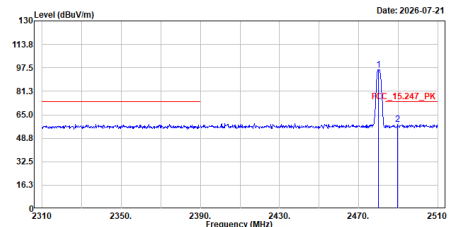


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	96.23	-----	-----	65.91	30.32	Peak
2	2489.000	58.32	74.00	-15.68	27.99	30.33	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2402MHz
Test BY :Rock

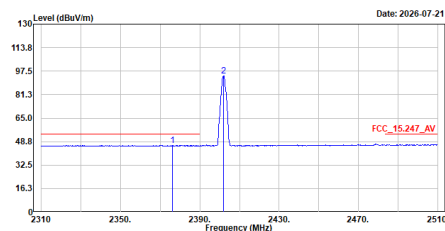


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2376.200	46.25	54.00	-7.75	15.88	30.37	Average
2	2402.000	94.28	-----	-----	64.02	30.26	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2402MHz
Test BY :Rock

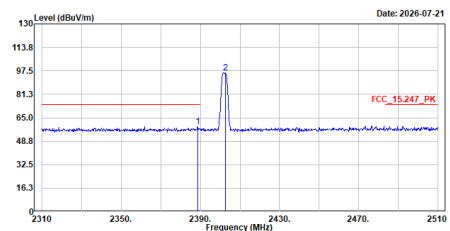


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.600	59.03	74.00	-14.97	28.75	30.28	Peak
2	2402.600	96.01	-----	-----	65.76	30.25	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2402MHz
Test BY :Rock

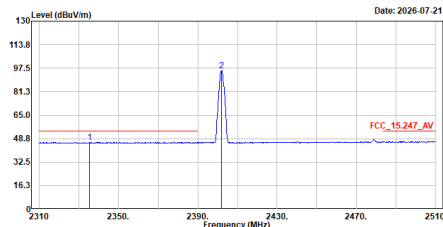


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2335.200	46.22	54.00	-7.78	15.78	30.44	Average
2	2402.000	95.75	-----	-----	65.49	30.26	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2402MHz
Test BY :Rock

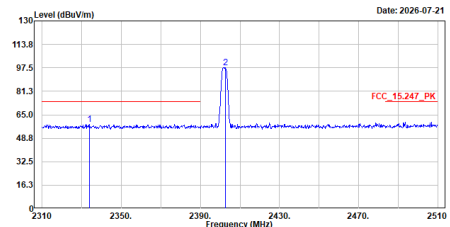


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2335.800	58.41	74.00	-15.59	27.97	30.44	Peak
2	2402.000	97.55	-----	-----	67.30	30.25	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2480MHz
Test BY :Rock

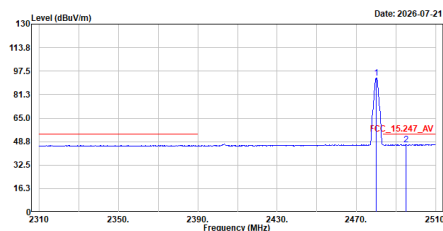


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	92.59	-----	-----	62.27	30.32	Average
2	2495.000	46.75	54.00	-7.25	16.42	30.33	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2480MHz
Test BY :Rock

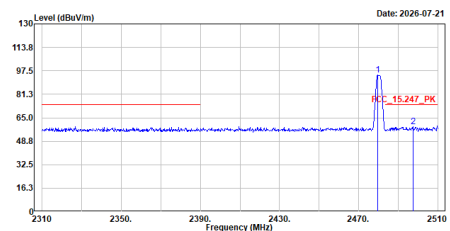


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2479.800	94.49	-----	-----	64.17	30.32	Peak
2	2497.400	58.87	74.00	-15.13	28.54	30.33	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2480MHz
Test BY :Rock

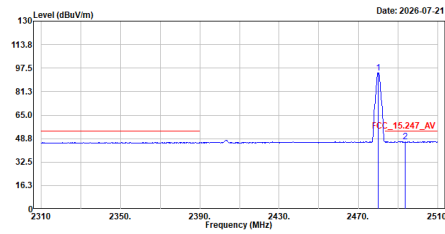


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.000	94.40	-----	-----	64.08	30.32	Average
2	2493.600	46.66	54.00	-7.34	16.33	30.33	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2480MHz
Test BY :Rock

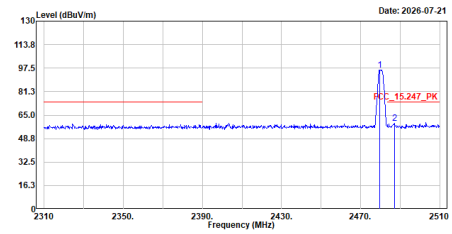


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2479.800	96.36	-----		66.04	30.32	Peak
2	2487.800	59.14	74.00	-14.86	28.82	30.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Worst-Case Emissions Above 18 GHz

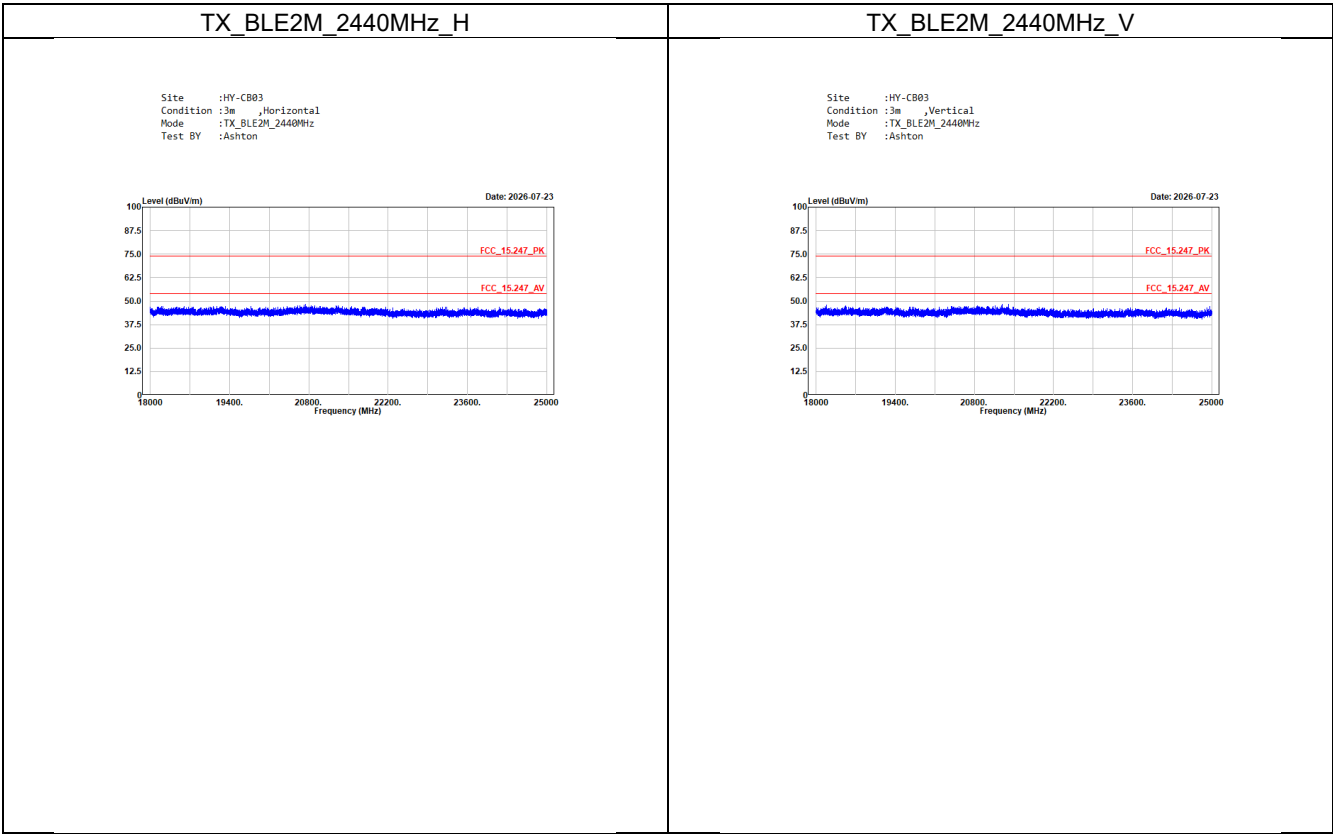

Co-location_ROW version

GSM850_voice_CH128_TX_BLE2M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :GSM850_voice_CH128_TX_BLE2M_2480MHz
Test BY :Ashton

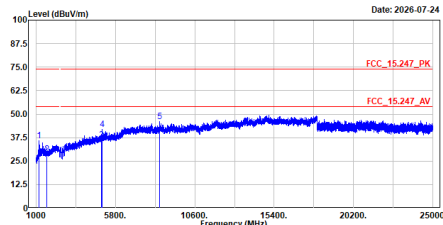


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1175.950	35.73	74.00	-38.27	61.66	-25.93	Peak
2	1648.400	28.77	74.00	-45.23	54.22	-25.45	Peak
3	4960.000	36.39	74.00	-37.61	50.95	-14.56	Peak
4	4997.550	41.78	74.00	-32.22	56.17	-14.39	Peak
5	8485.950	46.19	74.00	-27.81	53.68	-7.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

GSM850_voice_CH128_TX_BLE2M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :GSM850_voice_CH128_TX_BLE2M_2480MHz
Test BY :Ashton

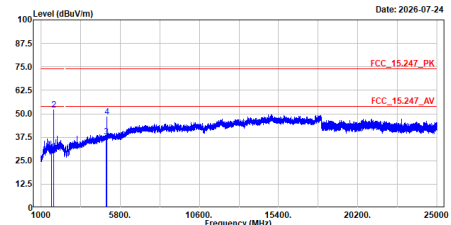


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1648.400	29.46	74.00	-44.54	54.91	-25.45	Peak
2	1759.050	51.96	74.00	-22.04	77.31	-25.35	Peak
3	4960.000	37.76	74.00	-36.24	52.32	-14.56	Peak
4	4989.900	48.25	74.00	-25.75	62.68	-14.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTEB25_5M_QPSK_CH26665_TX_ax40_5755MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTEB25_5M_QPSK_CH26665_TX_ax40_5755MHz
Test BY :Ashton

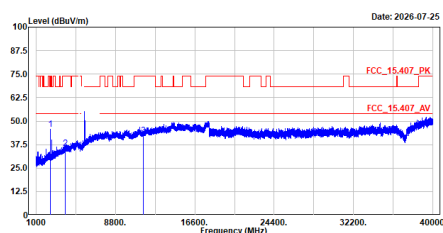


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	45.64	68.22	-22.58	69.51	-23.87	Peak
2	3825.000	35.46	74.00	-38.54	54.61	-19.15	Peak
3	11510.000	42.30	74.00	-31.70	44.76	-2.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTEB25_5M_QPSK_CH26665_TX_ax40_5755MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTEB25_5M_QPSK_CH26665_TX_ax40_5755MHz
Test BY :Ashton

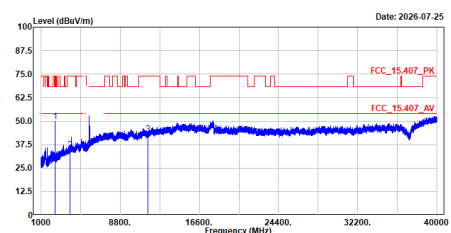


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	49.76	68.22	-18.46	73.62	-23.86	Peak
2	3825.000	34.81	74.00	-39.19	53.96	-19.15	Peak
3	11510.000	43.04	74.00	-30.96	45.50	-2.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTEB26_1.4M_QPSK_CH26783_TX_ax40_2452MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTEB26_1.4M_QPSK_CH26783_TX_ax40_2452MHz
Test BY :Ashton

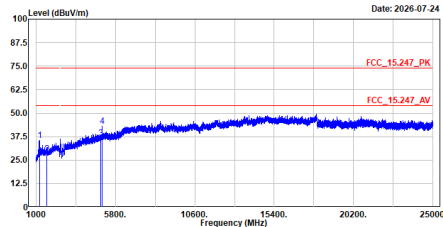


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1199.750	35.35	74.00	-38.65	61.29	-25.94	Peak
2	1646.600	28.48	74.00	-45.52	53.92	-25.44	Peak
3	4984.000	36.75	74.00	-37.25	51.56	-14.81	Peak
4	4994.150	43.06	74.00	-30.94	57.47	-14.41	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTEB26_1.4M_QPSK_CH26783_TX_ax40_2452MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTEB26_1.4M_QPSK_CH26783_TX_ax40_2452MHz
Test BY :Ashton

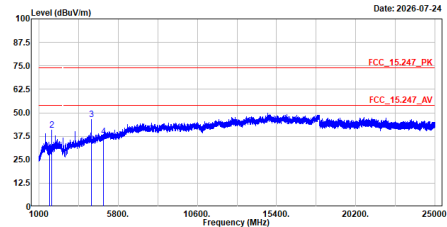


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1646.600	28.80	74.00	-45.20	54.24	-25.44	Peak
2	1768.400	40.87	74.00	-33.13	66.30	-25.43	Peak
3	4156.900	46.34	74.00	-27.66	64.86	-18.52	Peak
4	4904.000	37.22	74.00	-36.78	52.03	-14.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTEB42_15M_QPSK_CH42165_TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTEB42_15M_QPSK_CH42165_TX_ax20_5935MHz
Test BY :Ashton

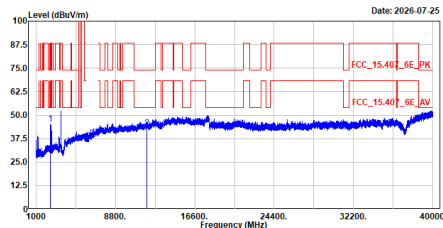


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2393.150	45.27	88.22	-42.95	69.14	-23.87	Peak
2	11870.000	43.18	74.00	-30.82	45.25	-2.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTEB42_15M_QPSK_CH42165_TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTEB42_15M_QPSK_CH42165_TX_ax20_5935MHz
Test BY :Ashton

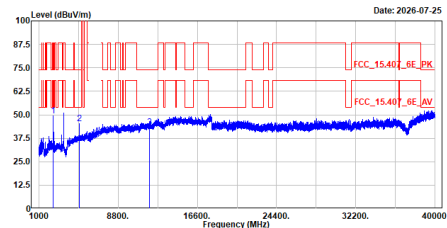


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2389.750	49.56	74.00	-24.44	73.43	-23.87	Peak
2	4981.400	45.22	74.00	-28.78	59.69	-14.47	Peak
3	11870.000	43.51	74.00	-30.49	45.58	-2.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

GSM850_voice_CH128_TX_BLE2M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :GSM850_voice_CH128_TX_BLE2M_2480MHz
Test BY :Ashton

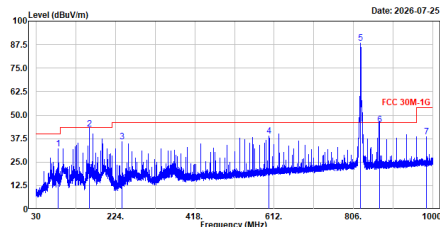


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	83.932	32.18	40.00	-7.90	61.96	-29.86	QP
2	160.029	42.49	43.50	-1.01	66.43	-23.94	QP
3	240.005	35.73	46.00	-10.27	60.85	-25.12	QP
4	600.069	38.69	46.00	-7.31	54.49	-15.80	QP
5	823.703	88.46	-----	-----	100.91	-12.45	QP
6	869.390	44.83	46.00	-1.17	56.92	-12.09	QP
7	984.092	38.40	54.00	-15.60	48.91	-10.51	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

GSM850_voice_CH128_TX_BLE2M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :GSM850_voice_CH128_TX_BLE2M_2480MHz
Test BY :Ashton

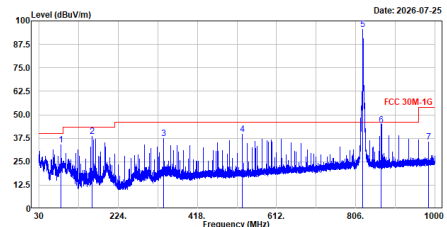


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	84.029	33.90	40.00	-6.10	63.77	-29.87	QP
2	160.029	38.46	43.50	-5.04	62.40	-23.94	QP
3	336.035	37.54	46.00	-8.46	59.61	-22.07	QP
4	528.047	39.74	46.00	-6.26	57.42	-17.68	QP
5	823.751	95.47	-----	-----	107.92	-12.45	QP
6	868.808	44.44	46.00	-1.56	56.52	-12.08	QP
7	984.092	35.51	54.00	-18.49	46.82	-10.51	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTEB25_5M_QPSK_CH26665_TX_ax40_5755MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTEB25_5M_QPSK_CH26665_TX_ax40_5755MHz
Test BY :Ashton

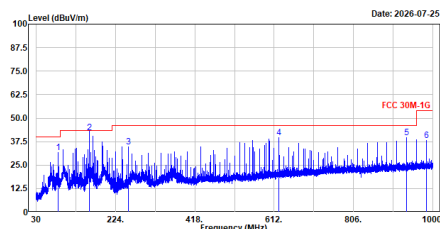


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	84.029	31.87	40.00	-8.13	61.74	-29.87	QP
2	160.029	42.12	43.50	-1.38	66.06	-23.94	QP
3	256.010	34.86	46.00	-11.14	59.70	-24.84	QP
4	624.077	39.76	46.00	-6.24	55.12	-15.36	QP
5	936.077	39.79	46.00	-6.21	50.88	-11.09	QP
6	984.092	38.03	54.00	-15.97	48.54	-10.51	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTEB25_5M_QPSK_CH26665_TX_ax40_5755MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTEB25_5M_QPSK_CH26665_TX_ax40_5755MHz
Test BY :Ashton

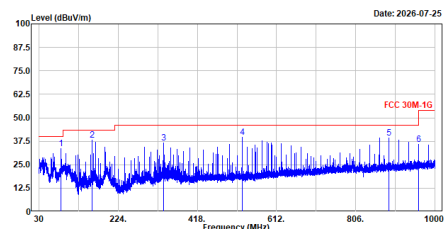


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	83.981	33.71	40.00	-6.29	63.58	-29.87	QP
2	160.029	38.06	43.50	-5.44	62.00	-23.94	QP
3	336.035	36.66	46.00	-9.34	58.73	-22.07	QP
4	528.047	39.59	46.00	-6.41	57.27	-17.68	QP
5	888.062	39.17	46.00	-6.83	51.08	-11.91	QP
6	968.085	35.92	54.00	-18.08	46.67	-10.75	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTEB26_1.4M_QPSK_CH26783_TX_ax40_2452MHz_H


Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :LTEB26_1.4M_QPSK_CH26783_TX_ax40_2452MHz
 Test BY :Ashton

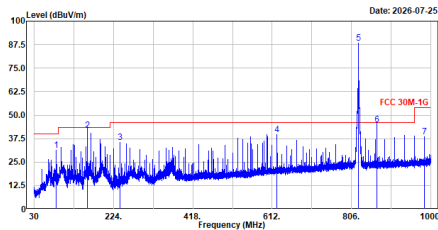

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTEB26_1.4M_QPSK_CH26783_TX_ax40_2452MHz_V


Site :HY-CB03
 Condition :3m ,Vertical
 Mode :LTEB26_1.4M_QPSK_CH26783_TX_ax40_2452MHz
 Test BY :Ashton

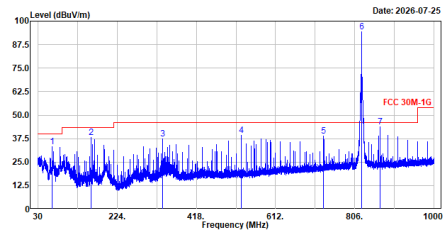

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTEB42_15M_QPSK_CH42165_TX_ax20_5935MHz_H


Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :LTEB42_15M_QPSK_CH42165_TX_ax20_5935MHz
 Test BY :Ashton

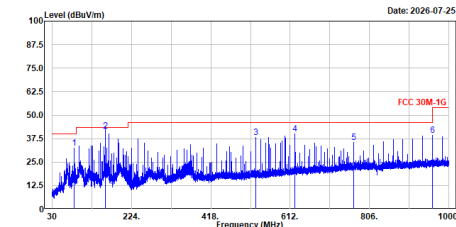

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTEB42_15M_QPSK_CH42165_TX_ax20_5935MHz_V

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :LTEB42_15M_QPSK_CH42165_TX_ax20_5935MHz
 Test BY :Ashton

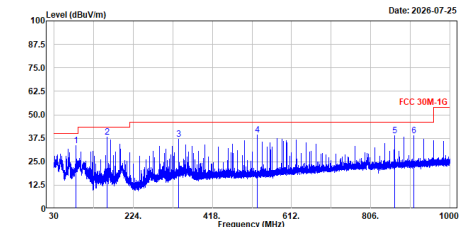


Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Co-location_US version

LTE_B25_1.4M_QPSK_CH26365+TX_ax40_5755MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B25_1.4M_QPSK_CH26365+TX_ax40_5755MHz
Test BY :Ashton

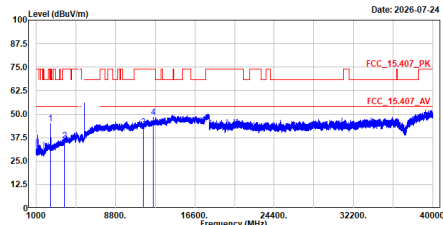


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2395.700	44.88	68.22	-23.34	68.75	-23.87	Peak
2	3765.000	35.66	74.00	-38.34	55.22	-19.56	Peak
3	11510.000	43.14	74.00	-30.86	45.60	-2.46	Peak
4	12499.650	48.13	74.00	-25.87	49.09	-0.96	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B25_1.4M_QPSK_CH26365+TX_ax40_5755MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B25_1.4M_QPSK_CH26365+TX_ax40_5755MHz
Test BY :Ashton

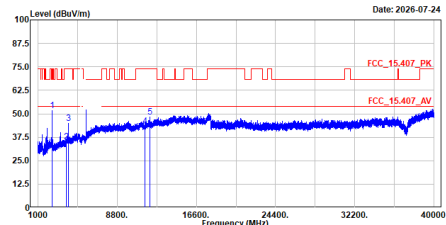


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.750	51.79	74.00	-22.21	75.66	-23.87	Peak
2	3765.000	34.95	74.00	-39.05	54.51	-19.56	Peak
3	3999.650	44.91	74.00	-29.09	63.68	-18.77	Peak
4	11510.000	43.30	74.00	-30.70	45.76	-2.46	Peak
5	11999.850	48.31	74.00	-25.69	50.43	-2.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz
Test BY :Ashton

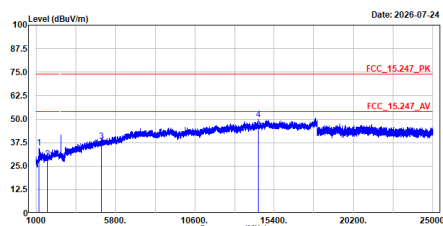


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1152.150	34.82	74.00	-39.18	60.83	-26.01	Peak
2	1683.000	28.84	74.00	-45.16	54.53	-25.69	Peak
3	4960.000	37.96	74.00	-36.04	52.52	-14.56	Peak
4	14432.550	49.95	74.00	-24.05	49.78	0.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz
Test BY :Ashton

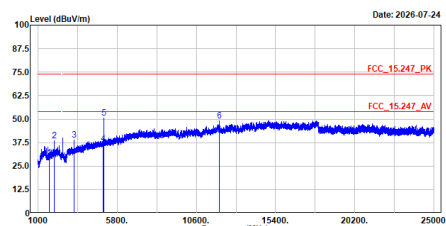


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1683.000	29.44	74.00	-44.56	55.13	-25.69	Peak
2	1993.650	38.66	74.00	-35.34	63.07	-24.41	Peak
3	3193.000	38.94	74.00	-35.06	61.00	-22.06	Peak
4	4960.000	36.97	74.00	-37.03	51.53	-14.56	Peak
5	4979.700	50.40	74.00	-23.60	64.88	-14.48	Peak
6	11999.850	48.89	74.00	-25.11	51.81	-2.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz
Test BY :Ashton

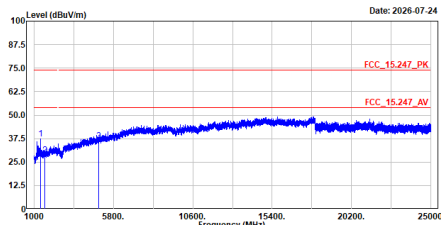


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1396.100	37.33	74.00	-36.67	62.79	-25.46	Peak
2	1645.000	28.62	74.00	-45.38	54.06	-25.44	Peak
3	4904.000	36.37	74.00	-37.63	51.18	-14.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz
Test BY :Ashton

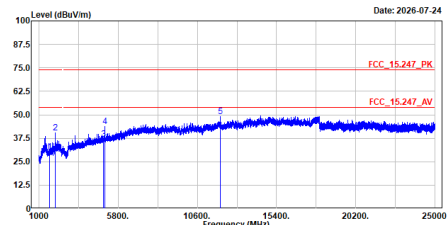


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1645.000	38.09	74.00	-35.91	55.53	-25.44	Peak
2	1994.500	40.54	74.00	-33.46	64.96	-24.42	Peak
3	4904.000	37.04	74.00	-36.96	51.85	-14.81	Peak
4	4983.950	43.64	74.00	-30.36	58.10	-14.46	Peak
5	12000.700	49.13	74.00	-24.87	51.25	-2.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz
Test BY :Ashton

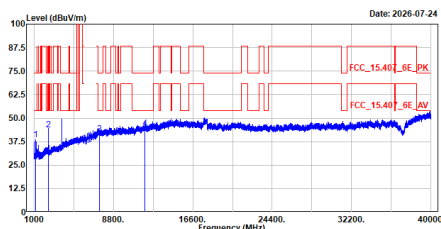


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1152.150	38.52	74.00	-35.48	64.53	-26.01	Peak
2	2392.300	43.75	88.22	-44.47	67.61	-23.86	Peak
3	7395.000	41.61	74.00	-32.39	49.05	-7.44	Peak
4	11870.000	44.43	74.00	-29.57	46.50	-2.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz
Test BY :Ashton

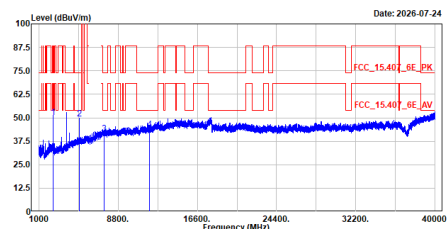


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2391.450	50.32	88.22	-37.90	74.19	-23.87	Peak
2	4993.300	49.34	74.00	-24.66	63.75	-14.41	Peak
3	7395.000	41.61	74.00	-32.39	49.05	-7.44	Peak
4	11870.000	43.82	74.00	-30.18	45.89	-2.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B7_20M_QPSK_CH21100+TX_ax40_5755MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_CH21100+TX_ax40_5755MHz
Test BY :Ashton

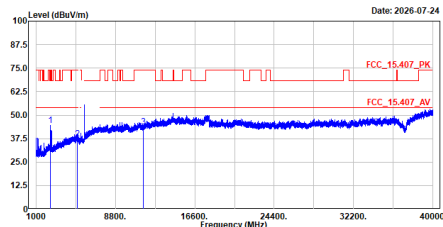


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	44.52	68.22	-23.70	68.39	-23.87	Peak
2	5070.000	37.21	74.00	-36.79	51.40	-14.19	Peak
3	11510.000	43.71	74.00	-30.29	46.17	-2.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B7_20M_QPSK_CH21100+TX_ax40_5755MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_CH21100+TX_ax40_5755MHz
Test BY :Ashton

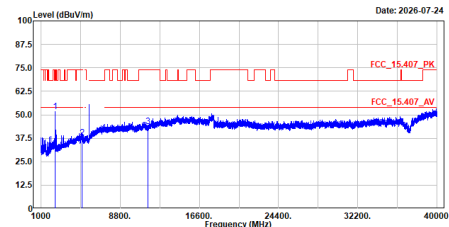


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	51.56	68.22	-16.66	75.43	-23.87	Peak
2	5070.000	37.86	74.00	-36.14	52.05	-14.19	Peak
3	11510.000	43.79	74.00	-30.21	46.25	-2.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTEB26_15M_QPSK_CH26965_TX_BLE2M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTEB26_15M_QPSK_CH26965_TX_BLE2M_2480MHz
Test BY :Ashton

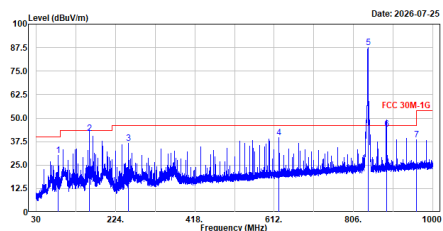


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	83.835	30.21	40.00	-9.79	60.05	-29.84	QP
2	160.029	41.75	43.50	-1.75	65.69	-23.94	QP
3	256.010	36.49	46.00	-9.51	61.33	-24.84	QP
4	624.077	39.59	46.00	-6.41	54.95	-15.36	QP
5	841.987	87.43	-----	-----	99.73	-12.30	QP
6	886.898	43.99	46.00	-2.01	55.92	-11.93	QP
7	960.133	38.57	54.00	-15.43	49.32	-10.75	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTEB26_15M_QPSK_CH26965_TX_BLE2M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTEB26_15M_QPSK_CH26965_TX_BLE2M_2480MHz
Test BY :Ashton

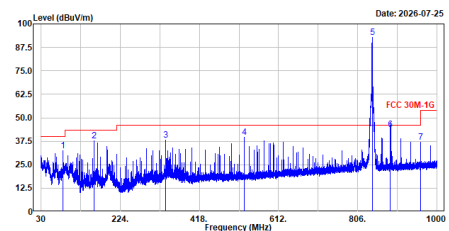


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	84.126	32.59	40.00	-7.41	62.47	-29.88	QP
2	160.029	37.91	43.50	-5.59	61.85	-23.94	QP
3	336.035	37.99	46.00	-8.01	60.06	-22.07	QP
4	528.047	39.62	46.00	-6.38	57.30	-17.68	QP
5	841.987	92.93	-----	-----	105.23	-12.30	QP
6	886.074	43.66	46.00	-2.34	55.61	-11.95	QP
7	960.005	36.87	54.00	-17.13	47.62	-10.75	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTEB26_3M_QPSK_CH26775_TX_ax40_2452MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTEB26_3M_QPSK_CH26775_TX_ax40_2452MHz
Test BY :Ashton

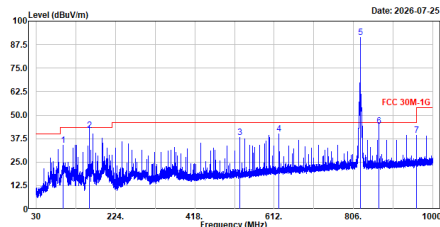


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	96.009	34.00	43.50	-9.50	63.00	-29.00	QP
2	160.029	42.06	43.50	-1.44	66.00	-23.94	QP
3	528.047	38.23	46.00	-7.77	55.91	-17.68	QP
4	624.077	40.16	46.00	-5.84	55.52	-15.36	QP
5	822.830	91.39	-----	-----	103.84	-12.45	QP
6	868.226	43.97	46.00	-2.03	56.03	-12.06	QP
7	960.133	39.23	54.00	-14.77	49.98	-10.75	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTEB26_3M_QPSK_CH26775_TX_ax40_2452MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTEB26_3M_QPSK_CH26775_TX_ax40_2452MHz
Test BY :Ashton

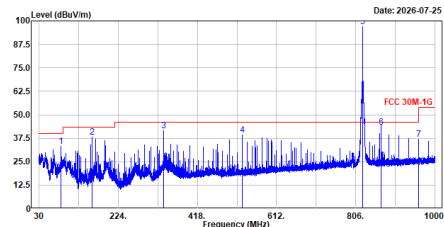


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	84.078	33.12	40.00	-6.88	63.00	-29.88	QP
2	160.029	37.96	43.50	-5.54	61.90	-23.94	QP
3	336.035	41.49	46.00	-4.51	63.56	-22.07	QP
4	528.047	39.41	46.00	-6.59	57.09	-17.68	QP
5	822.830	96.86	-----	-----	109.31	-12.45	QP
6	867.983	43.45	46.00	-2.55	55.51	-12.06	QP
7	960.133	36.79	54.00	-17.21	47.54	-10.75	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B25_1.4M_QPSK_CH26365+TX_ax40_5755MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B25_1.4M_QPSK_CH26365+TX_ax40_5755MHz
Test BY :Ashton

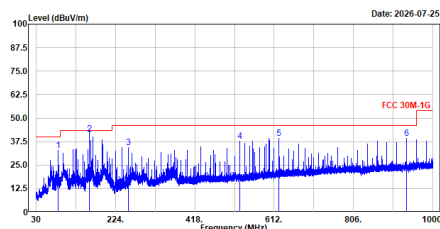


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	83.981	32.64	40.00	-7.36	62.51	-29.87	QP
2	160.029	41.50	43.50	-1.92	65.52	-23.94	QP
3	256.010	34.52	46.00	-11.48	59.36	-24.84	QP
4	528.047	37.91	46.00	-8.09	55.59	-17.68	QP
5	624.077	39.17	46.00	-6.83	54.53	-15.36	QP
6	936.077	39.21	46.00	-6.79	50.30	-11.09	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B25_1.4M_QPSK_CH26365+TX_ax40_5755MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B25_1.4M_QPSK_CH26365+TX_ax40_5755MHz
Test BY :Ashton

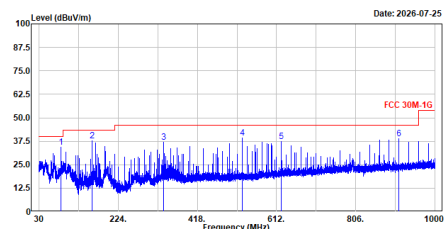


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	84.029	34.17	40.00	-5.83	64.04	-29.87	QP
2	160.029	37.65	43.50	-5.85	61.59	-23.94	QP
3	336.035	36.91	46.00	-9.09	58.98	-22.07	QP
4	528.047	39.43	46.00	-6.57	57.11	-17.68	QP
5	624.077	37.30	46.00	-8.70	52.66	-15.36	QP
6	912.070	38.86	46.00	-7.14	50.36	-11.50	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz
Test BY :Ashton

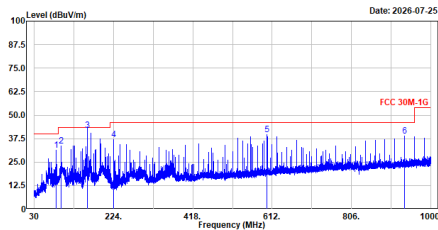


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	84.029	31.25	40.00	-8.75	61.12	-29.87	QP
2	96.009	33.47	43.50	-10.03	62.47	-29.00	QP
3	160.029	41.84	43.50	-1.66	65.78	-23.94	QP
4	224.049	36.98	46.00	-9.02	63.59	-26.61	QP
5	600.069	39.58	46.00	-6.42	55.38	-15.80	QP
6	936.077	39.05	46.00	-6.95	50.14	-11.09	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz
Test BY :Ashton

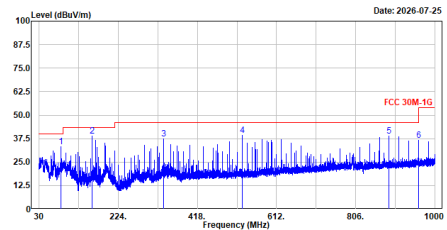


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	84.078	33.17	40.00	-6.83	63.05	-29.88	QP
2	160.029	38.69	43.50	-4.81	62.63	-23.94	QP
3	336.035	37.48	46.00	-8.52	59.55	-22.07	QP
4	528.047	39.18	46.00	-6.82	56.86	-17.68	QP
5	888.111	38.90	46.00	-7.10	50.81	-11.91	QP
6	960.085	36.52	54.00	-17.48	47.27	-10.75	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B7_20M_QPSK_CH21100+TX_ax40_5755MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_CH21100+TX_ax40_5755MHz
Test BY :Ashton

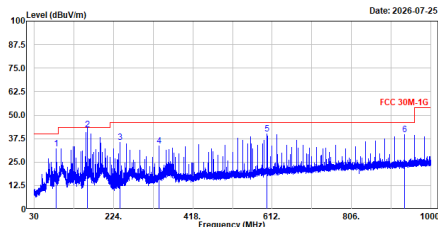


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	84.029	32.26	40.00	-7.74	62.13	-29.87	QP
2	160.029	42.43	43.50	-1.07	66.37	-23.94	QP
3	240.005	35.45	46.00	-10.55	60.57	-25.12	QP
4	336.035	33.58	46.00	-12.42	55.65	-22.07	QP
5	600.069	39.93	46.00	-6.07	55.73	-15.80	QP
6	936.126	39.60	46.00	-6.40	50.69	-11.09	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B7_20M_QPSK_CH21100+TX_ax40_5755MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_CH21100+TX_ax40_5755MHz
Test BY :Ashton

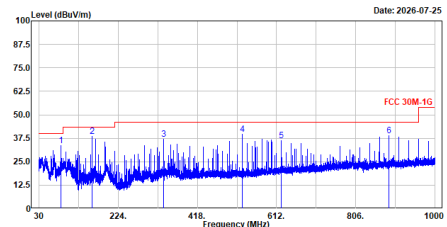

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	83.981	33.73	40.00	-6.27	63.60	-29.87	QP
2	160.029	38.45	43.50	-5.05	62.39	-23.94	QP
3	336.035	36.88	46.00	-9.12	58.95	-22.07	QP
4	528.047	39.75	46.00	-6.25	57.43	-17.68	QP
5	624.077	36.17	46.00	-9.83	51.53	-15.36	QP
6	888.062	38.91	46.00	-7.09	50.82	-11.91	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.