

Rugged Handheld Computer

- PA768e -



User Manual

Version 1.1

Revision History

Date	Change Description	Version
2025/6/18	Initial Version	V1.0
2025/6/19	Update WWAN Spec. & Storage Temperature	V1.1

Preface

About This Manual

Thank you for purchasing the Unitech product.

This manual explains how to install, operate and maintain our product.

No part of this publication may be reproduced or used in any form, or by any electrical or mechanical means, such as photocopying, recording, or information storage and retrieval systems, without permission in writing from the manufacturer. The material in this manual is subject to change without notice.

Regulatory Compliance Statements

FCC Warning Statement

This device has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference with radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference with radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

1. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
2. This device complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. To maintain compliance with FCC RF exposure requirements, avoid direct contact to the transmitting antenna during transmitting.
3. Any changes or modifications (including the antennas) made to this device that are not expressly approved by the manufacturer may void the user's authority to operate the equipment.

FCC Label Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

RF Radiation Exposure Statement

For body contact during operation, this device has been tested and meets FCC RF exposure guidelines when used with an accessory that contains no metal and that positions the handset a minimum of 1.0 cm from the body.

Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

European Conformity Statement

Unitech Electronics co., Ltd herewith declares that the Unitech product is in compliance with the essential requirements and all other provisions of the RED 2014/53/EU directive.

The declaration of conformity is available for download at :

<https://portal.Unitech.eu/public/Safetyregulatorystatement>

CE RF Exposure Compliance

For body-worn operation, this device has been tested and meets the ICNIRP guidelines and the European Standard EN 62209-2, for use with dedicated accessories, SAR is measured with this device at a separation of 0.5 cm to the body, while transmitting at the highest certified output power level in all frequency bands of this device. Use of other accessories which contain metals may not ensure compliance with ICNIRP exposure guidelines.

In accordance with Directive 2022/2380 of the European Union, we hereby provide specific information regarding the charging capabilities and compatible devices for the CE USB-C Adapter. This notice aims to offer essential details to purchasers for informed use and compliance with the outlined safety and performance standards.

Please note that this device supports fast charging via USB Power Delivery (USB PD), allowing for efficient charging at higher power levels when paired with compatible devices.

For reference to the detailed charging power specifications applicable to each device model, please find the link to consult our cloud-based table or scan the QR code provided below.

For detailed information on charging power specifications:

[Unitech Products USB-C Charging Power Specification Overview](#)



CE Mark Warning



RoHS Statement



This device conforms to RoHS (Restriction Of Hazardous Substances) European Union regulations that set maximum concentration limits on hazardous materials used in electrical and electronic equipment.

Waste electrical and electronic equipment (WEEE)



Unitech has set up a policy and process to meet the 2012/19/EU concerning electronic waste disposal.

For more detailed information of the electronic waste disposal of the products you have purchased from Unitech directly or via Unitech's resellers, you shall either contact your local supplier or visit us at :

<https://portal.Unitech.eu/public/WEEE>

Taiwan NCC Warning Statement

低功率射頻器材技術規範

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前述合法通信，指依電信管理法規定作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。應避免影響附近雷達系統之操作。高增益指向性天線只得應用於固定式點對點系統。

MPE警語：

電波功率密度MPE標準值： $1.0\text{mW}/\text{cm}^2$ ，送測產品實測值： $0.103\text{mW}/\text{cm}^2$ ，
建議使用時設備天線至少距離人體20公分。

注意事項：

1. 使用過度恐傷害視力。
2. 使用30分鐘請休息10分鐘；未滿2歲以下幼兒不看螢幕，2歲以上每天看螢幕不要超過1小時。
3. 減少電磁波影響，請妥適使用。

Note:

Within the 5.25-5.35 GHz band, U-NII devices will be restricted to indoor operations to reduce any potential for harmful interference to co-channel MSS operations.

Laser Information

The Unitech product is certified in the U.S. to conform to the requirements of DHHS/CDRH 21CFR Subchapter J and to the requirements of IEC 60825-1. Class II and Class 2 products are not considered to be hazardous. The Unitech product contains internally a Visible Laser Diode (VLD) whose emissions do not exceed the maximum limits as set forth in the above regulations. The scanner is designed so that there is no human access to harmful laser light during normal operation, user maintenance or prescribed service operations.

The laser safety warning label required by the DHHS/IEC for the Unitech product's optional laser scanner module is located on the memory compartment cover, on the back of the unit.

* Laser information only applies to the products with laser components.

CAUTION! Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous laser light. Use of optical instruments with the scanner, including binoculars, microscopes, and magnifying glasses, with will increase eye damage. This does not include eyeglasses worn by the user.

LED Information

The Unitech product contains LED indicator(s) or LED ring whose luminance is not harmful to human eyes during normal operation, user maintenance or prescribed service operations.

*LED information only applies to the products with LED components.

Battery Notice

Performance and Replacement

- For optimal performance, it is recommended to replace rechargeable batteries annually or after 500 charging cycles.
- It's normal for the battery to swell or expand slightly after a year or 500 cycles. This doesn't cause damage but indicates the battery should be replaced and disposed of properly according to local regulations.
- If battery performance drops by more than 20%, it has reached its end of life and should be replaced and disposed of properly.

Battery Life and Conservation

- Battery life depends on the battery type and device usage.
- Avoid fully discharging the battery as this puts stress on it. Several partial charges are better than one full discharge.
- Do NOT expose the battery or device to high temperatures for extended periods, such as in a parked car on a hot day or under direct sunlight. High temperatures can damage the battery. Keep the device within acceptable operating temperatures (refer to the specifications).
- For long-term storage, charge the battery to at least 50% every six months. Leaving the battery uncharged for extended periods will reduce its lifespan.
- If the battery cannot be charged after a long idle period and starts to heat up, do not attempt to charge it. It may be damaged.

Important Cautions

- **Use original batteries only from Unitech.** Using third-party batteries can damage the device and void the warranty.
- **Risk of explosion if the battery is replaced incorrectly.** Dispose of used batteries according to instructions.
- RISK OF EXPLOSION IF BATTERY IS REPLACED INCORRECTLY.
DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.
- 電池若未正確更換，可能會爆炸。請用原廠建議之同款或同等級的電池來更換，請依原廠指示處理廢電池。

- 请依制造商说明书处理用过之电池，如果更换不正确之电池行事会有爆炸的风险，请依制造商说明书处理用过之电池

Charging

- Consider temperature when charging. Charging is most efficient at room temperature or slightly cooler.
- Charge batteries within the specified range of 0°C to 40°C (32°F to 104°F). Charging outside this range can damage the battery and shorten its lifespan.
- **Do not charge batteries below 0°C.** This is dangerous and can make the batteries unstable. Use a battery temperature detecting device to ensure safe charging temperatures.

Maintenance and Safety

- Keep all connectors free of contaminants like dust, grease, mud, and water to ensure proper device operation. Neglecting this can cause communication issues, short circuits, or overheating.
- **To clean the battery connectors:**
 - Remove the main battery from the mobile computer.
 - Dip the cotton part of a cotton-tipped applicator in isopropyl alcohol.
 - Gently rub the cotton part of the applicator back and forth across the connectors on both the battery and the device to remove any grease or dirt. Ensure no cotton residue is left on the connectors.
 - Repeat this process at least three times.
 - Use a dry cotton-tipped applicator and repeat steps 3 and 4.
 - Inspect the area for any remaining grease or dirt and repeat the cleaning if needed.
- **To clean the cradle connectors:**
 - Disconnect the DC power cable from the cradle.
 - Dip the cotton part of a cotton-tipped applicator in isopropyl alcohol.
 - Rub the cotton part of the applicator along the pins of the connector, moving it back and forth gently from one side to the other. Do not leave any cotton residue on the connector.
 - Rub all sides of the connector with the applicator.
 - Remove any lint left by the applicator.

- If there is grease or dirt on other areas of the cradle, use a lint-free cloth and alcohol to clean them.
- Allow the alcohol to air dry for at least 10 to 30 minutes (depending on the ambient temperature and humidity) before powering on the cradle.

CAUTION! *If you clean the battery or cradle connectors with bleach-based chemicals, follow the instructions above to remove any bleach residue from the connectors.*

- If a connector is damaged, have it repaired before using the device to avoid short circuits.
- While charged batteries can be left unused for several months, their capacity may decrease due to internal resistance buildup. They may need recharging before use.
- Store batteries at temperatures between -20°C to 60°C. Higher temperatures can cause faster depletion. Room temperature storage is recommended.
- The above storage information applies only to removable batteries. For devices with non-removable batteries, refer to the product specifications.

Battery Safety Guidelines

- Charge the device in a clean area, away from debris, flammable materials, or chemicals. Take extra care when charging in non-commercial environments.
- Improper battery use can lead to fire, explosion, or other hazards.
- Do not disassemble, open, crush, bend, deform, puncture, or shred the battery.
- Dropping the device can cause the battery to overheat.
- Do not short-circuit the battery or allow metal or conductive objects to touch the battery terminals.
- Do not modify the battery, insert foreign objects, expose it to water or other liquids, or expose it to fire, explosion, or other hazards.
- Do not leave or store the device in hot areas, like parked cars or near heat sources. Do not put the battery in a microwave or dryer.
- Supervise battery usage by children.
- If swallowed, seek medical advice immediately.
- In case of leakage, avoid contact with skin and eyes. If contact occurs, flush the affected area with water for 15 minutes and seek medical advice.
- If you suspect damage to the equipment or battery, contact your service provider for inspection.

Product Operation and Storage Notice

The Unitech product has applicable operation and storage temperature conditions. Please follow the limitation of suggested temperature conditions to avoid failure, damage or malfunction.

**For applicable temperature conditions, please refer to the specification of each product.*

Adapter Notice

1. Please do not leave the power adapter in the socket when it is not connected to your Unitech product for charging.
2. Please remove the power adapter when the battery is fully recharged.
3. The bundled power adapter that comes with your Unitech product is not meant to be used outdoors. An adapter exposed to water or rain, or a very humid environment can cause damage to both the adapter and the product.
4. Please only use the bundled power adapter or same specification of adapter to charge your Unitech product. Using the wrong power adapter can damage your Unitech product.

** The message above only applies to the product connected to the adapter.
For the products without using the adapters, please refer to the specification of each product.*

Hearing Damage Warning

To prevent possible hearing damage, do not listen at high volume levels for long periods.



Figure 1 – Warning label (IEC 60417-6044)

Worldwide Support

Unitech's professional support team is available to quickly answer questions or assist with technical-related issues. Should an equipment problem occur, please contact the nearest Unitech regional service representative.

For complete contact information please visit the Web sites listed below:

Taipei, Taiwan – Headquarters Tel: +886-2-89121122 E-mail: info@hq.ute.com Address: 5F, No. 136, Lane 235, Baoqiao Road, Xindian District, New Taipei City 231, Taiwan (R.O.C.) Website: http://www.ute.com	Europe & Africa Tel: +31-13-4609292 E-mail: info@eu.ute.com Address: Kapitein Hatterasstraat 19, 5015 BB, Tilburg, the Netherlands Website: http://eu.ute.com
Mainland China Tel: +86-59-2310-9966 E-mail: info@cn.ute.com Address: Room401C, 4F, RIHUA International Mansion, Xinfeng 3rd Road, Huoju Hi-tech District, Xiamen, Fujan, China Website: http://cn.ute.com	Japan Tel: +81-3-62310896 E-mail: info@unitech-japan.co.jp Address: 3F Tosei Building, 18-10, Nihonbashi-Hakozakicho, Cyuouku, Tokyo 103-0015, Japan Website: https://jp.ute.com
Asia & Pacific / Middle East Tel: +886-2-27911556 E-mail: info@tw.ute.com Address: 4F., No. 236, ShinHu 2nd Rd., NeiHu Chiu, 114, Taipei, Taiwan Website: http://apac.ute.com	Latin America Tel: +52-55-5171-0528 E-mail: info@latin.ute.com Address: Av Insurgentes Sur Nro. 859-Segundo Piso Colonia Nápoles - Delegación Benito Juárez - CP03810 CDMX Website: http://latin.ute.com
North America Tel: +1-714-8916400 E-mail: info@us.ute.com / info@can.ute.com Address: 6182 Katella Ave, Cypress, CA 90630, USA Website: http://us.ute.com	Please scan QRCode to visit us: 

Warranty Policy

The following items covered under the Unitech Limited Warranty are free from defects during normal use:

The warranty period is varied from each country. Please consult with your supplier or Unitech local office for actual length of warranty period to your purchased product.

Warranty becomes void if equipment is modified, improperly installed or used, damaged by accident or neglect, or if any parts are improperly installed or replaced by the user.

Privacy Policy

This policy is developed in accordance with EN 18031 and the GDPR and applies to all Unitech products and services, including but not limited to rugged mobile devices, barcode scanners, mobile applications, and backend platform systems. Unitech respects your privacy and is committed to processing personal data in accordance with the principles of lawfulness, fairness, transparency, and data minimization.

Data Controller

Company Name: Unitech Electronics Co., LTD

Address: 8F, No. 122, Ln. 235, Baoqiao Rd., Xindian Dist., New Taipei City 231, Taiwan

Email: info@hq.ute.com

Website: <https://www.ute.com>

A. Lawful Basis of Processing

We collect and process your personal data only when there is a lawful basis to do so. These bases include:

1. To fulfill contractual obligations (e.g., account registration, device activation, after-sales support)
2. To comply with legal obligations (e.g., tax compliance, security incident reporting)
3. Based on your explicit consent (e.g., enabling location or integrating with third-party platforms)
4. To pursue legitimate interests of Unitech or third parties (e.g., abuse detection, service security)

B. Categories of Personal Data Collected

We may collect your information through:

1. Information you voluntarily provide (e.g., repair requests, registration, technical support)
2. Data automatically generated during your use of our products or services
3. Information lawfully obtained from authorized third parties

Types of data include:

- Device Information: such as serial number, IMEI, MAC address, OS, and model name
- Application and Log Data: including installed application lists, usage records, error logs, and crash reports
- Operational Data: such as scanned barcode content, photos, GPS information, Wi-Fi or mobile IP address, and usage timestamps
- Account Data: including system login username and email address (as configured by authorization)
- Biometric Data: such as facial or fingerprint recognition (stored locally on the device and not uploaded)
- Location Information: GPS, Wi-Fi, or cell tower data collected when location services are enabled
- Configuration Parameters: system and application settings stored locally or on cloud service servers
- Mobile Network Information: such as ICCID, IMSI, carrier name, mobile network type, SIM slot usage, and phone number (if available). This data is primarily used for mobile communication features, device identification, and diagnostic analysis

C. Use of Personal Data

When you use our products or services, we may process your personal data for the following purposes:

1. Providing core product functions, such as login, barcode scanning, data synchronization, and location services
2. Assisting with account registration, preference settings, and device activation
3. Delivering system notifications and update alerts (e.g., firmware upgrades)
4. Analyzing error data for device diagnostics and maintenance support
5. Integrating third-party enterprise management platforms (e.g., MDM or cloud systems), based on your consent
6. Enabling security authentication and device identification
7. Enhancing the overall user experience and optimizing our products and services, including statistical analysis and usage trend research

Unitech does not use your personal data for targeted advertising or profiling, nor do we sell your data to any third parties.

D. Delegated Processing, Sharing, Transfers, and Disclosures of Personal Data

We may process or share your personal data under the following circumstances:

1. **Delegated Processing:** We may engage trusted third-party service providers to assist with device operations, remote support, or related services. In such cases, we will enter into data protection agreements with those vendors and require that they process personal data in accordance with this policy.
2. **Data Sharing:** We do not share your personal data with third parties without your prior consent, unless required by law or when the service you use integrates with third-party platforms (e.g., MoboLink, device management systems).
3. **Data Transfers:** In the event of a corporate merger, acquisition, or

bankruptcy that results in data transfer, we will notify you and ensure that the recipient continues to comply with this privacy policy.

4. Public Disclosure: Your data may be disclosed only when required by applicable law or with your explicit authorization, such as during regulatory investigations or legal proceedings.

E. Protection of Children's Personal Data

This product and its associated services are not intended for children under the age of 13, and we do not knowingly collect personal data from children. If we become aware that personal data from a child has been inadvertently collected, we will take prompt steps to delete the data and cease any further processing. Parents or legal guardians may contact us to request deletion.

F. Security Measures for Personal Data Protection

We are committed to ensuring the security of your personal data and have implemented a range of measures, including but not limited to, the following:

1. Use of encrypted communication and secure storage technologies
2. Implementation of user authentication and access control mechanisms
3. Logging of data access and monitoring of abnormal behavior
4. Restriction of access to personal data to authorized personnel only, all of whom are bound by confidentiality obligations
5. Regular vulnerability scanning, patching, and risk assessments

In the event of a data breach, we will take appropriate action and notify the relevant authorities in accordance with applicable laws and regulations.

G. Data Accuracy and Integrity

We collect and process personal data solely for specified and legitimate purposes. Measures such as data validation, user authorization, and system controls are implemented to ensure the accuracy, integrity, and timeliness of the information.

H. Cross-Border Transfer of Personal Data

Some of our servers or services may be located outside your jurisdiction. Where cross-border transfer of personal data is necessary, we will comply with applicable local laws and implement appropriate safeguards, such as Standard Contractual Clauses (SCCs), encryption measures, or security assessments, to ensure the confidentiality and integrity of your information.

I. Data Retention

We retain your personal data only for as long as necessary to fulfill the purposes for which it was collected. Once the retention period has expired, we will delete, anonymize, or de-identify the data in accordance with its nature and applicable legal requirements, ensuring that it can no longer be identified or reconstructed.

Certain types of data—such as transaction records, customer support logs, and error reports—may be retained for longer periods to comply with legal obligations, auditing requirements, information security policies, dispute resolution needs, or service improvement purposes. We regularly review the necessity of such retention in accordance with data minimization and security principles.

J. Personal Data Rights

You have the following rights regarding your personal data:

- To request access to the personal data we hold about you
- To request rectification, supplementation, or erasure of inaccurate or outdated data
- To withdraw your consent to data processing (where applicable)
- To request data portability or the deletion of your account

To exercise any of the above rights, please contact us at info@hq.ute.com. In accordance with the GDPR, we will respond to your request within 30 days of receipt. If your request is particularly complex or numerous, we may extend this period by up to an additional two months and will inform you of the reason for the extension within the first month.

K. Privacy Policy Updates

This Privacy Policy may be updated from time to time to reflect changes in our business practices or legal obligations. If any material changes are made to the purposes or scope of personal data usage, we will notify you in accordance with applicable legal requirements. The latest version will be incorporated into the product user manual.

L. Disclaimer

While we implement reasonable and appropriate security measures to protect your personal data, you acknowledge that no system can eliminate all risks inherent in operating over open networks. Unitech shall not be held liable for any unauthorized access, use, disclosure, or destruction of personal data caused by third parties beyond our control. You are responsible for safeguarding your account credentials, and Unitech will not be held liable for any data breach or damages resulting from user negligence.

M. Contact Us

If you have any questions, suggestions, or requests regarding this Privacy Policy or the protection of your personal data, please contact us using the information below:

Email: info@hq.ute.com

Website: <https://www.ute.com/en/contact>

Note:

Please read this Privacy Policy carefully before using this product. You may choose whether to enable certain features (such as location services or network synchronization). By enabling such features, you consent to the collection and processing of your personal data as necessary for the operation of those features.

Table of Contents

Preface	i
Regulatory Compliance Statements	i
Laser Information	vi
LED Information	vi
Battery Notice	vii
Adapter Notice	x
Hearing Damage Warning	xi
Worldwide Support	xii
Warranty Policy	xiii
Privacy Policy	xiv
Chapter 1 - Overview	1
1.1 Package	1
1.2 Product Detail	2
1.3 Specifications	4
1.4 Getting Started	7

Chapter 1 - Overview

1.1 Package

Please make sure the following contents are in the PA768 gift box. If something is missing or damaged, please contact your Unitech representative.

The Package Contents

- PA768 Rugged Handheld Computer
- Battery
- Hand Strap
- USB Type-C Cable
- Quick Start Guide

Optional Accessories

- Hand Strap
- USB 3.0 Type-C cable
- Fast charge adaptor
- 9H glass screen protector
- 1 Slot USB cradle
- 1 Slot Charging cradle
- 1 Slot Ethernet cradle
- Multi-Slot Terminal Charging / Ethernet Cradle / Battery Charger
- Standard/UHF gun grip (RG768)
- Stylus with Coiled strap

1.2 Product Detail

Product View



1. Barcode Scanner Window
2. Receiver
3. LED Indicator
4. Front Camera
5. Volume Key


6. Scanner Trigger Key
7. Power Key
8. Programmable Key
9. Scanner Trigger Key

Rear View



Note:

Please remove the black film while using gun grip.

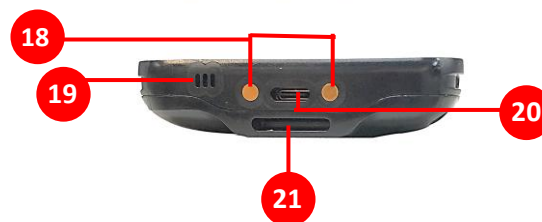

Bottom View

10. Microphone (Sub)

11. Flash LED

12. Rear Camera

13. Speaker

14. Hand Strap Attachment Point

15. NFC

16. UHF (Option)

17. Pogo Pin for Gun Grip

18. Pogo Pin for Cradle

19. Microphone (Main)

20. USB-C Port

21. Hand Strap Attachment Point

1.3 Specifications

System Features	
CPU	Qualcomm Snapdragon™ 6225 Processor, 8 Cores, up to 2.4GHz
Memory	6 GB RAM / 64GB Flash (128GB option), UFS
OS	Android 14 w/ GMS & AER, Upgradeable to Android 16
Security	Supports Secure Boot and Verified Boot
Languages support	Multiple languages
Display	
Screen Size	6.3" Color LCD 2340 X 1080 (FHD+) High Resolution Display
Touchpanel	Gorilla Glass with Multi-Touch Capacitive Touch Panel, support stylus, glove, wet-finger Compatibility High sunlight visibility - LCD backlight up to 500nits
Keypad	
Programmable key, Volume up/down key, Left/right scan key, Power key	
Camera	
5 MP Front camera 16 MP Rear Camera with LED flash and auto-focus function,	
Indicator Type	
LED, Vibrator	
Symbologies	
Build-in 2D barcode imager engine with red laser aimer Support All 1D&2D major barcodes	
RFID	
UHF	Short range integrated UHF RFID; 1.2M range. Support long range UHF RFID gun grip (RG768); 15M range.
HF	Support HF/NFC, Frequency 13.56 Mhz Support: ISO14443A/B, ISO15693, Mifare, Felica (ISO/IEC18092)
Power Source	
Main Battery	Hot Swappable 5100mAh Li-Polymer battery / battery with cover in one piece

Extended Battery	7700mAh / battery with cover in one piece (optional)
Hot Swap	Yes
Regulatory Approvals	
CE, FCC, RoHS 2.0	
Communication	
Bluetooth®	Bluetooth® 5.1
WLAN	2.4GHz & 5GHz & 6GHz IEEE 802.11 a/b/g/n/ac/d/h/i/k/r/v/ax, support WIFI 6E Security WPA3, WPA2, WPA & WEP
WWAN	4G LTE (FDD) – Bands 1, 2, 3, 4, 5, 7, 8, 12, 14, 17, 20, 28 (TDD) – Bands 38, 39, 40, 41 3G UMTS/HSPA+ – Bands 1, 2, 5, 8 2G GSM/GPRS/EDGE (850/900/1800/1900 MHz)
GPS	GPS/GLONASS/Gallileo/Beidou
Sensors	Gyroscope, G-sensor, E-compass, Light & Proximity Sensor
I/O Interfaces	
USB	USB 3.1 type C, support fast charging, OTG
POGO PIN	Bottom pogo pin for cradles, rear pogo pin for gun grips
SIM Slot	Dual SIM: Nano SIM Slot x 1, eSIM x 1
Expansion slot	Micro SD x 1, up to 1 TB
Audio	Speaker support 95 dB at 10cm Dual-Microphone support noise cancellation
Enclosure	
Dimensions	167mm x 75.5mm x 17mm (H x W x D)
Weight	270 g (w/o bumper & hand strap)
Environmental	
Operating Temperature	-4°F to 131°F (-20°C to 55°C)
Storage Temperature	-22°F to 158°F (-30°C to 70°C), w/o battery
Charging Temperature	32°F to 113°F (0°C to 45°C)
Relative Humidity	5% ~ 95% (Non-Condensing)
Drop Specification	1.5 m, 1.8 m w/ optional bumper

Sealing	IP65 & IP68
Vibration/Tumble test	Tumble 600 times (1.6 ft./0.5 m)
Software	
MDM Software	SOTI, VMware, 42Gears, and MoboLink
Accessories	
■ Hand Strap ■ USB 3.0 Type-C cable ■ Fast charge adaptor ■ 9H glass screen protector ■ 1 Slot USB cradle ■ 1 Slot Charging cradle	■ 1 Slot Ethernet cradle ■ Multi-Slot Terminal Charging / Ethernet Cradle / Battery Charger ■ Standard/UHF gun grip (RG768) ■ Stylus with Coiled strap

Note: The device is restricted to indoor use only when operating in the 5150 to 5350 MHz frequency range.

	AT	BE	BG	HR	CY	CZ	DK
	EE	FI	FR	DE	EL	HU	IE
	IT	LV	LT	LU	MT	NL	PL
	PT	RO	SK	SI	ES	SE	UK
	IS	LI	NO	CH	TR		


1.4 Getting Started

1.4.1 Inserting the Micro SD/Nano SIM Card

1. Pick out the Micro SD/Nano SIM card holder.



1. You may put in one SIM card and one SD card at a time.



Replacing the Battery

This section describes how to replace the battery.

CAUTION! The battery is designed to be removed by hand. Do not use tools to remove the battery.

NOTE: Do not put labels, asset tags, engravings, stickers, or other objects in the battery slot, as this might compromise the performance of the device or accessories. Performance levels, such as sealing [Ingress Protection (IP)], impact performance (drop and tumble), functionality, or temperature resistance could be affected.

NOTE: If the hand strap is attached, remove the hand strap clip first.

1.4.2 Remove the Battery

1. Press and hold both of the plastic buckles at the bottom.



2. Push the battery against the front and lift to remove.



1.4.3 Install the Battery

1. Align the battery with the battery compartment following the picture below.



2. Press and hold both of the plastic buckles at the bottom, then push against the front.



3. Press down the battery to secure in place



1.4.4 Charging the Battery

Before using the PA768 for the first time, you need to charge it for about 24 hours. For the regular use, you can charge the PA768 for 4 hours to recharge the battery to full capacity.

To charge the PA768, please use the USB charging cable or the cradle.


Connect the Type C USB cable to the USB-C port on PA768 and the other end of the USB cable connect to AC power adapter into the electrical outlet on the USB plug.

The charging LED indicator on PA768 is turning red when it is in charging state.



Note:

To protect your device, the USB port will be disabled once it detects contaminants. You will see the following popup window:

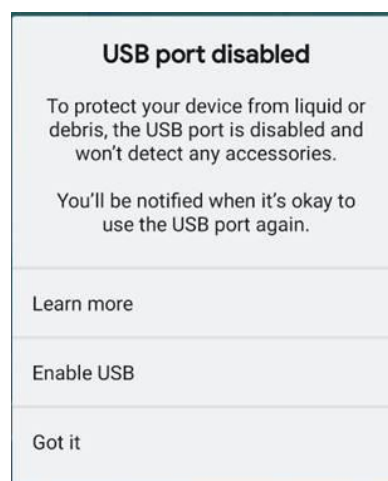

1.4.5 Turning on the PA768e UHF for the First Time

It is recommended to fully charge PA768e UHF before first use. You can now start up your device to set up the languages, WLAN setting, and date and time.

Power Button

Turn ON your device by pressing the power button on the side of the device.



1.4.6 Checking the LED status

Checking the Battery Status

LED	Description
Red Light	● Battery Charging
Green Light	● Battery Fully charged ● Barcode scan good read
Blue Light	● Message
If scanner app is running, LED is controlled by the scanner app. No LED (Red and Green) display when battery is out. (even with AC IN)	

WARNING! *There is a risk of fire and burns if the battery is handled improperly. DO NOT disassemble, crush, puncture, short external contacts, or dispose the battery pack in fire or water. DO NOT attempt to open or service the battery. Dispose of used batteries according to local recycling guidelines in your area.*