



Appendix E

RF Test Data for 5.3GWIFI (Conducted Measurement)

Product Name: Rugged Handheld Computer

Test Model: EA530

Environmental Conditions

Temperature:	24.4°C
Relative Humidity:	53.2%
ATM Pressure:	100.0 kPa
Test Engineer:	Can Kun
Supervised by:	Paddi Chen



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



E.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5260	Ant0	28.396	---	Pass
NVNT	a	5300	Ant0	27.127	---	Pass
NVNT	a	5320	Ant0	27.513	---	Pass
NVNT	n20	5260	Ant0	28.78	---	Pass
NVNT	n20	5300	Ant0	28.996	---	Pass
NVNT	n20	5320	Ant0	27.512	---	Pass
NVNT	n40	5270	Ant0	47.387	---	Pass
NVNT	n40	5310	Ant0	48.551	---	Pass
NVNT	ac20	5260	Ant0	28.897	---	Pass
NVNT	ac20	5300	Ant0	29.13	---	Pass
NVNT	ac20	5320	Ant0	29.628	---	Pass
NVNT	ac40	5270	Ant0	45.981	---	Pass
NVNT	ac40	5310	Ant0	45.82	---	Pass
NVNT	ac80	5290	Ant0	85.619	---	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

-26dB Bandwidth NVNT a 5260MHz Ant0

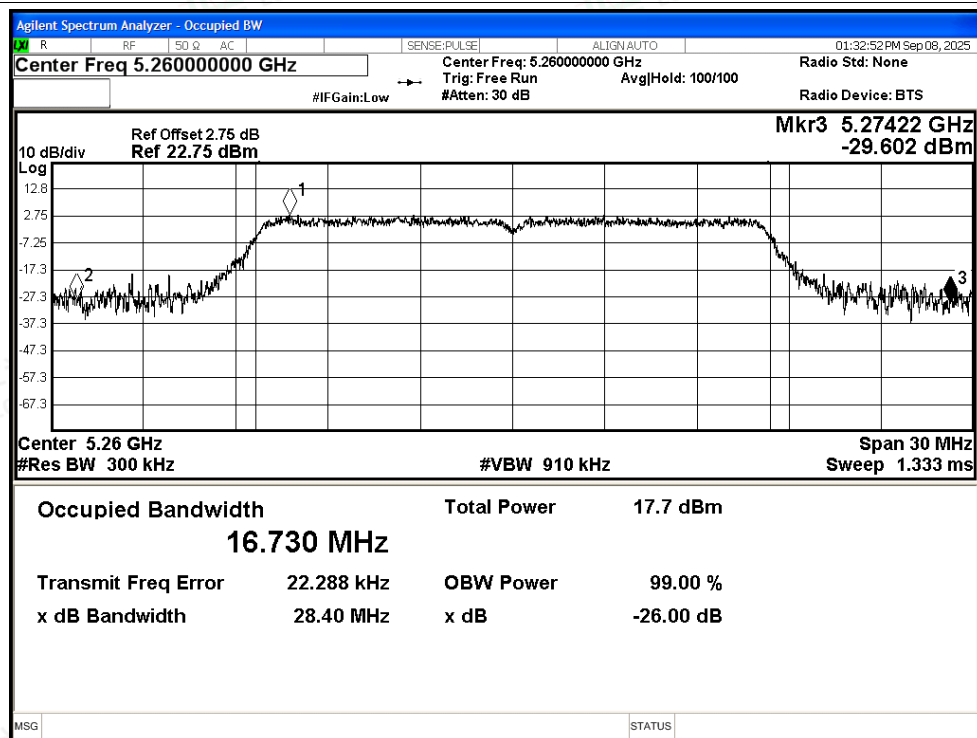

-26dB Bandwidth NVNT a 5300MHz Ant0

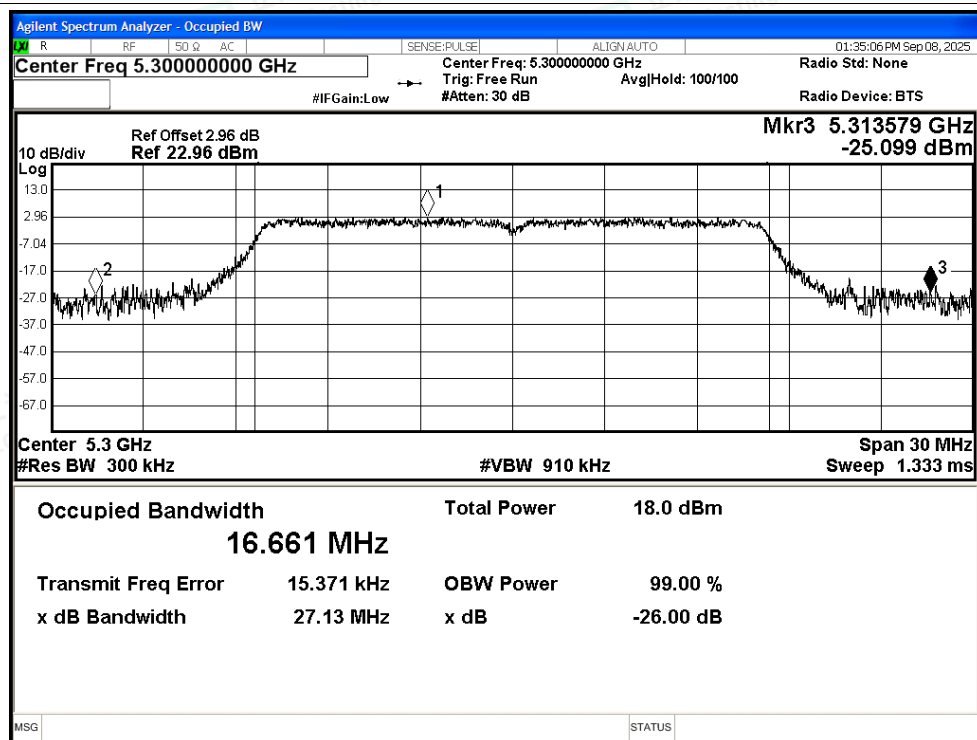

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT a 5320MHz Ant0

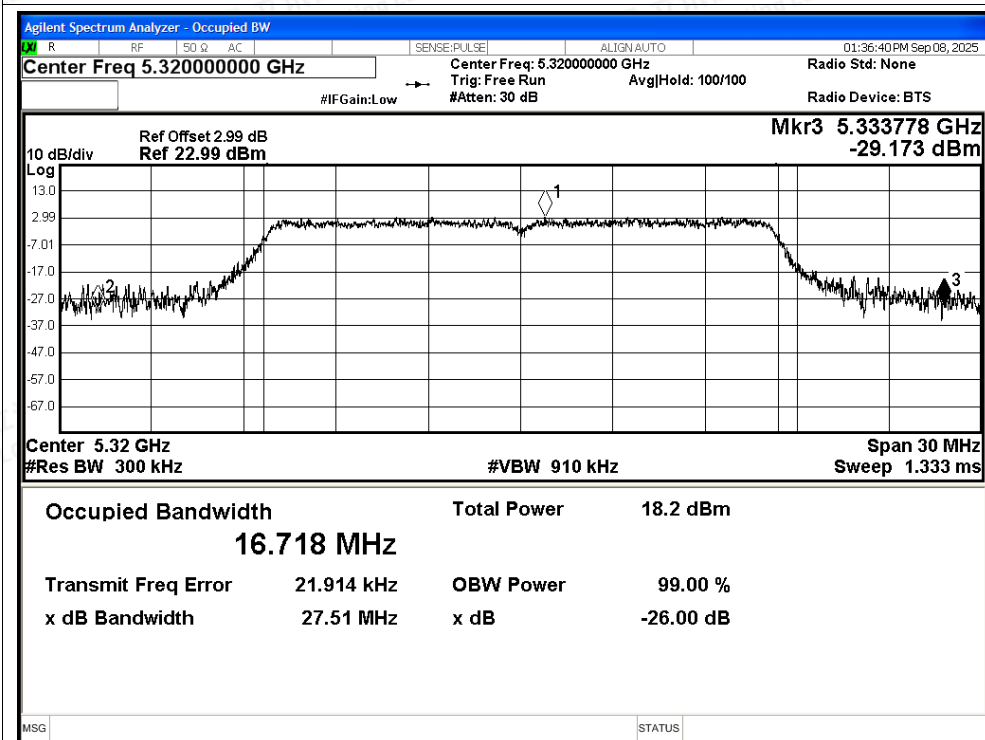

-26dB Bandwidth NVNT n20 5260MHz Ant0

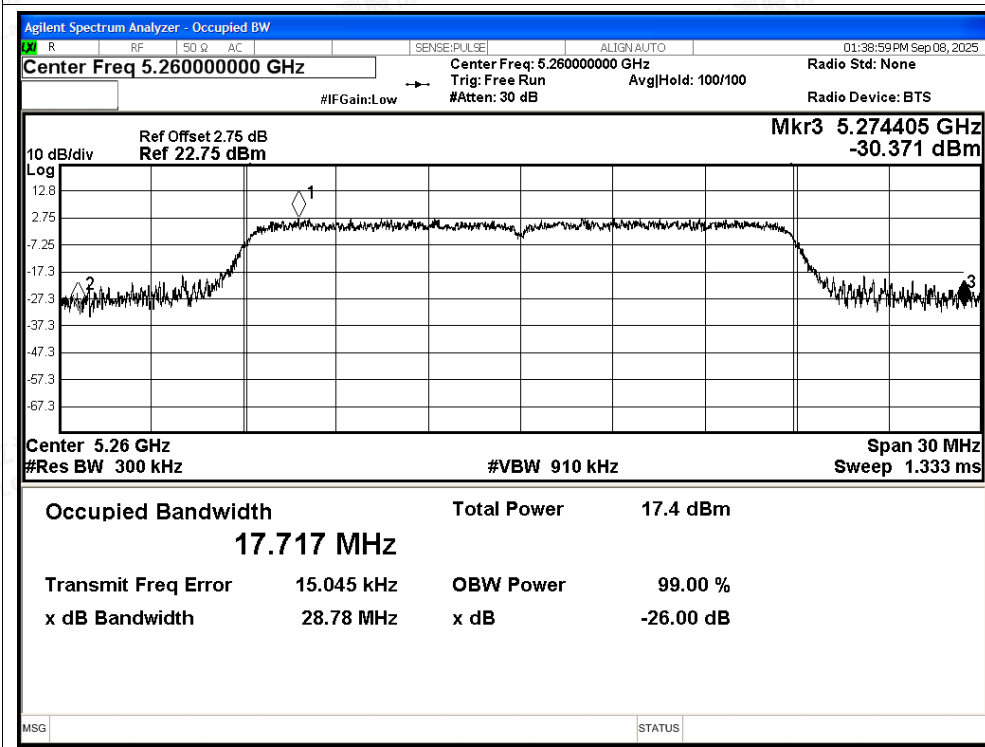

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT n20 5300MHz Ant0

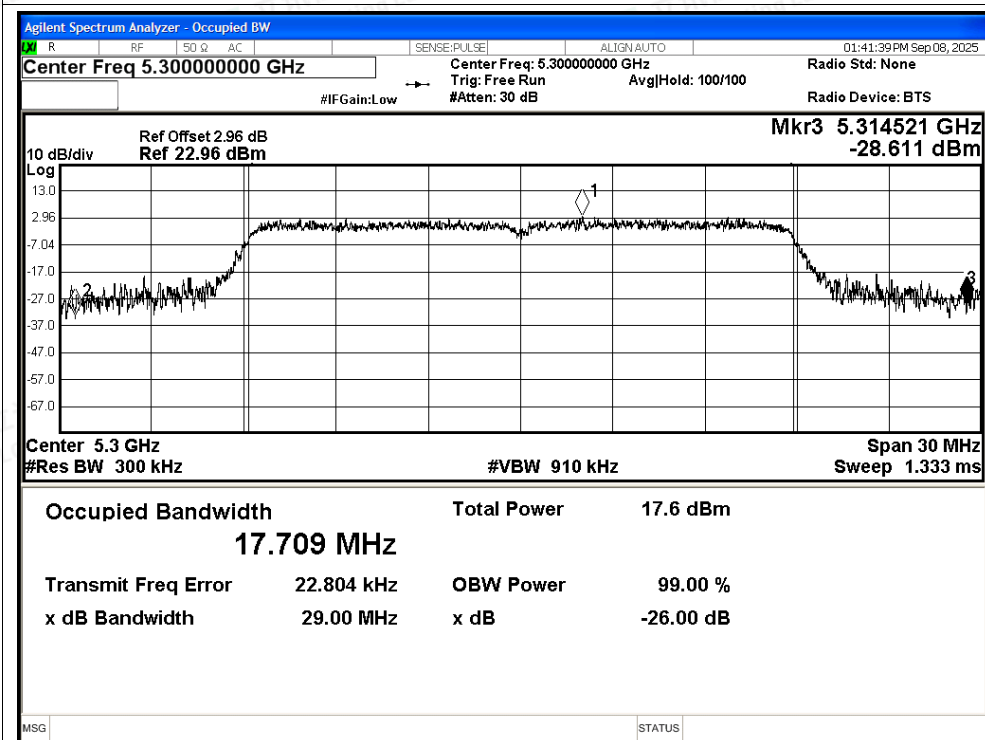

-26dB Bandwidth NVNT n20 5320MHz Ant0

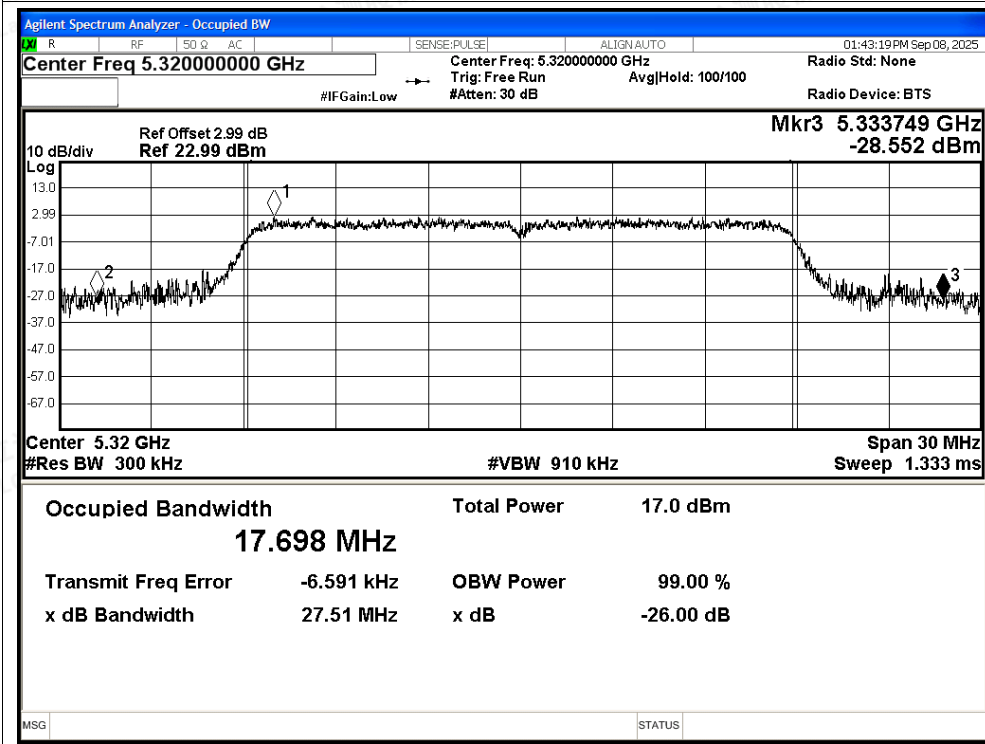

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT n40 5270MHz Ant0

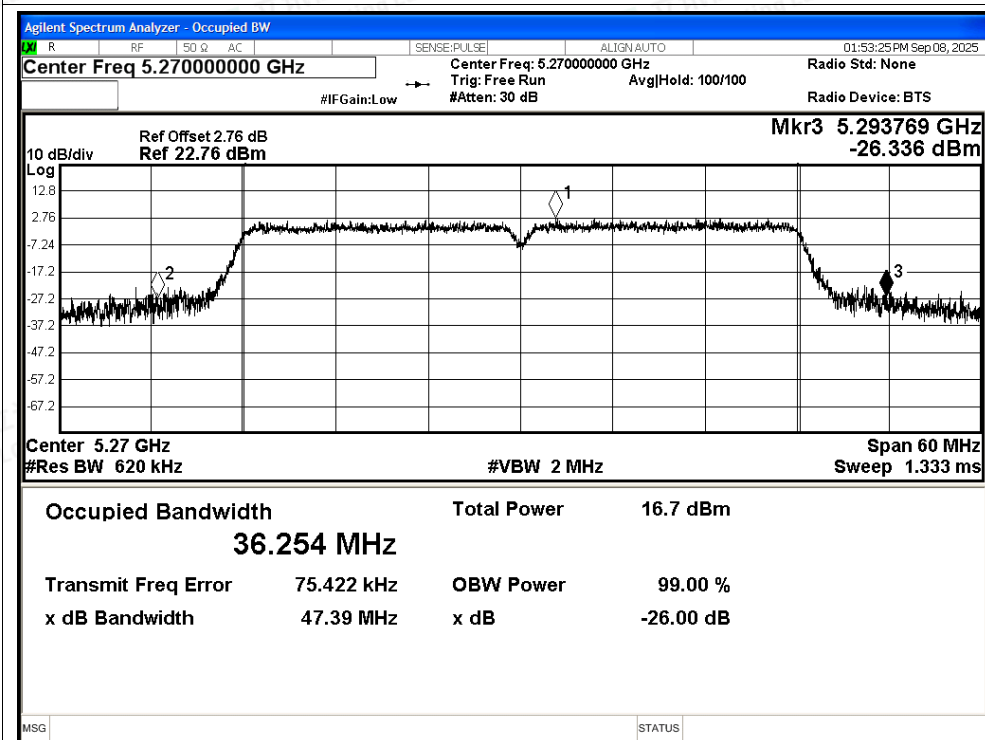

-26dB Bandwidth NVNT n40 5310MHz Ant0

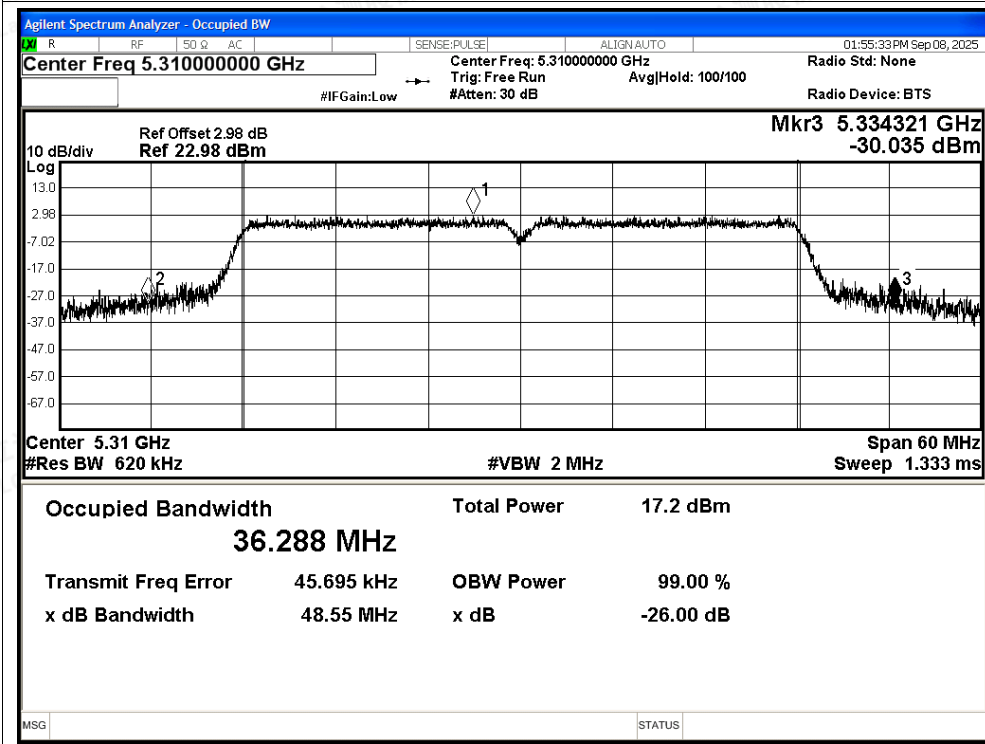

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT ac20 5260MHz Ant0

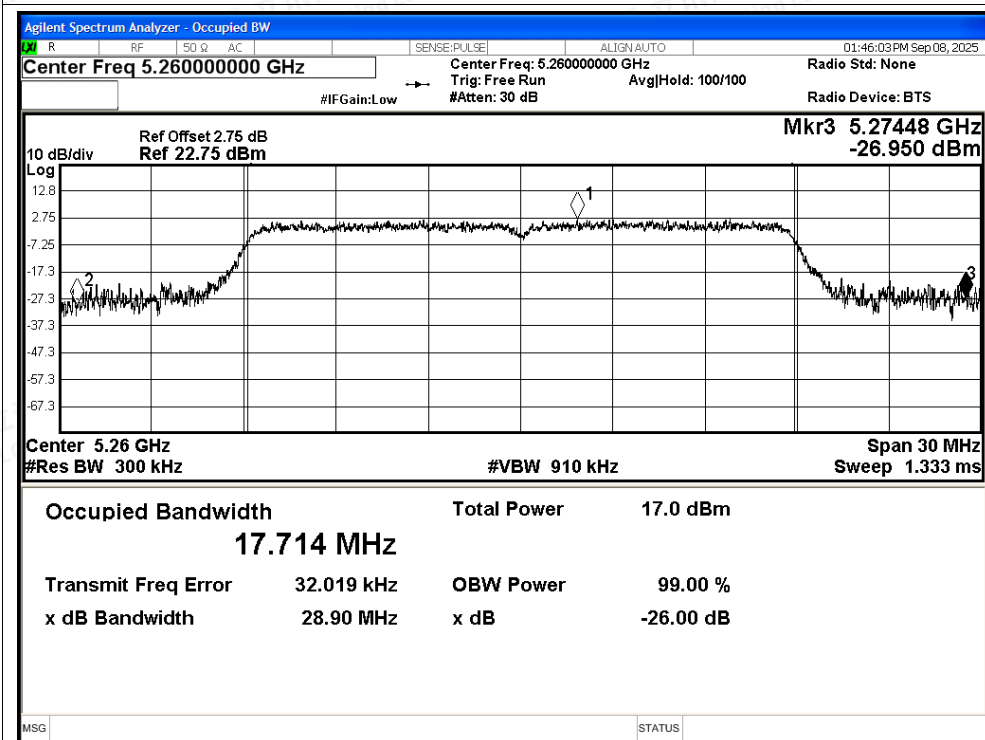

-26dB Bandwidth NVNT ac20 5300MHz Ant0

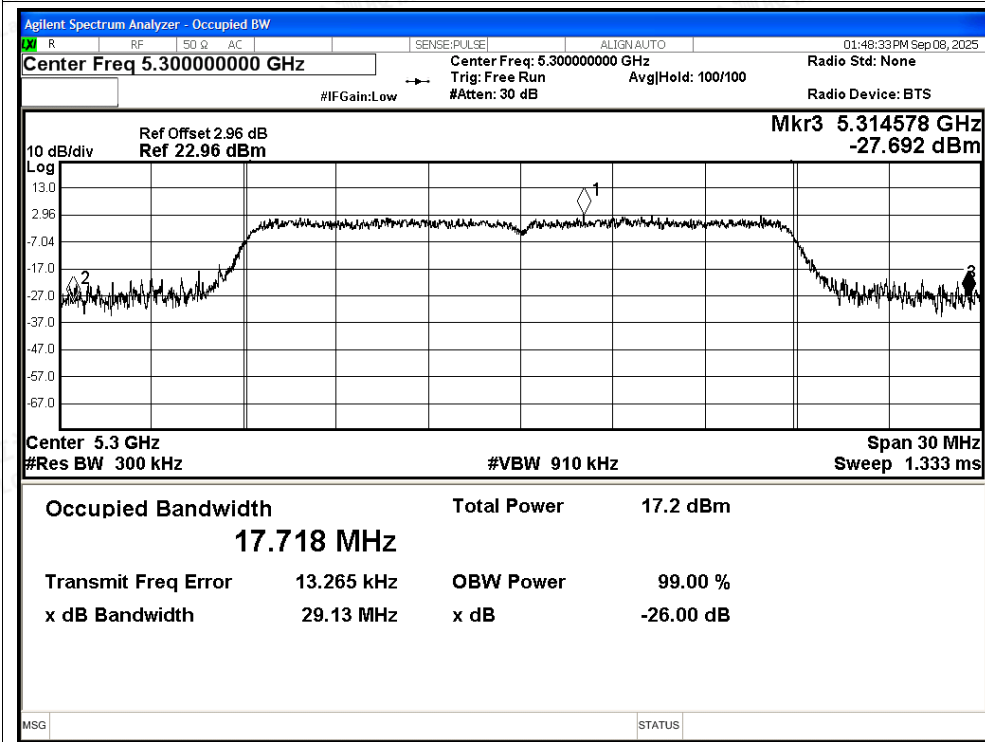

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT ac20 5320MHz Ant0

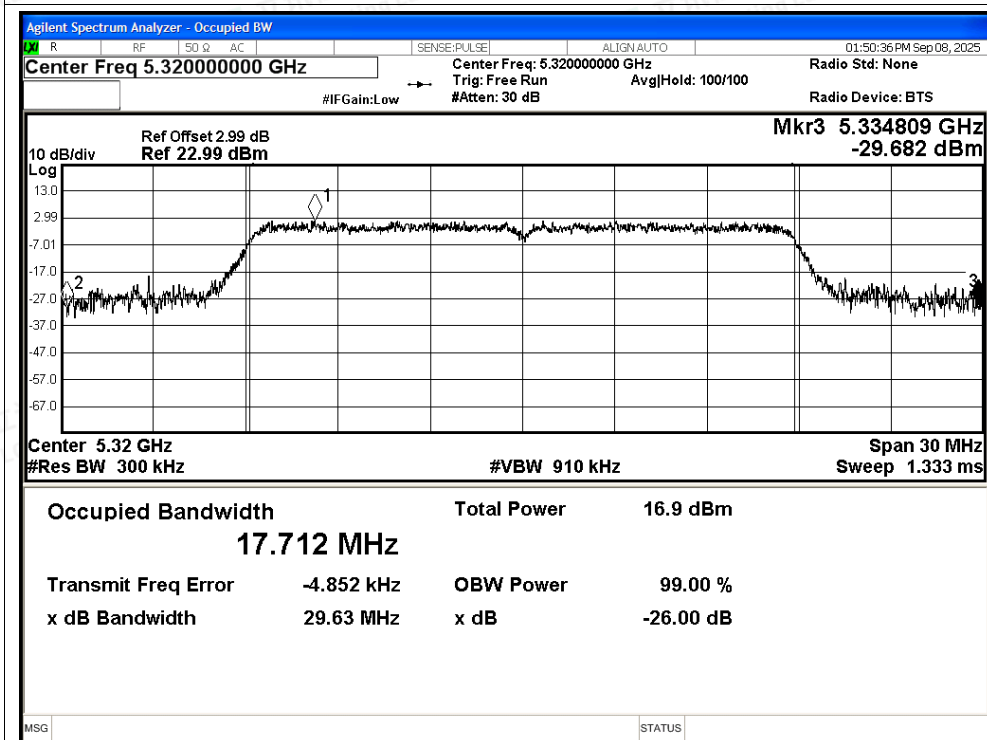

-26dB Bandwidth NVNT ac40 5270MHz Ant0

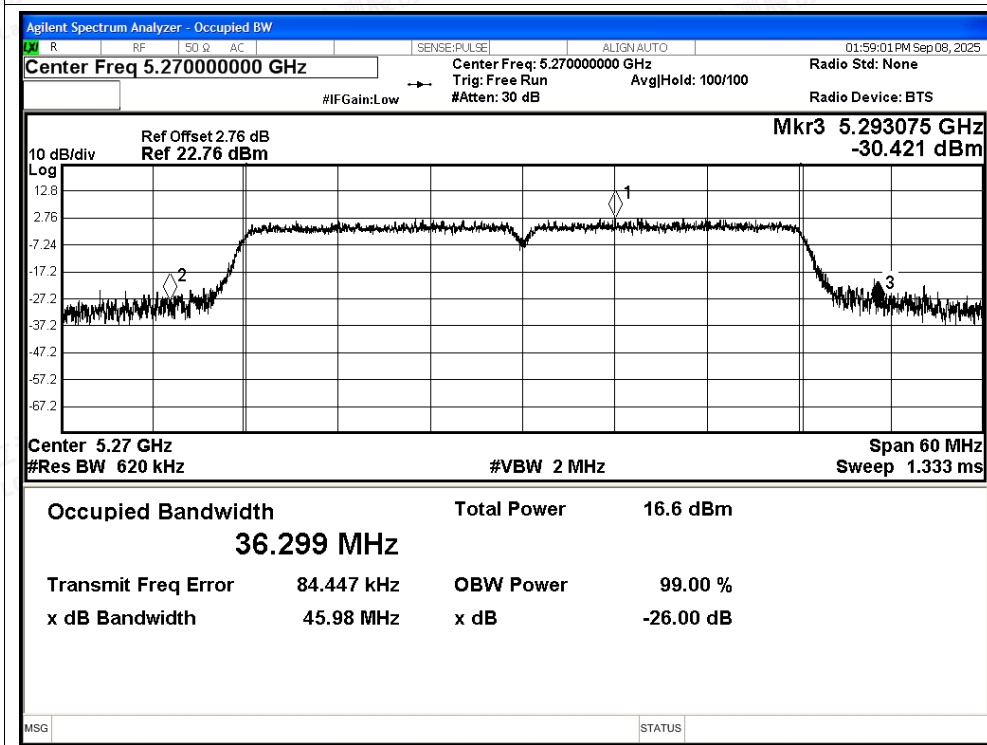

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT ac40 5310MHz Ant0

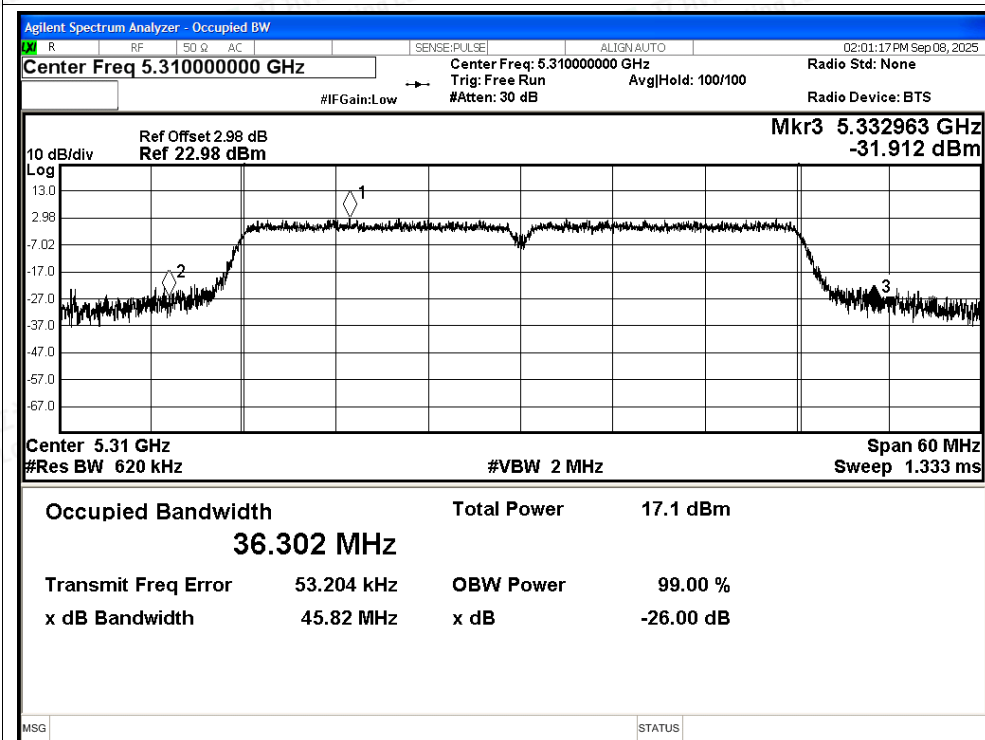

-26dB Bandwidth NVNT ac80 5290MHz Ant0

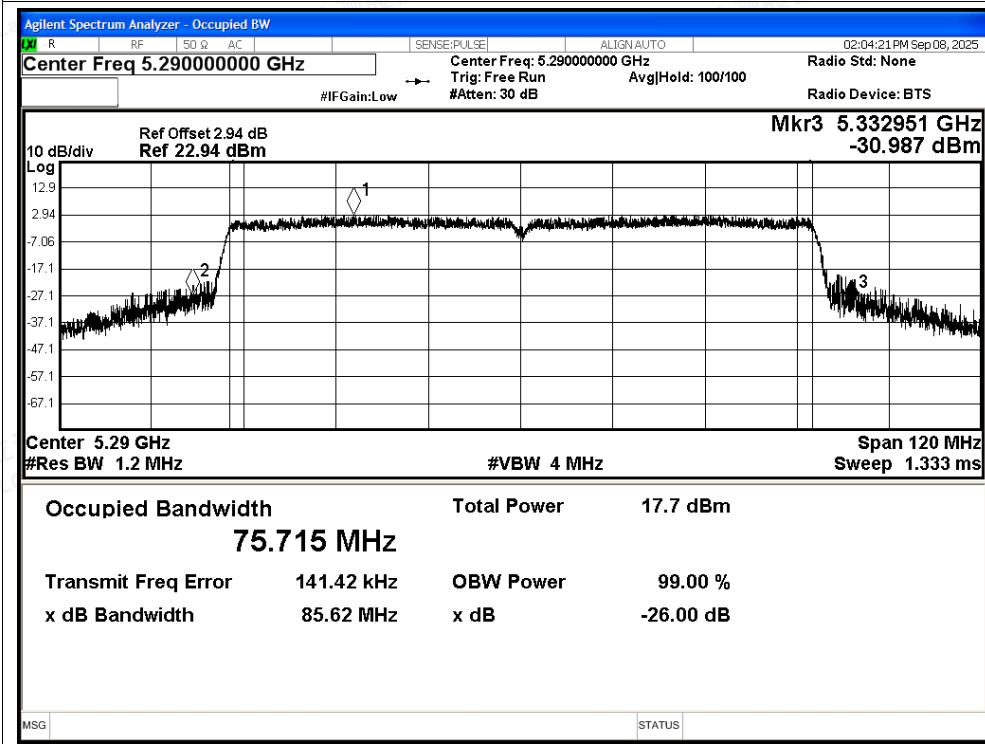

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5260	Ant1	24.901	---	Pass
NVNT	a	5300	Ant1	27.135	---	Pass
NVNT	a	5320	Ant1	25.6	---	Pass
NVNT	n20	5260	Ant1	27.572	---	Pass
NVNT	n20	5300	Ant1	26.61	---	Pass
NVNT	n20	5320	Ant1	27.193	---	Pass
NVNT	n40	5270	Ant1	49.21	---	Pass
NVNT	n40	5310	Ant1	48.202	---	Pass
NVNT	ac20	5260	Ant1	26.458	---	Pass
NVNT	ac20	5300	Ant1	27.382	---	Pass
NVNT	ac20	5320	Ant1	28.336	---	Pass
NVNT	ac40	5270	Ant1	45.717	---	Pass
NVNT	ac40	5310	Ant1	45.09	---	Pass
NVNT	ac80	5290	Ant1	85.612	---	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

-26dB Bandwidth NVNT a 5260MHz Ant1

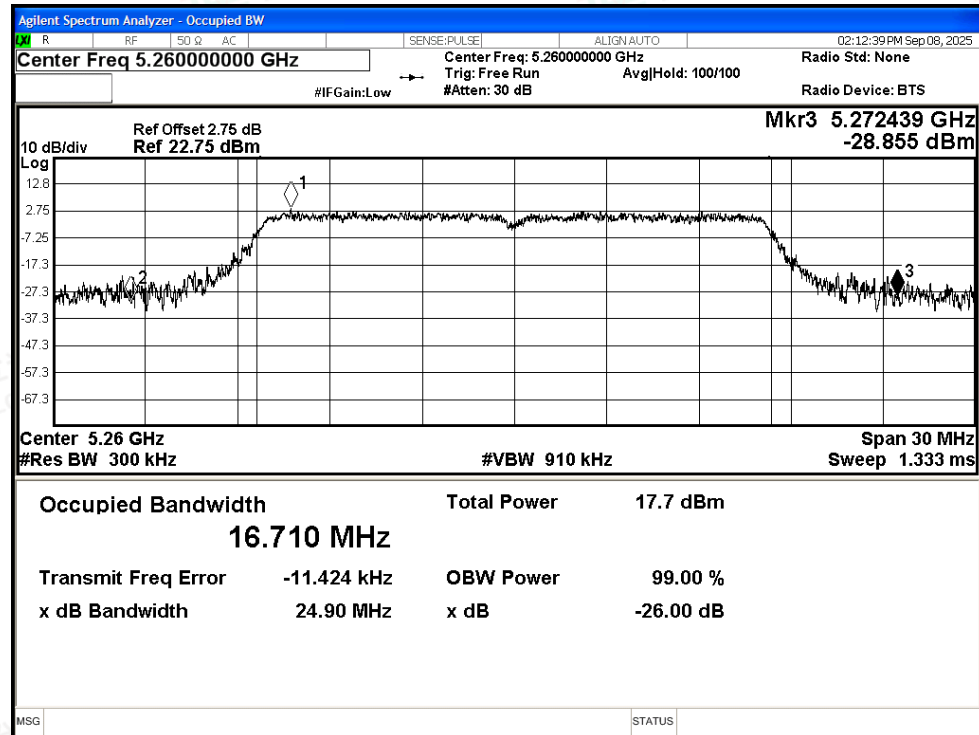

-26dB Bandwidth NVNT a 5300MHz Ant1

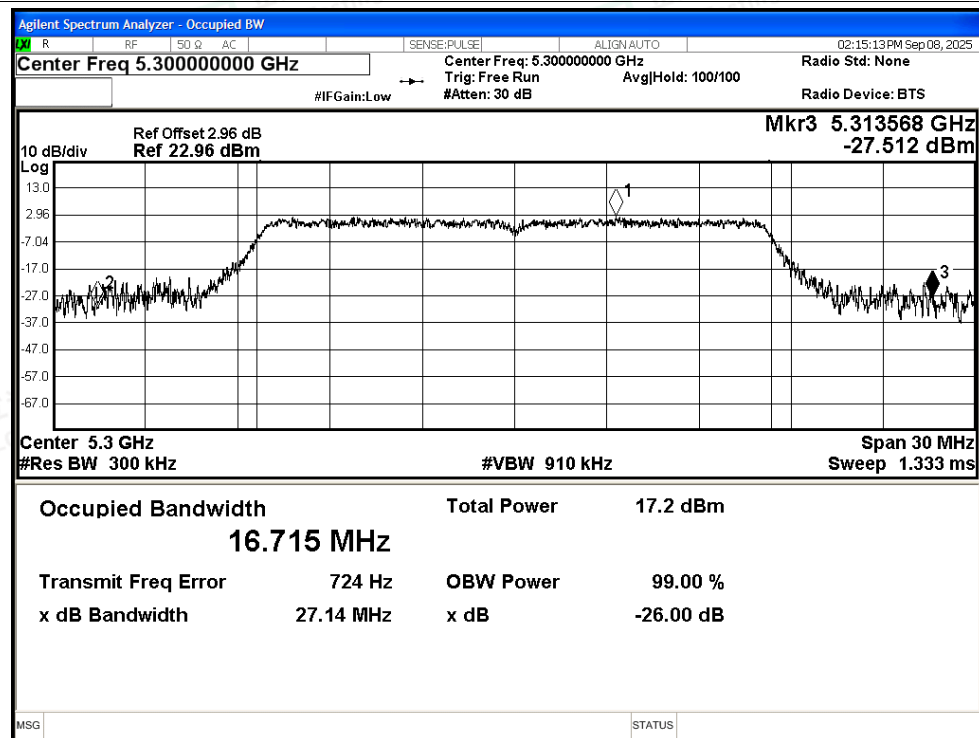

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT a 5320MHz Ant1

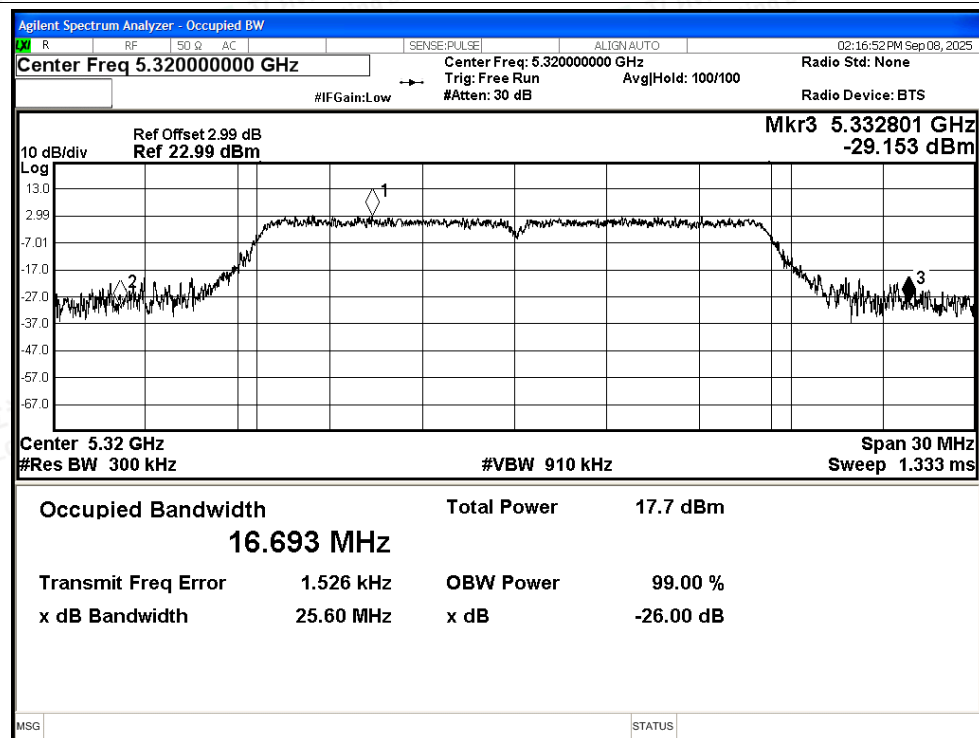

-26dB Bandwidth NVNT n20 5260MHz Ant1

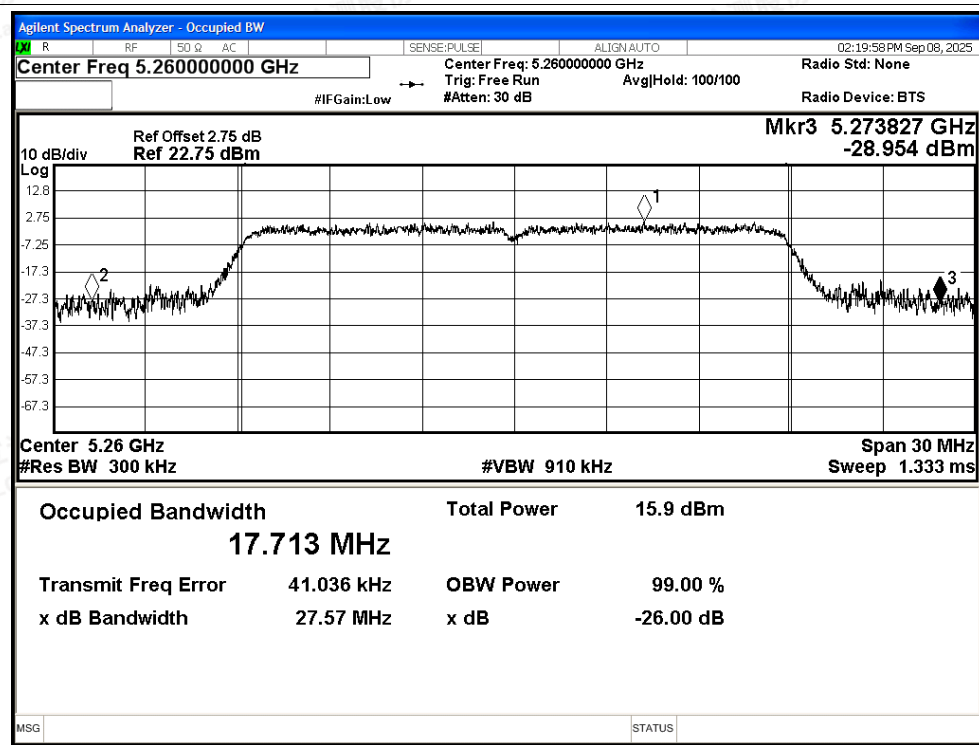

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT n20 5300MHz Ant1

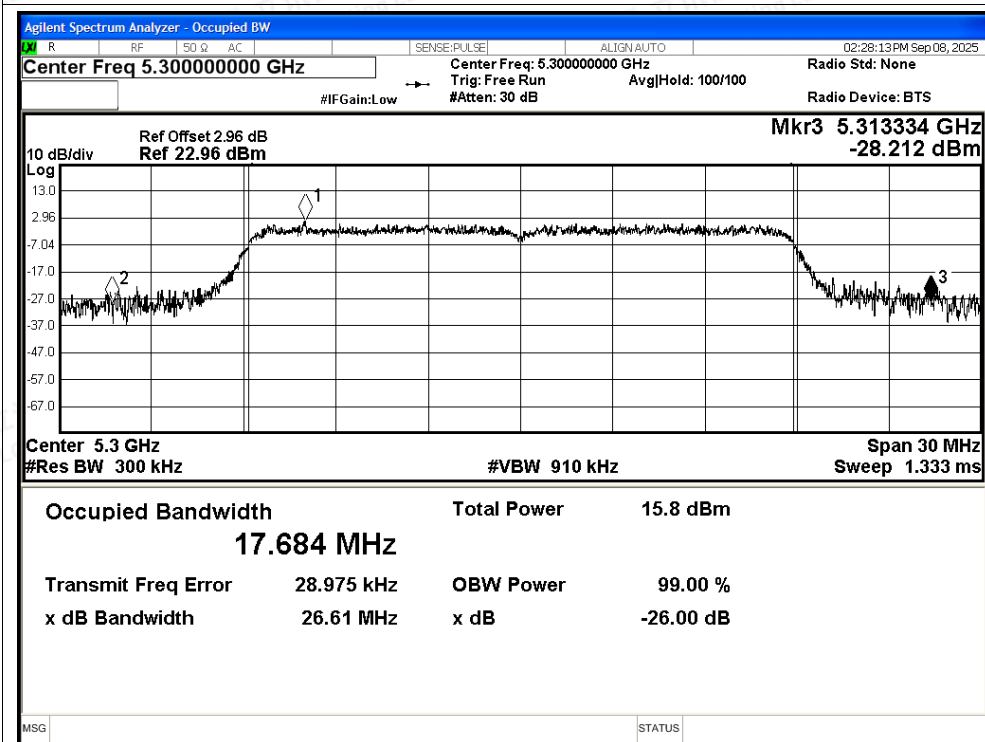

-26dB Bandwidth NVNT n20 5320MHz Ant1

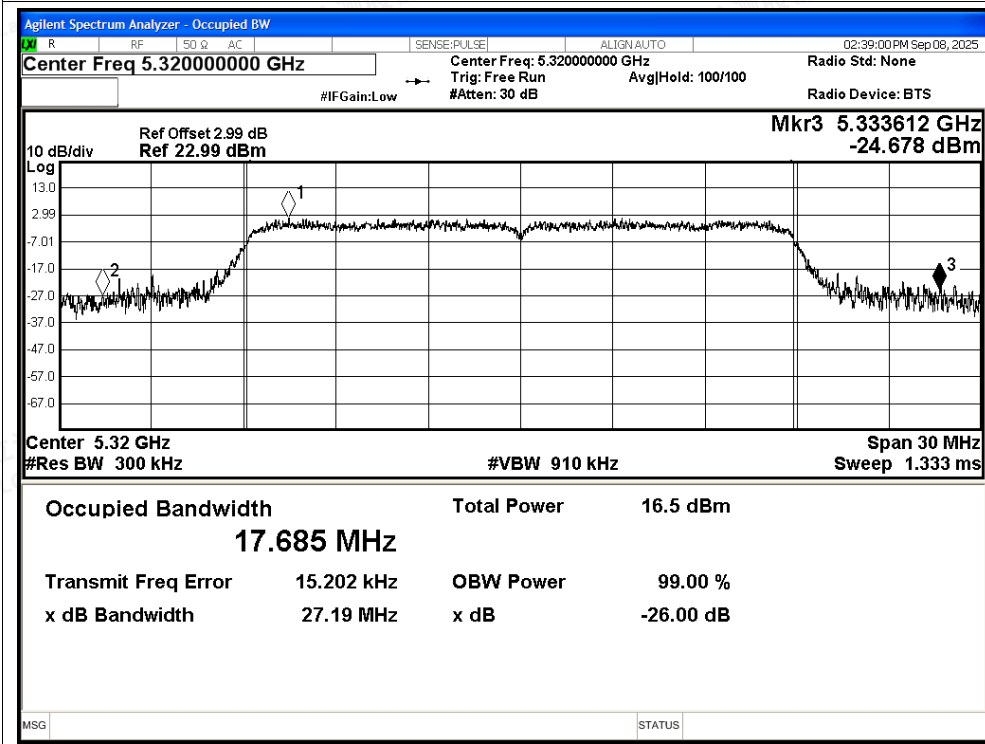

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT n40 5270MHz Ant1

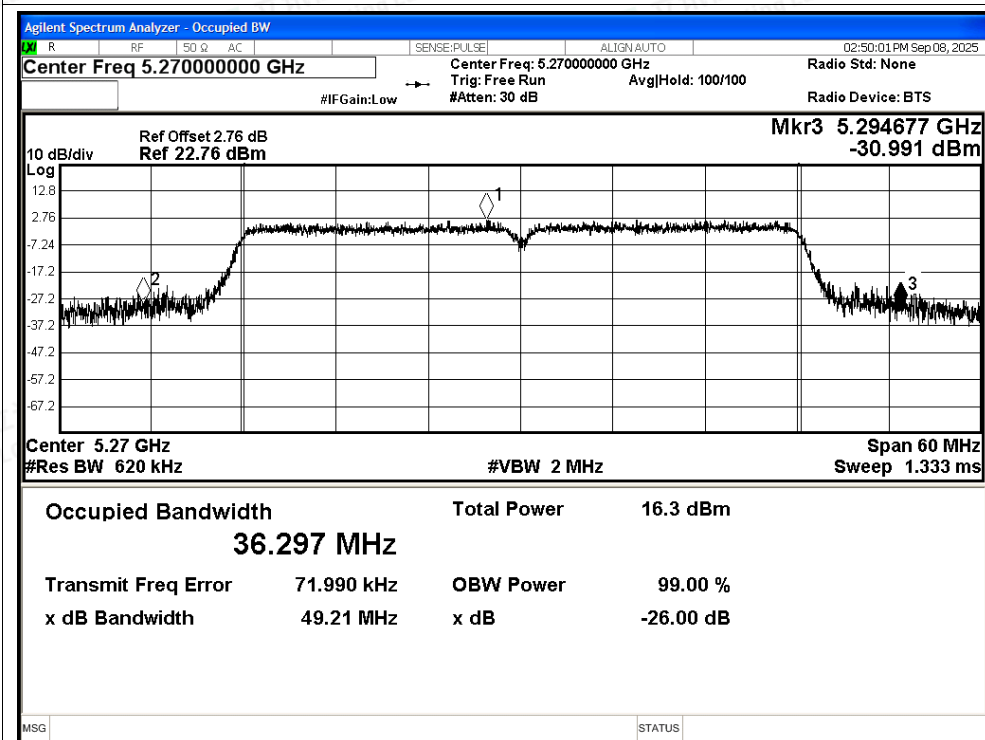

-26dB Bandwidth NVNT n40 5310MHz Ant1

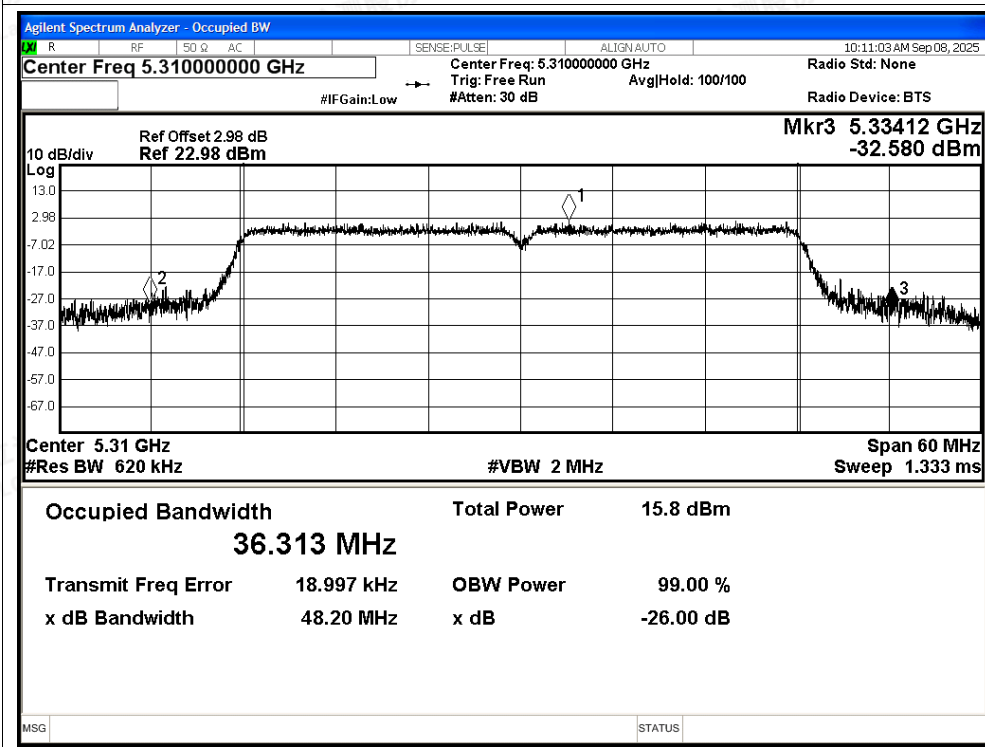

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT ac20 5260MHz Ant1

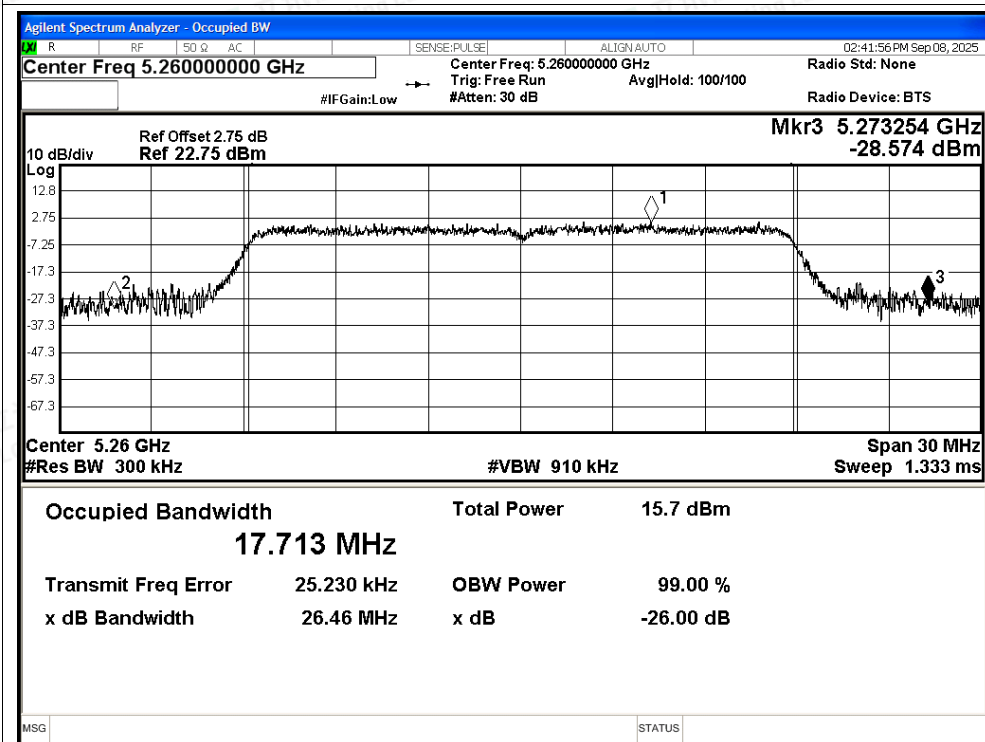

-26dB Bandwidth NVNT ac20 5300MHz Ant1

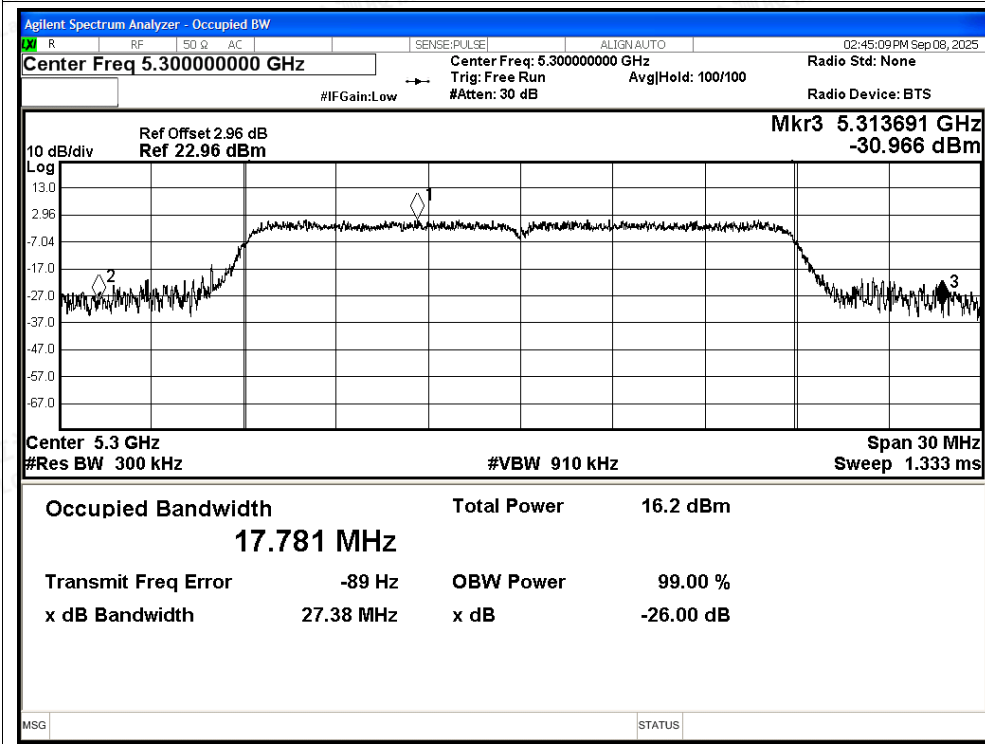

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT ac20 5320MHz Ant1

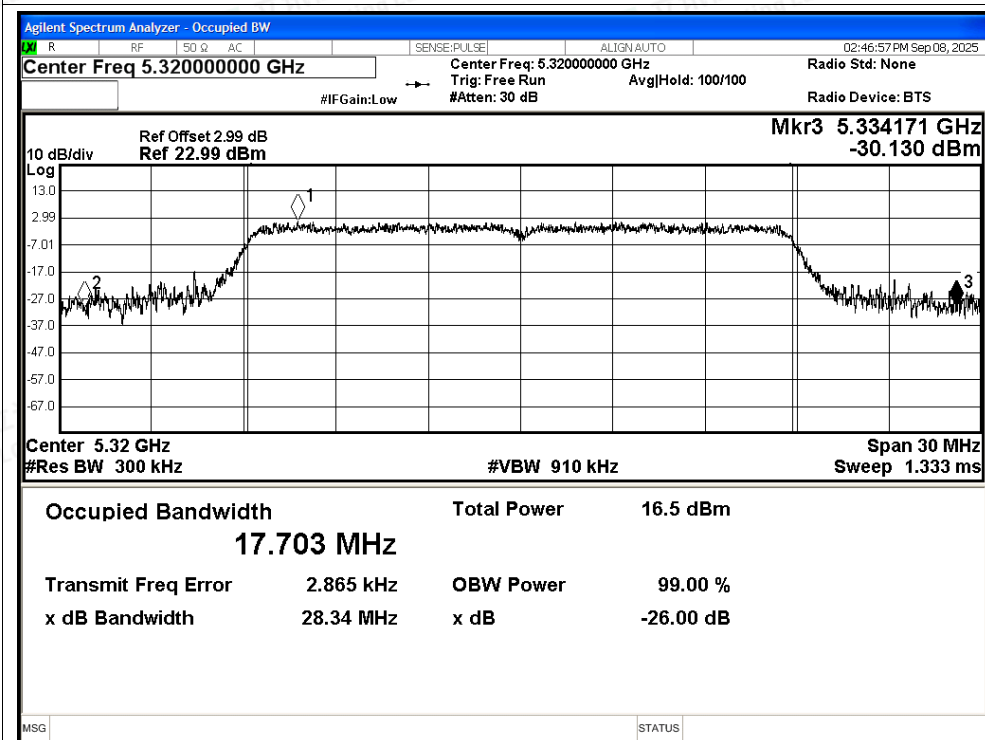

-26dB Bandwidth NVNT ac40 5270MHz Ant1

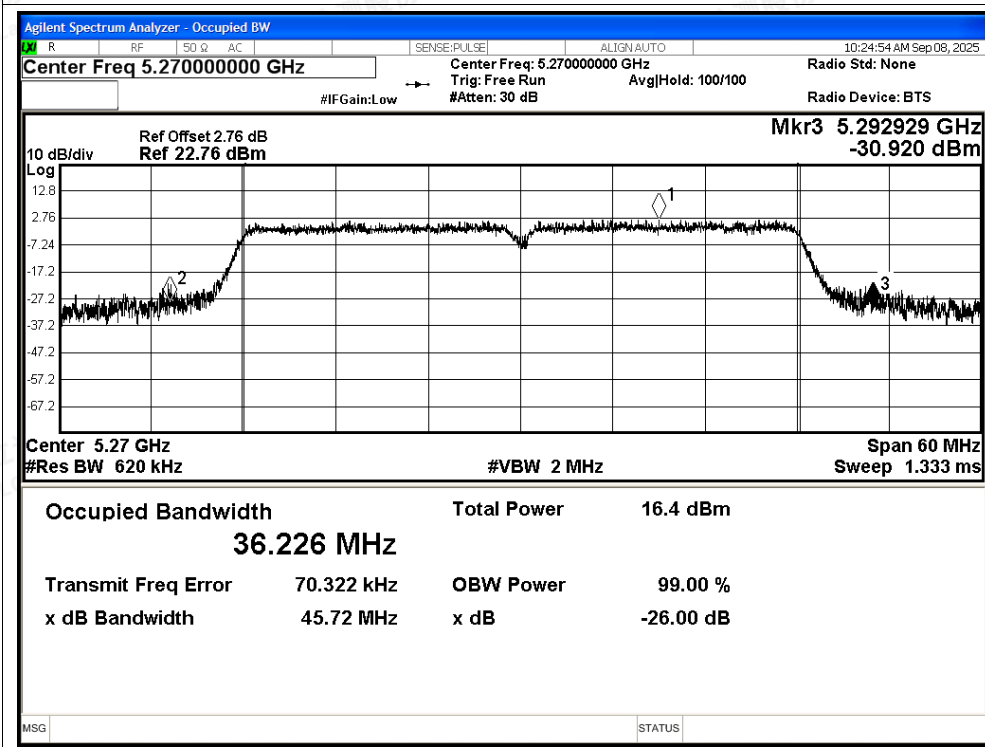

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-26dB Bandwidth NVNT ac40 5310MHz Ant1

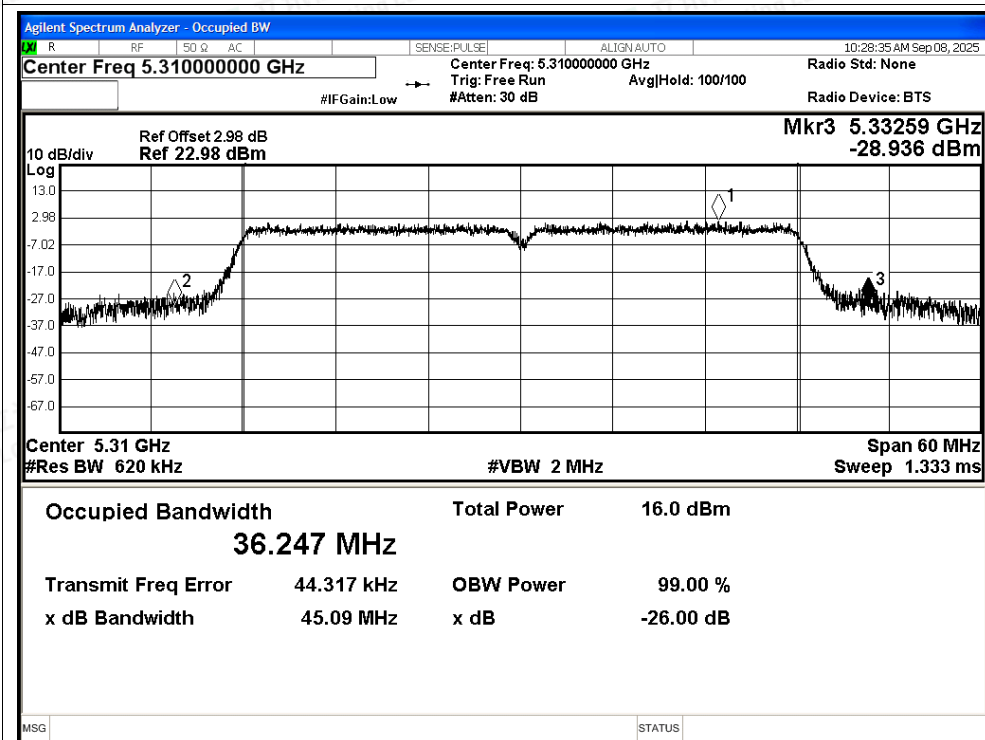

-26dB Bandwidth NVNT ac80 5290MHz Ant1

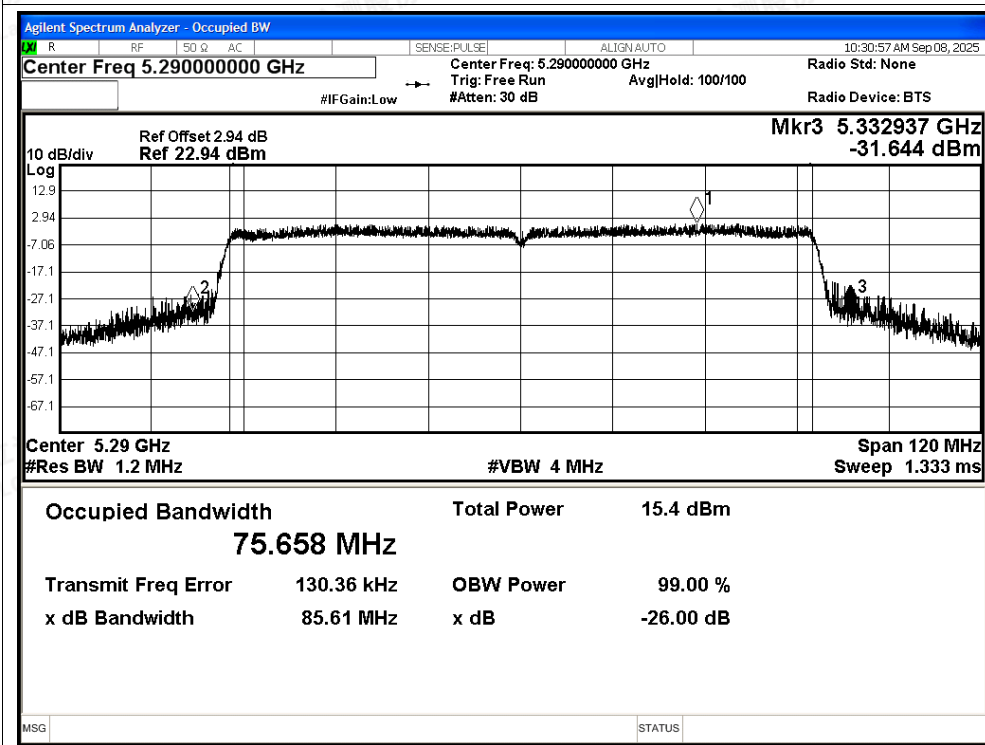

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



E.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant0	12.12	0.24	12.36	24	Pass
NVNT	a	5300	Ant0	12.31	0.24	12.55	24	Pass
NVNT	a	5320	Ant0	12.55	0.24	12.79	24	Pass
NVNT	n20	5260	Ant0	11.8	0.12	11.92	24	Pass
NVNT	n20	5300	Ant0	12.21	0.12	12.33	24	Pass
NVNT	n20	5320	Ant0	11.45	0.12	11.57	24	Pass
NVNT	n40	5270	Ant0	10.47	0.23	10.7	24	Pass
NVNT	n40	5310	Ant0	11.08	0.24	11.32	24	Pass
NVNT	ac20	5260	Ant0	11.57	0.12	11.69	24	Pass
NVNT	ac20	5300	Ant0	11.79	0.12	11.91	24	Pass
NVNT	ac20	5320	Ant0	11.3	0.12	11.42	24	Pass
NVNT	ac40	5270	Ant0	10.47	0.24	10.71	24	Pass
NVNT	ac40	5310	Ant0	10.95	0.24	11.19	24	Pass
NVNT	ac80	5290	Ant0	10.58	0.47	11.05	24	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant1	11.92	0.24	12.16	24	Pass
NVNT	a	5300	Ant1	11.47	0.24	11.71	24	Pass
NVNT	a	5320	Ant1	11.99	0.24	12.23	24	Pass
NVNT	n20	5260	Ant1	10.47	0.12	10.59	24	Pass
NVNT	n20	5300	Ant1	10.26	0.12	10.38	24	Pass
NVNT	n20	5320	Ant1	10.96	0.12	11.08	24	Pass
NVNT	n40	5270	Ant1	10.12	0.24	10.36	24	Pass
NVNT	n40	5310	Ant1	9.64	0.24	9.88	24	Pass
NVNT	ac20	5260	Ant1	10.22	0.12	10.34	24	Pass
NVNT	ac20	5300	Ant1	10.68	0.12	10.8	24	Pass
NVNT	ac20	5320	Ant1	11.09	0.12	11.21	24	Pass
NVNT	ac40	5270	Ant1	10.29	0.24	10.53	24	Pass
NVNT	ac40	5310	Ant1	9.84	0.23	10.07	24	Pass
NVNT	ac80	5290	Ant1	8.43	0.47	8.9	24	Pass





MIMO

Condition	Mode	Frequency (MHz)	Total Power (dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+Ant1		
NVNT	n20	5260	11.92	10.59	14.32	24	Pass
NVNT	n20	5300	12.33	10.38	14.47	24	Pass
NVNT	n20	5320	11.57	11.08	14.34	24	Pass
NVNT	n40	5270	10.7	10.36	13.54	24	Pass
NVNT	n40	5310	11.32	9.88	13.67	24	Pass
NVNT	ac20	5260	11.69	10.34	14.08	24	Pass
NVNT	ac20	5300	11.91	10.8	14.40	24	Pass
NVNT	ac20	5320	11.42	11.21	14.33	24	Pass
NVNT	ac40	5270	10.71	10.53	13.63	24	Pass
NVNT	ac40	5310	11.19	10.07	13.68	24	Pass
NVNT	ac80	5290	11.05	8.9	13.12	24	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



E.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5260	Ant0	1.5	0.24	1.74	11	Pass
NVNT	a	5300	Ant0	1.76	0.24	2	11	Pass
NVNT	a	5320	Ant0	2.09	0.24	2.33	11	Pass
NVNT	n20	5260	Ant0	0.93	0.12	1.05	11	Pass
NVNT	n20	5300	Ant0	1.18	0.12	1.3	11	Pass
NVNT	n20	5320	Ant0	0.65	0.12	0.77	11	Pass
NVNT	n40	5270	Ant0	-3.51	0.23	-3.28	11	Pass
NVNT	n40	5310	Ant0	-2.91	0.24	-2.67	11	Pass
NVNT	ac20	5260	Ant0	0.75	0.12	0.87	11	Pass
NVNT	ac20	5300	Ant0	1.21	0.12	1.33	11	Pass
NVNT	ac20	5320	Ant0	0.46	0.12	0.58	11	Pass
NVNT	ac40	5270	Ant0	-3.17	0.24	-2.93	11	Pass
NVNT	ac40	5310	Ant0	-3.15	0.24	-2.91	11	Pass
NVNT	ac80	5290	Ant0	-6.42	0.47	-5.95	11	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5260	Ant1	1.7	0.24	1.94	11	Pass
NVNT	a	5300	Ant1	0.69	0.24	0.93	11	Pass
NVNT	a	5320	Ant1	1.35	0.24	1.59	11	Pass
NVNT	n20	5260	Ant1	-0.23	0.12	-0.11	11	Pass
NVNT	n20	5300	Ant1	-0.09	0.12	0.03	11	Pass
NVNT	n20	5320	Ant1	0.25	0.12	0.37	11	Pass
NVNT	n40	5270	Ant1	-3.89	0.24	-3.65	11	Pass
NVNT	n40	5310	Ant1	-4.39	0.24	-4.15	11	Pass
NVNT	ac20	5260	Ant1	-0.44	0.12	-0.32	11	Pass
NVNT	ac20	5300	Ant1	0.18	0.12	0.3	11	Pass
NVNT	ac20	5320	Ant1	0.29	0.12	0.41	11	Pass
NVNT	ac40	5270	Ant1	-3.61	0.24	-3.37	11	Pass
NVNT	ac40	5310	Ant1	-4	0.23	-3.77	11	Pass
NVNT	ac80	5290	Ant1	-8.51	0.47	-8.04	11	Pass





MIMO

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/MHz)		Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
			Duty Factor (dB)				
			Ant0	Ant1			
NVNT	n20	5260	1.05	-0.11	3.52	11	Pass
NVNT	n20	5300	1.3	0.03	3.72	11	Pass
NVNT	n20	5320	0.77	0.37	3.58	11	Pass
NVNT	n40	5270	-3.28	-3.65	-0.45	11	Pass
NVNT	n40	5310	-2.67	-4.15	-0.34	11	Pass
NVNT	ac20	5260	0.87	-0.32	3.33	11	Pass
NVNT	ac20	5300	1.33	0.3	3.86	11	Pass
NVNT	ac20	5320	0.58	0.41	3.51	11	Pass
NVNT	ac40	5270	-2.93	-3.37	-0.13	11	Pass
NVNT	ac40	5310	-2.91	-3.77	-0.31	11	Pass
NVNT	ac80	5290	-5.95	-8.04	-3.86	11	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




Test Graphs

PSD NVNT a 5260MHz Ant0

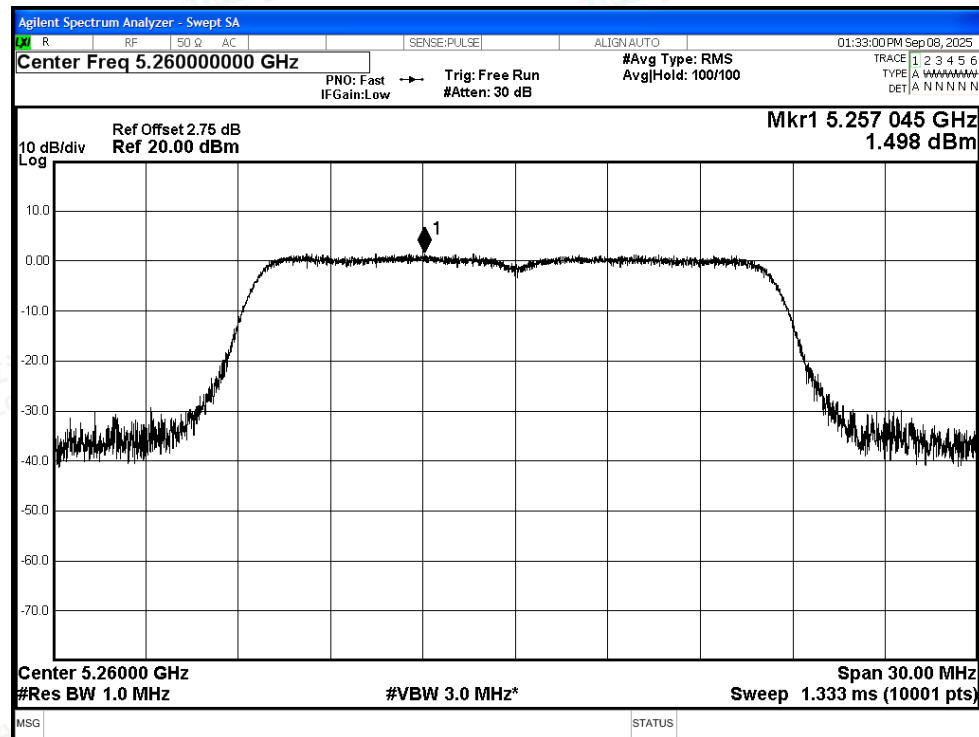


PSD NVNT a 5300MHz Ant0

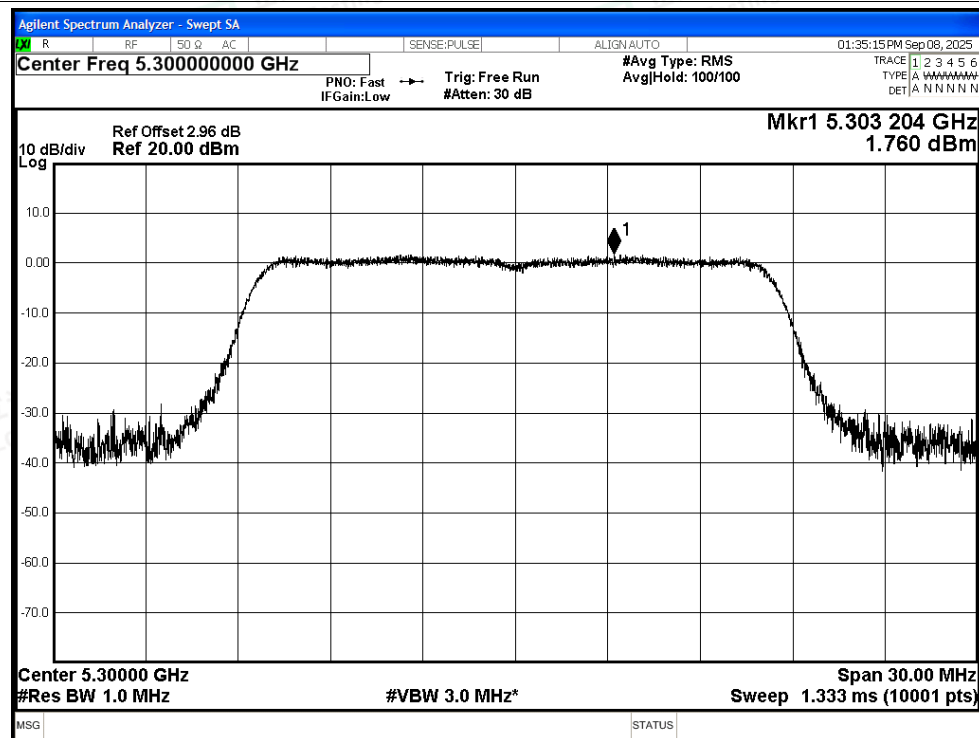








PSD NVNT a 5320MHz Ant0


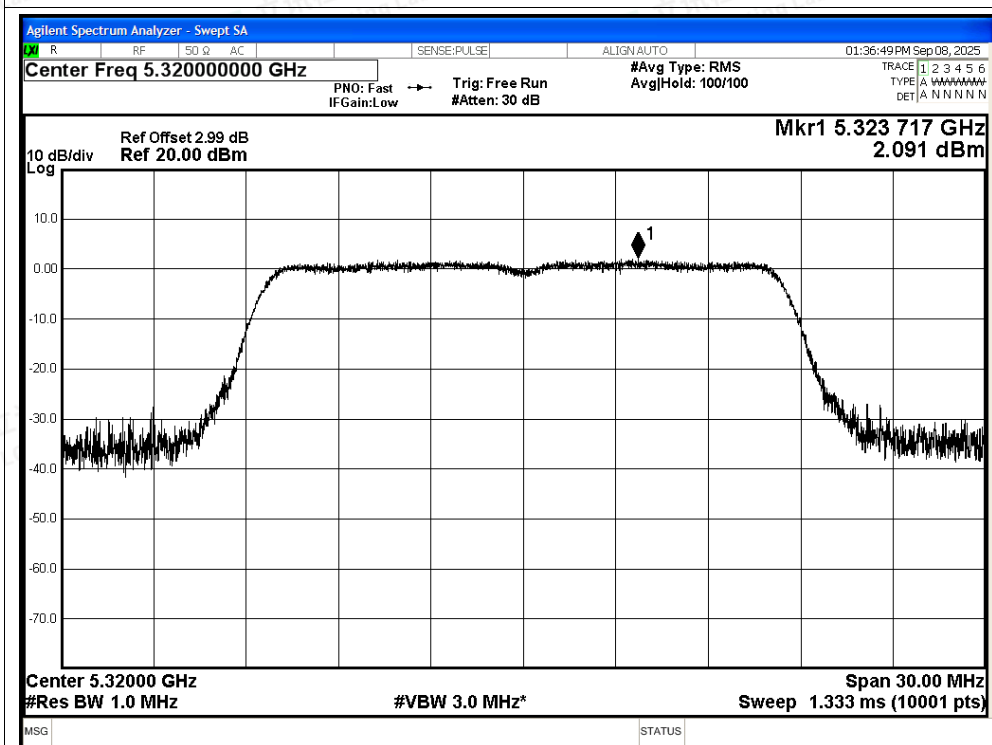


PSD NVNT n20 5260MHz Ant0

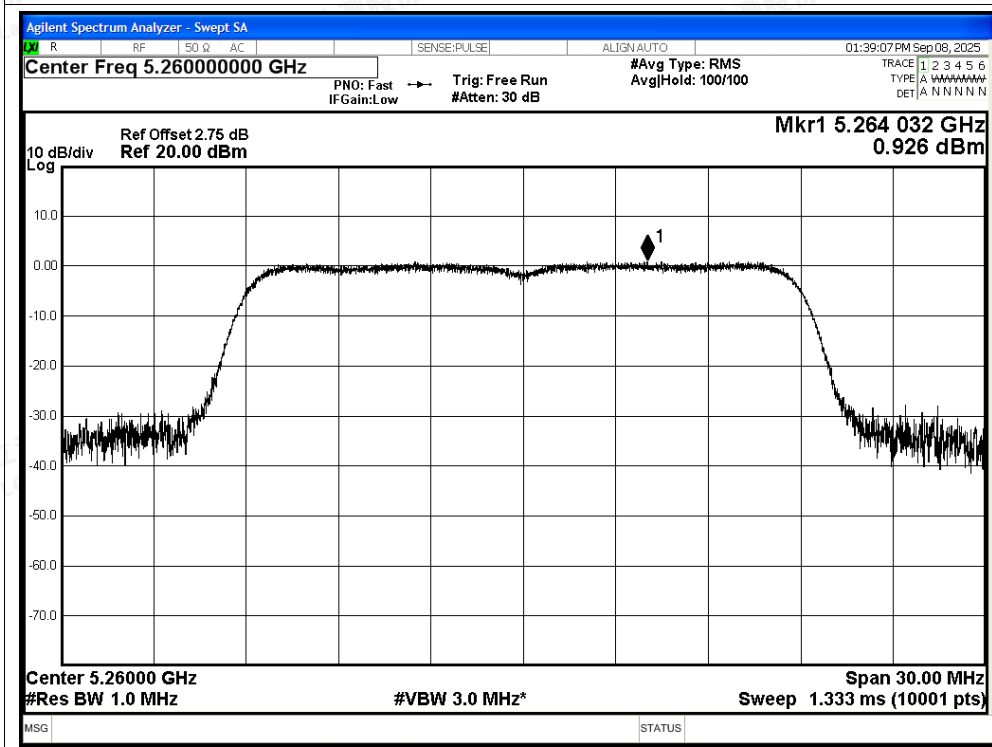

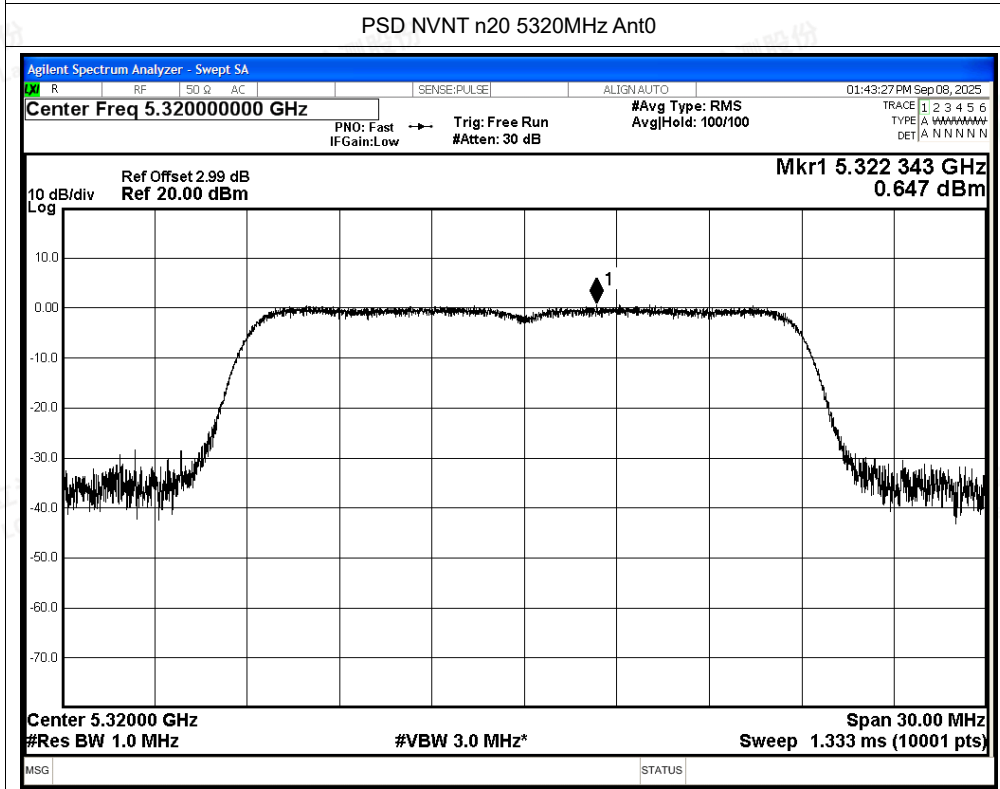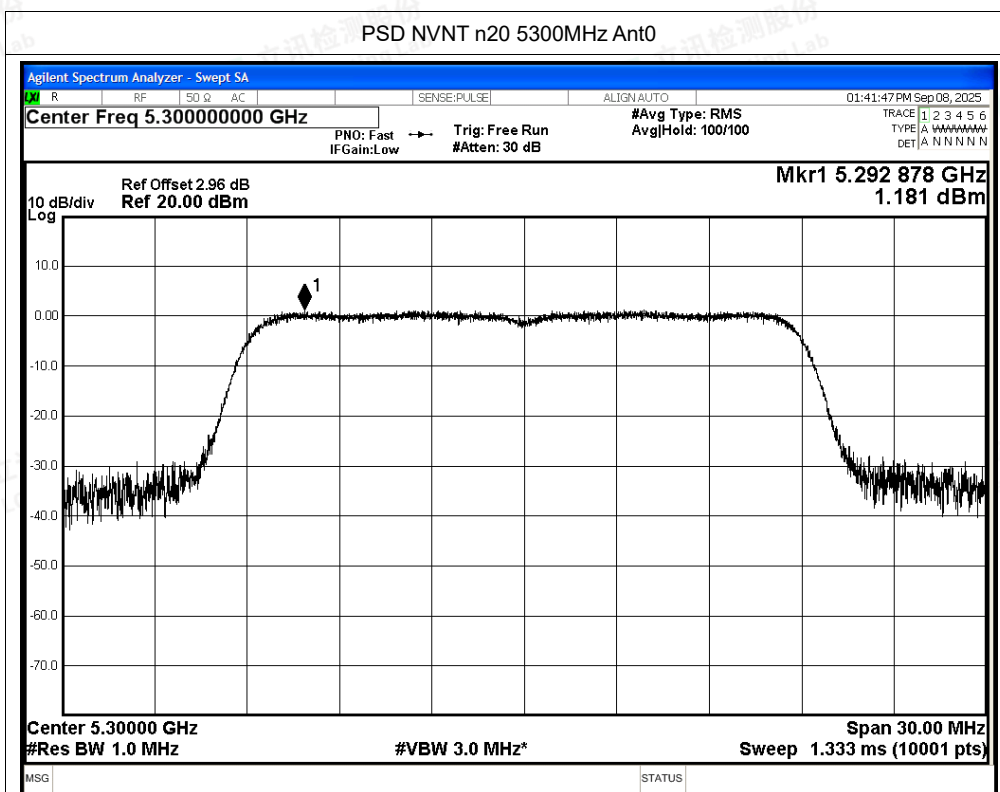

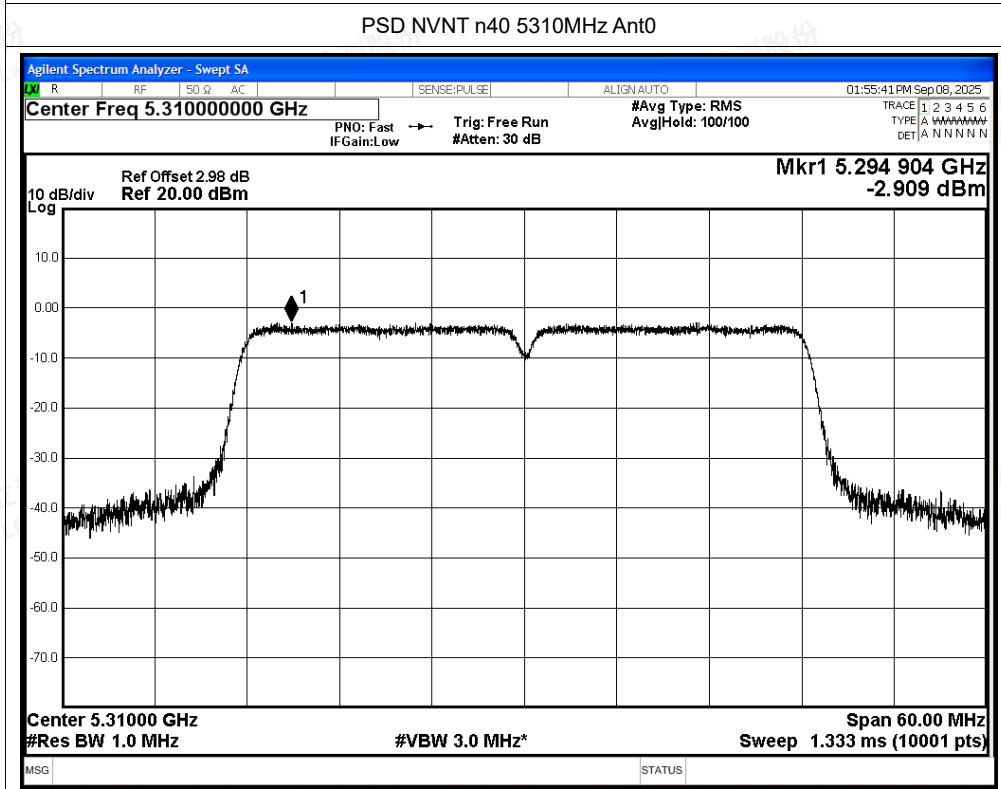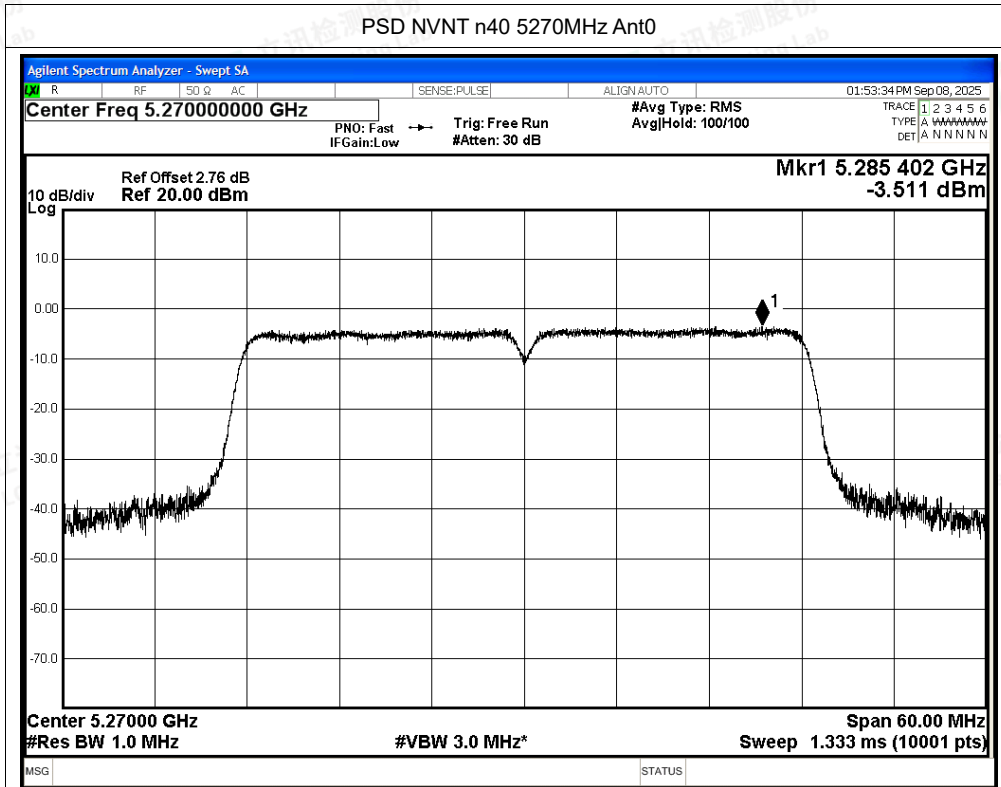

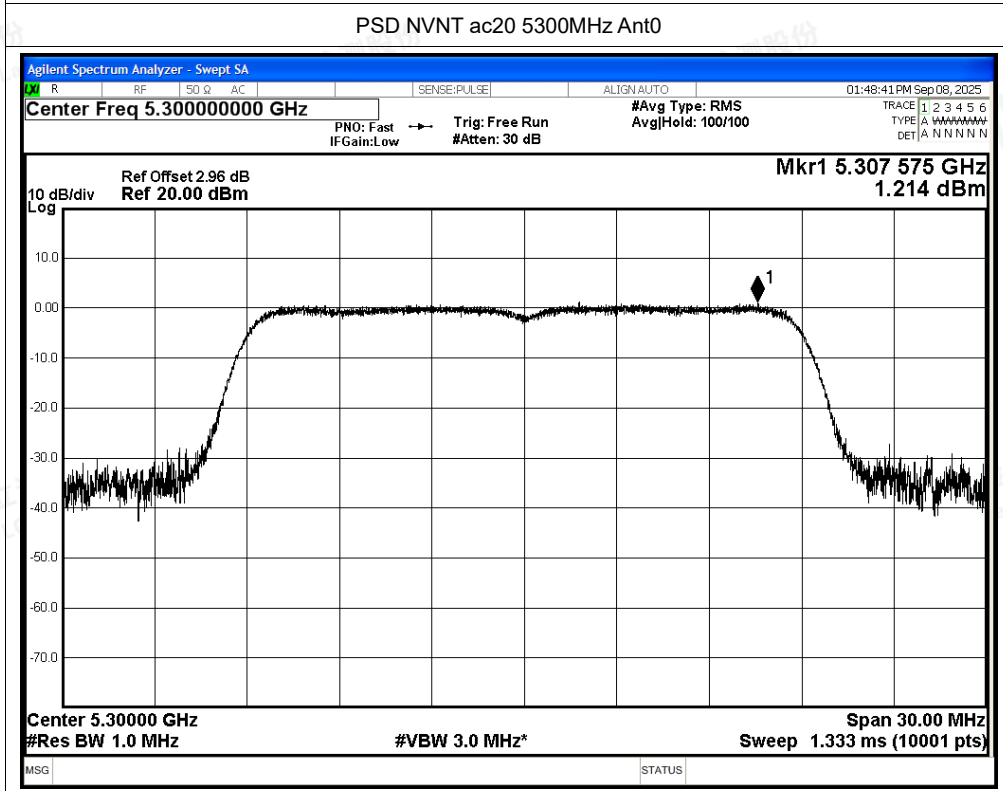
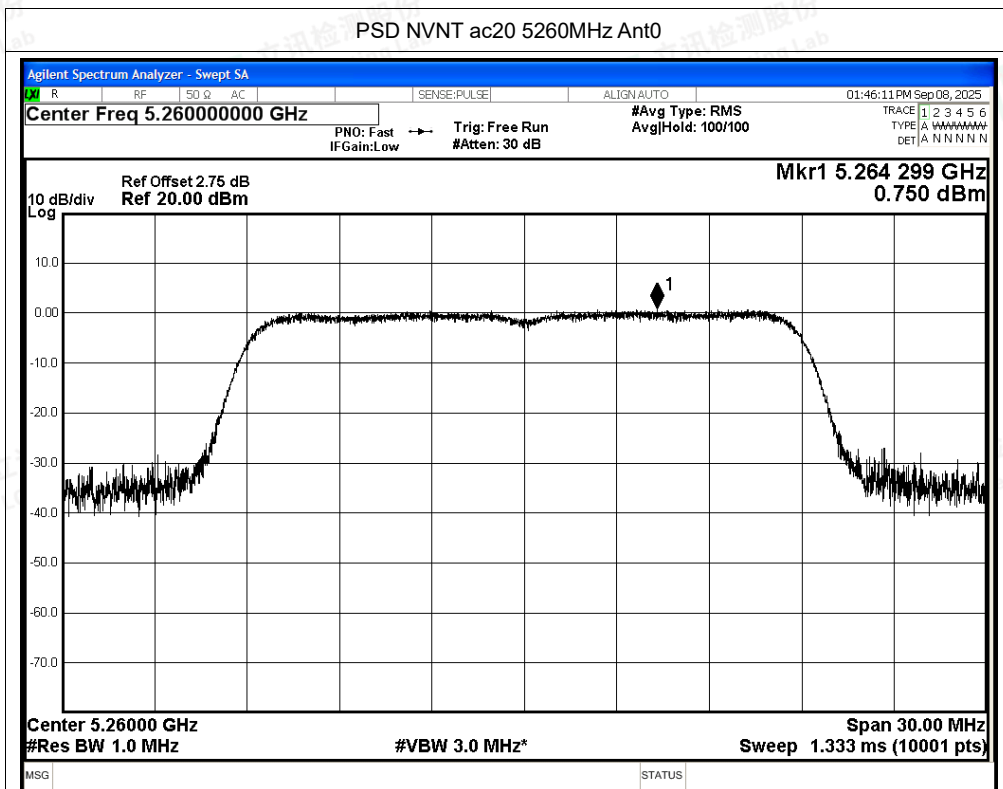




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

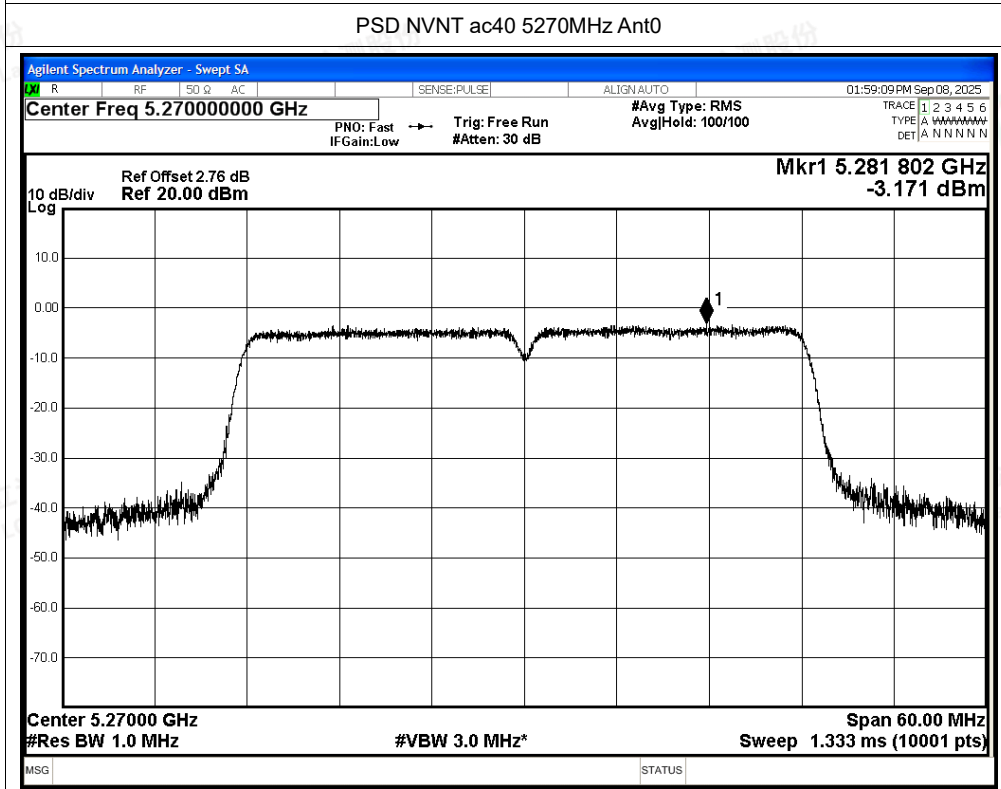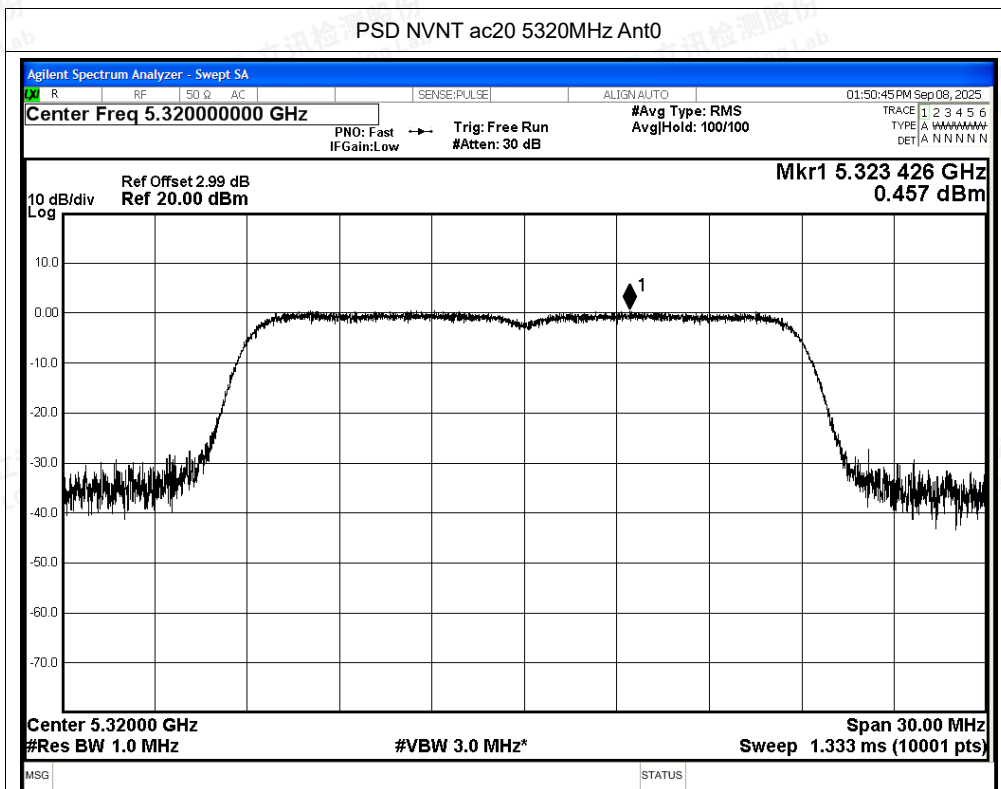

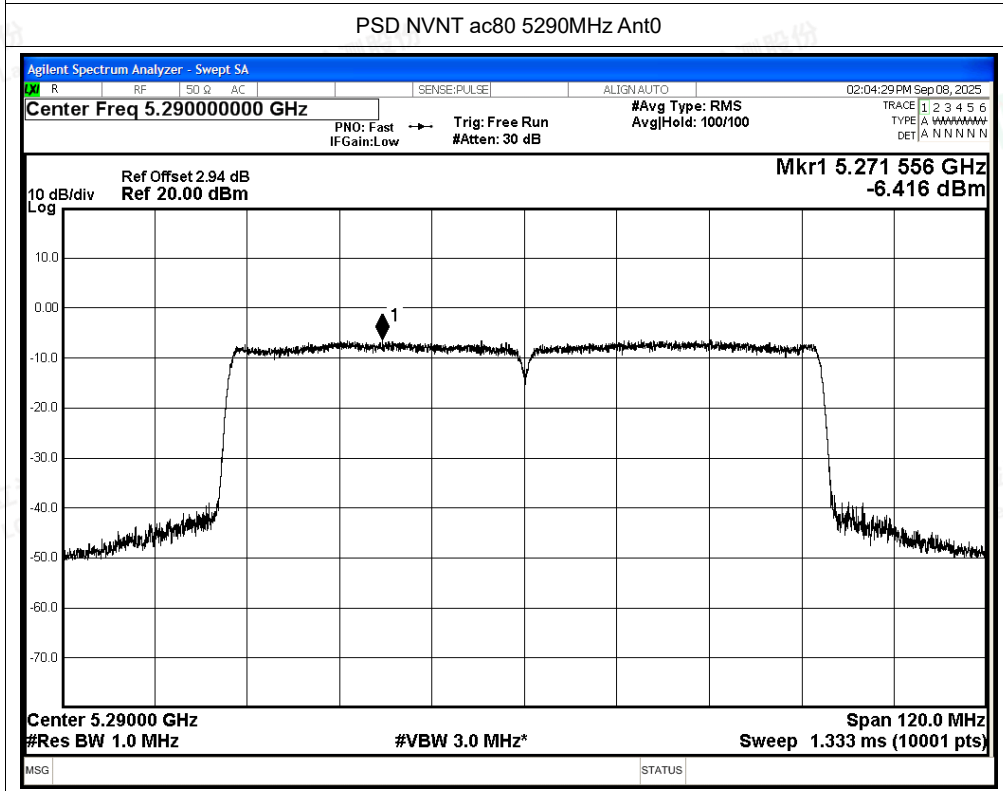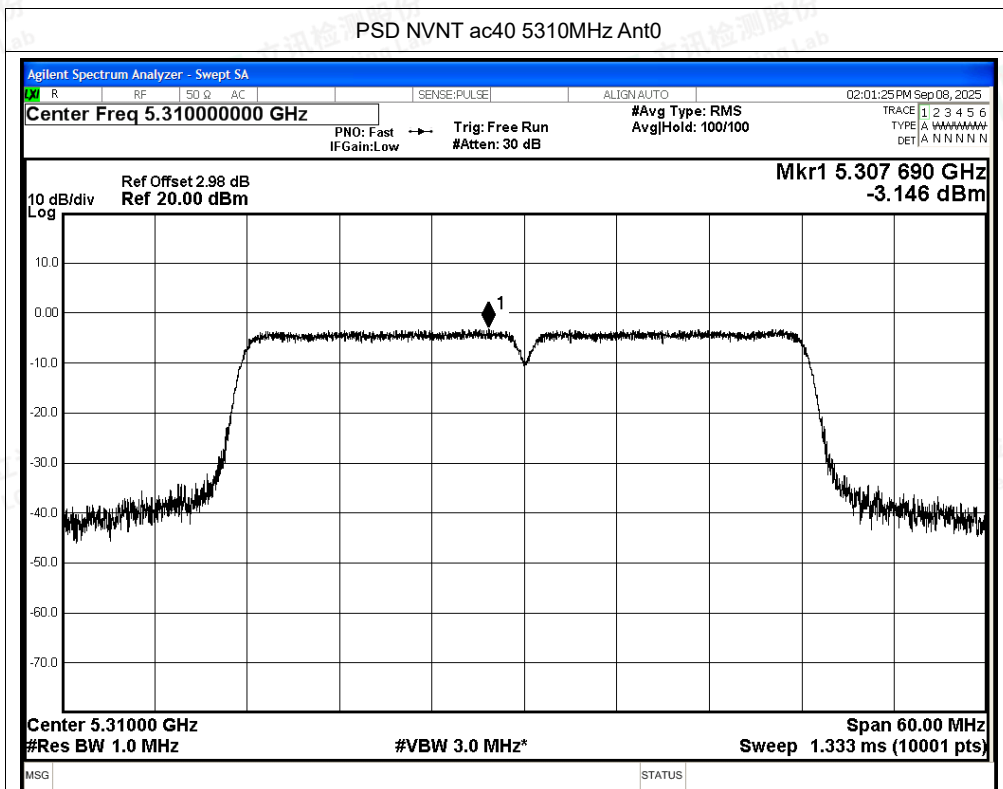

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




Test Graphs

PSD NVNT a 5260MHz Ant1

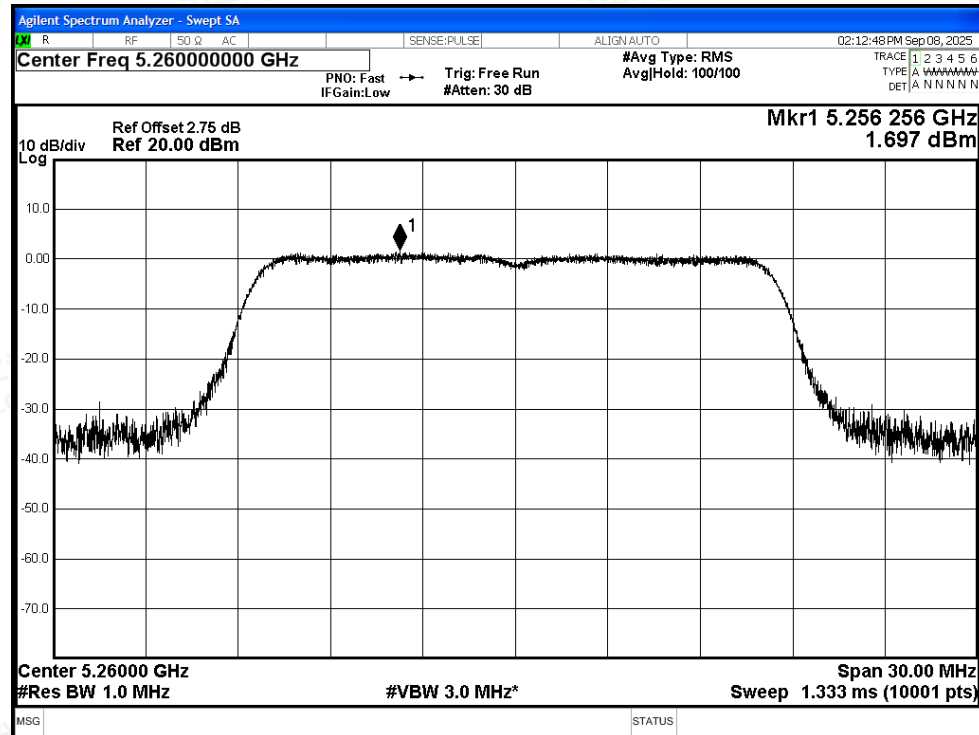


PSD NVNT a 5300MHz Ant1

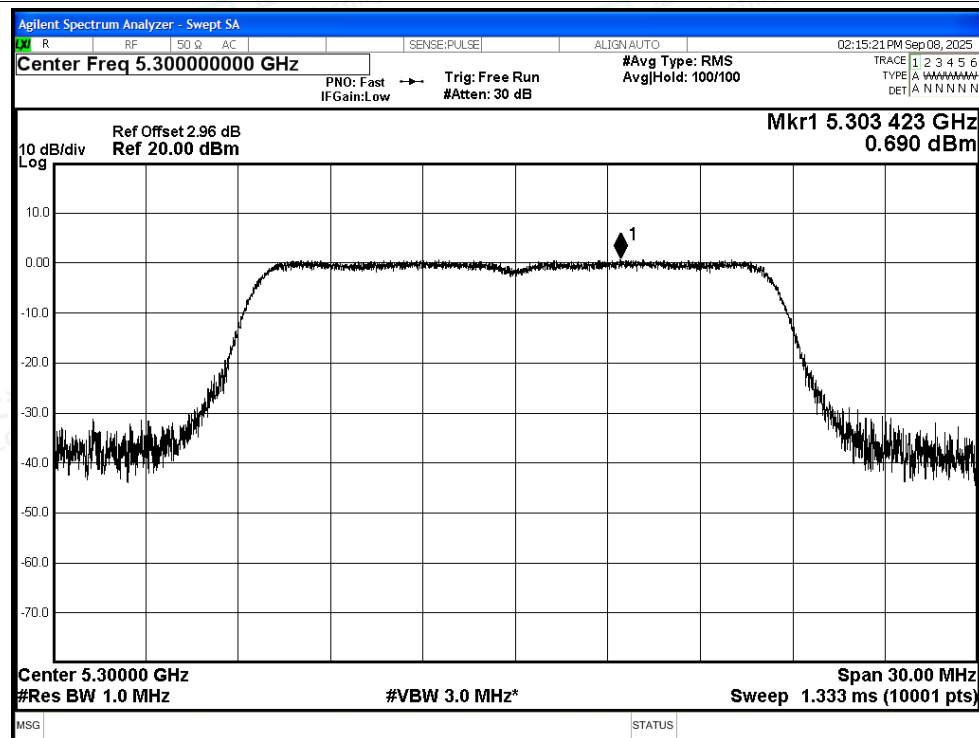






PSD NVNT a 5320MHz Ant1

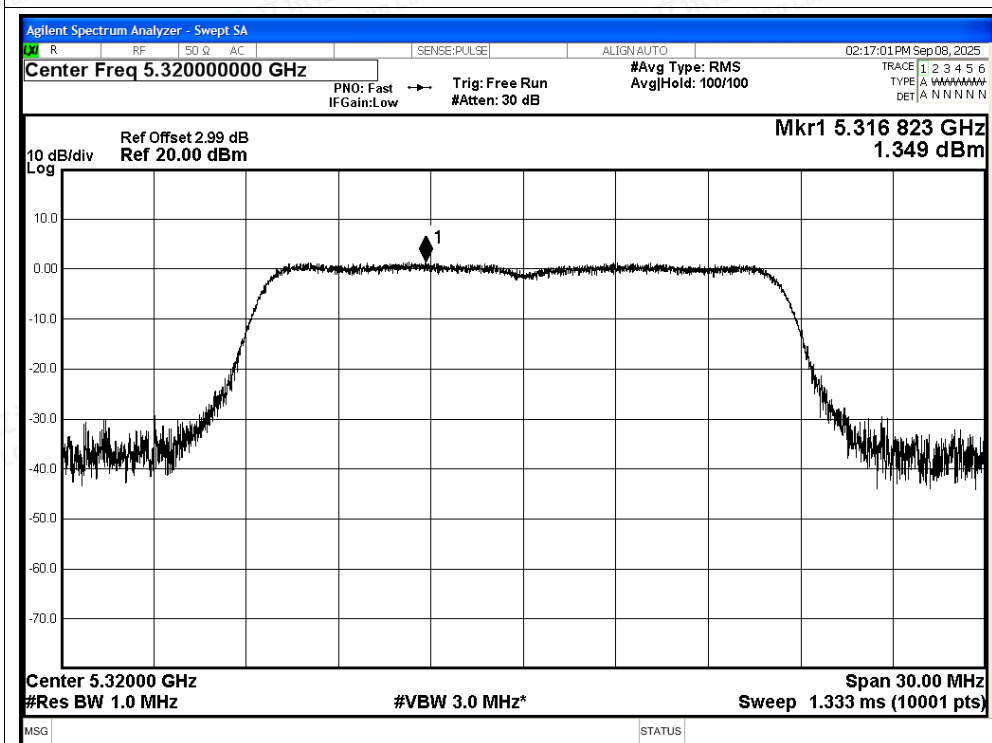

PSD NVNT n20 5260MHz Ant1

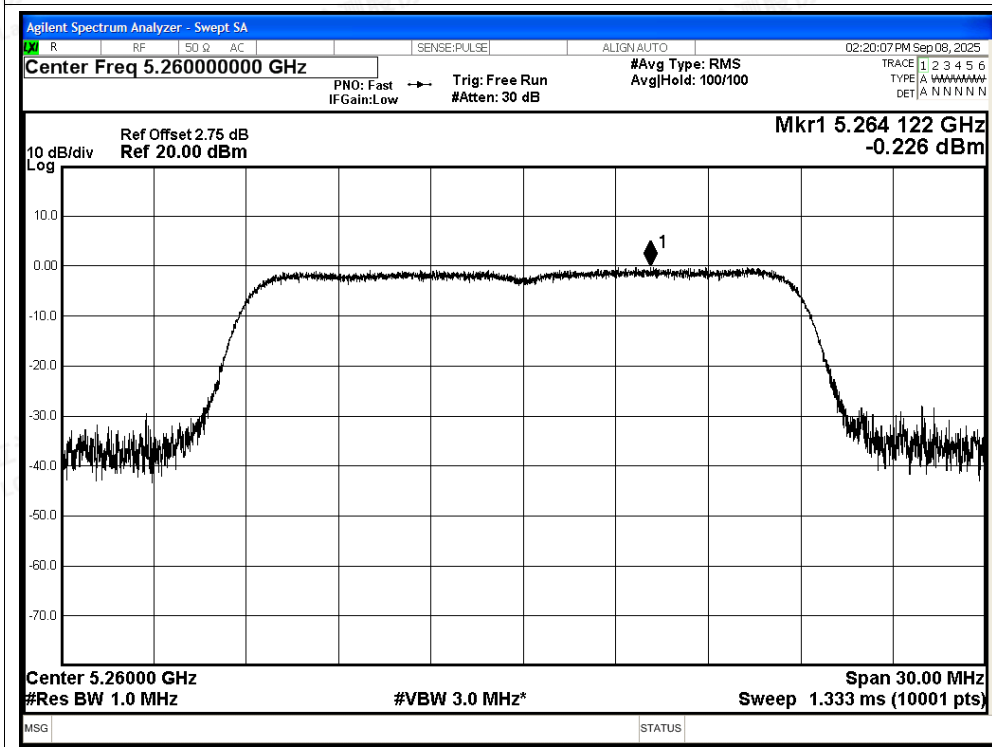

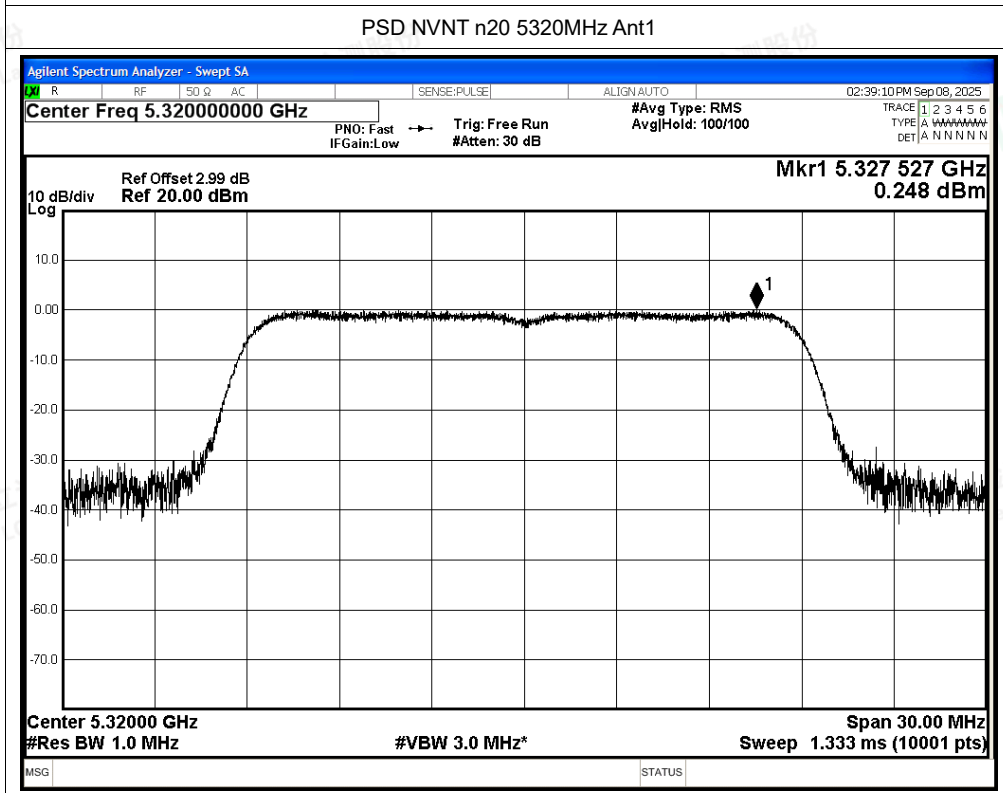
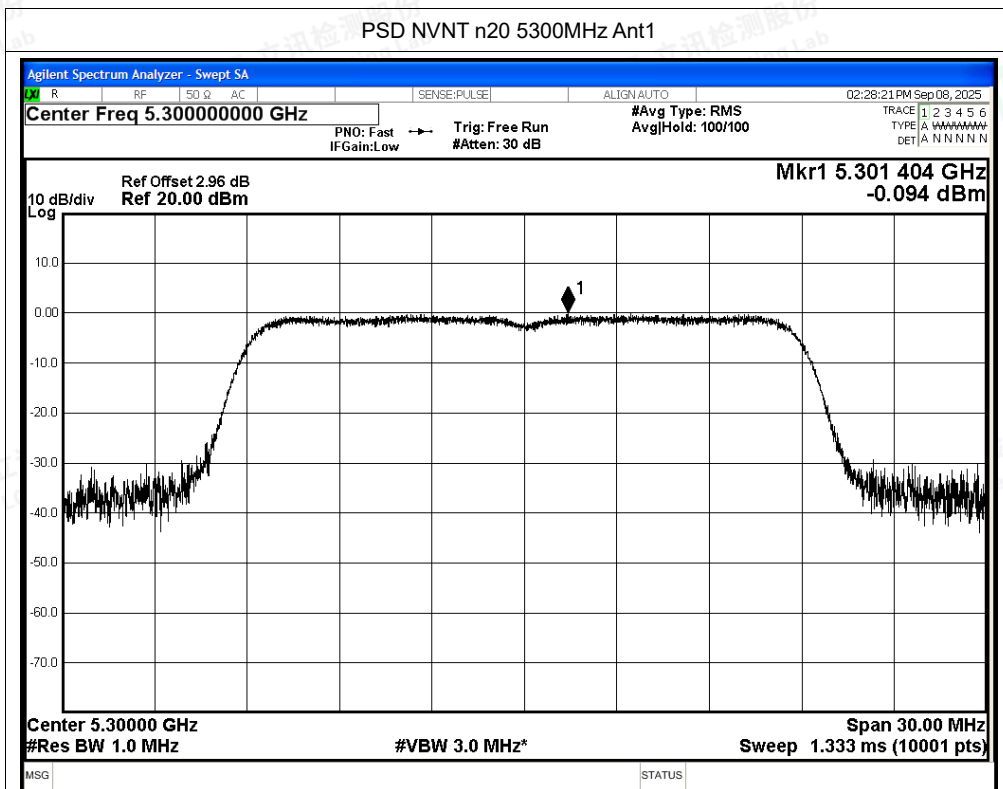




Shenzhen LCS Compliance Testing Laboratory Ltd.



Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China



Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

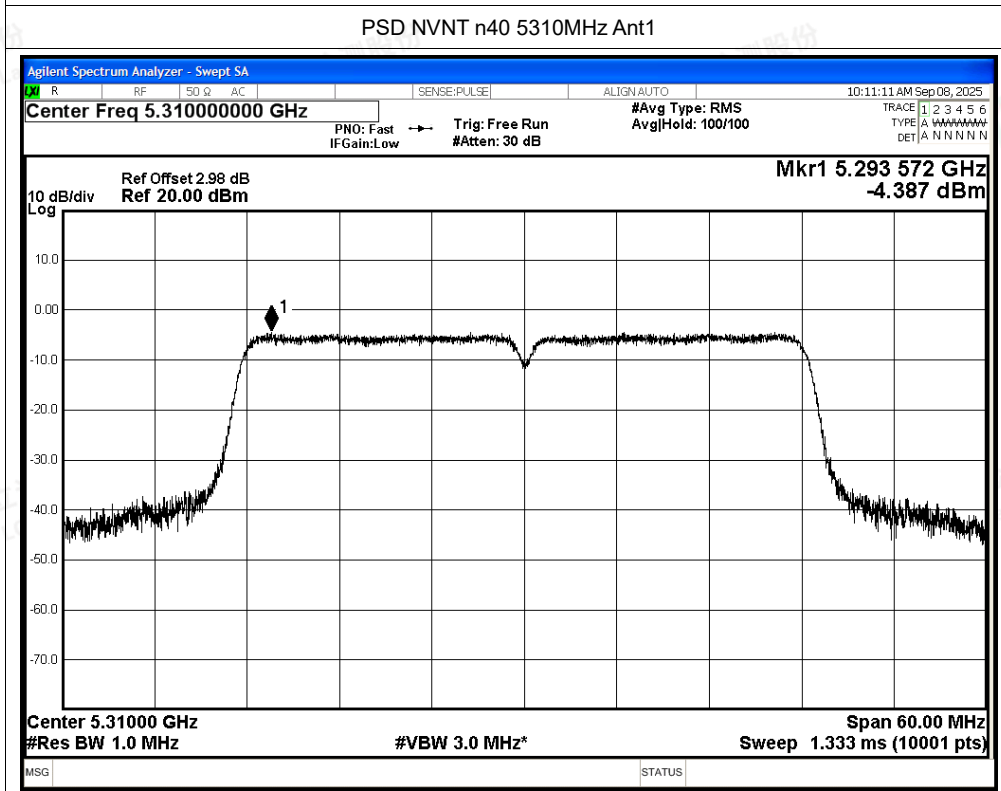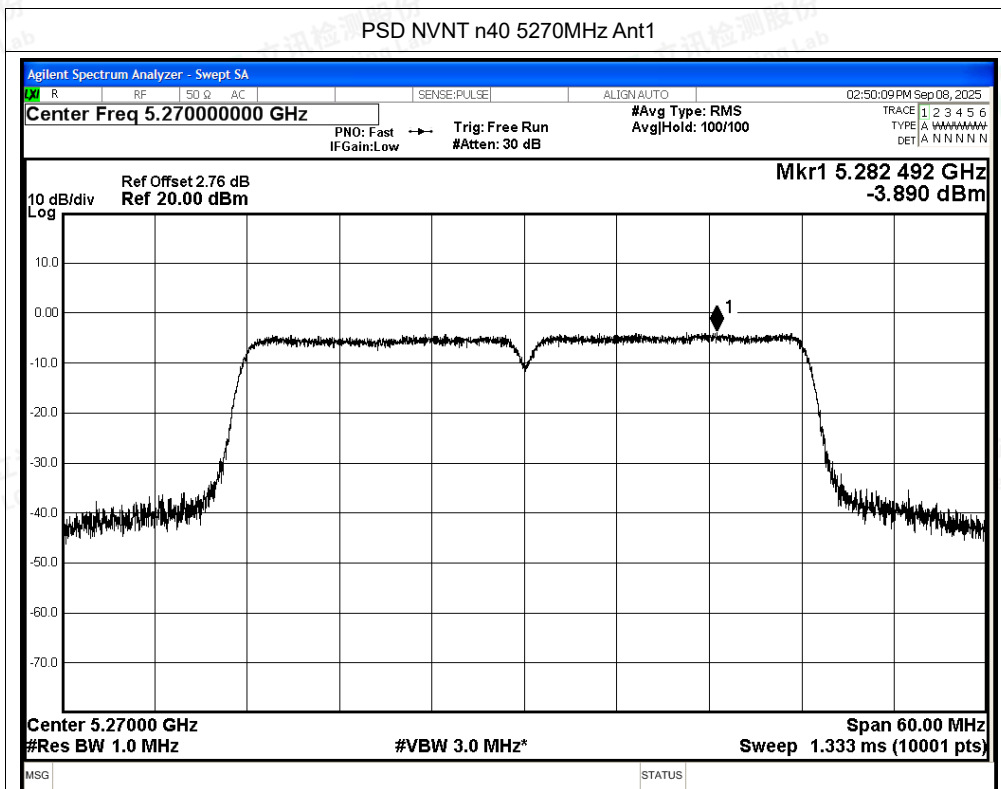

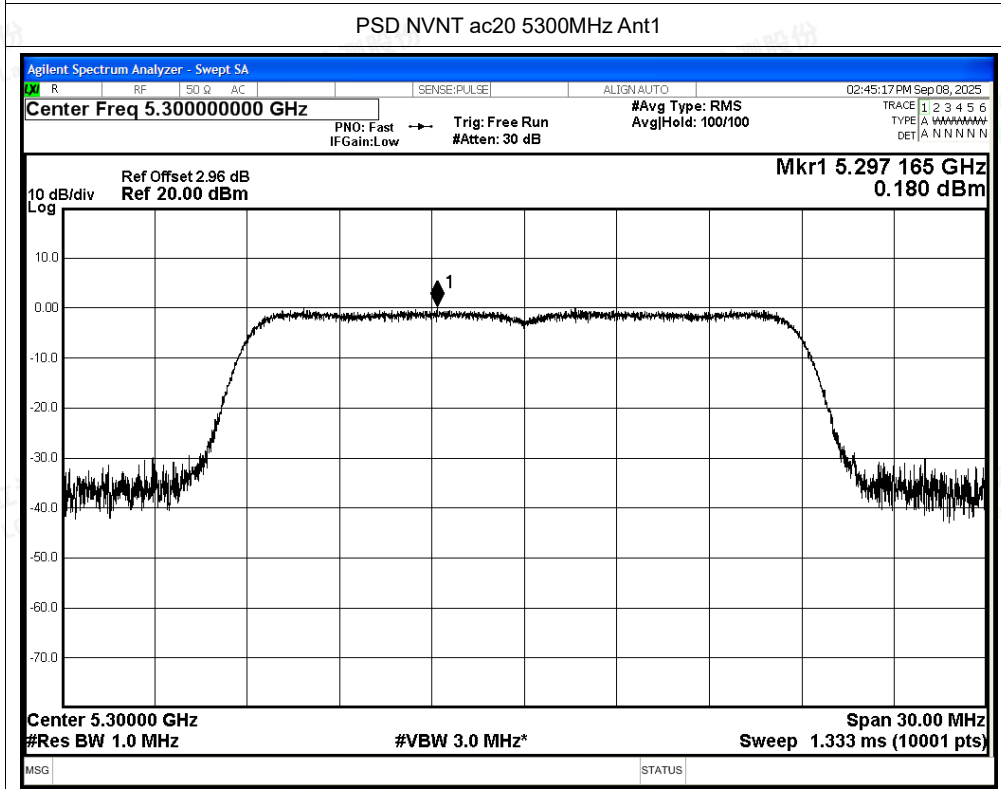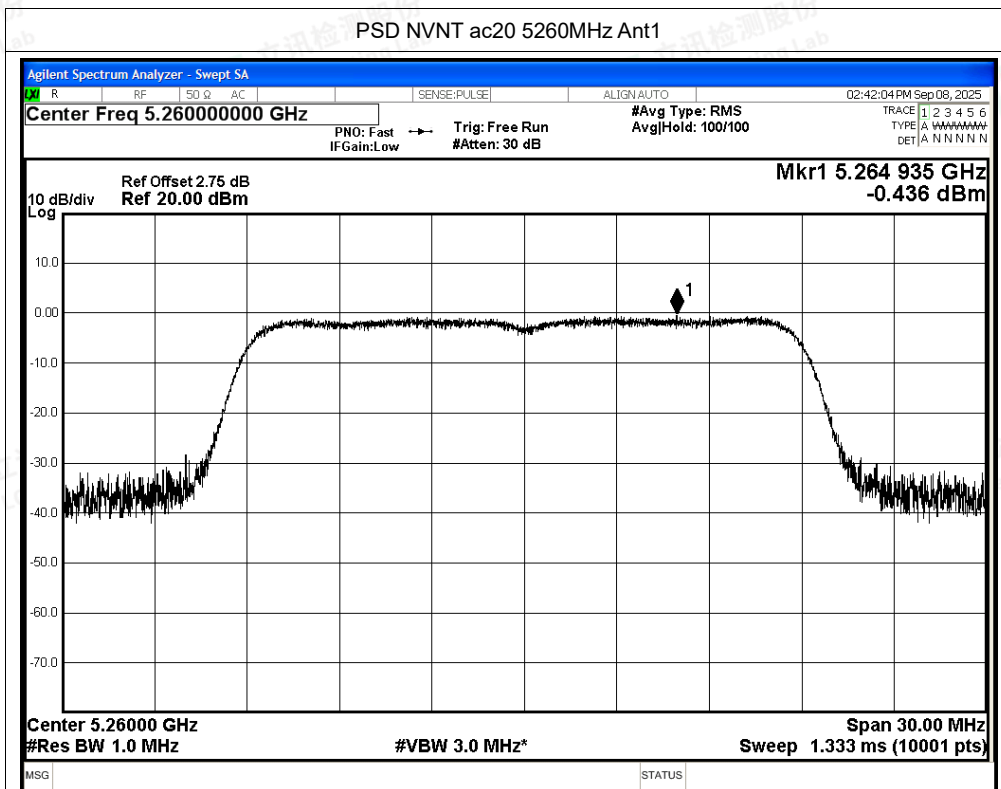

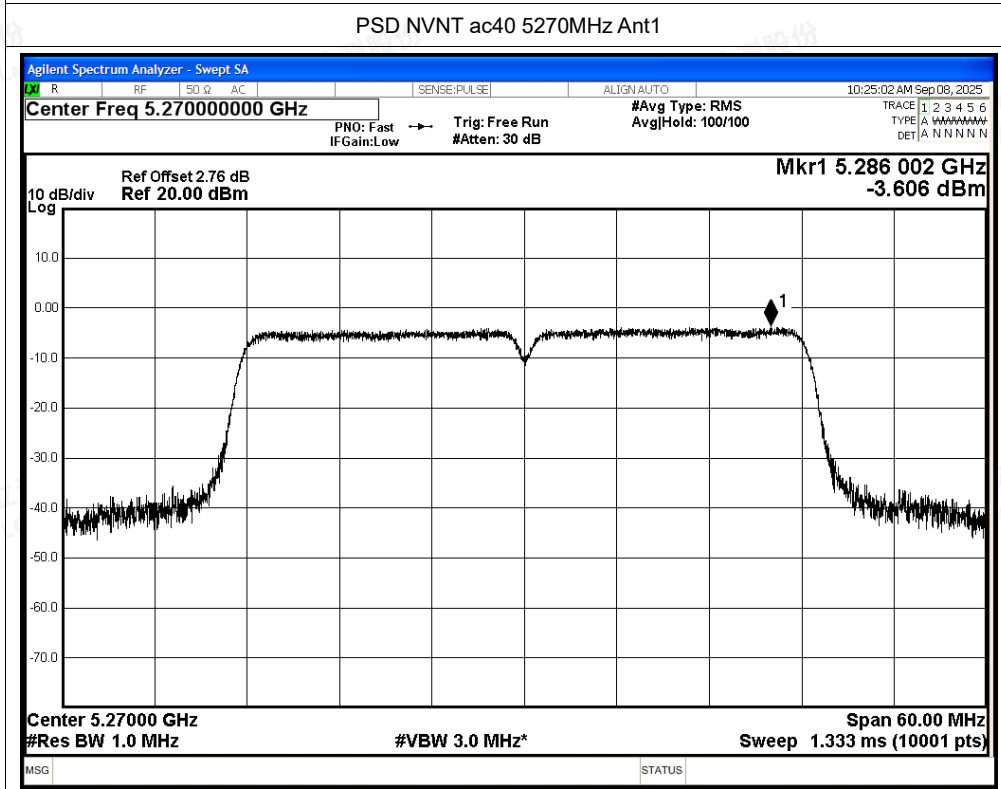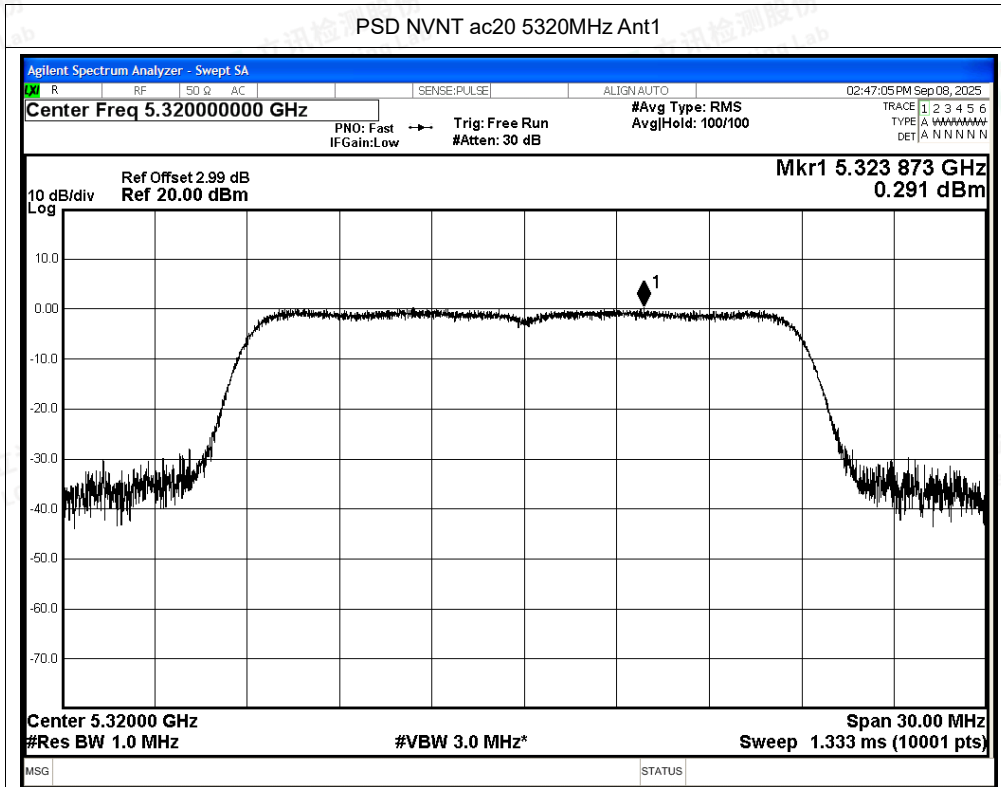

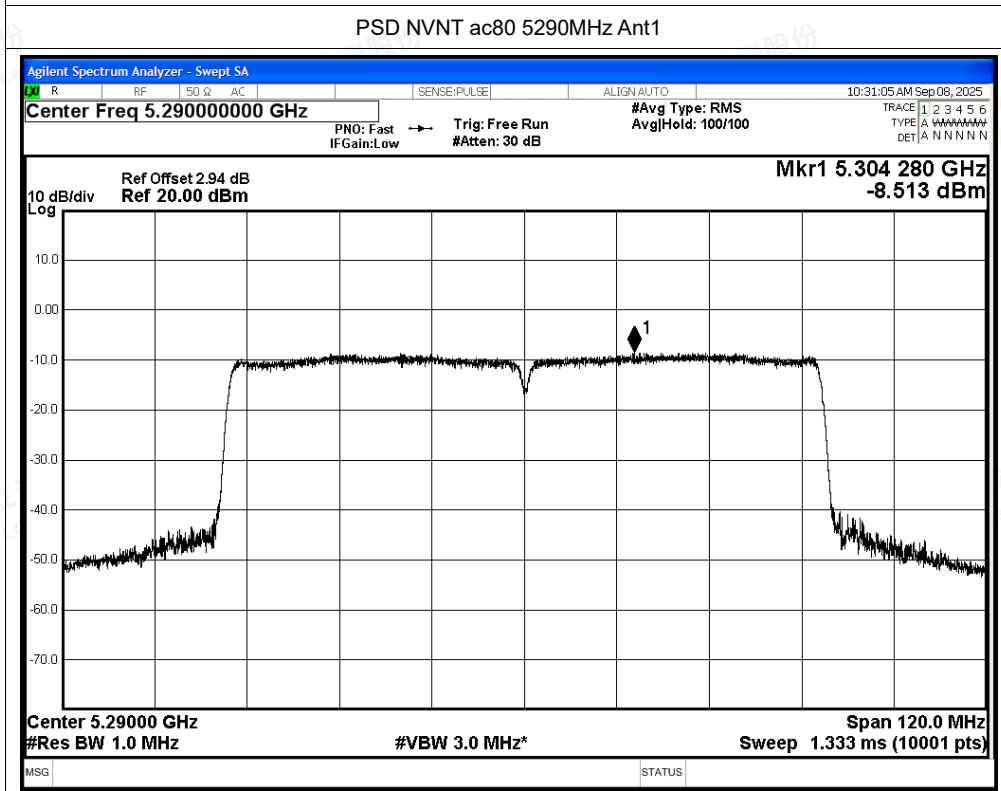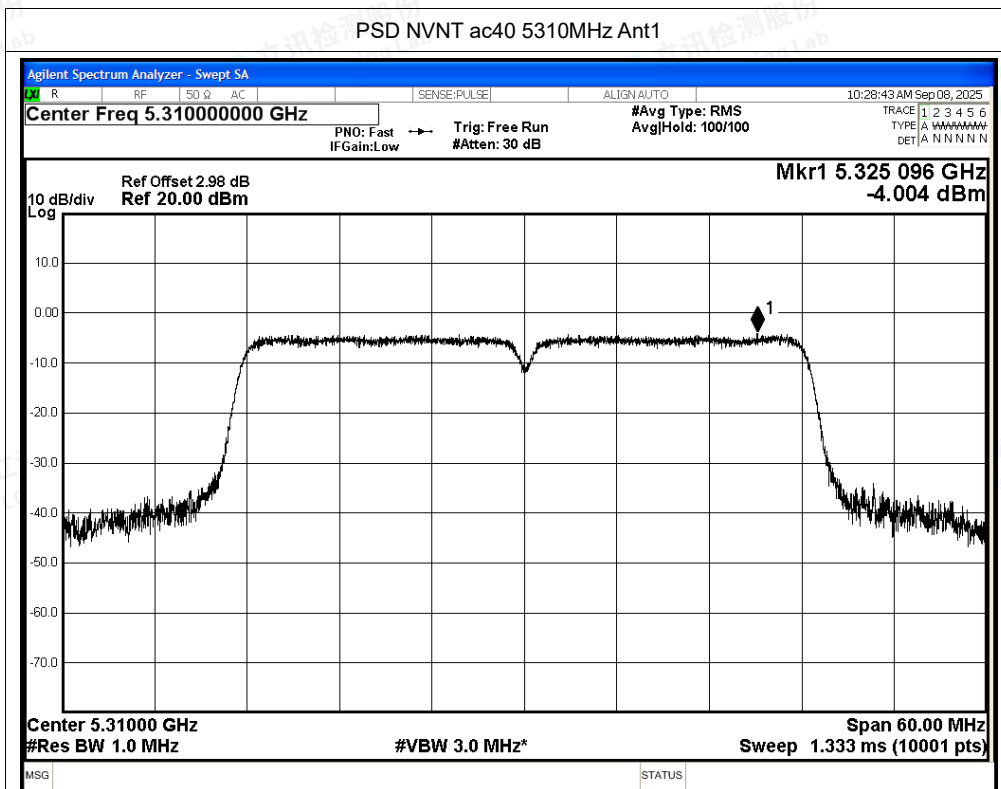



E.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5260	Ant0	4500	-51.41	2.00	-	45.82	Peak	68.2	Pass
NVNT	a	5260	Ant0	4500	-59.79	2.00	0.24	37.68	Average	54	Pass
NVNT	a	5260	Ant0	5134.14	-47.05	2.00	-	50.18	Peak	68.2	Pass
NVNT	a	5260	Ant0	5148.18	-56.96	2.00	0.24	40.51	Average	54	Pass
NVNT	a	5260	Ant0	5150	-48.53	2.00	-	48.70	Peak	68.2	Pass
NVNT	a	5260	Ant0	5150	-57.82	2.00	0.24	39.65	Average	54	Pass
NVNT	a	5320	Ant0	5350	-44.73	2.00	-	52.50	Peak	68.2	Pass
NVNT	a	5320	Ant0	5350	-56.55	2.00	0.24	40.92	Average	54	Pass
NVNT	a	5320	Ant0	5350.8	-42.98	2.00	-	54.25	Peak	68.2	Pass
NVNT	a	5320	Ant0	5350	-56.55	2.00	0.24	40.92	Average	54	Pass
NVNT	a	5320	Ant0	5460	-49.66	2.00	-	47.57	Peak	68.2	Pass
NVNT	a	5320	Ant0	5460	-58.43	2.00	0.24	39.04	Average	54	Pass
NVNT	n20	5260	Ant0	4500	-50.36	2.00	-	46.87	Peak	68.2	Pass
NVNT	n20	5260	Ant0	4500	-59.45	2.00	0.12	37.90	Average	54	Pass
NVNT	n20	5260	Ant0	5117.76	-46.58	2.00	-	50.65	Peak	68.2	Pass
NVNT	n20	5260	Ant0	5120.88	-57.05	2.00	0.12	40.30	Average	54	Pass
NVNT	n20	5260	Ant0	5150	-49.06	2.00	-	48.17	Peak	68.2	Pass
NVNT	n20	5260	Ant0	5150	-57.73	2.00	0.12	39.62	Average	54	Pass
NVNT	n20	5320	Ant0	5350	-43.77	2.00	-	53.46	Peak	68.2	Pass
NVNT	n20	5320	Ant0	5350	-56.29	2.00	0.12	41.06	Average	54	Pass
NVNT	n20	5320	Ant0	5353.6	-42.9	2.00	-	54.33	Peak	68.2	Pass
NVNT	n20	5320	Ant0	5351	-55.39	2.00	0.12	41.96	Average	54	Pass
NVNT	n20	5320	Ant0	5460	-50.55	2.00	-	46.68	Peak	68.2	Pass
NVNT	n20	5320	Ant0	5460	-57.91	2.00	0.12	39.44	Average	54	Pass
NVNT	n40	5270	Ant0	4500	-51.11	2.00	-	46.12	Peak	68.2	Pass
NVNT	n40	5270	Ant0	4500	-59.3	2.00	0.23	38.16	Average	54	Pass
NVNT	n40	5270	Ant0	4742.19	-46.25	2.00	-	50.98	Peak	68.2	Pass
NVNT	n40	5270	Ant0	5107.5	-56.8	2.00	0.23	40.66	Average	54	Pass
NVNT	n40	5270	Ant0	5150	-49.03	2.00	-	48.20	Peak	68.2	Pass
NVNT	n40	5270	Ant0	5150	-57.79	2.00	0.23	39.67	Average	54	Pass
NVNT	n40	5310	Ant0	5350	-43.29	2.00	-	53.94	Peak	68.2	Pass
NVNT	n40	5310	Ant0	5350	-55.08	2.00	0.24	42.39	Average	54	Pass
NVNT	n40	5310	Ant0	5350.2	-43.25	2.00	-	53.98	Peak	68.2	Pass
NVNT	n40	5310	Ant0	5350.8	-54.83	2.00	0.24	42.64	Average	54	Pass
NVNT	n40	5310	Ant0	5460	-50.86	2.00	-	46.37	Peak	68.2	Pass
NVNT	n40	5310	Ant0	5460	-58.06	2.00	0.24	39.41	Average	54	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



NVNT	ac20	5260	Ant0	4500	-51.62	2.00	-	45.61	Peak	68.2	Pass
NVNT	ac20	5260	Ant0	4500	-59.48	2.00	0.12	37.87	Average	54	Pass
NVNT	ac20	5260	Ant0	5083.44	-47.26	2.00	-	49.97	Peak	68.2	Pass
NVNT	ac20	5260	Ant0	5114.64	-56.96	2.00	0.12	40.39	Average	54	Pass
NVNT	ac20	5260	Ant0	5150	-48.61	2.00	-	48.62	Peak	68.2	Pass
NVNT	ac20	5260	Ant0	5150	-57.39	2.00	0.12	39.96	Average	54	Pass
NVNT	ac20	5320	Ant0	5350	-40.73	2.00	-	56.50	Peak	68.2	Pass
NVNT	ac20	5320	Ant0	5350	-55.8	2.00	0.12	41.55	Average	54	Pass
NVNT	ac20	5320	Ant0	5350	-40.73	2.00	-	56.50	Peak	68.2	Pass
NVNT	ac20	5320	Ant0	5350.2	-55.15	2.00	0.12	42.20	Average	54	Pass
NVNT	ac20	5320	Ant0	5460	-49.12	2.00	-	48.11	Peak	68.2	Pass
NVNT	ac20	5320	Ant0	5460	-58.19	2.00	0.12	39.16	Average	54	Pass
NVNT	ac40	5270	Ant0	4500	-50.5	2.00	-	46.73	Peak	68.2	Pass
NVNT	ac40	5270	Ant0	4500	-58.98	2.00	0.24	38.49	Average	54	Pass
NVNT	ac40	5270	Ant0	5039.46	-46.77	2.00	-	50.46	Peak	68.2	Pass
NVNT	ac40	5270	Ant0	4806.99	-56.39	2.00	0.24	41.08	Average	54	Pass
NVNT	ac40	5270	Ant0	5150	-49.3	2.00	-	47.93	Peak	68.2	Pass
NVNT	ac40	5270	Ant0	5150	-57.59	2.00	0.24	39.88	Average	54	Pass
NVNT	ac40	5310	Ant0	5350	-45.77	2.00	-	51.46	Peak	68.2	Pass
NVNT	ac40	5310	Ant0	5350	-55.18	2.00	0.24	42.29	Average	54	Pass
NVNT	ac40	5310	Ant0	5351.6	-42.67	2.00	-	54.56	Peak	68.2	Pass
NVNT	ac40	5310	Ant0	5350.4	-54.44	2.00	0.24	43.03	Average	54	Pass
NVNT	ac40	5310	Ant0	5460	-49.33	2.00	-	47.90	Peak	68.2	Pass
NVNT	ac40	5310	Ant0	5460	-58.25	2.00	0.24	39.22	Average	54	Pass
NVNT	ac80	5290	Ant0	4500	-51.1	2.00	-	46.13	Peak	68.2	Pass
NVNT	ac80	5290	Ant0	4500	-58.83	2.00	0.47	38.87	Average	54	Pass
NVNT	ac80	5290	Ant0	4920.21	-46.29	2.00	-	50.94	Peak	68.2	Pass
NVNT	ac80	5290	Ant0	5032.44	-56.83	2.00	0.47	40.87	Average	54	Pass
NVNT	ac80	5290	Ant0	5150	-48.73	2.00	-	48.50	Peak	68.2	Pass
NVNT	ac80	5290	Ant0	5150	-57.42	2.00	0.47	40.28	Average	54	Pass
NVNT	ac80	5290	Ant0	5350	-44.26	2.00	-	52.97	Peak	68.2	Pass
NVNT	ac80	5290	Ant0	5350	-55.01	2.00	0.47	42.69	Average	54	Pass
NVNT	ac80	5290	Ant0	5351.25	-43.14	2.00	-	54.09	Peak	68.2	Pass
NVNT	ac80	5290	Ant0	5350	-55.01	2.00	0.47	42.69	Average	54	Pass
NVNT	ac80	5290	Ant0	5460	-48.85	2.00	-	48.38	Peak	68.2	Pass
NVNT	ac80	5290	Ant0	5460	-58.33	2.00	0.47	39.37	Average	54	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




Test Graphs

Restrict Band NVNT a 5260MHz Ant0 Peak

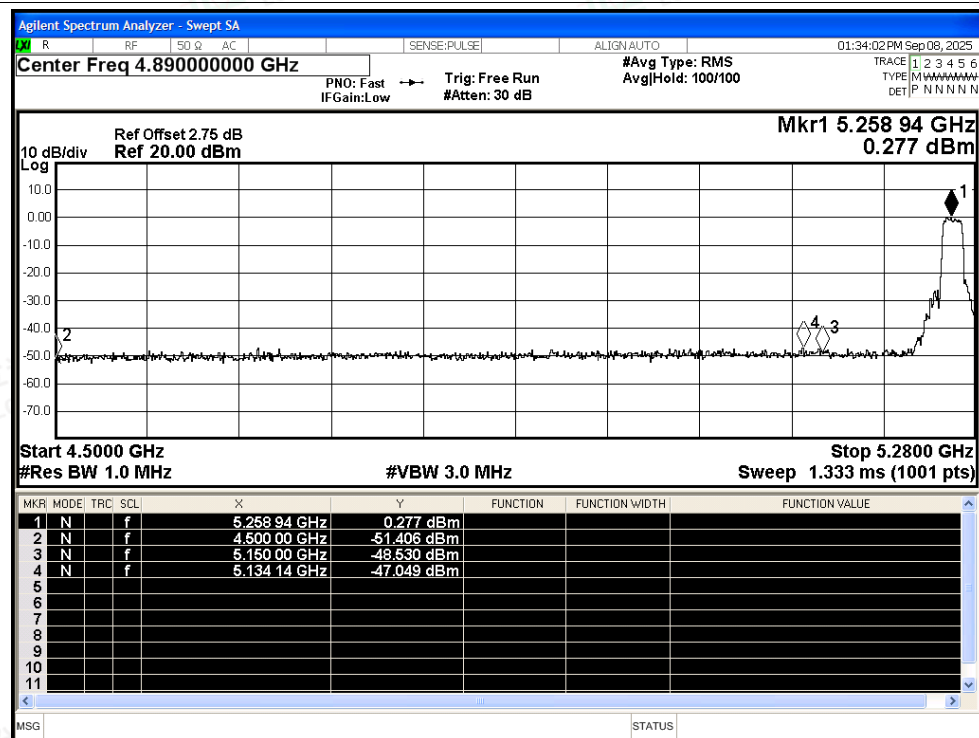

Restrict Band NVNT a 5260MHz Ant0 Average

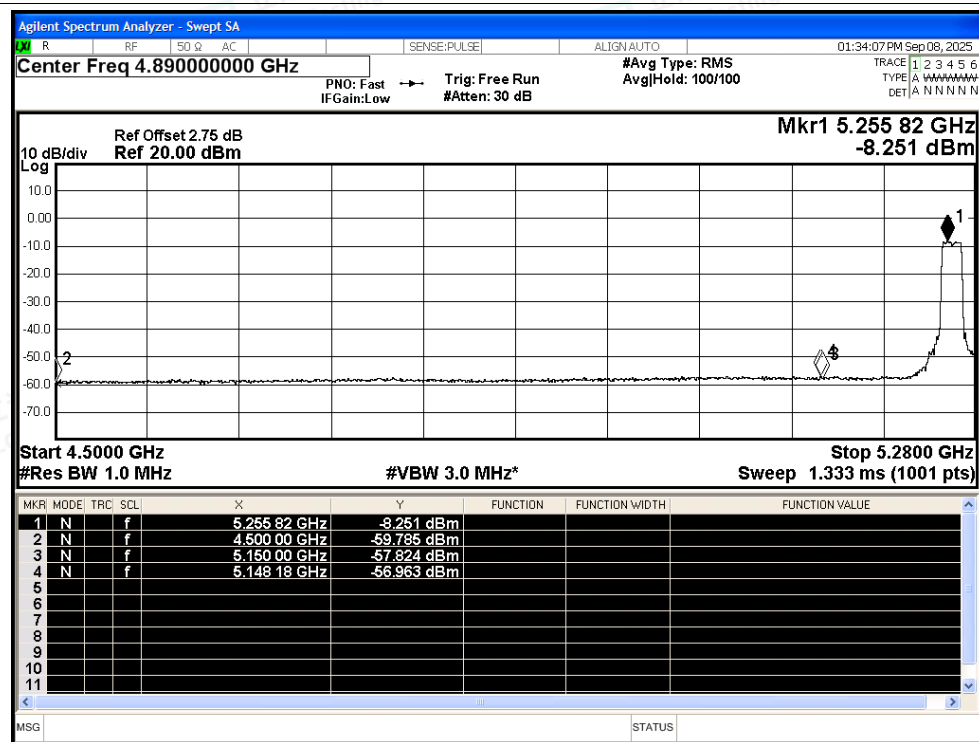

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT a 5320MHz Ant0 Peak

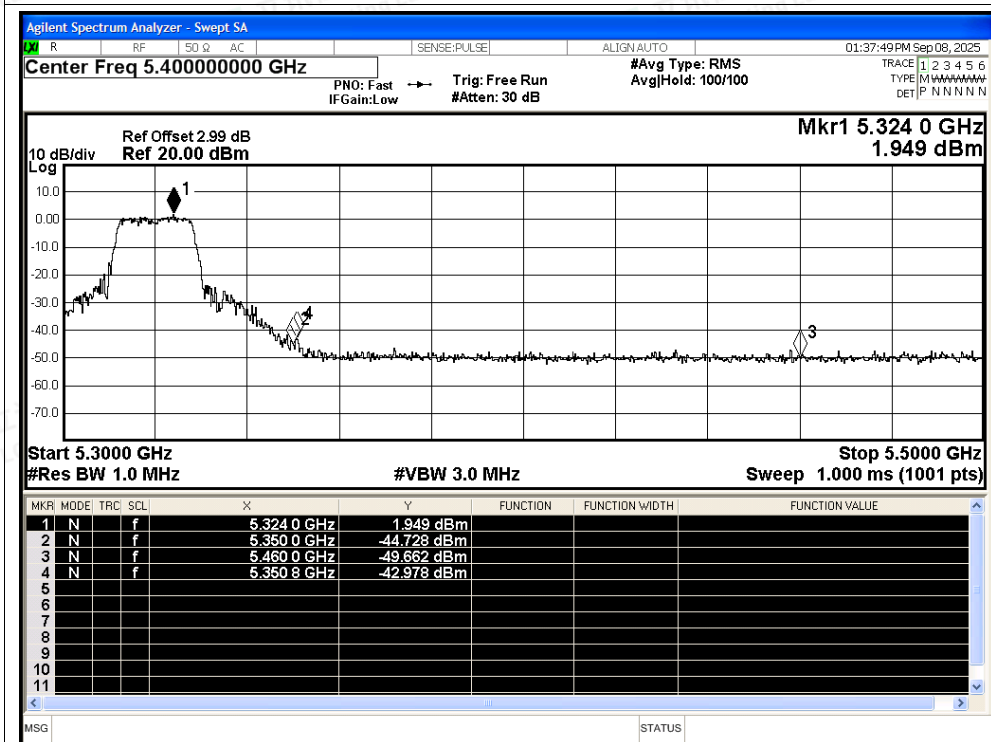


Restrict Band NVNT a 5320MHz Ant0 Average

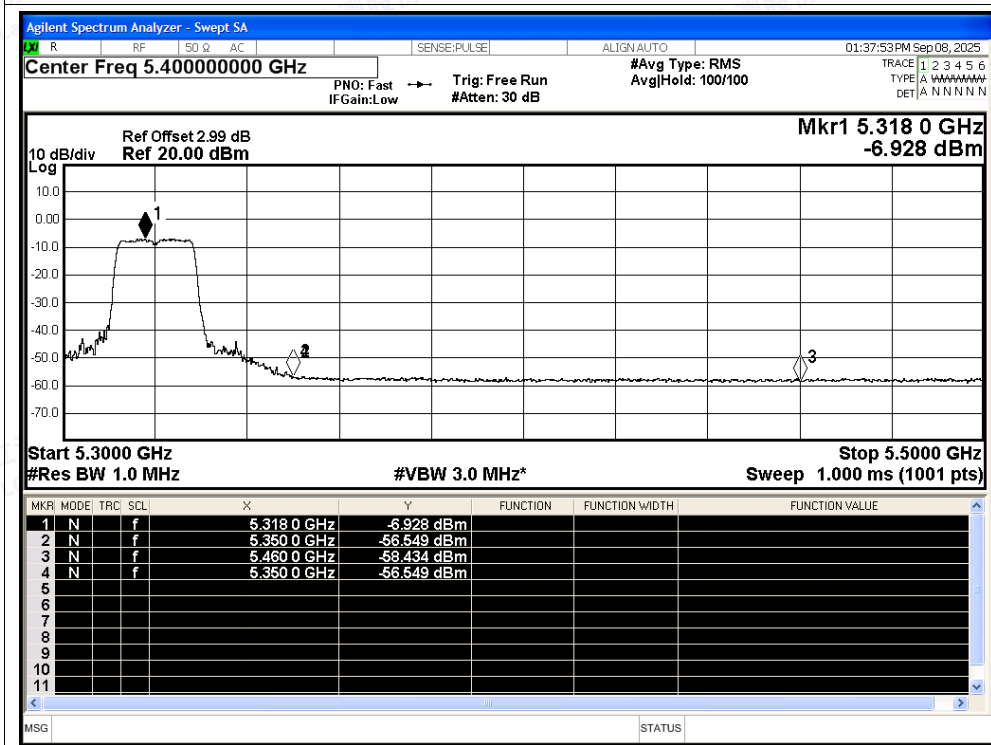




Restrict Band NVNT n20 5260MHz Ant0 Peak

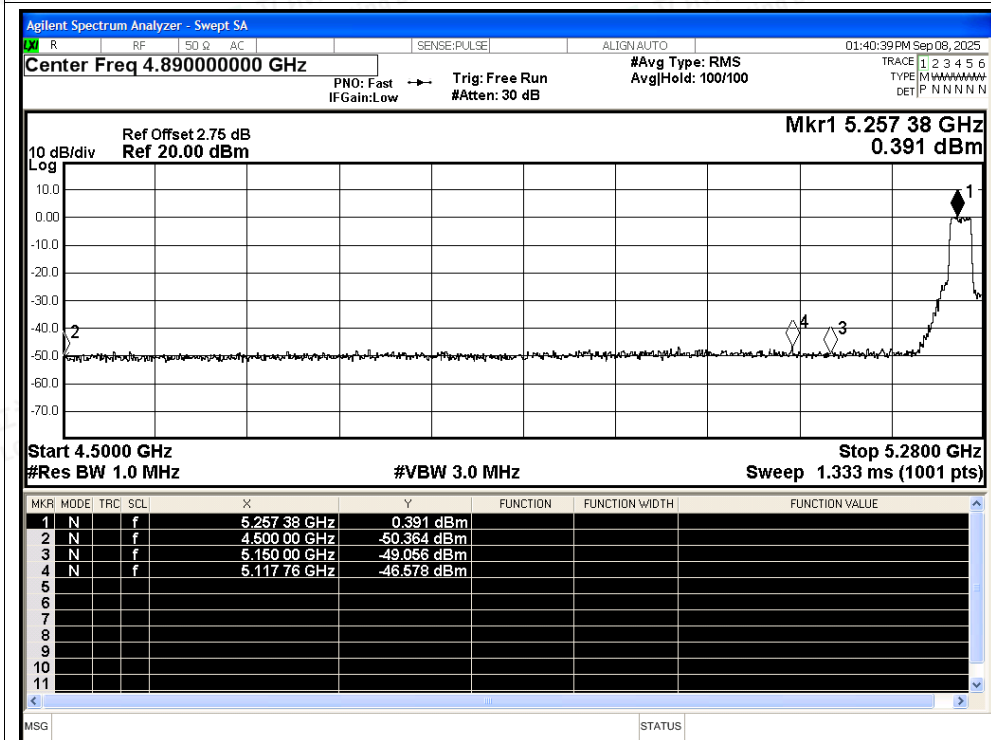


Restrict Band NVNT n20 5260MHz Ant0 Average

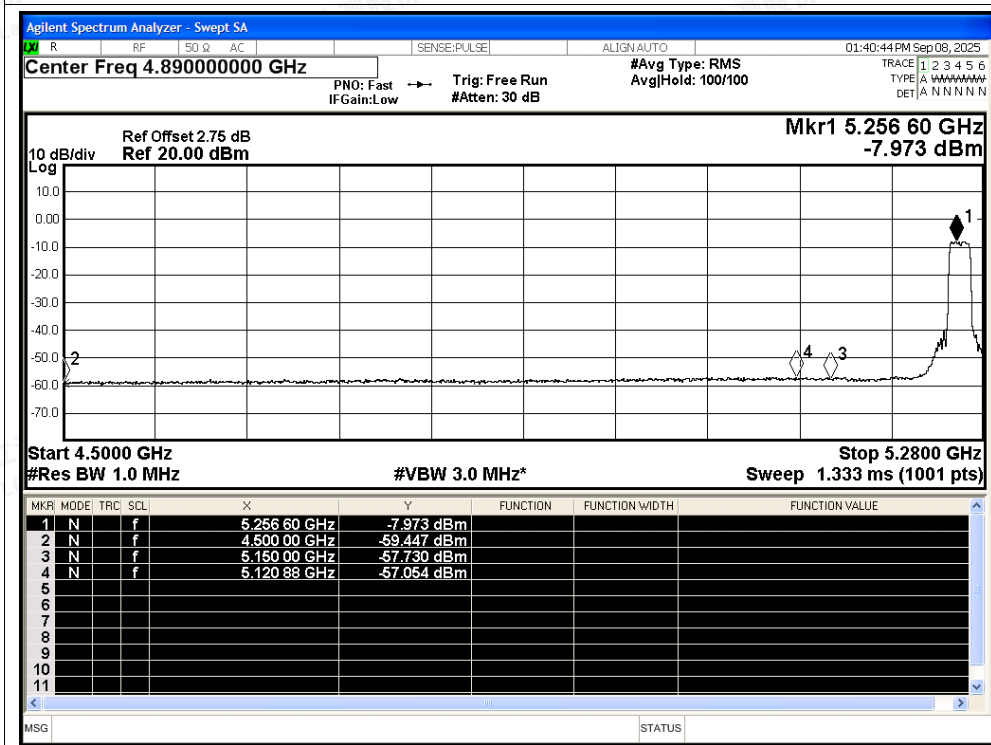




Restrict Band NVNT n20 5320MHz Ant0 Peak

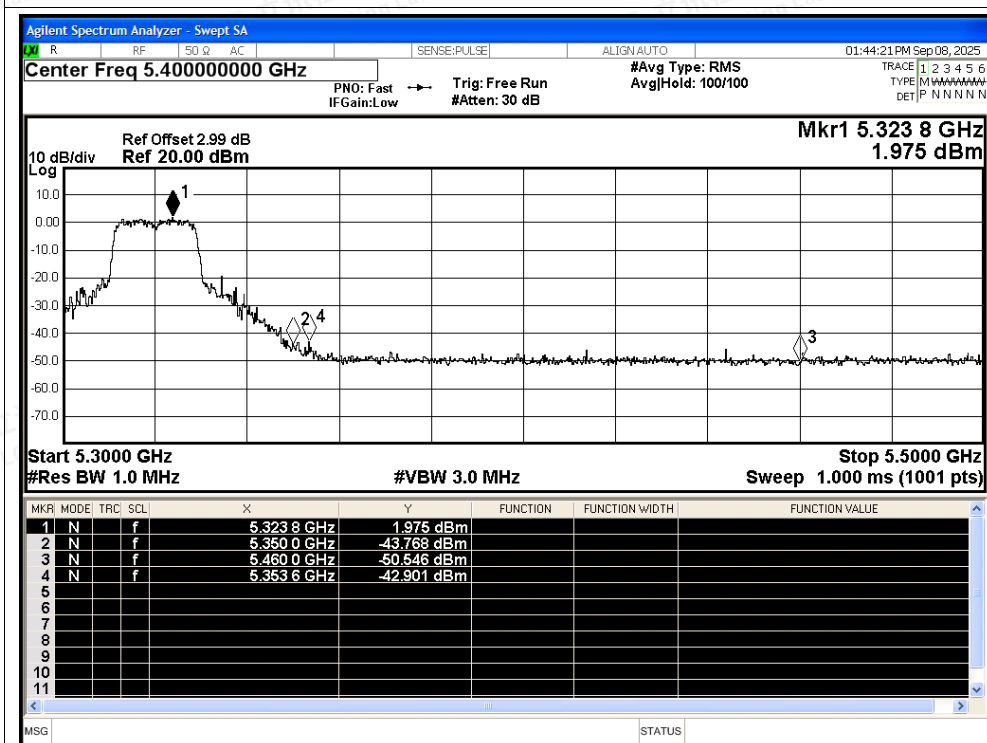

Restrict Band NVNT n20 5320MHz Ant0 Average

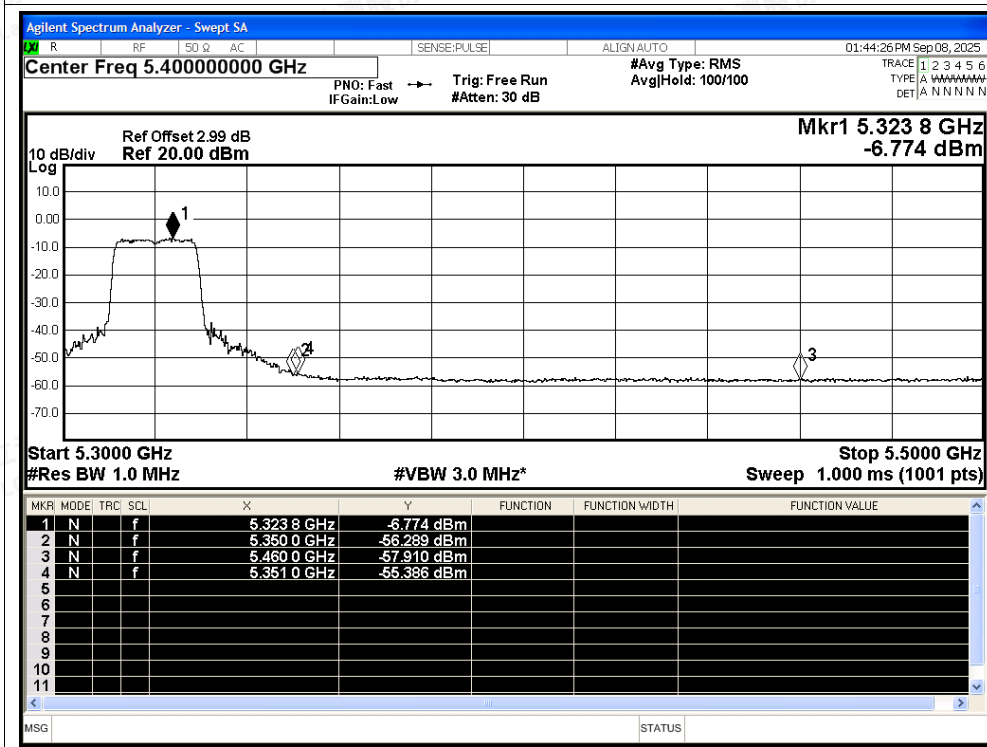

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT n40 5270MHz Ant0 Peak

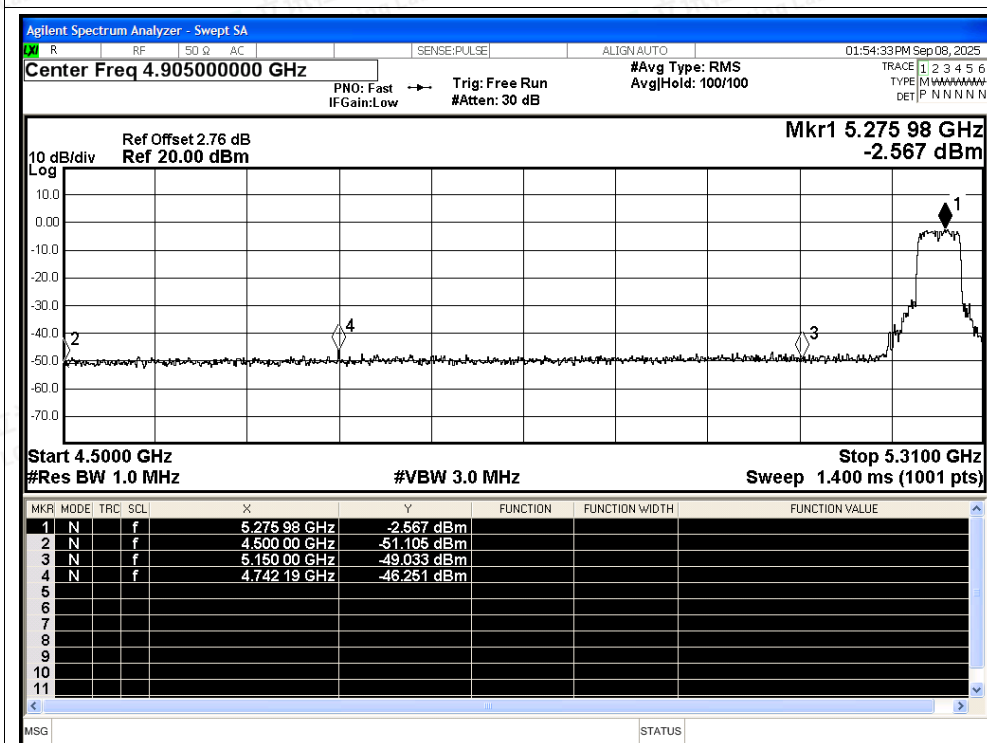

Restrict Band NVNT n40 5270MHz Ant0 Average

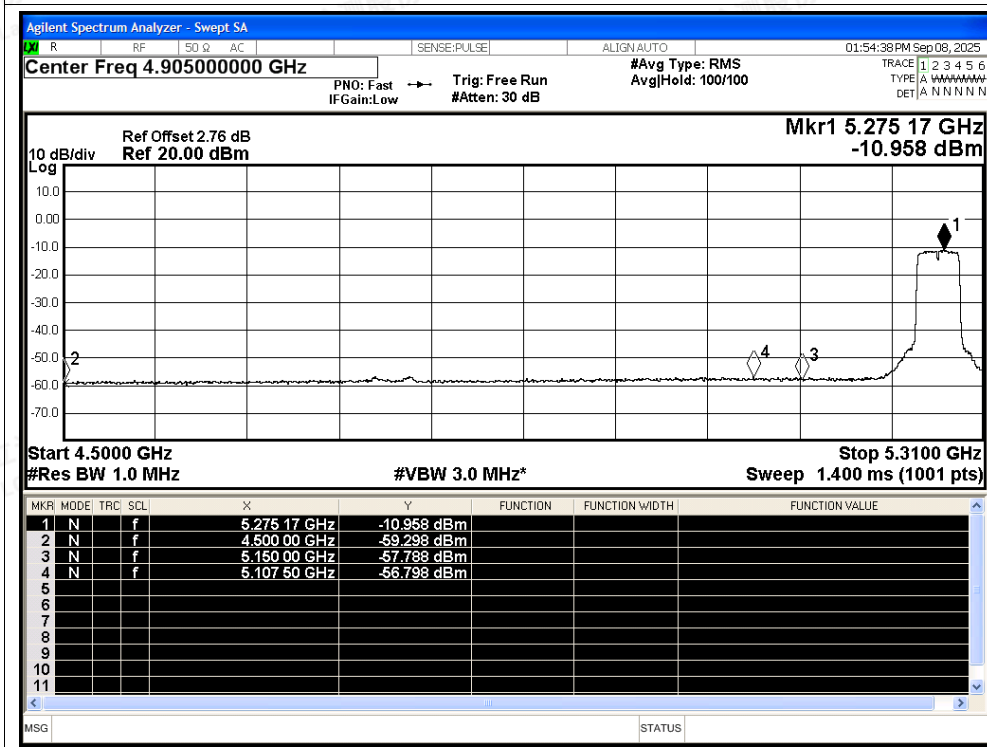

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT n40 5310MHz Ant0 Peak

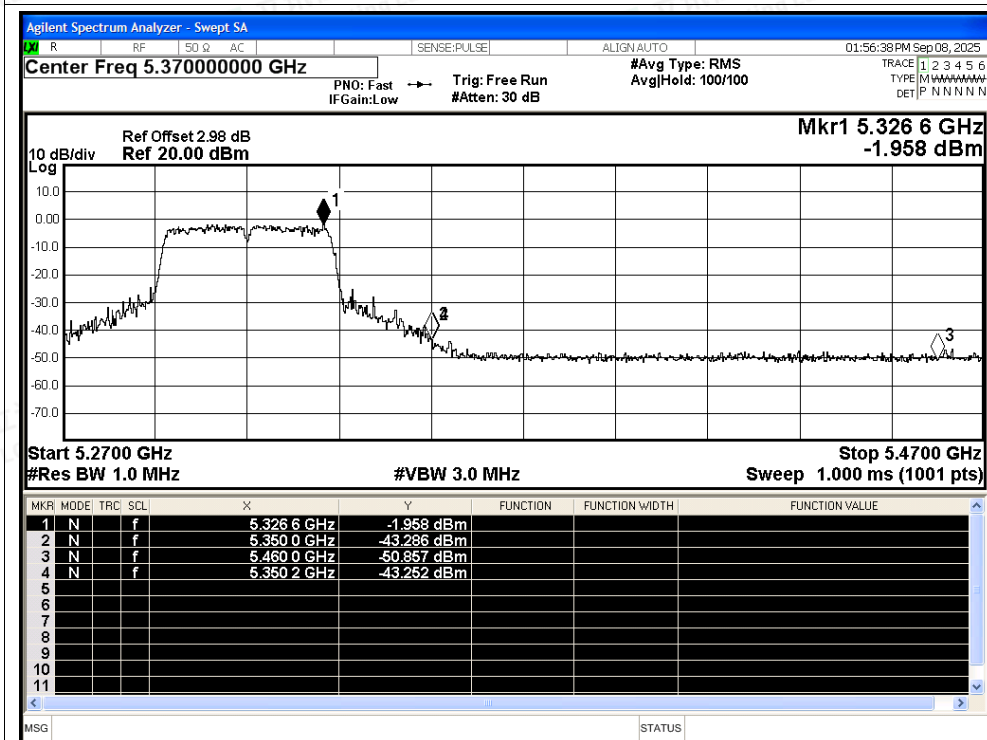

Restrict Band NVNT n40 5310MHz Ant0 Average

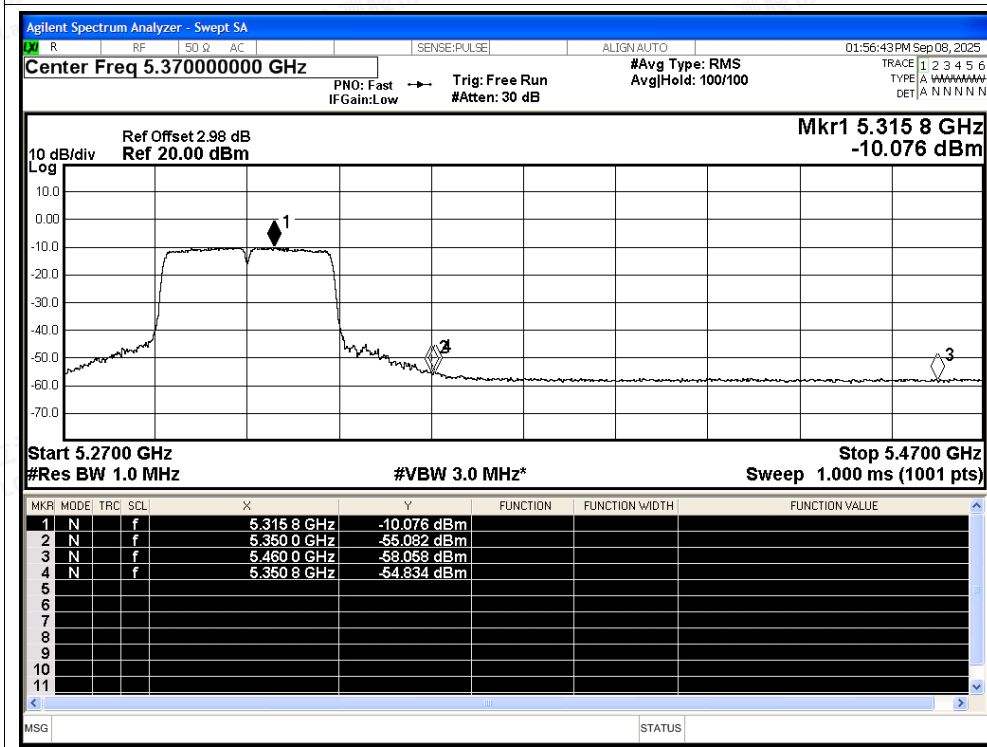

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT ac20 5260MHz Ant0 Peak

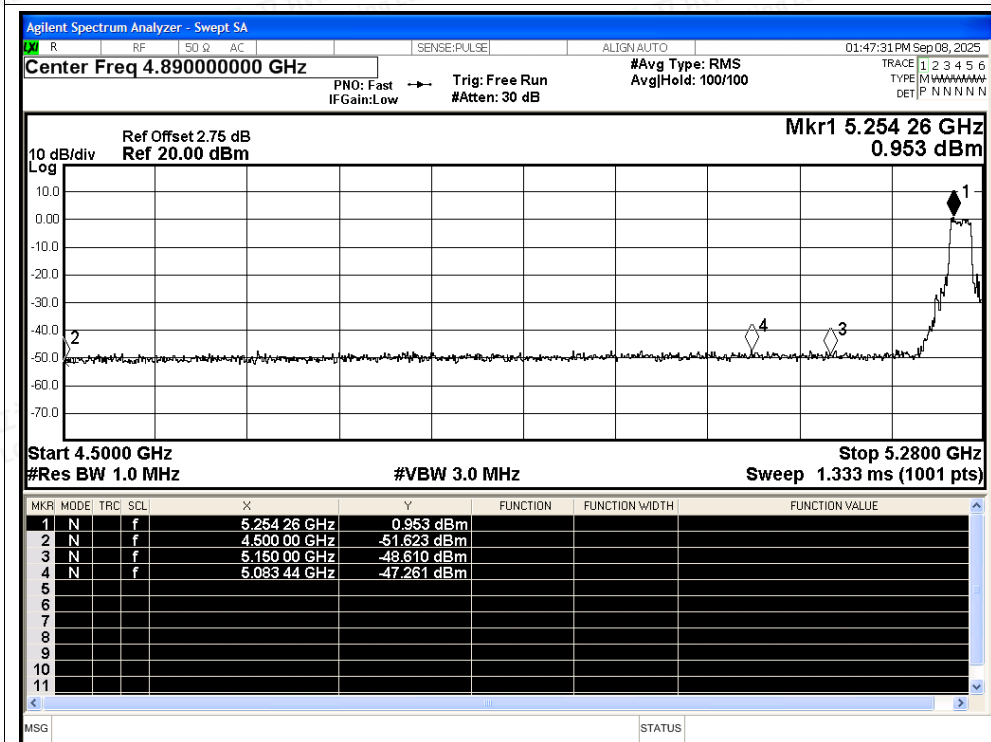


Restrict Band NVNT ac20 5260MHz Ant0 Average

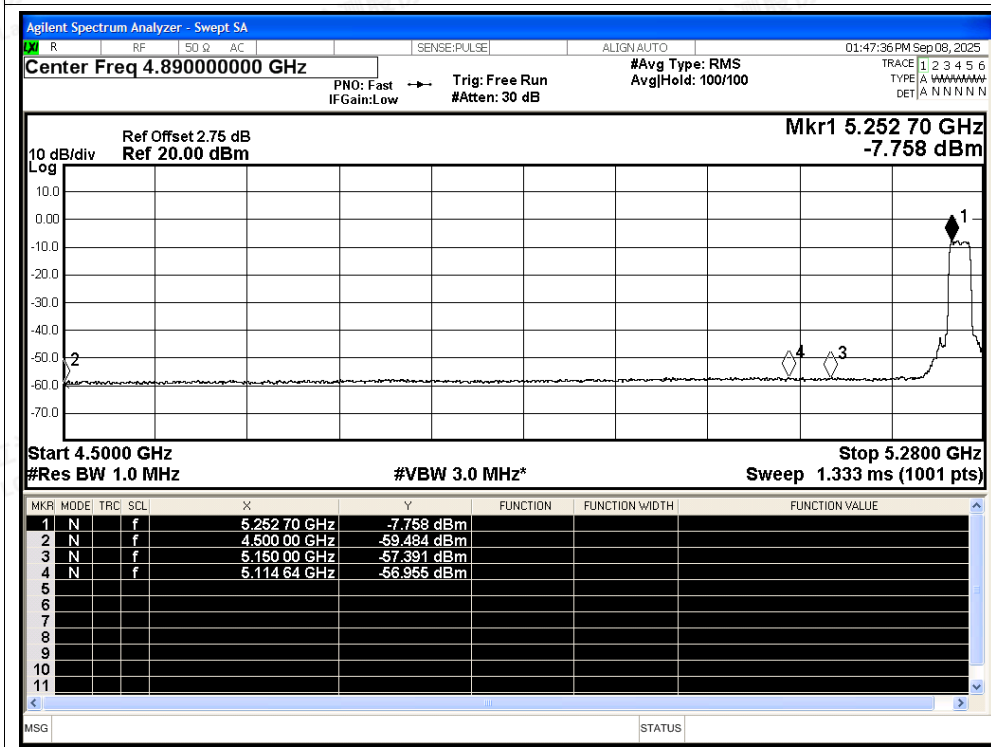




Restrict Band NVNT ac20 5320MHz Ant0 Peak

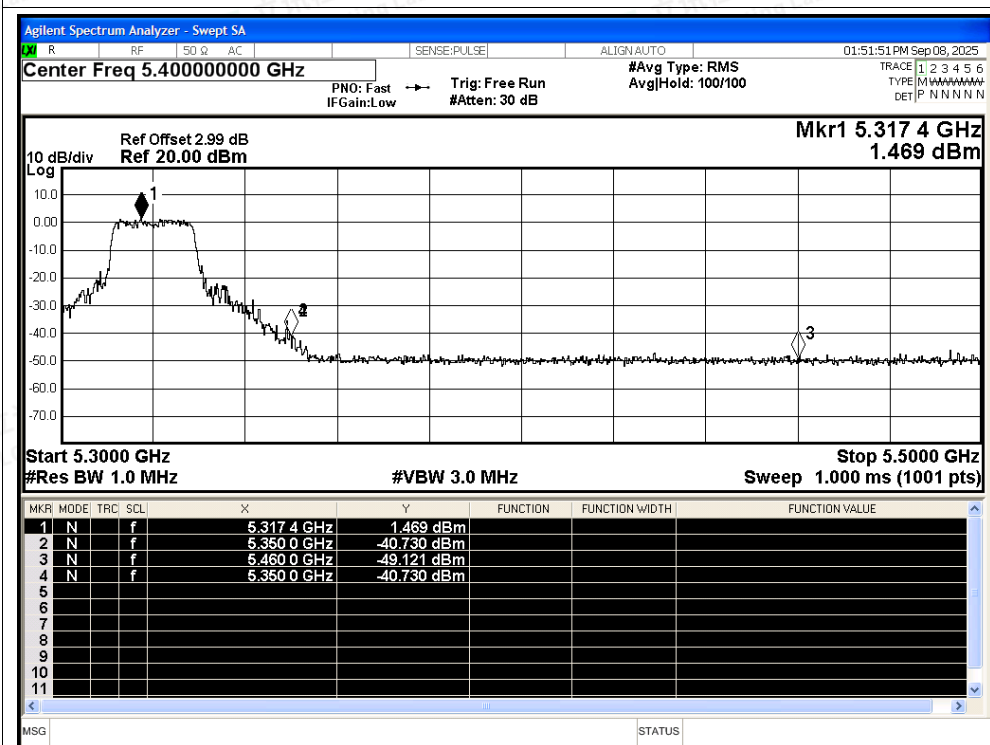

Restrict Band NVNT ac20 5320MHz Ant0 Average

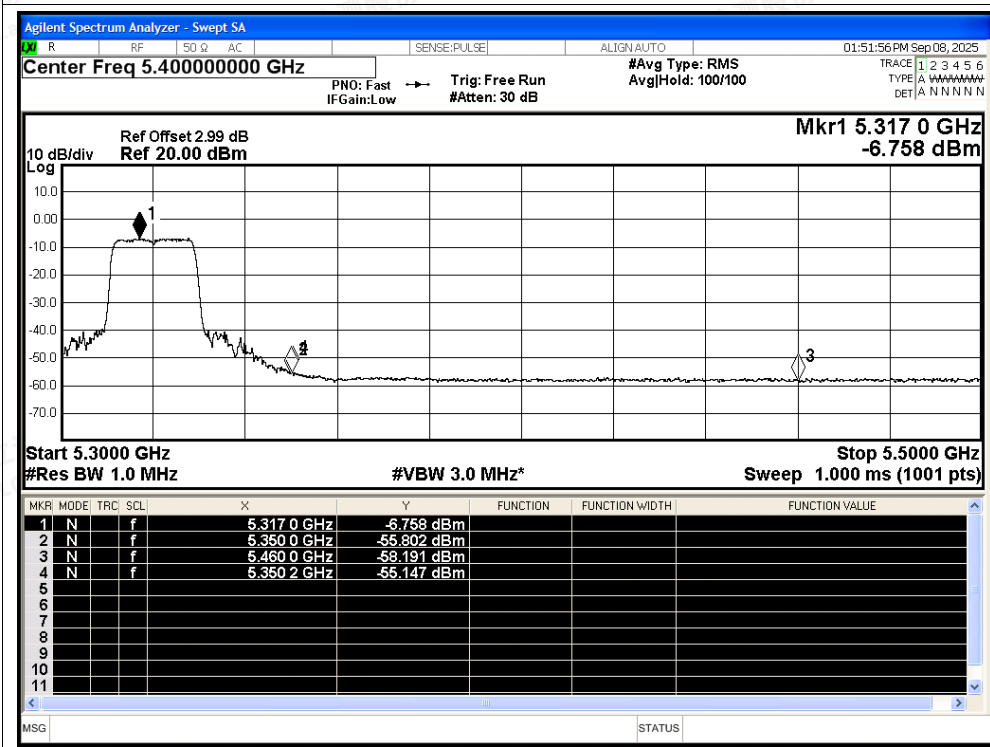

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity