


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6665MHz	Pass	6.58908G	-2.50	7.0058G	-49.69	-42.50	-7.19	1
6665MHz	Pass	6.58988G	-2.59	6.997G	-49.39	-42.59	-6.80	2
6665MHz	Pass	6.59947G	-2.34	7.0074G	-49.54	-42.34	-7.20	3
6665MHz	Pass	6.59307G	-2.23	6.9322G	-48.65	-42.23	-6.42	4
6825MHz Straddle 6.875-7.125GHz	Pass	6.821G	-2.11	6.5002G	-50.19	-42.11	-8.08	1
6825MHz Straddle 6.875-7.125GHz	Pass	6.81701G	-2.18	6.509G	-49.72	-42.18	-7.54	2
6825MHz Straddle 6.875-7.125GHz	Pass	6.80582G	-2.17	6.5034G	-49.21	-42.17	-7.04	3
6825MHz Straddle 6.875-7.125GHz	Pass	6.75387G	-1.95	6.509G	-48.52	-41.95	-6.57	4
6985MHz	Pass	6.92266G	-3.76	7.385G	-49.94	-43.76	-6.18	1
6985MHz	Pass	6.91867G	-3.79	7.3786G	-49.60	-43.79	-5.81	2
6985MHz	Pass	6.90828G	-3.46	7.3442G	-49.78	-43.46	-6.32	3
6985MHz	Pass	6.91147G	-3.62	7.2482G	-49.39	-43.62	-5.77	4
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.089G	1.85	6.617G	-42.56	-38.15	-4.41	1
6105MHz	Pass	6.081G	1.70	6.6186G	-43.43	-38.30	-5.13	2
6105MHz	Pass	6.0874G	2.32	6.617G	-43.02	-37.68	-5.34	3
6105MHz	Pass	6.0906G	2.12	6.6186G	-43.16	-37.88	-5.28	4
6265MHz	Pass	6.4073G	1.80	6.7802G	-43.34	-38.12	-5.22	1
6265MHz	Pass	6.1195G	1.12	6.785G	-44.53	-38.88	-5.65	2
6265MHz	Pass	6.2762G	1.57	5.9802G	-29.23	-23.77	-5.46	3
6265MHz	Pass	6.4168G	1.31	6.7738G	-43.85	-38.60	-5.25	4
6425MHz Straddle 6.425-6.525GHz	Pass	6.4474G	0.43	6.0474G	-34.28	-30.14	-4.14	1
6425MHz Straddle 6.425-6.525GHz	Pass	6.4442G	0.43	6.0394G	-35.33	-30.62	-4.71	2
6425MHz Straddle 6.425-6.525GHz	Pass	6.4394G	0.48	6.049G	-34.24	-30.06	-4.18	3
6425MHz Straddle 6.425-6.525GHz	Pass	6.4154G	0.21	6.049G	-35.23	-30.33	-4.90	4
6585MHz Straddle 6.425-6.525GHz	Pass	6.5674G	0.43	6.1706G	-38.22	-32.55	-5.67	1
6585MHz Straddle 6.425-6.525GHz	Pass	6.4427G	0.26	6.0714G	-45.65	-39.74	-5.91	2
6585MHz Straddle 6.425-6.525GHz	Pass	6.4348G	0.82	6.0586G	-44.32	-39.18	-5.14	3
6585MHz Straddle 6.425-6.525GHz	Pass	6.5738G	0.60	6.0586G	-44.23	-39.40	-4.83	4
6745MHz Straddle 6.875-7.125GHz	Pass	6.5963G	0.35	7.2634G	-44.99	-39.65	-5.34	1
6745MHz Straddle 6.875-7.125GHz	Pass	6.6027G	0.40	7.2602G	-45.20	-39.60	-5.60	2
6745MHz Straddle 6.875-7.125GHz	Pass	6.5995G	0.45	6.2298G	-44.71	-39.55	-5.16	3
6745MHz Straddle 6.875-7.125GHz	Pass	6.5932G	0.23	6.233G	-44.67	-39.77	-4.90	4
6905MHz Straddle 6.875-7.125GHz	Pass	6.8602G	-0.93	7.4986G	-44.98	-40.93	-4.05	1
6905MHz Straddle 6.875-7.125GHz	Pass	6.7611G	-0.65	7.497G	-45.15	-40.65	-4.50	2
6905MHz Straddle 6.875-7.125GHz	Pass	6.8443G	-0.75	7.4938G	-45.11	-40.75	-4.36	3
6905MHz Straddle 6.875-7.125GHz	Pass	6.7532G	-0.66	7.489G	-45.14	-40.66	-4.48	4

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


5955MHz_TX

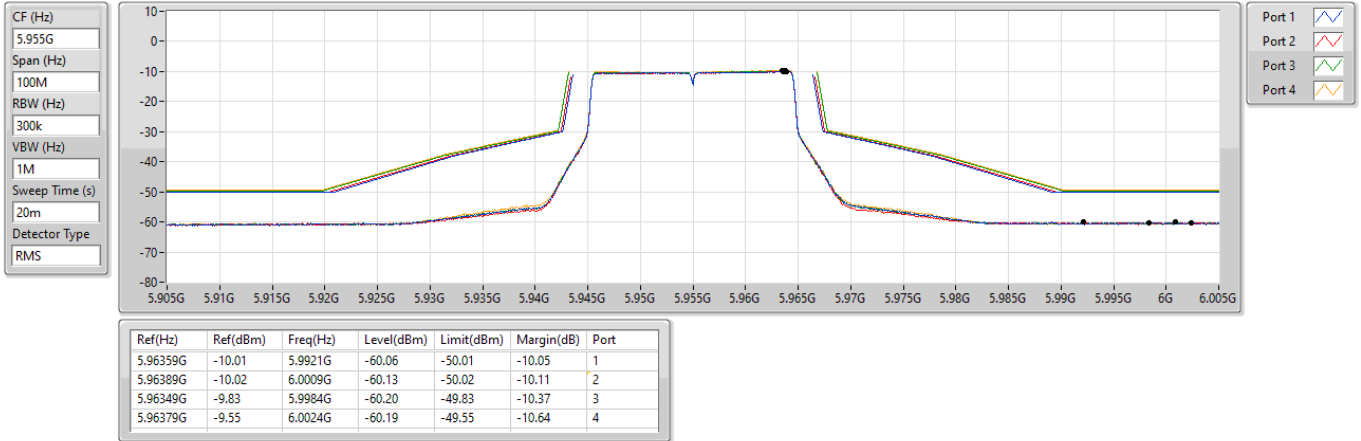

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6175MHz_TX

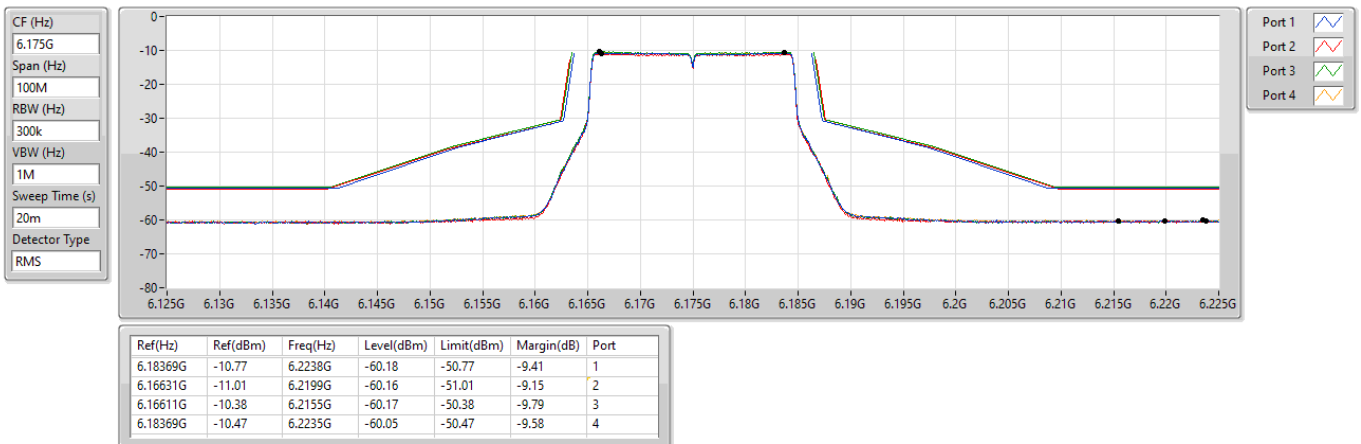

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6415MHz_TX

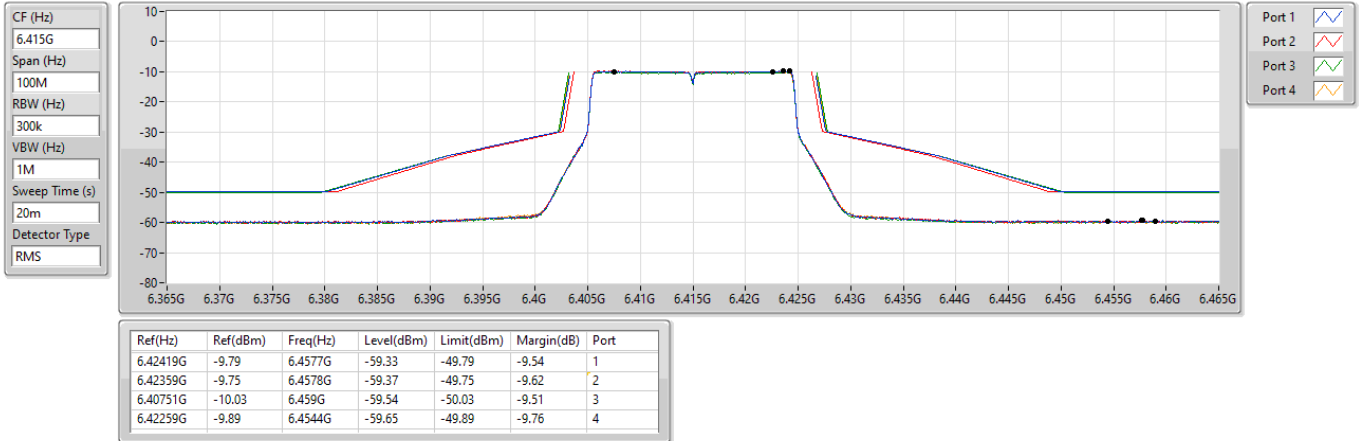

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6435MHz_TX

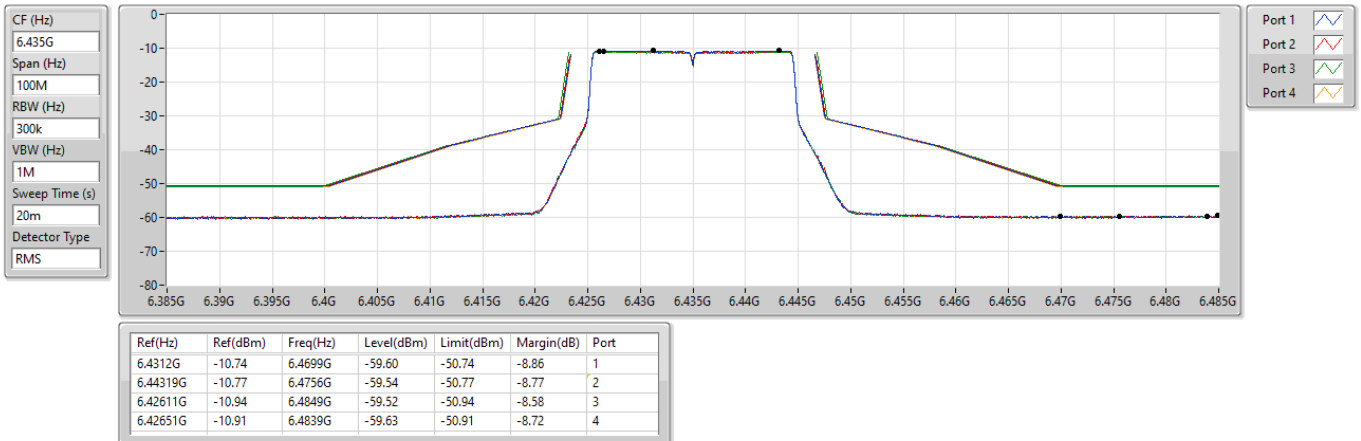

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6475MHz_TX

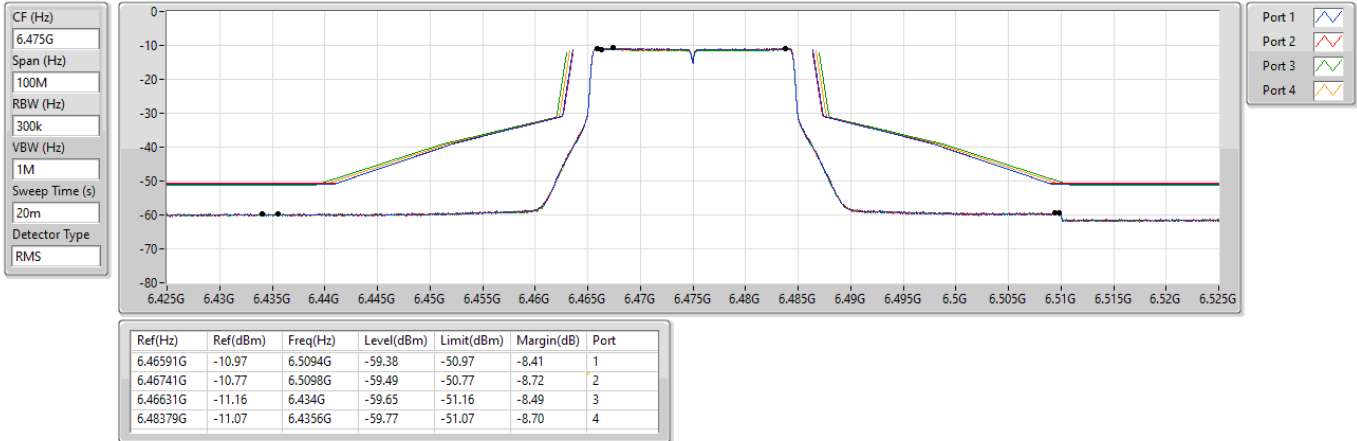

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6515MHz_TX

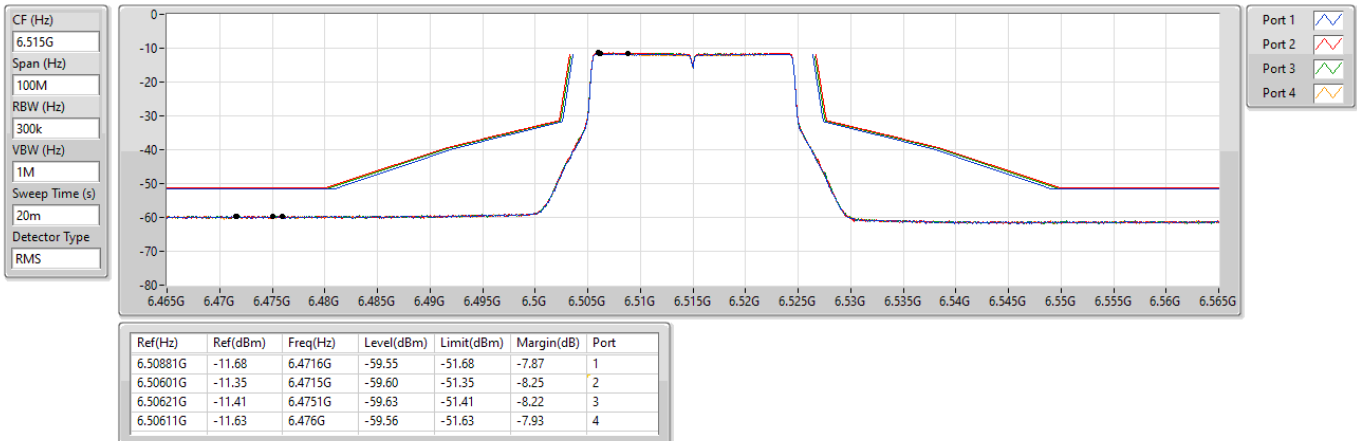

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6535MHz_TX

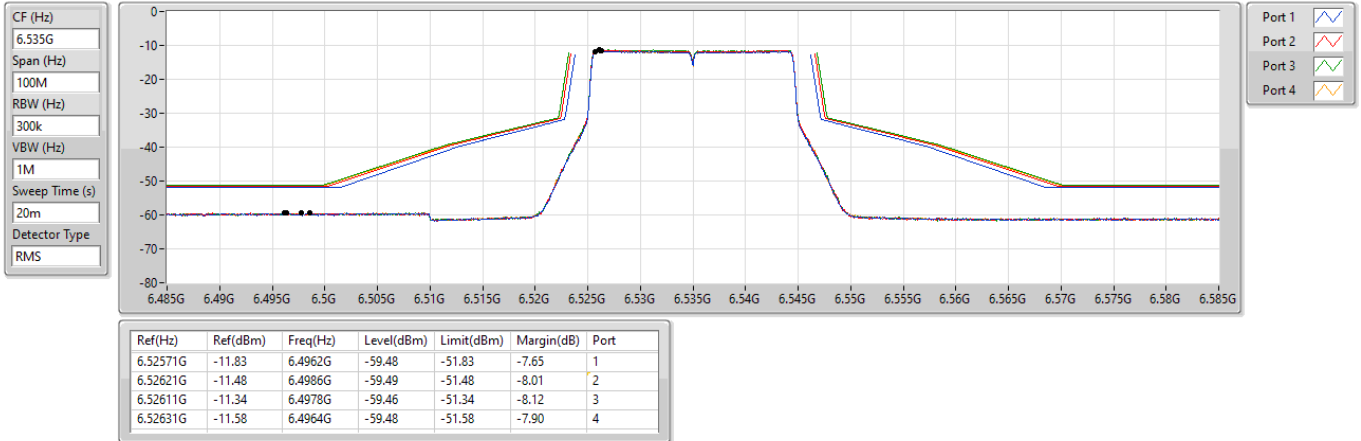

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK

6715MHz_TX

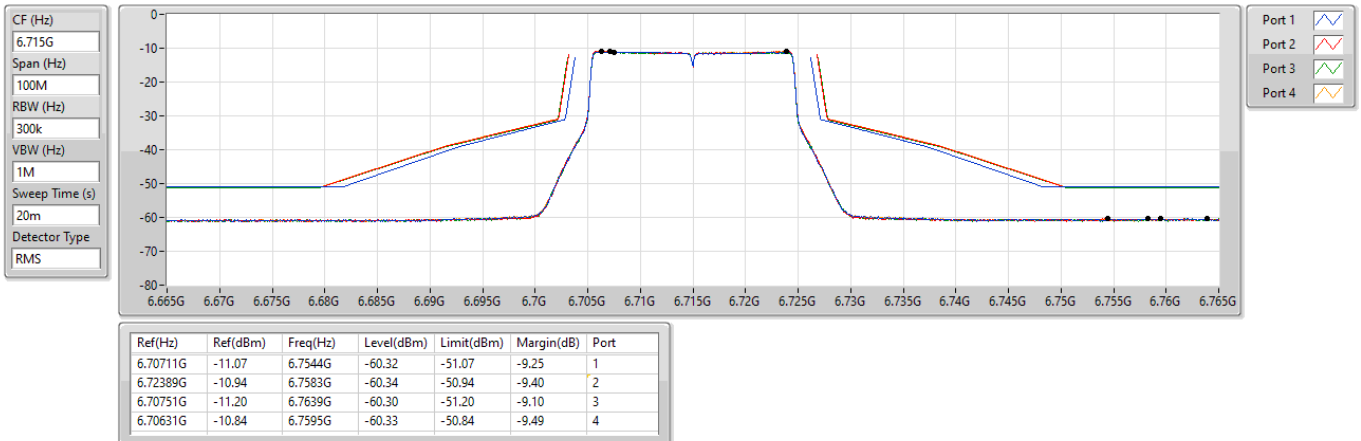




6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6855MHz_TX

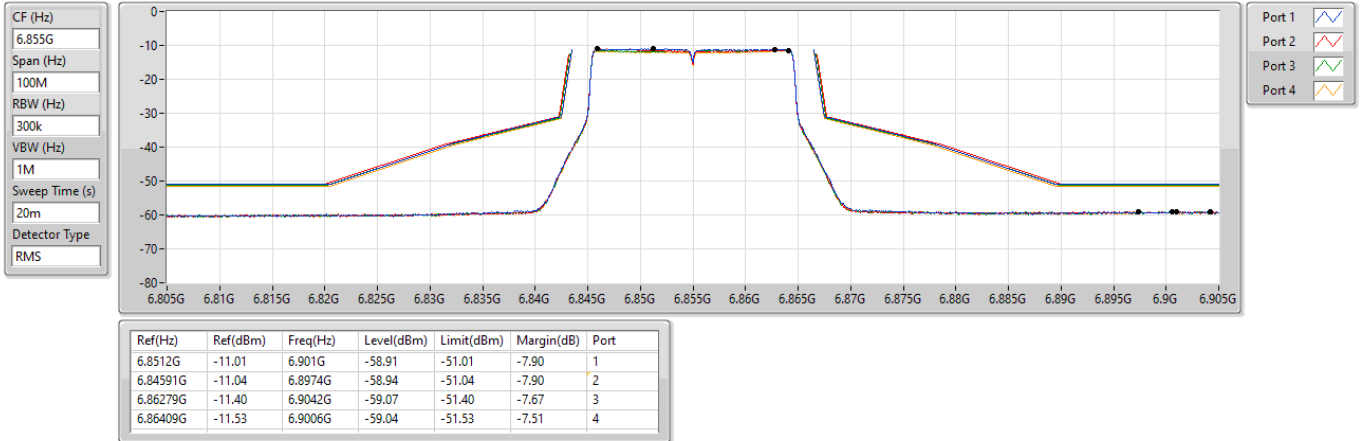

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6875MHz Straddle 6.875-7.125GHz_TX

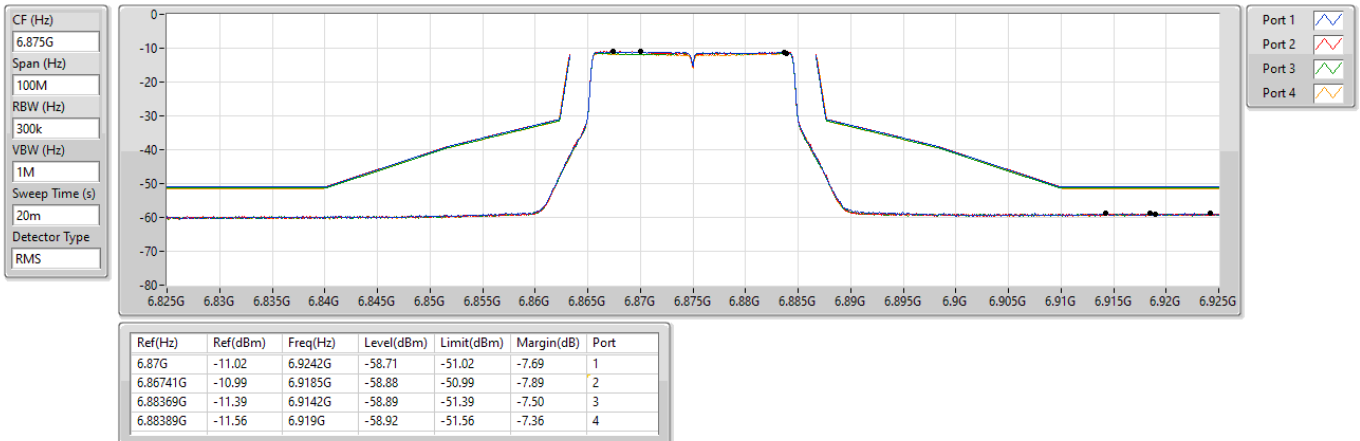

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


6895MHz_TX

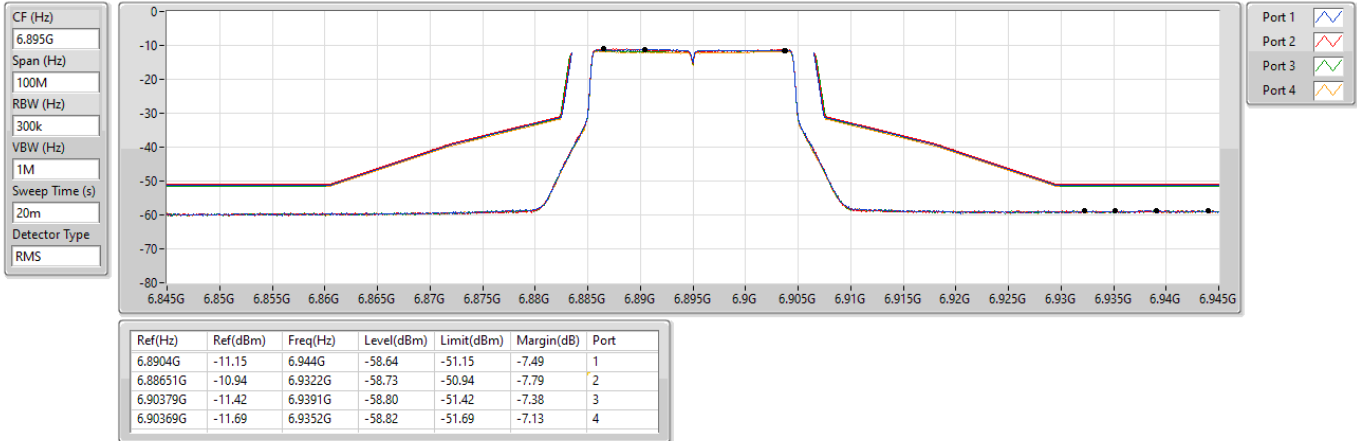

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


7015MHz_TX

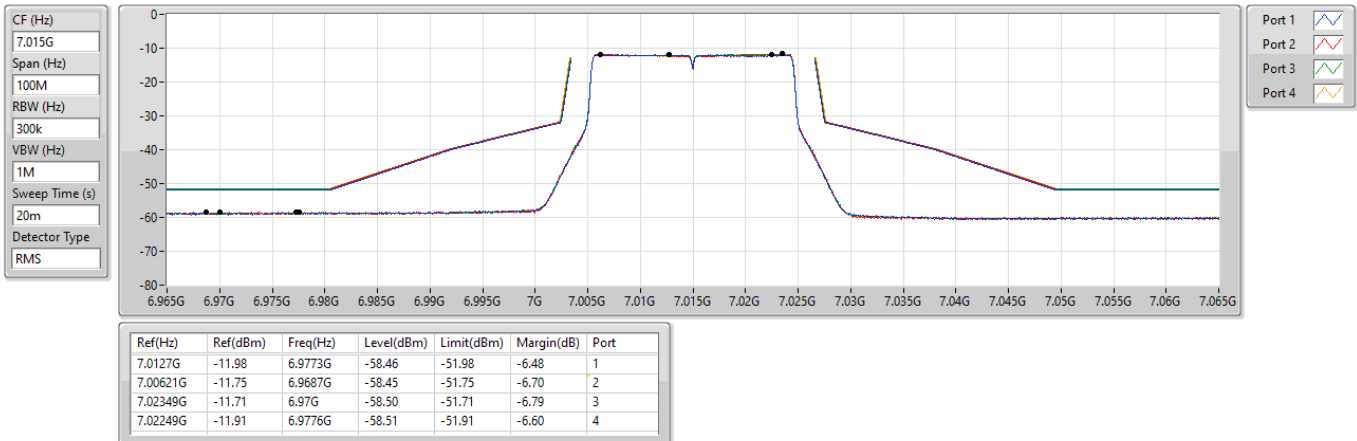

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK


7095MHz_TX

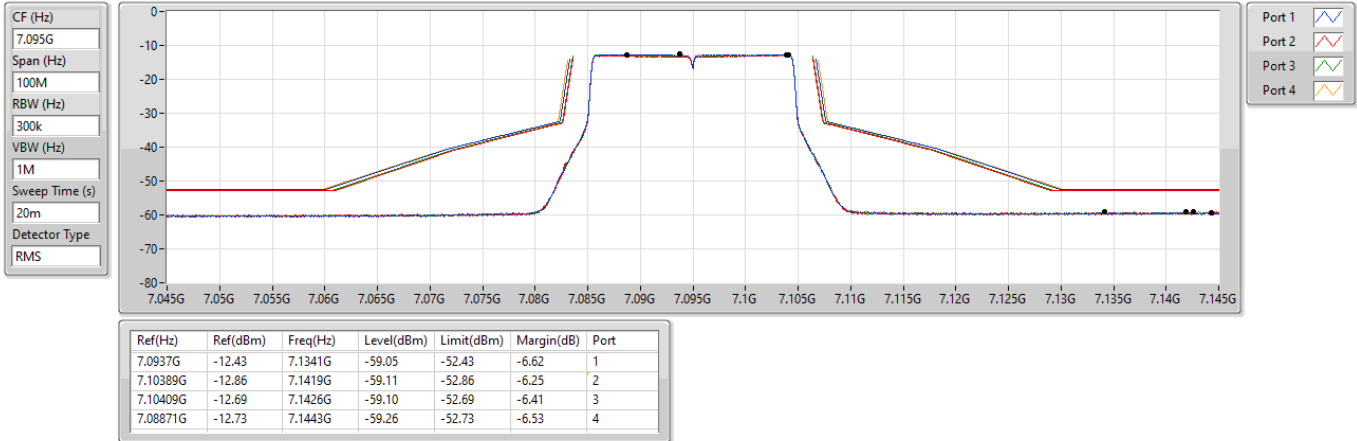

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


5965MHz_TX

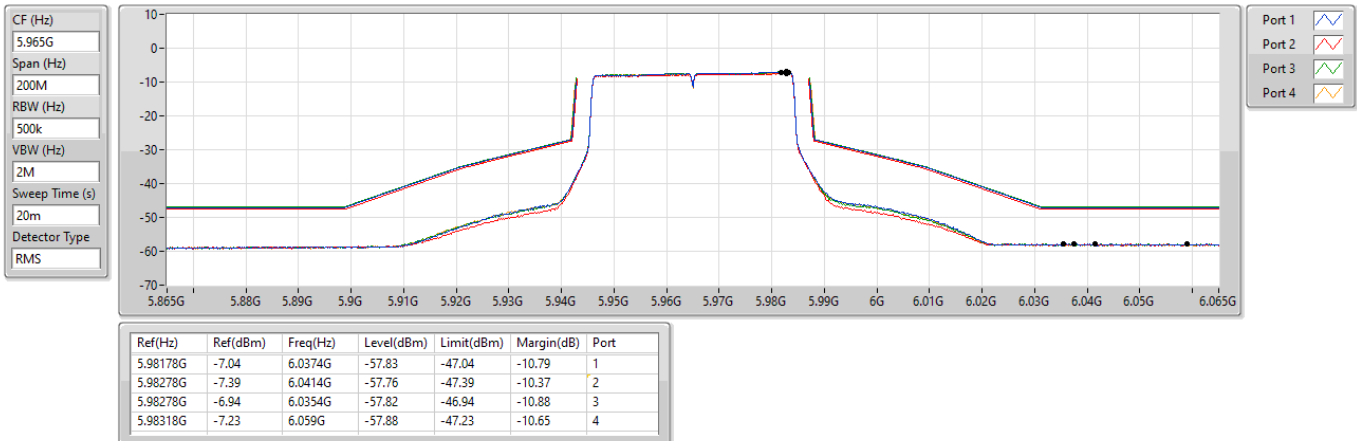

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6165MHz_TX

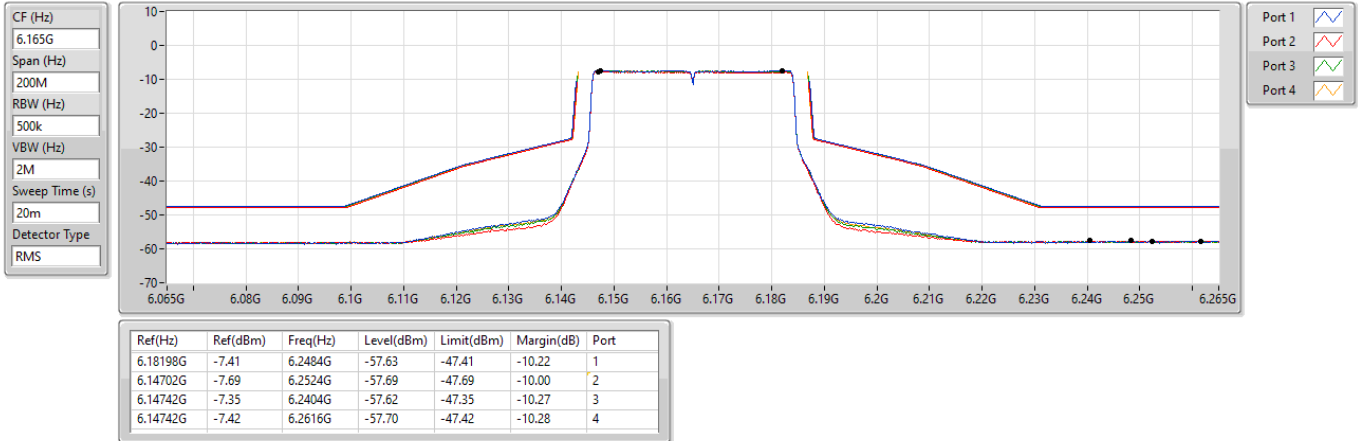

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6405MHz_TX

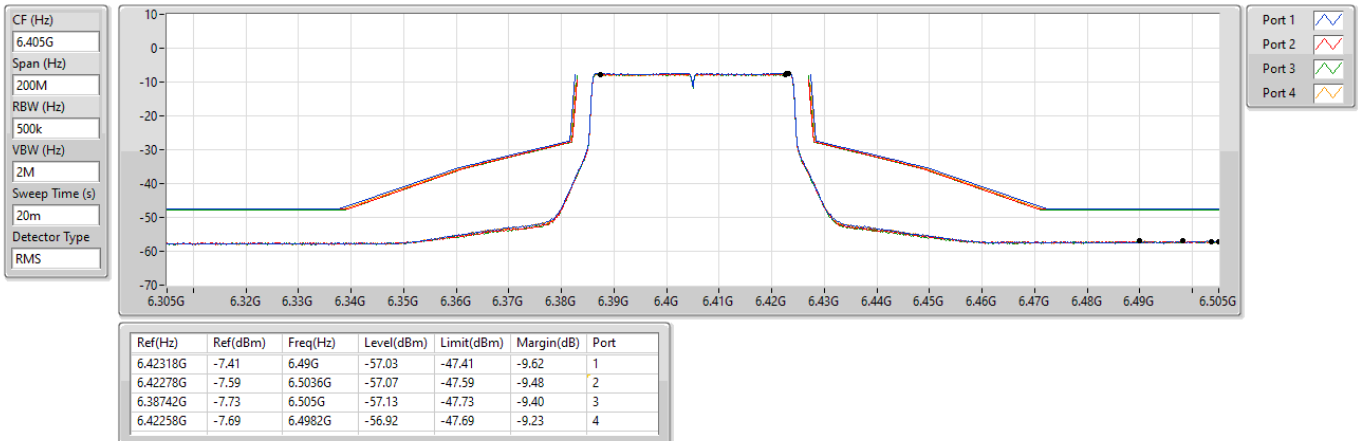

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6445MHz_TX

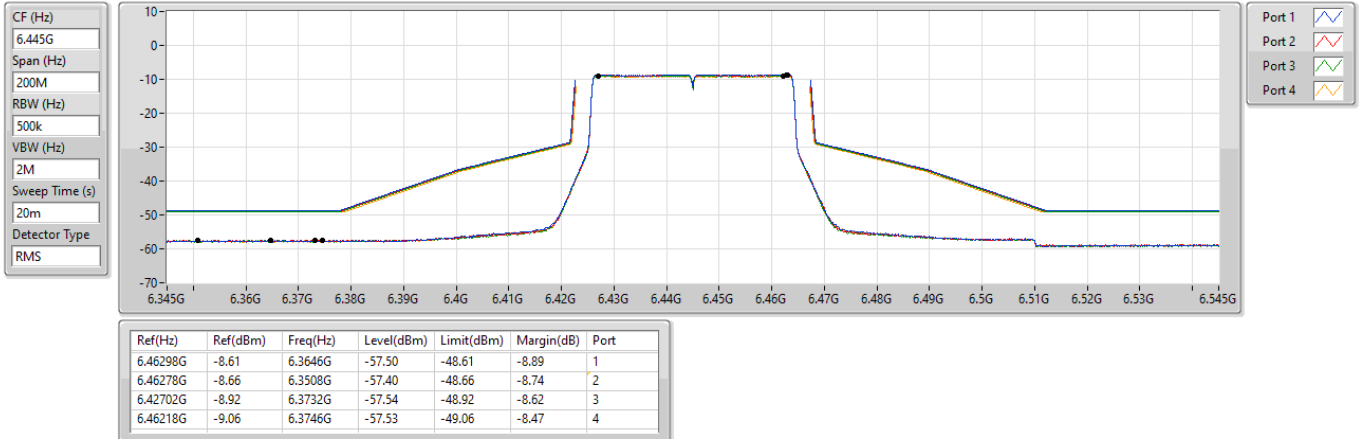

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK

6485MHz_TX

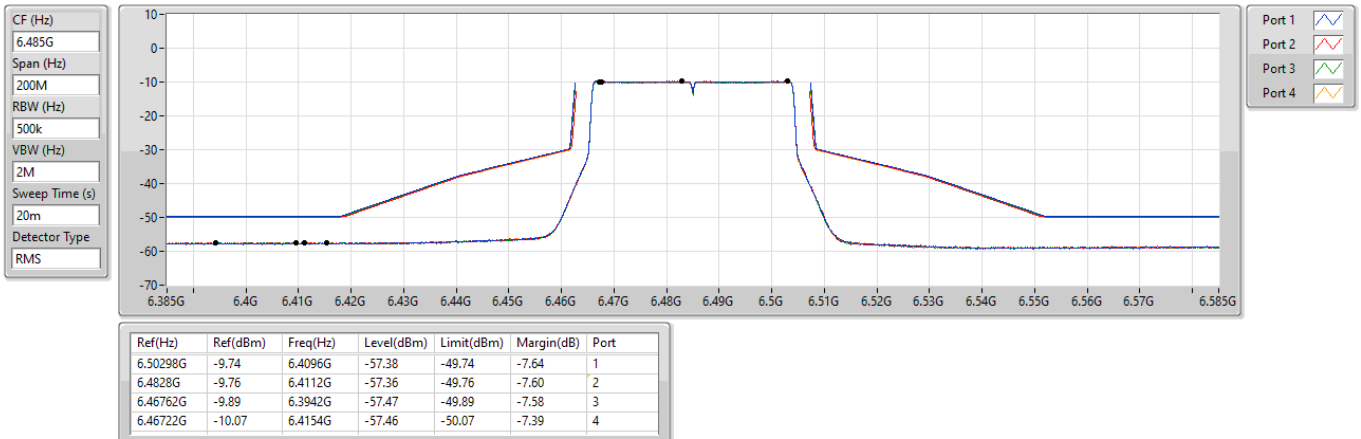




6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6525MHz Straddle 6.425-6.525GHz_TX

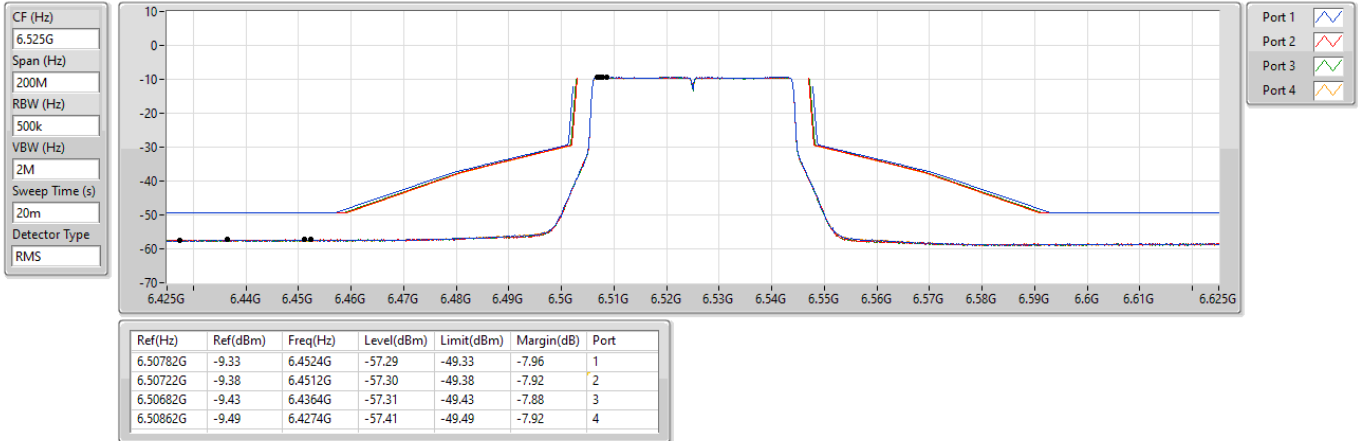

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK

6565MHz_TX

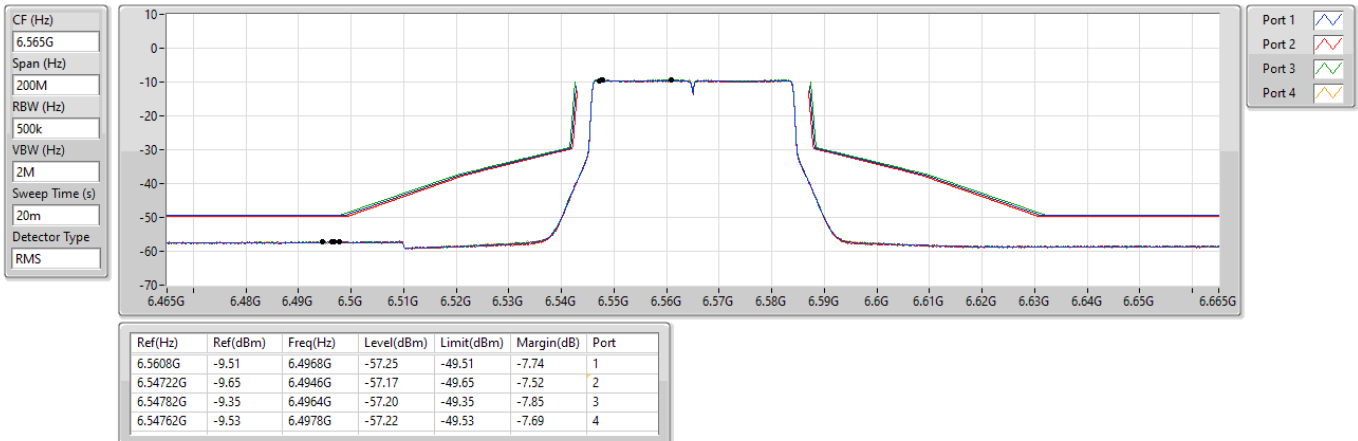




6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6725MHz_TX

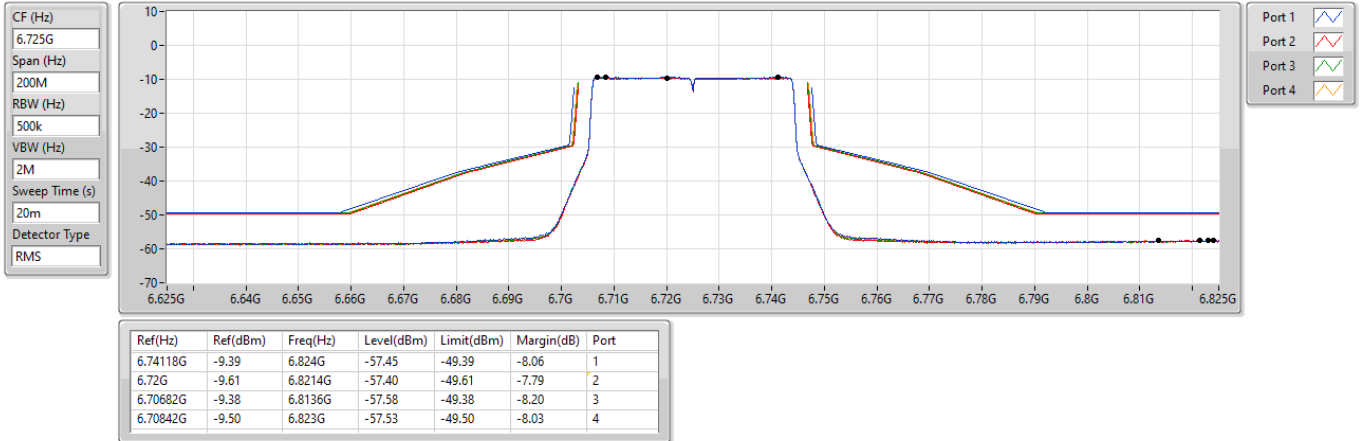

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6845MHz_TX

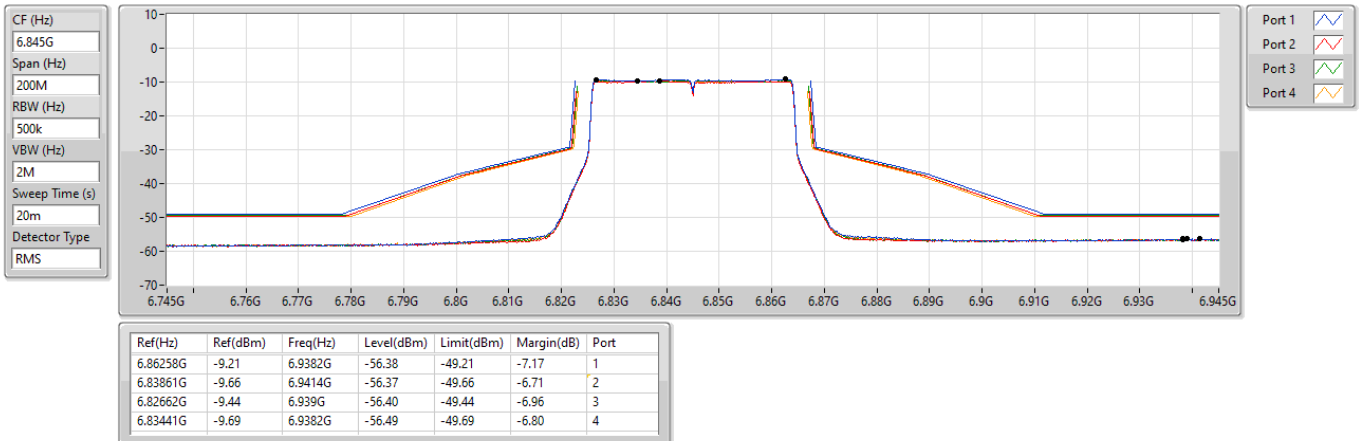

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6885MHz Straddle 6.875-7.125GHz_TX

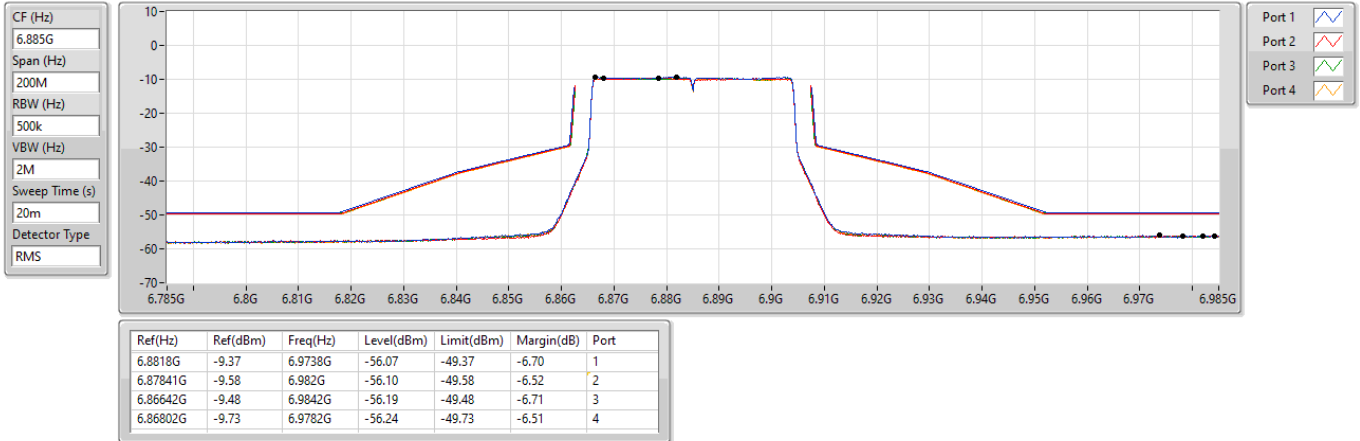

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK


6925MHz_TX

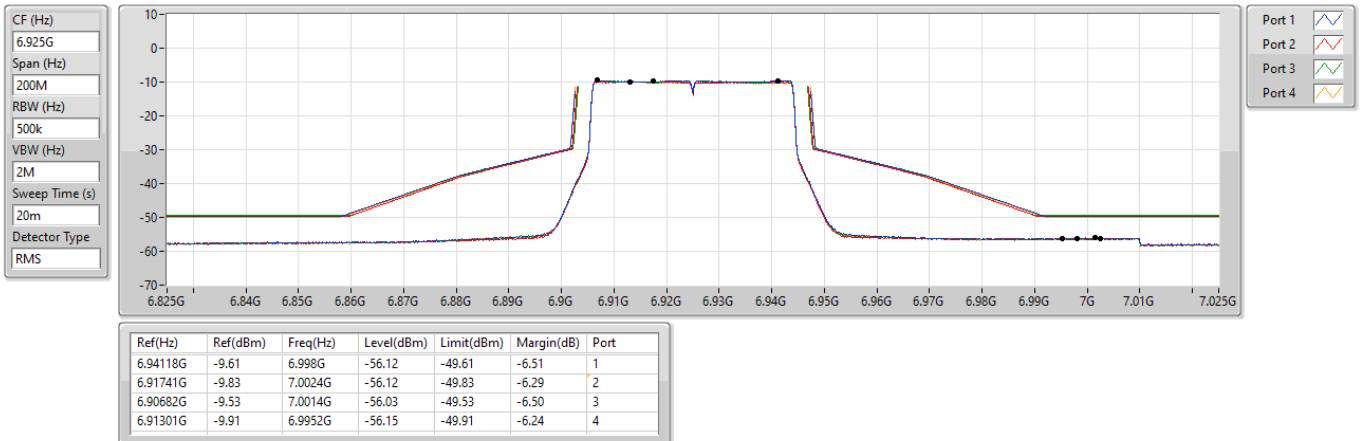

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


5985MHz_TX

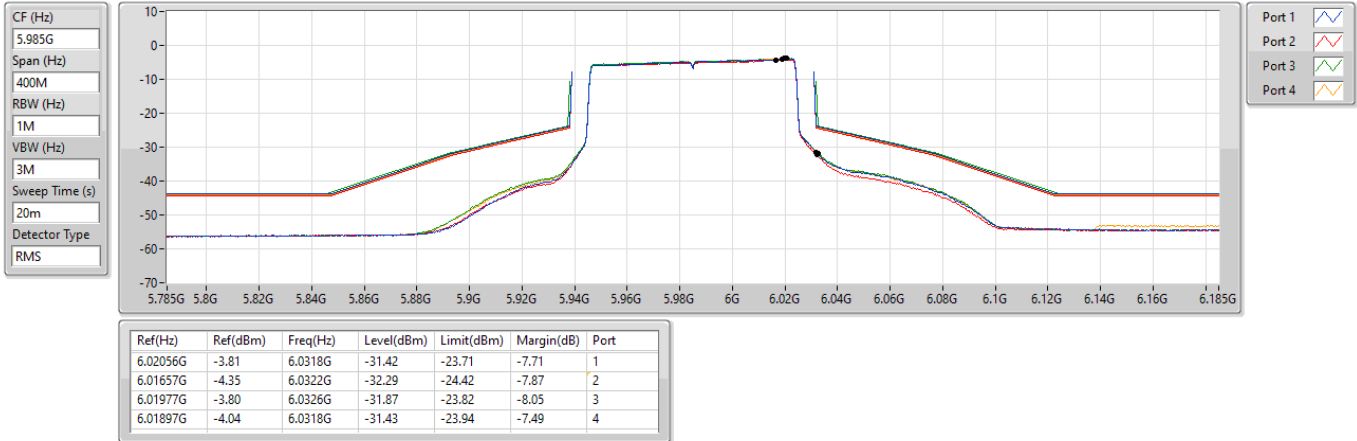

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6145MHz_TX

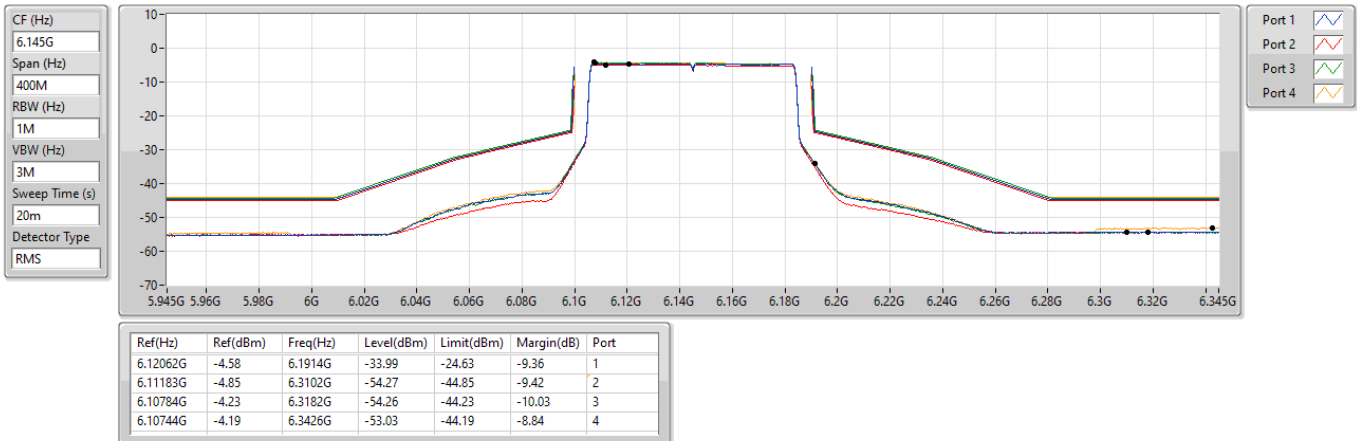

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6385MHz_TX

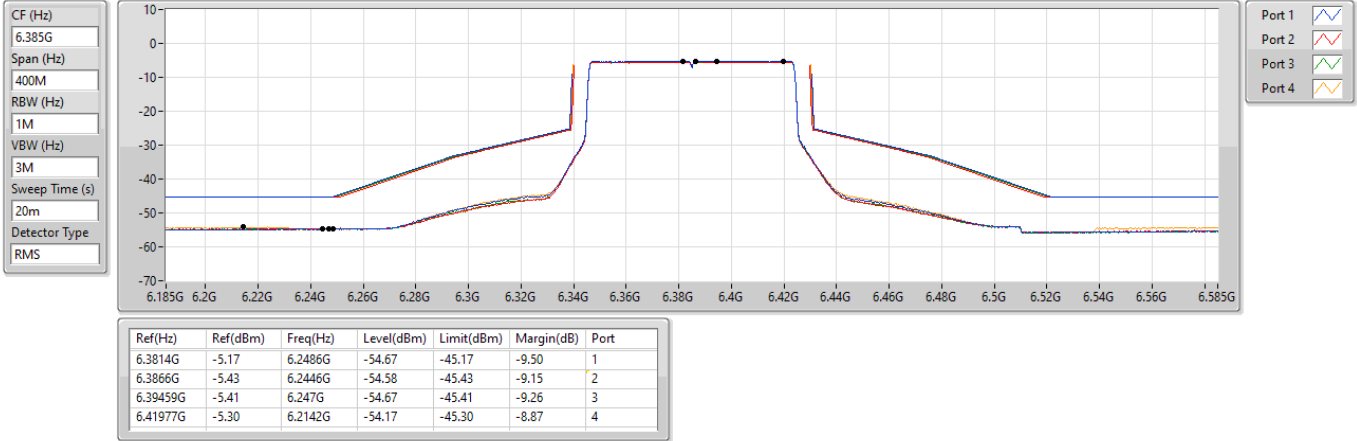

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6465MHz_TX

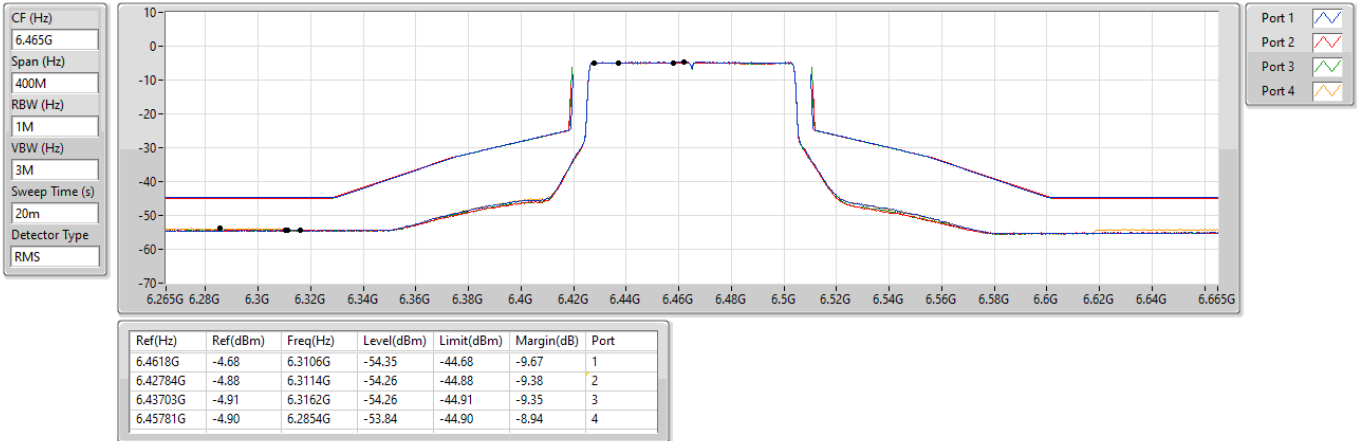

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6545MHz Straddle 6.425-6.525GHz_TX

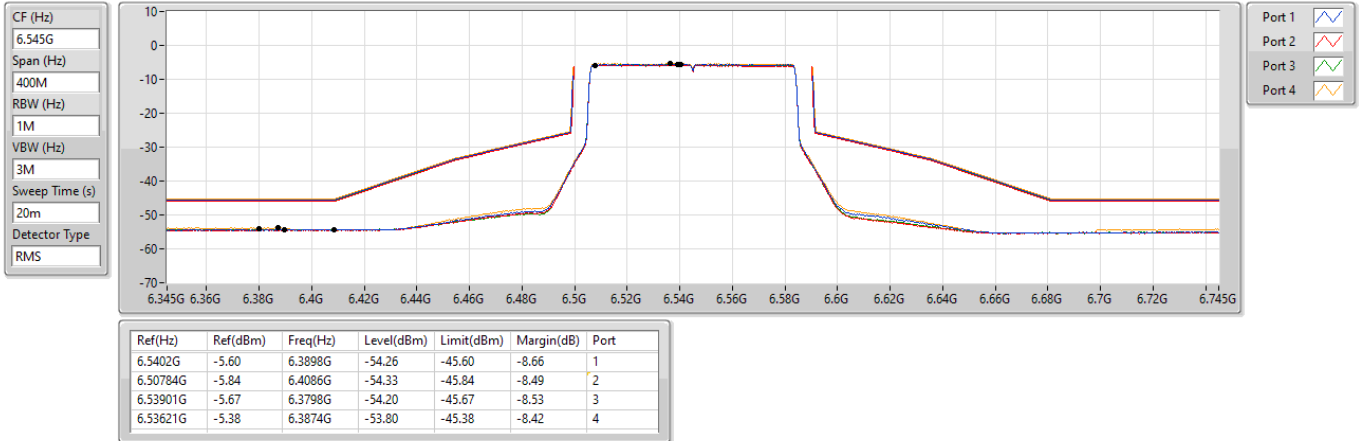

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6625MHz_TX

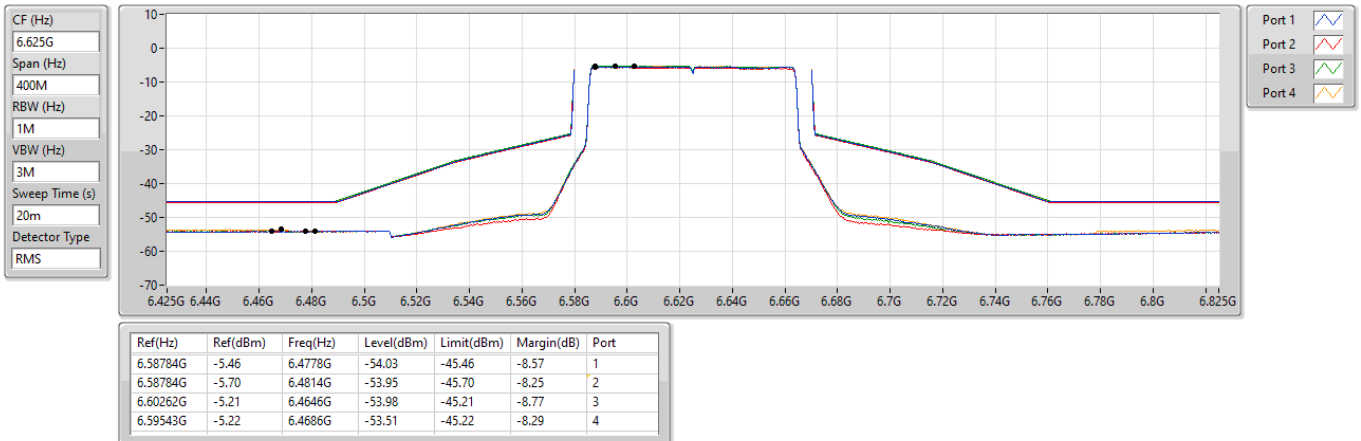

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6705MHz_TX

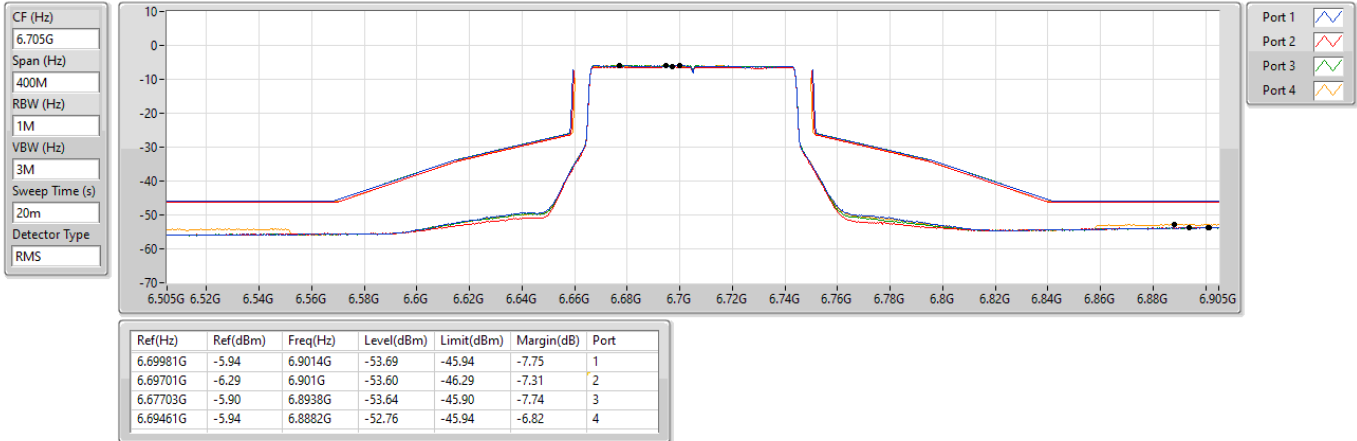

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6785MHz_TX

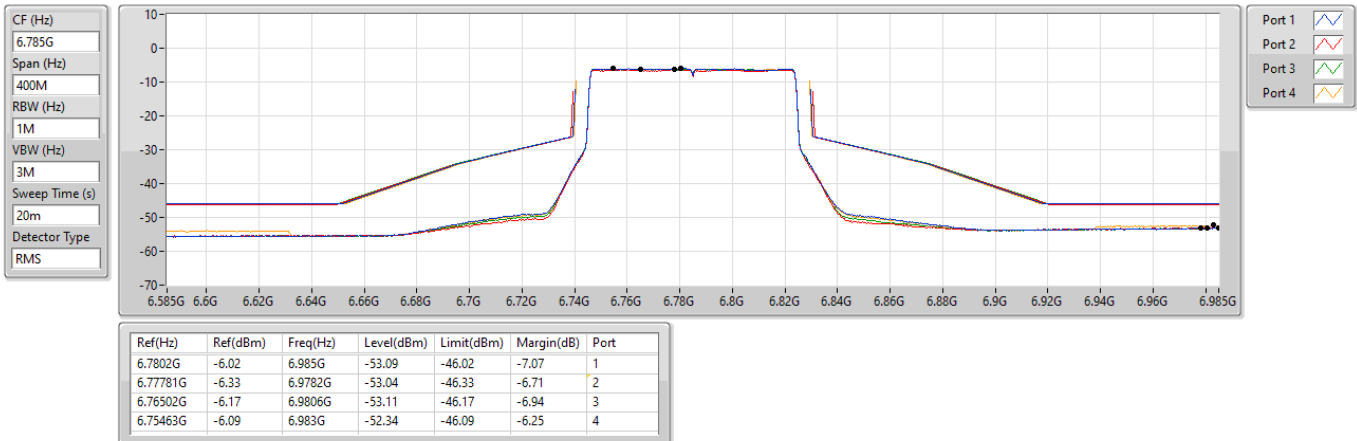

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6865MHz Straddle 6.875-7.125GHz_TX

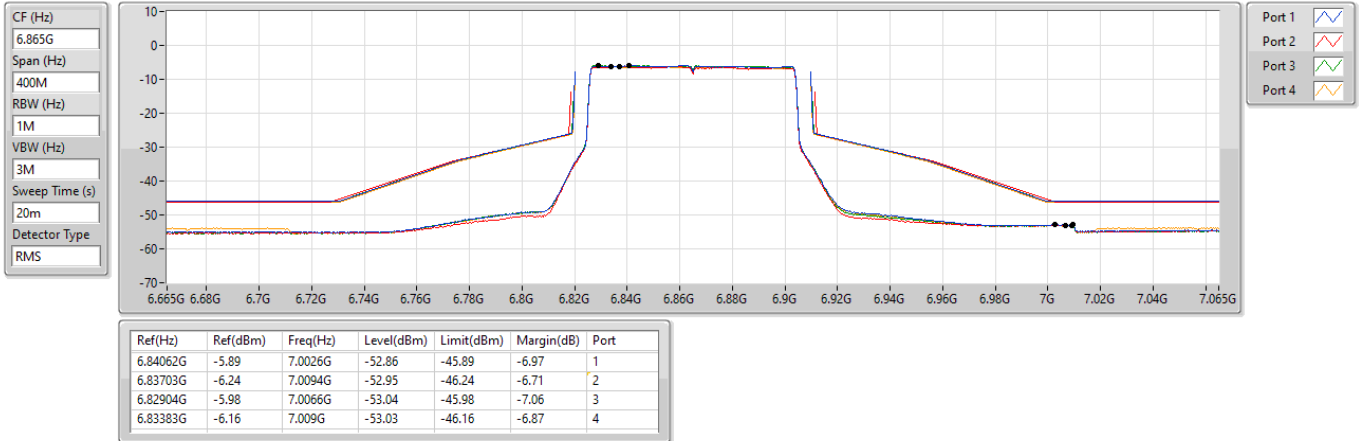

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


6945MHz_TX

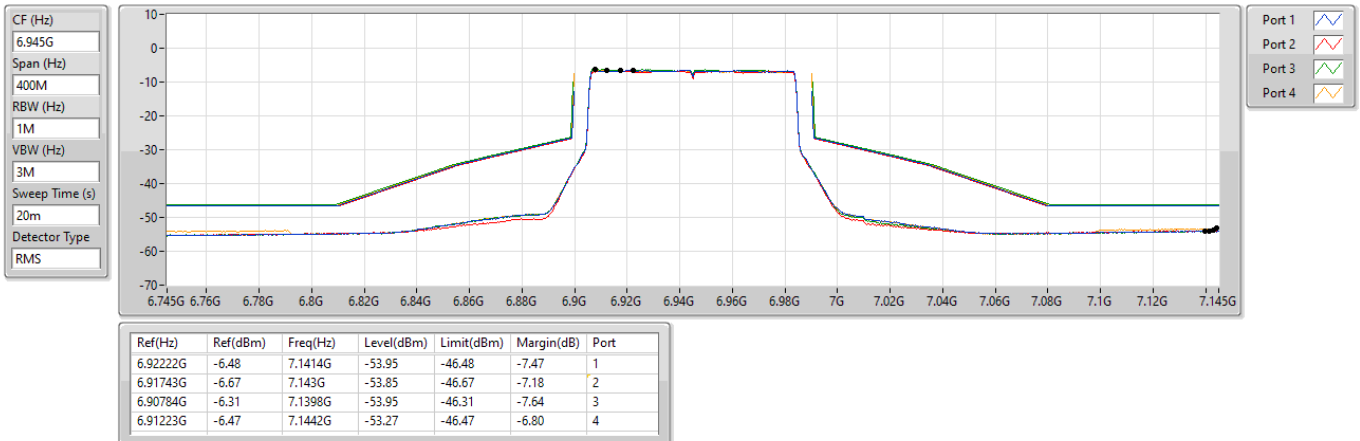

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK


7025MHz_TX

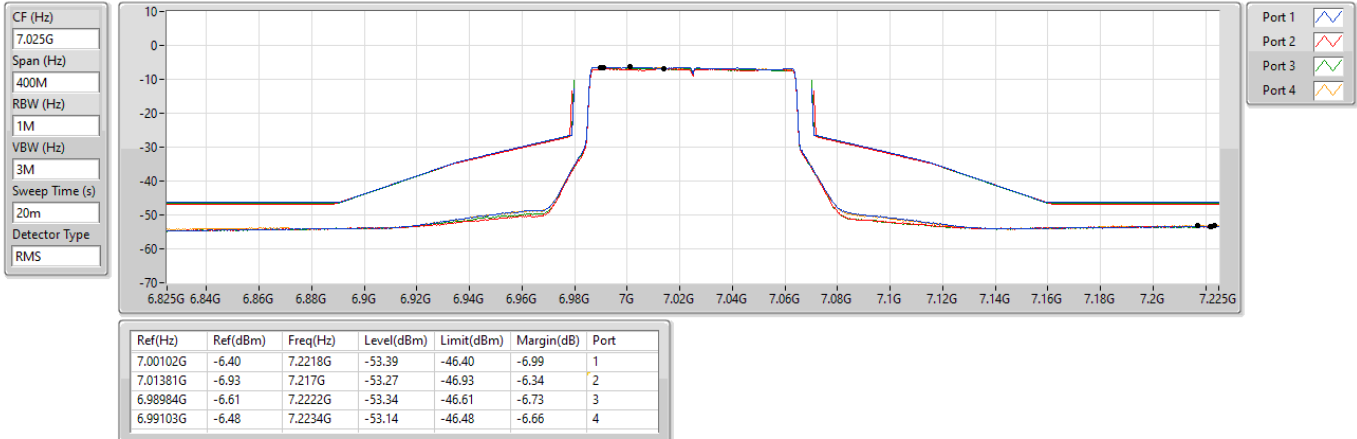

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6025MHz_TX

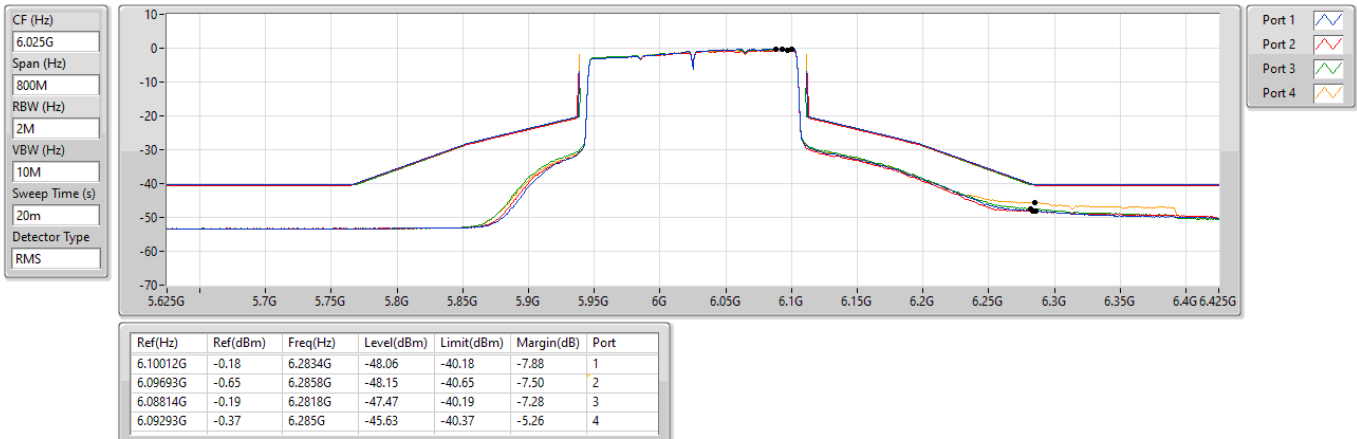

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6185MHz_TX

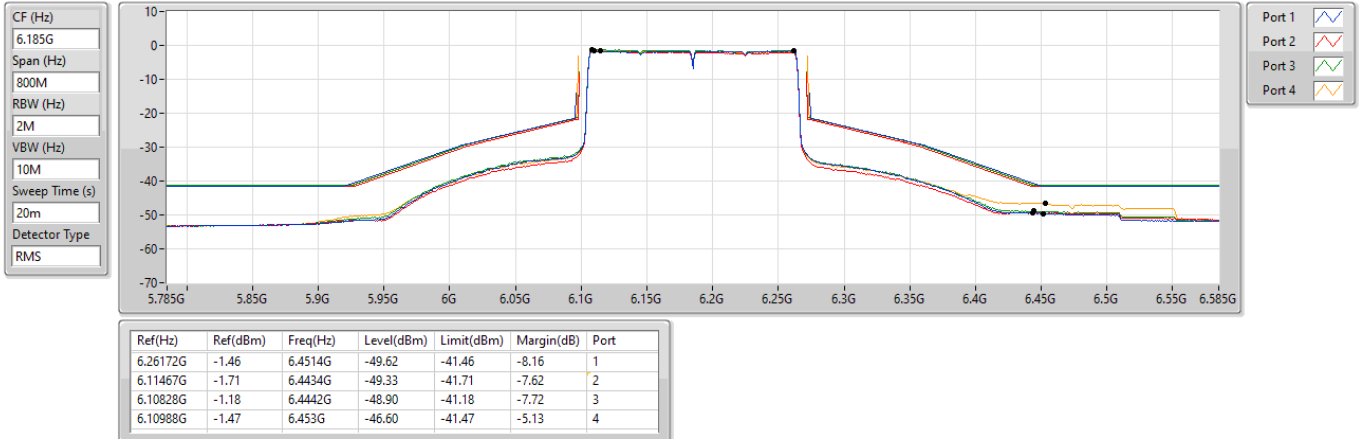

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6345MHz_TX

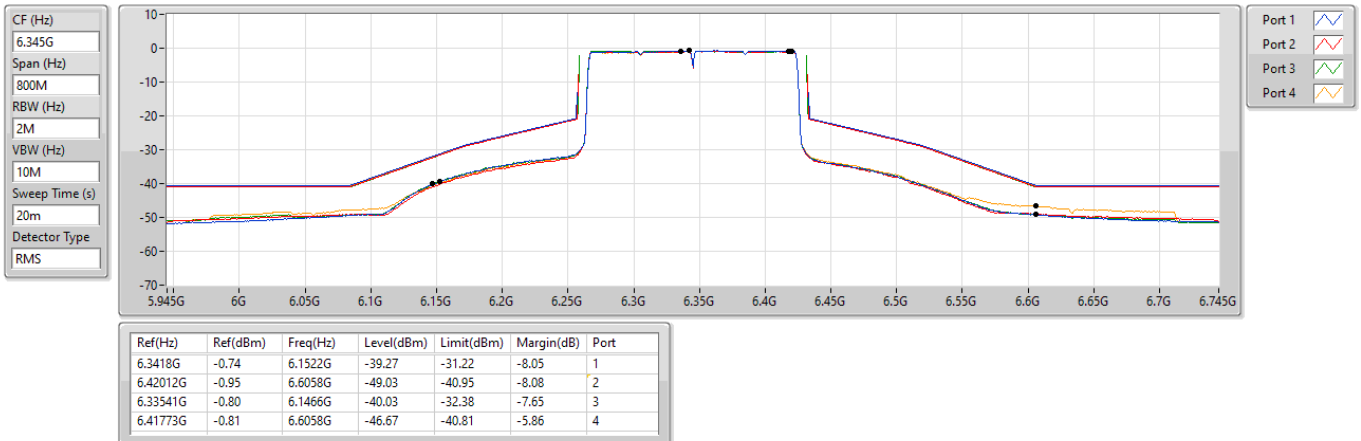

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6505MHz Straddle 6.425-6.525GHz_TX

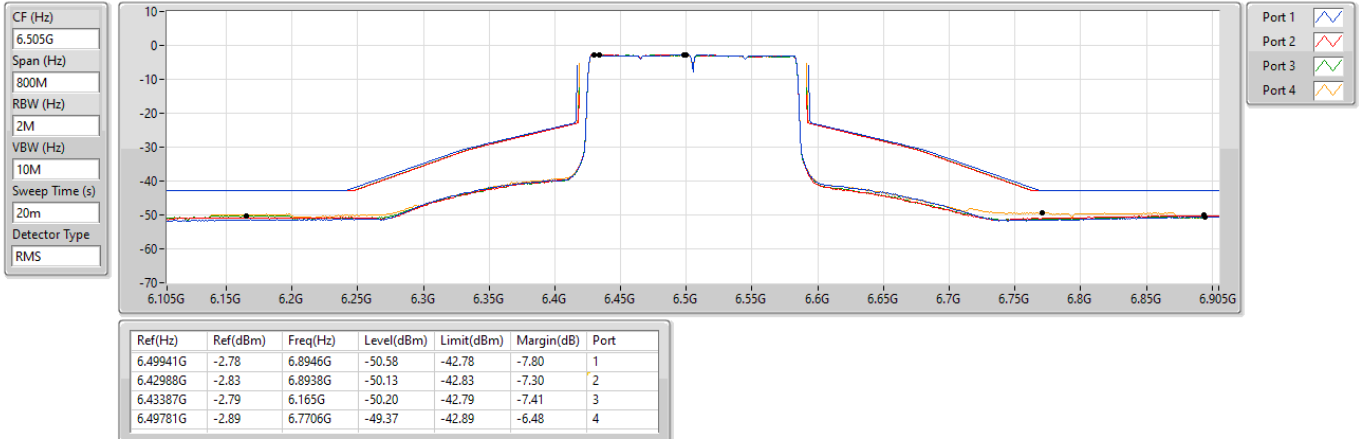

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6665MHz_TX

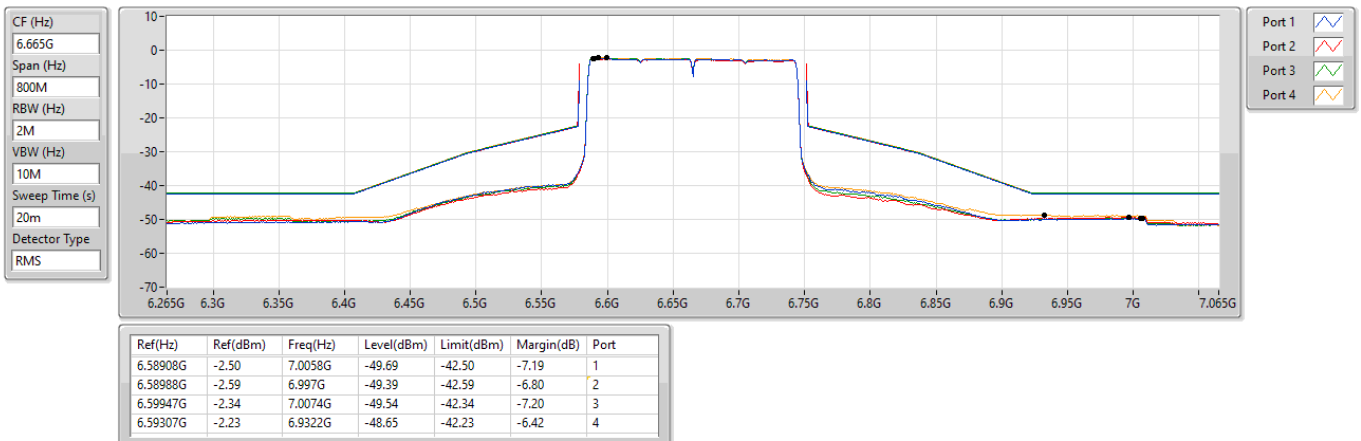

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6825MHz Straddle 6.875-7.125GHz_TX

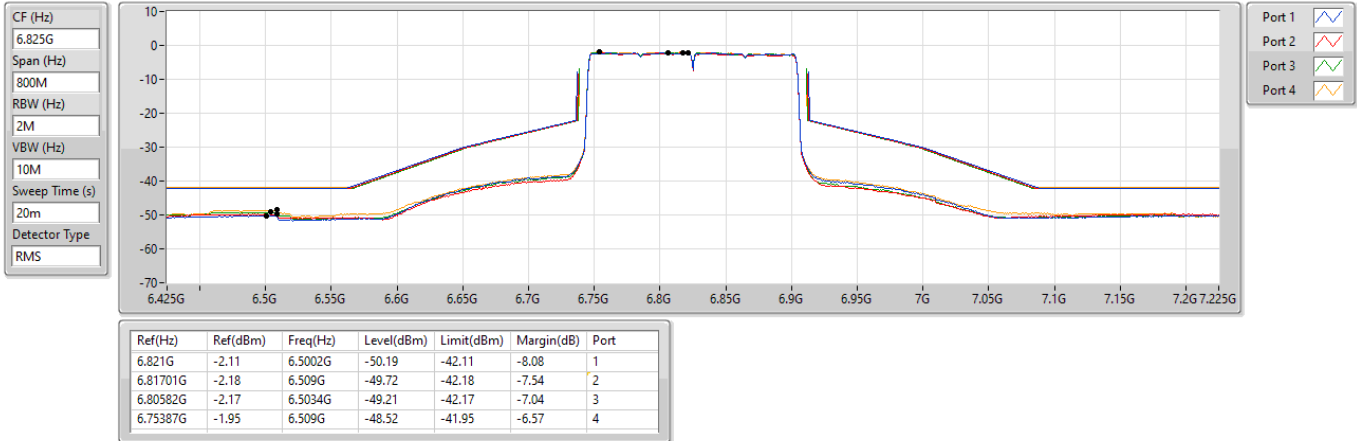

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK


6985MHz_TX

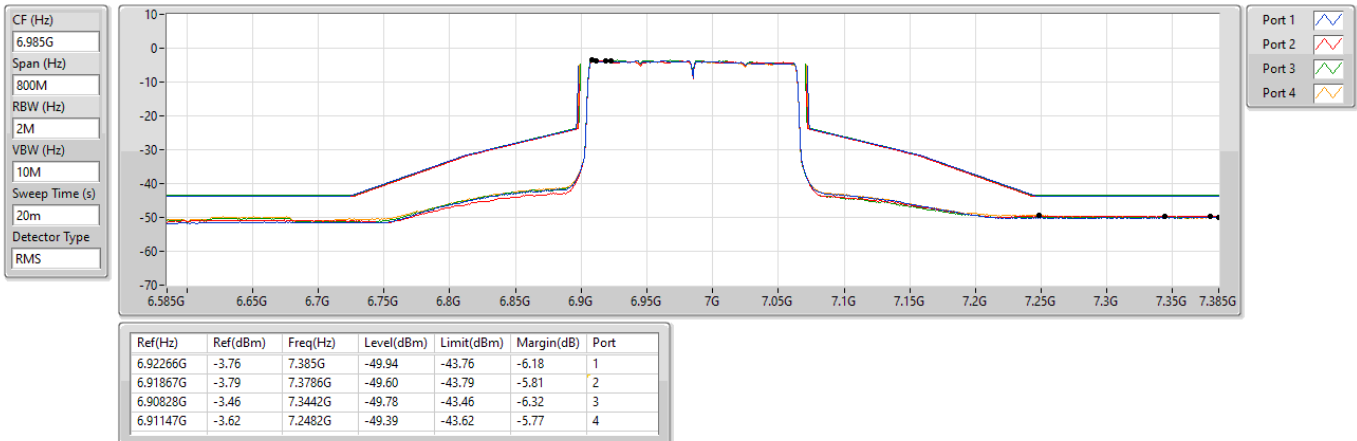

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

MASK


6105MHz_TX

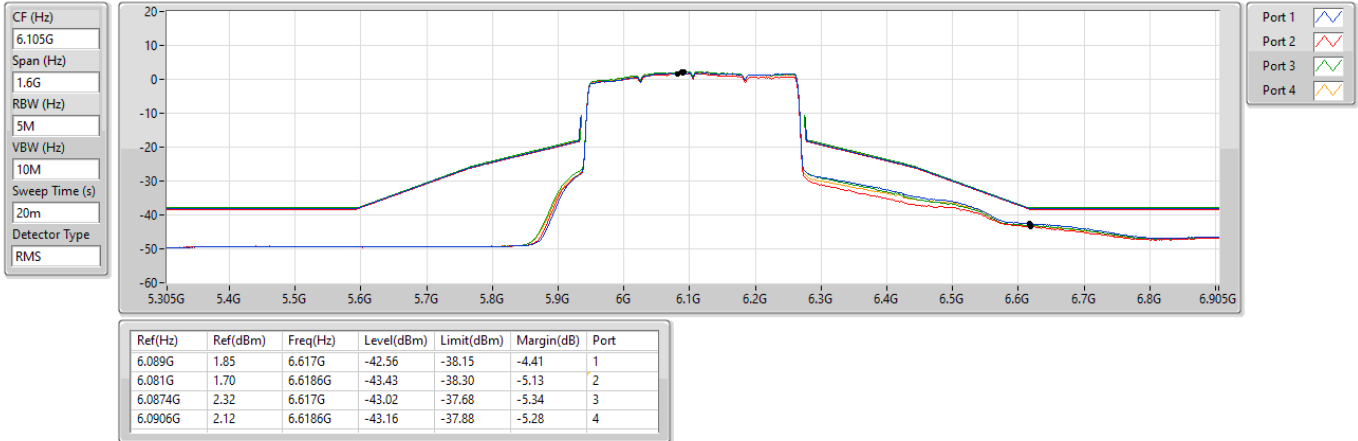

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

MASK


6265MHz_TX

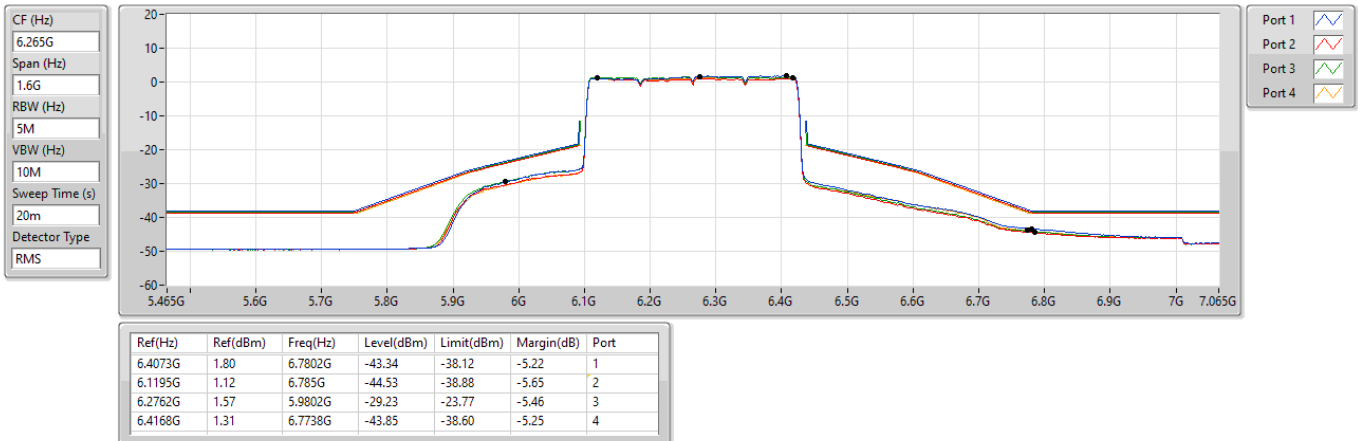

6.425-6.525GHz 802.11be EHT320_Nss1,(MCS0)_4TX

MASK


6425MHz Straddle 6.425-6.525GHz_TX

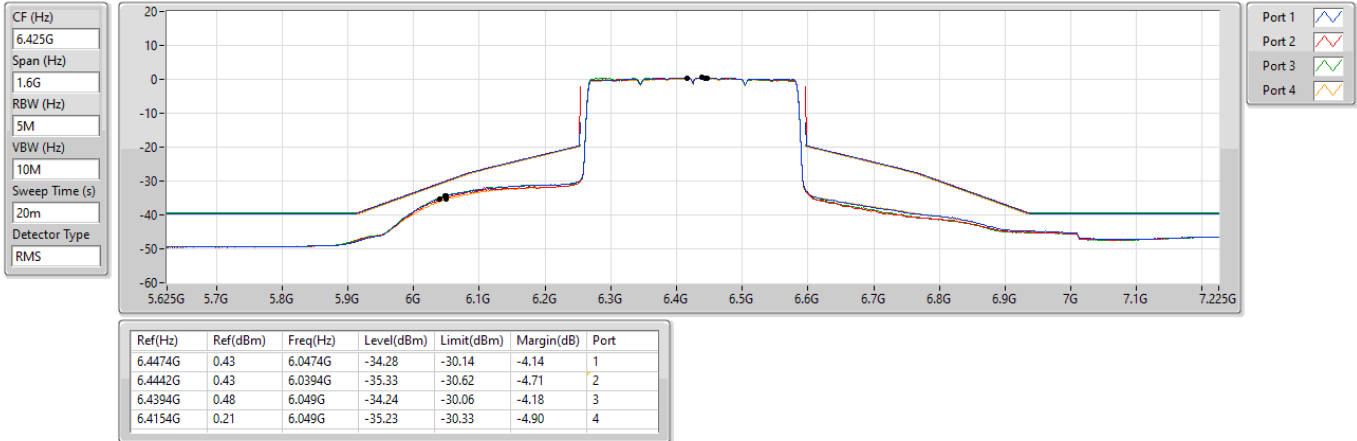

6.425-6.525GHz 802.11be EHT320_Nss1,(MCS0)_4TX

MASK


6585MHz Straddle 6.425-6.525GHz_TX

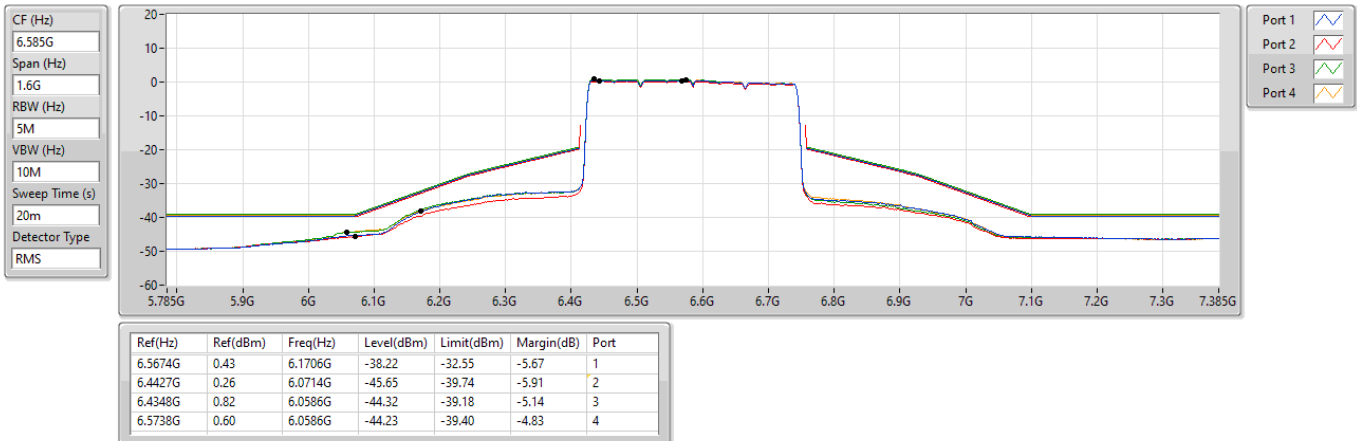

6.875-7.125GHz 802.11be EHT320_Nss1,(MCS0)_4TX

MASK


6745MHz Straddle 6.875-7.125GHz_TX

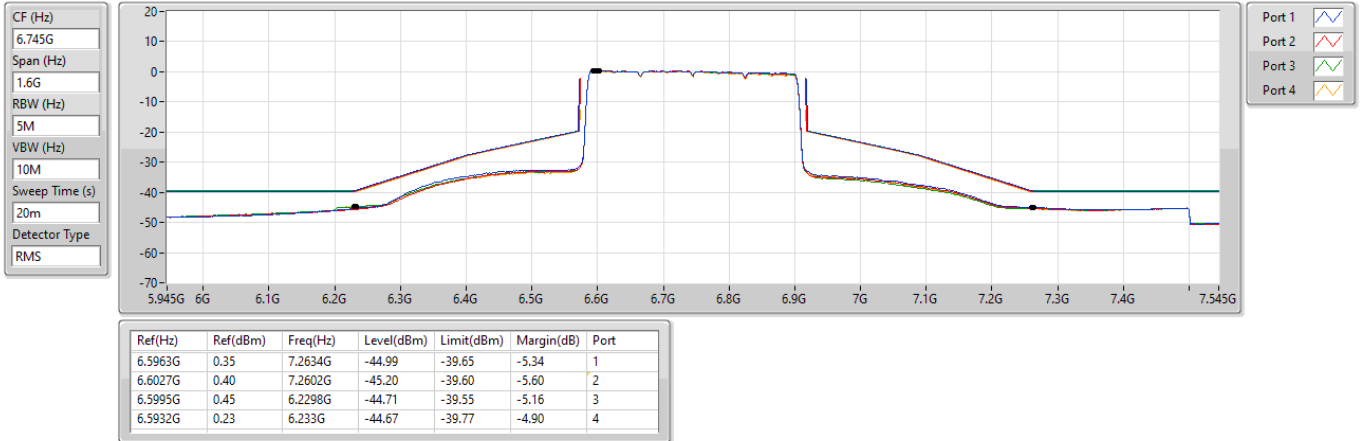

6.875-7.125GHz 802.11be EHT320_Nss1,(MCS0)_4TX

MASK

6905MHz Straddle 6.875-7.125GHz_TX

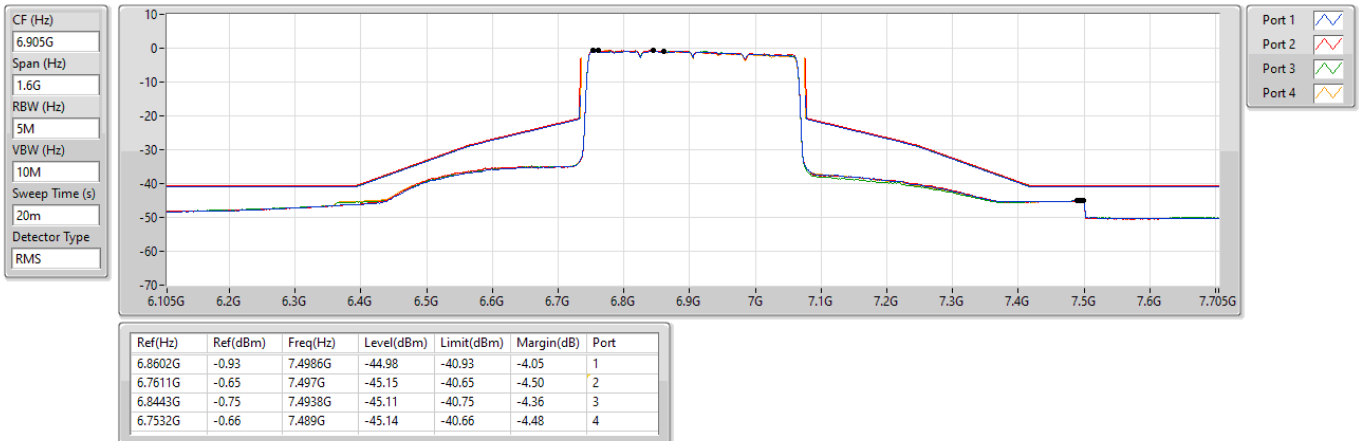



Frequency: 6475 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	0.46	0.93	0.35	0.54
T20°C Vmin	0.62	1.20	0.97	0.82
T40°C Vnom	-1.85	-1.14	-1.70	-1.63
T30°C Vnom	-1.39	-1.14	-0.67	-1.16
T20°C Vnom	0.77	0.79	1.01	1.38
T10°C Vnom	1.08	1.21	1.05	1.14
T0°C Vnom	1.24	1.36	1.12	0.86
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	

Frequency: 7015 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	0.43	0.22	0.27	0.77
T20°C Vmin	0.57	0.70	0.50	0.76
T40°C Vnom	-1.71	-1.38	-1.57	-1.62
T30°C Vnom	-1.28	-1.13	-1.53	-1.38
T20°C Vnom	0.71	1.26	0.67	0.80
T10°C Vnom	1.00	1.31	0.88	1.50
T0°C Vnom	1.14	1.27	1.30	0.89
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna gain With path Loss (dBi)	Adjusted Power (dBm)	Detection limit (dBm)	EUT Tx Status
be EHT20	5	6195	6194	-69.95	4.67	-74.62	-62	Ceased
				-71.95	4.67	-76.62	-62	Minimal
				-89.95	4.67	-94.62	-62	Normal
	6	6475	6474	-69.22	4.02	-73.24	-62	Ceased
				-71.22	4.02	-75.24	-62	Minimal
				-89.22	4.02	-93.24	-62	Normal
	7	6695	6694	-60.04	3.1	-63.14	-62	Ceased
				-62.04	3.1	-65.14	-62	Minimal
				-80.04	3.1	-83.14	-62	Normal
	8	6995	6994	-66.43	4.48	-70.91	-62	Ceased
				-68.43	4.48	-72.91	-62	Minimal
				-86.43	4.48	-90.91	-62	Normal

Note: Adjusted Power = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna gain with path Loss (dBi)	Adjusted Power (dBm)	Detection limit (dBm)	EUT Tx Status
be EHT320	5	6105	6260	-69.44	4.67	-74.11	-62	Ceased
				-71.44	4.67	-76.11	-62	Minimal
				-89.44	4.67	-94.11	-62	Normal
	5 / 6 / 7	6425	6580	-60.2	3.1	-63.3	-62	Ceased
				-62.2	3.1	-65.3	-62	Minimal
				-80.2	3.1	-83.3	-62	Normal
	7 / 8	6905	6750	-60.89	3.1	-63.99	-62	Ceased
				-62.89	3.1	-65.99	-62	Minimal
				-80.89	3.1	-83.99	-62	Normal

Note: Adjusted Power = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Adjusted Power (dBm)	1	2	3	4	5	6	7	8	9	10	Detection Probability (%)	Limit (%)
be EHT20	5	6195	6194	-69.95	-74.62	V	V	V	V	V	V	V	V	V	V	100	90
	6	6475	6474	-69.22	-73.24	V	V	V	V	V	V	V	V	V	V	100	90
	7	6695	6694	-60.04	-63.14	V	V	V	V	V	V	V	V	X	V	90	90
	8	6995	6994	-66.43	-70.91	V	V	V	V	V	V	V	V	V	V	100	90


Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Adjusted Power (dBm)	1	2	3	4	5	6	7	8	9	10	Detection Probability (%)	Limit (%)
be EHT320	5	6105	5950	-70.14	-74.81	V	V	V	V	V	V	V	V	V	V	100	90
			6110	-69.65	-74.32	V	V	V	V	V	V	V	V	V	V	100	90
			6260	-69.44	-74.11	V	V	V	V	V	V	V	V	V	V	100	90
	5 / 6 / 7	6425	6270	-69.4	-72.5	V	V	V	V	V	V	V	X	V	V	90	90
			6430	-68.43	-71.53	V	V	V	V	V	V	V	V	V	V	100	90
			6580	-60.2	-63.3	V	V	V	V	V	V	V	V	X	V	90	90
	7 / 8	6905	6750	-60.89	-63.99	V	V	V	V	V	V	V	X	V	V	90	90
			6910	-69.33	-72.43	V	V	V	V	V	V	V	V	X	V	90	90
			7060	-69.54	-72.64	V	V	V	V	V	V	V	V	V	V	100	90

Test plot of Incumbent signal


BW: 20 MHz / Frequency: 6194 MHz



BW: 20 MHz / Frequency: 6474 MHz

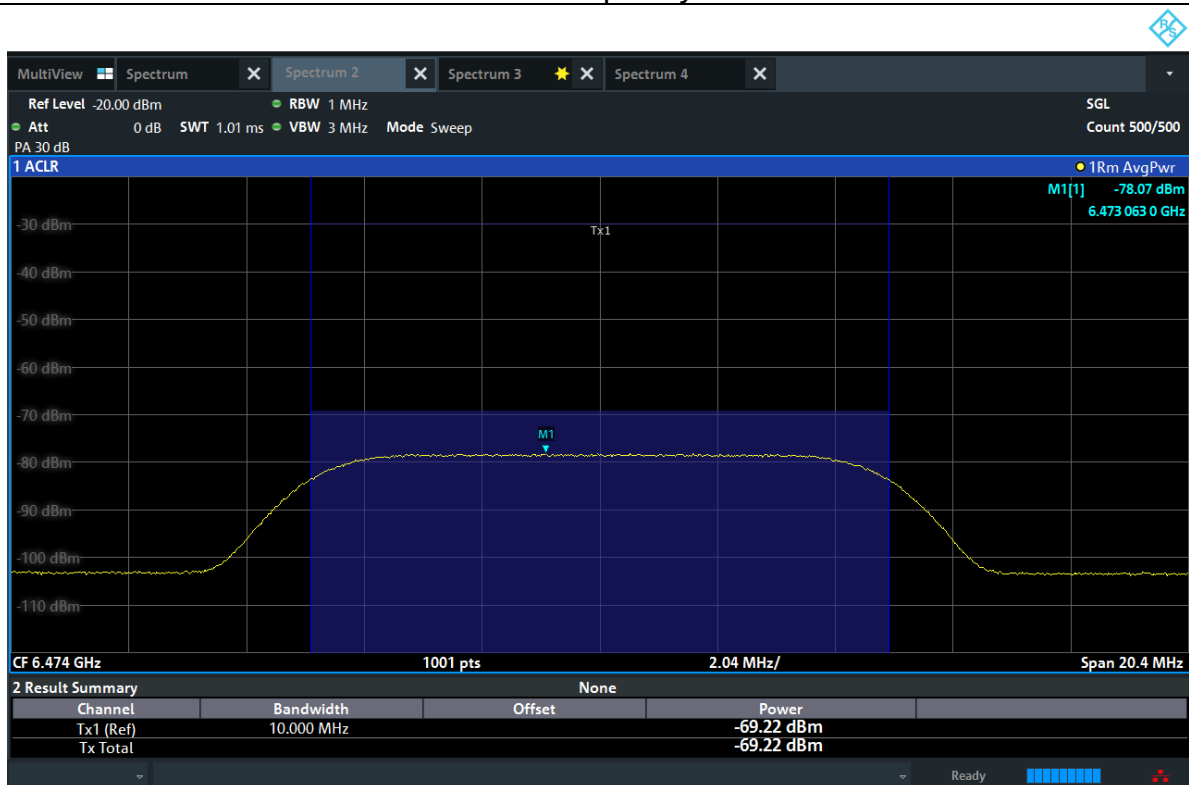


BW: 20 MHz / Frequency: 6694 MHz

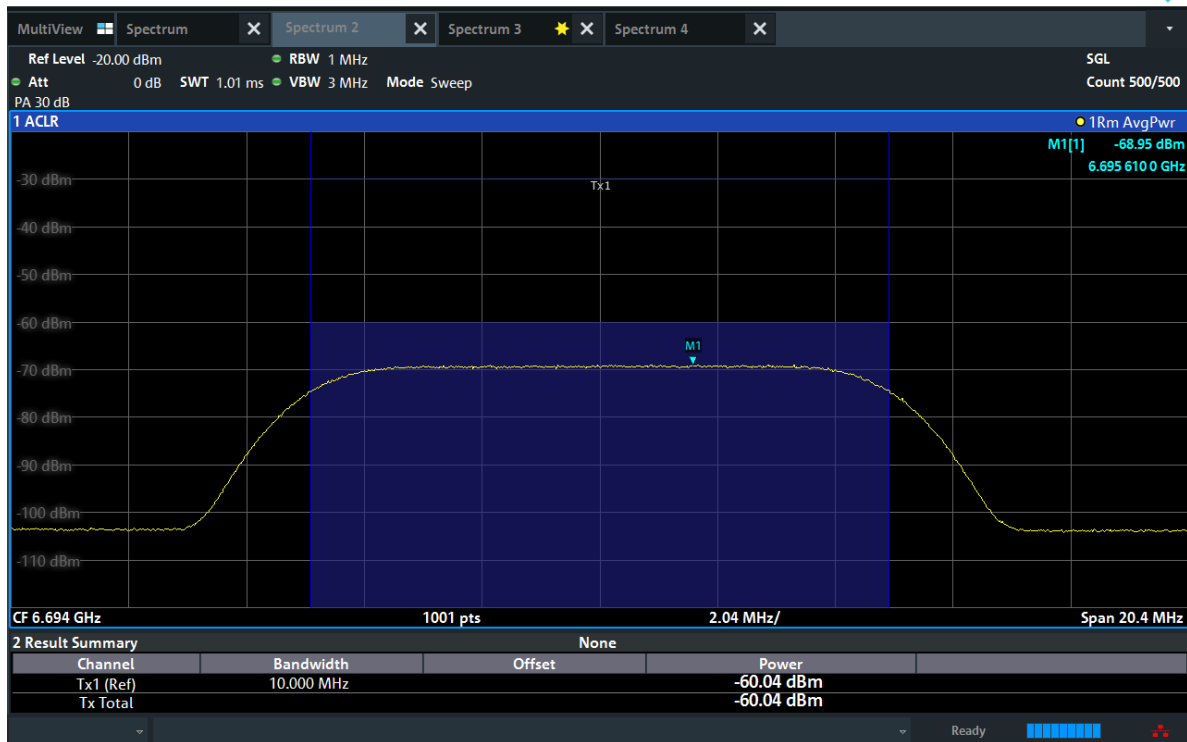


BW: 20 MHz / Frequency: 6994 MHz




BW: 320 MHz / Frequency: 5950 MHz

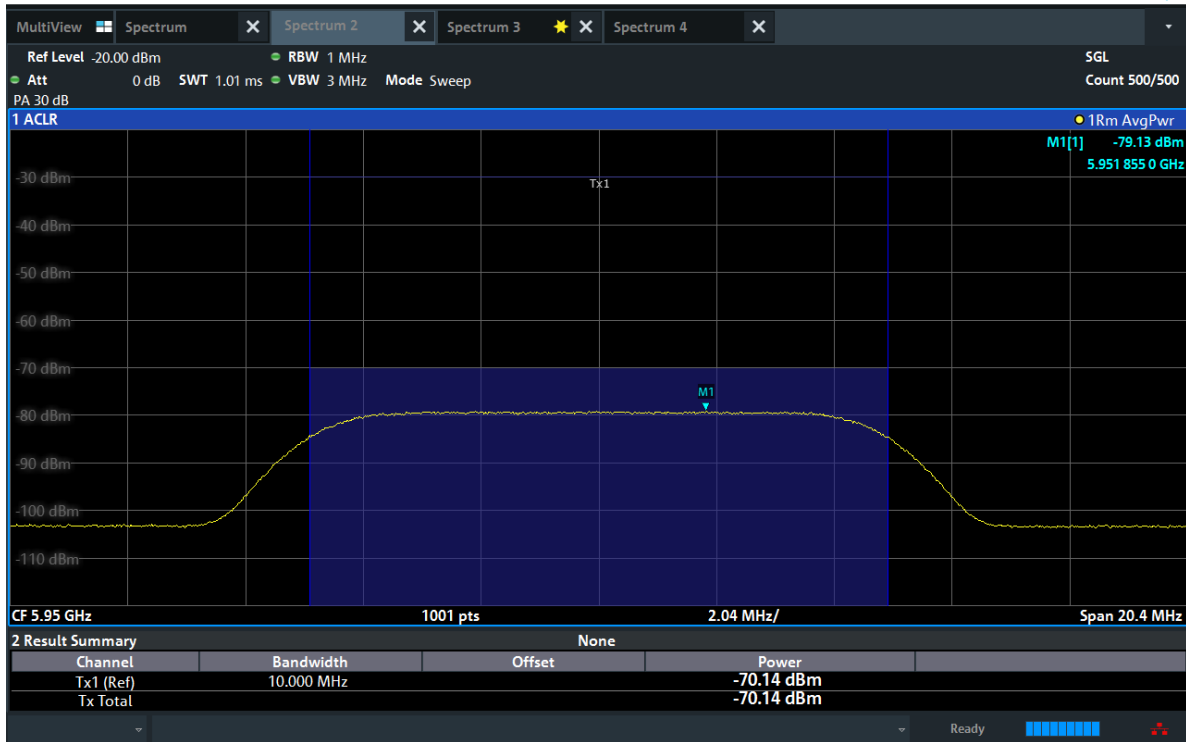


BW: 320 MHz / Frequency: 6110 MHz

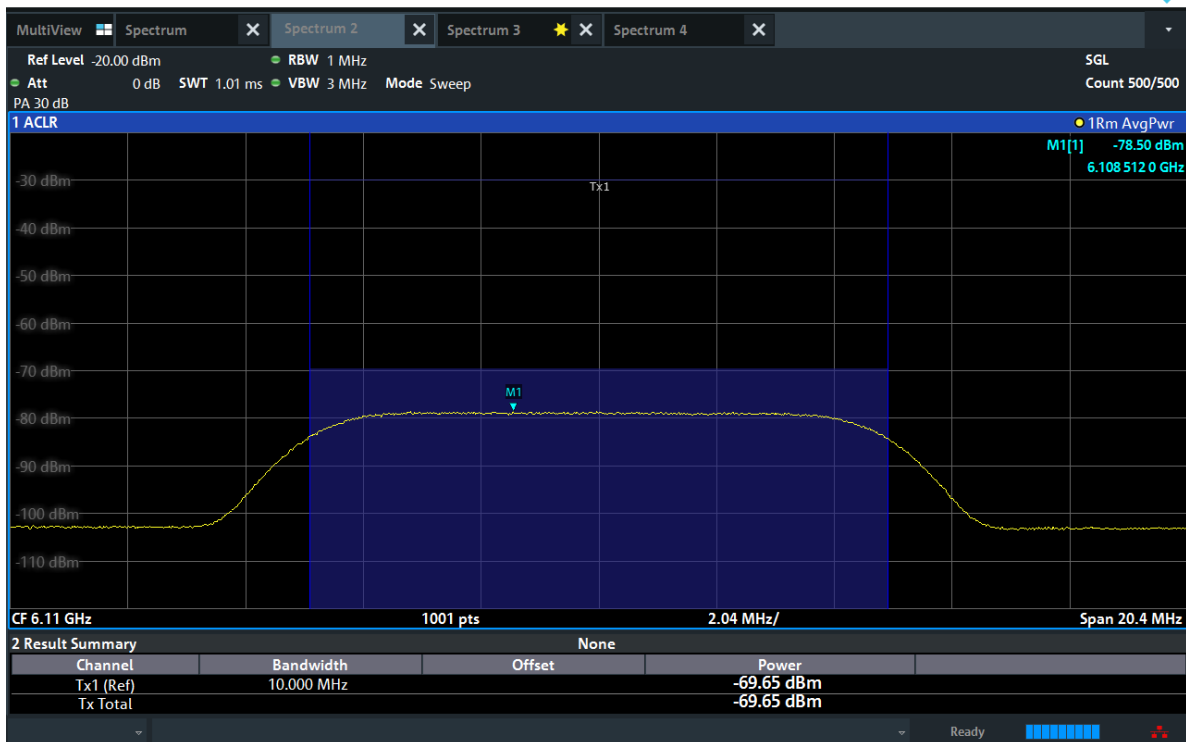


BW: 320 MHz / Frequency: 6260 MHz

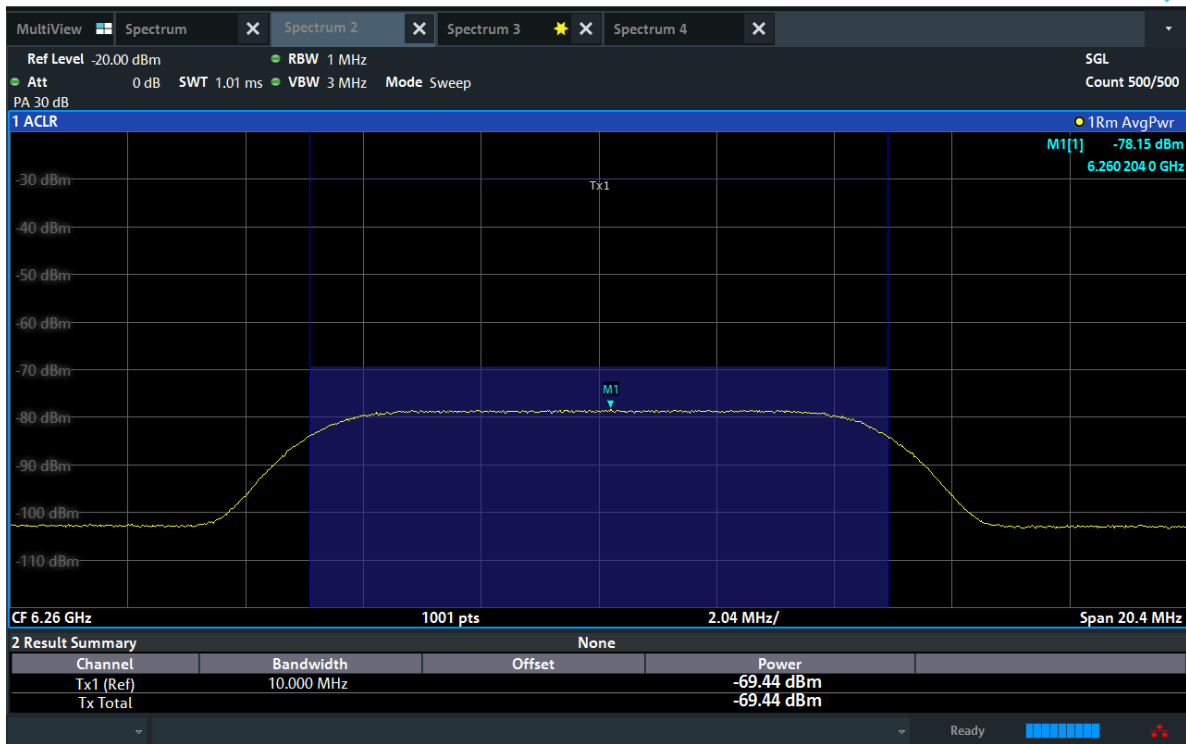


BW: 320 MHz / Frequency: 6270 MHz

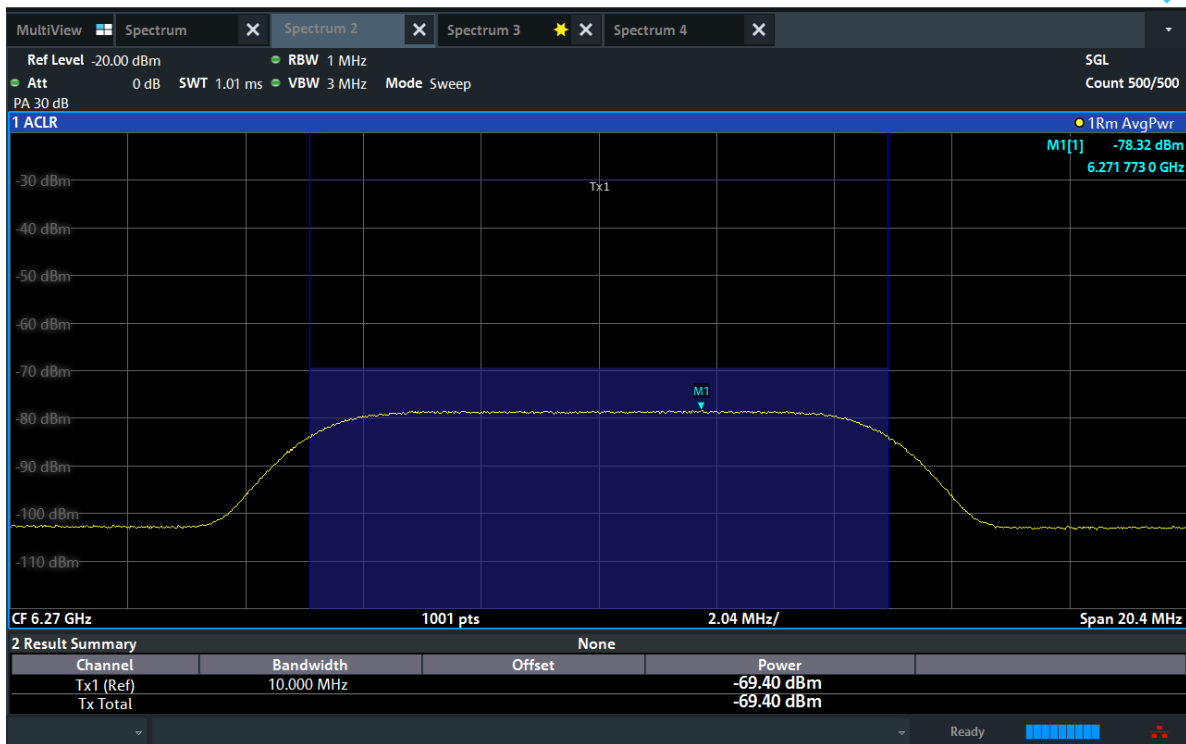


BW: 320 MHz / Frequency: 6430 MHz

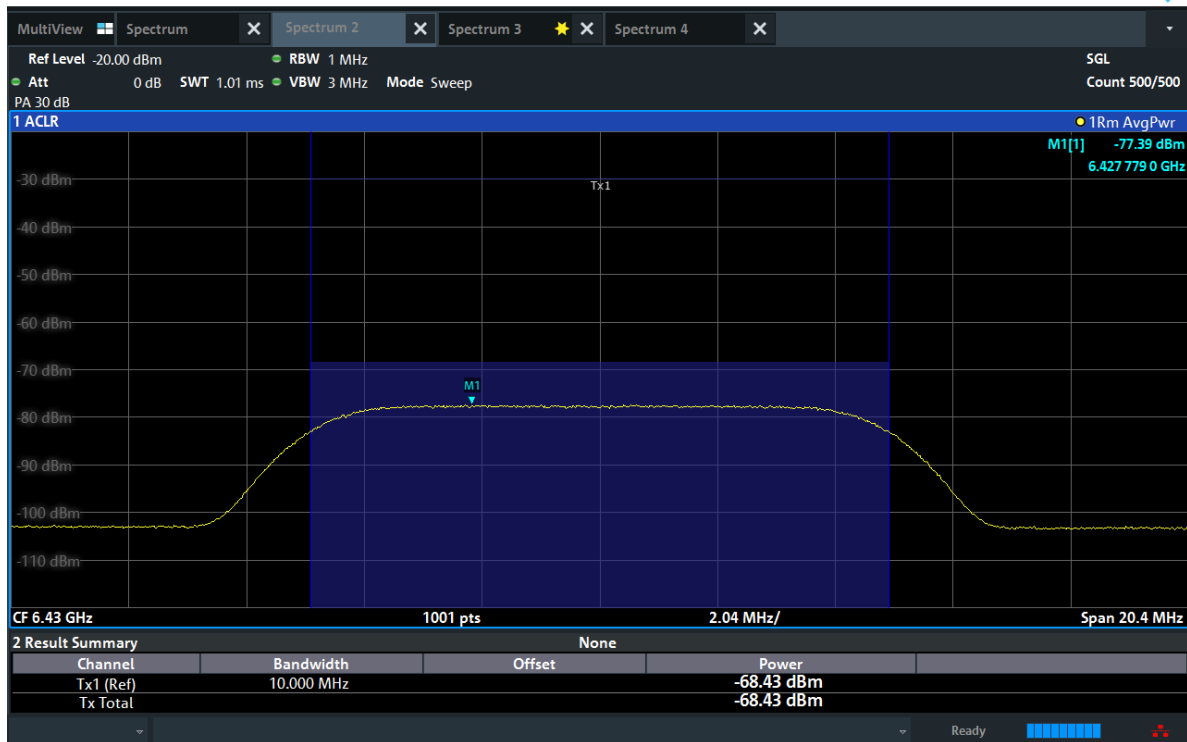


BW: 320 MHz / Frequency: 6580 MHz

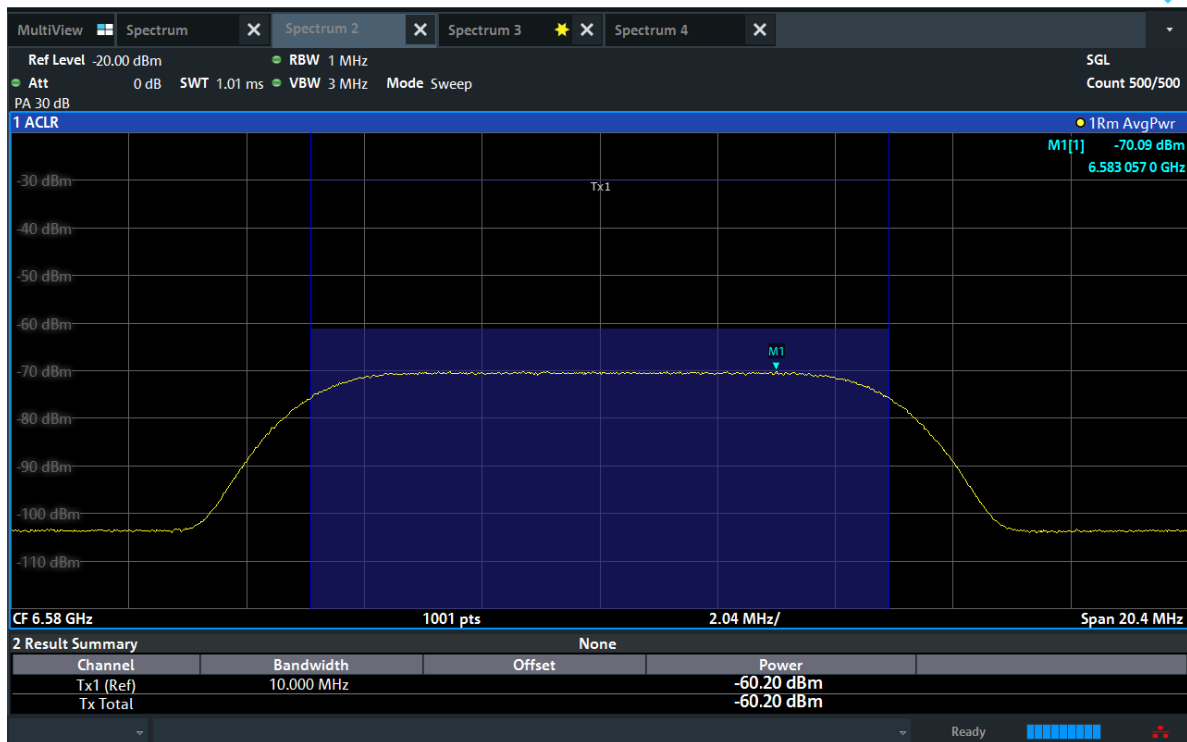


BW: 320 MHz / Frequency: 6750 MHz

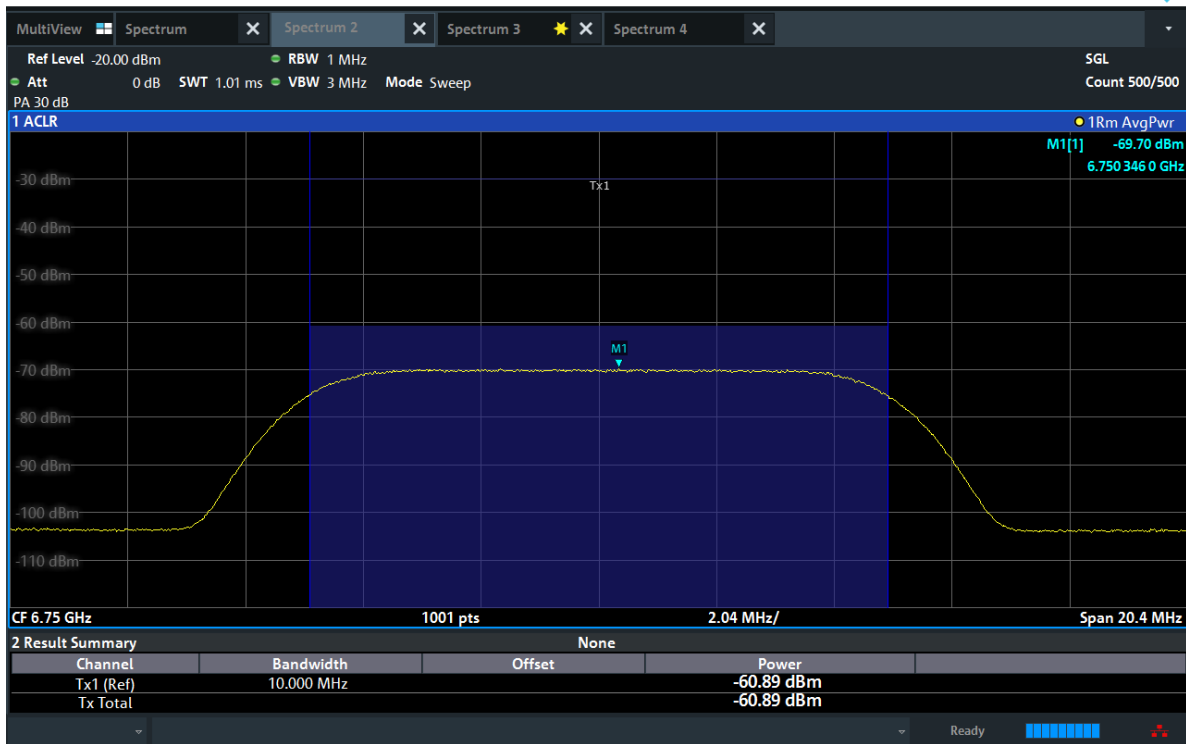

BW: 320 MHz / Frequency: 6910 MHz

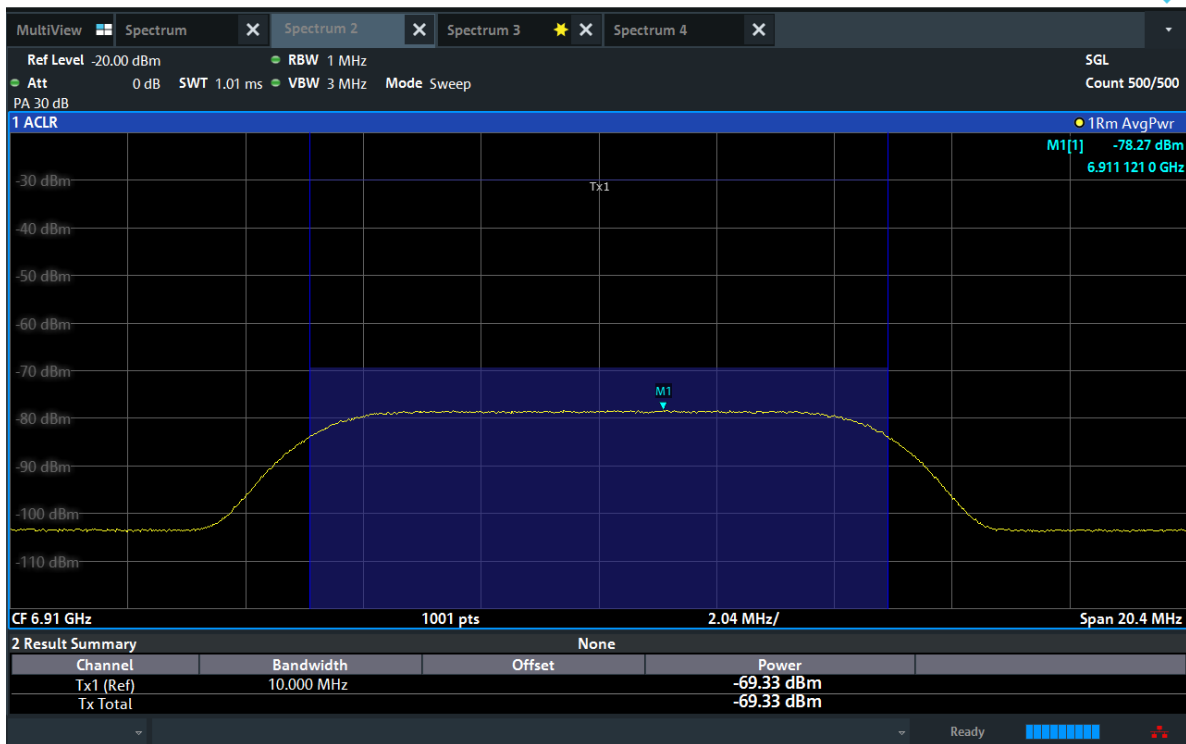


BW: 320 MHz / Frequency: 7060 MHz

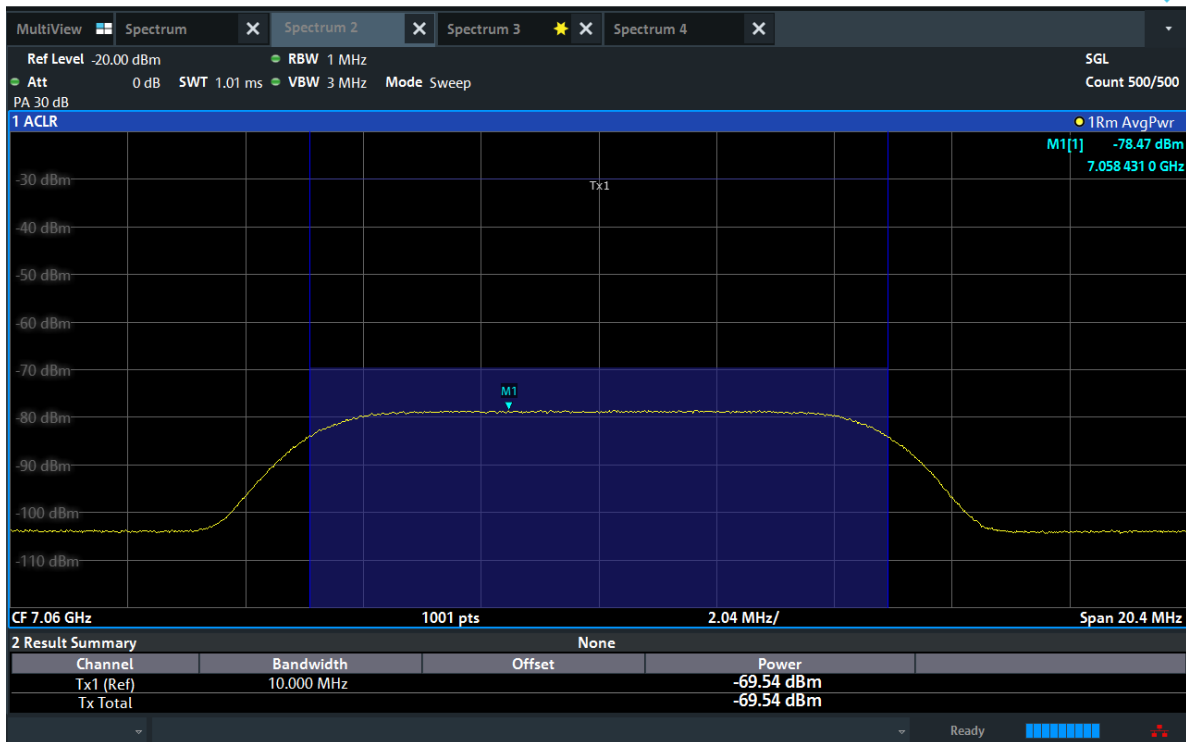


Test plot of Contention Based Protocol EUT Normal transmission


BW: 20 MHz / Frequency: 6194 MHz

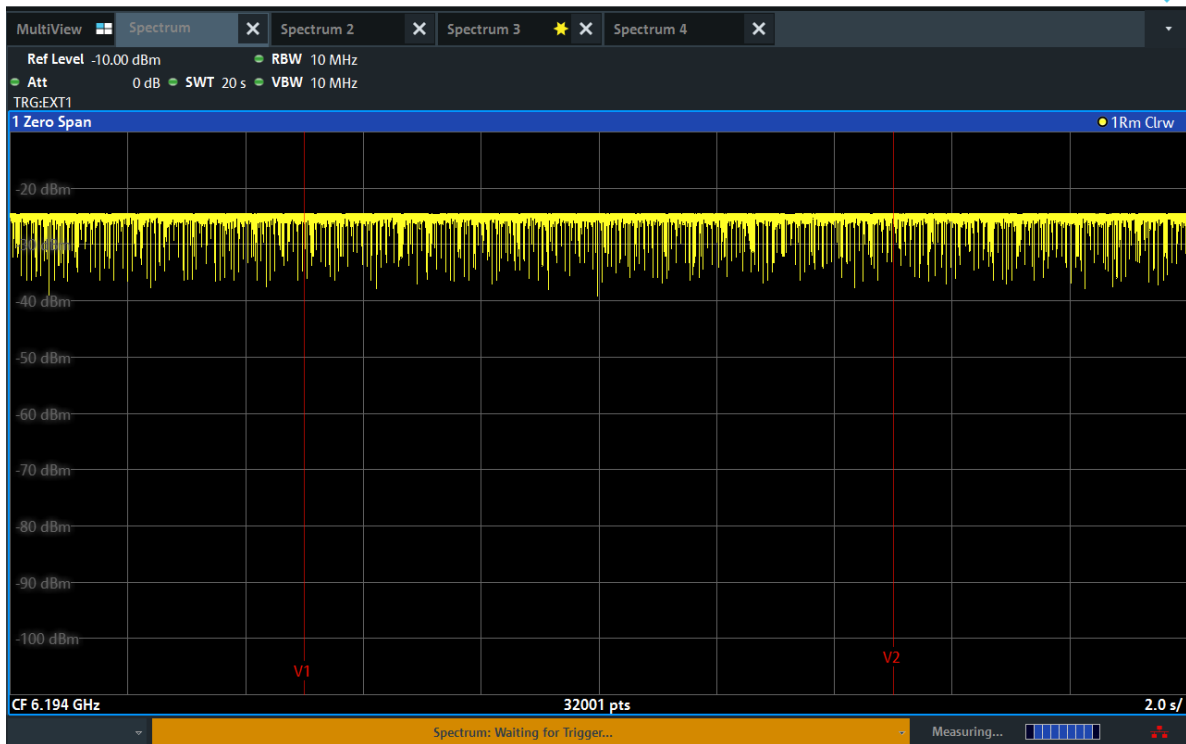


BW: 20 MHz / Frequency: 6474 MHz

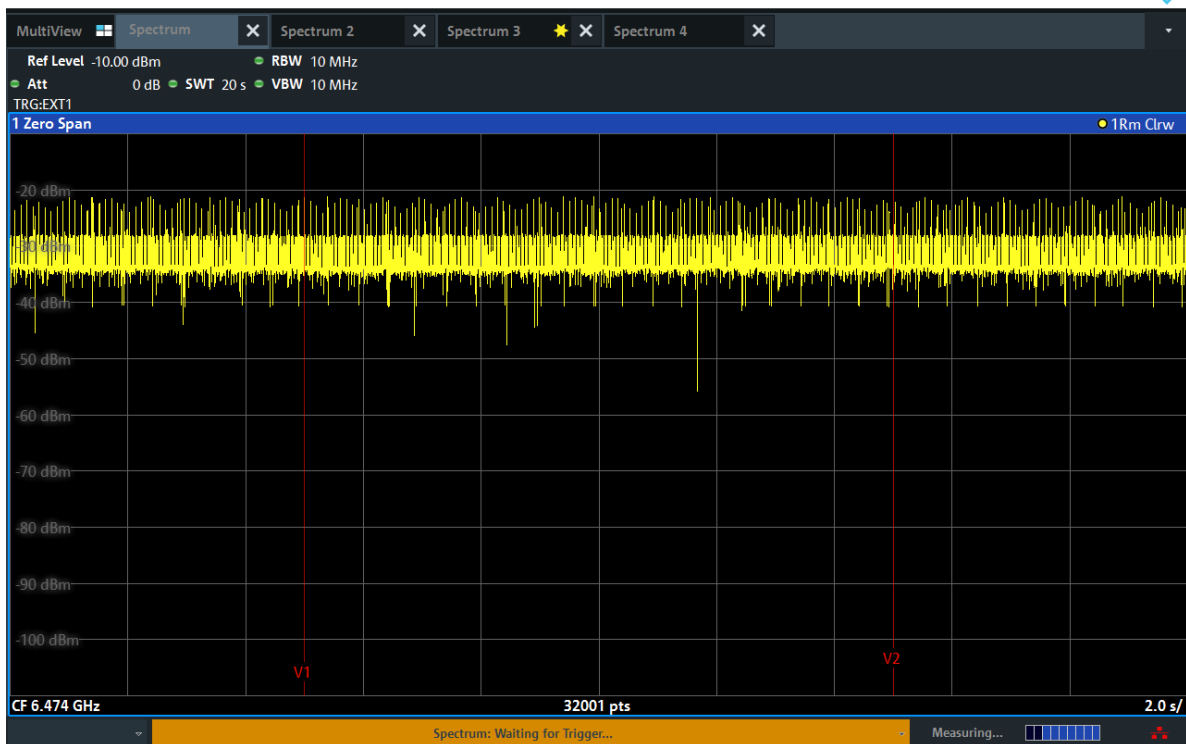

BW: 20 MHz / Frequency: 6694 MHz

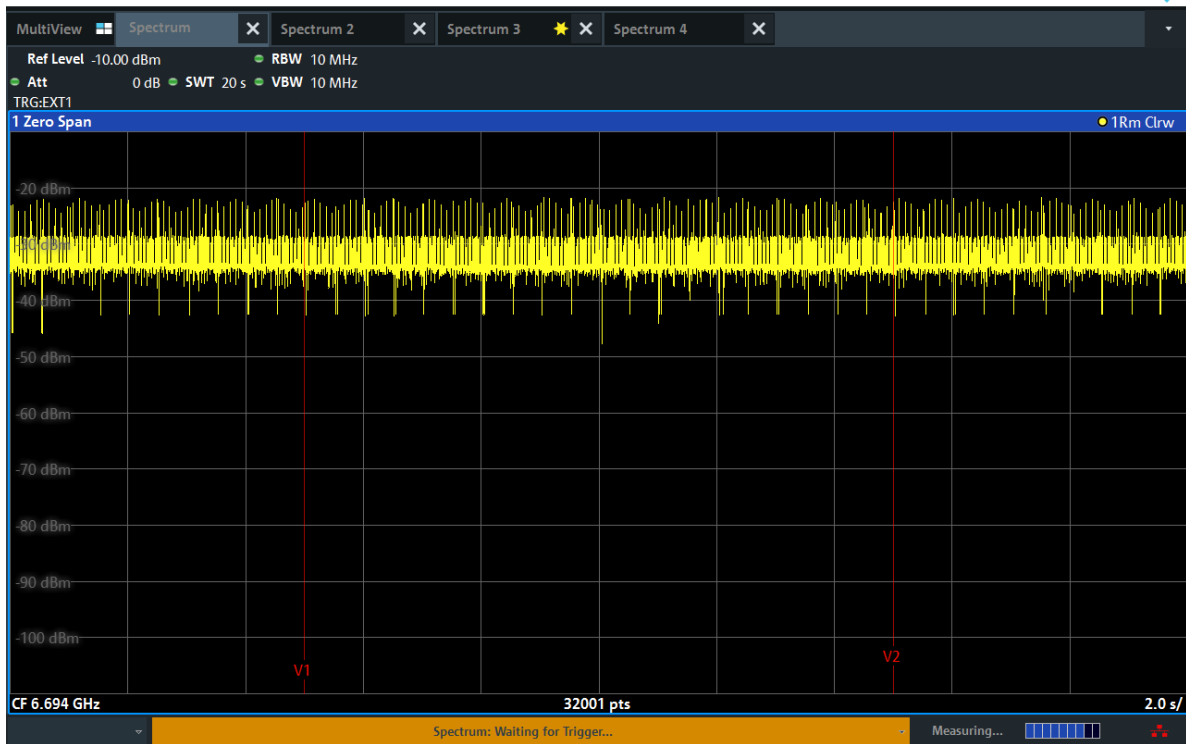

BW: 20 MHz / Frequency: 6994 MHz

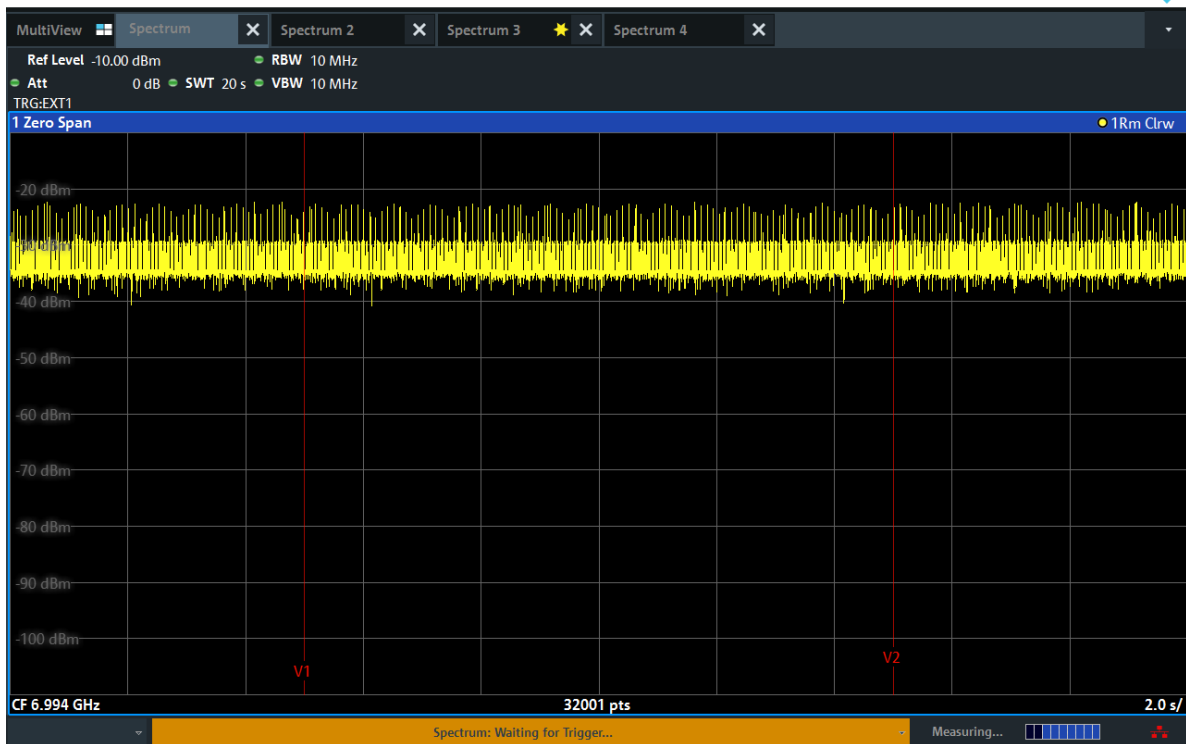

BW: 320 MHz / Frequency: 6260 MHz



BW: 320 MHz / Frequency: 6580 MHz




BW: 320 MHz / Frequency: 6750 MHz




EUT Minimal transmission


BW: 20 MHz / Frequency: 6194 MHz

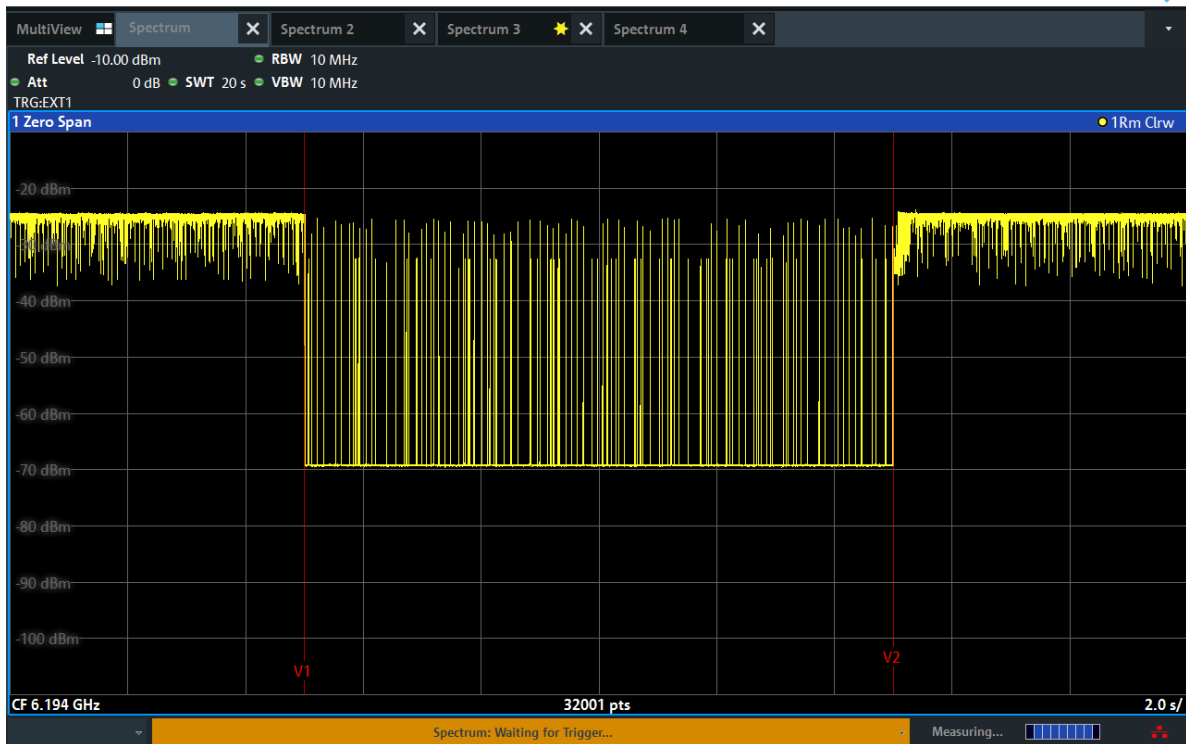


BW: 20 MHz / Frequency: 6474 MHz

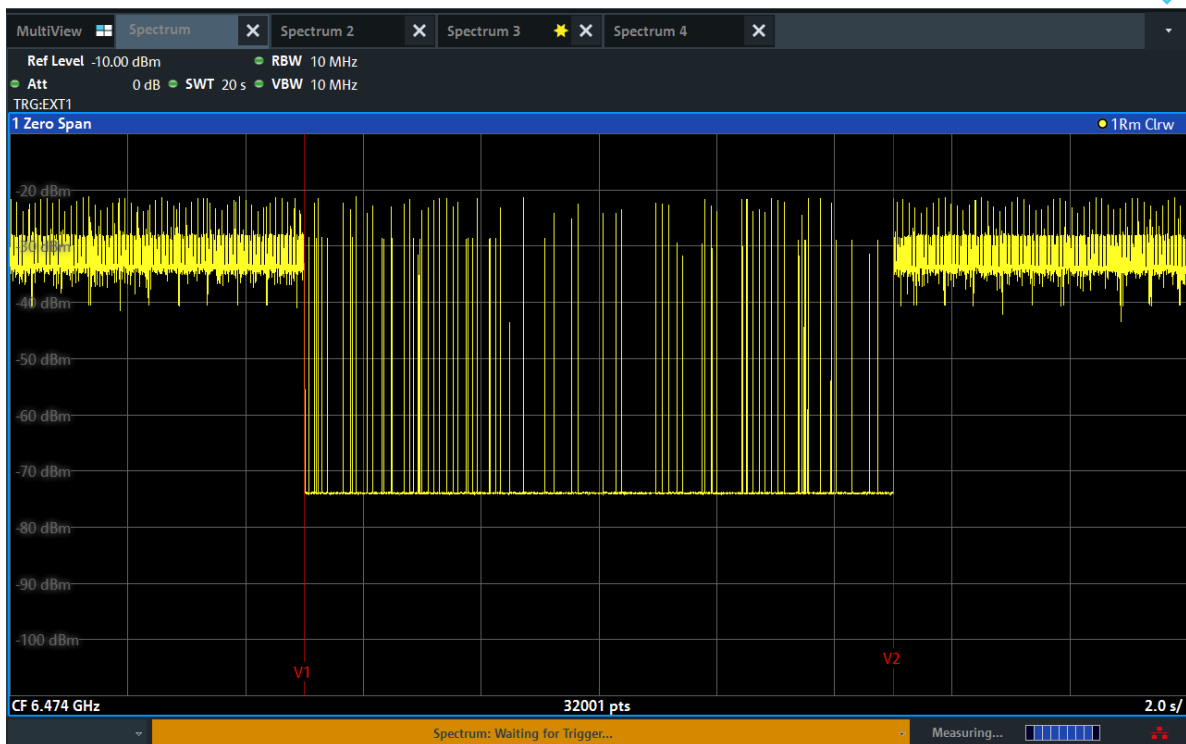

BW: 20 MHz / Frequency: 6694 MHz

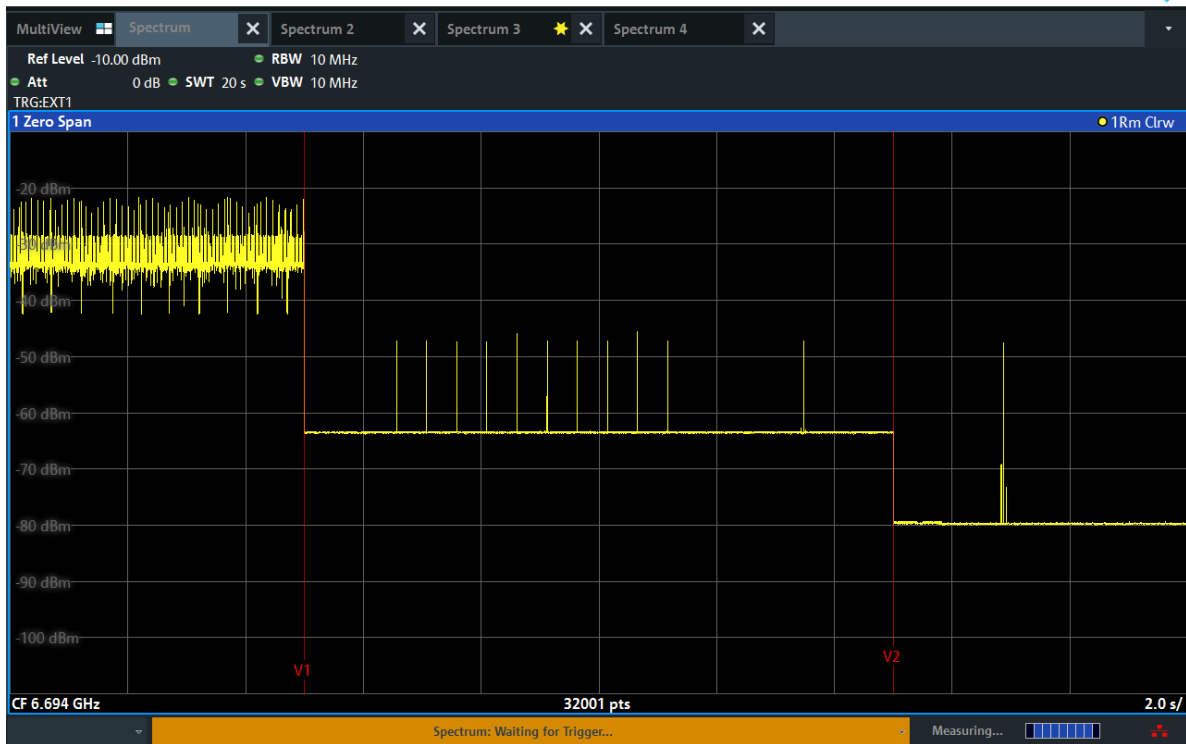

BW: 20 MHz / Frequency: 6994 MHz

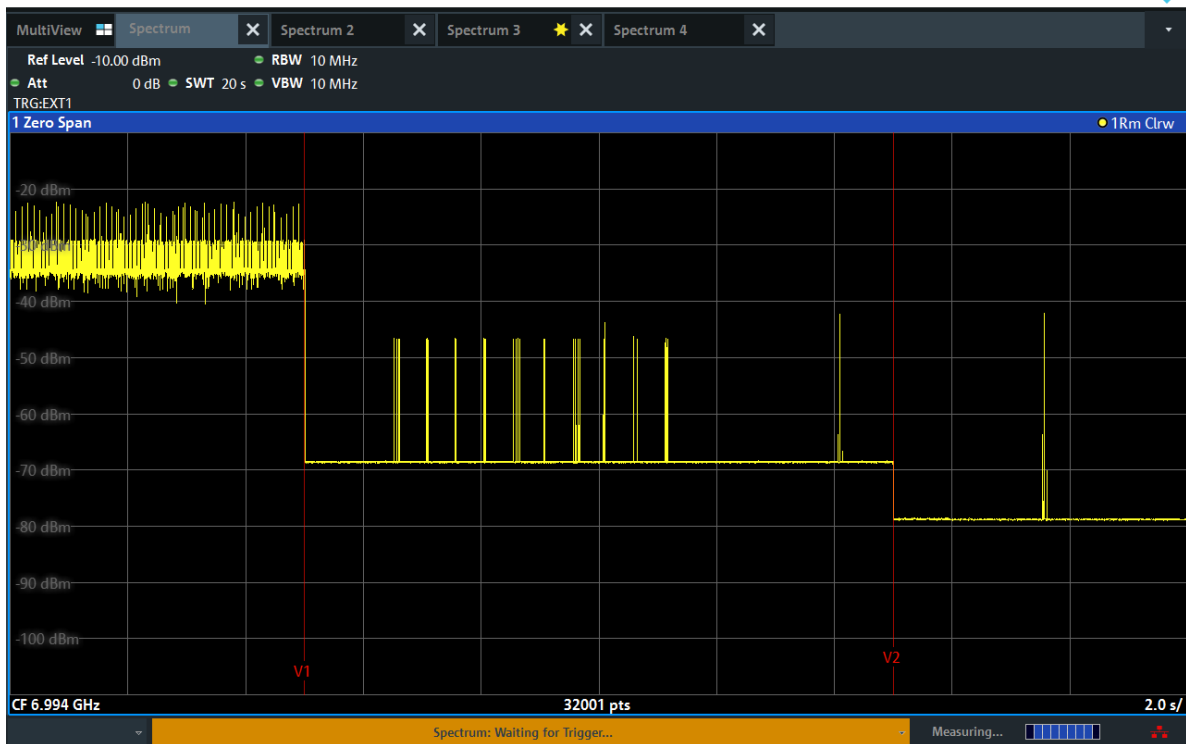

BW: 320 MHz / Frequency: 6260 MHz



BW: 320 MHz / Frequency: 6580 MHz




BW: 320 MHz / Frequency: 6750 MHz




EUT ceased transmission

BW: 20 MHz / Frequency: 6194 MHz

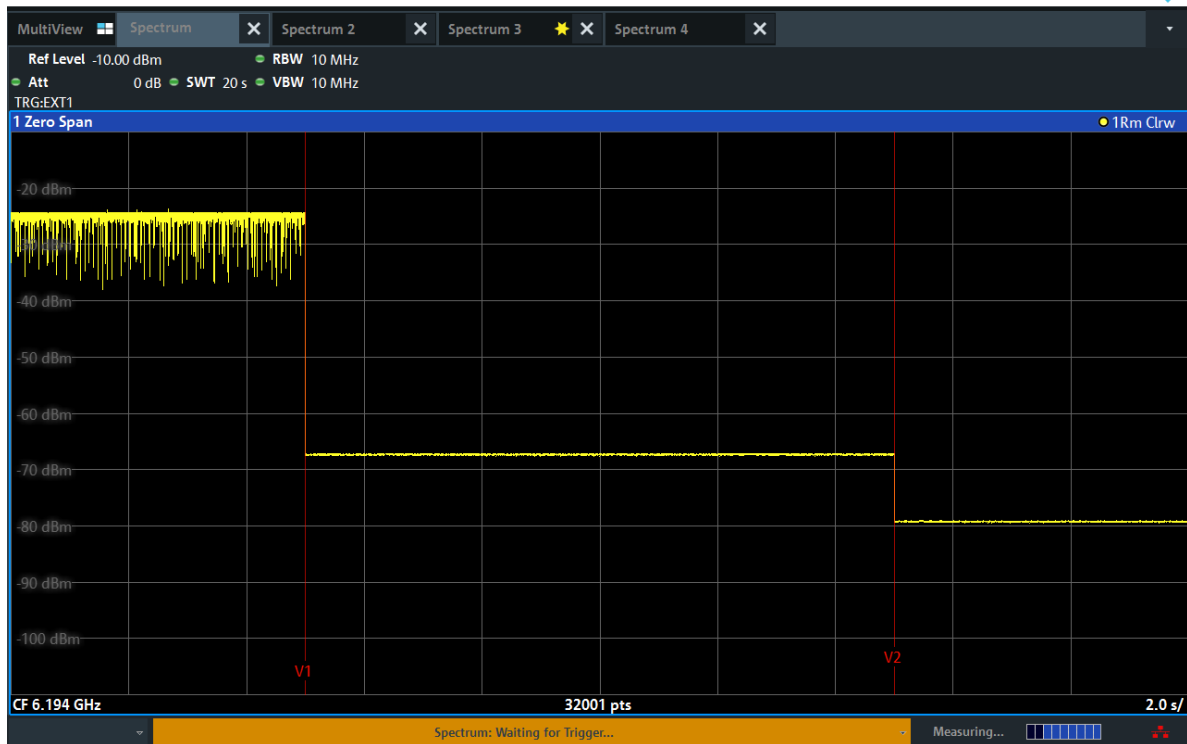


BW: 20 MHz / Frequency: 6474 MHz

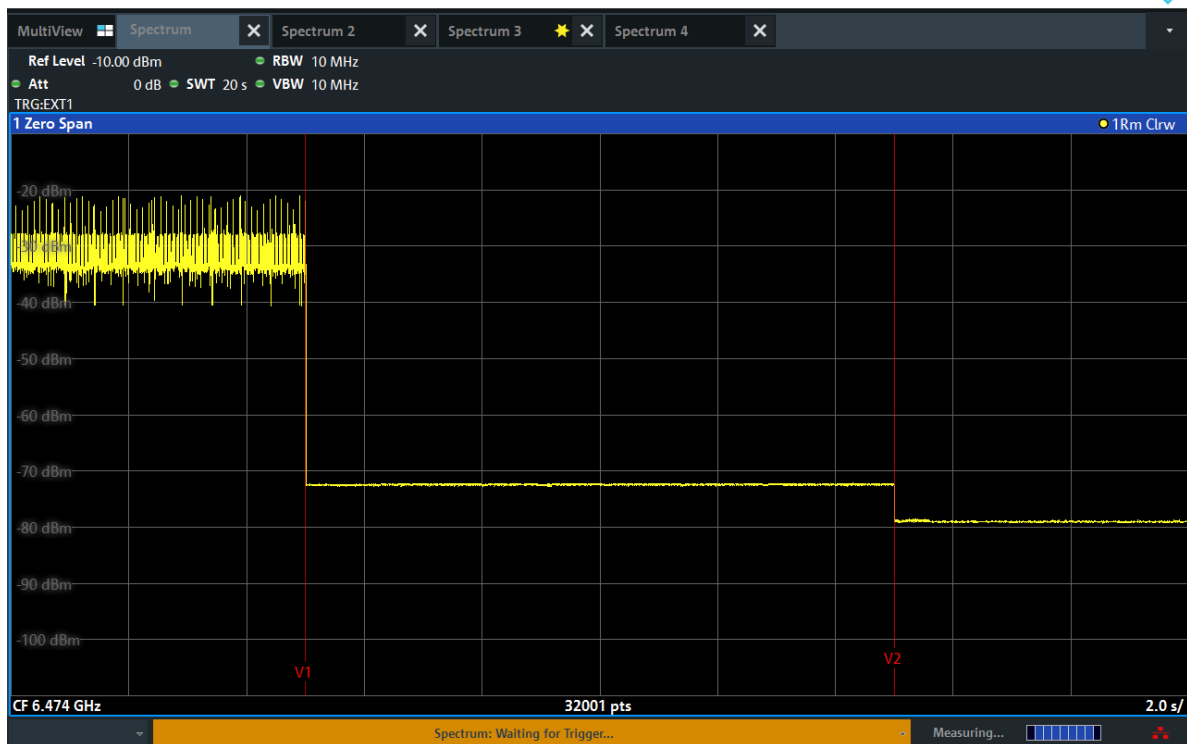


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

BW: 20 MHz / Frequency: 6694 MHz

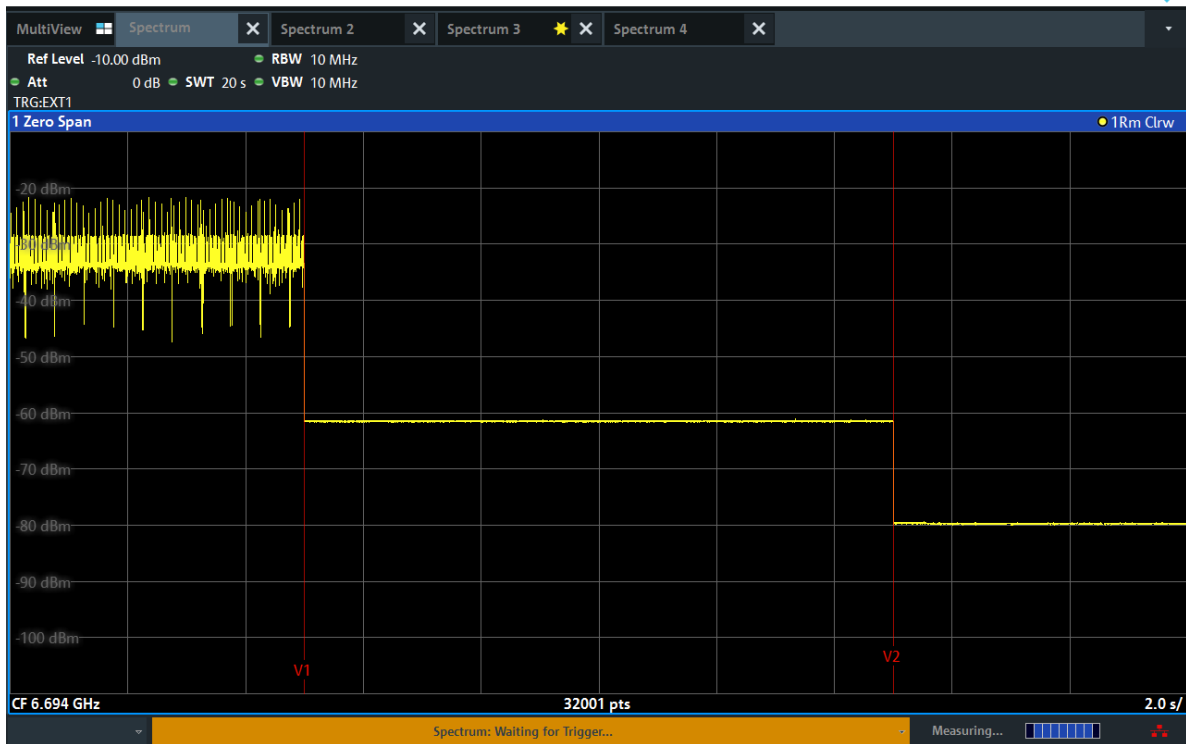


BW: 20 MHz / Frequency: 6994 MHz

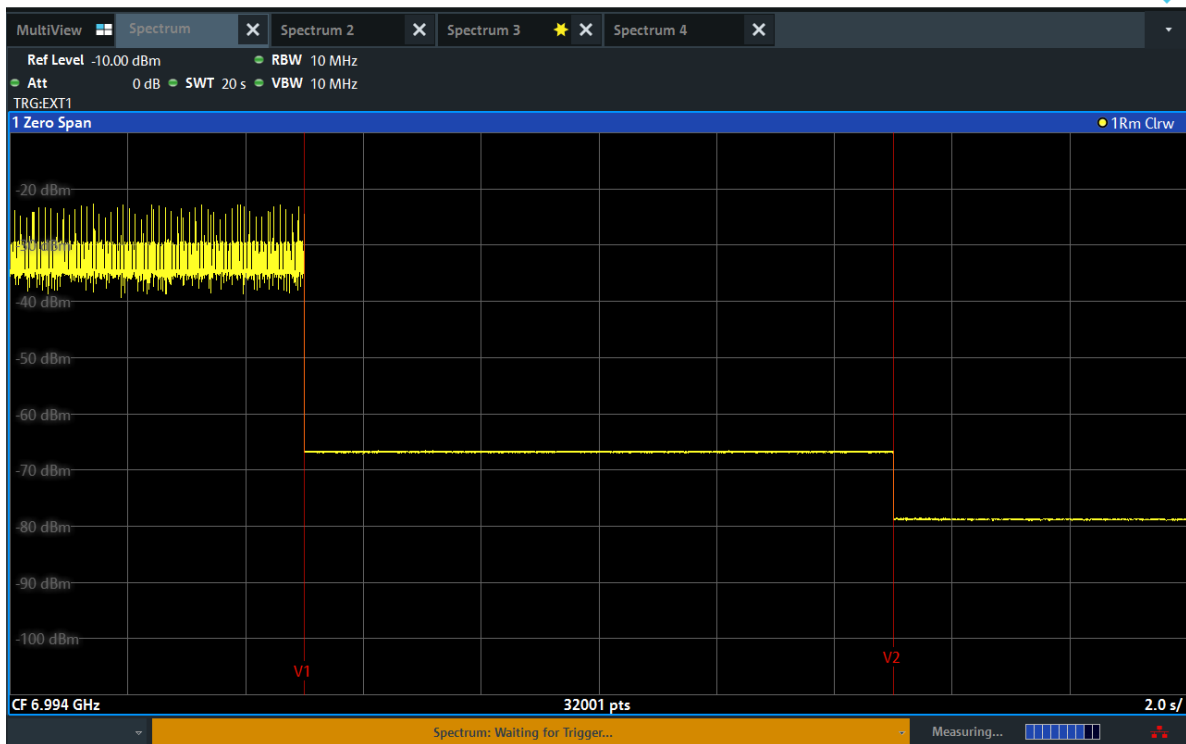


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

BW: 320 MHz / Frequency: 5950 MHz

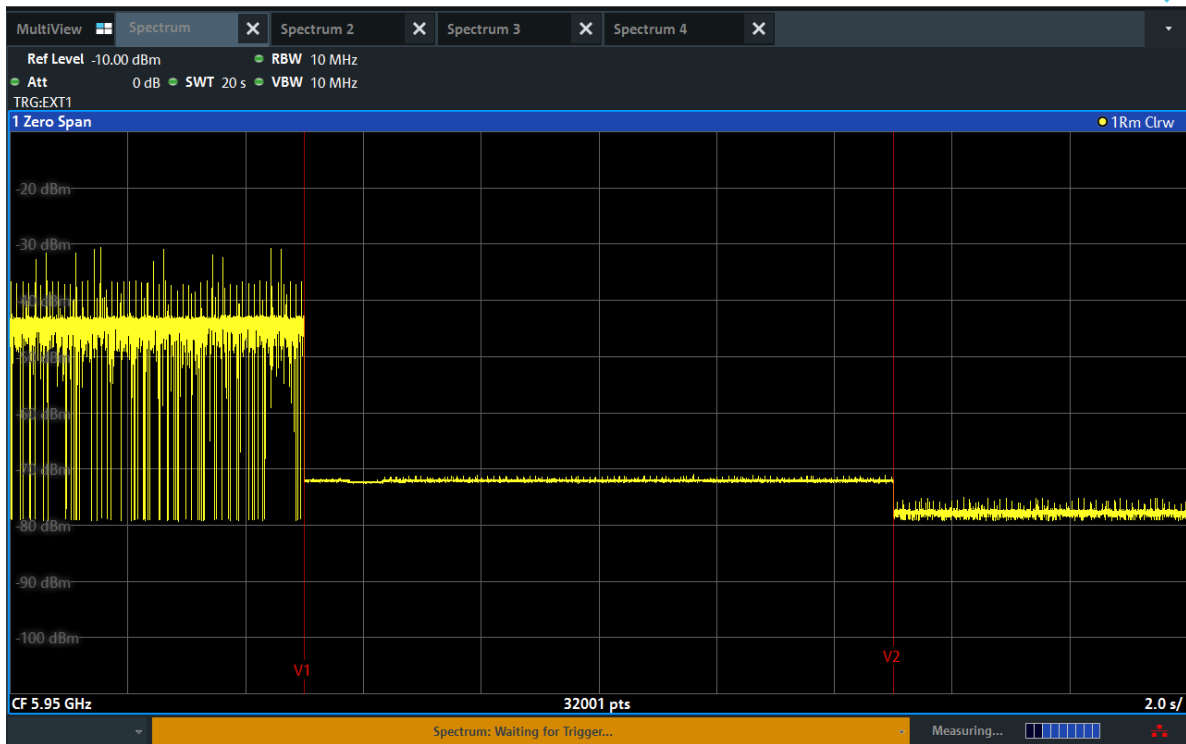

BW: 320 MHz / Frequency: 6110 MHz

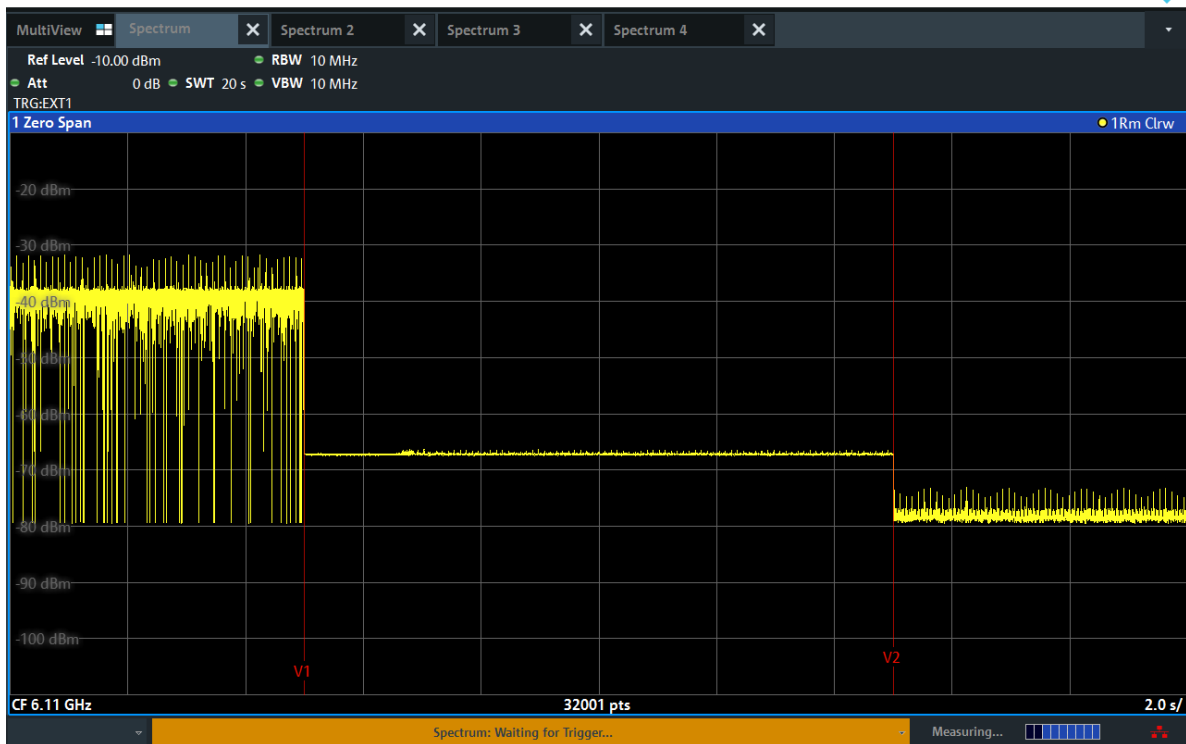

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.