FCC RF Test Report

APPLICANT	:	Motorola Mobility LLC
EQUIPMENT	:	Mobile Cellular Phone
BRAND NAME	:	Motorola
MODEL NAME	:	XT2225-1
FCC ID	:	IHDT56AE5
STANDARD	:	47 CFR Part 2, 22, 24, 27
CLASSIFICATION	:	PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S)	:	Feb. 04, 2022 ~ Mar. 05, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen).

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

Alex wang

Approved by: Alex Wang / Manager

ACCREDITED
Cert #5145.02

Sporton International Inc. (Kunshan)
No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China

TABLE OF CONTENTS

REVISION HISTORY **3**

SUMMARY OF TEST RESULT **4**

1 GENERAL DESCRIPTION **5**

1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 5
1.5 Modification of EUT 6
1.6 Specification of Accessory 6
1.7 Maximum ERP/EIRP Power and Emission Designator 7
1.8 Testing Location 8
1.9 Test Software 9
1.10 Applicable Standards 9

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST **10**

2.1 Test Mode 10
2.2 Connection Diagram of Test System 12
2.3 Support Unit used in test configuration and system 12
2.4 Measurement Results Explanation Example 12
2.5 Frequency List of Low/Middle/High Channels 13

3 CONDUCTED TEST ITEMS **15**

3.1 Measuring Instruments 15
3.2 Test Setup 15
3.3 Test Result of Conducted Test 15
3.4 Conducted Output Power and ERP/EIRP 16
3.5 Peak-to-Average Ratio 17
3.6 Occupied Bandwidth 18
3.7 Conducted Band Edge 19
3.8 Conducted Spurious Emission 21
3.9 Frequency Stability 22

4 RADIATED TEST ITEMS **23**

4.1 Measuring Instruments 23
4.2 Test Setup 23
4.3 Test Result of Radiated Test 24
4.4 Radiated Spurious Emission 25

5 LIST OF MEASURING EQUIPMENT **26**

6 UNCERTAINTY OF EVALUATION **27**

APPENDIX A. TEST RESULTS OF CONDUCTED TEST

APPENDIX B. TEST RESULTS OF RADIATED TEST

APPENDIX C. TEST SETUP PHOTOGRAPHS

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG212701G	Rev. 01	Initial issue of report	Mar. 21, 2022

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(5)	Effective Radiated Power (5G NR n5)	ERP < 7 Watt		
	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (5G NR n2) (5G NR n7)	EIRP < 2Watt		
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (5G NR n66)	EIRP < 1Watt		
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Band Edge Measurement (5G NR n5) (5G NR n2) (5G NR n66)	< 43+10log10(P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (5G NR n7)	§27.53(m)(4)		
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Spurious Emission (5G NR n5) (5G NR n2) (5G NR n66)	< 43+10log10(P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (5G NR n7)	< 55+10$\log_{10}$(P[Watts])		
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Radiated Spurious Emission (5G NR n5) (5G NR n2) (5G NR n66)	< 43+10$\log_{10}$(P[Watts])	PASS	Under limit 5.58 dB at 7584.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (5G NR n7)	< 55+10$\log_{10}$(P[Watts])		

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2225-1
FCC ID	IHDT56AE5
IMEI Code	Radiation: 357895300018167 Conducted: 350714860021197
HW Version	DVT2
SW Version	S1SU32.41
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz
Rx Frequency	5G NR n2 : 1930 MHz ~ 1990 MHz 5G NR n5 : 869 MHz ~ 894 MHz 5G NR n7 : 2620 MHz ~ 2690 MHz 5G NR n66 : 2110 MHz~ 2200 MHz
Bandwidth	n2, n5: 5MHz / 10MHz / 15MHz / 20MHz n7: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz n66: 5MHz / 10MHz / 15MHz / 20MHz / 30MHz / 40MHz
Antenna Gain	**<Ant. 0>:** 5G NR n2: 1.5 dBi 5G NR n5: -2.0 dBi **<Ant. 1>:** 5G NR n7: -2.5 dBi 5G NR n66: -2.0 dBi **<Ant. 5>:** 5G NR n7: 0.8 dBi

Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The device supports SA mode for 5G NR n7 and NSA mode for 5G NR n2/n5/n7/n66. For n7, the whole testing has assessed SA mode by referring to the higher conducted power for conducted test items.
2. The maximum ERP/EIRP is calculated from max output power and max antenna gain, so only the maximum ERP/EIRP (Antenna 0) for n2/n5, Antenna 1 for n66 and Antenna5 for n7 are shown in the report
3. The EN-DC combinations declared by the manufacturer are as follows: DC_66A_n2A, DC_7A_n5A, DC_66A_n5A, DC_2A_n7A, DC_5A_n7A, DC_66A_n7A, DC_2A_n66A, DC_5A_n66A and DC_7A_n66A.
4. For NSA mode of all EN-DC combination, we only show the combination of the maximum power among all NSA combinations in the report.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	**Brand Name**	Motorola (Salcomp)	**Model Name**	MC-331
AC Adapter 1(EU)	**Brand Name**	Motorola (Salcomp)	**Model Name**	MC-332
AC Adapter 1(UK)	**Brand Name**	Motorola (Salcomp)	**Model Name**	MC-333
AC Adapter 1(IN)	**Brand Name**	Motorola (Salcomp)	**Model Name**	MC-334
AC Adapter 1(AU)	**Brand Name**	Motorola (Salcomp)	**Model Name**	MC-335
AC Adapter 1(AR)	**Brand Name**	Motorola (Salcomp)	**Model Name**	MC-336
AC Adapter 1(BR)	**Brand Name**	Motorola (Salcomp)	**Model Name**	MC-337
AC Adapter 1(CHILE)	**Brand Name**	Motorola (Salcomp)	**Model Name**	MC-339
AC Adapter 2(US)	**Brand Name**	Motorola (Acbel)	**Model Name**	MC-331
AC Adapter 2(EU)	**Brand Name**	Motorola (Acbel)	**Model Name**	MC-332
AC Adapter 2(UK)	**Brand Name**	Motorola (Acbel)	**Model Name**	MC-333
AC Adapter 3(US)	**Brand Name**	Motorola (Aohai)	**Model Name**	MC-331
AC Adapter 3(EU)	**Brand Name**	Motorola (Aohai)	**Model Name**	MC-332
AC Adapter 3(UK)	**Brand Name**	Motorola (Aohai)	**Model Name**	MC-333
Battery 1	**Brand Name**	Motorola (Sunwoda)	**Model Name**	NE50
Battery 2	**Brand Name**	Motorola (ATL)	**Model Name**	NE50
Earphone 1	**Brand Name**	Motorola (NEW LEADER)	**Model Name**	NLD-EM313A-09SF
Earphone 2	**Brand Name**	Motorola (LYAND ACOUSTIC)	**Model Name**	LYM239-76C-006
Earphone 3	**Brand Name**	Motorola(LYAND ACOUSTIC)	**Model Name**	LYM528-76C-001
Earphone 4	**Brand Name**	Motorola(NEW LEADER)	**Model Name**	NLD-EM313A-19SF
Earphone 5	**Brand Name**	Motorola(LCHSE)	**Model Name**	MH191
Earphone 6	**Brand Name**	Motorola(LYAND)	**Model Name**	MH191
USB Cable 1	**Brand Name**	Motorola(Salbao)	**Model Name**	SHQ-A110A
USB Cable 2	**Brand Name**	Motorola(KINGPOWER)	**Model Name**	K235-07760-H0

1.7 Maximum ERP/EIRP Power and Emission Designator

5G NR n2 NSA (EN DC_66A-n2A)		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1852.5 ~ 1907.5	0.3033	4M47G7D	0.2512	4M48W7D
10	1855.0 ~ 1905.0	0.3133	9M28G7D	0.2495	9M30W7D
15	1857.5 ~ 1902.5	0.2972	14M1G7D	0.2399	14M1W7D
20	1860.0 ~ 1900.0	0.2979	18M9G7D	0.2421	19M0W7D

5G NR n5 NSA (EN DC_7A-n5A)		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	826.5 ~ 846.5	0.0906	4M47G7D	0.0706	4M48W7D
10	829.0 ~ 844.0	0.0893	9M26G7D	0.0695	9M27W7D
15	831.5 ~ 841.5	0.0891	14M1G7D	0.0685	14M1W7D
20	834.0 ~ 839.0	0.0875	18M9G7D	0.0684	18M9W7D

5G NR n7 SA		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	2502.5 ~ 2567.5	0.2897	4M48G7D	0.2259	4M49W7D
10	2505.0 ~ 2565.0	0.2877	9M27G7D	0.2270	9M28W7D
15	2507.5 ~ 2562.5	0.2729	14M1G7D	0.2234	14M1W7D
20	2510.0 ~ 2560.0	0.2799	18M9G7D	0.2234	18M9W7D
25	2512.5 ~ 2557.5	0.2884	23M7G7D	0.2270	23M7W7D
30	2515.0 ~ 2555.0	0.2891	28M6G7D	0.2291	28M6W7D
40	2520.0 ~ 2550.0	0.2844	38M5G7D	0.2323	38M6W7D

5G NR n66 NSA (EN DC_2A-n66A		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1712.5 ~ 1777.5	0.1256	4M48G7D	0.1014	4M48W7D
10	1715.0 ~ 1775.0	0.1265	9M28G7D	0.1000	9M29W7D
15	1717.5 ~ 1772.5	0.1253	14M1G7D	0.0977	14M1W7D
20	1720.0 ~ 1770.0	0.1227	18M9G7D	0.0957	19M0W7D
30	1725.0 ~ 1765.0	0.1205	28M5G7D	0.0955	28M6W7D
40	1730.0 ~ 1760.0	0.1202	38M6G7D	0.0942	38M5W7D

Note: All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.8 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	**Sporton Site No.**	**FCC Designation No.**	**FCC Test Firm Registration No.**
	03CH02-KS	CN1257	314309

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	**Sporton Site No.**	**FCC Designation No.**	**FCC Test Firm Registration No.**
	TH01-SZ	CN1256	421272

Test data subcontracted: Conducted test case in section 3 of this report.

1.9 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a

1.10 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22, 24, 27
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane

Test Items	5G NR	Bandwidth (MHz)							Modulation					RB #		Test Channel		
		5	10	15	20	25	30	40	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H
Max. Output Power	n2	v	v	v	v	-	-	-	v	v	v	v	v	v	v	v	v	v
	n5	v	v	v	v	-	-	-	v	v	v	v	v	v	v	v	v	v
	n7	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n66	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n2				v	-	-	-	v	v				v	v	v	v	v
	n5				v	-	-	-	v	v				v	v	v	v	v
	n7				v				v	v				v	v	v	v	v
	n66				v	-			v	v				v	v	v	v	v
26dB and 99% Bandwidth	n2	v	v	v	v	-	-	-	v	v	v	v	v		v		v	
	n5	v	v	v	v	-	-	-	v	v	v	v	v		v		v	
	n7	v	v	v	v	v	v	v	v	v	v	v	v		v		v	
	n66	v	v	v	v	-	v	v	v	v	v	v	v		v		v	

Test Items	5G NR	Bandwidth (MHz)							Modulation					RB #		Test Channel		
		5	10	15	20	25	30	40	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H
Conducted Band Edge	n2	v	v		v	-	-	-	v	v				v	v	v		v
	n5	v	v		v	-	-	-	v	v				v	v	v		v
	n7	v			v			v	v	v				v	v	v		v
	n66	v			v	-		v	v	v				v	v	v		v
Conducted Spurious Emission	n2	v	v		v	-	-	-	v	v				v		v	v	v
	n5	v	v		v	-	-	-	v	v				v		v	v	v
	n7	v			v			v	v	v				v		v	v	v
	n66	v			v	-		v	v	v				v		v	v	v
Frequency Stability	n2				v	-	-	-		v					v		v	
	n5				v	-	-	-		v					v		v	
	n7				v					v					v		v	
	n66				v	-				v					v		v	
E.R.P / E.R.P / E.I.R.P	n2	v	v	v	v	-	-	-	v	v	v	v	v	v	v	v	v	v
	n5	v	v	v	v	-	-	-	v	v	v	v	v	v	v	v	v	v
	n7	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n66	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	n2	Worst Case															v	
	n5	Worst Case															v	
	n7	Worst Case															v	
	n66	Worst Case															v	
Note	1. The mark "**v** " means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Based on engineering evaluation, only the worst modulations test results are shown in the report. 5. Frequency Stability：Normal Voltage = 3.87V ; Low Voltage =3.5V. ; High Voltage =4.45V																	

2.2 Connection Diagram of Test System

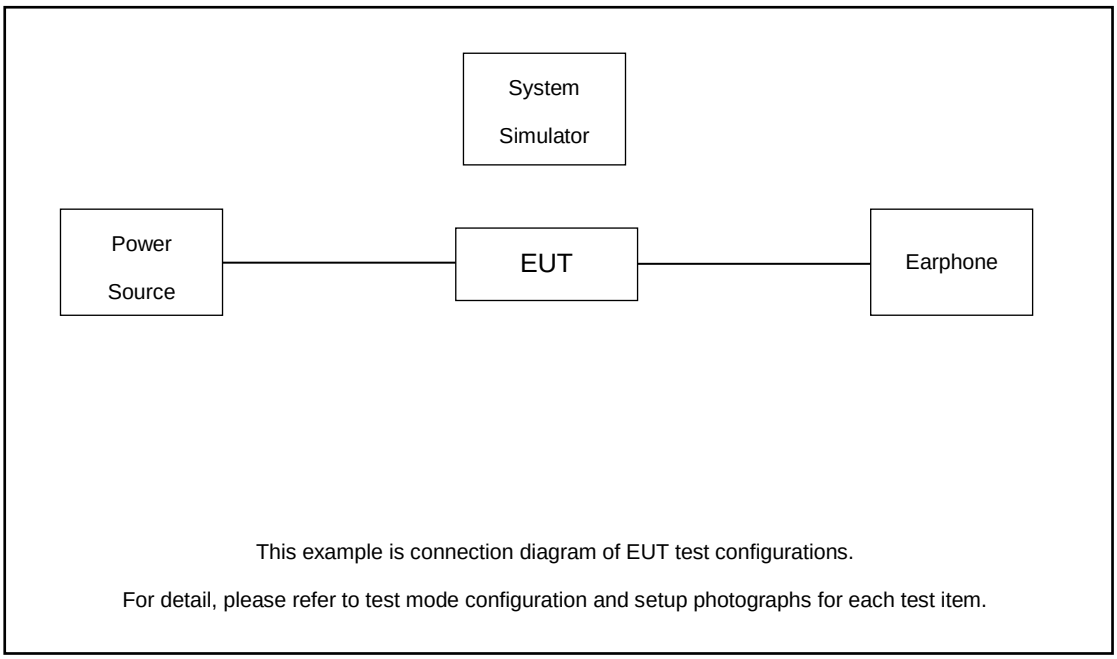

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820/8821	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 8.1 dB.

Example :

Offset(dB) = RF cable loss(dB).

= 8.1 (dB)

2.5 Frequency List of Low/Middle/High Channels

5G NR n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	388000	392000	396000
	Frequency	1860	1880	1900
15	Channel	387500	392000	396500
	Frequency	1857.5	1880	1902.5
10	Channel	387000	392000	397000
	Frequency	1855	1880	1905
5	Channel	386500	392000	397500
	Frequency	1852.5	1880	1907.5

5G NR n5 Channel and Frequency List for				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	175800	176300	176800
	Frequency	834	836.5	839
15	Channel	175300	176300	177300
	Frequency	831.5	836.5	841.5
10	Channel	174800	176300	177800
	Frequency	829	836.5	844
5	Channel	174300	176300	178300
	Frequency	826.5	836.5	846.5

5G NR n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	528000	531000	534000
	Frequency	2520	2535	2550
30	Channel	527000	531000	535000
	Frequency	2515	2535	2555
25	Channel	526500	531000	535500
	Frequency	2512.5	2535	2557.5
20	Channel	526000	531000	536000
	Frequency	2510	2535	2560
15	Channel	525500	531000	536500
	Frequency	2507.5	2535	2562.5
10	Channel	525000	531000	537000
	Frequency	2505	2535	2565
5	Channel	524500	531000	537500
	Frequency	2502.5	2535	2567.5

5G NR n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	426000	429000	432000
	Frequency	1730	1745	1760
30	Channel	425000	429000	433000
	Frequency	1725	1745	1765
20	Channel	424000	429000	434000
	Frequency	1720	1745	1770
15	Channel	423500	429000	434500
	Frequency	1717.5	1745	1772.5
10	Channel	423000	429000	435000
	Frequency	1715	1745	1775
5	Channel	422500	429000	435500
	Frequency	1712.5	1745	1777.5

3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power

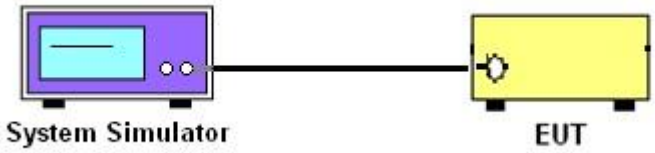

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

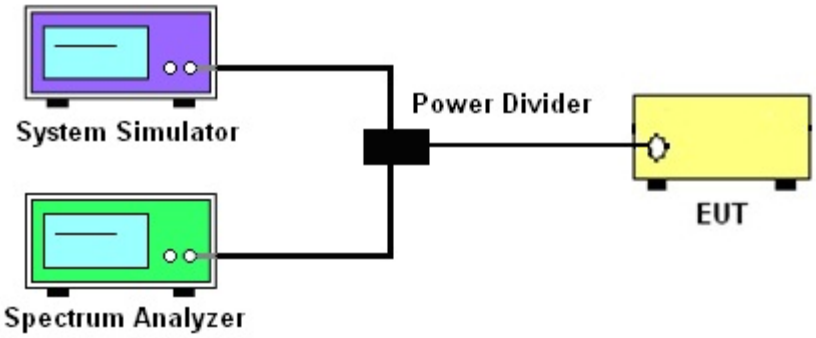

3.2.3 Frequency Stability

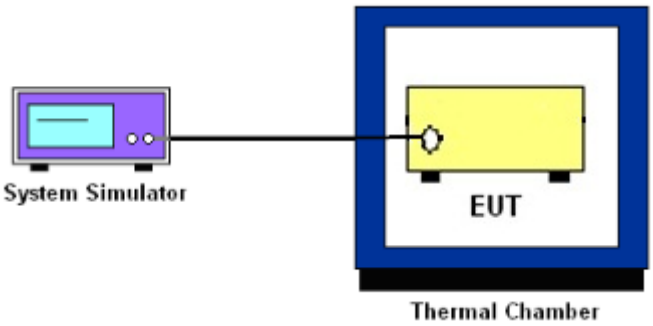

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n2, n7.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n66.

According to KDB 412172 D01 Power Approach,

EIRP = $P_T + G_T – L_C$, ERP = EIRP -2.15, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
   (this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “–X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is 43 + $10\log_{10}$(P[Watts]) dB below the transmitter power P(Watts) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is 43 + $10\log_{10}$(P[Watts]) dB below the transmitter power P(Watts) in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h)

For operations in the 1710 – 1780 MHz band, the FCC limit is 43 + $10\log_{10}$(P[Watts]) dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW >= 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

   Example:

   The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

   = P(W)- [43 + 10log(P)] (dB)

   = [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB) = -13dBm.
9. For 5G NR n7, the other 40 dB, and 55 dB have additionally applied same calculation above.
10. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

For 5G NR n7:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 55 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)
    = P(W)- [43 + 10log(P)] (dB)
    = [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)
    = -13dBm.
11. For 5G NR n7
    The limit line is derived from 55 + 10log(P)dB below the transmitter power P(Watts)
    = P(W)- [55+ 10log(P)] (dB)
    = [30+ 10log(P)] (dBm) - [55+ 10log(P)] (dB)
    = -25dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

4 Radiated Test Items

4.1 Measuring Instruments

See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test below 30MHz

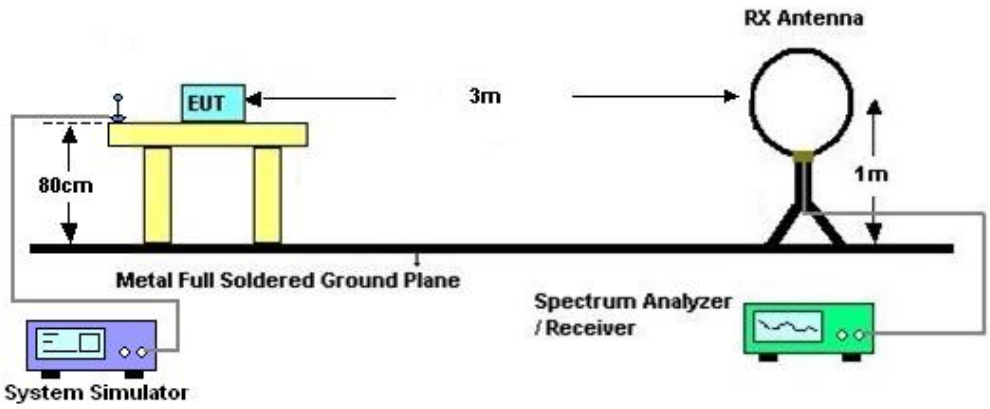

4.2.2 For radiated test from 30MHz to 1GHz

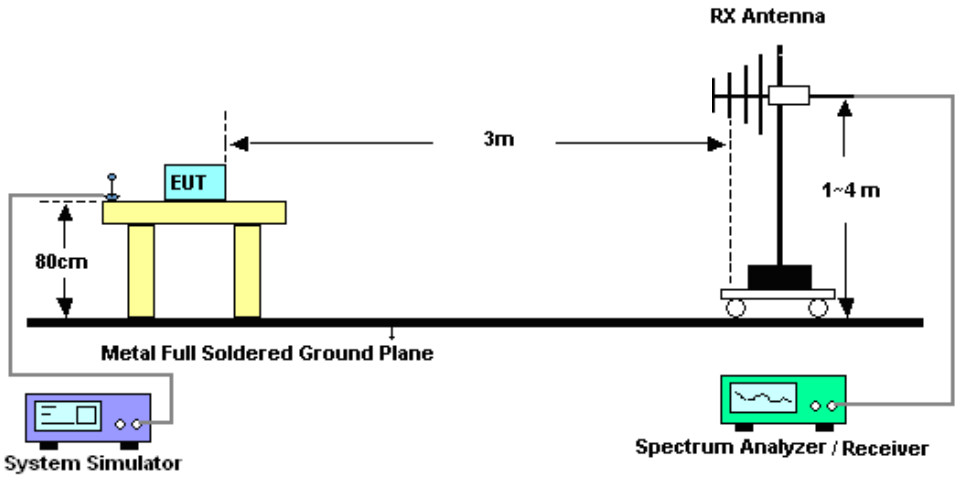

4.2.3 For radiated test above 1GHz

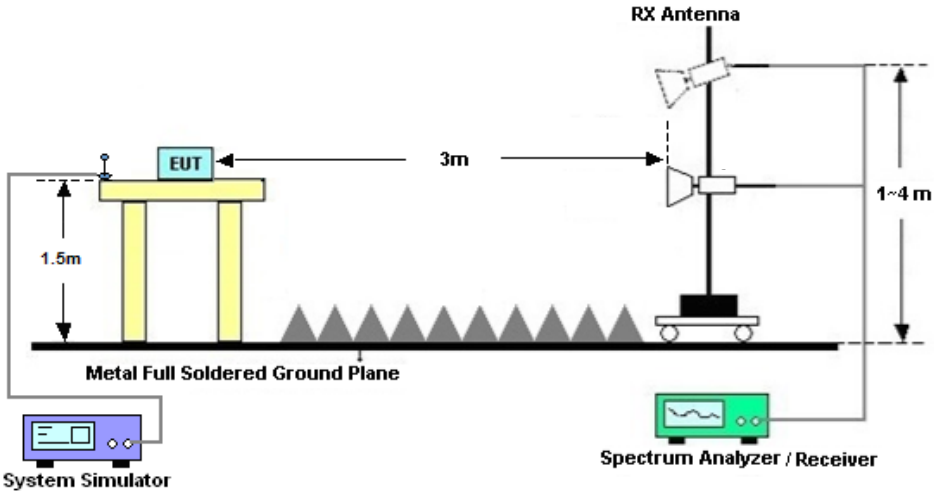

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

For 5G NR n7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 55 + 10 log (P) dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
11. ERP (dBm) = EIRP - 2.15
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
    The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)
    = P(W)- [43 + 10log(P)] (dB)
    = [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)
    = -13dBm.
13. For 5G NR n7:
    The limit line is derived from 55 + 10log(P)dB below the transmitter power P(Watts)The limit line is derived from 55 + 10log(P)dB below the transmitter power P(Watts)

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Signal Analyzer	KEYSIGHT	N9010B	MY60240803	10Hz~44GHz	Apr. 03, 2021	Feb. 04, 2022~ Feb. 21, 2022	Apr. 02, 2022	Conducted (TH01-SZ)
Power divider	STI	STI08-0055	-	0.5~40GHz	Aug. 26, 2021	Feb. 04, 2022~ Feb. 21, 2022	Aug. 25, 2022	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 14, 2021	Feb. 04, 2022~ Feb. 21, 2022	Jul. 13, 2022	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct, 16, 2021	Mar. 05, 2022	Oct, 15,2022	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44G,MAX 30dB	Oct, 16, 2021	Mar. 05, 2022	Oct, 15,2022	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Mar. 05, 2022	Oct. 29, 2022	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 22, 2021	Mar. 05, 2022	Dec. 21, 2022	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 30, 2021	Mar. 05, 2022	Oct. 29, 2022	Radiation (03CH02-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	2025788	1Ghz-18Ghz	Jul. 30, 2021	Mar. 05, 2022	Jul. 29, 2023	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Mar. 05, 2022	Jan. 04, 2023	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Apr. 13, 2021	Mar. 05, 2022	Apr. 12, 2022	Radiation (03CH02-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct, 16, 2021	Mar. 05, 2022	Oct, 15,2022	Radiation (03CH02-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 05, 2022	Mar. 05, 2022	Jan. 04, 2023	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Mar. 05, 2022	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Mar. 05, 2022	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Mar. 05, 2022	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required

6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**2.5dB**

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**2.1dB**

---------- THE END ----------

Appendix A. Test Results of Conducted Test

Test Engineer :	Jung Guo	**Temperature :**	22~23℃
		Relative Humidity :	40~42%

Software Version: 22.02.012503

FR1 N2<Ant. 0>

LTE Band: 66, LTE BW: 10M, LTE ARFCN: 66886

Transmitter Conducted Output Power And EIRP, (G_T-L_C)=1.5dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
2	15	5	386500	1852.5	DFT-s-OFDM PI/2 BPSK	12@6	22.94	24.44	0.2780
2	15	5	386500	1852.5	DFT-s-OFDM PI/2 BPSK	1@1	22.92	24.42	0.2767
2	15	5	386500	1852.5	DFT-s-OFDM PI/2 BPSK	1@23	22.97	24.47	0.2799
2	15	5	386500	1852.5	DFT-s-OFDM QPSK	12@6	22.97	24.47	0.2799
2	15	5	386500	1852.5	DFT-s-OFDM QPSK	1@1	22.93	24.43	0.2773
2	15	5	386500	1852.5	DFT-s-OFDM QPSK	1@23	23.02	24.52	0.2831
2	15	5	386500	1852.5	DFT-s-OFDM 16 QAM	12@6	22.15	23.65	0.2317
2	15	5	386500	1852.5	DFT-s-OFDM 16 QAM	1@1	22.03	23.53	0.2254
2	15	5	386500	1852.5	DFT-s-OFDM 16 QAM	1@23	22.09	23.59	0.2286
2	15	5	386500	1852.5	DFT-s-OFDM 64 QAM	12@6	20.68	22.18	0.1652
2	15	5	386500	1852.5	DFT-s-OFDM 64 QAM	1@1	20.73	22.23	0.1671
2	15	5	386500	1852.5	DFT-s-OFDM 64 QAM	1@23	20.79	22.29	0.1694
2	15	5	386500	1852.5	DFT-s-OFDM 256 QAM	12@6	18.56	20.06	0.1014
2	15	5	386500	1852.5	DFT-s-OFDM 256 QAM	1@1	17.96	19.46	0.0883
2	15	5	386500	1852.5	DFT-s-OFDM 256 QAM	1@23	18.09	19.59	0.0910
2	15	5	386500	1852.5	CP-OFDM QPSK	13@6	21.54	23.04	0.2014
2	15	5	386500	1852.5	CP-OFDM QPSK	1@1	21.51	23.01	0.2000
2	15	5	386500	1852.5	CP-OFDM QPSK	1@23	21.61	23.11	0.2046
2	15	5	392000	1880	DFT-s-OFDM PI/2 BPSK	12@6	23.09	24.59	0.2877
2	15	5	392000	1880	DFT-s-OFDM PI/2 BPSK	1@1	23.07	24.57	0.2864
2	15	5	392000	1880	DFT-s-OFDM PI/2 BPSK	1@23	23.13	24.63	0.2904
2	15	5	392000	1880	DFT-s-OFDM QPSK	12@6	23.12	24.62	0.2897
2	15	5	392000	1880	DFT-s-OFDM QPSK	1@1	23.12	24.62	0.2897
2	15	5	392000	1880	DFT-s-OFDM QPSK	1@23	23.19	24.69	0.2944
2	15	5	392000	1880	DFT-s-OFDM 16 QAM	12@6	22.33	23.83	0.2415
2	15	5	392000	1880	DFT-s-OFDM 16 QAM	1@1	22.18	23.68	0.2333
2	15	5	392000	1880	DFT-s-OFDM	1@23	22.26	23.76	0.2377

					16 QAM				
2	15	5	392000	1880	DFT-s-OFDM 64 QAM	12@6	20.81	22.31	0.1702
2	15	5	392000	1880	DFT-s-OFDM 64 QAM	1@1	20.86	22.36	0.1722
2	15	5	392000	1880	DFT-s-OFDM 64 QAM	1@23	20.92	22.42	0.1746
2	15	5	392000	1880	DFT-s-OFDM 256 QAM	12@6	18.71	20.21	0.1050
2	15	5	392000	1880	DFT-s-OFDM 256 QAM	1@1	18.13	19.63	0.0918
2	15	5	392000	1880	DFT-s-OFDM 256 QAM	1@23	18.14	19.64	0.0920
2	15	5	392000	1880	CP-OFDM QPSK	13@6	21.67	23.17	0.2075
2	15	5	392000	1880	CP-OFDM QPSK	1@1	21.68	23.18	0.2080
2	15	5	392000	1880	CP-OFDM QPSK	1@23	21.74	23.24	0.2109
2	15	5	397500	1907.5	DFT-s-OFDM PI/2 BPSK	12@6	23.3	24.8	0.3020
2	15	5	397500	1907.5	DFT-s-OFDM PI/2 BPSK	1@1	23.2	24.7	0.2951
2	15	5	397500	1907.5	DFT-s-OFDM PI/2 BPSK	1@23	23.25	24.75	0.2985
2	15	5	397500	1907.5	DFT-s-OFDM QPSK	12@6	23.32	24.82	0.3034
2	15	5	397500	1907.5	DFT-s-OFDM QPSK	1@1	23.27	24.77	0.2999
2	15	5	397500	1907.5	DFT-s-OFDM QPSK	1@23	23.26	24.76	0.2992
2	15	5	397500	1907.5	DFT-s-OFDM 16 QAM	12@6	22.5	24	0.2512
2	15	5	397500	1907.5	DFT-s-OFDM 16 QAM	1@1	22.32	23.82	0.2410
2	15	5	397500	1907.5	DFT-s-OFDM 16 QAM	1@23	22.3	23.8	0.2399
2	15	5	397500	1907.5	DFT-s-OFDM 64 QAM	12@6	21	22.5	0.1778
2	15	5	397500	1907.5	DFT-s-OFDM 64 QAM	1@1	20.97	22.47	0.1766
2	15	5	397500	1907.5	DFT-s-OFDM 64 QAM	1@23	21.08	22.58	0.1811
2	15	5	397500	1907.5	DFT-s-OFDM 256 QAM	12@6	18.9	20.4	0.1096
2	15	5	397500	1907.5	DFT-s-OFDM 256 QAM	1@1	18.29	19.79	0.0953
2	15	5	397500	1907.5	DFT-s-OFDM 256 QAM	1@23	18.28	19.78	0.0951
2	15	5	397500	1907.5	CP-OFDM QPSK	13@6	21.92	23.42	0.2198
2	15	5	397500	1907.5	CP-OFDM QPSK	1@1	21.81	23.31	0.2143
2	15	5	397500	1907.5	CP-OFDM QPSK	1@23	21.8	23.3	0.2138
2	15	10	387000	1855	DFT-s-OFDM PI/2 BPSK	25@12	23.03	24.53	0.2838
2	15	10	387000	1855	DFT-s-OFDM PI/2 BPSK	1@1	22.98	24.48	0.2805
2	15	10	387000	1855	DFT-s-OFDM PI/2 BPSK	1@50	23.09	24.59	0.2877
2	15	10	387000	1855	DFT-s-OFDM QPSK	25@12	23.01	24.51	0.2825
2	15	10	387000	1855	DFT-s-OFDM QPSK	1@1	22.98	24.48	0.2805
2	15	10	387000	1855	DFT-s-OFDM QPSK	1@50	23.14	24.64	0.2911
2	15	10	387000	1855	DFT-s-OFDM	25@12	22.19	23.69	0.2339

					16 QAM				
2	15	10	387000	1855	DFT-s-OFDM 16 QAM	1@1	22.07	23.57	0.2275
2	15	10	387000	1855	DFT-s-OFDM 16 QAM	1@50	22.16	23.66	0.2323
2	15	10	387000	1855	DFT-s-OFDM 64 QAM	25@12	20.65	22.15	0.1641
2	15	10	387000	1855	DFT-s-OFDM 64 QAM	1@1	20.79	22.29	0.1694
2	15	10	387000	1855	DFT-s-OFDM 64 QAM	1@50	20.9	22.4	0.1738
2	15	10	387000	1855	DFT-s-OFDM 256 QAM	25@12	18.55	20.05	0.1012
2	15	10	387000	1855	DFT-s-OFDM 256 QAM	1@1	18.04	19.54	0.0899
2	15	10	387000	1855	DFT-s-OFDM 256 QAM	1@50	18.12	19.62	0.0916
2	15	10	387000	1855	CP-OFDM QPSK	26@13	21.57	23.07	0.2028
2	15	10	387000	1855	CP-OFDM QPSK	1@1	21.56	23.06	0.2023
2	15	10	387000	1855	CP-OFDM QPSK	1@50	21.7	23.2	0.2089
2	15	10	392000	1880	DFT-s-OFDM PI/2 BPSK	25@12	23.14	24.64	0.2911
2	15	10	392000	1880	DFT-s-OFDM PI/2 BPSK	1@1	23.14	24.64	0.2911
2	15	10	392000	1880	DFT-s-OFDM PI/2 BPSK	1@50	23.14	24.64	0.2911
2	15	10	392000	1880	DFT-s-OFDM QPSK	25@12	23.15	24.65	0.2917
2	15	10	392000	1880	DFT-s-OFDM QPSK	1@1	23.18	24.68	0.2938
2	15	10	392000	1880	DFT-s-OFDM QPSK	1@50	23.19	24.69	0.2944
2	15	10	392000	1880	DFT-s-OFDM 16 QAM	25@12	22.27	23.77	0.2382
2	15	10	392000	1880	DFT-s-OFDM 16 QAM	1@1	22.22	23.72	0.2355
2	15	10	392000	1880	DFT-s-OFDM 16 QAM	1@50	22.25	23.75	0.2371
2	15	10	392000	1880	DFT-s-OFDM 64 QAM	25@12	20.8	22.3	0.1698
2	15	10	392000	1880	DFT-s-OFDM 64 QAM	1@1	20.92	22.42	0.1746
2	15	10	392000	1880	DFT-s-OFDM 64 QAM	1@50	20.95	22.45	0.1758
2	15	10	392000	1880	DFT-s-OFDM 256 QAM	25@12	18.65	20.15	0.1035
2	15	10	392000	1880	DFT-s-OFDM 256 QAM	1@1	18.16	19.66	0.0925
2	15	10	392000	1880	DFT-s-OFDM 256 QAM	1@50	18.19	19.69	0.0931
2	15	10	392000	1880	CP-OFDM QPSK	26@13	21.69	23.19	0.2084
2	15	10	392000	1880	CP-OFDM QPSK	1@1	21.71	23.21	0.2094
2	15	10	392000	1880	CP-OFDM QPSK	1@50	21.78	23.28	0.2128
2	15	10	397000	1905	DFT-s-OFDM PI/2 BPSK	25@12	23.34	24.84	0.3048
2	15	10	397000	1905	DFT-s-OFDM PI/2 BPSK	1@1	23.35	24.85	0.3055
2	15	10	397000	1905	DFT-s-OFDM PI/2 BPSK	1@50	23.39	24.89	0.3083
2	15	10	397000	1905	DFT-s-OFDM QPSK	25@12	23.33	24.83	0.3041
2	15	10	397000	1905	DFT-s-OFDM	1@1	23.44	24.94	0.3119

					QPSK				
2	15	10	397000	1905	DFT-s-OFDM QPSK	1@50	23.46	24.96	0.3133
2	15	10	397000	1905	DFT-s-OFDM 16 QAM	25@12	22.47	23.97	0.2495
2	15	10	397000	1905	DFT-s-OFDM 16 QAM	1@1	22.47	23.97	0.2495
2	15	10	397000	1905	DFT-s-OFDM 16 QAM	1@50	22.42	23.92	0.2466
2	15	10	397000	1905	DFT-s-OFDM 64 QAM	25@12	20.97	22.47	0.1766
2	15	10	397000	1905	DFT-s-OFDM 64 QAM	1@1	21.18	22.68	0.1854
2	15	10	397000	1905	DFT-s-OFDM 64 QAM	1@50	21.23	22.73	0.1875
2	15	10	397000	1905	DFT-s-OFDM 256 QAM	25@12	18.84	20.34	0.1081
2	15	10	397000	1905	DFT-s-OFDM 256 QAM	1@1	17.82	19.32	0.0855
2	15	10	397000	1905	DFT-s-OFDM 256 QAM	1@50	17.84	19.34	0.0859
2	15	10	397000	1905	CP-OFDM QPSK	26@13	21.84	23.34	0.2158
2	15	10	397000	1905	CP-OFDM QPSK	1@1	21.99	23.49	0.2234
2	15	10	397000	1905	CP-OFDM QPSK	1@50	21.99	23.49	0.2234
2	15	15	387500	1857.5	DFT-s-OFDM PI/2 BPSK	36@18	23.02	24.52	0.2831
2	15	15	387500	1857.5	DFT-s-OFDM PI/2 BPSK	1@1	22.96	24.46	0.2793
2	15	15	387500	1857.5	DFT-s-OFDM PI/2 BPSK	1@77	23.12	24.62	0.2897
2	15	15	387500	1857.5	DFT-s-OFDM QPSK	36@18	23.03	24.53	0.2838
2	15	15	387500	1857.5	DFT-s-OFDM QPSK	1@1	23.02	24.52	0.2831
2	15	15	387500	1857.5	DFT-s-OFDM QPSK	1@77	23.11	24.61	0.2891
2	15	15	387500	1857.5	DFT-s-OFDM 16 QAM	36@18	22.15	23.65	0.2317
2	15	15	387500	1857.5	DFT-s-OFDM 16 QAM	1@1	22.06	23.56	0.2270
2	15	15	387500	1857.5	DFT-s-OFDM 16 QAM	1@77	22.22	23.72	0.2355
2	15	15	387500	1857.5	DFT-s-OFDM 64 QAM	36@18	20.69	22.19	0.1656
2	15	15	387500	1857.5	DFT-s-OFDM 64 QAM	1@1	20.78	22.28	0.1690
2	15	15	387500	1857.5	DFT-s-OFDM 64 QAM	1@77	20.96	22.46	0.1762
2	15	15	387500	1857.5	DFT-s-OFDM 256 QAM	36@18	18.57	20.07	0.1016
2	15	15	387500	1857.5	DFT-s-OFDM 256 QAM	1@1	18.02	19.52	0.0895
2	15	15	387500	1857.5	DFT-s-OFDM 256 QAM	1@77	18.16	19.66	0.0925
2	15	15	387500	1857.5	CP-OFDM QPSK	39@19	21.65	23.15	0.2065
2	15	15	387500	1857.5	CP-OFDM QPSK	1@1	21.61	23.11	0.2046
2	15	15	387500	1857.5	CP-OFDM QPSK	1@77	21.67	23.17	0.2075
2	15	15	392000	1880	DFT-s-OFDM PI/2 BPSK	36@18	23.13	24.63	0.2904
2	15	15	392000	1880	DFT-s-OFDM PI/2 BPSK	1@1	23.16	24.66	0.2924
2	15	15	392000	1880	DFT-s-OFDM	1@77	23.13	24.63	0.2904

					PI/2 BPSK				
2	15	15	392000	1880	DFT-s-OFDM QPSK	36@18	23.18	24.68	0.2938
2	15	15	392000	1880	DFT-s-OFDM QPSK	1@1	23.23	24.73	0.2972
2	15	15	392000	1880	DFT-s-OFDM QPSK	1@77	23.19	24.69	0.2944
2	15	15	392000	1880	DFT-s-OFDM 16 QAM	36@18	22.27	23.77	0.2382
2	15	15	392000	1880	DFT-s-OFDM 16 QAM	1@1	22.3	23.8	0.2399
2	15	15	392000	1880	DFT-s-OFDM 16 QAM	1@77	22.26	23.76	0.2377
2	15	15	392000	1880	DFT-s-OFDM 64 QAM	36@18	20.78	22.28	0.1690
2	15	15	392000	1880	DFT-s-OFDM 64 QAM	1@1	20.97	22.47	0.1766
2	15	15	392000	1880	DFT-s-OFDM 64 QAM	1@77	20.92	22.42	0.1746
2	15	15	392000	1880	DFT-s-OFDM 256 QAM	36@18	18.7	20.2	0.1047
2	15	15	392000	1880	DFT-s-OFDM 256 QAM	1@1	18.17	19.67	0.0927
2	15	15	392000	1880	DFT-s-OFDM 256 QAM	1@77	18.2	19.7	0.0933
2	15	15	392000	1880	CP-OFDM QPSK	39@19	21.74	23.24	0.2109
2	15	15	392000	1880	CP-OFDM QPSK	1@1	21.82	23.32	0.2148
2	15	15	392000	1880	CP-OFDM QPSK	1@77	21.67	23.17	0.2075
2	15	15	396500	1902.5	DFT-s-OFDM PI/2 BPSK	36@18	23.09	24.59	0.2877
2	15	15	396500	1902.5	DFT-s-OFDM PI/2 BPSK	1@1	23.02	24.52	0.2831
2	15	15	396500	1902.5	DFT-s-OFDM PI/2 BPSK	1@77	23.12	24.62	0.2897
2	15	15	396500	1902.5	DFT-s-OFDM QPSK	36@18	23.13	24.63	0.2904
2	15	15	396500	1902.5	DFT-s-OFDM QPSK	1@1	23.13	24.63	0.2904
2	15	15	396500	1902.5	DFT-s-OFDM QPSK	1@77	23.2	24.7	0.2951
2	15	15	396500	1902.5	DFT-s-OFDM 16 QAM	36@18	22.26	23.76	0.2377
2	15	15	396500	1902.5	DFT-s-OFDM 16 QAM	1@1	22.14	23.64	0.2312
2	15	15	396500	1902.5	DFT-s-OFDM 16 QAM	1@77	22.18	23.68	0.2333
2	15	15	396500	1902.5	DFT-s-OFDM 64 QAM	36@18	20.81	22.31	0.1702
2	15	15	396500	1902.5	DFT-s-OFDM 64 QAM	1@1	20.88	22.38	0.1730
2	15	15	396500	1902.5	DFT-s-OFDM 64 QAM	1@77	20.93	22.43	0.1750
2	15	15	396500	1902.5	DFT-s-OFDM 256 QAM	36@18	18.68	20.18	0.1042
2	15	15	396500	1902.5	DFT-s-OFDM 256 QAM	1@1	18.01	19.51	0.0893
2	15	15	396500	1902.5	DFT-s-OFDM 256 QAM	1@77	18.22	19.72	0.0938
2	15	15	396500	1902.5	CP-OFDM QPSK	39@19	21.72	23.22	0.2099
2	15	15	396500	1902.5	CP-OFDM QPSK	1@1	21.68	23.18	0.2080
2	15	15	396500	1902.5	CP-OFDM QPSK	1@77	21.64	23.14	0.2061
2	15	20	388000	1860	DFT-s-OFDM	50@25	23.04	24.54	0.2844

					PI/2 BPSK				
2	15	20	388000	1860	DFT-s-OFDM PI/2 BPSK	1@1	22.97	24.47	0.2799
2	15	20	388000	1860	DFT-s-OFDM PI/2 BPSK	1@104	23.04	24.54	0.2844
2	15	20	388000	1860	DFT-s-OFDM QPSK	50@25	23.06	24.56	0.2858
2	15	20	388000	1860	DFT-s-OFDM QPSK	1@1	23.05	24.55	0.2851
2	15	20	388000	1860	DFT-s-OFDM QPSK	1@104	23.08	24.58	0.2871
2	15	20	388000	1860	DFT-s-OFDM 16 QAM	50@25	22.21	23.71	0.2350
2	15	20	388000	1860	DFT-s-OFDM 16 QAM	1@1	22.11	23.61	0.2296
2	15	20	388000	1860	DFT-s-OFDM 16 QAM	1@104	22.13	23.63	0.2307
2	15	20	388000	1860	DFT-s-OFDM 64 QAM	50@25	20.71	22.21	0.1663
2	15	20	388000	1860	DFT-s-OFDM 64 QAM	1@1	20.86	22.36	0.1722
2	15	20	388000	1860	DFT-s-OFDM 64 QAM	1@104	20.86	22.36	0.1722
2	15	20	388000	1860	DFT-s-OFDM 256 QAM	50@25	18.61	20.11	0.1026
2	15	20	388000	1860	DFT-s-OFDM 256 QAM	1@1	17.98	19.48	0.0887
2	15	20	388000	1860	DFT-s-OFDM 256 QAM	1@104	18.09	19.59	0.0910
2	15	20	388000	1860	CP-OFDM QPSK	53@26	21.65	23.15	0.2065
2	15	20	388000	1860	CP-OFDM QPSK	1@1	21.66	23.16	0.2070
2	15	20	388000	1860	CP-OFDM QPSK	1@104	21.65	23.15	0.2065
2	15	20	392000	1880	DFT-s-OFDM PI/2 BPSK	50@25	23.17	24.67	0.2931
2	15	20	392000	1880	DFT-s-OFDM PI/2 BPSK	1@1	23.19	24.69	0.2944
2	15	20	392000	1880	DFT-s-OFDM PI/2 BPSK	1@104	23.16	24.66	0.2924
2	15	20	392000	1880	DFT-s-OFDM QPSK	50@25	23.22	24.72	0.2965
2	15	20	392000	1880	DFT-s-OFDM QPSK	1@1	23.24	24.74	0.2979
2	15	20	392000	1880	DFT-s-OFDM QPSK	1@104	23.19	24.69	0.2944
2	15	20	392000	1880	DFT-s-OFDM 16 QAM	50@25	22.33	23.83	0.2415
2	15	20	392000	1880	DFT-s-OFDM 16 QAM	1@1	22.34	23.84	0.2421
2	15	20	392000	1880	DFT-s-OFDM 16 QAM	1@104	22.28	23.78	0.2388
2	15	20	392000	1880	DFT-s-OFDM 64 QAM	50@25	20.84	22.34	0.1714
2	15	20	392000	1880	DFT-s-OFDM 64 QAM	1@1	21.03	22.53	0.1791
2	15	20	392000	1880	DFT-s-OFDM 64 QAM	1@104	20.97	22.47	0.1766
2	15	20	392000	1880	DFT-s-OFDM 256 QAM	50@25	18.72	20.22	0.1052
2	15	20	392000	1880	DFT-s-OFDM 256 QAM	1@1	18.21	19.71	0.0935
2	15	20	392000	1880	DFT-s-OFDM 256 QAM	1@104	18.2	19.7	0.0933
2	15	20	392000	1880	CP-OFDM QPSK	53@26	21.75	23.25	0.2113
2	15	20	392000	1880	CP-OFDM	1@1	21.81	23.31	0.2143

					QPSK				
2	15	20	392000	1880	CP-OFDM QPSK	1@104	21.7	23.2	0.2089
2	15	20	396000	1900	DFT-s-OFDM PI/2 BPSK	50@25	23.15	24.65	0.2917
2	15	20	396000	1900	DFT-s-OFDM PI/2 BPSK	1@1	23.02	24.52	0.2831
2	15	20	396000	1900	DFT-s-OFDM PI/2 BPSK	1@104	23.09	24.59	0.2877
2	15	20	396000	1900	DFT-s-OFDM QPSK	50@25	23.18	24.68	0.2938
2	15	20	396000	1900	DFT-s-OFDM QPSK	1@1	23.11	24.61	0.2891
2	15	20	396000	1900	DFT-s-OFDM QPSK	1@104	23.18	24.68	0.2938
2	15	20	396000	1900	DFT-s-OFDM 16 QAM	50@25	22.28	23.78	0.2388
2	15	20	396000	1900	DFT-s-OFDM 16 QAM	1@1	22.12	23.62	0.2301
2	15	20	396000	1900	DFT-s-OFDM 16 QAM	1@104	22.16	23.66	0.2323
2	15	20	396000	1900	DFT-s-OFDM 64 QAM	50@25	20.82	22.32	0.1706
2	15	20	396000	1900	DFT-s-OFDM 64 QAM	1@1	20.88	22.38	0.1730
2	15	20	396000	1900	DFT-s-OFDM 64 QAM	1@104	20.91	22.41	0.1742
2	15	20	396000	1900	DFT-s-OFDM 256 QAM	50@25	18.71	20.21	0.1050
2	15	20	396000	1900	DFT-s-OFDM 256 QAM	1@1	18	19.5	0.0891
2	15	20	396000	1900	DFT-s-OFDM 256 QAM	1@104	18.12	19.62	0.0916
2	15	20	396000	1900	CP-OFDM QPSK	53@26	21.68	23.18	0.2080
2	15	20	396000	1900	CP-OFDM QPSK	1@1	21.69	23.19	0.2084
2	15	20	396000	1900	CP-OFDM QPSK	1@104	21.71	23.21	0.2094

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
2	15	20	392000	1880.0	DFT-s-OFDM QPSK	100@0	0.00261	**PASS**	NV
2	15	20	392000	1880.0	DFT-s-OFDM QPSK	100@0	0.00684	**PASS**	LV
2	15	20	392000	1880.0	DFT-s-OFDM QPSK	100@0	0.00413	**PASS**	HV
2	15	20	392000	1880.0	DFT-s-OFDM QPSK	100@0	0.00271	**PASS**	-30℃
2	15	20	392000	1880.0	DFT-s-OFDM QPSK	100@0	0.00531	**PASS**	-20℃
2	15	20	392000	1880.0	DFT-s-OFDM QPSK	100@0	0.00482	**PASS**	-10℃
2	15	20	392000	1880.0	DFT-s-OFDM QPSK	100@0	0.00304	**PASS**	0℃
2	15	20	392000	1880.0	DFT-s-OFDM QPSK	100@0	0.00543	**PASS**	10℃
2	15	20	392000	1880.0	DFT-s-OFDM QPSK	100@0	0.00645	**PASS**	20℃
2	15	20	392000	1880.0	DFT-s-OFDM QPSK	100@0	0.00349	**PASS**	30℃
2	15	20	392000	1880.0	DFT-s-OFDM QPSK	100@0	0.00584	**PASS**	40℃
2	15	20	392000	1880.0	DFT-s-OFDM QPSK	100@0	0.00667	**PASS**	50℃

Peak to Average Radio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
2	15	20	388000	1860.0	DFT-s-OFDM PI/2 BPSK	100@0	4.26	13	**PASS**
2	15	20	388000	1860.0	DFT-s-OFDM PI/2 BPSK	1@0	3.52	13	**PASS**
2	15	20	388000	1860.0	DFT-s-OFDM QPSK	100@0	5.55	13	**PASS**
2	15	20	388000	1860.0	DFT-s-OFDM QPSK	1@0	5.29	13	**PASS**
2	15	20	392000	1880.0	DFT-s-OFDM PI/2 BPSK	100@0	4.3	13	**PASS**
2	15	20	392000	1880.0	DFT-s-OFDM PI/2 BPSK	1@0	3.62	13	**PASS**
2	15	20	392000	1880.0	DFT-s-OFDM QPSK	100@0	5.59	13	**PASS**
2	15	20	392000	1880.0	DFT-s-OFDM QPSK	1@0	5.62	13	**PASS**
2	15	20	396000	1900.0	DFT-s-OFDM PI/2 BPSK	100@0	4.3	13	**PASS**
2	15	20	396000	1900.0	DFT-s-OFDM PI/2 BPSK	1@0	3.58	13	**PASS**
2	15	20	396000	1900.0	DFT-s-OFDM QPSK	100@0	5.53	13	**PASS**
2	15	20	396000	1900.0	DFT-s-OFDM QPSK	1@0	5.49	13	**PASS**

B66_N2(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH

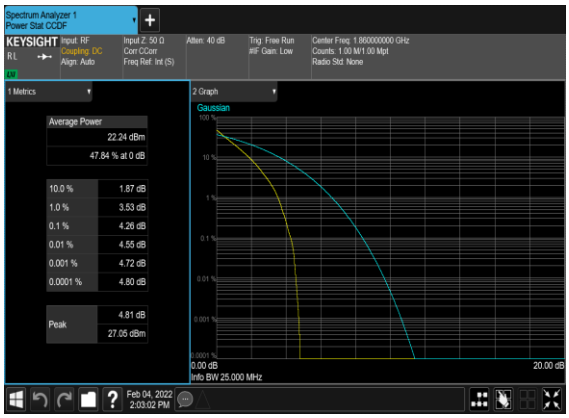

B66_N2(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH

B66_N2(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

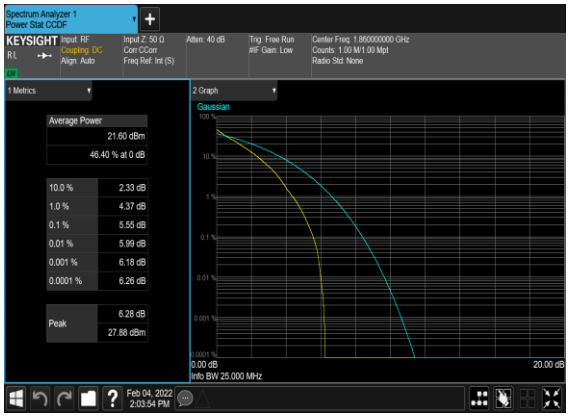

B66_N2(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

B66_N2(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

B66_N2(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

B66_N2(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

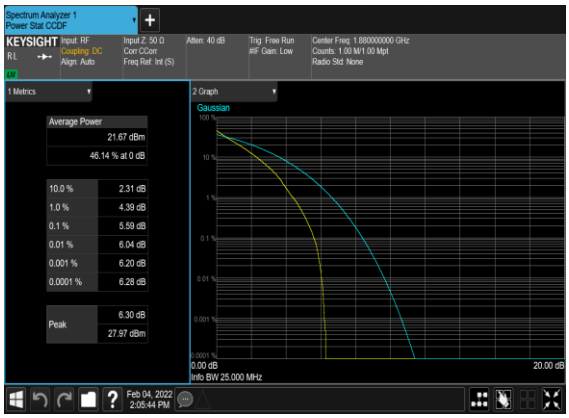

B66_N2(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

B66_N2(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH

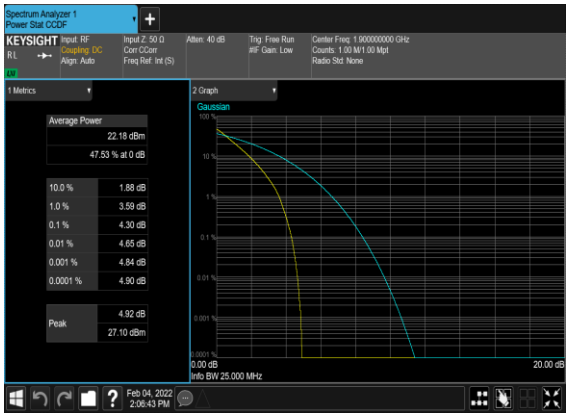

B66_N2(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH

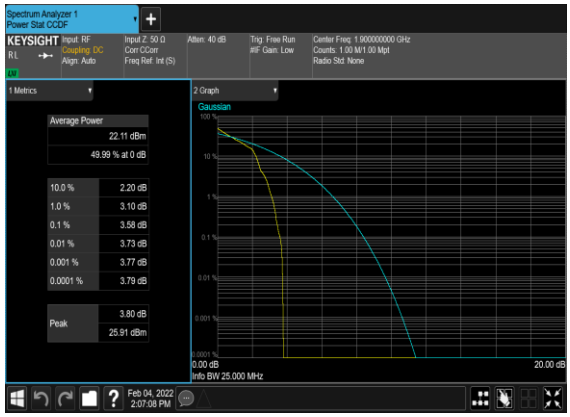

B66_N2(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

B66_N2(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB OBW (MHz)
2	15	5	392000	1880.0	DFT-s-OFDM PI/2 BPSK	25@0	4.4655	4.842
2	15	5	392000	1880.0	DFT-s-OFDM QPSK	25@0	4.4694	4.816
2	15	5	392000	1880.0	CP-OFDM QPSK	25@0	4.4714	4.956
2	15	5	392000	1880.0	CP-OFDM 16 QAM	25@0	4.4845	4.917
2	15	5	392000	1880.0	CP-OFDM 64 QAM	25@0	4.4805	4.969
2	15	5	392000	1880.0	CP-OFDM 256 QAM	25@0	4.472	4.928
2	15	10	392000	1880.0	DFT-s-OFDM PI/2 BPSK	50@0	8.8925	9.423
2	15	10	392000	1880.0	DFT-s-OFDM QPSK	50@0	8.9143	9.526
2	15	10	392000	1880.0	CP-OFDM QPSK	52@0	9.2808	9.946
2	15	10	392000	1880.0	CP-OFDM 16 QAM	52@0	9.2678	9.878
2	15	10	392000	1880.0	CP-OFDM 64 QAM	52@0	9.2723	9.885
2	15	10	392000	1880.0	CP-OFDM 256 QAM	52@0	9.2986	9.931
2	15	15	392000	1880.0	DFT-s-OFDM PI/2 BPSK	75@0	13.399	14.1
2	15	15	392000	1880.0	DFT-s-OFDM QPSK	75@0	13.372	14.05
2	15	15	392000	1880.0	CP-OFDM QPSK	79@0	14.091	14.85
2	15	15	392000	1880.0	CP-OFDM 16 QAM	79@0	14.102	14.84
2	15	15	392000	1880.0	CP-OFDM 64 QAM	79@0	14.113	14.8
2	15	15	392000	1880.0	CP-OFDM 256 QAM	79@0	14.074	14.81
2	15	20	392000	1880.0	DFT-s-OFDM PI/2 BPSK	100@0	17.857	18.73
2	15	20	392000	1880.0	DFT-s-OFDM QPSK	100@0	17.845	18.7
2	15	20	392000	1880.0	CP-OFDM QPSK	106@0	18.929	19.81
2	15	20	392000	1880.0	CP-OFDM 16 QAM	106@0	18.929	19.84
2	15	20	392000	1880.0	CP-OFDM 64 QAM	106@0	18.917	19.77
2	15	20	392000	1880.0	CP-OFDM 256 QAM	106@0	19.005	19.82

B66_N2(5M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

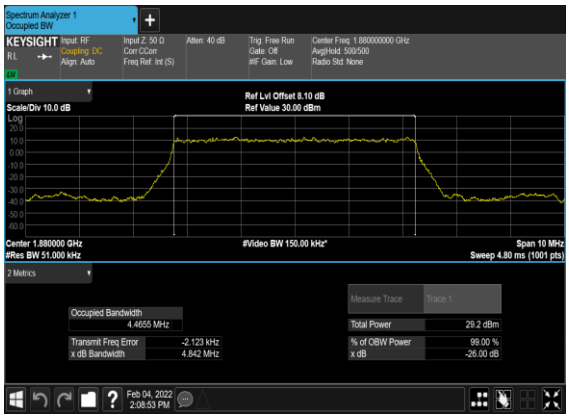

B66_N2(5M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

B66_N2(5M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

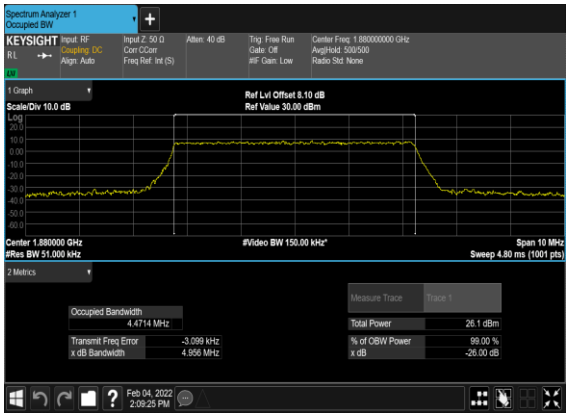

B66_N2(5M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

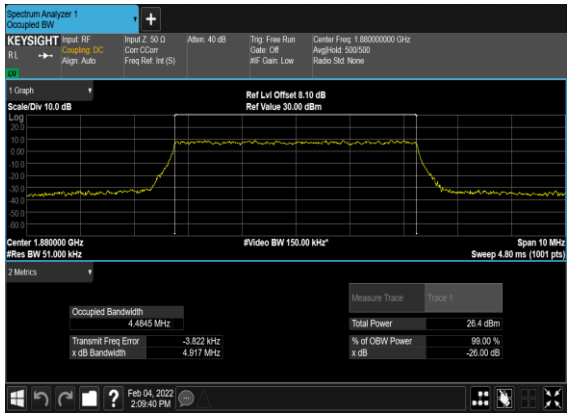

B66_N2(5M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

B66_N2(5M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

B66_N2(10M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

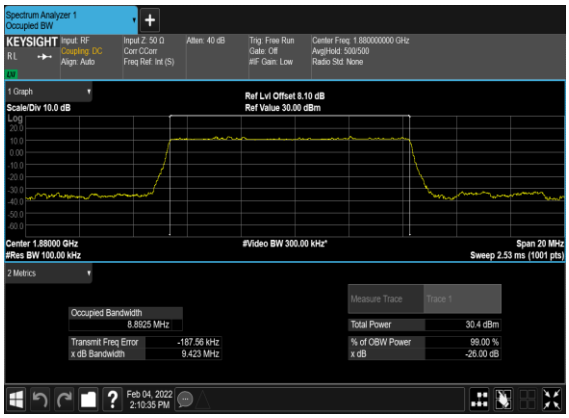

B66_N2(10M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

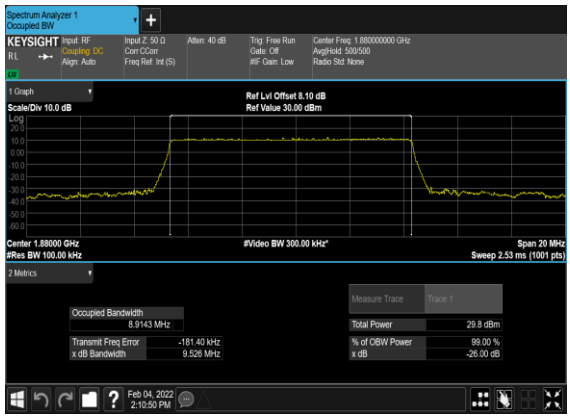

B66_N2(10M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

B66_N2(10M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

B66_N2(10M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

B66_N2(10M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

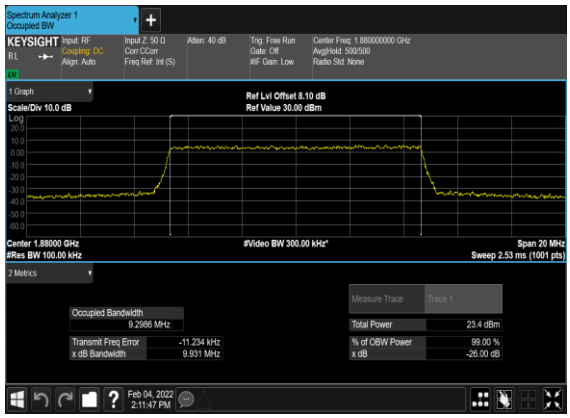

B66_N2(15M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

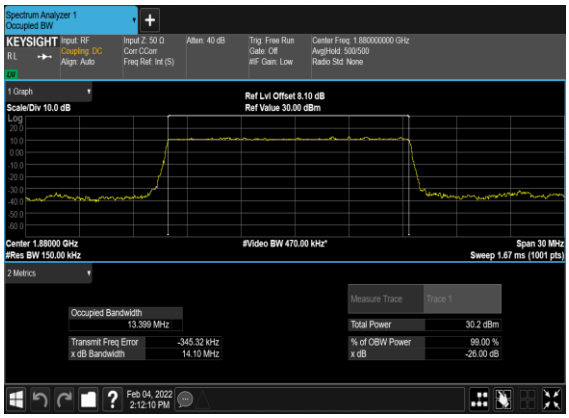

B66_N2(15M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

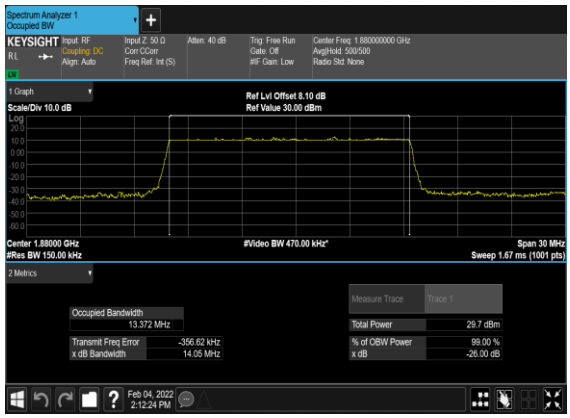

B66_N2(15M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

B66_N2(15M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

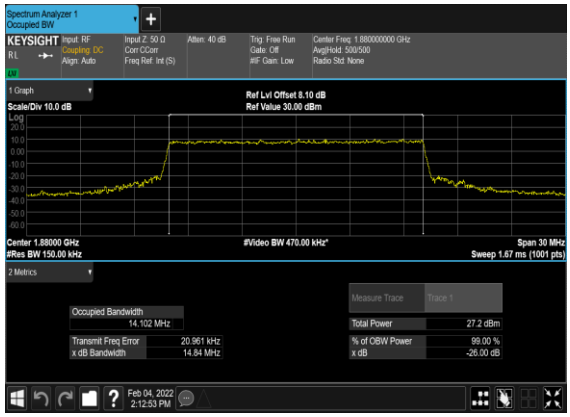

B66_N2(15M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

B66_N2(15M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

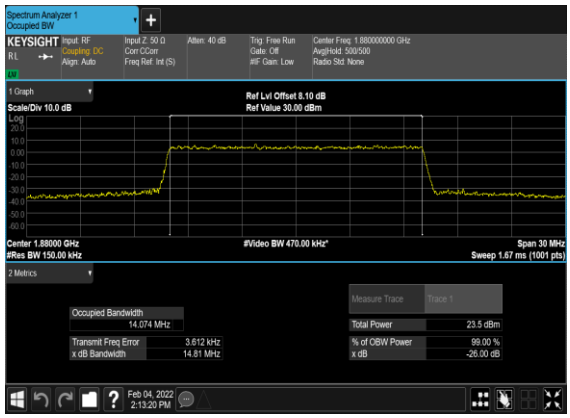

B66_N2(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

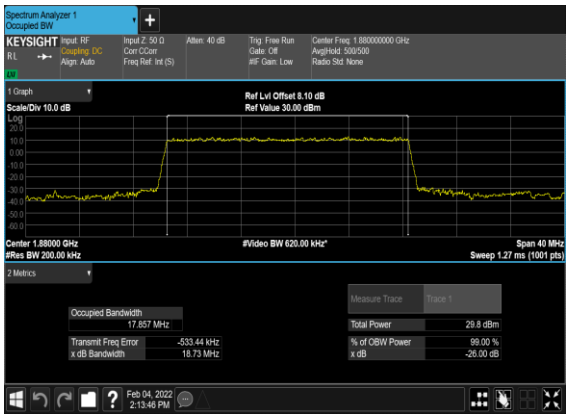

B66_N2(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

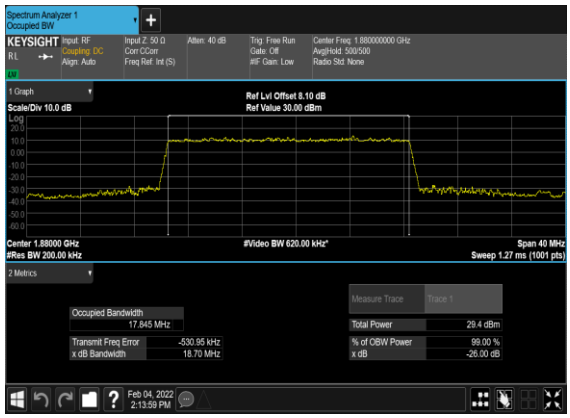

B66_N2(20M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

B66_N2(20M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

B66_N2(20M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

B66_N2(20M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

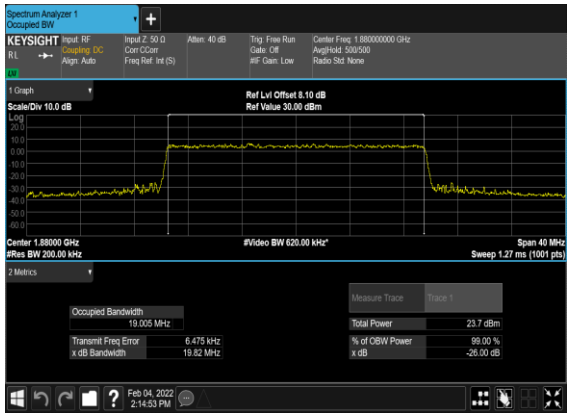

Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
2	15	5	386500	1852.5	DFT-s-OFDM BPSK	1@0	see graph	**---**
2	15	5	386500	1852.5	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
2	15	5	386500	1852.5	DFT-s-OFDM QPSK	1@0	see graph	**---**
2	15	5	386500	1852.5	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
2	15	5	392000	1880.0	DFT-s-OFDM BPSK	1@0	see graph	**---**
2	15	5	392000	1880.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
2	15	5	392000	1880.0	DFT-s-OFDM QPSK	1@0	see graph	**---**
2	15	5	392000	1880.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
2	15	5	397500	1907.5	DFT-s-OFDM BPSK	1@0	see graph	**---**
2	15	5	397500	1907.5	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
2	15	5	397500	1907.5	DFT-s-OFDM QPSK	1@0	see graph	**---**
2	15	5	397500	1907.5	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
2	15	10	387000	1855.0	DFT-s-OFDM BPSK	1@0	see graph	**---**
2	15	10	387000	1855.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
2	15	10	387000	1855.0	DFT-s-OFDM QPSK	1@0	see graph	**---**
2	15	10	387000	1855.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
2	15	10	392000	1880.0	DFT-s-OFDM BPSK	1@0	see graph	**---**
2	15	10	392000	1880.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
2	15	10	392000	1880.0	DFT-s-OFDM QPSK	1@0	see graph	**---**
2	15	10	392000	1880.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
2	15	10	397000	1905.0	DFT-s-OFDM BPSK	1@0	see graph	**---**
2	15	10	397000	1905.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**

2	15	10	397000	1905.0	DFT-s-OFDM QPSK	1@0	see graph	**---**
2	15	10	397000	1905.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
2	15	20	388000	1860.0	DFT-s-OFDM BPSK	1@0	see graph	**---**
2	15	20	388000	1860.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
2	15	20	388000	1860.0	DFT-s-OFDM QPSK	1@0	see graph	**---**
2	15	20	388000	1860.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
2	15	20	392000	1880.0	DFT-s-OFDM BPSK	1@0	see graph	**---**
2	15	20	392000	1880.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
2	15	20	392000	1880.0	DFT-s-OFDM QPSK	1@0	see graph	**---**
2	15	20	392000	1880.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
2	15	20	396000	1900.0	DFT-s-OFDM BPSK	1@0	see graph	**---**
2	15	20	396000	1900.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
2	15	20	396000	1900.0	DFT-s-OFDM QPSK	1@0	see graph	**---**
2	15	20	396000	1900.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**

B66_N2(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

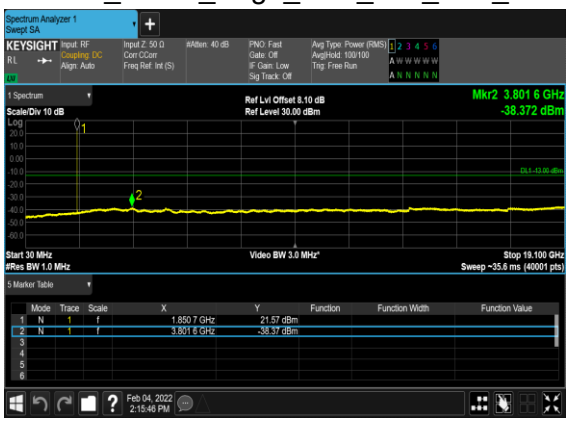

B66_N2(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

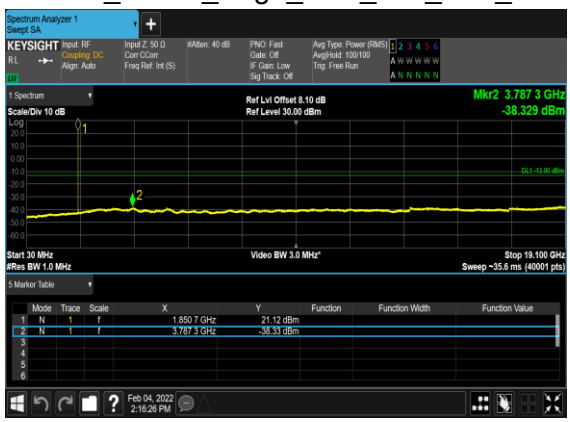

B66_N2(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

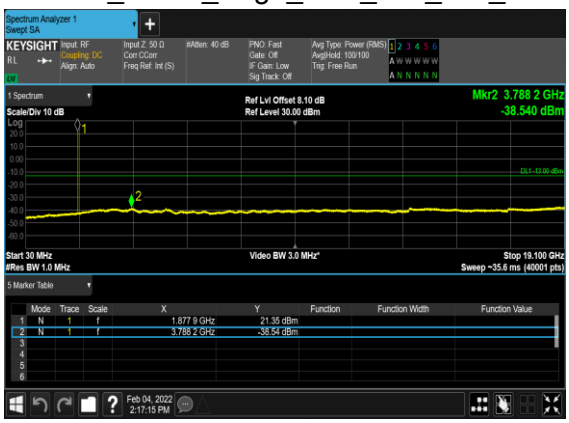

B66_N2(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

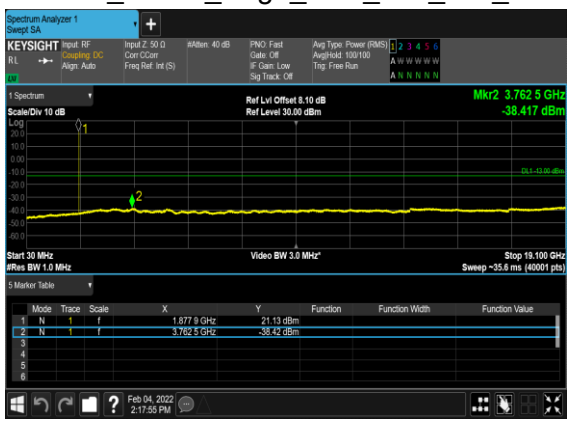

B66_N2(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

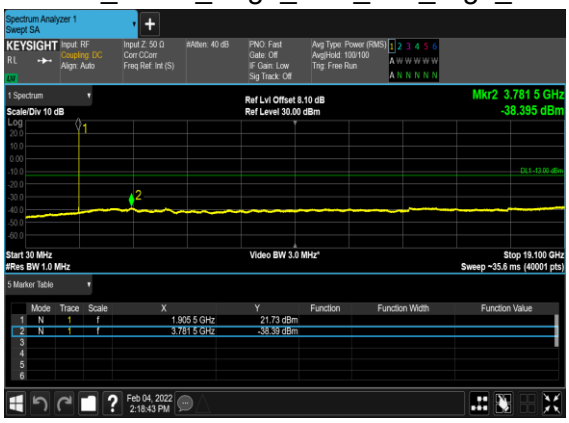

B66_N2(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

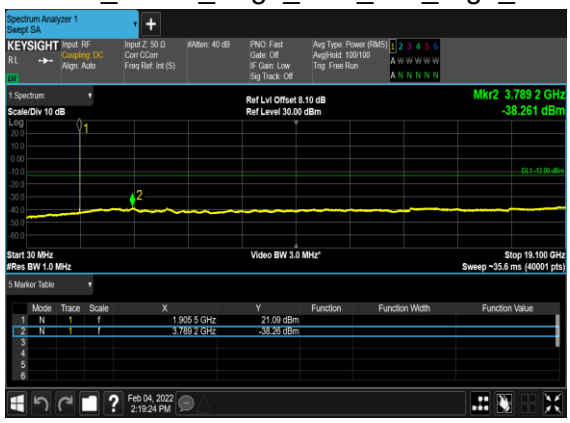

B66_N2(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

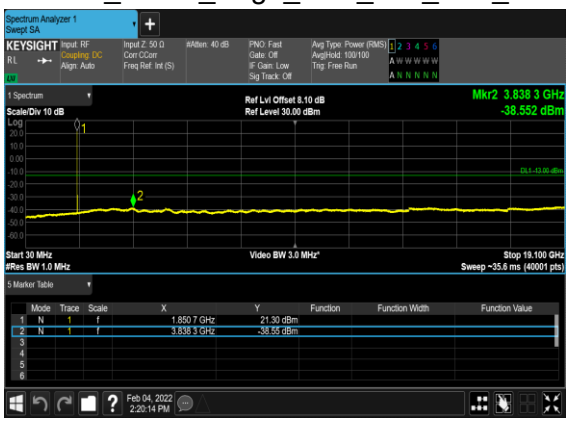

B66_N2(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

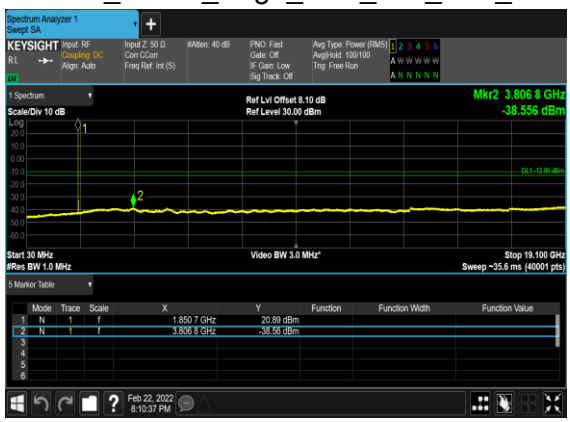

B66_N2(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

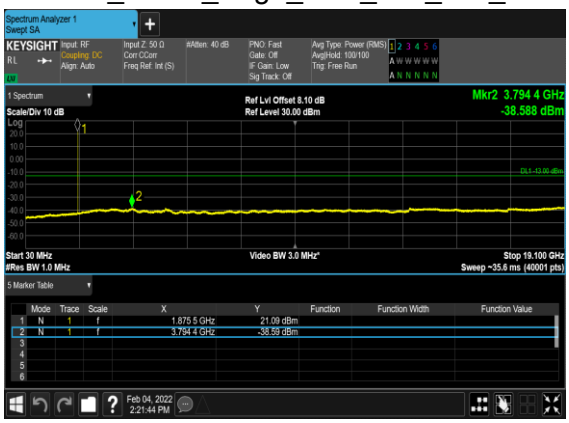

B66_N2(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

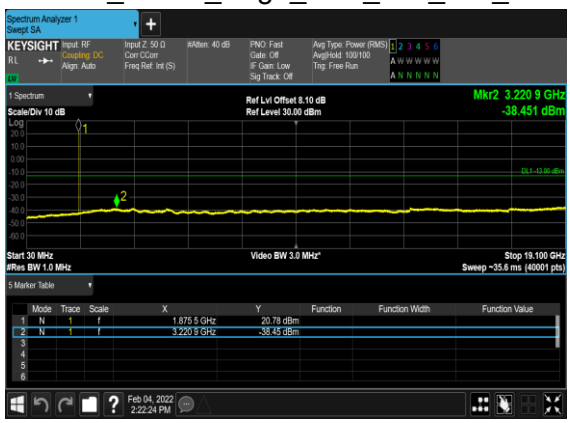

B66_N2(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

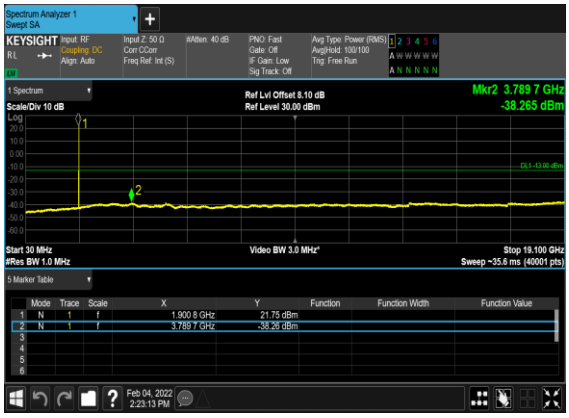

B66_N2(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

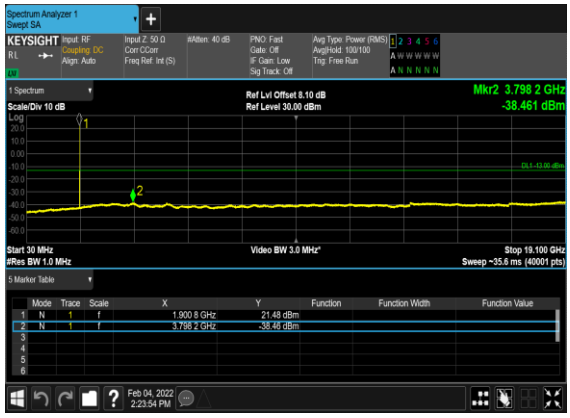

B66_N2(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

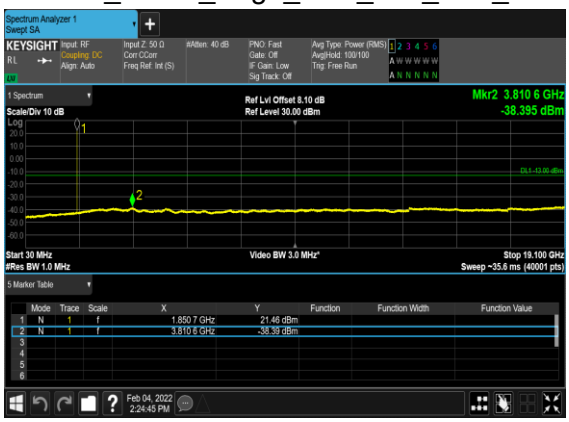

B66_N2(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

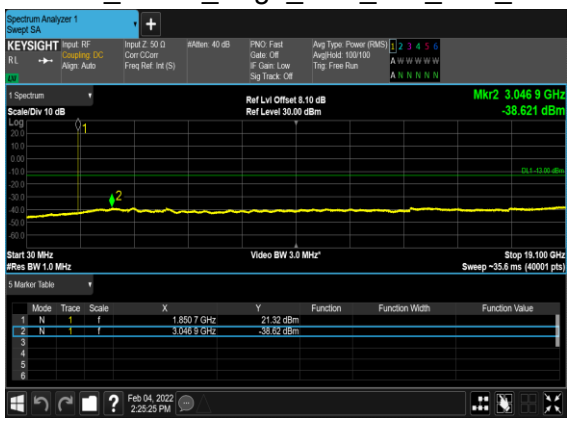

B66_N2(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

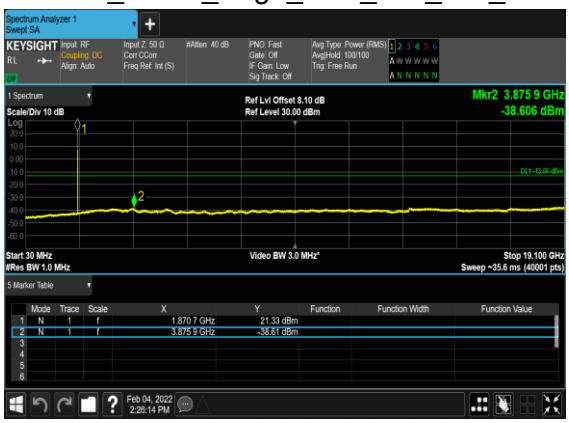

B66_N2(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

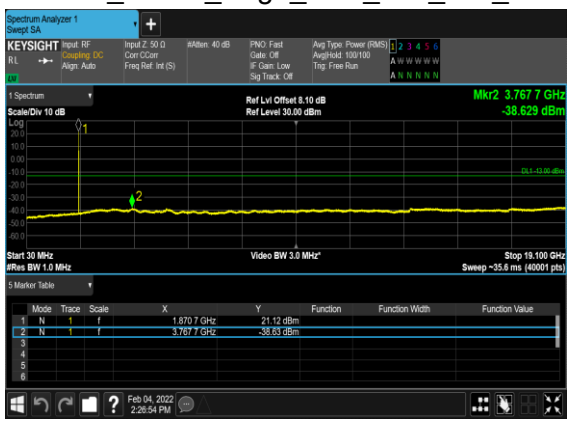

B66_N2(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

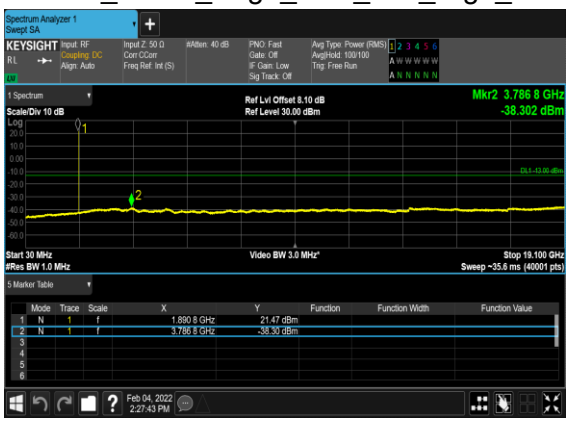

B66_N2(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

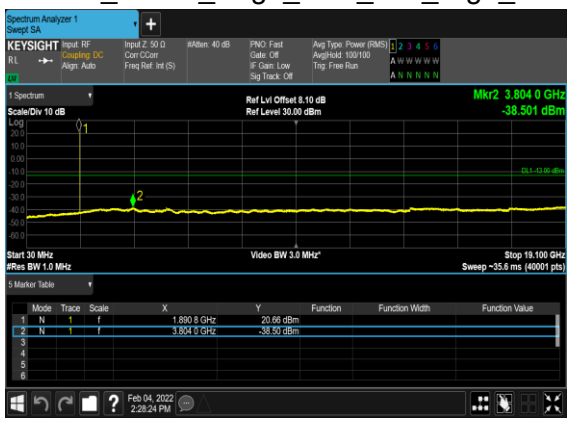

Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
2	15	5	386500	1852.5	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
2	15	5	386500	1852.5	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
2	15	5	386500	1852.5	DFT-s-OFDM BPSK	25@0	see graph	**PASS**
2	15	5	386500	1852.5	DFT-s-OFDM QPSK	25@0	see graph	**PASS**
2	15	5	397500	1907.5	DFT-s-OFDM BPSK	1@24	see graph	**PASS**
2	15	5	397500	1907.5	DFT-s-OFDM QPSK	1@24	see graph	**PASS**
2	15	5	397500	1907.5	DFT-s-OFDM BPSK	25@0	see graph	**PASS**
2	15	5	397500	1907.5	DFT-s-OFDM QPSK	25@0	see graph	**PASS**
2	15	10	387000	1855.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
2	15	10	387000	1855.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
2	15	10	387000	1855.0	DFT-s-OFDM BPSK	50@0	see graph	**PASS**
2	15	10	387000	1855.0	DFT-s-OFDM QPSK	50@0	see graph	**PASS**
2	15	10	397000	1905.0	DFT-s-OFDM BPSK	1@51	see graph	**PASS**
2	15	10	397000	1905.0	DFT-s-OFDM QPSK	1@51	see graph	**PASS**
2	15	10	397000	1905.0	DFT-s-OFDM BPSK	50@0	see graph	**PASS**
2	15	10	397000	1905.0	DFT-s-OFDM QPSK	50@0	see graph	**PASS**
2	15	20	388000	1860.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
2	15	20	388000	1860.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
2	15	20	388000	1860.0	DFT-s-OFDM BPSK	100@0	see graph	**PASS**
2	15	20	388000	1860.0	DFT-s-OFDM QPSK	100@0	see graph	**PASS**
2	15	20	396000	1900.0	DFT-s-OFDM BPSK	1@105	see graph	**PASS**
2	15	20	396000	1900.0	DFT-s-OFDM QPSK	1@105	see graph	**PASS**
2	15	20	396000	1900.0	DFT-s-OFDM BPSK	100@0	see graph	**PASS**
2	15	20	396000	1900.0	DFT-s-OFDM QPSK	100@0	see graph	**PASS**

B66_N2(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

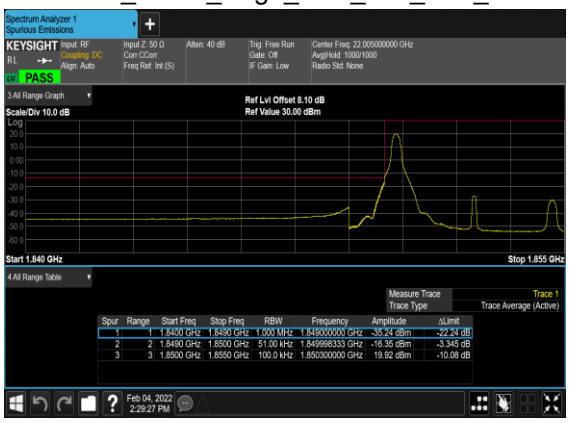

B66_N2(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

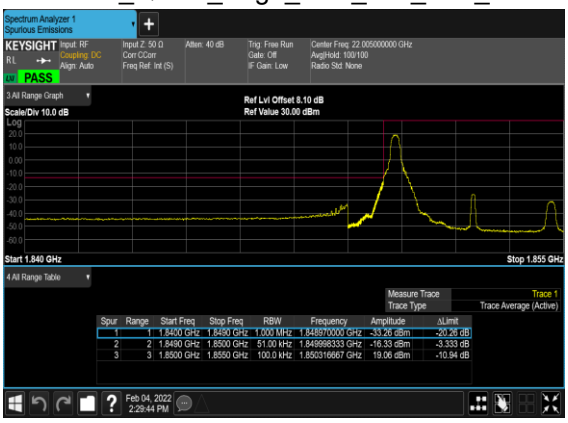

B66_N2(5M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

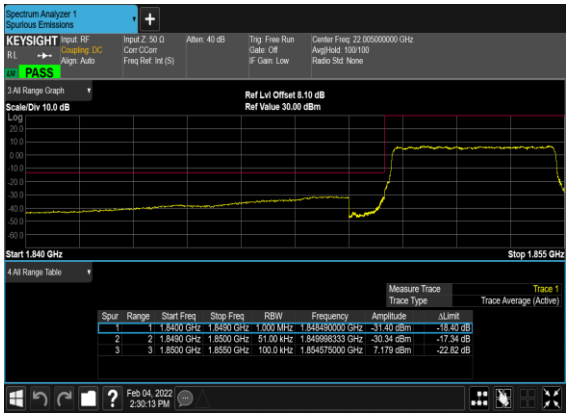

B66_N2(5M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

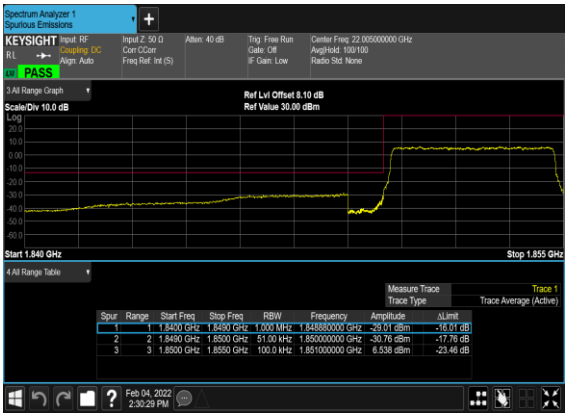

B66_N2(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH

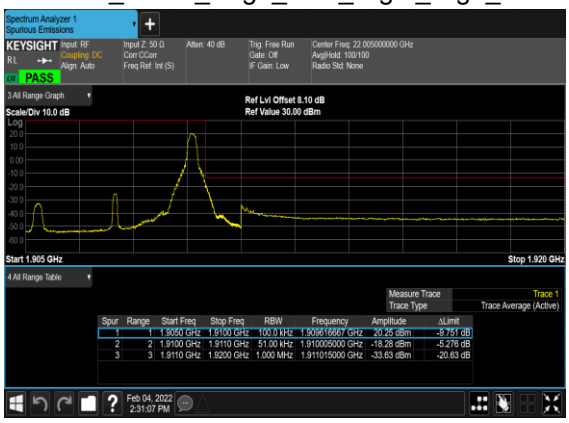

B66_N2(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

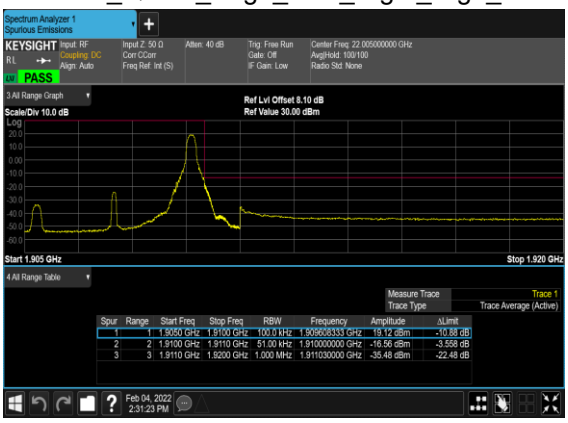

B66_N2(5M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH

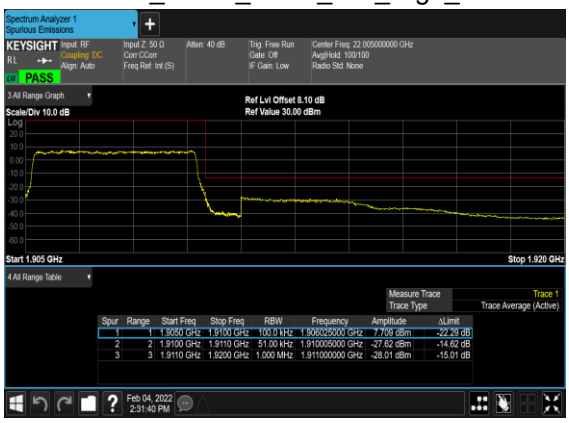

B66_N2(5M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

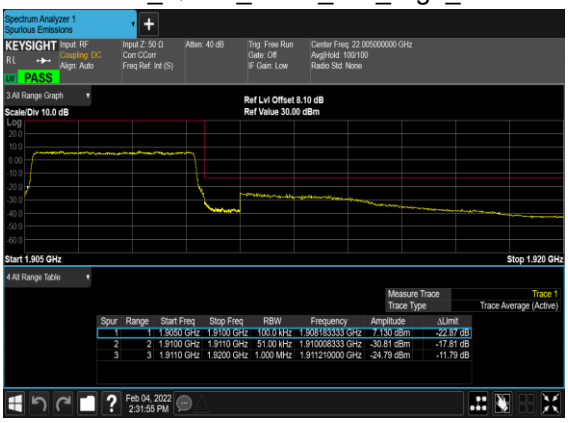

B66_N2(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

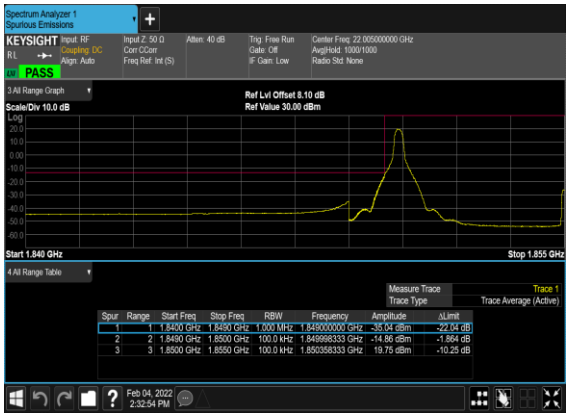

B66_N2(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

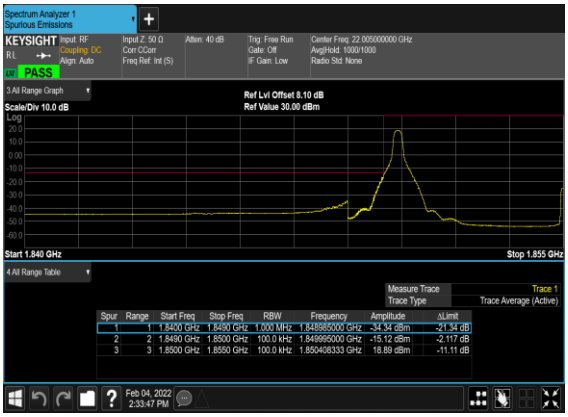

B66_N2(10M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

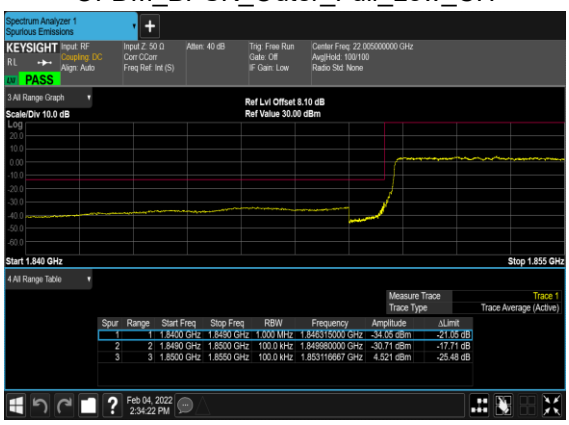

B66_N2(10M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

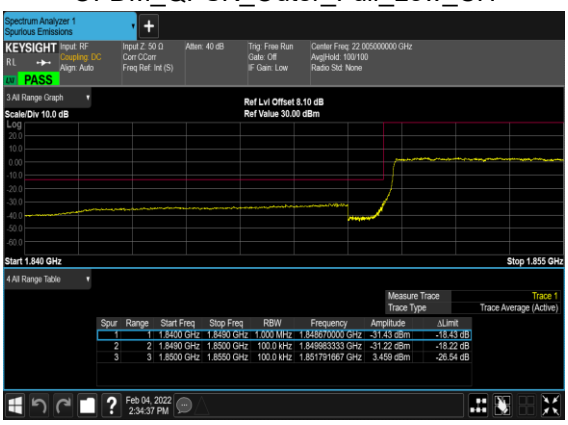

B66_N2(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH

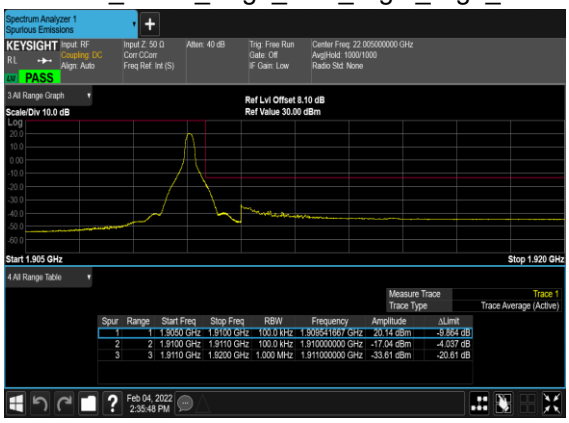

B66_N2(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

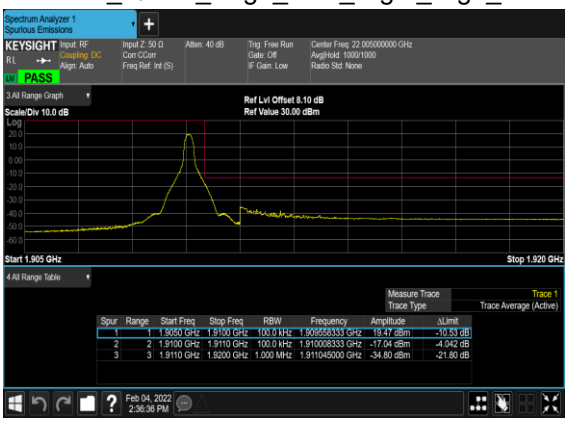

B66_N2(10M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH

B66_N2(10M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

B66_N2(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

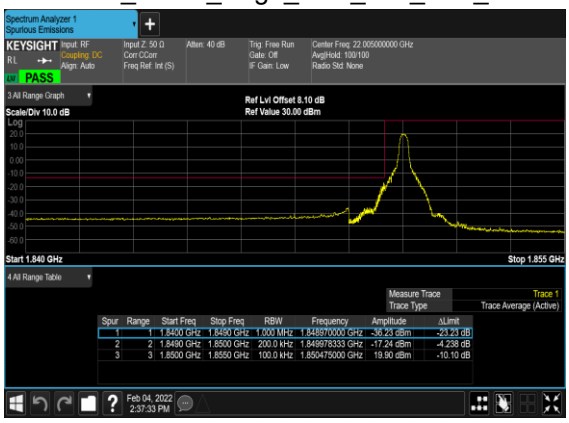

B66_N2(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

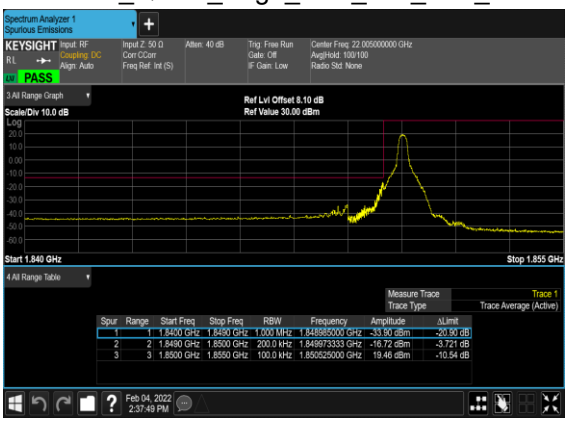

B66_N2(20M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

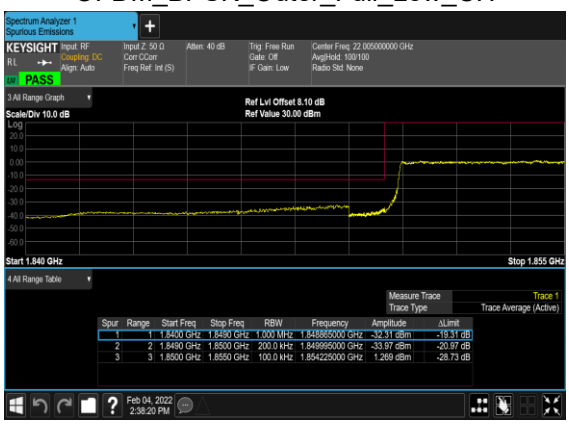

B66_N2(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

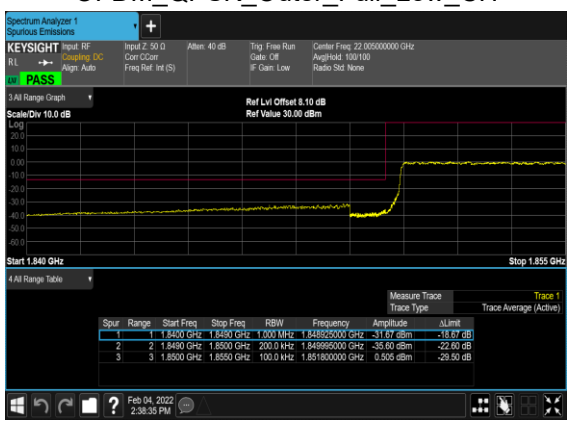

B66_N2(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH

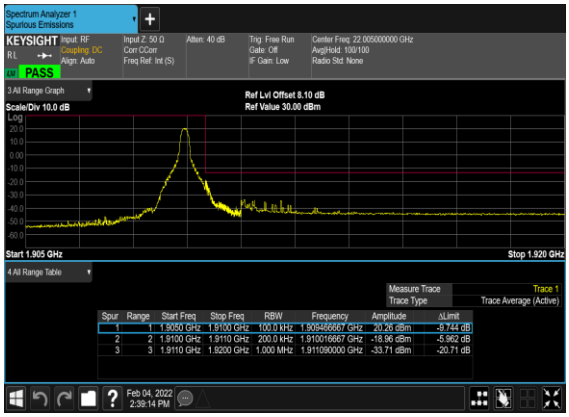

B66_N2(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

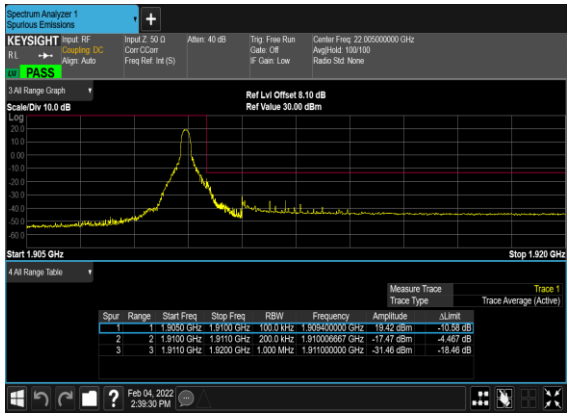

B66_N2(20M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH

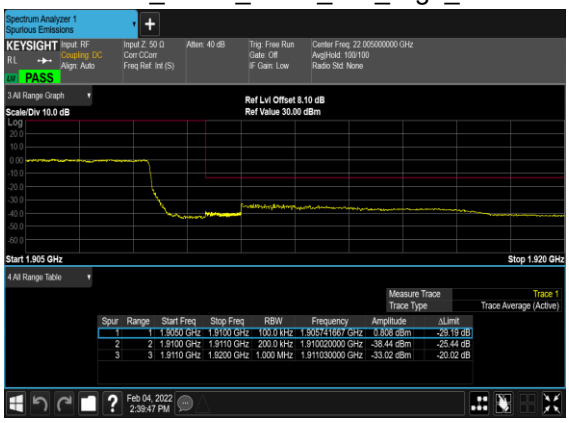

B66_N2(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

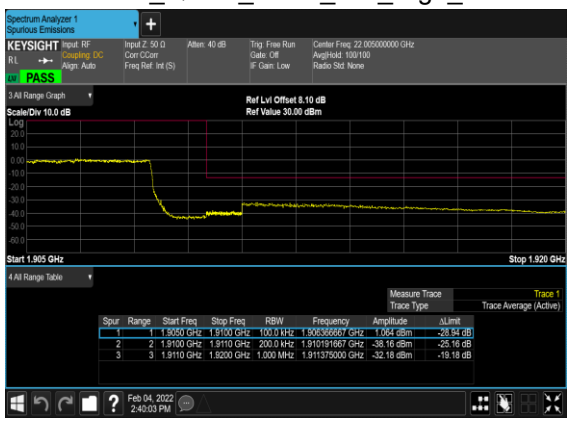

Software Version: 22.02.012503

FR1 N5<Ant. 0>

LTE Band: 7, LTE BW: 10M, LTE ARFCN: Mid

Transmitter Conducted Output Power And ERP, (G_T-L_C)=-2.0dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	ERP(dBm)	ERP(W)
5	15	5	174300	826.5	DFT-s-OFDM PI/2 BPSK	12@6	23.58	19.43	0.0877
5	15	5	174300	826.5	DFT-s-OFDM PI/2 BPSK	1@1	23.66	19.51	0.0893
5	15	5	174300	826.5	DFT-s-OFDM PI/2 BPSK	1@23	23.62	19.47	0.0885
5	15	5	174300	826.5	DFT-s-OFDM QPSK	12@6	23.54	19.39	0.0869
5	15	5	174300	826.5	DFT-s-OFDM QPSK	1@1	23.72	19.57	0.0906
5	15	5	174300	826.5	DFT-s-OFDM QPSK	1@23	23.59	19.44	0.0879
5	15	5	174300	826.5	DFT-s-OFDM 16 QAM	12@6	22.64	18.49	0.0706
5	15	5	174300	826.5	DFT-s-OFDM 16 QAM	1@1	22.61	18.46	0.0701
5	15	5	174300	826.5	DFT-s-OFDM 16 QAM	1@23	22.52	18.37	0.0687
5	15	5	174300	826.5	DFT-s-OFDM 64 QAM	12@6	21.13	16.98	0.0499
5	15	5	174300	826.5	DFT-s-OFDM 64 QAM	1@1	21.3	17.15	0.0519
5	15	5	174300	826.5	DFT-s-OFDM 64 QAM	1@23	21.27	17.12	0.0515
5	15	5	174300	826.5	DFT-s-OFDM 256 QAM	12@6	19.06	14.91	0.0310
5	15	5	174300	826.5	DFT-s-OFDM 256 QAM	1@1	18.63	14.48	0.0281
5	15	5	174300	826.5	DFT-s-OFDM 256 QAM	1@23	18.52	14.37	0.0274
5	15	5	174300	826.5	CP-OFDM QPSK	13@6	22.03	17.88	0.0614
5	15	5	174300	826.5	CP-OFDM QPSK	1@1	22.12	17.97	0.0627
5	15	5	174300	826.5	CP-OFDM QPSK	1@23	22.01	17.86	0.0611
5	15	5	176300	836.5	DFT-s-OFDM PI/2 BPSK	12@6	23.28	19.13	0.0818
5	15	5	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	23.4	19.25	0.0841
5	15	5	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@23	23.46	19.31	0.0853
5	15	5	176300	836.5	DFT-s-OFDM QPSK	12@6	23.35	19.2	0.0832
5	15	5	176300	836.5	DFT-s-OFDM QPSK	1@1	23.47	19.32	0.0855
5	15	5	176300	836.5	DFT-s-OFDM QPSK	1@23	23.45	19.3	0.0851
5	15	5	176300	836.5	DFT-s-OFDM 16 QAM	12@6	22.43	18.28	0.0673
5	15	5	176300	836.5	DFT-s-OFDM 16 QAM	1@1	22.39	18.24	0.0667
5	15	5	176300	836.5	DFT-s-OFDM	1@23	22.43	18.28	0.0673

					16 QAM				
5	15	5	176300	836.5	DFT-s-OFDM 64 QAM	12@6	20.91	16.76	0.0474
5	15	5	176300	836.5	DFT-s-OFDM 64 QAM	1@1	21.11	16.96	0.0497
5	15	5	176300	836.5	DFT-s-OFDM 64 QAM	1@23	21.11	16.96	0.0497
5	15	5	176300	836.5	DFT-s-OFDM 256 QAM	12@6	18.81	14.66	0.0292
5	15	5	176300	836.5	DFT-s-OFDM 256 QAM	1@1	18.37	14.22	0.0264
5	15	5	176300	836.5	DFT-s-OFDM 256 QAM	1@23	18.37	14.22	0.0264
5	15	5	176300	836.5	CP-OFDM QPSK	13@6	21.76	17.61	0.0577
5	15	5	176300	836.5	CP-OFDM QPSK	1@1	21.87	17.72	0.0592
5	15	5	176300	836.5	CP-OFDM QPSK	1@23	21.82	17.67	0.0585
5	15	5	178300	846.5	DFT-s-OFDM PI/2 BPSK	12@6	23.09	18.94	0.0783
5	15	5	178300	846.5	DFT-s-OFDM PI/2 BPSK	1@1	23.2	19.05	0.0804
5	15	5	178300	846.5	DFT-s-OFDM PI/2 BPSK	1@23	23.1	18.95	0.0785
5	15	5	178300	846.5	DFT-s-OFDM QPSK	12@6	23.08	18.93	0.0782
5	15	5	178300	846.5	DFT-s-OFDM QPSK	1@1	23.25	19.1	0.0813
5	15	5	178300	846.5	DFT-s-OFDM QPSK	1@23	23.11	18.96	0.0787
5	15	5	178300	846.5	DFT-s-OFDM 16 QAM	12@6	22.14	17.99	0.0630
5	15	5	178300	846.5	DFT-s-OFDM 16 QAM	1@1	22.19	18.04	0.0637
5	15	5	178300	846.5	DFT-s-OFDM 16 QAM	1@23	22.03	17.88	0.0614
5	15	5	178300	846.5	DFT-s-OFDM 64 QAM	12@6	20.7	16.55	0.0452
5	15	5	178300	846.5	DFT-s-OFDM 64 QAM	1@1	20.9	16.75	0.0473
5	15	5	178300	846.5	DFT-s-OFDM 64 QAM	1@23	20.79	16.64	0.0461
5	15	5	178300	846.5	DFT-s-OFDM 256 QAM	12@6	18.57	14.42	0.0277
5	15	5	178300	846.5	DFT-s-OFDM 256 QAM	1@1	18.14	13.99	0.0251
5	15	5	178300	846.5	DFT-s-OFDM 256 QAM	1@23	18.06	13.91	0.0246
5	15	5	178300	846.5	CP-OFDM QPSK	13@6	21.54	17.39	0.0548
5	15	5	178300	846.5	CP-OFDM QPSK	1@1	21.7	17.55	0.0569
5	15	5	178300	846.5	CP-OFDM QPSK	1@23	21.52	17.37	0.0546
5	15	10	174800	829	DFT-s-OFDM PI/2 BPSK	25@12	23.55	19.4	0.0871
5	15	10	174800	829	DFT-s-OFDM PI/2 BPSK	1@1	23.66	19.51	0.0893
5	15	10	174800	829	DFT-s-OFDM PI/2 BPSK	1@50	23.43	19.28	0.0847
5	15	10	174800	829	DFT-s-OFDM QPSK	25@12	23.57	19.42	0.0875
5	15	10	174800	829	DFT-s-OFDM QPSK	1@1	23.64	19.49	0.0889
5	15	10	174800	829	DFT-s-OFDM QPSK	1@50	23.44	19.29	0.0849
5	15	10	174800	829	DFT-s-OFDM	25@12	22.57	18.42	0.0695

					16 QAM				
5	15	10	174800	829	DFT-s-OFDM 16 QAM	1@1	22.55	18.4	0.0692
5	15	10	174800	829	DFT-s-OFDM 16 QAM	1@50	22.43	18.28	0.0673
5	15	10	174800	829	DFT-s-OFDM 64 QAM	25@12	21.03	16.88	0.0488
5	15	10	174800	829	DFT-s-OFDM 64 QAM	1@1	21.26	17.11	0.0514
5	15	10	174800	829	DFT-s-OFDM 64 QAM	1@50	21.08	16.93	0.0493
5	15	10	174800	829	DFT-s-OFDM 256 QAM	25@12	18.98	14.83	0.0304
5	15	10	174800	829	DFT-s-OFDM 256 QAM	1@1	18.56	14.41	0.0276
5	15	10	174800	829	DFT-s-OFDM 256 QAM	1@50	18.38	14.23	0.0265
5	15	10	174800	829	CP-OFDM QPSK	26@13	21.99	17.84	0.0608
5	15	10	174800	829	CP-OFDM QPSK	1@1	22.06	17.91	0.0618
5	15	10	174800	829	CP-OFDM QPSK	1@50	21.95	17.8	0.0603
5	15	10	176300	836.5	DFT-s-OFDM PI/2 BPSK	25@12	23.47	19.32	0.0855
5	15	10	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	23.39	19.24	0.0839
5	15	10	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@50	23.3	19.15	0.0822
5	15	10	176300	836.5	DFT-s-OFDM QPSK	25@12	23.49	19.34	0.0859
5	15	10	176300	836.5	DFT-s-OFDM QPSK	1@1	23.44	19.29	0.0849
5	15	10	176300	836.5	DFT-s-OFDM QPSK	1@50	23.36	19.21	0.0834
5	15	10	176300	836.5	DFT-s-OFDM 16 QAM	25@12	22.5	18.35	0.0684
5	15	10	176300	836.5	DFT-s-OFDM 16 QAM	1@1	22.35	18.2	0.0661
5	15	10	176300	836.5	DFT-s-OFDM 16 QAM	1@50	22.26	18.11	0.0647
5	15	10	176300	836.5	DFT-s-OFDM 64 QAM	25@12	20.98	16.83	0.0482
5	15	10	176300	836.5	DFT-s-OFDM 64 QAM	1@1	21.09	16.94	0.0494
5	15	10	176300	836.5	DFT-s-OFDM 64 QAM	1@50	20.99	16.84	0.0483
5	15	10	176300	836.5	DFT-s-OFDM 256 QAM	25@12	18.91	14.76	0.0299
5	15	10	176300	836.5	DFT-s-OFDM 256 QAM	1@1	18.37	14.22	0.0264
5	15	10	176300	836.5	DFT-s-OFDM 256 QAM	1@50	18.27	14.12	0.0258
5	15	10	176300	836.5	CP-OFDM QPSK	26@13	21.87	17.72	0.0592
5	15	10	176300	836.5	CP-OFDM QPSK	1@1	21.9	17.75	0.0596
5	15	10	176300	836.5	CP-OFDM QPSK	1@50	21.82	17.67	0.0585
5	15	10	177800	844	DFT-s-OFDM PI/2 BPSK	25@12	23.21	19.06	0.0805
5	15	10	177800	844	DFT-s-OFDM PI/2 BPSK	1@1	23.26	19.11	0.0815
5	15	10	177800	844	DFT-s-OFDM PI/2 BPSK	1@50	23.05	18.9	0.0776
5	15	10	177800	844	DFT-s-OFDM QPSK	25@12	23.22	19.07	0.0807
5	15	10	177800	844	DFT-s-OFDM	1@1	23.31	19.16	0.0824

					QPSK				
5	15	10	177800	844	DFT-s-OFDM QPSK	1@50	23.1	18.95	0.0785
5	15	10	177800	844	DFT-s-OFDM 16 QAM	25@12	22.25	18.1	0.0646
5	15	10	177800	844	DFT-s-OFDM 16 QAM	1@1	22.26	18.11	0.0647
5	15	10	177800	844	DFT-s-OFDM 16 QAM	1@50	22	17.85	0.0610
5	15	10	177800	844	DFT-s-OFDM 64 QAM	25@12	20.7	16.55	0.0452
5	15	10	177800	844	DFT-s-OFDM 64 QAM	1@1	21	16.85	0.0484
5	15	10	177800	844	DFT-s-OFDM 64 QAM	1@50	20.76	16.61	0.0458
5	15	10	177800	844	DFT-s-OFDM 256 QAM	25@12	18.67	14.52	0.0283
5	15	10	177800	844	DFT-s-OFDM 256 QAM	1@1	18.23	14.08	0.0256
5	15	10	177800	844	DFT-s-OFDM 256 QAM	1@50	17.99	13.84	0.0242
5	15	10	177800	844	CP-OFDM QPSK	26@13	21.64	17.49	0.0561
5	15	10	177800	844	CP-OFDM QPSK	1@1	21.76	17.61	0.0577
5	15	10	177800	844	CP-OFDM QPSK	1@50	21.55	17.4	0.0550
5	15	15	175300	831.5	DFT-s-OFDM PI/2 BPSK	36@18	23.47	19.32	0.0855
5	15	15	175300	831.5	DFT-s-OFDM PI/2 BPSK	1@1	23.59	19.44	0.0879
5	15	15	175300	831.5	DFT-s-OFDM PI/2 BPSK	1@77	23.29	19.14	0.0820
5	15	15	175300	831.5	DFT-s-OFDM QPSK	36@18	23.54	19.39	0.0869
5	15	15	175300	831.5	DFT-s-OFDM QPSK	1@1	23.65	19.5	0.0891
5	15	15	175300	831.5	DFT-s-OFDM QPSK	1@77	23.36	19.21	0.0834
5	15	15	175300	831.5	DFT-s-OFDM 16 QAM	36@18	22.5	18.35	0.0684
5	15	15	175300	831.5	DFT-s-OFDM 16 QAM	1@1	22.51	18.36	0.0685
5	15	15	175300	831.5	DFT-s-OFDM 16 QAM	1@77	22.27	18.12	0.0649
5	15	15	175300	831.5	DFT-s-OFDM 64 QAM	36@18	20.99	16.84	0.0483
5	15	15	175300	831.5	DFT-s-OFDM 64 QAM	1@1	21.23	17.08	0.0511
5	15	15	175300	831.5	DFT-s-OFDM 64 QAM	1@77	20.98	16.83	0.0482
5	15	15	175300	831.5	DFT-s-OFDM 256 QAM	36@18	18.94	14.79	0.0301
5	15	15	175300	831.5	DFT-s-OFDM 256 QAM	1@1	18.58	14.43	0.0277
5	15	15	175300	831.5	DFT-s-OFDM 256 QAM	1@77	18.35	14.2	0.0263
5	15	15	175300	831.5	CP-OFDM QPSK	39@19	21.96	17.81	0.0604
5	15	15	175300	831.5	CP-OFDM QPSK	1@1	22.11	17.96	0.0625
5	15	15	175300	831.5	CP-OFDM QPSK	1@77	21.73	17.58	0.0573
5	15	15	176300	836.5	DFT-s-OFDM PI/2 BPSK	36@18	23.32	19.17	0.0826
5	15	15	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	23.46	19.31	0.0853
5	15	15	176300	836.5	DFT-s-OFDM	1@77	23.14	18.99	0.0793

					PI/2 BPSK				
5	15	15	176300	836.5	DFT-s-OFDM QPSK	36@18	23.37	19.22	0.0836
5	15	15	176300	836.5	DFT-s-OFDM QPSK	1@1	23.51	19.36	0.0863
5	15	15	176300	836.5	DFT-s-OFDM QPSK	1@77	23.16	19.01	0.0796
5	15	15	176300	836.5	DFT-s-OFDM 16 QAM	36@18	22.38	18.23	0.0665
5	15	15	176300	836.5	DFT-s-OFDM 16 QAM	1@1	22.38	18.23	0.0665
5	15	15	176300	836.5	DFT-s-OFDM 16 QAM	1@77	22.1	17.95	0.0624
5	15	15	176300	836.5	DFT-s-OFDM 64 QAM	36@18	20.9	16.75	0.0473
5	15	15	176300	836.5	DFT-s-OFDM 64 QAM	1@1	21.15	17	0.0501
5	15	15	176300	836.5	DFT-s-OFDM 64 QAM	1@77	20.79	16.64	0.0461
5	15	15	176300	836.5	DFT-s-OFDM 256 QAM	36@18	18.77	14.62	0.0290
5	15	15	176300	836.5	DFT-s-OFDM 256 QAM	1@1	18.4	14.25	0.0266
5	15	15	176300	836.5	DFT-s-OFDM 256 QAM	1@77	18.22	14.07	0.0255
5	15	15	176300	836.5	CP-OFDM QPSK	39@19	21.8	17.65	0.0582
5	15	15	176300	836.5	CP-OFDM QPSK	1@1	21.97	17.82	0.0605
5	15	15	176300	836.5	CP-OFDM QPSK	1@77	21.58	17.43	0.0553
5	15	15	177300	841.5	DFT-s-OFDM PI/2 BPSK	36@18	23.18	19.03	0.0800
5	15	15	177300	841.5	DFT-s-OFDM PI/2 BPSK	1@1	23.33	19.18	0.0828
5	15	15	177300	841.5	DFT-s-OFDM PI/2 BPSK	1@77	22.92	18.77	0.0753
5	15	15	177300	841.5	DFT-s-OFDM QPSK	36@18	23.23	19.08	0.0809
5	15	15	177300	841.5	DFT-s-OFDM QPSK	1@1	23.36	19.21	0.0834
5	15	15	177300	841.5	DFT-s-OFDM QPSK	1@77	23.01	18.86	0.0769
5	15	15	177300	841.5	DFT-s-OFDM 16 QAM	36@18	22.21	18.06	0.0640
5	15	15	177300	841.5	DFT-s-OFDM 16 QAM	1@1	22.28	18.13	0.0650
5	15	15	177300	841.5	DFT-s-OFDM 16 QAM	1@77	21.89	17.74	0.0594
5	15	15	177300	841.5	DFT-s-OFDM 64 QAM	36@18	20.75	16.6	0.0457
5	15	15	177300	841.5	DFT-s-OFDM 64 QAM	1@1	21.01	16.86	0.0485
5	15	15	177300	841.5	DFT-s-OFDM 64 QAM	1@77	20.64	16.49	0.0446
5	15	15	177300	841.5	DFT-s-OFDM 256 QAM	36@18	18.62	14.47	0.0280
5	15	15	177300	841.5	DFT-s-OFDM 256 QAM	1@1	18.32	14.17	0.0261
5	15	15	177300	841.5	DFT-s-OFDM 256 QAM	1@77	18.02	13.87	0.0244
5	15	15	177300	841.5	CP-OFDM QPSK	39@19	21.64	17.49	0.0561
5	15	15	177300	841.5	CP-OFDM QPSK	1@1	21.83	17.68	0.0586
5	15	15	177300	841.5	CP-OFDM QPSK	1@77	21.39	17.24	0.0530
5	15	20	175800	834	DFT-s-OFDM	50@25	23.43	19.28	0.0847

					PI/2 BPSK				
5	15	20	175800	834	DFT-s-OFDM PI/2 BPSK	1@1	23.53	19.38	0.0867
5	15	20	175800	834	DFT-s-OFDM PI/2 BPSK	1@104	23.13	18.98	0.0791
5	15	20	175800	834	DFT-s-OFDM QPSK	50@25	23.47	19.32	0.0855
5	15	20	175800	834	DFT-s-OFDM QPSK	1@1	23.57	19.42	0.0875
5	15	20	175800	834	DFT-s-OFDM QPSK	1@104	23.14	18.99	0.0793
5	15	20	175800	834	DFT-s-OFDM 16 QAM	50@25	22.42	18.27	0.0671
5	15	20	175800	834	DFT-s-OFDM 16 QAM	1@1	22.5	18.35	0.0684
5	15	20	175800	834	DFT-s-OFDM 16 QAM	1@104	22.11	17.96	0.0625
5	15	20	175800	834	DFT-s-OFDM 64 QAM	50@25	21.02	16.87	0.0486
5	15	20	175800	834	DFT-s-OFDM 64 QAM	1@1	21.21	17.06	0.0508
5	15	20	175800	834	DFT-s-OFDM 64 QAM	1@104	20.77	16.62	0.0459
5	15	20	175800	834	DFT-s-OFDM 256 QAM	50@25	18.87	14.72	0.0296
5	15	20	175800	834	DFT-s-OFDM 256 QAM	1@1	18.58	14.43	0.0277
5	15	20	175800	834	DFT-s-OFDM 256 QAM	1@104	18.23	14.08	0.0256
5	15	20	175800	834	CP-OFDM QPSK	53@26	21.88	17.73	0.0593
5	15	20	175800	834	CP-OFDM QPSK	1@1	22.08	17.93	0.0621
5	15	20	175800	834	CP-OFDM QPSK	1@104	21.6	17.45	0.0556
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	50@25	23.32	19.17	0.0826
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	23.47	19.32	0.0855
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@104	23.04	18.89	0.0774
5	15	20	176300	836.5	DFT-s-OFDM QPSK	50@25	23.38	19.23	0.0838
5	15	20	176300	836.5	DFT-s-OFDM QPSK	1@1	23.56	19.41	0.0873
5	15	20	176300	836.5	DFT-s-OFDM QPSK	1@104	23.1	18.95	0.0785
5	15	20	176300	836.5	DFT-s-OFDM 16 QAM	50@25	22.39	18.24	0.0667
5	15	20	176300	836.5	DFT-s-OFDM 16 QAM	1@1	22.41	18.26	0.0670
5	15	20	176300	836.5	DFT-s-OFDM 16 QAM	1@104	22.02	17.87	0.0612
5	15	20	176300	836.5	DFT-s-OFDM 64 QAM	50@25	20.9	16.75	0.0473
5	15	20	176300	836.5	DFT-s-OFDM 64 QAM	1@1	21.18	17.03	0.0505
5	15	20	176300	836.5	DFT-s-OFDM 64 QAM	1@104	20.71	16.56	0.0453
5	15	20	176300	836.5	DFT-s-OFDM 256 QAM	50@25	18.78	14.63	0.0290
5	15	20	176300	836.5	DFT-s-OFDM 256 QAM	1@1	18.53	14.38	0.0274
5	15	20	176300	836.5	DFT-s-OFDM 256 QAM	1@104	18.15	14	0.0251
5	15	20	176300	836.5	CP-OFDM QPSK	53@26	21.82	17.67	0.0585
5	15	20	176300	836.5	CP-OFDM	1@1	22.03	17.88	0.0614

					QPSK				
5	15	20	176300	836.5	CP-OFDM QPSK	1@104	21.54	17.39	0.0548
5	15	20	176800	839	DFT-s-OFDM PI/2 BPSK	50@25	23.27	19.12	0.0817
5	15	20	176800	839	DFT-s-OFDM PI/2 BPSK	1@1	23.4	19.25	0.0841
5	15	20	176800	839	DFT-s-OFDM PI/2 BPSK	1@104	22.95	18.8	0.0759
5	15	20	176800	839	DFT-s-OFDM QPSK	50@25	23.3	19.15	0.0822
5	15	20	176800	839	DFT-s-OFDM QPSK	1@1	23.43	19.28	0.0847
5	15	20	176800	839	DFT-s-OFDM QPSK	1@104	22.95	18.8	0.0759
5	15	20	176800	839	DFT-s-OFDM 16 QAM	50@25	22.3	18.15	0.0653
5	15	20	176800	839	DFT-s-OFDM 16 QAM	1@1	22.33	18.18	0.0658
5	15	20	176800	839	DFT-s-OFDM 16 QAM	1@104	21.91	17.76	0.0597
5	15	20	176800	839	DFT-s-OFDM 64 QAM	50@25	20.82	16.67	0.0465
5	15	20	176800	839	DFT-s-OFDM 64 QAM	1@1	21.04	16.89	0.0489
5	15	20	176800	839	DFT-s-OFDM 64 QAM	1@104	20.41	16.26	0.0423
5	15	20	176800	839	DFT-s-OFDM 256 QAM	50@25	18.73	14.58	0.0287
5	15	20	176800	839	DFT-s-OFDM 256 QAM	1@1	18.45	14.3	0.0269
5	15	20	176800	839	DFT-s-OFDM 256 QAM	1@104	18.04	13.89	0.0245
5	15	20	176800	839	CP-OFDM QPSK	53@26	21.73	17.58	0.0573
5	15	20	176800	839	CP-OFDM QPSK	1@1	21.96	17.81	0.0604
5	15	20	176800	839	CP-OFDM QPSK	1@104	21.45	17.3	0.0537

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00495	**PASS**	NV
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00643	**PASS**	LV
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00476	**PASS**	HV
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00499	**PASS**	-30℃
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00292	**PASS**	-20℃
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00391	**PASS**	-10℃
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00674	**PASS**	0℃
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00497	**PASS**	10℃
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00386	**PASS**	20℃
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00398	**PASS**	30℃
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00663	**PASS**	40℃
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	0.00461	**PASS**	50℃

Peak to Average Radio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
5	15	20	175800	834.0	DFT-s-OFDM PI/2 BPSK	100@0	3.89	13	**PASS**
5	15	20	175800	834.0	DFT-s-OFDM PI/2 BPSK	1@0	3.5	13	**PASS**
5	15	20	175800	834.0	DFT-s-OFDM QPSK	100@0	5.35	13	**PASS**
5	15	20	175800	834.0	DFT-s-OFDM QPSK	1@0	5.09	13	**PASS**
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	100@0	3.95	13	**PASS**
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@0	3.48	13	**PASS**
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	5.33	13	**PASS**
5	15	20	176300	836.5	DFT-s-OFDM QPSK	1@0	5.08	13	**PASS**
5	15	20	176800	839.0	DFT-s-OFDM PI/2 BPSK	100@0	4.01	13	**PASS**
5	15	20	176800	839.0	DFT-s-OFDM PI/2 BPSK	1@0	3.52	13	**PASS**
5	15	20	176800	839.0	DFT-s-OFDM QPSK	100@0	5.41	13	**PASS**
5	15	20	176800	839.0	DFT-s-OFDM QPSK	1@0	5.14	13	**PASS**

B7_N5(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH

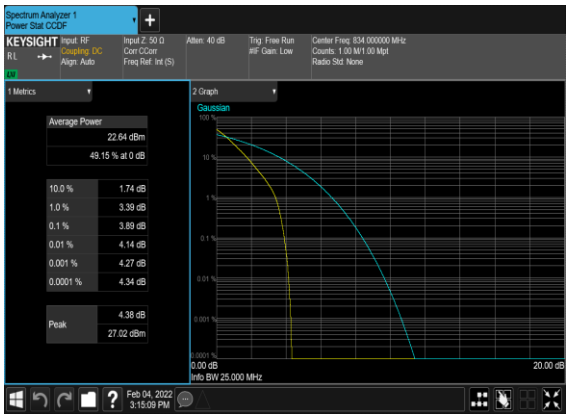

B7_N5(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH

B7_N5(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

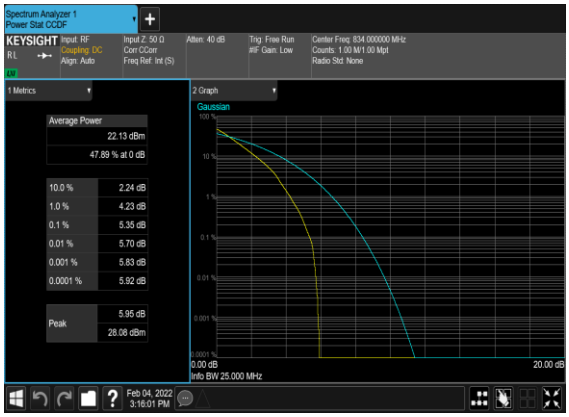

B7_N5(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

B7_N5(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

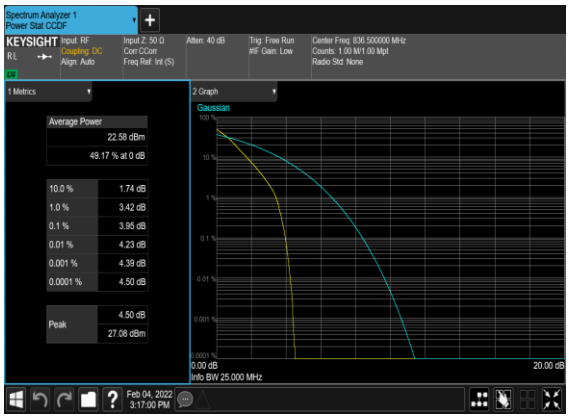

B7_N5(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH