



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2243-1
FCC ID : IHDT56AF5
STANDARD : 47 CFR Part 2, Part 27 Subpart O
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : May 26, 2022 ~ Jun. 15, 2022

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Maximum EIRP Power and Emission Designator	7
1.7 Testing Location	8
1.8 Test Software	8
1.9 Applicable Standards	8
1.10 Specification of Accessory	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode	10
2.2 Connection Diagram of Test System	11
2.3 Support Unit used in test configuration and system	11
2.4 Measurement Results Explanation Example	11
2.5 Frequency List of Low/Middle/High Channels	12
3 CONDUCTED TEST ITEMS	14
3.1 Measuring Instruments	14
3.2 Test Setup	14
3.3 Test Result of Conducted Test	14
3.4 Conducted Output Power and EIRP	15
3.5 Peak-to-Average Ratio	16
3.6 Occupied Bandwidth	17
3.7 Conducted Band Edge	18
3.8 Conducted Spurious Emission	19
3.9 Frequency Stability	20
4 RADIATED TEST ITEMS	21
4.1 Measuring Instruments	21
4.2 Test Setup	21
4.3 Test Result of Radiated Test	22
4.4 Radiated Spurious Emission	23
5 LIST OF MEASURING EQUIPMENT	24
6 UNCERTAINTY OF EVALUATION	25
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG242301H	Rev. 01	Initial issue of report	Jun. 29, 2022



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(j)(3)	Equivalent Isotropic Radiated Power (5G NR n77, n78)	EIRP < 1Watt		
3.5	§27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §27.53(l)(2)	Conducted Band Edge Measurement (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.8	§2.1051 §27.53(l)(2)	Conducted Spurious Emission (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.9	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(l)(2)	Radiated Spurious Emission (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 26.9 dB at 7752.00 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2243-1
FCC ID	IHDT56AF5
IMEI Code	Conducted: 353593830018955 Radiation: 35359380019631
HW Version	DVT2
SW Version	SSJ32.60
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz
Rx Frequency	5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz
SCS	30kHz
Bandwidth	20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz
Maximum Output Power to Antenna	<Ant. 2> 5G NR n77 : 23.58 dBm 5G NR n78 : 25.34 dBm <Ant. 4> 5G NR n78 : 24.31 dBm <Ant. 6> 5G NR n78 : 24.64 dBm <Ant. 7> 5G NR n78 : 24.83 dBm
Antenna Gain	<Ant. 2> 5G NR n77: -3.4 dBi 5G NR n78: -3.4 dBi <Ant. 4> 5G NR n78: -4.5 dBi <Ant. 6> 5G NR n78: -4.7 dBi <Ant. 7> 5G NR n78: -4.2 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. 5G NR n77 only support Ant.2, and n78 support antenna switch on Ant.2/4/6/7, only the test data of worst Ant.2 is showed in the report according to the maximum power.
2. 5G NR n78 supports HPUE mode.
3. 5G NR n77/n78 support SA and NSA mode. The whole testing has assessed SA mode by referring to the higher conducted power for conducted test items.
4. All the supported EN-DC combinations are verified conducted power, only the EN-DC combination with highest power are shown in the report.
5. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP Power and Emission Designator

5G NR n77 SA		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3710.01 ~ 3969.99	0.1030	18M2G7D	0.0693	18M2W7D
30	3715.02 ~ 3964.98	0.1028	27M8G7D	0.0690	27M8W7D
40	3720.00 ~ 3960.00	0.1040	37M8G7D	0.0701	37M9W7D
50	3725.01 ~ 3954.99	0.0986	47M4G7D	0.0653	47M5W7D
60	3730.02 ~ 3949.98	0.0971	57M9G7D	0.0640	57M8W7D
70	3735.00 ~ 3945.00	0.0940	67M5G7D	0.0618	67M6W7D
80	3740.01 ~ 3939.99	0.0944	77M4G7D	0.0617	77M5W7D
90	3745.02 ~ 3934.98	0.0935	87M5G7D	0.0610	87M6W7D
100	3750.00 ~ 3930.00	0.1042	97M3G7D	0.0646	97M7W7D

5G NR n78 SA		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3710.01 ~ 3789.99	0.1535	18M2G7D	0.1285	18M2W7D
30	3715.005 ~ 3784.995	0.1521	27M8G7D	0.1300	27M8W7D
40	3720.00 ~ 3780.00	0.1560	37M8G7D	0.1306	37M8W7D
50	3725.01 ~ 3774.99	0.1469	47M4G7D	0.1194	47M5W7D
60	3730.02 ~ 3769.98	0.1419	58M0G7D	0.1151	57M8W7D
70	3735.00 ~ 3765.00	0.1422	67M4G7D	0.1161	67M5W7D
80	3740.01 ~ 3759.99	0.1413	77M4G7D	0.1180	77M6W7D
90	3745.02 ~ 3754.98	0.1406	87M6G7D	0.1153	87M5W7D
100	3750.00 ~ 3750.00	0.1563	97M4G7D	0.1213	97M5W7D

Note: All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 270
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

1.10 Specification of Accessory

Specification of Accessory				
AC Adapter (US)	Brand Name	Motorola (Salcomp)	Model Name	MC-681L
AC Adapter (EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-682L
AC Adapter (UK)	Brand Name	Motorola (Salcomp)	Model Name	MC-683L
AC Adapter (AU)	Brand Name	Motorola (Salcomp)	Model Name	MC-685L
AC Adapter (AR)	Brand Name	Motorola (Salcomp)	Model Name	MC-686L
AC Adapter (BR)	Brand Name	Motorola (Salcomp)	Model Name	MC-687L
AC Adapter (PRC)	Brand Name	Motorola (Salcomp)	Model Name	MC-688L
AC Adapter (CHILE)	Brand Name	Motorola (Salcomp)	Model Name	MC-689L
Battery 1	Brand Name	Motorola (ATL)	Model Name	NP44
Battery 2	Brand Name	Motorola (Sunwoda)	Model Name	NP44
Earphone 1	Brand Name	Motorola (Lyand)	Model Name	MD211(SH38D20195)
Earphone 2	Brand Name	Motorola (LCHSE)	Model Name	MD211(SH38D41948)
USB Cable	Brand Name	Motorola (Saibao)	Model Name	SC18D58980\SC18D24968
Type C to HDMI HDMI/ USBC Cable 1	Brand Name	Motorola (Linxee)	Model Name	SC18D02146
Type C to HDMI HDMI/ USBC Cable 2	Brand Name	Motorola (Linxee)	Model Name	SC18D38847

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

Test Items	5G NR	Bandwidth (MHz)									Modulation					RB #		Test Channel		
		20	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H
Max. Output Power	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n77	v									v	v					v	v	v	v
	n78	v									v	v					v	v	v	v
26dB and 99% Bandwidth	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v		v	
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v		v	
Conducted Band Edge	n77	v				v				v	v	v				v	v	v		v
	n78	v				v				v	v	v				v	v	v		v
Conducted Spurious Emission	n77	v				v				v	v	v				v		v	v	v
	n78	v				v				v	v	v				v		v	v	v
Frequency Stability	n77	v										v					v		v	
	n78	v										v					v		v	
E.R.P / E.I.R.P	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	n77	Worst Case																v	v	v
	n78	Worst Case																v	v	v
Note		1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Based on engineering evaluation, only the worst modulations test results are shown in the report. 5. Frequency Stability : Normal Voltage = 3.89V ; Low Voltage =3.4V. ; High Voltage =4.2V																		

2.2 Connection Diagram of Test System

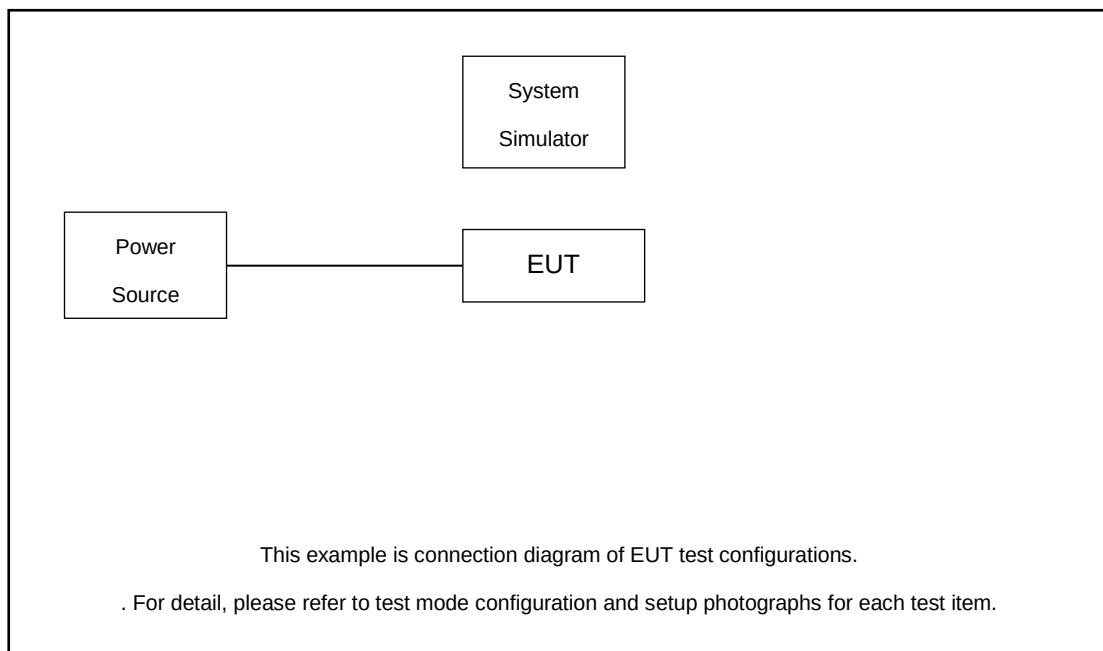

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820/8821	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 8.6 dB.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\
 &= 8.6 \text{ (dB)}
 \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

5G n77 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000	656000	662000
	Frequency	3750	3840	3930
90	Channel	649668	656000	662332
	Frequency	3745.02	3840	3934.98
80	Channel	649334	656000	662666
	Frequency	3740.01	3840	3939.99
70	Channel	649000	656000	663000
	Frequency	3735	3840	3945
60	Channel	648668	656000	663332
	Frequency	3730.02	3840	3949.98
50	Channel	648334	656000	663666
	Frequency	3725.01	3840	3954.99
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
30	Channel	647668	656000	664332
	Frequency	3715.02	3840	3964.98
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99



5G n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000		
	Frequency	3750		
90	Channel	649668	650000	650332
	Frequency	3745.02	3750	3754.98
80	Channel	649334	650000	650666
	Frequency	3740.01	3750	3759.99
70	Channel	649000	650000	651000
	Frequency	3735	3750	3765
60	Channel	648668	650000	651332
	Frequency	3730.02	3750	3769.98
50	Channel	648334	650000	651666
	Frequency	3725.01	3750	3774.99
40	Channel	648000	650000	652000
	Frequency	3720	3750	3780
30	Channel	647668	650000	652332
	Frequency	3715.02	3750	3784.98
20	Channel	647334	650000	652666
	Frequency	3710.01	3750	3789.99


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

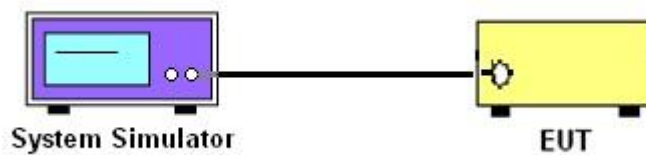

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

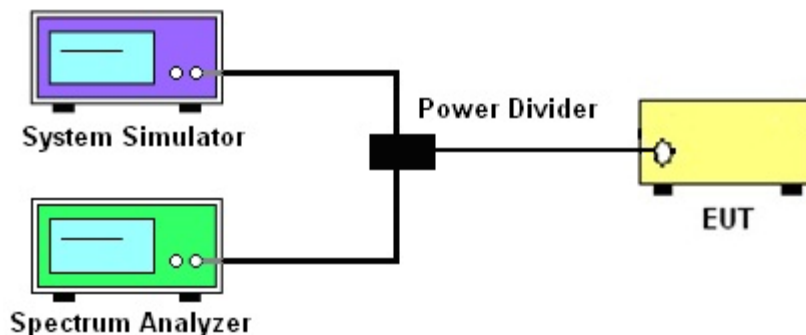

3.2.3 Frequency Stability

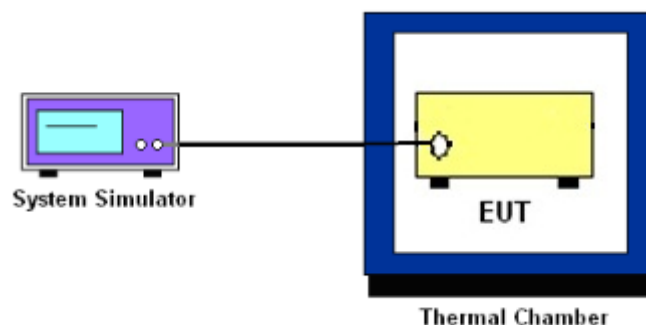

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n77, n78.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(l)(2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

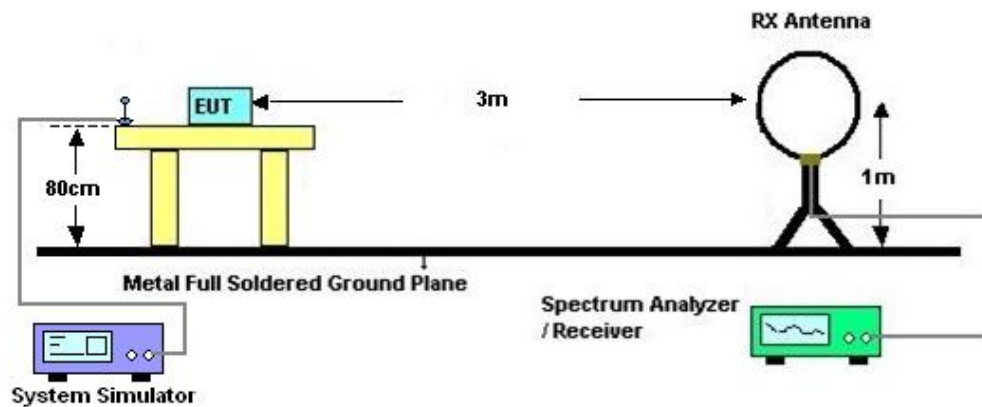

4.2.2 For radiated test from 30MHz to 1GHz

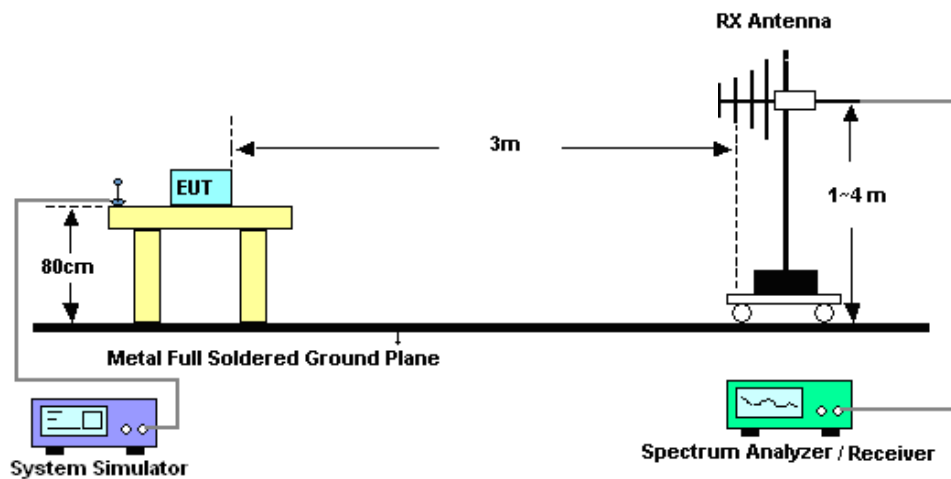

4.2.3 For radiated test above 1GHz

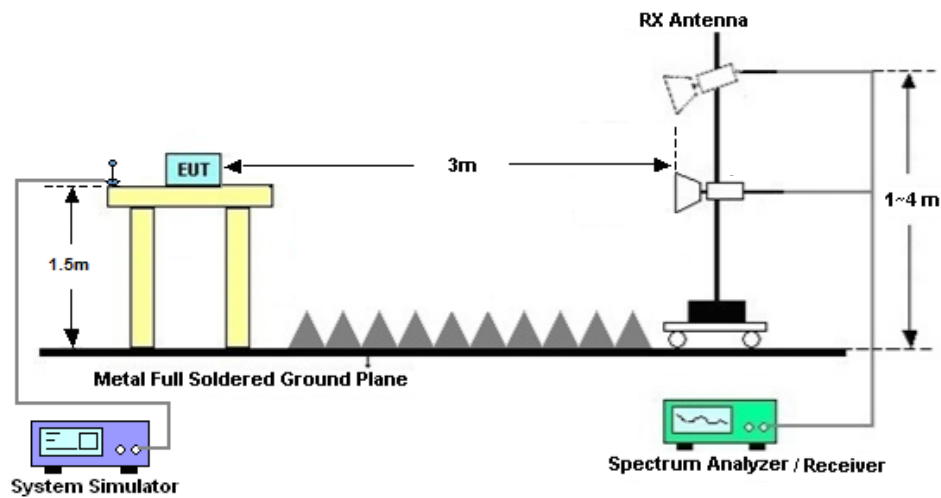

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 07, 2022	May 26, 2022	Apr. 06, 2023	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 25, 2021	May 26, 2022	Oct. 24, 2022	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2021	May 26, 2022	Dec. 24, 2022	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 14, 2021	May 26, 2022	Jul. 13, 2022	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2021	Jun. 15, 2022	Dec. 26, 2022	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 14, 2021	Jun. 15, 2022	Jul. 13, 2022	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	Jun. 15, 2022	Jun. 21, 2022	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Sep. 28, 2021	Jun. 15, 2022	Sep. 27, 2022	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 18, 2021	Jun. 15, 2022	Jul. 17, 2022	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 10, 2022	Jun. 15, 2022	Apr. 09, 2023	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 06, 2022	Jun. 15, 2022	Apr. 05, 2023	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 22, 2021	Jun. 15, 2022	Oct. 21, 2022	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 22, 2021	Jun. 15, 2022	Oct. 21, 2022	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 13, 2021	Jun. 15, 2022	Jul. 12, 2022	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Jun. 15, 2022	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jun. 15, 2022	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jun. 15, 2022	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	± 1.34 dB
Conducted Emissions	± 1.34 dB
Occupied Channel Bandwidth	± 0.13 %

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.48dB
--	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.53dB
--	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.02dB
--	--------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Jung Guo	Temperature :	21~23°C
		Relative Humidity :	45~51%

FR1 N77(ANT2)

Conducted Output Power and EIRP(gian=-3.4dBi)

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@1	23.1	19.7	0.0933
77	30	20	647334	3710.01	DFT-s-OFDM 16 QAM	1@1	21.24	17.84	0.0608
77	30	20	656000	3840	DFT-s-OFDM QPSK	1@1	23.48	20.08	0.1019
77	30	20	656000	3840	DFT-s-OFDM 16 QAM	1@1	21.65	18.25	0.0668
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@1	23.53	20.13	0.1030
77	30	20	664666	3969.99	DFT-s-OFDM 16 QAM	1@1	21.81	18.41	0.0693
77	30	30	647668	3715.02	DFT-s-OFDM QPSK	1@1	23.2	19.8	0.0955
77	30	30	647668	3715.02	DFT-s-OFDM 16 QAM	1@1	21.33	17.93	0.0621
77	30	30	656000	3840	DFT-s-OFDM QPSK	1@1	23.52	20.12	0.1028
77	30	30	656000	3840	DFT-s-OFDM 16 QAM	1@1	21.79	18.39	0.0690
77	30	30	664332	3964.98	DFT-s-OFDM QPSK	1@1	23.41	20.01	0.1002
77	30	30	664332	3964.98	DFT-s-OFDM 16 QAM	1@1	21.62	18.22	0.0664
77	30	40	648000	3720	DFT-s-OFDM QPSK	1@1	23.29	19.89	0.0975
77	30	40	648000	3720	DFT-s-OFDM 16 QAM	1@1	21.43	18.03	0.0635
77	30	40	656000	3840	DFT-s-OFDM QPSK	1@1	23.22	19.82	0.0959
77	30	40	656000	3840	DFT-s-OFDM 16 QAM	1@1	21.86	18.46	0.0701
77	30	40	664000	3960	DFT-s-OFDM QPSK	1@1	23.57	20.17	0.1040
77	30	40	664000	3960	DFT-s-OFDM 16 QAM	1@1	21.86	18.46	0.0701
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@1	22.96	19.56	0.0904
77	30	50	648334	3725.01	DFT-s-OFDM 16 QAM	1@1	21.04	17.64	0.0581
77	30	50	656000	3840	DFT-s-OFDM QPSK	1@1	23.34	19.94	0.0986
77	30	50	656000	3840	DFT-s-OFDM 16 QAM	1@1	21.55	18.15	0.0653
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@1	23.24	19.84	0.0964
77	30	50	663666	3954.99	DFT-s-OFDM 16 QAM	1@1	21.45	18.05	0.0638
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@1	22.97	19.57	0.0906
77	30	60	648668	3730.02	DFT-s-OFDM 16 QAM	1@1	21	17.6	0.0575
77	30	60	656000	3840	DFT-s-OFDM QPSK	1@1	23.27	19.87	0.0971
77	30	60	656000	3840	DFT-s-OFDM	1@1	21.46	18.06	0.0640

					16 QAM				
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@1	23.04	19.64	0.0920
77	30	60	663332	3949.98	DFT-s-OFDM 16 QAM	1@1	21.27	17.87	0.0612
77	30	70	649000	3735	DFT-s-OFDM QPSK	1@1	22.85	19.45	0.0881
77	30	70	649000	3735	DFT-s-OFDM 16 QAM	1@1	21.03	17.63	0.0579
77	30	70	656000	3840	DFT-s-OFDM QPSK	1@1	23.13	19.73	0.0940
77	30	70	656000	3840	DFT-s-OFDM 16 QAM	1@1	21.31	17.91	0.0618
77	30	70	663000	3945	DFT-s-OFDM QPSK	1@1	23.13	19.73	0.0940
77	30	70	663000	3945	DFT-s-OFDM 16 QAM	1@1	21.28	17.88	0.0614
77	30	80	649334	3740.01	DFT-s-OFDM QPSK	1@1	22.85	19.45	0.0881
77	30	80	649334	3740.01	DFT-s-OFDM 16 QAM	1@1	20.99	17.59	0.0574
77	30	80	656000	3840	DFT-s-OFDM QPSK	1@1	23.15	19.75	0.0944
77	30	80	656000	3840	DFT-s-OFDM 16 QAM	1@1	21.3	17.9	0.0617
77	30	80	662666	3939.99	DFT-s-OFDM QPSK	1@1	22.98	19.58	0.0908
77	30	80	662666	3939.99	DFT-s-OFDM 16 QAM	1@1	21.16	17.76	0.0597
77	30	90	649668	3745.02	DFT-s-OFDM QPSK	1@1	22.85	19.45	0.0881
77	30	90	649668	3745.02	DFT-s-OFDM 16 QAM	1@1	20.94	17.54	0.0568
77	30	90	656000	3840	DFT-s-OFDM QPSK	1@1	23.11	19.71	0.0935
77	30	90	656000	3840	DFT-s-OFDM 16 QAM	1@1	21.25	17.85	0.0610
77	30	90	662332	3934.98	DFT-s-OFDM QPSK	1@1	22.98	19.58	0.0908
77	30	90	662332	3934.98	DFT-s-OFDM 16 QAM	1@1	21.23	17.83	0.0607
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	135@67	22.85	19.45	0.0881
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	1@1	22.83	19.43	0.0877
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	1@271	22.86	19.46	0.0883
77	30	100	650000	3750	DFT-s-OFDM QPSK	135@67	22.89	19.49	0.0889
77	30	100	650000	3750	DFT-s-OFDM QPSK	1@1	22.89	19.49	0.0889
77	30	100	650000	3750	DFT-s-OFDM QPSK	1@271	22.86	19.46	0.0883
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	135@67	20.85	17.45	0.0556
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	1@1	20.92	17.52	0.0565
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	1@271	20.92	17.52	0.0565
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	135@67	19.37	15.97	0.0395
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	1@1	19.19	15.79	0.0379
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	1@271	19.24	15.84	0.0384
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	135@67	17.35	13.95	0.0248

77	30	100	650000	3750	DFT-s-OFDM 256 QAM	1@1	17.15	13.75	0.0237
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	1@271	17.12	13.72	0.0236
77	30	100	650000	3750	CP-OFDM QPSK	137@68	20.32	16.92	0.0492
77	30	100	650000	3750	CP-OFDM QPSK	1@1	20.36	16.96	0.0497
77	30	100	650000	3750	CP-OFDM QPSK	1@271	20.37	16.97	0.0498
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	135@67	23.32	19.92	0.0982
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	23.03	19.63	0.0918
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	1@271	23.27	19.87	0.0971
77	30	100	656000	3840	DFT-s-OFDM QPSK	135@67	23.58	20.18	0.1042
77	30	100	656000	3840	DFT-s-OFDM QPSK	1@1	23.12	19.72	0.0938
77	30	100	656000	3840	DFT-s-OFDM QPSK	1@271	23.25	19.85	0.0966
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	135@67	21.33	17.93	0.0621
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	1@1	21.22	17.82	0.0605
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	1@271	21.42	18.02	0.0634
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	135@67	19.81	16.41	0.0438
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	1@1	19.55	16.15	0.0412
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	1@271	19.71	16.31	0.0428
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	135@67	17.78	14.38	0.0274
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	1@1	17.46	14.06	0.0255
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	1@271	17.67	14.27	0.0267
77	30	100	656000	3840	CP-OFDM QPSK	137@68	20.8	17.4	0.0550
77	30	100	656000	3840	CP-OFDM QPSK	1@1	20.6	17.2	0.0525
77	30	100	656000	3840	CP-OFDM QPSK	1@271	20.79	17.39	0.0548
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	135@67	23.14	19.74	0.0942
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	1@1	23.17	19.77	0.0948
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	1@271	23.35	19.95	0.0989
77	30	100	662000	3930	DFT-s-OFDM QPSK	135@67	23.15	19.75	0.0944
77	30	100	662000	3930	DFT-s-OFDM QPSK	1@1	23.13	19.73	0.0940
77	30	100	662000	3930	DFT-s-OFDM QPSK	1@271	23.36	19.96	0.0991
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	135@67	21.18	17.78	0.0600
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	1@1	21.33	17.93	0.0621
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	1@271	21.5	18.1	0.0646
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	135@67	19.66	16.26	0.0423
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	1@1	19.65	16.25	0.0422

77	30	100	662000	3930	DFT-s-OFDM 64 QAM	1@271	19.79	16.39	0.0436
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	135@67	17.67	14.27	0.0267
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	1@1	17.48	14.08	0.0256
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	1@271	17.75	14.35	0.0272
77	30	100	662000	3930	CP-OFDM QPSK	137@68	20.66	17.26	0.0532
77	30	100	662000	3930	CP-OFDM QPSK	1@1	20.69	17.29	0.0536
77	30	100	662000	3930	CP-OFDM QPSK	1@271	20.89	17.49	0.0561

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00325	PASS	NV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00327	PASS	LV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00699	PASS	HV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00587	PASS	-30°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00597	PASS	-20°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00627	PASS	-10°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00416	PASS	0°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00428	PASS	10°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00344	PASS	20°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00408	PASS	30°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00201	PASS	40°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00655	PASS	50°C


Peak to Average Radio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	30	20	647334	3710.01	DFT-s-OFDM PI/2 BPSK	50@0	7.33	13	PASS
77	30	20	647334	3710.01	DFT-s-OFDM PI/2 BPSK	1@0	7.65	13	PASS
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	50@0	8.17	13	PASS
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	8.54	13	PASS
77	30	20	656000	3840.0	DFT-s-OFDM PI/2 BPSK	50@0	6.82	13	PASS
77	30	20	656000	3840.0	DFT-s-OFDM PI/2 BPSK	1@0	7.98	13	PASS
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	8.04	13	PASS
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	8.68	13	PASS
77	30	20	664666	3969.99	DFT-s-OFDM PI/2 BPSK	50@0	6.94	13	PASS
77	30	20	664666	3969.99	DFT-s-OFDM PI/2 BPSK	1@0	7.68	13	PASS
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	50@0	8.32	13	PASS
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@0	9.49	13	PASS


N77(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH




N77(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH

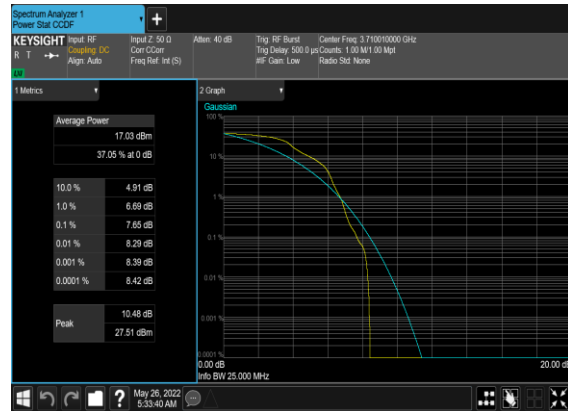

N77(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

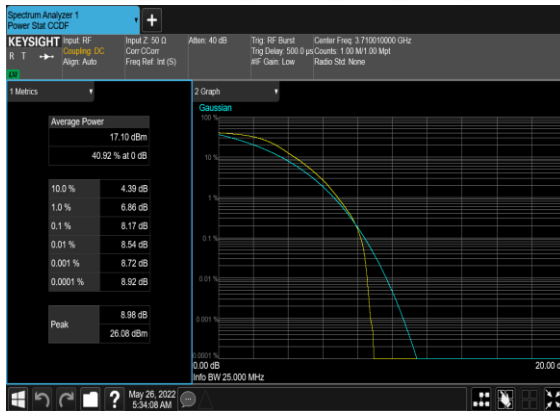


N77(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

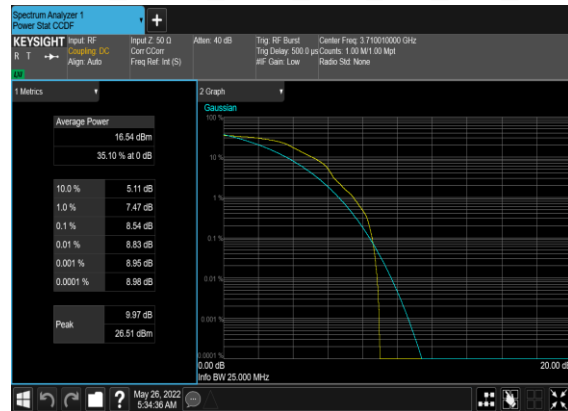


N77(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH




N77(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

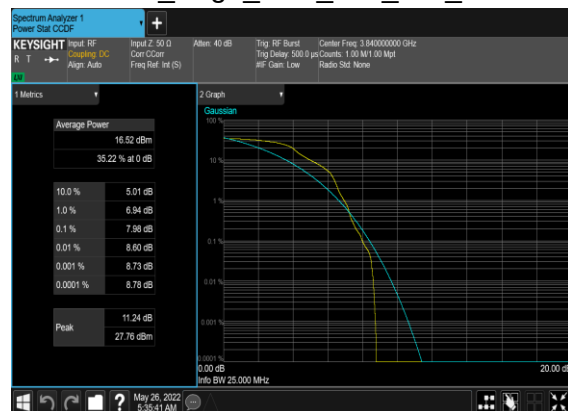


N77(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

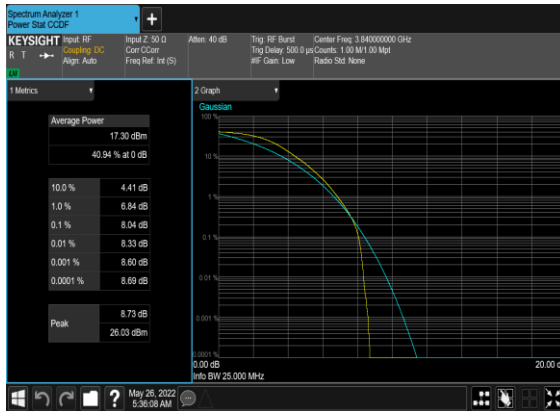


N77(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

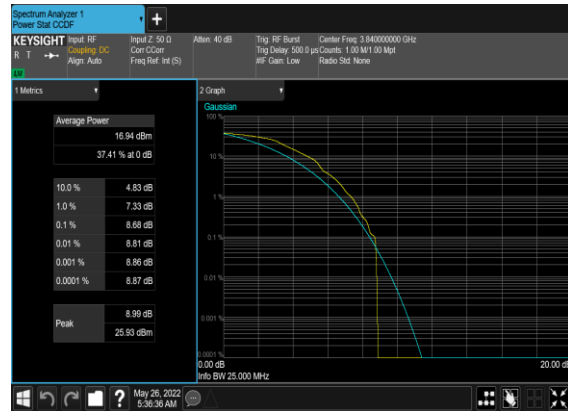


N77(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_High_CH

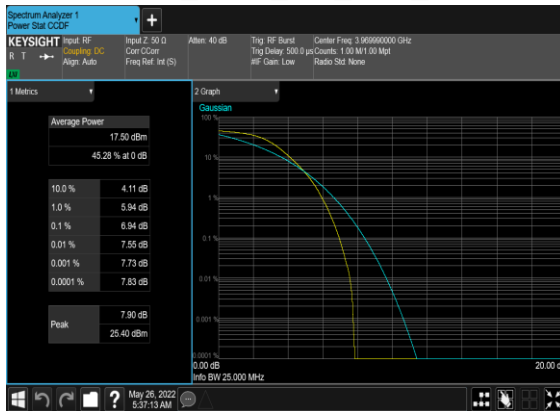


N77(20M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_High_CH

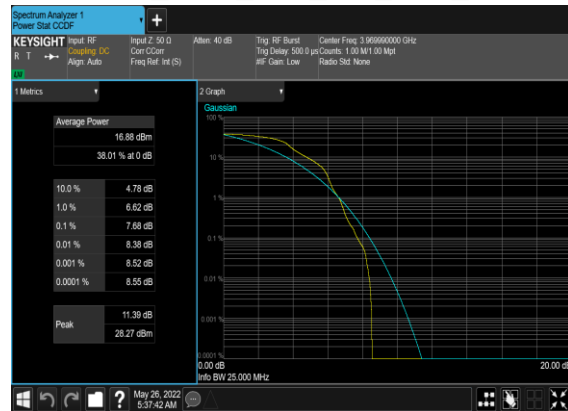

N77(20M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

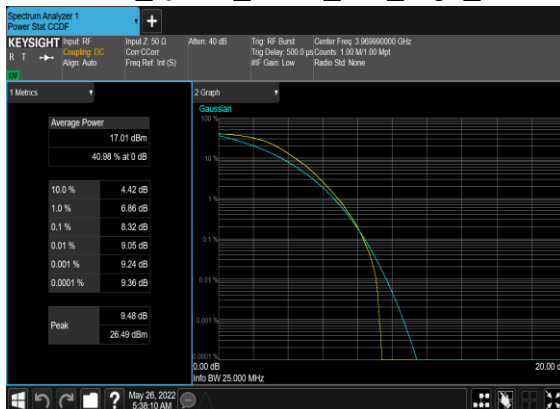

N77(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

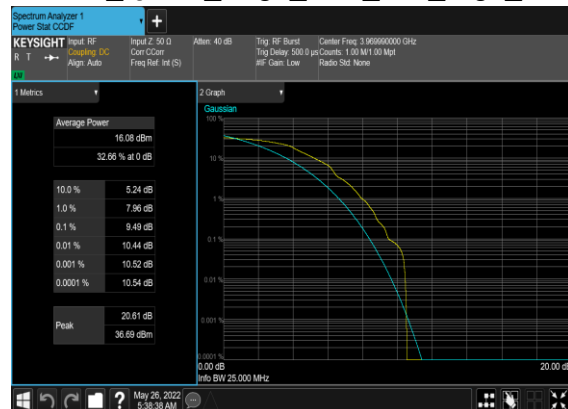


Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB OBW (MHz)
77	30	20	656000	3840.0	DFT-s-OFDM PI/2 BPSK	50@0	17.814	18.95
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	17.792	18.74
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	18.202	19.2
77	30	20	656000	3840.0	CP-OFDM 16 QAM	51@0	18.222	19.4
77	30	20	656000	3840.0	CP-OFDM 64 QAM	51@0	18.195	19.25
77	30	20	656000	3840.0	CP-OFDM 256 QAM	51@0	18.165	19.33
77	30	30	656000	3840.0	DFT-s-OFDM PI/2 BPSK	75@0	26.741	28.08
77	30	30	656000	3840.0	DFT-s-OFDM QPSK	75@0	26.773	28.15
77	30	30	656000	3840.0	CP-OFDM QPSK	78@0	27.797	29.27
77	30	30	656000	3840.0	CP-OFDM 16 QAM	78@0	27.847	29.33
77	30	30	656000	3840.0	CP-OFDM 64 QAM	78@0	27.829	29.23
77	30	30	656000	3840.0	CP-OFDM 256 QAM	78@0	27.842	29.25
77	30	40	656000	3840.0	DFT-s-OFDM PI/2 BPSK	100@0	35.712	37.31
77	30	40	656000	3840.0	DFT-s-OFDM QPSK	100@0	35.697	37.15
77	30	40	656000	3840.0	CP-OFDM QPSK	106@0	37.834	39.37
77	30	40	656000	3840.0	CP-OFDM 16 QAM	106@0	37.797	39.28
77	30	40	656000	3840.0	CP-OFDM 64 QAM	106@0	37.843	39.52
77	30	40	656000	3840.0	CP-OFDM 256 QAM	106@0	37.856	39.5
77	30	50	656000	3840.0	DFT-s-OFDM PI/2 BPSK	128@0	45.776	47.68
77	30	50	656000	3840.0	DFT-s-OFDM QPSK	128@0	45.855	47.48
77	30	50	656000	3840.0	CP-OFDM QPSK	133@0	47.449	49.3
77	30	50	656000	3840.0	CP-OFDM 16 QAM	133@0	47.396	49.37
77	30	50	656000	3840.0	CP-OFDM 64 QAM	133@0	47.475	49.0
77	30	50	656000	3840.0	CP-OFDM 256 QAM	133@0	47.441	49.28
77	30	60	656000	3840.0	DFT-s-OFDM PI/2 BPSK	162@0	57.884	59.79


77	30	60	656000	3840.0	DFT-s-OFDM QPSK	162@0	57.848	59.75
77	30	60	656000	3840.0	CP-OFDM QPSK	162@0	57.871	59.93
77	30	60	656000	3840.0	CP-OFDM 16 QAM	162@0	57.789	59.9
77	30	60	656000	3840.0	CP-OFDM 64 QAM	162@0	57.812	60.02
77	30	60	656000	3840.0	CP-OFDM 256 QAM	162@0	57.781	59.92
77	30	70	656000	3840.0	DFT-s-OFDM PI/2 BPSK	180@0	64.31	66.58
77	30	70	656000	3840.0	DFT-s-OFDM QPSK	180@0	64.344	66.4
77	30	70	656000	3840.0	CP-OFDM QPSK	189@0	67.478	69.8
77	30	70	656000	3840.0	CP-OFDM 16 QAM	189@0	67.495	69.7
77	30	70	656000	3840.0	CP-OFDM 64 QAM	189@0	67.53	69.77
77	30	70	656000	3840.0	CP-OFDM 256 QAM	189@0	67.589	69.65
77	30	80	656000	3840.0	DFT-s-OFDM PI/2 BPSK	216@0	77.181	79.65
77	30	80	656000	3840.0	DFT-s-OFDM QPSK	216@0	77.261	79.63
77	30	80	656000	3840.0	CP-OFDM QPSK	217@0	77.416	80.09
77	30	80	656000	3840.0	CP-OFDM 16 QAM	217@0	77.431	80.03
77	30	80	656000	3840.0	CP-OFDM 64 QAM	217@0	77.482	80.04
77	30	80	656000	3840.0	CP-OFDM 256 QAM	217@0	77.479	80.02
77	30	90	656000	3840.0	DFT-s-OFDM PI/2 BPSK	240@0	85.707	88.41
77	30	90	656000	3840.0	DFT-s-OFDM QPSK	240@0	85.701	88.59
77	30	90	656000	3840.0	CP-OFDM QPSK	245@0	87.489	90.31
77	30	90	656000	3840.0	CP-OFDM 16 QAM	245@0	87.37	90.25
77	30	90	656000	3840.0	CP-OFDM 64 QAM	245@0	87.371	90.27
77	30	90	656000	3840.0	CP-OFDM 256 QAM	245@0	87.619	90.33
77	30	100	656000	3840.0	DFT-s-OFDM PI/2 BPSK	270@0	96.286	99.41
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	270@0	96.421	99.46
77	30	100	656000	3840.0	CP-OFDM QPSK	273@0	97.257	100.6
77	30	100	656000	3840.0	CP-OFDM 16 QAM	273@0	97.443	100.5

77	30	100	656000	3840.0	CP-OFDM 64 QAM	273@0	97.442	100.5
77	30	100	656000	3840.0	CP-OFDM 256 QAM	273@0	97.738	100.4


N77(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

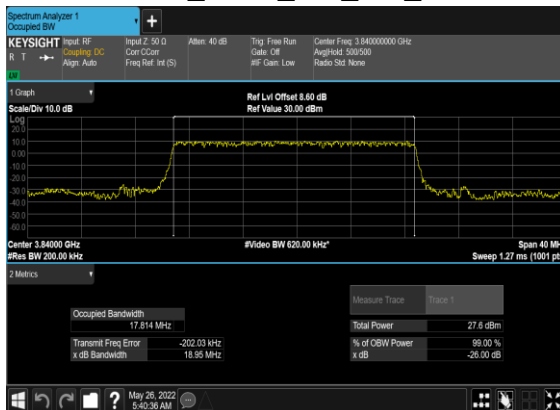


N77(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

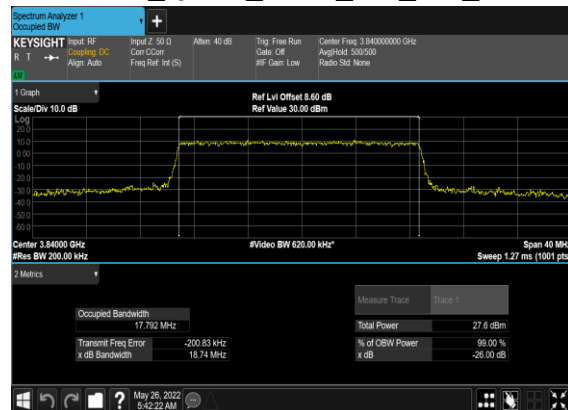


N77(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

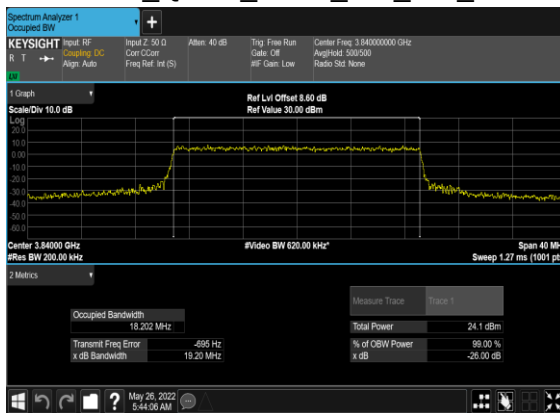


N77(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

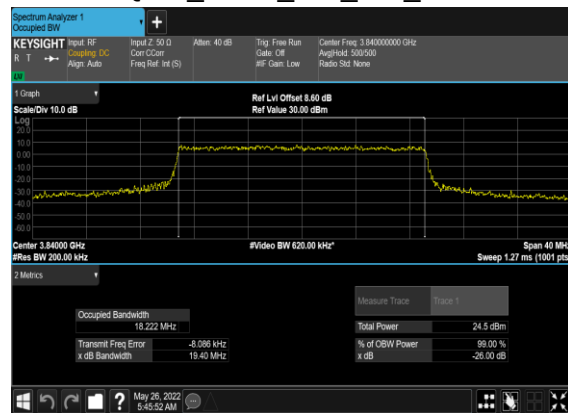


N77(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

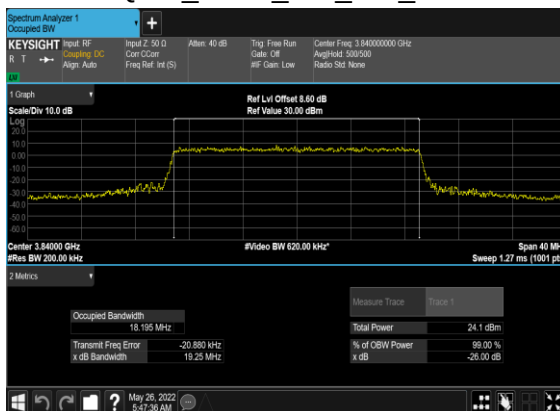


N77(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

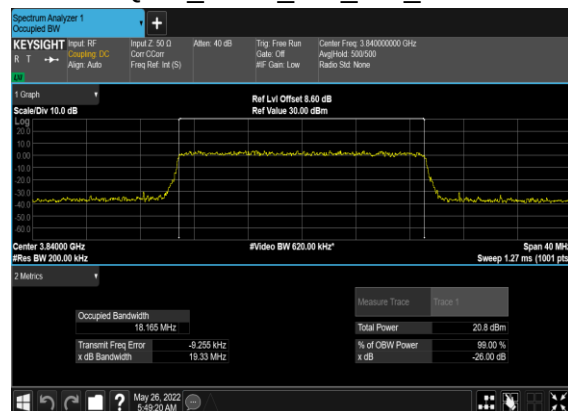


N77(30M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

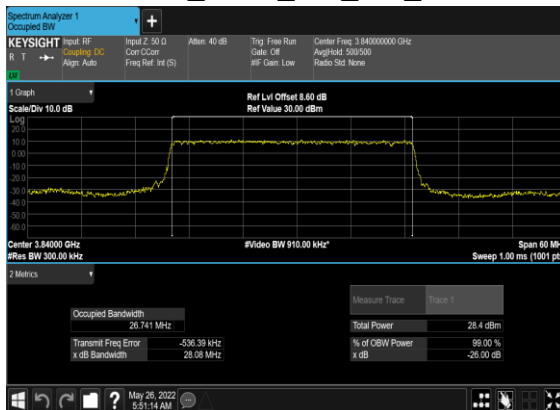


N77(30M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

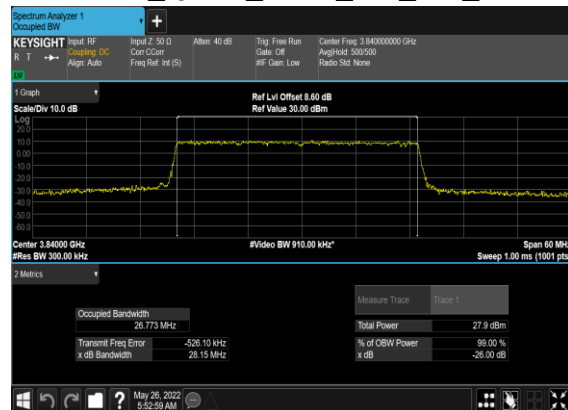


N77(30M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

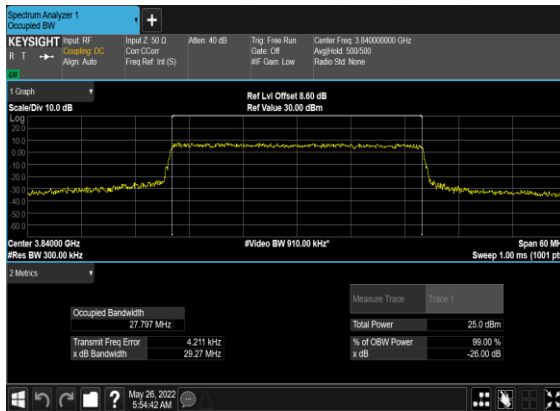


N77(30M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

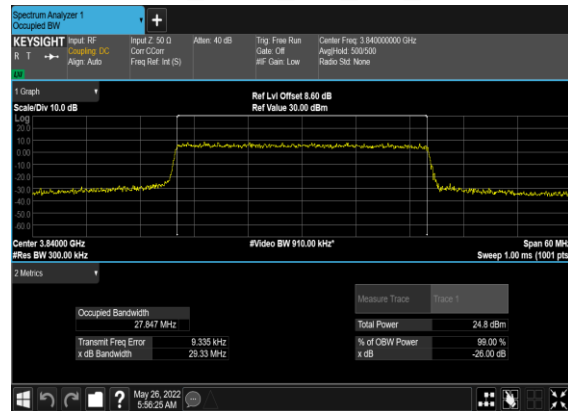


N77(30M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

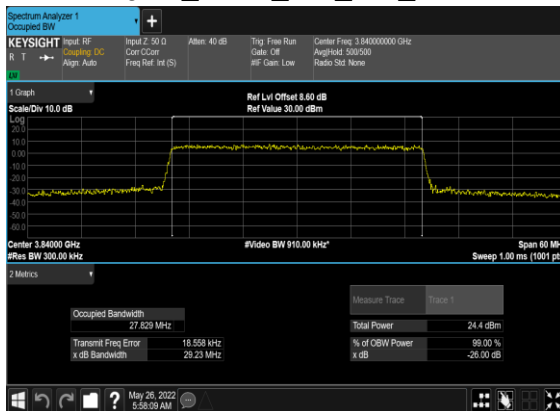


N77(30M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

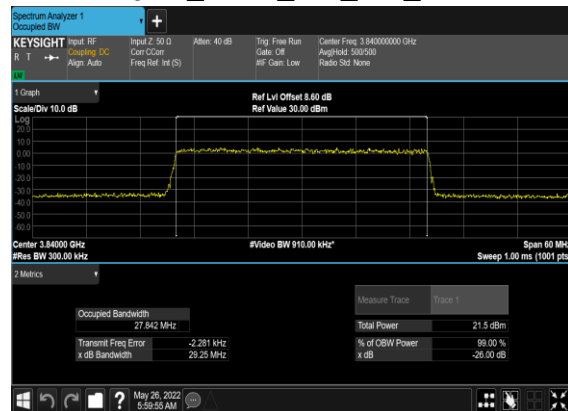


N77(40M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

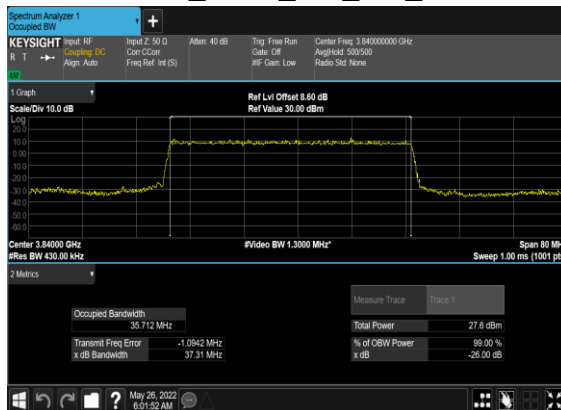


N77(40M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

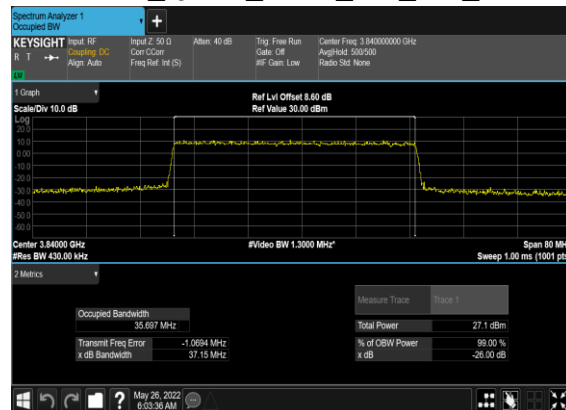


N77(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

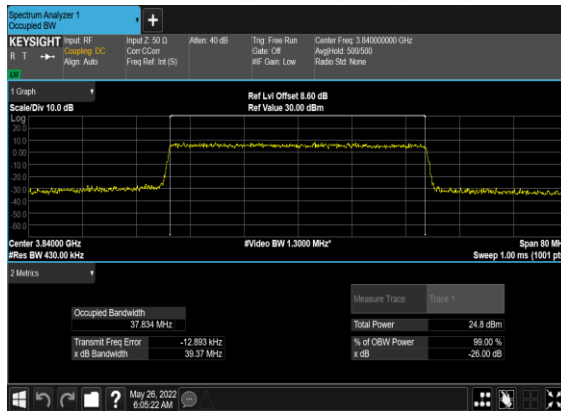


N77(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

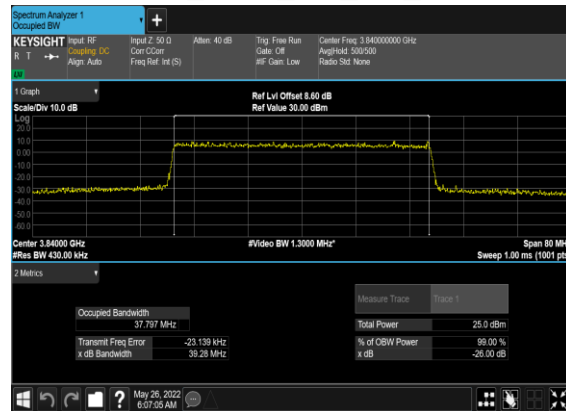


N77(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

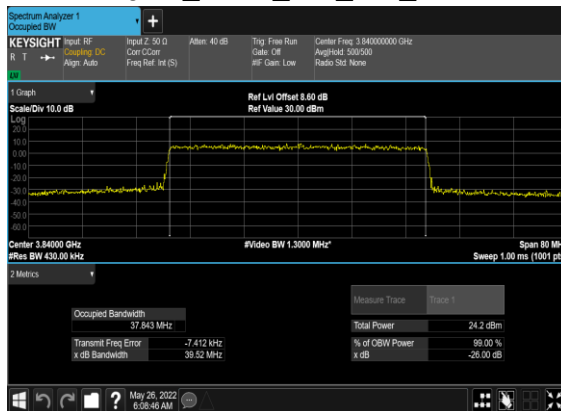


N77(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

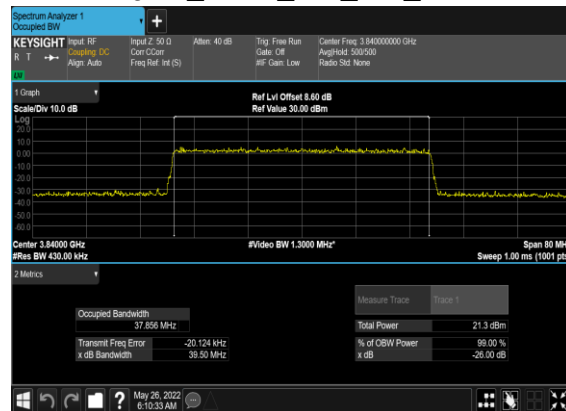


N77(50M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

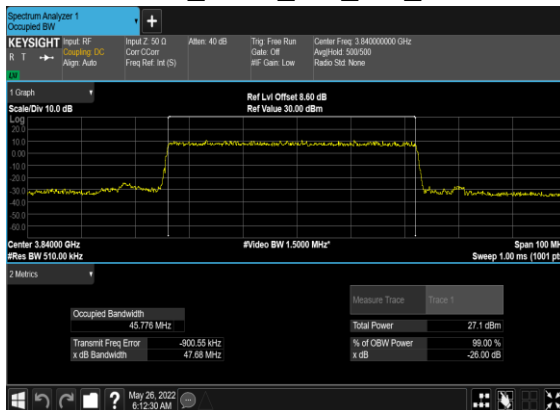


N77(50M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

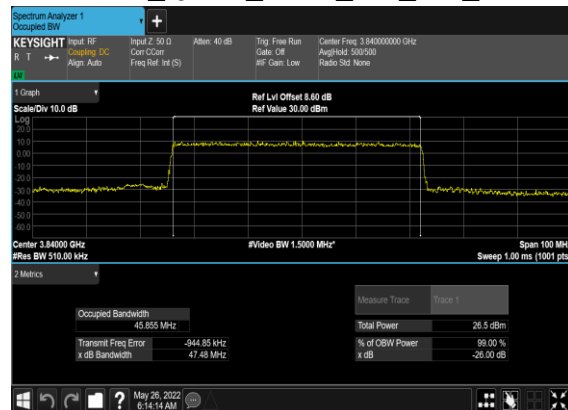


N77(50M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

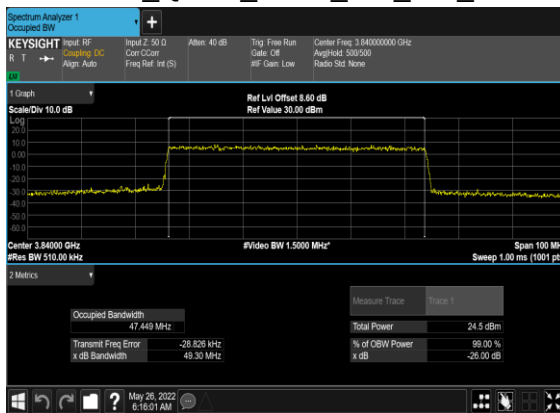


N77(50M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

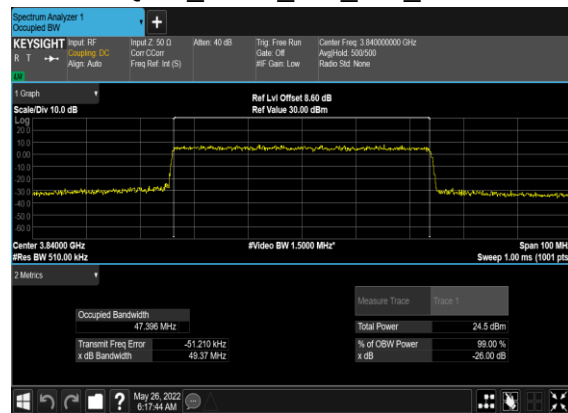


N77(50M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

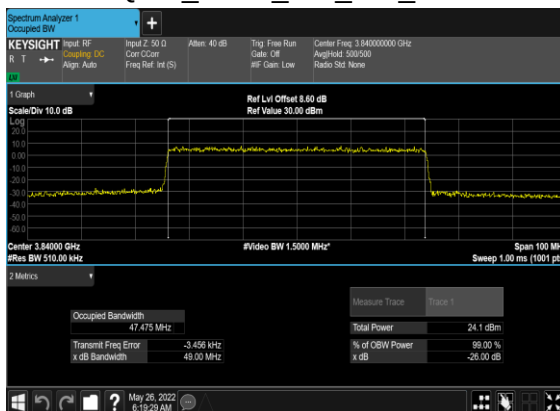


N77(50M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

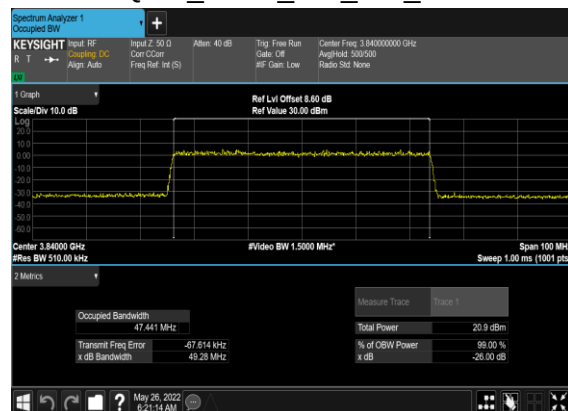


N77(60M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

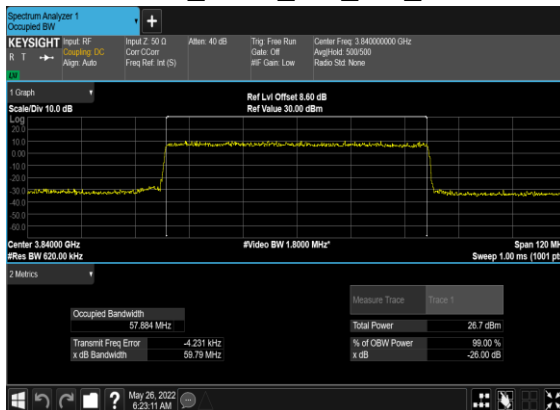


N77(60M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

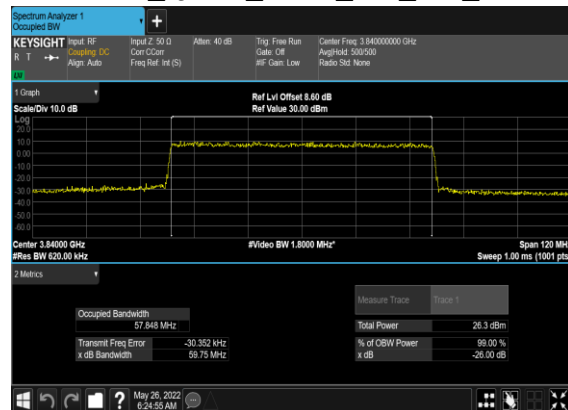


N77(60M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

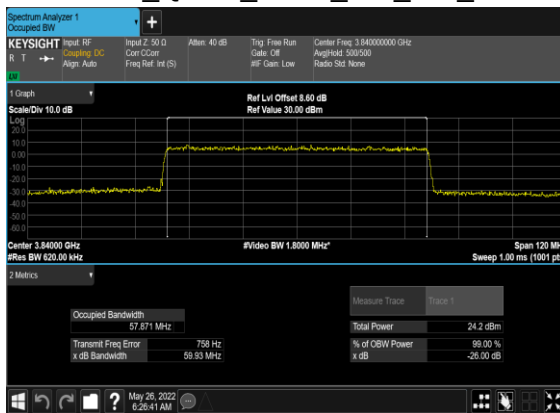


N77(60M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

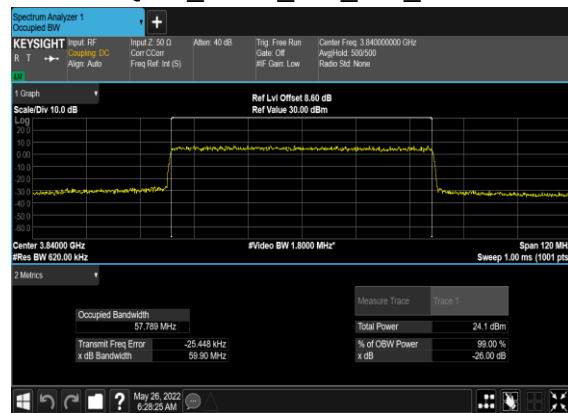


N77(60M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

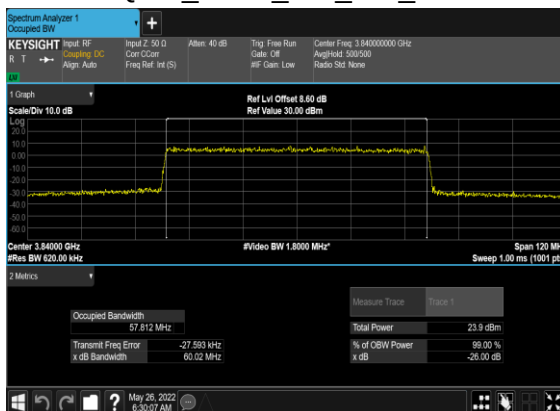


N77(60M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

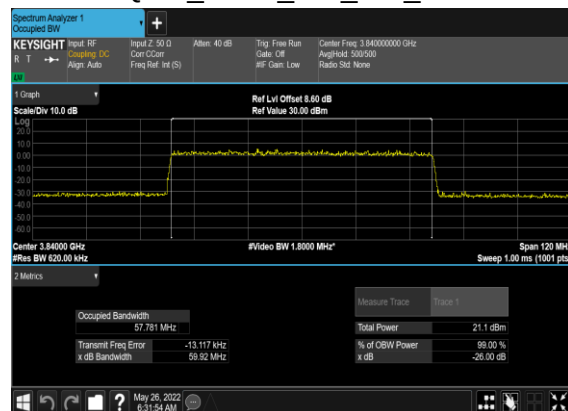


N77(70M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

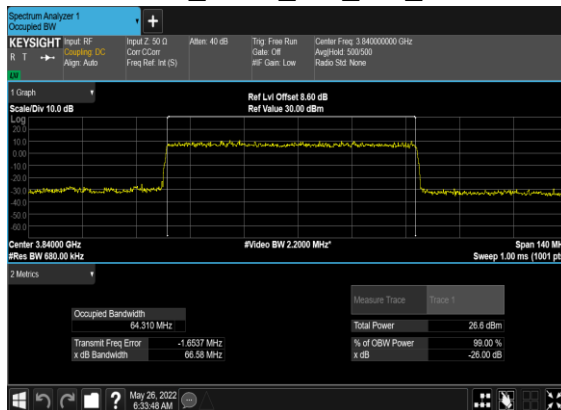


N77(70M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

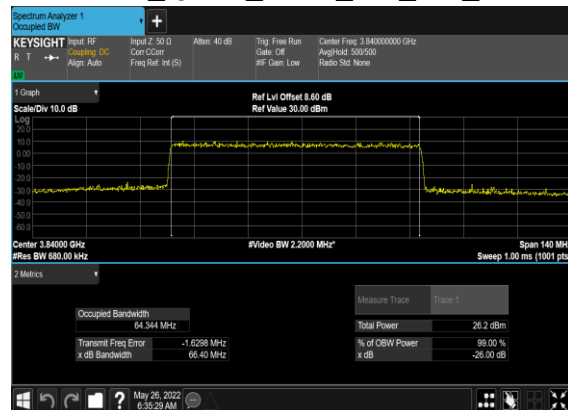


N77(70M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

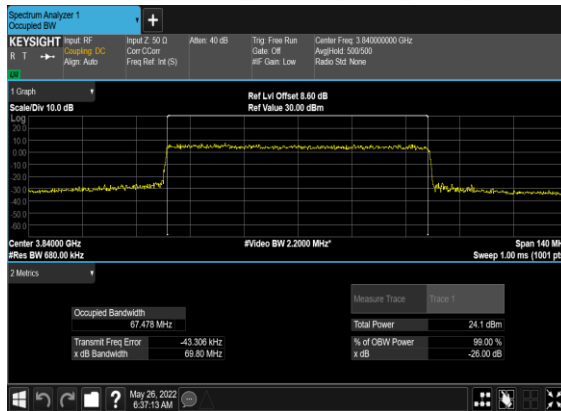


N77(70M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

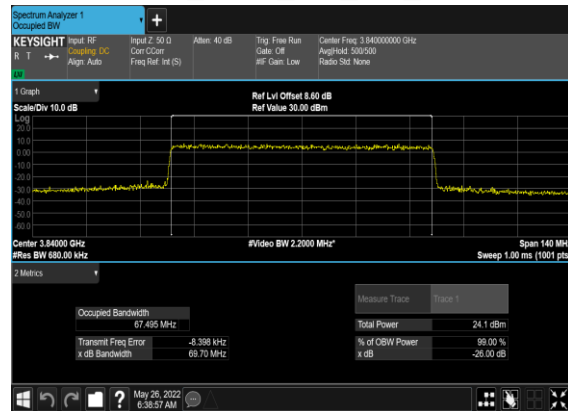


N77(70M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

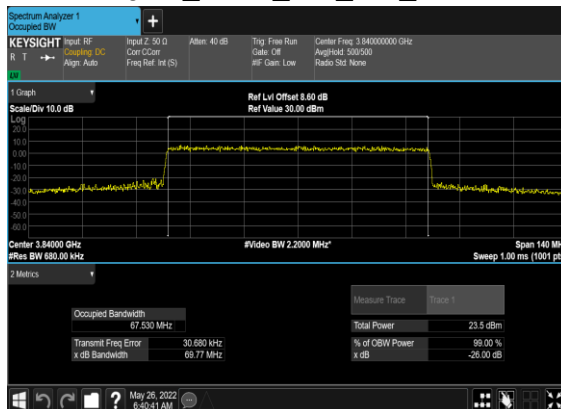


N77(70M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

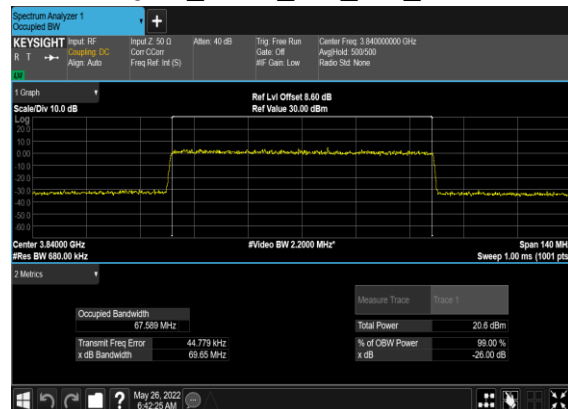


N77(80M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

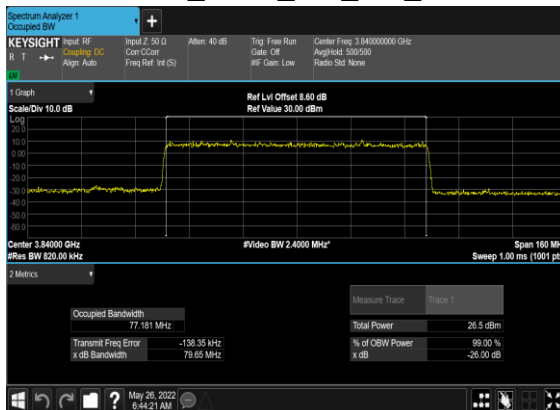


N77(80M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

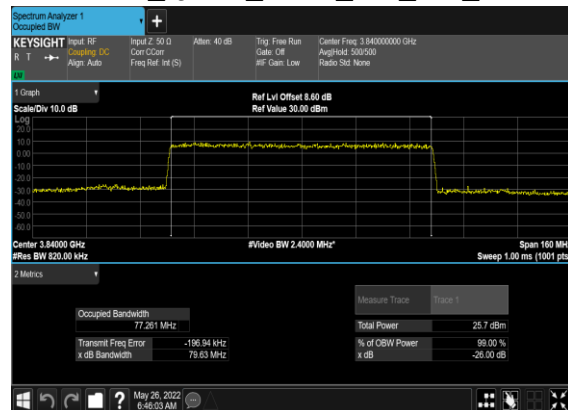


N77(80M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

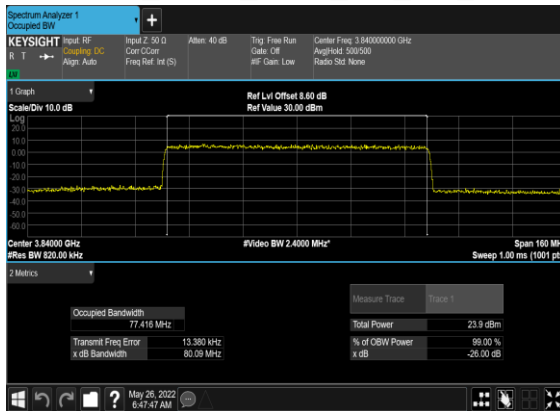


N77(80M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

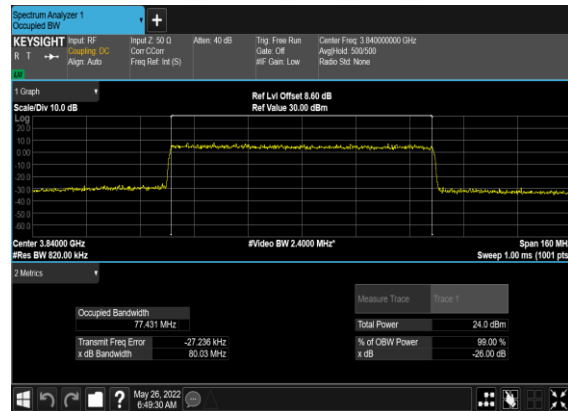


N77(80M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

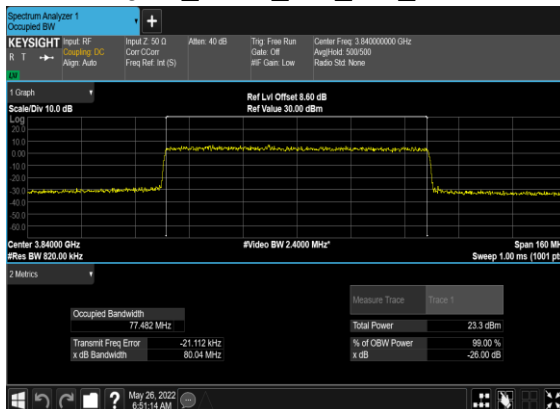


N77(80M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

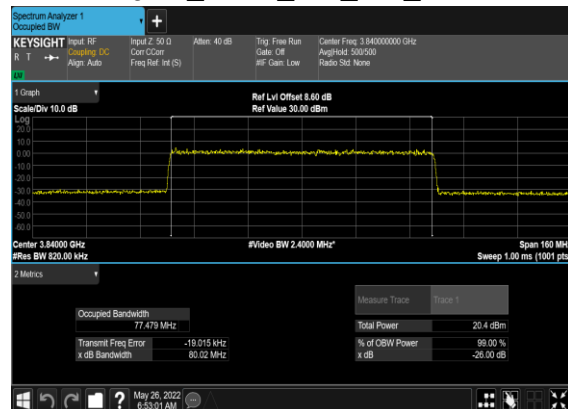


N77(90M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

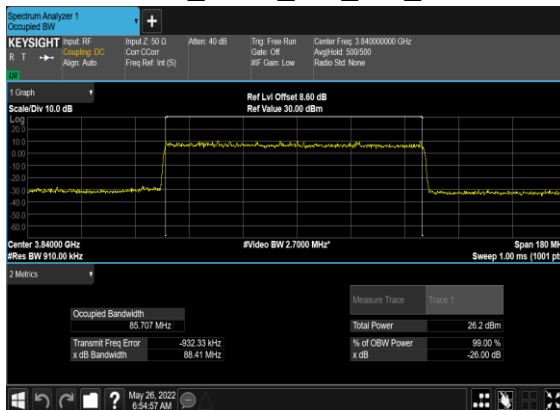


N77(90M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

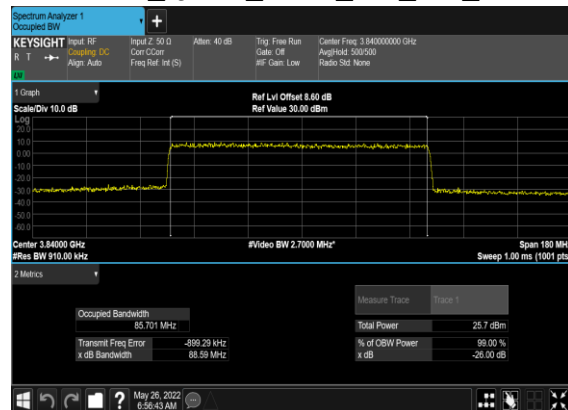


N77(90M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

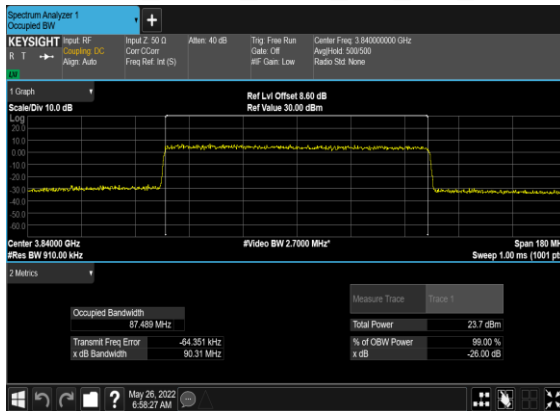


N77(90M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

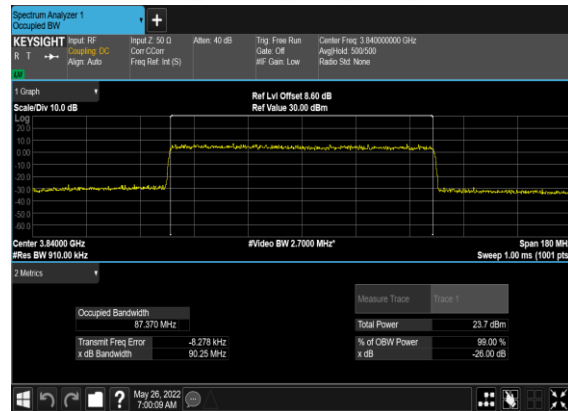


N77(90M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

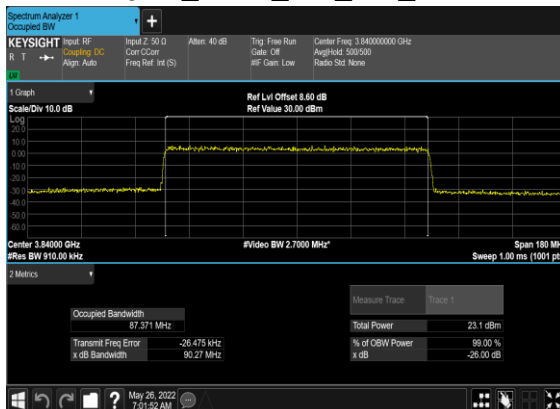


N77(90M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

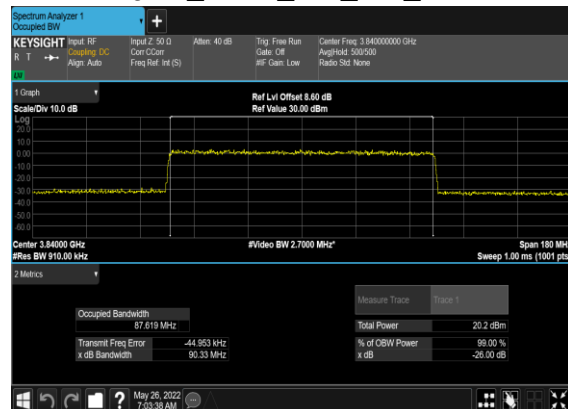


N77(100M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

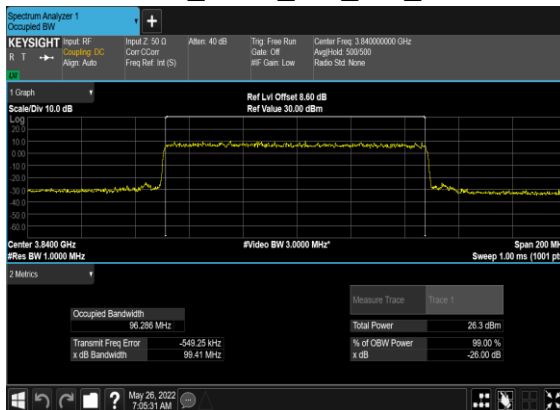


N77(100M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

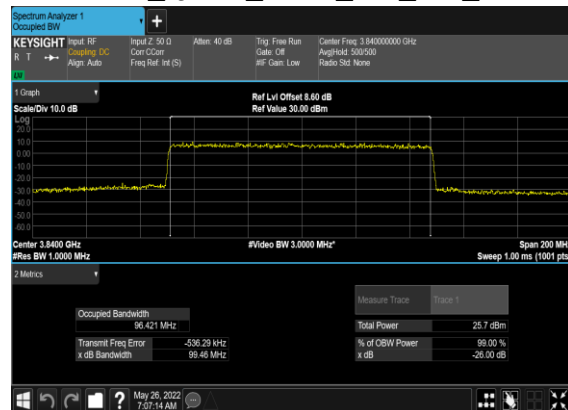


N77(100M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

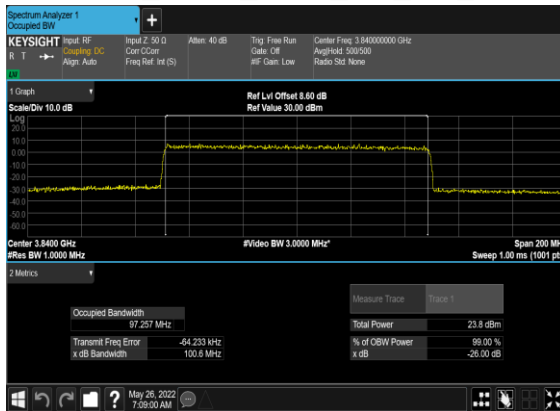


N77(100M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

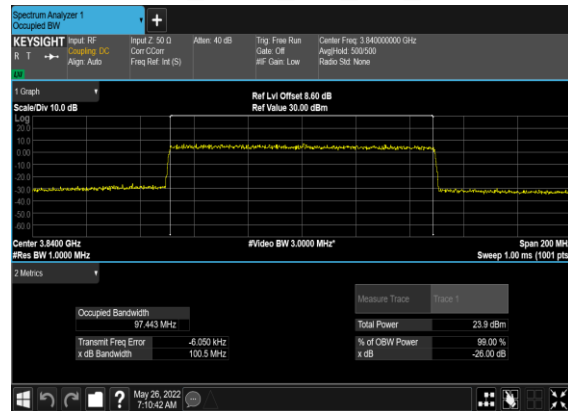

N77(100M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

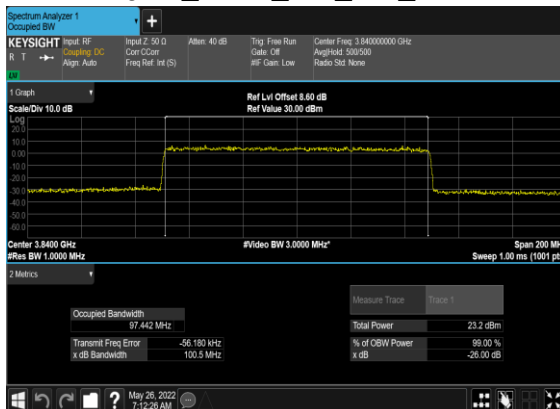

N77(100M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

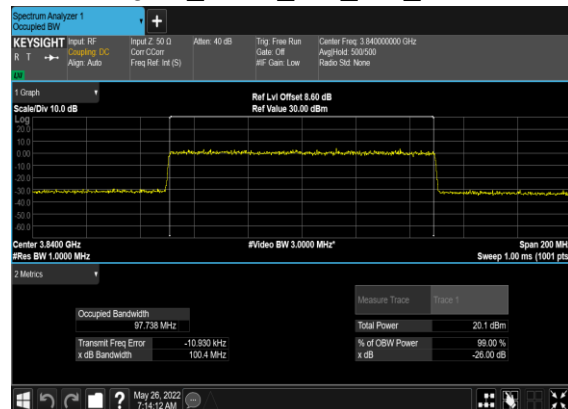

Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	20	647334	3710.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	647334	3710.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	647334	3710.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	664666	3969.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	648668	3730.02	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	648668	3730.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	648668	3730.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@0	see graph	---


77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	60	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	663332	3949.98	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	663332	3949.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	663332	3949.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---

77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	PASS

N77(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH




N77(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

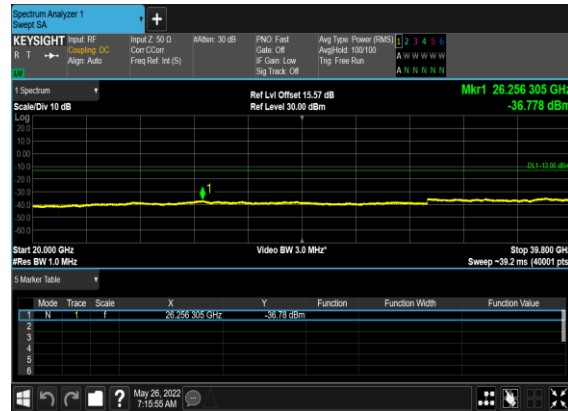


N77(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH




N77(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

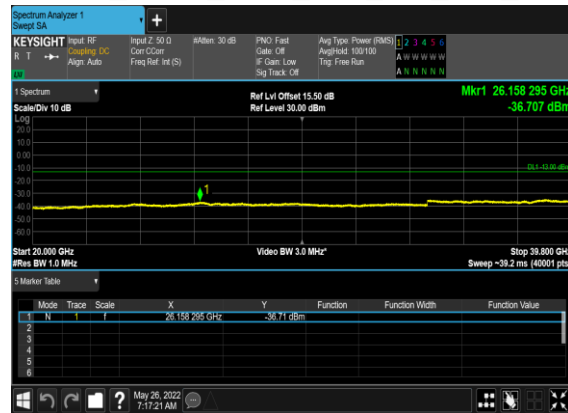

N77(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

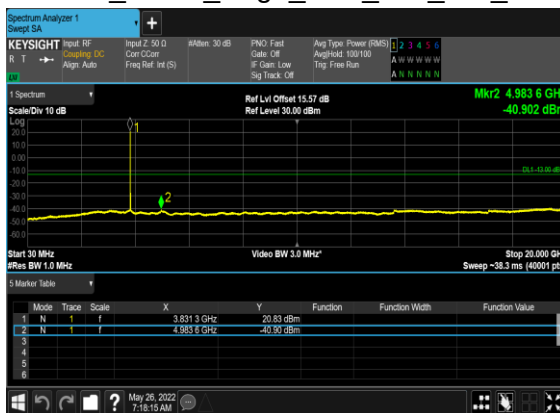


N77(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

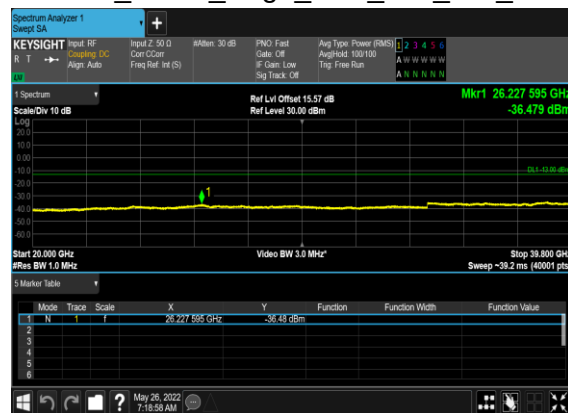


N77(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH




N77(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

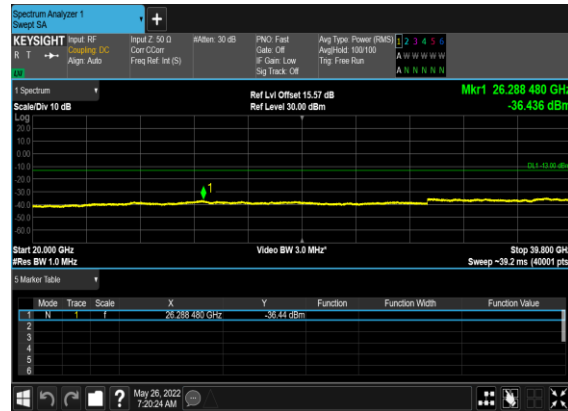


N77(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

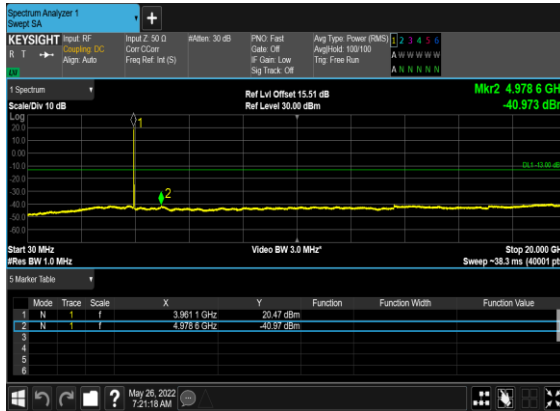


N77(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

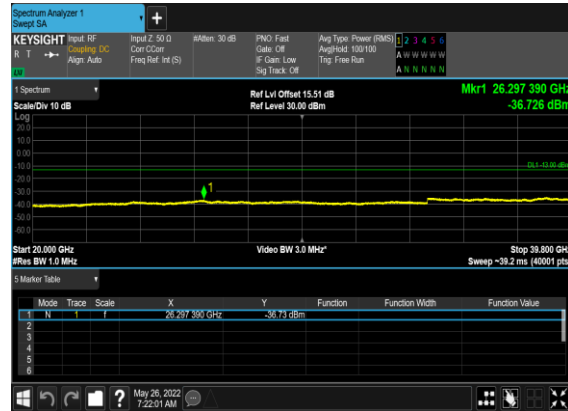

N77(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

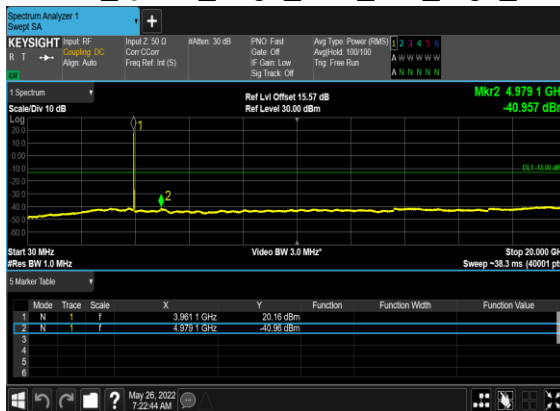


N77(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

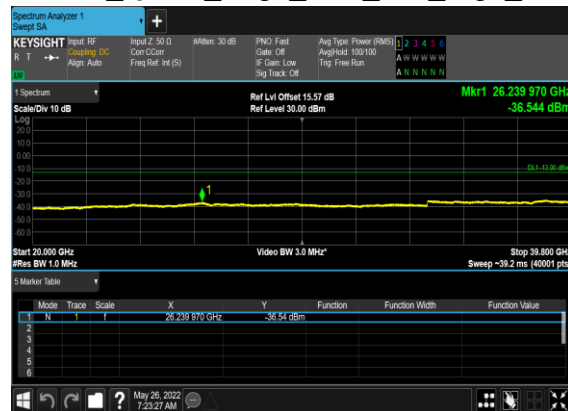

N77(60M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH




N77(60M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

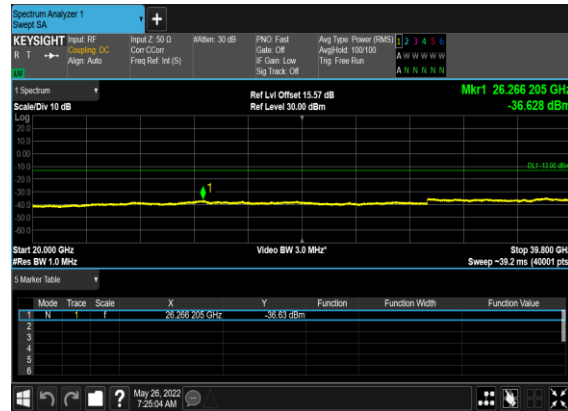


N77(60M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH




N77(60M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

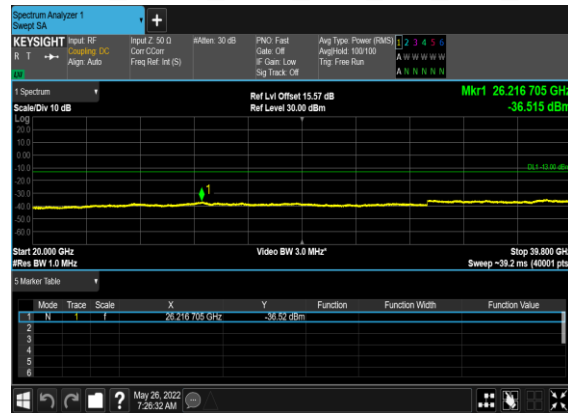


N77(60M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

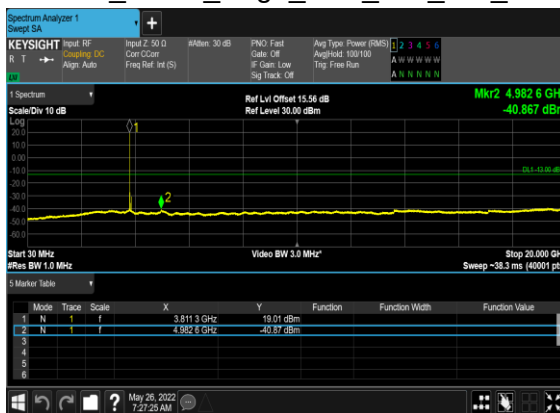


N77(60M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

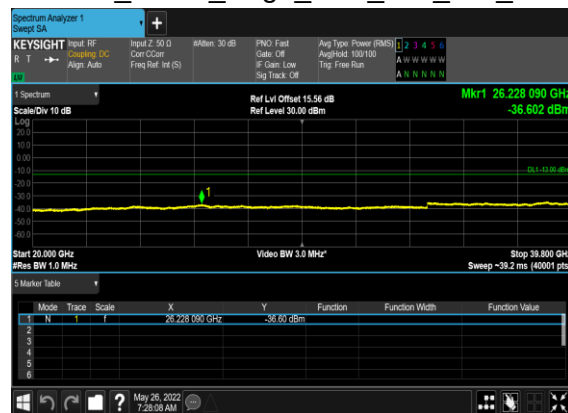


N77(60M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

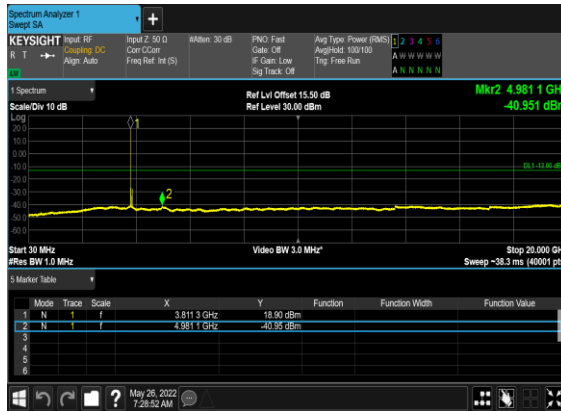


N77(60M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

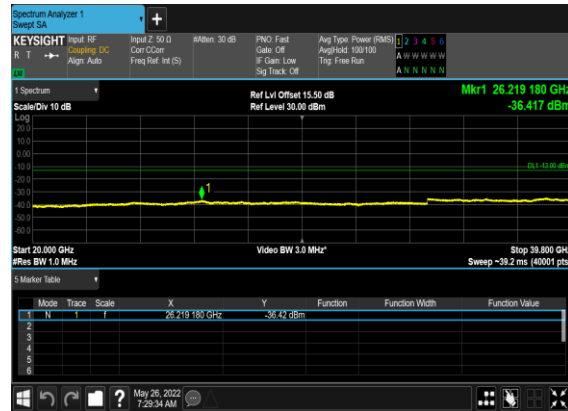


N77(60M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

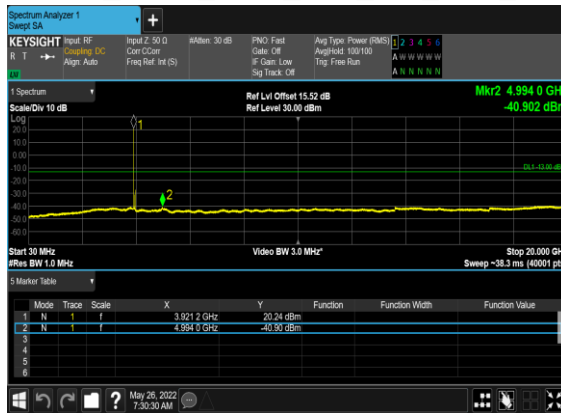


N77(60M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

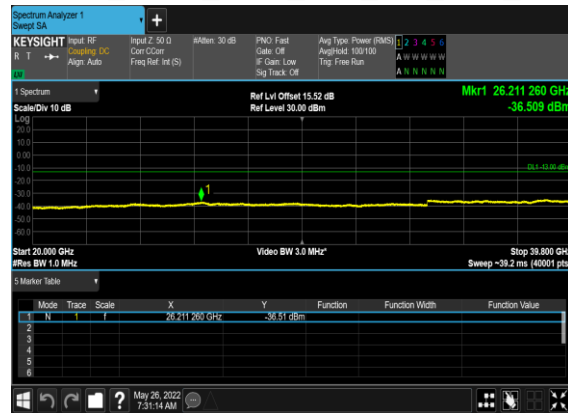

N77(60M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

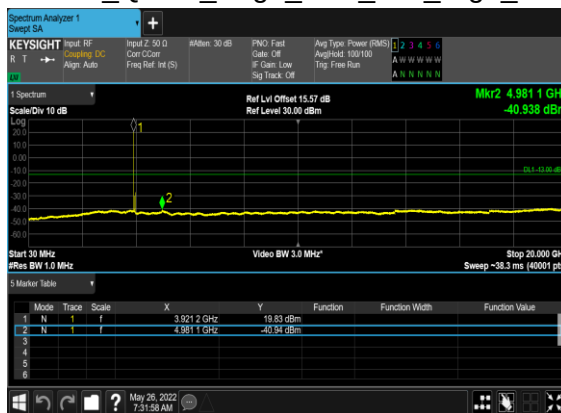


N77(60M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

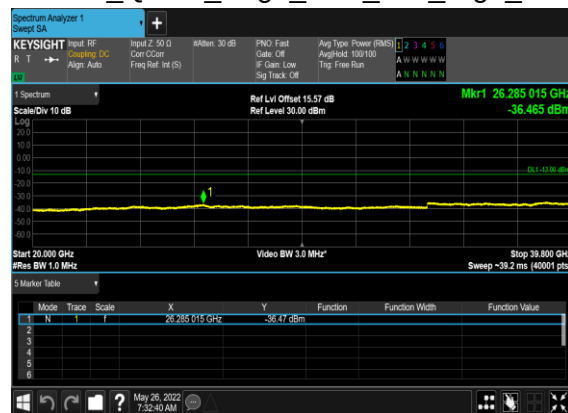


N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH




N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

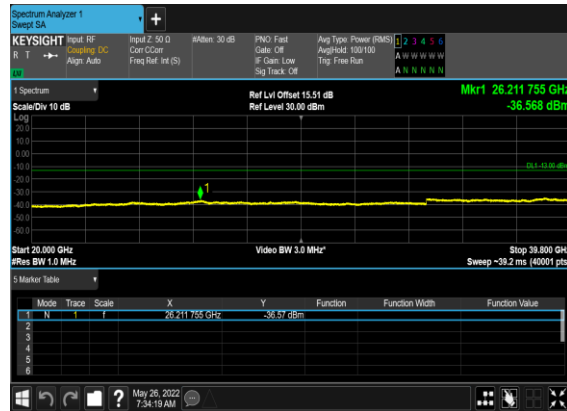


N77(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

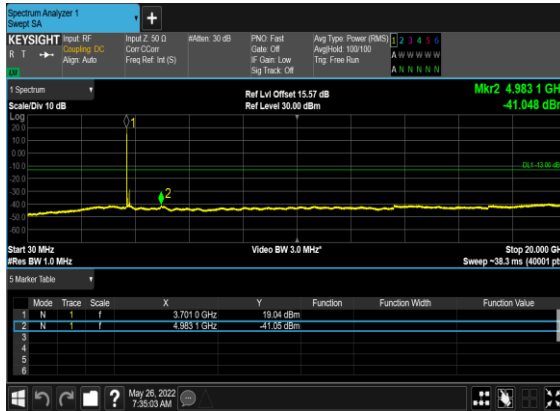

N77(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

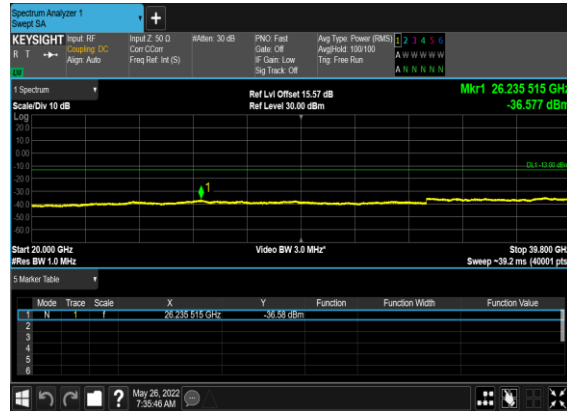

N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

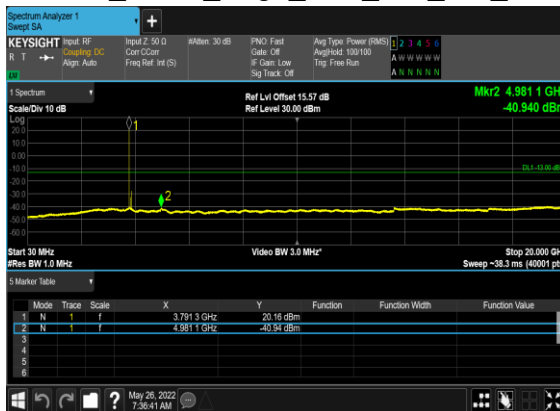

N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

