



**中认信通**

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



## TEST REPORT

**Applicant:** EVOTE INTERNATIONAL LIMITED

Address: FLAT/RM A 12/F ZJ 300 300 LOCKHART ROAD WAN CHAI,  
HONGKONG, China

**FCC ID:** 2A6DTET003

**Product Name:** TWO-WAY RADIO( Amateur Radio)

**Standard(s):** 47 CFR Part 15 Subpart B  
ANSI C63.4-2014

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

**Report Number:** CR221261135-00AM2

**Date Of Issue:** 2023/5/5

**Reviewed By:** Sun Zhong *Sun Zhong*

Title: Manager

**Test Laboratory:** China Certification ICT Co., Ltd (Dongguan)  
No. 113, Pingkang Road, Dalang Town, Dongguan,  
Guangdong, China  
Tel: +86-769-82016888

## Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

## Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

# CONTENTS

|                                                                                    |           |
|------------------------------------------------------------------------------------|-----------|
| TEST FACILITY .....                                                                | 2         |
| DECLARATIONS .....                                                                 | 2         |
| <b>DOCUMENT REVISION HISTORY .....</b>                                             | <b>4</b>  |
| <b>1. GENERAL INFORMATION .....</b>                                                | <b>5</b>  |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                       | 5         |
| 1.2 DESCRIPTION OF TEST CONFIGURATION .....                                        | 6         |
| 1.2.2 Support Equipment List and Details .....                                     | 6         |
| 1.2.3 Support Cable List and Details .....                                         | 6         |
| 1.2.4 Block Diagram of Test Setup .....                                            | 7         |
| 1.3 MEASUREMENT UNCERTAINTY .....                                                  | 10        |
| <b>2. SUMMARY OF TEST RESULTS .....</b>                                            | <b>11</b> |
| <b>3. REQUIREMENTS AND TEST PROCEDURES .....</b>                                   | <b>12</b> |
| 3.1 AC LINE CONDUCTED EMISSIONS .....                                              | 12        |
| 3.1.1 EUT Setup .....                                                              | 12        |
| 3.1.2 EMI Test Receiver Setup .....                                                | 12        |
| 3.1.3 Test Procedure .....                                                         | 13        |
| 3.1.4 Corrected Amplitude & Margin Calculation .....                               | 13        |
| 3.2 RADIATION SPURIOUS EMISSIONS .....                                             | 14        |
| 3.2.1 EUT Setup .....                                                              | 14        |
| 3.2.2 Equipment Setup .....                                                        | 15        |
| 3.2.3 Test Procedure .....                                                         | 15        |
| 3.2.4 Corrected Amplitude & Margin Calculation .....                               | 15        |
| 3.3 ANTENNA POWER CONDUCTION LIMITS FOR RECEIVERS .....                            | 16        |
| 3.3.1 Applicable Standard .....                                                    | 16        |
| Test Procedure .....                                                               | 16        |
| 3.4 SCANNING RECEIVERS AND FREQUENCY CONVERTERS USED WITH SCANNING RECEIVERS ..... | 17        |
| Applicable Standard .....                                                          | 17        |
| Test Procedure .....                                                               | 17        |
| <b>4. TEST DATA AND RESULTS .....</b>                                              | <b>18</b> |
| 4.1 AC LINE CONDUCTED EMISSIONS .....                                              | 18        |
| 4.2 RADIATION SPURIOUS EMISSIONS .....                                             | 27        |
| 4.3 ANTENNA POWER CONDUCTION LIMITS FOR RECEIVERS .....                            | 66        |
| 4.3 SCANNING RECEIVERS AND FREQUENCY CONVERTERS USED WITH SCANNING RECEIVERS ..... | 84        |

**DOCUMENT REVISION HISTORY**

| Revision Number | Report Number     | Description of Revision | Date of Revision | Note                                             |
|-----------------|-------------------|-------------------------|------------------|--------------------------------------------------|
| 1               | CR221261135-00A   | Original Report         | 2023/4/11        | /                                                |
| 2               | CR221261135-00AM1 | Revision Report         | 2023/4/21        | Updated Scanning<br>Operation Frequency<br>Range |
| 3               | CR221261135-00AM2 | Revision Report         | 2023/5/5         | Updated UHF<br>Receiving Frequency<br>Range      |

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

|                                                                                                                                                                       |                                                                                                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| <b>EUT Name:</b>                                                                                                                                                      | TWO-WAY RADIO( Amateur Radio)                                                                                          |
| <b>EUT Model:</b>                                                                                                                                                     | KG-Q10H                                                                                                                |
| <b>Multiple Models:</b>                                                                                                                                               | KG-Q10H Plus, KG-Q10HX, KG-Q10HR, KG-Q11H, KG-Q11H Plus, KG-Q11HX, KG-Q11HR, KG-Q12H, KG-Q12H Plus, KG-Q12HX, KG-Q12HR |
| <b>Highest Operation Frequency:</b>                                                                                                                                   | 999.9975MHz                                                                                                            |
| <b>Rated Input Voltage:</b>                                                                                                                                           | DC 7.4V from Battery<br>DC 5V charging from USB<br>DC 12V charging from Charger Base                                   |
| <b>Serial Number:</b>                                                                                                                                                 | 1V8R-1                                                                                                                 |
| <b>EUT Received Date:</b>                                                                                                                                             | 2022/12/14                                                                                                             |
| <b>EUT Received Status:</b>                                                                                                                                           | Good                                                                                                                   |
| Note: The Multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer. |                                                                                                                        |

### Accessory Information:

| Accessory Description | Manufacturer | Model          | Parameters                                             |
|-----------------------|--------------|----------------|--------------------------------------------------------|
| Adapter               | Unknown      | DSX-120050L-US | Input: AC 100-240V~50/60Hz 0.3A<br>Output: DC 12V=0.5A |

### Operation Frequency And Test Channel:

| Operation Modes | Operation Frequency Range (MHz)                       | Test Frequency (MHz)                                                |
|-----------------|-------------------------------------------------------|---------------------------------------------------------------------|
| VHF Receiving   | 50-54,<br>108-174.9975,<br>222-225                    | 50.0125, 53.9875,<br>108.0125, 141, 174.9975,<br>222.0125, 224.9875 |
| UHF Receiving   | 320-479.9975,<br>714-824,<br>849-869,<br>894-999.9975 | 320.0125, 400, 479.9975,<br>714.0125, 857, 999.9975                 |
| Scanning        | 50-824,<br>849-869,<br>894-960                        | /                                                                   |
| FM              | 76-108                                                | 76.1, 92, 107.9                                                     |

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

|                                 |                                                                                                                                                                                                                                                                   |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EUT Operation Mode:</b>      | <p>The system was configured for testing in Typical Use Mode, which was provided by the manufacturer.</p> <p>Test Mode:<br/> M1: Charging + Scanning (base)<br/> M2: Charging + Scanning (USB)<br/> M3: Charging + Receiving<br/> M4: Charging + FM Receiving</p> |
| <b>Equipment Modifications:</b> | No                                                                                                                                                                                                                                                                |
| <b>EUT Exercise Software:</b>   | No                                                                                                                                                                                                                                                                |

### 1.2.2 Support Equipment List and Details

| Manufacturer | Description                | Model          | Serial Number |
|--------------|----------------------------|----------------|---------------|
| Jian Aohai   | Adapter (AE)               | A8-050200U-US3 | AD220930002   |
| HP           | RF Communications Test Set | 8920A          | 3438A05209    |
| /            | Antenna                    | /              | /             |
| /            | Earphone                   | /              | /             |


### 1.2.3 Support Cable List and Details

| Cable Description | Shielding Type | Ferrite Core | Length (m) | From Port    | To            |
|-------------------|----------------|--------------|------------|--------------|---------------|
| Adapter cable     | No             | No           | 1.2        | Adapter      | Charging base |
| Antenna cable     | No             | No           | 1.5        | 8920A        | Antenna       |
| USB cable         | No             | No           | 1          | Adapter (AE) | EUT           |


### 1.2.4 Block Diagram of Test Setup

CE:

M1/M3/M4:

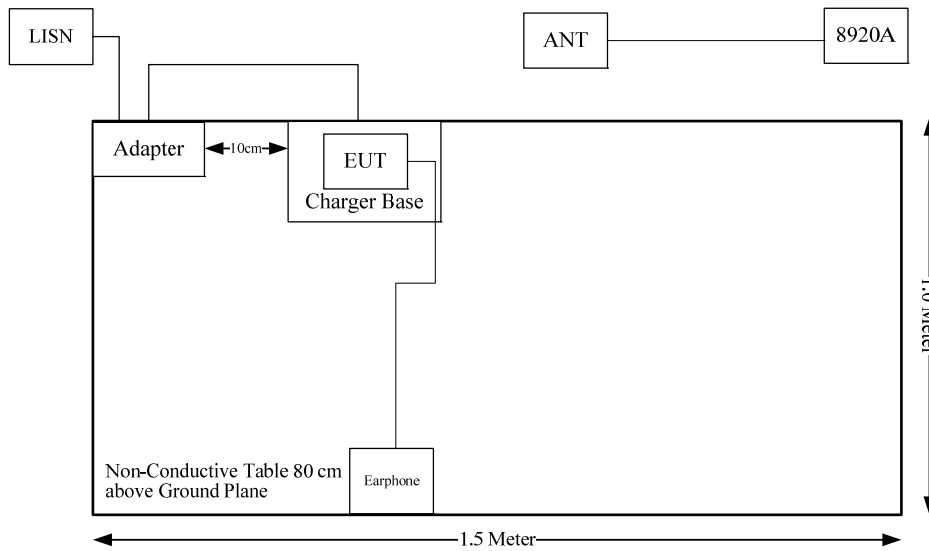


M2:

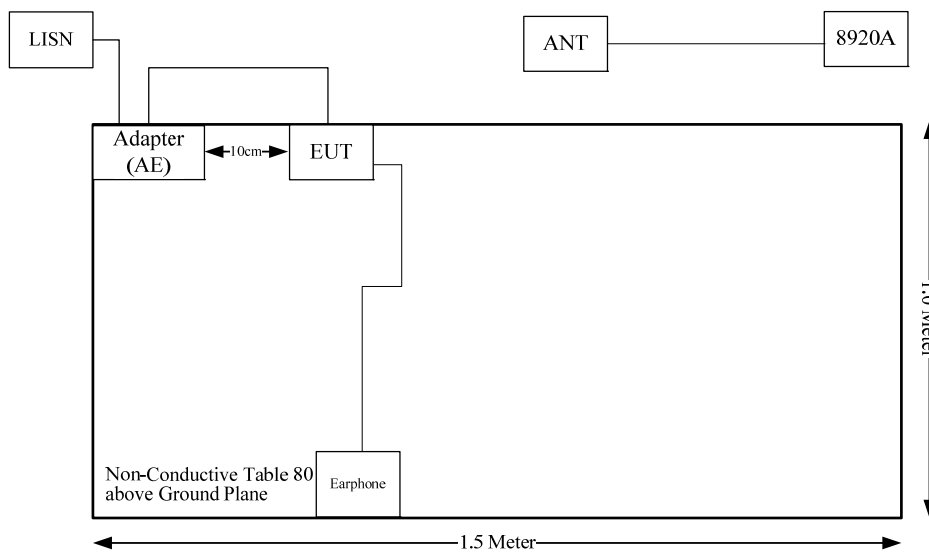


**RE:**


M1:

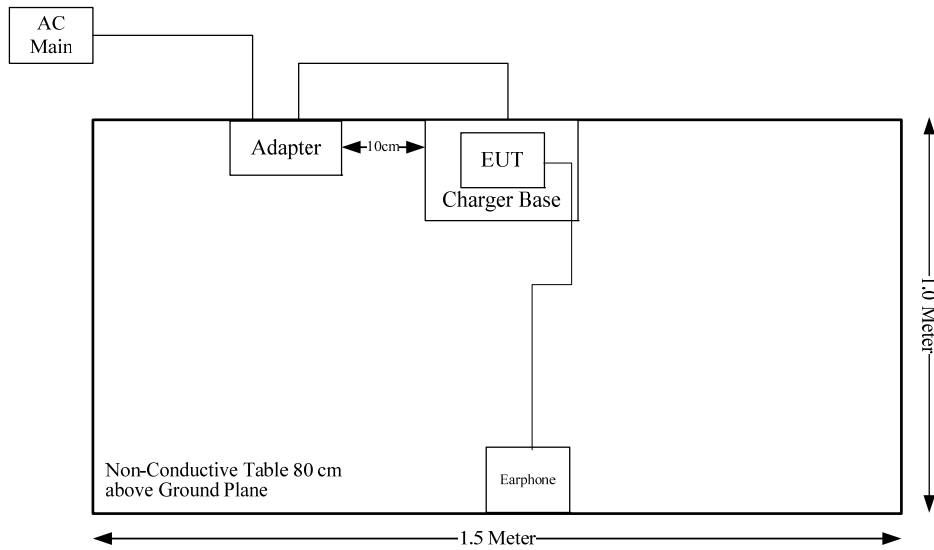

M2:

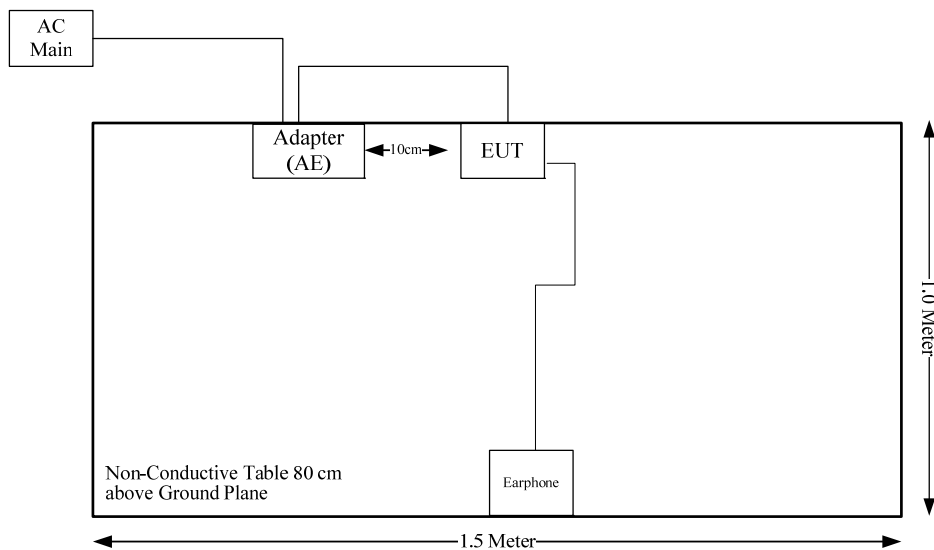

M3/M4:

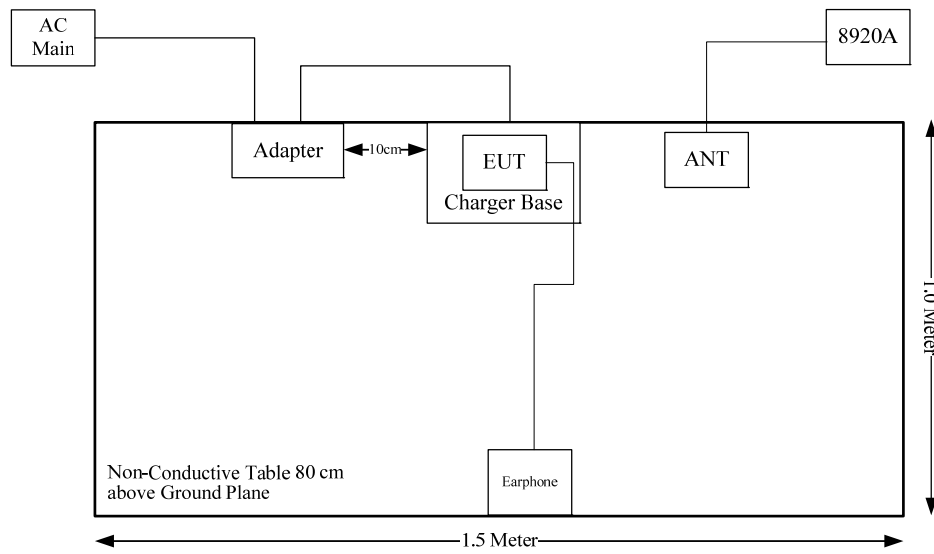

### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

| Parameter                         | Measurement Uncertainty                                                                                                 |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Unwanted Emissions, radiated      | 30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB,<br>6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB |
| Temperature                       | $\pm 1^{\circ}\text{C}$                                                                                                 |
| Humidity                          | $\pm 5\%$                                                                                                               |
| AC Power Lines Conducted Emission | 2.8 dB (150 kHz to 30 MHz)                                                                                              |


## 2. SUMMARY OF TEST RESULTS

| Standard(s) Section | Description of Test                                                         | Result    |
|---------------------|-----------------------------------------------------------------------------|-----------|
| §15.107             | Conducted emissions                                                         | Compliant |
| §15.109             | Radiated emissions                                                          | Compliant |
| §15.111             | Antenna power conduction limits for receivers                               | Compliant |
| §15.121(b)          | Scanning receivers and frequency converters<br>used with scanning receivers | Compliant |

### 3. REQUIREMENTS AND TEST PROCEDURES

#### 3.1 AC Line Conducted Emissions

##### 3.1.1 EUT Setup

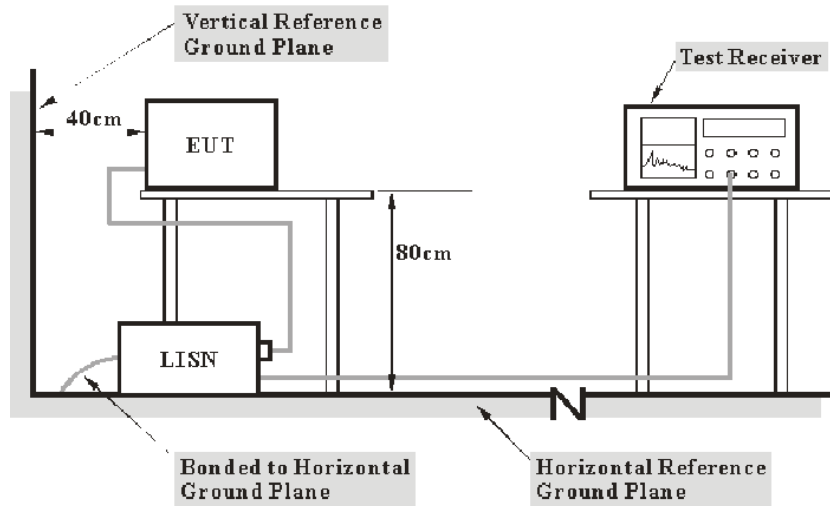

Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

##### 3.1.2 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

### 3.1.3 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT, the report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

All data was recorded in the Quasi-peak and average detection mode.

The report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

### 3.1.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN


The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


## 3.2 Radiation Spurious Emissions

### 3.2.1 EUT Setup

Below 1GHz:

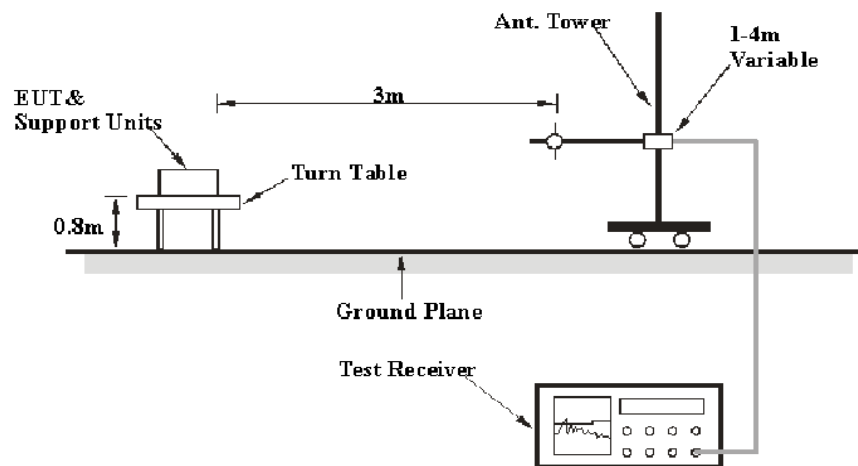

Above 1GHz:

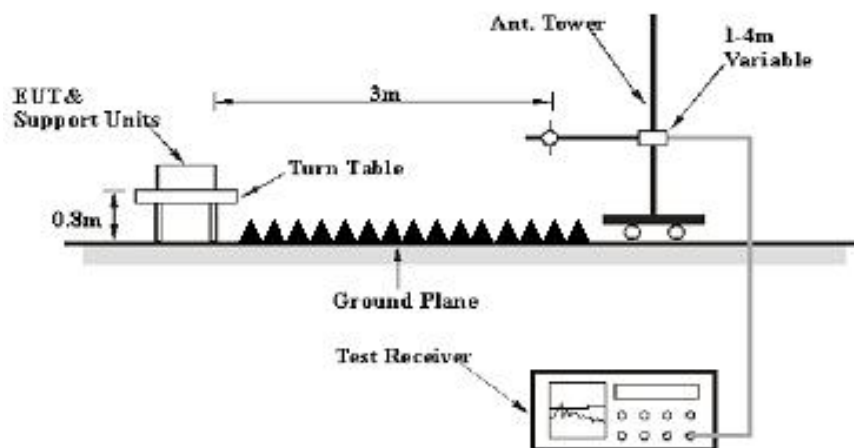

The radiated emission were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was with the FCC Part 15 B Class B limits.

### 3.2.2 Equipment Setup

The system was investigated from 30 MHz to 5 GHz.

During the radiated emission test, the test equipment was set with the following configurations:

| Frequency Range   | RBW     | Video B/W | IF B/W  | Measurement |
|-------------------|---------|-----------|---------|-------------|
| 30 MHz – 1000 MHz | 120 kHz | 300 kHz   | 120 kHz | QP          |
| Above 1 GHz       | 1 MHz   | 3 MHz     | /       | Peak        |
|                   | 1 MHz   | 10Hz      | /       | AVG         |

If the maximized peak measured value complies with under the limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

### 3.2.3 Test Procedure

During the radiated emissions, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

### 3.2.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

### **3.3 Antenna Power Conduction Limits for Receivers**

#### **3.3.1 Applicable Standard**

FCC§15.111.

(a) In addition to the radiated emission limits, receivers that operate (tune) in the frequency range 30 to 960 MHz and CB receivers that provide terminals for the connection of an external receiving antenna may be tested to demonstrate compliance with the provisions of § 15.109 with the antenna terminals shielded and terminated with a resistive termination equal to the impedance specified for the antenna, provided these receivers also comply with the following: With the receiver antenna terminal connected to a resistive termination equal to the impedance specified or employed for the antenna, the power at the antenna terminal at any frequency within the range of measurements specified in § 15.33 shall not exceed 2.0 nanowatts.

#### **Test Procedure**

EUT antenna port connected to a spectrum analyzer, the traces were recorded as shown on the data pages.

### 3.4 Scanning Receivers and Frequency Converters Used with Scanning Receivers


#### Applicable Standard

FCC §15.121(b).

(b) Except as provided in paragraph (c) of this section, scanning receivers shall reject any signals from the Cellular Radiotelephone Service frequency bands that are 38 dB or lower based upon a 12 dB SINAD measurement, which is considered the threshold where a signal can be clearly discerned from any interference that may be present.

#### Test Procedure

1. Connected the EUT as the below block diagram;



2. Apply a signal to the EUT antenna port at lowest, middle, highest channel frequencies of the operating band;
3. Adjust the audio output level of the EUT to its rated value with the distortion less than 10%;
4. Adjust the Signal Generator output power to produce 12 dB SINAD without the audio output power dropping by more than 3 dB; These output level of the Signal Generator at each channel frequency is the sensitivity of the EUT;
5. Select the lowest or worst case sensitivity level for all of the bands as the reference sensitivity;
6. Adjust the Signal Generator output to a level of +60 dB above the reference sensitivity obtained in step 5 and its frequency to the frequency point in the Cellular Band;
7. Set the EUT squelch to threshold, the signal required to open the squelch must be lower than the reference sensitivity level;
8. Set the EUT in a scanning mode and allow it to scan through its complete receiving range;
9. If the EUT un-squelched or stopped on any frequency, receiving at this frequency, then adjust the signal generator output level until 12 dB SINAD is produced, this level is the spurious value and the difference between the reference sensitivity and the spurious value is the rejection ratio and must be at least 38 dB;
10. Repeat above procedure at the frequencies 824, 836, 849 MHz for the mobile band, and 869, 881.5 and 894 MHz for the Cellular Base Band.

## 4. TEST DATA AND RESULTS

### 4.1 AC Line Conducted Emissions

|                |        |              |             |
|----------------|--------|--------------|-------------|
| Serial Number: | 1V8R-1 | Test Date:   | 2023/4/11   |
| Test Site:     | CE     | Test Mode:   | M1,M2,M3,M4 |
| Tester:        | Vic Du | Test Result: | Pass        |

| Environmental Conditions: |      |                              |    |                        |       |
|---------------------------|------|------------------------------|----|------------------------|-------|
| Temperature:<br>(°C)      | 20.1 | Relative<br>Humidity:<br>(%) | 39 | ATM Pressure:<br>(kPa) | 102.4 |

#### Test Equipment List and Details:

| Manufacturer | Description       | Model   | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|---------|---------------|------------------|----------------------|
| R&S          | LISN              | ENV216  | 101134        | 2023/04/01       | 2024/03/31           |
| R&S          | EMI Test Receiver | ESR3    | 102726        | 2022/07/15       | 2023/07/14           |
| MICRO-COAX   | Coaxial Cable     | UTIFLEX | C-0200-01     | 2022/08/07       | 2023/08/06           |
| Audix        | Test Software     | E3      | 190306 (V9)   | N/A              | N/A                  |


*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Mode: M1****Line:**

Test Mode: Charging + Scanning (base)

Port: Line

Note:

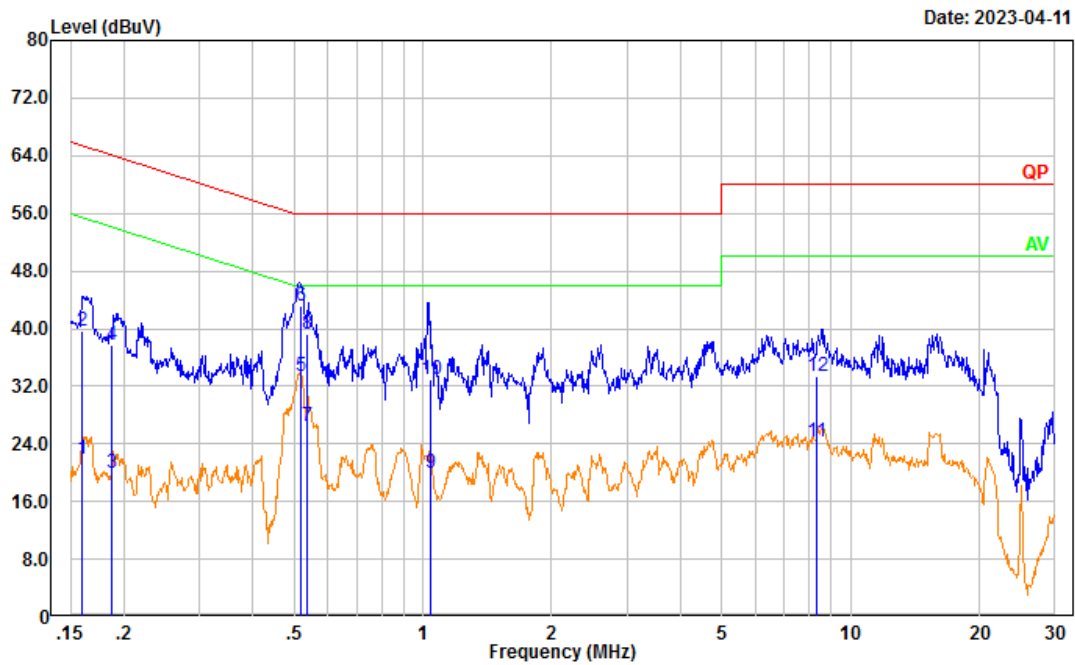


| No. | Frequency (MHz) | Reading (dBμV) | Factor (dB) | Result (dBμV) | Limit (dBμV) | Margin (dB) | Detector |
|-----|-----------------|----------------|-------------|---------------|--------------|-------------|----------|
| 1   | 0.159           | 12.24          | 9.61        | 21.85         | 55.49        | 33.64       | Average  |
| 2   | 0.159           | 30.06          | 9.61        | 39.67         | 65.49        | 25.82       | QP       |
| 3   | 0.187           | 10.36          | 9.61        | 19.97         | 54.18        | 34.21       | Average  |
| 4   | 0.187           | 28.12          | 9.61        | 37.73         | 64.18        | 26.45       | QP       |
| 5   | 0.517           | 23.76          | 9.61        | 33.37         | 46.00        | 12.63       | Average  |
| 6   | 0.517           | 33.61          | 9.61        | 43.22         | 56.00        | 12.78       | QP       |
| 7   | 0.536           | 16.73          | 9.61        | 26.34         | 46.00        | 19.66       | Average  |
| 8   | 0.536           | 29.57          | 9.61        | 39.18         | 56.00        | 16.82       | QP       |
| 9   | 1.041           | 10.39          | 9.62        | 20.01         | 46.00        | 25.99       | Average  |
| 10  | 1.041           | 23.23          | 9.62        | 32.85         | 56.00        | 23.15       | QP       |
| 11  | 8.331           | 14.60          | 9.67        | 24.27         | 50.00        | 25.73       | Average  |
| 12  | 8.331           | 23.81          | 9.67        | 33.48         | 60.00        | 26.52       | QP       |

**Neutral:**

Test Mode: Charging + Scanning (base)

Port: neutral

Note:

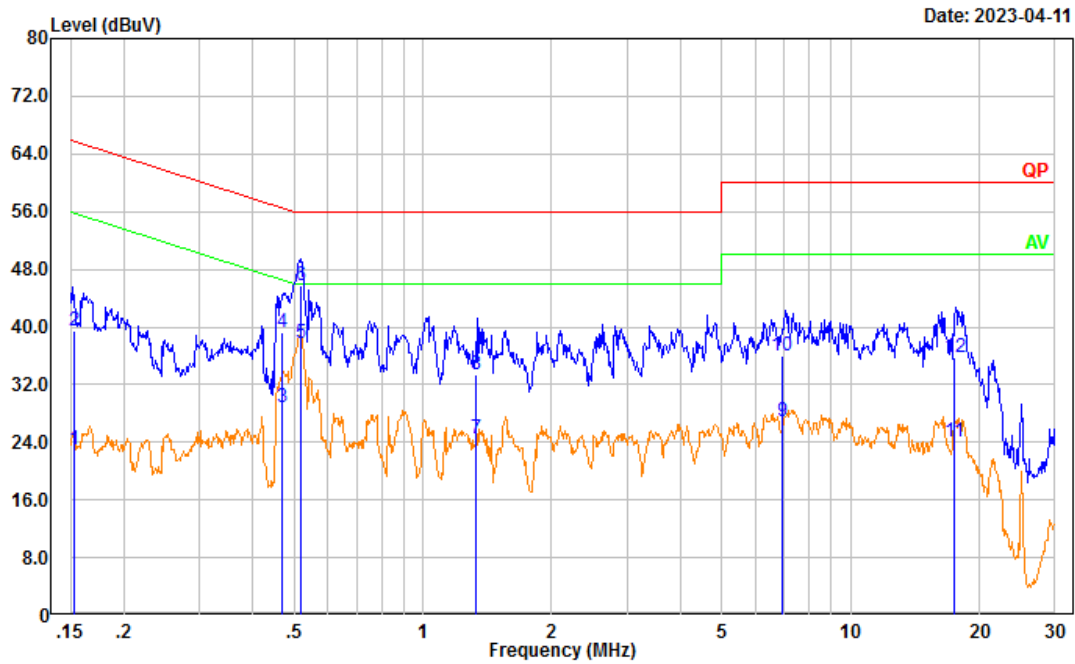


| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB) | Result<br>(dBμV) | Limit<br>(dBμV) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|----------------|------------------|-----------------|----------------|----------|
| 1   | 0.153              | 13.43             | 9.61           | 23.04            | 55.85           | 32.81          | Average  |
| 2   | 0.153              | 29.79             | 9.61           | 39.40            | 65.85           | 26.45          | QP       |
| 3   | 0.468              | 19.31             | 9.61           | 28.92            | 46.55           | 17.63          | Average  |
| 4   | 0.468              | 29.58             | 9.61           | 39.19            | 56.55           | 17.36          | QP       |
| 5   | 0.520              | 28.16             | 9.61           | 37.77            | 46.00           | 8.23           | Average  |
| 6   | 0.520              | 36.04             | 9.61           | 45.65            | 56.00           | 10.35          | QP       |
| 7   | 1.334              | 14.93             | 9.62           | 24.55            | 46.00           | 21.45          | Average  |
| 8   | 1.334              | 23.67             | 9.62           | 33.29            | 56.00           | 22.71          | QP       |
| 9   | 6.892              | 17.25             | 9.66           | 26.91            | 50.00           | 23.09          | Average  |
| 10  | 6.892              | 26.41             | 9.66           | 36.07            | 60.00           | 23.93          | QP       |
| 11  | 17.464             | 14.47             | 9.69           | 24.16            | 50.00           | 25.84          | Average  |
| 12  | 17.464             | 26.07             | 9.69           | 35.76            | 60.00           | 24.24          | QP       |

**Test Mode: M2****Line:**

Test Mode: Charging + Scanning (USB)

Port: Line

Note:

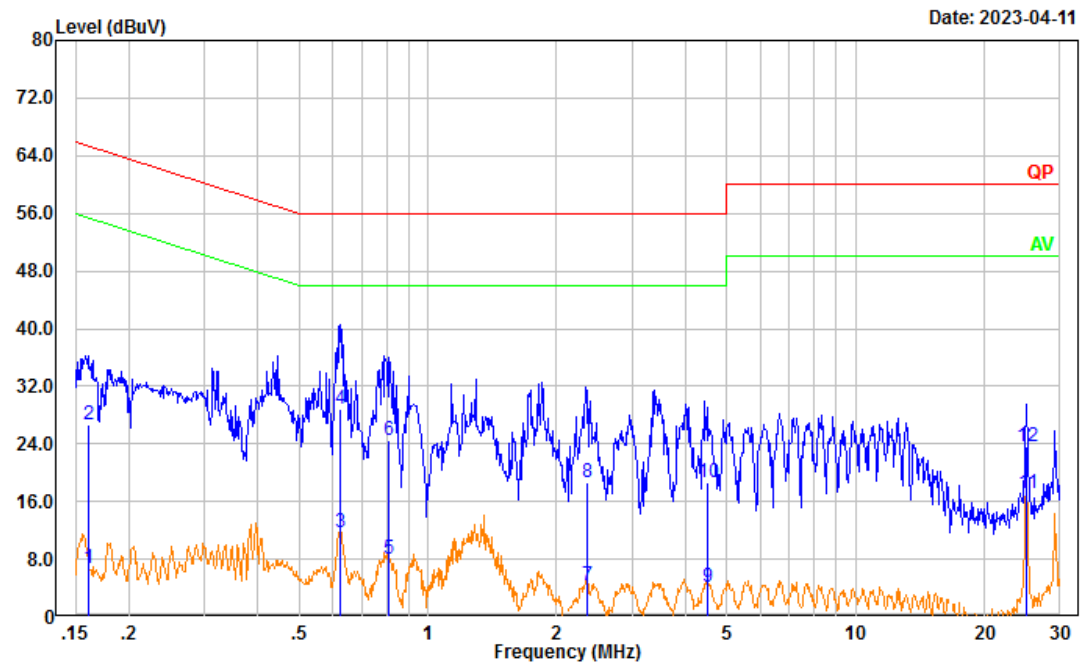


| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB) | Result<br>(dBμV) | Limit<br>(dBμV) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|----------------|------------------|-----------------|----------------|----------|
| 1   | 0.161              | -2.94             | 9.61           | 6.67             | 55.39           | 48.72          | Average  |
| 2   | 0.161              | 17.00             | 9.61           | 26.61            | 65.39           | 38.78          | QP       |
| 3   | 0.623              | 2.05              | 9.62           | 11.67            | 46.00           | 34.33          | Average  |
| 4   | 0.623              | 19.17             | 9.62           | 28.79            | 56.00           | 27.21          | QP       |
| 5   | 0.808              | -1.66             | 9.62           | 7.96             | 46.00           | 38.04          | Average  |
| 6   | 0.808              | 14.98             | 9.62           | 24.60            | 56.00           | 31.40          | QP       |
| 7   | 2.350              | -5.39             | 9.64           | 4.25             | 46.00           | 41.75          | Average  |
| 8   | 2.350              | 9.10              | 9.64           | 18.74            | 56.00           | 37.26          | QP       |
| 9   | 4.514              | -5.46             | 9.66           | 4.20             | 46.00           | 41.80          | Average  |
| 10  | 4.514              | 9.03              | 9.66           | 18.69            | 56.00           | 37.31          | QP       |
| 11  | 25.126             | 7.34              | 9.81           | 17.15            | 50.00           | 32.85          | Average  |
| 12  | 25.126             | 13.89             | 9.81           | 23.70            | 60.00           | 36.30          | QP       |

**Neutral:**

Test Mode: Charging + Scanning (USB)

Port: neutral

Note:

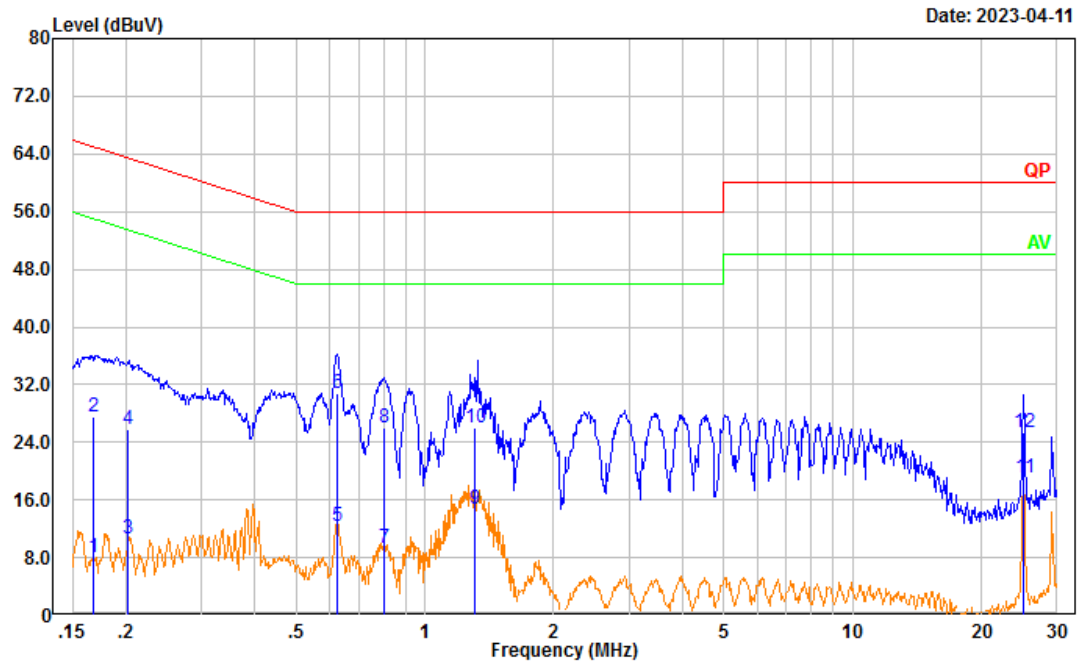

| No.   | Frequency (MHz) | Reading (dBμV) | Factor (dB) | Result (dBμV) | Limit (dBμV) | Margin (dB) | Detector |
|-------|-----------------|----------------|-------------|---------------|--------------|-------------|----------|
| <hr/> |                 |                |             |               |              |             |          |
| 1     | 0.168           | -1.60          | 9.61        | 8.01          | 55.05        | 47.04       | Average  |
| 2     | 0.168           | 17.90          | 9.61        | 27.51         | 65.05        | 37.54       | QP       |
| 3     | 0.202           | 0.96           | 9.61        | 10.57         | 53.51        | 42.94       | Average  |
| 4     | 0.202           | 16.19          | 9.61        | 25.80         | 63.51        | 37.71       | QP       |
| 5     | 0.624           | 2.63           | 9.62        | 12.25         | 46.00        | 33.75       | Average  |
| 6     | 0.624           | 21.25          | 9.62        | 30.87         | 56.00        | 25.13       | QP       |
| 7     | 0.804           | -0.31          | 9.62        | 9.31          | 46.00        | 36.69       | Average  |
| 8     | 0.804           | 16.31          | 9.62        | 25.93         | 56.00        | 30.07       | QP       |
| 9     | 1.304           | 5.02           | 9.62        | 14.64         | 46.00        | 31.36       | Average  |
| 10    | 1.304           | 16.35          | 9.62        | 25.97         | 56.00        | 30.03       | QP       |
| 11    | 25.131          | 9.27           | 9.76        | 19.03         | 50.00        | 30.97       | Average  |
| 12    | 25.131          | 15.69          | 9.76        | 25.45         | 60.00        | 34.55       | QP       |

**Test Mode: M3****Note:**


1. Pre-scan Test mode M1/M2, worst case is M1 (charging from base), so for M3/M4, base charging is selected to test.

2. Pre-scan operating frequency at

50.0125/53.9875/108.0125/141/174.9975/222.0125/224.9875/320.0125/400/479.9975/714.0125/857/999.9975 MHz, worst case is operating at 479.9975MHz.

**Line:**


Test Mode: Charging + Receiving  
Port: Line  
Note:

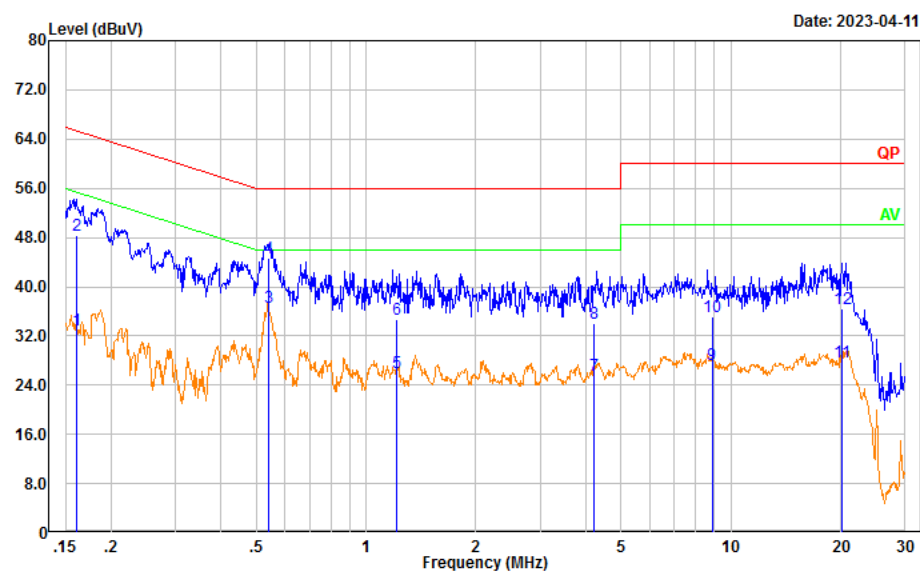

| No. | Frequency (MHz) | Reading (dBμV) | Factor (dB) | Result (dBμV) | Limit (dBμV) | Margin (dB) | Detector |
|-----|-----------------|----------------|-------------|---------------|--------------|-------------|----------|
| 1   | 0.161           | 23.32          | 9.61        | 32.93         | 55.42        | 22.49       | Average  |
| 2   | 0.161           | 38.73          | 9.61        | 48.34         | 65.42        | 17.08       | QP       |
| 3   | 0.540           | 26.96          | 9.61        | 36.57         | 46.00        | 9.43        | Average  |
| 4   | 0.540           | 35.01          | 9.61        | 44.62         | 56.00        | 11.38       | QP       |
| 5   | 1.214           | 16.40          | 9.62        | 26.02         | 46.00        | 19.98       | Average  |
| 6   | 1.214           | 25.00          | 9.62        | 34.62         | 56.00        | 21.38       | QP       |
| 7   | 4.208           | 15.94          | 9.65        | 25.59         | 46.00        | 20.41       | Average  |
| 8   | 4.208           | 24.44          | 9.65        | 34.09         | 56.00        | 21.91       | QP       |
| 9   | 8.867           | 17.61          | 9.67        | 27.28         | 50.00        | 22.72       | Average  |
| 10  | 8.867           | 25.45          | 9.67        | 35.12         | 60.00        | 24.88       | QP       |
| 11  | 20.076          | 17.91          | 9.80        | 27.71         | 50.00        | 22.29       | Average  |
| 12  | 20.076          | 26.68          | 9.80        | 36.48         | 60.00        | 23.52       | QP       |

**Neutral:**

Test Mode: Charging + Receiving  
Port: neutral  
Note:

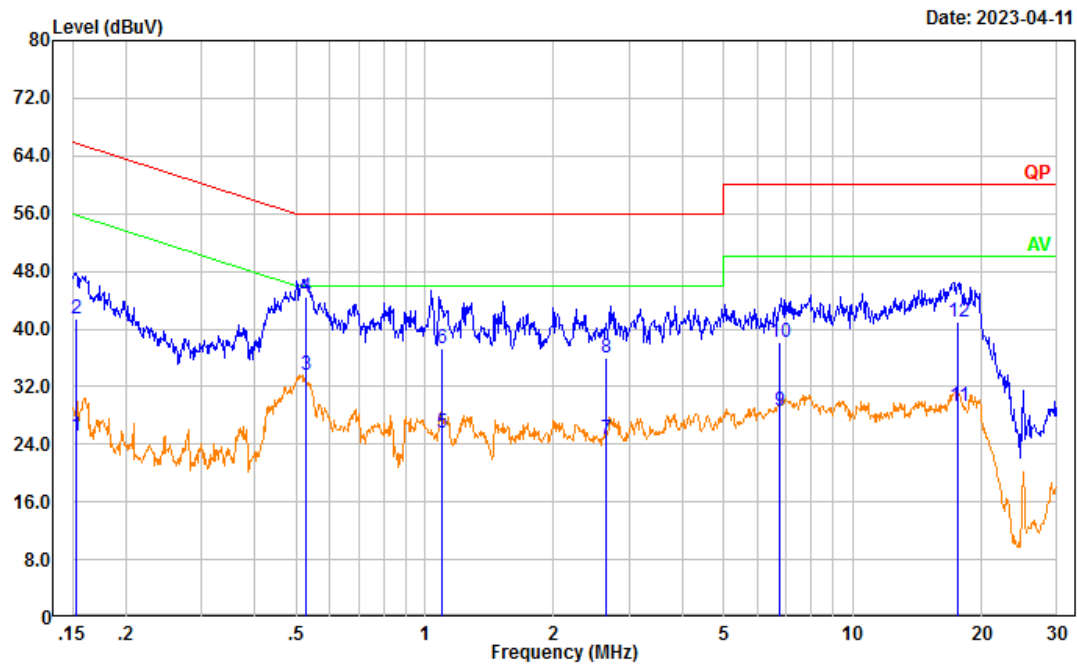


| No. | Frequency (MHz) | Reading (dBμV) | Factor (dB) | Result (dBμV) | Limit (dBμV) | Margin (dB) | Detector |
|-----|-----------------|----------------|-------------|---------------|--------------|-------------|----------|
| 1   | 0.153           | 15.46          | 9.61        | 25.07         | 55.82        | 30.75       | Average  |
| 2   | 0.153           | 31.69          | 9.61        | 41.30         | 65.82        | 24.52       | QP       |
| 3   | 0.528           | 24.08          | 9.61        | 33.69         | 46.00        | 12.31       | Average  |
| 4   | 0.528           | 34.78          | 9.61        | 44.39         | 56.00        | 11.61       | QP       |
| 5   | 1.099           | 15.95          | 9.62        | 25.57         | 46.00        | 20.43       | Average  |
| 6   | 1.099           | 27.68          | 9.62        | 37.30         | 56.00        | 18.70       | QP       |
| 7   | 2.654           | 15.04          | 9.64        | 24.68         | 46.00        | 21.32       | Average  |
| 8   | 2.654           | 26.41          | 9.64        | 36.05         | 56.00        | 19.95       | QP       |
| 9   | 6.744           | 18.91          | 9.66        | 28.57         | 50.00        | 21.43       | Average  |
| 10  | 6.744           | 28.42          | 9.66        | 38.08         | 60.00        | 21.92       | QP       |
| 11  | 17.650          | 19.59          | 9.69        | 29.28         | 50.00        | 20.72       | Average  |
| 12  | 17.650          | 31.33          | 9.69        | 41.02         | 60.00        | 18.98       | QP       |

**Test Mode: M4****Note:**

1. Pre-scan Test mode M1/M2, worst case is M1 (charging from base), so for M3/M4, base charging is selected to test.
2. Pre-scan operating frequency at 76.1/92/107.9MHz, worst case is operating at 92MHz.

**Line:**

Test Mode: **Charging + FM Receiving**  
 Port: Line  
 Note:

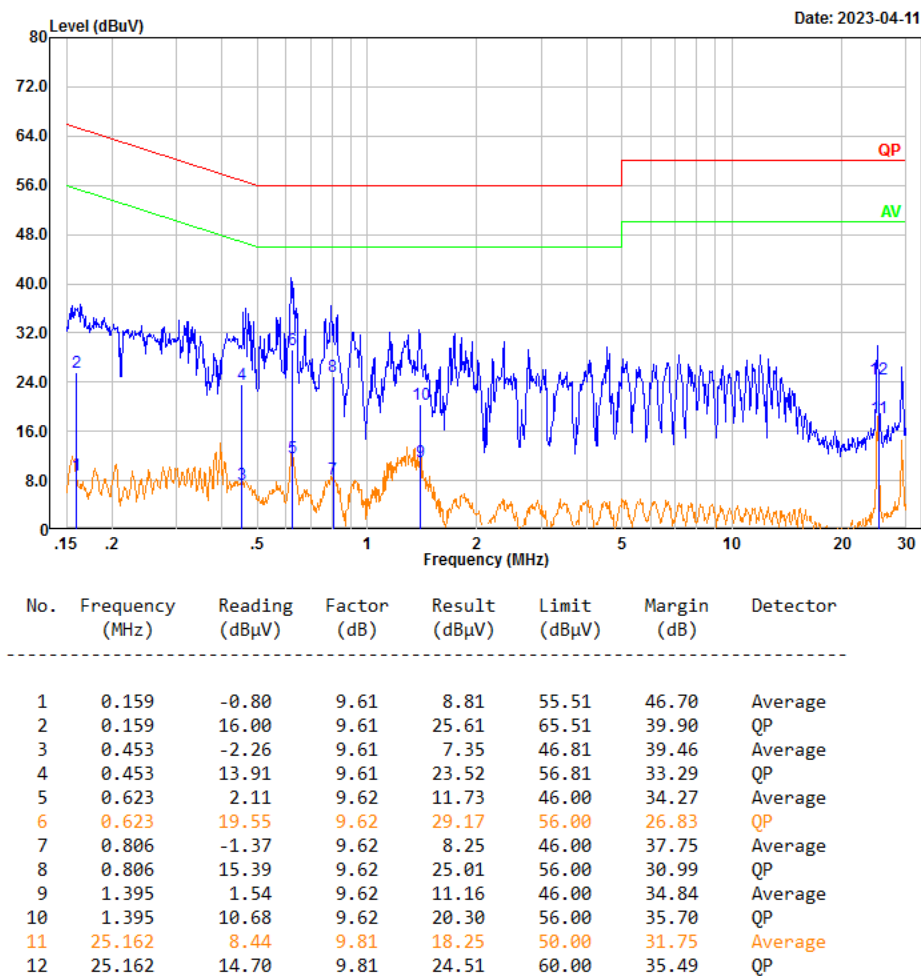


**Neutral:**

Test Mode: Charging + FM Receiving

Port: neutral

Note:

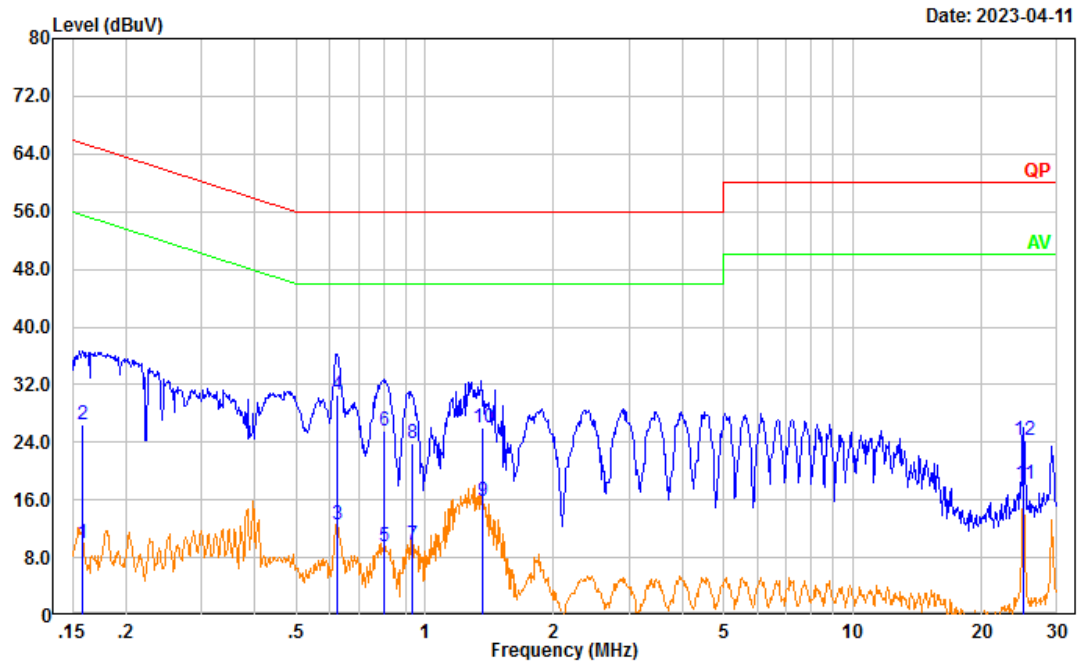

| No. | Frequency (MHz) | Reading (dBμV) | Factor (dB) | Result (dBμV) | Limit (dBμV) | Margin (dB) | Detector |
|-----|-----------------|----------------|-------------|---------------|--------------|-------------|----------|
| 1   | 0.158           | 0.39           | 9.61        | 10.00         | 55.54        | 45.54       | Average  |
| 2   | 0.158           | 16.83          | 9.61        | 26.44         | 65.54        | 39.10       | QP       |
| 3   | 0.625           | 2.88           | 9.62        | 12.50         | 46.00        | 33.50       | Average  |
| 4   | 0.625           | 21.00          | 9.62        | 30.62         | 56.00        | 25.38       | QP       |
| 5   | 0.804           | -0.15          | 9.62        | 9.47          | 46.00        | 36.53       | Average  |
| 6   | 0.804           | 16.06          | 9.62        | 25.68         | 56.00        | 30.32       | QP       |
| 7   | 0.936           | 0.03           | 9.62        | 9.65          | 46.00        | 36.35       | Average  |
| 8   | 0.936           | 14.26          | 9.62        | 23.88         | 56.00        | 32.12       | QP       |
| 9   | 1.360           | 6.25           | 9.62        | 15.87         | 46.00        | 30.13       | Average  |
| 10  | 1.360           | 16.48          | 9.62        | 26.10         | 56.00        | 29.90       | QP       |
| 11  | 25.156          | 8.54           | 9.76        | 18.30         | 50.00        | 31.70       | Average  |
| 12  | 25.156          | 14.57          | 9.76        | 24.33         | 60.00        | 35.67       | QP       |

## 4.2 Radiation Spurious Emissions

|                |                      |              |                       |
|----------------|----------------------|--------------|-----------------------|
| Serial Number: | 1V8R-1               | Test Date:   | 2023/01/09-2023/04/10 |
| Test Site:     | 966-2/966-1          | Test Mode:   | M1-M4                 |
| Tester:        | Carl Xue, Mack Huang | Test Result: | Pass                  |

### Environmental Conditions:

|                      |           |                              |       |                        |             |
|----------------------|-----------|------------------------------|-------|------------------------|-------------|
| Temperature:<br>(°C) | 22.4~23.1 | Relative<br>Humidity:<br>(%) | 48~60 | ATM Pressure:<br>(kPa) | 101.2~101.7 |
|----------------------|-----------|------------------------------|-------|------------------------|-------------|

### Test Equipment List and Details:


| Manufacturer    | Description       | Model                 | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|-----------------------|---------------|------------------|----------------------|
| Sunol Sciences  | Antenna           | JB6                   | A082520-5     | 2020/10/19       | 2023/10/18           |
| R&S             | EMI Test Receiver | ESR3                  | 102724        | 2022/07/15       | 2023/07/14           |
| TIMES MICROWAVE | Coaxial Cable     | LMR-600-UltraFlex     | C-0470-02     | 2022/07/17       | 2023/07/16           |
| TIMES MICROWAVE | Coaxial Cable     | LMR-600-UltraFlex     | C-0780-01     | 2022/07/17       | 2023/07/16           |
| Sonoma          | Amplifier         | 310N                  | 186165        | 2022/07/17       | 2023/07/16           |
| Audix           | Test Software     | E3                    | 201021 (V9)   | N/A              | N/A                  |
| ETS-Lindgren    | Horn Antenna      | 3115                  | 9912-5985     | 2020/10/13       | 2023/10/12           |
| R&S             | Spectrum Analyzer | FSV40                 | 101591        | 2022/07/15       | 2023/07/14           |
| MICRO-COAX      | Coaxial Cable     | UFA210A-1-1200-70U300 | 217423-008    | 2022/08/07       | 2023/08/06           |
| MICRO-COAX      | Coaxial Cable     | UFA210A-1-2362-300300 | 235780-001    | 2022/08/07       | 2023/08/06           |
| Mini            | Pre-amplifier     | ZVA-183-S+            | 5969001149    | 2022/11/09       | 2023/11/08           |
| Mini Circuits   | High Pass Filter  | VHF-6010+             | 31119         | 2022/08/07       | 2023/08/06           |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## 1) 30MHz-1GHz:


Test Mode: M1

Test Mode: Charging + scanning(base)  
Polarization: horizontal  
Note:

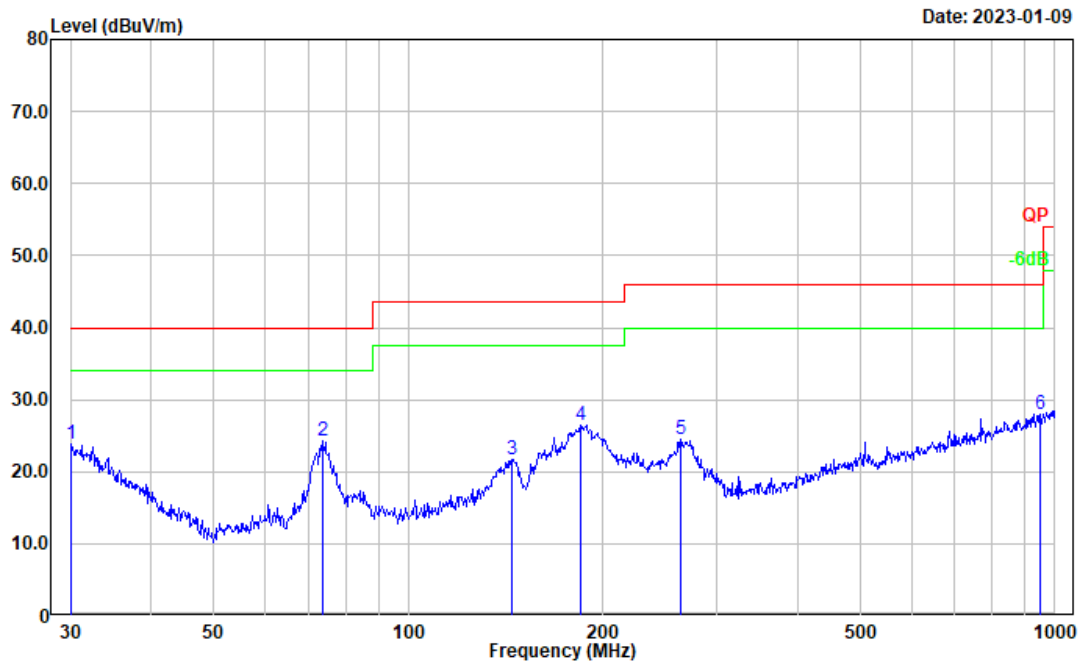

| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 30.105             | 27.48             | -3.68            | 23.80              | 40.00             | 16.20          | Peak     |
| 2   | 73.876             | 41.13             | -16.88           | 24.25              | 40.00             | 15.75          | Peak     |
| 3   | 144.335            | 33.72             | -11.96           | 21.76              | 43.50             | 21.74          | Peak     |
| 4   | 184.490            | 40.02             | -13.58           | 26.44              | 43.50             | 17.06          | Peak     |
| 5   | 263.819            | 36.78             | -12.31           | 24.47              | 46.00             | 21.53          | Peak     |
| 6   | 948.761            | 28.22             | -0.21            | 28.01              | 46.00             | 17.99          | Peak     |


Test Mode: Charging + scanning(base)  
Polarization: vertical  
Note:

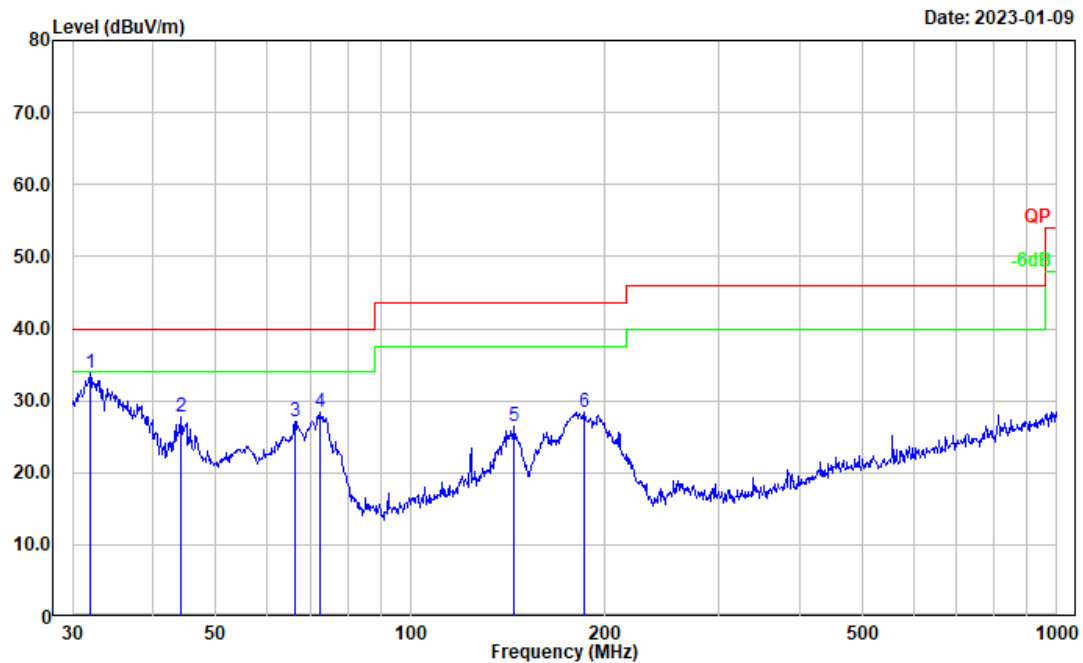

| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 31.955             | 38.92             | -5.08            | 33.84              | 40.00             | 6.16           | Peak     |
| 2   | 44.120             | 41.57             | -13.73           | 27.84              | 40.00             | 12.16          | Peak     |
| 3   | 66.266             | 43.87             | -16.84           | 27.03              | 40.00             | 12.97          | Peak     |
| 4   | 72.338             | 45.10             | -16.70           | 28.40              | 40.00             | 11.60          | Peak     |
| 5   | 144.842            | 38.48             | -11.94           | 26.54              | 43.50             | 16.96          | Peak     |
| 6   | 185.788            | 42.04             | -13.56           | 28.48              | 43.50             | 15.02          | Peak     |


**Test Mode: M2**

Test Mode: Charging + Scanning (USB)  
Polarization: horizontal  
Note:

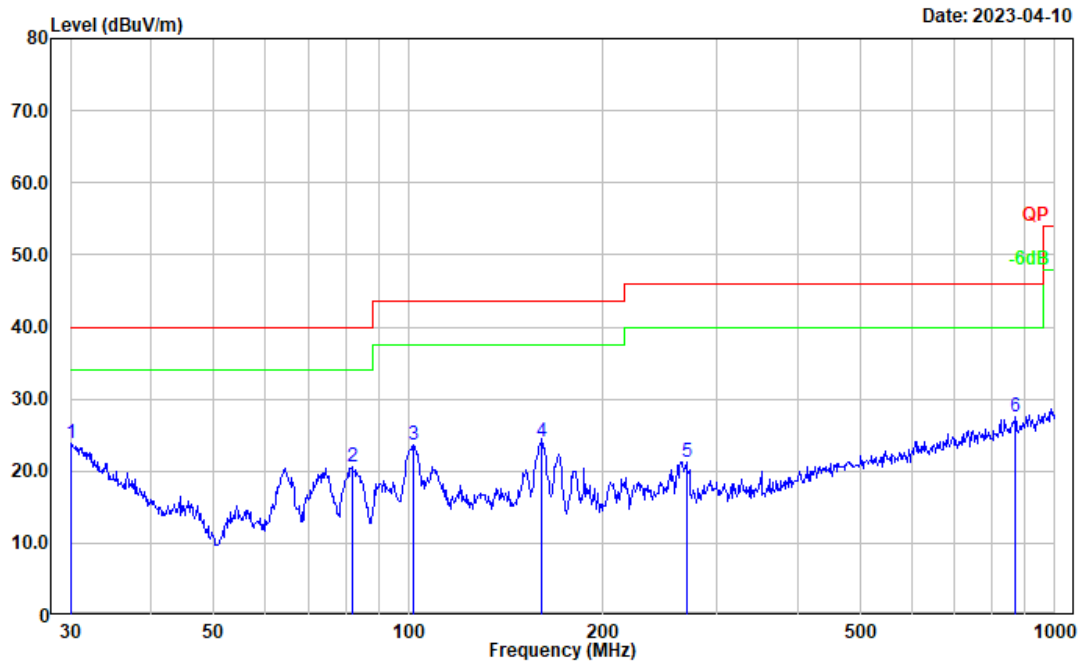

| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 30.105             | 27.50             | -3.68            | 23.82              | 40.00             | 16.18          | Peak     |
| 2   | 81.783             | 37.86             | -17.36           | 20.50              | 40.00             | 19.50          | Peak     |
| 3   | 101.644            | 37.67             | -14.02           | 23.65              | 43.50             | 19.85          | Peak     |
| 4   | 160.346            | 36.17             | -12.09           | 24.08              | 43.50             | 19.42          | Peak     |
| 5   | 269.428            | 33.45             | -12.12           | 21.33              | 46.00             | 24.67          | Peak     |
| 6   | 869.130            | 28.79             | -1.21            | 27.58              | 46.00             | 18.42          | Peak     |

Test Mode: Charging + Scanning (USB)  
Polarization: vertical  
Note:

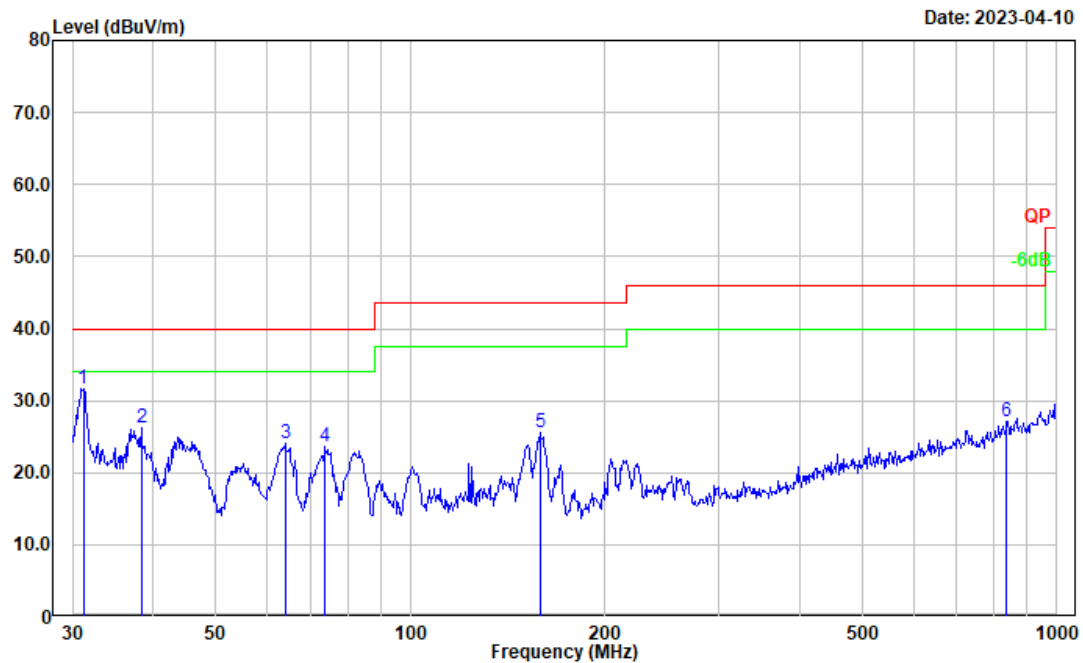


| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 31.180             | 36.22             | -4.50            | 31.72              | 40.00             | 8.28           | Peak     |
| 2   | 38.346             | 36.27             | -10.00           | 26.27              | 40.00             | 13.73          | Peak     |
| 3   | 63.983             | 41.02             | -17.04           | 23.98              | 40.00             | 16.02          | Peak     |
| 4   | 73.876             | 40.43             | -16.88           | 23.55              | 40.00             | 16.45          | Peak     |
| 5   | 158.668            | 37.65             | -12.05           | 25.60              | 43.50             | 17.90          | Peak     |
| 6   | 836.244            | 28.81             | -1.66            | 27.15              | 46.00             | 18.85          | Peak     |


**Test Mode: M3 (operating at 50.0125MHz)**

Note: Pre-scan Test mode M1/M2, worst case is M1 (charging from base), so for M3/M4, base charging is selected to test.

Test Mode: Charging + Receiving  
Polarization: horizontal  
Note:

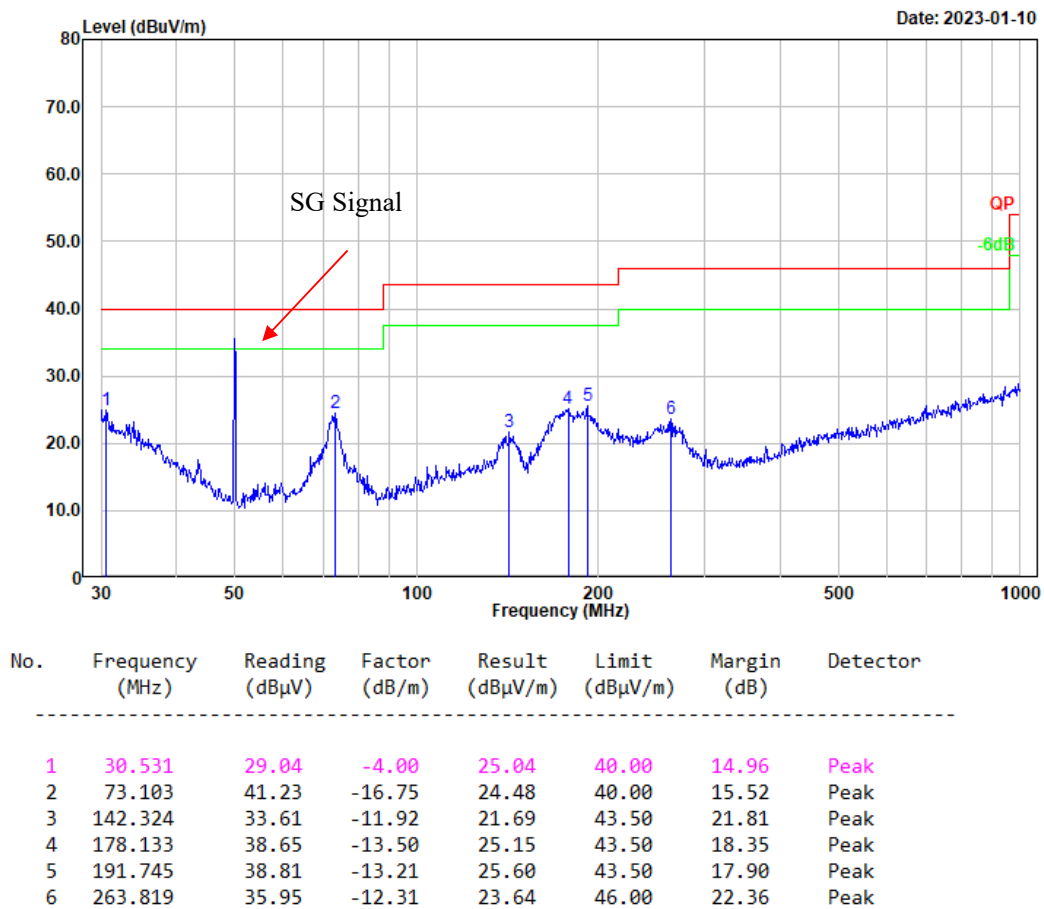

Test Mode: Charging + Receiving  
Polarization: vertical  
Note:

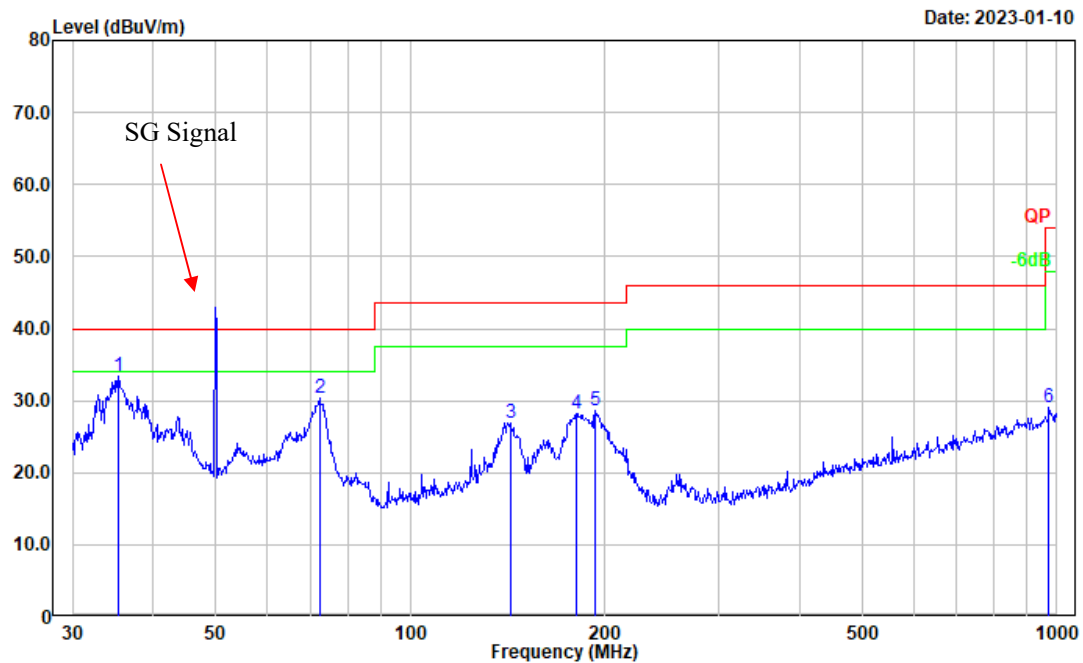


| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 35.251             | 40.97             | -7.67            | 33.30              | 40.00             | 6.70           | Peak     |
| 2   | 72.338             | 47.06             | -16.70           | 30.36              | 40.00             | 9.64           | Peak     |
| 3   | 142.824            | 38.74             | -11.91           | 26.83              | 43.50             | 16.67          | Peak     |
| 4   | 180.649            | 41.87             | -13.65           | 28.22              | 43.50             | 15.28          | Peak     |
| 5   | 193.095            | 41.59             | -13.04           | 28.55              | 43.50             | 14.95          | Peak     |
| 6   | 972.337            | 28.75             | 0.32             | 29.07              | 54.00             | 24.93          | Peak     |


**Test Mode: M3 (operating at 53.9875MHz)**

Note: Pre-scan Test mode M1/M2, worst case is M1 (charging from base), so for M3/M4, base charging is selected to test.

Test Mode: Charging + Receiving  
Polarization: horizontal  
Note:

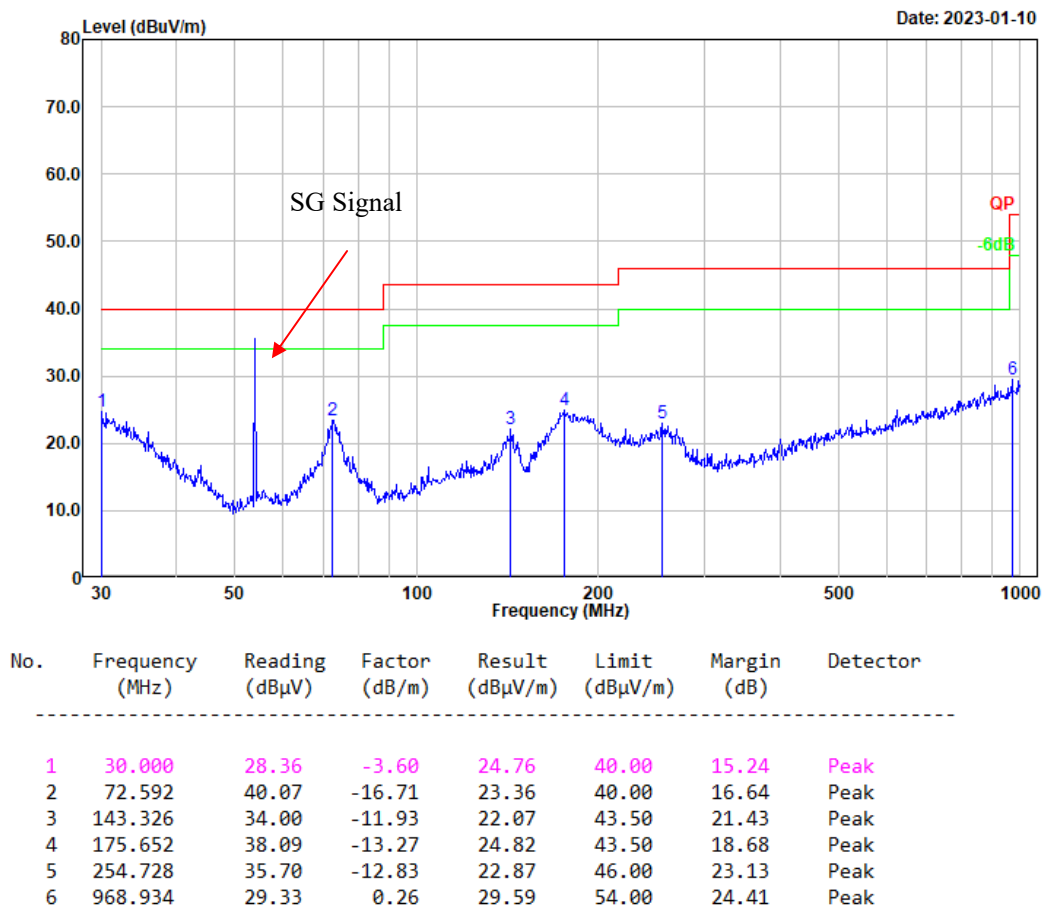

Test Mode: Charging + Receiving  
Polarization: vertical  
Note:

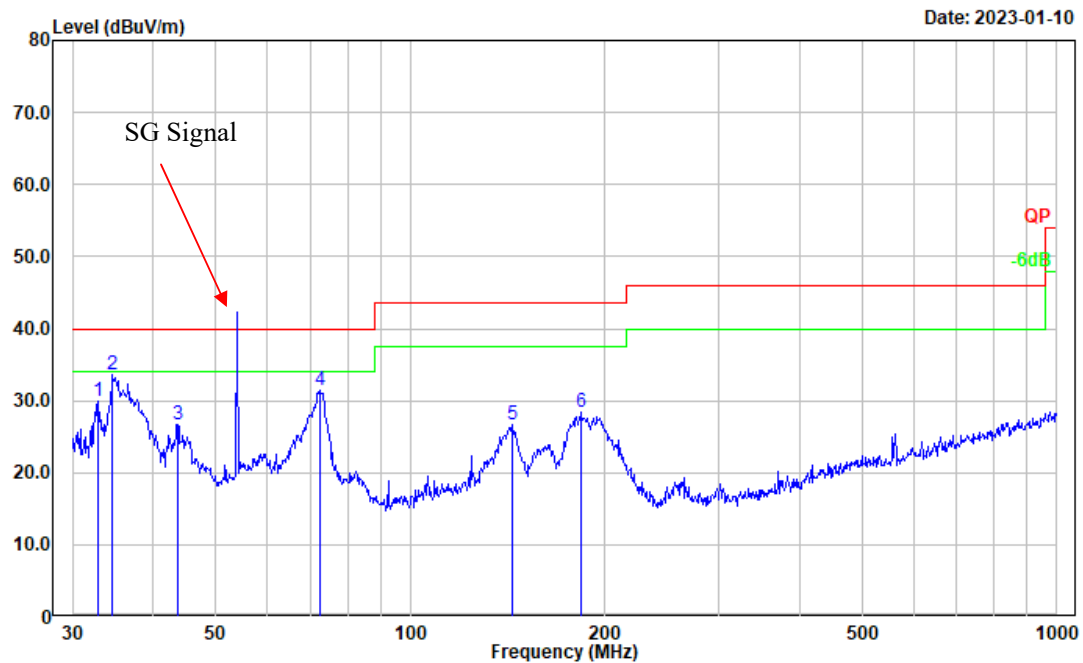


| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 32.864             | 35.76             | -5.81            | 29.95              | 40.00             | 10.05          | Peak     |
| 2   | 34.639             | 40.80             | -7.19            | 33.61              | 40.00             | 6.39           | Peak     |
| 3   | 43.659             | 40.16             | -13.46           | 26.70              | 40.00             | 13.30          | Peak     |
| 4   | 72.338             | 48.06             | -16.70           | 31.36              | 40.00             | 8.64           | Peak     |
| 5   | 143.830            | 38.72             | -11.96           | 26.76              | 43.50             | 16.74          | Peak     |
| 6   | 183.201            | 42.07             | -13.60           | 28.47              | 43.50             | 15.03          | Peak     |


**Test Mode: M3 (operating at 108.0125MHz)**

Note: Pre-scan Test mode M1/M2, worst case is M1 (charging from base), so for M3/M4, base charging is selected to test.

Test Mode: Charging + Receiving  
Polarization: horizontal  
Note:

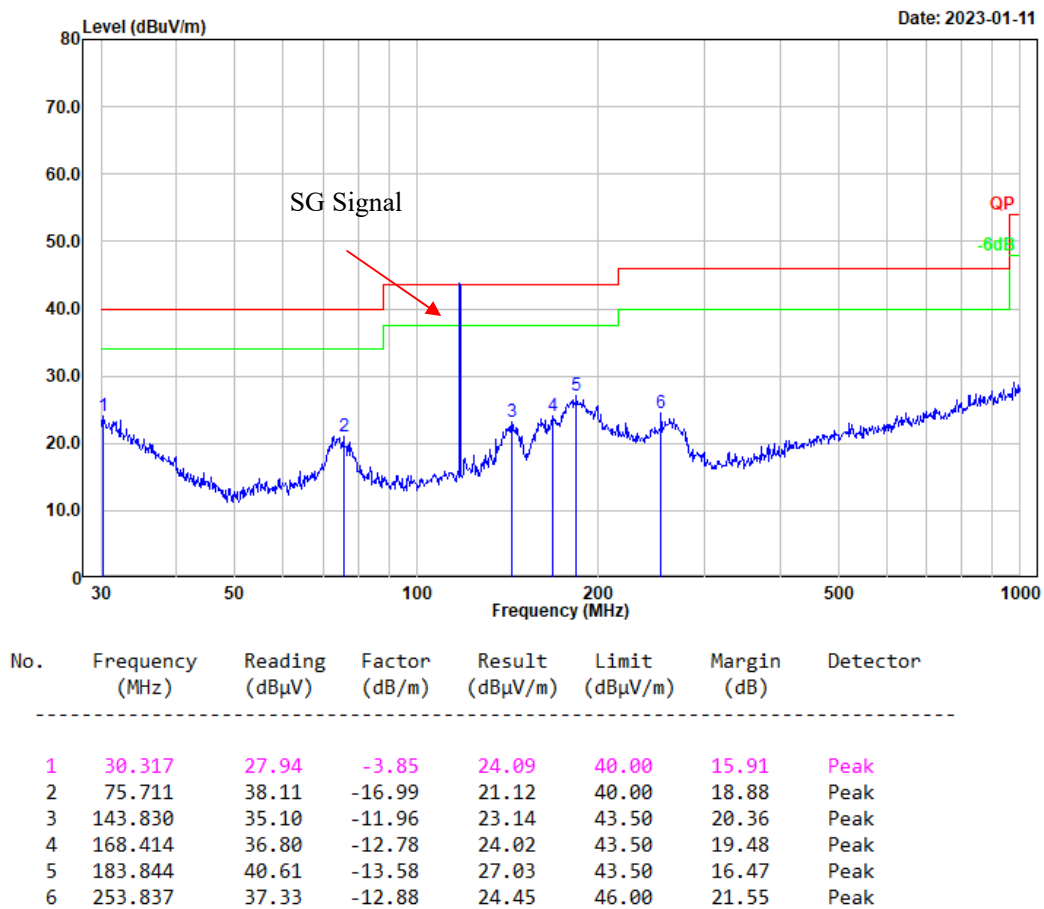

Test Mode: Charging + Receiving  
Polarization: vertical  
Note:

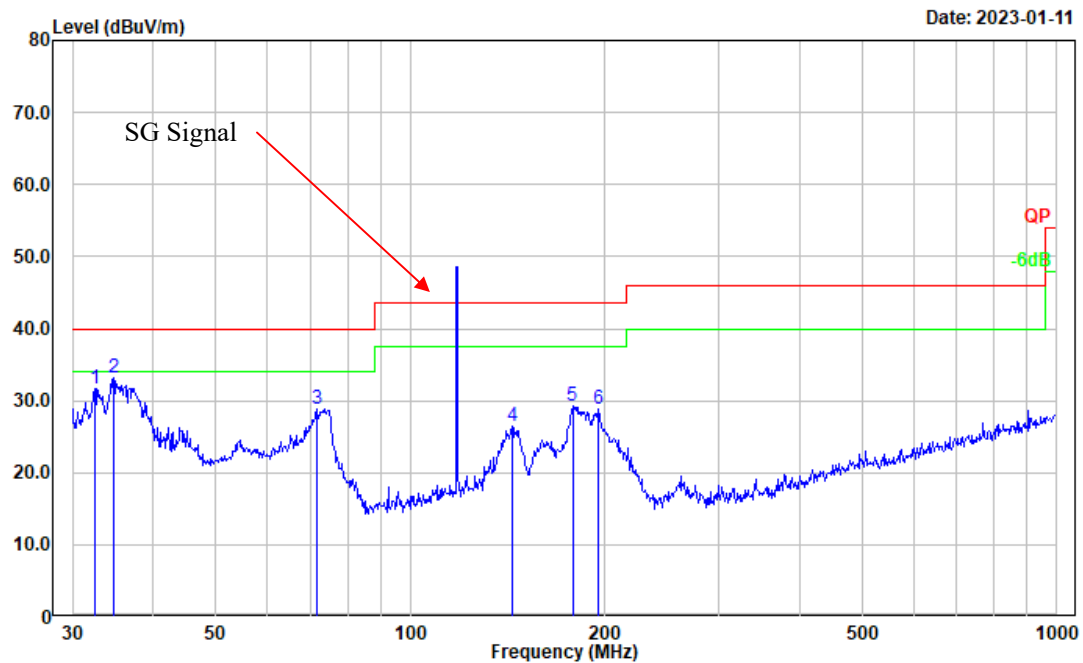


| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 32.520             | 37.16             | -5.54            | 31.62              | 40.00             | 8.38           | Peak     |
| 2   | 34.760             | 40.50             | -7.29            | 33.21              | 40.00             | 6.79           | Peak     |
| 3   | 71.581             | 45.42             | -16.64           | 28.78              | 40.00             | 11.22          | Peak     |
| 4   | 143.830            | 38.31             | -11.96           | 26.35              | 43.50             | 17.15          | Peak     |
| 5   | 178.133            | 42.69             | -13.50           | 29.19              | 43.50             | 14.31          | Peak     |
| 6   | 195.137            | 41.50             | -12.76           | 28.74              | 43.50             | 14.76          | Peak     |


**Test Mode: M3 (operating at 141MHz)**

Note: Pre-scan Test mode M1/M2, worst case is M1 (charging from base), so for M3/M4, base charging is selected to test.

Test Mode: Charging + Receiving  
Polarization: horizontal  
Note:

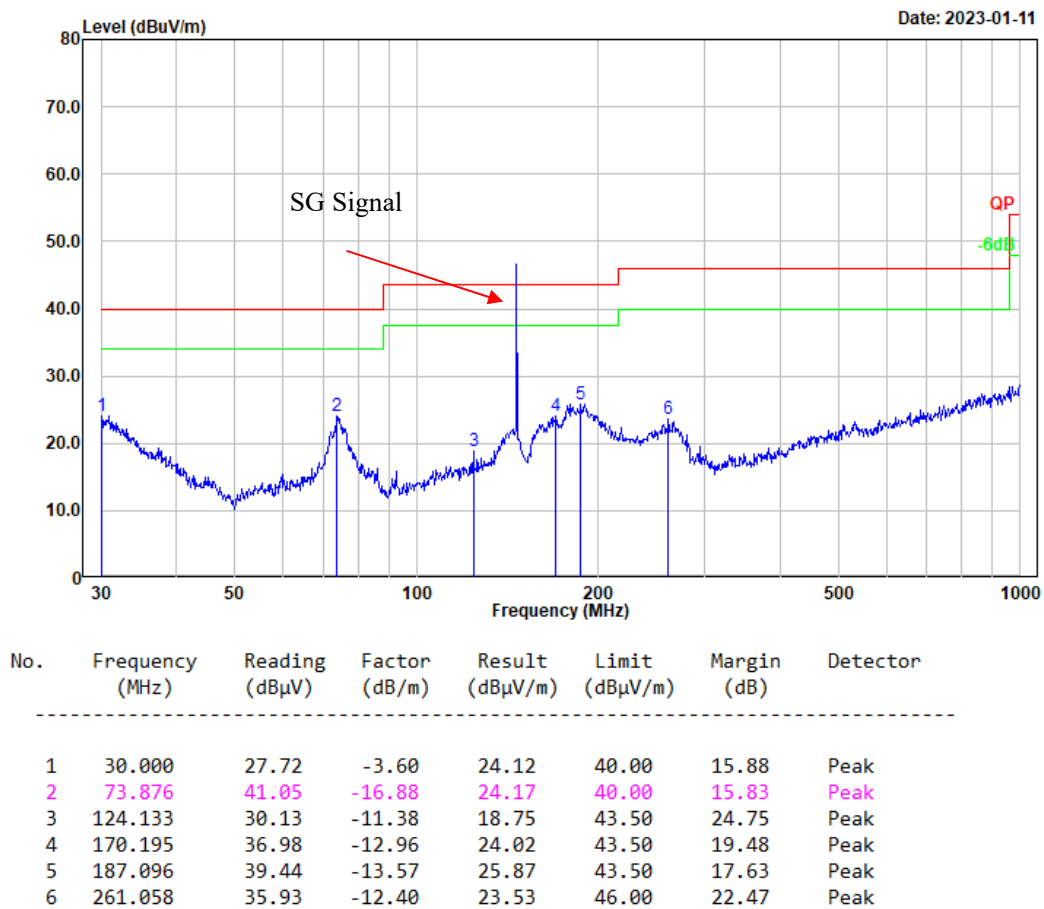

Test Mode: Charging + Receiving  
Polarization: vertical  
Note:

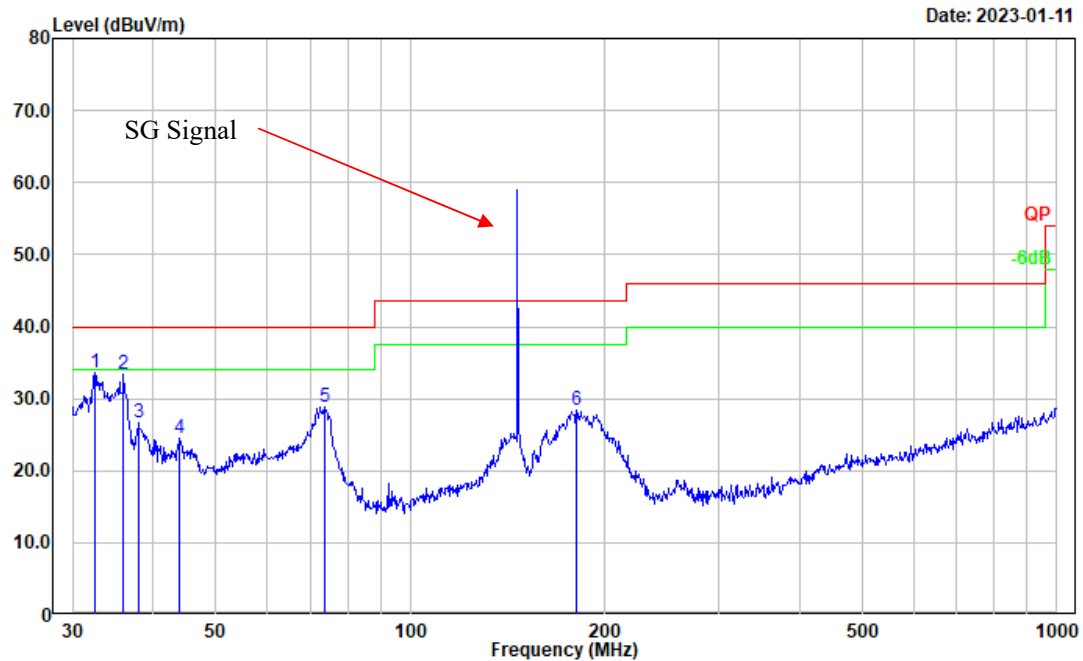


| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 32.520             | 39.12             | -5.54            | 33.58              | 40.00             | 6.42           | Peak     |
| 2   | 36.001             | 41.70             | -8.24            | 33.46              | 40.00             | 6.54           | Peak     |
| 3   | 37.945             | 36.27             | -9.69            | 26.58              | 40.00             | 13.42          | Peak     |
| 4   | 43.966             | 38.08             | -13.65           | 24.43              | 40.00             | 15.57          | Peak     |
| 5   | 73.876             | 45.80             | -16.88           | 28.92              | 40.00             | 11.08          | Peak     |
| 6   | 180.649            | 42.10             | -13.65           | 28.45              | 43.50             | 15.05          | Peak     |


**Test Mode: M3 (operating at 174.9975MHz)**

Note: Pre-scan Test mode M1/M2, worst case is M1 (charging from base), so for M3/M4, base charging is selected to test.

Test Mode: Charging + Receiving  
Polarization: horizontal  
Note:

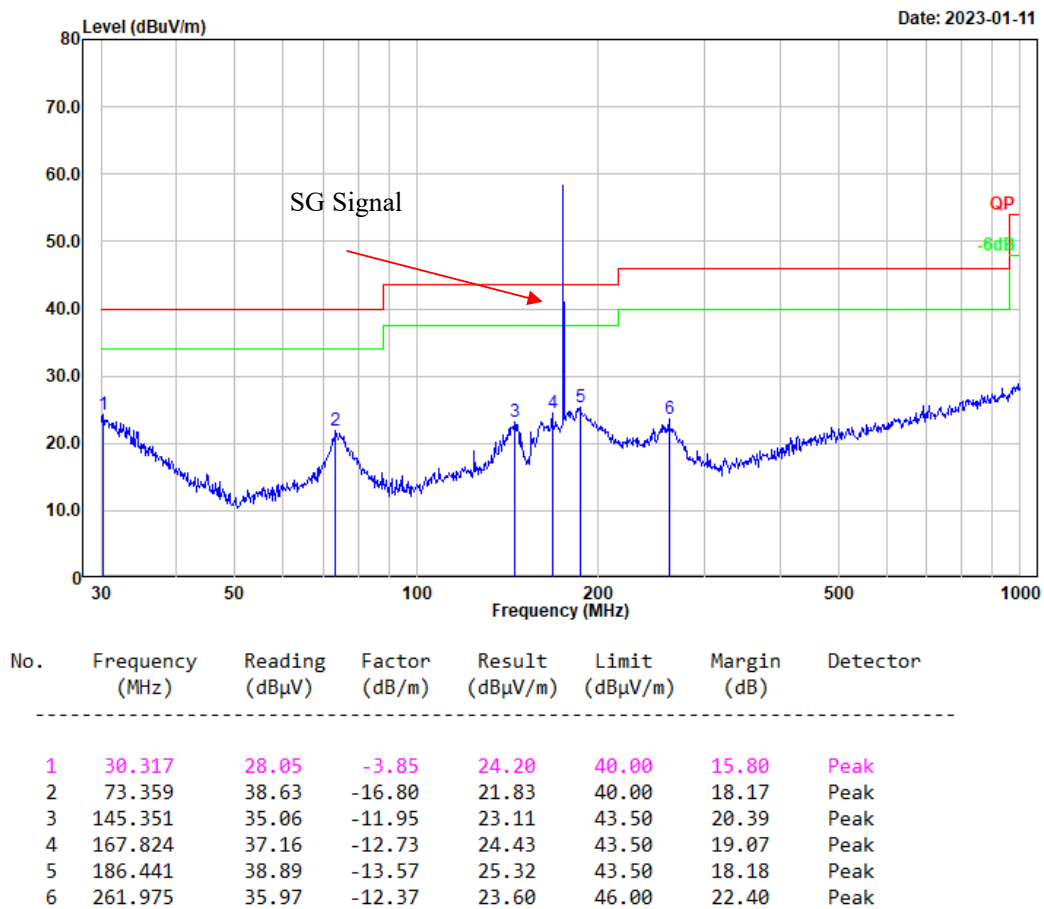

Test Mode: Charging + Receiving  
Polarization: vertical  
Note:

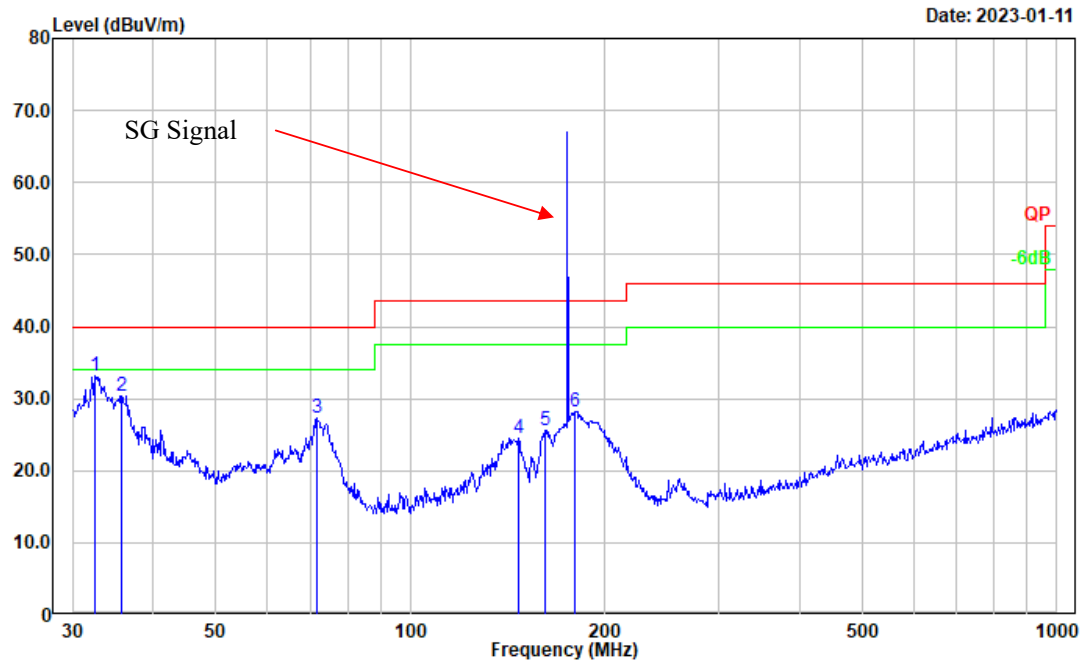


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 32.520             | 38.60             | -5.54            | 33.06              | 40.00             | 6.94           | Peak     |
| 2   | 35.749             | 38.49             | -8.05            | 30.44              | 40.00             | 9.56           | Peak     |
| 3   | 71.581             | 43.87             | -16.64           | 27.23              | 40.00             | 12.77          | Peak     |
| 4   | 146.888            | 36.52             | -11.98           | 24.54              | 43.50             | 18.96          | Peak     |
| 5   | 161.474            | 37.90             | -12.21           | 25.69              | 43.50             | 17.81          | Peak     |
| 6   | 179.386            | 41.89             | -13.60           | 28.29              | 43.50             | 15.21          | Peak     |


**Test Mode: M3 (operating at 222.0125MHz)**

Note: Pre-scan Test mode M1/M2, worst case is M1 (charging from base), so for M3/M4, base charging is selected to test.

Test Mode: Charging + Receiving  
Polarization: horizontal  
Note:

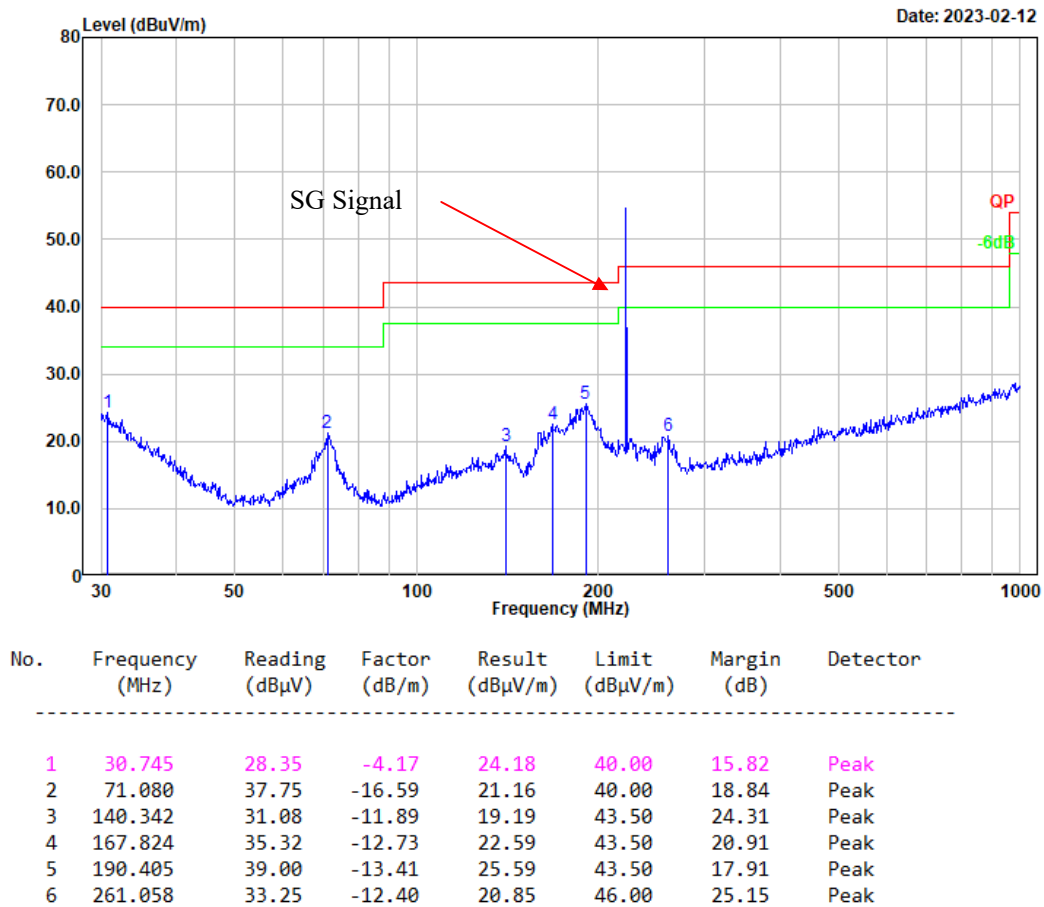

Test Mode: Charging + Receiving  
Polarization: vertical  
Note:

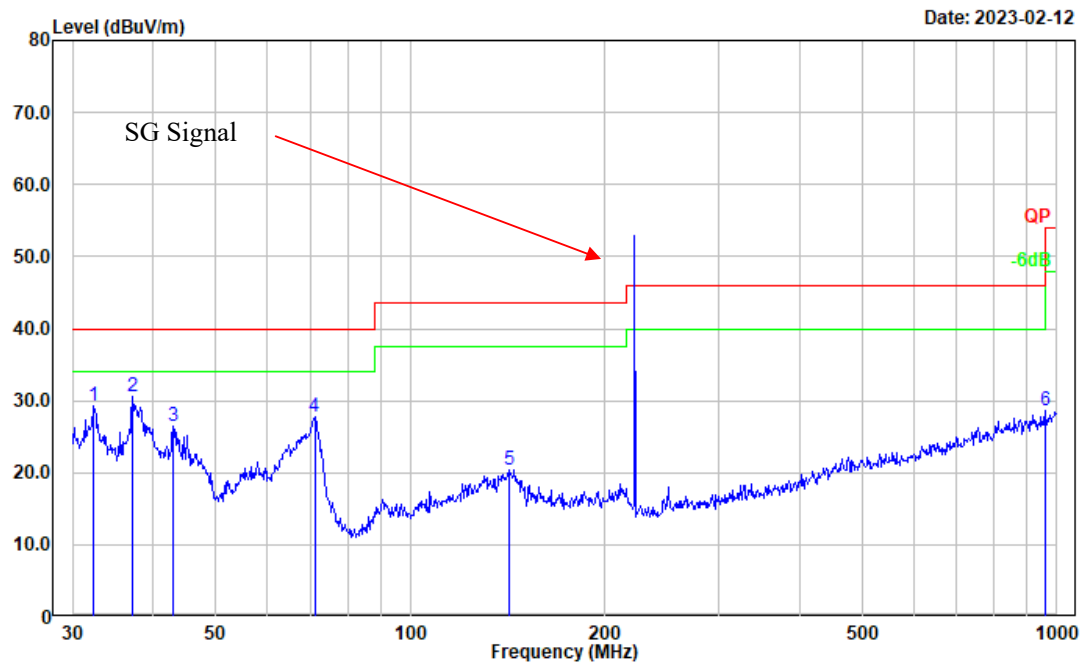


| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 32.406             | 34.74             | -5.45            | 29.29              | 40.00             | 10.71          | Peak     |
| 2   | 37.155             | 39.61             | -9.12            | 30.49              | 40.00             | 9.51           | Peak     |
| 3   | 42.900             | 39.43             | -13.01           | 26.42              | 40.00             | 13.58          | Peak     |
| 4   | 71.080             | 44.35             | -16.59           | 27.76              | 40.00             | 12.24          | Peak     |
| 5   | 141.826            | 32.34             | -11.92           | 20.42              | 43.50             | 23.08          | Peak     |
| 6   | 958.794            | 28.63             | 0.03             | 28.66              | 46.00             | 17.34          | Peak     |


**Test Mode: M3 (operating at 224.9875MHz)**

Note: Pre-scan Test mode M1/M2, worst case is M1 (charging from base), so for M3/M4, base charging is selected to test.

Test Mode: Charging + Receiving  
Polarization: horizontal  
Note:

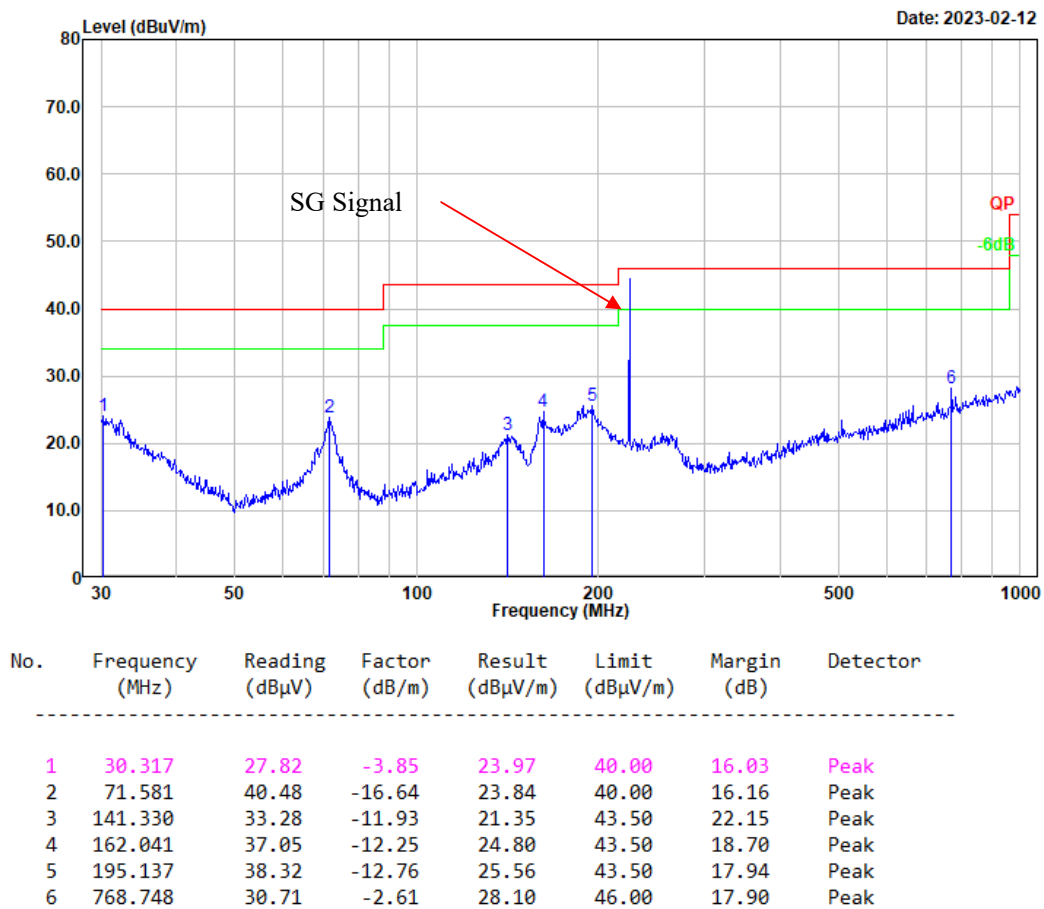

Test Mode: Charging + Receiving  
Polarization: vertical  
Note:

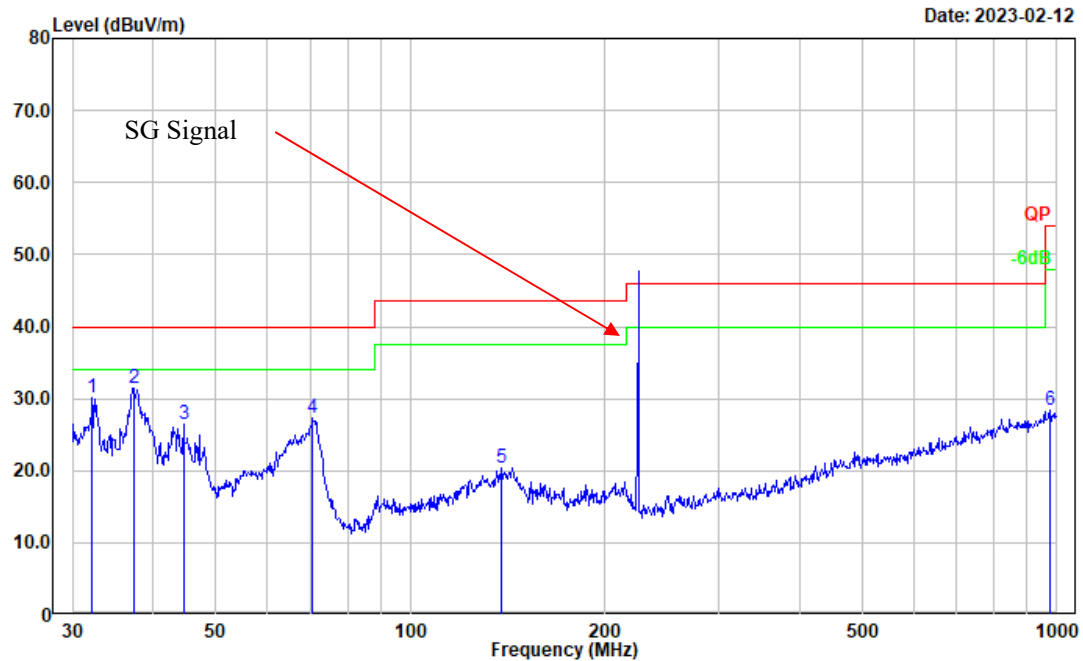


| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 32.179             | 35.38             | -5.27            | 30.11              | 40.00             | 9.89           | Peak     |
| 2   | 37.285             | 40.58             | -9.22            | 31.36              | 40.00             | 8.64           | Peak     |
| 3   | 44.587             | 40.36             | -14.00           | 26.36              | 40.00             | 13.64          | Peak     |
| 4   | 70.584             | 43.83             | -16.53           | 27.30              | 40.00             | 12.70          | Peak     |
| 5   | 138.387            | 32.20             | -11.81           | 20.39              | 43.50             | 23.11          | Peak     |
| 6   | 975.753            | 28.07             | 0.40             | 28.47              | 54.00             | 25.53          | Peak     |


**Test Mode: M3 (operating at 320.0125MHz)**

Note: Pre-scan Test mode M1/M2, worst case is M1 (charging from base), so for M3/M4, base charging is selected to test.

Test Mode: Charging + Receiving  
Polarization: horizontal  
Note:

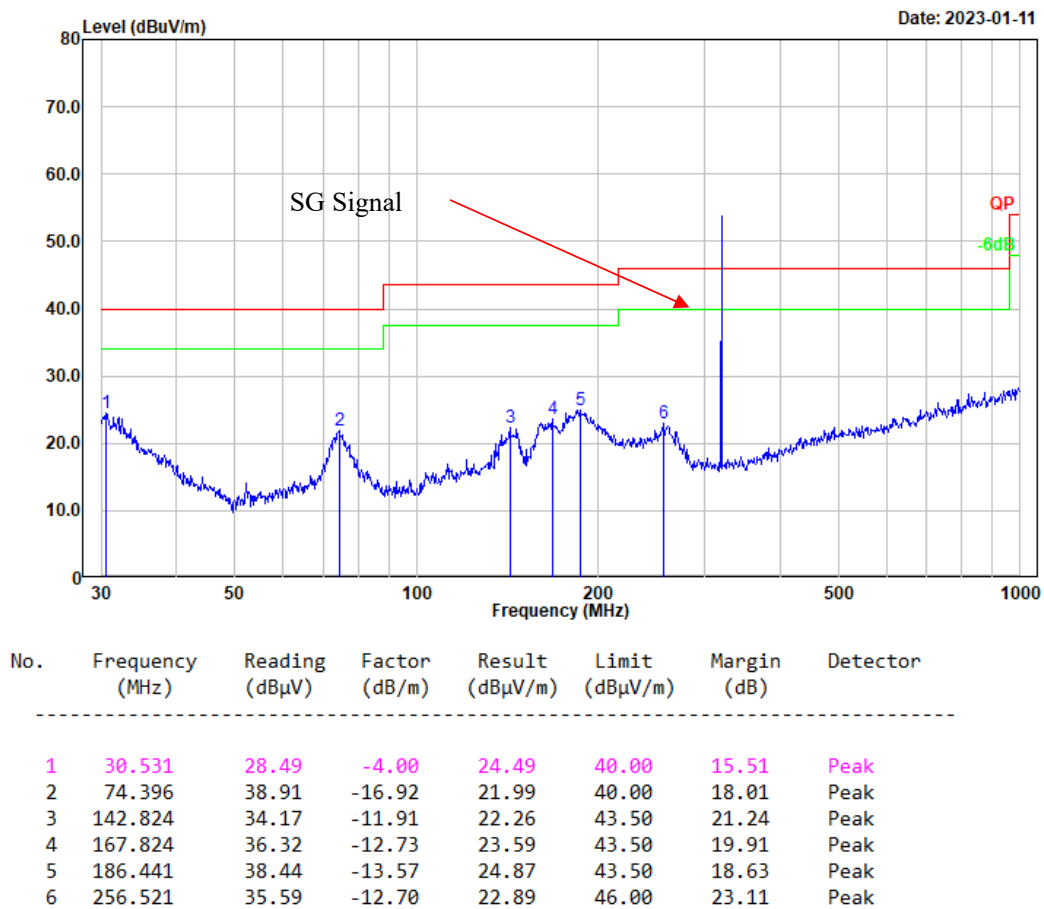

Test Mode: Charging + Receiving  
Polarization: vertical  
Note:

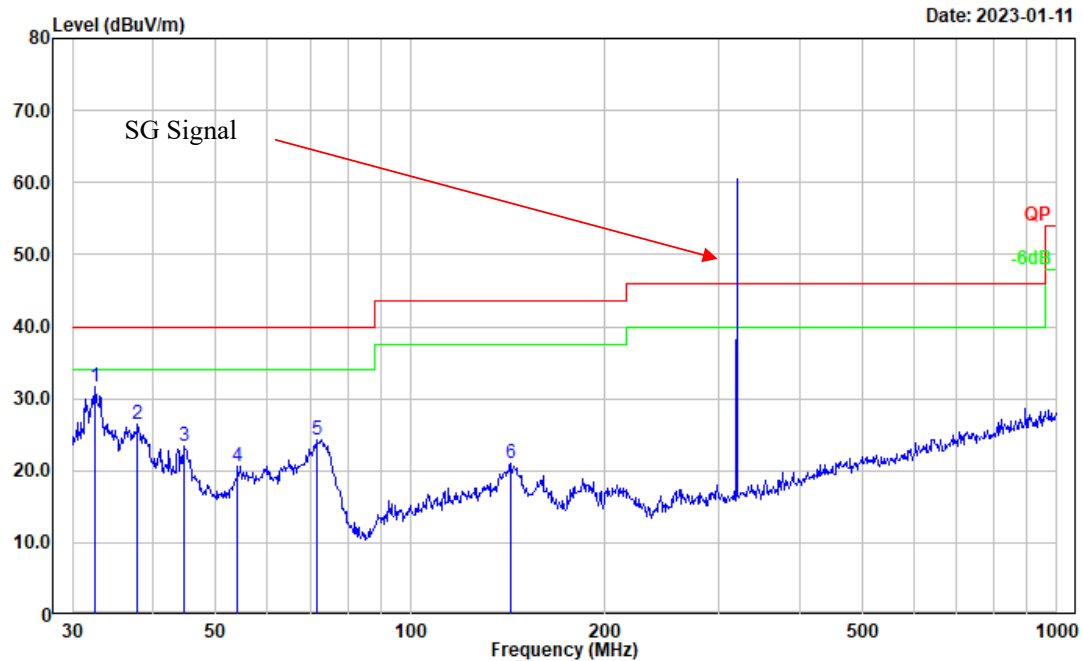


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|----------|
| 1   | 32.520          | 37.17          | -5.54         | 31.63           | 40.00          | 8.37        | Peak     |
| 2   | 37.812          | 36.00          | -9.59         | 26.41           | 40.00          | 13.59       | Peak     |
| 3   | 44.743          | 37.53          | -14.08        | 23.45           | 40.00          | 16.55       | Peak     |
| 4   | 54.071          | 37.86          | -17.26        | 20.60           | 40.00          | 19.40       | Peak     |
| 5   | 71.832          | 40.91          | -16.66        | 24.25           | 40.00          | 15.75       | Peak     |
| 6   | 143.326         | 33.02          | -11.93        | 21.09           | 43.50          | 22.41       | Peak     |


**Test Mode: M3 (operating at 400MHz)**

Note: Pre-scan Test mode M1/M2, worst case is M1 (charging from base), so for M3/M4, base charging is selected to test.

Test Mode: Charging + Receiving  
Polarization: horizontal  
Note:

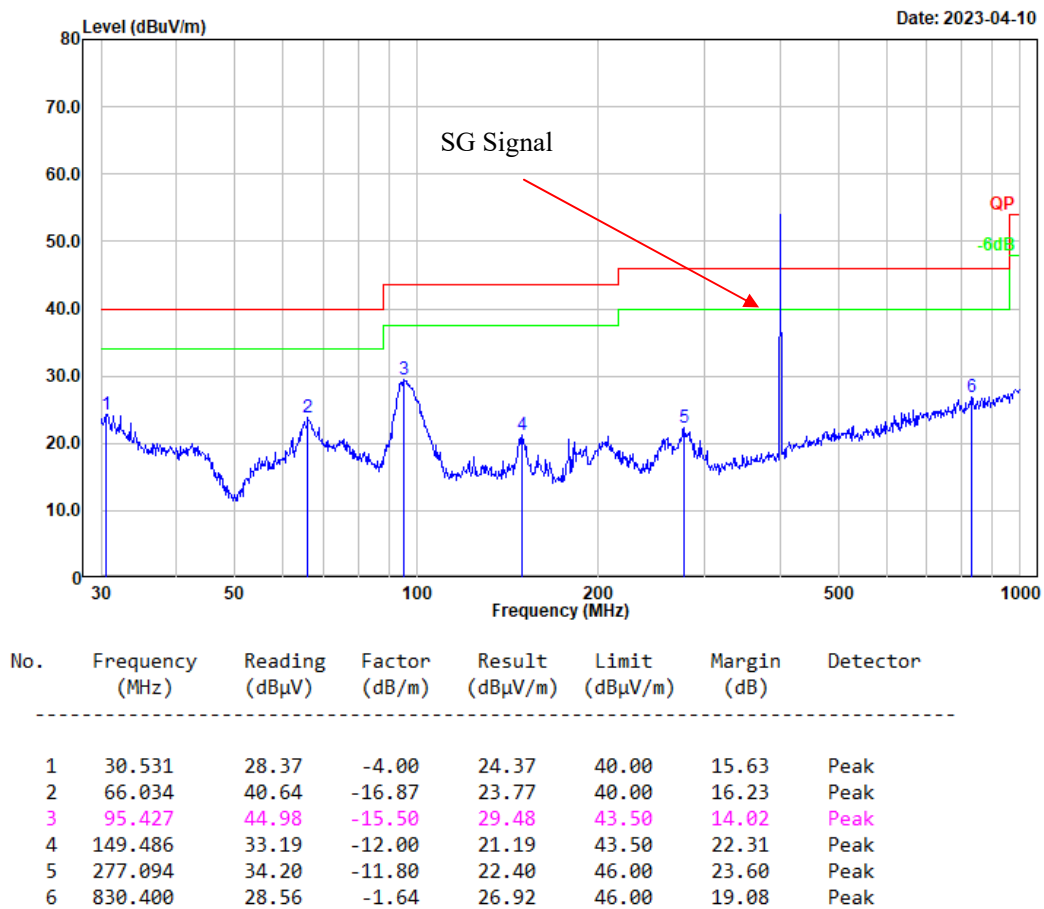

Test Mode: Charging + Receiving  
Polarization: vertical  
Note:

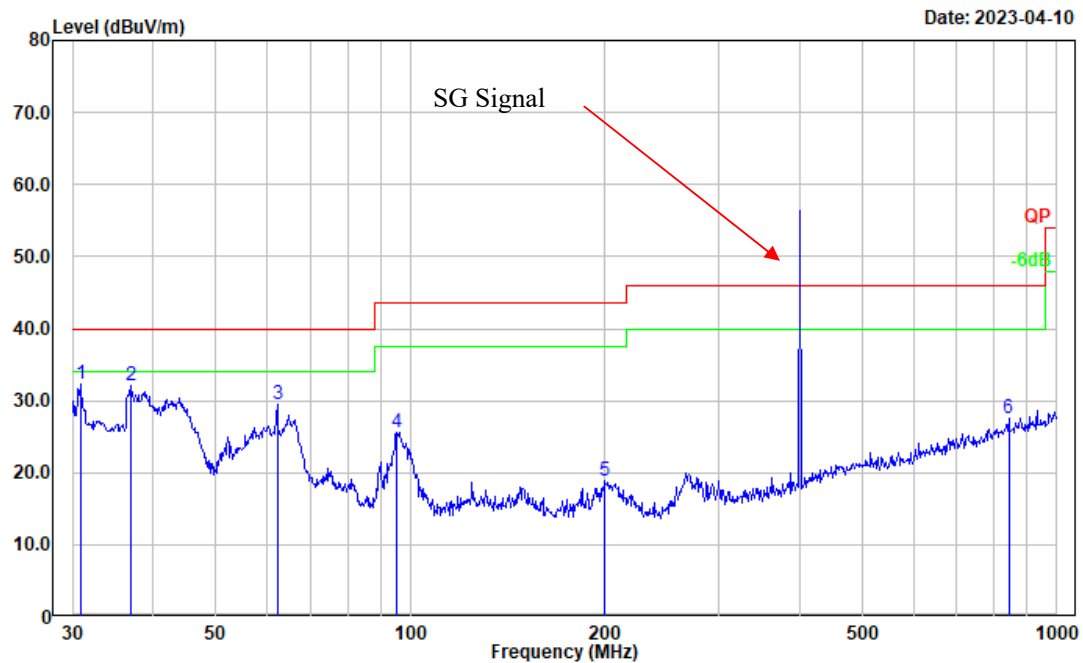


| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 30.853             | 36.64             | -4.26            | 32.38              | 40.00             | 7.62           | Peak     |
| 2   | 36.895             | 41.10             | -8.93            | 32.17              | 40.00             | 7.83           | Peak     |
| 3   | 62.213             | 46.62             | -17.22           | 29.40              | 40.00             | 10.60          | Peak     |
| 4   | 95.427             | 41.18             | -15.50           | 25.68              | 43.50             | 17.82          | Peak     |
| 5   | 199.986            | 31.09             | -12.21           | 18.88              | 43.50             | 24.62          | Peak     |
| 6   | 842.130            | 29.21             | -1.63            | 27.58              | 46.00             | 18.42          | Peak     |


**Test Mode: M3 (operating at 479.9975MHz)**

Note: Pre-scan Test mode M1/M2, worst case is M1 (charging from base), so for M3/M4, base charging is selected to test.

Test Mode: Charging + Receiving  
Polarization: horizontal  
Note:

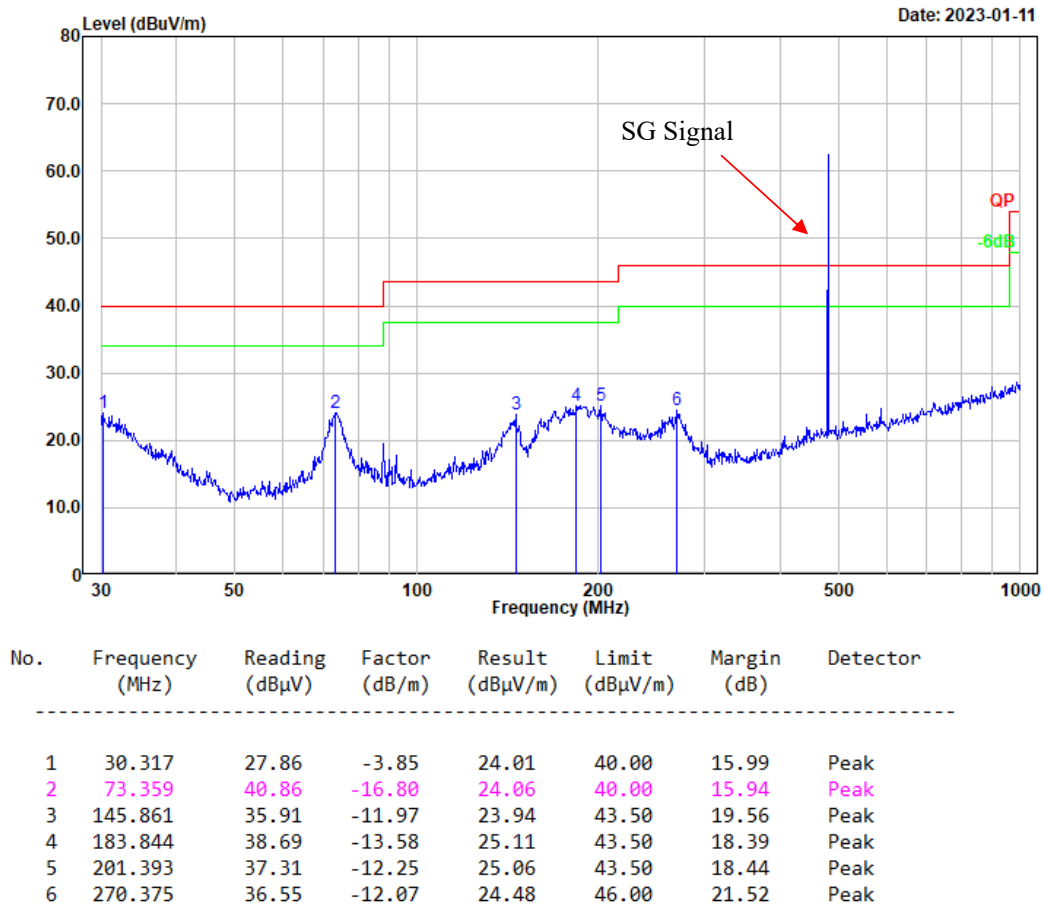

Test Mode: Charging + Receiving  
Polarization: vertical  
Note:

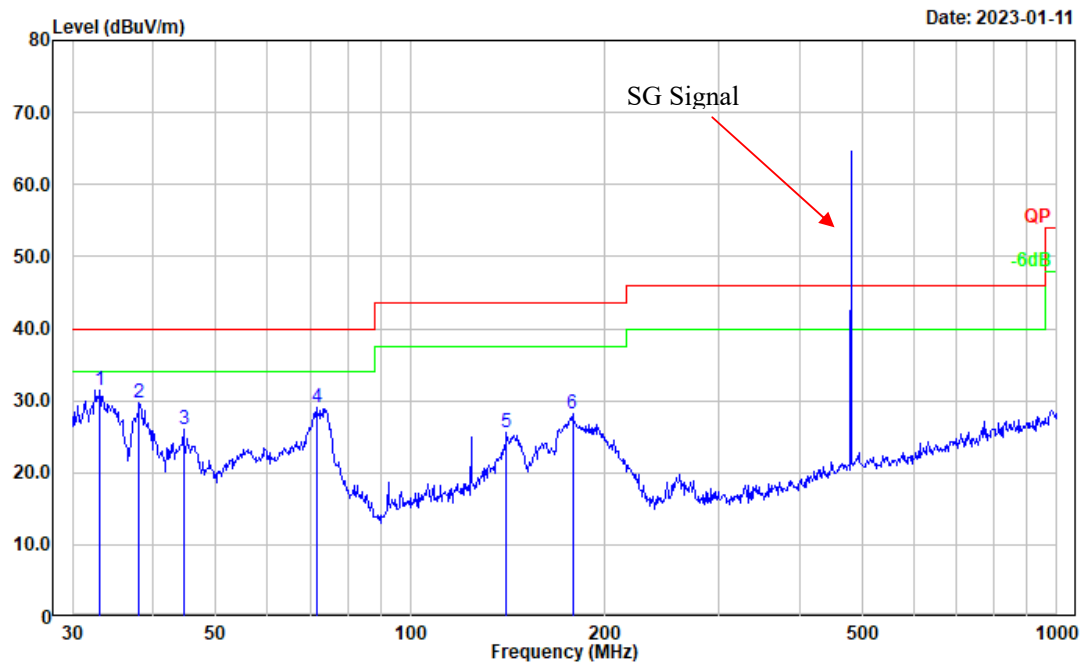


| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 33.095             | 37.39             | -5.99            | 31.40              | 40.00             | 8.60           | Peak     |
| 2   | 38.078             | 39.39             | -9.79            | 29.60              | 40.00             | 10.40          | Peak     |
| 3   | 44.587             | 39.93             | -14.00           | 25.93              | 40.00             | 14.07          | Peak     |
| 4   | 71.581             | 45.61             | -16.64           | 28.97              | 40.00             | 11.03          | Peak     |
| 5   | 140.835            | 37.53             | -11.93           | 25.60              | 43.50             | 17.90          | Peak     |
| 6   | 178.133            | 41.78             | -13.50           | 28.28              | 43.50             | 15.22          | Peak     |


**Test Mode: M3 (operating at 714.0125MHz)**

Note: Pre-scan Test mode M1/M2, worst case is M1 (charging from base), so for M3/M4, base charging is selected to test.

Test Mode: Charging + Receiving  
Polarization: horizontal  
Note:

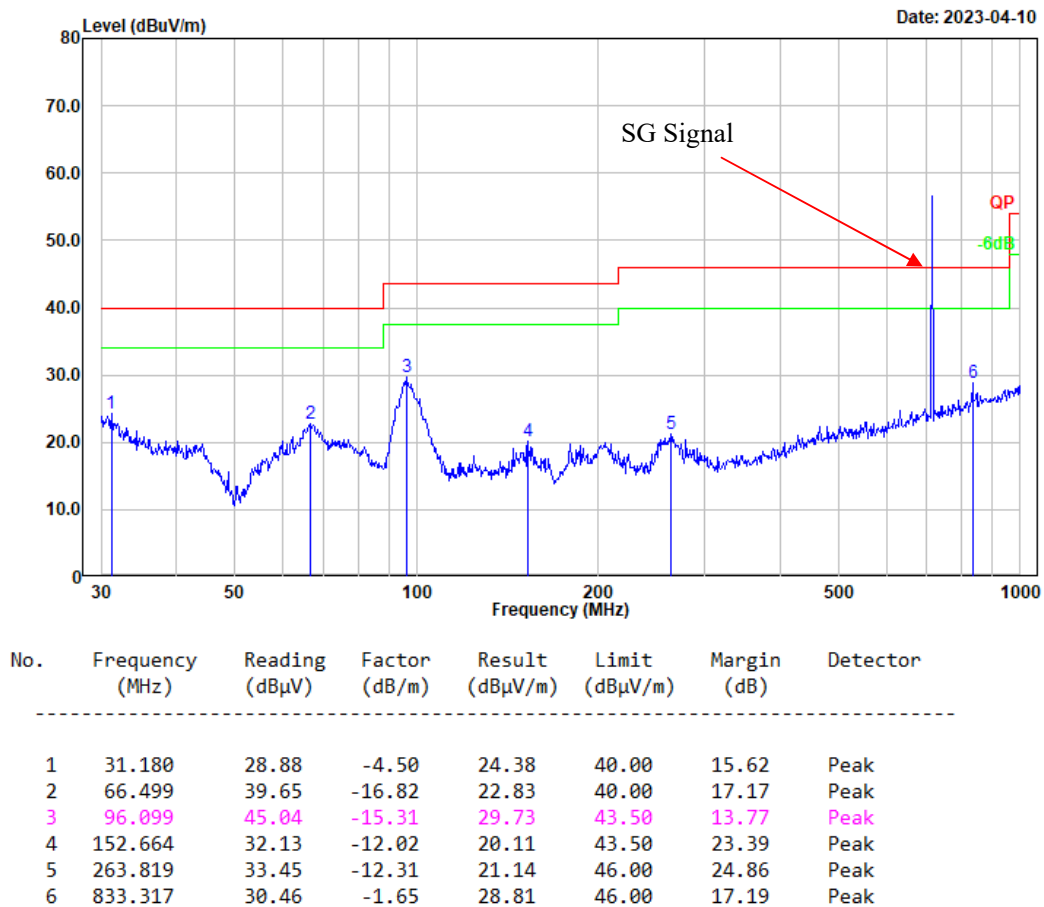

Test Mode: Charging + Receiving  
Polarization: vertical  
Note:

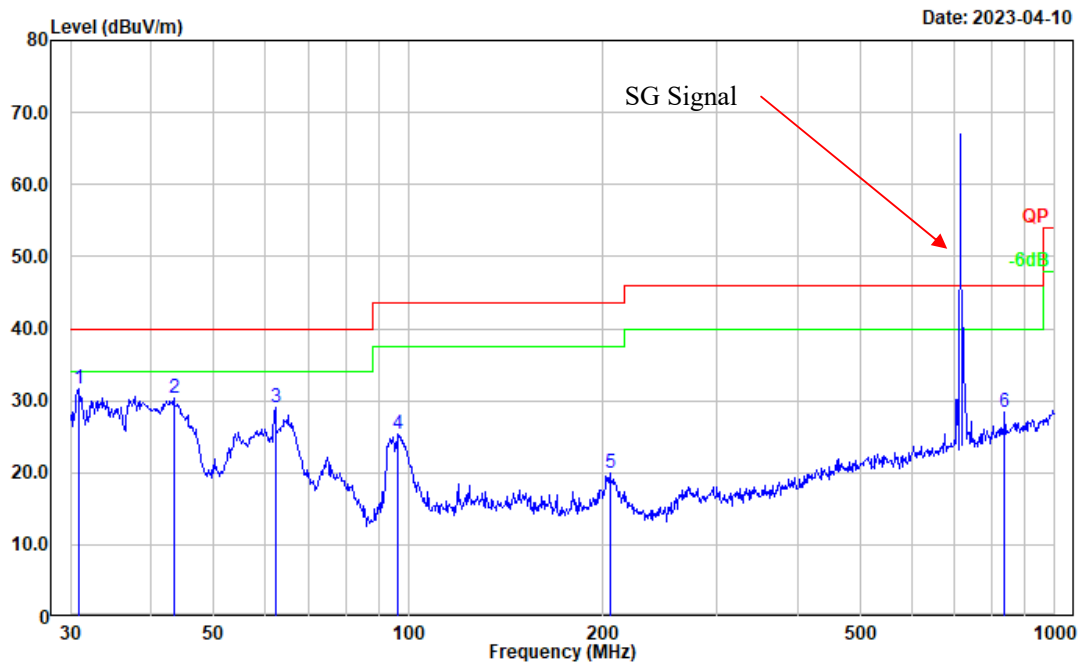


| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 30.962             | 36.04             | -4.34            | 31.70              | 40.00             | 8.30           | Peak     |
| 2   | 43.353             | 43.65             | -13.29           | 30.36              | 40.00             | 9.64           | Peak     |
| 3   | 62.213             | 46.36             | -17.22           | 29.14              | 40.00             | 10.86          | Peak     |
| 4   | 96.436             | 40.56             | -15.23           | 25.33              | 43.50             | 18.17          | Peak     |
| 5   | 204.955            | 32.30             | -12.36           | 19.94              | 43.50             | 23.56          | Peak     |
| 6   | 836.244            | 30.07             | -1.66            | 28.41              | 46.00             | 17.59          | Peak     |


**Test Mode: M3 (operating at 857MHz)**

Note: Pre-scan Test mode M1/M2, worst case is M1 (charging from base), so for M3/M4, base charging is selected to test.

Test Mode: Charging + Receiving  
Polarization: horizontal  
Note:

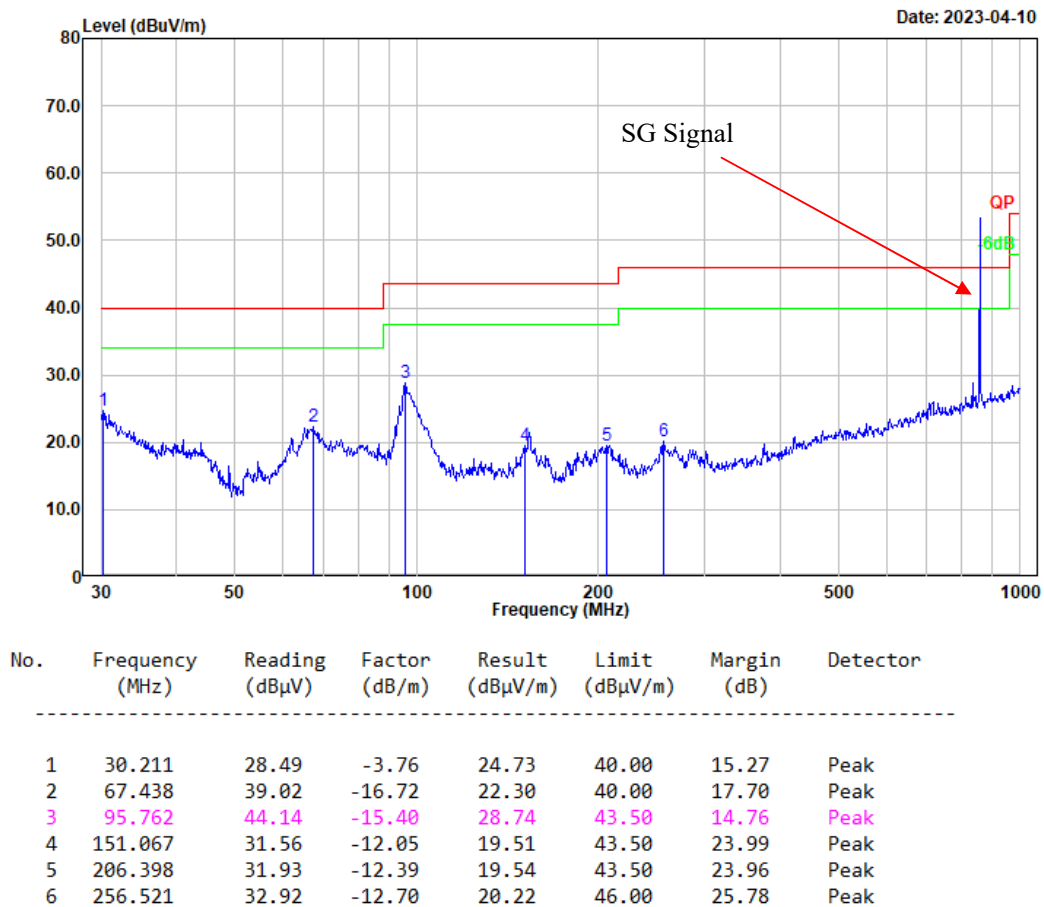

Test Mode: Charging + Receiving  
Polarization: vertical  
Note:

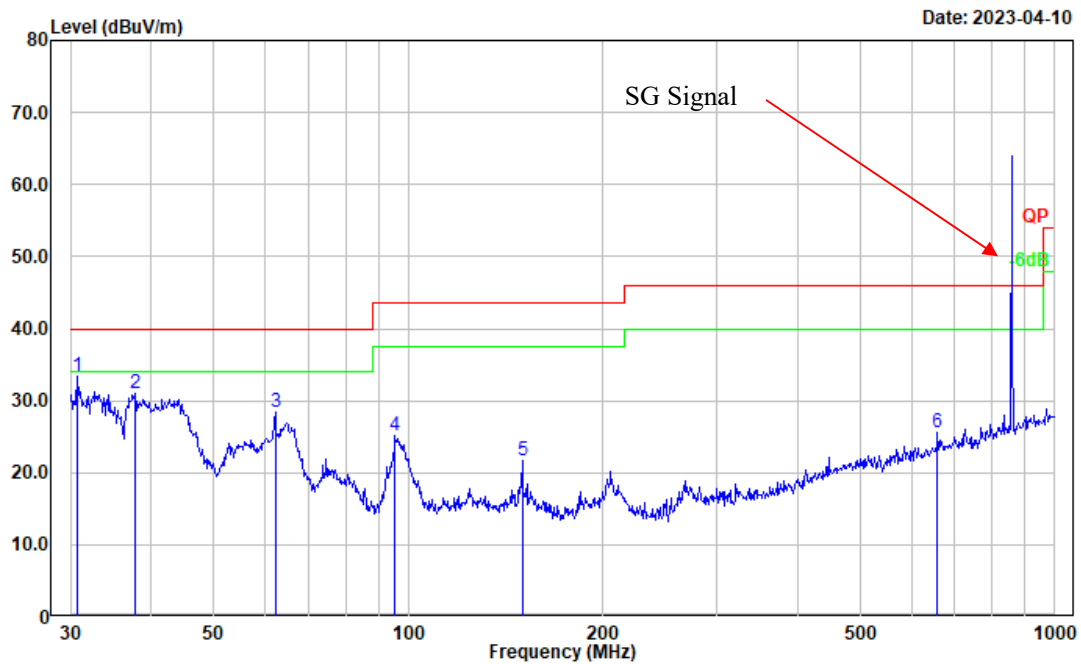


| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 30.745             | 37.57             | -4.17            | 33.40              | 40.00             | 6.60           | Peak     |
| 2   | 37.812             | 40.61             | -9.59            | 31.02              | 40.00             | 8.98           | Peak     |
| 3   | 62.213             | 45.66             | -17.22           | 28.44              | 40.00             | 11.56          | Peak     |
| 4   | 95.427             | 40.71             | -15.50           | 25.21              | 43.50             | 18.29          | Peak     |
| 5   | 150.011            | 33.76             | -12.00           | 21.76              | 43.50             | 21.74          | Peak     |
| 6   | 658.836            | 29.65             | -4.13            | 25.52              | 46.00             | 20.48          | Peak     |


**Test Mode: M3 (operating at 999.9975MHz)**

Note: Pre-scan Test mode M1/M2, worst case is M1 (charging from base), so for M3/M4, base charging is selected to test.

Test Mode: Charging + Receiving  
Polarization: horizontal  
Note:

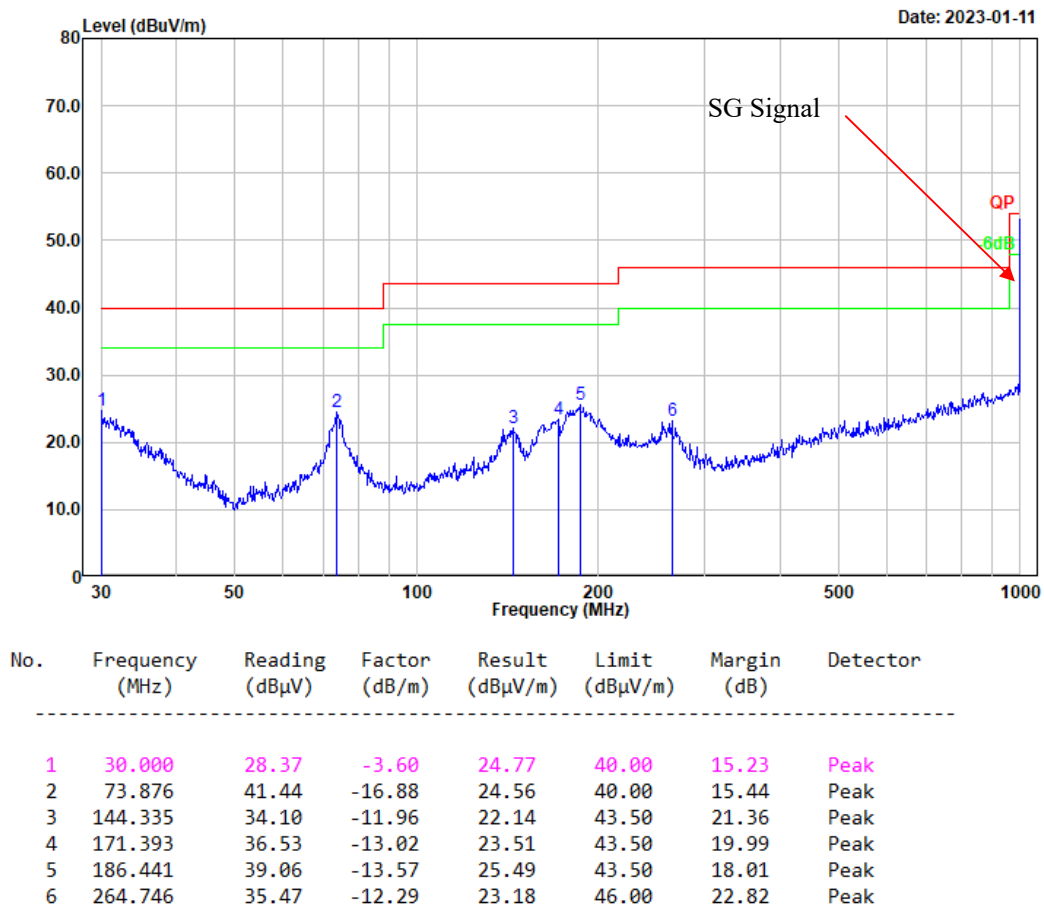

Test Mode: Charging + Receiving  
Polarization: vertical  
Note:

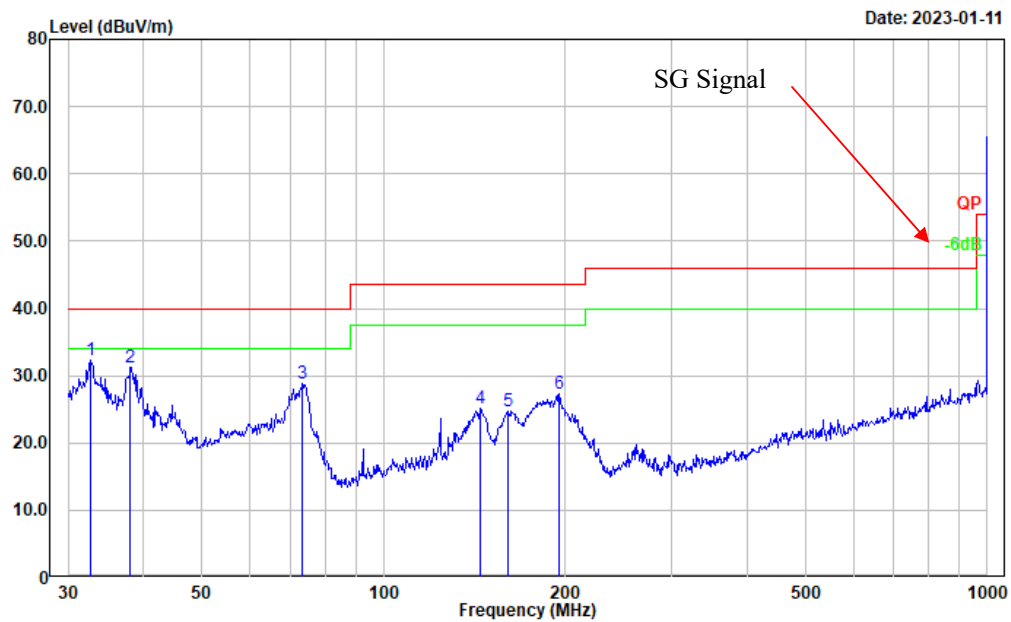


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 32.749             | 38.12             | -5.71            | 32.41              | 40.00             | 7.59           | Peak     |
| 2   | 38.078             | 40.91             | -9.79            | 31.12              | 40.00             | 8.88           | Peak     |
| 3   | 73.359             | 45.62             | -16.80           | 28.82              | 40.00             | 11.18          | Peak     |
| 4   | 144.335            | 37.01             | -11.96           | 25.05              | 43.50             | 18.45          | Peak     |
| 5   | 160.909            | 36.84             | -12.15           | 24.69              | 43.50             | 18.81          | Peak     |
| 6   | 195.137            | 40.11             | -12.76           | 27.35              | 43.50             | 16.15          | Peak     |


**Test Mode: M4 (operating at 76.1MHz)**

Note: Pre-scan Test mode M1/M2, worst case is M1 (charging from base), so for M3/M4, base charging is selected to test.

Test Mode: Charging + FM Receiving  
Polarization: horizontal  
Note:

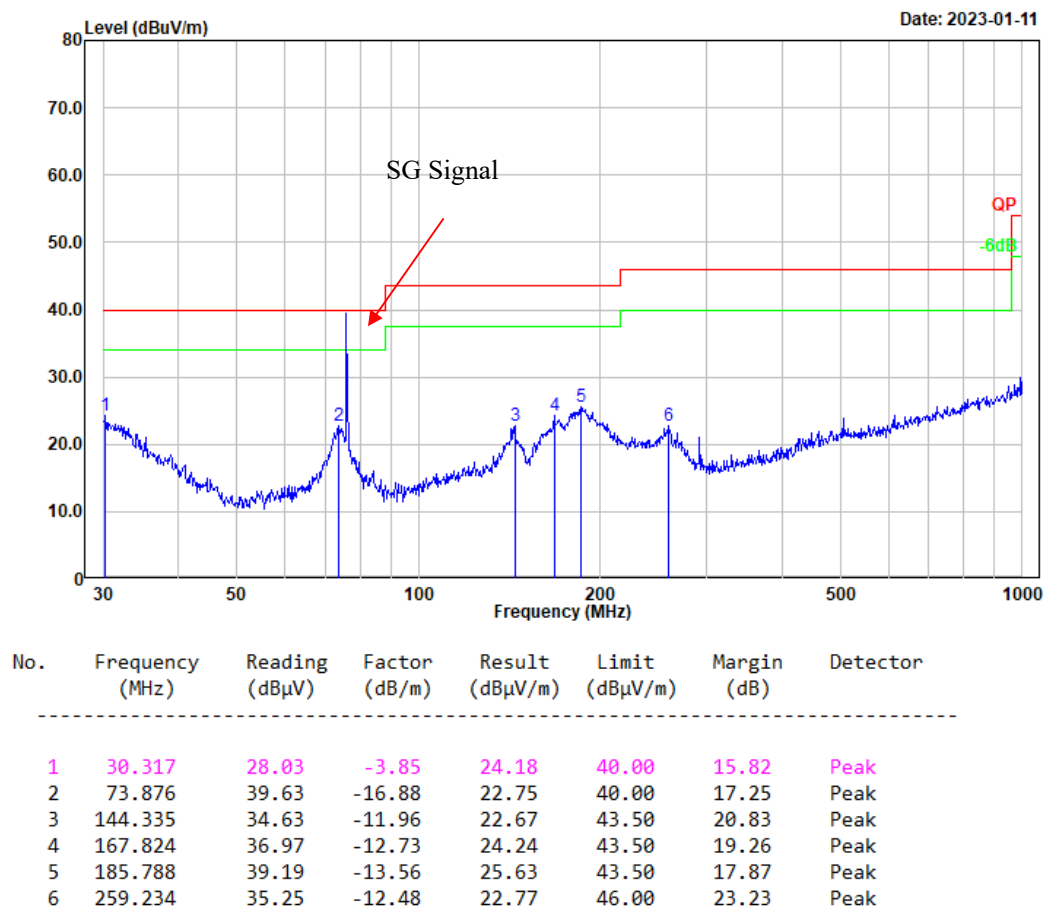

Test Mode: Charging + FM Receiving  
Polarization: vertical  
Note:

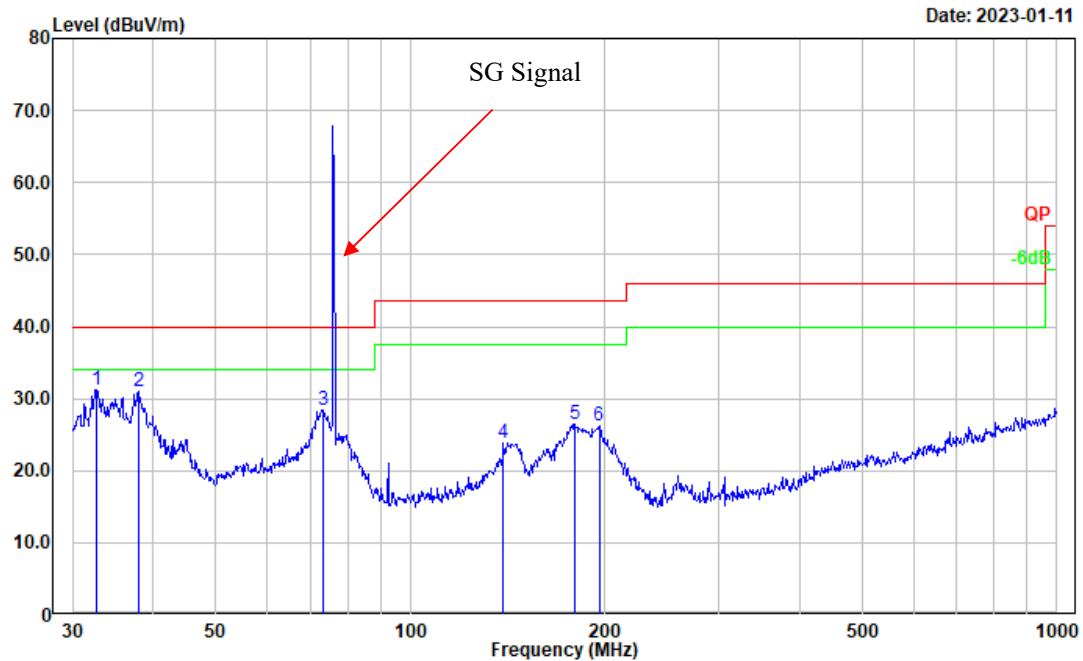


| No. | Frequency (MHz) | Reading (dBμV) | Factor (dB/m) | Result (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|----------|
| 1   | 32.634          | 36.87          | -5.62         | 31.25           | 40.00          | 8.75        | Peak     |
| 2   | 37.945          | 40.62          | -9.69         | 30.93           | 40.00          | 9.07        | Peak     |
| 3   | 73.359          | 45.21          | -16.80        | 28.41           | 40.00          | 11.59       | Peak     |
| 4   | 139.361         | 35.62          | -11.83        | 23.79           | 43.50          | 19.71       | Peak     |
| 5   | 180.017         | 40.04          | -13.63        | 26.41           | 43.50          | 17.09       | Peak     |
| 6   | 195.822         | 38.82          | -12.68        | 26.14           | 43.50          | 17.36       | Peak     |


**Test Mode: M4 (operating at 92MHz)**

Note: Pre-scan Test mode M1/M2, worst case is M1 (charging from base), so for M3/M4, base charging is selected to test.

Test Mode: Charging + FM Receiving  
Polarization: horizontal  
Note:

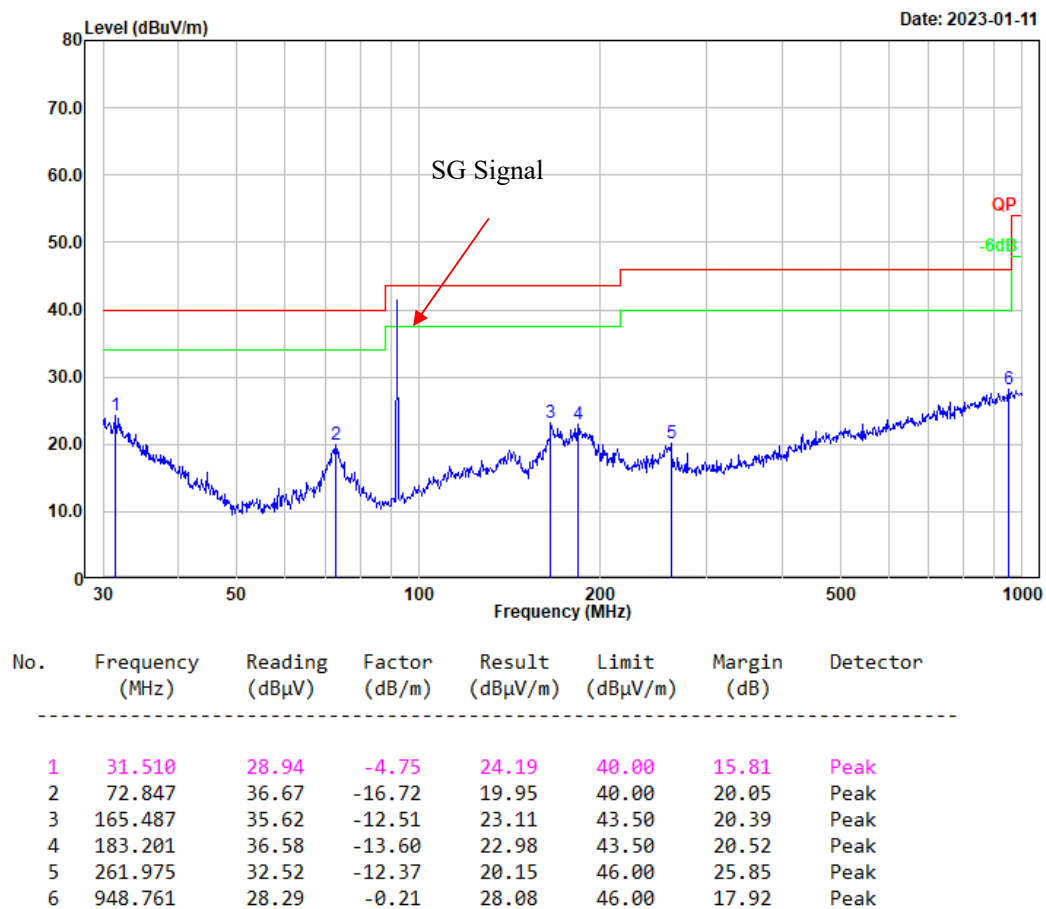

Test Mode: Charging + FM Receiving  
Polarization: vertical  
Note:

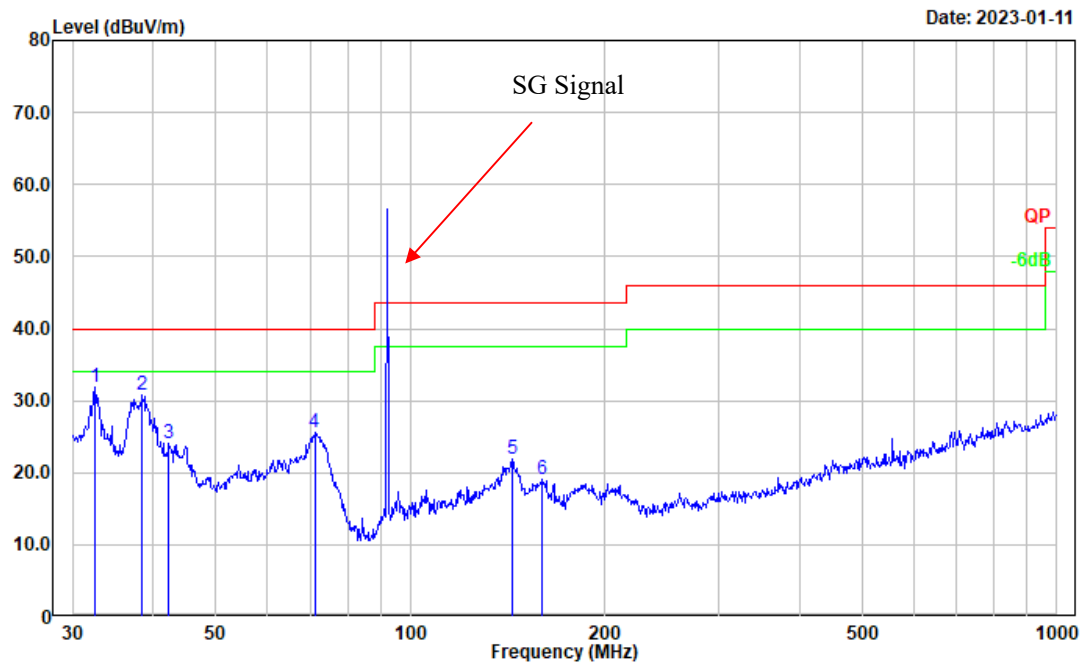


| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 32.520             | 37.32             | -5.54            | 31.78              | 40.00             | 8.22           | Peak     |
| 2   | 38.481             | 40.93             | -10.11           | 30.82              | 40.00             | 9.18           | Peak     |
| 3   | 42.302             | 36.81             | -12.64           | 24.17              | 40.00             | 15.83          | Peak     |
| 4   | 71.080             | 42.08             | -16.59           | 25.49              | 40.00             | 14.51          | Peak     |
| 5   | 143.830            | 33.79             | -11.96           | 21.83              | 43.50             | 21.67          | Peak     |
| 6   | 159.784            | 31.07             | -12.05           | 19.02              | 43.50             | 24.48          | Peak     |


**Test Mode: M4 (operating at 107.9MHz)**

Note: Pre-scan Test mode M1/M2, worst case is M1 (charging from base), so for M3/M4, base charging is selected to test.

Test Mode: Charging + FM Receiving  
Polarization: horizontal  
Note:

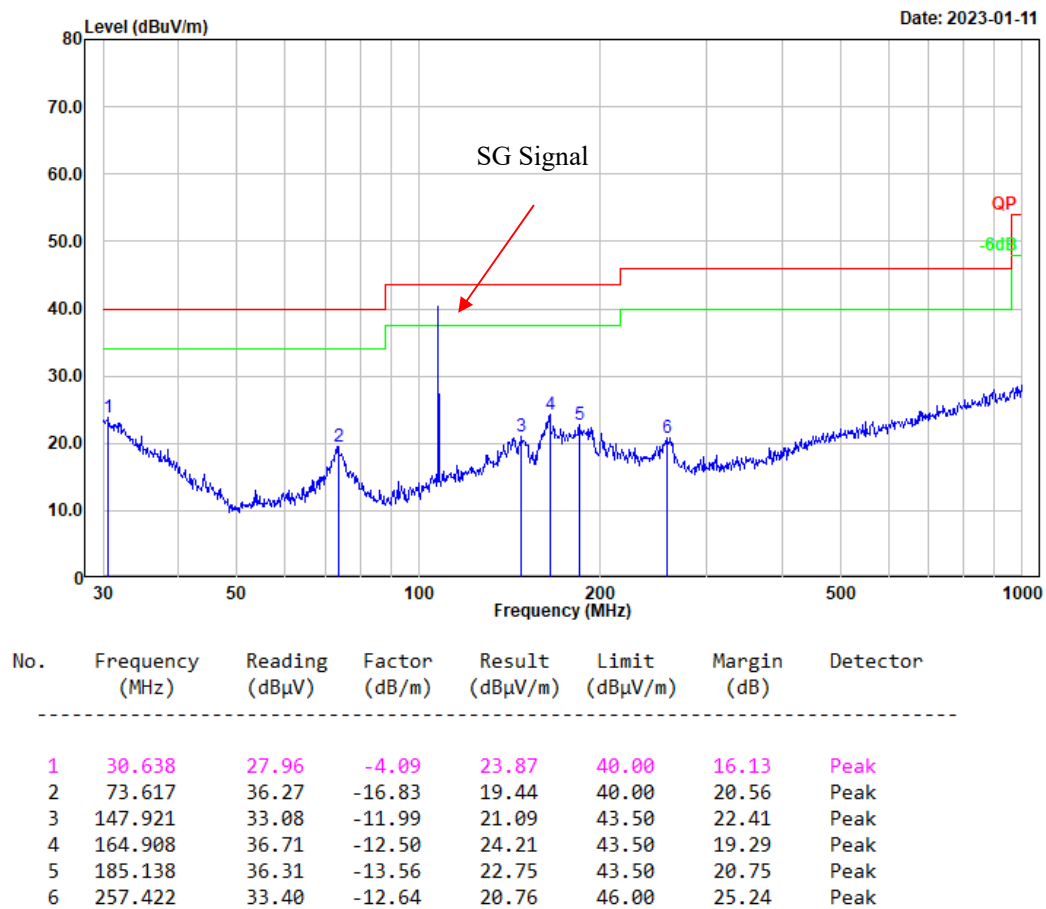

Test Mode: Charging + FM Receiving  
Polarization: vertical  
Note:

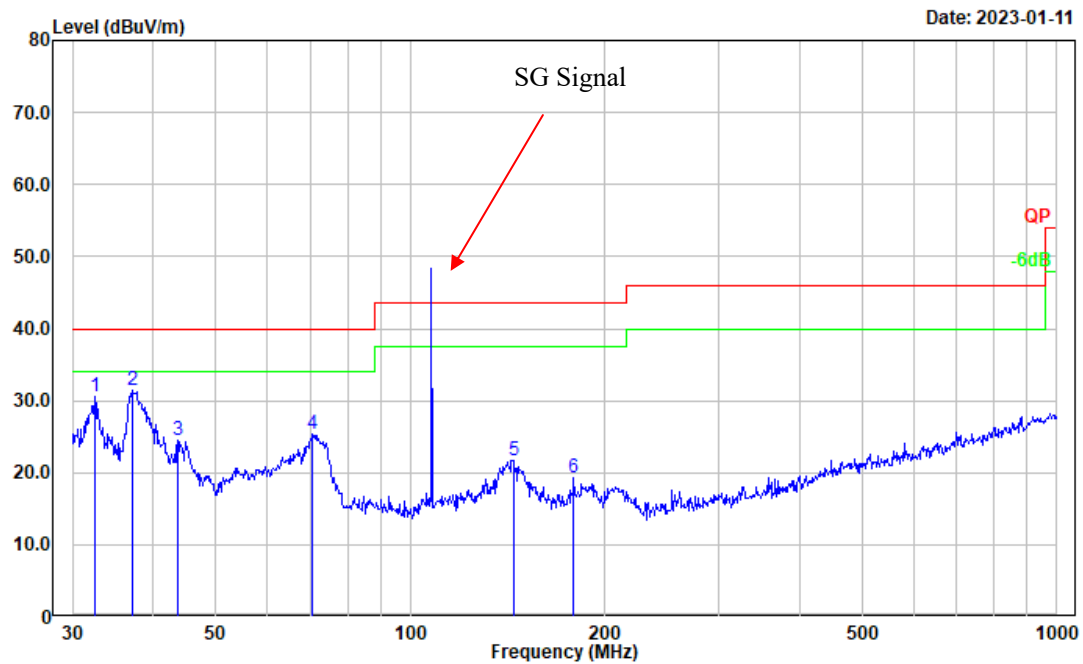


| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 32.520             | 36.21             | -5.54            | 30.67              | 40.00             | 9.33           | Peak     |
| 2   | 37.155             | 40.52             | -9.12            | 31.40              | 40.00             | 8.60           | Peak     |
| 3   | 43.659             | 37.86             | -13.46           | 24.40              | 40.00             | 15.60          | Peak     |
| 4   | 70.584             | 41.85             | -16.53           | 25.32              | 40.00             | 14.68          | Peak     |
| 5   | 144.335            | 33.60             | -11.96           | 21.64              | 43.50             | 21.86          | Peak     |
| 6   | 178.758            | 32.94             | -13.55           | 19.39              | 43.50             | 24.11          | Peak     |

**2) Above 1GHz** (Worst mode is M3 (charging from base, operating at 222.0125MHz):

Test Mode: Charging + Receiving  
Polarization: horizontal  
Note:


Date: 2023-02-12

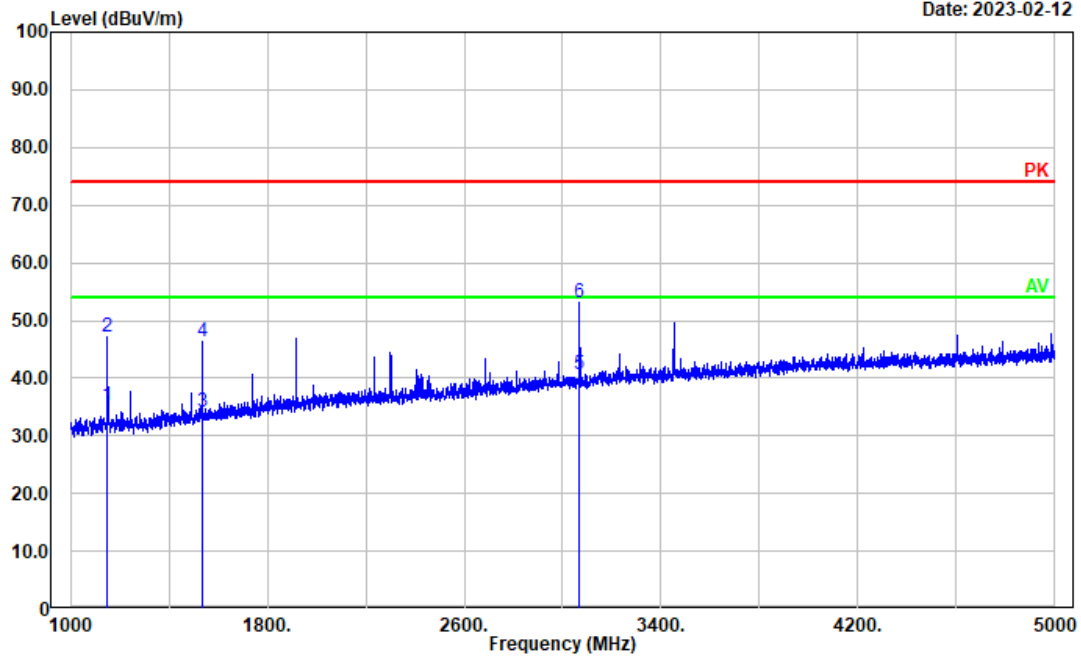

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|----------|
| 1   | 1150.430        | 37.04          | -1.92         | 35.12           | 54.00          | 18.88       | Average  |
| 2   | 1150.430        | 49.05          | -1.92         | 47.13           | 74.00          | 26.87       | Peak     |
| 3   | 1533.707        | 34.28          | -0.25         | 34.03           | 54.00          | 19.97       | Average  |
| 4   | 1533.707        | 46.56          | -0.25         | 46.31           | 74.00          | 27.69       | Peak     |
| 5   | 3068.414        | 34.37          | 6.29          | 40.66           | 54.00          | 13.34       | Average  |
| 6   | 3068.414        | 46.74          | 6.29          | 53.03           | 74.00          | 20.97       | Peak     |

Test Mode: Charging + Receiving  
Polarization: vertical  
Note:

Date: 2023-02-12

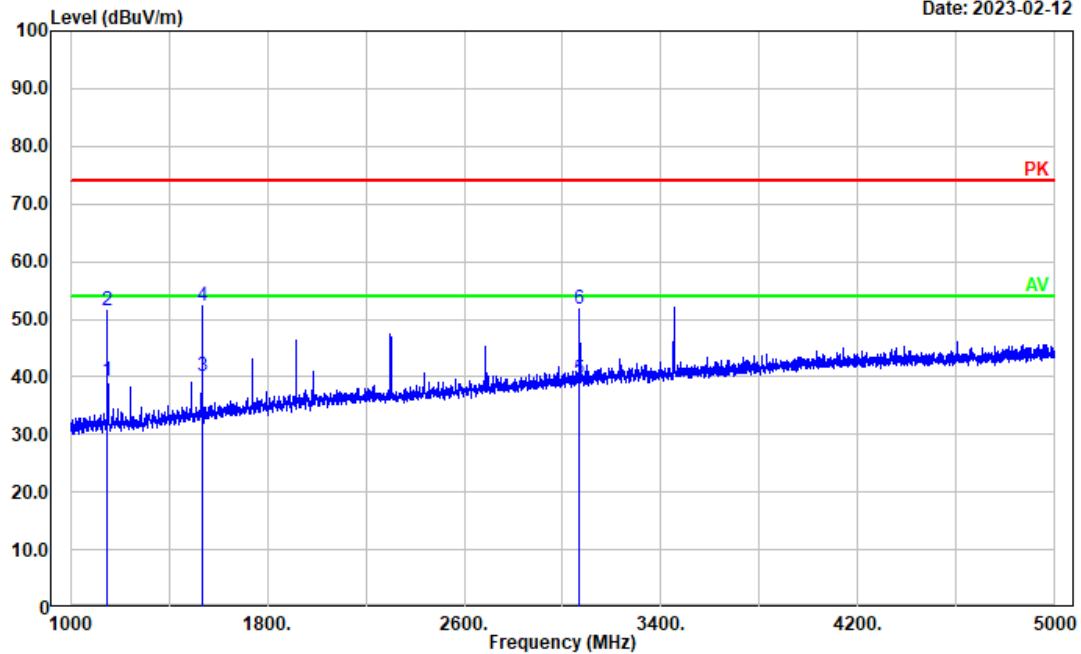

| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 1150.430           | 41.26             | -1.92            | 39.34              | 54.00             | 14.66          | Average  |
| 2   | 1150.430           | 53.53             | -1.92            | 51.61              | 74.00             | 22.39          | Peak     |
| 3   | 1533.707           | 40.27             | -0.25            | 40.02              | 54.00             | 13.98          | Average  |
| 4   | 1533.707           | 52.55             | -0.25            | 52.30              | 74.00             | 21.70          | Peak     |
| 5   | 3068.414           | 33.23             | 6.29             | 39.52              | 54.00             | 14.48          | Average  |
| 6   | 3068.414           | 45.46             | 6.29             | 51.75              | 74.00             | 22.25          | Peak     |

### 4.3 Antenna Power Conduction Limits for Receivers

|                |              |              |           |
|----------------|--------------|--------------|-----------|
| Serial Number: | 1V8R-1       | Test Date:   | 2023/2/3  |
| Test Site:     | RF           | Test Mode:   | Receiving |
| Tester:        | Morpheus Shi | Test Result: | Pass      |

**Environmental Conditions:**


|                      |      |                              |     |                        |       |
|----------------------|------|------------------------------|-----|------------------------|-------|
| Temperature:<br>(°C) | 25.1 | Relative<br>Humidity:<br>(%) | 49% | ATM Pressure:<br>(kPa) | 101.3 |
|----------------------|------|------------------------------|-----|------------------------|-------|

**Test Equipment List and Details:**

| Manufacturer  | Description          | Model     | Serial<br>Number | Calibration<br>Date | Calibration Due<br>Date |
|---------------|----------------------|-----------|------------------|---------------------|-------------------------|
| R&S           | Spectrum<br>Analyzer | FSV40     | 101474           | 2022/07/15          | 2023/07/14              |
| zhuoxiang     | Coaxial Cable        | SMA-178   | 211001           | Each time           | N/A                     |
| Mini-Circuits | DC Block             | BLK-18-S+ | 1554403          | Each time           | N/A                     |


*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

## Receiving Mode

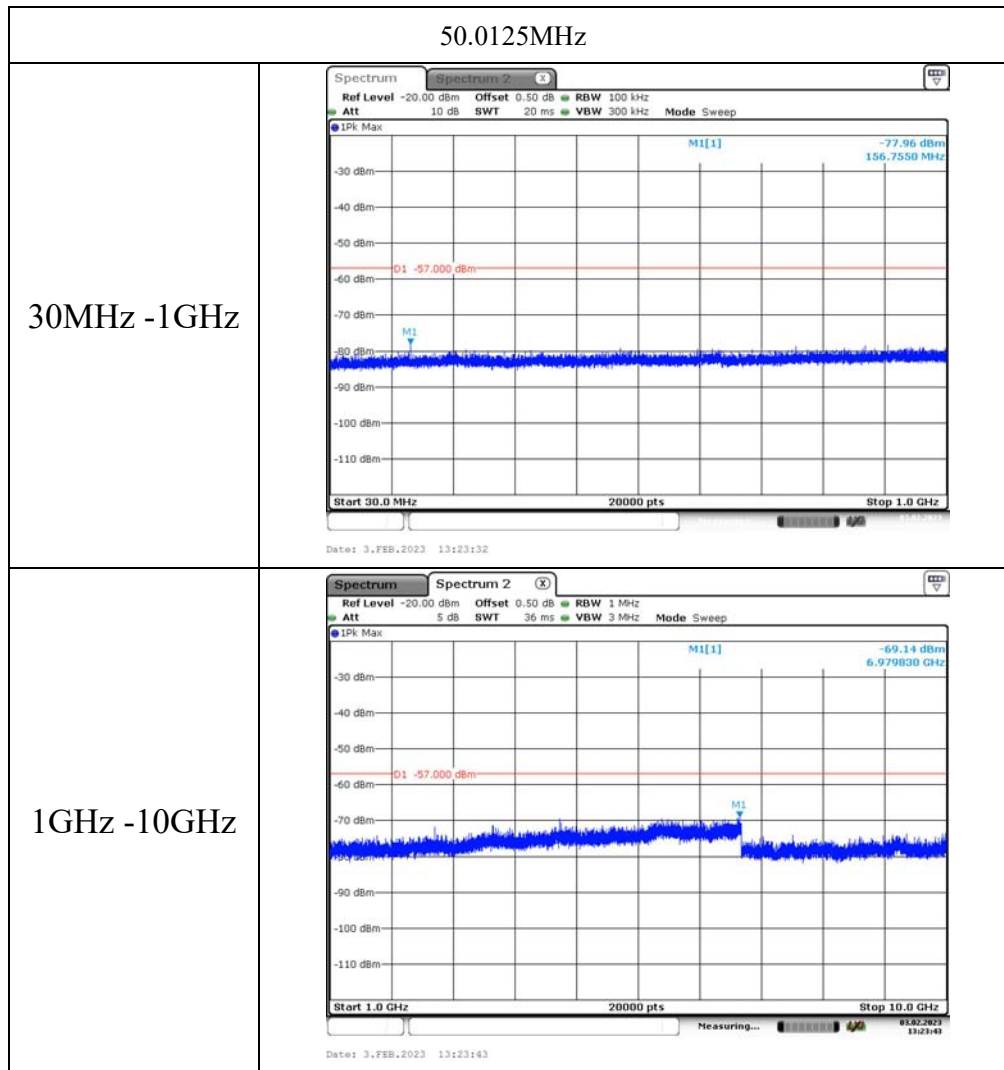



53.9875MHz

30MHz -1GHz

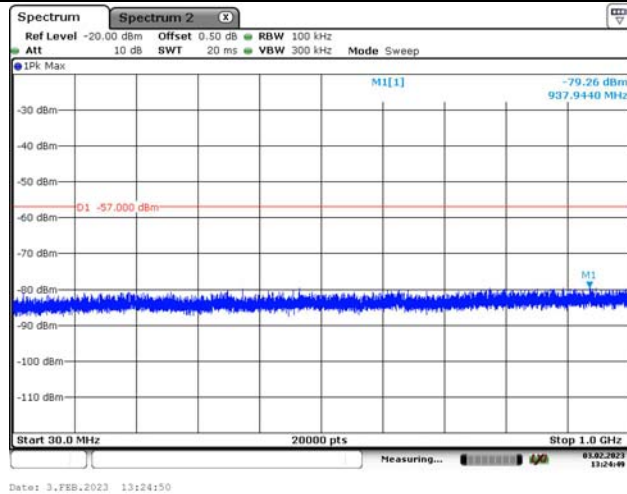


1GHz -10GHz

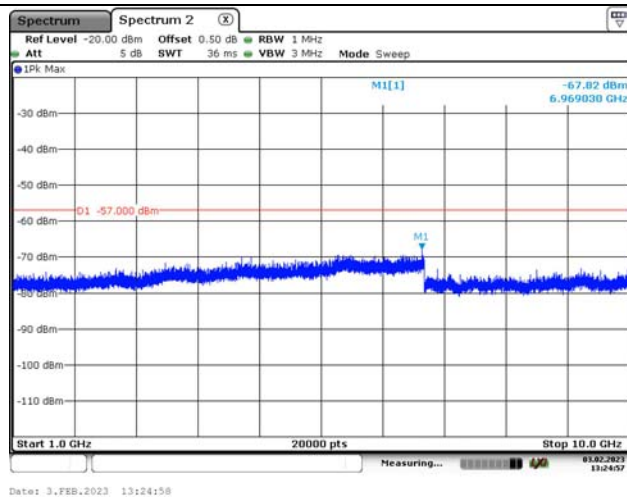

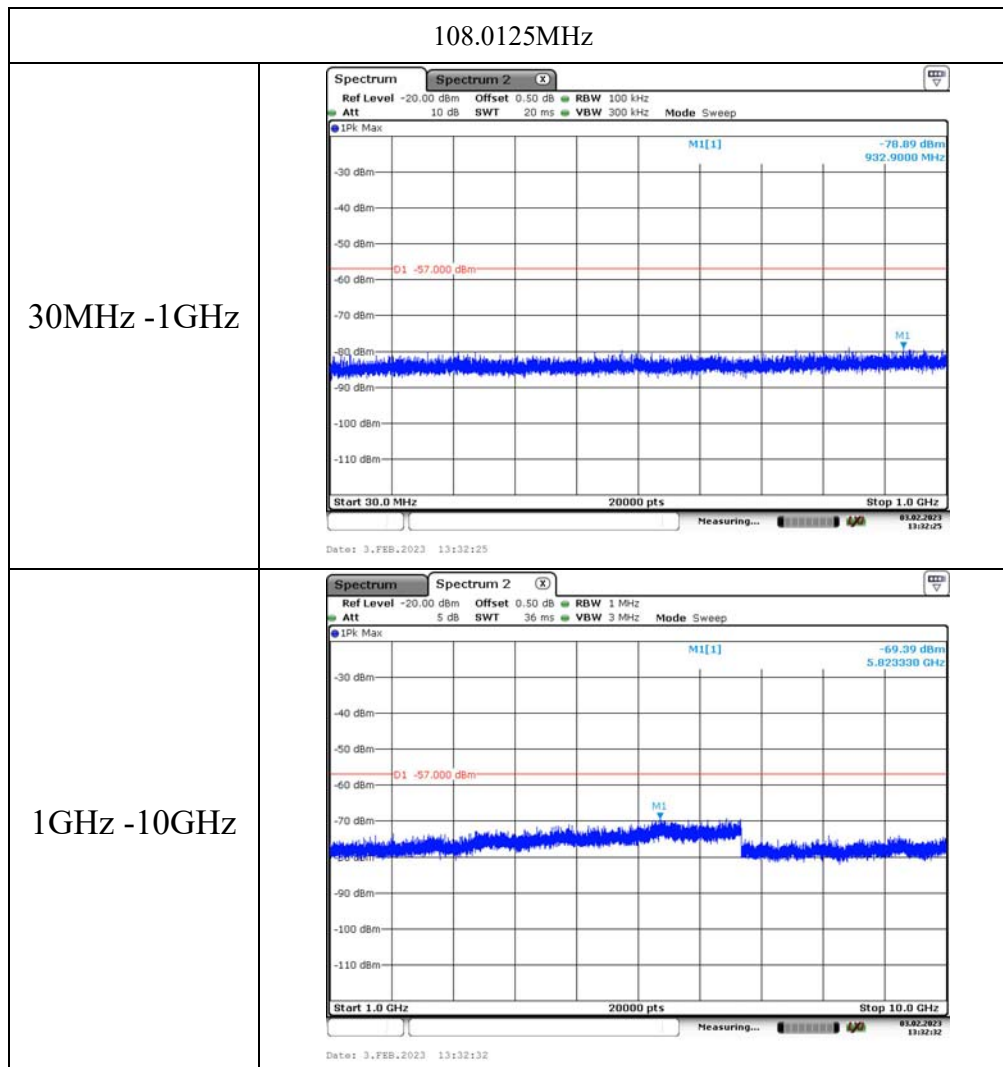



141MHz

30MHz -1GHz

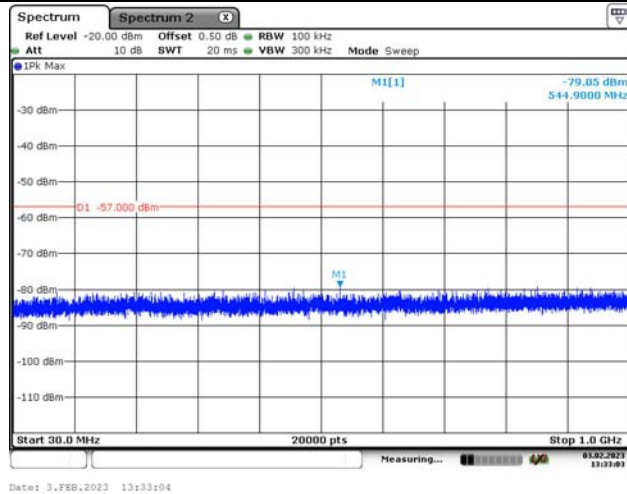


1GHz -10GHz

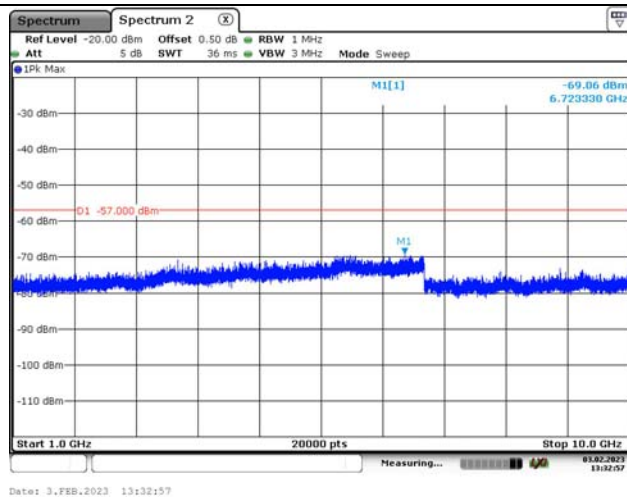

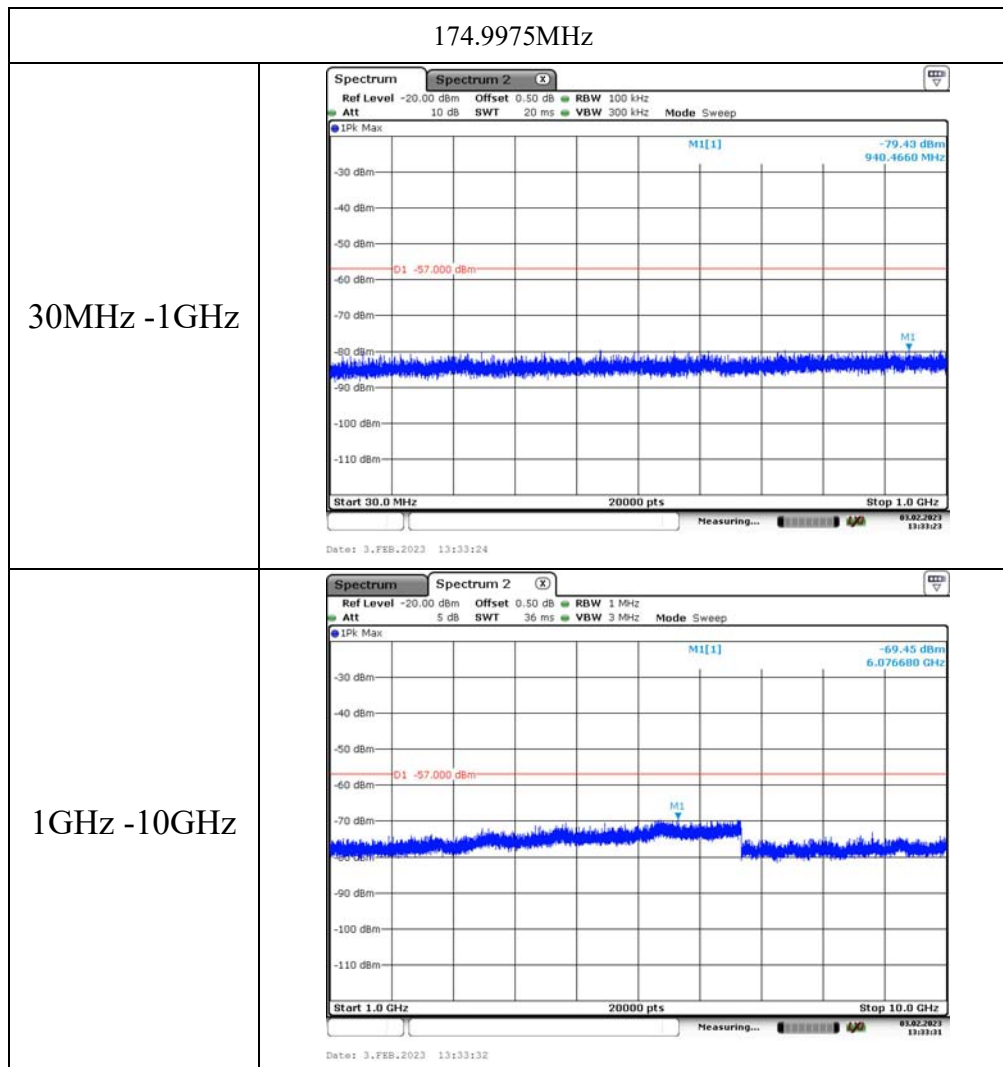


222.0125MHz

30MHz -1GHz

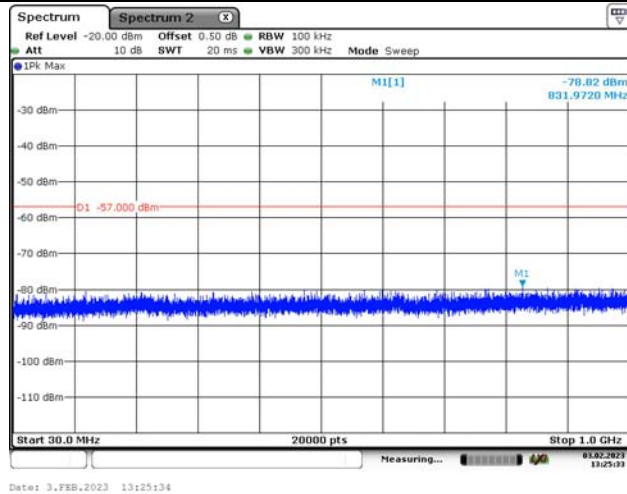


1GHz -10GHz

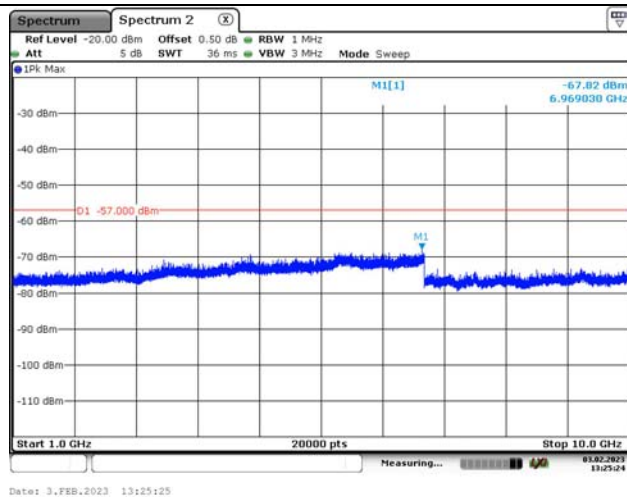


224.9875MHz

30MHz -1GHz

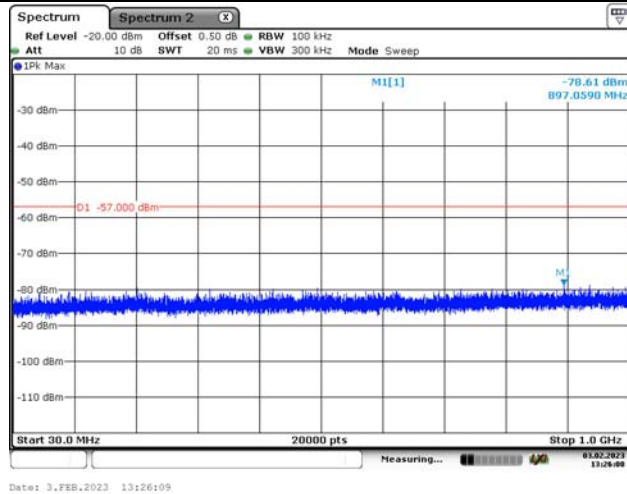


1GHz -10GHz

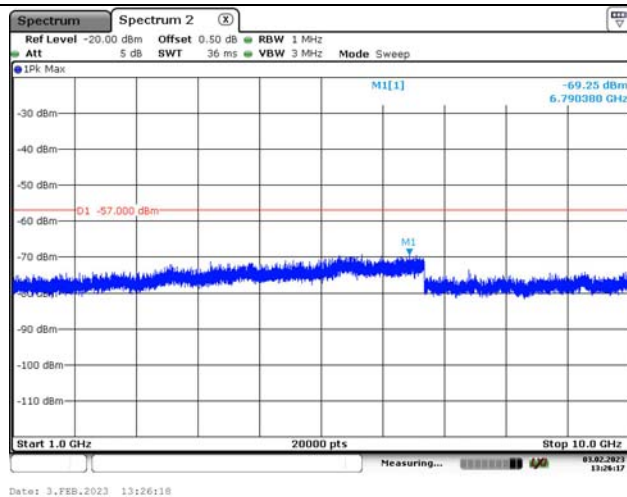



320.0125MHz

30MHz -1GHz

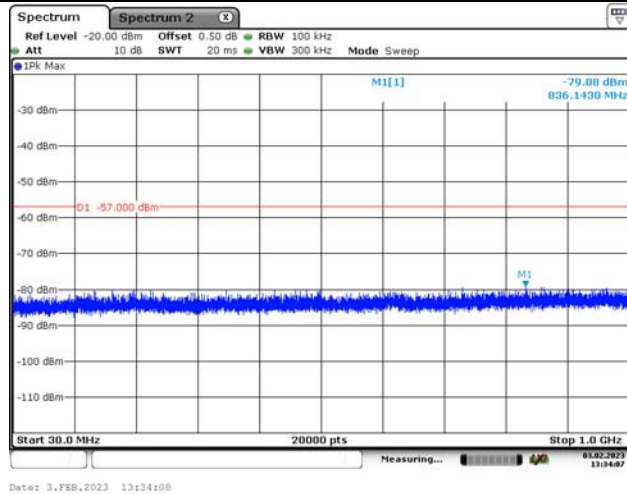


1GHz -10GHz

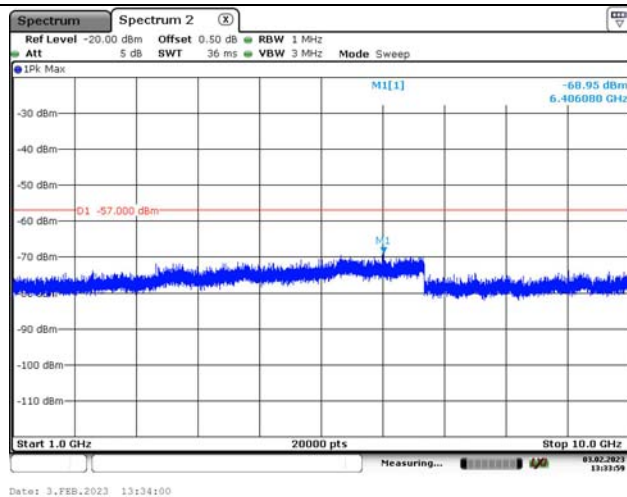

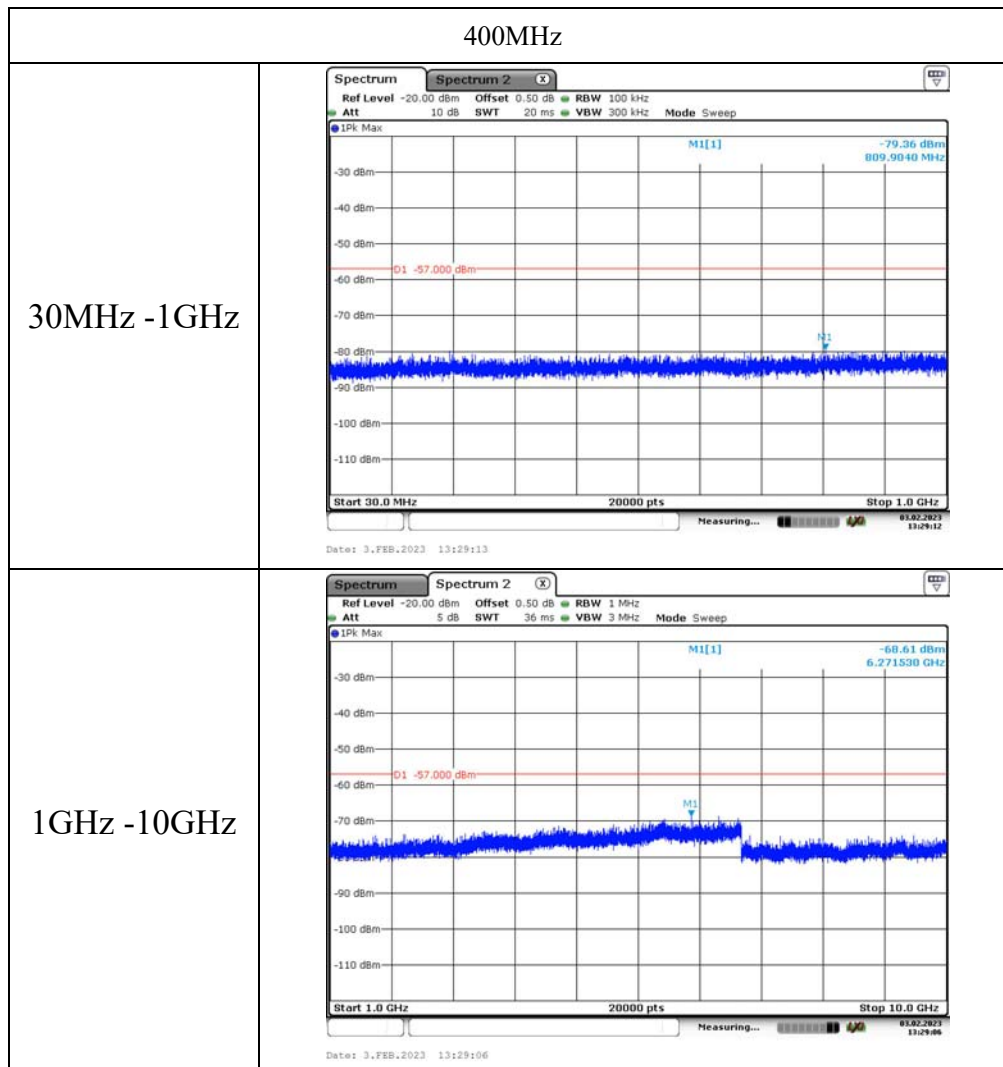


479.9975MHz

30MHz -1GHz

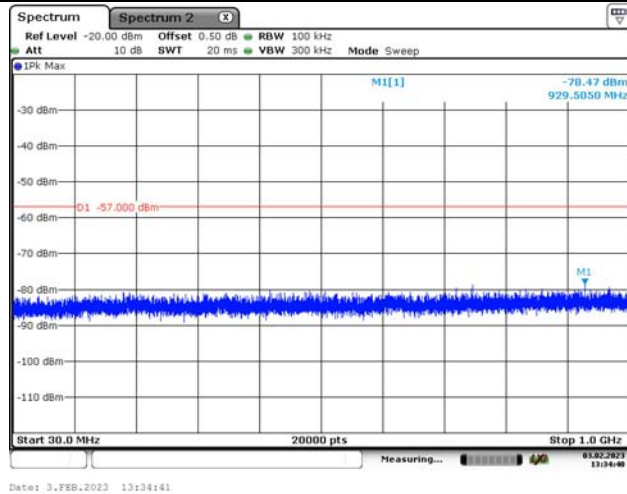


1GHz -10GHz

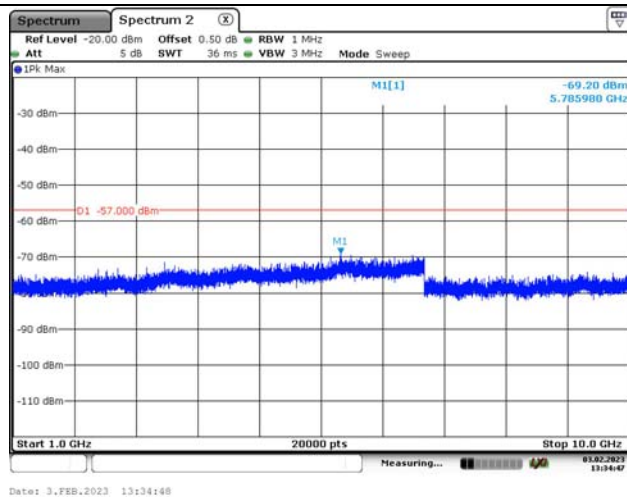


714.0125MHz

30MHz -1GHz

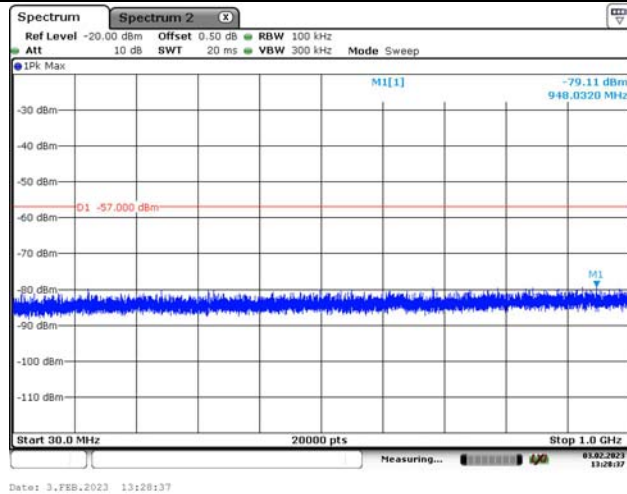


1GHz -10GHz

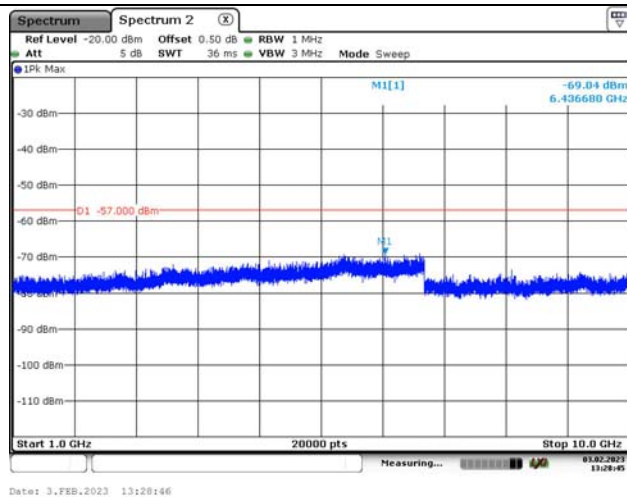


857MHz

30MHz -1GHz

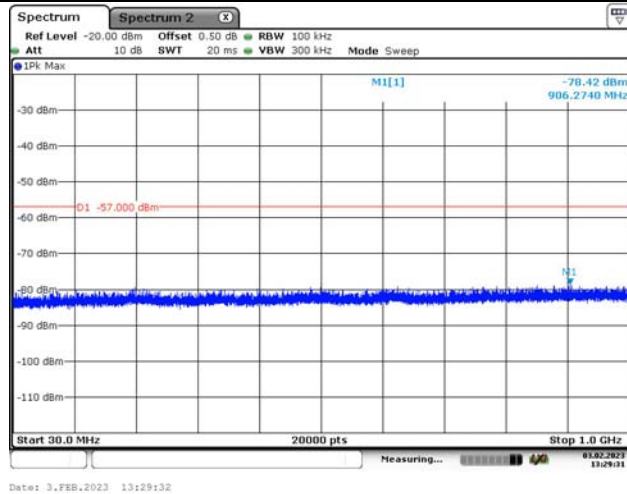


1GHz -10GHz

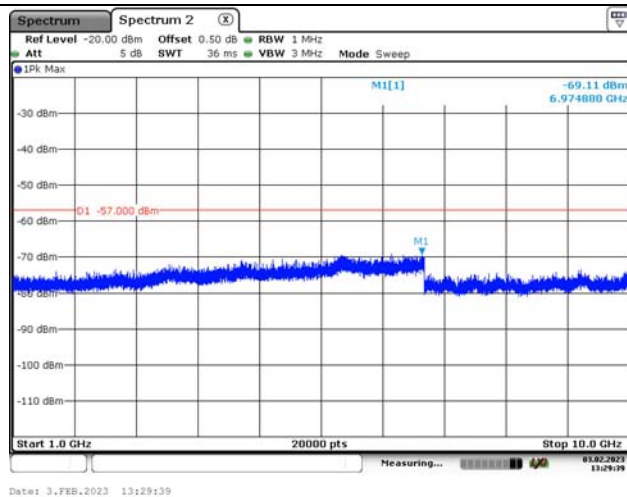


999.9975MHz


30MHz -1GHz

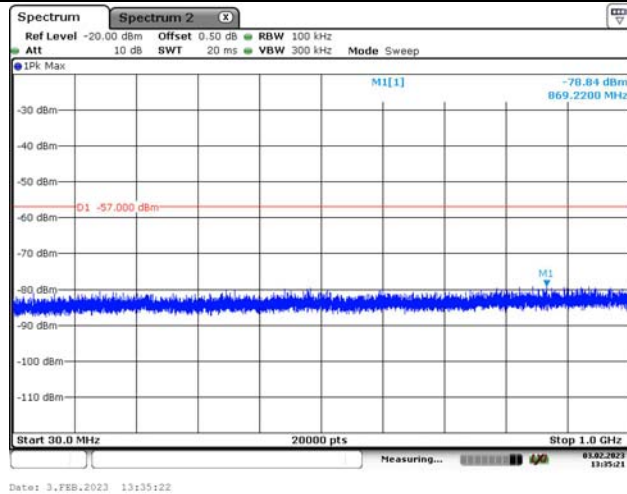

1GHz -10GHz

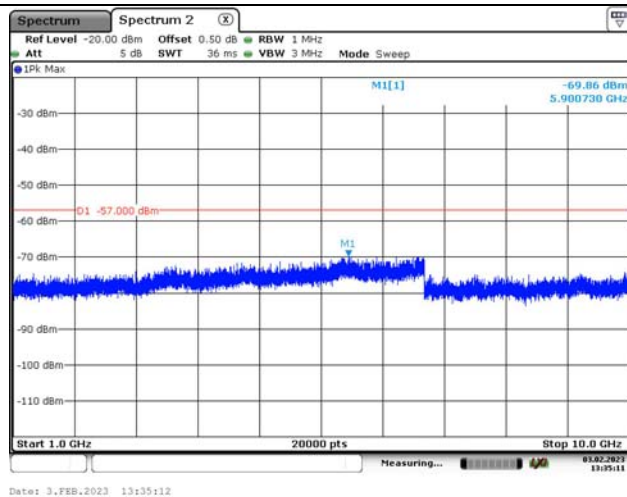


## FM Mode

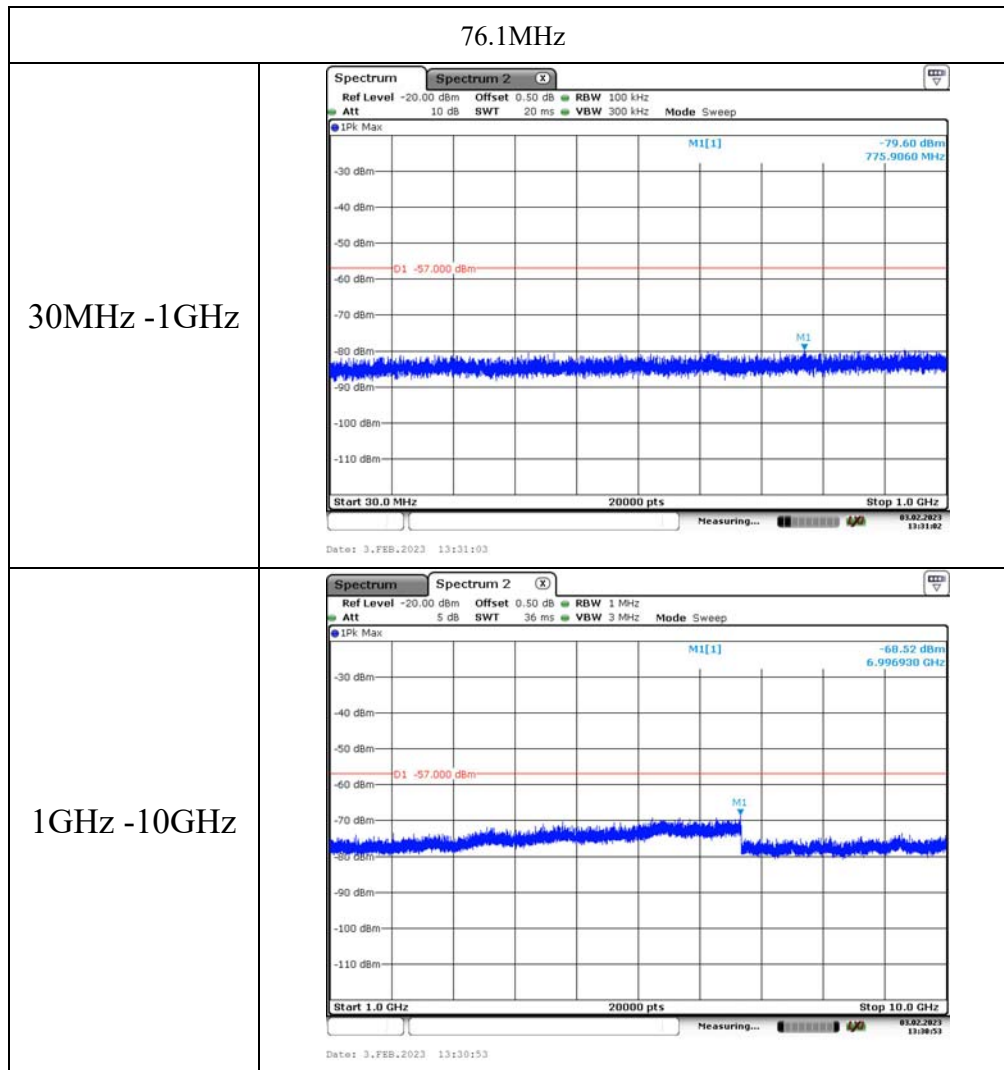


92MHz



30MHz -1GHz

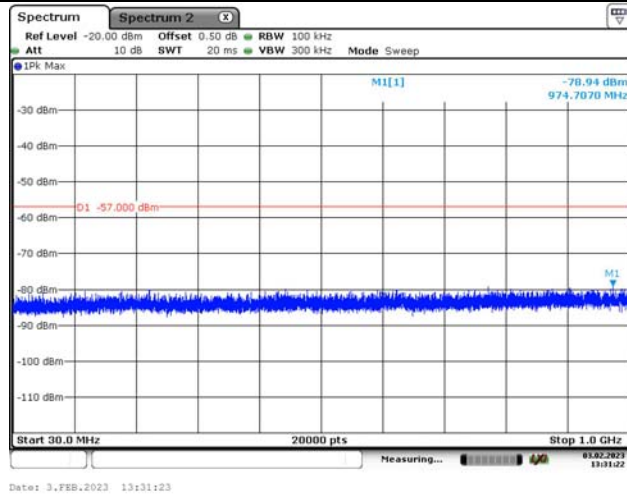



1GHz -10GHz

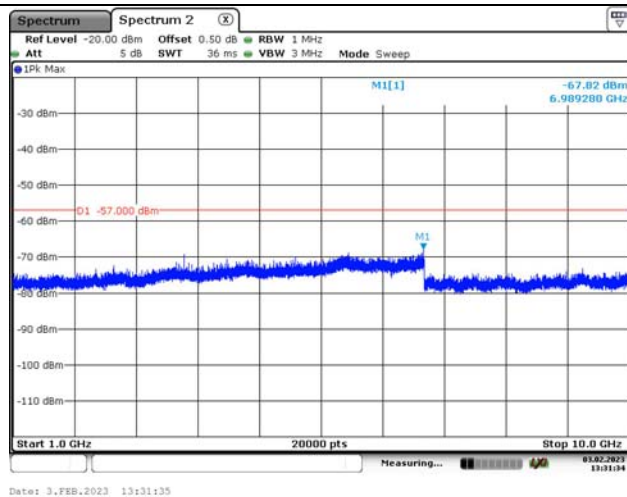

30MHz -1GHz

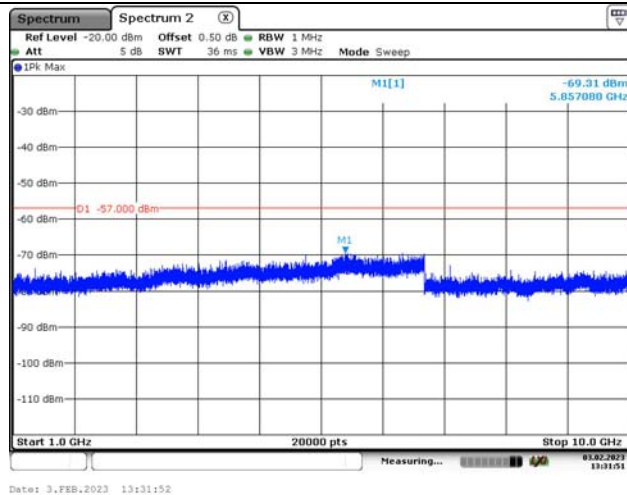

## 30MHz -1GHz

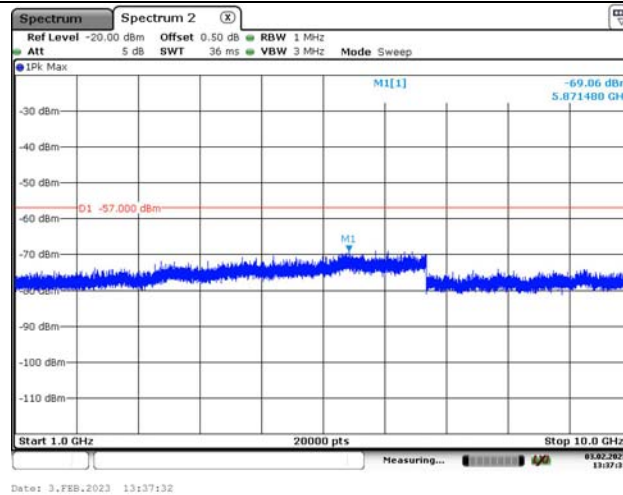

**4.3 Scanning Receivers and Frequency Converters Used with Scanning Receivers**

|                |              |              |           |
|----------------|--------------|--------------|-----------|
| Serial Number: | 1V8R-1       | Test Date:   | 2023/2/3  |
| Test Site:     | RF           | Test Mode:   | Receiving |
| Tester:        | Morpheus Shi | Test Result: | Pass      |

**Environmental Conditions:**

|                      |      |                              |     |                        |       |
|----------------------|------|------------------------------|-----|------------------------|-------|
| Temperature:<br>(°C) | 25.1 | Relative<br>Humidity:<br>(%) | 49% | ATM Pressure:<br>(kPa) | 101.3 |
|----------------------|------|------------------------------|-----|------------------------|-------|

**Test Equipment List and Details:**

| Manufacturer  | Description                 | Model     | Serial Number | Calibration Date | Calibration Due Date |
|---------------|-----------------------------|-----------|---------------|------------------|----------------------|
| R&S           | Spectrum Analyzer           | FSV40     | 101474        | 2022/07/15       | 2023/07/14           |
| zhuoxiang     | Coaxial Cable               | SMA-178   | 211001        | Each time        | N/A                  |
| Mini-Circuits | DC Block                    | BLK-18-S+ | 1554403       | Each time        | N/A                  |
| HP            | RF Communications Test Set  | 8920A     | 3438A05209    | 2022/7/15        | 2023/7/14            |
| Agilent       | MXG Vector Signal Generator | N5182B    | MY51350142    | 2022/11/18       | 2023/11/17           |

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Data:**

| Scanning Frequency Range       | Test Frequency                 | Measurement Result<br>(Worst Case) | Limit |
|--------------------------------|--------------------------------|------------------------------------|-------|
| MHz                            | MHz                            | dB                                 | dB    |
| 50-824,<br>849-869,<br>894-960 | 824, 836, 849, 869, 881.5, 894 | 42.5                               | >38   |

**===== END OF REPORT =====**