






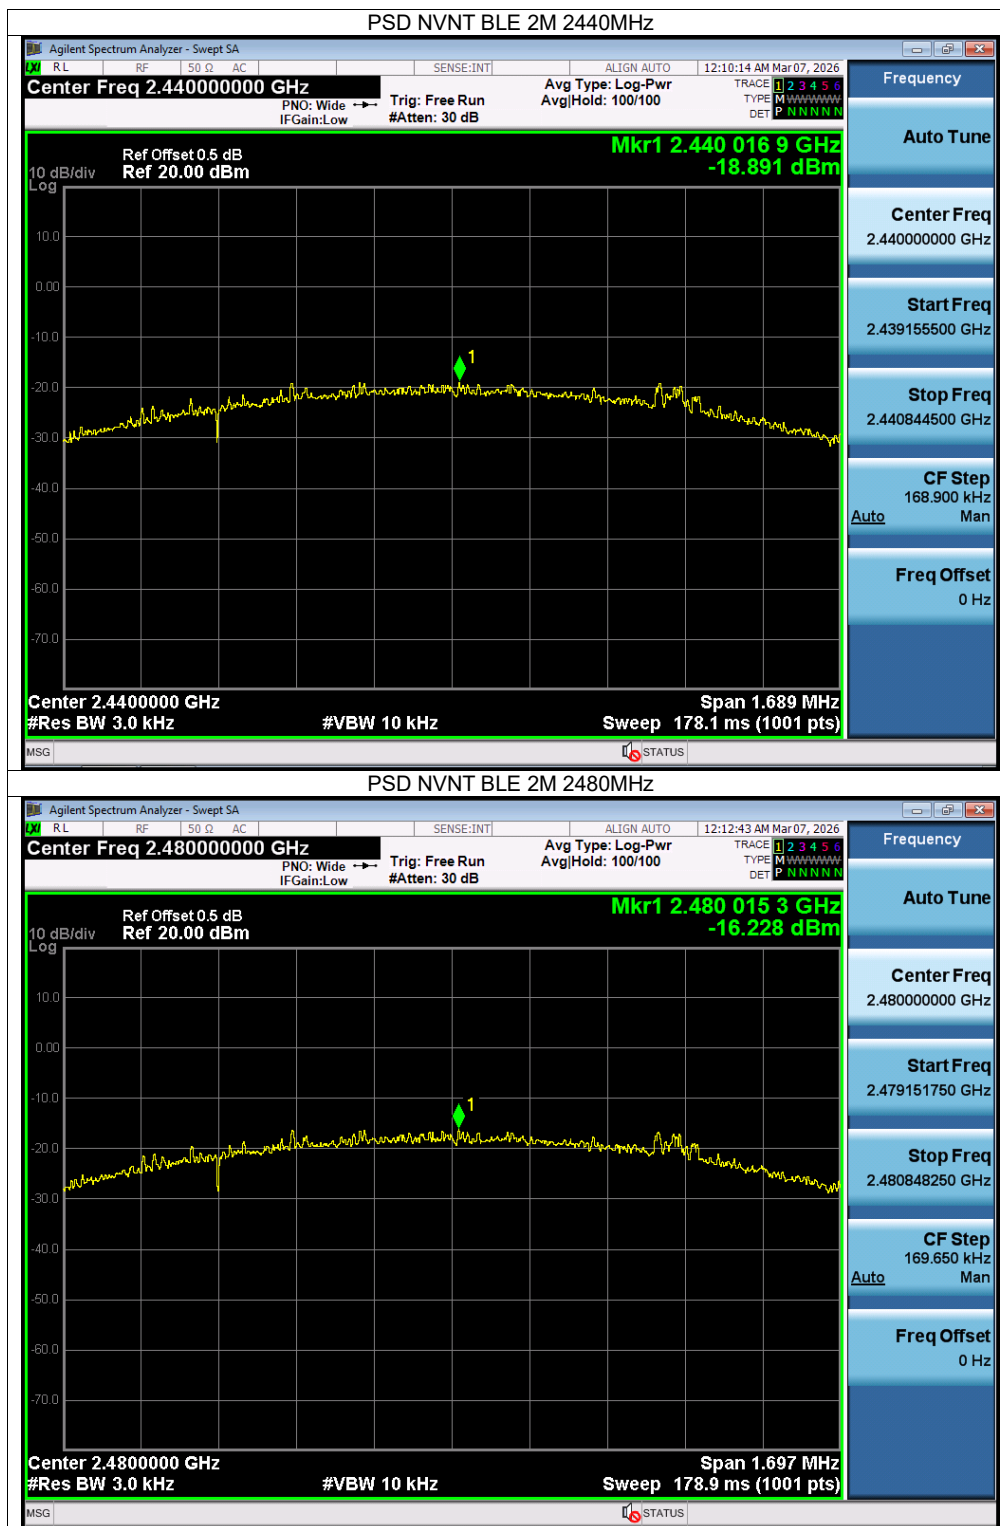



Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-50.1	-20	Pass
NVNT	BLE 1M	2480	-60.35	-20	Pass
NVNT	BLE 2M	2402	-38.08	-20	Pass
NVNT	BLE 2M	2480	-59.51	-20	Pass

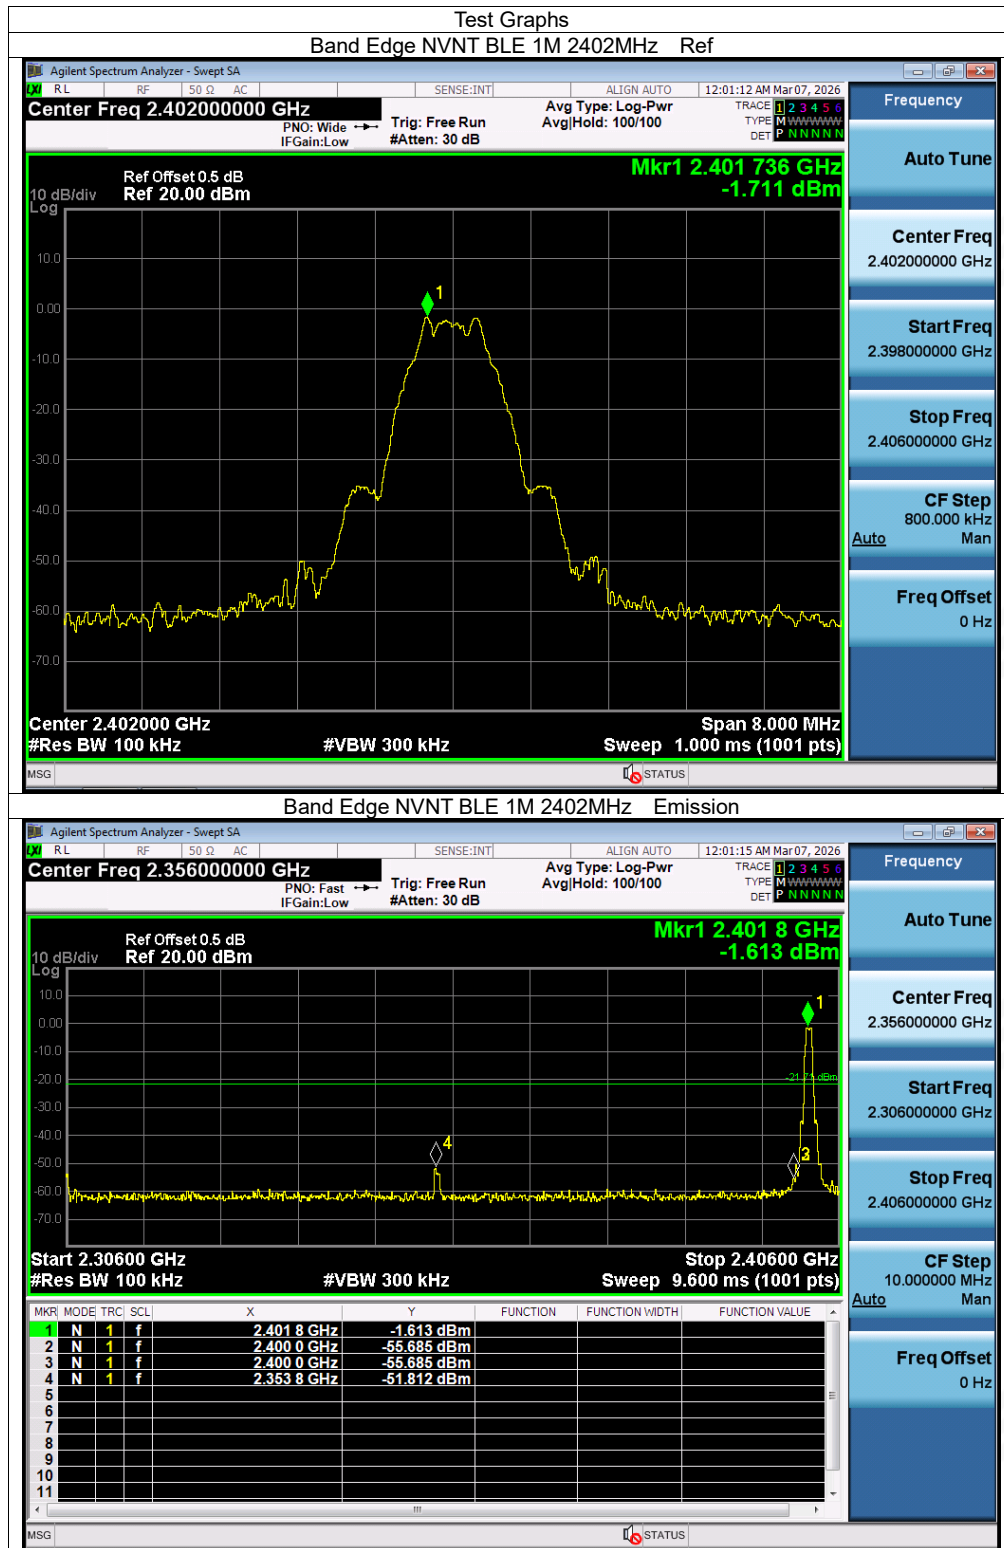

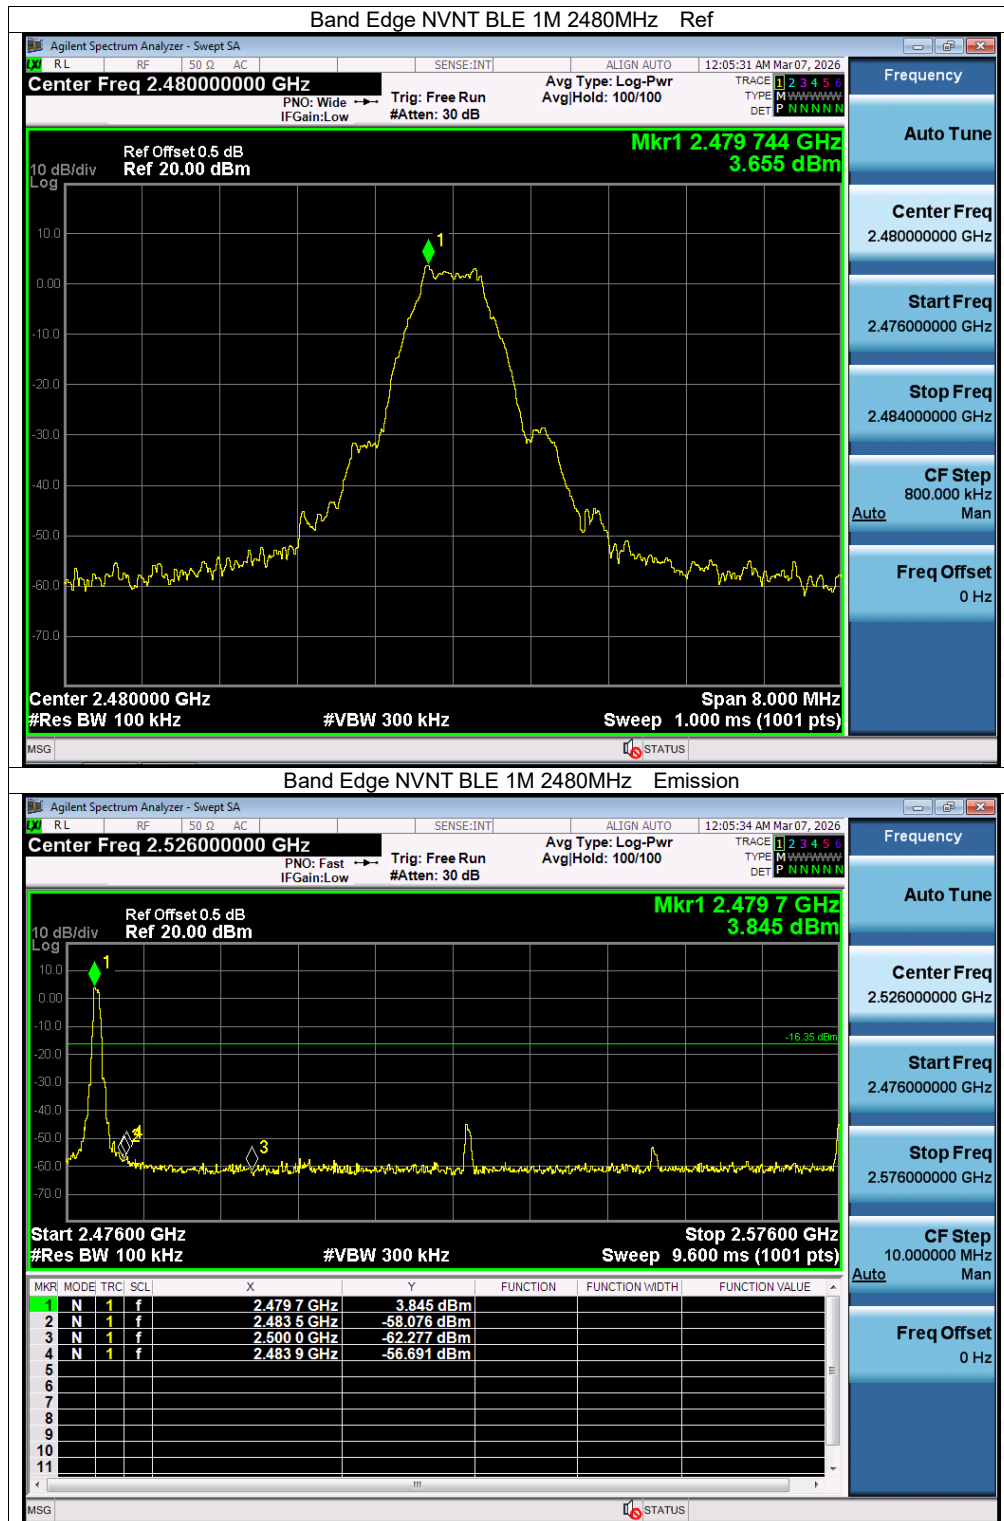

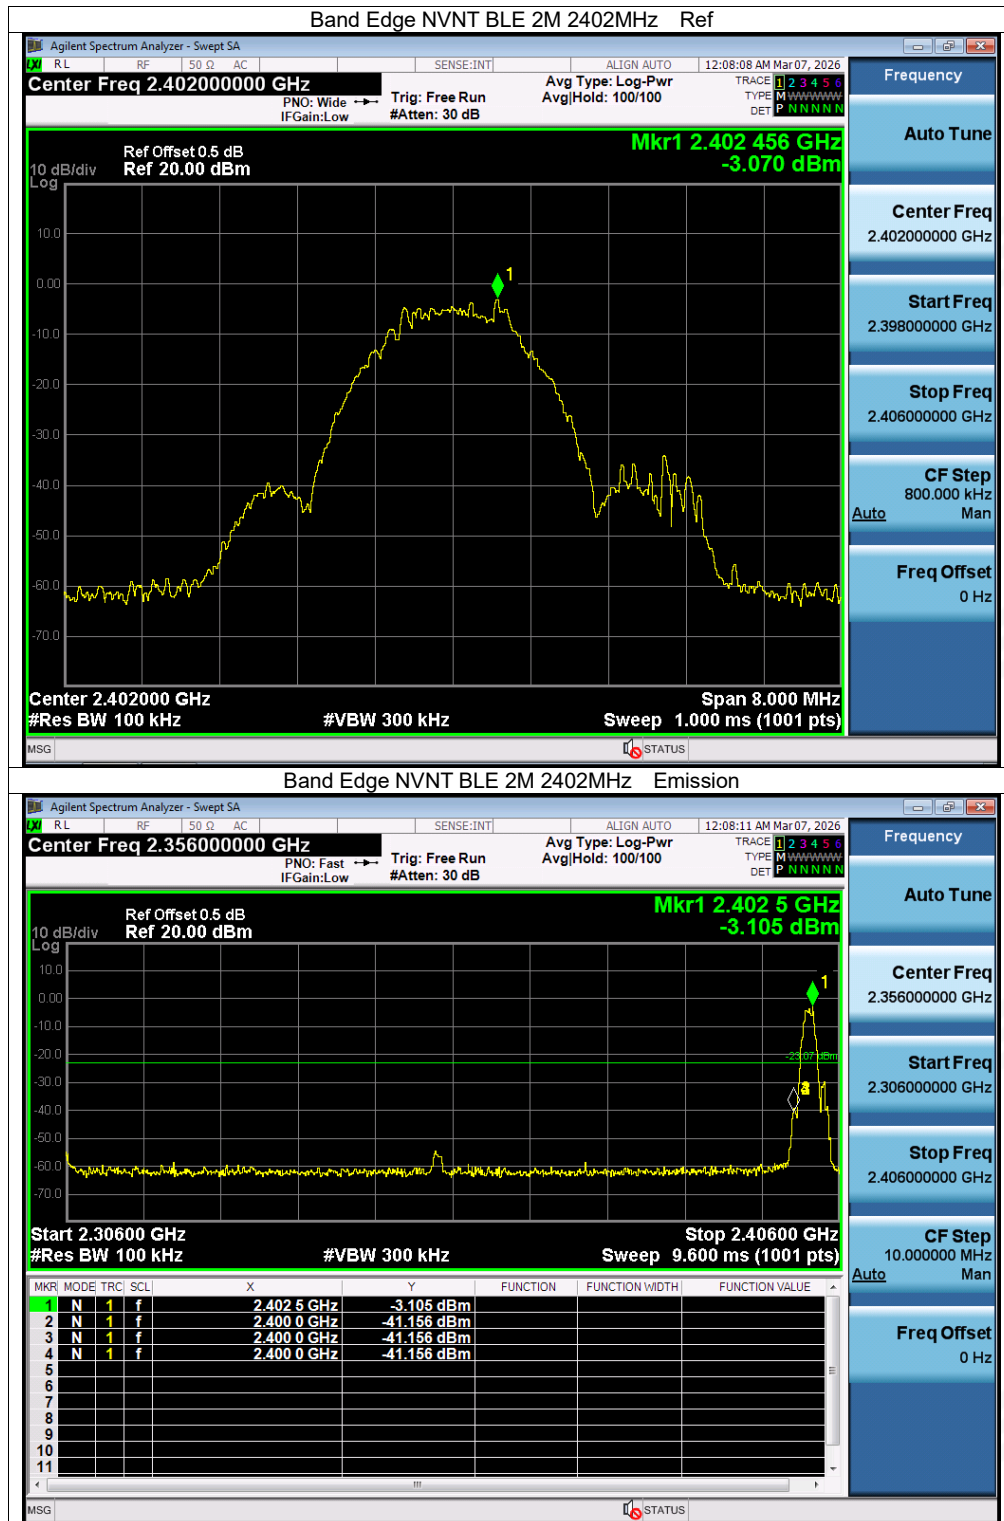


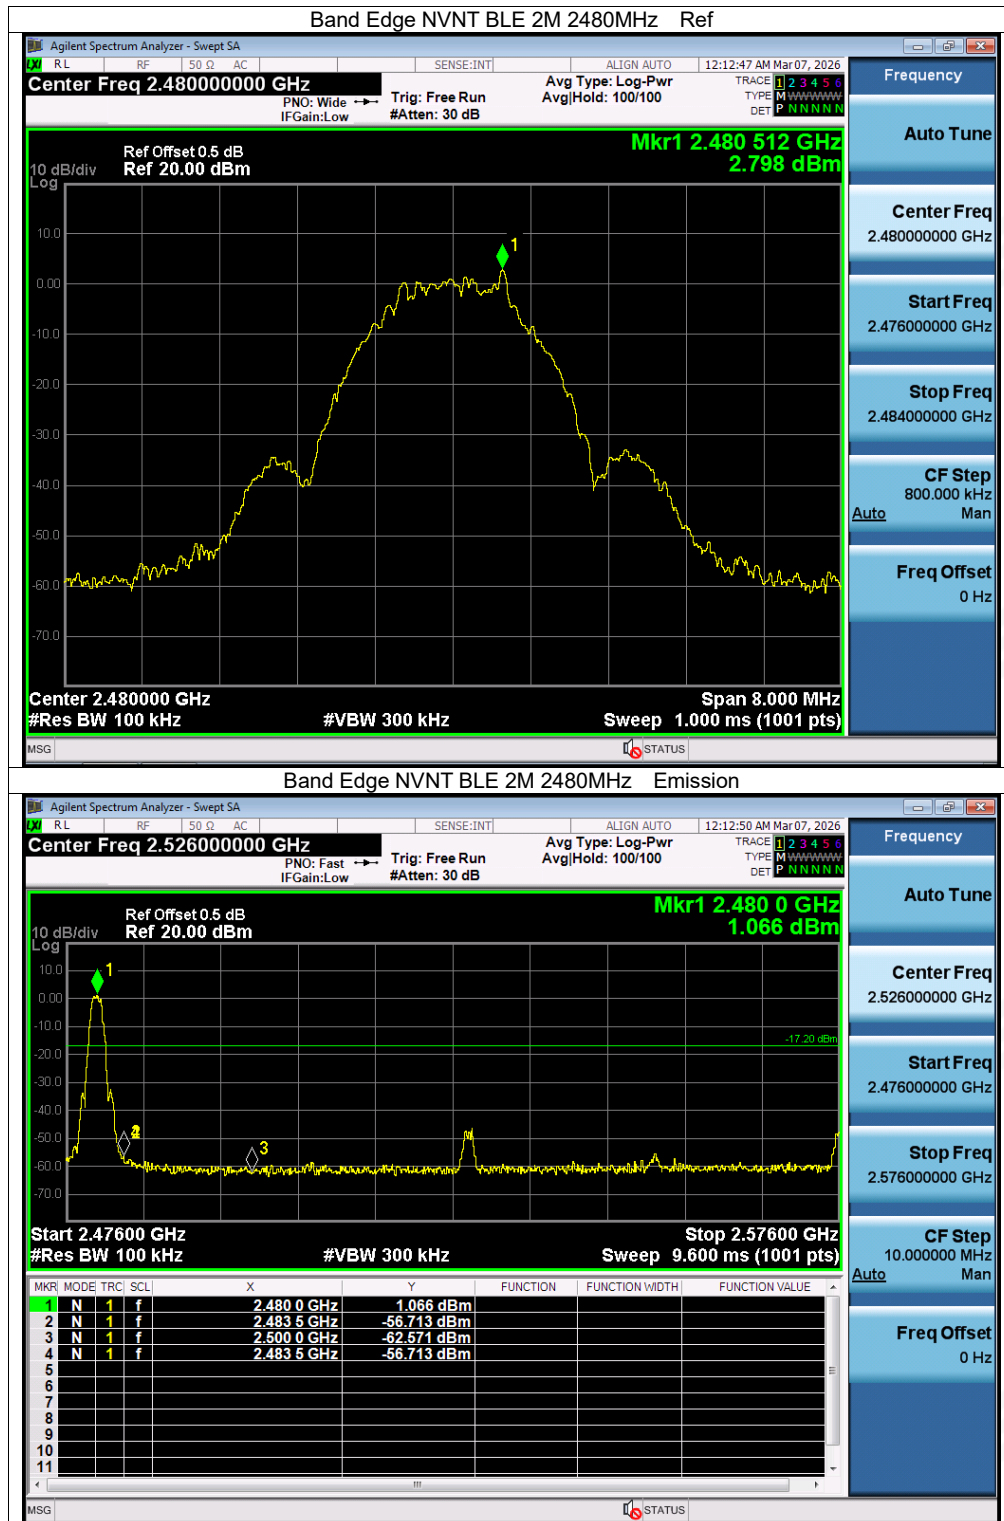






Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-23.4	-20	Pass
NVNT	BLE 1M	2440	-23.39	-20	Pass
NVNT	BLE 1M	2480	-24.7	-20	Pass
NVNT	BLE 2M	2402	-25.27	-20	Pass
NVNT	BLE 2M	2440	-28.52	-20	Pass
NVNT	BLE 2M	2480	-24.95	-20	Pass

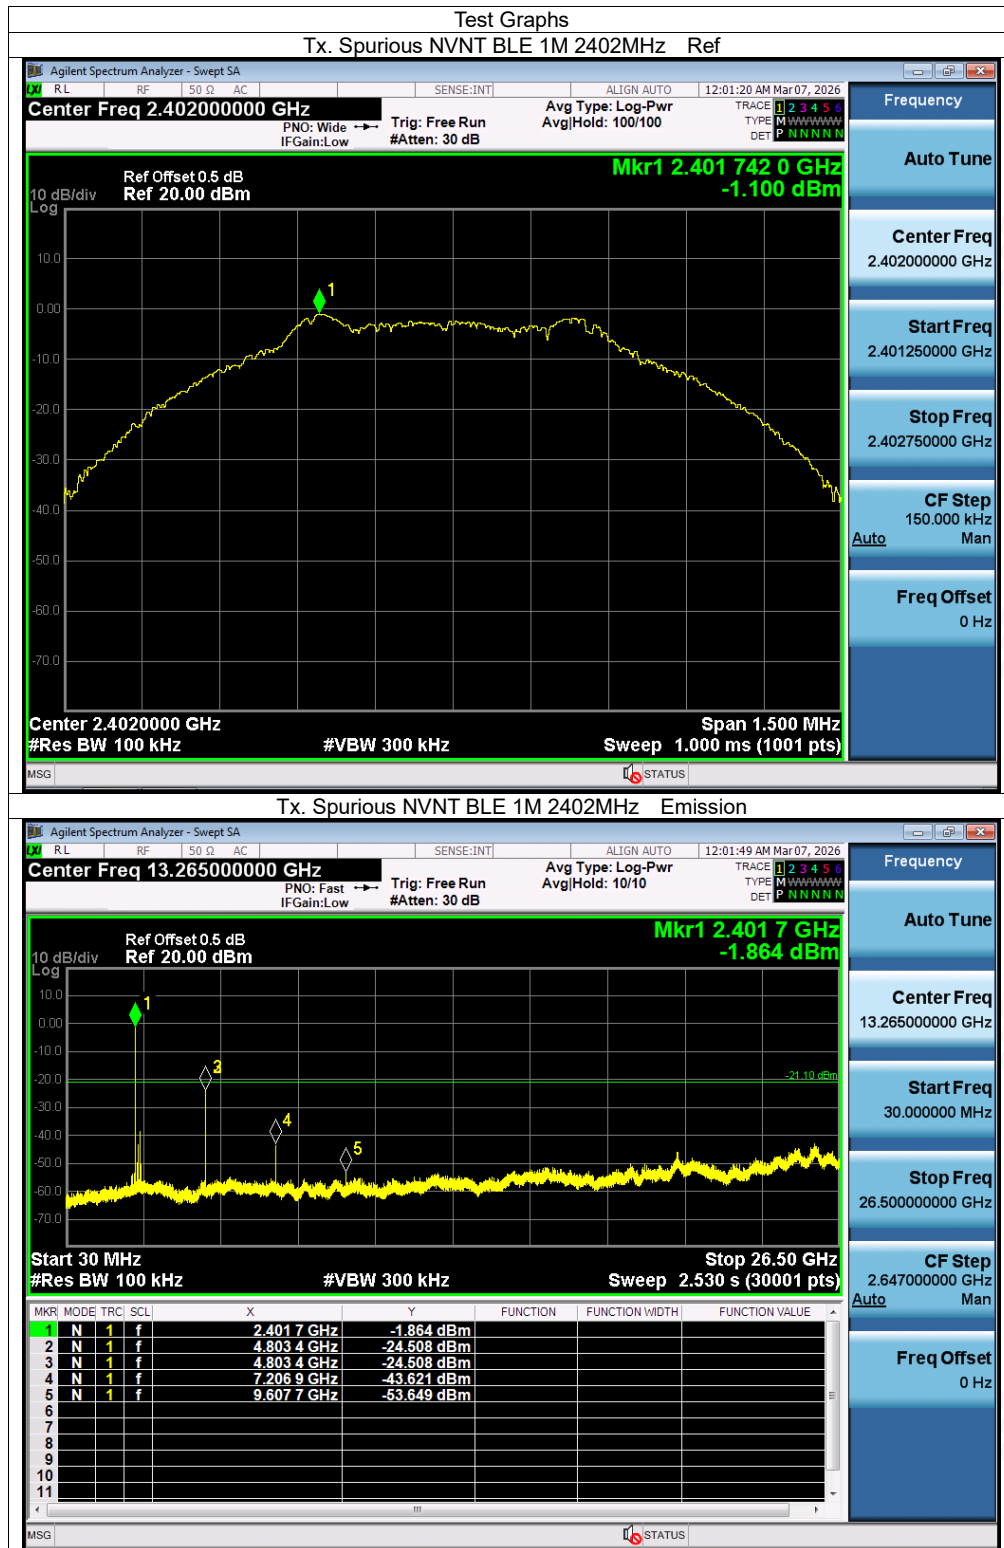


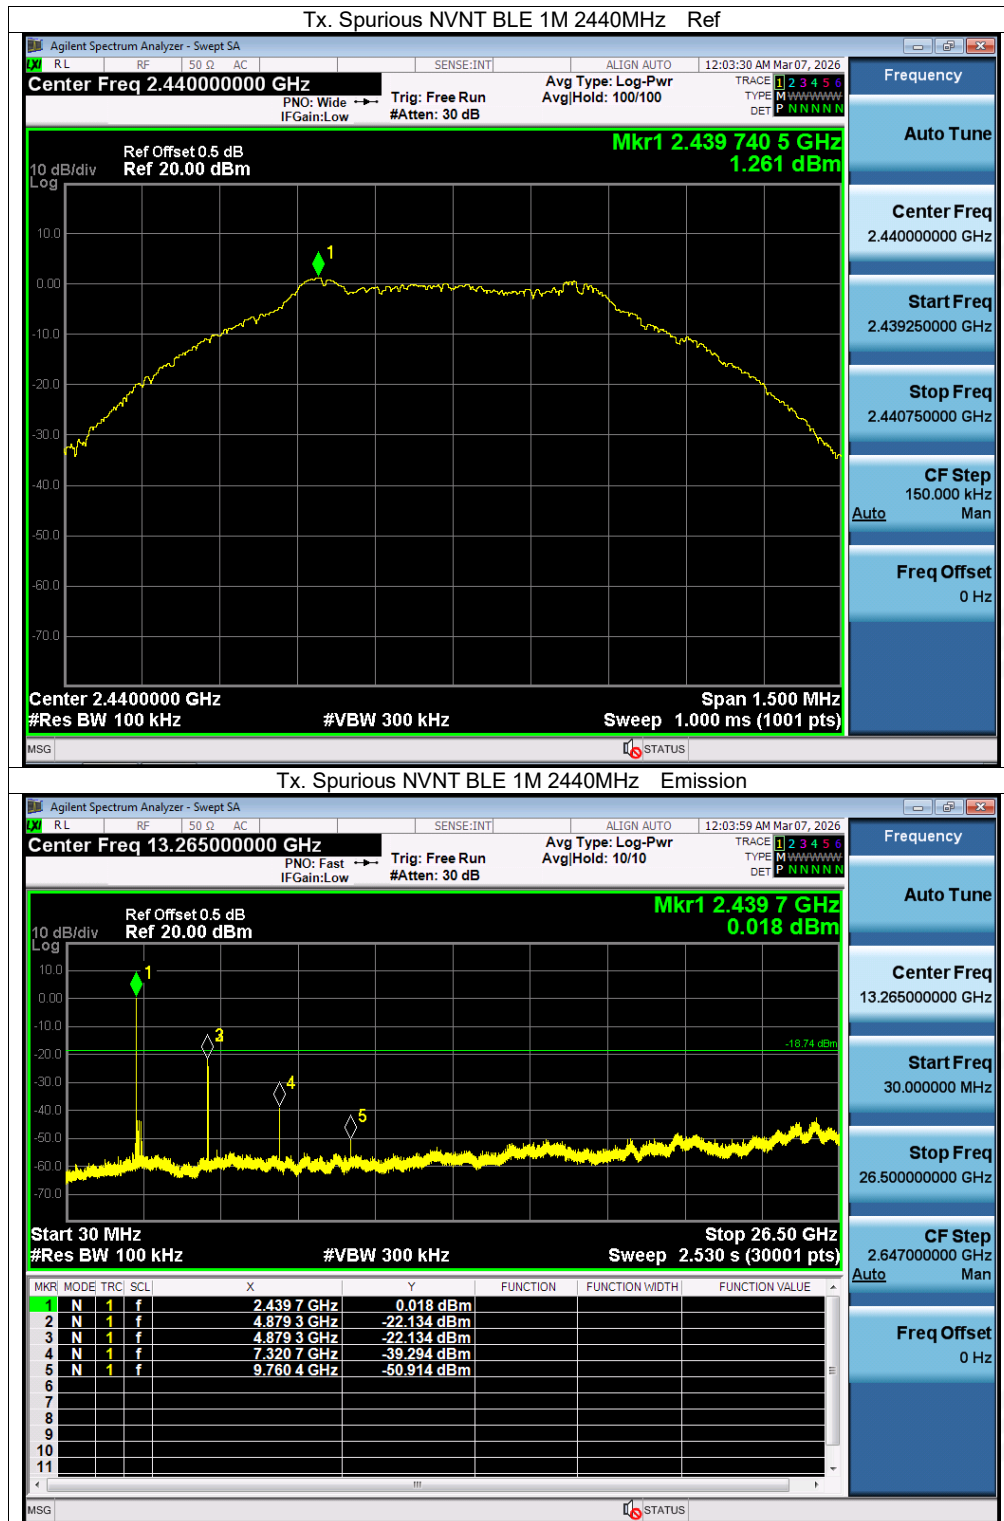

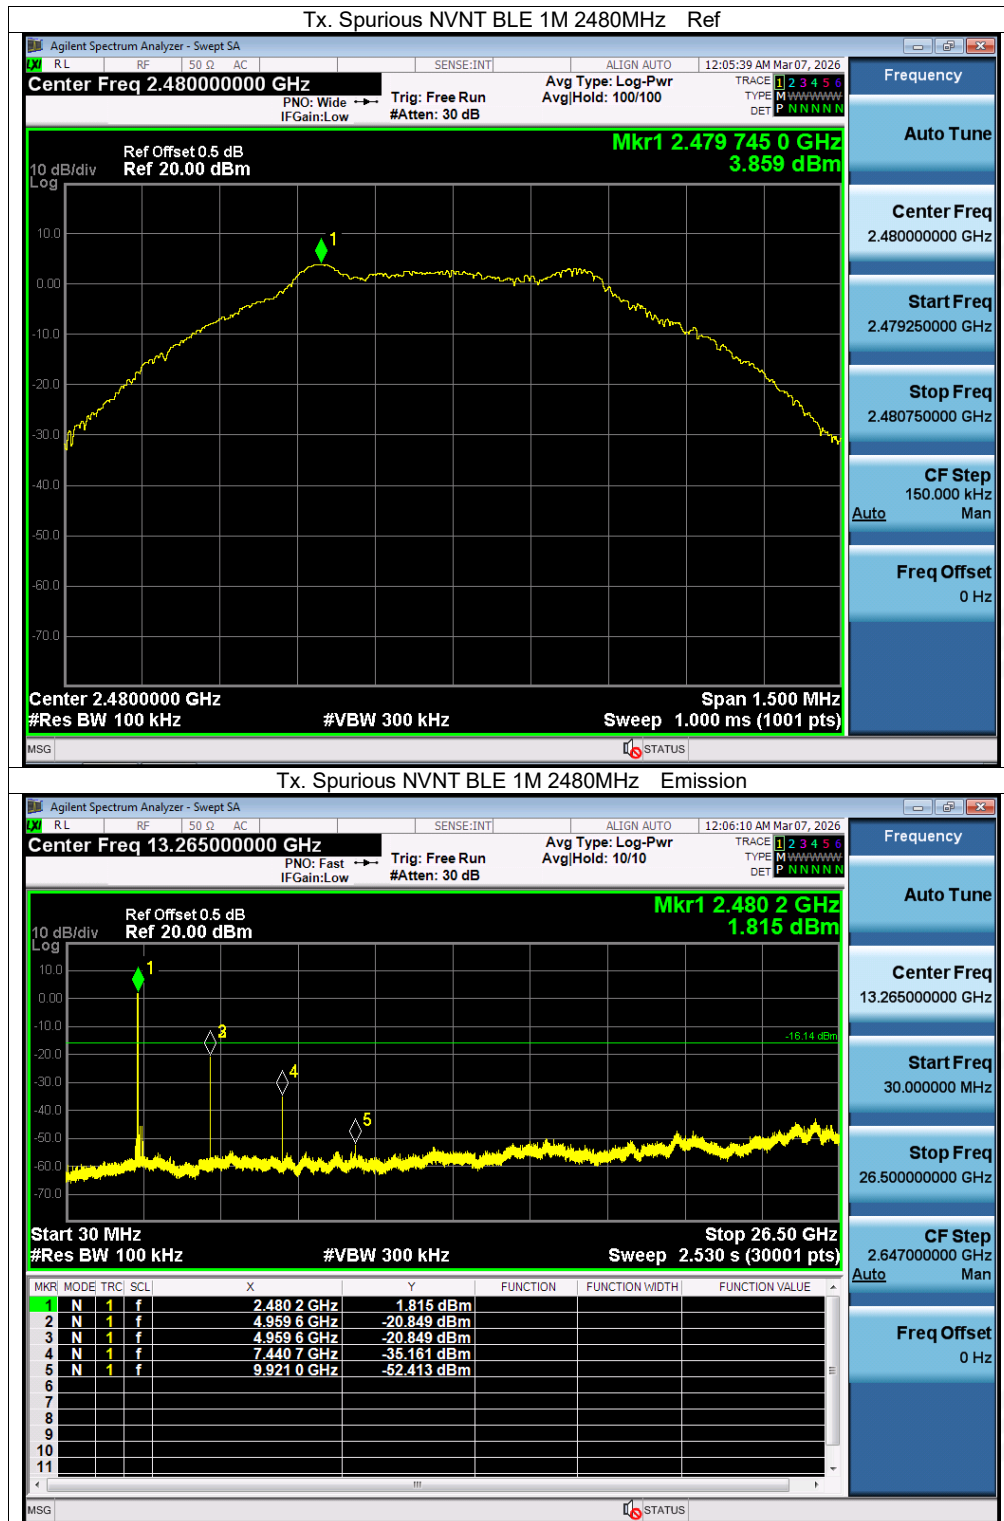

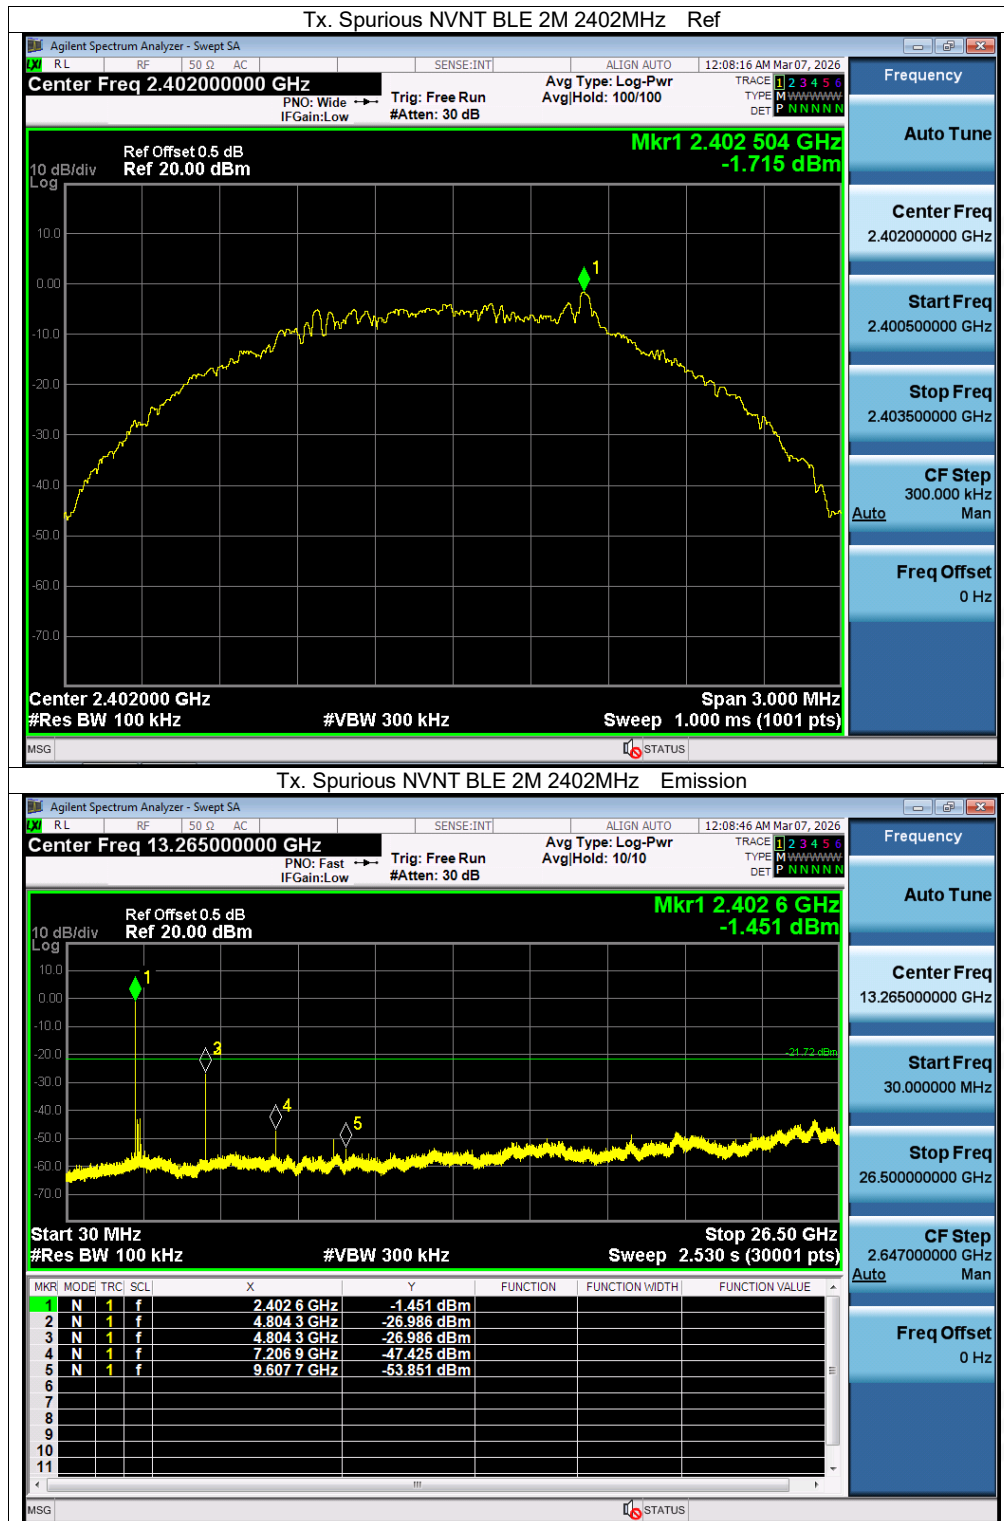

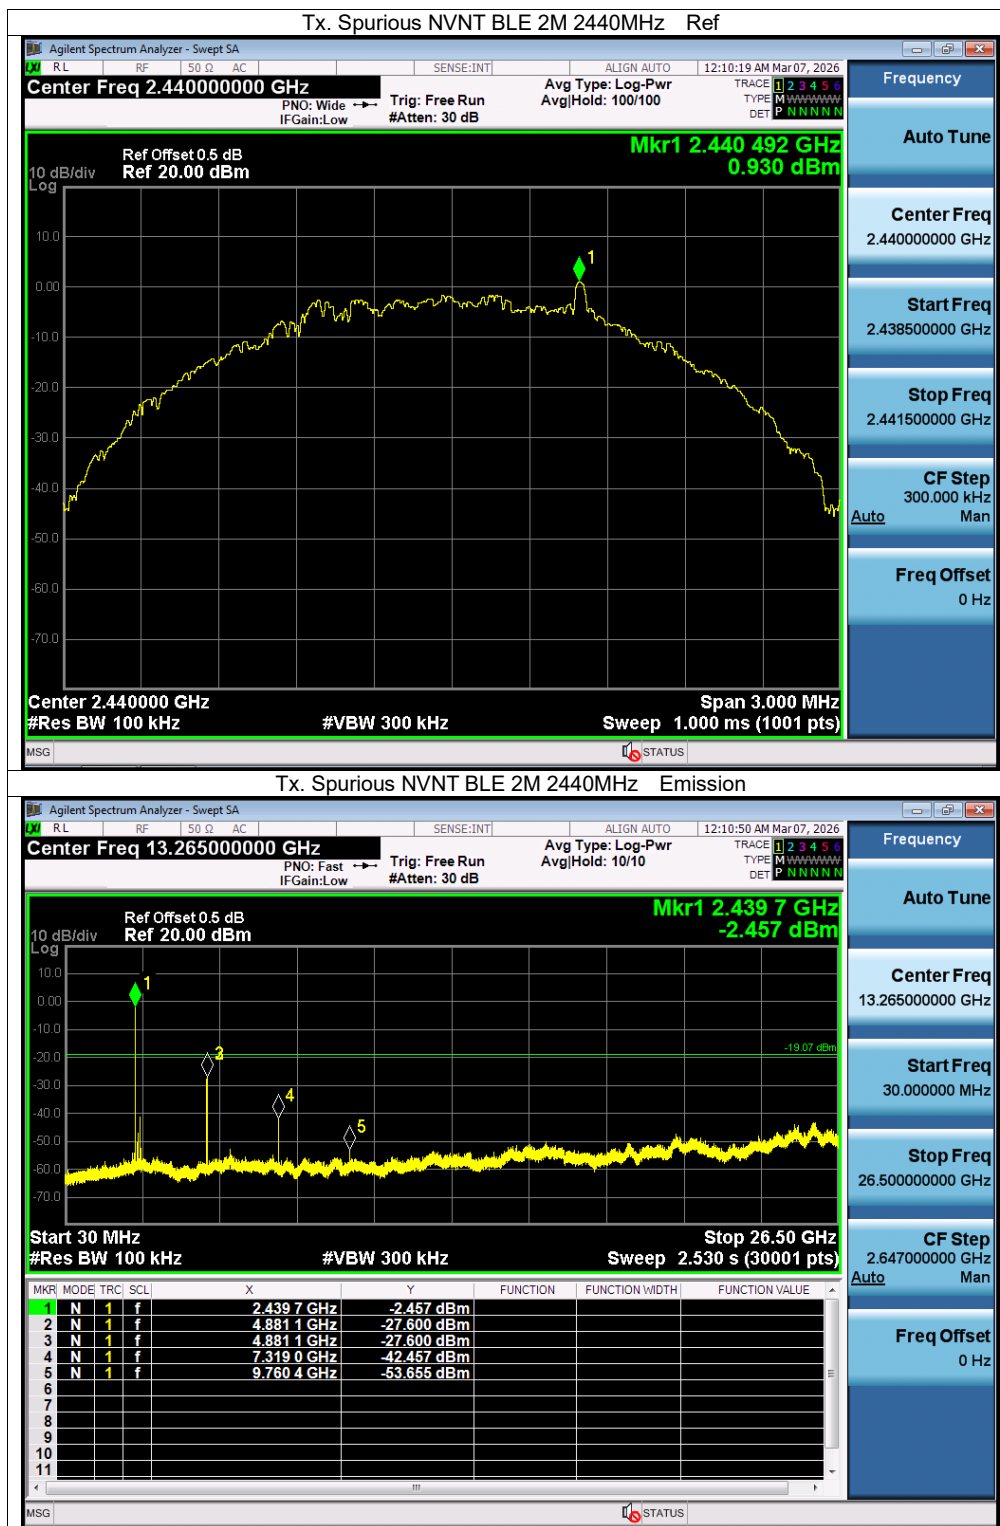

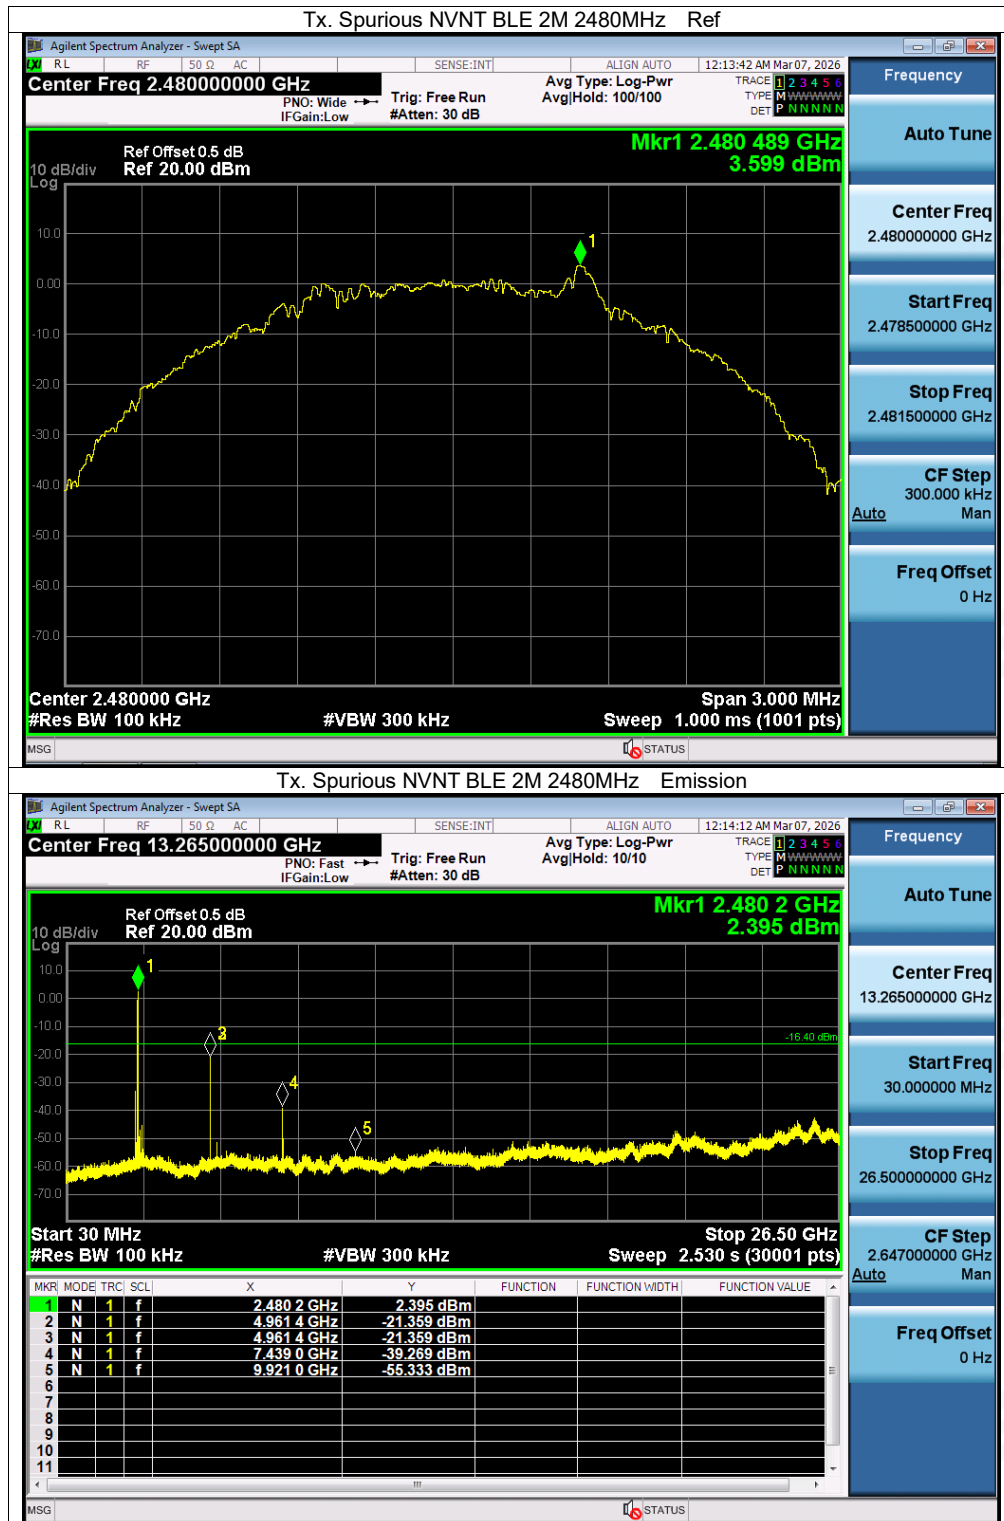






BT8961B6

Duty Cycle

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
NVNT	BLE 1M	2402	65.08	1.87
NVNT	BLE 1M	2440	64.52	1.9
NVNT	BLE 1M	2480	64.52	1.9
NVNT	BLE 2M	2402	58.29	2.34
NVNT	BLE 2M	2440	58.29	2.34
NVNT	BLE 2M	2480	57.98	2.37

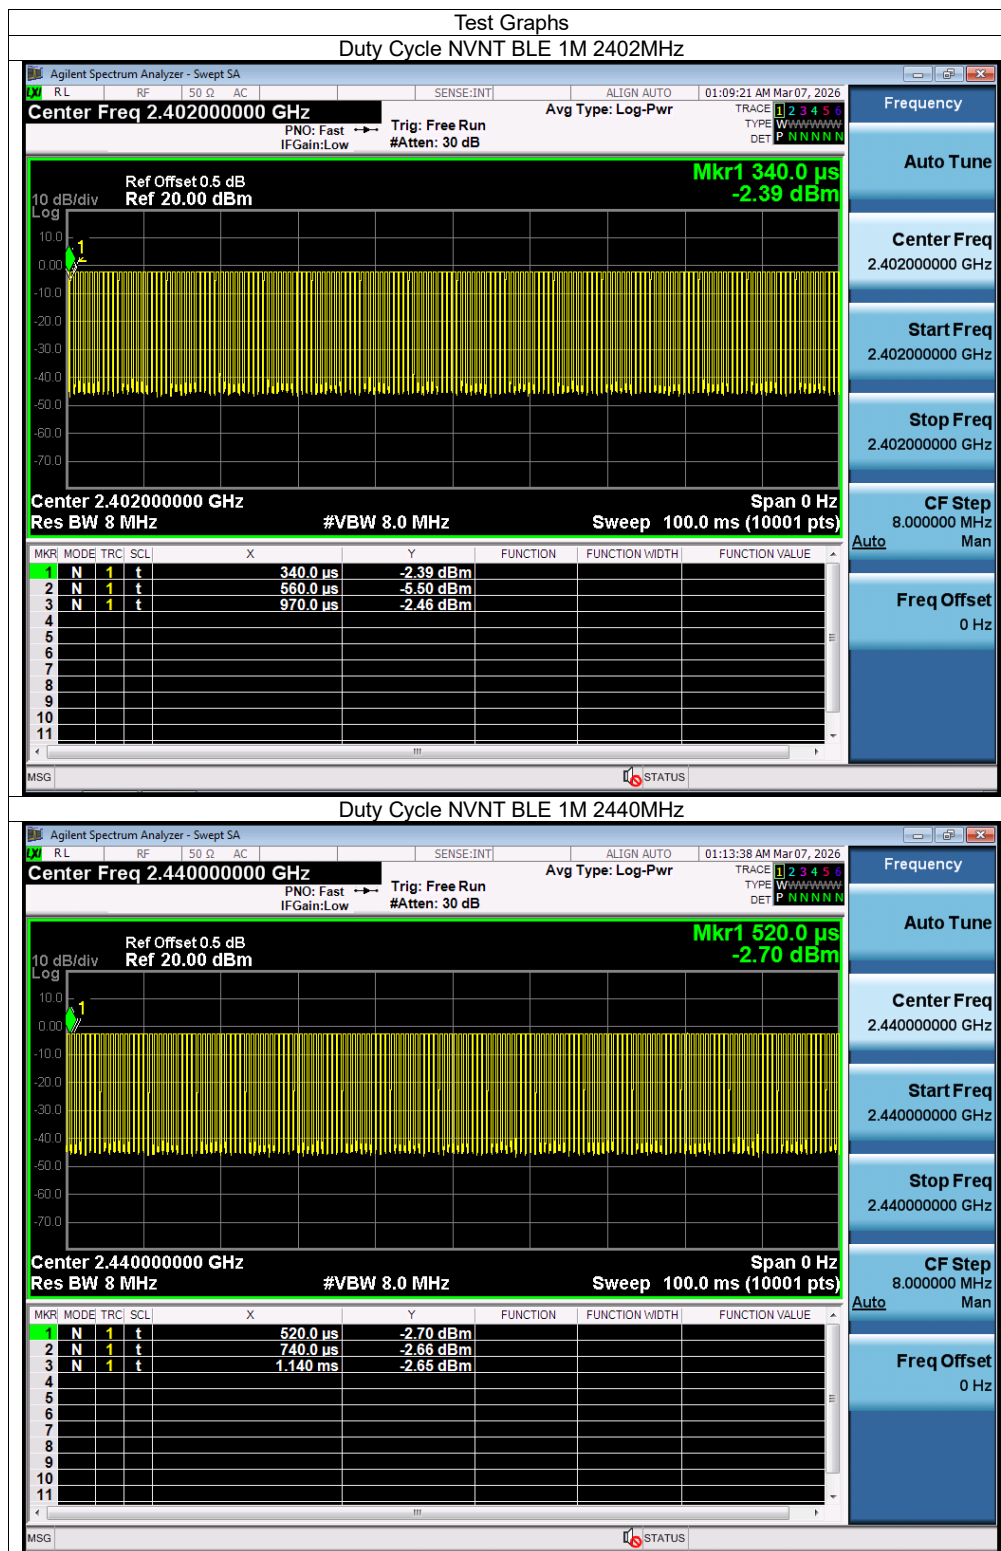

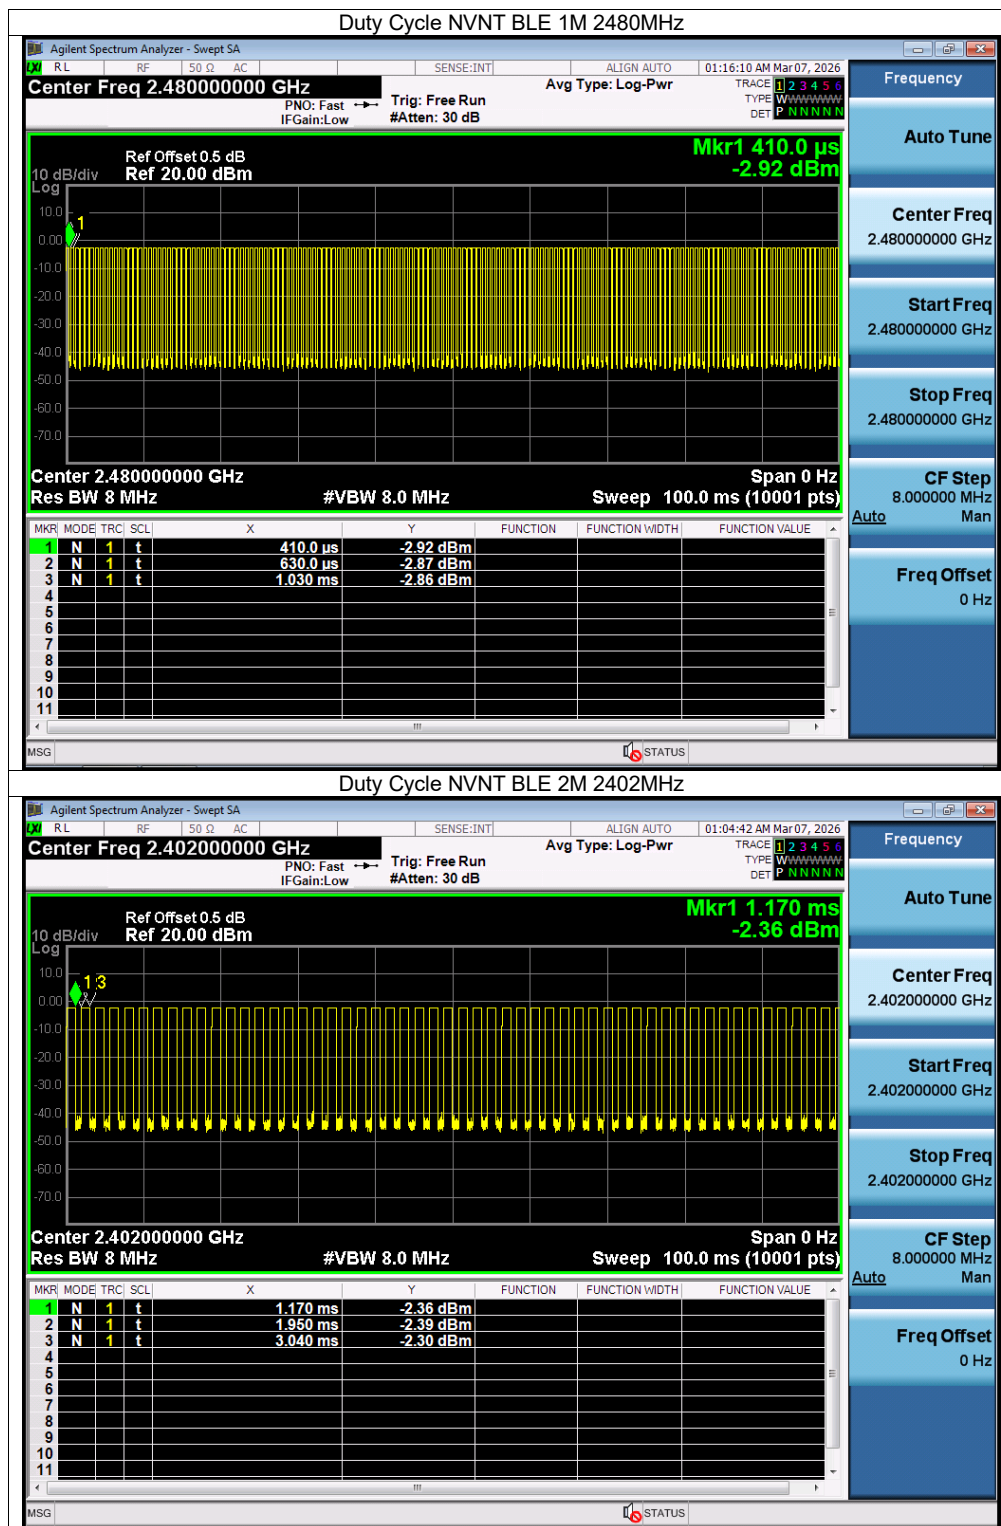


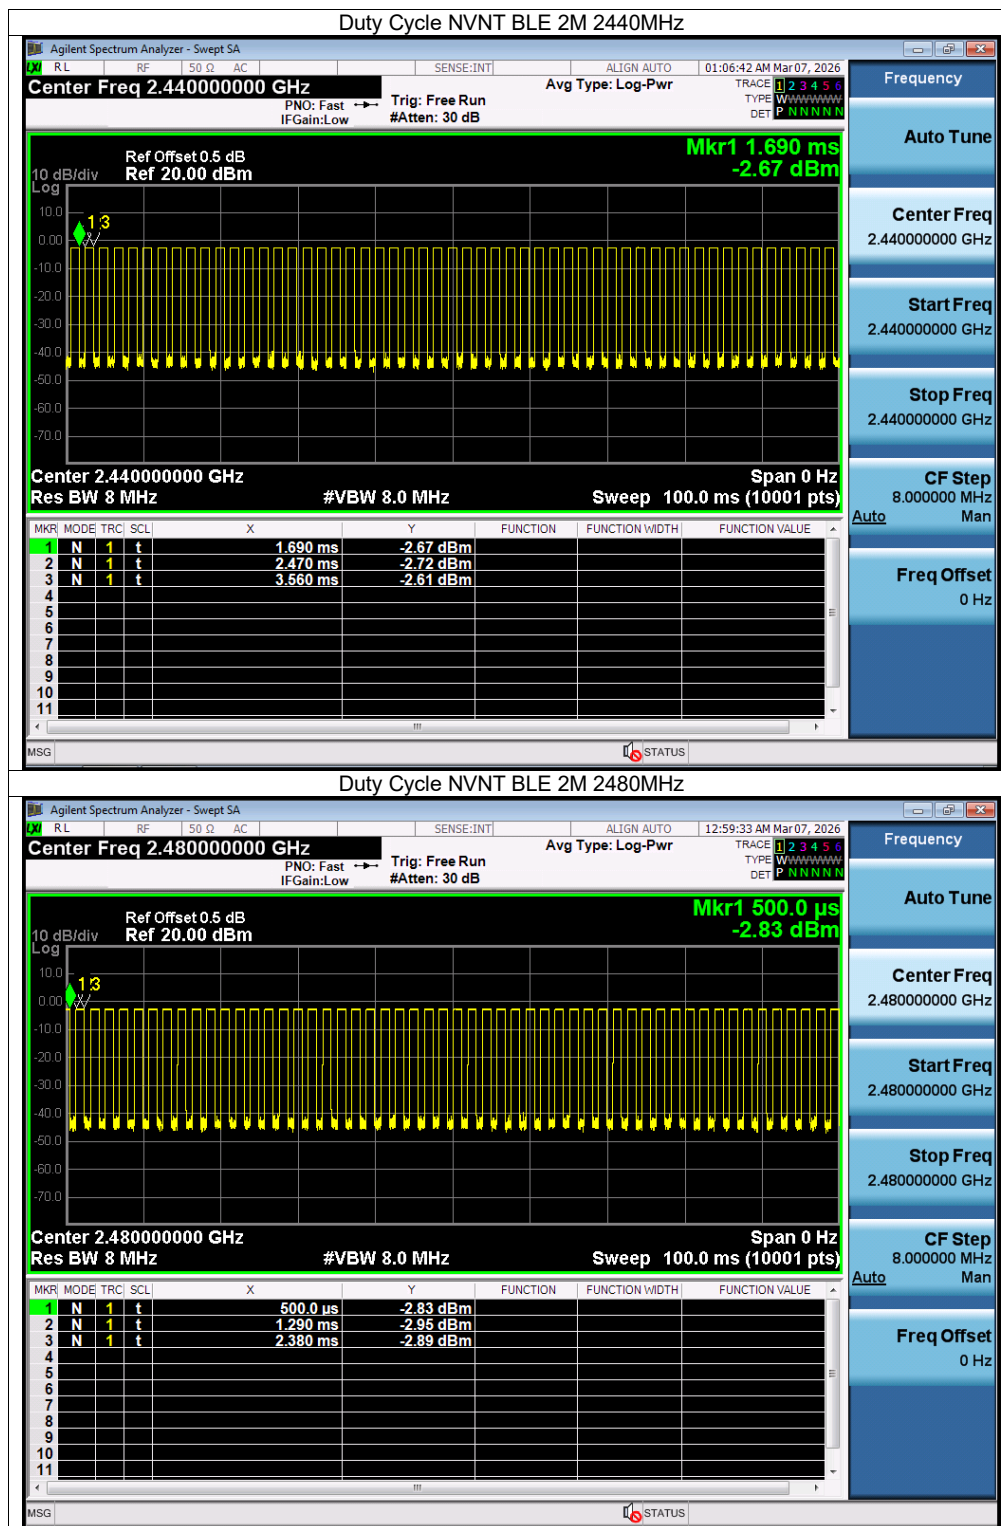





Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	-1.09	30	Pass
NVNT	BLE 1M	2440	-1.57	30	Pass
NVNT	BLE 1M	2480	-0.79	30	Pass
NVNT	BLE 2M	2402	-1.25	30	Pass
NVNT	BLE 2M	2440	-1.31	30	Pass
NVNT	BLE 2M	2480	-1.82	30	Pass

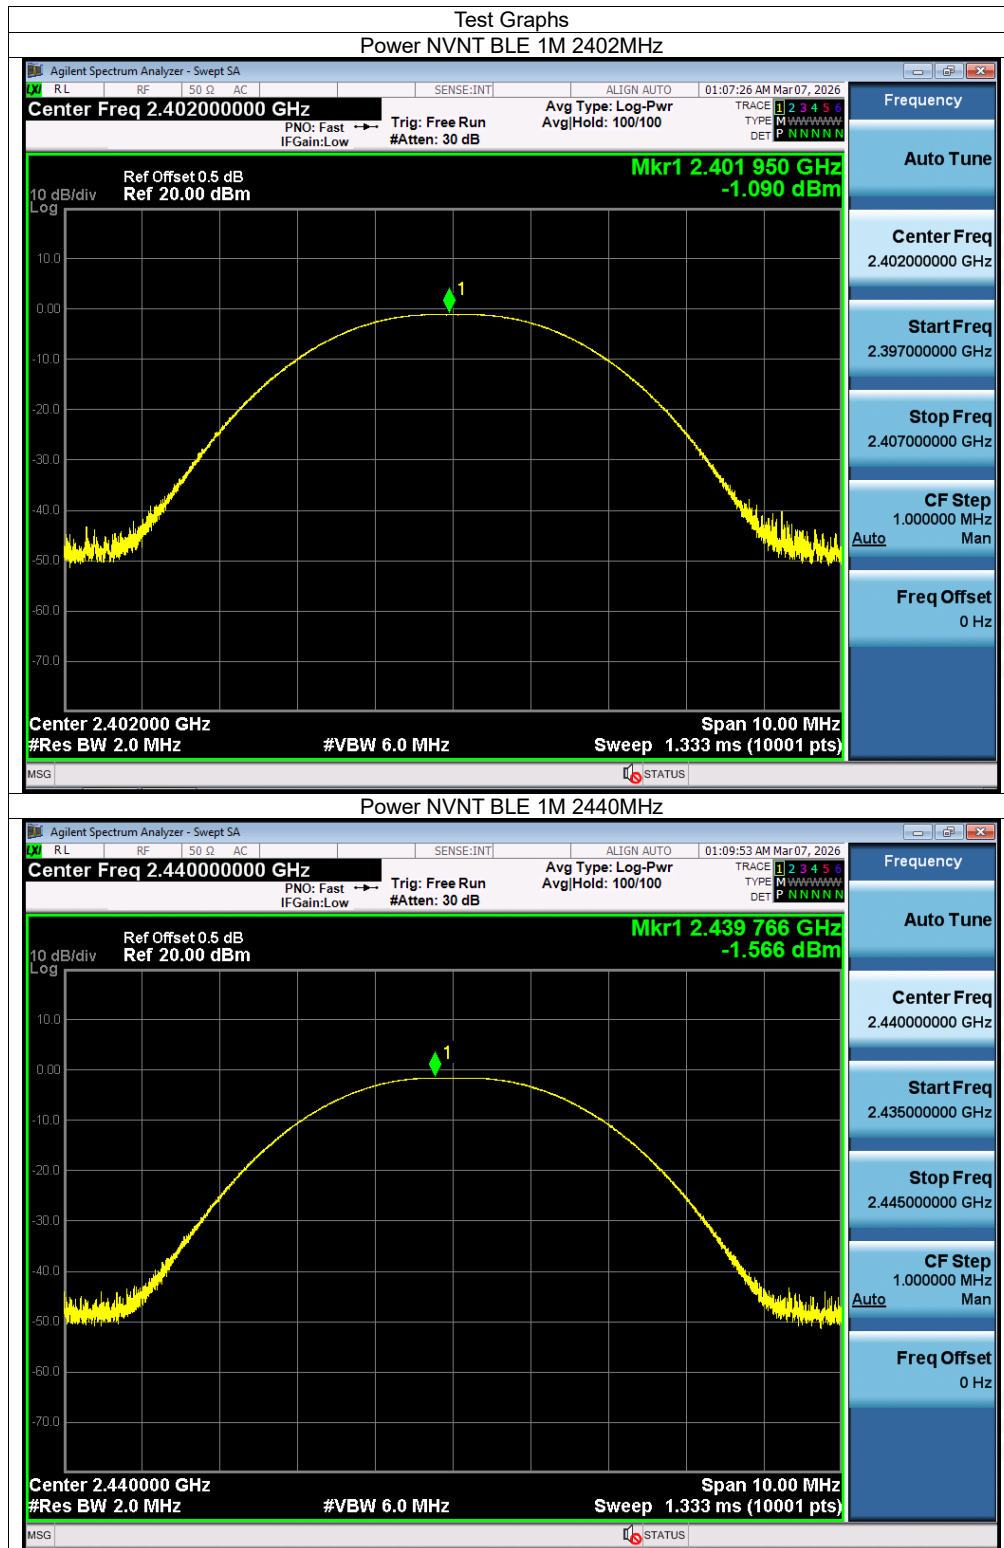

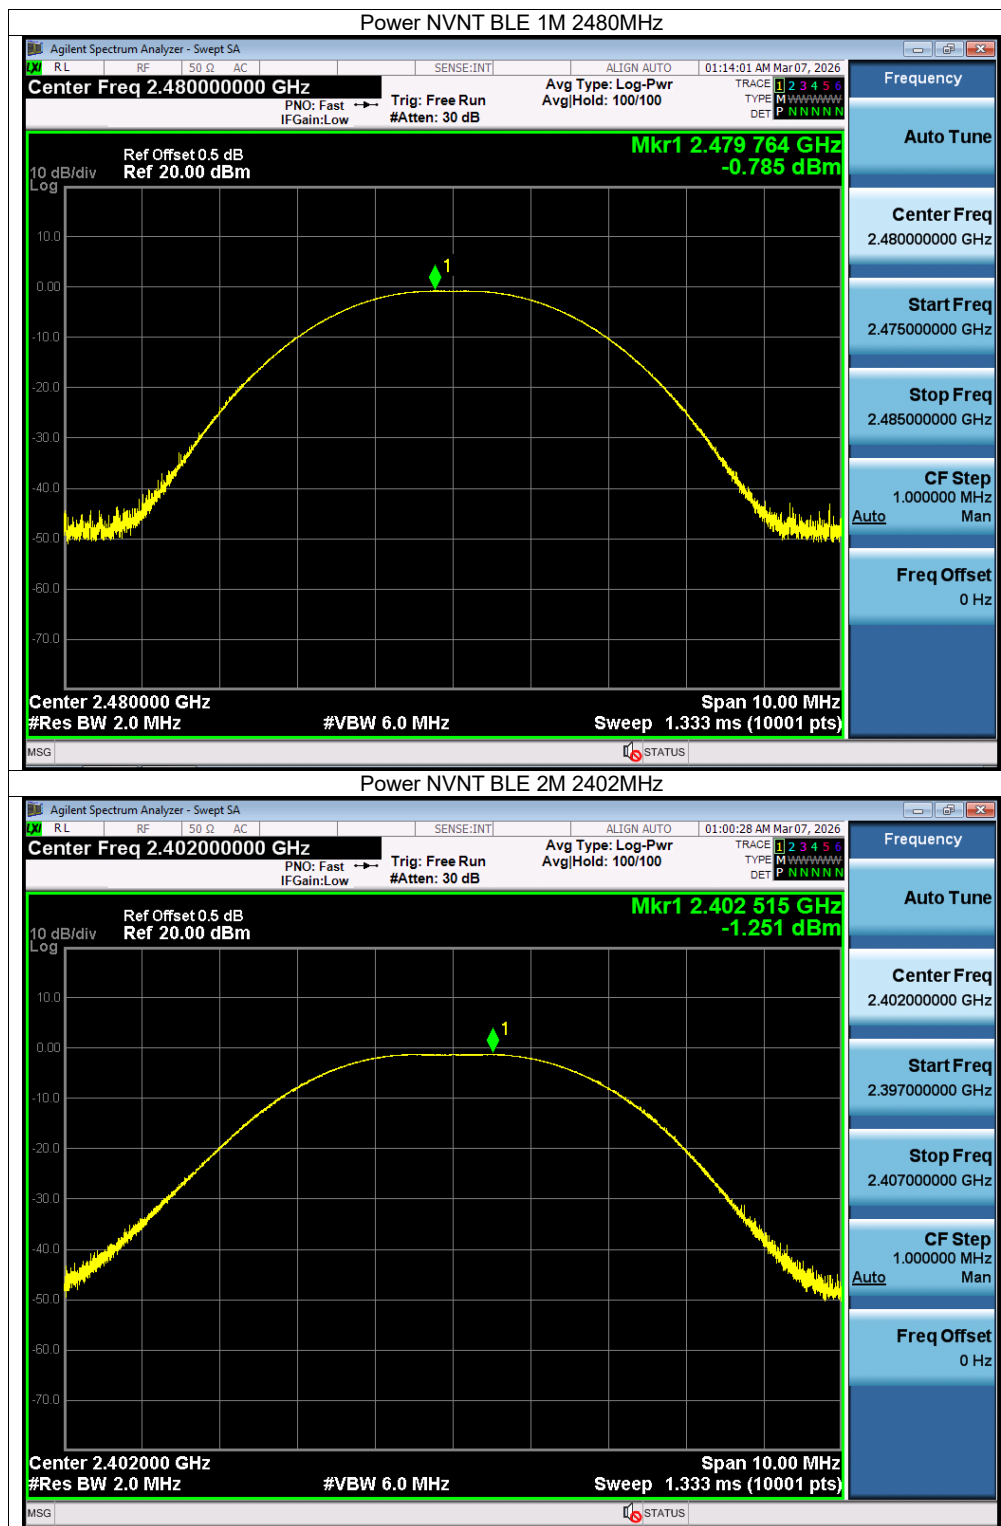


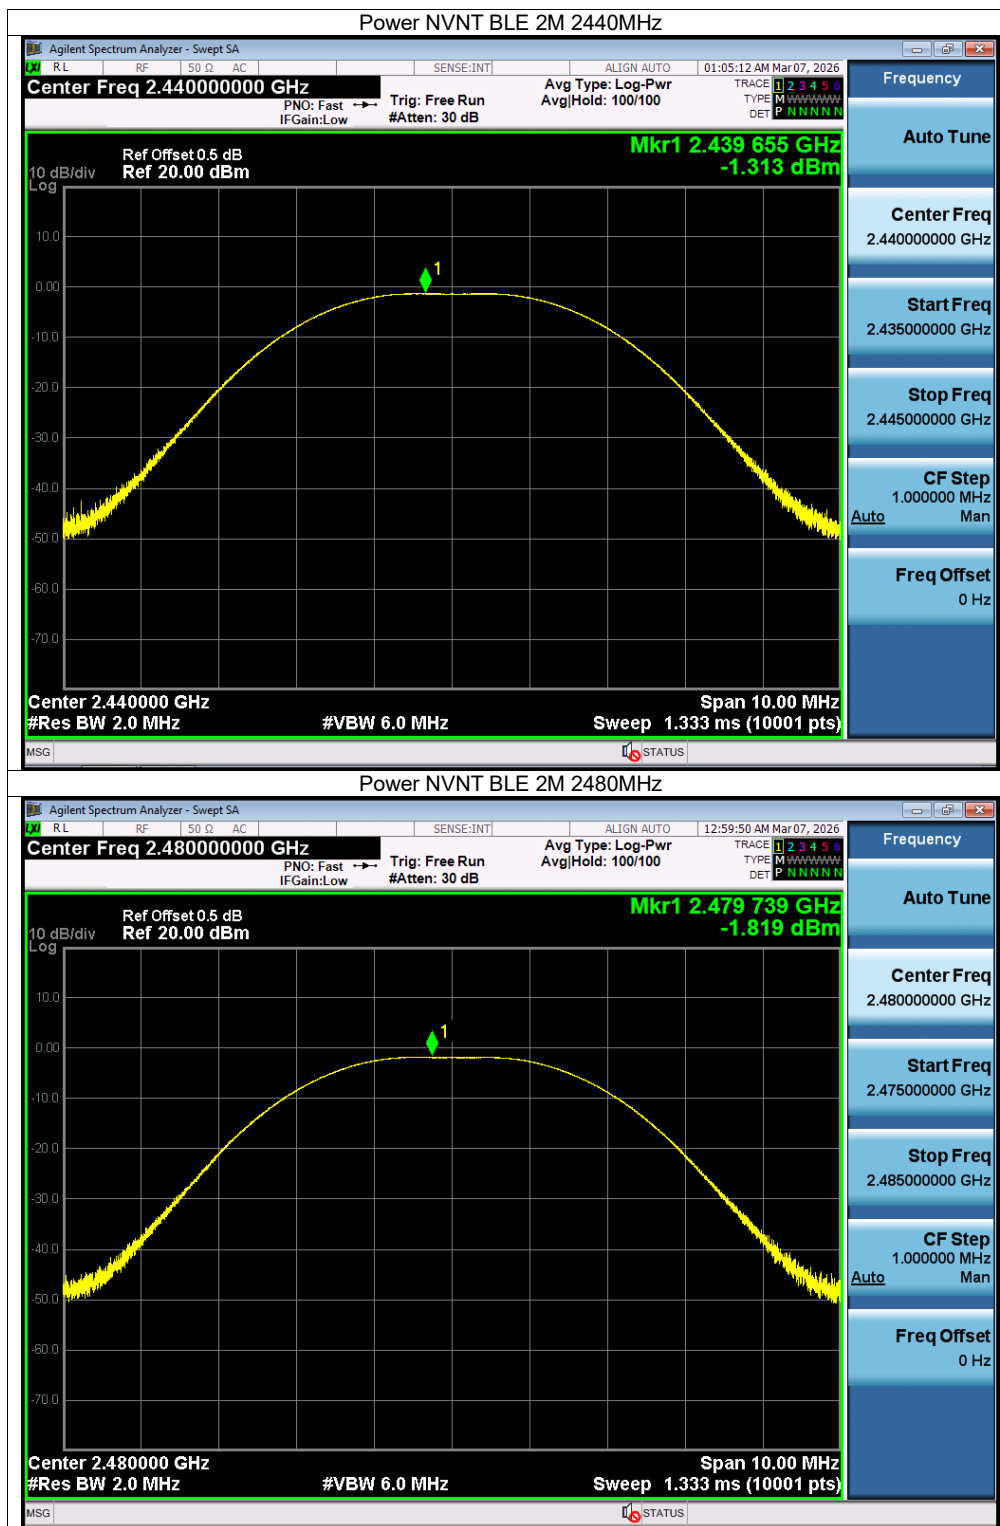



-6dB Bandwidth

Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	0.655	0.5	Pass
NVNT	BLE 1M	2440	0.652	0.5	Pass
NVNT	BLE 1M	2480	0.65	0.5	Pass
NVNT	BLE 2M	2402	1.126	0.5	Pass
NVNT	BLE 2M	2440	1.124	0.5	Pass
NVNT	BLE 2M	2480	1.111	0.5	Pass

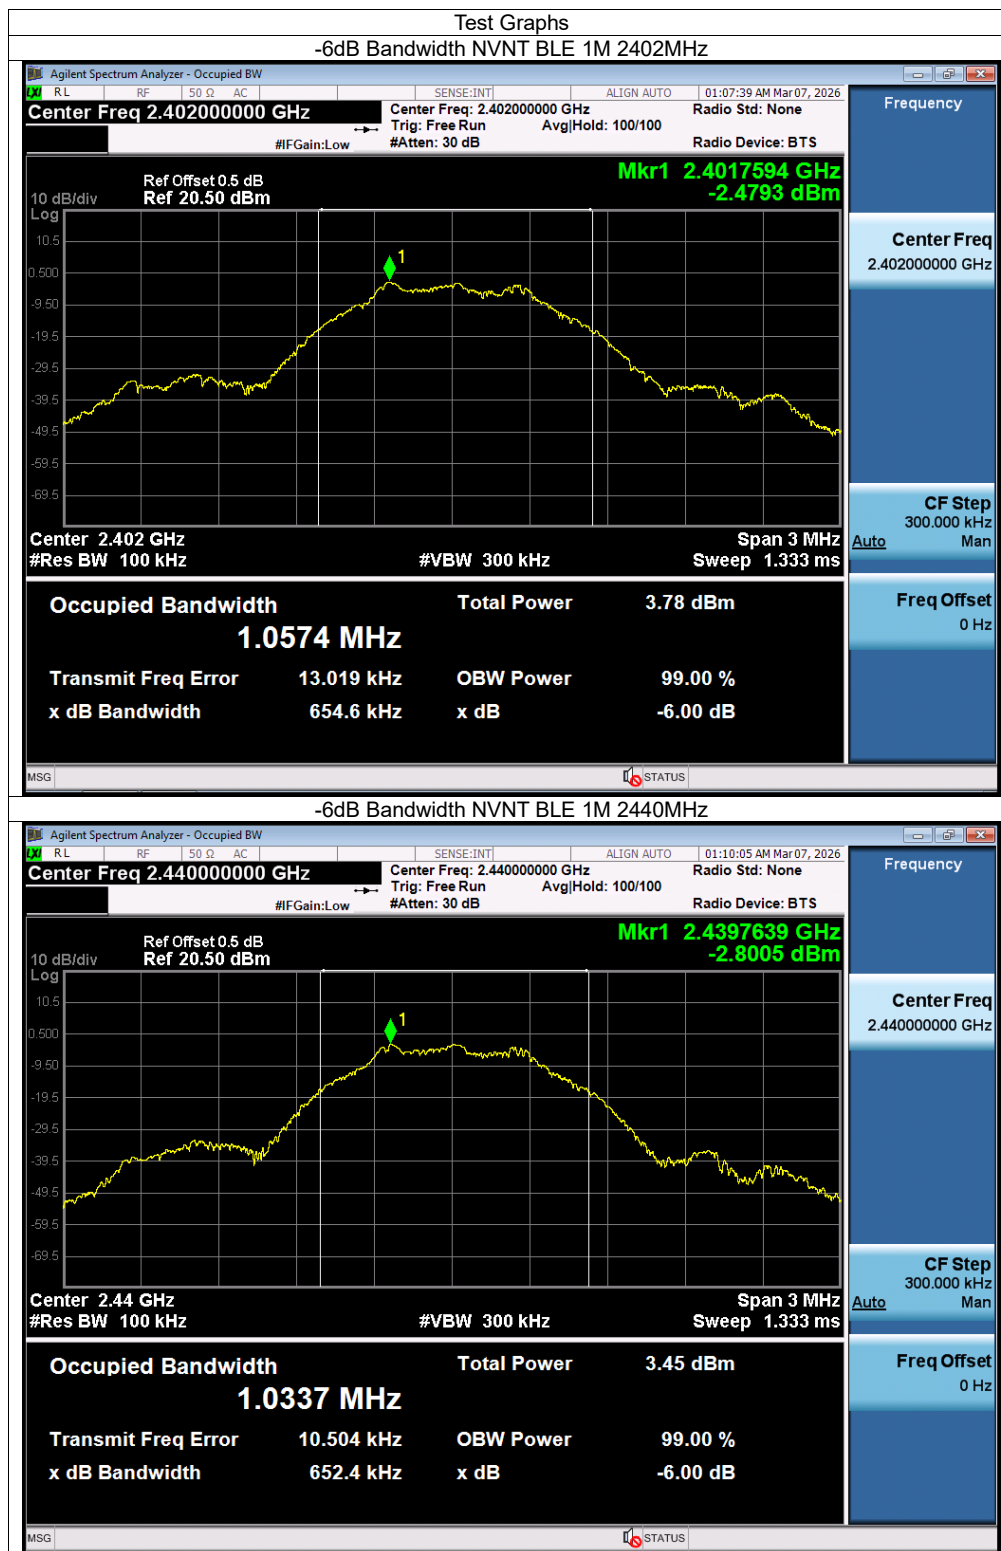










Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	-17.2	8	Pass
NVNT	BLE 1M	2440	-17.65	8	Pass
NVNT	BLE 1M	2480	-18	8	Pass
NVNT	BLE 2M	2402	-20.16	8	Pass
NVNT	BLE 2M	2440	-20.52	8	Pass
NVNT	BLE 2M	2480	-20.98	8	Pass

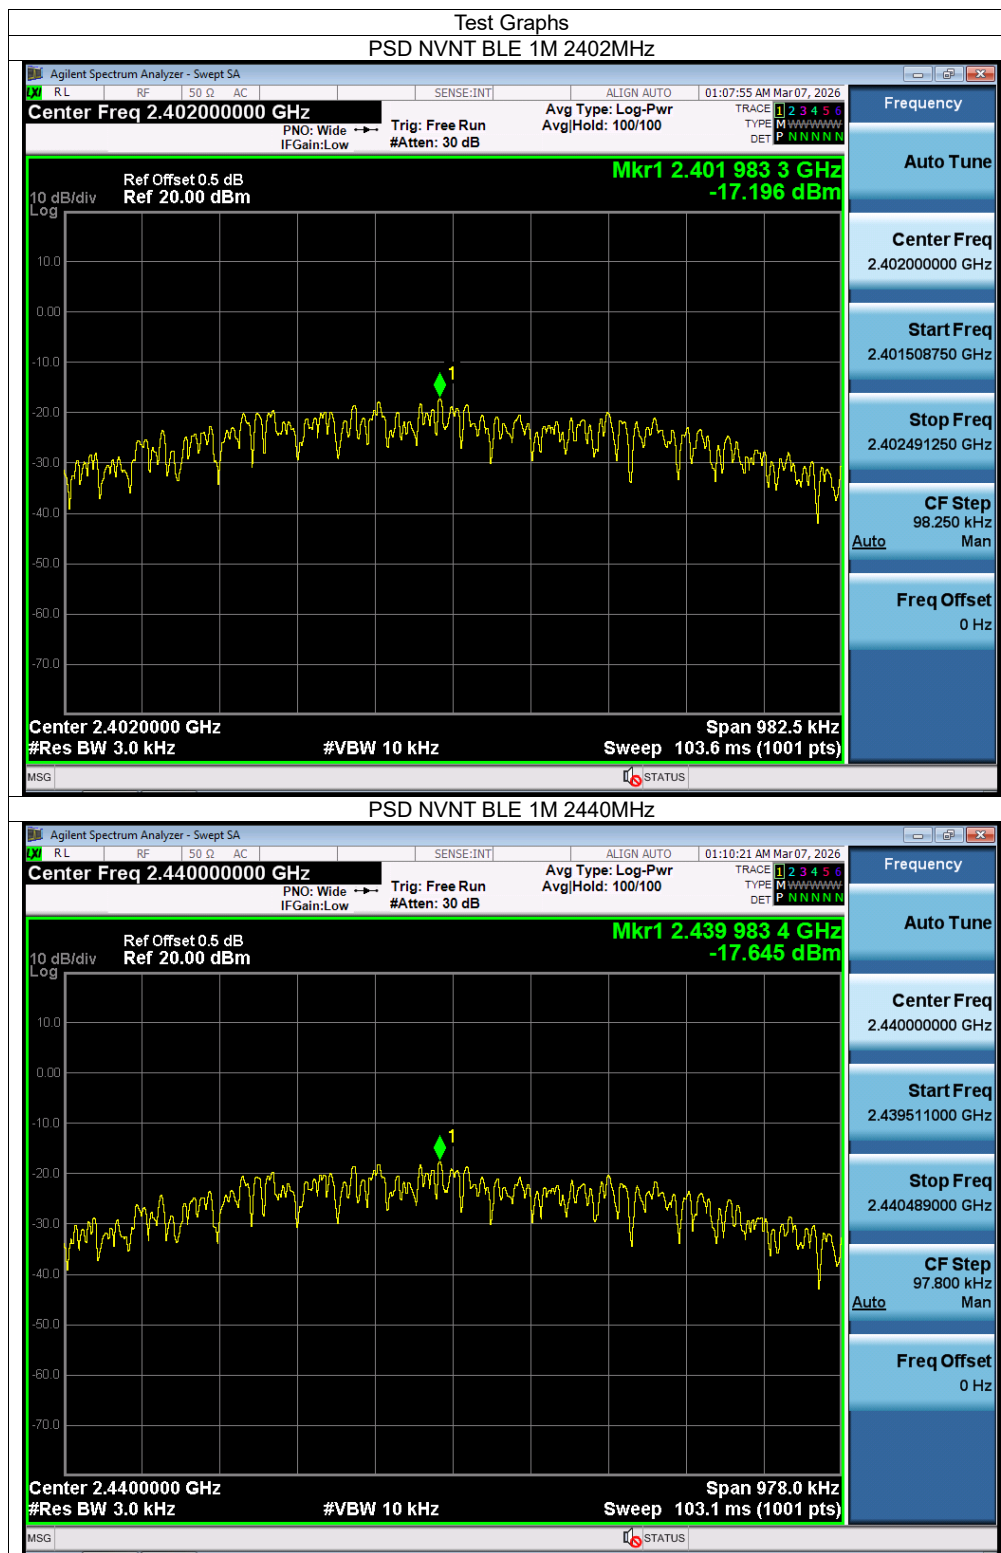

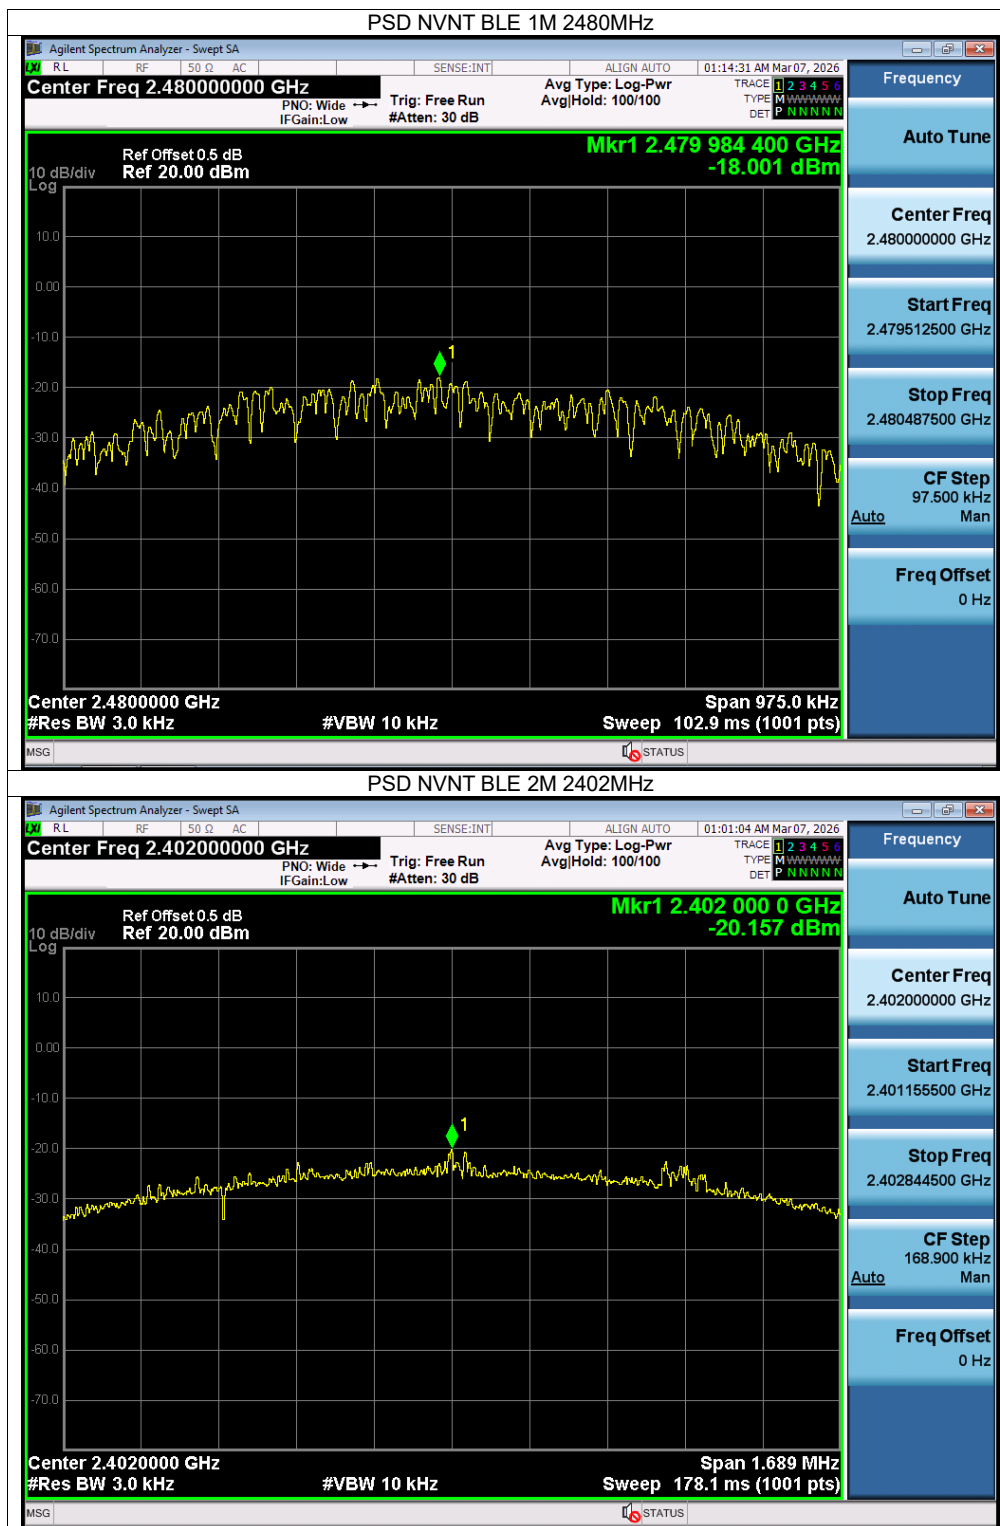


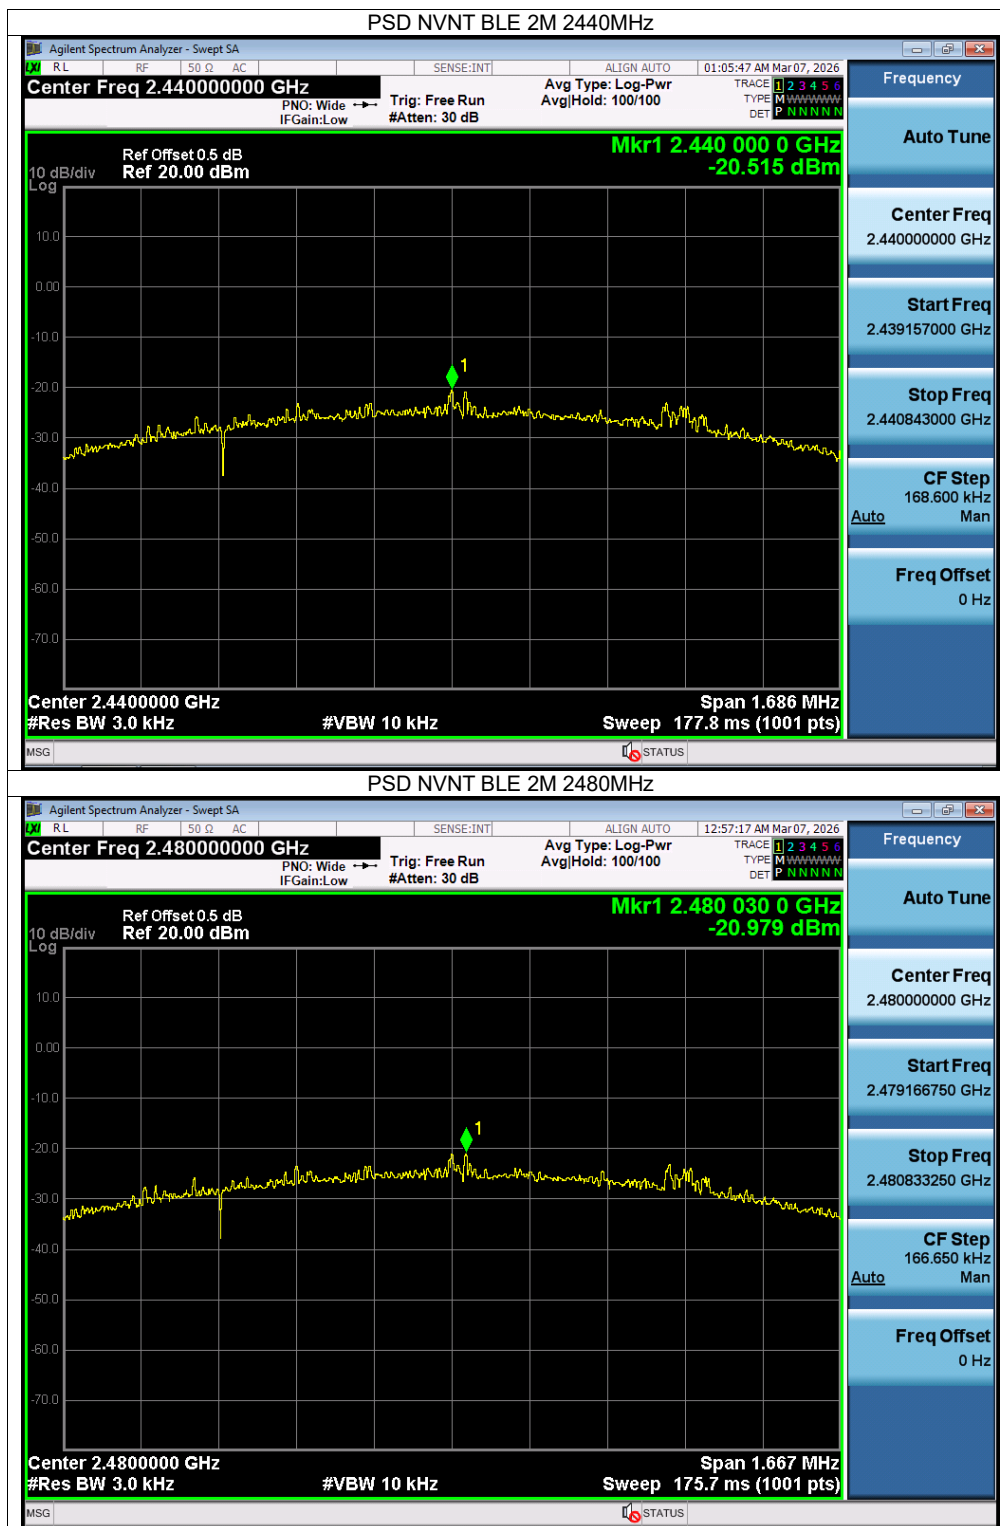





Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-50.49	-20	Pass
NVNT	BLE 1M	2480	-49.94	-20	Pass
NVNT	BLE 2M	2402	-32.84	-20	Pass
NVNT	BLE 2M	2480	-52.75	-20	Pass

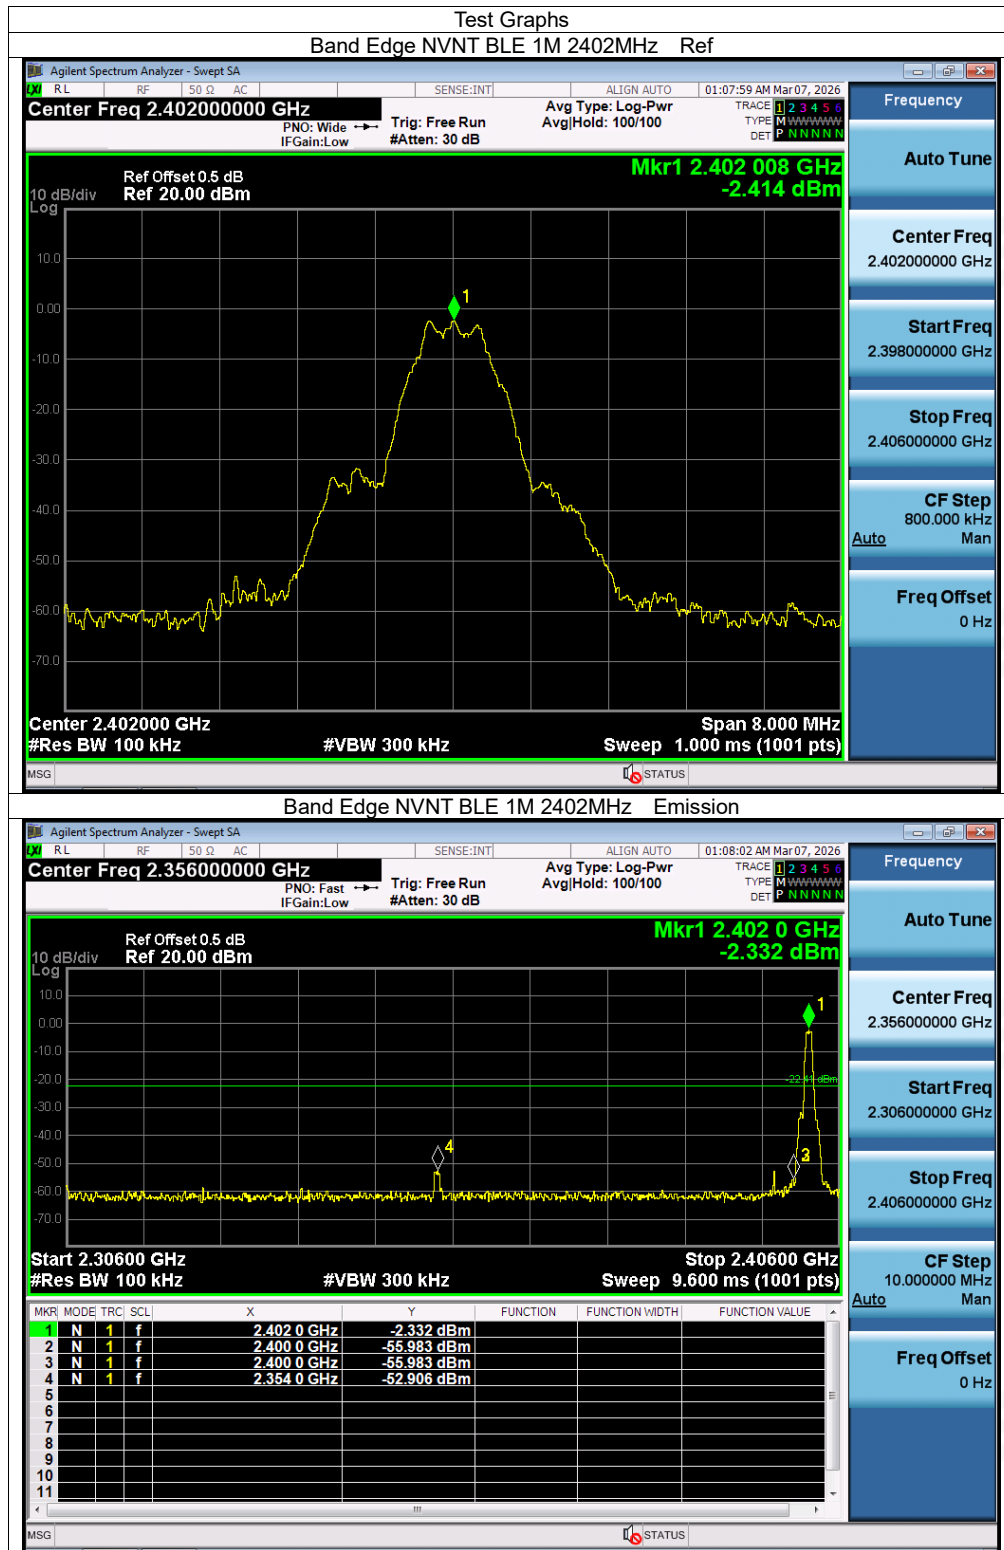

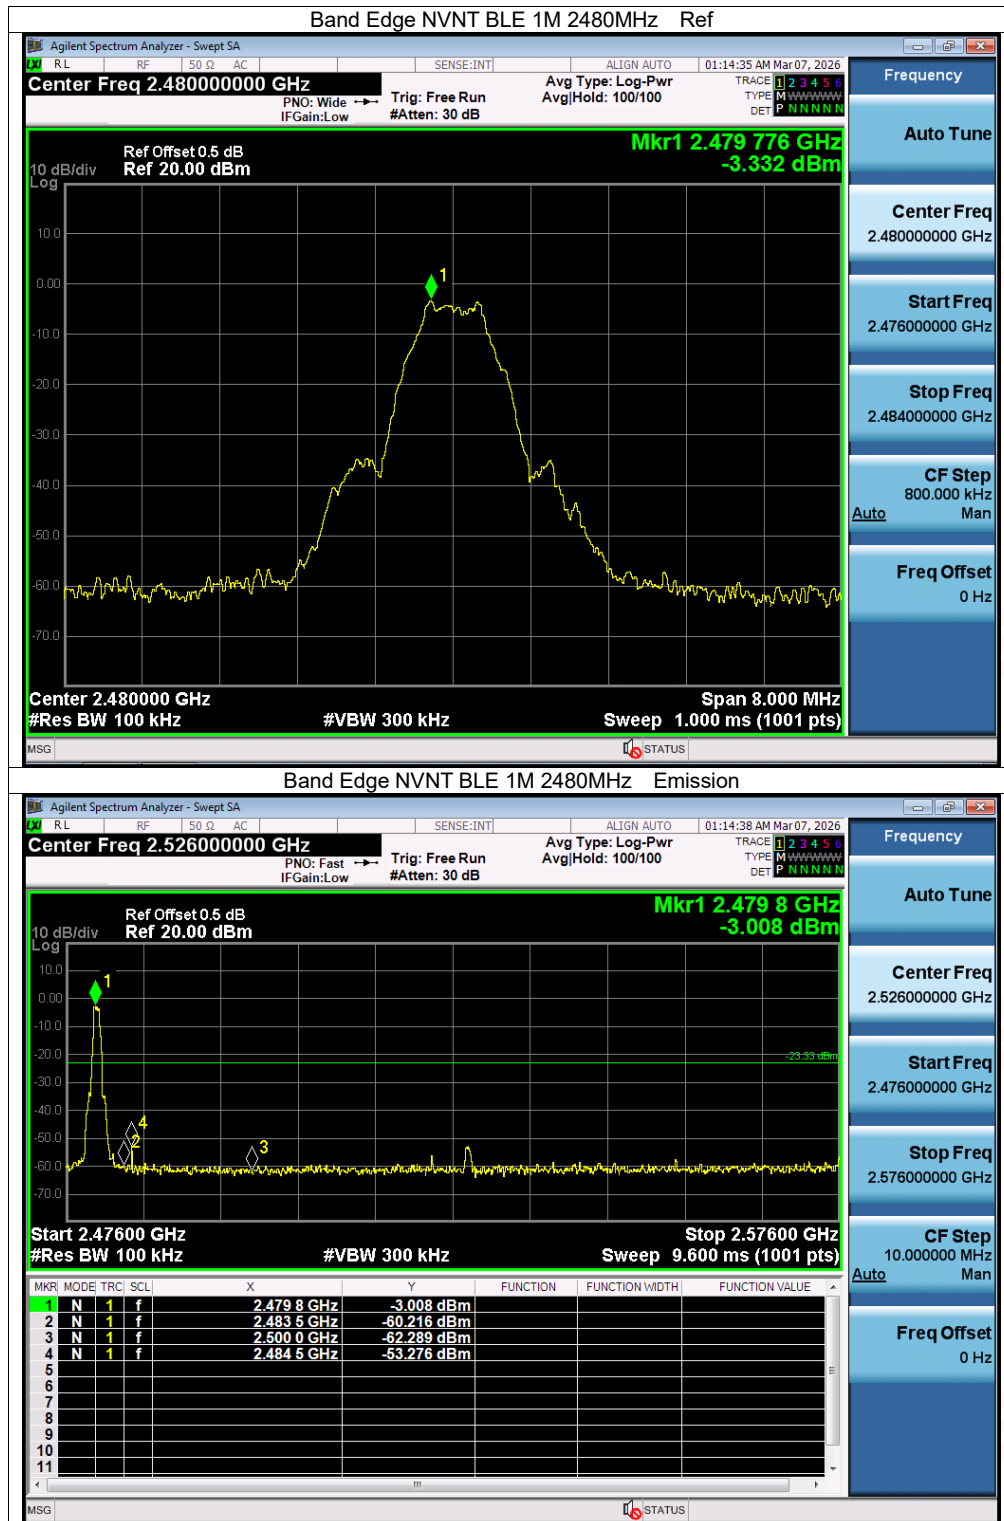




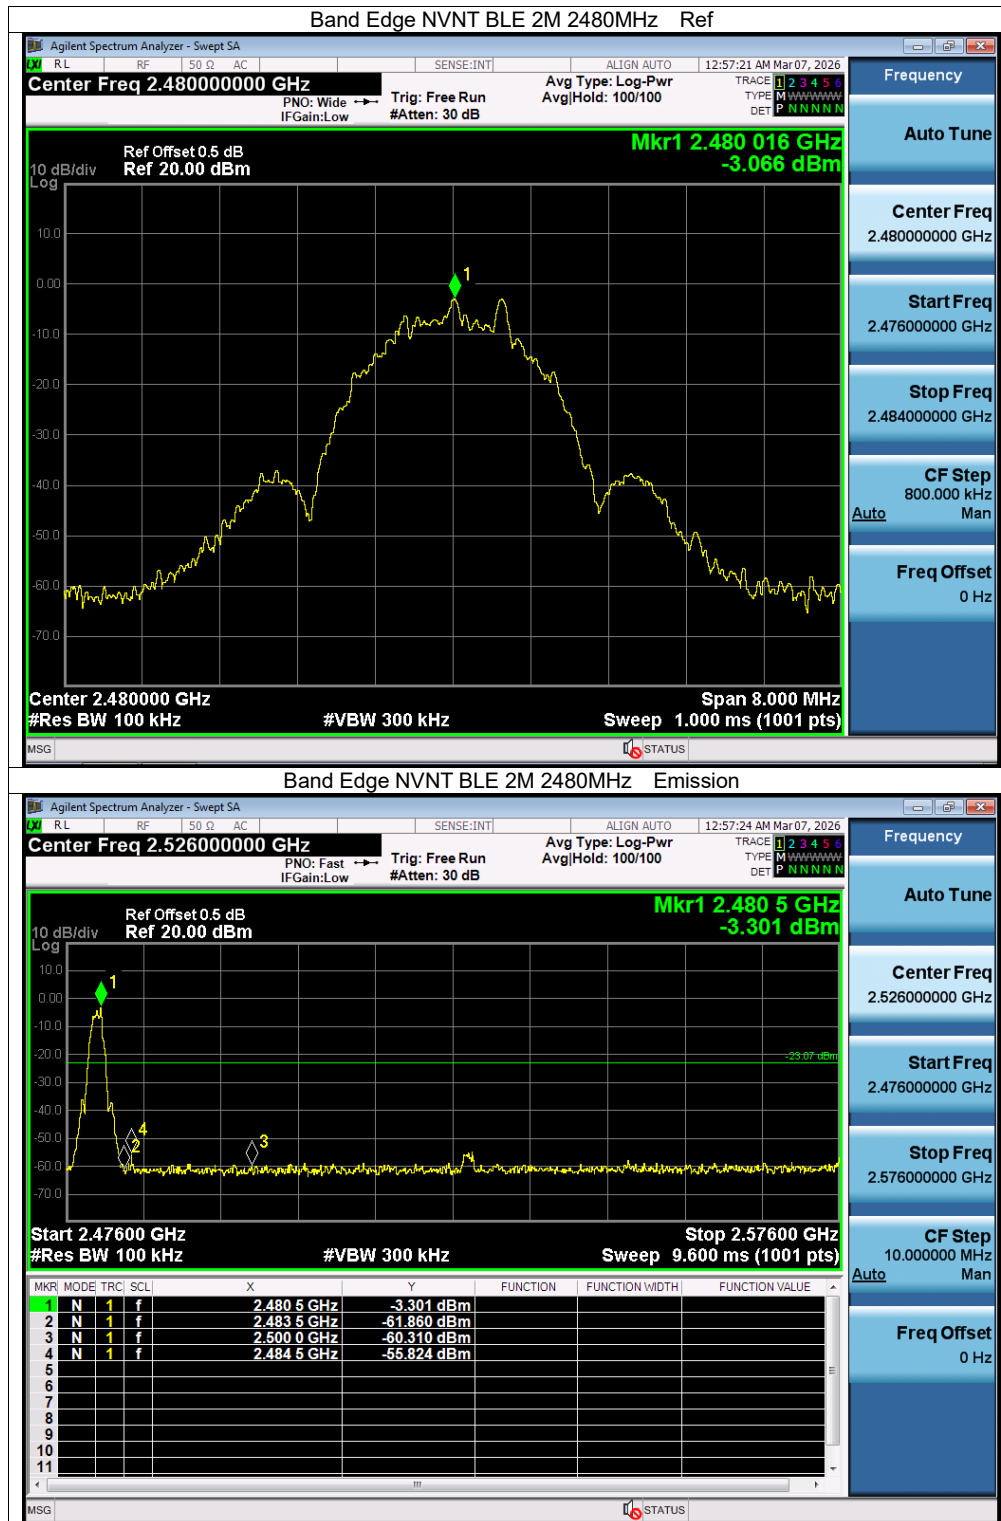






Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-31.83	-20	Pass
NVNT	BLE 1M	2440	-33.95	-20	Pass
NVNT	BLE 1M	2480	-34.95	-20	Pass
NVNT	BLE 2M	2402	-34	-20	Pass
NVNT	BLE 2M	2440	-35.6	-20	Pass
NVNT	BLE 2M	2480	-33.51	-20	Pass

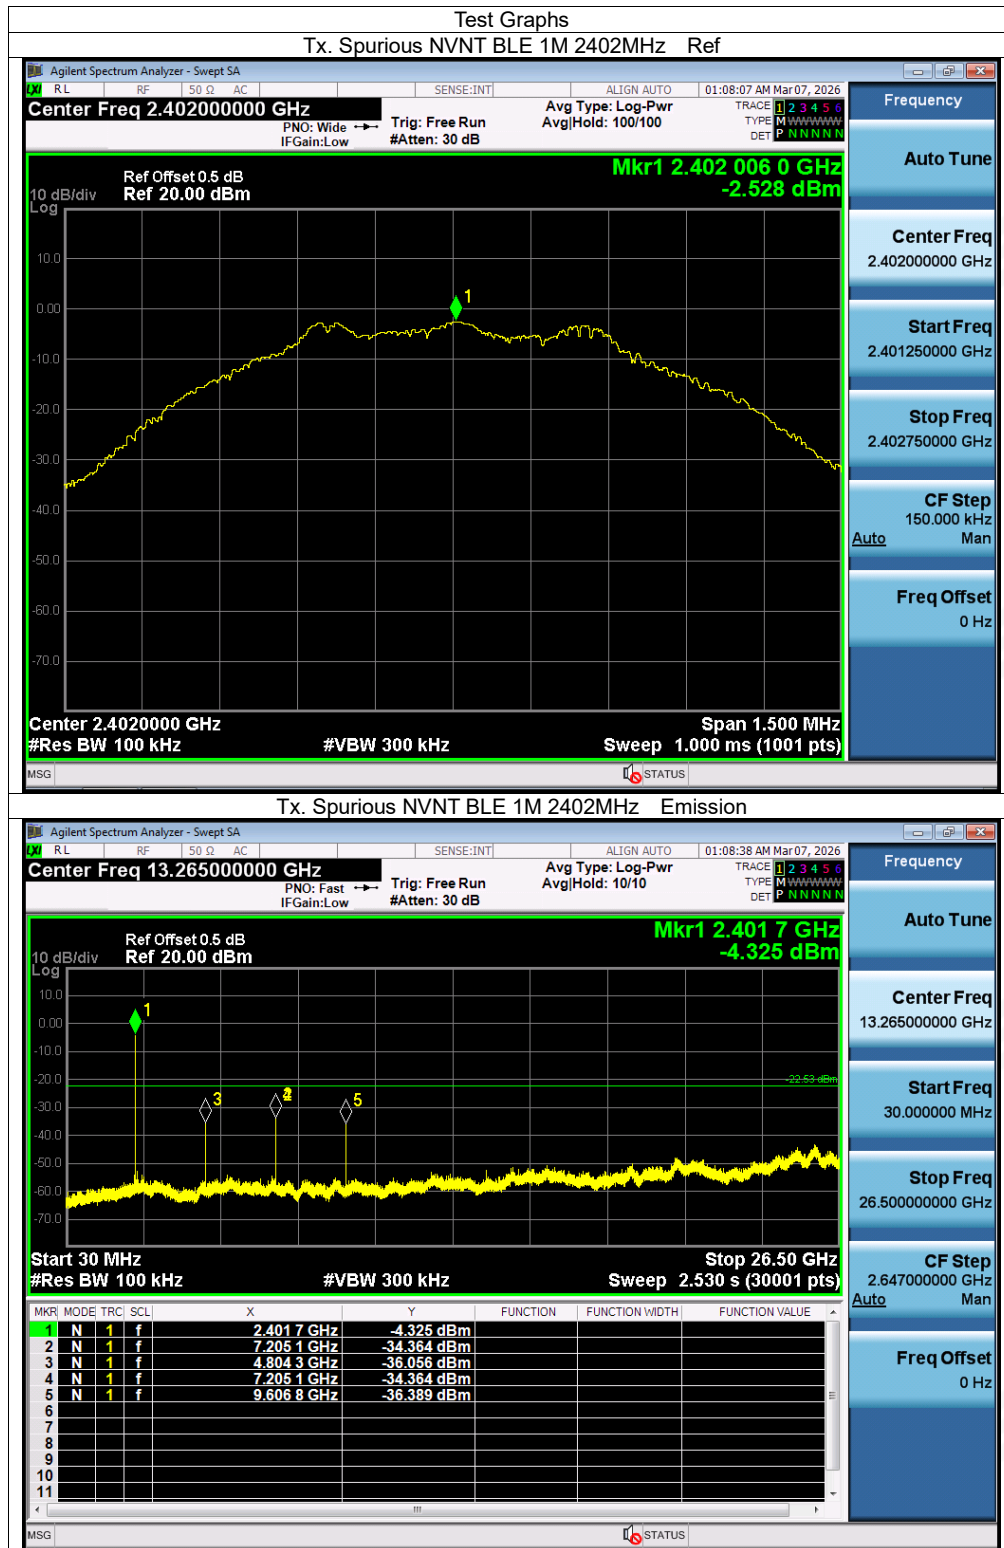


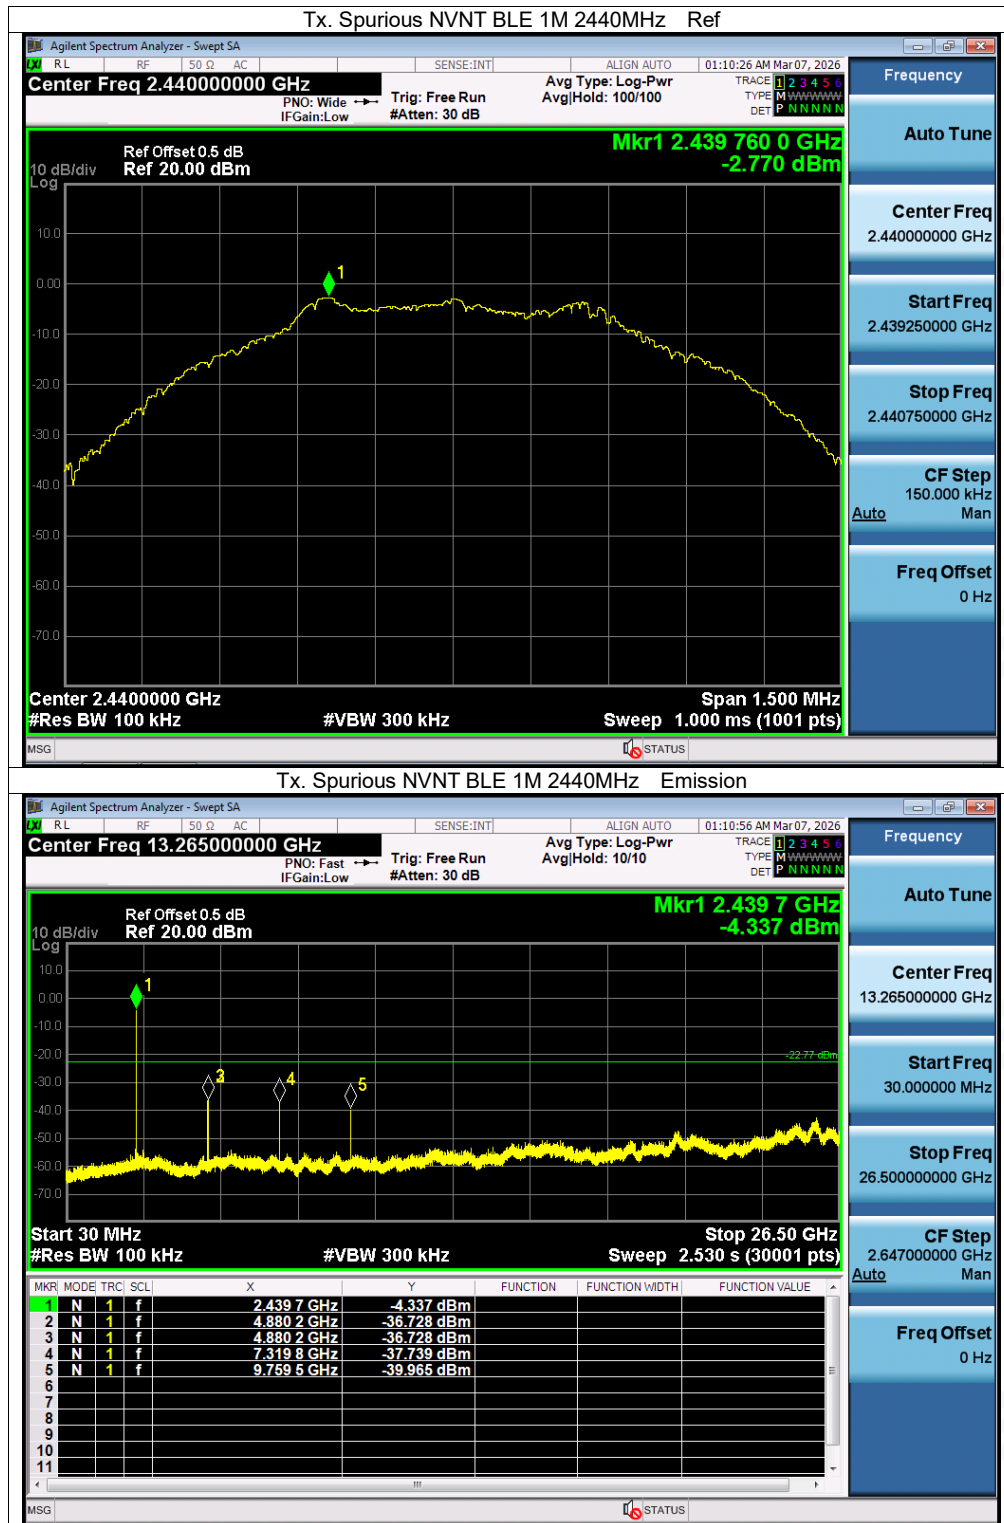

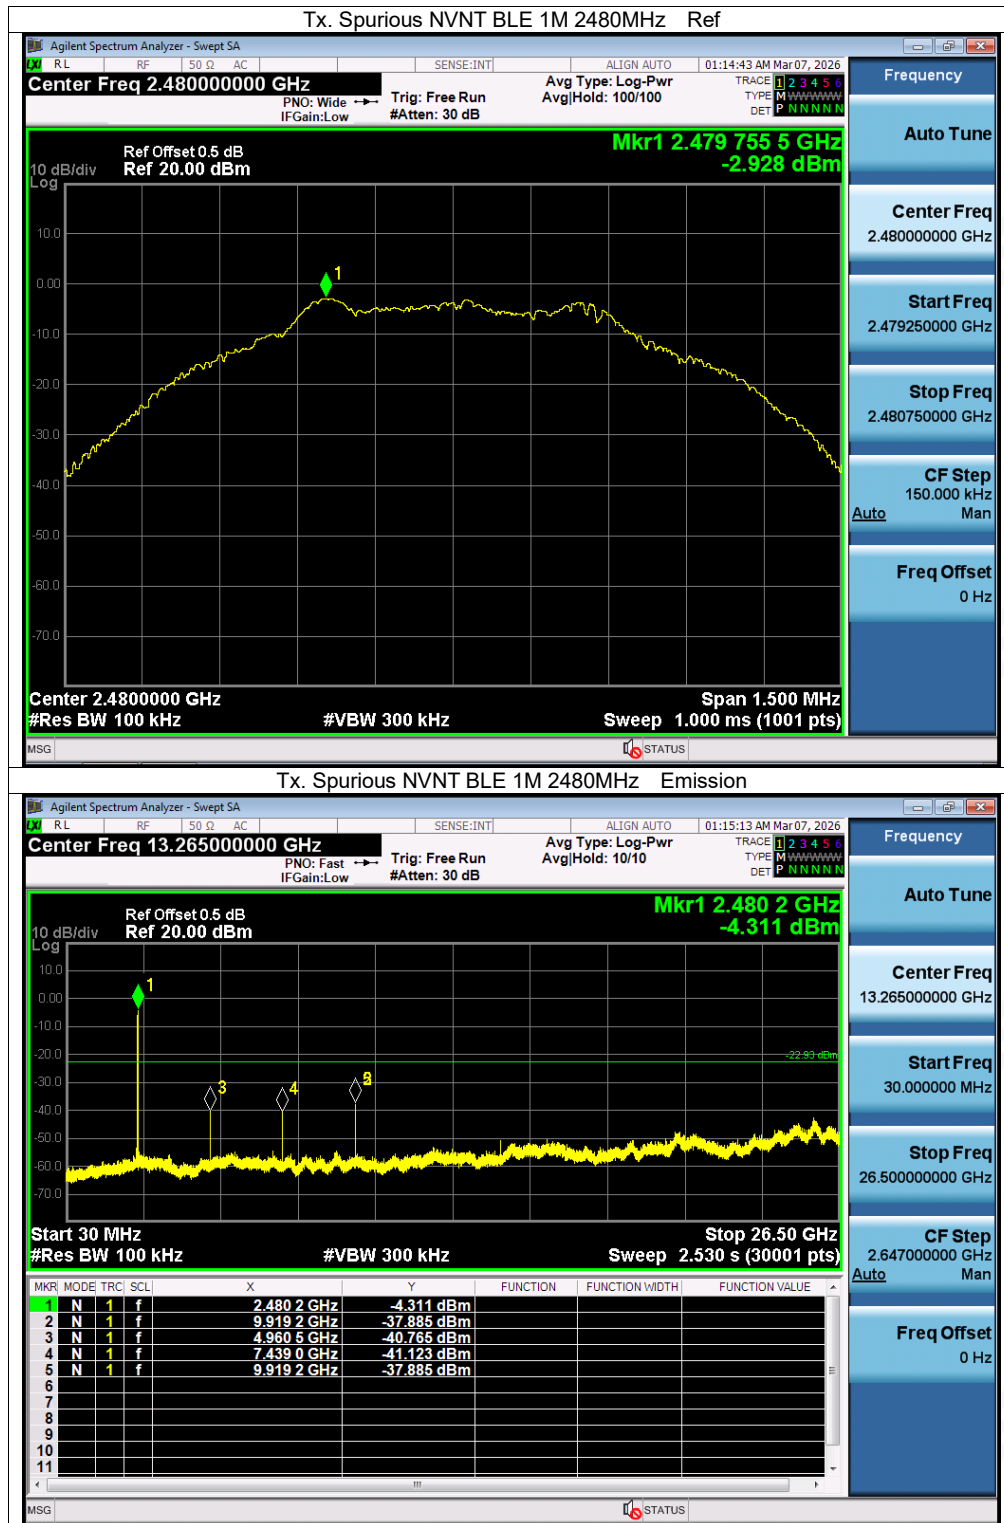

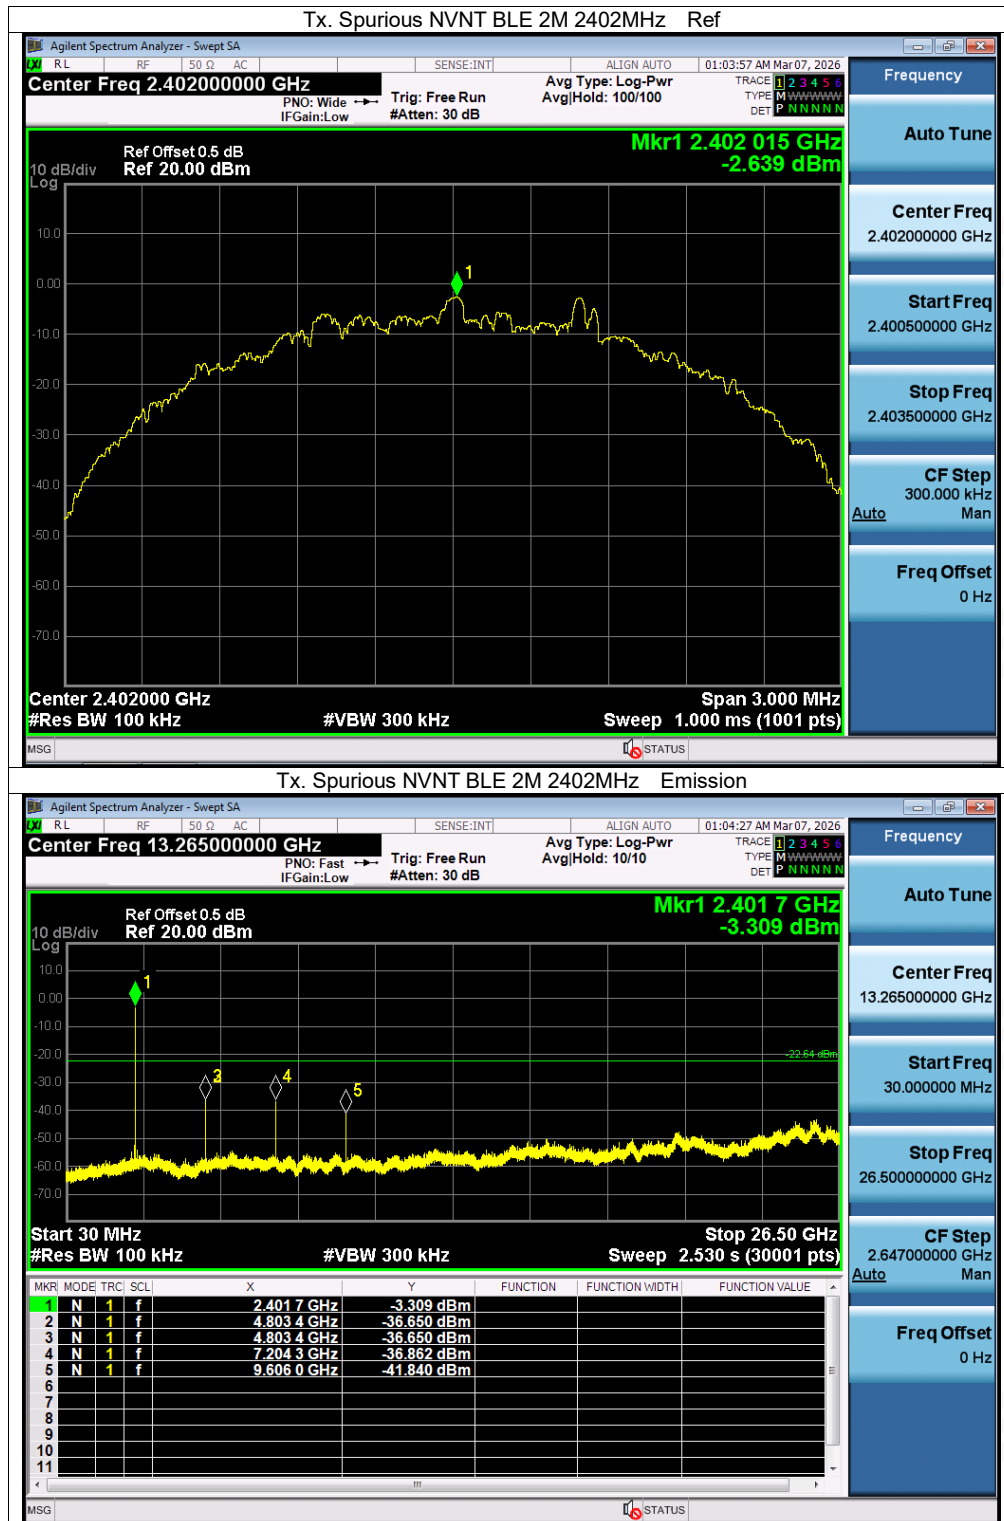

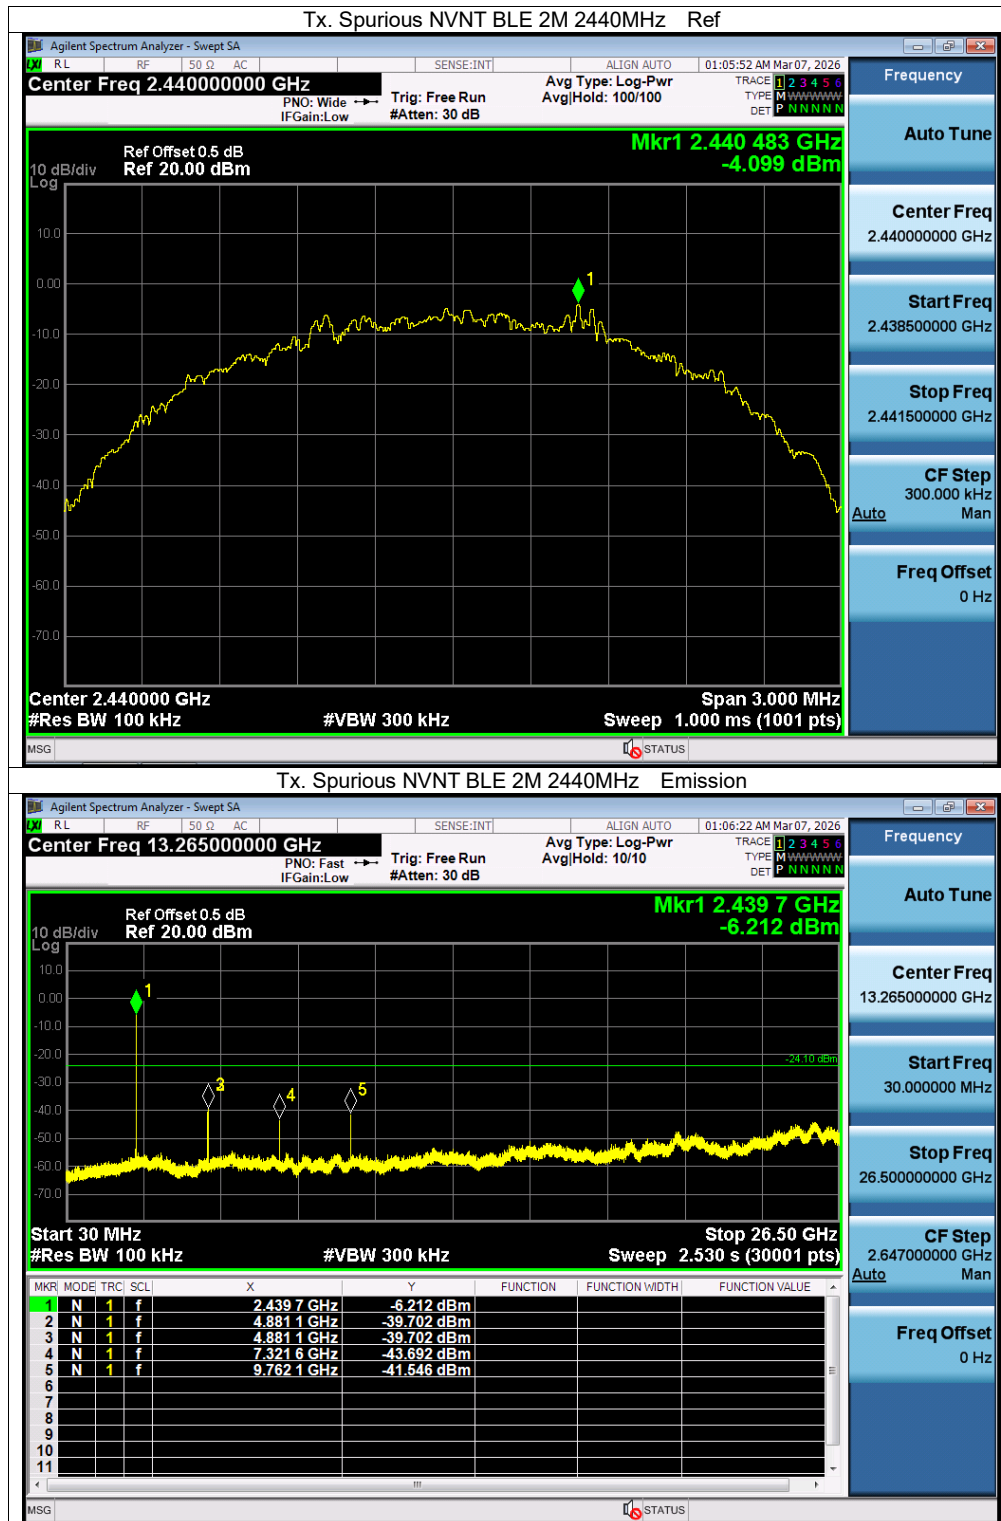

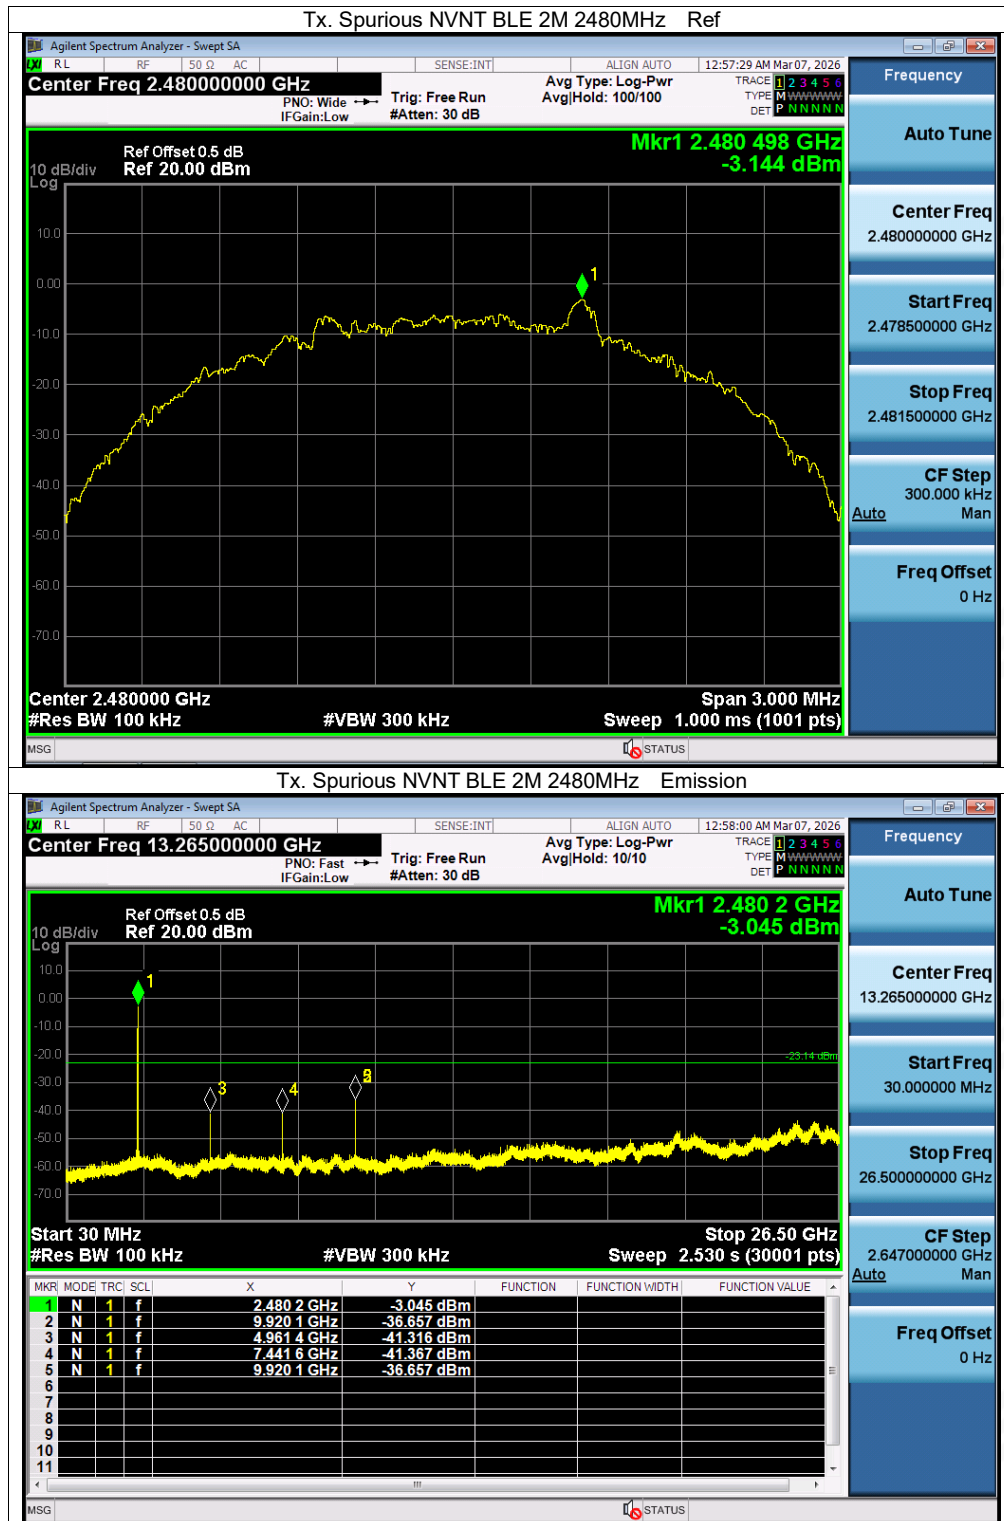



APPENDIX 2- EUT TEST PHOTO

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****