
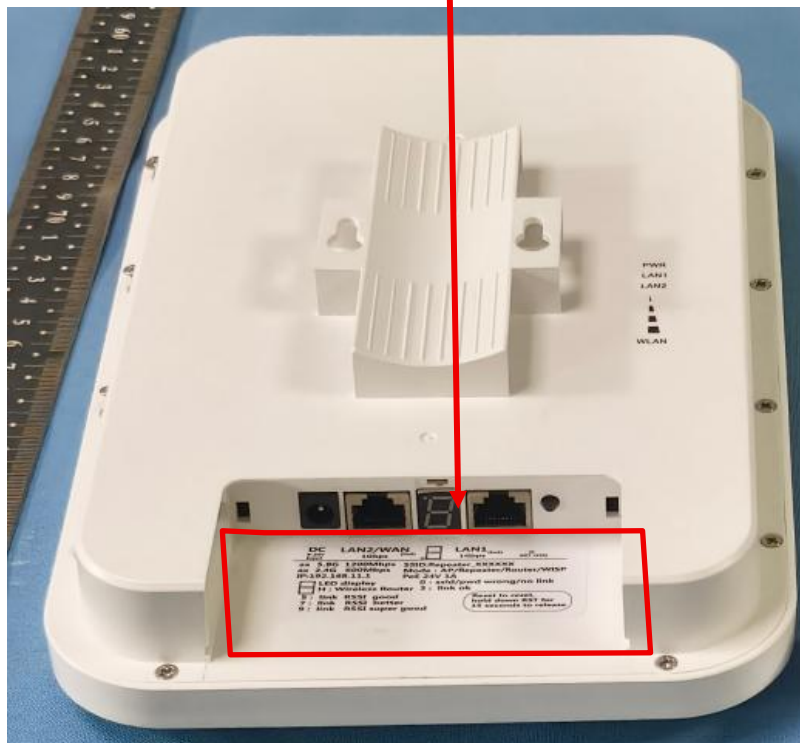


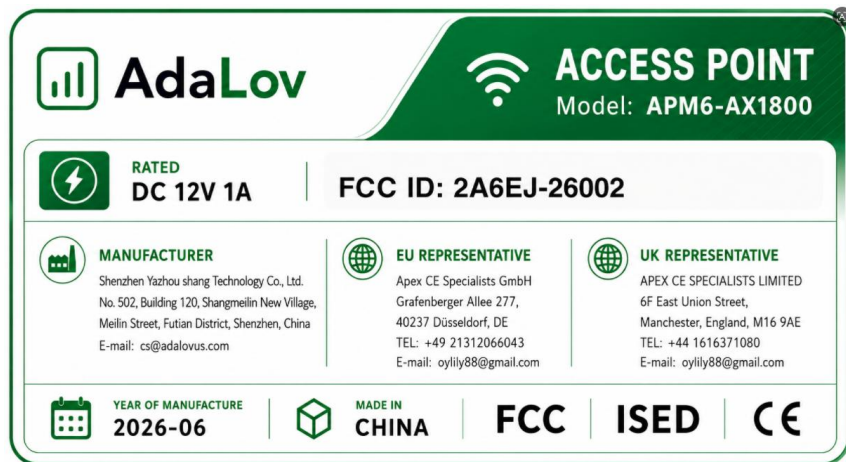

The outer casing of the label position is fixed by snap fasteners instead of screws or adhesives. Customers can easily open it for inspection without using any tools.