


Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2402Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

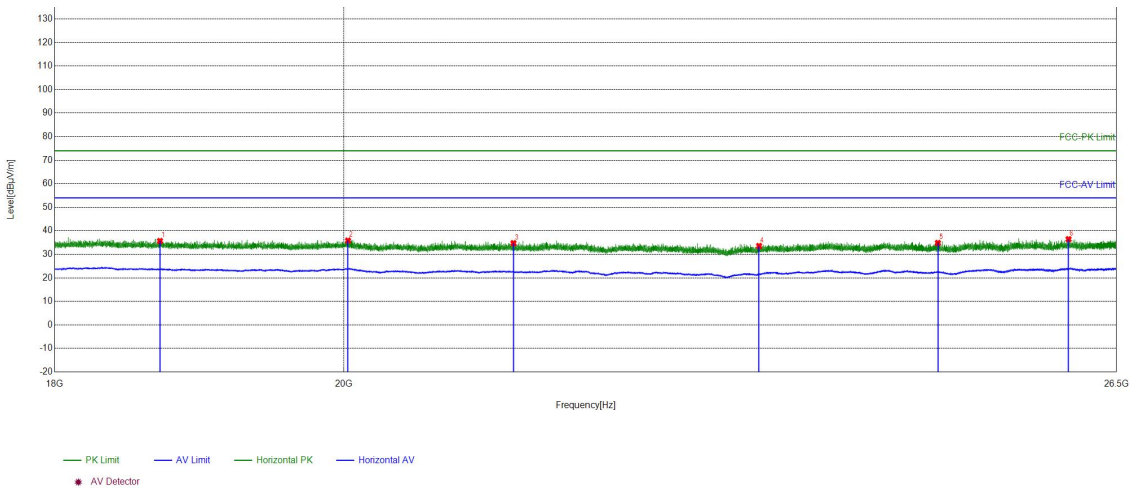

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18703.1481	-26.48	62.12	35.64	74.00	38.36	PASS	Horizontal	PK
2	20029.2012	-24.75	60.56	35.81	74.00	38.19	PASS	Horizontal	PK
3	21273.6509	-25.80	60.51	34.71	74.00	39.29	PASS	Horizontal	PK
4	23265.1106	-24.03	57.56	33.53	74.00	40.47	PASS	Horizontal	PK
5	24830.8732	-21.99	56.79	34.80	74.00	39.20	PASS	Horizontal	PK
6	26041.6617	-20.99	57.39	36.40	74.00	37.60	PASS	Horizontal	PK

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2402Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

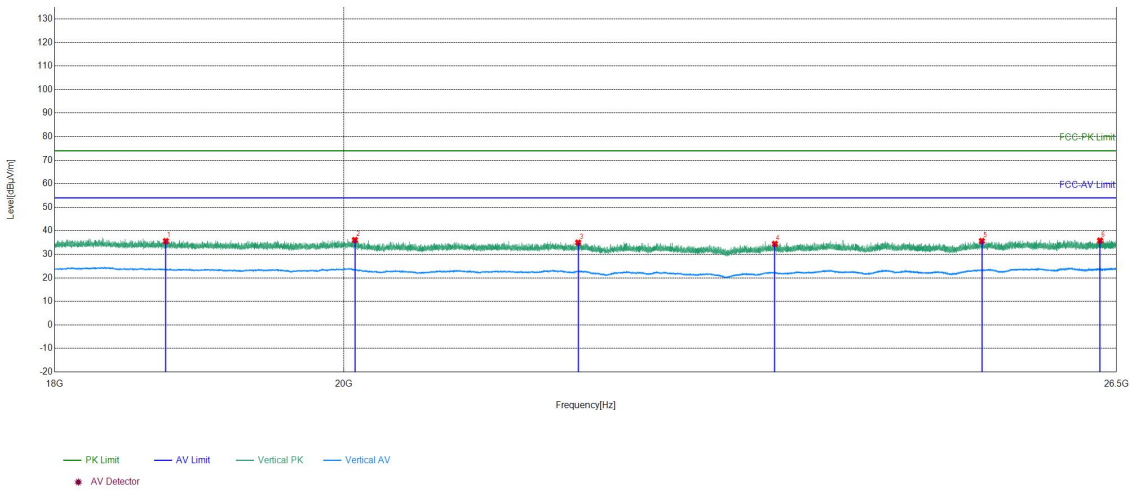

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18743.2697	-26.40	61.98	35.58	74.00	38.42	PASS	Vertical	PK
2	20079.5232	-24.97	61.02	36.05	74.00	37.95	PASS	Vertical	PK
3	21780.9512	-25.55	60.49	34.94	74.00	39.06	PASS	Vertical	PK
4	23399.416	-23.56	57.96	34.40	74.00	39.60	PASS	Vertical	PK
5	25232.4293	-21.10	56.72	35.62	74.00	38.38	PASS	Vertical	PK
6	26342.5737	-21.23	57.06	35.83	74.00	38.17	PASS	Vertical	PK

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2440Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

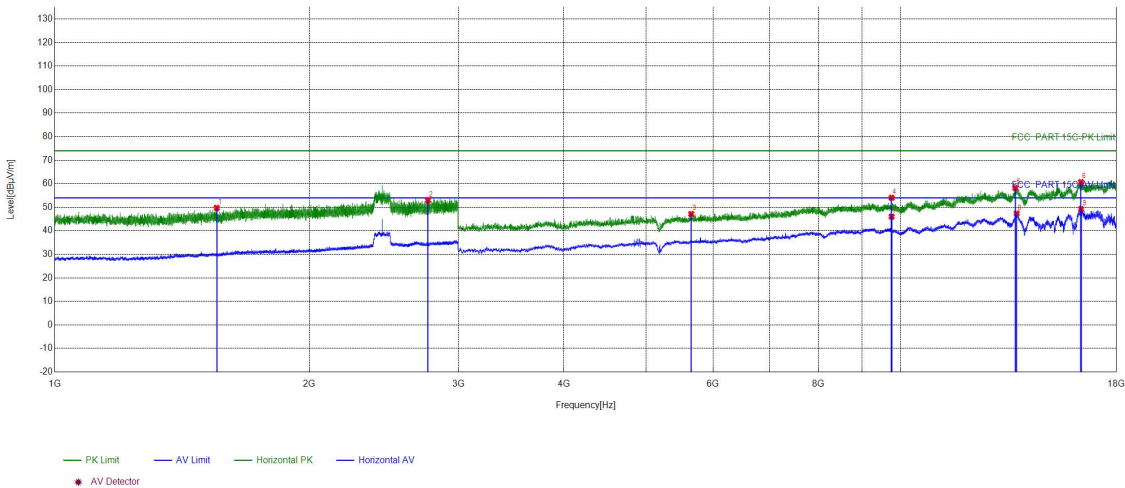

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1554.0369	13.50	36.22	49.72	74.00	24.28	PASS	Horizontal	PK
2	2761.8508	16.91	36.05	52.96	74.00	21.04	PASS	Horizontal	PK
3	5656.1771	-6.26	53.38	47.12	74.00	26.88	PASS	Horizontal	PK
4	9759.4506	1.27	52.77	54.04	74.00	19.96	PASS	Horizontal	PK
5	13668.7112	7.38	50.81	58.19	74.00	15.81	PASS	Horizontal	PK
6	16345.8897	11.53	49.13	60.66	74.00	13.34	PASS	Horizontal	PK
7	9760.4507	1.26	44.75	46.01	54.00	7.99	PASS	Horizontal	AV
8	13719.7146	7.22	40.11	47.33	54.00	6.67	PASS	Horizontal	AV
9	16347.8899	11.56	37.67	49.23	54.00	4.77	PASS	Horizontal	AV

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2440Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

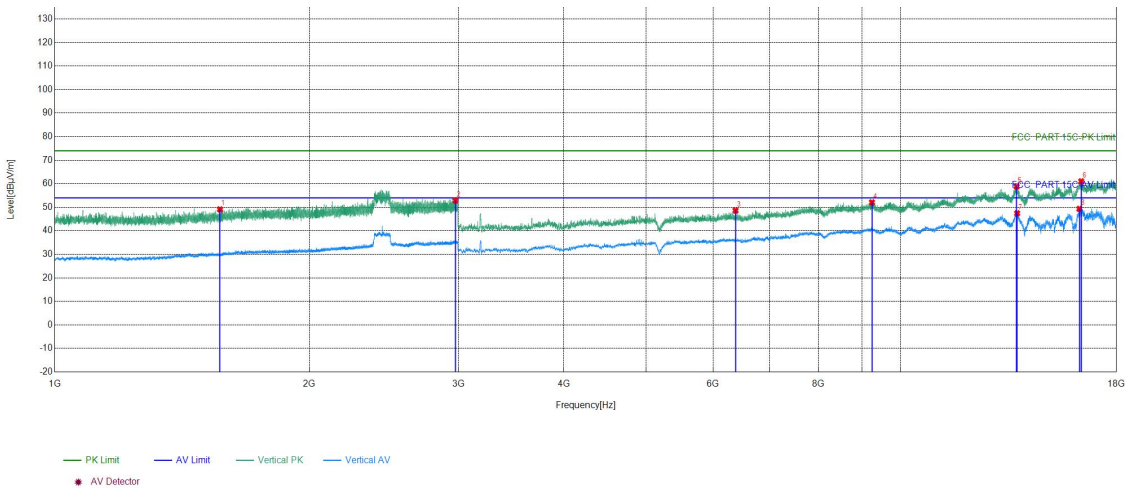

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1567.9045	13.47	35.61	49.08	74.00	24.92	PASS	Vertical	PK
2	2977.0651	17.89	34.96	52.85	74.00	21.15	PASS	Vertical	PK
3	6381.2254	-4.37	52.97	48.60	74.00	25.40	PASS	Vertical	PK
4	9251.4168	0.63	51.43	52.06	74.00	21.94	PASS	Vertical	PK
5	13717.7145	7.22	51.59	58.81	74.00	15.19	PASS	Vertical	PK
6	16356.8905	11.36	49.64	61.00	74.00	13.00	PASS	Vertical	PK
7	13736.7158	7.19	40.22	47.41	54.00	6.59	PASS	Vertical	AV
8	16273.8849	10.69	38.63	49.32	54.00	4.68	PASS	Vertical	AV

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2440Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

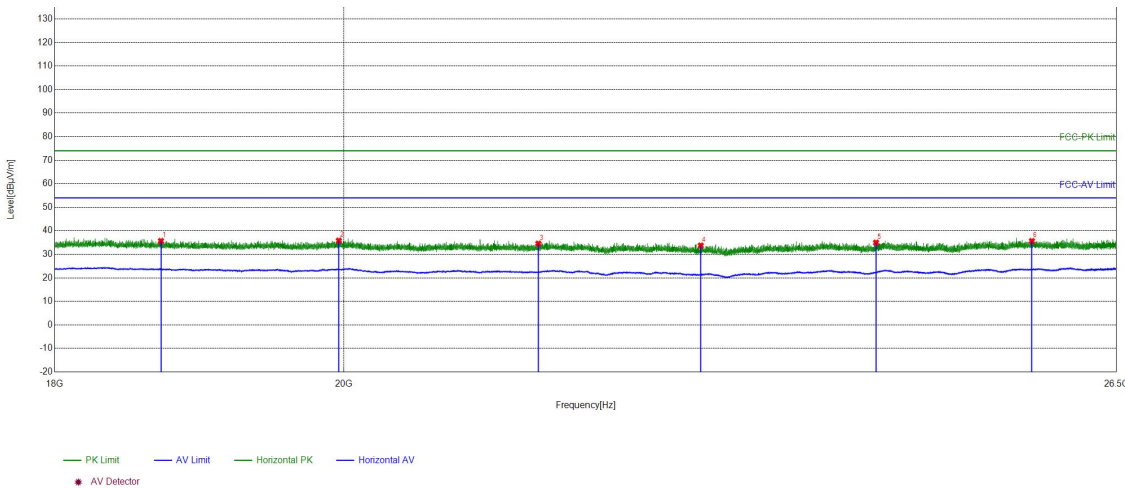

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18709.9484	-26.47	62.09	35.62	74.00	38.38	PASS	Horizontal	PK
2	19962.5585	-24.74	60.51	35.77	74.00	38.23	PASS	Horizontal	PK
3	21467.4587	-25.84	60.32	34.48	74.00	39.52	PASS	Horizontal	PK
4	22776.171	-25.04	58.74	33.70	74.00	40.30	PASS	Horizontal	PK
5	24278.0111	-22.27	57.18	34.91	74.00	39.09	PASS	Horizontal	PK
6	25696.5479	-20.76	56.35	35.59	74.00	38.41	PASS	Horizontal	PK

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2440Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

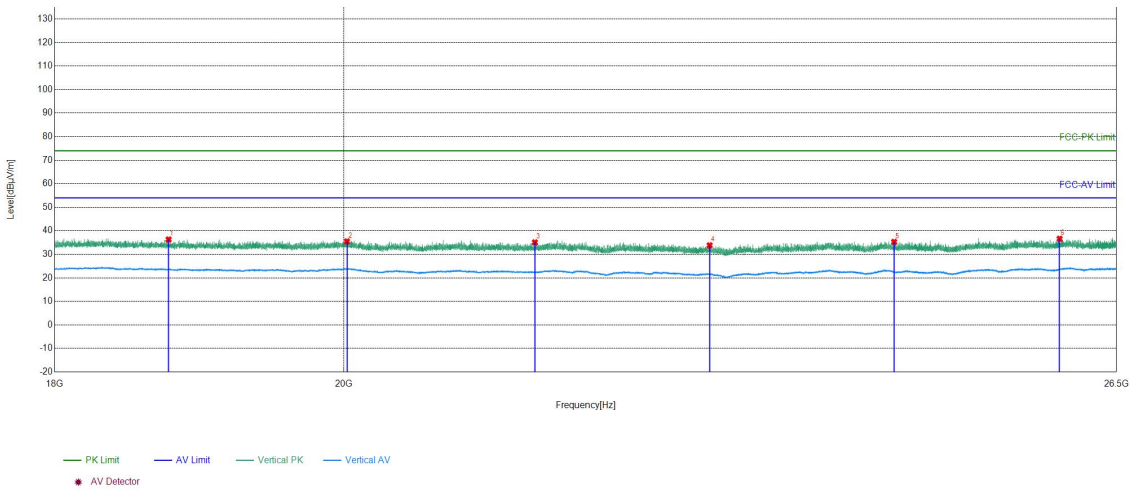

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	18761.9705	-26.37	62.65	36.28	74.00	37.72	PASS	Vertical	PK
2	20021.7209	-24.72	60.17	35.45	74.00	38.55	PASS	Vertical	PK
3	21440.2576	-25.85	60.90	35.05	74.00	38.95	PASS	Vertical	PK
4	22849.614	-25.21	59.01	33.80	74.00	40.20	PASS	Vertical	PK
5	24438.4975	-21.72	56.97	35.25	74.00	38.75	PASS	Vertical	PK
6	25956.9983	-20.88	57.47	36.59	74.00	37.41	PASS	Vertical	PK

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2480Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

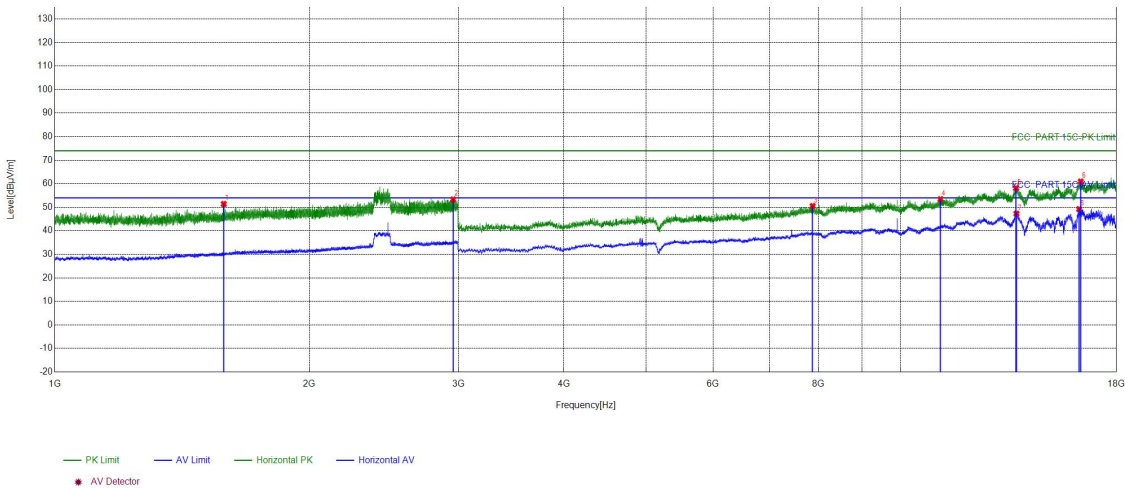

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1584.0389	13.60	37.78	51.38	74.00	22.62	PASS	Horizontal	PK
2	2958.2639	17.72	35.57	53.29	74.00	20.71	PASS	Horizontal	PK
3	7871.3248	-1.51	52.02	50.51	74.00	23.49	PASS	Horizontal	PK
4	11149.5433	2.02	51.38	53.40	74.00	20.60	PASS	Horizontal	PK
5	13696.7131	7.27	50.83	58.10	74.00	15.90	PASS	Horizontal	PK
6	16333.8889	11.39	49.52	60.91	74.00	13.09	PASS	Horizontal	PK
7	13709.714	7.24	40.00	47.24	54.00	6.76	PASS	Horizontal	AV
8	16265.8844	10.60	38.59	49.19	54.00	4.81	PASS	Horizontal	AV

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2480Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

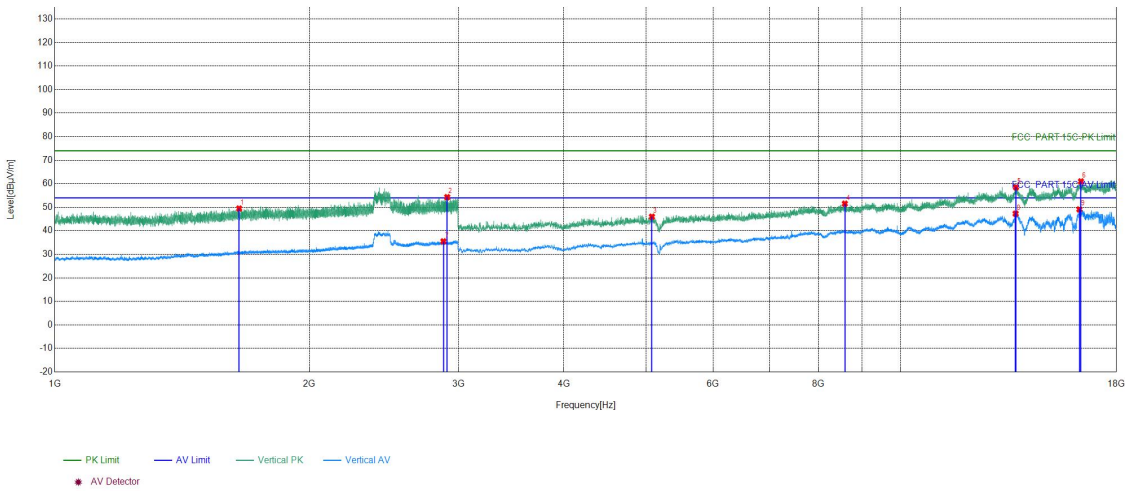

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1651.7768	13.97	35.48	49.45	74.00	24.55	PASS	Vertical	PK
2	2910.9274	17.76	36.51	54.27	74.00	19.73	PASS	Vertical	PK
3	5082.1388	-7.75	53.72	45.97	74.00	28.03	PASS	Vertical	PK
4	8593.3729	-0.52	52.03	51.51	74.00	22.49	PASS	Vertical	PK
5	13692.7128	7.28	51.19	58.47	74.00	15.53	PASS	Vertical	PK
6	16343.8896	11.51	49.46	60.97	74.00	13.03	PASS	Vertical	PK
7	2880.6587	17.42	18.08	35.50	54.00	18.50	PASS	Vertical	AV
8	13679.712	7.34	39.92	47.26	54.00	6.74	PASS	Vertical	AV
9	16273.8849	10.69	38.39	49.08	54.00	4.92	PASS	Vertical	AV

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2480Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

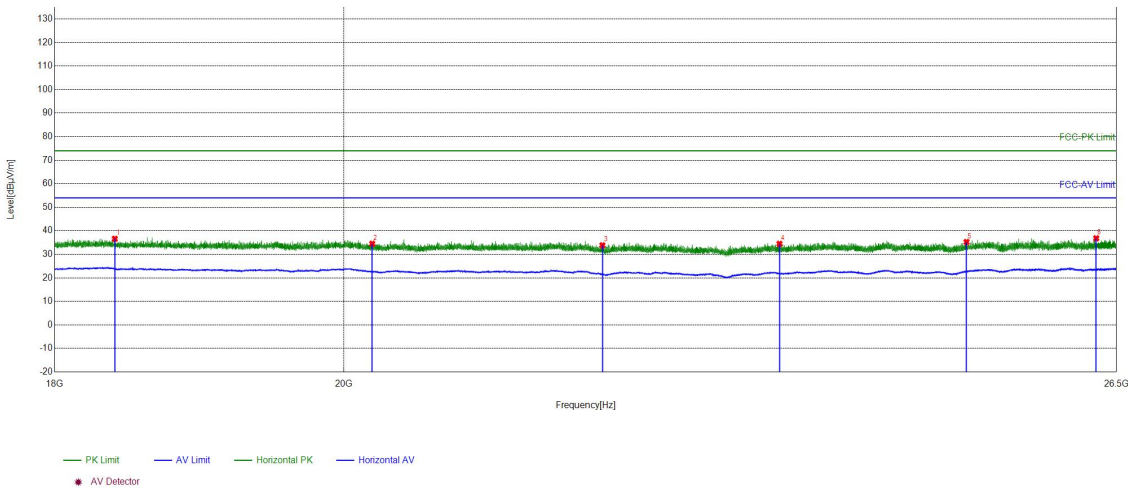

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	18397.4759	-26.70	63.28	36.58	74.00	37.42	PASS	Horizontal	PK
2	20206.6883	-25.51	59.97	34.46	74.00	39.54	PASS	Horizontal	PK
3	21974.419	-25.78	59.59	33.81	74.00	40.19	PASS	Horizontal	PK
4	23438.8576	-23.46	57.90	34.44	74.00	39.56	PASS	Horizontal	PK
5	25091.3237	-21.64	56.85	35.21	74.00	38.79	PASS	Horizontal	PK
6	26305.8522	-21.26	58.05	36.79	74.00	37.21	PASS	Horizontal	PK

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2480Mhz
Tset_Engineer	\	Test_Date	2026/8/31

Test Graph

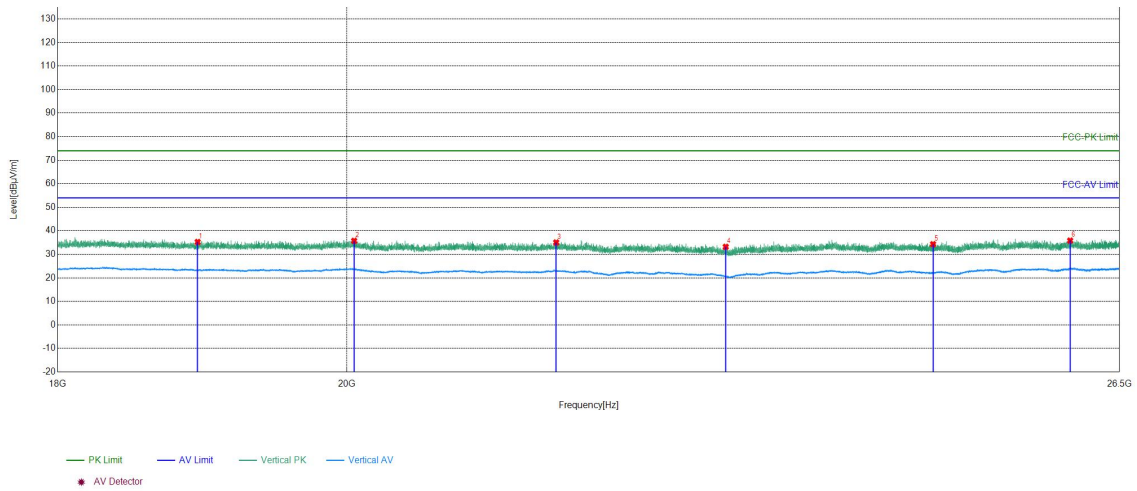

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18940.8176	-26.28	61.50	35.22	74.00	38.78	PASS	Vertical	PK
2	20052.3221	-24.85	60.56	35.71	74.00	38.29	PASS	Vertical	PK
3	21583.7434	-25.75	60.75	35.00	74.00	39.00	PASS	Vertical	PK
4	22959.0984	-25.55	58.71	33.16	74.00	40.84	PASS	Vertical	PK
5	24760.1504	-21.94	56.22	34.28	74.00	39.72	PASS	Vertical	PK
6	26028.4011	-20.97	56.78	35.81	74.00	38.19	PASS	Vertical	PK


Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. The report records the lowest Peak value. If the Peak value is greater than 54dBμV/m, then the Average value at that time is recorded.

Restricted bands:
Test plot as follows:

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2402Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

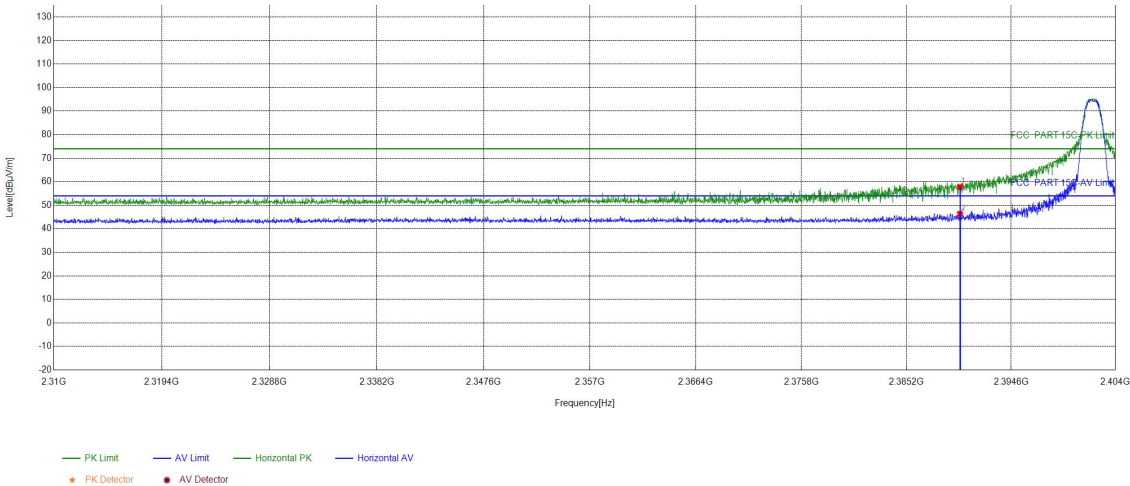

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	41.85	57.81	74.00	16.19	PASS	Horizontal	PK
2	2390	15.96	30.32	46.28	54.00	7.72	PASS	Horizontal	AV

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2402Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

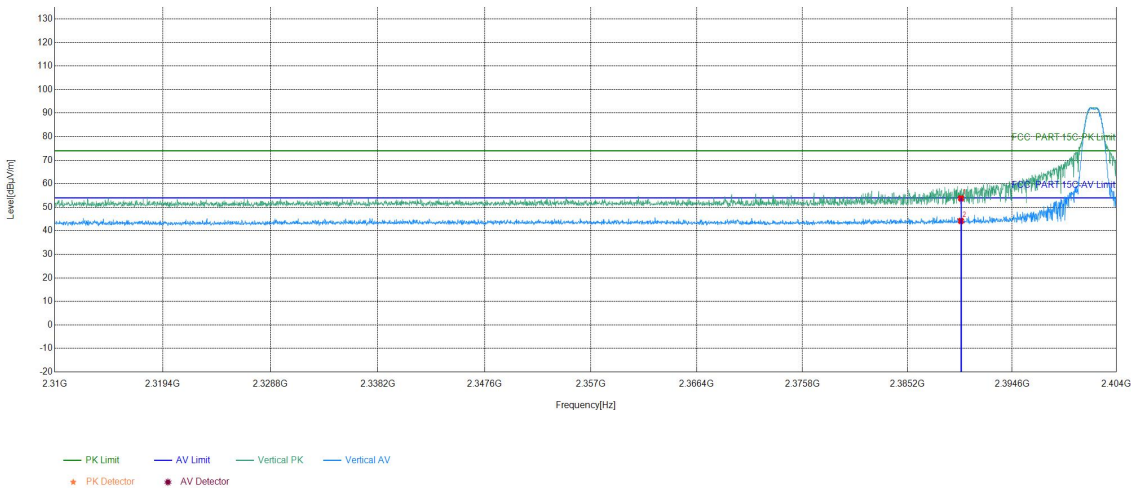

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	37.83	53.79	74.00	20.21	PASS	Vertical	PK
2	2390	15.96	28.22	44.18	54.00	9.82	PASS	Vertical	AV

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2480Mhz
Tset_Engineer	\	Test_Date	2026/8/31


Test Graph

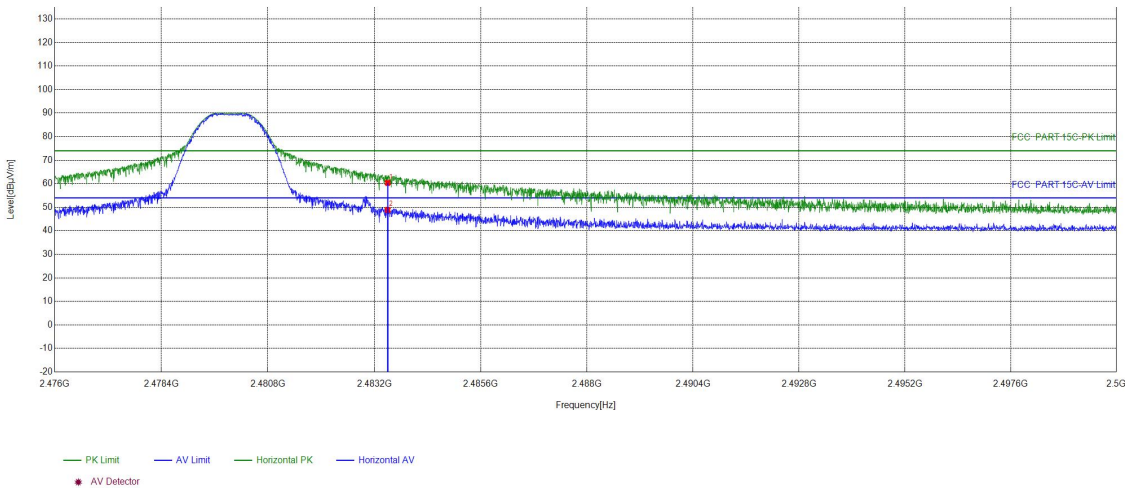

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	44.08	60.37	74.00	13.63	PASS	Horizontal	PK
2	2483.5	16.29	32.55	48.84	54.00	5.16	PASS	Horizontal	AV

Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2480Mhz
Tset_Engineer	\	Test_Date	2026/8/31

Test Graph

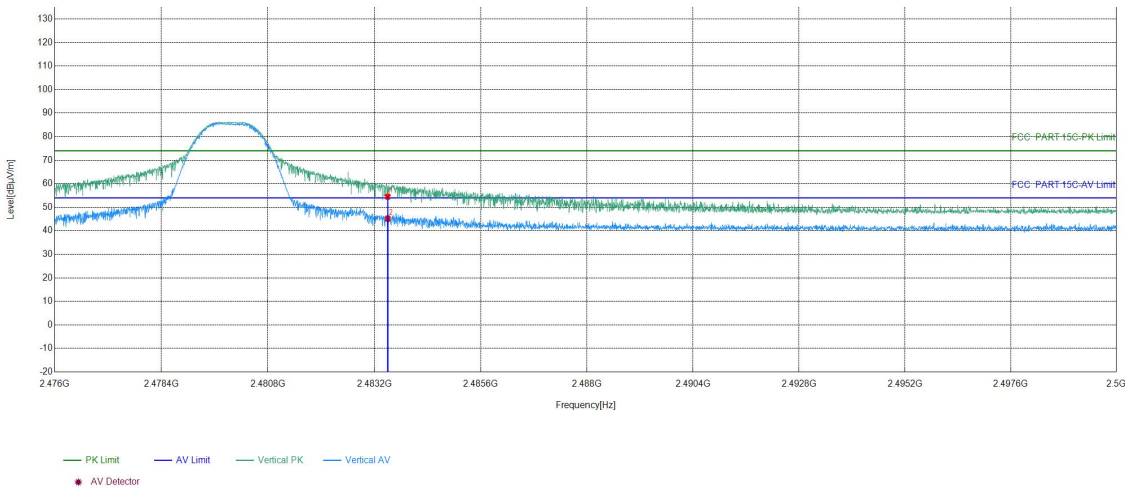

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	38.23	54.52	74.00	19.48	PASS	Vertical	PK
2	2483.5	16.29	28.87	45.16	54.00	8.84	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading -Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

6 Appendix A

Refer to Appendix: Bluetooth LE of EED32S819714

7 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S819714 .